



# **Installation Guide**

# **AK-UI55**






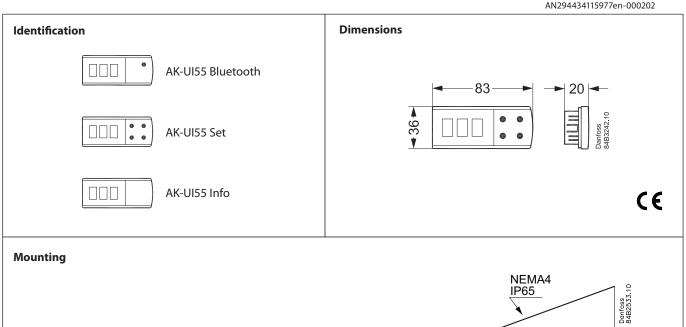




 $t_{amb} = 0 - 55 \,^{\circ}\text{C}$   $32 - 130 \,^{\circ}\text{F}$ Non condensing



# Connection

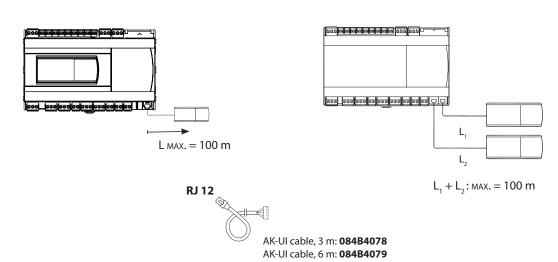



## **AK-UI55 Info**



With start-up /connection to a controller, the display will "light up in circles" as it collects data from the controller.

Lights up in event of:

The display can give the following messages:

-d-Defrost is in progress

The temperature cannot be displayed due to a sensor error Err Fan Appliance cleaning has been initiated. The fans are running OFF Appliance cleaning is activated and the appliance can be cleaned

OFF The main switch is set to Off

SEr The main switch is set to service / manual operation

 $CO_2$ Flashes: Will display in event of a refrigerant leakage alarm, but only if the refrigerant is set up for CO2

## **AK-UI55 Bluetooth**





Without configuration, the display can show the same information as shown above.

#### Access to parameters via Bluetooth and app

- 1. App can be downloaded from Google App Store and Google Play Name = AK-CC55 Connect Start the app.
- 2. Click on the display's Bluetooth button for 3 seconds. The Bluetooth light will then flash while display is showing the controller's address.
- 3. Connect to the controller from the app.







**Functions:** See the respective controller's User Guide.

The operation is locked and cannot be operated via Bluetooth.


Unlock from the system device.



### **AK-UI55 Set**

#### Display during operation

The values will be shown with three digits, and with a setting you can display the temperature in °C or in °F.

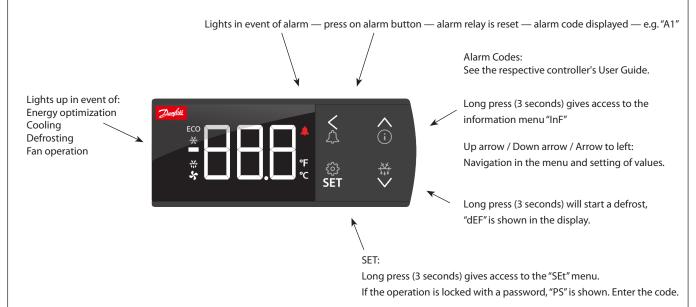

Shows the setting for a chosen parameter / saves a changed setting. Short press gives access to entering of the thermostat's cut-out limit.

#### The display can give the following messages:

-d- Defrost is in progress

Err The temperature cannot be displayed due to a sensor error

Err The display cannot load data from the controller. Disconnect and then reconnect the display

ALA The alarm button is activated. The first alarm code is then shown

--- Top position in the alarm queue

--- Bottom position in the alarm queue

Loc The configuration is locked. Unlock by pressing (for 3 seconds) on the 'up arrow' and 'down arrow' simultaneously

UnL The configuration is unlocked

--- The parameter has reached min. or max. limit

PS A password is required for access to the menu

Fan Appliance cleaning has been initiated. The fans are running

OFF Appliance cleaning is activated and the appliance can now be cleaned

OFF The main switch is set to Off

SEr The main switch is set to service / manual operation

CO<sub>2</sub> Flashes: Will display in event of a refrigerant leakage alarm, but only if the refrigerant is set up for CO<sub>2</sub>

# Factory setting

If you need to return to the factory-set values, it can be done in this way:

- Cut off the supply voltage to the controller
- Keep up "∧" and down "∨" arrow buttons depressed at the same time as you reconnect the supply voltage
- When FAc is shown in the display, select "yes".



#### Statements for the AK-UI55 Bluetooth display:

## **FCC COMPLIANCE STATEMENT**

CAUTION: Changes or modifications not expressly approved could void your authority to use this equipment
This device complies with Part 15 of the FCC Rules. Operation to the following two conditions: (1) This device may not cause harmful
interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

#### **INDUSTRY CANADA STATEMENT**

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

#### NOTICE

#### **FCC COMPLIANT NOTICE**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Modifications: Any modifications made to this device that are not approved by Danfoss may void the authority granted to the user by the FCC to operate this equipment.

Danfoss Cooling 11655 Crossroads Circle Baltimore, Maryland 21220 United States of America www.danfoss.com

# **EU CONFORMITY NOTICE**

Hereby, Danfoss A/S declares that the radio equipment type AK-UI55 Bluetooth is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.danfoss.com

Danfoss A/S Nordborgvej 81 6430 Nordborg Denmark www.danfoss.com