



**FLATRON** LCD 885LE Monitor

---

User's Guide

---

---

# FCC Warning

## Class B Computing Device

### Information to the User

This equipment has been tested and found to comply with the limits for a class B digital device pursuant to part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help and for additional suggestions.

The user may find the following booklet prepared by the Federal Communications Commission helpful: "How to Identify and Resolve Radio-TV Interference Problems." This booklet is available from the U.S. Government Printing Office, Washington, D.C. 20402, Stock No. 004-000-00345-4.

### FCC Warning

The user is cautioned that changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

NOTE: In order for an installation of this product to maintain compliance with the limits for a Class B device, **shielded cables** must be used.

## Table of Contents

<b>Introduction</b>	Introduction	A1
	Important Precautions	A2
<b>Installation</b>	Connecting the Monitor	A4
	Making use of USB (Universal Serial Bus) Feature	A6
<b>Operation</b>	Location and Function of Controls	A8
	Control Panel Function	A9
	On Screen Display (OSD) Control Adjustment	A10
	On Screen Display(OSD) Selection and Adjustment	A11
<b>Technical Information</b>	Energy Saving Design	A13
	Low Radiation Compliance (MPR II), Self Diagnostics Messages and DDC (Display Data Channel)	A14
	Video Memory Modes	A15
	Troubleshooting	A16
	Service	A17
	Specifications	A18
<b>Appendix</b>	Communications Regulation Information	See back of manual
	Environmental Labelling of Personal Computers	See back of manual

ENGLISH

## Introduction

### Introduction

**The FLATRON LCD 885LE Flat Panel Monitor has an active matrix TFT (Thin-Film Transistor) LCD (Liquid Crystal Display).**

**This monitor is designed for use in small working areas or for those who need more working space on the desk.**

### Features

- The FLATRON LCD 885LE is a 18.1-inch (18.1 inches viewable) intelligent microprocessor based monitor.
- Two signal ports (Dsub port and DVI-D port) on the rear panel allow 2 connections to 2 computers at a time. The DVI - D (Digital Visual Interface - integrated) port supports analog and digital signal inputs and also improves quality of the displayed image by eliminating poor video at the monitor source.
- We accomplished to adapt the advanced design and technology to the monitor. Soft touch buttons on the front panel are simple and allow you to conveniently adjust a variety of image controls. The absolute flat screen and screen surface treatment eliminate distracting glares.
- USB (Universal Serial Bus) ports at the back of the monitor are prepared for the USB cable and hub. You can easily and flexibly connect USB-designed devices-such as a mouse, keyboard or printer- to the monitor for true Plug and Play function.
- Digitally controlled auto-scanning is done with the micro-processor for horizontal scan frequencies between 31 and 81kHz, and vertical scan frequencies between 56 - 85Hz. The microprocessor-based intelligence allows the monitor to operate in each frequency mode with the precision of a fixed frequency monitor.
- It supports resolutions up to 1280x1024, and has a wide viewing angle of  $\pm 80$  degrees horizontal and  $\pm 80$  degrees vertical.
- For greater user health and safety, this monitor complies with the stringent Swedish TCO'99 requirements for low radiation emissions.
- For low cost of monitor operation, this monitor is certified as meeting the EPA Energy Star requirements, and utilizes the VESA Display Power Management Signalling (DPMS) protocol for power saving during non-use periods.

### Monitor Registration

The model and serial numbers are found on the rear of this unit. These numbers are unique to this unit and not available to others. You should record requested information here and retain this guide as a permanent record of your purchase. Staple your receipt here.

Date of Purchase : \_\_\_\_\_  
Dealer Purchased From : \_\_\_\_\_  
Dealer Address : \_\_\_\_\_  
Dealer Phone No. : \_\_\_\_\_  
Model No. : \_\_\_\_\_  
Serial No. : \_\_\_\_\_

## Important Precautions

**This unit has been engineered and manufactured to assure your personal safety, but improper use can result in potential electrical shock or fire hazard. In order not to defeat the safeguards incorporated in this monitor, observe the following basic rules for its installation, use, and servicing. Also follow all warnings and instructions marked directly on your monitor.**

### On Safety

Use only the power cord supplied with the unit. In case you use another power cord, make sure that it is certified by the applicable national standards if not being provided by the supplier. If the power cable is faulty in any way, please contact the manufacturer or the nearest authorized repair service provider for a replacement.

Operate the monitor only from a power source indicated in the specifications of this manual or listed on the monitor. If you are not sure what type of power supply you have in your home, consult with your dealer.

Overloaded AC outlets and extension cords are dangerous. So are frayed power cords and broken plugs. They may result in a shock or fire hazard. Call your service technician for replacement.

Do not Open the Monitor.

- There are no user serviceable components inside.
- There are Dangerous High Voltages inside, even when the power is OFF.
- Contact your dealer if the monitor is not operating properly.

To Avoid Personal Injury :

- Do not place the monitor on a sloping shelf unless properly secured.
- Use only a stand recommended by the manufacturer.
- Do not try to roll a stand with small casters across thresholds or deep pile carpets.

To Prevent Fire or Hazards:

- Always turn the monitor OFF if you leave the room for more than a short period of time. Never leave the monitor ON when leaving the house.
- Keep children from dropping or pushing objects into the monitor's cabinet openings. Some internal parts carry hazardous voltages.
- Do not add accessories that have not been designed for this monitor.
- During a lightning storm or when the monitor is to be left unattended for an extended period of time, unplug it from the wall outlet.
- Do not bring magnetic devices such as magnets or motors near the picture tube.

### On Installation

## Important Precautions

Do not allow anything to rest upon or roll over the power cord, and do not place the monitor where the power cord is subject to damage.

Do not use this monitor near water such as near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool.

Monitors are provided with ventilation openings in the cabinet to allow the release of heat generated during operation. If these openings are blocked, built-up heat can cause failures which may result in a fire hazard.

Therefore, NEVER:

- Block the bottom ventilation slots by placing the monitor on a bed, sofa, rug, etc.
- Place the monitor in a built-in enclosure unless proper ventilation is provided.
- Cover the openings with cloth or other material.
- Place the monitor near or over a radiator or heat source.

Do not rub or strike the Active Matrix LCD with anything hard as this may scratch, mar, or damage the Active Matrix LCD permanently.

Do not press the LCD screen with your finger for a long time as this may incur some afterimages.

Some dot defects may appear on the screen, like Red, Green or Blue spots on the screen. However, this will have no impact or effect on the monitor performance.

If possible, use the VESA 1280x1024 @60Hz video mode to obtain the best image quality for your LCD monitor. If used under any modes except the VESA 1280x1024 @60Hz video mode, some scaled or processed images may appear on the screen. However, this is the characteristics of the LCD panel which has a fixed resolution of 1280x1024 at 60Hz.

### On Cleaning

- Unplug the monitor before cleaning the face of the LCD screen.
- Dust the monitor by wiping the screen and the cabinet with a soft, clean cloth. If the screen requires additional cleaning, use a clean, damp cloth.
- Do not use liquid cleaners or aerosol cleaners.

### On Repacking

- Do not throw away the carton and packing materials. They make an ideal container in which to transport the unit. When shipping the unit to another location, repack it in its original material.

## Connecting the Monitor

To set up the monitor, ensure that the power is turned off to the monitor, computer system, and other attached devices, then follow these steps:

1. Place the monitor in a convenient, well-ventilated location near your computer.
2. Remove the stand cover of the monitor to connect the cables.
3. Connect the signal cable.

- When connecting the DVI-D signal cable .....Figure 1

Connect the end of monitor signal cable to the port on the rear panel of the monitor through the slot and cable holder on Stand. ❶ Connect the other end to the DVI port on the rear panel of the computer and tighten the screws. ❷

- When connecting the Dsub signal cable

PC ..... Figure 2


Connect one end of the monitor signal cable to either of the connectors ❶ on the rear panel of the monitor. Connect the other end to the Dsub port on the rear panel of the computer and tighten the screws. ❷

MAC ..... Figure 3



Connect one end of the monitor signal cable to either of the connectors ❶ on the rear panel of the monitor. Connect the other end of the monitor signal cable to the rear panel of Macintosh computer through a Macintosh adapter and then tighten screws. ❷

4. Connect the plug from the AC adapter into the back of the monitor. ❸

Figure 1

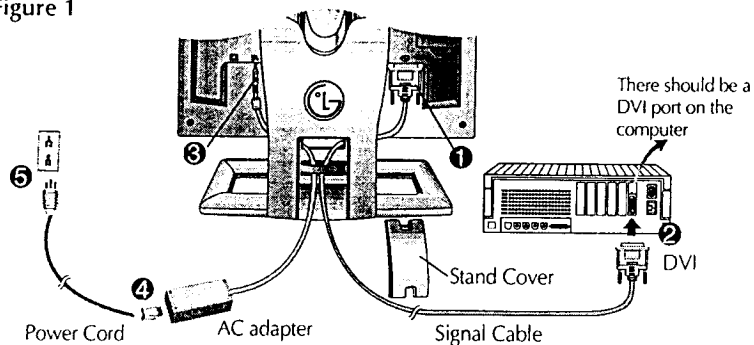

## Connecting the Monitor

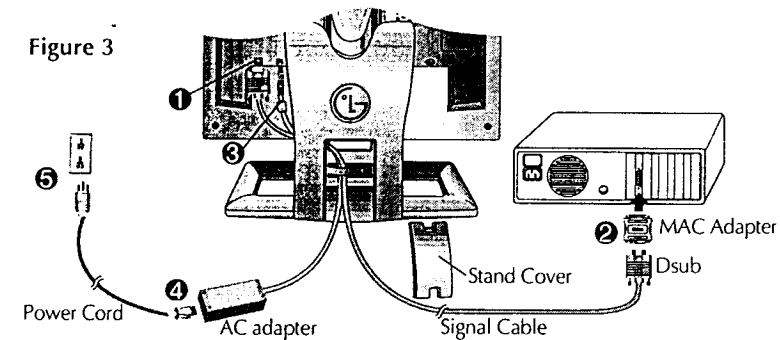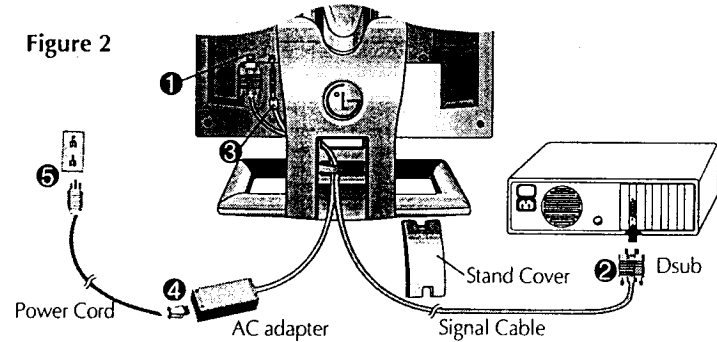

### NOTE

- The figure3 shows the connection to an Apple Macintosh, using a separately purchased adapter. For more information on adapter requirements, contact your authorized dealer, reseller, or service provider.

5. Connect one end of the AC power cord to the AC adapter ④ and the other end to a properly grounded AC outlet that is easily accessible and close to the monitor. ⑤
6. After connecting cables, put stand cover correctly into the holes under stand. If securely connected, you can hear click sound from the latch.
7. Power ON the PC, then the monitor.
8. If you see the **NO SIGNAL** message, check the signal cable and connectors.
9. After using the system, power OFF the monitor, then the PC.

Note : If you see the **INPUT SIGNAL OUT OF RANGE** message, check to make sure your system is set to one of the factory preset modes (see page A15), or is set to a resolution and refresh rate within the specification limits of this monitor.






## Making use of USB (Universal Serial Bus) Feature


USB (Universal Serial Bus) is an innovation in connecting your different desktop peripherals conveniently to your computer. By using the USB, you will be able to connect your mouse, keyboard, printer, and other peripherals to your monitor instead of having to connect them to your computer. This will give you greater flexibility in setting up your system. USB allows you to connect chain up to 120 devices on a single USB port, and you can “hot” plug (attach them while the computer is running) or unplug them while maintaining Plug and Play auto detection and configuration. This monitor has an integrated self-powered USB hub, allowing up to 4 other USB devices to be attached it.

### USB connection

1. Connect the upstream port of the monitor to the downstream port of the USB compliant PC or another hub using the USB cable (Computer must have a USB port).
2. Connect the USB compliant peripherals to the downstream ports of the monitor.

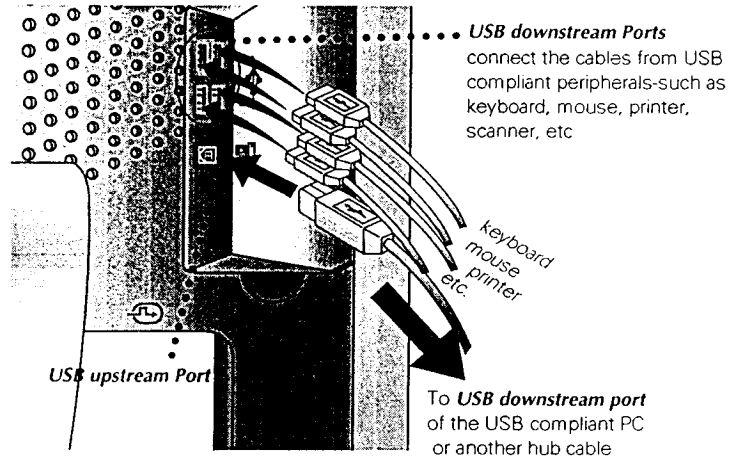

## Making use of USB (Universal Serial Bus) Feature

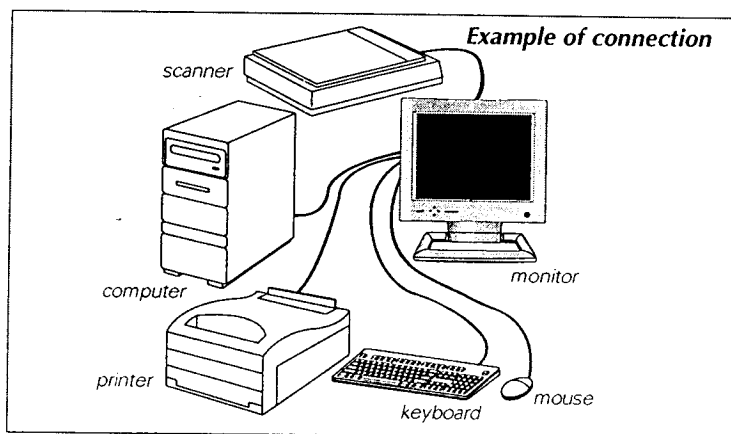

### NOTE


- To activate the USB hub function, the monitor must be connected to a USB compliant PC(OS) or another hub with the USB cable(enclosed).
- When connecting the USB cable, check that the shape of the connector at the cable side matches the shape at the connecting side.
- When the monitor is not plugged into an electric socket, the peripherals connected to the downstream ports will not operate.
- Even if the monitor is in a power saving mode, USB compliant devices will function when they are connected the USB ports(both the upstream and downstream) of the monitor.

### USB specifications


USB standard	Rev. 1.1 complied self-powered hub
Downstream power supply	500mA for each (MAX)
Communication speed	12 Mbps (full), 1.5 Mbps (low)
USB port	1 Upstream port 4 Downstream ports

### Location and Function of Controls

Front View

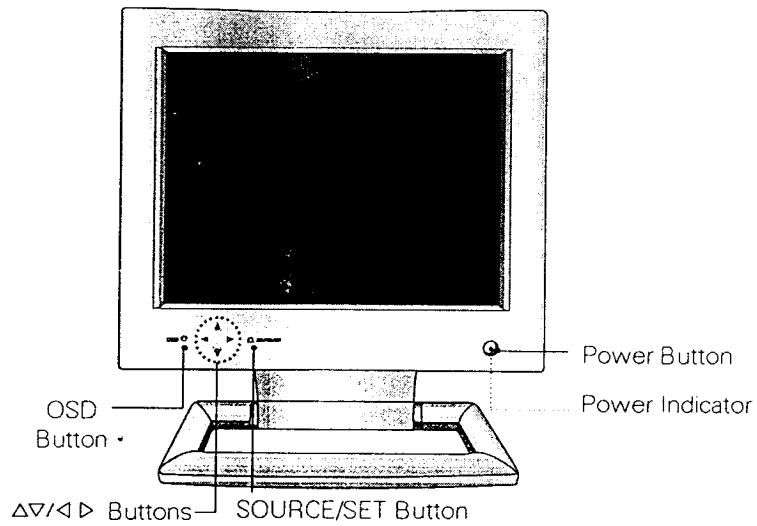


Rear View

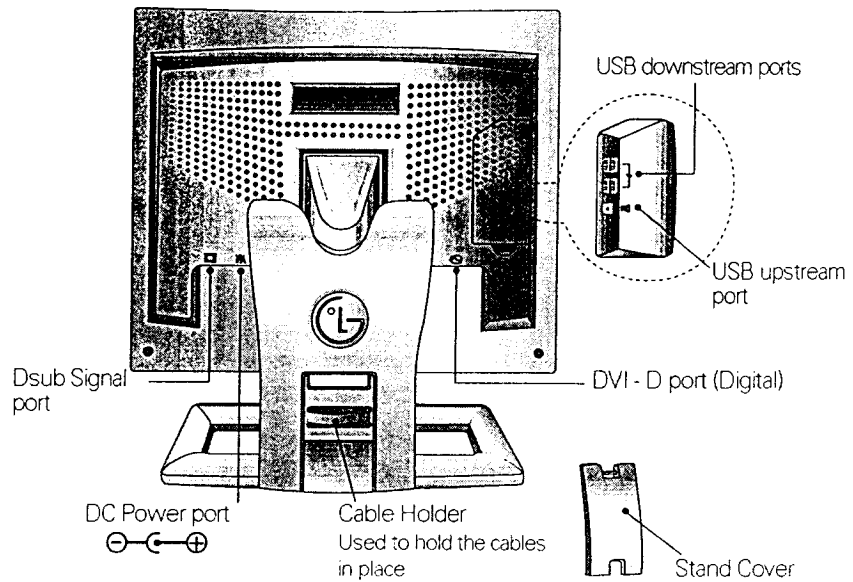

## Front Panel Controls

### <Shortcut Keys>


- Brightness and Contrast can be adjusted directly without entering the On Screen Display (OSD) system.



Touch the  $\leftarrow/\rightarrow$  buttons to adjust the settings and then the **OSD button** to save all changes. The Brightness and Contrast functions are also available in the On Screen Display (OSD) menu.


### <Auto Button>

- This function is suitable for analog signal input only. This button is for the automatic adjustment of the screen position, clock and phase.



**Note:** Some signal from some graphics boards may not function properly. If the results are unsatisfactory, adjust your monitor's Position, Clock and Phase manually.

## Control Panel Function

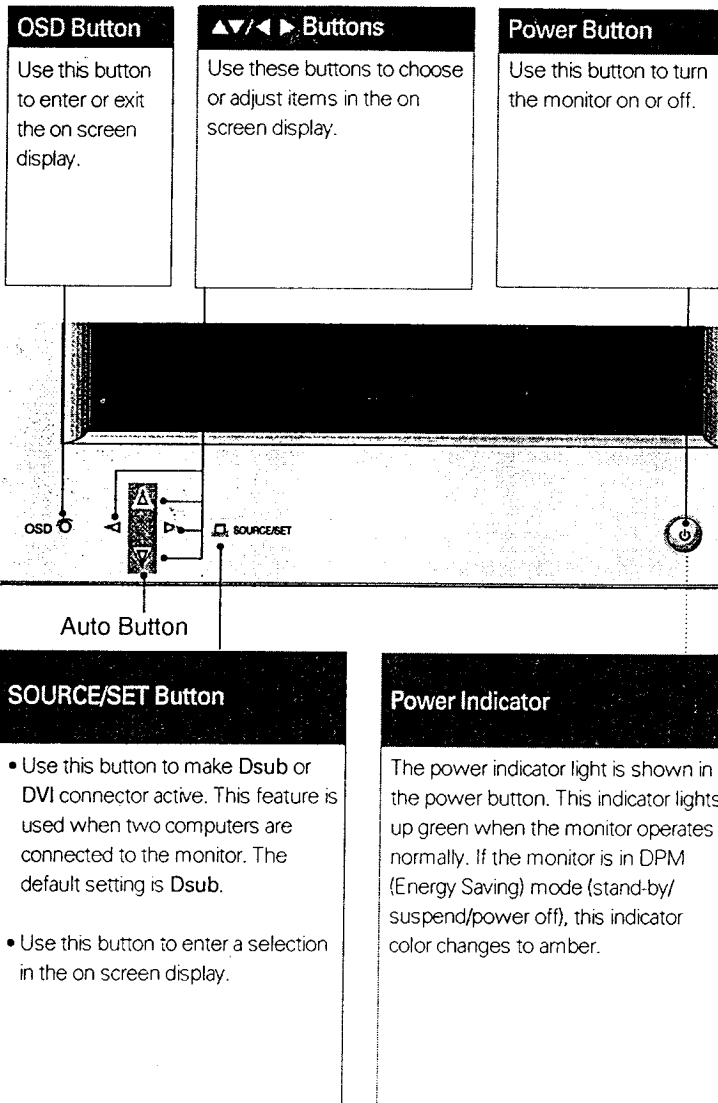


## On Screen Display (OSD) Control Adjustment

Making adjustments to the image size, position and operating parameters of the monitor are quick and easy with the On Screen Display Control system. A quick example is given below to familiarize you with the use of the controls. Following section is an outline of the available adjustments and selections you can make using the OSD.

### NOTE

- Allow the monitor to stabilize for at least 30 minutes before making image adjustment.

To make adjustments in the On Screen Display, follow these steps:

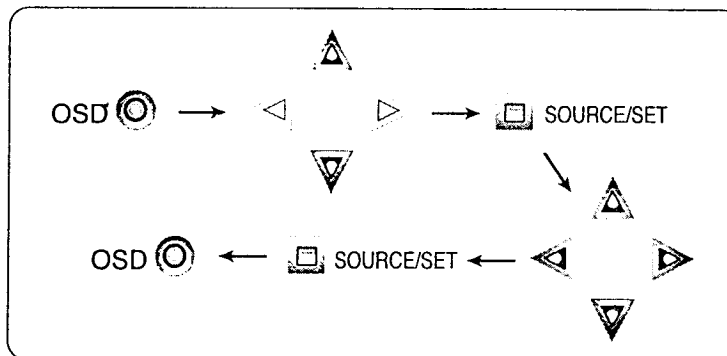


- 1 Touch the OSD Button, then the main menu of the OSD appears.
- 2 To access a control, use the  $\Delta$  or  $\nabla$  Buttons. When the icon you want becomes highlighted, touch the SOURCE/SET Button.
- 3 Use the  $\Delta/\nabla/\leftarrow/\rightarrow$  Buttons to adjust the item to the desired level.
- 4 Accept the changes by touching the SOURCE/SET Button.
- 5 Exit the OSD by touching the OSD Button.

## On Screen Display(OSD) Selection and Adjustment

You were introduced to the procedure of selection and adjusting an item using the OSD system.

Listed below are the icons, icon names, and icon descriptions of the items that are shown on the Menu.

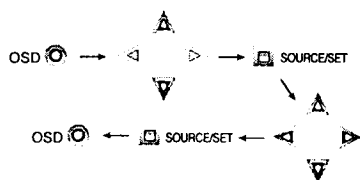

### BRIGHTNESS/CONTRAST

OSD Adjust	Description
	<p><b>Brightness</b> Used to adjust the brightness of the screen.</p> <p><b>Contrast</b> Adjust the display to the contrast desired.</p>

### COLOR


	<p><b>PRESET 9300K/6500K</b> To appear the displays color temperature. • 9300K:Slightly bluish white. • 6500K:Slightly reddish white.</p> <p><b>RED GREEN BLUE</b> To set your own color levels.</p>
--	--

### POSITION

	<p><b>Vertical Position</b> To move image up and down.</p> <p><b>Horizontal Position</b> To move picture image left and right.</p>
--	--

#### NOTE

- When a digital signal is set as an input, only the BRIGHTNESS, CONTRAST and SETUP properties can be adjusted. You do not need to adjust the other properties.

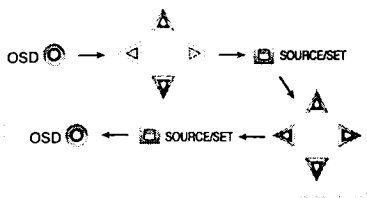

## On Screen Display(OSD) Selection and Adjustment

**TRACKING**

OSD Adjust	Description
	<p><b>CLOCK</b> To minimize any vertical bars or stripes visible on the screen background. The horizontal screen size will also change.</p> <p><b>PHASE</b> To adjust the focus of the display. This item allows you to remove any horizontal noise and clear or sharpen the image of characters. Phase adjustment should be done after adjusting the Clock.</p>

**SETUP**

OSD Adjust	Description
	<p><b>LANGUAGE</b> To choose the language in which the control names are displayed.</p> <p><b>IMAGE SIZE</b> This function displays the image in its original size or enlarged size so as to fit in the full screen of the LCD panel.</p> <p><b>OSD POSITION</b> To adjust position of the OSD window on the screen.</p> <p><b>MODE INFO</b> This function displays the current mode information on the screen when power on the monitor.</p> <p><b>BEEP</b> To select beep ON or OFF.</p> <p><b>ELAPSED TIME</b> To display the use time of monitor.</p>

## Energy Saving Design

This monitor complies with the EPA's Energy Star program, which is a program designed to have manufacturers of computer equipment build circuitry into their products to reduce power consumption during time of non-use.

This monitor also goes into its energy saving mode if you exceed the monitor's operating limits, such as the maximum resolution of 1280x1024 or the frequency refresh rates of 31-81kHz horizontal or 56-85Hz vertical. When this monitor is used with a Green or EPA Energy Star PC, or a PC with a screen blanking software following the VESA Display Power Management Signalling (DPMS) protocol, this monitor can conserve significant energy by reducing power consumption during periods of non-use. When the PC goes into the energy saving mode, the monitor will go into a suspended operation state, indicated by the Power LED light changing from a green color to an amber color. After an extended period in the suspended mode, the monitor will then enter a semi-OFF mode to conserve more energy. In the semi-OFF mode or DPMS OFF mode as we call it in our specifications, the Power LED will still show an amber color. When you awaken your PC by hitting a key or moving the mouse, the monitor will also awaken to its normal operating mode, indicated by the green Power LED light. By following these conventions, the power consumption can be reduced to the following levels:

### Power Consumption

Mode	Hori. Sync	Verti. Sync	Video	Power Consumption	LED Color
Normal(Max.)	On	On	Normal	≤ 60W	Green
Stand-by	Off	On	Off	≤ 5W	Amber
Suspend	On	Off	Off	≤ 5W	Amber
Power Off	Off	Off	Off	≤ 5W	Amber



## Low Radiation Compliance (MPR II), Self Diagnostics Messages and DDC (Display Data Channel)


### Low Radiation Compliance (MPR II)

This monitor meets one of the strictest guidelines available today for low radiation emissions, offering the user extra shielding and an antistatic screen coating. These guidelines, set forth by a government agency in Sweden, limit the amount of emission allowed in the Extremely Low Frequency (ELF) and Very Low Frequency (VLF) electromagnetic range.

### Self Diagnostics Messages


Special Self Diagnostics messages will appear on the screen when identifying the following monitor conditions:

- NO SIGNAL



This OSD may pop up when it is ON but no signal is detected. In this case the message NO SIGNAL will be highlighted, alerting you to check the signal cable connections.

- INPUT SIGNAL OUT OF RANGE



This OSD may appear to inform you that the signal being sent to the monitor is not within its frequency range. In this case, you would need to check the resolution and refresh rate you have your video card set to, and adjust to be within the range of the monitor.

### DDC (Display Data Channel)

DDC is a communication channel over which the monitor automatically informs the host system (PC) about its capabilities. This monitor has two DDC function; DDC1 and DDC2B. DDC1 and DDC2B carry out uni-directional communication between the PC and the monitor. Under these situations, the PC sends display data to the monitor but not commands to control the monitor settings.

#### NOTE

- PC must support DDC functions to do this.

## Video Memory Modes

The monitor has 26 memory locations for display modes, 16 of which are factory preset to popular video modes.

### Display Modes (Resolution)

Display Modes (Resolution)	Horizontal Freq. (kHz)	Vertical Freq. (Hz)	
1 VGA 640 x 350	31.469	70	D-Sub/DVI
2 VGA 720 x 400	31.468	70	D-Sub/DVI
3 VGA 640 x 480	31.469	60	D-Sub/DVI
4 VESA 640 x 480	37.500	75	D-Sub/DVI
5 VESA 640 x 480	43.269	85	D-Sub/DVI
6 VESA 800 x 600	37.879	60	D-Sub/DVI
7 VESA 800 x 600	46.875	75	D-Sub/DVI
8 VESA 800 x 600	53.674	85	D-Sub/DVI
9 MAC 832 x 624	49.725	75	D-Sub/DVI
10 VESA 1024 x 768	48.363	60	D-Sub/DVI
11 VESA 1024 x 768	60.123	75	D-Sub/DVI
12 VESA 1024 x 768	68.677	85	D-Sub/DVI
13 MAC 1152 x 870	68.681	75	D-Sub/DVI
14 VESA 1152 x 900	61.805	65	D-Sub/DVI
15 VESA 1280 x 1024	63.981	60	D-Sub/DVI
16 VESA 1280 x 1024	79.976	75	D-Sub

### User Modes

- Modes 17-26 are empty and can accept new video data. If the monitor detects a new video mode that has not been present before or is not one of the preset modes, it stores the new mode automatically in one of the empty modes starting with mode 17.

If you use up the 10 blank modes and still have more new video modes, the monitor replaces the information in the user modes starting with mode 17.

### Recalling Display Modes

- When your monitor detects a mode it has seen before, it automatically recalls the image settings you may have made the last time you used that mode.

You may, however, manually force a recall of each of the 16 preset modes by pressing the Recall button. All preset modes are automatically recalled as the monitor senses the incoming signal.

The ability to recall the preset modes is dependent on the signal coming from your PC's video card or system. If this signal does not match any of the factory modes, the monitor automatically sets itself to display the image.

### Troubleshooting

Check the following before calling for service.

**Display Position is incorrect.**

- Select AUTO from the OSD menu, and press◀/▶ to activate the function.
- If the results are unsatisfactory, adjust the image position using the H position and V position icon in the on screen display.

**On the screen background, vertical bars or stripes are visible.**

- Select AUTO from the OSD menu, and press◀/▶ to activate the function.
- If the results are unsatisfactory, decrease the vertical bars or stripes using the CLOCK icon in the on screen display.

**Any horizontal noise appearing in any image or characters are not clearly portraided.**

- Select AUTO from the OSD menu, and press◀/▶ to activate the function.
- If the results are unsatisfactory, decrease the horizontal bars using the PHASE icon in the on screen display.

**NO SIGNAL message.**

- The signal cable is not connected, or is loose. Check and secure the connection.

**INPUT SIGNAL OUT OF RANGE message appears.**

**Picture is blank.**

- The frequency of the signal from the video card is outside the operating range of the monitor.  
\*Horizontal Frequency: 31kHz-81kHz  
\*Vertical Frequency: 56Hz-85Hz

Use the graphics board's utility software to change the frequency setting (Refer to the manual for graphics board).

You can change the setup to the supported resolution using the **Safe Mode** (Press the F8 key during booting the system).

**The power LED is illuminated amber.**

- The monitor is in its display power management mode.
- There is no active signal coming from the PC.
- The signal cable is not fastened securely.
- Check the computer power and graphics adapter configuration.

**The monitor doesn't enter the power saving off mode (Amber).**

- Computer video signal is not VESA DPMS standard. Either the PC or the video controller card is not using the VESA DPMS power management function.

#### NOTE

- If the power indicator(LED) light is blinking amber, may result in abnormal condition of the monitor.
- Then press a power ON/OFF button on the front panel control and call your service technician for more information.

## Service



**Unplug the monitor from the wall outlet and refer servicing to qualified service personnel when :**

- The power cord or plug is damaged or frayed.
- Liquid has been spilled into the monitor.
- The monitor has been exposed to rain or water.
- The monitor does not operate normally following the operating instructions. Adjust only those controls that are covered in the operating instructions. An improper adjustment of other controls may result in damage and often requires extensive work by a qualified technician to restore the monitor to normal operation.
- The monitor has been dropped or the cabinet has been damaged.
- The monitor exhibits a distinct change in performance.
- Snapping or popping from the monitor is continuous or frequent while the monitor is operating. It is normal for some monitors to make occasional sounds when being turned on or off, or when changing video modes.

**Do not attempt to service the monitor yourself, as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.**

## Specifications

### Signal Connector Pin Assignment



#### ■ 15pin VGA Connector

Pin	Signal(D-Sub)	Pin	Signal(D-Sub)
1	Red Video	9	N.C.
2	Green Video	10	Sync.Ground
3	Blue Video	11	Ground
4	Ground	12	SDA
5	Ground	13	H. Sync.
6	Red Ground	14	V. Sync.
7	Green Ground	15	SCL
8	Blue Ground		

#### NOTE

- No. 5 Pin have to ground on the PC side.

#### ■ DVI-I Connector (Digital/Analog)

Pin	Signal(DVI-I)	Pin	Signal(DVI-I)
1	T. M. D. S. Data2-	16	Hot Plug Detect
2	T. M. D. S. Data2+	17	T. M. D. S. Data0-
3	T. M. D. S. Data2/4 Shield	18	T. M. D. S. Data0+
4	T. M. D. S. Data4-	19	T. M. D. S. Data0/5 Shield
5	T. M. D. S. Data4+	20	T. M. D. S. Data5-
6	DDC Clock	21	T. M. D. S. Data5+
7	DDC Data	22	T. M. D. S. Clock Shield
8	Analog Vertical Sync.	23	T. M. D. S. Clock+
9	T. M. D. S. Data1-	24	T. M. D. S. Clock-
10	T. M. D. S. Data1+		
11	T. M. D. S. Data1/3 Shield		
12	T. M. D. S. Data3-		
13	T. M. D. S. Data3+		
14	+5V Power		
15	Ground (return for +5V, H. Sync. and V. Sync.)		

T. M. D. S. (Transition Minimized Differential Signaling)

### AC-DC Adapter

Input AC 100-240V ~1.5 - 1.0A 50/60Hz

Output DC12V 5.0A

Use only the AC-DC adapter supplied with the monitor.

## Technical Information

### Specifications

<b>Display</b>	Type	18.1inch (45.97cm) Flat Panel Active matrix-TFT LCD Anti-Glare coating	
	Viewable Size	18.1inch (45.97cm)	
	Viewing Angle (max.)	80° (Left / Right / Up / Down)	
	Pixel pitch	0.28 x 0.28mm	
	True color	16.7 million color	
<b>Sync Input</b>	Horizontal Freq.	31kHz - 81kHz (Automatic)	
	Vertical Freq.	56Hz - 85Hz (Automatic)	
	Input form	Separate, TTL, Positive/Negative	
		Composite, TTL, Positive/Negative SOG (Sync On Green) Digital	
<b>Video Input</b>	Signal input	15 pin D-Sub connector / DVI - D connector (Analog/Digital)	
	Input Form	Separate, RGB Analog, 0.7Vp-p/75ohm, Positive, Digital	
	Resolution	Max	VESA 1280 x 1024 @75Hz
<b>Power Input</b>		Recommend	VESA 1280 x 1024 @60Hz
	DC 12V 5.0A		
<b>Dimensions</b>	Width	43.6cm / 17.2inches	
	Height	45.7cm / 18.0inches	
	Depth	20.5cm / 8.07inches	
<b>Weight Tilt/Swivel Range</b>	Net	8.9kg / 19.62lbs	
	Tilt	5° (Down) / 30° (Up)	
	Swivel	30° (Left) / 30° (Right)	
<b>Environment Conditions</b>	Operating condition		
	Temperature	10°C to 35°C	
	Humidity	10% to 80% non-condensing	
	Storage condition		
	Temperature	-20°C to 60°C	
	Humidity	5% to 95% non-condensing	

#### NOTE

- Information in this document is subject to change without notice.

**FCC Compliance Statement****Communications Regulation Information**

This equipment has been tested and found to comply within the limits of a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception (which can be determined by turning the equipment on and off), the user is encouraged to try to correct the interference by using one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**Caution:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's (or your) authority to operate the equipment. Only peripherals (digital input/output devices, terminals, printers, etc.) certified to comply with the Class B limits may be attached to this monitor. Operation with non-certified peripherals is likely to result in interference to radio and TV reception. Only shielded signal cables may be used with this System.

**NOTICE**

The regulations are applied only to the products with the ID LABEL indicating specific requirements.

**Canadian DOC Notice**

This Class B digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations.  
Cet appareil numérique de la classe B respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.

**NOTICE**

The regulations are applied only to the products with the ID LABEL indicating specific requirements.

**CE Conformity Notice**

Products with the "CE" Marking comply with the EMC Directive(89/336/EEC) and LOW VOLTAGE Directive (73/23/EEC) issued by the Commission of the European Community. Compliance with these directives implies conformity to the following European Norms :

- EN 55022 ; Radio Frequency Interference
- EN 50082-1:1992 ; Electromagnetic Immunity
- EN 60555-2 ; Power Line Harmonics
- EN 60555-3 ; Voltage Fluctuations
- EN 60950 ; Product Safety

**NOTICE**

The regulations are applied only to the products with the ID LABEL indicating specific requirements.

## Environmental Labelling of Personal Computers



### Congratulations!

You have just purchased a TCO'99 approved and labelled product! Your choice has provided you with a product developed for professional use. Your purchase has also contributed to reducing the burden on the environment and also to the further development of environmentally adapted electronics products.

This product meets the requirements for the TCO'99 scheme which provides for an international environmental and quality labelling of personal computers. The labelling scheme was developed as a joint effort by the TCO (The Swedish Confederation of Professional Employees), Svenska Naturskyddsforeningen (The Swedish Society for Nature Conservation), Statens Energimyndighet (The Swedish National Energy Administration) and SEMKO AB.

The requirements cover a wide range of issues: environment, ergonomics, usability, reduction of electric and magnetic fields, energy consumption and electrical safety.

### Why do we have environmentally labelled computers?

In many countries, environmental labelling has become an established method for encouraging the adaptation of goods and services to the environment. The main problem, as far as computers and other electronics equipment are concerned, is that environmentally harmful substances are used both in the products and during their manufacture. Since it is not so far possible to satisfactorily recycle the majority of electronics equipment, most of these potentially damaging substances sooner or later enter nature.

There are also other characteristics of a computer, such as energy consumption levels, that are important from the viewpoints of both the work (internal) and natural (external) environments. Since all methods of electricity generation have a negative effect on the environment (e.g. acidic and climate-influencing emissions, radioactive waste), it is vital to save energy. Electronics equipment in offices is often left running continuously and thereby consumes a lot of energy.



## Environmental Labelling of Personal Computers

### What does labelling involve?

The environmental demands impose restrictions on the presence and use of heavy metals, brominated and chlorinated flame retardants, CFCs (freons) and chlorinated solvents, among other things. The product must be prepared for recycling and the manufacturer is obliged to have an environmental policy which must be adhered to in each country where the company implements its operational policy.

The energy requirements include a demand that the computer and/or display, after a certain period of inactivity, shall reduce its power consumption to a lower level in one or more stages. The length of time to reactivate the computer shall be reasonable for the user.

Labelled products must meet strict environmental demands, for example, in respect of the reduction of electric and magnetic fields, physical and visual ergonomics and good usability.

Below you will find a brief summary of the environmental requirements met by this product. The complete environmental criteria document may be ordered from:

#### **TCO Development**

SE-114 94 Stockholm, Sweden

Fax: +46 8 782 92 07

Email (Internet): [development@tco.se](mailto:development@tco.se)

Current information regarding TCO'99 approved and labelled products may also be obtained via the Internet, using the address: <http://www.tco-info.com/>

### Environmental requirements

#### **Flame retardants**

Flame retardants are present in printed circuit boards, cables, wires, casings and housings. Their purpose is to prevent, or at least to delay the spread of fire. Up to 30% of the plastic in a computer casing can consist of flame retardant substances. Most flame retardants contain bromine or chloride, and those flame retardants are chemically related to another group of environmental toxins, PCBs. Both the flame retardants containing bromine or chloride and the PCBs are suspected of giving rise to severe health effects, including reproductive damage in fish-eating birds and mammals, due to the bio-accumulative\* processes. Flame retardants have been found in human blood and researchers fear that disturbances in foetus development may occur.

## Environmental Labelling of Personal Computers

The relevant TCO'99 demand requires that plastic components weighing more than 25 grams must not contain flame retardants with organically bound bromine or chlorine. Flame retardants are allowed in the printed circuit boards since no substitutes are available.

### Cadmium\*\*

Cadmium is present in rechargeable batteries and in the colour-generating layers of certain computer displays. Cadmium damages the nervous system and is toxic in high doses. The relevant TCO'99 requirement states that batteries, the colour-generating layers of display screens and the electrical or electronics components must not contain any cadmium.

### Mercury\*\*

Mercury is sometimes found in batteries, relays and switches. It damages the nervous system and is toxic in high doses. The relevant TCO'99 requirement states that batteries may not contain any mercury. It also demands that mercury is not present in any of the electrical or electronics components associated with the labelled unit. There is however one exception. Mercury is, for the time being, permitted in the back light system of flat panel monitors as there today is no commercially available alternative. TCO aims on removing this exception when a mercury free alternative is available.

### CFCs (freons)

The relevant TCO'99 requirement states that neither CFCs nor HCFCs may be used during the manufacture and assembly of the product. CFCs (freons) are sometimes used for washing printed circuit boards. CFCs break down ozone and thereby damage the ozone layer in the stratosphere, causing increased reception on earth of ultraviolet light with e.g. increased risks of skin cancer (malignant melanoma) as a consequence.

### Lead\*\*

Lead can be found in picture tubes, display screens, solders and capacitors. Lead damages the nervous system and in higher doses, causes lead poisoning. The relevant TCO'99 requirement permits the inclusion of lead since no replacement has yet been developed.

\* Bio-accumulative is defined as substances which accumulate within living organisms

\*\* Lead, Cadmium and Mercury are heavy metals which are Bio-accumulative.