

Contents

- 1. Overview**
 - Introduction
 - Box Contents (Charger Clip, Charger, LBA-T950)
 - Specification
 - Watch Overview
- 2. Getting Started**
 - Charging
 - Time & Date Setting
 - Connecting to your mobile phone
 - 1) Easy Pairing
 - 2) Manual Pairing
- 3. Basic**
 - Main Menu and Profiles
 - Watch Theme
 - Setting the Manner Mode
 - Responding to a call
 - Check the New Message
 - Check Received Message List
- 4. Tools**
 - Setting the Alarm
 - Updating the time automatically
 - Using the world time
 - Using Stopwatch
 - Setting the Event Alert
- 5. Settings**
 - Changing the Language
 - Changing the Backlight
 - Restore factory setting
 - Hot Keys
- 6. How to handle LBA-T950**
 - Water resistance of the watch
 - When wearing watch
- 7. Safety Guideline**
- 8. Troubleshooting**
- 9. Warranty and Service**
- 10. Declaration of confirmation**
- 11. Additional information**

1. Overview

Introduction

The LBA-T950 is a light weight wireless Watch utilizing Bluetooth® technology. This device can be used as an incoming call and SMS indicator from only LGE Mobile phone for supporting LBA-T950.

LBA-T950 only supports LGE Bluetooth enabled mobile phones. Please make sure that LGE mobile phone you already have or plan to purchase is compatible with LBA-T950. Notice also that Bluetooth headset can be simultaneously used with LBA-T950 only if your mobile phone is capable of multi-pairing.

Contents of Box



LBA-T950



Charging Clip



Manual



Charging Cable

EU	UK	US



[Power Adapter Type]

Specification

ITEM	Bluetooth enabled watch
Model	LBA-T950
Bluetooth® specification	V2.0 (Class 2), Gap Profile
Battery	3.7V, Li-Polymer Rechargeable
Operation Temperature	-10℃ ~ 60℃
Humidity	20%~60% (No Dew formation)
Dimension / weight	33mm(L) X 40mm(W) X 11 mm(H) / 51g
Wrist Band	Genuine Leather
Adapter rated voltage	AC 100 ~ 220V, 50 ~ 60HZ
Charging Time	3Hr
Watch Accuracy	±5s/Day (25℃)
Runtime	<ul style="list-style-type: none"> • Not Connected to a mobile phone <ul style="list-style-type: none"> - approximately 3 days for watch - Check the Operating conditions • Connected to a mobile phone <ul style="list-style-type: none"> - approximately 3 days for watch - Check the Operating conditions
Duration (Operating Condition)	<ul style="list-style-type: none"> • Not Connected to a mobile phone <ul style="list-style-type: none"> - Check on the time : 15/day - Backlight Duration : 15 sec • Connected to a mobile phone <ul style="list-style-type: none"> - Call : 10/day (Vibrator only) - SMS : 10/day (Viewing) - Time Check : 15/day - Alarm : 1/day

1. Overview

▪ Watch Overview

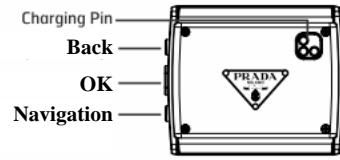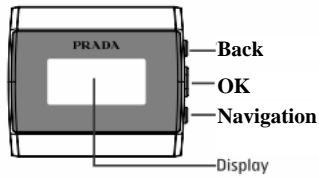

▪ Back(B) key

Call history/ Messages/ Back

▪ OK(O) key

PWR on-off/ Top menu/ Select/ OK

▪ Navigation(N) key

Profile setting/ Time theme change/ Navigation



	Bluetooth ON (not Connected)		Charging
	Bluetooth ON (Connected)		Charging Completed
	Incoming Call		Low Battery Level
	Incoming Call Reject		Message Received
	Incoming Call Silent		Menu Back
	Missed Call		Navigation

2. Getting Started



▪ Battery Status

When the battery voltage drops, transmission and alarm functions become ineffective. Check the remaining battery level frequently and recharge the battery before it runs out.

It takes 3 hours to fully charge the completely discharged battery.


Icon	Description
	Charge the battery right now
	On charging the battery
	Full charge

▪ Charging

The LBA-T950 can be charged in two ways

1. Connect LBA-T950 to power adapter

- Plug the power adapter into a working electrical outlet.
- Connect the charging clip to back of the watch. Make sure that charging pins are properly aligned with pins on the clip.
- Connect the power adapter to the charging clip with the symbols on the power adapter and clip connector facing the same direction.

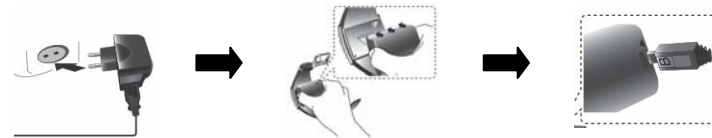

- When connecting the charger, LBA-T950 will be reset and then the battery begin to charge. If the screen indicates “Battery full” icon, charging battery is completed.



2. Getting Started


2. Connect LBA-T950 to your computer using charging cable

- a) Turn on your computer
- b) Connect charging cable to a USB port on your computer
- c) Following same steps shown in the previous section using charging cable instead of power adapter

If the screen doesn't show charging icon, the watch might not be connected properly to either USB port or power outlet. Once it happens, please follow the steps again.

▪ Setting time and Date

1. Press "OK" button shortly to show Top menu "Messaging"
2. Choose "Setting" → "Time&Date" → "Time Settings" & "Date settings"

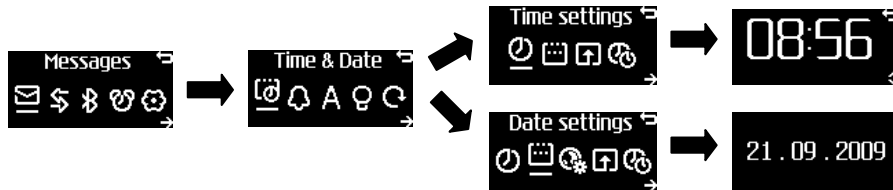

3. Press "Navigation" button to increase the number
4. Press "OK" key to confirm the Hour and move on to minute
5. Date setting is similar to time setting procedure shown above.
6. Day is automatically set based on the date

The date and time on this watch can be set to synchronize with those set on your LGE mobile phone. To set the time and date only once and to have it set automatically each time this watch gets connected to your LGE mobile phone.

▪ Connecting to your mobile phone

Follow the instructions that came with your mobile phone to place your phone in pairing mode. Pairing process is essential to fully utilize LBA-T950. There are two ways to establish connection.

▪ Easy Pairing

1. Press "Back" and "Navigation" keys simultaneously for 1 sec and then the LBA-T950 is ready for pairing



2. Search LBA-T950 from your phone
3. Choose LBA-T950 to pair with your phone
4. When properly done, "Connected" message will be displayed

▪ Manual Pairing

1. Choose "Connectivity" → "Pairing"




2. Following same steps shown in the "Easy Pairing" from step2

Optimum operating range is within 10m. If the LBA-T950 is out of range, the connection will be lost. when the LBA-T950 is brought back in the range, it will automatically attempt to establish the connection

3. Basic


▪ Main Menu and Profiles

To enter the menu map, press “OK” key shortly. The following Main menu map shows the available menu structure and Icons

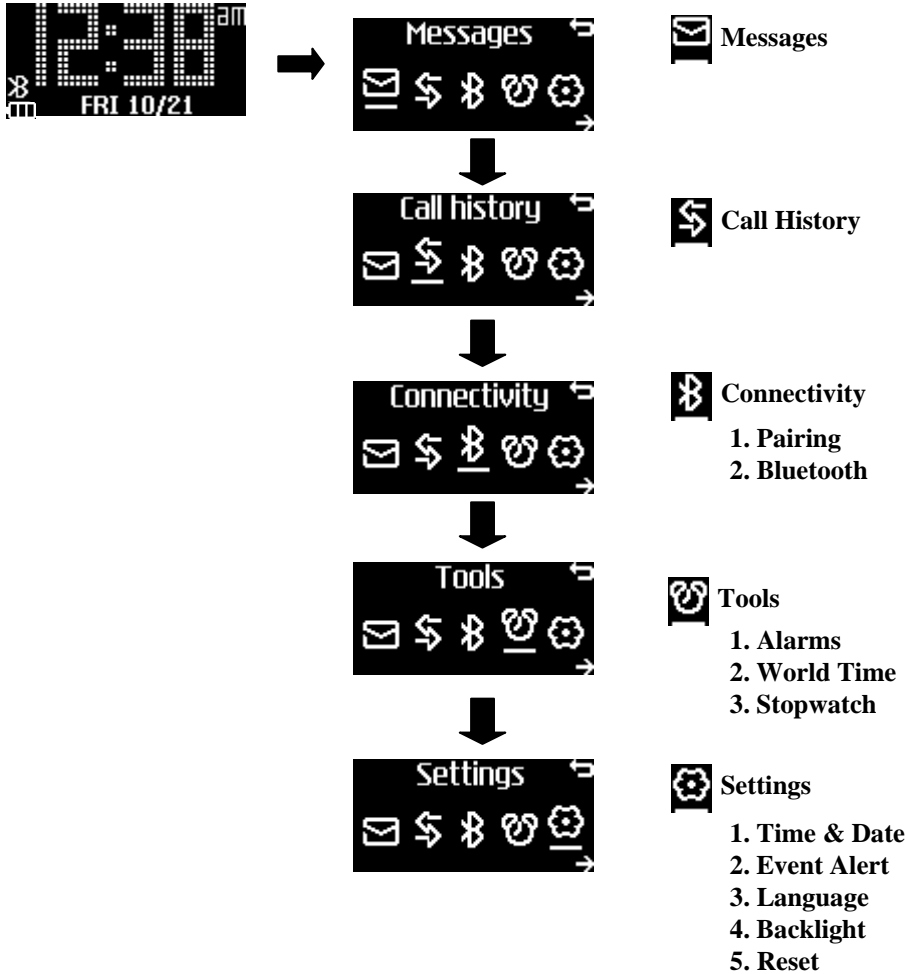

▪ Watch Theme

LBA-T950 provides 5 time themes to be selected upon your preference

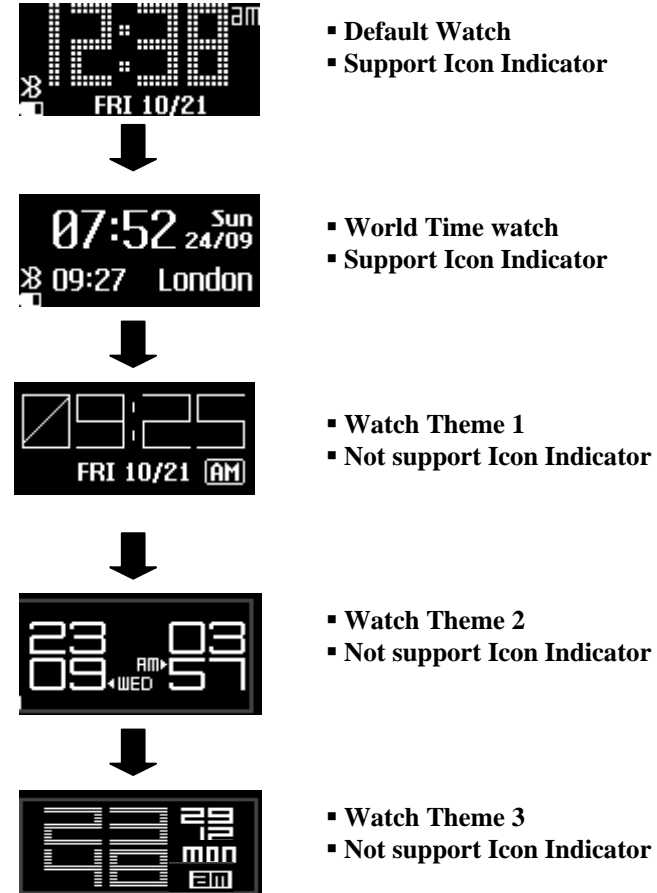

▪ Setting the Manner Mode


1. Pressing “Navigation” for 1sec will place LBA-T950 into Alert Setting Mode.
2. LBA-T950 provides Ring & Vibration, Vibration, Ring, and LCD only (silent) modes



▪ Responding to a call

When receiving a phone call, you have two options to respond

1. Press “back” key to mute the sound.
2. Click “navigation” button to reject an incoming call.

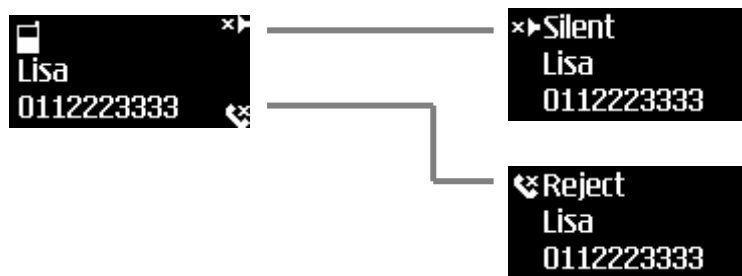

These are useful when you've forgotten the set an alert mode to silent or vibration for a meeting


▪ Check the New Message

1. The LBA-T950 alerts you and displays a notification on screen when you receive a text message
2. Press “OK” key to check the sender's information.
3. Contents of the selected message will be displayed and Up to 70 characters can be displayed.



▪ Check Received Message List

1. Press “OK” key and select Messages
2. Up to 3 messages will be shown on the screen
3. Press “Navigate” button and select message title to see the details



The LBA-T950 is unable to save the messages in internal storage memory. Therefore, if the LBA-T950 is not connect to mobile phone, received message list is not able to be displayed on LBA-T950. The LBA-T950 doesn't support MMS for now.

4. Tools

▪ Setting the Alarm

Bluetooth connection is not required to use this local alarm function.

1. Press the “OK” key and then select “Tools” → “Alarm”
2. Press “Navigation” button to increase the number
3. Press “OK” key to confirm the Hour and move on to minute



Alarm indicator




When alarm setting of your phone becomes active, “Phone alert” message will be displayed on the LBA-T950 screen . Press “Back” or “OK” button to snooze the alert and press “ Navigation” button to stop the phone alarm. Icon indicator will blink on the screen of LBA-T950 when local alarm function is in action.

▪ Updating the time automatically


LBA-T950 supports “auto update” function to synchronize with your phone

1. Set “Off” in the “Auto update” menu, Time & Date have to be set manually.
2. Set “On”, Time &Date will be updated automatically by synchronizing with the phone.

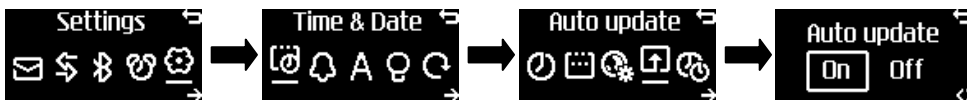

▪ Using the world time

The world time theme of LBA-T950 supports two types of time settings.

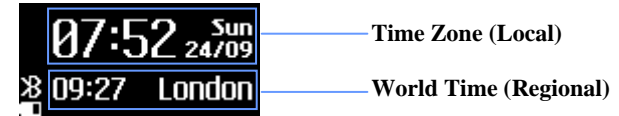

1. Select the “ Setting” → ”Time & Date” → ”Time Zone”
2. Choose the region or country where you are located.



3. Select the “ Tools” → ”World Time”
4. Choose the region or country desired to display.




The default World Time region has been set to “London”
Notice that The LBA-T950 is not able to set clock to summer time automatically.

4. Tools


▪ Using Stopwatch

1. Go to “Tools” → “Stopwatch”
2. Press “OK” key to start and Pressing “OK” key again will stop timer.
3. Press “Navigation” button for Lap.
4. Press “back” button to clear

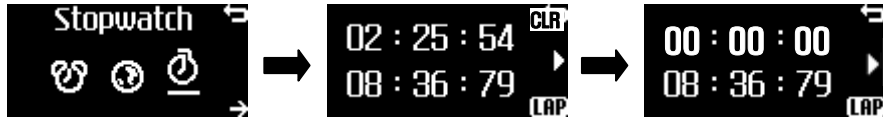

▪ Setting the Event Alert

1. Go to “Settings” → “Event alert”
2. LBA-T950 provides three event alerts
3. Select an option that you want to get notified and set it “ON” or “OFF”

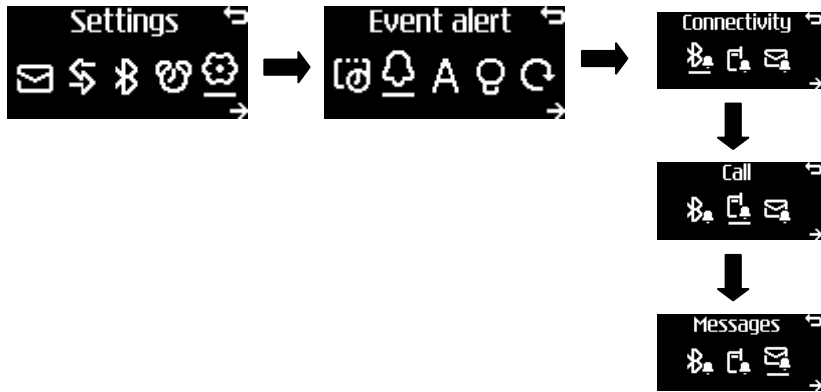


The default event alert setting is “ON” for all the choices.

5. Settings



▪ Changing the Language

1. Go to “Settings” → “Language”
2. Select region where you are located
3. Language of country that you selected will be a default

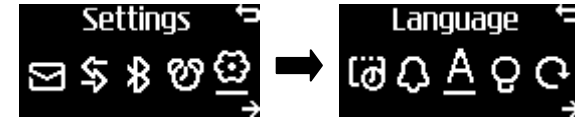

▪ Changing the Backlight

1. Go to “Setting” → “Backlight”
2. Select the proper duration and brightness upon your preference

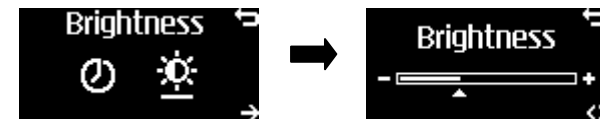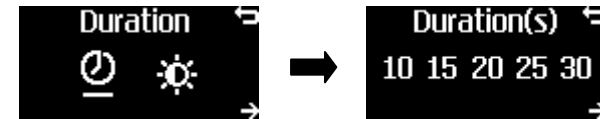

Battery runtime may vary and depends on your LCD setting

5. Settings

▪ Restore factory setting

Set the LBA-T950 to factory default settings and deletes changes you have made.

▪ To reset the watch

1. Go to “Settings” → ”Reset” → ”Reset all”
2. Choose the “Yes”
3. All the settings are initialized



The LBA-T950 needs to re-establish the connection through pairing process once you set the LBA-T950 to factory default settings.

▪ Hot Keys

Key	Description		
	Case	Press	Actions
B	Main display	Short	Messages
		Long	Call history
	Time/Alarm setting	Short	Previous menu
		Long	Main clock display
	Top menu	Short	Previous menu
		Long	Main clock display
Unavailable connection (from main display)	Short Long	Attempt to establish connection	
OK	Main display	Short	Top menu
		Long	Power off
	Time/Alarm setting	Short	Confirm the setting
		Long	Power off
	Top menu	Short	Select sub menus
		Long	Power off
N	Main display	Short	watch theme
		Long	Profile Setting (vibration/ring)
	Time/Alarm setting	Short	Increase hour/minute
		Long	Increase hour/minute fast
	Top menu	Short	Move pointer
		Long	Move pointer fast
B+N	Main display	Long	Pairing mode

How to handle LBA-T950 watch

Water resistance of the watch

- The degree of water resistance is indicated on the back of the watch case.
- You can wash your face while wearing a water resistant watch in normal daily use.
- If liquids have entered the watch, or if the inside of the glass is fogged up and does not become clear for an extended period, do not leave the watch in this state. Immediately take the watch to a service center for inspection and repair.

When wearing watch

- Do not expose the device to high temperatures and large amounts of damp or dust. Product failure, deformation and discoloration of the device and burn injuries may result.
- Do not damage the cord. Electric shock, overheating or fire may result.
- Do not touch the recharging devices or plugs with wet hands. Electric shock may result.
- Do not spill water on the device while recharging. If water spills, immediately unplug the charger. Electric shock, overheating, fire due to a short circuit, or product failure may result.
- The battery charger and the adapter are not waterproof.
- Those who have sensitive skins or who are in weak physical conditions may experience rash or skin irritation by wearing the watch. If you notice that your skin is affected by the watch, immediately stop using it and consult a physician.
- Take proper care not to injure yourself as well as others around you when engaged in heavy physical exercise or work.

Do not drop the unit from high places.

Product failure, deformation and discoloration of the device and burn injuries may result.

Do not modify, repair or take apart the unit.

Electric shock, explosion, product failure or injury may result.

Do not expose the watch directly to water, alcohol, benzene, etc. for cleaning.

Avoid use of solvents such as alcohol or benzene as they may damage the finish.

Use a dry cloth to wipe off dirt, perspiration and moisture from the watch case and the glass.

Do not expose directly to flammables.

Ignition of gas and an explosion may result.
Do not use the device in places where it can be exposed to gas fumes, such as in gas stations.

Do not drop or throw the device.

Overheating, product failure, or explosion may result.

Do not place the device in an electromagnetic device such as a microwave, or heated cooking utensils and pressured container.

Overheating, smoke or explosion may result.

Keep the unit away from humidity and dust.

Product failure, deformation and discoloration of the device and burn injuries may result.

Keep the unit out of the reach of children.

Improper handling of the device by children may cause injury.

Do not transmit radio waves where it is prohibited, such as in airplanes and hospitals.

Doing so may affect onboard electronic instrumentation and electric medical equipment.

Do not operate the watch while driving a vehicle.

Lack of concentration on the road may lead to an accident.

If you hear the thunder, unplug the charger.

This chapter lists some problems that you might encounter while using your LBA-T950.

Problem	Possible Corrective measures	solution
No display	Not enough battery	• Try to charge the battery
Battery Charging cannot be done	The watch is not mounted properly to the charge clip	• Check the charge clip direction with watch rear case's charge pin
System Halt	No key is functional	•Please connect LBA-T950 to the charger to reset. •Press "OK" button for 5~12 sec to power off and press "OK" button to turn on power
Not pairing with Phone	Do not receive Caller ID, messages.	• Please try to follow the pairing process

■ Conditions

- The warranty is valid only if the original receipt issued to the original purchaser by the dealer, specifying the date of purchase and serial number, is presented with the product to be repaired or replaced.

LG Electronics reserves the right to refuse warranty service if this information has been removed or changed after the original purchase of the product from the dealer.

- If LG Electronics repairs or replaces the product, the repaired or replaced product shall be warranted for the remaining time of the original warranty period or for ninety (90) days from the date of repair, whichever is longer. Repair or replacement may involve the use of functionally equivalent reconditioned units. Replaced parts or components will become the property of LG Electronics.

- This Warranty does not cover any failure of the product due to normal wear and tear, or due to misuse, including but not limited to use in other than the normal and customary manner, in accordance with instructions for use and maintenance of the product. Nor does this warranty cover any failure of the product due to accident, modification or adjustment, acts of God or damage resulting from liquid.

- This warranty does not cover product failures due to improper repair installations, modifications or service performed by a non- LG Electronics authorized person. Tampering with any of the seals on the product will void the warranty.

9. Warranty and Service

▪ **THERE ARE NO EXPRESS WARRANTIES, WHETHER WRITTEN OR ORAL, OTHER THAN THIS PRINTED INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED TO THE DURATION OF THIS LIMITED WARRANTY. IN NO EVENT SHALL LG ELECTRONICS OR ITS VENDORS BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY NATURE WHATSOEVER, INCLUDING BUT NOT LIMITED TO LOST PROFITS OR COMMERCIAL LOSS, TO THE FULL EXTENT THOSE DAMAGES CAN BE DISCLAIMED BY LAW.**

▪ Some countries/states do not allow the exclusion or limitation of incidental or consequential damages, or limitation of the duration of implied warranties, so the preceding limitations or exclusions may not apply to you. The warranty provided does not affect the consumer's statutory rights under applicable national legislation in force, nor the consumer's rights against the dealer arising from their sales/purchase contract.

▪ **Limited Warranty**

▪ Subject to the conditions of this Limited Warranty, LG Electronics warrants this product to be free from defects in design, material and workmanship at the time of its original purchase by a consumer, and for a subsequent period of one (1) year. Should your product need warranty service, please return it to the dealer from whom it was purchased or contact your local LG Electronics contact center to get further information.

10. Declaration of Confirmation



This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modification not expressly approved by the party responsible for Compliance could void the user's authority to operate the equipment. Connecting of peripherals requires the use of grounded shielded signal cables.

RF exposure statements

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

European Union Notice: Products with CE marking comply with the R & TTE Directive (99/5/EC), the EMC Directive (89/336/EEC) and the Low Voltage Directive (73/23/EEC) issued by the Commission of the European Community.



FCC ID: BEJ-LBA-T950
QDID: B014727

11. Additional Information

1. Radio frequency exposure

This Bluetooth®, LBA-T950, is a radio transmitter and receiver. When in operation, it communicates with a Bluetooth® equipped mobile device by receiving and transmitting radio frequency (RF) electromagnetic fields (microwaves) in the frequency range 2.4 to 2.4835 GHz. The output power of the radio transmitter is low, 0.001 watt. Your Bluetooth® Device is designed to operate in compliance with the RF exposure guidelines and limits set by national authorities and international health agencies when used any compatible LG Electronics mobile phone.

2. Potentially explosive atmosphere

Turn off your electronic device when in any area with a potentially explosive atmosphere. It is rare, but your electronic device could generate sparks. Sparks in such areas could cause an explosion or fire resulting in bodily injury or even death. Areas with a potentially explosive atmosphere are often, but not always, clearly marked.

3. Battery information

A rechargeable battery has a long service life if treated properly. A new battery or one that has not been used for a long period of time could have reduced capacity the first few times it is used. Do not expose the battery to extreme temperatures, never above +60. (+140. F) or under -20. (-4. F). For maximum battery capacity, use the battery in room temperature. If the battery is used in low temperatures, the battery capacity will be reduced. The battery can only be charged in temperatures between +10. (+50. F) and +45. (+ 113. F).

4. Recycling the battery in your Bluetooth® Device

The battery in your Bluetooth® Device must be disposed of properly and should never be placed in municipal waste. The LG Electronics service partner removing battery will dispose of it according to local regulations.