




PROJECT
TYPE
CATALOG #

Photocells



- 1/2" CdS Photocell
- 3/8" - 19 Thread Nipple with Rubber Gasket & Plastic Lock-Nut
- Polycarbonate Enclosure & Eye
- Rain Tight For Outdoor Use
- 12" Leads
- Thermal Switch
- On-Off Level: 10-20Lx On(Dusk); On-Off Level: 30-60Lx Off(Dawn)
- Ambient Temp: -40°F ~ +158°F
- Relative Humidity: 96%
- Power Consumption: 1.5VA Max.
- Electrical Life: 6500 Cycles
- Ballast: 850VA
- Tungsten: 500w

MODEL	TYPE	VOLTAGE	RATING	LEADS
07-APCW120	Button	110-130V	120VAC	12" AWG#18 AWM1015
07-APCW277	Button	208-277V	240VAC	12" AWG#18

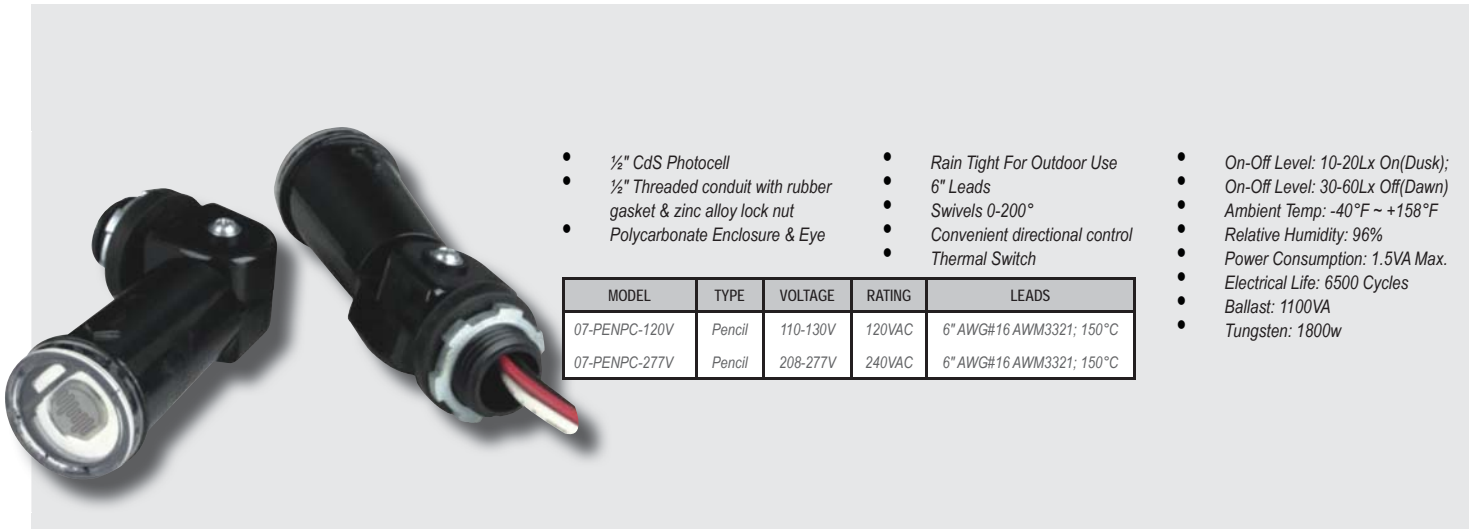

- 1/2" CdS Photocell
- 1/2" Threaded conduit with rubber gasket & zinc alloy lock nut
- Polycarbonate Enclosure & Eye
- Rain Tight For Outdoor Use
- 6" Leads
- Swivels 0-200°
- Convenient directional control
- Thermal Switch
- On-Off Level: 10-20Lx On(Dusk); On-Off Level: 30-60Lx Off(Dawn)
- Ambient Temp: -40°F ~ +158°F
- Relative Humidity: 96%
- Power Consumption: 1.5VA Max.
- Electrical Life: 6500 Cycles
- Ballast: 1100VA
- Tungsten: 1800w

MODEL	TYPE	VOLTAGE	RATING	LEADS
07-PENPC-120V	Pencil	110-130V	120VAC	6" AWG#16 AWM3321; 150°C
07-PENPC-277V	Pencil	208-277V	240VAC	6" AWG#16 AWM3321; 150°C



- 1/2" CdS Photocell
- 1/2" Threaded conduit with rubber gasket & zinc alloy lock nut
- Polycarbonate Enclosure & Eye
- Rain Tight For Outdoor Use
- 6" Leads
- Swivels 0-200°
- Convenient directional control
- Thermal Switch
- On-Off Level: 10-20Lx On(Dusk); On-Off Level: 30-60Lx Off(Dawn)
- Ambient Temp: -40°F ~ +158°F
- Relative Humidity: 96%
- Power Consumption: 1.5VA Max.
- Electrical Life: 6500 Cycles
- Ballast: 1100VA
- Tungsten: 1800w

MODEL	TYPE	VOLTAGE	RATING	LEADS
07-SWPC-120V	Swivel	110-130V	120VAC	6" AWG#16 AWM3321; 150°C
07-SWPC-277V	Swivel	208-277V	240VAC	6" AWG#16 AWM3321; 150°C