


## A SERIES

## LED REMOTE PHOSPHOR AREA LIGHTING

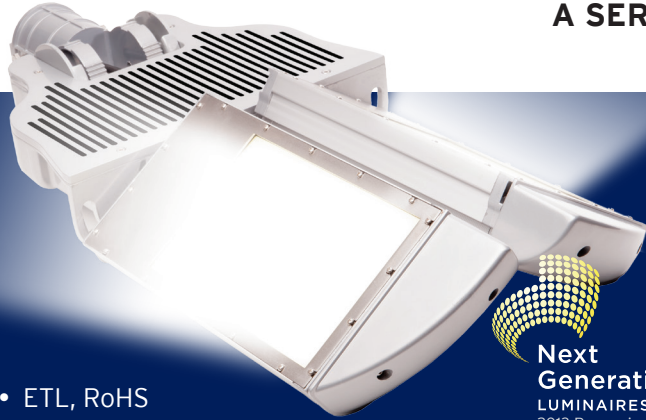

Next  
Generation  
LUMINAIRES  
2013 Recognized


- ETL, RoHS
- Instant strike
- Adjustable pivot allows for 100% level
- -40°C to 45°C ambient temperature
- Low glare and uniform light distribution

- High CRI options
- Dimmable
- Enable occupancy sensors for power savings
- Customizable and standard CCT options
- High capacity surge 10KV/10KA
- Up to 30% higher system efficacy compared to conventional LEDs
- Longer lifetime
- Universal AC input/full range, 90-305 VAC
- No mercury
- 5 year warranty
- Made in USA with global components




ETG-A100A

MODEL	PRODUCT NUMBER	CRI	CCT	LUMENS *Estimate	TOTAL WATTS	LUMENS/WATTS	L90 HOURS
ETG-A100A	RP750	70	5000K	10,400*	110	94.5	> 96,000
	RP840	80	4000K	8,243*	110	74.9	> 96,000
	RP835	80	3500K	9,020*	110	82	> 96,000
	RP930	90	3000K	7,214*	110	65.6	> 96,000
	RP830	80	3000K	8,787*	110	79.9	> 96,000
	RP927	90	2700K	6,991*	110	63.6	> 96,000
	RP827	80	2700K	7,894*	110	71.8	> 96,000
	RP9456	90-94	5600K	8,350*	110	75.9	> 96,000

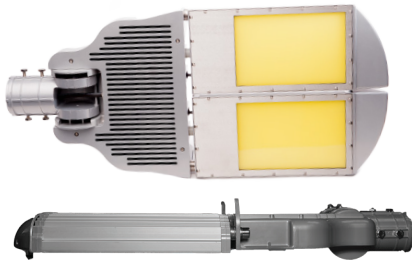

ETG-A200

MODEL	PRODUCT NUMBER	CRI	CCT	LUMENS *Estimate	TOTAL WATTS	LUMENS/WATTS	L90 HOURS
ETG-A200	RP750	70	5000K	20,863*	230	90.7	> 96,000
	RP840	80	4000K	19,006*	230	82.6	> 96,000
	RP835	80	3500K	18,547*	230	80.6	> 96,000
	RP930	90	3000K	14,834*	230	64.5	> 96,000
	RP830	80	3000K	18,067*	230	78.6	> 96,000
	RP927	90	2700K	14,375*	230	62.5	> 96,000
	RP827	80	2700K	16,231*	230	70.6	> 96,000
	RP9456	90-94	5600K	16,500*	230	71.7	> 96,000
ETG-A200H	RP750	70	5000K	24,600*	230	107	> 96,000
	RP850R	80*	5000K	17,100*	230	74.3	> 96,000
	RP940R	90*	4000K	16,245*	230	70.6	> 96,000

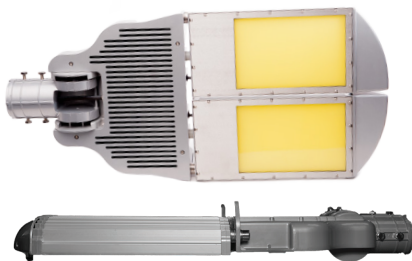

ETG-A300

MODEL	PRODUCT NUMBER	CRI	CCT	LUMENS *Estimate	TOTAL WATTS	LUMENS/WATTS	L90 HOURS
ETG-A300	RP750	70	5000K	29,200*	320	91.3	> 96,000
	RP840	80	4000K	27,676*	320	86.5	> 96,000
	RP835	80	3500K	26,660*	320	83.3	> 96,000
	RP930	90	3000K	20,948*	320	65.5	> 96,000
	RP830	80	3000K	25,645*	320	80.1	> 96,000
	RP927	90	2700K	20,440*	320	63.9	> 96,000
	RP827	80	2700K	22,852*	320	71.4	> 96,000
	RP9456	94	5600K	25,600*	320	80	> 96,000
ETG-A300H	RP750	70	5000K	34,450*	320	107.7	> 96,000
	RP850R	80*	5000K	26,280*	320	82.1	> 96,000
	RP940R	90*	4000K	24,908*	320	77.8	> 96,000

\*Red Enhanced

## A SERIES

## LED REMOTE PHOSPHOR AREA LIGHTING

### POWER OPTIONS

PRODUCT NUMBER	POWER	A100A	A200	A300
P1	ON/OFF 90~305 VAC*	✓	✓	✓
P4	Dimming 90~305 VAC	✓	✓	✓
P5	Transformer ON/OFF 480 VAC		✓	
P6	Transformer Dimming 480 VAC		✓	
P7	INTERNAL 480 VAC Dimming			✓
P8	Dimming 24 VDC	✓	✓	✓

\*Standard

### HOUSING COLOR

PRODUCT NUMBER	HOUSING COLOR
G	Gray*
W	White
B	Black
Z	Bronze

\*Standard  
All colors available on A Series models

### OPTIONS

PRODUCT NUMBER	OPTION	A100A	A200	A300
D1	Step Dimming 30-100%		✓	✓
D2	Step Dimming 50-100%		✓	✓
D3	Step Dimming Adjustable		✓	✓
L1	Photo Sensor 120 VAC	✓	✓	✓
L2	Photo Sensor 240/277 VAC	✓	✓	✓
L3	Photo Sensor 480 VAC		✓	✓
M3	Programmable Motion Sensor		✓	✓
M4	Programmable Motion Sensor Cold		✓	✓
W1	Wireless ON/OFF with Dimming		✓	✓
W2	Wireless +0-10 Input	✓	✓	✓
W3	Wireless Thermistor	✓	✓	✓
W4	Wireless +24 VDC Input	✓	✓	✓

