

2.4GHz USB Digital Wireless Security Kit USER MANUAL



Guides You into a Harmonious World




 Any relevant alteration is subject to the latest real object !

2.4G Digital Wireless Kit

I. Introduction:

- Four channel available monitoring at the same time
- Audio & Video Recording, Image Capturing
- Network Remote Monitoring
- Video Clips Played by our software or any other Video Player
- USB2.0
- Support Date, Time, Week Stamps
- Intelligent Search

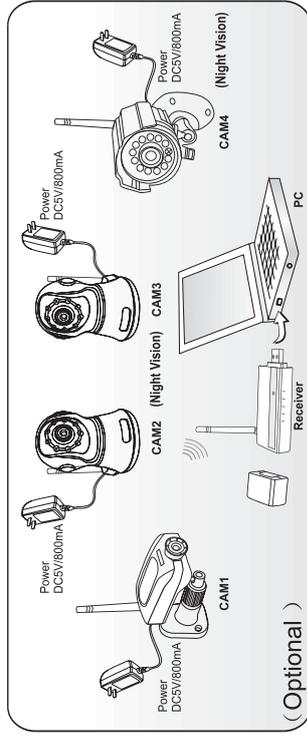

2.4G Digital Wireless Kit

II. Installation Software


1. Install " setup.exe " 
2. Plug in the USB receiver
3. Run program file

System configuration:

	Basic	Recommend
CPU	Pentium4	2.0 GHz
RAM	512 MB	1 GB or more
Resolution	800 x 600	1024 x 768
System	Windows 2000	Windows XP or Vista
Windows Media Player	Windows Media Player 9	Windows Media Player 9 or higher

2.4G Digital Wireless Kit

III. Software introduction

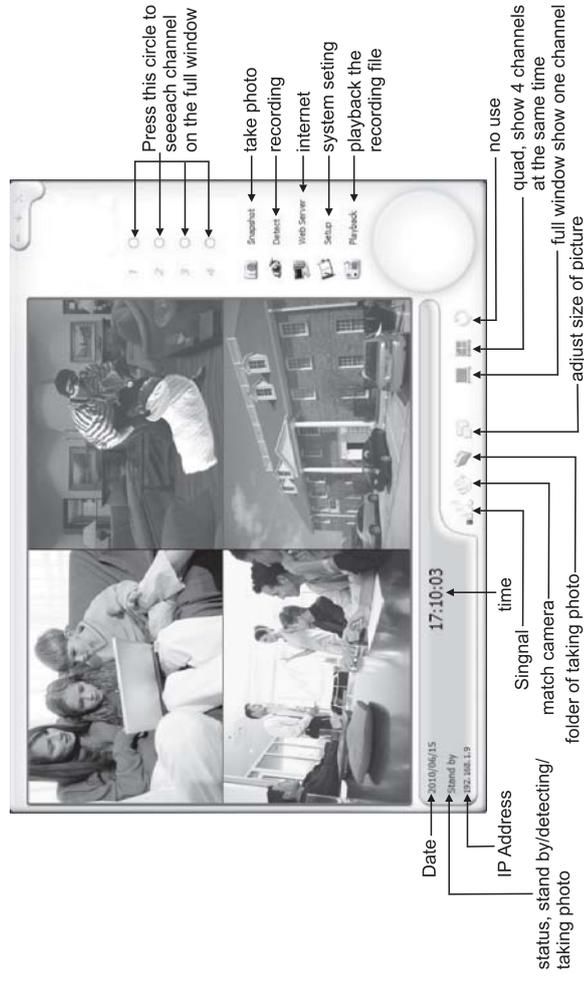

2.4G Digital Wireless Kit

system basic setting

only english

set mail server for mail alarm send you email once there is a motion detection

start these functions when start

adjust the free space ratio, rewrite when the free space is lower than setting

setting recording storage location

setting taking photo storage location

show your computer IP address auto

open this default port 7788 in your router, then when you visit this port of router from internet, you can see the picture

you can set password to protect your information

MMS port

default is disable, when it is enable, you can type the MMS address to see the picture

System Settings

Language Support
Language: English

Mail Server
SMTP: []
E-mail Account: []
Password: []

Startup Option
Start Detecting: []
Start Web Server: []

Recording/Recording
Enable: []
Recording Ratio (%): []

Storage Location
Record: []
Snapshot: []

Web Service
IP Address: []
Web Server Port: []

MMS Server
Port: []
Channel: []

Confirm Apply Cancel

2.4G Digital Wireless Kit

select setting Camera Setting

Show the words on the picture

Show water mark on the picture

Camera Settings

Basic Settings Image Adjust Motion Detect Alarm Settings

Channel Name: []

Text Display: []

Channel Information
Channel Number: []
Channel Name: []

Date and Time
Date: []
Time: []
Week: []

First Size: []
Text Color: []
Background: []


Watermark
Path: []
Transparency: []

Preview

Confirm Apply Cancel

2.4G Digital Wireless Kit


Image Adjust

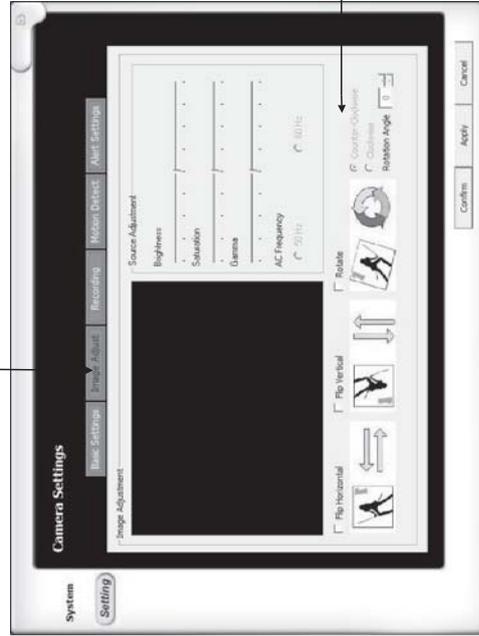

If the camera is not installed for good direction, adjust the picture easily by this way, no need to go to adjust the cameras

2.4G Digital Wireless Kit


Recording

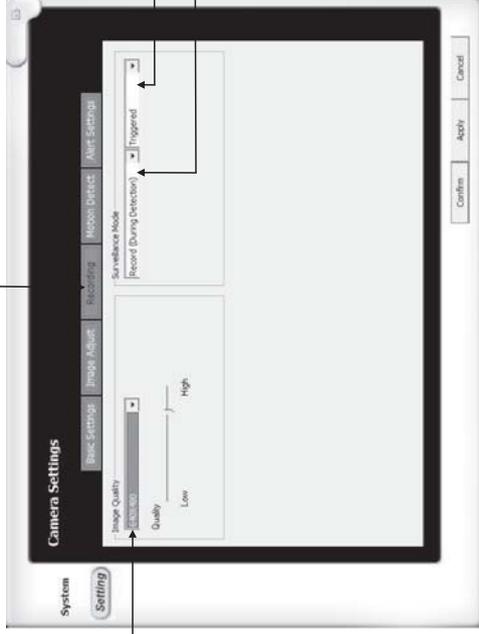

3 types image size:
640x480
320x240
160x120


3 types recording model:
1. Recording full time
2. Recording when motion detection
3. Schedule recording

2.4G Digital Wireless Kit

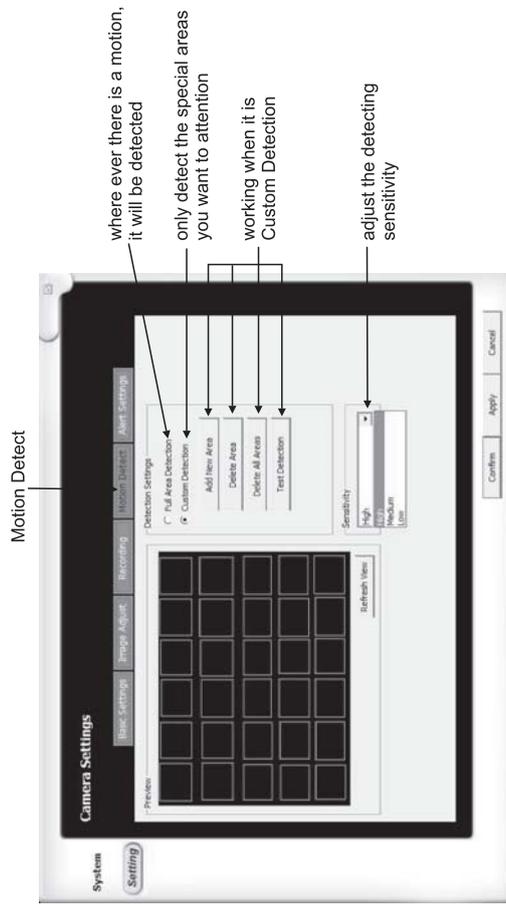

8

2.4G Digital Wireless Kit

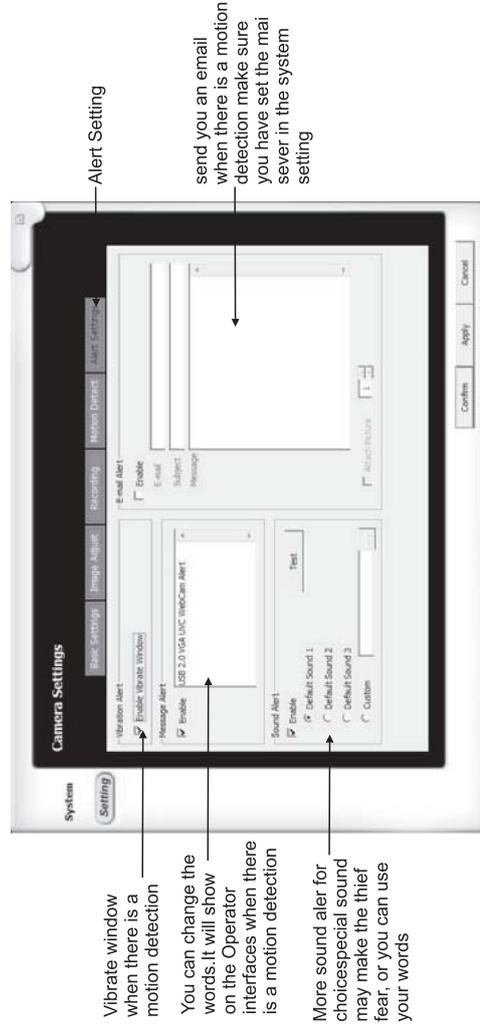

Install the software before plug in the USB receiver
How to match the camera to the receiver?
Press the "code" button when the light is flashing, choose the camera channel you want on the software operator window

9

2.4G Digital Wireless Kit

IV . FAQ:

Q: Can not find the device after installed software.

A: After you installed the software, when you plug in the USB receiver, it shows found unknown new device, please update the drive from device manager or you can do according the guider.

Q: How to set network function?

A: Setting network, when you press web server, you can see IP address, and port 7788, please also open this port in your router, then when you visit your router IP address:7788, you can see the pictures, e.g.: if your router IP address is 202.96.134.33, then you should visit <http://202.96.134.33:7788>

Q: Why can not we use some functions or buttons?

A: Some functions only work when it is one-channel view, and you should be out "detecting" .

Q: Why can not we go to set and playback?

A: Please leave "detecting" .

Q: Why can not we use remote control (PTZ)?

A: It only works when it is one-channel view, and your cameras do not support this function.

2.4G Digital Wireless Kit

Q: Does it support DDNS?

A: Yes, it supports DDNS, and you can also visit by the ip address or DNS address.

Q: Why does it not recording after press "detecting"?

A: Please check the recording setting, if it is recording all the time, it should work, but if this recording by motion detection, it will only work when there is a motion.

Q: Why can not see remote view?

A: Please check the network setting and IP address.

Q: What is the meaning of "Can not connect to following channel(s)"?

A: Please check the connect status.

Q: What is the meaning of "Can not import to the following channel"?

A: Please check the IP address, maybe your IP address is the same as some other computer.

Q: What is the meaning of "No buffer space error"?

A: The space of hard drive is not enough.

Q: What is the meaning of "Virtual RAM insufficient"?

A: Please up your RAM to be 1G.

2.4G Digital Wireless Kit

Q: Why no sound when play video?

A: If the video is 4CH quad picture, there is no sound, only when it is one channel and single picture, there is sound.

Note: Please make the Stereo Mix (volume recording setting) is on when you record.

V. What is in the box?

Receiver 1PC
Camera 1PC (Optional)
Stand of the camera (Optional)
Antenna 2PCS (Optional)
Power adapter (5V/800mA) 1PC (Optional)
Driver CD 1PC
User Manual 1PC



Warranty card

This card is the important evidence to receive our service, please keep it well.

① When used normally, the following services can be offered:

- A. Replacement for functional disorder within 3 months.
- B. Repair free of charge for functional disorder within 1 year.
- C. Service for all the life(only charge material cost and freight if the warranty date expires.)

② The following conditions are excluded for warranty service (repairable if needed, but will charge material cost and freight.)

- A. Malfunctions or damages by mistaken installation or using the products exceeding the limited operating conditions.
- B. Malfunctions or damages by self disassembled or repair and any other misuse.
- C. Spare parts missed, artificial damages
- D. Unmatched products.

③ Repair cycle Excluding the shipping dates, the Quality Department will submit the examine report in one day on receipt of the products, the products on the quantity under 50sets will be repaired in 3 days after customers signed back the test report.

Product name: _____ Purchase date: _____

User's name: _____ Invoice No.: _____

User's address: _____ Distributor: _____

Tel: _____ Contact person: _____

Zip code: _____ Tel: _____

Dealer: (Valid by sealed)

FCC STATEMENT

Changes or modifications not expressly approved by the party responsible for compliance

could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.