

हिंदी
ENGLISH



KP199 | उपयोगकर्ता मार्गदर्शिका

KP199 | उपयोगकर्ता मार्गदर्शिका

इस मैन्युअल की कुछ सामग्री आपके फोन से अलग हो सकती है, यह फोन के सॉफ्टवेयर या आपके सेवा प्रदाता पर निर्भर करता है।



LG Electronics Inc.
<http://www.lgmobile.com>

P/N : MMBB0286401 (1.0)

CE 0681

Bluetooth QDID B013918

हिंदी

KP199 उपयोगकर्ता मार्गदर्शिका

इस मैन्युअल की कुछ सामग्री आपके फोन से अलग हो सकती है, यह फ़ोन के सॉफ़्टवेयर या आपके सेवा प्रदाता पर निर्भर करता है.



विषय सूची

स्वागत है	4	इनपुट पद्धति	19
फ़ंक्शंस की सूची	5	कॉल फ़ंक्शंस	21
सामान्य जानकारी	6	कॉल करना	21
बैटरी देखभाल	6	आवक कॉल का उत्तर देना या उसे	22
देखभाल और रख-रखाव	6	निरस्त करना	22
महत्वपूर्ण सुरक्षा जानकारी	8	कॉल प्रतीक्षा	22
पहुँच कोड्स	8	कॉन्फ्रेंस कॉल करना	22
रेडियो फ्रीक्वेंसी क्षमता	8	कॉल विकल्प के लिए युक्तियाँ	23
विशिष्ट अवशोषण दर (SAR) जानकारी	9	ब्राउज़र	24
इलेक्ट्रॉनिक डिवाइस	9	वैप	24
पेसमेकर	10	डेटा खाता	27
श्रवण सुविधाएँ	10	कॉल इतिहास	29
वायुयान	10	सभी कॉल	29
संभावित रूप से विस्फोट वाले	10	ड्रूटे कॉल	29
वातावरण	10	डायल की हुई कॉल	29
वाहन चालन	11	प्रास कॉल	29
आपका फ़ोन	12	कॉल लॉग हटाएँ	30
प्रारंभिक जानकारी	13	कॉल समय	30
सिम कार्ड और बैटरी स्थापित करना	13	कॉल लागत	30
बैटरी चार्ज करना	14	SMS काउंटर	31
फ़ोन बंद और चालू करना	14	GPRS काउंटर	31
फ़ंक्शन कुंजियाँ	14	उपकरण	32
कीपैड अनलॉक करना	16	कैलेंडर	32
निष्क्रिय स्थिति	16	टू टू	33
मेनू का उपयोग करना	17	अलार्म	34
		समय सूचक	34
		विश्व घड़ी	34

कैल्क्युलेटर	34
इकाई परिवर्तक	35
स्वास्थ्य	35
STK (सिम टूल किट)	36
मल्टीमीडिया	37
खेल व अनुप्रयोग	37
कैमरा	39
छवि व्यूअर	41
वीडियो रिकॉर्डर	42
वीडियो प्लेयर	43
संगीत प्लेयर	44
वाइस रिकॉर्डर	47
मेलॉडी बनाना	48
FM रेडियो	49
FM रिकॉर्ड शेड्यूल	50
संदेश सेवा	51
पाठ्य संदेश	51
मल्टीमीडिया संदेश	56
चैट	63
वाइस मेल सर्वर	64
संदेश प्रसारण	65
मेरा सामान	66
फोन	66
स्मृति कार्ड	66

प्रोफाइल्स	69
संपर्क	72
खोजें	72
नया संपर्क	73
कॉलर समूह	73
स्पीड डायल	74
मेरा वी कार्ड	74
अतिरिक्त नंबर	75
सेटिंग्स	75
सेटिंग्स	76
समय व दिनांक	76
डिस्प्ले	77
फोन	78
कॉल	80
ब्लूटूथ	82
नेटवर्क	86
सुरक्षा	87
फैक्टरी सेटिंग्स पुनर्स्थापित करें	90
समस्या निवारण	91
आपातकालीन कॉल्स	93
सहायक उपकरण	94
तकनीकी डेटा	95

स्वागत है

स्वागत है

KP199 सेल फ़ोन चुनने के लिए धन्यवाद. इस मार्गदर्शिका को ध्यान से पढ़ें और भावी संदर्भों के लिए इसे सुरक्षित स्थान पर रखें.

संक्षिप्त विवरण

आज की मोबाइल दुनिया के लिए KP199 एक बहु उपयोगी, सुविधा-संपन्न और आधुनिक उपकरण है. KP199 एसएमएस/ एमएसएम संदेश क्षमता, कैमरा, म्यूजिक प्लेयर, एफएम रेडियो, वॉइस रिकॉर्डर, चैट रूम, ऑर्गनाइजर, ब्लूटूथ, जीपीआरएस, वैप और मजेदार गेम्स से सुसज्जित है.

सुविधाएँ

- रंगीन एलसीडी स्क्रीन
- जीएसएम प्रारंभिक-स्तर का फ़ोन
- स्थिर चित्रों और वीडियो के लिए इंटीग्रेटेड वीजीए कैमरा
- मल्टीमीडिया मैसेजिंग (एमएमएस)
- जावा अनुप्रयोग
- वाइस रिकॉर्डर
- एफएम स्टीरियो रेडियो
- Bluetooth™

- डाउनलोड करने योग्य MIDI और MP3 रिंगिंग टोन्स, स्क्रीनसेवर्स और गेम्स

इस मार्गदर्शिका के बारे में

सभी प्रयास यह सुनिश्चित करने के लिए किए गए हैं कि इस मार्गदर्शिका की सामग्री सही और नवीनतम है. हालांकि, सामग्री के सही होने की कोई गारंटी नहीं ली जाती है, और निर्माता के पास बिना किसी सूचना के परिवर्तन करने के अधिकार सुरक्षित हैं.

© 2008 LG Electronics.

सर्वाधिकार सुरक्षित.

फ़ंक्शंस की सूची

1. ब्राउज़र
1.1. वैप
1.2. डेटा खाता
2. कॉल इतिहास
2.1. सभी कॉल
2.2. ड्रॉपे कॉल
2.3. डायल की हुई कॉल
2.4. प्राप्त कॉल
2.5. कॉल लॉग हटाएँ
2.6. कॉल समय
2.7. कॉल लागत
2.8. SMS काउंटर
2.9. GPRS काउंटर
3. उपकरण
3.1. कैलेंडर
3.2. दृ इ
3.3. अलार्म
3.4. समय सूचक
3.5. विश्व घड़ी
3.6. कैल्क्युलेटर
3.7. इकाई परिवर्तक
3.8. स्वास्थ्य
3.9. STK

4. मल्टीमीडिया
4.1. खेल व अनुप्रयोग
4.2. कैमरा
4.3. छवि व्युअर
4.4. वीडियो रिकॉर्डर
4.5. वीडियो प्लेयर
4.6. संगीत प्लेयर
4.7. वॉइस रिकॉर्डर
4.8. मेलोंडी बनाना
4.9. FM रेडियो
4.0. FM रिकॉर्ड शेड्यूल
5. संदेश सेवा
5.1. पाठ्य संदेश (SMS)
5.2. मल्टीमीडिया संदेश (MMS)
5.3. चैट
5.4. वॉइस मेल सर्वर
5.5. संदेश प्रसारण
6. मेरा सामान
6.1. फ़ोन
6.2. मेमोरी कार्ड (यदि microSD कार्ड लगाया गया हो)

7. प्रोफाइल
7.1. सामान्य
7.2. मीटिंग
7.3. बाहर
7.4. केवल कंपनी
7.5. हेडसेट
7.6. मॉन
7.7. ब्लूटूथ
8. संपर्क
8.1. खोजें
8.2. नया सम्पर्क
8.3. कॉलर समूह
8.4. स्पीड डायल
8.5. मेरा वी कार्ड
8.6. अतिरिक्त नम्बर
8.7. सेटिंग्स
9. सेटिंग्स
9.1. समय व दिनांक
9.2. डिस्प्ले
9.3. फ़ोन
9.4. कॉल
9.5. ब्लूटूथ
9.6. नेटवर्क
9.7. सुरक्षा
9.8. फ़ैक्टरी सेटिंग्स पुनर्स्थापित करें

सामान्य जानकारी

बैटरी देखभाल

आपका फ़ोन एक रिचार्ज की जा सकने वाली बैटरी से चलता है.

- ▶ बैटरी को सैकड़ों बार चार्ज और डिस्चार्ज किया जा सकता है फिर भी अंततः यह खत्म हो जाएगी. जब ऑपरेटिंग समय (टॉक-टाइम और स्टैंडबाय टाइम) स्पष्ट रूप से सामान्य से बहुत कम है, तब आपको एक नई बैटरी खरीदनी चाहिए.
- ▶ उपयोग में न आने पर चार्जर को प्लग से निकाल दें, और बैटरी को एक सप्ताह से अधिक तक चार्जर से कनेक्ट न रखें, क्योंकि अधिक चार्ज करने से इसका जीवनकाल कम हो सकता है.
- ▶ अधिक चार्ज करने से इसका जीवनकाल कम हो सकता है, और उपयोग में न आने पर, पूर्ण रूप से चार्ज बैटरी अपने आप डिस्चार्ज हो सकती है.
- ▶ कभी भी किसी क्षतिग्रस्त चार्जर या बैटरी का उपयोग न करें.
- ▶ बैटरी का उपयोग इसके निर्दिष्ट उद्देश्य के लिए ही करें.
- ▶ तापमान की अधिकता से आपकी बैटरी की चार्ज करने की क्षमता प्रभावित हो सकती है.

- ▶ बैटरी को गर्म या ठंडे स्थानों पर न छोड़ें, जैसे गर्मी या सर्दी के समय में कार में.
- ▶ बैटरी को शॉर्ट-सर्किट न करें. टर्मिनल्स के शॉर्ट-सर्किट होने से बैटरी या कनेक्ट किया गया ऑब्जेक्ट क्षतिग्रस्त हो सकता है.
- ▶ बैटरियों को स्थानीय नियमों के अनुसार नष्ट करें. हमेशा रीसायकल करें. बैटरियों को आग में नष्ट न करें.

देखभाल और रख-रखाव

अपने मोबाइल फ़ोन का उपयोग करने से पहले यह जानकारी पढ़ें. आपका मोबाइल फ़ोन एक उच्च परिष्कृत इलेक्ट्रॉनिक ड्रिवाइस है. अपना फ़ोन, बैटरी, चार्जर या अन्य सहायक सामग्री का उपयोग करते समय, कृपया पहले इसे पढ़ें.

उत्पाद देखभाल

- ▶ अपने मोबाइल फ़ोन और इसके सभी भागों को छोटे बच्चों की पहुँच से दूर रखें.
- ▶ अपने मोबाइल फ़ोन को सूखा रखें.
- ▶ अपने मोबाइल फ़ोन को अत्यधिक गर्म या ठंडे तापमान में रखने से बचें.

- ▶ अपने मोबाइल फोन को जलती सिगरेट, आग की लपटों या किसी गरम स्रोत के पास रखने से बचें.
- ▶ इसे डिसअसेंबल करने का प्रयास न करें. ऐसा किये जाने पर डिवाइस क्षतिग्रस्त हो सकती है.
- ▶ इसे न गिराएँ, इस पर चोट न करें या न हिलाएँ. असावधानी से उपयोग करने पर आंतरिक सर्किट बोर्ड्स टूट सकते हैं.
- ▶ अपने मोबाइल फोन पर रंग न लगाएँ, क्योंकि रंग से ईयरफोन, माइक्रोफोन या किसी चल भाग में बाधा आ सकती है और सामान्य उपयोग बंद हो सकता है.
- ▶ अपने मोबाइल फोन का सुरक्षित उपयोग कर, इसे साफ और धूल मुक्त स्थान पर रखें
- ▶ एंटीना के क्षतिग्रस्त होने पर फोन का उपयोग न करें. यदि क्षतिग्रस्त एंटीना त्वचा के संपर्क में आता है, तो हो सकता है त्वचा कुछ झुलस जाए. क्षतिग्रस्त एंटीना को बदलने के लिए कृपया LG के किसी अधिकृत सेवा केंद्र से संपर्क करें.
- ▶ फोन के चालू होने पर अनावश्यक रूप से एंटीना स्पर्श न करें. एंटीना से संपर्क होने पर कॉल गुणवत्ता प्रभावित होती है और हो सकता है इससे फोन को आवश्यक पावर स्तर से अधिक पर चलाना पड़े और टॉक और स्टैंडबाय टाइम कम हो सकता है.
- ▶ फोन को वैसे ही पकड़ें, जैसे अन्य टेलीफोन को बात करते समय पकड़ते हैं. सीधे माइक्रोफोन से बात करते समय, एंटीना को ऊपर की ओर एवं कंधे से ऊपर रखें. यदि एंटीना ऊँचा/नीचा हो सकता है, तो कॉल के दौरान इसे ऊँचा रखना चाहिए.

महत्वपूर्ण सुरक्षा जानकारी

पहुँच कोड्स

PIN कोड

PIN (पर्सनल आइडेंटिफिकेशन नंबर) कोड आपके सिम कार्ड को अनाधिकृत उपयोग से बचाता है. सामान्यतः आपकी सिम के साथ PIN कोड आता है.

पासवर्ड आपके सेवा प्रदाता द्वारा प्राप्त किया जा सकता है. तीन बार गलत PIN कोड डालने पर आपको PUK कोड दर्ज करना पड़ सकता है.

PIN2 कोड

SIM कार्ड के साथ PIN2 कोड आ सकता है. कुछ फ़ंक्शन, जैसे टैरिफ़ सेट करे के लिए PIN2 समर्थन की आवश्यकता है. पासवर्ड आपके सेवा प्रदाता द्वारा प्राप्त किया जा सकता है.

PUK

लॉक किए गए PIN कोड को बदलने के लिए PUK (पर्सनल अनलॉकिंग की) कोड की आवश्यकता होती है. लॉक किए गए PIN2 कोड को बदलने के लिए PUK कोड की आवश्यकता होती है.

पासवर्ड आपके सेवा प्रदाता द्वारा प्राप्त किया जा सकता है. यदि आप लगातार तीन बार गलत PIN2 कोड दर्ज करते हैं,

तो आपको PUK2 कोड दर्ज करना होगा.

दस बार गलत PUK कोड डालने पर, SIM कार्ड का कभी उपयोग नहीं किया जा सकता. नए कार्ड के लिए आपको अपने सेवा प्रदाता से संपर्क करना होगा.

फ़ोन कोड

फ़ोन कोड, फ़ोन को अनधिकृत उपयोग से बचाता है. जब आप फ़ोन खरीदते हैं, तब यह चालू नहीं होता है. आप फ़ोन कोड (0000) को किसी भी चार से आठ अंक के व्यक्तिगत कोड में बदल सकते हैं.

रेडियो फ़्रीक्वेंसी क्षमता

आपका मोबाइल फ़ोन एक रेडियो ट्रांसमिटर और रिसीवर है. जब फ़ोन चालू होता है, तब यह रेडियो फ़्रीक्वेंसी (RF) क्षमता प्राप्त और ट्रांसमिट करता है. आपके पास मोबाइल फ़ोन का जो प्रकार है, उसके आधार पर, यह विभिन्न फ़्रीक्वेंसी श्रेणियों पर कार्य करता है और सामान्यतः उपयोग की जाने वाली मॉड्यूलेशन तकनीकों पर कार्य करता है. जब आप अपने फ़ोन का उपयोग करते हैं, तब आपकी कॉल का प्रबंधन करने वाली प्रणाली उस पावर स्तर को नियंत्रित करती है, जिस स्तर पर आपका फ़ोन ट्रांसमिट करता है.

विशिष्ट अवशोषण दर (SAR) जानकारी

आपके फ़ोन को रेडियो तरंगों के एक्सपोजर के लिए लागू सुरक्षा आवश्यकताओं के अनुपालन के लिए बनाया गया है। यह आवश्यकता वैज्ञानिक अध्ययनों के सावधिक और गहन मूल्यांकन द्वारा वैज्ञानिक संगठनों पर आधारित है। इन दिशानिर्देशों में आयु और स्वास्थ्य पर ध्यान दिए बिना सभी व्यक्तियों की सुरक्षा सुनिश्चित करने के लिए बनाई गई सुरक्षा सीमाएँ शामिल हैं।

- ▶ रेडियो तरंग संपर्क दिशानिर्देश विशिष्ट अवशोषण दर, या SAR के रूप में पहचाने जाने वाली मापन इकाई का उपयोग करते हैं। उपयोग किए गए सभी फ़ीक्वेन्सी बैंड में इस उच्चतम प्रमाणित ऊर्जा स्तर पर ट्रांसमिट करने वाले फ़ोन के साथ मानकीकृत पद्धति का उपयोग करके SAR का परीक्षण किया जाता है।
- ▶ वैसे तो कई LG फ़ोन मॉडल के SAR स्तर में भिन्नता हो सकती है, किंतु उन सभी को रेडियो तरंगों से संपर्क के लिए संबद्ध दिशानिर्देशों को पूरा करने के लिए बनाया गया है।

- ▶ नॉन-आयोनाइजिंग रेडिएशन प्रोटेक्शन (ICNIRP) पर अंतर्राष्ट्रीय समिति द्वारा अनुशंसित SAR सीमा, जो (10) ग्राम टिशू से अधिक पर औसतन 2W/kg है।
- ▶ कान पर उपयोग के लिए Sporton द्वारा जाँचा गया इस मॉडल फ़ोन का उच्चतम SAR मान 0.930 W/kg (10g) है और शरीर के संपर्क में 0.854 W/kg (10g) होता है।

इंस्टिट्यूट ऑफ़ इलेक्ट्रिकल एंड इलेक्ट्रॉनिक्स इंजीनियर्स (IEEE) द्वारा अनुशंसित SAR सीमा, जो एक (1) ग्राम टिशू पर औसतन 1.6 W/किग्रा है, स्वीकार करने वाले देशों/क्षेत्रों के नियामकों के लिए SAR डेटा जानकारी।

इलेक्ट्रॉनिक डिवाइस

अधिकतर आधुनिक इलेक्ट्रॉनिक उपकरण RF ऊर्जा से, सुरक्षित होते हैं। फिर भी, हो सकता है कि कुछ इलेक्ट्रॉनिक उपकरण आपके वायरलेस फ़ोन के RF सिग्नल के प्रति सुरक्षित न हों, अतः

- ▶ अनुमति लिए बिना चिकित्सा उपकरणों के पास अपने मोबाइल फ़ोन का उपयोग न करें।

महत्वपूर्ण सुरक्षा जानकारी

पेसमेकर

इम्प्लान्ट किए गए कुछ कार्डिएक पेसमेकर और चिकित्सकीय रूप से इम्प्लान्ट किए गए अन्य उपकरणों की कार्य प्रणाली को मोबाइल फोन प्रभावित कर सकते हैं। पेसमेकर में संभावित हस्तक्षेप से बचने के लिए, पेसमेकर निर्माता हैंड-हेल्ड वायरलेस फोन और पेसमेकर के बीच न्यूनतम 20 सेमी (6 इंच) की दूरी बनाए रखने की अनुशंसा करते हैं। ये अनुशंसा वायरलेस तकनीकी शोध द्वारा की गई स्वतंत्र शोध और उनकी अनुशंसाओं के अनुरूप हैं।

पेसमेकर वाले व्यक्ति:

- ▶ फोन चालू होने पर फोन को अपने पेसमेकर से हमेशा 20 सेमी (6 इंच) दूर रखें;
- ▶ फोन को सीने के पास वाली जेब में न रखें;
- ▶ हस्तक्षेप की संभावना को कम करने के लिए पेसमेकर के विपरीत दिशा वाले कान का उपयोग करें।
- ▶ यदि आपको किसी भी कारण से यह संदेह हो कि हस्तक्षेप हो रहा है, तो फोन को तुरंत बंद कर दें।

श्रवण सुविधाएँ

मोबाइल फोन द्वारा कुछ श्रवण सुविधाएँ बाधित हो सकती हैं। ऐसी बाधा आने पर, आप अपने सेवा प्रदाता से सलाह ले सकते हैं, या विकल्पों के बारे में चर्चा के लिए ग्राहक सेवा लाइन पर कॉल कर सकते हैं।

वायुयान

- ▶ विमान में प्रवेश से पूर्व अपना मोबाइल फोन बन्द करें"
- ▶ विमान क्षेत्र में विमानकर्मी की अनुमति के बिना मोबाइल फोन का प्रयोग न करें

संचार प्रणाली द्वारा होने वाला हस्तक्षेप रोकने के लिए, विमान में उड़ान के दौरान अपने फोन का उपयोग न करें।

संभावित रूप से विस्फोट वाले वातावरण

संभावित रूप से विस्फोट वाले किसी भी वातावरण में अपना फोन बंद कर दें और सभी संकेतों और निर्देशों का पालन करें। ऐसा बहुत कम होता है, किंतु आपका फोन या इसकी सहायक सामग्री से चिगारी उत्पन्न हो सकती है।

ऐसे क्षेत्र में चिंगारी विस्फोट या आग का कारण हो सकती है, परिणामस्वरूप शारीरिक चोट लग सकती या यहाँ तक कि मृत्यु हो सकती है। संभावित रूप से विस्फोट वाले वातावरण अक्सर स्पष्ट रूप से चिह्नित होते हैं, किंतु हमेशा नहीं।

इसमें शामिल है ईंधन भराने वाले क्षेत्र, जैसे पेट्रोल स्टेशन, नाव के डेक की निचली मंजिल, ईंधन या रसायन स्थानांतरण या संग्रहण सुविधाएँ, और ऐसे क्षेत्र जहाँ हवा में रसायन या कण, जैसे अनाज, धूल, या धातु चूर्ण शामिल हैं; और ऐसा कोई भी क्षेत्र जहाँ आपको सामान्यतः अपने वाहन का इंजन बंद रखने की सलाह दी जाती है।

वाहन चालन

जिन क्षेत्रों में आप गाड़ी चलाते हैं, वहाँ मोबाइल फोन के उपयोग से संबंधित कानूनों और नियमों को जाँच लें। यदि आप वाहन चलाते समय अपने फोन का उपयोग करने वाले हैं, तो कृपया:

- ▶ वाहन चलाने पर पूरा ध्यान दें
- ▶ हैंड्सफ्री का उपयोग करें। कई देशों के कानून के अनुसार वाहन चलाते समय हैंड्सफ्री होना आवश्यक है।

- ▶ यदि वाहन चलाते समय आवश्यक हो, तो कॉल करने या उसका उत्तर देने से पहले वाहन को सड़क के किनारे लगाएँ।

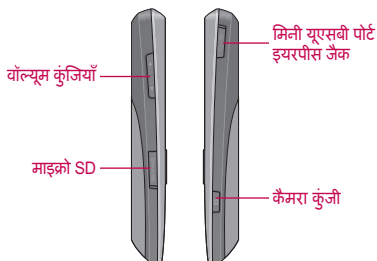
RF क्षमता से मोटर वाहन की कुछ इलेक्ट्रॉनिक प्रणालियों, जैसे कार स्टीरियो, सुरक्षा उपकरण आदि को प्रभावित कर सकते हैं, इसके अतिरिक्त, कुछ वाहन निर्माता मोबाइल फोन के उपयोग को तब तक अनुमति नहीं देते, जब तक कि उनके वाहन के बाह्य एंटीना वाले हैंड्सफ्री किट से इंस्टालेशन समर्थित न हो। आपका मोबाइल फोन आपके वाहन की इलेक्ट्रॉनिक प्रणाली को प्रभावित नहीं करेगा, यह सुनिश्चित करने के लिए अपने वाहन निर्माता के प्रतिनिधि से संपर्क करें।

आपका फ़ोन

आगे का दृश्य



बाईं/दाईं ओर का दृश्य



प्रारंभिक जानकारी

जब आप किसी सेवा प्रदाता से पंजीकृत होते हैं, तो आपको एक सिम कार्ड मिलता है (सबस्क्राइबर आईडेंटिटी मॉड्यूल कार्ड)।

कॉल करने के लिए आपके फोन में एक सिम कार्ड होना आवश्यक है। सिम कार्ड एक कंप्यूटर चिप होती है जिसमें आपका फ़ोन नंबर, फ़ोनबुक जानकारी और सेवा प्रदाता की जानकारी होती है। इसे ध्यान से रखें और इसे मोड़ें नहीं या स्थिर विद्युत अथवा धूल में न रखें। सिम कार्ड डालने से पहले अपने फ़ोन का पावर अवश्य बंद करें। सिम कार्ड स्लॉट बैटरी के नीचे स्थित होता है। अपना सिम कार्ड और बैटरी स्थापित करने के लिए निम्न चरणों का पालन करें:

सिम कार्ड और बैटरी स्थापित करना

1. पिछला कवर निकालने के लिए नाँव दबाएँ।



2. जैसा दिखाया गया है, बैटरी निकालें।



3. जैसा दिखाया गया है, सिम कार्ड डालें।



4. बैटरी डालें और तब पिछला कवर फिर से लगा दें।



प्रारंभिक जानकारी

बैटरी चार्ज करना

अपने फ़ोन का उपयोग करने के पहले, पहली बार आपको बैटरी पूरी तरह चार्ज करना होगी।


1. अपने फ़ोन के बाईं ओर मिनी यूएसबी पोर्ट को यूएसबी केबल से कनेक्ट करें।
2. किसी AC वॉल आउटलेट से यात्रा चार्जर कनेक्ट करें।




नोट

- ▶ चार्जर के कनेक्ट होने पर आप फ़ोन का उपयोग कर सकते हैं।
- ▶ बैटरी के रिक्त होने पर "□" दिखाई देगा और एक चेतावनी की ध्वनि सुनाई देगी। फ़ोन "□" चिह्न दिखाने के बाद, थोड़ी देर में अपने आप बंद हो जाएगा।



फ़ोन बंद और चालू करना





- ▶  कुंजी दबाकर रखें।







नोट

- ▶ सिम कार्ड के ठीक से डले होने पर भी यदि फ़ोन "सिम डालें" संदेश दे, तो किसी PIN कोड के लिए अपने नेटवर्क ऑपरेटर से संपर्क करें, PIN दर्ज करें और पुष्टि करने के लिए  बाईं सॉफ़्ट कुंजी दबाएँ।
- ▶ आप बिना सिम कार्ड के भी फ़ोन का उपयोग कर सकते हैं। कॉल डायल करना और प्राप्त करना अक्षम होता है किंतु मल्टीमीडिया फ़ंक्शन, उपकरण, समय और दिनांक कार्य करते हैं।
- ▶ जब वायरलेस फ़ोन का उपयोग निषेध हो, या जब यह बाधा या खतरे का कारण बन सकता हो, तब फ़ोन चालू न करें।

फ़ंक्शन कुंजियाँ

कुंजिया	कुंजियाँ
 वॉल्यूम कुंजिया	<ul style="list-style-type: none">● किसी कॉल के दौरान अपने फ़ोन का वॉल्यूम ठीक करने के लिए दबाएँ।
 कैमरा कुंजी	<ul style="list-style-type: none">● कैमरा मोड में होने पर कोई शॉट लेने के लिए यह कुंजी दबाएँ।

कुंजिया	कुंजियाँ
 बाईं सॉफ्ट कुंजी	<ul style="list-style-type: none"> निष्क्रिय स्थिति में होने पर मेनू दिखाने के लिए दबाएँ. स्क्रीन के सबसे नीचे बाएँ कोने में वर्तमान में दिखाए जा रहे फंक्शन को चुलाने के लिए दबाएँ.
 दाईं सॉफ्ट कुंजी	<ul style="list-style-type: none"> निष्क्रिय स्थिति में संपर्क देखने के लिए दबाएँ. स्क्रीन के सबसे नीचे दाएँ कोने में वर्तमान में दिखाए जा रहे फंक्शन को चुलाने के लिए दबाएँ.
 भेजे कुंजी	<ul style="list-style-type: none"> कॉल करने के लिए दबाएँ. कॉल किए गए अंतिम नंबर को फिर से डायल करने के लिए दबाकर रखें.
 समाप्त/ पाँवर कुंजी	<ul style="list-style-type: none"> कॉल समाप्त करने के लिए दबाएँ. फोन का पाँवर चालू/ बंद करने के लिए दबाएँ



कुंजिया	कुंजियाँ
 नेविगेशन कुंजियाँ	<ul style="list-style-type: none"> संदेश लेखन, प्रोफाइल, शॉर्टकट और संपर्क सूची मोड में तेजी से जाने के लिए नेविगेशन कुंजियाँ दबाएँ. नीचे नेविगेशन कुंजियों के फंक्शन देखें.
 ऊपर कुंजी	<ul style="list-style-type: none"> संदेश लेखन मोड में जाने के लिए दबाएँ.
 बाईं कुंजी	<ul style="list-style-type: none"> प्रोफाइल मोड में जाने के लिए दबाएँ.
 दाईं कुंजी	<ul style="list-style-type: none"> शॉर्टकट मोड में जाने के लिए दबाएँ.
 नीचे कुंजी:	<ul style="list-style-type: none"> संपर्क सूची मोड में जाने के लिए दबाएँ.
 संख्या कुंजी	<ul style="list-style-type: none"> संख्या या वर्ण इनपुट करने के लिए दबाएँ.

प्रारंभिक जानकारी


कीपैड अनलॉक करना

किसी बटन को आकस्मिक दब जाने से बचाने के लिए KP199 को एक निश्चित समय के बाद अपने आप लॉक किया जा सकता है। कीपैड लॉक करना सीखने के लिए सेटिंग मेनू में सुरक्षा सेटअप देखें (पृष्ठ 87 पर ऑटो कीपैड लॉक देखें)।

कीपैड अनलॉक करने के लिए निम्न चरणों का पालन करें:

1. फ़ोन के निष्क्रिय स्थिति में होने पर स्क्रीन के निचले दाएँ कोने में अनलॉक विकल्प दिखाई देता है।
2. कीपैड अनलॉक करने के लिए  दाईं कुंजी के बाद  कुंजी दबाएँ। तब कीपैड अनलॉक हो जाता है।

नोट










इस पर  कुंजी थोड़ी देर तक दबाने से कीपैड लॉक होता है।






निष्क्रिय स्थिति

जब फ़ोन चालू होता है किंतु उपयोग में नहीं होता, तब यह निष्क्रिय स्थिति में होता है। निष्क्रिय स्थिति में स्क्रीन निचले बाएँ कोने पर मेनू दिखाती है और स्क्रीन के निचले दाएँ कोने पर संपर्क दिखाती है।


मुख्य मेनू में जाने के लिए मेनू दबाएँ या संपर्क सूची में जाने के लिए संपर्क दबाएँ। स्क्रीन के ऊपरी भाग में सूचक भी दिखाई देते हैं।

निष्क्रिय स्थिति में सूचक इस तरह होते हैं:




	खड़े बार GSM नेटवर्क सिग्नल की सिग्नल क्षमता बताते हैं, पाँच बार बताते हैं की अभी आपकी स्थिति में सबसे अच्छे सिग्नल है।
	बैटरी चार्ज स्तर दिखाता है।
	बताता है कि आपका फ़ोन सामान्य प्रोफाइल सेटिंग का उपयोग कर रहा है।
	बताता है कि आपका फ़ोन मीटिंग सेटिंग का उपयोग कर रहा है।
	बताता है कि आपका फ़ोन मीटिंग सेटिंग का उपयोग कर रहा है।
	बताता है कि आपका फ़ोन कंपन सेटिंग का उपयोग कर रहा है।
	बताता है कि आपका फ़ोन मौन सेटिंग का उपयोग कर रहा है।
	बताता है कि आपका फ़ोन हेडसेट सेटिंग का उपयोग कर रहा है।
	बताता है कि अलार्म घड़ी सेट है।


	बताता है कि फ़ोन रोमिंग में है.
	नया संदेश बताता है.
	बताता है कि आपकी सभी कॉल अन्य नंबर पर अंतरित की गई हैं.
	बताता है कि फ़ोन पर ब्लूटूथ फ़ंक्शन सक्षम है.
	बताता है कि फ़ोन पर WAP फ़ंक्शन सक्षम है.

मेनू का उपयोग करना



निष्क्रिय स्थिति में, मुख्य मेनू को देखने के लिए  बाईं सॉफ़्ट कुंजी दबाएँ.

मेनू और मेनू के विकल्पों को नेविगेट करने के लिए निम्न युक्तियों का पालन करें.



- ▶ मेनू देखने के लिए निष्क्रिय स्थिति में  बाईं सॉफ़्ट कुंजी या  मध्य कुंजी दबाएँ.
- ▶ किसी मेनू में जाने के लिए नेविगेशन कुंजियों का उपयोग करें.
- ▶ वर्तमान में चयनित मेनू आइटम में जाने के लिए निचला बायाँ कोना "ठीक" प्रदर्शित करता है जबकि निचला दायाँ कोना "वापस" प्रदर्शित करता है. मेनू आइटम का चयन करने के लिए  बाईं सॉफ़्ट कुंजी (ठीक के नीचे

स्थित होती है) दबाएँ. मेनू से बाहर निकलने के लिए  दाईं सॉफ़्ट कुंजी (पीछे के नीचे स्थित होती है) दबाएँ.

- ▶ प्रत्येक मेनू आइटम मेनू विकल्प शीपक के बाईं ओर एक छोटा नंबर भी दिखाता है. आप किसी आइटम को चुनने के लिए कीपैड पर किसी मेनू आइटम से संबंधित नंबर भी दबा सकते हैं.








- ▶ मेनू से जल्दी से बाहर निकलने के लिए समाप्त/पॉवर कुंजी दबाएँ.
- ▶ उपमेनू आइटम या विकल्पों का चयन करने के लिए नेविगेशन कुंजियों का उपयोग करें. उपमेनू में कई विकल्पों का चयन करने के लिए  दाईं और  बाईं सॉफ़्ट कुंजियों का भी उपयोग किया जा सकता है.



उदाहरण के लिए, छूटी कॉलें देखने के लिए निम्न कार्य करें:

1. मुख्य मेनू से कॉल इतिहास का चयन करने के लिए नेविगेशन कुंजियों का उपयोग करें.
2. चयन की पुष्टि करने के लिए  बाईं सॉफ़्ट कुंजी दबाएँ. कॉल इतिहास उपमेनू खुलता है.
3. छूटे कॉल विकल्प का चयन करने के लिए  बाईं सॉफ़्ट कुंजी दबाएँ. छूटी कॉलों की एक सूची खुलती है.

प्रारंभिक जानकारी

निम्न तालिका मुख्य मेनू के सभी आइटम की सूची देती है:

	ब्राउज़र: इससे आप वैप फ़ंक्शन का उपयोग कर सकते हैं और सेट कर सकते हैं।
	कॉल इतिहास: किए गए कॉल, प्राप्त और छूटी कॉल की जानकारी संग्रहीत करता है।
	उपकरण: आवश्यकता के अनुरूप उपयोगी उपकरण और सुविधाएँ।
	मल्टीमीडिया: आपको कई प्रकार के फ़ंक्शन जैसे गेम्स, कैमरा, छवि/वीडियो, विडियो कैमरा, विडियो प्लेयर, संगीत प्लेयर, वाइस रिकॉर्डर, मेलोडी बनाना, FM रेडियो व FM रिकॉर्ड शेड्यूल देता है। यह विकल्प आपको मनोरंजन के कई घंटे देता है।
	संदेश: प्राप्त संदेशों पर एक्सेस देता है। पाठ (एसएमएस/ एमएमएस) संदेश बनाएँ और भेजें, यहाँ तक की चैट भी करें।
	मेरा सामान: इस मेनू में आपकी सभी फ़ाइलें प्रबंधित करता है।
	प्रोफाइल: विभिन्न पर्यावरणीय स्थितियों में अनुकूलन के लिए अलग-अलग प्रोफाइल सेट कर सकते हैं।

	फोनबुक: इससे आप आसान पहुँच और कॉलर की पहचान के लिए नामों और टेलीफोन नंबरों को प्रबंधित कर सकते हैं।
	सेटिंग्स: इससे आप समय और दिनांक, डिस्प्ले, फोन, कॉल, सुरक्षा और फ़ैक्टरी सेटिंग्स पुनर्स्थापना जैसे फोन सेटिंग कर सकते हैं।

इनपुट पद्धति


अपनी फ़ोन बुक में नाम जोड़ते समय या पाठ संदेश भेजते समय आपको पाठ की प्रविष्टि करनी होती है। आपके सेल फ़ोन में कई पाठ प्रविष्टि पद्धतियाँ हैं। आप अलग से या पूर्वाभास पाठ प्रविष्टि से भी अक्षर दर्ज कर सकते हैं, जिससे अक्षरों को दर्ज करते समय ही शब्दों को पूरा करने में मदद मिलती है। आप अपर केस, लॉअर केस या दोनों में अक्षर दर्ज कर सकते हैं, अथवा प्रतीक सम्मिलित कर सकते हैं। आपका फ़ोन अंग्रेज़ी और हिंदी का समर्थन करने के लिए बनाया गया है।

मूलभूत बातें


इनपुट पद्धति का चयन करना

1. मुख्य मेनू से, संदेश सेवा का चयन करने के लिए नेविगेशन कुंजियों का उपयोग करें और ठीक दबाएँ।
2. पाठ संदेश का चयन करें और ठीक दबाएँ।
3. संदेश लेखन का चयन करें और ठीक दबाएँ। तब आप पाठ मोड में हैं।
4. विकल्प दबाएँ और इनपुट विधि का चयन करें। तब ठीक दबाएँ।
5. किसी इच्छित इनपुट पद्धति का चयन करें और ठीक दबाएँ।


इनपुट पद्धति बदलने का तेज़ तरीका

पाठ मोड में होने पर इनपुट पद्धति बदलने के लिए  कुंजी दबाएँ।

एक स्पेस देना







जब इनपुट पद्धतियाँ T9/ ABC/ Abc/ abc/ हिन्दी हों तब स्पेस देने के लिए आप  कुंजी दबा सकते हैं।

पारंपरिक अंग्रेज़ी इनपुट

जब आप पाठ मोड में होते हैं, तब आपको फ़ोन आपको मल्टी-टैप फंक्शन देता है। पाठ मोड में, आप B अक्षर दिखाने के लिए दो बार और C दिखाने के लिए तीन बार  कुंजी दबा सकते हैं।

जब आप अंग्रेज़ी या हिंदी इनपुट पद्धतियों से कीपैड दबाते हैं, तब निम्न वर्ण तालिका (अंग्रेज़ी और हिंदी) वर्ण दिखाती है।


वर्ण तालिका (अंग्रेज़ी)

कुंजी	बिना शिफ़्ट वाले वर्ण	शिफ़्ट वाले वर्ण
	.,-?!'@:# \$/_1	.,-?!'@:# \$/_1
	abc2	ABC2
	def3	DEF3
	ghi4	GHI4
	jkl5	JKL5
	mno6	MNO6

कॉल फ़ंक्शंस

यह अनुभाग आपको आपके फ़ोन समर्थन की कॉलिंग सेवा के बारे में जानकारी देता है।



कॉल करना

1. निष्क्रिय स्थिति में, एरिया कोड और फ़ोन नंबर दर्ज करें।
2.  कुंजी दबाएँ।


नोट

यदि आप ग़लत नम्बर दर्ज करते हैं तो उस नम्बर को हटाने के लिए साफ़ दबाए।


संपर्क से कॉल करना

1. निष्क्रिय स्थिति में, संपर्क मोड में जाने के लिए  दाईं साँफ़्ट कुंजी दबाएँ।
2. खोज विकल्प का चयन करने के लिए नेविगेशन कुंजियों का उपयोग करें। आप संपर्क सूची से सीधे किसी नाम का चयन कर सकते हैं या त्वरित खोज फ़ील्ड में नाम दर्ज कर सकते हैं। तब कॉल करने के लिए  कुंजी दबाएँ।



या

1. संपर्क मेनू चुनने के लिए मेनू दबाएँ।
2. खोज विकल्प का चयन करने के लिए नेविगेशन कुंजियों का उपयोग करें। आप संपर्क सूची से सीधे किसी नाम का चयन कर सकते हैं या त्वरित खोज फ़ील्ड में नाम दर्ज कर सकते हैं। तब कॉल करने के लिए  कुंजी दबाएँ।

या

1. संपर्क सूची में जाने के लिए नेविगेशन कुंजियों को नीचे की ओर दबाएँ।
2. खोज विकल्प का चयन करने के लिए नेविगेशन कुंजियों का उपयोग करें। आप संपर्क सूची से सीधे किसी नाम का चयन कर सकते हैं या त्वरित खोज फ़ील्ड में नाम दर्ज कर सकते हैं। तब कॉल करने के लिए  कुंजी दबाएँ।


अंतर्राष्ट्रीय कॉल करना

1. निष्क्रिय स्थिति में  कुंजी को तब तक दबाएँ रखें, जब तक की + (अंतर्राष्ट्रीय उपसर्ग वर्ण) न दिखाई दे।
2. देश कोड, क्षेत्र कोड और फ़ोन नंबर दर्ज करें।
3. तब कॉल करने के लिए  कुंजी दबाएँ।


कॉल फ़ंक्शंस

आवक कॉल का उत्तर देना या उसे निरस्त करना

आवक कॉल का उत्तर देना


फ़ोन बजने पर कॉल का उत्तर देने के लिए  कुंजी दबाएँ.

आवक कॉल निरस्त करना

फ़ोन बजने पर कॉल निरस्त करने के लिए  कुंजी दबाएँ.

कॉल प्रतीक्षा



एक कॉल चालू होने पर आप किसी दूसरी आवक कॉल का उत्तर दे सकते हैं.

1. किसी कॉल के दौरान विकल्प में जाने के लिए  बाईं सॉफ़्ट कुंजी दबाएँ और दूसरे कॉल का उत्तर देने के लिए होल्ड का चयन करें.

कॉन्फ़्रेंस कॉल करना

एक से अधिक कॉल चालू होने पर आप कॉन्फ़्रेंस कॉल कर सकते हैं.

1. जैसा कि पहले बताया गया है पहले सहभागी को कॉल करें (पृष्ठ 21 पर कॉल करना देखें).

2. पहले सहभागी के साथ कॉल के दौरान दूसरे सहभागी को कॉल करें.
3.  बाईं सॉफ़्ट कुंजी दबाएँ और कॉन्फ़्रेंस का चयन करें. यह पहले और दूसरे कॉल को कॉन्फ़्रेंस में जोड़ता है.
4. नए सहभागियों को कॉन्फ़्रेंस कॉल से कनेक्ट रहने की अनुमति देने के लिए चरण 2 और 3 दोहराएँ.
5. विकल्प दबाएँ और कॉल समाप्त करने के लिए सभी समाप्त करें का चयन करें या सभी कॉल समाप्त करने के लिए  कुंजी दबाएँ.

नोट

- ▶ कॉलर्स को अलग-अलग डिस्कनेक्ट किया जा सकता है. आप बस किसी कॉन्फ़्रेंस कॉल के दौरान एक कॉलर का चयन करें विकल्प > एक समाप्त करें दबाएँ.
- ▶ किसी कॉन्फ़्रेंस में स्वीकृत पक्षों की संख्या 6 है, जिसमें कॉन्फ़्रेंस प्रारंभ करने वाला व्यक्ति भी शामिल है.

कॉल विकल्प के लिए युक्तियाँ

किसी सक्रिय कॉल के दौरान कई फंक्शन उपलब्ध हैं, जब कोई नया कॉल किया जाता है तो विकल्प 1-8 (नीचे) उपलब्ध होते हैं, किसी कॉन्फ्रेंस के दौरान अतिरिक्त विकल्प (9-17) उपलब्ध होते हैं.

1. **होल्ड:** कॉल को होल्ड पर रखता है.
2. **अंत:** कॉल समाप्त करता है.
3. **नई कॉल:** किसी सक्रिय कॉल के दौरान नई कॉल करता है.
4. **संपर्क:** संपर्क मेनू के लिए शॉर्टकट.
5. **पाठ संदेश:** संदेश सेवा मेनू के लिए शॉर्टकट.
6. **ध्वनि रिकार्डर:** किसी सक्रिय कॉल के दौरान आपकी बात-चीत रिकॉर्ड करता है.
7. **म्यूट:** किसी बात-चीत के दौरान म्यूट को चालू/ बंद करता है.
8. **DTMF:** DTMF (ड्यूअल टोन मल्टी-फ्रीक्वेंसी) टोन डायलिंग सिस्टम के लिए चालू/ बंद सेट करता है.
9. **पुनर्प्राप्त:** होल्ड की गई कॉल फिर से कनेक्ट करता है
10. **सभी पुनर्प्राप्त:** होल्ड की गई सभी कॉल को फिर से कनेक्ट करता है.
11. **स्वैप:** होल्ड और सक्रिय कॉल को

स्विच करता है.

12. **कॉन्फ्रेंस:** बहु-पक्षीय वार्तालाप करता है.
13. **स्थानांतरण:** कॉल स्थानांतरित करता है.
14. **एक समाप्त करें:** किसी कॉन्फ्रेंस कॉल में एक सहभागी को समाप्त करता है.
15. **सभी समाप्त करें:** बहु-पक्षीय कॉल समाप्त करता है.
16. **H-फ्री/H-हेल्ड:** किसी बहु-पक्षीय कॉल के दौरान या तो हैंड्स फ्री या हेल्ड चुनें.
17. **विभाजित करें:** बहु-पक्षीय कॉल रद्द करता है.

ब्राउज़र [Menu 1]

नीचे बताई गई सेवाएँ सेवा प्रदाता द्वारा समर्थित हैं. यदि आप इनमें से किसी एक सेवा से कनेक्ट नहीं हो सकते, तो और जानकारी के लिए अपने सेवा प्रदाता से संपर्क करें.

वैप

Menu 1.1

आपका फ़ोन वेब ब्राउज़िंग का समर्थन करता है. आप कई सेवाएँ जैसे नवीनतम समाचार, मौसम, खेल, और अन्य जानकारी, साथ ही ई-मेल और अन्य इंटरनेट सेवाएँ प्राप्त कर सकते हैं. ये सेवाएँ आपके वैप सेवा प्रदाता द्वारा बनाई और प्रबंधित की जाती हैं.

वैप सेवा उनके वैप पृष्ठों पर वायरलेस मार्कअप लैंग्वेज (WML) का उपयोग करता है. आप अपने फ़ोन पर मानक इंटरनेट वेब पेज नहीं देख सकते हैं.


नोट

- ▶ वैप सेवा सक्रिय करने के लिए, आपको अपने सेवा प्रदाता से संपर्क करना होगा.
- ▶ जब वायरलेस फ़ोन का उपयोग निषेध हो, या जब यह बाधा या खतरे का कारण बन सकता हो, तब फ़ोन चालू न करें.

मुखपृष्ठ

स्टैंडबाय मोड से ब्राउज़र पर पहुँचने के लिए, सेवा में वैप पर जाएँ और मुख पृष्ठ दबाएँ. कनेक्ट होने पर, मुख पृष्ठ प्रदर्शित होता है. सामग्री सेवा प्रदाता पर निर्भर करती है.

ब्राउज़र से बाहर निकलना

ब्राउज़िंग स्थिति में ब्राउज़िंग स्थिति से बाहर निकलने के लिए  कुंजी दबाएँ.

गूगल खोज

आप तुरंत गूगल वेबसाइट पर पहुँच सकते हैं.

बुकमार्क

अपनी किसी पसंदीदा वेबसाइट पर तेजी से पहुँचने के लिए URL पता सहेजने हेतु आप इस मेनू का उपयोग कर सकते हैं.

आपका फ़ोन आपके विकल्प के लिए आपको निम्न चयन भी प्रदान करता है:

- ▶ **यहाँ जाएँ:** इससे आप किसी वेबसाइट से कनेक्ट कर सकते हैं.
- ▶ **संपादित करें:** इससे आप यूआरएल पतों को संपादित कर सकते हैं.

- ▶ **इससे भेजें:** इससे आप एसएमएस/एमएमएस द्वारा यूआरएल पते भेज सकते हैं.
- ▶ **हटाएँ:** चयनित बुकमार्क को हटाने की सुविधा देता है.
- ▶ **सभी हटाएँ:** सभी बुकमार्क को हटाने की सुविधा देता है.
- ▶ **बुकमार्क जोड़ें:** इससे आप बुकमार्क सूची में URL पते जोड़ सकते हैं.

नवीनतम पृष्ठ

आप उन नवीनतम पृष्ठों को देख सकते हैं, जिन पर आप जा चुके हैं. चयनित पृष्ठ कनेक्ट करने के लिए यहाँ जाएँ दबाएँ.

- ▶ **यहाँ जाएँ:** आपको URL से कनेक्ट होने की सुविधा देता है.
- ▶ **संपादित करें:** इससे आप URL पता संपादित कर सकते हैं.
- ▶ **बुकमार्क जोड़ें:** इससे आप बुकमार्क सूची में URL पता जोड़ सकते हैं.
- ▶ **हटाएँ:** इससे आप URL पता हटा सकते हैं.
- ▶ **सभी हटाएँ:** इससे आप सभी रिकॉर्ड किए गए URL पते हटा सकते हैं.

पता दर्ज करें

आप URL पता लिख सकते हैं और पता दर्ज करके पूर्ण का चयन कर सकते हैं. जैसे ही आप URL दर्ज करते हैं, आपका फ़ोन उससे कनेक्ट हो जाता है. पता दर्ज किए जाने के बाद, आप नीचे के फ़ंक्शंस चुनने के लिए URL का चयन कर सकते हैं और विकल्प दबा सकते हैं.

सेवा इनबॉक्स

आपका फ़ोन आपके सेवा प्रदाता द्वारा भेजे गए सेवा संदेश प्राप्त करने में सक्षम है. सेवा संदेश हेडलाइन या सामग्री की सूचना होते हैं, और उनमें किसी वैप सेवा का पता हो सकता है. आप अपने सेवा प्रदाता से नवीनतम समाचार या नई वैप सेटिंग प्राप्त कर सकते हैं.

प्राप्त वैप पुश संदेशों को सेवा इनबॉक्स में संग्रहीत किया जाता है. आप पुश संदेशों को स्वीकार करने या हटाने के लिए विकल्प दबा सकते हैं.

सेटिंग्स

जीपीआरएस (जनरल पैकेट रेडियो सर्विस) एक ऐसी तकनीक है, जिसका उपयोग मोबाइल नेटवर्क पर डेटा भेजने या प्राप्त करने के लिए किया जाता है. जो अनुप्रयोग जीपीआरएस का उपयोग

ब्राउज़र

करते हैं, वे वैप सेवाएँ, एमएमएस और एसएमएस संदेश सेवा एवं जीपीआरएस डायल-अप (जैसे इंटरनेट और ई-मेल) हैं। फ़ोन चालू करने पर, आप जीपीआरएस नेटवर्क पर अपने फ़ोन का स्वतः पंजीकरण सेट कर सकते हैं।

यदि आपका सेवा प्रदाता WAP प्रोफ़ाइल असाइन करता है और आपके लिए सेटिंग्स कॉन्फ़िगर करता है, तो आप तत्काल GPRS या GSM का उपयोग कर सकते हैं। यदि आप मैन्युअली WAP सेटिंग्स कॉन्फ़िगर करना चाहते हैं, तो आपको अपने नेटवर्क ऑपरेटर या सेवा प्रदाता से उचित सेटिंग्स के लिए संपर्क करना होगा।

Note

अधिकांश मामलों में, इंटरनेट का उपयोग करने के लिए आपको केवल डिफ़ॉल्ट प्रोफ़ाइल में से किसी एक का उपयोग करना होगा। प्रत्येक ऑपरेटर की सेटिंग्स अलग-अलग होती हैं। सही सेटिंग और सावधानीपूर्वक आगे बढ़ने के लिए कृपया अपने ऑपरेटर या सेवा प्रदाता की सलाह लें। अनुचित सेटिंग से कनेक्शन विफल हो जाएगा।

प्रोफ़ाइल संपादित करें

आप अपने फ़ोन में संग्रहीत WAP प्रोफ़ाइल सक्रिय और कॉन्फ़िगर कर सकते हैं।

कोई वैप प्रोफ़ाइल सक्रिय करने के लिए, प्रोफ़ाइल चयन करें सूची से प्रोफ़ाइल चुनने के लिए ब्राउज़र > वैप > सेटिंग्स > प्रोफ़ाइल संपादित करें चयन करें। फिर प्रोफ़ाइल सक्रिय करें दबाएँ।

कोई वैप प्रोफ़ाइल मैन्युअली कॉन्फ़िगर करने के लिए, प्रोफ़ाइल चयन करें सूची से प्रोफ़ाइल चुनने के लिए ब्राउज़र > वैप > सेटिंग्स > प्रोफ़ाइल संपादित करें चयन करें। फिर निम्न पैरामीटर्स के लिए विवरण दर्ज करें।

- ▶ **नाम बदलें:** प्रोफ़ाइल नाम संपादित करें।
- ▶ **मुख पृष्ठ:** प्रोफ़ाइल पता संपादित करें।
- ▶ **डेटा खाता:** जीएसएम डेटा या जीपीआरएस से कोई खाता प्रकार चुनें।
- ▶ **कनेक्शन:** IP पता और सुरक्षा सेट करने के लिए वैप का चयन करें। प्रॉक्सी पता और प्रॉक्सी पोर्ट सेट करने के लिए HTTP चयन करें।
- ▶ **उपयोगकर्ता नाम:** प्रोफ़ाइल एक्सेस करने के अपना उपयोगकर्ता नाम संपादित करें।

- ▶ **पासवर्ड:** प्रोफाइल एक्सेस करने के अपना पासवर्ड नाम संपादित करें।

संपादन पूरा कर लेने के बाद, पूर्ण चयन करें और अपनी सेटिंग सहेजने के लिए हाँ दबाएँ।

ब्राउज़र विकल्प

आप ब्राउज़र के लिए समयबा. मान सेट कर सकते हैं. (यदि फ़ोन सेट समय में कनेक्ट नहीं होता तो यह ब्राउज़र को रोक देगा). छवियाँ दिखाएँ विकल्प में आप ब्राउज़िंग स्पीड को प्रभावित करने वाली छवियाँ को सक्षम या अक्षम भी कर सकते हैं.

सेवा संदेश सेटिंग्स

आप अपने सेवा प्रदाता द्वारा भेजे गए पुश संदेश को या दो सक्षम या अक्षम कर सकते हैं. आप विश्वास सेटिंग बदल सकते हैं या कोई नया विश्वसनीय स्रोत जोड़ सकते हैं.

कैश रिक्त करें

आपके द्वारा उपयोग की गई सभी जानकारी या दिनांक, आपके फ़ोन के कैश में संग्रहीत की जाती है. कैश फ़ाइल बफर है जो दिनाकों को अस्थायी रूप से संग्रहीत करने के लिए उपयोग किया जाता है. इस विकल्प का चयन करके आप इतिहास साफ़ कर सकते हैं.

कुकीज़ साफ़ करें

गोपनीयता और सुरक्षा चिंताओं को कम करने के लिए, फ़ोन खोने या चोरी होने की स्थिति में, संवेदनशील जानकारी वाली सभी कुकीज़ साफ़ करें.

विश्वसनीय प्रमाणपत्र

ब्राउज़ करते समय विश्वसनीय वेब प्रमाणपत्र प्रदर्शित करता है और आपकी "विश्वास सूची" प्रबंधित करता है.

डेटा खाता

Menu 1.2

इस फ़ोन के निर्माण के समय प्रमुख ऑपरेटर्स पर आधारित डिफ़ॉल्ट डेटा खाते प्रदान किए जाते हैं.

आप जीएसएम या जीएसएम डेटा के द्वारा वैप का उपयोग कर सकते हैं.

- ▶ इस सेवा के लिए एनालॉग संख्या या ISDN संख्या जानकारी प्राप्त करने हेतु, आपको अपने ऑपरेटर से संपर्क कर सकते हैं.
- ▶ इस सेवा के लिए जीपीआरएस का पहुँच बिंदु प्राप्त करने हेतु, आपको अपने ऑपरेटर से संपर्क करना होगा.

ब्राउज़र

जीएसएम डेटा

1. मुख्य मेनू से, ब्राउज़र > डेटा खाता > जीएसएम डेटा का चयन करने के लिए नेविगेशन कुंजियों का उपयोग करें और ठीक दबाएँ.
2. डेटा खाता सूची से कोई जीएसएम खाता चुनें और खाता नाम, नंबर, उपयोगकर्ता नाम, पासवर्ड, लाइन प्रकार, गति और DNS का विवरण दर्ज करने के लिए संपादित करें दबाएँ. आप अपने लाइन प्रकार को एनालॉग या ISDN में बदल सकते हैं. आप अपनी कनेक्ट स्पीड भी 4.8/ 9.6/ 14.4 Kbps में तय कर सकते हैं.


जीपीआरएस

1. मुख्य मेनू से ब्राउज़र > डेटा खाता > जीपीआरएस का चयन करें और ठीक दबाएँ.
2. डेटा खाता सूची से कोई खाता चुनें और खाता नाम, APN, उपयोगकर्ता नाम, पासवर्ड और प्रमाणीकरण प्रकार का विवरण दर्ज करने के लिए संपादित करें दबाएँ. प्रमाणीकरण प्रकार सामान्य और सुरक्षित हो सकते हैं.

कॉल इतिहास [Menu 2]

आपका फोन कॉल इतिहास में छूटी कॉल, प्राप्त कॉल, डायल किए गए कॉल, कॉल की अवधि और शुल्क के कॉल रिकॉर्ड्स सहेजता है। आप जब आवश्यकता हो, सभी कॉल रिकॉर्ड देख सकते हैं। इस मेनू में आपका फोन ये फंक्शन भी देता है: कोई फोन नंबर चुनने पर पाठ संदेश हटाना, सहेजना, संपादित करना, भेजना और मल्टीमीडिया संदेश भेजना।

नोट

- ▶ कॉल सूची के स्मृति सीमा से अधिक होने पर, सबसे पुरानी कॉल हटा दी जाती है।
- ▶ छूटी, डायल की गई और प्राप्त कॉलों को त्वरित रूप से देखने के लिए आप  कुंजी दबा सकते हैं।
- ▶ जब सिम कार्ड बदला जाता है, तो फोन में संग्रहीत किए गए कॉल रिकॉर्ड हट जाते हैं किंतु सिम कार्ड में संग्रहीत कॉल नहीं।

सभी कॉल

Menu 2.1

आपका फोन छूटी, डायल की गई और प्राप्त कॉलों की 120 प्रविष्टियाँ रिकॉर्ड कर सकता है।

अपनी सभी कॉल्स का रिकॉर्ड देखने के लिए, मुख्य मेनू से, कॉल इतिहास > सभी कॉल का चयन करें और ठीक दबाएँ।

छूटी कॉल्स

Menu 2.2

आप अपने फोन पर अंतिम 40 छूटी कॉल देख सकते हैं।

अपनी सभी छूटी कॉल्स का रिकॉर्ड देखने के लिए, मुख्य मेनू से, कॉल इतिहास > छूटी कॉल्स का चयन करें और ठीक दबाएँ।

डायल की गई कॉल्स

Menu 2.3

आप अपने फोन पर अंतिम 40 जावक कॉल देख सकते हैं।

अपनी सभी डायल की गई कॉल्स का रिकॉर्ड देखने के लिए, मुख्य मेनू से, कॉल इतिहास > डायल की गई कॉल्स का चयन करें और ठीक दबाएँ।

प्राप्त कॉल्स

Menu 2.4

आप अपने फोन पर अंतिम 40 प्राप्त कॉल देख सकते हैं।

अपनी सभी प्राप्त कॉल्स का रिकॉर्ड देखने के लिए, मुख्य मेनू से, कॉल इतिहास > प्राप्त कॉल्स का चयन करें और ठीक दबाएँ।

जब आप अपनी कॉल प्रविष्टियों में से किसी का चयन करते हैं, तो आपका फोन, कॉल जानकारी जैसे दिनांक, समय, कॉल का नाम, फोन नंबर और कॉल का समय

कॉल इतिहास

दिखाता है और निम्न विकल्प प्रदान करता है.

- ▶ **हटाएँ:** कॉल लॉग से प्रविष्टि हटाएँ.
- ▶ **डायल:** प्रविष्टि डायल करें.
- ▶ **संपादन:** प्रविष्टि संपादित करें और प्रविष्टि को सिम कार्ड या फ़ोन में सहेजें.
- ▶ **SMS भेजें:** किसी प्रविष्टि में पाठ संदेश भेजें.
- ▶ **MMS भेजें:** किसी प्रविष्टि में मल्टीमीडिया संदेश भेजें.

कॉल लॉग हटाएँ

Menu 2.5

आप अपने फ़ोन से अपने कुछ या सभी कॉल रिकॉर्ड हटा सकते हैं.

कॉल रिकॉर्ड्स हटाने के लिए, मुख्य मेनू से, कॉल इतिहास > कॉल लॉग हटाएँ का चयन करें और ठीक दबाएँ. छूटी कॉल्स, डायल की गई कॉल्स और प्राप्त कॉल्स में से आप कॉल रिकॉर्ड्स हटा सकते हैं या अपना कॉल रिकॉर्ड निकालने के लिए सभी हटाएँ का चयन कर सकते हैं.

कॉल समय

Menu 2.6

कोई कॉल करने या प्राप्त करने के बाद आप अपने फ़ोन से किसी कॉल अवधि का पता कर सकते हैं.

कॉल्स की अवधि देखने के लिए, मुख्य मेनू से, कॉल इतिहास > कॉल समय का चयन करें और ठीक दबाएँ. आपका फ़ोन निम्न विवरण दिखाता है.

- ▶ **अंतिम कॉल समय:** आपके अंतिम कॉल की अवधि दिखाता है.
- ▶ **कुल प्रेषित:** आपके द्वारा की गई कॉल के कुल समय का योग.
- ▶ **कुल प्राप्त:** आपके द्वारा प्राप्त की गई कॉल के कुल समय का योग.
- ▶ **सभी समय रीसेट करें:** समय गणक को शून्य पर रीसेट करता है.

कॉल लागत

Menu 2.7

आपके फ़ोन से आप फ़ोन कॉल करते समय लागत जांच सकते हैं.

कॉल्स की लागत देखने के लिए, मुख्य मेनू से, कॉल इतिहास > कॉल लागत का चयन करें और ठीक दबाएँ. आपका फ़ोन निम्न विवरण दिखाता है.

- ▶ **अंतिम कॉल शुल्क:** की गई अंतिम कॉल का शुल्क.
- ▶ **कुल शुल्क:** अभी तक आपके द्वारा की गई कॉल के शुल्क का योग.
- ▶ **लागत रीसेट:** गणक रीसेट करने के लिए.

- ▶ **अधिकतम शुल्क:** स्वीकृत अधिकतम कॉल सेट करने के लिए.
- ▶ **प्रति इकाई मूल्य:** कॉल का इकाई शुल्क सेट करने के लिए.

नोट

इससे पहले कि अधिकतम लागत और इकाई लागत सेट करने से पहले PIN2 कोड दर्ज करना होगा. लगातार तीन बार गलत PIN2 कोड दर्ज करने से कोड लॉक हो जाएगा.

SMS काउंटर

Menu 2.8

अपने फ़ोन से आप संदेशों की संख्या जाँच सकते हैं.

पाठ संदेशों की संख्या देखने के लिए, मुख्य मेनू से, कॉल इतिहास > पाठ संदेश काउंटर का चयन करें और ठीक दबाएँ. आपका फ़ोन भेजे गए और प्राप्त पाठ संदेशों की संख्या दिखाता है.

GPRS काउंटर

Menu 2.9

अपने फ़ोन से आप उपयोग किए गए GPRS पैकेट का डेटा आकार जाँच सकते हैं.

जीपीआरएस का डेटा आकार देखने के लिए, मुख्य मेनू से, कॉल इतिहास > जीपीआरएस काउंटर का चयन करें और ठीक दबाएँ.

आपका फ़ोन निम्न विवरण दिखाता है.

- ▶ **अन्तिम भेजा:** अंतिम बार भेजे गए डेटा आकार.
- ▶ **अंतिम बार प्राप्त:** अंतिम बार प्राप्त डेटा आकार.
- ▶ **सभी प्रेषित:** भेजे गए डेटा का कुल योग.
- ▶ **सभी प्राप्त:** प्राप्त डेटा का कुल योग.
- ▶ **गणक रीसेट करें:** गणक रीसेट करने के लिए.

उपकरण [Menu 3]

आपका फ़ोन आपकी व्यक्तिगत सहायता के लिए उपयोगी उपकरण प्रदान करता है। आप अपना कैलेंडर संपादित कर सकते हैं, करने के लिए कार्य व्यवस्थित कर सकते हैं, अलार्म सेट कर सकते हैं और टाइम टेलर, विश्व घड़ी, कैल्क्युलेटर, इकाई कनवर्टर और स्वास्थ्य प्रबंधक जैसे गज़ट का उपयोग कर सकते हैं।

कैलेंडर

Menu 3.1

इस फ़ंक्शन से आप कैलेंडर में सहेजे गए अपने शेड्यूल और कार्यों का ट्रैक रख सकते हैं। नोट संपादित करते समय आप फ़ोन में संग्रहीत टेम्पलेट्स का उपयोग कर सकते हैं। आप कोई अनुस्मारक लार्म भी सेट कर सकते हैं।

कैलेंडर में कोई नोट और अनुस्मारक पहली बार बनाने के लिए इन चरणों का पालन करें:

1. मुख्य मेनू से, उपकरण > कैलेंडर का चयन करें और ठीक दबाएँ।
2. वह दिनांक दर्ज करें जब आप कोई नोट और अनुस्मारक सम्मिलित करना चाहते हैं और जोड़ें।
3. दिनांक, प्रारंभ समय, समाप्ति समय, नोट, अलार्म और दोहराएँ सेटिंग्स संपादित करें।

4. पूर्ण दबाएँ और फिर परिवर्तन सहेजने के लिए हाँ दबाएँ।

आप 5/ 15/ 30 मिनट पहले अलार्म सक्षम कर सकते हैं, या अलार्म अक्षम कर सकते हैं, और अनुस्मारक को रोज़, दिनों में, सप्ताह में या माह में एक बार दोहराएँ जाने के लिए सेट कर सकते हैं।

किसी निर्दिष्ट दिनांक में नोट और अनुस्मारक देखने या संपादित करने के लिए इन चरणों का पालन करें:

1. मुख्य मेनू से, उपकरण > कैलेंडर का चयन करें और ठीक दबाएँ।
2. जिस दिनांक को आप नोट और अनुस्मारक देखना या संपादित करना चाहते हैं उसे हाइलाइट करें और विकल्प दबाएँ।
3. कार्य देखें चयन करें और ठीक दबाएँ।
4. नोट और अनुस्मारक चयन करें और विकल्प दबाएँ।
5. कोई क्रिया चयन करें और ठीक दबाएँ।

आप निर्दिष्ट दिन के किसी कार्य को देख, जोड़, संपादित कर सकते हैं, उसे हटा सकते हैं या सभी कार्यों को हटा सकते हैं और कार्य को पाठ संदेश, मल्टीमीडिया संदेश, ब्लूटूथ से भी भेज सकते हैं या अपने फ़ोन में फ़ाइल सहेज सकते हैं।

किसी निर्दिष्ट दिनांक में नोट या अनुस्मारक जोड़ने के लिए इन चरणों का पालन करें:

1. मुख्य मेनू से, उपकरण > कैलेंडर का चयन करें और ठीक दबाएँ.
2. जिस दिनांक को आप नोट और अनुस्मारक जोड़ना चाहते हैं उसे हाइलाइट करें और विकल्प दबाएँ.
3. कार्य जोड़ें चयन करें और ठीक दबाएँ.
4. दिनांक, प्रारंभ समय, समाप्ति समय, नोट, अलार्म और दोहराएँ सेटिंग्स संपादित करें.
5. पूर्ण दबाएँ और फिर परिवर्तन सहेजने के लिए हाँ दबाएँ.

इच्छित दिनांक पर जाने के लिए इन चरणों का पालन करें:

1. मुख्य मेनू से, उपकरण > कैलेंडर > विकल्प > इस दिनांक पर जाएँ का चयन करें और ठीक दबाएँ.
2. इच्छित स्वरूप dd/mm/yyyy में निर्दिष्ट दिनांक दर्ज करें और ठीक दबाएँ.

नोट

पिछले और अगले वर्ष पर जाने के लिए आप संख्या 1 और संख्या 3 कुंजियाँ दबा सकते हैं. पिछले और अगले माह पर जाने के लिए आप संख्या 7 और संख्या 9 कुंजियाँ भी दबा सकते हैं.

टू इ

Menu 3.2

यह सुविधा कैलेंडर विकल्प से जोड़े गए सभी कार्यों की सूची बनाती है.

इस सुविधा के अंतर्गत दिए गए विकल्पों से आप किसी कार्य को देख, जोड़, संपादित कर सकते हैं, उसे हटा सकते हैं या सभी कार्यों को हटा सकते हैं और कार्य को पाठ संदेश, मल्टीमीडिया संदेश, ब्लूटूथ से भी भेज सकते हैं या अपने फ़ोन में फ़ाइल सहेज सकते हैं. टू इ प्रबंधित करने के लिए इन चरणों का पालन करें:

1. मुख्य मेनू से, उपकरण > टू इ का चयन करें और ठीक दबाएँ.
2. कार्य सूची से कार्य का चयन करें और विकल्प दबाएँ.
3. कोई क्रिया चयन करें और ठीक दबाएँ.

फिर आप टू इ प्रबंधित कर सकते हैं.

उपकरण

अलार्म

Menu 3.3

इस फ़ंक्शन से आप निर्दिष्ट समय पर अलार्म बजना सेट कर सकते हैं. फ़ोन बंद होने पर भी अलार्म घड़ी कार्य करती है.

अलार्म सेट करने के लिए इन चरणों का पालन करें:

1. मुख्य मेनू से उपकरण > अलार्म का चयन करें और ठीक दबाएँ.
2. किसी अलार्म का चयन करें और संपादित करें दबाएँ.
3. अलार्म संपादित करें स्क्रीन पर मान सेट करें.
4. पूर्ण दबाएँ और फिर परिवर्तन सहेजने के लिए हॉ दबाएँ.

आप रोज, दिनों में या घंटे में एक बार दोहराए जाने के लिए सेट कर सकते हैं और आपकी इच्छित रिंगिंग टोन या एफएम रेडियो में बदल सकते हैं.

टाइम टेलर

Menu 3.4

यह फ़ंक्शन आपको वर्तमान समय बताता है. टाइम टेलर को सक्षम/ अक्षम करने के लिए उपकरण > टाइम टेलर का चयन करें और फिर पुष्टि के लिए ठीक दबाएँ. जब आप यह फ़ंक्शन सक्षम करते हैं, तो आप हर घंटे में समय सुन सकते हैं.

Note

वॉइस टाइम टेलर 12-घंटे समय स्वरूप (ए एम/पी एम) पर सेट होता है.

विश्व घड़ी

Menu 3.5

यह फ़ंक्शन आपको विश्व के बड़े शहरों का वर्तमान समय और दिनांक दिखाता है.

आप नेविगेशन कुंजियों को बाएँ/ दाएँ दबा कर शहर का चयन कर सकते हैं. जब क्रॉस कोई निश्चित शहर इंगित करता है, तब यह स्थानीय दिनांक या समय दिखाता है. विदेशी शहर के लिए डेलाइट सेविंग टाइम चालू/ बंद और होम सिटी सेट के लिए चयनित शहर सेट आप विकल्प दबा सकते हैं.

गणक

Menu 3.6

कैल्क्यूलेटर सामान्य कैल्क्यूलेटर कार्य जैसे जोड़, घटाव, गुणा और भाग करता है.

कैल्क्यूलेटर का उपयोग करने के लिए, मुख्य मेनू से, उपकरण > कैल्क्यूलेटर का चयन करें और ठीक दबाएँ. मान दर्ज करने के बाद, परिणाम के लिए बाईं सॉफ्ट कुंजी दबाएँ और साफ़ करने के लिए दाईं सॉफ्ट कुंजी दबाएँ.

आपका फोन निम्न आदेश देता है:

- ▶ ऊपरी नेविगेशन कुंजी: + (जोड़)
- ▶ नीचे नेविगेशन कुंजी: - (घटाव)
- ▶ बाई नेविगेशन कुंजी: x (गुणा)
- ▶ दाई नेविगेशन कुंजी: / (भाग)
- ▶ सांख्यिक # कुंजी: . (दशमलव)
- ▶ सांख्यिक * कुंजी: - (ऋणात्मक)

मात्रक कन्वर्टर

Menu 3.7

यह फंक्शन आपकी वजन, लंबाई और मुद्रा को एक इकाई से दूसरी में कनवर्ट करने में मदद करता है। आप विभिन्न वजन जैसे किग्रा., पाउंड और औंस के बीच कनवर्ट कर सकते हैं। आप विभिन्न लंबाई जैसे सेंमी, इंच, किमी, मील, मीटर, यार्ड और फुट के बीच कनवर्जन कर सकते हैं। कोई मुद्रा दर इनपुट करें, आप स्थानीय मुद्रा और विदेशी मुद्रा में कनवर्ट भी कर सकते हैं।

स्वास्थ्य

Menu 3.8

स्वास्थ्य विकल्प में BMI और मासिक चक्र, ये दो सुविधाएँ हैं।

BMI (बॉडी मास इंडेक्स)

यह सुविधा आपकी ऊँचाई और भार के अनुसार आपके शरीर में वसा की गणना करने में मदद करती है।

अपना BMI मान कैल्क्यूलेट करने के लिए इन चरणों का पालन करें:

1. मुख्य मेनू से उपकरण > स्वास्थ्य > BMI का चयन करें और ठीक दबाएँ.
2. नेविगेशन कुंजियाँ बाई या दाई दबाकर अपना लिंग चयन करें.
3. न्यूमेरिक कुंजियों का उपयोग करके सेंटीमीटर में अपनी ऊँचाई और किलो में अपना वजन इनपुट करें और ठीक दबाएँ.

BMI परिणाम तुरंत आपकी स्क्रीन पर दिखाई देता है। BMI मान के तहत 18 से कम वाले पतले, 18 से 23 वाले सामान्य और 23 से अधिक वाले मोटे।

मासिक चक्र

यह सुविधा महिला के मासिक चक्र की गणना करने और निम्न जानकारी प्रदान करती है:

- ▶ वर्तमान दिनांक पर गर्भवती होने की संभावना.

उपकरण

- ▶ वे दिनांक जिनके दौरान गर्भवती होने के संभावनाएं बढ़ जाती हैं.
- ▶ अगली माहवारी की दिनांक.

मासिक चक्र की जाँच करने के लिए इन चरणों का पालन करें:

1. मुख्य मेनू से उपकरण > स्वास्थ्य > मासिक चक्र का चयन करें और ठीक दबाएँ.
2. पिछले मासिक धर्म का प्रारंभ दिनांक dd/mm/yyyy स्वरूप में दर्ज करें.
3. मासिक चक्र की औसत लंबाई (14 से 99 के बीच मान) दर्ज करें और ठीक दबाएँ.
4. कोई दिनांक हाइलाइट करें और गर्भधारण की संभावना को दिखाने के लिए विकल्प दबाएँ.
5. छोड़ने के लिए ठीक दबाएँ.

नोट

हो सकता है कि परिणाम आपकी शारीरिक स्थितियों के अनुरूप न हो. यह केवल संदर्भ है.

STK (सिम टूल किट) Menu 3.9

आपके फ़ोन में उपलब्ध फ़ंक्शंस के अलावा, आपका सेवा प्रदाता सिम कार्ड द्वारा अतिरिक्त अनुप्रयोग जैसे मौसम या शेयर बाज़ार से संबंधित जानकारी प्रदान कर सकता है.

STK सेवा सेट करने के लिए

उपकरण मेनू में, STK चुनें, सेवा से कनेक्ट होने के लिए ठीक दबाएँ.

नोट

- ▶ उपलब्धता के लिए, आपको अपने सेवा प्रदाता से सेवा के लिए पंजीकरण की आवश्यकता होगी.
- ▶ इन सेवाओं के उपयोग में SMS भेजना शामिल हो सकता है, जिसके लिए आपको शुल्क देना पड़ सकता है.

मल्टीमीडिया [Menu 4]

खेल व अनुप्रयोग Menu 4.1

KP199 आपको विस्तृत मल्टीमीडिया कार्यक्षमता देता है, जो आपको घंटों मनोरंजन करता है. दो रचनात्मक अंतर्निहित गेम्स हैं, Let's have fruit और The Bomber का आनंद लें.

गेम्स

"Let's have fruit", "The Bomber" आपके फ़ोन के साथ दिए जाते हैं और इन्हें बिना किसी अतिरिक्त डाउनलोड के खेला जा सकता है.

गेम खेलने के लिए इन चरणों का पालन करें:

1. मुख्य मेनू से मल्टीमीडिया > खेल व अनुप्रयोग > गेम्स का चयन करें और ठीक दबाएँ.
2. गेम्स का चयन करें और ठीक दबाएँ.
3. आप जो खेल खेलना चाहते हैं उसका चयन करें और ठीक दबाएँ.
4. कोई खेल खेलना शुरू करने के लिए खेल आरंभ का चयन करें.

गेम सेटिंग समायोजित करने के लिए, मुख्य मेनू से, मल्टीमीडिया > गेम्स व अनुप्रयोग > गेम्स > गेम सेटिंग्स चुनें और ठीक दबाएँ: तब आप BGM (पृष्ठभूमि

संगीत), ध्वनि प्रभाव और गेम वायब्रेशन को चालू या बंद कर सकते हैं.

अनुप्रयोग

KP199 को जावा अनुप्रयोग का समर्थन करने के लिए डिज़ाइन किया गया है. दो डिफ़ॉल्ट जावा गेम्स होते हैं तथा आप और जावा गेम्स या अनुप्रयोग डाउनलोड और स्थापित कर सकते हैं.

जावा गेम खेलने से पहले, जावा गेम चलाने के लिए आपको मिडलेट सुइट स्थापित करना होगा. आपका हैंडसेट प्रदाता KP199 में डिफ़ॉल्ट के रूप में Java मिडलेट इंटीग्रेट करता है और इंस्टॉलेशन की दो विधियाँ प्रदान करता है: वैप द्वारा मिडलेट इंस्टॉल करना और मिडलेट को स्थानीय रूप से किसी डिवाइस पर HTTP द्वारा इंस्टॉल करना.

मिडलेट स्थापित करने के बाद, आप दो अंतर्निहित जावा गेम्स खेलना प्रारंभ कर सकते हैं. या अधिक जावा गेम्स डाउनलोड करने और डाउनलोड की गई जावा फ़ाइलों को यूएसबी केबल द्वारा माय स्टफ़ पर सहेजने के लिए आप वैप साइट (पृष्ठ 24 पर वैप देखें) पर भी जा सकते हैं. सहेजने की प्रगति आपके फ़ोन में म्युज़िक ट्रैक जोड़ने के समान है. (आपके फ़ोन में म्युज़िक ट्रैक जोड़ने के लिए पृष्ठ 47 पर देखें).

मल्टीमीडिया

नोट

JVM केवल .jad या .jar एक्सटेंशन वाली फाइलें पढ़ता है।

Java गेम खेलने के लिए इन चरणों का पालन करें:

1. मुख्य मेनू से, मल्टीमीडिया > गेम्स व अनुप्रयोग > अनुप्रयोग चुनें और ठीक दबाएँ।
2. खेलने के लिए इच्छित Java गेम चुनें और विकल्प दबाएँ।
3. लॉन्च चुनें और खेलना प्रारंभ करने के लिए ठीक दबाएँ

अपने अनुप्रयोग प्रबंधित करने के लिए, मुख्य मेनू से, मल्टीमीडिया > गेम्स व अनुप्रयोग > अनुप्रयोग चुनें और विकल्प दबाकर कोई अनुप्रयोग चुनें। आपके उपयोग के लिए कई फंक्शन हैं।

- ▶ **लॉन्च करें:** आपके द्वारा चयनित जावा खेल या अनुप्रयोग लॉन्च करता है।
- ▶ **सेटिंग:** जावा अनुप्रयोग का उपयोग करते समय अनुमति स्तर निर्धारित करता है। अनुमति स्तर "पहली बार पूछें", "कभी नहीं", "हमेशा पूछें" हैं। आप अनुमति की निम्न सात सेटिंग्स कॉन्फ़िगर कर सकते हैं:

- **नेटवर्क पहुँच:** नेटवर्क के द्वारा कोई डेटा कनेक्शन बनाने की स्वीकृति देता है।
- **स्वतः अनुरोध:** किसी MIDlet को स्वतः प्रारंभ होने की स्वीकृति देता है, उदाहरण के लिए पुश पंजीकरण द्वारा।
- **संदेश सेवा:** इसके द्वारा एसएमएस जैसे संदेश भेजे या प्राप्त किए जा सकते हैं।
- **मल्टीमीडिया:** इसके द्वारा छवियाँ, ऑडियो, वीडियो और अन्य चीजों की रिकॉर्डिंग कर सकते हैं।
- **उपयोगकर्ता डेटा पढ़ें:** इसके द्वारा फोन बुक या कैलेंडर प्रविष्टियाँ जैसा उपयोगकर्ता डेटा पढ़ सकते हैं।
- **उपयोगकर्ता डेटा लिखें:** इसके द्वारा उपयोगकर्ता डेटा लिख सकते हैं।
- **स्थानीय कनेक्टिविटी:** ब्लूटूथ जैसे स्थानीय पोर्ट्स द्वारा कनेक्ट करने की अनुमति देता है।
- ▶ **जानकारी:** अनुप्रयोग का नाम, स्मृति का आकार, अनुप्रयोग संस्करण, विक्रेता का नाम और प्रमाणित स्रोत सहित जावा गेम्स और अनुप्रयोग के बारे में जानकारी एक्सेस करें।

नोट

- ▶ जावा मिडलेट की स्थापना की विभिन्न विधियों के आधार पर, विकल्प एक-दूसरे से भिन्न होंगे। यदि कोई मिडलेट सुईट स्थापित नहीं है, तो रिक्त पॉप अप विंडो दिखाई देगी।
- ▶ डिफॉल्ट जावा खेल को हटाया नहीं जा सकता।

सेटिंग्स

अधिक जानकारी के लिए आप मल्टीमीडिया > गेम्स व अनुप्रयोग > सेटिंग्स चुन सकते हैं।

- ▶ **नेटवर्क प्रोफाइल:** इससे आप जीपीआरएस फंक्शन का उपयोग कर सकते हैं। (यह ब्राउज़ फंक्शन के जैसा ही है। पृष्ठ 24 पर ब्राउज़ देखें)
- ▶ **स्मृति स्थिति:** कुल स्मृति, उपयोग की गई और रिक्त स्मृति बताता है।
- ▶ **जानकारी:** जावा, CLDC और MIDP संस्करणों की जानकारी देता है।

कैमरा**Menu 4.2**

आप अंतर्निहित कैमरा से फोटो ले सकते हैं और आपकी आवश्यकता के अनुसार इसकी सेटिंग्स समायोजित कर सकते हैं। आपका फोन क्षैतिज ओएसडी प्रकार के

ऑपरेशन का समर्थन करता है और केवल अनुलंब 128 x 160 छवि आकारों का समर्थन करता है।

कैमरा लेंस फोन के पीछे होता है, और फोन का प्रदर्शन व्यूफाइंडर के रूप में कार्य करता है। यदि कैमरा फंक्शन के लिए पर्याप्त स्मृति नहीं है, तो आपको, ए) स्थान मुक्त करने के लिए पुराने फोटो हटाने होंगे बी) फोटोज को मेमोरी कार्ड में सहेजना होगा।

आपकी वीडियो कैमरा सेटिंग्स को पूर्वावलोकन मोड में फोन स्क्रीन के ऊपर दिखाया जाता है।

नोट

स्थानीय कानूनों का उल्लंघन होने पर इस सुविधा का उपयोग न करें।

कैमरा फंक्शन**कोई चित्र लेना**

1. मुख्य मेनू से मल्टीमीडिया का चयन करें और ठीक दबाएँ।
2. कैमरा का चयन करें और ठीक दबाएँ। अब आप पूर्वावलोकन मोड में हैं।
3. अपनी कैमरा सेटिंग्स को व्यक्तिगत करने के लिए विकल्प दबाएँ।

मल्टीमीडिया

मल्टीमीडिया

4. किसी ऑब्जेक्ट पर फोकस करने के लिए अपने लेंस का और ज़ूम इन या आउट करने के लिए यॉल्यूम कुजियों का उपयोग करें.
5. चित्र लेने के लिए कुंजी या मध्य कुंजी दबाएँ.








नोट




- ▶ फोटो JPEG स्वरूप में सहेजे जाते हैं और मेरी सामग्री के फोटो फोल्डर में सहेजे जाते हैं. आप एलबम मोड में भी चित्रों को देख सकते हैं.
- ▶ ऑब्जेक्ट को ऑटो फोकस करने के लिए कुंजी थोड़ी सी देर दबाएँ; कोई चित्र लेने के लिए कुंजी दबा कर रखें.

कैमरा सेट करना

1. मुख्य मेनू से मल्टीमीडिया का चयन करें और ठीक दबाएँ.
2. कैमरा दबाएँ और ठीक दबाएँ. आप पूर्वावलोकन मोड में हैं.
3. विकल्प दबाएँ. विकल्प पट्टी स्क्रीन के निचले हिस्से पर दिखाई देती है.
4. विभिन्न विकल्प चुनने या फोन स्क्रीन पर प्रदर्शित विकल्प पट्टी की सेटिंग्स समायोजित करने के लिए नेविगेशन कुंजी ऊपर/ नीचे उपयोग करें.

जब आप मुख्य मेनू से मल्टीमीडिया > कैमरा > विकल्प का चयन करते हैं, तो फोन निम्न चयन देता है. निम्न तालिका कैमरा सेटिंग चिह्नों को बताती है.

	वीडियो कैमरा पर जाएँ * ठीक दबाकर आप वीडियो कैमरा मोड पर जा सकते हैं
	एलबम पर जाएँ ठीक दबाकर आप लिए गए चित्रों को देख सकते हैं.
	छवि आकार * 128x160, 160x128, 320x240, 640x480
Nor	छवि गुणवत्ता सामान्य/ निम्न/ उच्च
	टाइमर * समय बंद/ 5 सेकंड / 10 सेकंड / 15 सेकंड
	संग्रहण * (जब बाह्य स्मृति डाली जाएँ, केवल तभी) ● फ़ोन में सहेजें. ● मेमोरी कार्ड में सहेजें
	मल्टी-शॉट * 1 शॉट / 3 शॉट / 5 शॉट / 9 शॉट
	प्रभाव बंद सामान्य/ ग्रेस्केल/ सेपिया/ सेपिया नीला/ सेपिया हरा/ रंग इनवर्ट/ ग्रे इनवर्ट/ ब्लैकबॉर्ड/ व्हाइटबॉर्ड/ कॉपर काविंग/ ब्लू काविंग/ इंबोज़मेंट/ कंट्रास्ट/ स्केच

Auto	श्वेत संतुलन ऑटो WB/ डेलाइट/ टंगस्टेन/ फ्लोरोसेंट/ क्लाउड/ उद्दीप्ति
	EV * EV-4 / EV-3 / EV-2 / EV-1 / EV 0 / EV+1 / EV+2 / EV+3 / EV+4
Auto	स्क्रीन मोड ऑटो/ रात्रि
50Hz	बैंडिंग 50 / 60 Hz
	शटर ध्वनि ध्वनि बंद / ध्वनि 1/ ध्वनि 2/ ध्वनि 3
	सेटिंग्स पुनर्स्थापित करें फेक्टरी डिफॉल्ट्स पुनर्स्थापित करें

* कैमरा मोड पर प्रदर्शित करें.

छवि व्यूअर

Menu 4.3

SMS, MMS, WAP और कैमरे की सभी छवियों को छवि व्यूअर मोड में देखा जा सकता है. उन्हें या तो फोन में या मेमोरी कार्ड में संग्रहीत किया जा सकता है. छवियों को देखते समय आप सूची शैली या मैट्रिक्स शैली के बीच टोगल कर सकते हैं.

जब आप मुख्य मेनू से मल्टीमीडिया > छवि व्यूअर > विकल्प का चयन करते हैं, तो फोन निम्न चयन देता है:

- ▶ **देखें:** मेरी सामग्री में सहेजे गए चित्रों को देखें.
- ▶ **ब्राउज़ शैली:** चित्रों को देखते समय शैली का चयन करें. चित्रों को देखने के लिए आपका फोन सूची शैली या मैट्रिक्स शैली देता है.
- ▶ **अग्रेषित करें:**

अपने चित्रों को वॉलपेपर, स्क्रीनसेवर, पॉवर चालू/बंद डिस्प्ले, या संपर्क आईडी के जैसे अग्रेषित कर सकते हैं, और आप इसे MMS द्वारा भी साझा कर सकते हैं.

- ▶ **नाम बदलें:** फ़ाइल का नाम बदलें.
- ▶ **हटाएँ:** मेरी सामग्री में चित्रों का हटाता है.
- ▶ **एकाधिक हटाना:** एक बार में अधिक छवियाँ हटाता है.
- ▶ **इसके आधार पर सॉर्ट करें:** अपने फ़ोटोज़ को नाम, प्रकार, समय या आकार से सॉर्ट करें.
- ▶ **संग्रहण:** संग्रहण गंतव्य चुनें (फोन या मेमोरी कार्ड).

मल्टीमीडिया

- ▶ **टीवी आउट सेटिंग्स:** अपने चित्रों को टीवी पर प्रदर्शित करें.

नोट

एमएमएस द्वारा कोई फ़ाइल भेजने का डिफ़ॉल्ट आकार 300KB है. (यह सेवा प्रदाता के अनुसार बदलता है)

चित्रों को देखना

1. मुख्य मेनू से मल्टीमीडिया का चयन करें और ठीक दबाएँ.
2. छवि व्यूअर का चयन करें और ठीक दबाएँ. तब चित्र फ़ोन की स्क्रीन पर प्रदर्शित होते हैं.
3. अपने फ़ोन/ मेमोरी कार्ड में सहेजे गए चित्रों को ब्राउज़ करने के लिए नेविगेशन कुंजियों को बाएँ/ दाँए दबाएँ.
4. किसी चित्र का चयन करें और ज़ूम इन/आउट करने के लिए मध्य कुंजी दबाएँ. तब मूल दृश्य पर वापस जाने के लिए [↩] दाईं साँफ़्ट कुंजी दबाएँ.

नोट

यदि आप ज़ूम करने के लिए मध्य कुंजी का उपयोग करते हैं, तो मूल स्थिति में लौटने के लिए [↩] दाईं साँफ़्ट कुंजी दबाएँ.

छवि अग्रेषण

आपके फ़ोन/ मेमोरी कार्ड में सहेजे गए आपके चित्रों को वॉलपेपर, स्क्रीन सेवर, पॉवर चालू/ बंद डिस्प्ले, संपर्क, मल्टीमीडिया संदेश और ब्लूटूथ के जैसे सेट किया जा सकता है. इस फ़ंक्शन को सेट करने के लिए निम्न चरणों का पालन करें.



1. मुख्य मेनू से, मल्टीमीडिया मेनू का चयन करने के लिए नेविगेशन कुंजियों का उपयोग करें और ठीक दबाएँ.
2. छवि व्यूअर का चयन करें और विकल्प दबाएँ. तब चित्र फ़ोन की स्क्रीन पर प्रदर्शित होते हैं.
3. अग्रेषित करें दबाएँ और वॉलपेपर पर/ स्क्रीन सेवर पर/ पॉवर चालू डिस्प्ले/ पॉवर बंद डिस्प्ले/ संपर्क पर/ मल्टीमीडिया संदेश पर/ ब्लूटूथ पर का चयन करें. तब आपके द्वारा चयनित विकल्प अग्रेषित करें.

वीडियो रिकॉर्डिंग

Menu 4.4

आप बिल्ड-इन कैमरा द्वारा कोई वीडियो क्लिप रिकॉर्ड कर सकते हैं. इस फ़ंक्शन से ऑडियो रिकॉर्डिंग भी की जा सकती है. निम्न विवरण में और जानकारी देखें.




कोई वीडियो क्लिप लेना

1. मुख्य मेनू से मल्टीमीडिया का चयन करें और ठीक दबाएँ.
2. वीडियो रिकॉर्डर का चयन करें और ठीक दबाएँ.
3. अपनी कैमरा सेटिंग को व्यक्तिगत करने के लिए विकल्प दबाएँ.
4. कोई वीडियो क्लिप रिकॉर्ड करने के लिए  कैमरा कुंजी दबाएँ और वीडियो क्लिप की रिकॉर्डिंग रोकने के लिए  बाई साफ्ट कुंजी दबाएँ.
5. आप वीडियो प्लेयर मोड से आपकी वीडियो क्लिप्स की समीक्षा कर सकते हैं.

नोट

- ▶ वीडियो क्लिप Mp4 स्वरूप में सहेजी जाती है और मेरी सामग्री के वीडियो फ़ोल्डर में सहेजी जाती है. आप एल्बम या वीडियो प्लेयर मोड से ऑडियो क्लिप भी सुन सकते हैं (पृष्ठ 43 पर वीडियो प्लेयर देखें).
- ▶ आप कैमरा कुंजी के द्वारा कैमरा फ़ंक्शन पर भी जा सकते हैं.
- ▶ वीडियो रिकॉर्डर मोड में फ़ंक्शन कुंजियों के लिए निम्न तालिका देखें.

रिकॉर्डिंग मोड में कुंजियों का निर्धारण


	बाई साफ्ट कुंजी किसी वीडियो रिकॉर्ड रोके.
	दाई साफ्ट कुंजी कोई वीडियो क्लिप रिकॉर्डिंग रोके
	कैमरा कुंजी कोई वीडियो क्लिप रिकॉर्ड करे. वीडियो रोके. वीडियो फिर से शुरू करे.

वीडियो प्लेयर

Menu 4.5

यह फ़ोल्डर आपके फ़ोन से सहेजे गए या आपके पीसी से डाउनलोड किए गए वीडियो संग्रहित करता है. यह फ़ोन 176x144 वीडियो आकार वाले .3GP और .MP4 स्वरूप का समर्थन करता है.

वीडियो चलाना

1. मुख्य मेनू से, मल्टीमीडिया मेनू का चयन करें और वीडियो प्लेयर चुनें.
2. जो फ़ाइल आप चलाना चाहते हैं, उसका चयन करें.
3. किसी वीडियो क्लिप का चयन करने के बाद, विकल्प और चलाएँ दबाएँ.
4. वॉल्यूम समायोजित करने के लिए वॉल्यूम कुंजियों को ऊपर/ नीचे दबाएँ और वीडियो क्लिप चलाने से रोकने के लिए  मध्य कुंजी दबाएँ.

मल्टीमीडिया

जब आप मुख्य मेनू से मल्टीमीडिया > कैमरा > वीडियो प्लेयर > विकल्प का चयन करते हैं, तो फोन निम्न चयन देता है:

- ▶ **चलाये:** वीडियो सामग्री चलाता और दिखाता है.
- ▶ **अग्रेषित करें:** वीडियो को स्क्रीन सेवर, पावर चालू प्रदर्शन या पावर बंद प्रदर्शन पर भेजने की सुविधा देता है. आप किसी वीडियो क्लिप को संपर्क या नए संपर्क को भी अग्रेषित कर सकते हैं या एमएमएस अथवा ब्लूटूथ से साझा कर सकते हैं.
- ▶ **नाम बदलें:** वीडियो का नाम बदलता है
- ▶ **हटाएँ:** मेरी सामग्री में संग्रहीत वीडियो को हटाता है.
- ▶ **एकाधिक हटाना:** एक बार में अधिक वीडियोज़ हटाता है.
- ▶ **इसके आधार पर सॉर्ट करें:** नाम, प्रकार, समय या आकार द्वारा वीडियो सॉर्ट करता है.
- ▶ **संग्रहण:** उपलब्ध स्मृति जाँचता है. या तो फोन या ममोरी कार्ड से वीडियो चला/सहेज सकता है.

वीडियो क्लिप अग्रेषण

आपके फोन/ मेमोरी कार्ड में सहेजे गए आपके चित्रों को वॉलपेपर, स्क्रीन सेवर, पावर चालू/ बंद डिस्प्ले, संपर्क, मल्टीमीडिया संदेश और ब्लूटूथ के जैसे सेट किया जा सकता है. इस फ़ंक्शन को सेट करने के लिए निम्न चरणों का पालन करें.

1. मुख्य मेनू से, मल्टीमीडिया > कैमरा का चयन करें और वीडियो प्लेयर चुनें.
2. निम्न चरण छवि व्यूअर के सामन ही है. (पृष्ठ 41 पर छवि व्यूअर देखें)

संगीत प्लेयर

Menu 4.6

आप मुख्य मेनू से म्यूजिक प्लेयर एक्सेस कर सकते हैं और यूएसबी या अन्य कनेक्शन के द्वारा म्यूजिक डाउनलोड कर सकते हैं. म्यूजिक ट्रैक का अपने आप पता लगाने और डिफॉल्ट प्ले लिस्ट में जोड़ने के लिए उसे मेरी सामग्री के **Audio** फ़ोल्डर में सहेजा जाना चाहिए. आप हेडसेट या लाउडस्पीकर द्वारा संगीत सुन सकते हैं. यूजर फ्रेंडली इंटरफ़ेस आपको आपके ऑडियो पर पूरा नियंत्रण देता है.

नोट

ऑडियो प्लेयर का उपयोग करते समय आप कॉल कर सकते हैं या उसका उत्तर दे सकते हैं. किसी कॉल के दौरान, प्लेबैक रोक दिया जाता है.


संगीत चलाएँ

अपने फ़ोन से म्यूजिक चलाने के बारे में जानने के लिए यह अनुभाग पढ़ें.





म्यूजिक चलाना

1. मुख्य मेनू से, मल्टीमीडिया मेनू चुनें और म्यूजिक प्लेयर मेनू चुनें और ठीक दबाएँ. प्ले लिस्ट फ़ोन स्क्रीन पर अपने आप ताज़ा हो जाती है.
2. कोई इच्छित म्यूजिक ट्रैक चुनें और विकल्प दबाएँ तथा वह म्यूजिक ट्रैक चलाने के लिए चलाएँ का चयन करें.

या

1. मुख्य मेनू से म्यूजिक प्लेयर मेनू पर जाने के लिए कीपैड से  कुंजी दबाएँ. प्ले लिस्ट फ़ोन स्क्रीन पर अपने आप ताज़ा हो जाती है.
2. कोई इच्छित म्यूजिक ट्रैक चुनें और उस म्यूजिक ट्रैक को चलाने के लिए मध्य कुंजी दबाएँ.

निम्न तालिका नेविगेशन कुंजी के फ़ंक्शन दिखाती है.

नेविगेशन और मध्य कुंजियाँ	फ़ंक्शन
	▶ चलाएँ / म्यूजिक रोकें
	■ रोकें
	▶▶ अगले ट्रैक पर जाएँ
	◀◀ पिछले ट्रैक पर जाएँ

नोट

आप वॉल्यूम बढ़ाने या घटाने के लिए वॉल्यूम कुंजियों का उपयोग कर सकते हैं.

आपके म्यूजिक डेटाबेस का अपने आप पता चल जाता है यदि "सूची खुद बनें" चालू है तो उस डिफ़ाल्ट प्ले लिस्ट में जोड़ा जाता है. सूची ऑटो जन. के बारे में और जानकारी सेटिंग में दी गई है.

नोट

आपके मोबाइल फ़ोन को फ़्लाइड्स के दौरान संगीत चलाने हेतु सक्षम होने के लिए बनाया गया है. फ़्लाइड सुरक्षा की दृष्टि से अपनी सेटिंग बदलने के लिए आपको सेटिंग्स > फ़ोन > फ़्लाइड मोड में जाना होगा (79 पर फ़्लाइड मोड देखें).

मल्टीमीडिया

सेटिंग्स कॉन्फिगर करने के लिए

म्यूजिक प्लेयर मेनू में, जब आप म्यूजिक प्लेयर > विकल्प का चयन करते हैं, तो आपका फ़ोन निम्न चयन प्रदान करता है।

- ▶ **चलाएँ:** इससे आप तुरंत म्यूजिक चला सकते हैं।
- ▶ **विवरण:** चयनित म्यूजिक ट्रैक का फ़ाइल नाम, चैनल, गुणवत्ता, आकार, समय, शीर्षक, कलाकार और एल्बम दिखाता है।
- ▶ **रिंग्स में जोड़ें:** इससे आप चयनित म्यूजिक ट्रैक को किसी रिंग टोन के रूप में जोड़ सकते हैं।
- ▶ **जोड़ें:** आपकी प्ले लिस्ट में चयनित ऑडियो जोड़ता है।
- ▶ **सूची ताज़ा करें:** फ़ाइल सूची को ताज़ा करता है।
- ▶ **निकालें:** प्ले लिस्ट से चयनित म्यूजिक ट्रैक्स निकालता है।
- ▶ **सभी निकालें:** किसी ताज़ा की गई प्ले लिस्ट में सभी म्यूजिक ट्रैक को निकालता है। (निम्न नाम बदलता है या ट्रैक निकालता है)।
- ▶ **सेटिंग्स:** निम्न प्रकार से सेटिंग का समायोजन करता है।

नोट

- ▶ सेटिंग में सूची आंदोलन जन. फंक्शन **My Music** फ़ोल्डर से प्लेलिस्ट का पता लगाने के लिए डिज़ाइन किया गया है. यदि आप इस फ़ोल्डर का नाम बदलते हैं, तो यह आपके फ़ोन द्वारा पहचाना नहीं जाएगा और नया माय म्यूजिक फ़ोल्डर माय स्टफ में बनाया जाएगा.
- ▶ सामान्य, बैस, डांस, क्लासिकल, ट्रीबल, पार्टी, पॉप और रॉक सहित 8 प्रकार के इक्वीलाइज़र पहले से सेट होते हैं. आप पहले से निर्धारित इन विकल्पों से अपने म्यूजिक प्लेयर को व्यक्तिगत बना सकते हैं.
- ▶ यदि उपयोगकर्ता द्वारा निर्धारित सभी रिंग पहले से निर्धारित कर दी गई हैं, तो सिस्टम "सूची पूर्ण" का संदेश दे सकता है. यदि चयनित शीर्षक रिंग सूची में है, तो सिस्टम "डुप्लीकेट" का संदेश दे सकता है.

पसंदीदा संगीत को रिंग्स में जोड़ना

1. मुख्य मेनू से, म्यूजिक प्लेयर का चयन करें और ठीक दबाएँ. प्ले लिस्ट फ़ोन स्क्रीन पर अपने आप ताज़ा हो जाती है.
2. किसी इच्छित म्यूजिक ट्रैक का चयन करें और विकल्प दबाएँ.

3. रिंग्स में जोड़ें का चयन करें और ठीक दबाएँ.

अपने फोन में म्यूजिक ट्रैक्स जोड़ना

आप अपने फोन में म्यूजिक ट्रैक जोड़ सकते हैं, निकाल सकते हैं और संपादित कर सकते हैं. आप अपने फोन और PC या Laptop को कनेक्ट करने के लिए USB केबल का उपयोग करें.

कनेक्ट करने के बाद, फोन स्क्रीन निम्न दो विकल्प दिखाती है.

- ▶ **सामूहिक संग्रहण:** मास स्टोरेज मोड में, आप पीसी या लैपटॉप द्वारा म्यूजिक जोड़ सकते हैं, संपादित कर सकते हैं और निकाल सकते हैं.

मास स्टोरेज का चयन करें और ठीक दबाएँ. फोन स्क्रीन एक "पूर्ण" का संदेश दिखाती है. तब आप पीसी या लैपटॉप पर म्यूजिक या छवियाँ संपादित कर सकते हैं.

- ▶ **COM पोर्ट:** मोडेम के रूप में उपयोग करने के लिए.

ध्वनि रिकॉर्ड

Menu 4.7

वॉइस रिकॉर्डर आपके लिए वॉइस फ़ाइलें प्रबंधित करने हेतु प्रदान की गई कार्यक्षमताओं वाला एक आसान ध्वनि रिकॉर्डिंग उपकरण है.

रिकॉर्डिंग प्रारंभ करना

1. मुख्य मेनू से मल्टीमीडिया का चयन करें और ठीक दबाएँ.
2. वॉइस रिकॉर्डर का चयन करें और ठीक दबाएँ.
3. विकल्प दबाएँ और रिकॉर्ड करें का चयन करें.
4. रिकॉर्डिंग प्रारंभ करने के लिए ठीक दबाएँ.

नोट

- ▶ रिकॉर्डिंग के दौरान, आप किसी भी समय सॉफ्ट कीज दबाकर वॉइस रिकॉर्डिंग रोक सकते हैं या बंद कर सकते हैं.
- ▶ रिकॉर्डिंग के बाद, फ़ाइल AMR और WAV स्वरूपों में सहेजी जाती है.

जब आप मल्टीमीडिया > वॉइस रिकॉर्डर > विकल्प का चयन करते हैं, तब आपका फोन निम्न चयन देता है.

- ▶ **रिकॉर्ड करें:** किसी फोन कॉल या आसपास की आवाज़ को रिकॉर्ड करता है.
- ▶ **चलाएँ:** रिकॉर्ड की गई ध्वनि को चलाता है.
- ▶ **जोड़ें:** किसी मौजूदा फ़ाइल में अतिरिक्त रिकॉर्डिंग जोड़ता है.

मल्टीमीडिया

- ▶ **नाम बदलें:** किसी फ़ाइल का नाम बदलता है.
- ▶ **हटाएँ:** "वॉइस रिकॉर्डर" में सहेजी गई फ़ाइलों को हटाता है.
- ▶ **बहु हटाएँ:** "वॉइस रिकॉर्डर" में सहेजी गई एक से अधिक फ़ाइलों को हटाता है.
- ▶ **सेटिंग्स:** आपको आपका संग्रहण और फ़ाइल स्वरूप चुनने की सुविधा देता है.
- ▶ **अग्रेषित करें:** MMS द्वारा फ़ाइल अग्रेषित करता है.

मेलोडी कंपोजर Menu 4.8

यह फ़ंक्शन आपको रिंग टोन या मेलोडी कंपोजर करने की सुविधा देता है.

कंपोजर करना प्रारंभ करना

1. मुख्य मेनू से मल्टीमीडिया का चयन करें और ठीक दबाएँ.
2. मेलोडी कंपोजर का चयन करें और ठीक दबाएँ.
3. जोड़े का चयन करें और कंपोजर करना प्रारंभ करने के लिए कीपैड दबाएँ. (पृष्ठ 48 पर मेलोडी कंपोजर मोड में कुंजी निर्धारण देखें)
4. अपनी मेलोडी सहेजने के लिए विकल्प दबाएँ.

नोट








- ▶ आपके द्वारा कंपोजर की गई मेलोडी IMY स्वरूप में सहेजी जाती है.

कोई मेलोडी कंपोजर करते समय, उस मेलोडी को व्यक्तिगत बनाने के लिए आपका फ़ोन निम्न चयन देता है.

- ▶ **चलाएँ:** आपको आपके द्वारा बनाई गई मेलोडी सुनने की सुविधा देता है.
- ▶ **चलाने की गति:** इससे आप चलाने की तीन भिन्न गतियाँ निर्धारित कर सकते हैं.
- ▶ **वाद्ययंत्र का चयन करें:** इससे आप अपना इच्छित वाद्ययंत्र चुन सकते हैं.
- ▶ **सहेजें:** मेलोडी सहेजता है.

मेलोडी कंपोजर मोड में कुंजी निर्धारण

कुंजियाँ	फ़ंक्शन और विवरण
1	Do बजाने के लिए 1 कुंजी दबाएँ.
2	Re बजाने के लिए 2 कुंजी दबाएँ.
3	Mi बजाने के लिए 3 कुंजी दबाएँ.
4	Fa बजाने के लिए 4 कुंजी दबाएँ.
5	So बजाने के लिए 5 कुंजी दबाएँ.
6	La बजाने के लिए 6 कुंजी दबाएँ.
7	Ti बजाने के लिए 7 कुंजी दबाएँ.

	कंपन स्वर बजाने के लिए 8 कुंजी दबाएँ.
	बैकलाइट/LED स्वर बजाने के लिए 9 कुंजी दबाएँ.
	रेस्ट बजाने के लिए 0 कुंजी दबाएँ.
	उच्च, सामान्य या कोमल स्वर में टोगल करने के लिए # कुंजी दबाएँ.
	वर्तमान संगीत स्वर की स्पंदन लंबाई बदलने या किसी स्वर को बैकलाइट और LED में बदलने के लिए * कुंजी दबाएँ.
	एक ससक नीचे जाने के लिए नेविगेशन कुंजियों को नीचे की ओर दबाएँ (कंपन, बैकलाइट और LED अक्षम कर सकते हैं).
	वाद्ययंत्र बदलने के लिए वॉल्यूम कुंजी दबाएँ.

अपनी मोलोडी संपादित करना

आपका फोन निम्न विकल्प प्रदान करता है.

- ▶ **चलाएँ:** अपने द्वारा बनाई गई मेलोडी सुनें.
- ▶ **संपादित करें:** चयनित मेलोडी संपादित करें.
- ▶ **जोड़ें:** चयनित मेलोडी में और रिंग टोन जोड़ें.

- ▶ **नाम बदलें:** फ़ाइल का नाम बदलें.
- ▶ **हटाएँ:** फ़ाइल हटाएँ.
- ▶ **सभी फ़ाइलें हटाएँ:** इस फोल्डर की सभी सामग्री हटाएँ.
- ▶ **अग्रेषित करें:** एमएमएस या ब्लूटूथ द्वारा किसी फ़ाइल को उपयोगकर्ता प्रोफ़ाइल पर या मित्रों को अग्रेषित करता है.

FM रेडियो

Menu 4.9

यह सुविधा आपको किसी भी समय आपका पसंदीदा रेडियो स्टेशन सुनने की सुविधा देती है.

रेडियो के लिए आपका फ़ोन निम्न विकल्प देता है:

- ▶ **चैनल सूची:** चैनल का नाम और फ़्रीक्वेंसी दर्ज करके 9 रेडियो स्टेशन को बुक मार्क करें.
- ▶ **मैनुअल इनपुट:** रेडियो स्टेशन फ़्रीक्वेंसी मैनुअली दर्ज करें.
- ▶ **स्वतः खोज प्रीसेट करें:** बार-बार आगे की ओर या पीछे की ओर दबाए बिना स्टेशनों को स्वतः खोजें.

मल्टीमीडिया

- ▶ **सेटिंग्स:** बैकग्राउंड प्ले, एफएम रेडियो की स्कीन, फ़ाइल स्वरूप और संग्रहण सेटिंग बदलें। आप लाउडस्पीकर से भी तेज़ ध्वनि प्राप्त कर सकते हैं। ध्वनियाँ AMR या Wav स्वरूपों में रिकॉर्ड की जा सकती हैं।
- ▶ **रिकॉर्ड करें:** अपने पसंदीदा रेडियो कार्यक्रम रिकॉर्ड करें।
- ▶ **जोई:** पहले से रिकॉर्ड की गई फ़ाइल को फिर से चलाएँ।
- ▶ **फ़ाइल सूची:** रिकॉर्ड किए गए रेडियो को ब्राउज़ करें और सुनें।

नोट

एफएम रेडियो उपयोग करने के लिए आपको ईयरफोन प्लग-इन करना होगा।

नोट

किसी रेडियो चैनल को प्री-शेड्यूल करने के पहले आपको हैडसेट को एटोना के जैसे सेट करना होगा।

FM रिकॉर्ड शेड्यूल Menu 4.0

यह फ़ोन आपको एफएम रेडियो के कार्यक्रम पहले से शेड्यूल करने की सुविधा देता है। आप एक समय में चार रिकॉर्डिंग तक शेड्यूल कर सकते हैं। विकल्पों में यह शामिल है: रिकॉर्डिंग चालू/बंद करें, पहले से शेड्यूल की गई रिकॉर्डिंग को एक-बार या दोहराव (प्रतिदिन/साप्ताहिक/मासिक) पर सेट करें, इसमें फ़ाइल और संग्रहण सेटिंग को मैन्युअली इनपुट करने के विकल्प भी शामिल हैं।

संदेश सेवा [Menu 5]

पाठ संदेश

Menu 5.1

आपके फ़ोन में वॉइस मेल, सूचना संदेश और पाठ संदेश हैं। वॉइस मेल और शॉर्ट मैसेज सर्विस (एसएमएस) नेटवर्क सेवाएँ हैं। आपका फ़ोन चित्रों या मेलोडीज़ वाले पाठ संदेश भेजने और प्राप्त करने की सुविधा भी देता है। चित्रों वाला संदेश कई पाठ संदेशों से बना होता है। इसलिए, चित्रों वाला संदेश को भेजने का शुल्क एक पाठ संदेश के शुल्क की तुलना में अधिक होगा।




संदेश लेखन

कोई संदेश लिखना

1. मुख्य मेनू से संदेश सेवा का चयन करें और ठीक दबाएँ।
2. पाठ संदेश का चयन करें और ठीक दबाएँ।
3. संदेश लेखन चुनें और संदेश लिखने के लिए ठीक दबाएँ।
4. आप निम्न विकल्पों का चयन करके कई विशेष प्रभावों द्वारा अपने संदेशों को व्यक्तिगत भी बना सकते हैं:
 - ▶ **टेम्पलेट उपयोग करें:** तेज़ लेखन के लिए डिफ़ॉल्ट टेम्पलेट सम्मिलित करें।

- ▶ **ऑब्जेक्ट सम्मिलित करें:** अपने पाठ संदेश में चित्र, ऐनिमेशन, मेलोडी और ध्वनि सम्मिलित करें।
- ▶ **पाठ स्वरूपित करें:** पाठ आकार, शैली, संरेखण या नए पैराग्राफ़ से प्रारंभ करें का चयन करें।
- ▶ **संपर्क सम्मिलित करें:** अपनी संपर्क सूची से संपर्क सम्मिलित करें।
- ▶ **बुकमार्क सम्मिलित करें:** अपनी बुकमार्क सूची से कोई बुकमार्क सम्मिलित करें।
- ▶ **सामान्य सेटिंग:** वितरण रिपोर्ट व उत्तर पथ का ऐच्छिक रूप से चयन करें।

नोट

- ▶ संदेश फ़ंक्शन पर जाने के लिए आप निष्क्रिय स्थिति में  नेविगेशन कुंजियाँ ऊपर दबा सकते हैं।
- ▶ सामग्री लिखने के लिए, कृपया पृष्ठ 19 पर इनपुट पद्धति देखें।
- ▶ आप प्रतीक दर्ज करने के लिए  कुंजी और इनपुट पद्धति बदलने के लिए  कुंजी तथा कर्सर शिफ्ट करने के लिए नेविगेशन कुंजियों का उपयोग करें।

संदेश सेवा

संदेश सेवा

मैन्युअली कोई संदेश भेजना

1. मुख्य मेनू से संदेश सेवा का चयन करें और ठीक दबाएँ.
2. पाठ संदेश का चयन करें और ठीक दबाएँ.
3. संदेश लेखन चुनें और संदेश लिखना प्रारंभ करने के लिए ठीक दबाएँ (कृपया "पृष्ठ 51" पर "कोई संदेश लिखना देखें").
4. लिखना समाप्त करने के बाद, विकल्प का चयन करें और इस पर भेजें का चयन करें.
5. जिस फोन नंबर पर आप भेजना चाहते हैं, उसका चयन करें.
6. विकल्प दबाएँ और संदेश भेजने के लिए इस पर भेजें का चयन करें.

नोट

चित्र संदेश फंक्शन का उपयोग करने के लिए, आपके नेटवर्क ऑपरेटर या सेवा प्रदाता का समर्थन आवश्यक है. केवल वे फोन चित्र संदेश प्राप्त और प्रदर्शित कर सकते हैं जिनमें यह फंक्शन होता है.

अपनी संपर्क सूची किसी को संदेश भेजना

1. मुख्य मेनू से संदेश सेवा का चयन करें और ठीक दबाएँ.
2. पाठ संदेश का चयन करें और ठीक दबाएँ.
3. संदेश लेखन चुनें और संदेश लिखना प्रारंभ करने के लिए ठीक दबाएँ (कृपया "पृष्ठ 51" पर "कोई संदेश लिखना देखें").
4. लिखना समाप्त करने के बाद, विकल्प का चयन करें और इस पर भेजें का चयन करें.
5. जिस फोन नंबर पर आप भेजना चाहते हैं, उसका चयन करें.
6. विकल्प दबाएँ और संपर्क का चयन करें. तब आप संपर्क सूची मोड में जाते हैं.
7. संदेश भेजने के लिए इच्छित संपर्क का चयन करें और ठीक दबाएँ.

जब आप संदेश सेवा > पाठ संदेश > संदेश लेखन > विकल्प > इस पर भेजें > विकल्प का चयन करते हैं, तब आपका फ़ोन निम्न चयन देता है:

- ▶ **भेजें:** आप संदेश भेज सकते हैं।
- ▶ **सम्पर्क:** आप सम्पर्क से इच्छित सम्पर्क चयन करके उन पर संदेश भेज सकते हैं।
- ▶ **समूह आधार पर भेजें:** इससे आप एक बार में कई संपर्कों को संदेश भेज सकते हैं। सफलतापूर्वक भेजे गए संदेश आउटबॉक्स में संग्रहीत नहीं होते हैं।
- ▶ **प्रारूप में सहेजें:** आप संदेश सहेज कर इसे बाद में भेज सकते हैं।


किसी टेम्पलेट का उपयोग करना

1. मुख्य मेनू से, संदेश सेवा का चयन करने के लिए नेविगेशन कुंजियाँ ऊपर/नीचे का उपयोग करें और ठीक दबाएँ।
2. पाठ संदेश का चयन करें और ठीक दबाएँ।
3. संदेश लेखन का चयन करें और ठीक दबाएँ।
4. टेम्पलेट का उपयोग करें का चयन करें और ठीक दबाएँ।
5. किसी इच्छित टेम्पलेट का उपयोग करने के लिए नेविगेशन कुंजियाँ ऊपर/नीचे का उपयोग करें और ठीक दबाएँ।

6. ठीक का चयन करें और जो टेम्पलेट आप भेजना चाहते हैं, उसे दर्ज करें।
7. विकल्प दबाएँ और इस पर भेजें का चयन करें और भेजने के लिए इच्छित फोन नंबर लिख सकते हैं।
8. संदेश भेजने के लिए ठीक दबाएँ।

इनबॉक्स

संदेश पढ़ना



आपको कोई संदेश प्राप्त होने पर, प्रदर्शन पर  सूचक दिखाई देता है। यदि आपके कुछ पुराने इनबॉक्स भरा है, तो आपके कुछ पुराने संदेश हटाने हेतु याद दिलाने के लिए एक पॉप-अप विंडो दिखाई देगी। अन्यथा, आपका संदेश सिम कार्ड के बजाय फोन में सहेज दिया जाएगा।

1. मुख्य मेनू से, संदेश सेवा का चयन करने के लिए नेविगेशन कुंजियाँ ऊपर/नीचे का उपयोग करें और ठीक दबाएँ।
2. पाठ संदेश का चयन करें और ठीक दबाएँ।
3. इनबॉक्स का चयन करें और ठीक दबाएँ। संदेश सूची फोन स्क्रीन पर दिखाई देगी।

संदेश सेवा

- विकल्प दबाकर कोई इच्छित संदेश चुनें और सामग्री पढ़ने के लिए देखें का चयन करें.
- संदेश पठन दृश्य में CSK (मध्य सॉफ्ट कुंजी / मध्य नेविगेशन कुंजी) दबाएँ, आप एक क्वेरी संदेश "हटाएँ ?" की पुष्टि करके इस संदेश को हटा सकेंगे.

नोट

- ▶ आपको प्राप्त हुआ संदेश डिफॉल्ट सेटिंग द्वारा सिम कार्ड में सहेजा जाएगा.
- ▶ जब आप अपने इनबॉक्स में  सूचक देखते हैं, तो उस सूचक का अर्थ है कि संदेश नहीं पढा गया है. जब आप अपने इनबॉक्स में  सूचक देखते हैं, तो उस सूचक का अर्थ है कि संदेश पढ लिया गया है.

जब आप संदेश सेवा > पाठ संदेश > इनबॉक्स > विकल्प का चयन करते हैं, तब आपका फोन निम्न चयन देता है.

- ▶ **देखें:** प्राप्त किए गए संदेश को पढ़ें
- ▶ **उत्तर दें:** प्राप्त किए गए संदेश का उत्तर दें.
- ▶ **हटाएँ:** प्राप्त किए गए संदेश को हटाएँ
- ▶ **अग्रेषित करें:** प्राप्त किए गए संदेश को अग्रेषित करें.

- ▶ **ऑब्जेक्ट्स सहेजें:** किसी प्राप्त संदेश में ऑब्जेक्ट्स सहेजें.
- ▶ **नंबर सहेजें:** अपने संपर्क में नंबर सहेजें.
- ▶ **URL पर जाएं:** किसी प्राप्त संदेश की यूआरएल से कनेक्ट करें.
- ▶ **कॉपी:** चयनित पाठ संदेश की अपने फोन/ सिम पर प्रतिलिपि बनाएँ.
- ▶ **सूचक:** चयनित पाठ संदेश की अपने फोन/ सिम पर ले जाएँ.
- ▶ **बात करें:** प्रेषक से चैट करें.

ड्राफ्ट

आप अपने प्रारूप श्रेणी में अपना संदेश संग्रहीत कर सकते हैं और बाद में उस पर कार्य कर सकते हैं.

जब आप संदेश सेवा > पाठ संदेश > प्रारूप > विकल्प का चयन करते हैं, तब आपका फोन निम्न चयन देता है:

- ▶ **देखें:** प्रारूप देखें.
- ▶ **भेजें:** प्रारूप भेजें.
- ▶ **संपादित करें:** सहेजे गए प्रारूप को संपादित करें.
- ▶ **हटाएँ:** चल रहे प्रारूप को हटाएँ.

- ▶ **कॉपी:** प्रारूप की फ़ोन पर प्रतिलिपि बनाएँ. यह विकल्प केवल तब उपलब्ध होता है, जब हाइलाइट किया गया प्रारूप सिम कार्ड में संग्रहीत किया जाता है.
- ▶ **सूच:** प्रारूप को फ़ोन में ले जाएँ. यह विकल्प केवल तब उपलब्ध होता है, जब हाइलाइट किया गया प्रारूप सिम कार्ड में संग्रहीत किया जाता है.
- ▶ **नंबर सहेजें:** संदेश में एम्बेडेड नंबर सहेजता है.
- ▶ **URL पर जाएं:** आपके फ़ोन पर यूआरएल सहेजता है.
- ▶ **कॉपी:** इससे आप संदेश की प्रतिलिपि फ़ोन पर बना सकते हैं. यह विकल्प केवल तब उपलब्ध होता है, जब हाइलाइट किया गया संदेश सिम कार्ड में संग्रहीत किया जाता है.
- ▶ **सूच:** संदेश को फ़ोन पर ले जाता है. केवल तब उपलब्ध होता है जब हाइलाइट किया गया संदेश सिम कार्ड में संग्रहीत किया जाता है.
- ▶ **नंबर सहेजें:** संदेश में एम्बेडेड नंबर सहेजता है.
- ▶ **URL कनेक्ट करें:** संदेश में जोड़ी गई यूआरएल का उपयोग करें.

आउटबॉक्स

संदेश भेजने के बाद, संदेश आउटबॉक्स फ़ोल्डर में रक्षित किया जाता है. आप संदेश सेवा > पाठ संदेश > आउटबॉक्स > विकल्प का चयन करके आउटबॉक्स संदेशों को पढ़ सकते हैं:

- ▶ **देखें:** संदेश पढ़ें.
- ▶ **भेजें:** संपादित किए बिना संदेश भेजना है.
- ▶ **संपादित करें:** इससे आप संदेश भेजने के पहले संपादित कर सकते हैं.
- ▶ **हटाएँ:** संदेश हटाएँ.

टेम्पलेट्स

शीघ्र संदेश लेखन के लिए आपके फ़ोन में कई डिफ़ॉल्ट टेम्पलेट्स हैं. आप अपनी आवश्यकताओं के अनुसार इन टेम्पलेट को अनुकूलित कर सकते हैं या हटा सकते हैं.

अपनी टेम्पलेट संपादित करना

1. मुख्य मेनू से, संदेश सेवा का चयन करने के लिए नेविगेशन कुंजियों ऊपर/नीचे का उपयोग करें और ठीक दबाएँ.
2. पाठ संदेश का चयन करें और ठीक दबाएँ.
3. टेम्पलेट चुनें और ठीक दबाएँ.

संदेश सेवा

4. किसी इच्छित टेम्पलेट का उपयोग करने के लिए नेविगेशन कुंजियाँ ऊपर/नीचे का उपयोग करें और ठीक दबाएँ.
5. टेम्पलेट संपादित करने के लिए संपादित करें (यदि आप टेम्पलेट मिटाना चाहते हैं, तो मिटाएँ का चयन करें.) का चयन करें और ठीक दबाएँ.
6. विकल्प दबाएँ और सहेजें का चयन करें.
7. ठीक दबाएँ. तब यदि आप अपने संपादन को सहेजना चाहते हैं तो हाँ का चयन करें अथवा यदि आप अपने संपादन को निरस्त करना चाहते हैं तो नहीं का चयन करें.

संदेश सेटिंग

आपका फ़ोन SMS सुविधा पर डिफ़ॉल्ट सेटिंग सेट करने की सुविधा देता है.

1. मुख्य मेनू से संदेश सेवा > पाठ संदेश > संदेश सेटिंग का चयन करने के लिए अपनी नेविगेशन कुंजियाँ का उपयोग करें.
2. ठीक दबाएँ और कोई सेटिंग चुनें.
3. अपनी संदेश सेटिंग सेट करने के लिए ठीक दबाएँ.

आपका फ़ोन निम्न सेटिंग्स प्रदान करता है:

- ▶ **प्रोफ़ाइल सेटिंग:** यदि आपकी सिम कार्ड द्वारा एक से अधिक संदेश प्रोफ़ाइल की अनुमति है, तो आप प्रोफ़ाइल अलग से संपादित कर सकते हैं.
- ▶ **सामान्य सेटिंग:** आप वितरण रिपोर्ट सक्षम या अक्षम करने का चयन कर सकते हैं और यदि कोई सेवा केंद्र हो तो, उसका उत्तर पथ बदल सकते हैं.
- ▶ **स्मृति स्थिति:** सिम कार्ड और फ़ोन में आपकी स्मृति की स्थिति जाँचता है.
- ▶ **अनुशंसित संग्रहण:** SIM या फ़ोन संग्रहण में से चयनित कर सकते हैं.
- ▶ **बियरर चुनें:** अपना पसंदीदा बियरर GSM या GPRS चुनें.

मल्टीमीडिया संदेश Menu 5.2

यह सुविधा आपको पाठ, ध्वनि और चित्र वाला संदेश भेजने देती है. नेटवर्क के आधार पर, आप ऐसे इंटरनेट पते वाला पाठ संदेश प्राप्त कर सकते हैं जहाँ आप मल्टीमीडिया संदेश देख सकते हैं.

आपका फोन MMS फंक्शन में निम्न स्वरूपों का समर्थन करता है।

- ▶ चित्र: JPG, GIF और BMP.
- ▶ ध्वनि: स्केलेबल पोलिफोनिक MIDI (SP-MIDI), i-मेलोडी.

नोट

- ▶ किसी कॉल, खेल, या जीपीआरएस डेटा पर किसी सक्रिय वैप कनेक्शन के दौरान आप मल्टीमीडिया संदेश नहीं प्राप्त कर सकते.
- ▶ मल्टीमीडिया संदेश की अधिकतम सीमा 100 है. यदि आपके मल्टीमीडिया संदेश 100 से अधिक हो जाते हैं, तो आपका फोन "संगृहीत मल्टीमीडिया संदेश की संख्या अधिकतम तक पहुँच गई है" का संदेश देता है.

कोई एमएमएस लिखना

मल्टीमीडिया संदेश सेवा की उपलब्धता के लिए, कृपया आपके नेटवर्क ऑपरेटर या सेवा प्रदाता से संपर्क करें.

1. मुख्य मेनू से संदेश सेवा का चयन करें और तब ठीक दबाएँ.
2. मल्टीमीडिया संदेश का चयन करें और ठीक दबाएँ.

3. संदेश लेखन का चयन करें और ठीक दबाएँ.
4. प्राप्तकर्ता जोड़ने के लिए प्रति का चयन करें.
5. आप जिसे भेजना चाहते हैं, उसके लिए नंबर जोड़ें या ईमेल जोड़ें का चयन करने के लिए संपादन का चयन करें या दबाएँ.

नोट

- ▶ यदि आप नंबर जोड़ें का चयन करते हैं, तो कृपया प्राप्तकर्ता का फोन नंबर दर्ज करें.
- ▶ यदि आप ई-मेल जोड़ें का चयन करते हैं, तो कृपया उपयोगकर्ता का ई-मेल आईडी दर्ज करें.

6. प्राप्तकर्ता और सामग्री जोड़ने के बाद ठीक दबाएँ और पूर्ण दबाएँ. संपादन स्क्रीन पर लौटें.

नोट


यदि आप Cc/Bcc में प्राप्तकर्ता जोड़ना चाहते हैं, तो कृपया चरण 4 और 5 दोहराएँ.



7. विषय का चयन करें और इस मल्टीमीडिया संदेश का विषय दर्ज करने के लिए संपादित करें का चयन करें.

संदेश सेवा

- विकल्प दबाएँ और पूर्ण का चयन करें। तब संपादन स्क्रीन पर लौटने के लिए ठीक दबाएँ।
- सामग्री संपादित करें का चयन करें और संपादित करें दबाएँ।
- विकल्प दबाएँ और छवि जोड़ें/ ऑडियो जोड़ें/ वीडियो जोड़ें/ अनुलग्नक जोड़ें का चयन करें। तब आप मेरी सामग्री मोड में जाते हैं।
- मेरी सामग्री से किसी फ़ाइल का चयन करें और ठीक दबाएँ। तब पूर्ण दबाएँ।
- संपादन स्क्रीन में भेजने की जानकारी की पुष्टि करें और पूर्ण दबाएँ।
- मल्टीमीडिया संदेश भेजने के लिए केवल भेजें का चयन करें।

नोट

- सामग्री लिखने के लिए, आप "इनपुट पद्धति" देख सकते हैं।
- चित्र संदेश फ़ंक्शन का उपयोग करने के लिए, आपके नेटवर्क ऑपरेटर या सेवा प्रदाता का समर्थन आवश्यक है।
- संदेश फ़ंक्शन पर जाएँ, आप निष्क्रिय स्थिति में  नेविगेशन कुंजियों ऊपर दबा सकते हैं।
- सामग्री लिखने के लिए, कृपया पृष्ठ 19 पर इनपुट पद्धति देखें।

▶ आप प्रतीक दर्ज करने के लिए  कंजी और इनपुट पद्धति बदलने के लिए  कंजी तथा कर्सर शिफ्ट करने के लिए नेविगेशन कुंजियों का उपयोग करें।

जब आप संदेश सेवा > मल्टीमीडिया संदेश > संदेश लेखन > संपादित करें > विकल्प का चयन करते हैं, तब आपका फ़ोन निम्न चयन देता है।

- ▶ **पूर्ण:** संपादन पृष्ठ से बाहर निकलें और सामग्री पृष्ठ संपादित करें पर वापस जाएँ।
- ▶ **इनपुट पद्धति:** इनपुट पद्धति बदलें।
- ▶ **छवि जोड़ें:** अपने संदेश में कोई छवि फ़ाइल जोड़ें।
- ▶ **ऑडियो जोड़ें:** अपने संदेश में कोई ऑडियो फ़ाइल जोड़ें।
- ▶ **वीडियो जोड़ें:** अपने संदेश में कोई वीडियो फ़ाइल जोड़ें।
- ▶ **अनुलग्नक जोड़ें:** अपने संदेश में कोई फ़ाइल जोड़ें।
- ▶ **पहले स्लाइड जोड़ें:** पुरानी स्लाइड के पहले कोई नई स्लाइड जोड़ें।
- ▶ **बाद में स्लाइड जोड़ें:** इससे आप पुरानी स्लाइड के बाद कोई नई स्लाइड जोड़ सकते हैं।

- ▶ **बुकमार्क पाठ जोड़ें:** स्लाइड पर कोई बुकमार्क जोड़ें.
- ▶ **पूर्वावलोकन:** जो स्लाइड(स्लाइड्स) आपने अभी लिखी है, उसका पूर्वावलोकन करें.
- ▶ **स्लाइड का समय निर्धारण:** स्लाइड्स में समय जोड़ें.

सामग्री में दूसरी स्लाइड जोड़ने के बाद, आप अधिक विकल्प उपलब्ध देखेंगे, जिनमें निम्न शामिल होंगे:

- ▶ **स्लाइड हटाएँ:** लक्षित स्लाइड हटाएँ.
- ▶ **पिछली स्लाइड:** पिछली स्लाइड दिखाएँ.
- ▶ **अगली स्लाइड:** अगली स्लाइड दिखाएँ.

कोई एमएमएस भेजना

भेजने के चरण किसी एमएमएस को लिखने के जैसे ही हैं (पृष्ठ 57 पर कोई एमएमएस लिखना देखें)

नोट

- ▶ सामग्री लिखने के लिए, आप "इनपुट पद्धति" देख सकते हैं.
- ▶ चित्र संदेश फ़ंक्शन का उपयोग करने के लिए, आपके नेटवर्क ऑपरेटर या सेवा प्रदाता का समर्थन आवश्यक है.

एमएमएस लिखने के बाद जब आप पूर्ण दबाते हैं, तो आपका फ़ोन निम्न विकल्प देता है.

- ▶ **केवल भेजें:** कोई पाठ संदेश तुरंत भेजता है.
- ▶ **सहेजें और भेजें:** कोई संदेश सहेजें और तुरंत भेजें.
- ▶ **प्रारूप में सहेजें:** बाद में भेजे जाने के लिए किसी संदेश को सहेजता है.
- ▶ **भेजने के विकल्प:** मान्यता अवधि, वितरण रिपोर्ट, पठन और प्राथमिकता सहित भेजने के विकल्पों का व्यक्तिगत बनाएँ.
- ▶ **बाहर निकलें:** बाहर निकलने पर आपको लिखे गए संदेशों को सहेजने या न सहेजने का संकेत दिया जाएगा.

इनबॉक्स

आपका फ़ोन प्राप्त हुए मल्टीमीडिया संदेशों को मल्टीमीडिया संदेश मेनू के इनबॉक्स फ़ोल्डर में सहेजता है.

प्राप्त हुए मल्टीमीडिया संदेश पढ़ने के लिए

1. मुख्य मेनू से, संदेश सेवा का चयन करने के लिए नेविगेशन कुंजियों का उपयोग करें और ठीक दबाएँ.

संदेश सेवा

संदेश सेवा

2. मल्टीमीडिया संदेश का चयन करें और तब ठीक दबाएँ.
3. इनबॉक्स का चयन करें और फिर ठीक दबाएँ.
4. कोई संदेश चुनें और मल्टीमीडिया संदेश देखने के लिए विकल्प दबाएँ.

जब आप संदेश सेवा > मल्टीमीडिया संदेश > इनबॉक्स का चयन करते हैं, तब आपका फ़ोन निम्न चयन देता है.

- ▶ **देखें:** किसी मल्टीमीडिया संदेश को तुरंत देखें.
- ▶ **उत्तर दें:** प्रेषक को उत्तर दें.
- ▶ **SMS से उत्तर दें:** SMS से प्रेषक को उत्तर दें.
- ▶ **सभी को उत्तर दें:** समूह को उत्तर दें.
- ▶ **अग्रेषित करें:** संदेशों को अग्रेषित करें.
- ▶ **हटाएँ:** चयनित संदेश हटाएँ.
- ▶ **सभी हटाएँ:** सभी संदेश हटाएँ.
- ▶ **गुण:** मेलिंग सूची देखें.
- ▶ **विवरण का उपयोग करें:** फ़ोन नंबर को या तो डायल करें या सहेजें.

आउटबॉक्स

न भेजे गए मल्टीमीडिया संदेश, मल्टीमीडिया संदेश मेनू के आउटबॉक्स फ़ोल्डर में सहेजे जाते हैं.

आउटबॉक्स मल्टीमीडिया संदेश देखना

1. मुख्य मेनू से संदेश सेवा का चयन करें और ठीक दबाएँ.
2. मल्टीमीडिया संदेश का चयन करें और तब ठीक दबाएँ.
3. आउटबॉक्स चुनें और ठीक दबाएँ.
4. किसी संदेश का चयन करें और देखने के लिए ठीक दबाएँ.

जब आप संदेश सेवा > मल्टीमीडिया संदेश > आउटबॉक्स का चयन करते हैं, तब आपका फ़ोन निम्न चयन देता है.

- ▶ **देखें:** किसी मल्टीमीडिया संदेश को तुरंत देखें.
- ▶ **हटाएँ:** चयनित संदेश हटाएँ.
- ▶ **सभी हटाएँ:** सभी संदेश हटाएँ.
- ▶ **गुण:** एमएमएस गुण देखें.
- ▶ **विवरणों का उपयोग करें:** फ़ोन नंबर डायल करें या सहेजें

प्रारूप

आपका फोन न भेजे गए मल्टीमीडिया संदेशों को मल्टीमीडिया संदेश मेनू के प्रारूप फ़ोल्डर में सहेजता है।

न भेजे गए मल्टीमीडिया संदेश पढना

1. मुख्य मेनू से, संदेश सेवा का चयन करने के लिए नेविगेशन कुंजियों का उपयोग करें और ठीक दबाएँ।
2. मल्टीमीडिया संदेश का चयन करें और तब ठीक दबाएँ।
3. प्रारूप चुनें और ठीक दबाएँ।
4. किसी संदेश का चयन करें और देखने के लिए ठीक दबाएँ।

जब आप संदेश सेवा > मल्टीमीडिया संदेश > प्रारूप का चयन करते हैं, तब आपका फ़ोन निम्न चयन देता है।

- ▶ देखें: किसी मल्टीमीडिया संदेश को तुरंत देखें।
- ▶ भेजें: संदेश भेजें।
- ▶ गुण: मेलिंग सूची देखें।
- ▶ संपादित करें: संदेश संपादित करें।
- ▶ हटाएँ: चयनित संदेश हटाएँ।
- ▶ सभी हटाएँ: सभी संदेश हटाएँ।
- ▶ गुण: मेलिंग सूची देखें।

- ▶ विवरणों का उपयोग करें: किसी मल्टीमीडिया संदेश का विवरण देखें।

टेम्पलेट्स

यह फ़ोन आपके मल्टीमीडिया संदेश के लिए त्वरित प्रविष्टि जोड़ने की सुविधा देता है।

1. मुख्य मेनू से संदेश सेवा का चयन करें और ठीक दबाएँ।
2. मल्टीमीडिया संदेश का चयन करें और तब ठीक दबाएँ।
3. टेम्पलेट चुनें और ठीक दबाएँ।
4. किसी संदेश का चयन करें और देखने के लिए ठीक दबाएँ।

नोट

आप स्लाइड पढने के लिए दृश्य विकल्प और संदेश सामग्री पढने और आकार के लिए गुण द्वारा किसी टेम्पलेट की सामग्री देख सकते हैं।

जब आप संदेश सेवा > मल्टीमीडिया संदेश > टेम्पलेट का चयन करते हैं, तब आपका फ़ोन देखें, गुण और संदेश लेखन दिखाता है। विवरण के लिए (पृष्ठ 53) इनबॉक्स देखें।

संदेश सेवा

संदेश सेवा

संदेश सेटिंग

कोई एमएमएस भेजने के पहले आपको संदेश सेटिंग पूरी करनी होगी। अपनी सेटिंग बदलने के लिए निम्न चरणों का पालन करें।

1. मुख्य मेनू से संदेश सेवा का चयन करें और ठीक दबाएँ।
2. मल्टीमीडिया संदेश का चयन करें और तब ठीक दबाएँ।
3. संदेश सेटिंग चुनें और ठीक दबाएँ।
4. किसी सेटिंग का चयन करें और सेटिंग प्रारंभ करने के लिए ठीक दबाएँ।
5. समाप्त करने के बाद पूर्ण दबाएँ।

जब आप संदेश सेवा > मल्टीमीडिया संदेश > संदेश सेटिंग का चयन करते हैं, तब आपका फोन निम्न दिखाता है।

► बनाएँ:

आप निम्न विकल्पों से निर्माण स्वरूप सेट कर सकते हैं:

- **निर्माण:** इससे आप चयन चुन सकते हैं: रिक्त या प्रतिबंधित।

- **छवि का आकार बदलना:** इससे आप चयन चुन सकते हैं: बंद/
160x120/ 320x240/ 640x480.

- **स्वतः हस्ताक्षर:** इससे आप चयन चुन सकते हैं: चालू या बंद.

► भेजें:

- **मान्य अवधि:** इस अवधि तक आपका संदेश, संदेश केंद्र में संग्रहीत रहता है। आप 1 घंटे/ 12 घंटे/ 1 दिन/ 1 सप्ताह और अधिकतम के बीच अवधि सेट कर सकते हैं।

- **वितरण रिपोर्ट:** वितरण रिपोर्ट को बंद या चालू के बीच टोगल कर सकते हैं।

- **पठन रिपोर्ट:** एमएमएस पढ़ा गया सूचना रिपोर्ट।

- **प्राथमिकता:** इससे आप चयन चुन सकते हैं: सामान्य/ उच्च/ निम्न.

- **स्लाइड का समय निर्धारण:** स्लाइड्स में समय जोड़ें. (1 - 60 सेकंड).

- **वितरण समय:** वितरण समय सेट करें (तुरंत/ 1 घंटा/ 12 घंटे या 24 घंटे)

► पुनर्प्राप्त करें:

- **होम नेटवर्क:** इन में से चुनें: तुरंत/ प्रतिबंधित/ लंबित.

- रोमिंग: इन में से चुनें: होम/ लंबित/प्रतिबंधित के जैसे.
- पठन रिपोर्ट: इससे आप चयन चुन सकते हैं: अनुरोध पर/ भेजें/ कभी नहीं भेजें.
- वितरण रिपोर्ट: चालू/बंद वितरण रिपोर्ट विकल्प टोगल करता है.
- ▶ फ़िल्टर:
 - अज्ञात: इन में से चुनें: स्वीकारें/अस्वीकारें.
 - व्यावसायिक: इन में से चुनें: स्वीकारें/ अस्वीकारें.
- ▶ सर्वर प्रोफ़ाइल: आप निम्नित नेटवर्क या सेवा प्रदाताओं द्वारा मल्टीमीडिया संदेशों को प्राप्त कर सकते हैं और भेज सकते हैं.
- ▶ स्मृति स्थिति: आप यह जांच सकते हैं कि फ़ोन की आंतरिक स्मृति का कितना प्रतिशत रिक्त है और संदेश अब भी किस प्रकार से सिम कार्ड या फ़ोन की स्मृति में संग्रहीत किए जा सकते हैं.

नोट

संदेश सेटिंग पूर्ण करने के लिए अपने नेटवर्क सेवा ऑपरेटर से संपर्क करें..

चैट

इस सुविधा से आप मित्रों से चैट कर सकते हैं. आपके सेल फ़ोन में 2 चैट रूम हैं.

चैटिंग करने के पहले, आपको निम्न चरणों को पूरा करना होगा:

1. मुख्य मेनू से संदेश सेवा का चयन करें और ठीक दबाएँ.
2. चैट का चयन करें और तब ठीक दबाएँ.
3. चैट रूम 1 या चैट रूम 2 का चयन करें और विकल्प दबाएँ.
4. चैट रूम जानकारी का चयन करें और ठीक दबाएँ.
5. संपादित करें दबा कर कोई उप नाम बनाएँ और विकल्प दबाएँ.
6. पूर्ण दबाएँ और रिमोट सं. का चयन करें.
7. खोजें दबाएँ और संपर्क सूची से किसी संपर्क का चयन करें.
8. तब ठीक दबाएँ और दबाएँ हाँ दबाएँ.

चैट प्रारंभ करना

1. चैट रूम सेट होने के बाद (पृष्ठ 63 पर चैट देखें), संदेश सेवा का चयन करने के लिए नेविगेशन कुंजियों का उपयोग करें और मुख्य मेनू से ठीक दबाएँ.

संदेश सेवा

संदेश सेवा

2. चैट का चयन करें और तब ठीक दबाएँ.
3. विकल्प > नया प्रारंभ करें का चयन करें और ठीक दबाएँ.
4. कोई संदेश दर्ज करें और विकल्प दबाएँ.
5. भेजें का चयन करें और ठीक दबाएँ.
6. संदेश भेजने के बाद चैट रूम सक्रिय हो जाता है.
7. आपकी चैट अब शुरू हो सकती है.

आपके चैट प्रारंभ करने पर आपका फ़ोन निम्न चयन प्रदान करता है.

- ▶ **भेजें:** आपके द्वारा लिखा गया संदेश भेजें.
- ▶ **टेम्पलेट उपयोग करें:** अपने एसएमएस टेम्पलेट विकल्प में कोई टेम्पलेट सम्मिलित करें.
- ▶ **पीएचबी नंबर डालें:** अपने संपर्क में फ़ोन नंबर डालें.
- ▶ **पीएचबी नाम सम्मिलित करें:** अपने संपर्क से नाम डालें.
- ▶ **इनपुट पद्धति:** आपकी इनपुट पद्धति बदलता है.

चैटिंग के दौरान आपका फ़ोन निम्न विकल्प देता है,

- ▶ **उत्तर दें:** किसी प्राप्त चैट संदेश का उत्तर देता है.
- ▶ **नंबर उपयोग करें:** किसी चैट करने वाले का नंबर या चैट करने वाले की ओर से भेजा गया नंबर सहेजता है.
- ▶ **चैट साफ़ करें:** चैट वार्तालाप साफ़ करता है.
- ▶ **अस्थायी रूप से छोड़ें:** चैट रूम को अस्थायी रूप से छोड़ें.
- ▶ **बाहर निकलें:** चैट से बाहर निकलें.
- ▶ **चैट रूम जानकारी:** चैट रूम जानकारी दिखाता है.

नोट

अस्थायी रूप से चैट छोड़ने पर आप या तो चैट फिर से शुरू कर सकते हैं या चैट समाप्त कर सकते हैं.

वॉइस मेल सर्वर

Menu 5.4

आप अपने फ़ोन से अपने वॉइस मेलबॉक्स पर जा सकता है. (यदि सेवा प्रदाता द्वारा समर्थित हो). आपका वॉइस मेल नंबर आपके सेवा प्रदाता द्वारा प्रदान किया जाएगा और फ़ोन में दिखाया जाएगा. वॉइस मेल सबमेनू में, आप पंक्ति 1 या 2 और विकल्प सूची चुन सकते हैं जिसमें शामिल हैं:

- ▶ **संपादित करें:** वॉइस मेल लाइन 1 का नाम और नंबर संपादित करें।
 - ▶ **वॉइस से कनेक्ट करें:** अपने वॉइस मेल बॉक्स से कनेक्ट करें।
1. निष्क्रिय स्थिति में अपना वॉइस मेल सर्वर सीधे एक्सेस करने के लिए [12](#) दबाएँ।

नोट

इस फंक्शन का उपयोग करने के लिए, आपको आपके सेवा प्रदाता से प्राप्त वॉइस सर्वर नंबर दर्ज करने की आवश्यकता हो सकती है।

- ▶ **संदेश पढ़ें:** आप ठीक दबाकर संदेश पढ़ सकते हैं या वापस दबाकर बाहर आ सकते हैं।
- ▶ **संदेश सूची:** आप ठीक दबाकर संदेश पढ़ सकते हैं या वापस दबाकर बाहर निकल सकते हैं।
- ▶ **भाषाएँ:** आप इच्छित प्रसारण भाषा निर्दिष्ट कर सकते हैं।
- ▶ **चैनल सेटिंग:** आप चैनल सूची से किसी चैनल का चयन कर सकते हैं या सूची में ऐसे नए चैनल जोड़ सकते हैं जहाँ आप संदेश प्राप्त करना चाहते हैं। एक बार चुनने के बाद, आप चैनल संपादित कर सकते हैं या हटा सकते हैं।

संदेश प्रसारित करें Menu 5.5

आपका फोन व्यावसायिक संदेशों को प्राप्त करने की सुविधा देता है। आप प्राप्ति मोड सक्षम या अक्षम कर सकते हैं और आपकी व्यक्तिगत प्राथमिकता के आधार पर कुछ अन्य विकल्प सेट कर सकते हैं।

आपका फोन निम्न विकल्प प्रदान करता है:

- ▶ **प्राप्ति मोड:** आपको प्राप्त हुए अंतिम प्रसारित संदेश को प्राप्त करना या नहीं करना आप चुन सकते हैं।

मेरा सामान [Menu 6]

इस मेनू में, आप छवियाँ, फोटोज, रिकॉडिंग्स और टोन्स प्रबंधित कर सकते हैं.

दो संग्रहण विकल्प उपलब्ध होंगे:

फ़ोन

Menu 6.1

आप आपके फ़ोन में सहेजी गई फ़ाइलें जाँच सकते हैं.

स्मृति कार्ड

Menu 6.2

यदि स्मृति कार्ड प्लग इन है, तो स्मृति कार्ड फ़ोन पर दिखाई देगा.

मेरी सामग्री देखना

मेरी सामग्री देखने के लिए निम्न चरणों का पालन करें.

1. मुख्य मेनू से मेरी सामग्री का चयन करें और ठीक दबाएँ.
2. फ़ोन या मेमोरी कार्ड का चयन करें और विकल्प दबाएँ. तब मेरी सामग्री में सहेजे गए सभी फ़ोल्डर देखने के लिए विकल्प का चयन करें.
3. किसी फ़ोल्डर का चयन करें और विकल्प दबाएँ.
4. आपके द्वारा चयनित फ़ोल्डर में फ़ाइलें देखने के लिए खोलें का चयन करें.

नोट

- ▶ जब आप मेरी सामग्री दर्ज करते हैं, तो आपको एक ड्राइवर फ़ोन दिख सकता है. यदि आप कोई microSD कार्ड डालते हैं, तो आपको स्मृति कार्ड नाम वाली एक और ड्राइव दिख सकती है.
- ▶ जब आप फ़ोन या स्मृति कार्ड चुनते हैं और विकल्प दबाते हैं, तो आपका फ़ोन आपको फ़ंक्शंस खोलें और स्वरूपित करें प्रदान करता है.
- ▶ जब आप फ़ोन या स्मृति कार्ड मोड में फ़ोल्डर चुनते हैं और विकल्प दबाते हैं, तो आपका फ़ोन आपको फ़ंक्शंस खोलें और स्वरूपित करें प्रदान करता है.
- ▶ किसी फ़ाइल नाम में * जैसे प्रतीक का उपयोग नहीं करें, या डिफ़ॉल्ट फ़ोल्डर का नाम नहीं बदला जा सकता है.
- ▶ स्वरूप करें फ़ंक्शन पूरा करने के बाद फ़ोन या मेमोरी कार्ड में कुल स्थान का अद्यतन हो जाता है.

कोई फ़ोल्डर बनाना

फ़ोन या मेमोरी कार्ड ड्राइवर में कोई फ़ोल्डर बनाने के लिए निम्न चरणों का पालन करें.

1. मुख्य मेनू से, मेरी सामग्री का चयन करने के लिए नेविगेशन कुंजियों का उपयोग करें और ठीक दबाएँ.

2. फ़ोन या मेमोरी कार्ड का चयन करें और विकल्प दबाएँ.
3. खोलें का चयन करें और ठीक दबाएँ.
4. किसी भी फ़ोल्डर का चयन करें और विकल्प दबाएँ.
5. फ़ोल्डर बनाएँ का चयन करें और ठीक दबाएँ.
6. फ़ोल्डर का नाम दर्ज करें और विकल्प दबाएँ.
7. पूर्ण का चयन करें और ठीक दबाएँ.

कोई चित्र या वॉलपेपर अग्रेषित करना

कोई चित्र या वॉलपेपर अग्रेषित करने के लिए निम्न चरणों का पालन करें.

1. मुख्य मेनू से मेरी सामग्री का चयन करें और ठीक दबाएँ.
2. फ़ोन या मेमोरी कार्ड का चयन करें और विकल्प दबाएँ.
3. खोलें का चयन करें और ठीक दबाएँ.
4. छवियों का चयन करें और विकल्प दबाएँ.
5. खोलें का चयन करें और ठीक दबाएँ.
6. किसी चित्र का चयन करें और विकल्प दबाएँ.
7. अग्रेषित करें का चयन करें और ठीक दबाएँ.

8. वॉलपेपर पर का चयन करें और ठीक दबाएँ. तब फ़ोन स्क्रीन "पूर्ण" दिखाती है.

अपने चित्र देखना

मेरी सामग्री मेनू में अपने चित्रों को देखने के लिए निम्न चरणों का पालन करें.

1. मुख्य मेनू से मेरी सामग्री का चयन करें और ठीक दबाएँ.
2. फ़ोन या मेमोरी कार्ड का चयन करें और विकल्प दबाएँ.
3. खोलें का चयन करें और ठीक दबाएँ.
4. छवियों का चयन करें और विकल्प दबाएँ.
5. खोलें का चयन करें और ठीक दबाएँ.
6. किसी चित्र का चयन करें और विकल्प दबाएँ.
7. देखें का चयन करें और अपने चित्र देखने के लिए ठीक दबाएँ.

वीडियो क्लिप चलाना

मेरी सामग्री में कोई वीडियो क्लिप चलाने के लिए निम्न चरणों का पालन करें.

1. मुख्य मेनू से मेरी सामग्री का चयन करें और ठीक दबाएँ.
2. फ़ोन या मेमोरी कार्ड का चयन करें और विकल्प दबाएँ.

मेरा सामान


मेरा सामान

3. खोलें का चयन करें और ठीक दबाएँ.
4. वीडियो का चयन करें और विकल्प दबाएँ.
5. खोलें का चयन करें और ठीक दबाएँ.
6. किसी वीडियो क्लिप का चयन करें और विकल्प दबाएँ.
7. वीडियो क्लिप चलाने के लिए चलाएँ चुनें और ठीक दबाएँ.


प्रोफ़ाइल्स [Menu 7]

विभिन्न पर्यावरणीय स्थितियों में अनुकूलन के लिए अलग-अलग प्रोफ़ाइल सेट कर सकते हैं। आपका फ़ोन 7 भिन्न प्रोफ़ाइल्स देता है। 7 प्रोफ़ाइल का और विवरण नीचे दिया गया है।


▶ सामान्य:

मानक प्रोफ़ाइल फ़ोन की डिफ़ॉल्ट सेटिंग होती है। सामान्य प्रोफ़ाइल सक्रिय करने के बाद, सामान्य प्रोफ़ाइल का  संकेतक निष्क्रिय स्क्रीन के ऊपरी बाएँ कोने पर प्रदर्शित होता है।

▶ मीटिंग:


मीटिंग प्रोफ़ाइल के लिए, रिंग वॉल्यूम न्यून पर सेट होती है और की टोन बंद कर दी जाती है। सक्रियण के बाद, मीटिंग प्रोफ़ाइल का  संकेतक निष्क्रिय स्क्रीन के ऊपरी बाएँ कोने पर प्रदर्शित होता है।

▶ आउटडोर:


आउटडोर प्रोफ़ाइल के लिए, रिंग और की टोन वॉल्यूम दोनों ही अपने अधिकतम मान पर होती हैं। सक्रियण के बाद, आउटडोर प्रोफ़ाइल का  संकेतक निष्क्रिय स्क्रीन के ऊपरी बाएँ कोने पर प्रदर्शित होता है।

▶ केवल कंपनी:


केवल प्रोफ़ाइल को वायब्रेट करने के लिए, रिंग और की टोन वॉल्यूम

दोनों ही बंद पर सेट किए जाते हैं और वायब्रेट चालू किया जाता है। सक्रियण के बाद, केवल प्रोफ़ाइल वायब्रेट करें का  संकेतक निष्क्रिय स्क्रीन के ऊपरी बाएँ कोने पर प्रदर्शित होता है।


▶ हेडसेट:

हेडसेट प्लग-इन के लिए प्रोफ़ाइल। सामान्य रूप से यह प्रोफ़ाइल मैनुअली सक्रिय नहीं की जा सकती। आपके फ़ोन द्वारा ईयरफोन प्लगइन पहचानने पर, यह अपने आप हेडसेट मोड पर स्विच हो जाएगा और हेडसेट प्रोफ़ाइल का  संकेतक निष्क्रिय स्क्रीन के ऊपरी बाएँ कोने पर प्रदर्शित होता है।

▶ मौन:

मौन प्रोफ़ाइल के लिए, रिंग वॉल्यूम और वाइब्रेटर दोनों ही बंद पर सेट किए जाते हैं और केवल LED चालू होता है। सेट करने के बाद, केवल प्रोफ़ाइल वायब्रेट करें का  संकेतक निष्क्रिय स्क्रीन के ऊपरी बाएँ कोने पर प्रदर्शित होता है।

▶ ब्लूटूथ:

ब्लूटूथ के कनेक्ट होने पर प्रोफ़ाइल। सेट करने के बाद, फ़ोन स्क्रीन के ऊपरी बाएँ कोने पर ब्लूटूथ प्रोफ़ाइल का  सूचक दिखाया जाता है।

प्रोफ़ाइल्स

नोट

प्रोफ़ाइल मोड सेट करने के बाद फ़ोन स्क्रीन पर सूचक प्रदर्शित होता है। (अधिक जानकारी के लिए कृपया पृष्ठ 16 पर निष्क्रिय स्थिति देखें)

प्रोफ़ाइल्स सक्रिय करना

प्रोफ़ाइल मेनू में प्रोफ़ाइल सक्रिय करने के लिए निम्न चरणों का पालन करें।

1. मुख्य मेनू से, प्रोफ़ाइल का चयन करने के लिए अपनी नेविगेशन कुंजियों ऊपर/नीचे का उपयोग करें और ठीक दबाएँ।
2. किसी इच्छित प्रोफ़ाइल का चयन करें और ठीक दबाएँ।
3. सक्रिय करें का चयन करें और आप जिस प्रोफ़ाइल का उपयोग करना चाहते हैं, उसे सक्रिय करने के लिए ठीक दबाएँ।

प्रोफ़ाइल्स संपादित करना

आप अपनी आवश्यकताओं को पूरा करने के लिए सामान्य/ मीटिंग/ आउटडोर/ केवल कंपनी/ हैंडसेट/ मौन/ ब्लूटूथ की प्रोफ़ाइल को अनुकूलित कर सकते हैं।

1. मुख्य मेनू से प्रोफ़ाइल का चयन करें और ठीक दबाएँ।

2. किसी इच्छित प्रोफ़ाइल का चयन करें और ठीक दबाएँ।
3. अनुकूलित करें का चयन करें और ठीक दबाएँ।
4. अनुकूलित करने के लिए किसी इच्छित विकल्प का चयन करें।

जब आप प्रोफ़ाइल > सामान्य/ मीटिंग/ आउटडोर/ / केवल कंपनी/ हैंडसेट/ मौन/ ब्लूटूथ > विकल्प > अनुकूलित करें का चयन करते हैं, तो आपका फ़ोन निम्न विकल्प देता है।

▶ **टोन सेटअप:** आवक कॉल/ पावर ऑन/ पावर ऑफ़/ संदेश टोन/ कीपैड टोन के लिए इच्छित रिंग टोन सेट करें। आप दी गई टोन सूची से चुन सकते हैं या फ़ोन या स्मृति कार्ड की अपनी ऑडियो/ म्यूजिक फ़ाइल से इसे बदल सकते हैं। चयनित मिडि/ टोन चलाने/ रोकने के लिए CSK दबाकर उपयोगकर्ता टोन फ़ाइल का पूर्वालोकन कर सकता है। चुनी गई टोन सेट करने के लिए ठीक दबाएँ।

▶ **वॉल्यूम:** रिंग टोन और कुंजी टोन का वॉल्यूम समायोजित करें।

नोट

कृपया रिंग वॉल्यूम उच्च पर सेट होने पर अपने कानों की सुरक्षा का ध्यान रखें।

- ▶ **टोन प्रकार:** विभिन्न प्रकार के संकेत प्रकारों का चयन करें (रिंग, केवल कंपन, कंपन और रिंग, कंपन के बाद रिंग और एक बार बीप)
- ▶ **इंटेलिजेंट कॉल:** आपके फ़ोन में आवक कॉल के फ़ोन नंबर की रिंगिंग से पहले उसके उच्चारण की सुविधा देता है.
- ▶ **रिंग प्रकार:** एकल, दोहराव, आरोही या अवरोही रिंग योगल करता है.
- ▶ **अतिरिक्त टोन:** इससे आप चेतावनी, बुटि, कैंप ऑन और कनेक्ट टोन चालू या बंद कर सकते हैं.
- ▶ **उत्तर मोड:** किसी कुंजी को दबाने से उत्तर मोड को चालू/बंद में टोगल करता है.

संपर्क [Menu 8]

सि.पू.


आपकी फ़ोनबुक सिम कार्ड की स्मृति या फ़ोन की स्मृति में सहेजी जाती है। आप दोनों में सहेजना भी चुन सकते हैं।

खोजें


Menu 8.1

संपर्क में सहेजे गए नाम और नंबरस खोजने की सुविधा देता है।


कोई नंबर और नाम खोजने के लिए

1. मुख्य मेनू से संपर्क का चयन करें और ठीक दबाएँ।
2. खोजें का चयन करें और ठीक दबाएँ।
3. संपर्क व्यक्ति के नाम का पूरा नाम या पहला वर्ण दर्ज करें। संपर्क सूची संबंधित वर्ण वाले पहले संपर्क पर स्वतः चली जाती है।
4. कॉल करने के लिए  कुंजी दबाकर कॉल करने के लिए इच्छित संपर्क का चयन करें।

या

1. निष्क्रिय स्थिति में, संपर्क मेनू में जाने के लिए  दाईं सॉफ़्ट कुंजी दबाएँ।
2. उपरोक्त चरणों का ही पालन करें।

नोट

खोज मोड में इनपुट पद्धति पर जाने के लिए आप  कुंजी दबा सकते हैं।

आप विकल्प इनपुट विधि बदलने या चयनित फ़ोन नंबर संपादित करने के लिए भी दबा सकते हैं।

जब आप मुख्य मेनू से संपर्क > खोजें > कोई संपर्क > विकल्प का चयन करते हैं, तो आपका फ़ोन निम्न चयन देता है।

- ▶ **देखें:** संपर्क जानकारी दिखाता है।
- ▶ **संपादित करें:** इससे आप संपर्क का नाम और फ़ोन नंबर संपादित कर सकते हैं।
- ▶ **नया संदेश:** इससे आप किसी चयनित संपर्क को एसएमएस या एमएमएस भेज सकते हैं।
- ▶ **vCard भेजें:** चयनित संपर्क व्यक्ति को vCard भेजने की सुविधा देता है।
- ▶ **हटाएँ:** चयनित संपर्क की जानकारी हटाता है।
- ▶ **एकाधिक हटाना:** एक समय में अधिक प्रविष्टियाँ हटाएँ।
- ▶ **नया संपर्क:** फ़ोनबुक में नया संपर्क जोड़ता है।
- ▶ **एकाधिक प्रतिलिपि:** फ़ोन या सिम कार्ड पर संपर्क की जानकारी की प्रतिलिपि बनाता है (जहाँ आपने फ़ोन नंबर सहेजा है, उस पर निर्भर करता है)।
- ▶ **एकाधिक का स्थान परिवर्तन:** चयनित संपर्क जानकारी को फ़ोन या सिम में

ले जाता है।

- ▶ **इनपुट विधि:** पसंदीदा इनपुट विधि चुनता है।
- ▶ **एकाधिक डुप्लिकेट:** समान संग्रहण माध्यम पर चयनित संपर्क जानकारी को डुप्लिकेट बनाता है।

नया संपर्क

Menu 8.2

इससे आप संपर्क मेनू में नई प्रविष्टि बना सकते हैं।

नई प्रविष्टि बनाना

1. मुख्य मेनू से संपर्क का चयन करें और ठीक दबाएँ।
2. नया संपर्क का चयन करें और ठीक दबाएँ।
3. सिम कार्ड या फ़ोन पर संग्रहण स्थान का चयन करें।
4. नाम का चयन करें और संपादित करें दबाएँ। तब प्रविष्टि का नाम दर्ज करें और विकल्प दबाएँ।
5. पूर्ण का चयन करें और ठीक दबाएँ।
6. नेविगेशन कुंजियों को नीचे की ओर दबाएँ और ठीक दबाएँ। तब फ़ोन एक "सहेजें हाँ/ ना" संदेश दिखाता है।
7. हाँ का चयन करें और मध्य कुंजी दबाएँ। तब फ़ोन स्क्रीन "पूर्ण" दिखाती है।

नोट

आपके फ़ोन में आप फ़ोन नंबर की 1000 प्रविष्टियाँ सहेज सकते हैं।

कॉलर समूह

Menu 8.3

फ़ोन में पाँच डिफ़ॉल्ट समूह होते हैं। आप विभिन्न टोन/ चित्र/ LED/ वीडियो/ और सदस्य सूची से प्रत्येक समूह का नाम संपादित कर सकते हैं। कॉलर समूह फ़ंक्शन से आप समूह के सभी सदस्यों को एक ही समय में संदेश भेज सकते हैं।

किसी कॉलर समूह में प्रविष्टि बनाना

1. मुख्य मेनू से संपर्क का चयन करें और ठीक दबाएँ।
2. कॉलर समूह का चयन करें और ठीक दबाएँ।
3. कोई समूह चुनें और ठीक दबाएँ।
4. सदस्य सूची चुनें और ठीक दबाएँ।
5. विकल्प > जोड़ें का चयन करें और ठीक दबाएँ। फिर आप संपर्क में से चुन सकते हैं।

नोट

आपका फ़ोन 5 कॉलर समूह प्रदान करता है जिनमें शामिल हैं: मित्र, परिवार, वीआईपी, व्यवसाय व अन्य।

संपर्क

म.
फ़ोन

आपका फ़ोन आपके विकल्प के लिए निम्न चयन प्रदान करता है:

- ▶ **समूह नाम:** आप समूह नाम संपादित कर सकते हैं.
- ▶ **रिंग टोन:** इससे आप किसी कॉलर समूह के लिए रिंग टोन की प्रोफ़ाइल सेट कर सकते हैं.
- ▶ **चित्र:** इससे आप किसी समूह के लिए चित्र सेट कर सकते हैं.
- ▶ **वीडियो:** इससे आप समूह के लिए कोई वीडियो क्लिप सेट कर सकते हैं.
- ▶ **सदस्य सूची:** इससे आप किसी निर्दिष्ट समूह में सदस्य जोड़ सकते हैं.

स्पीड डायल

Menu 8.4

यदि आप संपर्क में सहजे गए नंबर को स्पीड डायल कुंजियों (2-9) से (9-2) तक में से किसी एक को असाइन करते हैं, तो आप स्टैंडबाय मोड में वह कुंजी दबाकर फ़ोन नंबर को कॉल कर सकते हैं.

स्पीड डायल चालू करना

1. मुख्य मेनू से संपर्क का चयन करें और ठीक दबाएँ.
2. स्पीड डायल का चयन करें और ठीक दबाएँ.
3. स्पीड डायल सक्षम करें का चयन करें

और ठीक दबाएँ.

4. चालू का चयन करें और स्पीड डायल फ़ंक्शन चालू करने के लिए ठीक दबाएँ. तब फ़ोन स्क्रीन "पूर्ण" दिखाती है.

स्पीड डायल नंबर सेट करना

1. मुख्य मेनू से संपर्क का चयन करें और ठीक दबाएँ.
2. स्पीड डायल का चयन करें और ठीक दबाएँ.
3. नंबर सेट करें का चयन करें और ठीक दबाएँ.
4. किसी रिक्त नंबर का चयन करें और विकल्प दबाएँ.
5. संपादित दबाएँ और ठीक दबाएँ.
6. जिस प्रविष्टि को आप स्पीड डायल नंबर के जैसे सेट करना चाहते हैं, उसका चयन करें और ठीक दबाएँ. तब फ़ोन स्क्रीन "पूर्ण" दिखाती है.

मेरा vCard

Menu 8.5

आप अपनी vCard जानकारी संपादित कर सकते हैं और इस विकल्प से दूसरों के साथ साझा कर सकते हैं. मुख्य मेनू से अपना vCard भेजने के लिए संपर्क > खोजें > विकल्प > vCard भेजें का चयन करें.

अतिरिक्त नंबर

Menu 8.6

आपकी स्वयं की प्राथमिकता के लिए स्वामी का नंबर, सेवा डायल नंबर और SOS नंबर संपादित करने की सुविधा देता है।

नोट



आपका सेवा प्रदाता आपकी सिम कार्ड में कुछ विशेष फोन नंबर प्रोग्राम कर सकता है। यदि समर्थन न हो तो सेवा डायल नंबर को संशोधित करना संभव नहीं है।

सेटिंग्स

Menu 8.7

आपके फ़ोन को व्यक्तिगत बनाने के लिए आपका फ़ोन कई सेटिंग विकल्प प्रदान करता है, जिनमें शामिल हैं,

1. **कॉलर चित्र:** कॉल करते समय आपके मित्र के चित्र ID के रूप में उसका फ़ोटो या कोई अन्य चित्र उपयोग करने की सुविधा देता है।
2. **कॉलर रिंग टोन:** इससे आप अपनी संपर्क सूची में निर्दिष्ट संपर्क या कॉलर समूह के लिए आवक रिंग टोन को व्यक्तिगत बना सकते हैं।
3. **कॉलर वीडियो:** इससे आप अपनी सूची में किसी संपर्क के लिए कुछ वीडियो क्लिप का उपयोग कर सकते हैं।

4. **स्मृति स्थिति:** आप यह जाँच सकते हैं कि फ़ोन की ऑंतरिक स्मृति का कितना प्रतिशत रिक्त है और कितने नाम और नंबर प्रविष्टियाँ अब भी सिम कार्ड या फ़ोन की स्मृति में संग्रहीत किए जा सकते हैं।
5. **पसंदीदा संग्रहण:** आप अपना प्राथमिक संग्रहण फ़ोन, सिम या दोनों में चुन सकते हैं।
6. **फ़्रीलड:** आप अपने प्रदर्शन पर दिखाई जाने वाली संपर्क जानकारी अनुकूलित कर सकते हैं।
7. **नाम सूची फ़िल्टर:** आप अपनी vCard जानकारी संपादित कर सकते हैं और इस विकल्प से दूसरों के साथ साझा कर सकते हैं।
8. **मानव ध्वनि संकेत:** आपका फ़ोन  और  कुंजियों से मानव ध्वनि चला सकता है। आप मानव ध्वनि कीपैड टोन चालू या बंद करना चुन सकते हैं।

नोट

आप www.lgmobile.com से PC सुइट उपकरण प्राप्त कर सकते हैं। PC सुइट उपकरण से आप अपने फ़ोन या सिम कार्ड में संग्रहीत अपनी संपर्क सूची प्रबंधित कर सकते हैं।

सेटिंग्स [Menu 9]

समय व दिनांक

Menu 9.1

यह फंक्शन आपका गृह नगर सेट करने, आपके फोन में सेट समय व दिनांक देखने और बदलने की सुविधा देता है। आप दिनांक व समय स्वतः अद्यतन करना भी चुन सकते हैं।

गृह नगर सेट करें

1. मुख्य मेनू से सेटिंग्स का चयन करें और ठीक दबाएँ।
2. दिनांक व समय का चयन करें और ठीक दबाएँ।
3. गृह नगर सेट करें का चयन करें और ठीक दबाएँ। सभी प्रमुख शहर दिखाए जाते हैं।
4. गृहनगर का चयन करने के लिए ऊपर/नीचे नेविगेशन कुंजियाँ दबाएँ या त्वरित खोज के लिए गृहनगर के पहले वर्ण को दबाएँ।
5. ठीक दबाएँ।

समय व दिनांक सेट करें

1. मुख्य मेनू से सेटिंग्स का चयन करें और ठीक दबाएँ।
2. दिनांक व समय का चयन करें और ठीक दबाएँ।

3. दिनांक व समय सेट करें का चयन करें और ठीक दबाएँ।
4. दलित करने वाले फोकस को ले जाकर और न्यूमेरिक कुंजियों को दबाकर समय को संपादित करें और ए.एम. से पी.एम. या पी.एम. से ए.एम. में जाने के लिए LSK का उपयोग करें।
5. दिनांक मानों को बदलने के लिए दलित करने वाले फोकस को ले जाकर और न्यूमेरिक कुंजियों को दबाकर समय को संपादित करें।
6. या नेविगेशन कुंजियों को -बाएँ/दाएँ करके डैलाइट सेविंग को चालू/बंद करें।
7. ठीक दबाएँ। (स्क्रीन "पूर्ण" को दिखाता है)।

स्वरूप सेट करें

1. मुख्य मेनू से सेटिंग्स का चयन करें और ठीक दबाएँ।
2. दिनांक व समय का चयन करें और ठीक दबाएँ।
3. स्वरूप सेट करें दबाएँ और ठीक दबाएँ।
4. मान का चयन करने के लिए नेविगेशन कुंजियों को ऊपर/नीचे दबाकर और विकल्पों का चयन करने के लिए बाएँ/दाएँ दबाकर समय स्वरूप या दिनांक स्वरूप संपादित करें।

5. ठीक दबाएँ. (स्क्रीन "पूर्ण" को दिखाता है).

स्वतः अद्यतन

यदि सक्षम किया गया हो, तो फ़ोन स्वतः समय क्षेत्र के अनुसार समय व दिनांक को अद्यतन करेगा.

1. मुख्य मेनू से सेटिंग्स का चयन करें और ठीक दबाएँ.
2. समय व दिनांक का चयन करें और ठीक दबाएँ.
3. स्वतः अद्यतन दबाएँ और ठीक दबाएँ.
4. चालू या बंद का चयन करें और ठीक दबाएँ.

नोट

स्वतः अद्यतन अलार्म या कैलेंडर नोट्स को नहीं बदलता और इसके कारण कुछ अर्लाम्स की समय सीमा समाप्त हो सकती हैं.

स्क्रीन प्रदर्शन

Menu 9.2

यह सुविधा निम्न विकल्पों में आपकी प्रदर्शन सेटिंग व्यक्तिगत बनाने की सुविधा देता है:

► **वॉलपेपर:** निष्क्रिय स्क्रीन वॉलपेपर को बदलता है

1. मुख्य मेनू से सेटिंग्स का चयन करें और ठीक दबाएँ.
2. प्रदर्शित करें का चयन करें और ठीक दबाएँ.
3. वॉलपेपर का चयन करें और ठीक दबाएँ.
4. सिस्टम या यूजर डिफ़ाइन चुनें और ठीक दबाएँ.
5. इच्छित वॉलपेपर चुनें और देखें दबाएँ.
6. वॉलपेपर के रूप में चुनने के लिए ठीक दबाएँ और अन्य वॉलपेपर्स चुनने के लिए वापस का चयन करें.

► **स्क्रीन सेवर:** स्क्रीनसेवर अक्षम करें या चुनें

1. सेवर प्रारंभ समय को ट्रिगर करने के लिए आप समय अंतराल को सक्षम/अक्षम कर सकते हैं या सेट कर सकते हैं. (5 सेकंड से 1 मि)
2. अपना स्क्रीन सेवर चुनने के लिए सिस्टम या यूजर डिफ़ाइन का चयन करें.

सेटिंग्स

संक्षेप

- ▶ **पावर चालू/बंद प्रदर्शन:** यह फ़ोन आपको सिस्टम से, फोन/कार्ड स्मृति से पावर-चालू/बंद ऐनिमेशन सेट करने या ऐनिमेशन अक्षम करने की सुविधा देता है. समर्थित स्वरूप MP4/3GP होगा.
- ▶ **मुख्यसूचि शैली:** आपको मुख्यासुची शैली बदलने में सक्षम करता है मैट्रिक्स या तालिका प्रकार के लिए.
- ▶ **थीम:** आपको थीम बदलने, अद्यतन अवधि सेट करने और थीमों को स्विच करे के क्रम को बदलने में सक्षम करता है.
- ▶ **अभिवादन पाठ:** पाँवर चालू होने पर आपको अपने स्वागत नोट के लिए किसी भी संदेश को अक्षम या सक्षम करने में और संपादित करने में सक्षम करता है.
- ▶ **LCD बैकलाइट:** LCD की चमक और डिम टाइमर को समायोजित करता है.
- ▶ **दिनांक व समय दिखाएँ:** निष्क्रिय स्क्रीन पर समय व दिनांक दिखाता या छुपाता है.
- ▶ **होम शॉर्टकट दिखाता है:** निष्क्रिय स्थिति वाली स्क्रीन पर 4- तरीके के शॉर्टकटस में जाने को दिखाता या छुपाता है.

- ▶ **प्रसारण संदेश दिखाता है:** निष्क्रिय स्क्रीन पर प्रसारण जानकारी दिखाता है.
- ▶ **कॉल जानकारी दिखाएँ:** निष्क्रिय स्क्रीन पर प्रसारण जानकारी दिखाता है.
- ▶ **स्वामी का नंबर दिखाएँ:** निष्क्रिय स्क्रीन पर आपका नंबर दिखाता या छुपाता है.
- ▶ **ऑपरेटर का नाम दिखाएँ:** निष्क्रिय स्क्रीन पर आपका नंबर दिखाता या छुपाता है.

फ़ोन

Menu 9.3

पावर चालू/बंद शेड्यूल करें

यह फ़ंक्शन आपको फ़ोन के लिए पाँवर चालू/पाँवर बंद समय को शेड्यूल करने की सुविधा देता है.

1. मुख्य मेनू से सेटिंग्स का चयन करें और ठीक दबाएँ.
2. फ़ोन चयन करें और ठीक दबाएँ.
3. पाँवर ऑन/ऑफ़ शेड्यूल करें का चयन करें और ठीक दबाएँ.
4. कोई डिफॉल्ट समय हाइलाइट करें और संपादित करें दबाएँ.

5. स्थिति को सक्षम करने, चालू या बंद का चयन करने और कोई समय निर्दिष्ट करने का निर्णय लें, तब ठीक दबाएँ. (स्क्रीन "पूर्ण" को दिखाता है).

भाषा

भाषा सेट करना

यह फ़ोन विभिन्न प्रदर्शन भाषाओं की सुविधा देता है.

1. मुख्य मेनू से सेटिंग्स का चयन करें और ठीक दबाएँ.
2. फ़ोन चयन करें और ठीक दबाएँ.
3. भाषा चयन करें और ठीक दबाएँ.
4. किसी इच्छित भाषा का चयन करें और ठीक दबाएँ. (स्क्रीन "पूर्ण" को दिखाता है).

शॉर्टकट्स

यह फ़ंक्शन आपको अपने शॉर्टकट्स अनुकूलित करने की सुविधा देता है.

1. मुख्य मेनू से, सेटिंग्स चुनें और ठीक दबाएँ.
 2. फ़ोन चुनें और ठीक दबाएँ.
 3. शॉर्टकट्स चुनें और ठीक दबाएँ.
- आप विकल्पों को दबाकर शॉर्टकट्स की सूची को अनुकूलित कर सकते हैं.

▶ **जोड़ें:** आप कैंडिडेट शॉर्टकट पूल से कोई शॉर्टकट चुन सकते हैं और उसे वर्तमान शॉर्टकट सूची में जोड़ सकते हैं.

▶ **संपादित करें:** आप कैंडिडेट शॉर्टकट पूल से दूसरा शॉर्टकट चुनकर वर्तमान हाइलाइटड शॉर्टकट को बदल सकते हैं.

▶ **हटाएँ:** आप सूची से वर्तमान में चयनित शॉर्टकट हटा सकते हैं.

▶ **सभी हटाएँ:** आप शॉर्टकट सूची में सभी आइटम हटा सकते हैं.

▶ **अक्षम करें/सक्षम करें:** आप किसी शॉर्टकट को सूची से गायब करने या सूची में दिखाने के लिए उसे अक्षम/सक्षम कर सकते हैं.

▶ **क्रम बदलें:** आप वर्तमान में हाइलाइटड आइटम के सूचीकरण क्रम को बदल सकते हैं.

फ़्लाइट मोड

यदि आप मोड को सामान्य मोड के बजाय फ़्लाइट मोड पर बदलते हैं, तो यह फ़ंक्शन फ़्लाइट के दौरान म्यूजिक प्लेयर चलाने की सुविधा देता है. आप केवल संगीत सूचीबद्ध कर सकेंगे.

▶ **सामान्य मोड:** जीएसएम/जीपीआरएस नेटवर्क उपलब्ध है. आप कोई कॉल कर सकते हैं.

सेटिंग्स

- ▶ **फ्लाइंट मोड:** जीएसएम/जीपीआरएस अक्षम किया गया है. आप कॉल नहीं कर सकते.
- ▶ **पावर चालू होने पर क्वेरी करें:** फोन के चालू होने पर आपको सामान्य मोड या फ्लाइंट मोड का चयन करना होगा.

कॉल

Menu 9.4

कॉलर ID

आप नेटवर्क से सेट करें, ID छुपाएँ, या कॉल करने पर ID भेजें का चयन करके अपनी पहचान प्रस्तुत करने के तरीके का निर्णय ले सकते हैं.

कॉल प्रतीक्षा

एक नेटवर्क सेवा, जो मौजूदा कॉल के दौरान, दूसरे कॉलर की सूचना की सुविधा देती है.

1. मुख्य मेनू से सेटिंग्स का चयन करें और ठीक दबाएँ.
2. कॉल का चयन करें और ठीक दबाएँ.
3. कॉल प्रतीक्षा का चयन करें और ठीक दबाएँ.
4. सक्रिय करें, अक्रिय करें या क्वेरी स्थिति का चयन करें और ठीक दबाएँ.

5. क्वेरी स्थिति का चयन करने से सेवा के सक्रिय या अक्रिय किए जाने पर आप देखने में सक्षम होंगे.

कॉल अंतरण

आप कॉल की स्थिति सेट कर सकते हैं जिससे कॉल्स अन्य नंबर पर डाइवर्ट किए जाते हैं.

कॉल डाइवर्ट सेट करने के लिए

1. मुख्य मेनू से सेटिंग्स का चयन करें और ठीक दबाएँ.
2. कॉल का चयन करें और ठीक दबाएँ.
3. कॉल डाइवर्ट का चयन करें, तब ठीक दबाएँ.
4. किसी आइटम का चयन करें और ठीक दबाएँ.
5. सक्रिय करें, असक्रिय करें या क्वेरी स्थिति का चयन करें और ठीक दबाएँ.
6. नए नंबर पर या वॉइस मेल पर का चयन करें और ठीक दबाएँ.
7. यदि आप नए नंबर के लिए चुनते हैं, तो आपको फोनबुक से कोई मौजूदा नंबर लिखकर या चुनकर कोई फोन नंबर अवश्य देना होगा. समाप्त करने पर ठीक क्लिक करें.

8. यदि आप वॉइस मेल के लिए चुनते हैं, तो आपको सूची से कोई वॉइस मेल नंबर चुनना और ठीक क्लिक करना होगा.

आपका फोन निम्न डाइवर्ट विकल्प प्रदान करता है:

- ▶ **सभी ध्वनि कॉल अंतरण करें:** सभी वॉइस कॉल डाइवर्ट किए जाते हैं.
- ▶ **पहुँच में न होने पर अंतरण करें:** जब आप अपने प्रदाता की सीमा से बाहर होते हैं तो कॉल डाइवर्ट किए जाते हैं.
- ▶ **अनुत्तरित होने पर अंतरण करें:** यदि कॉल का उत्तर नहीं दिया जाता है तो कॉलें डाइवर्ट हो जाती हैं.
- ▶ **व्यस्त होने पर अंतरण करें:** आपके फ़ोन के अन्य कॉल्स में व्यस्त होने पर कॉल्स अंतरित की जाती हैं.
- ▶ **सभी ध्वनि कॉल अंतरण करें:** सभी डेटा कॉल डाइवर्ट किए जाते हैं.
- ▶ **सभी अंतरित कॉलें रद्द करें:** ऊपर की सेटिंग्स रद्द करें.

कॉल रोधन

नेटवर्क सेवा आपको अपने फ़ोन पर आवक और जावक कॉलों को प्रतिबंधित करने की सुविधा देती है. इस फ़ंक्शन को अक्षम/सक्षम करने के लिए पासवर्ड PIN2

की आवश्यकता है.

- ▶ **जावक कॉल्स:** सभी जावक कॉल रोकने के लिए.
- ▶ **आवाक कॉल्स:** सभी आवक कॉल रोकने के लिए.
- ▶ **सभी रद्द करें:** रोधन सेटिंग्स रद्द करता है (पासवर्ड PIN2 की आवश्यकता है)
- ▶ **रोधन PW बदलें:** आप यहाँ रोधन पासवर्ड संपादित कर सकते हैं. डिफ़ॉल्ट पासवर्ड के लिए अपने प्रदाता से संपर्क करें. यह मेनू आपको आपका कॉल रोधन पासवर्ड बदलने में सक्षम करता है.

लाइन बदलना

यह फ़ंक्शन आपको लाइन 1 या लाइन 2 चुनकर लाइन बदलने की अनुमति देता है.

नोट

दोनों ही लाइनों का उत्तर दिया जा सकता है भले ही कोई भी लाइन क्यों न चुनी गई हो, हालाँकि यदि आप ऐसी किसी सेवा की सदस्यता नहीं लेते हैं और अपने फ़ोन को लाइन 2 पर सेट करते हैं, तो आप कॉल नहीं कर सकेंगे.

सेटिंग्स

सेटिंग्स

कॉल अनुस्मारक

यह फ़ंक्शन आपको किसी कॉल के दौरान समय अनुस्मारक सेट करने की सुविधा देता है।

1. मुख्य मेनू से सेटिंग्स का चयन करें और ठीक दबाएँ।
2. कॉल का चयन करें और ठीक दबाएँ।
3. कॉल अनुस्मारक का चयन करें और ठीक दबाएँ।
4. अनुस्मारक सूचना की फ़रिक्वेंसी चुनें।
5. पुष्टि करने के लिए ठीक दबाएँ। (स्क्रीन "पूर्ण" को दिखाता है)।

आपका फ़ोन निम्न समय सूचना चयन विकल्पों को प्रदान करता है:

- ▶ बंद: इसका अर्थ है सूचना नहीं देता।
- ▶ एकल: इसका अर्थ एक बार सूचना है।
- ▶ सावधिक: इसका अर्थ है एक निश्चित समय के बीतने पर हर समय सूचना।

नोट

न्यूनतम आवृत्ति समय 30 सेकंड है।

कॉल समय प्रदर्शन

इस फ़ंक्शन से आप कॉल समय दिखाना सक्षम/अक्षम कर सकते हैं।

ऑटो रीडायल

यह फ़ंक्शन आपको स्वतः रीडायल सेट करने की सुविधा देता है।

चालू का चयन करें और आपका फ़ोन एक असफल कॉल प्रयास के बाद कॉल कनेक्ट करने के अधिक से अधिक दस प्रयास करेगा।

बंद यूजर समूह

यह फ़ंक्शन आपको सीमित कॉल समूह सेट करने की सुविधा देता है। केवल विशिष्ट समूह का व्यक्ति ही कॉल कर सकता है या उसकी कॉल ही प्राप्त की जा सकती है।

ब्लूटूथ




Menu 9.5

आपका फ़ोन ब्लूटूथ तकनीक V1.2 के संगत होने के लिए डिज़ाइन की जाती है। ब्लूटूथ तकनीक इलेक्ट्रॉनिक डिवाइसेस के बीच वायरलेस कनेक्शंस सक्षम करने देता है। ब्लूटूथ कनेक्शन स्टीरियो संगीत सुनने, छवियाँ, वीडियो, पाठ और vCard भेजने के लिए उपयोग किया जा सकता है।

ब्लूटूथ तकनीक का उपयोग प्रारंभ करना

ऑपरेशन के पहले आपके ब्लूटूथ कनेक्शन को कॉन्फ़िगर करने की

आवश्यकता होती है। एक बार सेटअप पूर्ण होने पर, निम्न ब्लूटूथ चिह्न स्थिति पट्टी में दिखाई देंगे।

-  : ब्लूटूथ सक्रिय और कनेक्ट होता है।
-  : चालू किंतु उपयोग में नहीं।
-  : स्टीलथ मोड (अन्य डिवाइसेस पर ब्रॉडकास्ट नहीं होता)।

ब्लूटूथ ऑडियो डिवाइस के साथ युग्मित करना

1. मुख्य मेनू से कनेक्टिविटी का चयन करें और ठीक दबाएँ।
2. ब्लूटूथ का चयन करें और ठीक दबाएँ।
3. अपने फ़ोन और डिवाइस जिसे आप पहले कनेक्ट करना चाहते हैं की ब्लूटूथ कनेक्टिविटी चालू/बंद करने के लिए पावर का चयन करें और ठीक दबाएँ।
4. जानकारी ऑडियो डिवाइस दबाएँ। आपका फ़ोन स्वतः डिवाइस खोज लेगा और उससे जुड़ जाएगा।
5. आपके फ़ोन को हेडसेट से जोड़ने के लिए जोड़ें दबाएँ।
6. हेडसेट को विश्वास सूची में जोड़ें और हॉ दबाकर हेडसेट से कनेक्ट करें।

नोट

- ▶ हेडसेट उपयोग करने के पहले, कृपया सुनिश्चित करें कि आपका डिवाइस पूरा चार्ज है।
- ▶ डिवाइस से फ़ोन कनेक्ट होने पर, पाँप-अप सूचना दिखाई देती है।
- ▶ एक बार विश्वास सूची में जोड़ने पर, हेडसेट मेरी डिवाइस सूची में दिखाई देगा। (एकबार मेरी डिवाइस में जोड़ने पर, पुनर्स्थितियाँ आसानी से स्थापित की जा सकती हैं)।
- ▶ सभी सक्रिय डिवाइसेस सक्रिय डिवाइस में प्रबंधित की जाती हैं और डिस्क दबाकर डिस्कनेक्ट की जा सकती हैं।

ब्लूटूथ डिवाइसेस से जोड़ना

1. मुख्य मेनू से, सेटिंग्स का चयन करने के लिए नेविगेशन कुंजियों का उपयोग करें और ठीक दबाएँ।
2. ब्लूटूथ का चयन करें और ठीक दबाएँ।
3. मेरी डिवाइस का चयन करें और विकल्प दबाएँ।
4. नया जोड़ें चुनें। (आपका फ़ोन ब्लूटूथ डिवाइसेस को खोजना प्रारंभ करता है)।

सेटिंग्स

सेटिंग्स

ब्लूटूथ डिवाइसेस से कनेक्ट करना

1. मुख्य मेनू से सेटिंग्स का चयन करें और ठीक दबाएँ.
2. ब्लूटूथ का चयन करें और ठीक दबाएँ.
3. मेरी डिवाइस का चयन करें और कनेक्ट करने के लिए इच्छित ब्लूटूथ डिवाइस चुनें.
4. विकल्प दबाएँ और कनेक्ट करें का चयन करें.
5. ब्लूटूथ डिवाइस कनेक्ट करने के बाद, आपका फोन इच्छित प्रोफाइल कनेक्ट करने के बारे में पूछता है (यह इस पर निर्भर करता है कि आपकी ब्लूटूथ डिवाइस कितनी प्रोफाइल का समर्थन करती है).

आपकी डिवाइस सूची में डिवाइस संपादित करने के लिए

जब आप मेरी डिवाइस में डिवाइस हाइलाइट करते हैं और विकल्प दबाते हैं तो आपका फोन निम्न चयन प्रदान करता है.

- ▶ **कनेक्ट करें:** ब्लूटूथ तकनीक का समर्थन करने वाली डिवाइसेस कनेक्ट करें.
- ▶ **नया जोड़ें:** नई डिवाइसेज खोजता है.

- ▶ **नाम बदलें:** लक्ष्य डिवाइस का नाम बदलें.
- ▶ **हटाएँ:** आपकी विश्वास सूची में चयनित आइटम हटाएँ.
- ▶ **सभी हटाएँ:** आपकी विश्वास सूची में चयनित आइटम हटाएँ.
- ▶ **सेवा सूची:** आपकी विश्वास सूची में जोड़ी गई डिवाइसेस द्वारा समर्थित प्रोफाइल एकसेस करें.

आपके मोबाइल फोन को मोडेम के रूप में उपयोग करने के लिए

आपका फोन नेटवर्क डायल अप करने के लिए मोडेम के रूप में उपयोग किया जा सकता है. यह फंक्शन केवल PC समर्थित ब्लूटूथ तकनीक द्वारा उपयोग किया जा सकता है. अपने सेवा प्रदाता विवरण को जाँचें.

ब्लूटूथ कनेक्टिविटी के उपयोग से डेटा भ्रजन के लिए

1. ब्लूटूथ सक्रिय करें. (पृष्ठ 82 देखें) और भ्रजन के लिए इच्छित ऑब्जेक्ट का चयन करें.
2. विकल्प दबाएँ और अग्नेषित करें का चयन करें
3. ब्लूटूथ के लिए चुनें. (फोन डिवाइसेस की खोज करेगा).

4. इच्छित डिवाइस का चयन करें और भेजें.

ब्लूटूथ कनेक्टिविटी के उपयोग से डेटा प्राप्त करने के लिए

ब्लूटूथ से डेटा प्राप्त होने पर, एक पॉप-अप सूचना दिखाई देगी. यदि आप स्थानांतरण को स्वीकार करना चाहते हैं, तो ठीक दबाएँ. डिफॉल्ट रूप से, सारा डेटा प्राप्त फ़ोल्डर के मेरी सामग्री में सहेजा जाता है.

आप अपने फ़ोल्डर का स्थान बदलने के लिए सेटिंग्स > ब्लूटूथ > सेटिंग > FTP सेटिंग > साझा फ़ोल्डर से वर्तमान फ़ोल्डर का स्थान बदल सकते हैं और सेटिंग्स > ब्लूटूथ > सेटिंग > FTP सेटिंग > पहुँच अधिकार में फ़ोल्डर को पूर्ण नियंत्रण या केवल पढ़ने के लिए रूप में पहुँच अधिकार निर्धारित कर सकते हैं.

PC से डेटा प्राप्त करना

आप अपने फ़ोन द्वारा पीसी से फ़ाइल ब्राउज़ कर सकते हैं और स्थानांतरित कर सकते हैं. आपके पीसी को ब्लूटूथ तकनीक का समर्थन करना आवश्यक है. (अपना पीसी मैनुअल देखें).

1. मुख्य मेनू से, सेटिंग्स का चयन करने के लिए नैविगेशन कुंजियों का उपयोग करें और ठीक दबाएँ.

2. ब्लूटूथ का चयन करें और ठीक दबाएँ.
3. हैंडसेट और पीसी दोनों पर ब्लूटूथ सक्रिय करें. ठीक दबाकर डिवाइस ढूँढें.
4. यदि पीसी उचित रूप से कॉन्फ़िगर किया गया है, तो मेरे डिवाइस में "कनेक्टेड पीसी" दिखाई देता है.
5. विकल्प दबाएँ और कनेक्ट करने के लिए FTP प्रोफ़ाइल का चयन करें.
6. डेटा को अब दोनों डिवाइसेस में व्यवस्थित किया जा सकता है.

स्टीरियो संगीत सुनना

1. मुख्य मेनू से सेटिंग्स का चयन करें और ठीक दबाएँ.
2. ब्लूटूथ का चयन करें और ठीक दबाएँ.
3. मेरे डिवाइस का चयन करें और उस डिवाइस को हाइलाइट करें, जिसे आप कनेक्ट करना चाहते हैं.
4. सेवा सूची का चयन करने और हेडसेट प्रोफ़ाइल को चुनने के लिए विकल्प दबाएँ.
5. आपको अपने हेडसेट द्वारा समर्थित प्रोफ़ाइल्स की सूची दिखाई देगी.
6. A2DP प्रोफ़ाइल का चयन करें, और तब कनेक्ट करने के लिए सॉफ़्ट कुंजी दबाएँ.

सेटिंग्स

नोट

पहले आपके ब्लूटूथ हेडसेट को युग्मित होना आवश्यक है। तब मेरे डिवाइस में इसका सिर्फ चयन करें।

आपकी BT तकनीक सेट करना

आपकी सेटिंग सूची में यह शामिल है:

- ▶ **दृश्यता:** आप अपने फ़ोन को दूसरे डिवाइस द्वारा खोजे जाने पर दृश्यमान या अदृश्य दोनों बना सकते हैं।
- ▶ **मेरे हैंडसेट का नाम बदलें:** अपने उस डिवाइस नाम को बदलें, जैसा वह दूसरे डिवाइस पर दिखाई देता है।
- ▶ **अधिकृत के रूप में सेट करें:** आपके फ़ोन के दूसरे डिवाइस से कनेक्ट किए जाने की अनुमति देने से पहले आपकी स्वीकृति की आवश्यकता होती है।
- ▶ **ऑडियो पथ:** फ़ोन या हेडसेट के बीच ऑडियो पथ को टॉगल करता है।
- ▶ **FTP सेटिंग्स:** आपके फ़ोन के साझा फ़ोल्डर्स और पहुँच विशेषाधिकारों को अनुकूलित करें।

नोट

अपने फ़ोन को अदृश्य मोड में रखना और केवल विश्वसनीय डिवाइसेस से कनेक्ट करना दुर्भावनापूर्ण सॉफ़्टवेयर हमलों से बचने का सबसे सुरक्षित तरीका है।

इसके बारे में

आपको यहाँ अपनी डिवाइस का नाम, BD पता और समर्थित सेवा जानकारी मिल सकती है। आपका फ़ोन HSP (हैंडसेट-फ़्री), HFP (हैंड्स-फ़्री), SPP (सिरिअल पोर्ट), DUN (डायल-अप नेटवर्किंग), OPP, FTP (फ़ाइल ट्रांसफ़र प्रोफ़ाइल), A2DP (एडवांस्ड ऑडियो डिस्ट्रीब्यूशन प्रोफ़ाइल) और AVRCP का समर्थन करता है।

नेटवर्क

Menu 9.6

नेटवर्क का चयन

आपका फ़ोन नेटवर्क कनेक्टिविटी के लिए आपको 3 चयन प्रदान करता है।

- ▶ **नई खोज:** आपके नेटवर्क कनेक्शन को ताज़ा करता है
- ▶ **नेटवर्क चुनें:** नेटवर्कस की सूची दिखाता है। (केवल मैनुअल मोड) इच्छित डिवाइस का चयन करें और भेजें
- ▶ **चयन मोड:** स्वचालित या मैनुअल मोड टॉगल करें।

स्वचालित मोड: फ़ोन स्वचालित रूप से किसी स्थानीय सेल्यूलर नेटवर्क का चयन करता है और कनेक्ट करता है।

मैनुअल मोड: उपलब्ध नेटवर्कस की सूची देता है. (नेटवर्क केवल तभी कनेक्ट होंगे, जब उनका आपके प्रदाता से रोमिंग अनुबंध हो)

प्राथमिक नेटवर्क्स

प्राथमिक नेटवर्क तब उपयोग किया जाता है जब मोड स्वतः पर सेट होता है. प्राथमिक नेटवर्क सूची के स्थान नंबरस खोज प्राथमिकता दिखाते हैं. आपके सेवा प्रदाता का नेटवर्क दिखाई देगा.

यदि आपका प्रदाता बहुत सारे नेटवर्क की पसंद उपलब्ध कराता है, तो आप अपने जीएसएम/जीपीआरएस नेटवर्क का चयन कर सकते हैं. (देश से बाहर यात्रा करने पर अंतर्राष्ट्रीय रोमिंग सेवा के लिए आवेदन करना याद रखें)

आपका फ़ोन निम्न विकल्प प्रदान करता है.:

- ▶ **सूची से जोड़ें:** दुनिया भर के 300 नेटवर्क्स से चयन कर सकते हैं.
- ▶ **नया बनाएँ:** MCC/MNC जानकारी दर्ज करके और प्राथमिकता सेटिंग समायोजित करके नई नेटवर्क सूची बनाता है.
- ▶ **प्राथमिकता बदलें:** आपकी पसंदीदा नेटवर्क सूची में प्राथमिकता सेटिंग्स बदलता है.

▶ **हटाएँ:** चयनित आइटम हटाता है.

जीपीआरएस कनेक्शन

हैंडसेट जीपीटीएस कनेक्शन स्थिति को हमेशा/आवश्यकता होने पर के बीच टॉगल कर सकता है.

सुरक्षा

Menu 9.7

सिम लॉक

यह फ़ंक्शन आपको एक विशिष्ट पिन नंबर द्वारा सिम कार्ड लॉक करने की सुविधा देता है. यह सुविधा आपका फ़ोन खो जाने पर आपके सिम कार्ड का उपयोग रोकने के लिए डिज़ाइन की गई है.

सही PIN कोड देकर आप SIM लॉक स्थिति को चालू/बंद पर स्विच कर सकते हैं.

फोन लॉक

फ़ोन लॉक का स्विच ऑन/ऑफ़ करता है. फ़ोन लॉक सक्षम करने में पासवर्ड की आवश्यकता होती है. (0000 डिफ़ॉल्ट है).

स्वतः कीपैड लॉक

किसी कुंजी के आकस्मिक रूप से दबने को रोकने के लिए यह आपके फ़ोन के कीपैड को अपने आप लॉक करने की

सेटिंग्स

सेटिंग्स

अनुमति देता है।

इस फ़ंक्शन को सेट करने के लिए निम्न चरणों का पालन करें।

1. मुख्य मेनू से सेटिंग्स का चयन करें और ठीक दबाएँ।
2. सुरक्षा का चयन करें और ठीक दबाएँ।
3. स्वतः कीपैड लॉक का चयन करें और ठीक दबाएँ।
4. इच्छित समय अंतराल चुनने के लिए नेविगेशन कुंजियों का उपयोग करें और ठीक दबाएँ।

नोट

अनलॉक करने के लिए पृष्ठ 16 (कीपैड अनलॉक करना) देखें।

सीमित डायल

यदि आपकी सिम इस सुविधा का समर्थन करती है, तो आप प्रतिबंधित कॉल सेटिंग्स टॉगल कर सकते हैं।

रोधित डायल

किसी प्रतिबंधित कॉल के लिए आप मोड को चालू और बंद कर सकते हैं। हालाँकि, आपको यह जाँचना होगा कि आपकी सिम इस फ़ंक्शन का समर्थन करती है या नहीं।

गुमे हुए मोबाइल का ट्रैक

लॉस्ट मोबाइल ट्रैक (LMT) से आपको अपने गुमे हुए फ़ोन को ट्रैक करने की सुविधा मिलती है। जब दूसरा पक्ष आपकी अनुमति के बिना आपको फ़ोन उपयोग करता है, तो ट्रैकिंग सेवा सक्रिय हो जाती है। दूसरे पक्ष की जानकारी के बिना, आपके द्वारा सेट किए गए डिफ़ॉल्ट फ़ोन नंबर पर पाठ संदेश भेजकर आपको याद दिलाया जाता है। आप हमेशा LMT फ़ंक्शन सक्रिय रख सकते हैं और अपनी व्यक्तिगत सेटिंग्स कॉन्फ़िगर कर सकते हैं।

यह फ़ंक्शन सक्रिय करने के लिए:

1. मुख्य मेनू से, सेटिंग्स > सुरक्षा > लॉस्ट मोबाइल ट्रैक चुनें और ठीक दबाएँ।
2. LMT सेट करें चुनें और ठीक दबाएँ।
3. चालू या बंद स्विच करें और ठीक दबाएँ।
4. इस फ़ंक्शन को सक्षम या अक्षम करने के लिए LMT कोड इनपुट करें।

Note

डिफ़ॉल्ट LMT कोड 0000 है। LMT सेटिंग्स कॉन्फ़िगर करने से पहले आपको कोड दर्ज करना होगा।

LMT कोड बदलने के लिए:

1. मुख्य मेनू से, सेटिंग्स > सुरक्षा > लॉस्ट मोबाइल ट्रैक चुनें और ठीक दबाएँ.
2. LMT कोड बदलें चुनें और ठीक दबाएँ.
3. पुराना LMT कोड इनपुट करें और ठीक दबाएँ.
4. नया LMT कोड इनपुट करें और ठीक दबाएँ.
5. नया LMT कोड फिर से दर्ज करें और ठीक दबाएँ.

LMT सेटिंग्स कॉन्फ़िगर करने के लिए:

1. मुख्य मेनू से, सेटिंग्स > सुरक्षा > लॉस्ट मोबाइल ट्रैक चुनें और ठीक दबाएँ.
2. LMT के लिए नंबर चुनें और ठीक दबाएँ.
3. संपादन दबाएँ.
4. LMT कोड इनपुट करें और ठीक दबाएँ.
5. पाठ संदेश भेजे जाने के लिए इच्छित नाम और फ़ोन नंबर संपादित करें.
6. ठीक दबाएँ और फिर अपनी सेटिंग्स सहेजने के लिए हाँ दबाएँ.

पासवर्ड बदलें

- ▶ **PIN:** इससे आपको पिन नंबर बदलने की सुविधा मिलती है.
- ▶ **PIN2:** इससे आपको PIN2 नंबर बदलने की सुविधा मिलती है.
- ▶ **फोन लॉक:** इससे आपको पासवर्ड बदलने की सुविधा मिलती है.

पासवर्ड बदलने पर आपको पुराना पासवर्ड, नया पासवर्ड देने और फिर से पासवर्ड की पुष्टि करने के लिए कहा जाएगा. पुराना पासवर्ड दर्ज करने पर उपलब्ध प्रयासों की संख्या दिखाई जाएगी.

यदि पुराना पासवर्ड सही हो और नया तथा पुष्टि करने वाला पासवर्ड एक जैसा हो, तो आपको PIN1/PIN2 दिखाने वाला पॉप-अप या बदला हुआ फ़ोन कोड दिखाई देगा. अन्यथा आपको यह संकेत देने वाला वृत्ति संदेश मिलेगा कि आपने पुराना गलत पासवर्ड दर्ज किया है और उपलब्ध प्रयास की संख्या को एक से तब तक घटते हुए क्रम में दिखाया जाएगा, जब तक वह 0 नहीं हो जाता. तब आपको उपलब्ध 10 प्रयासों वाला PUK1/PUK2 प्रविष्टि स्क्रीन दिखाई देगा.

सेटिंग्स

सहायता

यदि उपयोगकर्ता सही PUK1/PUK2 कोड देने में विफल रहता है तो फ़ोन को लॉक किया जाएगा. कोड को अनलॉक करने के लिए उपयोगकर्ता को सेवा प्रदाता को कॉल करना होगा.


यदि उपयोगकर्ता सही PUK1/ PUK2 कोड देता है, तो उसे पुराने PIN कोड को अधिलेखित करने के लिए तत्काल नए पासवर्ड के रूप में 4-अंकों वाला PIN कोड इनपुट करने के लिए कहा जाएगा. तब उपलब्ध प्रयासों की संख्या को फिर से 3 पर सेट किया जाएगा.

फैक्टरी सेटिंग्स पुनर्स्थापित करें

Menu 9.8

यह फ़ंक्शन आपको संपूर्ण फ़ोन को इसके फैक्ट्री डिफॉल्ट्स पर रीसेट करने देता है. (पासवर्ड सुरक्षित.)

समस्या निवारण

समस्या	संभावित हल
टेलीफ़ोन चालू नहीं किया जा सकता	कृपया बैटरी निकालें और वापस डालें और तब फ़ोन को चालू करने के लिए  दबाएँ.
बैटरी खाली	बैटरी चार्ज करें. डिस्प्ले में चार्जिंग सूचक देखें.
बैटरी ठीक से चार्ज नहीं होती है या कभी-कभी फ़ोन स्वयं बंद हो जाता है	फ़ोन और बैटरी पर चार्जिंग की सतहों को साफ़ नर्म कपड़े से पोछें.
बैटरी का उपयोग समय कम हो जाता है	यदि बैटरी का समय कम है, तो ऐसा उपयोगकर्ता वातावरण, या अधिक कॉल्स, या कमज़ोर सिग्नल्स के कारण हो सकता है.
चार्जिंग त्रुटि — तापमान सीमा से अधिक है	सुनिश्चित करें कि परिवेशी तापमान ठीक है, कुछ देर प्रतीक्षा करें, और तब पुनः चार्ज करें.
चार्जिंग त्रुटि — गलत चार्जर	केवल मूल LG सहायक सामग्री का उपयोग करें.
चार्जिंग त्रुटि — बैटरी खराब है	बैटरी बदलें.
चार्जिंग त्रुटि — चार्जिंग के समय कोई बैटरी चिह्न नहीं दिखाई देता	बैटरी खाली है या बहुत समय से उपयोग नहीं की गई है. बैटरी चिह्न को स्क्रीन पर दिखाई देने में कुछ समय लग सकता है.
फ़ोन कोड या पासवर्ड भूल गए	डिफ़ॉल्ट फ़ोन कोड "0000" है.
PUK दर्ज करें	पिन कोड लगातार तीन बार गलत दर्ज किया गया है, और फ़ोन अब अवरोधित हो गया है. आपके सेवा प्रदाता द्वारा दिया गया PUK दर्ज करें.
फ़ोन में नेटवर्क नहीं है	नेटवर्क कनेक्शन चला गया है. संभव है कि आप कमज़ोर सिग्नल क्षेत्र में हैं. ले जाएँ और पुनः प्रयास करें. आप ऐसे विकल्प का उपयोग करने का प्रयास कर रहे हैं जिसके लिए आपने अपने सेवा प्रदाता से सदस्यता नहीं ली है. और विवरण के लिए सेवा प्रदाता से संपर्क करें.

समस्या निवारण

समस्या	संभावित हल
आपने एक नंबर दर्ज किया है किंतु उसे डायल नहीं किया गया था	सुनिश्चित करें कि आपने  दबाया है. सुनिश्चित करें कि आप सही नेटवर्क सेवा तक पहुँचे हैं. सुनिश्चित करें कि आपने कोई जाने वाली कॉल रोधन विकल्प नहीं सेट किया है. सुनिश्चित करें कि आपने क्षेत्र कोड दर्ज कर दिया है.
आपका संवाददाता आप तक नहीं पहुँच सकता	सुनिश्चित करें कि आपका फ़ोन चालू है.  को एक सेकंड से अधिक दबाएँ. सुनिश्चित करें कि आप नेटवर्क सेवा का उपयोग कर रहे हैं. सुनिश्चित करें कि आपने कोई आने वाली रोधन विकल्प नहीं सेट किया है.
आपका संवाददाता आपकी आवाज़ नहीं सुन सकता	सुनिश्चित करें कि आपने लाउडस्पीकर बंद कर दिया है. सुनिश्चित करें कि आपने अपना फ़ोन मुँह के पास रखा है. माइक्रोफ़ोन, फ़ोन के नीचे स्थित है.
कॉल की ऑडियो गुणवत्ता खराब है	डिस्प्ले पर सिग्नल क्षमता सूचक  देखें. पट्टियों की संख्या सिग्नल क्षमता दर्शाती है. यदि आप किसी भवन में हैं, तो फ़िडकी के पास आने का प्रयास करें.
संपर्क प्रविष्टि फिर से देखने पर डायल किया गया कोई नंबर नहीं है	नंबर ठीक से संग्रहित किया गया है यह सुनिश्चित करने के लिए संपर्क/खोज सुविधा का उपयोग करें. यदि आवश्यकता हो, तो नंबर फिर से रक्षित करें.
इंटरनेट/WAP का उपयोग नहीं कर सकता	आपकी सदस्यता में डेटा क्षमता शामिल नहीं है. सेवा लागू करने के लिए आपको अपने सेवा प्रदाता से संपर्क करना होगा.
आपके फ़ोन पर MMS/चित्र संदेश का उपयोग नहीं कर सकता	आपकी सदस्यता में डेटा क्षमता शामिल नहीं है. सेवा लागू करने के लिए आपको अपने सेवा प्रदाता से संपर्क करना होगा.
यदि उपरोक्त दिशानिर्देशों से आपकी समस्या हल करने में मदद नहीं मिलती है	आपके मोबाइल फ़ोन का मॉडल नंबर और समस्या का स्पष्ट वर्णन नोट कर लें. मदद के लिए अपने फ़ोन डीलर या LG सेवा केंद्र से संपर्क करें.

आपातकालीन कॉल्स

महत्वपूर्ण

किसी वायरलेस फोन के समान, यह फोन रेडियो सिग्नलस, वायरलेस और लैंडलाइन नेटवर्क्स के साथ ही उपयोगकर्ता द्वारा प्रोग्राम किए गए फ़ंक्शंस के उपयोग से ऑपरेट होता है. इसके कारण, सभी स्थितियों में कनेक्शन्स की गारंटी नहीं दी जा सकती. इसलिए, आपको महत्वपूर्ण संचार (उदाहरणार्थ, मेडिकल आपातकालीन स्थितियाँ) के लिए कभी भी पूर्णतः वायरलेस फोन पर निर्भर नहीं रहना चाहिए.


आपातकालीन कॉल्स सभी वायरलेस फोन से या निश्चित नेटवर्क सेवाओं और/या फोन सुविधाओं के उपयोग में होने पर संभवतः नहीं लगाई जा सकती हैं. स्थानीय सेवा प्रदाता से संपर्क करें.

सहायक उपकरण

आपके मोबाइल फ़ोन के लिए विभिन्न सहायक उपकरण हैं। आप अपनी व्यक्तिगत संप्रेषण आवश्यकताओं के अनुसार इन विकल्पों का चयन कर सकते हैं।

मानक बैटरी

बैटरी विनिर्देश
प्रकार: 3.7V, 750
mAh, लीथियम
ऑयन



वार्ता समय#: 2.2 घन्टे तक
(GSM PL 5)

स्टैंडबाय समय#: 300 घन्टे तक (PG9)

सिम कार्ड, नेटवर्क स्थिति, प्रयोग के तरीके,
सेटिंग व परिवेश के आधार पर प्रचालन के समय
में अंतर आ सकता है

हैंडसेट

इससे हैंड्स फ्री कार्य
करता है।



ट्रैवल एडॉप्टर

इस चार्जर से आप
फ़ोन की बैटरी चार्ज
कर सकते हैं।



डेटा केबल

फ़ोन और पीसी में
डेटा बदलने के लिए
आप अपने फ़ोन को
पीसी से कनेक्ट कर
सकते हैं।



नोट

- ▶ हमेशा असली LG सहायक उपकरणों का उपयोग करें।
- ▶ यह करने में विफल होने से आपकी वारंटी अमान्य हो सकती है।
- ▶ अलग-अलग क्षेत्रों में सहायक उपकरण अलग-अलग हो सकते हैं; कृपया अधिक जानकारी के लिए हमारी क्षेत्रिय सेवा कंपनी या एजेंट से संपर्क करें।

तकनीकी डेटा

सामान्य

उत्पाद नाम : KP199

सिस्टम : GSM 900/ DCS 1800/ PCS 1900

आस-पास का तापमान

अधि : +55°C

न्यून : -10°C

Declaration of Conformity



LG Electronics

Suppliers Details

Name

LG Electronics Inc

Address

LG Twin Tower 20, Yeouido-dong, Yeongdeungpo-gu Seoul, Korea 150-721

Product Details

Product Name

E-GSM 900 / DCS 1800 / PCS 1900 Tri Band Terminal Equipment

Model Name

KP199

Trade Name

LG

C E 0681

Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 v1.3.1 / EN 301 489-07 v1.3.1 / EN 301 489-17 v1.2.1

EN 60950-1 : 2006

EN 50360/EN 50361 : 2001

EN 301 511 V9.0.2

EN 300 328 V1.7.1

Supplementary Information

The conformity to above standards is verified by ETS.

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

European Standard Center
LG Electronics Logistics and Services B.V.
Veluwezoom 15, 1327 AE Almere, The Netherlands
Tel : +31 - 36 - 547 - 8940, Fax : +31 - 36 - 547 - 8794
e-mail : jacob @ lge.com

Name

Seung Hyoun, Ji / Director

Issued Date

18. April. 2008


Signature of representative

English

KP199 User Guide

Some of contents in this manual may differ from your phone depending on the software of the phone or your service provider.



Contents

Welcome	4	Input method	19
Menu map	5	Call functions	21
General information	6	Making a call	21
Battery care	6	Answering or rejecting an incoming call	22
Care and maintenance	6	Call waiting	22
Important safety information	8	Making a conference call	22
Access codes	8	Tips for call options	22
Radio frequency energy	8	Browser	24
Specific Absorption Rate (SAR) information	9	WAP	24
Electronic devices	9	Data account	27
Pacemaker	10	Call history	29
Hearing aids	10	All calls	29
Aircraft	10	Missed calls	29
Potentially explosive atmospheres	10	Dialled calls	29
Driving	11	Received calls	29
Your phone	12	Delete call log	30
Getting Started	13	Call time	30
Installing the SIM card and the battery	13	Call cost	30
Charging the battery	14	Text message counter	31
Switching the phone on and off	14	GPRS counter	31
Function keys	15	Tools	32
Unlocking the keypad	16	Calendar	32
Idle Status	16	To do	33
Using the Menu	17	Alarm	33
		Time teller	34
		World clock	34

Calculator	34	Profiles	69
Unit converter	35	Contacts	72
Health	35	Search	72
STK	36	New contact	73
Multimedia	37	Caller group	73
Games & Apps	37	Speed dial	74
Camera	39	My vCard	75
Image viewer	41	Extra Number	75
Video recorder	42	Settings	75
Video player	43	Settings	77
Music player	44	Time & Date	77
Voice recorder	47	Display	78
Melody composer	48	Phone	79
FM radio	49	Call	80
Schedule FM record	50	Bluetooth	83
Messaging	51	Network	87
Text message	51	Security	87
Multimedia Message	56	Restore factory settings	90
Chat	63	Troubleshooting	91
Voice mail server	64	Emergency calls	93
Broadcast message	65	Accessories	94
My stuff	66	Technical data	95
Phone	66		
Memory Card	66		

Welcome

Thank you for choosing the KP199 cell phone. Read this manual carefully and keep it in a safe place for future reference.

Overview

The KP199 is a versatile, feature-rich and fashionable tool for today's mobile world. The KP199 comes equipped with SMS/ MMS messaging capability, camera, voice recorder, music player, FM radio, chat room, organizer, Bluetooth, GPRS, WAP, and funny games.

Features

- Color LCD screen
- GSM entry-level phone
- Integrated VGA Camera for still pictures and videos
- Multimedia messaging (MMS)
- Java Applications
- Voice recorder
- FM stereo radio
- Bluetooth™

- Downloadable MIDI and MP3 ringing tones, screensavers and games

About this manual

Every effort has been made to ensure that the contents of this manual are correct and up to date. However, no guarantee is made regarding the accuracy of the contents, and the manufacturer reserves the right to make changes without notice.

© 2008 LG Electronics.
All rights reserved.

Menu map

1. Browser

- 1.1. WAP
- 1.2. Data account

2. Call history

- 2.1. All calls
- 2.2. Missed calls
- 2.3. Dialed calls
- 2.4. Received calls
- 2.5. Delete call log
- 2.6. Call time
- 2.7. Call cost
- 2.8. Text message counter
- 2.9. GPRS counter

3. Tools

- 3.1. Calendar
- 3.2. To do
- 3.3. Alarm
- 3.4. Time teller
- 3.5. World clock
- 3.6. Calculator
- 3.7. Unit converter
- 3.8. Health
- 3.9. STK

4. Multimedia

- 4.1. Games & Apps
- 4.2. Camera
- 4.3. Image viewer
- 4.4. Video recorder
- 4.5. Video player
- 4.6. Music player
- 4.7. Voice recorder
- 4.8. Melody composer
- 4.9. FM radio
- 4.0. Schedule FM record

5. Messaging

- 5.1. Text message
- 5.2. Multimedia Message
- 5.3. Chat
- 5.4. Voice mail server
- 5.5. Broadcast Message

6. My stuff

- 6.1. Phone
- 6.2. Memory card

7. Profiles

- 7.1. General
- 7.2. Meeting
- 7.3. Outdoor
- 7.4. Vibrate only
- 7.5. Headset
- 7.6. Silent
- 7.7. Bluetooth

8. Contacts

- 8.1. Search
- 8.2. New contact
- 8.3. Caller group
- 8.4. Speed dial
- 8.5. My vCard
- 8.6. Extra number
- 8.7. Settings

9. Settings

- 9.1. Time & Date
- 9.2. Display
- 9.3. Phone
- 9.4. Call
- 9.5. Bluetooth
- 9.6. Network
- 9.7. Security
- 9.8. Restore factory settings

General information

Battery care

Your phone is powered by a rechargeable battery.

- ▶ The battery can be charged and discharged hundreds of times but it will eventually wear out. When the operating time (talk and standby) is noticeably shorter than normal, you should buy a new battery at the time.
- ▶ Unplug the travel charger when not in use, and don't leave the battery connected to a travel charger for longer than a week, since overcharging may shorten its lifetime.
- ▶ Overcharging may shorten its lifetime, and if left unused, discharge may occur over time.
- ▶ Do not use any charger or battery that is damaged in any way.
- ▶ Use the battery only for its intended purpose.
- ▶ Temperature extremes can affect the ability of your battery to charge.

- ▶ Do not leave the battery in hot or cold places, such as in a car in summer or winter condition.
- ▶ Do not short-circuit the battery. Short-circuiting the terminals may damage the battery or the connecting object.
- ▶ Dispose of batteries according to local regulations. Always recycle. Do not dispose of batteries in a fire.

Care and maintenance

Read this information before using your mobile phone.

Your mobile phone is a highly sophisticated electronic device. When using your phone, battery, travel charger or any accessory, please read this first.

Product Care

- ▶ Keep your mobile phone and all its parts out of young children's reach.

- ▶ Keep your mobile phone dry.
- ▶ Avoid exposing your mobile phone to extreme hot or cold temperatures.
- ▶ Avoid placing your mobile phone close to lit cigarettes, naked flames or any heat source.
- ▶ Do not attempt to disassemble it. Non-expert handling of the device may damage it.
- ▶ Do not drop, knock or shake it. Rough handling can break internal circuit boards.
- ▶ Do not paint your mobile phone as the paint could obstruct the earphone, microphone or any moveable parts and prevent normal use.
- ▶ Treat your mobile phone with care, keep it in a clean and dust free place.
- ▶ Do not use the phone if the antenna is damaged. If a damaged antenna contacts skin, it may cause a light burn. Please contact an LG Authorized Service Center to replace the damaged antenna.
- ▶ Do not touch the antenna unnecessarily when the phone is switched on. Contact with the antenna affects call quality and may cause the phone to operate at a higher power level than needed and shorten talk and standby times.
- ▶ Hold the phone as you would any other telephone. While speaking directly into the microphone, angle the antenna in navigation up and over your shoulder. If the antenna is extendable, it should be extended during the call.

Important safety information

Access codes

PIN code

The Personal Identification Number (PIN code) protects your SIM card against unauthorized use. Your SIM card usually supplies the PIN code.

The password can be obtained from your service provider. If the incorrect PIN code occurred three times, you may need to key in PUK code.

PIN2 code

The PIN2 code may be supplied with the SIM card. Some functions will require PIN2 support, such as Set tariff. The password can be obtained from your service provider.

PUK

The Personal Unlocking Key (PUK code) is required to change a blocked PIN code. The PUK code is required to change a blocked PIN2 code.

The password can be obtained from your service provider. If you key in an incorrect PIN2 code three times in succession, you may need to key in the PUK2 code.

If incorrect PUK code occurred for ten times, then SIM card cannot be used anymore. You might need to contact your service provider for a new card.

Phone code

Phone code protects the phone against unauthorized use. It is not enabled when you buy the phone. You can change the phone code (0000) to any four to eight-digit personal codes.

Radio frequency energy

Your mobile phone is a radio transmitter and receiver. When the phone is turned on, it receives and transmits radio frequency (RF) energy. Depending on the type of mobile phone you possess, it operates on different frequency ranges and employs commonly used modulation techniques. The system handles your call when you are using your phone and it also controls the power level at which your phone transmits.

Specific Absorption Rate (SAR) information

Your phone has been designed to comply with applicable safety requirements for exposure to radio waves. These requirements are based on scientific organizations through periodic and thorough evaluation of scientific studies. These guidelines include safety margins designed to assure the safety of all persons, regardless of age and health.

- ▶ The radio wave exposure guidelines employ a unit of measurement known as the Specific Absorption Rate, or SAR. Tests for SAR are conducted using standardized method with the phone transmitting at this highest certified power level in all used frequency bands.
 - ▶ While there may be differences between the SAR levels of various LG phone models, they are all designed to meet the relevant guidelines for exposure to radio waves.
- ▶ The SAR limit recommended by the international Commission on Non-Ionizing Radiation Protection (ICNIRP), which is 2W/kg averaged over (10) grams of tissue.
 - ▶ This highest SAR value for this model phone tested by ATL for use at the ear/body is [0.930/0.854] W/kg (10g).

SAR data information for residents in countries/regions that have adopted the SAR limit recommended by the Institute of Electrical and Electronics Engineers (IEEE), which is 1.6 W/kg averaged over one (1) gram of tissue.

Electronic devices

Most modern electronic equipment is shielded from RF energy. However, certain electronic equipment may not be shielded against the RF signals from your wireless phone, therefore:

- ▶ Do not use your mobile phone near medical equipment without requesting permission.

Important safety information

Pacemaker

Mobile phones may affect the operation of some implanted cardiac pacemakers and other medically implanted equipment. Pacemaker manufacturers recommend that a minimum separation of 20 cm (6 inches) be maintained between a hand-held wireless phone and a pacemaker to avoid potential interference with the pacemaker. These recommendations are consistent with independent research by the Wireless Technology Research Association.

Persons with pacemakers:

- ▶ Should always keep the phone more than 20 cm (6 inches) from their pacemaker when the phone is switched on.
- ▶ Should not carry the phone in a breast pocket.
- ▶ Should use the ear opposite the pacemaker to minimize the potential for interference.
- ▶ If you have any reason to suspect that interference is taking place, switch off your phone immediately.

Hearing aids

Some hearing aids might be disturbed by mobile phones. In the event of such disturbance, you may want to consult your service provider, or call the customer service line to discuss alternatives.

Aircraft

- ▶ Turn off your mobile phone before boarding any aircraft.
- ▶ Do not use it on the ground without crew permission.

To prevent interference with communication systems, you must not use your mobile phone while the plane is in the air.

Potentially explosive atmospheres

Switch off your phone when in any area with a potentially explosive atmosphere and obey all signs and instructions. It is rare, but your phone or its accessories could generate sparks. Sparks in such areas could cause an explosion or fire resulting in bodily injury or even death. Areas with a potentially

explosive atmosphere are often, but not always, clearly marked. They include fuelling areas, such as petrol station, below deck on boats, fuel or chemical transfer or storage facilities, and areas where the air contains chemicals or particles, such as grain, dust, or metal powders, and any other area where you would normally be advised to turn off your vehicle engine.

Driving

Check the laws and regulations on the use of mobile phones in the areas where you drive. If you are going to use your phone while driving, please:

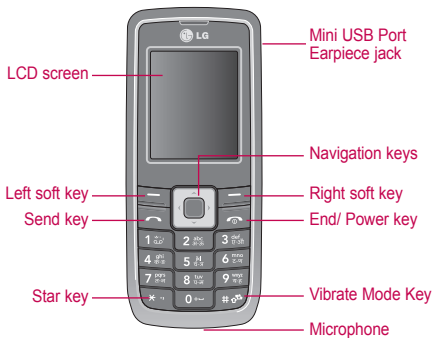
- ▶ Give full attention to driving.
- ▶ Use the “handsfree” setting. (Required by law in many countries).
- ▶ Pull off the road and park before making or answering a call if driving conditions so require.

RF energy may affect some electronic systems in motor vehicles such as the car stereo, safety equipment etc. In addition, some vehicle manufacturers do not allow use of mobile phones, unless the installation is supported by a handsfree kit with an external antenna in their vehicles. Check with your vehicle manufacturer's representative to be sure that your mobile phone will not affect the electronic systems in your vehicle.

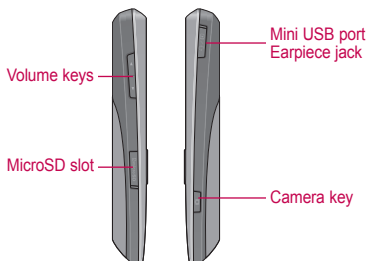
Your phone

Your phone

Front view



Left/right side view



Getting Started

When you register with a service provider, you receive an SIM card (Subscriber Identity Module card). Your phone must have an SIM card to make calls. The SIM card is a computer chip that contains your phone number, phone book information, and service provider information. Handle it with care and do not bend it or expose it to static electricity or dirt. Be sure to power off your phone before you insert the SIM card. The SIM card slot is situated underneath the battery. Follow the below steps to install your SIM card and the battery:

Installing the SIM card and the battery

1. Push the knob to release the back cover.



2. Remove the battery as shown.



3. Insert the SIM card as shown.



4. Insert the battery and then replace the back cover.



Getting Started



Charging the battery

You must fully charge the battery before using your phone for the first time.

1. Connect USB cable to the mini USB port on the left of your phone.
2. Connect the travel charger to an AC wall outlet.




Note

- ▶ When the battery runs low this “” will display and a warning will sound. The phone will switch off automatically shortly after displaying this “” icon.






Switching the phone on and off






- ▶ Press and hold the  key.

Note



- ▶ If the phone shows “Insert SIM” when an SIM card is properly inserted, contact your network operator for a PIN code, key in the PIN code, and press the  left soft key to confirm.
- ▶ You can also use the phone without the SIM card. Dialing and receiving calls are disabled but Multimedia functions, tools, time & date still operate.
- ▶ Do not switch the phone on when wireless phone use is prohibited or when it may cause interference or danger.

Function keys

Key	Function
 Volume keys	<ul style="list-style-type: none"> Press to adjust the volume of your phone during a call.
 Camera key	<ul style="list-style-type: none"> Press the key to take a shot while in the camera mode.
 Left soft key	<ul style="list-style-type: none"> Press to display the menu while in the idle status. Press to perform the function currently displayed in the lower left corner of the screen.
 Right soft key	<ul style="list-style-type: none"> Press to view the contacts while in the idle status. Press to perform the function currently displayed in the lower right corner of the screen.
 Send key	<ul style="list-style-type: none"> Press to make a call. Hold to redial the last number called.

Key	Function
 End/ Power key	<ul style="list-style-type: none"> Press to end a call. Press to power on/ off the phone.
 Navigation keys	<ul style="list-style-type: none"> Press the navigation keys to quickly enter the Write message, Profiles, Shortcuts and contact list modes. See the functions of the navigation keys below.
 Up navigation key	<ul style="list-style-type: none"> Press to enter into the Write message mode.
 Left navigation key	<ul style="list-style-type: none"> Press to enter into the Profiles mode.
 Right navigation key	<ul style="list-style-type: none"> Press to enter into the Shortcuts mode.



Getting Started

Key	Function
 Down navigation key	<ul style="list-style-type: none"> Press to enter into the contact list mode.
 Number keys	<ul style="list-style-type: none"> Press to input numbers or characters.


Unlocking the keypad

The KP199 can be locked automatically after a period of time to prevent an accidental press of any buttons. Refer to the Security setup in the Settings menu to learn how to lock the keypad (see Auto Keypad Lock on page 88).

To unlock the keypad, follow the below steps:

- When the phone is in the idle status, the **Unlock** option appears in the lower right corner of the screen.
- Press the  right soft key followed by the  key to unlock the keypad. The keypad is then unlocked.

Note




Long press  key on this locks the keypad.












Idle Status

When your phone is turned on but not in use, it is in the idle status. In the idle status, the screen displays **Menu** at the lower left corner of the screen and **Contacts** at the lower right corner of the screen.


Press **Menu** to enter the main menu or press **Contacts** to enter contacts list. Indicators also appear on the upper part of the screen.

The indicators in the idle status are as follows:







	Vertical bars indicate the signal strength of the GSM network signal. Five bars indicate that your current position has the best reception.
	Indicates the battery charge level.
	Indicates your phone uses the general profile settings.

	Indicates your phone uses the meeting settings.
	Indicates your phone uses the outdoor settings.
	Indicates your phone uses the vibration settings.
	Indicates your phone uses the silent settings.
	Indicates your phone uses the headset settings.
	Indicates the alarm clock is set.
	Indicates the phone is roaming.
	Indicates new messages.
	Indicates all calls are diverted to another number.
	Indicates the Bluetooth function is enabled on the phone.
	Indicates the WAP function is enabled on the phone.

Using the Menu

In the idle status, press the  left soft key to view the main menu.



Follow below tips to navigate through the menu and menu options.

- ▶ To view the menu, press the  left soft key or the  center key in the idle status.
- ▶ Use the navigation keys to move through the various menus.
- ▶ The lower left corner of the screen displays **OK** for you to enter the menu item currently selected while the lower right corner displays the **Back**. Press the  left soft key (situated under **OK**) to select the menu item. Press the  right soft key (situated under the **Back**) to exit the menu.
- ▶ Each menu item also displays a small number to the left of the **Menu Options** title. You can also press the number corresponding to a menu item, on the keypad to select the item.
- ▶ To quickly exit from the menu, press the **End/ power** key.
- ▶ Use the navigation keys to select the submenu items and options. The right  and  left soft keys can also be used




Getting Started







for selecting various options in submenus.

For example, to view missed calls, do the following:

1. Use the navigation keys to select the **Call History** from the main menu.
2. Press the  left soft key to confirm the selection. The **Call History** submenu opens.
3. Press the  left soft key to select the **Missed Calls** option. A list of missed calls opens.

The following table provides a list of all the main menu items:

	Browser: Enables you to use and set up WAP function.
	Call History: Stores information about calls made, received, and missed.
	Tools: Useful tools and utilities on demand.

	Multimedia: Offers you the multi-functions: games, camera, image viewer, video camera, video player, music player, voice recorder, melody composer, FM radio, scheduled FM recorder. This option provides hours of entertainment.
	Messaging: Gives you access to messages received. Compose and send text (SMS/ MMS) messages and even chat here.
	My stuff: Manages all your files in this menu.
	Profiles: Lets you set up different profiles to adapt to different environmental conditions.
	Contacts: Enables you to manage names and telephone numbers for easy access and caller recognition.
	Settings: Lets you adjust phone settings such as time and date, display, phone, call, security and restore factory settings.

Input method


When you add names to your phone book or send a text message, you need to enter text. Your cell phone has several text entry methods. You can enter letters individually or with predictive text entry, which helps you complete words as you enter them. You can enter letters in upper case, lower case, or both, or insert symbols. Your phone is designed to support English and Hindi.

Basics


To select input method

1. From the main menu, use the navigation keys to select **Messaging** and press **OK**.
2. Select **Text message** and press **OK**.
3. Select Write message and press **OK**. Then you are in the text mode.
4. Press **Options** and select **Input Method**. Then press **OK**.
5. Select a desired input method and press **OK**.


Quick way to change input method

Press the  key to change the input method when you are in the text mode.

To insert a space





You may press the  key to insert spaces when the input methods are T9/ ABC/ Abc/ abc.

Traditional English input

Your phone provides the Multi-tap function when you are in the text mode. In the text mode, you may press the  key twice to display the letter B, and press three times to display the letter C.

The below character tables (English and Hindi) display the characters when you press the keypad with English or Hindi input methods.

Character table (English)

Key	Unshifted Characters	Shifted Characters
	., - ? ! ' @ : # \$ / _ 1	., - ? ! ' @ : # \$ / _ 1
	a b c 2	A B C 2
	d e f 3	D E F 3
	g h i 4	G H I 4


5	jk l5	JKL5
6	mno6	MNO6
7	pqr s7	PQRS7
8	tuv8	TUV8
9	wxyz9	WXYZ9
0	0	0

Character table (Hindi)

Key	Characters
1	~ ` . 1
2	। ि ि ु ं ं अ आ इ ई उ ऊ ऋ ॠ 2
3	^ ˆ ˘ ˙ ˚ ॐ ए ऐ ओ औ ॐ 3
4	क ख ग घ ङ 4 क ख ग
5	च छ ज झ ञ 5 ज
6	ट ठ ड ढ ण 6 ङ ङ
7	त थ द ध न 7 न
8	प फ ब भ म 8 फ
9	य र ल व श ष स ह 9 ळ र ळ य
0	0

Text entry with “T9”

“T9” uses a built-in dictionary to recognize the most commonly used word for every sequence of key presses.

The input method is displayed at the upper right corner of your phone. You can switch your T9 input method by pressing  key (Refer Quick way to change input method on page 19).

Indicator	Function (English Smart mode)
T9 Abc	T9 Smart Abc
T9 abc	T9 Smart abc
T9 ABC	T9 Smart ABC
123	Numeric

Indicator	Function (English mode)
Abc	Multitap Abc
abc	Multitap abc
ABC	Multitap ABC
123	Numeric


Indicator	Function (Hindi Smart mode)
T9अइ	T9 Smart Hindi
123	Numeric

Indicator	Function (Hindi mode)
अअइ	Multitap Hindi
123	Numeric

Call functions

This section gives you information about the calling service your phone supports.



Making a call

1. In the idle status, enter the area code and the phone number.
2. Press the  key.

Note


If you enter the wrong number, press **Clear** to delete the number.

Making a call from the Contacts


1. In the idle status, press the  right soft key to enter **Contacts** mode.
2. Use navigation keys to select **Search** option. You can directly select a name from the contact list or enter the name in the quick search field. Then press the  key to call.

OR



1. Press Menu and choose **Contacts** menu.

2. Use navigation keys to select **Search** option. You can directly select a name from the contact list or enter the name in the quick search field. Then press the  key to call.

OR

1. Press navigation keys down to enter contact list.
2. Use navigation keys to select **Search** option. You can directly select a name from the contact list or enter the name in the quick search field. Then press the  key to call.


Making an international call

1. In the idle status, long press the  key until a + (international prefix character) sign is displayed.
2. Enter the country code, the area code and the phone number.
3. Press the  key to call.


Call functions

Answering or rejecting an incoming call

To answer the incoming call


Press the  key to answer the call when the phone rings.

To reject the incoming call

Press the  key to reject the call when the phone rings.

Call waiting

You can answer another incoming call while you have a call in progress.



1. During a call, press the  left soft key to enter **Option** and select **Answer** to answer the second call. The first call will be on hold automatically.
2. How to activate Call waiting (see Call waiting on page 80).

Making a conference call

You can make conference call while you have multiple calls in progress.

1. Make a call to the first participant as described previously (see

Making a call on page 21).

2. Call the second participant during a call with the first participant.
3. Press the  left soft key and select **Conference**. This joins the first and second calls to the conference.
4. Repeat step 2 and 3 to allow new participants to be connected to the conference call.
5. Press **Options** and select **End all** to end the calls or press the  key to end all calls.

Note

- ▶ Callers can be individually disconnected. You just select a caller press **Options > End Single** during a conference call.
- ▶ Number of parties allowed in a conference is up to 6, including the conference initiator.

Tips for call options

Many functions are available during active calls. Options 1 - 8 (below) are available when a new call is made. Additional options (9-17) are available during a conference call.

1. **Hold:** Put a call on hold.
2. **End:** End a call.
3. **New call:** Make a new call during an active call.
4. **Contacts:** Shortcut to **Contacts** menu.
5. **Text Message:** Shortcut to **Messaging** menu.
6. **Voice Recorder:** Record your conversation during an active call.
7. **Mute:** Set On/ Off to mute the call during the conversation.
8. **DTMF:** Set On / Off for DTMF (Dual Tone Multi-Frequency) tone dialing system.
9. **Retrieve:** Reconnect a holding call.
10. **Retrieve All:** Reconnect all holding call.
11. **Swap:** Switch between calls on hold and active.
12. **Conference:** Make a multi-party conversation.
13. **Transfer:** Transfer a call.
14. **End Single:** End one of the participants in a conference call.
15. **End all:** End a multi-party call.
16. **H-Free/H-Held:** Choose either Hands free or held during a multi-party call.
17. **Split:** Suspend the multi-party call.

Browser [Menu 1]

Services described in the following are supported by your service provider. If you cannot connect to either one of those services, contact your service provider for further information.

WAP

Menu 1.1

Your phone supports Web Browsing. You can obtain various services such as up-to-date news, weather, sports, and other information as well as e-mail and other Internet services. These services are designed and maintained by your WAP service provider.

The WAP service uses Wireless Markup Language (WML) on their WAP pages. You cannot view standard Internet web pages on your phone.


Note

- ▶ To activate your WAP service, you may need to contact your service provider.
- ▶ Do not switch the phone on when wireless phone use is prohibited or when it may cause interference or danger.

Homepage

To access the browser from the standby mode, go to WAP in Service and press Homepage. Once connected, the homepage is displayed. The content depends on the service provider.

To exit the browser

1. In browsing status, press the  key to exit the browsing status.

Google search

You can quickly access Google website.

Bookmarks

You can use this menu to save URL addresses to quickly access your favorite websites.

Your phone also provides you with the following selections.

- ▶ **Goto:** Allows you to connect to a website.
- ▶ **Edit:** Allows you to edit URL addresses.
- ▶ **Send via:** Allows you to send URL addresses via SMS/ MMS.

- ▶ **Delete:** Allows you to delete the selected bookmarks.
- ▶ **Delete all:** Allows you to delete all bookmarks.
- ▶ **Add bookmark:** Allows you to add URL addresses to the bookmark list.

Recent pages

You can view the recent pages you have visited. Press **Goto** to connect to the selected page.

- ▶ **Goto:** Allows you to connect to the URL.
- ▶ **Edit:** Allows you to edit the URL address.
- ▶ **Add bookmark:** Allows you to add the URL address to the bookmark list.
- ▶ **Delete:** Allows you to delete the URL address.
- ▶ **Delete all:** Allows you to delete all recorded URL addresses.

Enter address

You can key in a new URL address and enter the address followed by selecting **Done**. Your phone will connect the URL you just keyed in. After the address is entered, you can select the URL and press **Options** to choose the functions below.

Service Inbox

Your phone is able to receive service messages sent by your service provider. Service messages are notifications of headlines or content, and they may contain the address of a WAP service. You can get updated news or new WAP settings from your service provider.

The received WAP push messages are stored in the service inbox. You can press **Options** to either **Accept** or **Delete** the push messages.

Browser

Settings

GPRS (General Packet Radio Service) is a technology that use for sending and receiving data over the mobile network. The applications that use GPRS are WAP services, SMS and MMS messaging and GPRS dial-up (such as Internet and e-mail). You can set the phone to automatically register to a GPRS network when you switch the phone on.

If your service provider assigns the WAP profiles and configures the settings for you, you can use the GPRS or GSM immediately. If you want to configure the WAP settings manually, you have to contact your network operator or service provider for appropriate settings.

Note

In most cases, you only need to use one of the default profiles to access the Internet. The settings are different from operator to operator. Please consult your operator or service provider for the correct settings and proceed with care. Improper settings will cause the connection to fail.

Edit profile

You can activate and configure WAP profiles stored in yours phone.

To activate a WAP profile, select **Browser > WAP > Settings > Edit profile** to choose a profile in the Select profile list. Then press **Activate profile**.

To configure a WAP profile manually, select **Browser > WAP > Settings > Edit profile** and choose a profile from the Select profile list. Then enter details for the following parameters.

- ▶ **Rename:** Edit the profile name.
- ▶ **Homepage:** Edit the profile address.
- ▶ **Data account:** Select an account type from **GSM data** or **GPRS**.
- ▶ **Connection:** Select **WAP** to set up **IP address** and **Security**. Select **HTTP** to set up **Proxy address** and **Proxy port**.
- ▶ **Username:** Edit your username to access the profile.
- ▶ **Password:** Edit your password to access the profile.

After completing the editing, select **Done** and press **Yes** to save your settings.

Browser options

You can set the timeout value for the browser. (The phone will stop the browser if not connected within the set time). You can also enable or disable images affecting browsing speed in the Show images option.

Service message

You can choose either enable or disable the push message sent by your service provider. You can also change the trust setting or add a new trusted source.

Clear cache

The information or data you have accessed is all stored in the cache of the phone. A cache is a file buffer used to temporarily store data. You can clear the history by selecting this option.

Clear cookies

To alleviate privacy and security concerns, in case of lost or stolen phone, you can clear all cookies that may contain sensitive information.

Trusted certificates

Displays trusted web certificates while browsing and manages your “trust list”.

Data account

Menu 1.2

Default data accounts based on major operators at the time this phone was manufactured are provided.

You can access WAP via **GSM data** or **GPRS**.

- ▶ To get the analogue or ISDN number information, you may need to contact your operator.
- ▶ To get the access point of GPRS, you may need to contact your operator.

Browser

GSM data

1. From the main menu, select **Browser > Data account > GSM data** and press **OK**.
2. Select a GSM account from the Data account list and press **Edit** to enter the details of the account name, number, user name, password, line type, speed, and DNS. You can change your line type to analogue or ISDN. You can also decide your connect speed in 4.8/ 9.6/ 14.4 Kbps.


GPRS

1. From the main menu, select **Browser > Data account > GPRS** and press **OK**.
2. Select an account from the Data account list and press **Edit** to enter the details of the account name, APN, user name, password, and auth type. The auth type can be normal or secure.

Call history [Menu 2]

Your phone saves the call records of missed calls, received calls, dialled calls, length and cost of calls in the **Call history** menu. You can view all the call records when needed. In this menu, your phone also offers the functions: delete, save, edit, send text message and send multimedia message when you select a certain phone number.

Note

- ▶ Once the call list exceeds the memory limitation, the oldest one is deleted.
- ▶ You can press the  key to have a quick review of missed, dialed & received calls.
- ▶ When the SIM card is changed, the call records stored in phone are deleted but the call records stored in the SIM card are not.

All calls Menu 2.1

Your phone allows you to record up to 120 entries of missed, dialled and received calls.

To view all of your call records, from the main menu, select **Call history** > **All calls** and press **OK**.

Missed calls Menu 2.2

Your phone allows you to view the last 40 missed calls.

To view your missed call records, from the main menu, select **Call history** > **Missed calls** and press **OK**.

Dialled calls Menu 2.3

Your phone allows you to view the last 40 outgoing calls.

To view your dialled call records, from the main menu, select **Call history** > **Dialled calls** and press **OK**.

Received calls Menu 2.4

Your phone allows you to view the last 40 received calls.

To view received call records, from the main menu, select **Call history** > **Received calls** and press **OK**.

When you select one of your call entries, your phone displays the call info such as date, time, caller name, phone number, and calling times, and provides the following options.

Call history

- ▶ **Delete:** Delete the entry from the call log.
- ▶ **Dial:** Dial to the entry.
- ▶ **Edit:** Edit the entry and save the entry to SIM card or to the phone.
- ▶ **Send text message:** Send a text message to the entry.
- ▶ **Send multimedia message:** Send a multimedia message to the entry.
- ▶ **Call time** and press **OK**. Your phone displays the following details.
 - ▶ **Last call time:** Displays the duration of your last call.
 - ▶ **Total sent:** Sum of total time you have called out.
 - ▶ **Total received:** Sum of total call time you have received.
 - ▶ **Reset all time:** Press **OK** to reset the time counter to zero.

Delete call log Menu 2.5

Your phone allows you to delete some or all of your call records.

To delete the call records, from the main menu, select **Call history** > **Delete call log** and press **OK**. You can delete the call records from missed calls, dialled calls, and received calls, or even select **Delete all** to remove all your call records.

Call time Menu 2.6

Your phone allows you to view the lengths of calls after making or receiving calls.

To view the lengths of calls, from the main menu, select **Call history**

Call cost Menu 2.7

Your phone allows you to check the cost while making phone calls.

To view the costs of calls, from the main menu, select **Call history** > **Call cost** and press **OK**. Your phone displays the following details.

- ▶ **Last call cost:** Cost of last call made.
- ▶ **Total cost:** Sum of call costs you made so far.
- ▶ **Reset cost:** Clear all costs you made.
- ▶ **Max cost:** Set the max cost allowed.
- ▶ **Price per unit:** Set the unit cost allowed.

Note

You have to enter the PIN2 code before you can set the max cost and unit cost. Entering the wrong PIN2 code three times in succession will lock the code.

Text message counter

Menu 2.8

Your phone allows you to check the number of messages.

To view the number of text messages, from the main menu, select **Call history > Text message counter** and press **OK**. Your phone displays the number of text messages you sent and received.

GPRS counter

Menu 2.9

Your phone allows you to check the data size of GPRS packet you used.

To view the data size of GPRS, from the main menu, select **Call history > GPRS counter** and press **OK**.

Your phone displays the following details.

- ▶ **Last sent:** The size of last data sent.
- ▶ **Last received:** The size of last data received.
- ▶ **All sent:** Sum total of data sent.
- ▶ **All received:** Sum total of data received.
- ▶ **Reset counter:** To reset the counter.

Tools [Menu 3]

Your phone provides useful tools to serve as your personal assistant. You can edit your calendar, arrange tasks to do, set an alarm, and use the gadgets such as time teller, world clock, calculator, unit converter, and health manager.

Calendar

Menu 3.1

This function allows you to keep track of your schedule and tasks saved in the calendar. You can use the templates stored in the phone when editing a note. You can also set a reminder alarm.

Follow the steps to make a note and reminder in the calendar first time:

1. From the main menu, select **Tools > Calendar** and press **OK**.
2. Highlight a date you want to insert a note and reminder and press **Add**.
3. Edit the date, start time, end time, note, alarm, and repeat settings.
4. Press **Done** and then **Yes** to save your change.

You can enable an alarm before 5/ 15/ 30 mins, or disable the alarm, and set a reminder to repeat once, everyday, days, weekly, or monthly.

Follow the steps to view or edit a note and reminder in a specified date:

1. From the main menu, select **Tools > Calendar** and press **OK**.
2. Highlight a date you want to view or edit a note and reminder and press **Options**.
3. Select **View tasks** and press **OK**.
4. Select a note and reminder and press **Options**.
5. Select an action and press **OK**.

You can view, add, edit, delete a task, or delete all tasks on the specified day, and even send a task via text message, multimedia message, Bluetooth, or just save the file in your phone.

Follow the steps to add a note or reminder in a specified date:

1. From the main menu, select **Tools > Calendar** and press **OK**.

2. Highlight a date you want to add a note and reminder and press **Options**.
3. Select **Add task** and press **OK**.
4. Edit the date, start time, end time, note, alarm, and repeat settings.
5. Press **Done** and then **Yes** to save your change.

Follow the steps to jump to a desired date:

1. From the main menu, select **Tools > Calendar > Options > Jump** to date and press **OK**.
2. Key in a specified date in the format dd/mm/yyyy you want to move and press **OK**.

Note

You can press number 1 and number 3 keys to go to previous and next year. You can also press number 7 and number 9 keys to go to previous and next month.

To do

Menu 3.2

This function lists all of the tasks added from the Calendar option. From the options under this feature, you can also view, add, edit, delete a task, or delete all tasks, and send a task via text message, multimedia message, Bluetooth, or just save the file in your phone. Follow the steps to manage To do:

1. From the main menu, select **Tools > To do** and press **OK**.
2. Select a task from the task list and press **Options**.
3. Select an action and press **OK**.

Then you can manage To do.

Alarm

Menu 3.3

This function allows you to set an alarm to ring at a specified time. The alarm clock works even when the phone is switched off.

Follow the steps to set an alarm:

1. From the main menu, select **Tools > Alarm** and press **OK**.
2. Select an alarm and press **Edit**.

Tools

3. Set up values in the Edit alarm screen.
4. Press **Done** and then **Yes** to save your change.

You can set an alarm to repeat once, everyday, days, or hourly, and change to your desired ringing tone or FM radio.

Time teller

Menu 3.4

This function tells you the current time. Select **Tools > Time teller** to enable or disable the time teller, and then press **OK** to confirm. When you enable this function, you can listen to the time hourly.

Note

The voice time teller is set to 12-hour time format (AM/PM).

World clock

Menu 3.5

This function shows you current time and date in major cities around the world.

You can select a city simply by pressing the navigation keys left or right. When the cross points out a certain city, the screen shows its local time and date. You can also press **Options** to turn the **Daylight saving time for foreign city** on or off, and select **Set as home city** to save as your home city.

Calculator

Menu 3.6

The calculator applies simple calculator functions such as addition, subtraction, multiplications and division.

To use the calculator, from the main menu, select **Tools > Calculator** and press **OK**. After entering the values, press the left soft key to get the result, and the right soft key to clear.

Your phone provides the following commands:

- ▶ Up navigation key:
+ (Addition)
- ▶ Down navigation key:
- (Subtraction)

- ▶ Left navigation key: x (Multiplication)
- ▶ Right navigation key: / (Division)
- ▶ Numeric # key: . (Point)
- ▶ Numeric * key: - (Negative)

Unit converter Menu 3.7

This function helps you to convert weight, length, and currency from one unit to another. You can convert between different weight like kg., pound, and ounce. You can make conversion between different length like cm, inch, km, mile, meter, yard, and foot. Input a currency rate, you can also convert between local currency and foreign currency.

Health Menu 3.8

This function helps you to understand your health condition. There are two features in the health option, which are BMI and Menstrual.

BMI (Body Mass Index)

This feature helps to calculate your body fat in relation to your height and weight.

Follow the steps to calculate your BMI value:

1. From the main menu, select **Tools > Health > BMI** and press **OK**.
2. Select your gender by pressing the navigation keys left or right.
3. Input your height in centimeters and weight in kilos by using the numeric keys and press **OK**.

The BMI result displays on your screen immediately. BMI values which under 18 is thin, 18 to 23 is normal, and over 23 is fat.

Menstrual

This feature helps to calculate a woman's menstrual cycle and provide the following:

- ▶ Probability of becoming pregnant on the current date.

Tools

- ▶ Period during which it is possible to become pregnant.
- ▶ Date of next period.

Follow the steps to check the menstrual cycle.

1. From the main menu, select **Tools > Health > Menstrual** and press **OK**.
2. Key in a start date of the last menses in the format dd/mm/yyyy.
3. Enter the average length (values between 14 to 99) of the menstrual cycle and press **OK**.
4. Highlight a date press **Options** to display the probability of pregnancy.
5. Press **OK** to leave.

Note

The result may not fit to your physical condition. This is only a reference!

STK

Menu 3.9

In addition to the functions available in the phone, your service provider may offer additional applications such as weather or stock market information via the SIM card.

To set the STK service

In Tools menu, choose STK, press OK to connect the service.

Note

- ▶ For availability, you need to register for the services from your service provider.
- ▶ Accessing these services may involve sending an SMS for which you may be charged.

Multimedia [Menu 4]

Games & Apps Menu 4.1

The KP199 offers you extensive multimedia functionality, which provides you with hours of entertainment. There are two creative build-in games, Let's have Fruit and The Bomber.

Games

Let's have Fruit and The Bomber are bundled with your phone and can be played without additional downloads.

Follow the steps to play a game:

1. From the main menu, select **Multimedia > Games & Apps > Games** and press **OK**.
2. Select a game you want to play and press **OK**.
3. Select **Game** help to learn playing rules.
4. Select **Start game** to start playing the game.

To adjust the game setting, from the main menu, select **Multimedia > Games & Apps > Games > Game settings** and press **OK**: Then you can turn on or off the BGM

(background music), sound effect, and game vibration.

Applications

The KP199 is designed to support Java applications. There are two default Java games in the phone, and you are allowed to download and install more Java games or applications.

Before playing a Java game, you must install a MIDlet suite to execute Java games. Your handset provider has integrated the Java MIDlet as default in the KP199 and offers two methods of installation: installing a MIDlet via WAP and installing a MIDlet locally on a device via HTTP.

After installing a MIDlet, you can start to play the two build-in java games. Or you can also go to a WAP site (see WAP on page 24) to download more Java games and save the downloaded Java files to My stuff by a USB cable. The saving progress is same as adding music tracks to your phone. (See To add music tracks to your phone on page 47).

Multimedia

Note

JVM only reads files with .jad or .jar extensions.

Follow the steps to play a Java game.

1. From the main menu, select the **Multimedia > Games & Apps > Applications** and press **OK**.
2. Choose a Java game you want to play and press **Options**.
3. Select **Launch** and press **OK** to start playing

To manage your applications, from the main menu, select **Multimedia > Games & Apps > Applications** and select an application by pressing **Options**. There are functions for you to use.

- ▶ **Launch:** Launches the java game or application you have selected.
- ▶ **Settings:** Defines the permission level when using Java applications. Permission levels are " Prompt at first", "Allow", "Never", and "Prompt always".

You can configure the following seven settings of permission:

- **Network access:** Allows to making a data connection via networks.
- **Auto invocation:** Allows to automatically starting a MIDlet, for example, by push registration.
- **Messaging:** Allows to sending or receive messages like SMS.
- **Multimedia:** Allows to recording images, audio, video, and so on.
- **Read user data:** Allows to reading user data like phone book or calendar entries.
- **Write user data:** Allows to writing user data.
- **Local connectivity:** Allows you to connect via local ports like Bluetooth.
- ▶ **Information:** Access information about java games and applications including name of application, memory size, application version, name of vender, and authorized source.

Note

- ▶ Depend on different installing methods of Java MIDlet, the options will be different from one to another. If there is no MIDlet suit installed, the empty pop up window will be displayed.
- ▶ Default java games cannot be deleted.

Settings

You can select **Multimedia > Games & Apps > Settings** for more information.

- ▶ **Network profiles:** Allows you to use GPRS function. (Same as the Browse function. See Browse on page 24.)
- 2. **Memory status:** Indicates free memory and heap size.
- 3. **Information:** Provides information on Java, CLDC and MIDP versions.

Camera**Menu 4.2**

You can take photos with the built in camera and adjust it settings to suit your needs. Your phone supports

horizontal OSD type operation and only supports vertical 128x160 image sizes.

The camera lens is on the back of the phone, and the phone's display works as a viewfinder. If there's not enough memory for the camera function, you need to a) Delete old photos to free up space b) Save photos to a memory card.

Your video camera settings are displayed on the top of the phone screen in preview mode.

Note

Do not use this feature when it violates local laws.



To take a picture

1. From the main menu, select **Multimedia** and press **OK**.
2. Select **Camera** and press **OK**. You are now in Preview mode.
3. Press **Options** to personalize your camera settings.
4. Use your lens to focus on an object and volume keys to zoom in and out.

Multimedia

5. Press the  key or the  center key to take a picture.

Note








- ▶ The photo is saved in JPEG format and saved in the **Photo** folder of **My stuff**. You can also browse pictures in **Album mode**.
- ▶ Short press the  key to auto focus the object; hold the  key to capture take a picture.




To setup the camera

1. From the main menu, select **Multimedia** and press **OK**.
2. Select **Camera** and press **OK**.
3. Press **Options**. The option bar is displayed on the bottom of screen.
4. Use the navigation key up/ down to select the different options or to adjust the settings of the option bar displayed on the phone screen.

Your phone provides the following selections when you select **Multimedia > Camera > Options** from the main menu.

The table below defines the camera setting icons.

	Go to video camera? * You can jump to video camera mode by pressing OK
	Go to album? You can review pictures you have taken by pressing OK
	Image size * 128x160, 160x128, 320x240, 640x480
Nor	Image quality Normal / Low / High
	Timer * Time Off / 5 secs / 10 secs / 15 secs.
	Storage (Only when external memory is inserted) * • Save to Phone • Save to Memory card
	Multi-shot* 1 Shot / 3 Shots / 5 Shots / 9 Shots
	Effect off Normal/ Grayscale/ Sepia/ Sepia Blue/ Sepia Green/ Color Invert/ Gray Invert/ Blackboard/ Whiteboard/ Copper Carving/ Blue Carving/ Embossment/ Contrast/ Sketch

Auto	White balance Auto WB/ Daylight/ Tungsten/ Fluorescent/ Cloud/ Incandescence
	EV * EV-4 / EV-3 / EV-2 / EV-1 / EV 0 / EV+1 / EV+2 / EV+3 / EV+4
Auto	Scene mode Auto/ Night
50Hz	Banding 50 / 60 Hz
	Shutter sound Sound Off / Sound 1/ Sound 2/ Sound 3
	Restore settings Restores factory defaults

* Display at the Camera mode.

Image viewer Menu 4.3

All images from EMS, MMS, WAP and camera can be reviewed from the **Image viewer** mode. They are stored in either the phone or memory card. You can toggle between **List style** or **Matrix style** when viewing images.

Your phone provides the following selections when you select **Multimedia > Image viewer > Options** from the main menu:

- ▶ **View:** View pictures saved in **My stuff**.
- ▶ **Browse style:** Select the style when browsing pictures. Your phone offers the **List style** and **Matrix style** to view your pictures.
- ▶ **Forward:** Forwards your pictures as wallpaper, a screen saver, power on/off display, or contact ID, and you can also share it via MMS.
- ▶ **Rename:** Rename the file name.
- ▶ **Delete:** Deletes pictures in **My stuff**.
- ▶ **Multi delete:** Deletes more images at a time.
- ▶ **Sort by:** Sorts your photos by name, type, time, or size.
- ▶ **Storage:** Choose storage destination (phone or memory card).

Multimedia

Note

The maximum default size for sending a file via MMS is 300KB. (Varies according to service provider)

To view the pictures

1. From the main menu, select **Multimedia** and press **OK**.
2. Select **Image viewer** and press **OK**. Pictures are then displayed on the phone screen.
3. Press navigation keys left/ right to browse your pictures saved in your phone/ memory card.
4. Select a picture and press the center key to zoom in/out. Then press the  right soft key to go back to original view.

Note



If you use center key  to zoom, press the  right soft key to return to original state.

Image forward



Your pictures saved in your phone/ memory can be set as wallpaper, a screen saver, power on/ off display, contact, multimedia message and Bluetooth. Follow the below steps to set this function.

1. From the main menu, use the navigation keys to select **Multimedia** menu and press **OK**.
2. Select **Image viewer** and press **Options**. The Pictures are then displayed on the phone screen.
3. Press **Forward** and select **To wallpaper/ To screen saver / To power on display/ To power off display/ To contact/ To multimedia message/ To bluetooth**. Then forward the option you select.

Video recorder Menu 4.4

You can record a video clip through the build-in camera. This function also enables audio recordings. See the further details in the following descriptions.




To shoot a video clip

1. From the main menu, select **Multimedia** and press **OK**.
2. Select **Video recorder** and press **OK**.
3. Press **Options** to personalize your camera settings.
4. Press the  camera key to record a video clip and press the  right soft key to stop recording the video clip.
5. You may review your video clips from the **Video player** mode.

Note

- ▶ The video clip is saved as Mp4 format and saved in the **Video** folder of **My stuff**. You can also listen to the audio clips from the **Album** or **Video player** mode (see Video Player on page 43).
- ▶ You can also jump to the camera function via the camera key.
- ▶ View table below for function keys in **Video record** mode.

Keys definition in recording mode


	Left soft key Pause a video record.
	Right soft key Stop recording a video clip
	Camera key Record a video clip. Pause video. Resume video.

Video player

Menu 4.5

This folder stores videos saved from your phone or downloaded from your PC. This phone supports .3GP and .MP4 format with 176x144 video size.

To play the video clip

1. From the main menu, select **Multimedia** menu and choose **Video player**.
2. Select the file you wish to play.
3. After selecting a video clip, press **Option** and **Play**.
4. Press the volume keys up/ down to adjust the volume and press the  center key to stop playing the video clip.

Multimedia

Your phone provides the following selections when you select **Multimedia > Camera > Video player > Options** from the main menu:

- ▶ **Play:** Plays and views video content.
- ▶ **Forward:** Allow you to forward the video to screen saver, power on display or power off display. You can also forward the video clip to contacts or new contact or share via MMS or Bluetooth.
- ▶ **Rename:** Renames the video
- ▶ **Delete:** Deletes the video stored in **My stuff**.
- ▶ **Multi delete:** Deletes more videos at a time.
- ▶ **Sort by:** Sorts the video clips by name, type, time or size.
- ▶ **Storage:** Checks available memory. Can play/save a video from either the phone or memory card.

Video clip forward

Your pictures saved in your phone/ memory can be set as a screen saver, power on/ off display, contact, multimedia message and Bluetooth. Follow the below steps to set this function.

1. From the main menu, select **Multimedia > Camera** and choose **Video player**.
2. The following steps are the same as Image viewer. (See Image Viewer on page 41.)

Music player

Menu 4.6

You may access the music player from the main menu and download the music content via USB or other connection. Music tracks must be saved in the Music folder in My stuff in order to be automatically detected and added to the default play list. You may listen to the music by headset or loudspeaker. The user friendly interface gives you complete control of your audio.

Note

You can make or answer a call while using the audio player. During a call, the playback is paused.



Play the music

Read this section to learn how to play music from your phone.





To play music

1. From the main menu, select **Multimedia** menu and choose **Music player** menu and press **OK**. The play list automatically refreshes on the phone screen.
2. Select a desired music track and press the **Options** and select **Play** to play the music track.

OR

1. From the main menu, press the  key on the keypad to jump to the **Music player** menu. The play list automatically refreshes on the phone screen.
2. Select a desired music track and press the  center key to play the music track.

The following table displays the functions of the navigations keys.

Navigation and Center Keys	Functions
	▶ Play / Pause music
	■ Stop
	▶▶ Skip to next tracks
	◀◀ Skip to previous tracks

Note

You can use the volume keys to increase or decrease the Volume.

Your music database is detected automatically and is added into the default play list if the "**List of Auto Gen**" is set to be on. More **List Auto Gen** information is explained in **Settings**.

Note

Your mobile phone is designed to be able to play the music during flights. You have to go to **Settings > Phone > Flight mode** to change your setting for flight security concerns (see Flight Mode on 80).

Multimedia

To configure settings

In the **Music player** menu, your phone provides the following selections when you select **Play list > Options**.

- ▶ **Play:** Allows you to play the music immediately.
- ▶ **Detail:** Show the file name, channel, quality, size, time, title, artist and album of the selected music track.
- ▶ **Add To Rings:** Allows you to add the selected music track as a ring tone.
- ▶ **Add:** Adds selected audio to your play list.
- ▶ **Refresh list:** Refreshes the file list.
- ▶ **Remove:** Removes the selected music tracks from play list
- ▶ **Remove all:** Removes all music tracks in a refreshed play list. (Following name changes or track removal).
- ▶ **Settings:** Adjusts settings as follows.

Note

- ▶ **List Auto Gen** function in **Settings** is designed to detect the play list from the **My music** folder. If you rename this folder, it WILL NOT be detected by your phone and a new **My music** folder will be created in **My stuff**.
- ▶ There are 8 kinds of equalizer presets, including **Normal, Bass, Dance, Classical, Treble, Party, Pop** and **Rock**. You can personalize your music player with these presets.
- ▶ If all user definable rings are already defined, the system may pop up "List full". If the selected title is in the ring list, the system may pop up "Duplicated".

To add the favorite music to rings

1. From the main menu, select **Multimedia > Music player** menu and press **OK**. The play list automatically refreshes on the phone screen.

2. Select a desired music track and press **Options**.
3. Select **Add To Rings** and press **OK**.

To add music tracks to your phone

You can add, remove and edit the music tracks in your phone. Use the USB cable to connect your phone and the PC or laptop. After connecting, the phone screen shows the two following options.

- ▶ **Mass Storage:** In **Mass Storage** mode, you can add, edit and remove music on your handset via a PC or laptop.

Select the **Mass Storage** and press **OK**. The phone screen displays a "Done" message. Then you can edit the music or images on a PC or laptop.

- ▶ **COM Port:** To be used as modem.

Voice recorder Menu 4.7

Voice recorder is a simple sound recording tool provides functionalities for you to manage voice files.

To start recording

1. From the main menu, select **Multimedia** and press **OK**.
2. Select **Voice recorder** and press **OK**.
3. Press **Options** and select **Record**.
4. Press **OK** to start recording.

Note

- ▶ During a recording, you may pause or stop the voice recording anytime by pressing soft keys.
- ▶ After recording, the file is saved as AMR and WAV formats.

Your phone provides the following selections when you select **Multimedia > Voice recorder > Options**.

- ▶ **Record:** Records the sound of a phone call or surroundings.
- ▶ **Play:** Plays the recorded sound.
- ▶ **Append:** Adds additional recording to an existing file.
- ▶ **Rename:** Renames a file.
- ▶ **Delete:** Deletes files saved in "voice recorder".

Multimedia

- ▶ **Delete all:** Deletes all files saved in "voice."
- ▶ **Settings:** Allows you to choose your storage and file format.
- ▶ **Forward:** Forwards a file to user profile or share via MMS or Bluetooth.

Melody composer Menu 4.8

This function allows you to compose a ring signal or melody.

To start composing

1. From the main menu, select **Multimedia** and press **OK**.
2. Select **Melody composer** and press **OK**.
3. Select **Add** and press the keypad to start composing. (See the Key definition in melody composer mode on page 48.)
4. Press **Options** to save your melody.










Note






- ▶ The melody you composed is saved in IMY format.

While composing a melody, your phone provides the following selections to personalize the melody.

- ▶ **Play:** Allows you to listen to the melody you have made.
- ▶ **Play speed:** Allows you to adjust the three different play speeds.
- ▶ **Select instrument:** Allows you to select your desired instrument.
- ▶ **Save:** Saves the melody.

Key definition in melody composer mode

Keys	Functions and Descriptions
	Press the 1 key to play Do.
	Press the 2 key to play Re.
	Press the 3 key to play Mi.
	Press the 4 key to play Fa.
	Press the 5 key to play So.
	Press the 6 key to play La.
	Press the 7 key to play Ti.
	Press the 8 key to play Vibration note.
	Press the 9 key to play Backlight/LED note.

	Press the 0 key to play Rest.
	Press the # key to toggle sharp, normal or flat notes.
	Press the * key to change the beat length of current musical note or to change a note between backlight and LED.
	Press the navigation keys down to lower one octave (Can disable vibration, backlight and LED).
	Press the volume keys to change the instrument.

To edit your melodies

Your phone provides the following options.

- ▶ **Play:** Listen to the melody you have made.
- ▶ **Edit:** Edit the selected melody.
- ▶ **Add:** Add more ring tones to selected melody.
- ▶ **Rename:** Rename file.
- ▶ **Delete:** Delete file.
- ▶ **Delete All Files:** Delete all content in this folder.

- ▶ **Forward:** Forward melody to user profile or friends via EMS or MMS.

FM radio Menu 4.9

This feature allows you to listen to your favourite radio station anytime.

Your phone provides the following selections for your option:

- ▶ **Channel list:** Bookmark up to 9 radio stations by entering the channel name and frequency.
- ▶ **Manual input:** Key in the radio station frequency manually.
- ▶ **Preset auto search:** Auto search stations without pressing forward or backward repeatedly.
- ▶ **Settings:** Change the background play, the skin of the FM radio, the file format and storage settings. You can also get sounds out of loudspeaker. Sounds can be recorded in AMR or Wav formats.
- ▶ **Record:** Record your favorite radio programs.
- ▶ **Append:** Resumes a previously recorded file.

Multimedia

- ▶ **File list:** Browse and listen to recorded radio.

Note

You have to plug-in the earphone in order to use the FM radio.

Schedule FM record Menu 4.0

This phone allows you to pre-schedule FM radio recordings. You can schedule up to four recordings at a time. The options include: turn on/off recording, setup pre-scheduled one-time or repeat (Daily/Weekly/Monthly) recordings. Also includes an option to manually input file and storage settings.

Note

You must inset headset as the antenna when pre-scheduling a radio channel.

Messaging [Menu 5]

Text message Menu 5.1

Your phone includes voice mail, notification messages and text messages. Voice mail and short message service (SMS) are network services. Your phone also allows you to send and receive text messages contain pictures or melodies. A message with pictures is made up of several text messages. Therefore, sending a message with pictures will cost more than a single text only message.




Write message

To write a message

1. From the main menu, select **Messaging** and press **OK**.
2. Select **Text message** and press **OK**.
3. Choose **Write message** and press **OK** to write message.
4. You can also personalize your message with various special effects by selecting following options:
 - ▶ **Use template:** Insert default template for quick writing.

- ▶ **Insert object:** Insert picture, animation, melody and sound in your text message.
- ▶ **Format text:** Choose text size, style, alignment or start with new paragraph.
- ▶ **Insert contacts:** Insert a contact form your contact list.
- ▶ **Insert bookmark:** Insert a bookmark from your bookmark list.
- ▶ **Input method:** Choose desired input method.

Note

- ▶ To jump to Message function, you can press the  navigation keys up in the idle status.
- ▶ To key in the content, please refer to Input method on page 19.
- ▶ You can use the  key to enter symbols and use the  key to switch the input methods and use the navigation keys to shift the cursor.

To send a message manually

1. From the main menu, select **Messaging** and press **OK**.

Messaging

2. Select **Text message** and press **OK**.
3. Choose **Write Message**, and press **OK** to start writing message. (Please see “To write a message” on page 51.)
4. After finishing the writing, select the **Options** and select **Send to**.
5. Enter the phone number you want to send.
6. Press **Options** and select **Send to** send message.
4. After finishing the writing, select the **Options** and select **Send to**.
5. Enter the phone number you want to send.
6. Press **Options** and select **Send to** send message.
7. Select a desired contact to send the message and press **OK**.

Note

To use picture message function, your network operator or service provider support is necessary. Only phones that contain this function can receive and display picture messages.

To send a message to someone on your contact list

1. From the main menu, select **Messaging** and press **OK**.
2. Select **Text message** and press **OK**.
3. Choose **Write Message**, and press **OK** to start writing message. (Please see “To write a message” on page 51.)
4. After finishing the writing, select the **Options** and select **Send to**.
5. Enter the phone number you want to send.
6. Press **Options** and select **Contacts**. Then you enter the contact list mode.
7. Select a desired contact to send the message and press **OK**.

Your phone provides the following selections when you select **Messaging > Text message > Write message > Options > Send to > Options**:


- ▶ **Send**: Allows you to send the message
- ▶ **Contacts**: Allows you to insert contacts in To field.
- ▶ **Send by group**: Allows you to send many contacts at once. Successful sent messages are stored in outbox.
- ▶ **Save to drafts**: Allows you to save the message you wrote to the drafts in the phone.

To use a template

1. From the main menu, use the navigation keys up/ down to select **Messaging** and press **OK**.
2. Select **Text message** and press **OK**.
3. Select **Write Message** and press **OK**.
4. Select **Use Template** and press **OK**.
5. Use the navigation keys up/ down to select a desired template and press **Options**.
6. Select **OK** and enter the template you want to send.
7. Press **Options** and select **Send to** and enter the phone number you want to send.
8. Press **OK** to send message.

Inbox



To read messages

When you have received a message, the indicator  appears on the display. If your inbox is full, there will be a pop-up window to remind you to delete some of your old messages. Otherwise, your

message will be saved in the phone instead of the SIM card.

1. From the main menu, use the navigation keys up/ down to select **Messaging** and press **OK**.
2. Select **Text message** and press **OK**.
3. Select **Inbox** and press **OK**. The message list will display on the phone screen.
4. Choose a desired message by pressing **Options** and select **View** to read the content.

Note

- ▶ The message you have received will be saved in the SIM card as default setting.
- ▶ When you see the  indicator in your inbox, the indicator means the message has not been read. When you see the  indicator in your inbox the indicator means the message has been read.

Your phone provides the following selections when you select **Messaging > Text message > Inbox > Options**.

Messaging

- ▶ **View:** Read the message you received.
- ▶ **Reply:** Reply to the message you received.
- ▶ **Delete:** Delete the message you received.
- ▶ **Forward:** Forward the message you received.
- ▶ **Save objects:** Save objects within a received message.
- ▶ **Save number:** Save the number in your contacts.
- ▶ **Connect URL:** Connect to a URL within a received message.
- ▶ **Copy:** Copy the selected text message to your phone/ SIM.
- ▶ **Move:** Move the selected text message to your phone/ SIM.
- ▶ **Chat:** Chat with the sender.
- ▶ **View:** View the draft.
- ▶ **Send:** Send the draft.
- ▶ **Edit:** Edit a saved draft.
- ▶ **Delete:** Delete the draft in progress.
- ▶ **Copy:** Copy draft to phone. This option is available only when the highlighted draft is stored in the SIM card.
- ▶ **Move:** Move draft to phone. This option is available only when the highlighted draft is stored in the SIM card.
- ▶ **Save number:** Saves the numbers embedded in the message.
- ▶ **Connect URL:** Saves a URL to your phone.

Drafts

You can store your message in your **Drafts** category and work on it later. Your phone provides the following selections when you select **Messaging > Text message > Drafts > Options:**

Outbox

After sending out the message, the message is saved in the outbox folder. You can read outbox messages by selecting **Messaging > Text message > Outbox > Options:**

- ▶ **View:** Read the message.

- ▶ **Send:** Sends the message without editing.
- ▶ **Edit:** allows for editing before sending a message.
- ▶ **Delete:** Delete the message.
- ▶ **Copy:** Allow you to copy the message to phone. This option is available only when the highlighted message is stored in the SIM card.
- ▶ **Move:** Moves messages to the phone. Only available when the highlighted message is stored in the SIM card.
- ▶ **Save number:** Save the numbers embedded in the message.
- ▶ **Connect URL:** Use the URL embedded in the message.

Templates

There are several default templates in your phone for quick message writing. You can also customize or delete these templates to suite your needs.

To edit your template

1. From the main menu, use the navigation keys up/ down to select **Messaging** and press **OK**.
2. Select **Text message** and press **OK**.
3. Choose **Templates** and press **OK**.
4. Use the navigation keys up/ down to select a desired template and press **Options**.
5. Select **Edit** (If you want to erase the template, select **Erase**.) to edit the template and press **OK**.
6. Press **Options** and select **Save**.
7. Press **OK**. Then select **Yes** if you want to save your editing or select **No** if you want to abort your edit.

Message settings

Your phone allows you to set up default setting on the SMS feature.

1. From the main menu, use your navigation keys to select **Messaging > Text message > Message settings**.

Messaging

2. Press **OK** and choose a setting.
3. Press **OK** to set your message settings.

Your phone provides the following settings:

- ▶ **Profile setting:** If more than one message profile is allowed by your SIM card, you may edit the profile separately.
- ▶ **Common setting:** You may select whether to enable or disable the delivery report and change the reply path of your service center if any.
- ▶ **Memory status:** Checks your memory status in the SIM card and phone.
- ▶ **Preferred storage:** Toggles SIM or phone storage options.
- ▶ **Prefer bearer:** Choose your preferred bearer-GSM or GPRS.

Multimedia Message

Menu 5.2

The feature allows you to send the message that contains text, sound and a picture. Depending on the network, you may receive a text

message that includes an Internet address where you can view the multimedia message.

Your phone supports the following formats in MMS function.

- ▶ **Picture:** JPG, GIF and BMP.
- ▶ **Sound:** Scalable Polyphonic MIDI (SP-MIDI), i-Melody.

Note




- ▶ You are not able to receive multimedia messages during a call, a game, or any active WAP connection over GPRS data.
- ▶ The maximum amount of multimedia messages is 100. If your multimedia messages exceed 100, your phone pops up a message "Max no. of stored Multimedia message reached".

To write a MMS

For availability to the multimedia messaging service, please contact your network operator or service provider.

1. From the main menu, select **Messaging** and then press **OK**.

2. Select **Multimedia message** and press **OK**.
3. Select **Write message** and press **OK**.
4. Select **To** to add recipients.
5. Press **Edit** to select **Add Number** or **Add email** you wish to send to or press.
Note
 - ▶ If you select **Add Number**, please enter the recipient's phone number.
 - ▶ If you select **Add email**, please enter the recipient's e-mail.
6. After adding the recipients and contents, press **OK** and press **Done**. Return to editing screen.
Note

If you want to add recipients in **Cc/ Bcc**, please repeat steps 4 and 5.
7. Select **Subject** and press **Edit** to enter the subject of this multimedia message.
8. Press **Options** and select **Done**. Then press **OK** to return to the editing screen.
9. Select **Edit content** and press **Edit**.
10. Press **Options** and select **Add image/ Add audio/ Add video/ Add attachment**. Then you enter the **My stuff** mode.
11. Select a file from **My stuff** and press **OK**. Then press **Done**.
12. Confirm the sending information in editing screen and then press **Done**.
13. Select **Send only** to send the multimedia message.
Note
 - ▶ To key in the content, you can refer to "Input method".
 - ▶ To use picture message function, your network operator or service provider support is necessary.
 - ▶ Jump to Message function, you can press the  navigation keys up in the idle status.
 - ▶ To key in the content, please refer to Input method on page 19.
 - ▶ You can use the  key to enter symbols and use the  key to switch the input methods and use the navigation keys to shift the cursor.

Messaging

Your phone provides the following selections when you select **Messaging > Multimedia message > Write message > Edit > Options**.

- ▶ **Done:** Exit the editing page and go back to Edit content page.
- ▶ **Input method:** Change the input method.
- ▶ **Add image:** Add an image file to your message.
- ▶ **Add audio:** Add an audio file to your message.
- ▶ **Add video:** Add a video file to your message.
- ▶ **Add attachment:** Attach a file to your message.
- ▶ **Add slide before:** Add a new slide before the old one.
- ▶ **Add slide after:** Allow you to add a new slide after the old one.
- ▶ **Add bookmark text:** Add a bookmark to the slide.
- ▶ **Preview:** Preview the slide(s) you just wrote.
- ▶ **Slide timing:** Set the time between slides.

After adding second slide into the content, you will see more options available including:

- ▶ **Delete slide:** Delete target slide.
- ▶ **Previous slide:** Display previous slide.
- ▶ **Next slide:** Display next slide.

To send a MMS

The sending steps are the same as writing a MMS. (See To write a MMS on page 56.)

Note

- ▶ To key in the content, you can refer to "Input method".
- ▶ To use picture message function, your network operator or service provider support is necessary.

Your phone provides the following selections when press **Done** after writing a MMS.

- ▶ **Send only:** Sends a text message immediately.
- ▶ **Save and send:** Save a message and sends it immediately.

- ▶ **Save to drafts:** Saves a message to be sent later.
- ▶ **Send options:** Personalize the sending options including Validity period, Delivery report, Read report, and Priority.
- ▶ **Exit:** Upon exit, you will be prompted to save or not save messages written.

Inbox

Your phone saves the multimedia messages that have been received in the Inbox folder of the Multimedia messages menu.

To read received multimedia messages

1. From the main menu, use the navigation keys to select **Messaging** and press **OK**.
2. Select **Multimedia message** and then press **OK**.
3. Select **Inbox** followed by pressing **OK**.
4. Choose a message and press **Options** to view the multimedia messages.

Your phone provides the following selections when you select **Messaging > Multimedia message > Inbox**.

- ▶ **View:** View a multimedia message immediately.
- ▶ **Reply:** Reply the sender.
- ▶ **Reply by SMS:** Reply to sender via SMS.
- ▶ **Reply to all:** Reply to group.
- ▶ **Forward:** Forward message.
- ▶ **Delete:** Delete selected message.
- ▶ **Delete all:** Delete all messages.
- ▶ **Properties:** View mailing list.
- ▶ **Use detail:** Either dial or save the phone number.

Outbox

Multimedia messages that have not been sent are saved in Outbox folder of the Multimedia messages menu.

Messaging

To view outbox multimedia messages

1. From the main menu, select **Messaging** and press **OK**.
2. Select **Multimedia message** and then press **OK**.
3. Choose **Outbox** and press **OK**.
4. Select a message and press **OK** to view.

Your phone provides the following selections when you select **Messaging > Multimedia message > Outbox**.

- ▶ **View:** View a multimedia message immediately.
- ▶ **Delete:** Delete selected message.
- ▶ **Delete all:** Delete all messages.
- ▶ **Properties:** View the MMS properties.
- ▶ **Use details:** Dial or save the phone number.

Draft

Your phone saves multimedia messages that have not been sent in the drafts folder of the Multimedia messages menu.

To read unsent multimedia messages

1. From the main menu, use the navigation keys to select **Messaging** and press **OK**.
2. Select **Multimedia message** and then press **OK**.
3. Choose **Drafts** and press **OK**.
4. Select a message and press **Options** to view.

Your phone provides the following selections when you select **Messaging > Multimedia message > Drafts**.

- ▶ **View:** View a multimedia message immediately.
- ▶ **Send:** Send the message.
- ▶ **Properties:** View the mailing list.
- ▶ **Edit:** Edit message.

- ▶ **Delete:** Delete selected message.
- ▶ **Delete all:** Delete all messages.
- ▶ **Properties:** View mailing list.
- ▶ **Use Details:** Use details of a multimedia message.

Templates

This phone allows you to add a quick entry for your multimedia message.

1. From the main menu, select **Messaging** and press **OK**.
2. Select **Multimedia message** and then press **OK**.
3. Choose **Templates** and press **OK**.
4. Select a message and press **OK** to view.

Note

You can view the content of a template via **View** options to read the slide and **Properties** to read the message content and size.

Your phone displays **View**, **Properties** and **Write message** when you select **Messaging > Multimedia message > Templates**. See Inbox (Page 53) for details.

Message settings

Before you send an MMS message, you need to complete the **Message Settings**. Follow the below steps to switch your settings.

1. From the main menu, select **Messaging** and press **OK**.
2. Select **Multimedia message** and then press **OK**.
3. Choose **Message settings** and press **OK**.
4. Select a setting and press **OK** to start setting.
5. Press **Done** once finished.

Your phone displays the following when you select **Messaging > Multimedia message > Message Settings**.

Messaging

- ▶ **Compose:**
You can set your composition format from the following options:
 - **Creation:** Allows you to choose the selections: **Free or Restricted.**
 - **Image resizing:** Allows you to choose the selections: **Off/ 160x120/ 320x240/ 640x480.**
 - **Auto Signature:** Allows you to choose the selections: **On or Off.**
- ▶ **Send:**
 - **Valid Period:** This is the duration that your message is stored at the Message Center. You can set the duration between **1 hour/ 12 hours/ 1 day/ 1 week and Max.**
 - **Delivery report:** Can toggle delivery reports between **on and off.**
 - **Read Report:** Report which indicates that received MMS is read.
 - **Priority:** Allow you to choose the selections: **Normal/ High/ Low.**
 - **Slide timing:** Set time between slides. (**1 - 60 seconds**).
 - **Delivery time:** Set delivery times (**Immediate/ 1 hour/ 12 hours or 24 hours**)
- ▶ **Retrieve:**
 - **Home network:** Choose between: **Immediate/ Restricted/ Delayed.**
 - **Roaming:** Choose between: **As Home/ Delayed/ Restricted.**
 - **Read report:** Allow you to choose the selections: **On Request/ Send/ Never Send.**
 - **Delivery report:** Toggles **On/ Off** delivery reports option.
- ▶ **Filter:**
 - **Anonymous:** Choose between: **Allow/ Reject.**
 - **Commercial:** Choose between: **Allow/ Reject.**
- ▶ **Server profile:**
You may receive and send multimedia messages through certain network or service providers.

► **Memory status:**

You can check what percentage of the phone's internal memory is unoccupied and how messages can still be stored in the SIM card or Phone's memory.

Note

To complete the **Message Settings**, contact your network service operator.

Chat

Menu 5.3

You can chat with friends with this feature. There are 2 chat rooms in your cell phone.

Before chatting, you need to do the following steps:

1. From the main menu, select **Messaging** and press **OK**.
2. Select **Chat** and then press **OK**.
3. Select **Chat Room 1** or **Chat Room 2** and press **Options**.
4. Select **Chat Room Info** and press **OK**.
5. Create a nickname by pressing **Edit** and press **Options**.

6. Press **Done** and select **Remote No.**.
7. Press **Search** and select a contact from the contact list.
8. Then press **OK** and press **Yes**.

To start chatting

1. After chat room is set (See Chat on page 63), use the navigation keys to select **Messaging** and press **OK** from the main menu.
2. Select **Chat** and then press **OK**.
3. Select **Options > Start New**, and press **OK**.
4. Enter a message and press **Options**.
5. Select **Send** and press **OK**.
6. After sending the message, the Chat room is activated.
7. Your chat can now begin.

Your phone provides the following selections when you start to chat.

- **Send:** Send message you have written.
- **Use template:** Inserts a template in your SMS template option.

Messaging

- ▶ **Insert PHB number:** Inserts phone numbers from your contacts.
- ▶ **Insert PHB name:** Inserts names from your contacts.
- ▶ **Input method:** Changes your input method.

Your phone provides the following options while chatting,

- ▶ **Reply:** Replies to a received chat message.
- ▶ **Use number:** Saves the number of a chatter or a number sent by a chatter.
- ▶ **Clear chat:** Clears chat conversation.
- ▶ **Temp leave:** Temporarily leave the chat room.
- ▶ **Quit:** Quit chat.
- ▶ **Chat Room Info:** Displays chat room information.

Note

Upon temporarily leaving a chat you can either Resume or End the chat.

Voice mail server Menu 5.4

Your phone allows you to jump to your voice mailbox (If supported by your service provider). Your voice mail number will be provided by your service provider and displayed in the phone. In the Voice Mail submenu, you can choose line 1 or 2 the options list includes:

- ▶ **Edit:** Edit the name & number of voice mail line 1.
 - ▶ **Connect to Voice:** Connect to your voice mail box.
1. In the idle status, hold **1234** to access your voice mail server directly.

Note

To use this function, you may need to enter the voice server number obtained from your service provider.

Broadcast message

Menu 5.5

Your phone allows you to receive commercial messages. You can either enable or disable the receiving mode and set some other options based on your personal preference.

Your phone provides the following options:

- ▶ **Receive mode:** You can choose to receive or not receive the last broadcast message you have received.
- ▶ **Read message:** You can read messages by pressing **OK** or exit the pressing **Back**.
- ▶ **Message List:** You can read messages by pressing **OK** or exit the by pressing **Back**.
- ▶ **Languages:** You can specify the desired broadcast language.
- ▶ **Channel setting:** You can select a channel from the channel list or add new channel where you want the messages to be received on the list. Once selected, you can edit or delete the channel.

My stuff [Menu 6]

In this menu, you can manage your images, photos, recordings and tones.

There will be two storages options available:

Phone Menu 6.1

You may check files saved on your phone.

Memory Card Menu 6.2

If memory card is plugged in, the "Memory card" will display on the phone.

To view My Stuff

Follow the below steps to view My stuff.

1. From the main menu, select **My stuff** and press **OK**.
2. Select the **Phone** or **Memory card** and press **Options**. Then select **Open** to view the all folders saved in **My stuff**.
3. Select a folder and press **Options**.

4. Select **Open** to view the files in the folder you selected.

Note

- ▶ When you enter **My stuff**, you may see a driver **Phone**. If you insert a Micro-SD card in, you may also see one more drive named **Memory card**.
- ▶ When you select **Phone** or **Memory card** and press **Options**, your phone offers **Open** and **Format** functions for you.
- ▶ When you select a folder in **Phone** or **Memory card** mode and press **Options**, your phone offers **Open** and **Format** functions for you.
- ▶ Do not use symbols such as * in a file name, or the default folders cannot be renamed.
- ▶ After executing the **Format** function, the total space is updated in **Phone** or **Memory card**.

To create a folder

Follow the below steps to create a folder in **Phone** or **Memory card** driver.

1. From the main menu, use the navigation keys to select **My stuff** and press **OK**.
2. Select the **Phone** or **Memory card** and press **Options**.
3. Select **Open** and press **OK**.
4. Select any folder and press **Options**.
5. Select **Create folder** and press **OK**.
6. Enter the name of the folder and press **Options**.
7. Select **Done** and press **OK**.

To forward a picture to wallpaper

Follow the below steps to forward a picture to wallpaper.

1. From the main menu, select **My stuff** and press **OK**.
2. Select the **Phone** or **Memory Card** and press **Options**.
3. Select **Open** and press **OK**.
4. Select **Images** and press **Options**.
5. Select **Open** and press **OK**.
6. Select a picture and press **Options**.
7. Select **View** and press **OK** to view your pictures.

5. Select **Open** and press **OK**.
6. Select a picture and press **Options**.
7. Select **Forward** and press **OK**.
8. Select **To Wallpaper** and press **OK**. Then the phone screen display "Done".

To view your pictures

Follow the below steps to view your pictures in **My stuff** menu.

1. From the main menu, select **My stuff** and press **OK**.
2. Select the **Phone** or **Memory Card** and press **Options**.
3. Select **Open** and press **OK**.
4. Select **Images** and press **Options**.
5. Select **Open** and press **OK**.
6. Select a picture and press **Options**.
7. Select **View** and press **OK** to view your pictures.

My stuff



My stuff

To play a video clip


Follow the below steps to play a video clip in **My stuff**.

1. From the main menu, select **My stuff** and press **OK**.
2. Select the **Phone** or **Memory card** and press **Options**.
3. Select **Open** and press **OK**.
4. Select **Video** and press **Options**.
5. Select **Open** and press **OK**.
6. Select a video clip and press **Options**.
7. Select **Play** and press **OK** to play video clip.


Profiles [Menu 7]

You may set up the following different profiles to adapt to different environmental conditions. Your phone provides 7 different profiles. More details of the 7 profiles are introduced as below.


▶ **General:**

Standard profile is the phone's default setting. After activate general profile, the  indicator of the General profile is displayed at the upper left corner on the idle screen.


▶ **Meeting:**

For meeting profile, ring volume is set to be low and key tone is switched off. After activation, the  indicator of the Meeting profile is displayed at the upper left corner on the idle screen.


▶ **Outdoor:**

For outdoor profile, ring and key tone volume are both to its maximum values. After activation, the  indicator of the Outdoor profile is displayed at the upper left corner on the idle screen.


▶ **Vibrate only:**

For vibrate only profile, ring and key tone volume are both set to off and vibrator is switched on. After activation, the  indicator of the Vibrate only profile is displayed at the upper left corner on the idle screen.


▶ **Headset:**

Profile for headset plug-in. Normally this profile can not be activated manually. Once your phone detects earphone plug-in, it will automatically switch to headset mode and the  indicator of the Headset profile is displayed at the upper left corner on the idle screen.

▶ **Silent:**

For silent profile, ring volume and vibrator are both set to be off and only LED is switched on. After setup, the  indicator of the Vibrate only profile is displayed at the upper left corner on the idle screen.

Profiles

- ▶ **Bluetooth:** Profile when Bluetooth is connected. After setup, the  indicator of the Bluetooth profile is displayed at the upper left corner of the phone screen.

Note

The indicator displays on the phone screen after setting the profile mode. (For more detail information, please refer the Idle Status on page 16.)

To activate the Profiles

Follow the below steps to activate the profiles in the **Profiles** menu.

1. From the main menu, use your navigation keys up/ down to select **Profiles** and press **OK**.
2. Select a desired profile and press **OK**.
3. Select **Activate** and press **OK** to activate the profile you want to use.

To edit the Profiles

You can customize the profiles of **General/ Meeting/ Outdoor/ Headset/ Bluetooth** to meet your needs.

1. From the main menu, select **Profiles** and press **OK**.
2. Select a desired profile and press **OK**.
3. Select **Customize** and press **OK**.
4. Select a desired option to customize.

Your phone provides the following options when you select **Profiles > General/ Meeting/ Outdoor/ Vibrate only/ Headset/ Silent/ Bluetooth > Options > Customize**.

- ▶ **Tone Setup:** Set desired ring tones for incoming call/ poweron/ poweroff/ message tone/ keypad tone. You can choose from provided tone list, or replace it with your audio/ music file residing on the phone or memory card. User can preview tone file by pressing CSK to play/ stop selected midi/ tone. Press **OK** to set the selected tone.
- ▶ **Volume:** Adjust the volume of ring tone and key tone.

Note

Please be careful not to injure your ears when ring volume is set high.

- ▶ **Alert Type:** Select different alert type (**Ring, Vibrate only, Vibrate & Ring, Ring after Vibrate, and Beep Once**).
- ▶ **Intelligent call:** Allows your phone to have an incoming call's phone number pronounced before ringing.
- ▶ **Ring Type:** Toggles a single, repeat, ascending or descending ring.
- ▶ **Extra Tone:** Allow you to either on or off warning, error, camp on and connect tones.
- ▶ **Answer Mode:** Toggles on/off answer mode by pressing any key.

Contacts [Menu 8]


Your phonebook is saved either on the SIM card's memory or Phone's memory. You can also choose to save on both.

Search


Menu 8.1

Allow you to search names and numbers saved in the contacts.

To search a number and a name


1. From the main menu, select **Contacts** and press **OK**.
2. Select **Search** and press **OK**.
3. Key in full name or first character of contact person's name. The contact list automatically jumps to the first contact with the same corresponding character.
4. Select the one you wish to call by pressing the  key to make a call.

Or

1. In the idle status, press the  right soft key to enter Contacts menu.

2. Follow steps same steps as above.

Note

In the search mode, you might press  key to change the input method.

You can also press **Options** to change the input method or edit the selected phone number.

Your phone provides the following selections when you select **Contacts > Search > Options** from the main menu.

- ▶ **View:** Displays contact information.
- ▶ **Edit:** Allows you to edit name & phone number of the contact.
- ▶ **New message:** Allow you to send either SMS or MMS to the selected contact.
- ▶ **Send vCard:** Allow you to send a vCard to the selected contact person.
- ▶ **Delete:** Deletes the selected contact's information.
- ▶ **Multi delete:** Delete more entries at a time.

- ▶ **New contact:** Adds a new contact to the phonebook.
- ▶ **Multi copy:** Copies the contact's information to the phone or the SIM card (depending on where you have saved the phone number).
- ▶ **Multi move:** Moves selected contact information to phone or SIM.
- ▶ **Input method:** Selects the preferred input method.
- ▶ **Multi duplicate:** Duplicates the selected contact's information on the same storage medium.

New contact Menu 8.2

Allows you create a new entry into the **Contacts** menu.

To create a new entry

1. From the main menu, select **Contacts** and press **OK**.
2. Select **New contact** and press **OK**.
3. Select **Storage** location to the SIM card or to the Phone.

4. Select **Name** and press **Edit**. Then enter the name of the entry and press **Options**.
5. Select **Done** and press **OK**.
6. Press the navigation keys down and press **OK**. The phone then displays a "saving" message.
7. Select **Yes** and press the center key. Then the phone screen displays "Done".

Note

Your phone allows you to save 1000 entries of phone numbers.

Caller group Menu 8.3

There are five default groups on the phone. You can edit each group's name with different tone/ picture/ video/ and member list. With the caller group function, you can send a message to all members of a group at the same time.

To create an entry into a caller group

1. From the main menu, select **Contacts** and press **OK**.

Contacts

2. Select **Caller group** and press **OK**.
3. Choose a group and press **OK**.
4. Choose **Member list** and press **OK**.
5. Press **Options > Add** and press **OK**. Then you may choose from **Contacts**.

Note

Your phone provides 5 caller groups including: Friends, Family, VIP, Business & Others.

Your phone provides the following selections for your option:

- ▶ **Group name:** Group name can be edited.
- ▶ **Ring tone:** Allows you to set the profile of ring tone for a particular call group.
- ▶ **Pictures:** Allows you to set a picture for a group.
- ▶ **Video:** Allows you to set a video clip for the group.
- ▶ **Member list:** Allows you to add a member in the specified group.

Speed dial

Menu 8.4

If you assign a number to one of the speed dialing keys (from **2-9** to **9-99**) saved in the Contacts, you can call the phone number by holding the key in standby mode.

To turn on the speed dial

1. From the main menu, select **Contacts** and press **OK**.
2. Select **Speed dial** and press **OK**.
3. Select **Enable speed dial** and press **OK**.
4. Select **On** and press **OK** turn on the speed dial function. Then the phone screen displays "Done".

To set a speed dial number

1. From the main menu, select **Contacts** and press **OK**.
2. Select **Speed dial** and press **OK**.
3. Select **Set number** and press **OK**.
4. Select an empty number and press **Options**.
5. Press **Edit** and press **OK**.

6. Select an entry you want to set as a speed dial number and press **OK**. Then the phone screen displays “Done”.

My vCard Menu 8.5

You can edit your vCard information and share it with others from this option. Select **Contacts > Search > Options > Send vCard** to send your vCard from the main menu.

Extra Number Menu 8.6

Allows to you edit **Owner number**, **Service dial number** and **SOS number** for your personal preference.

Note




Your service provider may program some special phone numbers into your SIM card. It is not possible to modify the **Service dial numbers** if not supported.

Settings Menu 8.7

Your phone provides you various setting options to personalize your phone, including,

1. **Caller picture:** Allows you to use your friend's photo or any other picture as his/her picture ID when calling.
2. **Caller ringtone:** Allows you to personalize the incoming ring tone for specific contacts or caller groups in your contact list.
3. **Caller video:** Allows you to use certain video clips for specific contacts in your list.
4. **Memory status:** You can check what percentage of the phone's internal memory is unoccupied and how many name and number entries can still be stored in the SIM card and Phone's memory.
5. **Preferred storage:** You can choose your preferred storage on the phone, the SIM or both.
6. **Fields:** You can customize the contact information you want to show on your display.

Contacts

- 7. Name list filter:** You can choose displayed name list from SIM, Phone or both.
- 8. Human voice prompt:** Your phone is designed to be able to play a human voice from   and  keys. You can choose to either turn on or off the human voice keypad tone.

Note

You can get PC suite tool via www.lgmobile.com. PC suite tool allows you to manage your contact lists stored on your phone or the SIM card.

Settings [Menu 9]

Time & Date

Menu 9.1

This function allows you to set your home city, view and change the time and date settings in your phone. You can also choose to auto update the date and time.

Set home city

1. From the main menu, select **Settings** and press **OK**.
2. Select **Time & Date** and press **OK**.
3. Select **Set home city** and press **OK**. All major cities are displayed.
4. Press the navigation keys up/ down to select a home city, or use multi-tap key to quickly locate a city.
5. Press **OK**.

Set time & date

1. From the main menu, select **Settings** and press **OK**.
2. Select **Time & Date** and press **OK**.
3. Press **Set time & date** and press **OK**.

4. Edit the time by moving blinking focus and pressing numeric keys and use LSK to switch AM to PM and vice versa.
5. Edit the date by moving blinking focus and pressing numeric keys to change date values.
6. Or turn on/ off the daylight saving by navigation keys – left/ right.
7. Press **OK**. (screen displays “Done”).

Set format

1. From the main menu, select **Settings** and press **OK**.
2. Select **Time & Date** and press **OK**.
3. Press **Set format** and press **OK**.
4. Edit the **Time format** or **Date format** by pressing the navigation keys up/ down to select values and left/ right to select options.
5. Press **OK**. (screen displays “Done”).

Auto update

If enabled, the phone will automatically update the time and date according to time zone.

Settings

1. From the main menu, select **Settings** and press **OK**.
2. Select **Time and date** and press **OK**.
3. Press **Auto update** and press **OK**.
4. Select **On** or **Off** and press **OK**.

Note

Auto update does not change alarms or calendar notes and may cause some alarms to expire.

Display

Menu 9.2

This feature allows you to personalize your display setting with the following:

- ▶ **Wallpaper:** Changes the idle screen wallpaper
 1. From the main menu, select **Settings** and press **OK**.
 2. Select **Display** and press **OK**.
 3. Select **Wallpaper** and press **OK**.
 4. Select **System** or **User define** and press **OK**.
- 5. Select a desired wallpaper and press **View**.
- 6. Press **OK** to select as wallpaper or press **Back** to choose other wallpapers.
- ▶ **Screen saver:** Disable or Choose screensaver
 1. You can enable/ disable or setup time interval to trigger saver start time (5 sec to 1 min).
 2. To choose your screen saver select **System** or **User define**.
- ▶ **Power on/off display:** This phone allows you to set the power-on/off animation from system, phone/card memory or disable animation. The support format will be MP4/3GP.
- ▶ **Mainmenu style:** Enable you to change Main menu style to Matrix or List type.
- ▶ **Themes:** Enable you to change the theme, setup update period and order of switching themes.
- ▶ **Greeting text:** Enable you to enable or disable and edit any message for your welcome note which is displayed on idle screen.

- ▶ **LCD backlight:** Adjusts LCD brightness and dim timer.
 - ▶ **Show date and time:** Displays or hides time & date on idle screen.
 - ▶ **Show home shortcut:** Displays or hides “jump to” 4-way shortcuts on the idle status screen.
 - ▶ **Show broadcast message:** Displays or hides broadcast info on idle screen
 - ▶ **Show call information:** Displays or hides call info on idle screen
 - ▶ **Show owner number:** Displays or hides phone number on the idle screen.
 - ▶ **Show operator name:** Displays or hides operator name on the idle screen.
2. Select **Phone** and press **OK**.
 3. Select **Schedule power on/off** and press **OK**.
 4. Highlight a default time and press **Edit**.
 5. Decide whether to enable the Status, to select **On** or **Off** and to specify a time, then press **OK** (screen displays “Done”).

Language

To set the Language

This phone allows user to set for different display languages.

1. From the main menu, select **Settings** and press **OK**.
2. Select **Phone** and press **OK**.
3. Select **Language** and press **OK**.
4. Choose a desired language and press **OK** (screen displays “Done”).

Shortcuts

This function allows you to customize your shortcuts.

1. From the main menu, select **Settings** and press **OK**.

Phone

Menu 9.3

Schedule power on/off

This function allows you to schedule poweron/ poweroff time for the phone.

1. From the main menu, select **Settings** and press **OK**.

Settings

2. Select **Phone** and press **OK**.
3. Select **Shortcuts** and press **OK**.

You can customize list of shortcuts by pressing **Options**.

- ▶ **Add:** you can select a shortcut from a candidate shortcut pool and add it to current shortcut list.
- ▶ **Edit:** you can replace current highlighted shortcut by choosing another shortcut from candidate shortcut pool.
- ▶ **Delete:** you can delete current selected shortcut from list.
- ▶ **Delete all:** you can delete all items in shortcut list.
- ▶ **Disable/Enable:** you can disable/enable a shortcut to make it disappear from list or show on the list.
- ▶ **Change order:** you can change the listing order of current highlighted item.

Flight mode

This function allows you to play the music player during flight if you switch the mode to **Flight mode** instead of **Normal mode**. You will be able to listen to the music only.

- ▶ **Normal mode:** GSM/GPRS network is available. You may make a call.
- ▶ **Flight mode:** GSM/GPRS is disabled. You cannot make a call.
- ▶ **Query when power on:** You must select either Normal mode or Flight mode while the phone power on.

Call

Menu 9.4

Caller ID

You can decide how to present your identity by selecting Set via network, Hide ID, or Send ID when you make a call.

Call waiting

A network service allows notification for another caller during an existing call.

1. From the main menu, select **Settings** and press **OK**.
2. Select **Call** and press **OK**.
3. Select **Call waiting** and press **OK**.
4. Select **Activate, Deactivate** or **Query status** and press **OK**.

5. Selecting **Query status** will enable you to see if the service is activated or deactivated.

Call divert

You can set the call condition by which calls are diverted to phone number or voice mail number.

To set call divert

1. From the main menu, select **Settings** and press **OK**.
2. Select **Call** and press **OK**.
3. Select **Call divert**, then press **OK**.
4. Select an item and press **OK**.
5. Select **Activate**, **Deactivate** or **Query status** and press **OK**.
6. Select either **To new number** or **To voice mail** and press **OK**.
7. If you choose **To new number**, you must provide a phone number by either typing or select an existing one from phonebook. When finish press **OK**.
8. If you choose **To voice mail** you must select a voice mail number from list and press **OK**.

Your phone provides the following divert options:

- ▶ **Divert all voice calls:** All voice calls are diverted.
- ▶ **Divert if unreachable:** Calls are diverted when you are out of range of your provider.
- ▶ **Divert if no answer:** Calls are diverted when the call is not answered.
- ▶ **Divert if busy:** Calls are diverted when your phone is engaged on other calls.
- ▶ **Divert all data calls:** All data calls are diverted.
- ▶ **Cancel all diverts:** Cancel the above settings.

Call barring

A network service allows you to restrict incoming and outgoing calls on your phone. A password PIN2 is required to enable/disable this function.

- ▶ **Outgoing calls:** To ban all outgoing calls.
- ▶ **Incoming calls:** To bar all incoming calls.

Settings

- ▶ **Cancel all:** Cancels barring settings (Requires Password PIN2)
- ▶ **Change barring PW:** You can change barring password here. Contact your provider for default password. This menu enables you to change your barring call password.

Line switching

This function allows you to make line switches by selecting Line 1 or Line 2.

Note

Both lines can be answered regardless of which is selected, however if you don't subscribe to such a service and set your phone to Line 2, you will not be able to make calls.

Call reminder

This function allows you to set a time reminder during a call.

1. From the main menu, select **Settings** and press **OK**.
2. Select **Call** and press **OK**.

3. Select **Call reminder** and press **OK**.
4. Select reminder alert frequency.
5. Press **OK** to confirm (screen displays "Done").

Your phone provides the following time alert selections options:

- ▶ **Off:** means do not alert.
- ▶ **Single:** means alert once.
- ▶ **Periodic:** means alert every time when a certain time elapses.

Note

The minimum Periodic time is 30 seconds.

Call time display

This function allows you to enable/disable displaying the call time.

Auto redial

This function allows you to set auto redial function. Select **On** and your phone will make a maximum of ten attempts to connect the call after an unsuccessful call attempt.

Closed user group

This function allows you to set the limited call group. Only the person in the specific group is allowed to make call to and receive call from.




Bluetooth

Menu 9.5

Your phone is designed to be compliant with Bluetooth technology V1.2. Bluetooth technology enables wireless connections between electronic devices. The Bluetooth connection can be used to listen to stereo music, send images, video, texts and vCards.

To start using Bluetooth technology

Your Bluetooth connection needs to be configured prior to operation. Once setup is complete, the following Bluetooth icons will appear in the status bar.

-  : Bluetooth is active and connected
-  : On but not in use.
-  : stealth mode (Does not broadcast to other Devices).

To pair with Bluetooth audio device

1. From the main menu, select **Settings** and press **OK**.
2. Select **Bluetooth** and press **OK**.
3. Select **Power** and press **OK** to switch On/ Off the Bluetooth connectivity of your phone and the device you wish to connect first.
4. Press **Inquiry audio device**. Your phone will automatically search and pair the device.
5. Press **Bond** to pair your phone with the headset.
6. Add the headset to the trust list and connect to the headset by pressing **Yes**.

Note

- ▶ Before using the headset, please make sure your device has been fully charged.
- ▶ Whenever your phone is connected with the device, a pop-up notification will appear.

Settings

- ▶ Once added to the Trust List, the headset will appear in **My Device** list. (Once added to **My device**, reconnection can be established with ease).
- ▶ All active devices are managed in **Active device** and can be disconnected by pressing Disc.

To pair with Bluetooth devices

1. From the main menu, use the navigation keys to select **Settings** and press **OK**.
2. Select **Bluetooth** and press **OK**.
3. Select **My device** and press **Options**.
4. Select **Add new**. (Your phone begins searching for Bluetooth devices.)

To connect with Bluetooth devices

1. From the main menu, select **Settings** and press **OK**.
2. Select **Bluetooth** and press **OK**.
3. Select **My device** and choose the Bluetooth device you wish to connect.

4. Press **Options** and select **Connect**.
5. After connecting the Bluetooth device, your phone asks which profile you wish to connect (it depends on how many profiles your Bluetooth device supports).

To edit a device in your device list

Your phone provides the following selections when you highlight a device in **My device** and press **Options**.

- ▶ **Connect:** Connect devices supporting Bluetooth technology.
- ▶ **Add new:** Searches for new devices.
- ▶ **Rename:** Rename target device.
- ▶ **Delete:** Delete selected items in your trust list.
- ▶ **Delete all:** Delete all items in your trust list.
- ▶ **Service list:** Access profiles supported by devices you have added into your trust list.

To use your mobile phone as modem

Your phone can be used as modem for dialing up a network. This function can only be used by PC supported Bluetooth technology. Check with your service provider details.

To send data using Bluetooth connectivity

1. Activate Bluetooth (See page 83) and select the object you wish to send.
2. Press **Option** and select **Forward**.
3. Choose **To Bluetooth**. (Phone will search for devices).
4. Select the desired device and Send.

To receive data using Bluetooth connectivity

When data via Bluetooth is received, a pop-up notification will appear. If you wish to accept the transfer, press ok. By default, all data is saved in the **Received** folder in **My stuff**.

You can change the location of the current folder from **Settings > Bluetooth > Setting > FTP setting > Shared folder** to relocate your folder and define the access right of the folder as **Fully control** or **Read only** in **Settings > Bluetooth > Setting > FTP setting > Access right**.

To receive data from PC

Your phone allows you to browse and transfer files from a PC. Your PC must support Bluetooth Technology (Consult your PC manual).

1. From the main menu, use the navigation keys to select **Settings** and press **OK**.
2. Select **Bluetooth** and press **OK**.
3. Activate Bluetooth on both the handset and PC. Select **Inquiry device** by pressing **OK**.
4. If the PC is configured properly "Connected PC" appears in **My device**.
5. Press **Options** and select **FTP profile** to connect.
6. Data can now be managed across both devices.

Settings

To listen to stereo music

1. From the main menu, select **Settings** and press **OK**.
2. Select **Bluetooth** and press **OK**.
3. Select **My device** and highlight a device you wish to connect.
4. Press **Options** to select **Service list**.
5. You will see a list of profiles supported by your headset.
6. Select **A2DP profile** and then press left soft key to connect.

Note

Your Bluetooth headset must be paired first. Then simply select it under My device.

To setup your Bluetooth technology

Your setting list includes:

- ▶ **Visibility:** You can make your phone both visible or invisible to searches by other devices.
- ▶ **Change my handset's name:** Change your device name, as it appears on other devices.

▶ **Set as authorized:** Requires your approval before allowing another device to connect to your phone.

▶ **Audio path:** Toggles the audio path between phone or headset.

▶ **FTP settings:** Customize your phone's shared folders and access privileges.

Note

Keeping your phone on invisible mode and connecting only to devices you trust, is the safest way to avoid malicious software attacks.

About

You can find out your device name, BD address, and supported service information here. Your phone supports the following Bluetooth profiles: HSP (headset), HFP (hands-free), SPP (serial port), DUN (dial-up networking), OPP, FTP (file transfer profile), A2DP (advanced audio distribution profile) & AVRCP.

Network

Menu 9.6

Network selection

Your phone provides you 3 options for network connectivity.

- ▶ **New search:** Refreshes your network connection
- ▶ **Select network:** Displays a list of networks. (Manual mode only)
- ▶ **Selection mode:** Toggle Automatic or Manual mode.

Automatic mode: Phone automatically selects and connects to a local cellular network.

Manual mode: Lists available networks. (Your phone will connect to network only when they have a roaming agreement with your provider)

Preferred networks

Preferred networks is used when the mode has been set to Automatic. The location numbers in the preferred network list show the search priority. Your service provider's network will be displayed. You can select your GSM/GPRS network if your provider offers multiple network

choices. (Remember to apply the international roaming service while traveling abroad)

Your phone provides the following options:

- ▶ **Add from list:** Can select from over 300 networks worldwide.
- ▶ **Create new:** Creates a new network list by entering MCC/MNC information and adjusting the priority setting.
- ▶ **Change priority:** Changes the priority settings in your preferred network list.
- ▶ **Delete:** Deletes selected item.

GPRS connection

The handset can toggle the GPRS connection status between **Always/When needed**.

Security

Menu 9.7

SIM lock

This function allows you to lock the SIM card with a specific PIN number. The feature is designed to prevent the use of your SIM card if your phone was stolen or lost.

Settings

You can switch SIM lock status to on/ off by providing correct PIN code.

Phone lock

Switches the phone lock on/off. Enabling phone lock requires a password (default is 0000).

Auto keypad lock

This allows you to automatically lock your phone's keypad to prevent accidental pressing of any keys.

Follow the below steps to set up this function.

1. From the main menu, select **Settings** and press **OK**.
2. Select **Security** and press **OK**.
3. Select the **Auto keypad lock** and press **OK**.
4. Use the navigation keys to select a desired time interval and press **OK**.

Note

Refer to page 16 (Unlocking the keypad) to unlock.

Fixed dial

If your SIM supports this feature, you can toggle the restricted call settings.

Barred dial

You can switch mode on and off to have a restricted call. However, you need to check whether your SIM card supports this function or not.

Anti-theft Mobile Tracker

Anti-theft Mobile Tracker (ATMT) allows you to track your lost phone. When the other party uses your phone without your permission, the tracking service is active. You are reminded by text message sending to the default phone number you have set, without the other party's knowledge. You can always activate the ATMT function, and configure your personal settings.

To activate this function:

1. From the main menu, select **Settings > Security > Anti-theft Mobile Tracker** and press **OK**.

2. Select **Set ATMT** and press **OK**.
3. Switch **On** or **Off** and press **OK**.
4. Input the ATMT code to enable or disable this function.

Note

The default ATMT code is "0000". You have to enter the code before configuring the ATMT settings.

To change the ATMT code:

1. From the main menu, select **Settings > Security > Anti-theft Mobile Tracker** and press **OK**.
2. Select **Change ATMT code** and press **OK**.
3. Input the old ATMT code and press **OK**.
4. Input the new ATMT code and press **OK**.
5. Enter again the new ATMT code and press **OK**.

To configure the ATMT settings:

1. From the main menu, select **Settings > Security > Anti-theft Mobile Tracker** and press **OK**.

2. Select Number for ATMT and press **OK**.
3. Press **Edit**.
4. Input the ATMT code and press **OK**.
5. Edit the name and phone numbers you want the text message to be sent.
6. Press **OK** and then **Yes** to save your settings.

Change password

- ▶ **PIN:** This allows you to change the PIN number.
- ▶ **PIN2:** This allows you to change the PIN2 number.
- ▶ **Phone lock:** This allows you to change the password.

When changing password you will be asked to provide the old one, the new one and again the confirm password. Then number of available attempts will be displayed when you enter old password.

If the old password is correct and new and confirm password are identical then you will see a popup showing PIN1/PIN2 or phone code changed. Otherwise you will receive

Settings

error message to indicate that you have entered wrong old password, and the number of available try will be decremented by 1 until it reaches 0. Then you will see PUK1/ PUK2 entry screen with 10 available tries.

If user keeps failing to provide correct PUK1/PUK2 code the phone will be locked. User will have to call service provider to get unlock code.


If user provides correct PUK1/ PUK2 code, he will be asked to immediately input a 4-digits PIN code as new password to overwrite the old ones. Then number of available tries will be reset again to 3.

Restore factory settings




Menu 9.8

This function allows you to reset the entire phone to its factory defaults. (Password protected.)

Troubleshooting

Problem	Possible Solution
Telephone cannot be switched on	Please take out and insert the battery once again then press  power on .
Battery empty	Charge battery. Check charging indicator in the display.
The battery doesn't charge properly or the phone sometimes turns itself off	Wipe the charging contacts of both phone and battery with a clear soft cloth.
Usage time of battery becomes shorter	If the battery charge time is shorter, it may be due to the user environment, or large volume of calls, or weak signals.
Charging error – Temperature out of range	Make sure the ambient temperature is right, wait for a while, and charge it again.
Charging error – Wrong charger	Only use original LG accessories.
Charging error – Battery defective	Replace battery.
Charging error – No battery icon appears when charging	The battery is empty or has not been used for a long time.It may take a while before the battery icon appears on the screen.
Forget the phone code or password	The default phone code is "0000".
Enter PUK	The PIN code has been entered incorrectly three times in succession, and the phone is now blocked. Enter the PUK supplied by your service provider.
Phone loses network	The network connection has been lost. You may be in a weak signal area. Move and try again. You are trying to access an option for which you have no subscription with your service provider. Contact the service provider for further detail.

Troubleshooting

Problem	Possible Solution
You have entered a number but it was not dialled	Be sure that you have pressed  . Be sure that you have accessed the right network service. Be sure that you have not set an outgoing call barring option. Be sure that you have entered the area code.
Your correspondent cannot reach you	Be sure that your phone is switched on. Press  for more than one second. Be sure that you are accessing the network service. Be sure that you have not set an incoming call barring option.
Your correspondent cannot hear you speaking	Be sure that you have switched off the loudspeaker. Be sure that you are holding the phone close enough to your mouth. The microphone is located at the bottom of the phone.
The audio quality of the call is poor	Check the signal strength indicator on the display  . The number of bars indicates the signal strength. If you are in a building try to move closer to window side.
No number is dialled when you recall a Contacts entry	Use the Contacts/Search feature to ensure the number has been stored correctly. Resave the number, if necessary.
Cannot use the Internet/WAP	Your subscription does not include data capability. You will need to contact your service provider to apply the service.
Cannot use MMS/picture messages on your phone	Your subscription does not include data capability. You will need to contact your service provider to apply the service.
If the above guidelines do not help you to solve the problem	Take note of the model number of your mobile phone and a clear description of the problem. Contact your phone dealer or LG Service Center for help.

Emergency calls


Important

This phone, like any wireless phone, operates using radio signals, wireless and landline networks as well as user programmed functions. Because of this, connections in all conditions cannot be guaranteed. Therefore, you should never rely solely upon any wireless phone for essential communications (e.g. medical emergencies). Emergency calls may not be possible on all wireless phone networks or when certain network services and/or phone features are in use. Check with local service provider.

Accessories

There are various accessories for your mobile phone. You can select these options according to your personal communication requirements.

Standard Battery



Headset

Allows hands free operation.



Travel Adapter

This charger allows you to charge the Phone's battery.



USB cable

You can connect your phone to PC to exchange the data between them.



Note

- ▶ Always use genuine LG accessories.
- ▶ Failure to do this may invalidate your warranty.
- ▶ Accessories may be different in different regions; please check with our regional service company or agent for further enquires.

Technical data

General

Product name : KP199

System : GSM 900/ DCS 1800/ PCS 1900

Ambient temperatures

Max : +55°C

Min : -10°C

Declaration of Conformity



LG Electronics

Suppliers Details

Name

LG Electronics Inc

Address

LG Twin Tower 20, Yeouido-dong, Yeongdeungpo-gu Seoul, Korea 150-721

Product Details

Product Name

E-GSM 900 / DCS 1800 / PCS 1900 Tri Band Terminal Equipment

Model Name

KP199

Trade Name

LG

C E 0681

Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 v1.3.1 / EN 301 489-07 v1.3.1 / EN 301 489-17 v1.2.1

EN 60950-1: 2006

EN 50360/EN 50361: 2001

EN 301 511 V9.0.2

EN 300 328 V1.7.1

Supplementary Information

The conformity to above standards is verified by ETS.

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

European Standard Center
LG Electronics Logistics and Services B.V.
Valuwezoom 15, 1327 AE Almere, The Netherlands
Tel.: +31 - 36 - 547 - 8940, Fax : +31 - 36 - 547 - 8794
e-mail : jacob @ lge.com

Name

Seung Hyoun, Ji / Director

Issued Date

18. April. 2008

Signature of representative

SERVICE CENTER LIST

LG | CUSTOMER SERVICE

*From: BSNL / MTNL **1800-180-9999***

From Mobile: **39-01-0909**
Add local STD Code

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Adhoni	RS CDMA	21/490.Arts & Science College Road, Near Devi Nursing home, Adhoni	9346490905	Mr.Mohan
Andhra Pradesh	Adilabad	KIRAN MOBILE WORLD	7-14-78/A/Near Nethaji Chouk, Cinema Road, Adilabad	9346358181	kiran kumar
Andhra Pradesh	Amalapuram	SANDESH CELLULAR	Shop no 5 R.K. TOWERS COLLEGE ROAD AMALAPURAM	9346398838	Mr.RAVI KUMAR
Andhra Pradesh	Anantpur	RK LG CDMA	Shop No 3, Cellular/Pallavi Towers, Opp to Canara Bank,Subash Road, Anantpur	9393722777	Sridhar
Andhra Pradesh	Armoor	SAI SRI Electronics	Shop.no.2, mahalakshmi road, Armoor	9392622038	Mcsrinivas
Andhra Pradesh	Bapatla	Vijaya Communications	G.B.C.Road, Bapatla	9346206505	Mr.B.Siva
Andhra Pradesh	Bhimavaram	Gopi Krishna Communications	JP Road Near Mohan Service Center Bhimavaram	9346700202	Mr.Siva
Andhra Pradesh	Chirala	Lakshmi Infocomm	Murthavari street, sangam thestre Road, Chirala	9347052181	Ms.Shakeena
Andhra Pradesh	Chittoor	CMT Computer Services	20-439, A.S.M.STREET, MITTOOR, CHITTOOR	9347361979	Mr.Gopi
Andhra Pradesh	Cuddapah	Srinivasa Communication	Shop No.4, Siddapriya Complex, Opp. HP Petrol Pumping Point, Cuddapah	9346350224	Mr.Sahadeva Reddy
Andhra Pradesh	Dharmavaram	Siddharta Communications	Opp to Sathya Lodge, PRC Circle, Dharmavaram	9347064101	Mr.Naresh
Andhra Pradesh	Eluru	S.S.COMPUTERS	Doot.No:23B-4-8/3, Ayyappa Complex, Beside Kanuri Madhavi Hospital, Subbama Devi School Road, R.R.Pet, Eluru	329294	Mr.DIWAKER
Andhra Pradesh	Guduvada	KANAKADURGA COMMUNICATIONS	SHOP NO-4,C/O SURYA RESENCY, OPP-VIJAYA GAS COMPANY,ELURU ROAD,GUDIWADA	9394206888	Mr.KUMAR
Andhra Pradesh	Gudur	Srinivasa Electronics	1st floor, Airtel Building, Kummari Veedhi,Gudur	9390829440	S. Naga Suman
Andhra Pradesh	Guntur	Vissari Associates	Shop No:21,Central Plaza,Naaz Center,Guntur	3257789	Mr.Satyam
Andhra Pradesh	Hazunagar/ Kodad	Sri Pavan Electronics	Mallika Towers, Besides Reliance Web World, Kodad	9346901519	Mr Narasimha Rao
Andhra Pradesh	Hindupuram	SVA Cellular	Shop.no:3,Vinayaka Lodge, Railway Road, Hindupur	9390000135	Mr. D.B.Ravindra Nath
Andhra Pradesh	Huzarabad	BHARCAVI COMMUNICATIONS	DCMS Complex, Near bus Stand, main road, Huzarabad	9391755619	TVISHNU VARDHAN
Andhra Pradesh	Hyderabad	SUNBEAM TECHNOLOGIES	120.Chenoy Trade Centre, Parklane, Near Paradise.Secunderabad	40200193 / 66383193	Mr.Suresh
Andhra Pradesh	Hyderabad	Bhagya Communications	Shop no:109, Upper Ground Floor,#12-2-825, S.G.M. Mall, Mehdpalnam, Hyderabad	32972308, 32001406	Mr.Bipin

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Hyderabad	JVR Infotech Pvt Ltd	Shop No 8 ,Vanija Vihar, Nalanda Building, Diluskh Nagar Main Road, Hyderabad	24161848, 55109604	EY Ramakanth
Andhra Pradesh	Hyderabad	PRIMUS INFOMATIC & SOFTWARE PVT LTD	# 18/A,Methodist Complex, 5-9-190, Lane Opp to Chermus, Abids, Hyderabad	66755111	Mr.Govind Kabra
Andhra Pradesh	Hyderabad	Reliable Communication	C-8, 3-6-561, AALTO'S A & M Trade Ce ntre, HIMAYATNAGAR, HYDERABAD	32913251	Mr.Sandeep.soni
Andhra Pradesh	Hyderabad	S V Electronics	Shop No. 41, Nilagiri Block, Aditya Enclave, Ameerpet Main Road, Hydrabad	55754477 32977389	MrPradeep
Andhra Pradesh	Hyderabad	Shweta Communications	Shop No.9, Ground Floor, Pavani Anusya Complex, Opp. Huda Complex, Tamaka, Hyderabad	32968162	Mr. Sandeep Heda
Andhra Pradesh	Hyderabad	Shweta Computers	# 1-7-69/1 & 2, OPP Aditya Delux Hotel, Near Paradise circle, Sarojini Devi Road, Secunderabad	27721076, -32977548	MrJagdish
Andhra Pradesh	Hyderabad	Sreenivasa Technologies	SAI VIKRAM TOWERS, SHOP NO -4,RELIANCE WEB WORLD BUILDING, Balaji Nagar Kukatpally	32961479	MrPaveen
Andhra Pradesh	Hyderabad	Sri Surya Communications	#Madhu Enclave,Street no 06,Shyamal Buildings, Begumpet , Hyderabad	32961127	MrNageswara Rao
Andhra Pradesh	Hyderabad	Sri Varun Electronics	D.No 5-8-344/1, " DHAN BHAGIA ESTATE ", Chirag Ali Lane, Abids, Next to Raghava Ratna Towers, Hyderabad	32900909 55781999	Mr.Aloksh Mohan
Andhra Pradesh	Hyderabad	VICTORY ELECTRONICS	Shop No. 8-1, Quil Qutub Shah Stadium, Opp. City College, Hyderabad	32408999, 24502339	MR. B.L.VARMA
Andhra Pradesh	Jagtial	SS Communications	Opp to I.G.RAM. Lodge Street, Park Line, Jagtial	9391533535	MrHari
Andhra Pradesh	Jangaon	SKY WIN COMMUNICATIONS	#2-7-134, Beside Bharat Gas, Bus stand Road,Jangaon.	9390102839	VARUN
Andhra Pradesh	Jangareddygudem	SRI DEVI COMMUNICATION	Near Marulana Temple, Opp.Andhra Bank,Jangareddygudem	227297	Pasama Lakshmi
Andhra Pradesh	Kakinada	Delta Infotech	Door No. 6-1-29, Opp. Swami Vivekananda Park, Jawahar Street, Surya Rao Pet, Kakinada	5593533	Mr. Shivanand
Andhra Pradesh	Kamareddy	Pager King Communication	Sircilla Road, Kamareddy, Dist. Nizambad	9397366633	Mr. Moizuddin
Andhra Pradesh	Karimnagar	SS Marketers	2-8-40, Mukarampura, Near Circus Grounds, Karimnagar	9391552223	Sujan
Andhra Pradesh	Kavali	Sree Balaji infotech	Trunk Road,Near Ongole Bus stand, Kavali, Nellore District, Andhra Pradesh	6329567	Mr. G. Sri Sai Charan
Andhra Pradesh	Khammam	Sriven Technologies	D.No:11-2-37Shop No.3, D.VXKrishna Complex, Beside Baburao Petrol Bunk, Balaji Nagar, Wyrva Road, Khammam	325567	MrBhaskar Reddy
Andhra Pradesh	Kothagudem	S.Swathi CDMA Service Center	9-3-3, Above Sindhura Electronics, Near RTC BUS STAND,Kothagudem	9391552228	Mriaz Ahmed
Andhra Pradesh	Kuppam	SAGAR COMPUTER SERVICES	14-124, PALACE ROAD, KUPPAM	9391862436	Mr.Sagar
Andhra Pradesh	Kurnool	R K LG CDMA	Shop no:13, First floor, UCON Plaza, Kurnool	220201	Mr.G Rama Krishna
Andhra Pradesh	Machilipatnam	Om Sree Sai Communications	25/276, Kota Vari Tulla Center, Jagannadapuram, Machilipatnam	9347741777	Mr.Rafee

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Madanapalle	Sri Balaji Computers	Shop No.2, 1st floor, Sri sai Complex, CTM Road, Madanapally	9390025204	Ravi Kumar
Andhra Pradesh	Mahabubnagar	SRI Chakra mobile care centre	Shop.no:15,Shareef Complex, Near Bus stand, Mahbubnagar	9396489999	Mr.Anil
Andhra Pradesh	Mancherial	SS CDMA Service Centre	Shop no.7Mounika Complex,BPLI Chourasta,Mancherial	9394552223	Mr.T. Nagaraju
Medak	Kavali	Balaji Communications	Docno:1-5-77/j, Opp to State bank of Hyderabad, Main Branch, Main road, Medak	9346439961	Mr. Rajkumar
Andhra Pradesh	Medchal	Khan Electronics	Sanjeeva Reddy Complex, Besides RTC Bus Depot, Medchal	9347222088	Mr. Jaleel Khan
Andhra Pradesh	Miryalguda	Needs Electronics	Jagannath Complex, Opp Bus Stand, Miryalguda	9394645696	Mr Ravi Kumar
Andhra Pradesh	Nalgonda	Quintessence Electronics	Shop No :5,Srinivasa complex, Opp to market office,HYD road, Nalgonda	9396610220	Mr Venkateshwar Rao
Andhra Pradesh	Nandyal	Dhanush Systems,	Dno:25/165 B.Sanjeev Nagar, Near Ramalajam, Nandyal	9392236699	Mr.Ramesh
Andhra Pradesh	Narasaraopet	Rajendra Infotech	C/o Hari priya Electronics, Arundelpet, Narasaraopet	224136	Mr.Sasi Bhushan
Andhra Pradesh	Nellore	Sri Enterprises	Co-Operative Bank Complex, 1st Floor, Shop No: 26,Near Gandhi Statue, G.N.T.Road, NELLORE, Andhra Pradesh.	3290339, 9398309571	MrPratap
Andhra Pradesh	NELLORE	Balaji Watch & Electronics	16/249,Trunk Road,Nellore	2359999	Mr.Rajesh
Andhra Pradesh	Nimal	OM SAI Electronics	Shop.no.1, Kala Nagar road, Beside 2 town Police station, Nimal	9390000024	Mr. Mahendar
Andhra Pradesh	Nizamabad	Satya Electronics	# 7-10-65,Shop no 1 , 1 st Floor,M.H.V Complex,Beside Bus Stand,Nizamabad	326000	Mr.Satyam
Andhra Pradesh	Ongole	TejSri Communications	37-1-107,Near Mastan Darga Centes,Trunk Road,Ongole	9393026115	Mr:SASI BHUSAN
Andhra Pradesh	Peddapalli (Ramagundam)	Abhi Marketers	Shop No:19/8/291, MRK Plaza, Lakshmi Nagar, Godharari Khani	9347077009	Srinivas
Andhra Pradesh	Peddapuram	Devi Infotech	Opp.Veterinary Hospital, Shop No-1, Santa Market Road,Peddapuram	9394864400	Mr.Siva Kumar
Andhra Pradesh	Prodattur	SV Technologies	4-625-3,Gandhi Road, Opp Kanur Vyasa Bank, Prodattur	9347251806	Mr,Ravi Kumar
Andhra Pradesh	Puttur	Siva Sai Computer World	8-104/C, VIJAYA LAKSHMI COMPLEX TIRUPATI-CHENNAI ROAD, PUTTUR	9393028024	C.janardhna Reddy
Andhra Pradesh	Rajamundry	Sri Infotech	Police Welfare Complex, City Hospitals Junction, Damai Pet Main Road, Rajamundry	2421567	Mr Raghvendra
Andhra Pradesh	Raychoti	Raja Computer World	Room No 3 Up Stairs, Sreedya complex, bustand road, Rayachoty	9346209881	Mr.Raju
Andhra Pradesh	Repalle	Sri Satya Solutions	10/14-126,Municipal Office Road,Railpet,Repalle	9396222993	Mr.Sridhar
Andhra Pradesh	Sangareddy	Sri Technologies	Simaan Complex, Beside Inspection Bunglow, Main Road, Sangareddy	939126573	Mr:AJAZ AHMED
Andhra Pradesh	Sattenapalli	S.S. Communications	Opp. Telephone Exchange, Sattenapalli	9397610550	Mr.Sai
Andhra Pradesh	Shad Nagar	Sri Cana Electronics,	Shop No : 2, Khajja Veeresam Complex, College Road, Shadnagar	9392633111	Mr. Vigneshwar
Andhra Pradesh	Siddipet	Copala Krishana Communications	SHOP NO:13, FIRST FLOOR, MACCA COMPLEX, OPP:CITIZEN'S CLUB, M.G. ROAD, SIDDIPET	939251064	Mr. Kara Gridhar
Andhra Pradesh	Srikulam	SRI SAI COMPUTER SHOPPE	OPP TEJA TIFFIN CORNER,G. T. ROAD, SRIKAKULAM	9390611779	MR SESHAGIRI
Andhra Pradesh	Srikalahasti	KSV Computer Services	NNR Buildings, d.no: 16-582, Panagal road, Srikalahasti	9390044399	SAHADEVA REDDY

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Sullurpet	Sai Baba Electronics.	D.No. 10/47, Bajupi Steet, Sullurupet	9346920527	S. Venkata Krishna
Andhra Pradesh	Tadepalligudem	SRI HARIPRIYA INFOTECH	THOTA COPI COMPLEX PLOICE QUARTERS LANE, BESIDES ZP HIGH SCHOOL, TADEPALLIGUDAM.	9346408640	Mr.Suresh
Andhra Pradesh	Tanuku	SHIVANAND ENTERPRISES	D/NO-34-3-3, MAIN ROAD GAMINI COMPLUND TANUKU.	220489	Mr. SRINIVAS
Andhra Pradesh	Tenali	Vaishnavi Infotech	D.No.22/11/114, Opp.Kanikacharla Kalyanamandapam, Bose Road, Tenali.	9347651330	McMurali
Andhra Pradesh	Tirupathi	CMT Computer Services	18-1-624 VV Mahul Road,OPP HDFC BANK, Tirupathi	3296979	McK Visu Naidu
Andhra Pradesh	Vijayawada	K.L Computer House	39-9-46 SVS Temple Street.Labbipet,Vijayawada	5520461, 5671461	McKartik
Andhra Pradesh	Vijayawada	V Y Communications	28-25-31/32,OPESWARUGHA FOODS,VIJAY TALKIES CENTER,VIJAYAWADA	9396467789	McRahul
Andhra Pradesh	VIJAYAWADA	Balaji Watch & Mobiles Pvt.Ltd	29-37-79, Eluru Road, Opp. Vijaya Talkies, Vijayawada	6648888	McPrasad
Andhra Pradesh	Vishakhapatnam	Sri Sai Ganesh Infotech	G5.Ground Floor, Backside of Sangam-Sarat Theatre,1st Lane,Dwarka Nagar, Visakhapatnam	3258777	McChandra Shekar
Andhra Pradesh	Vishakhapatnam	Jai Bharani Communications	Door No:52-11-7/7, Saptagiri Plaza, Old Resuvanipalem, Vishakhapatnam-13	3242111	Mc PVenkatapathi Raju
Andhra Pradesh	Vizayanagaram	S R TECHNOLOGIES	DRNO 17-2-29, RAJABAZAR, VIZAINAGARAM	9346418791	Mr.Balakrishna
Andhra Pradesh	Vuyyuru	Sugreeva Communications	Behind Datta Automobiles, Katturu Road, Vuyyuru	9393033555	McPhani
Andhra Pradesh	Wanaparthy	Sri Ganesh Electronics	Shop No : 16-63, Opp R R Compex, Wanaparthy	9396800275	Mr Deva Raj
Andhra Pradesh	Warrangal	S S Marketers	6-1-73/1, Sai Bhavan, Sridevi Theatre Road, Hanamkonda, Warrangal	2552223	Mr L.Srinivas Rao
Assam	Guwahati	A B PERIPHERALS & SERVICES	Wahed house, 2nd FloorOpp ASTC Volvo point, Ulubari, Kamrup, Guwahati	2732417	Wassi Ahmed
Bihar	Arrah	Surya Services	Sushila Bhawan, Suryapuri colony, By pass road, Arrah	9334538845	Sanjay Kumar
Bihar	Aurangabad	Computer Sansar	L.P.Complex,old G.T.Road, Aurangabad, Bihar, PIN-824101	9334926768	Shreenivas
Bihar	Begusarai	Krishna Communication	Eashwari Complex,Dak Bangla Chowk, Bishnupur, Begusarai, Bihar-851101.	9334541700	Dinkar Kumar
Bihar	Bhagalpur	S.K. Communication	NEAR RAILWAY STATION,Super market complex, Patel Babu road, BHAGALPUR -812001	9334255275	Kundan Kumar
Bihar	Bhagalpur	Printonix Infosolutions	Campati Complex,1st floor, Patel babu road	9934629247	Himansu Shekhar
Bihar	Biharsharif	Shanya Infotech	Magdha Commeccrial Complex, 1st.Floor, Shop.No.5, MG Road, Bharoapur,Bihar Sharif, Nalanda Dist. Bihar:Pin:803101	9334048037	Amit Kanchan
Bihar	Chapra	Amhey Associates	D-23, Hathwa Market, Chapra,Dist: Saran, Bihar, Pin:841301	9334295605	Jayant Kumar
Bihar	Darbhanga	Prime Computer	Hanuman Nagar, Doner Road, Darbhanga.	2220560	Abhinav Kumar Verma
Bihar	Gaya	Agrawal Distributors	Swarajpuri Road (Opp. Naghatia Road), Waves Building,Gaya, Pin:	9334218122	Lalit Agrawal
Bihar	Muzaffarpur	Krish Enterprises	NxKarhoulinala.no.2, Kachisarai Road, Muzaffarpur.	9304410745	Sanjeev Kumar
Bihar	Patna	INFOTEK TRADING COMPANY	1st floor, City Palace, New Dak Bungalow Road, Patna-800001	2227166	Sanjay Choubey

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Bihar	Patna	Synergy Trading Company	G-01,Charanlya Plaza Complex,Main Road, Kankarabagh, Patna.800020	2356900	Vikas Chandra
Bihar	Patna	COMPETENT MOBILE SERVICE	Shop 1, Hotel Lalitha Complex, East Bowring Canal Road, Patna	9334027706	Mohit Ahluwalia
Bihar	Patna	Micro Zone-Patna	17/C.S.K Puri, Near Basawan Park	3294696	Mithlesh Kumar
Bihar	Purnea	Micro Zone-Purnea	Narottam Hata,NH-31, Purnea	9304166633	Amit Kumar
Bihar	Sasaram	Nandika Enterprises	Hari Complex, Panjab National Bank, Sasaram, Rohtas (Bihar)	4222008	Abhinav Gupta
Chhattisgarh	AMBIKAPUR	NEHA COMMUNICATION	Ramanaj Ganj road, Opp. Kosa Form , Ambikapur , Sarguja, Pin-497001	4404414	Mr.Rishi Dubey
Chhattisgarh	Bhilai	A B Automation	Shop No 117 , Ground Floor , Chouhan Estate, Supela Bhilai	09329750711/ 0788-2295989	Mr. Satish Singh
Chhattisgarh	Bhilai	Sai Ram Electronics	SHOP-NO-52/90, HIMALAY COMPLEX, AKASH CANGA, SUPELA, BHILAI	4038917	Mr. Balan
Chhattisgarh	Bilaspur	Mahamaya Infotech	Shop No 203, Jain Plaza, Ground floor, Link Road, Bilaspur	2413865	Mr. Pawan Kumar
Chhattisgarh	KORBA	STAR MOBILE SERVICES	SS Plaza FD-13 PH Road Korba Chhattisgarh	9300401485	Mr. Anish Menon
Chhattisgarh	Raigarh	BLUE CHIP COMPUTER	Purana Sadar Bazaar, Raigarh, Chhatisgarh.	329888	Mr. Ashok Agrawal
Chhattisgarh	Raipur	Cybernet Systems	B-2.1st Floor, Garchaz Complex, Jail Road, Raipur - 492001	077-14069971	Mr Anand Singh
Chhattisgarh	Rajnandgaon	BHAYEE SERVICES	SHOP NO 5 , BELOW SBI , KAMPTEE LINE , RAJNANDGAON	395200	MANISH COLCHA
Delhi	Delhi	Aegiss Infotech	UG-25 , Ansal Chamber -2, 6, Bhikaji Cama Place, New Delhi-110066	65477740 , 9312294105, 9313796774	Mr. Atul Gupta
Delhi	Delhi	Anham Infotech Services	1/1, Regal Building, Near Malik Sweets, Connaught Place New Delhi - 110 001.	011-41501124, 011-32584421	Mr. Anil Surana
Delhi	Delhi	Comhard Systems	D-30.31, First floor, Near Hotel Shriya, Main Vikas Marg, Lakshmi Nagar	011-32955887, 9838867678, 011-32979819	Mr Ravi Kant Gupta
Delhi	Delhi	Comhard Systems	B-120, Hardev Puri, 100 Feet Main Road, Near MTNL Office, Nathu Colony Chowk, Shahdha, New Delhi - 110 093.	011-32575507 , 011-32572427	Mr. Ravi Kant Gupta
Delhi	Delhi	Connesions and Communications	183, Avtar Enclave, Opposite Nirula's , Paschim vihar New Delhi-110063	011-32451451, 011-65237374	Mr. Bhupinder Agrawal
Delhi	Delhi	Cube Engineers and Consultants Pvt Ltd	A-65, Naraina Industrial Area, Phase-1, New Delhi	0931224103, 011-65450272, 41411623	Mr. Anvinder
Delhi	Delhi	Innovative Telecom	304 , GDITL Northex Towers, A-09 ,3rd Floor , Northex Tower, Netaji Subhash Place, Pitampura, New Delhi-110 088.	011-32925753, 011-65154343, 9811682453	Mr Manoj Garg
Delhi	Delhi	Nice Telecom	15/19 & 15/21, DDA Complex, Nargal raya, Near D Block, Janakpuri, Delhi - 110046	011-32607072, 0-9213264403	Ripul Garg
Delhi	Delhi	R K Communications	2516 Hudson Lines, Kingsway Camp-Nr. Kamla Nagar, New Delhi	011-32508861, 9312606463	Mr. Pradeep Agrawal

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Delhi	Delhi	Sagar Technologies	J-39,Central Mkt, Lajpat Naga-II, New Delhi-110024	011- 65425644, 9350224692	MrManoj Kumar
Delhi	Delhi	Sukriti Communication	101 Patparganj- Mayur Vihar phase -1 - New Delhi - 110091	011- 32498011, 011- 65238011	MrDipendra kumar chaturvedi
Delhi	Delhi	Touch Tone Telecom	B-52, First Floor, Kalkaji, New Delhi	011 32939031, 011-65672800	Ashish Dey
Delhi	Delhi	Ucom Technologies Pvt Ltd.	45, 1st Fl, Corner Mkt., Mahiya Nagar, New Delhi - 110017	011-41745469, 09212131300	Mr Neeraj
Delhi	Delhi	Telecom systems	67/4, harshvihar chowk, pitampara, new delhi	9910089333	mr Satbir
Delhi	Delhi	Shine telecom	N-18, SOUTH EX-1, NEW DELHI	981143204	Mr. Naveen Goyal
Delhi	Delhi	Elcom Trading Company Pvt. Ltd.	G-1, Goverdhan Building, 53-54, Nehru Place, New Delhi - 110019.	9310577009, 011-64582709	Mr. Somesh Narang
Delhi	Delhi	Teletalk	C-21,First Floor, Near Bus Stand, Bhajan pura, Delhi-11053	988400551	Mr.B. C. Vashist
Goa	Panjin	Mandovi Mobiles	Mohidin Towers Do. No. A53 Opp to Hotel Manasanti Dadavaiya rd Panjin-403001	6452949	Prakash
Gujarat	Ahmedabad	Vision Communication	33, 1st Floor, Sukh Sagar Complex, Opp. Dinesh Chamber, Bapunagar, Ahmedabad	6512322	Mr Ajay Kachhadia
Gujarat	Ahmedabad	M Age Cellnet	A-176, Popular Plaza, Near Someshwar Part -1, 132 Fl. Ring Road, Satellite, Ahmedabad	30122838	Mr K Jainaj
Gujarat	Ahmedabad	A Com Technologies	Shop No-37, 1st Floor, Shubh Complex, Near Rajasthan Hospital, Camp Road, Shahbaug, Ahmedabad	32940560	Mr. Vijay S.Gohel
Gujarat	Ahmedabad	Mishree Communication	FF-17, RUDRA SQUARE, OPP JUDGES BUNGALOW, POLICE STATION, BODAKDEV, AHMEDABAD	32508491	Mr. Mihesh Patel
Gujarat	Ahmedabad	Silicon Valley	9, Gokul Palace, Marinagar Cross Road, Maninagar Ahmedabad	30225430	Mr. Rajesh Patel
Gujarat	Ahmedabad	Shiv Sai Communications	21,Municipal Market, C.G.Road, Ahmedabad	66057999	Mr. K Jayraj
Gujarat	Amreli	Precision Telecom	32,33 Opera House, Station Road, Amreli.	230940	Mr. Kamlesh Tank
Gujarat	Anand	Desktop Infosystems	B/10, Valbhav Tower, V Y Nagar Road, Anand	246885	Mr. Dpesh Patel
Gujarat	Ankaleshwar	Alkhar Telecom	C 1 Keval Shopping Center,old National Highway No.8,GIDC, Ankaleshwar	02646-250860	Mrs. Anita Amin
Gujarat	Bharuch	Alkhar Telecom	Pramukh Swami Complex, Panch Batti, Bharuch	26422241027	Mr. Hanif Patel
Gujarat	Bhavnagar	Shivshruti Services	98/B, Malkvana Building, Down Chowk, Bhavnagar	3296222	Mr P D Jala
Gujarat	Bhuj	Infotech Computer	2nd Floor, NariNarayan Chambers, Opp Indian Airlines Office, Station Road,Bhuj	324295	Mr. Vasant Mepani
Gujarat	Gandhidham	Varsh Electronics	Shop No. 35, Swami Vivekanand Complex, Near Oslo Circle, Gandhidham	232739	Mr. Siddarth Cajjar
Gujarat	Gandhinagar	Creative Communications	Shop No 102,Sunan City,Sector 11,Gandhinagar	23226241	Mr. K.J.Barot
Gujarat	Godhra	Binary Computers	34, Lokhandwala Complex, LIC Road, Nr. Chitra Cinema, Godhra.	9376589019	MR. A. Raja
Gujarat	Himmatnagar	Jay Telecommunications	B-F 105, 1st floor, Durga Complex, Near Railway Station, Himmatnagar	329532	Mr. Manibhai Patel

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Gujarat	Idar	Maruti Communication	3, Sarvoday Market, Near Bus Stand, Behind Sarvoday Guest House, Idar		Mr. Niraj Patel
Gujarat	Jamnagar	Sudashan Infosys	"Shradha", Park Colony, Motor House, Near UTI Bank, P.N.Marg, Jamnagar	2552696	Mr. Amit Unadkat
Gujarat	Junagadh	KJ,Taders	29/30, Danapith, Junagadh	2627320	Mr. Paresh Rughani
Gujarat	Kalol	Maitree Communication	B/95,Yogi Complex, near Mahendra Mill Road,Kalol	325288	Mr. Jignesh Shah
Gujarat	Mehsana	Prime Computer Consumables	83-B, Vimal Super Market, B K Road, S.T.Workshop Road, Mehsana	2325123	Mr. Suleeta Patel
Gujarat	Morvi	Pulse Sales and Services	Madhav Market, 1st Floor; Near New ST Stand, Sanala Road Morbi.	300453	Mr. Natubhai Patel
Gujarat	Nadiad	D.C. Infosystems	105, Municipal Shopping Centre, Opp.Paras Cinema, Santram Road, Nadiad.		Mr. Dipesh Patel
Gujarat	Nasari	Deep Enterprise	10, Upper Level, Diamond Palace, Sattabir, Sajaji Road, Nasari-	02637 524095	Mr. Vinod Kasundra
Gujarat	Palanpur	Shree Manibhadra Mobile	16, 1st Floor, Aroma Arcad, Opp. Joravar Palace, Palanpur	320321	Mr. Panchal Sunil D
Gujarat	Patan	Able infotech	F/9, pallika bazar complex, rajmahal road,near sanktoba hall, Patan	226400	Mr. Rakesh Bhai
Gujarat	Porbandar	Yanun Infotech	1ST Floor:Garden Cafe Building, Opp.New Fountain, Nr.T.O Office, Porbandar	3290285	Mr. Mitesh Changela
Gujarat	Rajkot	Joshi Telecom	Shop No.8, Kuber Complex, Opp Chandubhai Bhelwala, Dr Yagnik Road, Rajkot	6530707	Mr. Jiten Dave
Gujarat	Rajkot	Roopang infocare	Vinod Nivas, 4, Sardarnagar(West), Nr Astron Cinema, Rajkot	6950111	Mr. Kishore Patel
Gujarat	Sanand	Ravi Communication	37Sagar Complex, Opp.Hotel Khabar, Sarkhej Barla Cross Road, Sanand	32401211	Mr. Ravi N
Gujarat	Surat	Om Sai Services	39.Golden Point.Near Science Laboratory.Ring Road, Surat -	2613231233	Mr. Dharmesh Patel
Gujarat	Surat	Yash Telecom	M-20, Centre point, Near Kadiwala High School, Civil Cross Road, Ring Road, Surat-395002	0261 2477903	Mr. Rehan Sakhi
Gujarat	Surat	Excel Solutions	H-3, Ruchi Flats, Near Igara Building, Adajan Hazira Road, Surat-	0261-6544500	Mr. Virender Jain
Gujarat	Surenranagar	Nihaal Computer Services	94, old housing board, opp school no 13, Surenranagar	320375	Mr. Sikandar
Gujarat	Vadodara	Shreeji Telecom	CF 13, Sterling Shopping Center,R.C.Dutt Road,Alkapuri, Vadodara -	0265-3059363	Mr. Jignesh Gohel
Gujarat	Valsad	Klassik Stationo Products	10, Jethalal Muji Market, Halar Road,Valsad -	02632-329363	Mr. Darshan Panchal
Gujarat	Vapi	Klassik Stationo Products	116, Bhanudarshan Co-Op Society, Koparli Road, Near Gunjan Cinema, GIDC, Vapi	0260-3292363	Mr. Avishek Sahasaria
Haryana	Ambala	Bee Ess Aar Communication	92-93, Gandhi market, Ambala Cantt-133001	2641234,	Rajiv Gupta
Haryana	Bahadurgarh	Unique Telecom	5,Rajaram Market, Main Najafgarh Road, Bahadurgarh, Near Bajaj Showroom	9315873676, 9350941877	Mr. Harinder
Haryana	Bhiwani	Sandeep Electronics	10 th Plot, First Floor; Circular road, Mahem Gate Chowk, Near Dc Kajal's Nursing Home, Adjacent to Rameshwar's Sweet House, Bhiwani, Haryana - 127021	252000	Mr. Sukhveer Saini

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Haryana	Faridabad	Comsoft Computers	601/1 Gopi Colony Chowk- Sector-19 , Near Prem Prakash Ashram, OLD Faridabad-121002	0129-3293512, 0129-4104252, 9310977888	Mr. Ashwani Jindal
Haryana	Faridabad	VR Infocomm	Shop No.44, Neelam Fly Over, Neelam Chowk, NIT Faridabad.	0129-4031959, 0129-3208737	Mr. Vinod Kumar Gupta.
Haryana	Faridabad	Sky talk mobile point	4, C.T.Road, Near Bus Stand, Marla Colony, Fatehabad	098965244	Pankaj
Haryana	Gurgaon	Signature Communications	B-100 A , South City -1, Opposite - Huda Gymkhana Club - Gurgaon 122001	0124-3256565, 0124-4102709	Raj Kumar Garg
Haryana	Gurgaon	Lalji Communication	SCO-31 , - First Floor, Above MTNL Sanchar Haat, Main Market, Opp. BSNL Exchange, Sector-12A, OLD Gurgaon -122001 .	95124-3200900	Mr.Bharat Bhushan
Haryana	HISAR	M K ELECTRONICS	SHOP NO-4A,FIRST FLOOR, NEELKANTH COMPLEX, CAMP CHOWK, MAIN DELHI RD.	9991090260	MANMOHAN KRISHAN
Haryana	Hissar	Pamami Communication	32,Neel Kamal Complex, Red square Market,Near Elite Cinema Hall, Hissar, Haryana-125001	09354532000	Mr. Pradeep Garg
Haryana	Jind	Gaurav Telecom	Main Bazar, Near rani Talab, Near Bharat Electronics, Jind	325400	Deepak Garg
Haryana	Kaithal	Mahesh Communication	Shop no.22, Bajrang Ball Market, Near Randhir cinema- Kaithal	9315160000	Mr. Mahesh
Haryana	Karnal	Mass Communication	Shop No.69, Main Market, Ground Floor, Moughal Canal, Karnal - 132001	3290717	Mr.Harish
Haryana	Kurukshetra	Bharti Communication	5,Krishna Market, Opp.Abhay Palace, Pipli Road,Kurukshetra,Haryana-	01744-327717	Mr. Ramesh
Haryana	NARNAUL	PRIME COMMUNICATION	Shop no.8 , 1st Floor Taneja complex, near Nirula Hotel , main Road Narnaul	935537551	MR. Naveen
Haryana	Palwal	Shree Ganesh Communications	Basant Apts, Shop No.5, Kithwari Chowk, Mathura Road, Near Saraswati School, Palwal	01275-321028, 09315403328	Harish Chandra
Haryana	Panipat	INS Telecom	2, Bishan Sarup Colony, Opp Bus Stand, Near Hotel Deep, Panipat	3291860	Jagdeep Sachdeva
Haryana	Rewari	Mahak tele services	53-A, Model Town, Near Shreeji restaurant, Rewari	01274-329222	Gaurav yadve
Haryana	Rohtak	Telecentre	Shakti Market, Civil Hospital Road, Near Chhotu Ram Chowk, Rohtak-124001	247242	Mr.Madaan
Haryana	Sisa	Sisa Communication	168,Huda Complex, Old Bus Stand, Sisa	0166-329591	Rajindera
Haryana	Sonapat	Teleworld	Shop No 20, 1st Floor, M.C.Market, Subhash Chowk, Sonapat, Haryana-138001	3290889	Vipin Dua
Haryana	SONIPAT	RELIABLE TELLY SHOPPE	OPP OLD CIVIL HOSPITAL RLY ROAD SONIPAT NEAR S.B.I. BANK, SONEPAT	9991090252	UMESH CHAUDHARY
Haryana	YAMUNAGAR	KRISHNA COMMUNICATION	SHOP NO.19, 20-A 1ST FLOOR, WORKSHOP ROAD, YAMUNAGAR	9354784019	MR. SURESH/ Mr.Sandeep
Haryana	Yamunanagar	Manish Communications	Shop No.3, Sharma Colony, Near Mahindra Petrol Pump, Yamunanagar - 135005	232777	Vinod Kumar Mittal
Himachal Pradesh	MANDI	YM. COMMUNICATION	NEAR PNB MOTI BAZAAR, MANDI-175001	9816024978	M Mahender Singh Thalur
Himachal Pradesh	Palampur	Electronic Home	Kalku Di Hatti,PO Maranda Thasil, Palampur, Distt-Kangra-176102	01894238463	Mr. Ravi Kumar
Himachal Pradesh	Poanta Sahib	SINGAL MARKETING	Badih Nagar,Near LIC Office, Poanta Sahib	9318715848	Mr. Rajesh singal

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Himachal Pradesh	Shimla	Hanu Computers	76/ 9, 2nd floor Lower Bazar Shimla	9418068421	Sandeep Patil
Himachal Pradesh	Solan	Vikas Mobile Repair Center	MOHAN COMPLEX, First Floor Upper Bazar, Solan-175212	9816271183	Vikas
Jammu	Jammu	MOBILE CARE	608-A Gandhi Nagar Behind Laxmi Narayan Mandir	0191-2436814	Mr Dicit Gupta
Jammu	Srinagar	THE NET SURFER	2nd Floor Mohi-ud-Din Building, Polowice, srinagar	0194-2459549	Mr Wasim
Jammu	Udhampur	SERVCE SOLUTIONS	Ward No. 15 Shukli Nagar Opp. Old ITI Udhampur	01992-276724	Mr Ralesh
JHARKHAND	BOKARO	Digital Equipment Centre	CB-11, City Palace, Opp.Indian Bank, Bokaro.	9334022270	Dewashish Ojha
Jharkhand	Daltonganj	MAA MOBILES	Jail Road, Jail Hata, Dalton Ganj-82101	9304285663	McNavin Kc. Kashyap
Jharkhand	Deogarh	Kanan Electronics	Hotel Relax Complex, BLC Road, Deogarh-814112	9304059528	Mr. Mahesh Sharma
Jharkhand	Dhanbad	Nimlata Enterprises	Ground Floor, Muskan Complex, Ne-Subhash Chowk, Dhanbad.	9334027583	McNiq. Sinha
Jharkhand	Godda	Karan Mobilink	Maa Kalyani, Katra, Main Market, Godda-814133	9334525200	McSaroj Kumar Jha
Jharkhand	Hazaribagh	Digital Services	Plaza Mit. pugmill road, NeKallu Chowk, Hazaribagh.	9334599570	McShish Alam
Jharkhand	Jamshedpur	Trupati Teletech	Chakravarti Compound, Near Hotel Castel, Contractors area, Bistupur, Jamshedpur-831001	0657 3293331	Abhijeet Mukherjee
Jharkhand	Jamshedpur	Prasad Electronics	NeBus stand,Community Center, Kagal Nagar, Jamshedpur.	0657-2226077	McRaju/ Saritha
Jharkhand	Rangarh	Shreyas Empaie	Bus Stand Complex, Rangarh-829122	9334085642	McPiyush
Jharkhand	Ranchi	Balaji Infotech	Near DrKashyap Eyeclinic, Purulia Road,Ranchi.	0651-3205400, 9304412277	Mr. Sanjeev, Mr. Sunil Kedia
Jharkhand	Ranchi	Saty Systems & Solutions	158, Opp Hotel Palace, Kadru, Ranchi-834002	0651 3291019	Amit Rastogi
Karnataka	Anekal	Sri Venkateshwara Communications	# 37, KSRIC COLONY, HOSUR MAIN ROAD,ANEXAL TALLUK, BANGALORE - 562106	320078	RJaganath
Karnataka	Bagalkote	Turning Point Computers	Opp. VRL Booking point, near Engg college BEC road, Vidyanagi, Bagalkote	329310	B.M. Hiremath/ Veeresh
Karnataka	Bailhongal	3G Communication	Shop No 459/2 Near Inchal Cross Belgaum Road Bailhongal-591102	9343815097	Vishwanath
Karnataka	Bangalore	Ascent Communication	No:113, St. Johns Church road, Bangalore - 560005	32914856	Kumaresan
Karnataka	Bangalore	Insta Service Point	NO-64,Mission road, SATHI COMPLEX, BANGALORE-27	22107560	Yenkaresh
Karnataka	Bangalore	Optima Mobile Services	24/2,Dr.Rajkumar Road, Near Subramanyanagar Police Station, 2nd Block, Rajajinagar, Bangalore - 560 010	23131953	Umri Krishnan
Karnataka	Bangalore	Optima Mobile Services	P-3, Mallikarjuna Complex, Opp R T Nagar Police Station, 80 Feet Road, R T Nagar, Bangalore-560032	32710202	Madan
Karnataka	Bangalore	Pranav infocom	No 102, Surya Mansion, 7th Main, 4th Block, JAYANAGAR, BANGALORE -560011	9343023209	SVSirish
Karnataka	Belgaum	Hello India Telecom	G-4,Maratha Mandir Complex, Khanapur Road, Near Railway Flyover, Belgaum - 590 001.	2420533	Mohan
Karnataka	Bellary	Shri Vinayak Electronics	# C1, R K Complex, KC Road Bellary-583103	655045	Devandra / Richard

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Karnataka	Bhadravati	Digital communication	SR Complex 4th cross B H Road Bhadravathi-577301	9341081291	Nagabushan
Karnataka	Bhatkal	Vijay Communication	Hussian Complex Bunder road Bhatkal - 581320	329527	Vittal H.Naik
Karnataka	Bidar	Mayuri Infotech	Ravi complex,shop no: 4,Udgi; road,Bidar-585401	225544	Ravi Halhali
Karnataka	Bijapur	Turning point computers	Khed building,opp Vijaya college, Sholapur road, Bijapur-586105	329518	S.M.Hiremath
Karnataka	Channarayana	C&C Technology	"Ramunjam Nilaya" No.2104, 11th Cross, Kempunagar B M Road, Channarayana - 571501	324222	Charan
Karnataka	Chikaballapur	Sri Ram Prasad Enterprises	Post office road Chikaballapur-562101	329579	Yardhanaj / Ram prasad
Karnataka	Chikmagalur	Cell Tec Electronics	ragavendra complex, NMC circle,Neharu road, Chikmagalur - 577101	9341013185	Prem kumar
Karnataka	Chintamani	Amrutha Mobiles	Gajanna Circle Chintamani - 563125	9342262811	Sudarshan Reddy
Karnataka	Davangere	Kruthika Communication	Shop No: 6, Park View Plaza, (Income Tax Office's Ground Floor), 4th Main, Near Vishweshwaraiah Park, Pj Extension, Davangere-577002	395444	Sujay
Karnataka	Doddaballapur	Santosh Communication	VITOBHA TEMPLE ROAD, OPP ASHWINI HOSPITAL, DODDABALLAPUR -562205.	9341766645	Santosh
Karnataka	Gadag	Tranqui Telecom Service Pvt Ltd	Shop No12, Siddalingeshwar Complex Below SBM, Station Road,Gadag District Gadag-528101	576998	Raju / Zakir
Karnataka	Gokak	Cell World	Basaweshwara circle opp-court Gokak - 591307	93458-73777	Shivanand / Chougala
Karnataka	Gulbarga	Ashwarya Communication	C-9, Asian Plaza S.V.P.Chowk Main road Gulbarga-585102	329447	Malikarjun
Karnataka	Hassan	Sree Digital Solutions	1380 Mission Hospital road opp Hindbed college - 573201	329481	Vidya Shankar
Karnataka	Hosakote	Empoys Communication	Shop no 1, Mahalatha Devi Complex M V Badavane, College Road Hoskote-562114	652552	Raghunandan
Karnataka	Hubli	Shrutii Services	shop no : B6, Lami complex, Court circle , Hubli- 580020	3290671	Mahendar
Karnataka	Hunsur	Sriam Infocom	No 6, Municipal complex, H.D.Kote road circle - 571105	253699	H.H.Pradeep
Karnataka	Kadur	Ashwa Tele Mobiles	TB Road Kadur -577548	9341033310	R.Ananda Murthy
Karnataka	Kankapura	Sumah Communications	Harshitha Complex, Budikere, Bangalore main rd, Near KSTC bus stand Kanakapura-562117	9342743544	R.C.Harish
Karnataka	Karwar	Mithun Tele Solution	Prema complex Civil court road opp SBM Karwar -581501	9341199222	Mithun palyunker
Karnataka	KGF	Global Net Communications	Opp. King George Hall, Geetha road Robertson pet, KGF - 563122	329559	Shiva Kumar
Karnataka	Kolar	Seamatrix	No:384 Suguna complex Near KSRTC bus stand, Anthargange road, Kolar 560101	2228714	Shetty
Karnataka	Kumta	Krishna Mobiles	938, College road, NH 17, opp RWW, Kumta - 581345	329607	D.V.Prabhu
Karnataka	Kundapur	Reya Mobiles	Vaishali complex I fir Shastris circle, Kundapur - 576201	320866	Anantha / Ramya
Karnataka	Madikeri	C.M. Communications	Shop no. 8, M A Complex 1st fir Kahirnoor rd Madikeri	9345837555	Mohamad Sharief
Karnataka	Mandya	C & C Technology	2068, First Cross, Krishna Krupa Nilaya Subhash Nagar, Mandya-571401	320777	Charan
Karnataka	Mangalore	Innovative Infocom	15-10-537/11, Jayawarma Centre, Mallikatte Circle, Kadri, Mangalore - 575002.	6563244	Sebastian Fernandes

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Karnataka	Moodabidri	Media Guard Technologies	Rajeev Gandhi complex main road Moodabidri	325909	Yishwas Kumar
Karnataka	Mysore	K.K.Marketing	1432/9, Tribhuvan Towers, opp Veterinary Hospital, Dewan's Road, Dhanwantri Road Cross, Mysore -570001	4258613	Karunakaran.
Karnataka	Nipani	Manusoft Computers	Dumale Complex Chikodi road Nipani - 591237	9448148005	Mahesh Dumale
Karnataka	Raichur	Akhay Electronics	1st floor, hotel UMA complex, station road, Raichur - 584101	329675	Narasimhu
Karnataka	Ranibennur	Kruthika Communication	LIC Building Opp to Gupta Petrol bank PB road Ranibennur-581115	231444	Sojary
Karnataka	Shimoga	Chetan Electronics	C-5, Kenchappa complex, Durggudi main road, Shimoga-577201	9345370193	Panduranga rao / Binoy
Karnataka	Tiptur	Shree Digital Solutions	Nanjappa complex, opp city union bank, BH road, Tiptur - 572201	9345813731	Vidyashankar
Karnataka	Tumkur	Durga Communication	No.14 CMI Complex, opp Jayadeva Hostel, B.H.Road - 572101	2256184	Naveen Kumar
Karnataka	Udupi	Sanman Mobile Services	Shop No: 15, Simaz complex, Diana circle, Court road, Udupi- 576101.	3955770	Prakash
Kerala	Alappuzha	GETRONICS	FIRST FLOOR, KARTHIKA BUILDING, OPP SDV BOYS HIGH SCHOOL, COURT ROAD, ALLEPPY	3290446	OMPRAKASH
Kerala	Alathur	MARSTEX	12/950, Ground Floor, AR Complex, Opp. Munsiff's Court, Alathur, Palakkad Dt.- 678 541	04922-323131	Mr. Rajesh. V.
Kerala	Aluva	SED INFOSYS	BUILDING NO 12/57 DOOR NO 8, FIRST FLOOR, POOTHULLIL BUILDING, ALUVA - 683 101.	3255599	Sudheesh
Kerala	Attingal	AM Technologies	Mamam, Near Dreams Theater, Attingal	3290301	Saji
Kerala	Badagara	Amarish Communications	1st Floor, Sarala Complex, Near KVR Motors, N.H. Bypass Road, Nut Street, Vadakara-673101.	0496 - 3255756	MJeeju / Mr. Bajju
Kerala	Cherthala	Cherukattu Phones	Krishna Building, Opp govt boys high school, AC road, Cherthala	9388441434	Mahesh C D
Kerala	Emakulam	TELETECH SYSTEMS	20, First Floor, Penta Estate, above Airtel office, Janatha Junction, Palairattom, Cochin-25	3207554	SONY THOMAS
Kerala	Emakulam	Zenicon Infocom(P) limited	Above Syndicate Bank, Opp Cochin Shipyard, M.G.Road, Cochin-15	2359511	Jaimon Joseph
Kerala	Emakulam	Guidelines	Ground Floor, Mundukottackal Estates, Kadavanthara, S A Road, Cochin	4000113	Mang G
Kerala	IRINJALAKKUDA	NICE MOBILES	NICE BUILDING, ST. JOSEPH'S COLLEGE JUNCTION, IRINJALAKKUDA - 680121	0480-3291515	MR. SEBASTIAN
Kerala	Kalpetta	Mobi Care	Apasara Building Near Municipality Office, Main Road, Kalpetta	04936-329366	Thanseer
Kerala	Kanhangad	Xn COMPUTERS & DATACARE	BENGACHERY COMPLEX, OPPVAPARA BHAVAN, T B ROAD JN. KANHANGAD.	0467-3259755	Mr.SANDEEP
Kerala	KANNUR	SAHAR COMMUNICATIONS	SB-666-C & D, PRESTIGE CENTRE, GROUND FLOOR, SUB REGISTER OFFICE ROAD, KANNUR.	0487-3258585	AJAI ABHIRAM
Kerala	Kanunagappally	Supreme Enterprises	Vaiyath Plaza, Opp to KSRTC Bus stand,Kanunagappally	2620282	Mr. Ratisch/Prem
Kerala	Kasargode	Xn COMPUTERS & DATACARE	BENDICHAL COMMERCIAL COMPLEX, PRESS CLUB JN. MG ROAD, KASARGOD.	04994-324755	Mr. SANDEEP
Kerala	Kollam	Digital Infosystems	MC-3087, New Block, Bishop Jeromi Nagar, Chinakkada, Kollam-691001	2760647	Johnson Lawrence
Kerala	Kottarakkara	Sivashakti Communications	KP II/1574, Vailyanla bldg, Near Marthoma Girls high school, Palamon PO, Kottarakkara	3298191	Suresh

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Kerala	Kottayam	SVM Technologies	M.PM COMPLEX, Near Popular Maruti Show Room, M.C ROAD, S.H MOUNTKOTTAYAM, KERALA- 686 006	2565303	Rajesh K S
Kerala	Kozhikode	Domain Infosystems	1st Floor, Al Fahad Complex, Saba School Cross Road, Near Corporation Stadium, Puthiyara, Kozhikode-673004	0495-272222, 0495-3243745	Mukundan
Kerala	KUNNAMKULAM	Y STAR MOBILES	ROOM NO 4/ VIII/1039, CITY COMPLEX,OPP TEMPO PARK, TOWN HALL ROAD, KUNNAMKULAM.	04885-320009	VIJIMONK.V.
Kerala	Manjeri	Integrated Computer Systems	Royal Tower TB Road, Manjeri - 676121	0483-3299686	Mr.Thomason Chacko
Kerala	Mavelikara	Ettutharai Agencies	GROUND FLOOR, KOIPPALLIL ROYAL ARCADE, PUTHIYAKAVU, MAVELIKARA	3293340	Biji
Kerala	Palai	Cyriac Tv Plaza	Vypana Building,Petta Road, Palai.	329746	Tom Cyriac
Kerala	Palakkad	Benraws International	12/310/6, Ground Floor, Mero Complex, H.P.O.Road, Palakkad - 678 001.	0491-3052002	Mathews
Kerala	Palakkad	ORION TECHNO SOLUTIONS	12/310/15 FIRST FLOOR, METRO COMPLEX, HEAD POST OFFICE ROAD, PALAKAD-678001	0491 - 3202525	KHAJA HUSSAIN
Kerala	Pathanamthitta	Melampambal Agencies	10/264, Main Road, Town,Pathanamthitta	2223132	M.V. Francis Oommen
Kerala	THALASSERY	SAHAR COMMUNICATION	44-1929, MACKSON MONOR, OPP PARIS RESIDENCY, LOGANS ROAD, THALASSERY	0490 - 3208585	AJAI
Kerala	Thiruvalla	Sangeetha Electronics	524/17, Central Tower, Cross Junction, Thiruvalla	3203000	Ranjeev Kumar
Kerala	Thiruvananthapuram	Appolo Systems	Thelungu Chetty Complex, Shop No 23-24, Kalpalayam JN Karamana, Thiruvananthapuram 695 002.	2340523	Santosh
Kerala	Thiruvananthapuram	Smart Mobile	TC 2/3554(5), First Floor, Opp. Petrol Pump, Kesavadasapuram, Thiruvandrum-695004	3200105	Krishnakumar P B
Kerala	Thodupuzha	National Electronics	Shop No 5, Aswathy Shopping Complex, Temple Junction, Thodupuzha	220320	Aneesh M A
Kerala	Thripunthura	Nice Mobiles	382J, 1st floor, Century Plaza, N.H.17 Near Bus Stand, Thripunthura-680567	0487 - 3240400	TP Sebastian
Kerala	Tirur	Telit Telecom Shop	GROUND FLOOR, AL AMAL COMPLEX, PAN BAZAR, TIRUR	0494 - 3295623	YasanK.Nair
Kerala	TRICHUR	CELL TECH	SHOP NUMBER 5B,TC23/326, N.P. TOWER, GJURUVAJOOR ROAD, WEST FORT, Thrissur	0487-2387386	SANTOM KALLOOR
Kerala	Vaikom	VAIKUNDAM ELECTRONICS	II/ 214C , Mannamkeriel Complex, Bus stand Road, Vailyakavala, Vaikom	326616	Sreekumar.G
Madhya Pradesh	Balaghat	Shri Computers	Keshar Plaza Complex, Hanuman Chowk, Balaghat	9300632132	Mr. Deepak Bajaj
Madhya Pradesh	Betul	Shivam Electronics	Jajprakash Chowk,Kothi Bazar, Auto Stand, Betul - 460001	9329099071	McVikram Motwani
Madhya Pradesh	Bhopal	Akansa Enterprises	25-26 , CENTRAL MARKET, ROSHANPURA SQUARE, BHOPAL MP	7553201626	Mr. Dinesh Asja
Madhya Pradesh	Bhopal	Neha Sales Corporation	F-104, Anmol Tower, E-5/14, Commercial Zone, Aera Colony, Bhopal-462016	7553015088	McAshok Hirwani
Madhya Pradesh	Bhopal	MUSIC MAHAL BHOPAL	SHOPNO.1 NEW MARKET NEAR HANUMAN MANDIR, BHOPAL	0755-5220725/ 2579178	McSHINU
Madhya Pradesh	Bhopal	GSM SOLUTION-BHO	M-2 CHEETAH COMPLEX, ZONE -2 M.P NAGAR, Bhopal	07373-316816	McNEERAJ
Madhya Pradesh	Biaora	MOBILECARE-BIAORA	KR Complex Rajkand Road, Biaora, M.P.	07373-316816	McAtul Sharma

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Madhya Pradesh	Chindwara	Bunty Photoelectronics	Shop No.33, Jji Bai Complex, Parasia Road, Chindwara	07162-230358	Mr.Ritesh Shukla
Madhya Pradesh	Dewas	New Taj Electronics	New Taj Electronics, 4, New Market, Moti Bunglow Main Road, Dewas	07272-220005, 406006	Mr.Shubbir Shaikh
Madhya Pradesh	Guna	Mobile Junction	Jai Stambh Chauraha,N:Central Bank, Guna-473001	07542-329277	Mr.Deepak Arya
Madhya Pradesh	Gwalior	Galav Computers	Ground floor ,Ganpati Plaza , City Centre , Gwalior	0751-4013311	Mr.Pradeep Dixit
Madhya Pradesh	Gwalior	VERSHA SALES & SERVICE-ASP	GROUND FLOOR SARAPA BAZAR LASHKAR,CWALIOR	0751-4060444	Mr.AJIT KUMAR
Madhya Pradesh	Indore	Apurva Electronics	UG 11 , B M Tower , Sapna Sangeeta Road , Opp. Lotus, Indore	7313207283	Mr.Nitin Kulkarni
Madhya Pradesh	Indore	Ayushi Electronics	UG-10,Ratnamani Complex, 7/1,New Palasia, Indore-452001	0731-4006503	Mr.Santosh Dwivedi
Madhya Pradesh	Indore	PIONEER MARKETING	224, Prem Trade Center, Maharani Road, Indore.	0731-4006503	Mr.Ritesh
Madhya Pradesh	Indore	IT CUSTOMER CARE-IND	LG-13, TRADE CENTRE,18,SOUTH TUKOGANI, INDORE	0731-4207487	Mr. Sanjay Dhankar
Madhya Pradesh	Itarsi	S.S. Telecommunications	Vijayshree Complex 5, Line Sarafa Bazar, Itarsi - 461111	9300272505.	Mr.Aklesh Sasena
Madhya Pradesh	Jabalpur	Sri Sai Communication	C/O MUSKAN CARD GALLERY, 766, SHAHID SMARK MARG, NEAR RANITAL SQUJARE, JABALPUR-482001	0761-4046831	Mr.MOHIT SAREEN
Madhya Pradesh	Jabalpur	I T SOLUTION	GROUND FLOOR,ASTHA APPARTMENTS.WRIGHT TOWN, Jabalpur	0761-4014064/ 4064370	Mr.SANJEEV CHOUBEY
Madhya Pradesh	Katni	Excellent Infosys	20/306, Gurunanak Ward, Katni	07622-406047	Mr.Prafull Agrawal
Madhya Pradesh	Khandwa	NAMAN REFRIGERATION-KHANDWA	TAPAL CHALL,KHANDWA	0733-2230089	MR.YASHWANT MALI
Madhya Pradesh	Mandsaur	Sky Link Mobile Services	Payas Ice Cream Parlour, 16, Opium Godown Road, Nai Abadi, Mandsaur 458001 (M.P)	07422-243978	Mr.Gaurav B. Mittal
Madhya Pradesh	MORENA	MOBILE PLAZA	M S ROAD ,JIWAI GUJ , OPP BANK OF INDIA, MORENA	07532-400886	Mr.T C SHIVHARE
Madhya Pradesh	Neemuch	Shree Balaji Mobiles	Jain Bhawan Road, Near Ganganagar Off. NEEMUCH (M.P)	07423-320033	Mr.Saresh Goyal
Madhya Pradesh	Ratlam	Kirti Telecom	124 Station road Opp.Raj Tower, Ratlam - 457001	239546	Mr.Kirti Jain
Madhya Pradesh	Sagar	Neeta Computers	Jama Complex, Teen Batti, Sagar - 470002.	07582-329951	Mr.Ramesh Gupta
Madhya Pradesh	Satna	Ma Sharda Communication	Call No 1, C/o Shri Gopal Sharan Singh, Pushp Raj Colony, Satna	7672320797	Mr.Prashant Singh
Madhya Pradesh	SATNA	AKASHWANI AGENCIES-SATNA	OPPCMA SCHOOL,SHOP NO.2,ANNAM CHHAYA, REWA ROAD, Satna	07672-416455	Mr.Ajay Sukhrmani
Madhya Pradesh	Shivpuri	Ocean Computer Corporation	1st Floor, Vishnu Mandir Market, Near Panipat Handloom, Shivpuri	07492-225505	Mr.Sameer Saena
Madhya Pradesh	Ujain	Galaxy Computers & Communication	43/2, Yamuchi Marg,Opp Madhav Nagar Police Station, Freeganj, Ujain	0734-2515995, 2530777	Mr.Anurag Chhabhani
Maharashtra	AHMEDNAGAR	T V SPOT	B-3, ADARSH SAMRUDHI, NR. CHOURPATI KARANJA 414001	0241-2526267	MR ANIL APTÉ
Maharashtra	Akola	Supra Computers	Ushakian Complex, Shastri Nagar, Opp. Hotel Surya, Akola.	9326864649	Mr.Prashant

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Maharashtra	Amravati	Scorpio Services	Shop No. 84, Ground Floor, Gulshan Towers, Nr. Panchasheel Cinema, Amravati, Pin-444601	0721-2567302	Mr Pramod
Maharashtra	Aurangabad	Unique Telematics	Shop no.108/B, Behind Sajawat Handloom, Tapdiya Super Market, Nirala Bazar, Aurangabad-431001	0240-2536447	MrMahar Ahmed Shaikh
Maharashtra	Aurangabad	Electronics World	Sahyadri Building,opp. To Shivaji School,Khokadpura, Aurangabad-431001.	0240-3296998	Mr. Rauf
Maharashtra	Beed	Shree Enterprises	Behind Raj Hotel, A H Wadia Vachnalay Road, Beed-431122.	02442 231831, 02442-228855	Mr. Rahul Joshi/ Mr. Rajiv Joshi
Maharashtra	BHIWANDI	WARAD ELECTRONICS	SHOP NO.2, PRABHU CHAYA BLDG, PRABHU ALL NEAR OLD GOVT. HOSPITAL, MANDAL, BHIWANDI, DIST THANE	02522- 222653	Mr. Htendra Zope
Maharashtra	Chalisgaon	Mobile Point	Shop-22, Momaya Complex, Near Bus Stand, Chalisgaon	02554-309996	Mohd. Israfil Ansari
Maharashtra	Chandrapur	Crystal Services	Behind Hotel Simran, Jatpura Gate Chandrapur	9370273776	Mr. Mahmood
Maharashtra	Chandrapur	Shiv Communications	Ramnagar, Near Durga Mata Mandir, Sindihi Colony, Chandrapur	529546	Mr.Mahesh
Maharashtra	Chinchwad (Pimpri)	Ritz Communication	Shop No 10,"A" wing,Jai Ganesh Vision,Next to Hotel Neelkanth,Near Fam Multiplex,Akurd, Pune-411033	020-27485613, 020 32661900, 09371029777	Ms Nikita
Maharashtra	Dhule	Pearl Communications	Below Reliance WebWorld Express, CKB Arcade, Nr Deapur Bus Stand, Dhule.	02562-324666	Mrs. Soru Atul Bang
Maharashtra	Gondia	M/s V2 Care	Opp. Cofee house, Railtoi, Gondia 441614	529522	Mr. Krishna Sargam
Maharashtra	Hatkangale (Chalkaranji)	Sai Vision Services	11/236 MOHAN ARCADE SHOP NO B14, STATION ROAD, TAL- HATKANGALE. CITY-ICHALKARANJI-416115	0230-2439989	Sameer Bhonsale
Maharashtra	Islampur	Solar Shoppo	opp Sai Motor Driving School, Nr Stand Road, Islampur, Distt Sangli, ISLAMPUR-415409	9326777603	Mr. D.H.Patil
Maharashtra	Jalgaon	Global Enterprises	E-81, 1st floor, Golari Market, Jalgaon -425001	0257-2256899	Mr Pramod
Maharashtra	KADAN	SKY LARK ASSOCIATES	Shop.1, 'A' Wing, Suresh Tower Co-op. Hsg. Soc. Opp. Municipal Vegetable Market, Santoshi Mata Road, Kalyan (W)	0251-3209899	MR. NASEER
Maharashtra	Kolhapur	SMS Services	S.S. Diwan Tower Opp. Nutan Marathi School, Near Mirajkar Tikky, Kolhapur, Pin -416005.	0231-2541120, 9326226120	Prakash Patil
Maharashtra	Kolhapur	KDMAL ELECTRONICS	517/10 "SAWALI" SHIVAJI PARK,NEAR VIKRAM HIGHSCHOOL,SHIVAJI PARK KOLHAPUR-416001	0231-2521424, 09823517055	MR. VASANT P. BODAKE
Maharashtra	Kopergaon	Om Sai Mobile	Opp. ST Bus Stand, Dahargmaon Road, Kopergaon, Dist Ahmednagar.	02423-226463	Mr Mahendra Dewkar
Maharashtra	Latur	HINDUSTAN MOBILES SERVICES	Shop No.47/59,Site 110, Gandhi Market, Nr Bhalchandra Blood Bank, Main Road, Latur-413512	02382-641111, 982345500	Mr Sandeep Parande
Maharashtra	Malegaon	Cell Care	Shop No.14, Beside Sana Travels, Bunkar Bazar, Qidwai Road, Malegaon - 423203.	937020819	Mr Ansari Mohd Israfil
Maharashtra	Mumbai	Absolute Networks	A007, Vishal Shopping Centre, Next to Vishal Hall, Near Station, M.V.Road, Andheri (E), Mumbai - 400 069	022 32544800	Mr Anun

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Maharashtra	Mumbai	Creative Solutions	SHOP NO 6 AMBIKA COOPERATIVE HOUSING SOCIETY, JAWAHAR NAGAR ROAD NO 2 NEAR RAILWAY CROSSING,GOREGAON WEST, MUMBAI 400062	022-28769003	Mr Anand
Maharashtra	Mumbai	CYBER-OMN CONVERGENCE & SERVICES (INDIA) PVT. LTD.	43/44, Gold Filled Plaza, Sion Bandra Link Road, Sion, Mumbai-400017	022-24075939	Mr.Jatin Parekh
Maharashtra	Mumbai	G.PLECTRONIC	A/27, Gc. floor, Sagar Tech Plaza, Andheri-Kurla Road, Saki-Naka, Andheri (E), Mumbai 400072	2232633960	Mr MAYUR
Maharashtra	Mumbai	Grace Tele Services	Shop no 3, C/1, Manik Nagar Soc, Punjabi lane, Borivali (W), Mumbai 400092	022-32455033	Mr. Daniel
Maharashtra	Mumbai	Komplex Telecom Corporation	Shop no.A/19, Nootan Nagar Premises Co. Op. Hsg. Society, Near Bandra Rly. Stn., Towards Bandra Talav, Turner Road, Bandra (West) Mumbai	022 64147153	Mr. Haque
Maharashtra	Mumbai	IG Service Centre	Shop No.1,2,3 Ground Floor, Rajakamal Bldg,Opp.Ram Mandir, Subhash Road, Vile Parle(E) Mumbai 400 057	022-26134917	MR. RAKESH / OMKAR
Maharashtra	Mumbai	PARAS TELECOM	2nd floor, Rear Side Capital Cinema Building, Wauddy Road, Opp. Mumbai CST Railway Station, Mumbai	022 32022228	Mr. Ganesh
Maharashtra	Mumbai	Sai Tele Services	A-110, Satyam Commercial Complex, M.G.Road, Chhatroper (E), Mumbai - 400 077.	022-40111264	Ms. ISHA
Maharashtra	Mumbai	Yash Telecom	Dadarkar Tower, Shop no.1, Opp.Film Centre, Near Crossroads, Tardeo, Mumbai - 400 034	9324049698	Mr.Grishh
Maharashtra	Mumbai	TERABYTE	Shop 27 Vikas Paradise, Bhakti Marg, Off L.B.S. Road, Near R Mall, Mulund (W), Mumbai 400080	022-32640045	Mr. Chirag
Maharashtra	Mumbai	Trident Communications	8-A,Vasant Smriti, Dadasaheb Phalke Road, Beside "BharatKhsetra Building", Near Dadar station(E), Dadar -East, Mumbai - 400 014.	9323960027	Mr. Kalpesh
Maharashtra	Mumbai	Sierra Mobiles	Opp Prabhu Darshan, L.J.Road, Shivaji Park, Near Shiv Sena Bhavan, Mumbai 400016	022 24382200	Mr. Anurag
Maharashtra	Nagpur	Epoch Services	"Shop No. UG-9, Bhakati Vihar Complex, Chapru Nagar Square, Lakadgarj, Nagpur -440008"	0712 3246777	Mr. Grishh
Maharashtra	Nagpur	Spectrum Marketing	Shop No.2, Dharampeth Towers, West High Court (WHC) Road, Dharampeth , Nagpur - 440010	712-22527823	Ms. Sonali
Maharashtra	Nagpur	Shivatronics	B-31 Sai Regency Complex Ravi Nagar Square Nagpur Maharashtra 440044	9300892579	Mr. Ravi Gupta
Maharashtra	NANDED	DEVANSH MICROTRONICS	.opp forest office, nr Rambhidkar's residence -Nanded-431602	02462-249789	Mr. Prashant Palhate
Maharashtra	Nanded	ROYAL UNIQUE SERVICES-NANDED	Plot No-48,Krishna Kamal , Opp. Sunil Furniture, Bhagya Nagar road, Ashok Nagar Nanded-431605	2,462,262,419	Mrs. Sunita Ashish Naik
Maharashtra	Nasik	Mobs Associates	Shop No. 8a, First Floor,'Kapote-Meher' Market, Renuka Nagar, Wadala Naka, Dawika, Nasik - 422 001.	0253-6523613	Mr. Mahesh
Maharashtra	PANVEL	Oceanic Tele System	Shop No. 3, Sai Arcade, Sector 15, New Panel (E),Dist. Raigad.	9322217221	Ms. Swapnaja
Maharashtra	PEN	SKYPHONE ENTERPRISES	SHOP NO 3, SHREE COMPLEX, OPP UNIQUE BAZAR, PEN KHOPOLI ROAD, PEN, DIST RAIGAD-402107	9373435000	MR KJLDEEP

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Maharashtra	Pune	MICROCHIP SOLUTIONS	Alkshay Chambers 216 Naryan Peth,Near Blhde Bridge, N C Kellar Rd, Pune-411030	020-24471155, 9823905949	Mr Mahesh Bhosale
Maharashtra	Pune	Horizon	32A, Lotus Court, Near Hotel Panchami, Pune Satara Road, Pune.	02032501222, 9325002399	Mr. Nilesh Pundye
Maharashtra	Pune	Mobile World	G-25, AKSHAY COMPLEX, DHOLE PATIL ROAD, PUNE-411 001	30942268, 9325088055	Pawan Mantri
Maharashtra	Pune	Wiki Info Technologies	Shop No-4, Amit Complex,474, Sadashiv Peth,Opp New English School, Tilak Road Pune Maharashtra	020 24434134.9 32220664.093 71829891	MR.VIVEK SURVE
Maharashtra	Ratnagiri	S P ELECTRONICS-PUNE	shop no-19, Parasmani Complex, K C Jain Nagar, Nr Maruthi Mandic, Ratnagiri-415612	02352-329556, 221982, 9823317158	MR. SANTOSH PRABHU
Maharashtra	Sangamner	Rajpal Telecom	Yashodhan complex,New Nagar Rd, Near hotel Chaitali, Sangamner	02425320888	Mr Harish Rajpal
Maharashtra	Sangli	Ramesh Electronics	Opp. Kanya Purohit prashala, Rajwada, Sangli-416416	0235-2327601, 9823085176, 09372107601	Suresh Shegane
Maharashtra	Satara	Shivalk Mobilink	173/6/7 Raviwarpath shop no-11, Vithal Lila Complex, Powai Naka, opp Janta Bank, Satara-415002	02162-325212	Mr Mahesh Shinde
Maharashtra	Shirampur	Siddharth Infocom	Shop No 1, Hotel Sidhartha Building, Sidhartha Stop, Sagamner Road, Shirampur-413709	02422-222171, 02422-329530	Mr. Kedar Fargade
Maharashtra	Solapur	ATHARVA ELECTRONICS PLUN	940/2 NORTH SADAR BAZAR, CARUD BUNGLOW, SOLAPUR-413003	0217-2317595, 9823317081	MR. LIMESH KAMALAPURKAR
Maharashtra	Solapur	Jawaharlal Radio Service	184, Gold Finch Peth, nr Hotel Ritesh, Solapur - 413007.	0217-2725030	Pasama J Chavan
Maharashtra	Thane	Umi Enterprises	G. F. Abhinan II , Opp. Forest Office, Teen Hath Naka, Thane (W)	022 65928384	Mr. Rinkesh Panchal
Maharashtra	VASHI	E-Link Solutions	Shop No.5, Type C, Bldg no.5/6, Shanti Vihar, Mira Road -E, Pin Code : 401107.	9322839386	Mr. OMKAR
Maharashtra	VASHI	BEEKEYEN ENTERPRISES	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	022-65114304	Mr. Shailesh
Maharashtra	VASHI	LIC Service Centre- DAKC	H Block, Ground Floor, Dhirubhai Ambani Knowledge City, Navi Mumbai-400709	022-30386032	Mr. Rajnish
Maharashtra	VIRAR	Siddhivinayak Tele Services	Shop no 5&6, Vishnu Prasad Complex, Opp Ulkarsha School, Near S.T. Bus stand, PP Marg., Virar (West) Pin 401305.	0250-3258111	Mrs. Yegita Kadam
Maharashtra	Wardha	Libra Electronics	Opposite to LIC office,Arvi Stand Main Road, Wardha : - 442001	245286	Ms. Manjusha
Maharashtra	Yavatmal	Star Electronics	Near Shyam Talkies Ram Mandir Road Yavatmal Maharashtra 445001	2324106	Mr.Srujay Chabda
Maharashtra	Yavatmal	Combine Electronics & Services	Shop No 13, 1st floor, Old Indira Gandhi Market, Azad Maidan Road, Yavatmal-445001	9822200166	Mr. Ajay Shukla
Maharashtra	Yeotmal	I T Services	Nr datley college,C/o Yahoo cyber cafe, Yavatmal 445001	9372610121	Mr. Umeh Gadwe
Orissa	Angul	Creative Solution	Hanuman Bazar, Near gandicha mandir, Angul-759122	06764-329207	Mr Tapas Sahu

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Orissa	Balasure	Raghunath IT Solutions	Azimabad, Proof Road, Balasure.-756001	06782-329267, 9337669107	Mr. Sujit Kr Sen
Orissa	Berhampur	Global Electronics	Gandhi Nagar, 1st Lane, Berhampur.	0680-2223124	Mr. D.B.Nepak
Orissa	Berhampur (Orissa)	RASHMI ELECTRONICS & COMPUTERS	Shop No.19, Sai Complex, Main Road, Gandhi Nagar, Berhampur, Orissa	0680-3290409	RASHMI RANAN SHARMA
Orissa	BHADRAK	A B Associates	NrReliance Web World Express, Bypass Road, BHADRAK-756001	9337040450	Kartik Chandra Rout
Orissa	Bhubaneswar	Miracle Services IT Estn.	Plot No. 136, Fr. Lane of Vigilance Office, Beh. Passport Office, Surya Nagar, BBSR.	0674-2390461, 2391533	Mr. Chaco/ Suprava
Orissa	Bhubneshwar	S.A.INFOSYS	291.Bomikhal, Opp.Akamra cinema hal, Bhubaneswar-751010	0674-2573314	Ashwini k saho
Orissa	Cuttack	O.A.INFOTECH	Behind Govt Bus Stand, Badambadi, Cuttack -753012	9338912613	Arabind Rout Ray
Orissa	Jajpuraod	Smruti Infotech	Dala Chhak, Jajpur Road, Jajpur	06726-324529	Mr. Sumit Ranjan Nayak
Orissa	PURI	Bajinath Infocomm	At Muncipal Mkt, Grand Road, Puri-752001	9337032005	MrAjay/ Sandeep Agrawal
Orissa	Rourkela	Infosys	T3,Bisra Road,subhadra complex Opp.Choudhary Petrol Pump, Rourkela	9337403999	Arun Ghosh
Orissa	Sambalpur	AN.Communication	Inf. Of Zilla School, Pensionpara, Sambalpur-768001	9337660919	Mr. Md. Abdul Aziz
Punjab	Amritsar	Bajaj Telecommunication	87, G Floor, Nehru Complex, Lawrence Road, Amritsar-143001	9814650314	Suman Bajaj
Punjab	Barnala	Unique Infotech	Mittal Street, Near M C Office, Barnala-148101	01679- 238007	Pankaj Goyal
Punjab	Batala	New Krishna Entrepriese	Circular Road, Near Shekhari di Kothi, Batala	1871-396612	Navin Handa
Punjab	Bathinda	Lal's Electronic Gallery	1139-A, First Floor, Amrik Singh Road, Nr Gole Digg, Bhatinda	0164-2239500, 2236337	Ashok Kakria
Punjab	Chandigarh	Vignesh Services	S.C.O- 189-90, Sec- 34, Chandigarh	0172-3018028	Mukesh Arya
Punjab	Chandigarh	New Tech	SCO 495/496 SEC 35C First floor	9814244862	Mr Pawan
Punjab	Curdaspur	S K Electronics	Ajit Singh Market, Batala Road, Nr: Petrol Pump, Curdaspur	01874-329906	Mr. S.Sukhvinder
Punjab	Hoshiarpur	Kuldip's Mobile Care	Dhobian Wali Gal,Phagwara Road, Hoshiarpur-	01882-226906	Kuldip
Punjab	Jalandhar	Mobile Center	233/1/1, Saheed Udham Singh Nagar,Backside Hotel Preet, Nakodar Road, Jalandhar-144001.	0181-3292666	Vikas Sangar
Punjab	Kapurthala	Arun Electronics	217C Block,Jama Masjid, Shopping Complex-144601	01822 329254	Arun Khosla
Punjab	Kotkapura	OM MOBILE SERVICE CENTRE	1ST FLOOR DHANU RAM PANSARI, Railway Road-151204	1635-223069, 9815759239	ROHIT MITTAL
Punjab	Ludhiana	Shahi Communication	Shop No.5, 4X International, 583 L, Model Town, Ludhiana	0161-3244190	Amit Shahi
Punjab	Ludhiana	Anant Shree Comp	19K Opp PAU Gate no 1 Ferozpur Road	0161-3245386	Ms Monia
Punjab	Malaut	KHURANA MOBILE SOLUTION	SHOP NO 7 OPP. NEW TELEPHONE EXCHANGE G T ROAD MALLUAT PIN NO - 152107	9316940005	RAMESH KHURANA
Punjab	Malerkotla	Prime Infocomm	Opp. Main gate, Govt College, Malerkotla-148025	931731979	Rohit Bansal/Raj Verma

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Punjab	Mandi Gobindgarh	Aditya Infocom	Main Iron Market, Mandi Gobindgarh	9316320490	Nresh Aggarwal
Punjab	Mansa	Sharma Telecom	OPPPARKASH BOOK DEPOTNAGINA MARKET, MANSA	9316173009	Udesh Kumar Sharma
Punjab	Moga	Rashpal Telecom	6, Red Cross Road, Court Road, Near Old Court, Moga-142001	01636-222468	Mr. Rashpal Singh
Punjab	Nabha	Echo Telecom	Opp. Milan Palace Circuar Road, NABHA 147201	01765-329244	Grish Garg
Punjab	Nawasher	K Kapoor Electronics	Kothi Road, Opp Kumar Hotel, Nawashahr-144514	01823-509739	Narender Pal
Punjab	Pathankot	Touch InfoSys	189 Opp. Guru Nanak Park, Model Town, Pathankot.	0186-3290300	Mr.Navdeep Singh Bedi
Punjab	Pathankot	Leo Comp	Near Tourist hotel, military ground, Pathankot	9814586406	Mr. Kamal
Punjab	Patiala	Image Services	84, First Floor, Leela Bhawan, Patiala-147001	0175-222796, 9872281524	Rohit Bansal
Punjab	Phagwara	Bansal telecom	C T Road,Railway Road Chowk, Phagwara-144401	01824-461321, 9888005339	Mangalesh
Punjab	Rajpura	M K Enterprises	Shop no.6,Gurudwara Singh Sabha Market, Rajpura Town-140401	9316432866	Johny
Punjab	Ropar	Arora Communication	Shop No.1,Lehari Shah Mandir Road,Ropar	9872363032	Amit Arora
Punjab	Samana	Sangam Mobile care	Tehsile Road,Near Garg Laboury	9316868292	Vaneet Kumar
Punjab	Sangur	NATIONAL COMPUTERS	SUNAMI GATE, SANGRUR PIN NO - 148001	1672233355, 9814586196	SARABJIT SINGH
Punjab	Sarhind	A.S. Infocom	Grain Market,Cinema Road Sirhind City-140406	01763-324777	Jaspreet Singh
Rajasthan	Ajmer	Nehal Infotech	S1, 2nd Floor, Inderlok Complex, Near Aga gate, Ajmer	3291404	Suresh sharma/ Shatrugan
Rajasthan	Ajmer	Piangan	112/10,Civil lines,Ajmer		Pareek
Rajasthan	Alwar	R.K.Telecom	SHOP NO.112, FIRST FLOOR, GANPATI TOWER NEAR NANGLI CIRCLE , Alwar		Umesh sharma
Rajasthan	alwar	Pareek electronics	Opp. To Tehsil,Alwar		Pareek
Rajasthan	Beawar	Srikrishna Infocom	Chaoni Road, Bhagat Charaha, Near Roadways Bus Terminus,Beawar	329675	Shawan
Rajasthan	Bhilwara	Ajanta Communications	No 3,Bapna Complex,Pur Road,Bhilwara	9351610212	Shawan
Rajasthan	Bikaner	Tech Solutions	1st floor,222&223, Ganpati plaza, KEM Road, Bikaner	3292423	Aziz/Vika
Rajasthan	chittorgarh	Ahiant Infotech	A46,Meera Market, Near Rajasthan Patrika Office, Chittorgarg	325933	Abhishek
Rajasthan	chomu	Tambi Telelink	Kotwali chabutra, dhan ji ki gali, Sadar Bazar Chomu	9314090400	Arup tamba/DP Saini
Rajasthan	Dholpur	Tirupati Telecom	14.Bhagwati Market, Near Jagan Cinema hall, Jagan Tiraha,Dholpur		Moshin/Devender
Rajasthan	Jaipur	Alpha Infotech Systems	F-1, First Floor, Krishna Mall, Lakshmi Mandir Crossing, Tonk Road, Jaipur-302015	3299724	Shatrugan mangal
Rajasthan	Jaipur	Vishwas Infotek	13-14,Indira Switch, Opp Chambal Power House, Hawa Sarak,Civil Lines, Jaipur-302016	3242050	Madan

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Rajasthan	Jaipur	Alliance Communication	C6,City plaza.Space Cinema Hall ,Jhotwara Road, Jaipur-16		Amit/Bhushan
Rajasthan	Jaipur	Solution Computers	Plot no-4,Krishna nagar II, Jampath, Lalkothi, Near Hotel Paradise, Jaipur.		Dhreej mathur
Rajasthan	Jhunjunu	M S Mobile Point	Shop num.5,Kaxwan Complex,Opp Roadways Bus Stand,Jhunjunu		Abhshek/Sunil
Rajasthan	Jodhpur	Omega Electronics	UG/4, Adeshwar Tower, Main Chopasani Road, Opp.Cehlot Watch Co, Jodhpur-342005	3291214	Pratap singh
Rajasthan	Jodhpur	Space Electronics	Shop no4, Manidhari Hospital, Residency road, Jodhpur	3291214	Hemanbt
Rajasthan	Jodhpur	Digital electrocare	3/4B, 1st Polo Pawta,Jodhpur		Johender
Rajasthan	Kishangarh	Capital Enterprises	5,Radha Krishna market, Opp. Sardul school, Kishangarg	326550	Sharrugan
Rajasthan	Kota	Cyber Infosystems	26, Ground floor, Kalawati Palwal market, Gamanpura, Kota-324007	232153	Rais khan
Rajasthan	lota	Rajesh electronics	355.Shopping centre.Near Jain Mandir,Kota		Rajesh
Rajasthan	Kota	Saya electronics	1-1A-16,Vigyan Nagar,Kota		Lalit
Rajasthan	Kotpali	Isha Communications	11, ground floor, Govardhan plaza, Nehru Bazar, Kotpali		Vijender
Rajasthan	Nagaur	Jam Apex	Shop num.7, Opp. Old power house, Station road, Nagaur	329595	Amit
Rajasthan	Nathdwara	Geniue Infotech	Shop num.10,Suriya apartments, Opp.Vandana talkies, Bus stand, Nathdwara.	329208	Gajender
Rajasthan	Pali	Mansi Mobile	9,Nasant Vihar,Opp. Bangur college,Pali		Abhishek
Rajasthan	ShrigangNagar	Telecare Serevices	33J Block, Near Birbal Circle, SriGanga nagar	3207687	Abhishek
Rajasthan	ShrigangNagar	Electro device care	10 H Block, Sri Ganga nagar.		Raman choudhary
Rajasthan	Sikar	Rita Computers	ShopNo4, Kabra Market, Shrandan Marg, Sikar		Saurav chakravathy
Rajasthan	Udaipur	Ficusa Enterprises	13.Darshanpura.Opp.M.B.Commerce College Gate, N° Computer Zone,Udaipur-313002	2410002	Mahak/Vrendra
Tamilnadu	Ambasamudram	THE MOST TECH	63D , k.r.v.complex, Opp to Marichamman Temple ,Ambasamudram	04654-25145	mrstary
Tamilnadu	Arkonam	G.M. MARKETING	NO.3/4, SUBURAYAN STREET, ARAKKONAM-631001	04177-231595	Mr.p.gajjipathi
Tamilnadu	Arni	Digitech Computers	Shop No. 201/82- B1, SM Road, Arani - 623101	04173-223929	d.mohan ram
Tamilnadu	Aruppukottai	THE MERCURY COMPUTERS	607 MADURAI ROAD, NEAR NEW BUS STAND, ARUPPUKOTTAI-626101	04566-225252	Mr. R.BOMINATHAN
Tamilnadu	Attur	VRNET	VR,Net,Dr.Arumugam complex,salem main road AITTUR	04282-243585	Mr.Senthil kumar
Tamilnadu	Batlagundu	Karthik Communications	No 221, Main Road , Batlagundu- 624202	9560019090	Mr Lakshmanan
Tamilnadu	Bhavani	Sri Abirami Electronics	2E , Pavadi Street, Anthiyur Corner, bhavani-638301	04256-230919	Mr Balamurugan
Tamilnadu	Chegalapatu	SKB Electronics	No-42 Devarajanar pillai Street, Vedachalam Nagar, Chengalpet	044-37406080	Mr.Balaji
Tamilnadu	Chennai	Genesis Communication	63/3, First main road, Gandhi Nagar, Adyar, Chennai-600020	044-24401188	Mr Suresh
Tamilnadu	Chennai	CS Systems	547/352, F M Towers, Mount Road, Nandanam, Chennai-600035	044-24330889	MrNicholus
Tamilnadu	Chennai	Sabisu	B2, Golden Enclave, New 275, Old 184, Poonamallee High Road, Kilpauk, CHENNAI 600 010.	044-26612347	MrPalani

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Tamilnadu	Chennai	Unicare Infocomm Services	No.293, Arcot Road, Next to Indian Overseas Bank, Kodambakkam Chennai - 24	044 24724666, 044 52047059, 09382306857	Kartik
Tamilnadu	Chennai	CARAGE DE TELECOM	OLD No:30- NEW No: 10, KMBF BUILDING, 1ST FLOOR, DURAISAMY ROAD, NEAR POTHYS, TNAGAR, CHENNAI 600017	044-28143454	
Tamilnadu	Chidambaram	Future Tech	Hasan Towers, 1st Floor, No. 14, V.G.PStreet, Near Hotel Ritz, Chidambaram	04144-222150	McShaker
Tamilnadu	Coimbatore	Fast track	138-C, TV Swamy Road (West), KS Puram , Coimbatore - 641002	2551155 ,	Mr Anand
Tamilnadu	Coimbatore	Nucom Services	3/61, Master Building, Kattoor Road, Pappa Naicken, Palayam, Coimbatore - 641037.	4351569	Mr.Uthaman
Tamilnadu	Coimbatore	Classic Electronics - Coi	No 1/1 , Alagappa Road , 6th St, Tatabad, Coimbatore - 640012	4374875	Mr Arivazhagan
Tamilnadu	Cuddlore	Kasturi Cellular Service	NO. 37 (2C) BHARATHI ROAD, CUDDALORE 607 001, CUDDALORE DISTRICT, TAMIL NADU.	04142 - 220185	Mr Raghupati
Tamilnadu	Cumbum	JG MOBILE SERVICE GALLERY	No 52, Gandhiji Street, CUMBUM-625516	9360211000	Mr.Senthil kumar
Tamilnadu	Dharapuram	IT Zone	40-A-1, Bye Pass Corner, Dharapuram-624202	9360360779, 04258-329293	Mr Ramakrishnan
Tamilnadu	Dharmapuri	CALRITY DIGITAL PHOTO&AUDIO	98/29C KANDASAMY VADIYAR STREET, DHARMAPURI, 636701	04342-265835	MR. RAJ MURUGHESAN
Tamilnadu	Dindigul	padma electronics	15.Dudley high School, Dindigul	0451-2427080	murali chandira
Tamilnadu	Erode	Jans Electronics	29, Sathy Road, Near Hotel Oasis, Erode - 638004	3258526	Mr Kannan
Tamilnadu	Gobichettipalayam	BEST ELECTRONICS	47a/1, lms complex kachery medu, gobichettipalayam	04285-225598	Mr.g.a.jayakumar
Tamilnadu	Hosur	Suryas will of people	R S Towers, Opp Traffic Police Station, Bangalore By Pass Road, Hosur-635109	04344-246687	Shanmugam
Tamilnadu	Kallkuruchi	NEW MAGESTIC CELL SALES&SERVICE	OPP TO TELEPHONE EXCHANGE, GANDHI ROAD KALLAKURICHI	04151-228270	MURUGESAN
Tamilnadu	Kancheepuram	Classic Mobile Care Centre	Door No.67-A, (Shop No.5), P.S.K. Street, Kancheepuram-631 501	9345636900	Mr. Damodaran
Tamilnadu	Karaikal	SHREE HARINI CELLULOR SERVICE	OPP TO NEW BUS STAND , BHARATHI MAIN ROAD,KARAIKAL-609602	320544	K.SVEGANAPATHY
Tamilnadu	Karakudi	SITYYES ELECTRONICS	10 A / 3 , Muthalaksimi Complex, Opp to Income Tax Office, Sekkalai, Karakudi - 630002	9362611455	M.S.VEERAPANDIAN
Tamilnadu	Kanur	Aswathi Electronics	108 ,Old Bye-pass Road , Near KIC Hospital , Kanur	9360244555, 9367123748	Mr Satish Kumar
Tamilnadu	Kovilpatti	STMARYS CELLPHONES	No.6, Rajakumari Towers, AKS Theater Road, Kovilpatti	9360533649 / 9894133839	Mr. Iyyappan
Tamilnadu	Krishnagiri	Madura Care Centre	No 361 , Crown Complex, Bangalore Main Road, Krishnagiri-635001	9364258223	Mr Suresh Kumar
Tamilnadu	Kumbakonam	FARGAN ELECTRONICS	NO.5 VRS COMPLEX, HAJIAR STREET, KUMBakonam- 612001,	0435-240123, 3290303	SURBIDEEN
Tamilnadu	Kuzhithurai	Mobile Care	Shop no 211, SM Arcade, Main Road, Marthandam , Kuzhithurai - 629165	270587	Mr Surendra Kumar

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Tamilnadu	Madurai	Devas Electronics	No.4, Thirumakulam North Street,Near Ayyappan koil, Thhalakulam, Madurai-625002	4360995	Cuna
Tamilnadu	Mayiladuthurai	NIS MOBILE CITY	NO-28 - C/14, R.R.COMPLEX, MAILADUTHURAI	04364-223277	ABDUL RAHIM
Tamilnadu	Nagercoil	Redeemer Electronics	Shop no 2, Pillars Gate, Balamore Road, Nagercoil-629001	04652-327788, 9445453490	MrDinkar
Tamilnadu	Namakkal	VR CARE	77/2, Veera Vilas, Trichy Main Road, Namakkal - 637001	04286-329504	Mr. R.Vijayalakshmi
Tamilnadu	Ooty	MOUNTAIN CELL COM	NO.302, Band lane, Commercial road,Near Liberty Theatre, Ooty-643001.	0425-2443787	Mr.Sujith & Miss. Geetha
Tamilnadu	Palani	HI-TECH ELECTRONICS	No.76, New Dharapuram Road, Opp. ICICI Bank, Palani - 624601	04545-240244	Mr cramachandran
Tamilnadu	Paramathy Velur	Vishwak Mobiles	No 5, KK High School Building, 98, High school road, Paramathy Velur - 638182	04268-224348, 9360110755	Mr Mohan
Tamilnadu	Pattukottai	MOBILE CARE	127, BIG STREET, PATTUKOTTAI	04373-252150	MR.ARIJ ALAGAN
Tamilnadu	Perambalur	THE BEST	Vivkanand st., M.P. office opp., Perambalur	04328-275717	MrPKumar
Tamilnadu	Perundurai	SREE BABY ELECTRONIC	483, mainroad, perundurai	04294-221800	Mrshiva balan
Tamilnadu	Pollachi	STAR MOBILES	SHOP NO. 5 Ground Floor, Vasanth Complex, Inmankan Street, POLLACHI.	04259-222230	Mr.Senthil Kumar
Tamilnadu	Pondicherry	Digital Logistics	126/2, Perumal Koil Street (Bharathi Street Cutting), Pondicherry-605001	9843093348	G Singaravelu
Tamilnadu	Pondicherry	BALAJI ELECTRONICS (ASC)PON-CHE	No:21, 3rd CROSS STREET, Annanagar, PONDICHERRY	3090414	
Tamilnadu	Ponneri	SRI BALAJI MOBILE CARE CENTER	NO. 26, THALUKKA OFFICE ROAD, PONNERI, THIRUVALLUR DIST-601204	27973381	MrBALAJI
Tamilnadu	Port Blair	UNIVERSAL SERVICE CARE	R.G.T. ROAD, PORT BLAIR, ANDAMAN-744101	03192-329588	McNaveen
Tamilnadu	Pudukottai	YEM KAY ELECTRONICS	2, Subabharathi complex, 5378, 79, Alangudi Road, Pudukotai- 622001.	9344038441	Mr.Rajesh Kaman
Tamilnadu	Rajapalayam	SRI VIGNESH MOBILES	292/1, TENKASI ROAD, OPP BOMBAY LADGE, RAJAPALAYAM-626117	04563-220398	Mr KJ.G.MUTTHIAH
Tamilnadu	Ramanathapuram	ZEENATH TELECOM	13-B/25, PAL LUCKY PLAZA, Madurai Road , RAMANATHAPURAM-623501	04567-226750	MrM.S.JAHIR HUSSAIN
Tamilnadu	Ranipet	Unicare Infocom Services	No.36, opp.Gangadhara Muddilar Middle School, MBT Road, Novelpuzanipet, Vellore Dist.	270806	MrBasker/ Mrkarthik
Tamilnadu	Rasipuram	SMS CARE SERVICE	No 179 / 1, Anna Salai, Ground Floor, Rasipuram-637208	9345052553	Mr Manikavasagam
Tamilnadu	Salem	Vishwesh Mobiles	Siner Complex, 121/19A, Sarada College Road, Next to Abi Medical Centre, Salem - 636007	3290553	Vasudev Nayak
Tamilnadu	Sivakasi	TELE WORLD	78, PARSN PLAZA, Chariman Shanmuga Nadar Road , OPPTO.WATER TANK, SIVAKASI-626123	04562-325370	B.MATHAN KUMAR
Tamilnadu	Tambaram	SARAVANAS INFOCOM SERVICES PVT LTD	New No-43 ,Old No:3A,Madichur road,Tambaram west,Chennai 600045	044-32915599	Mr.Palani/ Mrranjith

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Tamilnadu	Tenkasi	AIRTONE	1/ 17,KMSS complex, west masi street, Tenkasi. 627811	04633-227980	Mr.M.Nagaraja sankar
Tamilnadu	Thanjavur	Z M Electronics	1006/1007, South East Rampart, Opp to Municipal Higher Sec School Thanjore - 613001	272595, 329554	Ziauddin
Tamilnadu	Tandivanam	REVA COMMUNICATIONS	Old No. 117/1, New No. 205/1, Nehru Street, Tandivanam - 604001	225250	LAKSHMI NARAYANAN
Tamilnadu	Tiruchendur	ARK MOBILE SOLUTIONS	ARK DTP centre, No. 1 a 7 North car street, Rayan Complex, Tiruchendur. 628215	04639-243339	McMahesh
Tamilnadu	Tiruchengode	BALAJI ELECTRONICS	108 s s d road/near lorry stand tiruchengode	04288-255157	Micsekar
Tamilnadu	Tirunelveli	Classic Electronic	39, Trivendrum Road, Opposite Kalmark, Welcome Complex, Palayamkottai, Tirunelveli-627002	2575801, 3290339	Erkins
Tamilnadu	Tirupattur	Acal Computer Systems	52/1, kkc complex, krishnagiri road, tirupattur	325385	sunder
Tamilnadu	Tirupur	Shri Vasavi Electronics	*# 155-303, Margalam Road, Karunam palayam, Tirupur-641604*	4244009	MR.L.B. Balu Murali
Tamilnadu	Tiruvarur	Softel Teleservices	No 21, Municipal Complex , Ground Floor , Panagal Road , Tiruvarur-610001	04366- 22110, 9362721444	Mr Ravi
Tamilnadu	Tiruvellore	Yamkama Computer	38/186 JAWAHARLAL NEHRU ROAD, OPP TO SBI MAIN BRANCH, THIRUVALLUR - 602 001	37600329	Mr Saravana
Tamilnadu	Trichy	S K Electronics	Raj Complex, 9/A EVR Road, Puthuc, Trichy- 620017	272194	Krishnan
Tamilnadu	Tuticorin	Snows Cell Care	Kala Complex, No 20,B-1,W G C Road, Tuticorin-628002	0461-2334043	Kennedy
Tamilnadu	Udumalpet	ALWA ELECTRONICS	5 Thulava vellar shopping complex, V.O.C. street,UDUMALPET.642126	04252-223407	Mr. Sentamarai kannan
Tamilnadu	Vaniambadi	REVA COMMUNICATIONS	No.848/3, Cl. Road, Vaniambadi - 635 751	395023	LAKSHMI NARAYANAN
Tamilnadu	Vellore	Matha Communication	4, S.L.N Plaza, Opposite Odai Pillar Koil, Gandhinagar,Vellore - 632006	0416-2240800	Gunas Shekhar
Tamilnadu	Villupuram	BROAD BAND	no 642, nehruji road, VILLUPURAM	222936	Mr. Pragasam
Tamilnadu	Virudhunagar	RBG Electronics	76/9, Lakshmi Complex, Pullalakottai Road, (Opposite Uzhavar sandhai), Virudhunagar-626001.	04562-420160, 9344869593	Mr Karuppuswamy
U.P. (East)	Barabanki	Yash Enterprises	Rashid Enclave, Mugal Darbar, First Floor,nagar palika rd, Barabanki	9336523714	Mr. Ajay Srivastava
U.P. (East)	FAIZABAD	Microworld Computer Hardware Lab	1st floor, Baldev Plaza, Rakhbagari, faizabad	9335098244	Kapil/Sunil
U.P. (East)	Fatehpur	TRIMURTI TELECOM SERVICES	230, SHADI PUR CHAURAHA, NASEFEER ROAD,FATEHPUR-212601	9336235093	Sanjay Sachan
U.P. (East)	Gonda	DIGITECH SERVICES	Suraj Complex Malviya Nagar, Ground Floor,in front of Distt. Mahila Hospital, Gonda	9336695719	Atul Singh Chauhan
U.P. (East)	HARDOI	Shiro Electricals & Appliances	553 STATION ROAD, RAIUWAY GANJ, HARDOI-241001	9335348407	Gaurav
U.P. (East)	JHANSI	Krishna Enterprises	372/A CIVIL LINES,GWALIAR ROAD, JHANSI-284001	9335090997	SUJEET

State	City	ASC Name	ASC Address	Phone No.	Contact Person
U.P. (East)	Kanpur	AAKARSH ELECTRONICS	63/2 Cj9)BALAJI COMPLEX, THE MALL, KANPUR	9335360303	Mr.Raman
U.P. (East)	Kanpur	AR Infotech	111/402 Ashok Nagar, Kanpur Pin 208012		Amit Trivedi
U.P. (East)	Kanpur	LB Infotech	124/122A GOVIND NAGAR, KANPUR	0512-3207303	Deepak Bhatia
U.P. (East)	LAKHIMPUR	S S ELECTRONICS	GURDARSHAN BUILDING, KACHEHRI ROAD, LAKHIMPUR KHERI, LAKHIMPUR -262701	9335038258	SAURABH SINHA
U.P. (East)	Lucknow	ALFA ELECTRONICS	Shop No.GF20 ABC Complex, Kanpur Road, Lucknow	0522-3948730	Harjinder Singh
U.P. (East)	Lucknow	Hitech Communication	SS 205, Road Cross Plaza, Badshah Nagar Crossing, Lucknow.	9335088061	MR.RAVI PRAKASH/ MR.RAJENDRA RAMAN
U.P. (East)	Lucknow	NET COM	3 way road, City Point, Opp Krishna Bhawan, Lucknow-226024	0522-3094222	Vinod Sharma
U.P. (East)	Lucknow	RR ENTERPRISES	Shop No.3.first floor, Deewan Chand Complex, 292/11 Chowk, Lucknow	0522-3262263	MR.YOGESH
U.P. (East)	Lucknow	MOBILE DOT COM	G2 Shi Ram Towers Ashok Marg ,Lucknow	9335819202	Mr Anand Jhouri
U.P. (East)	Raebareilly	Kanara Enterprises	Shop No.3, Bajpai Market, Belgarij, Malk Main Road, Raebareilly	9336005741	Vikas
U.P. (East)	Sitapur	Higrade Computers	7, Municipal Market, Sitapur	05862-331808	Sanjeev Goel
U.P. (East)	SULTANPUR	S S INFOCOM	SHOP NO. 14&15 NANDINI COMPLEX NEAR SUPER MARKET SULTANPUR-228001	9335055217	SACHIN DWIVEDI
U.P. (East)	Unnao	Avijit Infocom	251 opp Collector Ganj, Unnao	0512-6820020	VISHNU PANDEY
Uttar Pradesh	Agra	NSC Computers	Shop No G-124, Block No- 29, Sanjay Place, Agra -	9319113550	Rajeev Singhal
Uttar Pradesh	Agra	Ankur Care Centre	6/1, M.G.Road, Agra.	9412254152	Ankur Goyal
Uttar Pradesh	Agra	Space Consultancy & Services	UG 1 & 2, Opp. Jaihind Hotel, Merchant Chamber, Sadar Bazar, Agra	9338504140	Kapil Sharma / Rihan Pervej
Uttar Pradesh	Aligarh	Infocare	17, Vikram Arcade, Railway Road, Aligarh -	9359588880	Kamal Jain / Prabal bansal
Uttar Pradesh	Aligarh	A.V.Computer Services	City Enclave opp.Kumar Nursing Home Ramghat Road	9412274391	Yashiv Gupta
Uttar Pradesh	Allahabad	RADIO CENTRE	SHOP NO-3 1ST FLOOR MEENA BAZAR, Allahabad	3292488	MR. MANISH KHANNA
Uttar Pradesh	Allahabad	B.P.Electronics	28, M.G.Marg, opp Rama Jewellers Civil lines, Allahabad-211001	3290315	Mr. Umesh Aggarwal
Uttar Pradesh	Allahabad	MICRONET SOLUTION	B 38/1 ,SHOP NO. FF3 VASHTISHTHA VINAYAK TOWER, TASHKAND MARG, CIVIL LINES, ALLAHABAD	9335395183	Mr. Hashmi
Uttar Pradesh	AMROHA	SHREE JEE TRADERS	K.ILISA ROAD NEAR MODABADI GATE, AMROHA	9319075289	SIDHARTH ACARWAL
Uttar Pradesh	AZAMGARH	RAJASTHALI	ASIF GANJ, CHOWK, AZAMGARH-276001	223644	MR.TRILOKI NATH JALAAAN
Uttar Pradesh	Badyn	Customer Care Services.	Plaza Market 1st Floor Near Chantaghar sixroad Badyun.	9319086944	Mr. Nazim
Uttar Pradesh	BALIA	Sankatha Communications	Mall Godam Road D.S. N.Pandey Clinic Chowk Balia-277001. UP	9336655533	Mr. Manish
Uttar Pradesh	Bareilly	JAI INFOTECH	SA-96 DEENDAYAL PURAM BAREILLY	0581-3208484	Mr Rohit Tandon

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Uttar Pradesh	Bareilly	Sapan Infotech	G - 64 A Kumar Complex, Near Gupta Watch Co.116 Civil Lines, Bareilly	9359102467	Mr Dharendra Negi
Uttar Pradesh	Basti	Royal Enterprises	Shop No.12 Nagar Palika Market, Company Bagh, Basti	9356784054	Sunil Kumar
Uttar Pradesh	BHADOI	Kislay Communication	VINDA MARKET NEAR TEHSIL, BHADOI-224101	9255506029	KISLAY
Uttar Pradesh	Bijnor	Konark Service Centre	Shop No.71st Floor Near Ajaz Ali Hall, Nagar Palika Complex, Bijnor	9358564067	MrPratyush Gupta
Uttar Pradesh	Bulandshar	MN Telecom	Shop No-1 BHARAMAPUTRA COMPLEX,KALA AAM, BULANDSHAR	9,358,011,688	Mr. Taakir Khan
Uttar Pradesh	CHANDOUSI	OM TECHNOLOGIES	697 SITA ROAD,NEAR GANESH MANDIR, CHANDOUSI	9359986766	SACHIN GUPTA
Uttar Pradesh	DEORIA	ATHARAV COMMUNICATION	SHOP NO 5,SHANTI COMPLEX, HANUMAN MANDIR ROAD	9305012566	K.N.GUPTA
Uttar Pradesh	Etah	Triveni Computer Service	688/1 Vijay Nagar,Infront of Shradha Cinema, Thandi Sadak, Etah-207001	9719398761	Vinod Kumar
Uttar Pradesh	Etawah	Frontline Computer	132, Civil lines, Palka Talab X-ing, Opp. HeroHonda Showroom, Etawah-206001	9219404194	MrPuneet Kaushik
Uttar Pradesh	FARRUKHABAD	WAVE TECHNOLOGIES	2 B /122 AWAS VIKAS, LOHIA PURAM, FARRUKHABAD-209625	9355291075	DHARAMVEER
Uttar Pradesh	Chaziabad	Charu Enterprises	Shop No.15,Opp. Sales Tax Check Post, G.T.Road,Mohan Nagar	0120-3223417	Mr.Chander Shekher
Uttar Pradesh	Chaziabad	Concessionair Documentation India Pvt Ltd (CDIL)	C-83, Rajnagar District Center (RDC), Chaziabad	0120-3292011, 4102418	Anil Tiwari
Uttar Pradesh	Chaziabad	AZURE SYSTEMS	F-28 Konark Building, RDC, Raj nagar GZB	0120-2700717	Mr. Aseem Saraswat
Uttar Pradesh	Corakhpur	Eternal Electronics	Shop No.11, Pandey Complex, 33, Kasya Road, Opp DIG Bungalow, Corakhpur -273001	3250395	Mr. Ajith
Uttar Pradesh	Corakhpur	MM Communication	Udai Trade Centre, Opp Dr H.N.Singh Medical College, Basharatpur, Corakhpur	3250395	Mr.Ashwari
Uttar Pradesh	Hapur	SMART SOLUTIONS	10, 1st Floor,City Plaza , Hapur, Chaziabad - 388001	9319384063	Mr.Rajkumar Kanaojia
Uttar Pradesh	Hathras	Anya Electricals	Bldg No.2206,Near Mayfair Hotel, Kamla Bazar, Hathras-204101	9319338655	Mr.Sumeet Arya
Uttar Pradesh	Jaunpur	Shubham Pustakalya	Mandi Naseeb Khan, Near Siya College,Jaunpur	9336510130	Sudhir/Sanjay
Uttar Pradesh	Jaunpur	SUPREME COMMUNICATION	J.P. Complex, Oland Ganj, Jaunpur	9235407278	Mr.Mahatab Raja bag
Uttar Pradesh	Kannoj	DIXIT MOBILE LAB	SHOP NO. A1 WARSI COMPLEX, LAKHAN TIRAHA, KANNOJ	9335042373	SUNIL DIXIT
Uttar Pradesh	Khatauli	Sigma Systems	A-6,Shivlok Market,Near Indra Murti, G.T.Road, Khatauli	9412582668	Mr.Alok Kumar
Uttar Pradesh	Mainpuri	Raj Communication	1002, Sadar Bazar, Near PNB , Mainpuri-205001 (I/P)	9358090251	Mr.Rishabh Khirbat
Uttar Pradesh	Mathura	R K Infocare	G-1, Athiya Palace, Sonkh Adda, Junction Road, Mathura-	9319999666	Alok Gupta
Uttar Pradesh	Meerut	Care Centre	G-19 , Yardaman Plaza, Garh Road, Meerut.	0121-3249666	MrAjay Mittal
Uttar Pradesh	Meerut	Systech Computers	F-124/125 1st floor Ganga Plaza, Begam Bridge Road, Meerut.	0121-4003194	Vineet Goyal

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Uttar Pradesh	Meerut	COINCAP SERVICES	Labour Compound, Above Allahabad Bank,Near Akash Ganga Jewellers, Begum Bridge, Meerut	0121-2667942	Atul Mittal
Uttar Pradesh	Meerut	Essar Services	F-122/123 1st floor Ganga Plaza, Begum Bridge Road, Meerut.	4024894	Rajiv Gupta
Uttar Pradesh	MIRZAPUR	MOBILE ZONE	RAM MARKET, PASARHATTA BAZAR, MIRZAPUR-231001 .	9335785979	MR.Arup
Uttar Pradesh	Modinagar	ANANYA COMMUNICATIONS	24.K.N.MODI COMPLEX, Modinagar 201204	01232-325424	McNitin
Uttar Pradesh	Moradabad	Bhavya Technologies	A1Z, 1st Floor, Rampur Road, Gandhi Nagar, Moradabad	0591-3292318	Yvesh Kumar Singh
Uttar Pradesh	MUGALSARAI	SKY MOBILE WORLD	SUPER MARKET,MUGALSARAI	255505	VIBHUTI JAISWAL
Uttar Pradesh	Muzaffarnagar	ADVANCE SERIES	Shop No-15 prakash chowk Muzaffarnagar-251001	09412210142	Mr. Rajiv
Uttar Pradesh	Muzaffarnagar	Jai Computers	Shop No. 4, 1st Floor, Roorkee road, Near Shiv Chowk,Central Bank.Mkt, Muzaffarnagar-251001	0131-3294447	Manohar Singh
Uttar Pradesh	Noida	M R Telecom	D-329, Sector 10, Noida, (Corner Building, Noids Stadium - Jhunduwa Main Road)	0120-4321715	Kailash Aggarwal
Uttar Pradesh	Pilibhit	Kamal Electronics	Station Road, Pilibhit	9319911226	Mr. M A Jilani
Uttar Pradesh	PRATAPGARH	CHANDRA PRATAP VEER & CO	KATCHERY ROAD, CHOWK BAZAR, PRATAPGARH - 250001	9335048271	RAJESH ACARWAL
Uttar Pradesh	RAMPUR	MAMTA TECHNOLOGIES	OPPJILA PANCHAYAT OFFICE, RAHE RAZA, RAMPUR	9319347583	RAJEEV YADAV
Uttar Pradesh	Saharanpur	Maharaj Communications	Near Maharaja Palace,Delhi Road, Saharanpur	0132-2720881	Pankaj Malhotra
Uttar Pradesh	Shahjahanpur	Sunny Mobile Point	258 B TARIN BAHADURGANJ, SHAHJANPUR	9335019616	Rajaram Maurya
Uttar Pradesh	Varanasi	Jaiswal Electronics	56/107 KACHAHRI CROSSING,NEAR COURT, VARANSI	3200375	Mr.Sujeet
Uttar Pradesh	Varanasi	Shivam Mobile Distributers	Shop No.5 B37/715-B-1 Baradari Complex, Rathaytra Crossing, Varansi Pin 221010	933540000	Rishi Mohan
Uttaranchal	Almora	Kumar Telecommunications	Paltan Bazaar, Almora	9411525789	Mr. S Kumar
Uttaranchal	Dehradun	Krishna Communication	Shop No 15A, Meedo Plaza, Rajpur Road, Dehradun,Uttaranchal.	0135 3290895	Ynod
Uttaranchal	Dehradun	PROMPT SERVICES-DEH	133, Old Connaught Place, Dehradun	9359903573	Mr. Bipin
Uttaranchal	Haldwani	Fairdeal Agencies	1st Floor,Nainital Road,Uttaranchal Trade Centre,Tikonia Chouraha, Tikonia, Haldwani	09359136000	Mr.Ajay Gupta
Uttaranchal	Haridwar	Maharaj Computer Services	B-7, Royal Plaza, Ranipur Mod., Haridwar	9359209901	Mr. Kamal Sachdeva
Uttaranchal	Kashipur	Tirpti Communications	Station Road, Main Market, Udamsingh Nagar, KASHIPUR	9857005991	Mr.Ajay Gupta
Uttaranchal	Roorkee	Geejanjali Telecom	Shop No.6, Shyam Market, BSM Tiraha, NehruNagar, Dehradun Road, Roorkee.	01332-326510	Mr. Manish Kumar
West Bengal	Assansol	Sky Computer & Telecom	Islam Market, Nuruddin Road, Assansol-713301	2207719	Syed Arshad Ali
West Bengal	Basirhat	Telelink	Basirhat Old Market(Bowbazar),Basirhat Dist,North 24pgs.Pin-745411	933251610, 03217-325499	Mr. Sukanta Debnath.

State	City	ASC Name	ASC Address	Phone No.	Contact Person
West Bengal	Behrampur	CHAITANNYA ENTERPRISE	152, B B Sen Road, Sadar bazar, PO Behrampur, Distt Murshidabad,pin-742101	9333310161	SUBHAS CHANDRA BASAK
West Bengal	Bolpur	CYBER WORLD	59, SUPER MARKET, SANTINIKETAN ROAD, BOLPUR - 751204	9333739783	McKISHOR KUMAR MUKHERJEE
West Bengal	Bongoan	MOJINA TRADERS	Jessore Road, Bongoan, Dist- North 24 th Pargana, PIN-743235	9332410022	Mc. Sabir Dutta
West Bengal	Burdwan	San Infosys	27/1 G.T Road , East End, Burdwan -713103.	3290265	Sanjit Debnath
West Bengal	Durgapur	Digitech Service	Ashok Bhawan J.K.Pal Lane.Benachity, Durgapur -713213	3293600	McPinLu Chatterjee
West Bengal	Habra	JOYRAM INFOTECH	51,Jessore Road,Habra Bazar, Das Market, Dist- 24th Pargana(North), PIN-743263	237608	Mc Malay Das
West Bengal	Halda	DIGITRONIX	Holding no -25 ,PO Khanjanchak, PS Durgachak, Halda, Dist- East Medinipur-721602	9332987527	Suman Jana
West Bengal	Katwa	Devarshi Mobile Communication	Bhutrath Tala, Besides Ram Bhavan, Post - Katwa, Burdwan - 713130	05453-255197	Devananda Dutta
West Bengal	Kharagpur	S. J. Communication	Inda Main Road, Khudiram Ram Market, Kharagpur,Shop No-53, Pin -721305	9333745553	McSuman Jana
West Bengal	Kolkata	Benma Infosol Pvt Ltd.	P-168/1 CIT Road, Scheme VIII, KOLKATA 700 067	033-32943176-7	Arun Surana
West Bengal	Kolkata	Friends Communication	32(8) Barsat Road,N/L 15 no railgate,PO-nonachandanpukur, PS-Titagarh, Barrackpore, Dist- North 24PCS, PIN-743102	033-25921263	Arup Sarkar & Tarasankar Mukherjee
West Bengal	Kolkata	Jaksom Engineering, Pvt Ltd	Block-A, Shop-1, Ambika Vihar,1/1 Harduttai Chamaria Road,Howrah-711001	033-32950383	PMukherjee
West Bengal	Kolkata	JP Computers	5B Ekdalia Place, Kolkata - 700019	033-24401923	Sonim Kabir
West Bengal	Kolkata	Skylink	8/1A, Little Russel Street, Calcutta-700071	033-32903814	H R Molla
West Bengal	Kolkata	SOURAV TELECOM	195 BLOCKJ NEW ALIPLUR, N/L New Alipur State Bank, KOLKATA-700053.	033-32511256	Amit Ghosh
West Bengal	Kolkata	Sun Mobile Service	15 B.T. Road, N/L Peikapara Bus Stop, Kolkata -700002	033-32550444	VIVEK KUMAR GUPTA
West Bengal	Kolkata	Sagnik	10A HO CHI MINH SARANI , KOLKATA-71	9830880150	RATHIN PAL CHOWDHURY
West Bengal	Krishnagar	ADDYA ELECTRONICS	13 MOHITOSH BISWAS STREET, PO,KRISHNANAGAR, DIST: NADIA, PIN: 741101.	03472253031	MR ARIJIT SEN
West Bengal	Malda	Classic Services	3 No Govt Colony, Near B.B. Medicine , Malda, Pin-752101	9332293622	Mc. S.P Ganguly
West Bengal	Ranaghat	PRAYASH	30 SWAMI VIVAKNANDA SARANI, RANAGHAT, DIST-NADIA	09333515949	Mc. Amar Nath Malick
West Bengal	Serampore	Sri Guru Mobile Service	8/ B/15 G.T.Road (West), Hooghly Pin-712203	033-32528581	Shyamal Kumar Das

State	City	ASC Name	ASC Address	Phone No.	Contact Person
West Bengal	Siliguri	CARE	A.T Mukherjee Road, Subhash Pally (PRANTIK), Near SILIGURI COLLEGE, PO- Siliguri, Dist - Dejeeling.	9332211009	Mr.Sjoy Dutta
West Bengal	Tamluk	ZEROBIT	Vii- Parbatipur, PO.-Tamluk, Dist- Purba MidnapurPIN-721636	9434110802	Mr. Chanakya Sengupta

 **CUSTOMER SERVICE**

*From: BSNL / MTNL **1800-180-9999***

 **From Mobile: **39-01-0909****

Add local STD Code

