

AN-D-211: External Antenna Design and Leveraging Modular Approval for CVMDECT

Abstract

This document describes the Modular Approval conditions and how to leverage the existing Dialog regulatory certificate when certifying an end-product that includes CVMDECT.

Table of Contents

1.0 Introduction	1
1.1 TERMS AND ABBREVIATIONS	1
1.2 REFERENCES	1
1.3 HISTORY	1
1.4 DISCLAIMER	1
2.0 Modular Approval	2
2.1 DESCRIPTION	2
2.2 AVAILABLE CERTIFICATIONS	2
2.3 APPLICABILITY	2
2.4 CONDITIONS	2
2.4.1 ANTENNA	2
2.4.2 TRANSMITTER ANTENNA	2
2.4.3 HOST PCB LAYOUT	3
2.4.4 LABELLING REQUIREMENTS	3
2.4.5 USER DOCUMENTATION TEXT	3
2.4.6 SAFETY REQUIREMENTS	4
2.5 MISCELLANEOUS COMMENTS	4
3.0 External Antenna Design	5
3.1 SC14CVMDECT_AF01_SF01 CONVERSION BOARD	5
3.1.1 BOUNDARY CONDITIONS	5
3.2 HOST PCB PRINTED ANTENNA DESIGN	6
3.3 OTHER ANTENNAS	6

1.0 Introduction

Dialog Semiconductor B.V. has obtained a Modular Approval Certificate (US, EU) for CVMDECT. When meeting the conditions as referenced in this document, this implies that those tests already covered by the Modular Approval Certificate don't need to be rerun on the end-product level. This may alleviate the overall regulatory approval process of the end-product.

1.1 TERMS AND ABBREVIATIONS

DoC	Declaration of Conformity
EU	Europe
ETSI	European Telecommunications Standards Institute
FAD	Fast Antenna Diversity
FCC	Federal Communications Commission
FP	Fixed Part
IC	Industry Canada
JP	Japan
MIC	Ministry of Internal affairs and Communications
SAR	Specific Absorption Rate
TCF	Technical Construction File

1.2 REFERENCES

1. SC14CVMDECT SF01 Datasheet v1.00 Data sheet, Dialog Semiconductor B.V.
2. FCC document "DA-00-1407"
3. FCC document "784748 D01 Labelling Part 15 18 Guidelines v07"
4. FCC document "D01 Mobile Portable RF Exposure v04"
5. FCC order "04-165"

1.3 HISTORY

June 24, 2013, v0.1	Initial version
June 28, 2013, v0.2	Added section "External Antenna Design"
November 14, v0.3	Added FCC/IC text
January 28 '14 v.06	Minor editorial changes

1.4 DISCLAIMER

This document is for general information purposes only. Dialog Semiconductor B.V. does not guarantee the completeness, correctness or accuracy of the information in this document and shall not be liable for any direct or indirect loss or damage arising from the use of information or documents found in it.

Please consult with your test house when planning for and/or undertaking any action with respect to regulatory certification.

2.0 Modular Approval

2.1 DESCRIPTION

When a wireless module has passed the Modular Approval process, and when the host conforms to certain conditions (this will be detailed in the subsequent sections), then the end-product containing this module will not need to be tested against the regulatory standards covered by the module's certificates.

The availability of the Modular Approval is intended to reduce time, cost and effort putting an end-product containing CVMDECT on the market.

2.2 AVAILABLE CERTIFICATIONS

Dialog Semiconductor B.V. has obtained the following modular approvals for CVMDECT:

- FCC Part 15, subpart D, Isochronous UPCS Device 1920-1930 MHz: FCC ID Y82-SC14D
- IC RSS-213, issue 2, 2GHz License-exempt Personal Communications Service Devices: IC ID 9576A-SC14D

In addition, testing has shown compliance to the following:

- EU testing (to be used in the DoC process when applicable):
 - Emissions EN 301-406
 - Immunity EN 301-489
 - CE IECEN 60950-1
 - SAR EN 62311
- JP Radio Law pre-test

2.3 APPLICABILITY

Only FCC (US) and IC (Canada) officially support Modular Certification.

ETSI (Europe) doesn't support Modular Certification, rather Declaration of Conformity (DoC). The manufacturer is responsible for the compliance to regulatory requirements. Previous testing, such as made available by Dialog Semiconductor B.V., may be taken into consideration by the module integrator. If module testing is trusted for the DoC of the host, the module's Technical Construction File (TCF) becomes part of the host's TCF.

This is part of the "self certification" process where the end-product OEM declares conformity to regulatory requirements. The available ETSI test reports may be used to this purpose and the tests in these reports don't need to be repeated on end-product/system level.

MIC (Japan) announced incorporation of modular approvals in Japanese Radio Law (Feb '13). Requirements are being developed now. Currently, there is no timeline or estimated implementation date. Modular Certification is still judged on a case-by-case basis.

Other countries may not support Modular Certification. The available test reports may help expedite the sys-

tem level certification process though.

Any regulatory standards not covered by the available Modular Approval certificates will still need to be tested on end-product/system level.

2.4 CONDITIONS

The FCC document "DA-00-1407" provides a clear overview of the conditions applicable to the host, associated with leveraging existing Modular Approval.

With respect to CVMDECT, the following subsections reference the relevant conditions that have to be met. Not adhering to these will invalidate the certification, requiring recertification on end-product/system level.

2.4.1 Antenna

The FCC document "DA-00-1407" specifies:

- The antenna gain of a new antenna should be of the same type as the originally approved antenna and the antenna gain should not be higher than the antenna gain of the originally tested antenna.
- The emission levels or reported RF safety levels shall not be increased by the new antenna (of the same antenna type)
- If the new antenna is a different type, recertification on end-product/system level is required.

With the existing CVMDECT certification this implies the following:

- If only the embedded/internal antenna of CVMDECT is used, then the Antenna Condition is fulfilled
- If an external antenna is connected to CVMDECT, then this antenna would need to meet specific criteria in order to prevent recertification requirements. Please refer to section 3.0 for further details.

2.4.2 Transmitter Antenna

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter

by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Le présent émetteur radio (identifier le dispositif par son numéro de certification ou son numéro de modèle s'il fait partie du matériel de catégorie I) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

2.4.3 Host PCB layout

The PCB layout of the host PCB is critical to the validity of the RF certification of CVMDECT because it is part of the embedded printed antenna. Please refer to sections 7.4 and 7.5 of the SC14CVMDECT SFxx data-sheet for details.

2.4.4 Labelling Requirements

FCC

The modular transmitter must be labelled with its own FCC ID number. If the FCC ID is not visible when the module is installed inside another device, then the host device must contain the FCC ID number with the statement such as the following: "Contains FCC ID: Y82-SC14D".

Some further details about labelling requirements and compliance statements can be found in "784748 D01 Labelling Part 15 18 Guidelines v07".

IC (Canada)

The host device shall be properly labelled to identify the modules within the host device. The Industry Canada certification label of a module shall be clearly visible at all times when installed in the host device, otherwise the host device must be labelled to display the Industry Canada certification number of the module, preceded by the words "Contains transmitter module", or the word "Contains", or similar wording expressing the same meaning, as follows:

Contains transmitter module IC: 9576A-SC14D

L'appareil hôte doit être étiqueté comme il faut pour permettre l'identification des modules qui s'y trouvent. L'étiquette de certification d'Industrie Canada d'un module donné doit être posée sur l'appareil hôte à un endroit bien en vue en tout temps. En l'absence d'étiquette, l'appareil hôte doit porter une étiquette donnant le numéro de certification du module d'Industrie Canada, précédé des mots « Contient un module d'émission », du mot « Contient » ou d'une formulation similaire exprimant le même sens, comme suit :

Contient le module d'émission IC: 9576A-SC14D

2.4.5 User Documentation Text

The literature provided to the end user must include the following wording:

"FCC compliance statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation of the device.

Module transmetteur ID IC:

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Changes or modifications to the equipment not expressly approved by the Party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Privacy of communications may not be ensured when using this phone."

ITE Class: CAN ICES-3 (B)/NMB-3(B).

2.4.6 Safety Requirements

This section provides of an overview of the safety requirements you must adhere to when working with CVMDECT.

- The specific external power supply for CVMDECT has to fulfil the requirements according to clause 2.5 (Limited power source) of this standard EN 60950-1:2006.
- Interconnection circuits shall be selected to provide continued conformance to the requirements of clause 2.2 for SELV (Safety Extra Low Voltage) circuits according to EN 60950-1:2006 after making connections
- Interface type not subjected to over voltages
- Requirements additional to those specified in this standard may be necessary for:
 - Equipment intended for operation in special environments (for example, extremes of temperature, excessive dust, moisture or vibration, flammable gases and corrosive or explosive atmospheres)
 - Equipment intended to be used in vehicles, on board ships or aircraft, in tropical countries or at altitudes greater than 2000m
 - Equipment intended for use where ingress of water is possible
- Installation by qualified personnel only
- The product is a component intended for installation and use in complete equipment. The final acceptance of the component is dependent upon its installation and use in complete equipment

2.5 MISCELLANEOUS COMMENTS

In FCC terminology, a “Host” is what is referred to in DECT as a “fixed part”. The FCC term “Mobile” corresponds with the DECT term “portable part”, provided that the device is >20cm from the human body. A DECT termed “portable part” <20cm from the human body is referred to as “Portable” in FCC terminology.

The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

Une distance de séparation de 20cm ou plus doit être maintenue entre cet appareil et des personnes lors de fonctionnement du dispositif. L’antenne utilisée pour ce transmetteur ne doit pas être co-localisés en conjonction avec toute autre antenne ou transmetteur.

A Permissive Change to the Modular Approval can only be issued by the Grantee (i.e. Dialog Semiconductor B.V.). Therefore, any change to the module and/or its connections will require submission for a new FCC ID by the customer (either on module level or system level).

The existing Modular Approval may be invalidated if CVMDECT is co-located with other wireless devices (e.g. BlueTooth, WLAN/WiFi) that transmit simultaneously. Please consult with your test house on the possible implications.

3.0 External Antenna Design

FCC-04-165 now allows different antennas may be certified with one module. Dialog Semiconductor B.V. has obtained Modular Approval for CVMDECT using a specific external printed antenna. FCC-04-165 dictates that the certification measurements must to be performed with the highest gain antenna and any other antenna must have a similar radiation pattern.

For CVMDECT, this implies that an external antenna may be connected to radio module, provided that:

- the antenna gain is not higher than -1.2dBi
- the antenna type is a (printed) monopole

In addition, if the antenna connection is user accessible, then the antenna connector shall be proprietary.

3.1 SC14CVMDECT_AF01_SF01 CONVERSION BOARD

The “SC14CVMDECT_AF01_SF01” design is a conversion PCB that holds a SC14CVMDECT SF xx module on the top side, while having an SC14CVMDECT AF compatible footprint on the bottom side. Please refer to the following indicative picture:



Figure 1 SC14CVMDECT_AF01_SF01 with SC14CVMDECT SFxx module

This design also has an embedded printed antenna (located to the top right in the above picture) so that CVMDECT can support FAD and may have increased performance to operate as an FP.

The SC14CVMDECT_AF01_SF01 design passed the Modular Approval testing and can be used as a drop-in replacement for the SC14CVMDECT AF module without needing to recertify the end-product (for those countries allowing Modular Approvals, please refer to section 2.3).

The gerber files of this design can be obtained through your Dialog Semiconductor B.V. sales contact or representative.

3.1.1 Boundary Conditions

In order to be allowed to leverage the CVMDECT Modular Approval for the SC14CVMDECT_AF01_SF01 design, the PCB should meet the following specifications:

- PCB material: FR4
- Dimensions: length x width x thickness = 25.9mm x 25.0mm x 0.8mm
- PCB layer stackup:
 - L1 copper thickness: 18um
 - L1-L2 prepreg thickness: 163um
 - L2 copper thickness: 35um
 - L2-L3 core thickness: 360um
 - L3 copper thickness: 35um
 - L3-L4 prepreg thickness 163um
 - L4 copper thickness: 18um

The SC14CVMDECT_AF01_SF01 has been designed using 6mil lines/space and 0.25mm end-size drill holes rules.

When deviating in any way from these specifications, the Modular Approval will be invalidated and recertification on end-product/system level will be required.

3.2 HOST PCB PRINTED ANTENNA DESIGN

The printed antenna that is part of the SC14CVMDECT_AF01_SF01 design can also be used directly, as part of the host PCB design.

In that case, the host PCB design must adhere to the same PCB layer stackup (material, layer spacings) as mentioned in section 3.1.1. The antenna must be located in a corner and spaced from the SC14CVMDECT SFxx module in the same way as the SC14CVMDECT_AF01_SF01 design. Also the ground plane design (especially the spacing with respect to the antenna structure) should follow exactly the same outline as in the SC14CVMDECT_AF01_SF01 design.

The printed antenna is not 50 Ohms by itself. It requires a printed transformer on the inner layer (indicated in red in the below picture) that is part of the SC14CVMDECT_AF01_SF01 design. The layout of this component is critical to the antenna performance and should be copied accurately from the available gerber files.

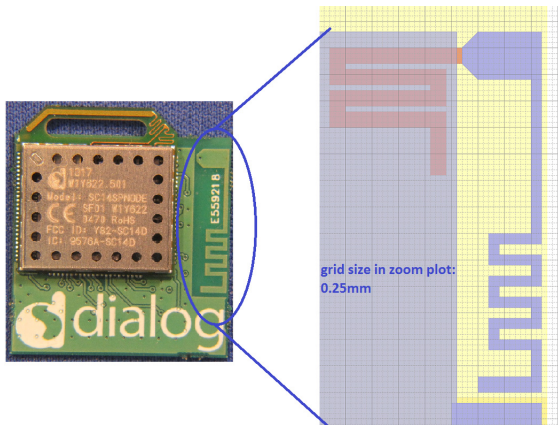


Figure 2 SC14CVMDECT_AF01_SF01 printed antenna design details

Figure 2 here above is only meant to show the basic design; the picture is from simulation used as a basis for the actual physical design. The gerber files should be leading in any customer design.

3.3 OTHER ANTENNAS

If an antenna is connected to CVMDECT that has a dissimilar radiation pattern than that of the SC14CVMDECT_AF01_SF01 design and/or if the antenna has a higher gain than that of the SC14CVMDECT_AF01_SF01 design, then FCC-04-165 dictates that the Modular Approval is invalidated and that recertification is required on end-product/system level.

If the antenna connected to CVMDECT is user accessible, then the antenna connector shall be proprietary (per FCC DA-00-1407).