
YOUR LIFE. OUR INSPIRATION.



MODEL CONTROL PANEL



WTA4400US WTA4400CN Axxis+™ Dryer (Vented)

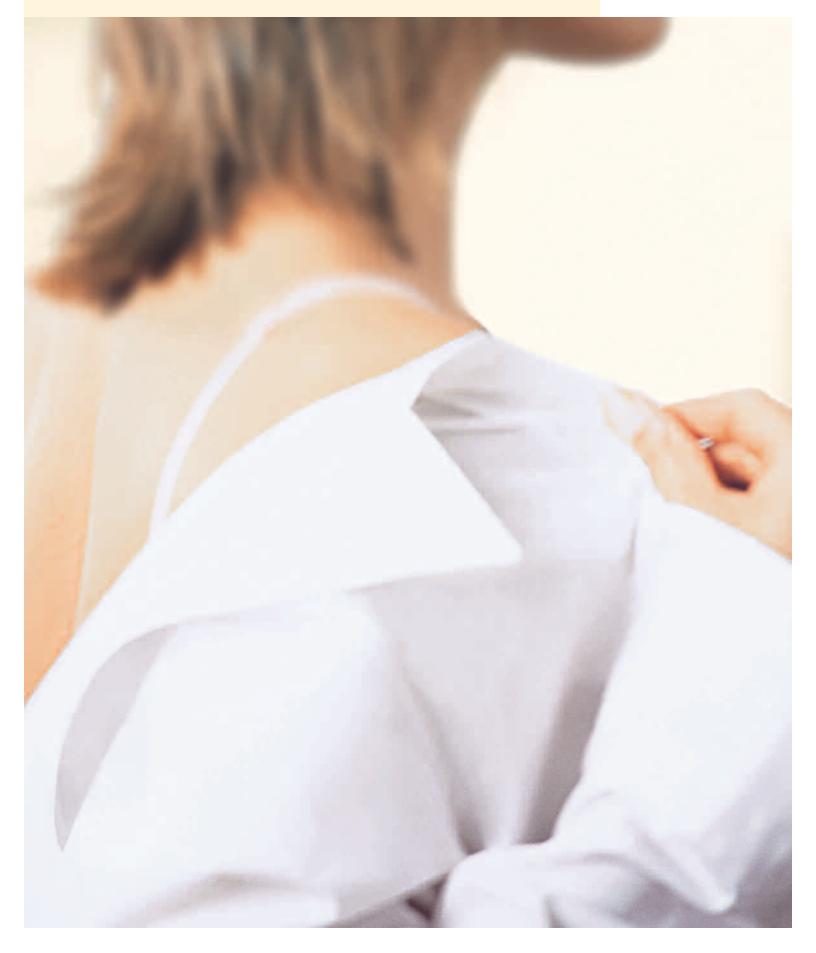

WTL5410UC Axxis™ Dryer (Condensation)







WTL5410UC Axxis™ Dryer (Condensation)

Dimensions:

For planning only. For details, see Installation Manual. Specifications subject to change without notice.

UL and CUL listed.


Stacked installation height 67" (with WTZ1180 Stacking Kit = 68 9/16").

AXXIS™ DRYER

MODEL NUMBER	WTA4400US	WTL5410UC
	WTA4400CN	Axxis Dryer
	Axxis™ Dryer (Vented)	(Condensation)
FEATURES		
Bosch Duotronic™		
Stainless Steel Drum		
Reverse Tumble Action	•	
Simple Door Lock Mechanism	-	-
Simple Door Lock Mechanism	-	
DRYING PROGRAMS		
Timed Drying (20 – 60 min.)		
Timed Drying (10 – 90 min.)		•
Air Fluff (10 min.)	•	
Air Fluff (10 – 90 min.)		•
DUOTRONIC™ Auto Dry Cycles – Regular/Cotton	5	6
DUO TRONIC [™] Auto Dry Cycles - Permanent Press	4	5
ODTIONAL CETTINGS		
OPTIONAL SETTINGS		
Delicates Option	•	•
	•	•
Delicates Option		
Delicates Option Condensation Drying System Time Remaining Display	_	•
Delicates Option Condensation Drying System Time Remaining Display Adjustable End-of-Cycle Signal	•	•
Delicates Option Condensation Drying System Time Remaining Display Adjustable End-of-Cycle Signal Anticrease Feature (for 35 min. after cycle)	•	•
Delicates Option Condensation Drying System Time Remaining Display Adjustable End-of-Cycle Signal Anticrease Feature (for 35 min. after cycle) Wrinkle Block (up to 1 hour)	•	•
Delicates Option Condensation Drying System Time Remaining Display Adjustable End-of-Cycle Signal Anticrease Feature (for 35 min. after cycle) Wrinkle Block (up to 1 hour) Lint Filter LED Indicator	•	
Delicates Option Condensation Drying System Time Remaining Display Adjustable End-of-Cycle Signal Anticrease Feature (for 35 min. after cycle) Wrinkle Block (up to 1 hour) Lint Filter LED Indicator	•	
Delicates Option Condensation Drying System Time Remaining Display Adjustable End-of-Cycle Signal Anticrease Feature (for 35 min. after cycle) Wrinkle Block (up to 1 hour) Lint Filter LED Indicator Start Delayed	Up to 19 hours	
Delicates Option Condensation Drying System Time Remaining Display Adjustable End-of-Cycle Signal Anticrease Feature (for 35 min. after cycle) Wrinkle Block (up to 1 hour) Lint Filter LED Indicator Start Delayed DESIGN ELEMENTS	Up to 19 hours	
Delicates Option Condensation Drying System Time Remaining Display Adjustable End-of-Cycle Signal Anticrease Feature (for 35 min. after cycle) Wrinkle Block (up to 1 hour) Lint Filter LED Indicator Start Delayed DESIGN ELEMENTS Electronic Controls	Up to 19 hours with 1 hr. increments	•
Delicates Option Condensation Drying System Time Remaining Display Adjustable End-of-Cycle Signal Anticrease Feature (for 35 min. after cycle) Wrinkle Block (up to 1 hour) Lint Filter LED Indicator Start Delayed DESIGN ELEMENTS Electronic Controls LED Sequence Indicator	Up to 19 hours with 1 hr. increments	
Delicates Option Condensation Drying System	Up to 19 hours with 1 hr. increments	

ACCESSORIES


12" Pedestal for Washer and Dryer (white)	WTZ1210	Sold Separately	Sold Separately
Vertical Stacking Kit with Pull-Out-Tray (white)	WTZ1180	Sold Separately	Sold Separately



Dimensions for WTA4400US and CN (Vented)

Electrical Requirements:

208/240V, 60Hz, 15A (Supplied 240V/30A cord for installation with Bosch washing machines.)



Dimensions for WTL5410UC (Condensation — no ducting required) Electrical Requirements:

208/240V, 60Hz, 15A (Supplied 240V/30A cord for installation with Bosch washing machines.)





Copyright ©2005 BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

Warranty Information: 1 year parts and labor; 2 years parts; 5 years on all electronic components (parts only); 5 years on motor/pump (parts only); 5 years against rust-through of cabinet (parts only); lifetime warranty against rust-through on stainless steel drums. Certain limitations apply. See Manufacturer's Limited Warranty for details.



YOUR LIFE. OUR INSPIRATION.