



Merit
power
TRANSFORMERS



Merit No.	Plate Supply		Rectifier		Filament Wdgs.		Mtg. Type	Dimensions—Inches				Shpg. Wt. Lbs.-Oz
	Volts	DCMA	Volts	Amps	Volts	Amps		Mtg. Centers	H	W	D	
P-3044	96	145			6.3	6.45	C	2 1/16	2 1/2	3	3 3/4	3-0
*P-2880	117	240			6.3	7.0	C	3 3/16 x 4 1/16	3 3/4	4 3/8	4 3/8	8-0
*P-2871	119.5	380			6.3	6.5	D	2 1/4 x 2 1/2	3 1/2	2 11/16	3 5/8	5-0
*P-3045	120	50			6.3	2.0	A	3 1/8	2 1/16	3 11/16	2 1/8	1-7
*P-3144	123**	200			6.3	10.3	D	2 x 2 1/16	3 1/8	2 1/2	3 3/4	4-0
P-3079	{140 117 tap}	300			6.3	9	C	3 x 3 3/4	3 3/4	4 1/2	3 3/4	8-0
P-3046	150	25			6.3	5	B	2	2	2 1/2	1 3/4	0-12
P-2892	210-210	240	5	3.0	6.3	8.0	C	3 3/16 x 4 1/16	3 3/4	4 1/2	3 3/8	8-6
P-3062	230-230	240	5	6.0	6.3	8.8	C	2 3/4 x 3 7/16	3 7/16	4 1/8	4 3/4	10-0
P-2949	240-240	40	5	2.0	6.3	2.0	C	2 x 2 1/2	2 1/2	3	2 1/2	2-6
P-3149	240-240	40	5	2.0	6.3	2.0	D	2 x 1 1/16	3 3/8	2 3/8	2 3/8	2-7
P-3047	240-240	50			6.3	2.5	C	2 x 2 1/2	2 1/2	3	2	2-0
P-3147	240-240	50			6.3	2.5	D	2 x 1 9/16	3 3/8	2 3/8	2 1/2	2-4
P-2958	240-240	50	5	2.0	6.3	2.6	C	2 x 2 1/2	2 1/2	3	3	2-10
P-2830	253-253	300	5	6.0	6.3	6.0	C	3 x 3 3/4	3 3/4	4 1/2	4 3/8	11-0
P-3051	260-260	70	5	2.0	6.3	3.0	C	2 x 2 1/2	2 1/2	3	3 1/8	3-0
P-3048	260-260	90			6.3	4.7	C	2 x 2 1/2	2 1/2	3	3 3/16	3-2
P-3148	260-260	90			6.3	4.7	D	2 x 2 1/16	3 3/8	2 3/8	3 1/8	3-6
P-2870	262-262	250	5	3.0	6.3	10.0	C	2 1/16 x 3 3/16	3 3/8	3 3/4	4 3/8	5-8
P-3060	265-265	260	5	3.0	6.3		C	2 1/16 x 3 7/16	3 3/8	3 3/4	4	11-0
P-2873	265-265	265	5	3.0	12.6	5.1	C	2 1/2 x 3 3/8	3 3/8	3 3/4	4	6-8
P-3135	265-265	300	5	6.0	12.6	5.5	D	3 x 4 3/8	5 1/2	3 3/8	4 3/4	11-6
P-3083	265-265	300	5	6.0	12.6	4.7	C	3 x 3 3/4	3 3/4	4 1/2	4 3/8	11-14
P-2841	265-265	320	5	6.0	12.6	4.9	C	3 x 3 3/4	3 3/4	4 1/2	4 3/8	10-0
P-2883	265-265	380	5	6.0	12.6	6.4	CSS	3 x 4 3/8	5 3/4	3 3/4	4 3/8	12-6
P-2872	268-268	260	5	3.0	6.3	10.6	C	2 1/2 x 3 1/8	3 3/8	3 3/4	3 3/8	7-0
P-2885	268-268	260	5	3.0	6.3	8.0	D	2 3/4 x 2 13/16	4 3/16	3 7/16	4	7-0
P-2869	270-270	200	5	3.0	6.4	8.4	C	2 1/16 x 3 3/16	3 3/8	3 3/4	4	7-0
P-3076	{270-270 180-180}	{300 200}	5	3.0	6.3	6.5	C	3 x 3 3/4	3 3/4	4 1/2	5	13-8
P-3136	270-270	270	5	3.0	12.6	4.4	D	3 x 4 1/4	4 3/8	3 3/4	4 1/2	8-0
P-3154	275-275	50	5	2.0	7.0	2.6	D	2 x 2 1/16	3 3/8	2 3/8	3 3/8	3-5
P-2832	275-275	220	5	3.0	7.0	4.75	C	3 x 3 3/8	3 3/8	4 1/8	3 1/2	11-0
*P-2879	117	280	5	4.8	6.3	9.6	C	3 3/16 x 4 1/16	3 3/4	4 3/8	5	9-0
P-3049	275-275	310	5	3.0	6.3	12.6	CS	3 x 3 3/4	3 3/4	4 1/2	5	13-8
P-2839	276-276	290	5	6.0	6.3	11.5	CSS	3 x 3 3/4	3 3/4	4 1/2	5 1/2	14-8
P-2874	277-277	210	5	3.0	6.3	3.6	C	2 1/2 x 3 3/8	3 3/8	3 3/4	3 3/4	6-8
P-2876	277-277	305	5	5.0	6.3	8.5	C	3 x 3 3/4	3 3/4	4 1/2	4 15/16	12-0
P-3084	278-278	220	5	3.0	6.3	8.0	C	2 3/4 x 3 7/16	3 7/16	4 1/8	4 1/16	9-8
P-2878	279-279	265	5	5.0	6.3	7.1	C	3 3/16 x 4 1/16	3 3/4	4 3/8	5 1/4	12-0
P-3052	280-280	90	5	2.0	6.3	5.0	C	2 1/4 x 2 13/16	2 13/16	3 3/8	3 1/2	4-2
P-2849	280-280	205	5	3.0	6.3	9	C	3 x 3 1/16	3 7/16	4 1/8	3 3/4	9-0
P-3058	280-280	315	5	3.0	6.3	11.5	C	3 3/16 x 4 1/16	3 3/4	4 1/2	5 1/2	12-0
P-2882	281-281	250	5	3.0	6.3	9.5	D	2 1/2 x 2 1/2	3 7/16	4 1/2	4 1/16	8-0
P-3056	282-282	240	5	3.0	6.3	8.7	C	3 3/16 x 4 1/16	3 3/4	4 1/2	4 3/8	10-0
P-2837	282-282	250	5	3.0	6.3	9.3	CS	3 x 3 3/4	3 3/4	4 1/2	5 1/16	12-0
P-2881	280-280	250	5.0	3.0	6.3	1.25	D	1 3/16 x 2 1/2	3 3/4	3 1/8	3 7/16	8-0
P-2842	286-286	210	5	3.0	6.3	9.5	C	2 3/4 x 3 1/2	4 3/8	4 1/8	3 3/2	7-0
P-2867	290-290	230	5	3.0	6.3	8.0	C	3 7/16 x 2 3/4	4 3/8	3 7/16	4 3/4	11-0
P-3134	290-290	270	5	3.0	12.6	4.8	D	3 x 3 3/8	4 3/8	3 3/4	4 3/8	8-4
P-3064	{290-290 275-275 310}	{340 310}	5	6.0	12.6	6.1	C	3 x 3 3/4	3 3/4	4 1/2	5 1/4	13-0
P-2844	292-292	285	5	3.0	6.3	8.5	C	2 3/4 x 3 1/2	4 1/4	3 1/2	4 3/4	8-14
P-2836	300-300	250	5	4.0	6.3	11.7	C	2 3/4 x 3 7/16	3 7/16	4 1/8	4 7/8	10-0
P-3077	300-300	250	5	3.0	6.3	9.0	C	3 x 3 3/4	3 3/4	4 1/2	4 1/4	10-2
P-3055	300-300	400	5	6.0	6.3	10.0	C	3 x 3 3/4	3 3/4	4 1/2	5 3/8	14-4
P-2833	305-305	300	5	6.0	6.3	9	C	3 x 3 3/4	3 3/4	4 1/2	5 3/8	13-5
P-2847	306-306	460	5	6.0	6.3	11.4	C	3 1/2 x 4 3/8	4 3/8	5 1/4	4 15/16	14-0
P-2840	312-312	340	5	6.0	6.3	5.1	CSS	3 x 3 3/4	6 1/4	4 1/2	3 3/4	14-0
P-2884	320-320	270	5	3.0	12.6	5.2	D	3 x 3 1/2	4 1/16	3 3/4	4	9-0
P-3073	{322-322 205-205 70}	{180 70}	5	3.0	6.3	10.0	CS	3 x 3 3/4	3 3/4	4 1/2	5	12-5
P-2950	325-325	40	5	2.0	6.3	2.0	C	2 x 2 1/2	2 1/2	3	2 3/8	2-14

*Can be used as Isolation Transformer by ignoring filament windings

Quality in Production—Speed in Delivery



Plate and Filament

Merit
power
TRANSFORMERS

Merit No.	Plate Supply		Rectifier		Filament Wdgs.		Mtg. Type	Dimensions—Inches				Shpg. Wt. Lbs.-Oz.	
	Volts	DCMA	Volts	Amps	Volts	Amps		Mtg. Centers	H	W	D		
P-3150	325-325	40	5	2.0	6.3 c.t.	2.0	D	2	x 1 1/8	3 1/8	2 3/8	2 13/16	2-13
P-2951	325-325	70	5	3.0	6.3	3.5	C	2	x 2 1/2	2 1/2	3	3 3/8	3-6
P-3151	325-325	70	5	3.0	6.3 c.t.	3.5	D	2 1/2	x 1 15/16	3 3/8	3 1/16	3 1/16	4-2
P-2831	331-331 211-211	1250 90	5	3.0 2.0	6.3	13.0	C	3	x 3 3/4	3 3/4	4 1/2	5 3/8	13-0
P-2838	333-333	250	5	3.0	6.3 6.3 6.3 6.3	5.8 5.8 3.3 85	CS	3	x 3 3/4	3 3/4	4 1/2	5 1/2	15-0
P-2877	338-338	300	5	6.0	6.3 6.3	10.1 2.4	C	3 1/16	x 4 1/16	3 3/4	4 3/8	5 3/4	13-0
P-2887	342-342 260-260	180 148	5	3.0 3.0	12.6 c.t.	6.0	D	4	x 3	4 3/4	3 3/8	5	13-0
P-2957	350-350	50	5	2.0	6.3 c.t.	2.6	C	2 1/4	x 2 13/16	3 1/16	2 13/16	2 3/4	3-0
P-3160	350-350	50	5	2.0	6.3 c.t.	2.6	D	2 1/4	x 2	3 1/2	2 13/16	3 1/16	3-2
P-2966	350-350	70	5	3.0	2.5 c.t.	9.0	C	2 1/4	x 2 13/16	2 13/16	3 3/8	3 3/8	4-10
P-2967	350-350	90	5	3.0	2.5 c.t.	12.5	C	2 1/2	x 3 3/8	3 3/8	3 3/4	4 1/16	6-12
P-2952	350-350	90	5	3.0	6.3 c.t.	3.5	C	2 1/4	x 2 13/16	2 13/16	3 3/8	3 3/4	4-10
P-3152	350-350	90	5	3.0	6.3 c.t.	3.5	D	2 3/4	x 2 1/2	4 1/4	3 1/16	3 3/8	5-0
P-3153	350-350	110	5	3.0	6.3 c.t.	4.5	D	3	x 2 1/4	4 3/8	3 13/16	3 7/16	5-12
P-2953	350-350	120	5	3.0	6.3 c.t.	4.7	C	2 1/4	x 3 3/8	3 3/8	3 3/4	3 13/16	5-14
P-3173	350-350	150	5	3.0	6.3	6.5	D	2 1/2	x 2 7/8	3 3/8	3 3/4	4 1/8	6-12
P-3054	350-350 220-220	180 70	5	6.0	6.3 6.3 6.3	10.2 2.7 7.0	C	3	x 3 3/4	3 3/4	4 1/2	5 3/8	13-4
P-3165	350-350	200	5	2.0 3.0	6.3 6.3	7.0 10.0	D	3	x 3 3/8	4 3/8	3 3/4	5	11-10
P-3069	350-350	225	5	3.0	6.3 6.3 6.3	10.0 2.7	CS	3	x 3 3/4	3 3/4	4 1/2	4 1/4	9-8
P-3070	350-350	225	5	3.0	6.3 6.3	10.0 2.7	C	3	x 3 3/4	3 3/4	4 1/2	4	9-0
P-3057	350-350	290	5	6.0	6.3 6.3 6.3	9.5 2.4 1.5	C	3 1/16	x 4 1/16	3 3/4	4 1/2	6 1/4	15-0
P-3071	360-360	180	5	3.0	6.3	9.0	CS	2 3/4	x 3 7/16	3 7/16	4 1/8	4 1/16	9-10
P-3072	360-360	180	5	3.0	6.3	9.0	C	2 3/4	x 3 7/16	3 7/16	4 1/8	4 1/16	9-6
P-2834	360-360	225	5	6.0	6.3 6.3	1.2 9.0	C	3	x 3 3/4	3 3/4	4 1/2	4 7/8	11-14
P-3059	360-360	250	5	2.0 3.0	6.3 6.3	2.7 9.0	C	3	x 3 3/4	3 3/4	4 1/2	5 1/8	11-5
P-3063	360-360	250	5	2.0	6.3 6.3	9.0 1.2	C	3 1/16	x 4 1/16	3 13/16	4 3/8	5 1/2	11-10
P-3078	360-360	275	5	3.0	6.3 6.3 or 5	9.0 1.5 2.7	C	3	x 3 3/4	3 3/4	4 1/2	5 1/4	11-8
P-3179	362-362 210-210	210 120	5	3.0 2.0	12.6 c.t.	6.0	D	3	x 3 11/16	4 3/8	3 13/16	5 1/8	11-2
P-3061	362-362	295	5	6.0 2.0	12.6 c.t.	5.0	C	3 1/16	x 4 1/16	3 13/16	4 3/8	6 3/8	15-0
P-2875	373-373	190	5	3.0	6.3	7.8	C	3	x 3 3/4	3 3/4	4 1/2	4 11/16	
P-2954	375-375	150	5	3.0	6.3 c.t.	5.0	C	2 1/2	x 3 3/8	3 3/8	3 3/4	4 5/16	7-6
P-2886	375-375 220-220	190 100	5	3.0 2.0	12.6 c.t.	6.0	D	3	x 3 9/16	4 9/16	3 3/4	4 3/8	11-6
P-3053	375-375 325-325	170 130	5	3.0 3.0	6.3 6.3 or 5	7.0 7.0 2.7	C	3	x 3 3/4	3 3/4	4 1/2	5 3/8	14-8
P-3066	375-375 325-325	170 130	5	3.0 3.0 2.0	12.6 c.t. 6.3	5.0 2.6	C	3	x 3 3/4	3 3/4	4 1/2	5 3/8	13-2
P-3169	390-390 325-325	160 130	5	3.0 2.0	6.3 6.3	8.4 4.0	D	3	x 3 3/8	4 3/8	3 13/16	4 13/16	10-10
P-2968	400-400	110	5	3.0	2.5 c.t. 2.5 c.t.	15.0 3.5	C	3	x 3 3/4	3 3/4	4 1/2	3 13/16	7-12
P-2955	400-400	200	5	3.0	6.3 c.t.	5.0	C	3	x 3 3/4	4 1/2	4 1/2	4 1/8	9-0
P-3155	400-400	200	5	3.0	6.3 c.t.	5.0	D	3	x 3 3/16	4 3/8	3 15/16	4 1/4	9-6
P-3067	400-400 212-212	1220 90	5	3.0 2.0	6.3 6.3	10.0 2.6	C	3	x 3 3/4	3 3/4	4 1/2	5 3/8	13-9
P-3166	400-400	300	5	3.0 6.0	12.6 c.t.	10.	D	3 1/2	x 4 1/4	5 3/8	4 1/2	5 3/4	18-3
P-3174	405-405 325-325	240 200	5	3.0 3.0	6.3 6.3 6.3	6.0 6.0 8.0 3.0 1.2	D	3 3/8	x 3 3/8	5 15/16	4 7/16	5 3/8	17-4
P-2835	420-420	250	5	3.0	6.3 6.3	8.0 3.0	C	3	x 3 3/4	3 3/4	4 1/2	5 1/8	12-0
P-2956	435-435 80 volt Bias Tap	250	5 2.5	3.0 10.0	6.3 c.t. 6.3 or 5	3.0 3.0	C	3	x 3 3/4	3 3/4	4 1/2	4 3/4	11-8
P-3156	435-435 80 volt Bias Tap	250	5 2.5	3.0 10.0	6.3 c.t. 6.3 or 5	3.0 3.0	D	3	x 3 13/16	4 3/8	3 13/16	4 7/8	11-14
P-3170	1750	2	2.5	2.0	6.3 or 2.5	.9 2.0	D	2	x 2 1/16	3 3/8	2 3/8	2 7/8	2-12
P-3171	2500	5	2.5	2.0	6.3 or 2.5	3.0 3.0	D	2 1/2	x 2 13/16	3 3/8	3 3/16	3 3/8	4-4

▲ Tapped
● Can be used in Series for 12.6 v.c.t.
★ For use with half wave rectifier.

★ Tapped primary
* Primary taps

† Max. MA High Tap Only.
Max. MA Low Tap Only.


P-3053 320
P-3066 340

P-2831 300
P-3067 340

P-3054 270
P-3073 325

P-3076 435
500


Sec. 5600

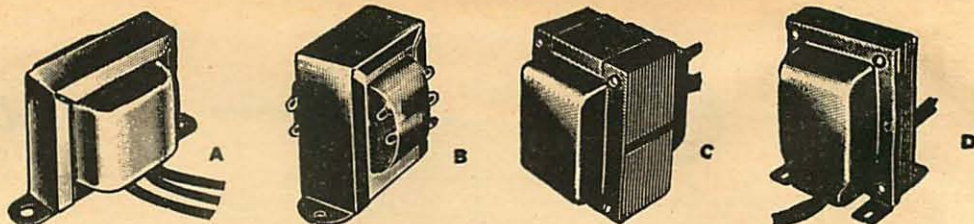

FILAMENT

power

TRANSFORMERS

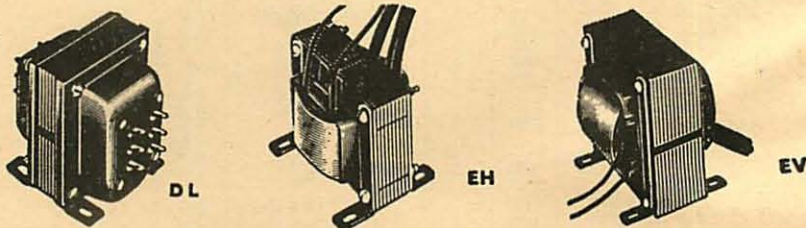

Merit No.	Sec. Volts	Sec. Amp.	Insulation Volts RMS	Mtg. Centers	Dimensions—Inches			Mtg. Type	Shpg. Wt. Lbs.-Oz.
					H	W	D		
P-2939	2.5 c.t.	5	2500	2 13/16	2	3 1/4	1 1/8	A	1- 4
P-2940	2.5 c.t.	10	7500	3 1/8	3	3 3/8	2 1/4	B	2- 2
P-3042	2.5 c.t.	10	10000	2 13/16 x 2	2 7/8	3 3/8	2 3/4	EH	2- 8
P-3040	5.0 c.t.	3	2500	2 13/16	2	3 1/4	2 1/8	A	1- 4
P-2941	5.0 c.t.	6	2500	3 3/8	2 1/4	3 11/16	1 7/8	A	1-12
P-2942	5.0 c.t.	15	10000	3 x 2 1/2	4 1/2	3 3/4	3 1/2	EV	6-12
P-2943	5.0 c.t.	30	2500	2 1/2 x 3 1/8	3 3/8	3 3/16	4 7/8	DL	6- 4
P-2964	6.3	0.5	1500	2	1 3/8	2 3/8	1 1/4	A	0- 6
P-2888	6.3	.85	1500	2	1 3/8	2 13/16	1 7/16	A	1- 0
P-2944	6.3 c.t.	1	2500	2 7/8	1 3/8	2 13/16	1 1/2	A	0-12
P-3074	6.3	1.2	5000	2 13/16	2	3 1/4	2	A	1- 4
P-2945	6.3 c.t.	2	2500	2 13/16	2	3 1/4	1 3/8	A	1- 0
P-2946	6.3 c.t.	3	2500	2 13/16	2	3 1/4	1 7/8	A	1- 6
P-3050	6.3	8.8	1500	2 x 2 1/16	3 3/8	2 1/2	3	D	3- 0
P-2947	6.3 c.t.	6	2500	3	3	3 3/8	2 1/4	B	2- 4
P-2846	6.3	.7	1500	2	1 3/8	2 3/8	1 3/8	A	1- 0
P-2948	6.3 c.t.	10	2500	2 13/16 x 2 3/8	3 7/16	2 11/16	2 7/8	EV	3-10
P-3141	6.3	10.3	1500	2 x 2 3/16	3 3/8	2 1/2	3 3/8	D	3- 5
P-2845	6.3	1.3	1500	2 1/4 x 2 3/8	3 1/2	2 13/16	3 3/8	D	5- 0
P-2890*	6.3*	7.2	1500	2 x 2 1/4	3	2 1/2	3 3/8	D	4- 0
	6.3	1.2							
	6.3	.6							
P-3041	5.0 c.t.	3	2500	3 9/16	2 1/2	4	2 1/8	A	2- 2
	6.3 c.t.	3.6							
P-3043	5.0	3	3000	2 1/2 x 3 3/8	3 3/8	3 3/4	4 1/16	C	6-12
	6.3	3.5							
	6.3	10							
P-2961	6.3 c.t.	3	2500	3 3/8	3	3 3/8	2 1/4	B	2- 6
	6.3 c.t.	3							
P-3082	6.3	8	5000	3 3/8	3 1/16	3 9/16	2 1/2	D	2- 8
	6.3	.3							
P-2868	6.3	5.1	1500	2 1/4 x 1 3/8	3 3/8	2 3/8	2 7/8	D	4- 0
	6.3	3.6							
P-2864	6.7	9.6	2500	2 1/4 x 2 1/8	3 1/16	2 1/2	3 3/16	D	3-10
P-2863	6.7	4.1	1500	2 1/4 x 2 3/8	3 1/2	2 15/16	3 3/8	D	5- 6
	6.7	6.6							
P-2866	6.7	6.4	2500	2 1/2 x 2 3/16	3 3/8	3 1/4	3 9/16	D	4- 8
	6.7	6							
P-2960	25.2 c.t.	.003	2500	2 13/16	2 3/8	3 3/8	1 3/8	B	1-12
P-3143	7.5 c.t.	8	2500	2 1/4 x 2	3 1/2	2 15/16	3 3/8	D	3- 8
P-3145	10.0 c.t.	5	2500	2 1/4 x 2	3 1/2	2 15/16	3	D	3- 1
P-3146	10.0 c.t.	10	3000	2 1/2 x 2 7/16	3 3/8	3 3/16	3 3/8	D	5- 6
P-2959	12.6 c.t.	2	2500	2 13/16	2	3 1/4	1 3/8	A	1- 4
P-2889	12.6 c.t.	5.7	2500	2 3/8 x 2 3/4	3 1/2	2 15/16	3 3/8	D	5- 0
P-3142	12.6	.6	2500	2 3/8 x 2 3/4	3 1/2	2 15/16	3 3/8	D	4- 0
	6.3	7.8							
	6.3	1.2							
P-2865	25V	.005	1500	2 1/2 x 2 3/16	3 3/8	3 1/4	3 1/2	D	4- 4
	6.3	11.9							
P-2848	25.8	.3	1500	2 x 1 15/16	3 3/8	2 1/2	3	D	2-15
	6.3	6.5							
P-2962	6.3	.9	2500	2 13/16	2	3 1/4	1 3/8	A	1- 6
	6.3	.9							
P-2963	#12.6	7	2500	2 1/4 x 2 1/2	3 1/2	2 15/16	3 3/8	D	4-10

Or 12.6V @ 3.5A, 12.6V @ 3.5A or 25.2V C.T. @ 3.5A.

Primary 117V, 60 cycles

* Primary taps.

Merit power






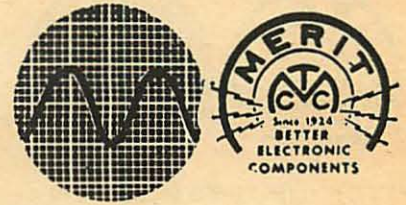


Plate Transformers

Merit No.	Sec. Rms. Volts	Sec. DC Volts	Sec. DC MA	Dimensions—Inches				Mtg. Type	Shpg. Wt. Lbs.-Oz.
				Mtg. Centers	H	W	D		
P-3178	415-415	300	200	2½x2¼	3⅞	3⅜	3⅞	D	4-15
P-3175	550-550	400	150	2¼x2¾	3⅞	3	3⅞	D	5-4
P-3157	660-660† 550-550	500 400	250	3 x 3⅜	4⅞	3⅜	4⅞	D	9-2
P-3158	1080-1080 500-500	1000† 400	125 150	3 x 3⅜	4⅞	3⅜	5	D	11-12
P-3159	900-900 800-800	750 600	225	3 x 4⅜	4⅞	3⅜	5⅞	D	12-6
P-3167	1450-1450 1175-1175	1200 1000	300	5¼x3	5⅞	6⅞	5	EH	24-10
P-3168	2100-2100 1800-1800	1750 1500	300	5¼x3¾	5⅞	6⅞	6	EH	29-0
P-4062	2900-2900 2385-2385	2500 2000	300	5¼x5¾	8¼	6⅞	6⅞	H	43-13

†Has 40V. Bias Tap. †For dual operation with simultaneous use of both sec. ratings. Max. one winding only 275 M.A.]

Rectifier Transformers


Merit No.	Secondary Volts	Secondary Amps.	Insulation Volts RMS	Mtg. Centers	Dimensions—Inches			Mtg. Type	Shpg. Wt. Lbs.-Oz.
					H	W	D		
P-3088	13	12	2000	3½x2⅞	3⅞	4⅞	3¼	EH	6-3
P-3085	#26 c.t.	3	2000	2⅜x2⅞	2⅜	3⅞	2¼	EH	3-4
*P-3093	36 c.t.	10	2000	4⅞x3½	4⅞	5¼	4¼	EH	18-10
*P-3094	72 c.t.	10	2000	5⅜x3¼	6⅜	7⅞	5¼	EH	30-2
P-3087	78 tapped @ 26 and 52	6	2000	5¼x3¼	5⅜	6⅞	5⅞	EH	26-6
P-3086	104 c.t.	3	2000	4⅞x3	4⅞	5¼	4¼	EH	15-0
P-3089	104 c.t.	6	2000	5¼x4	5⅜	6⅞	6⅞	EH	32-5
P-3091	130 tapped @ 104	12	2000	8⅞x4¼	7⅞	9⅞	7⅞	EH	71-8
P-3092	156	6	2000	5⅜x4¼	6⅜	7⅞	7	EH	40-11
P-3090	156 tapped @ 130	3	2000	5¼x3¼	5⅜	6⅞	5⅞	EH	25-6

Vibrator Transformers

Merit No.	Sec. Rms. Volts	Sec. DC Volts to Filter	Sec DC MA	Dimensions—Inches				Mtg. Type	Shpg. Wt. Lbs.-Oz.
				Mtg. Centers	H	W	D		
<i>For operation from 6V battery & vibrator.</i>									
P-2969	160-160	150	40	2⅞	2¼	2⅞	1¼	B	1-1
P-2970	235-235	225	40	2⅜	2⅞	3⅞	2⅞	B	1-7
P-2971	260-260	250	50	2⅜	2⅞	3⅞	2¼	B	1-12
P-4071	260-260	250	50		3	2⅞	2⅞	JT	2-0
P-2972	265-265	260	60	3⅞	3	3⅞	2⅞	B	2-4
P-3068	275-275	260	60	1¾ x 2⅜	2⅞	2⅞	1⅞	CO	1-6
P-4076*	280-280	265	55		3¼	2⅞	2⅞	JG	2-8
P-4078	285-285	270	60		2⅞	2⅞	2¼	JT	1-15
P-4079	275-275	270	75		3⅜	2⅞	2½	JT	2-4
P-4077*	290-290	280	65		3⅞	2¼	2⅞	JT	2-7
<i>For operation from 12V battery & vibrator.</i>									
P-2860	235-235	225	50	2⅜	2⅜	3⅞	1⅞	B	2-0
P-2861	260-260	250	60	1¾ x 2⅜	2⅞	2⅞	2⅞	CO	2-0
P-2978	275-275	260	60	1¾ x 2⅜	2⅞	2⅞	1⅞	CO	1-8
P-4051*	280-280	265	65		3¼	2⅞	2⅞	JG	2-9
P-4052*	290-290	280	65		3⅞	2¼	2⅞	JT	2-6

* Built-in hash filter.

Quality in Production—Speed in Delivery




Merit power


STEP-UP, STEP-DOWN TRANSFORMERS

Merit No.	Input Voltage	Output Voltage*	Watts	Dimensions—Inches			Mtg. Type	Shpg. Wt. Lbs.-Oz.	
				Mtg. Centers	H	W			D
★P-3138	Dependent on Line Voltage	Dependent on Line Voltage and Position of Switch	350	3 x 5 ⁷ / ₁₆	4 ⁷ / ₈	3 ¹³ / ₁₆	7 ¹ / ₂	DEM	10-10
★P-3139			750	3 ¹ / ₂ x 6 ⁷ / ₈	5 ⁷ / ₈	4 ¹ / ₂	9 ¹ / ₂	DEM	19- 8

Equipped with voltmeter, line cord, and plug, variable primary switch, indicator light and output receptacle.
*See detailed instruction sheet packed with unit.




B



D




DE



DEM



H



Step-Down Auto-Transformers

Merit No.	Primary Volts	Secondary Volts	Output Watts	Dimensions—Inches			Mtg. Type	Shpg. Wt. Lbs.-Oz.	
				Mtg. Centers	H	W			D
P-3161	220-250	110-125	80	2 ¹ / ₄ x 1 ⁷ / ₈	3 ¹ / ₂	2 ¹⁵ / ₁₆	3	DE	3- 6
P-3162	220-250	110-125	150	2 ¹ / ₂ x 2 ⁷ / ₁₆	3 ³ / ₈	3 ³ / ₁₆	3 ³ / ₈	DE	5- 3
P-3163	220-250	110-125	250	3 x 2 ¹⁵ / ₁₆	4 ⁷ / ₈	3 ¹³ / ₁₆	4	DE	8- 7
P-3164	220-250	110-125	500	3 x 3 ³ / ₁₆	4 ⁷ / ₈	3 ¹³ / ₁₆	4 ³ / ₈	DE	10- 2
P-4065	220-250	110-125	1000	4 ⁷ / ₈ x 5 ³ / ₄	7 ¹ / ₄	6 ³ / ₈	5 ³ / ₈	H	35- 8

Statically shielded, conservatively rated, equipped with cord plug and receptacle.

Photo-Flash Transformer

Merit No.	Secondary		Dimensions—Inches				Mtg. Type	Shpg. Wt. Lbs.-Oz.
	AC Volts	DCMA	Mtg. Centers	H	W	D		
P-3065	1100	1.5	2 ¹¹ / ₁₆	2 ⁵ / ₈	3 ¹ / ₈	2	B	1-12

ISOLATION TRANSFORMERS

Merit No.	Shpg. Wt. Lbs.-Oz.	Primary Volts	Secondary Volts	Output Watts	Mtg. Centers Inches	Mtg. Type	Dimensions—Inches		
							H	W	D
P-3096	2- 4	117	117	40	3 ¹ / ₈	B	3 ³ / ₈	2 ⁵ / ₈	2 ⁵ / ₈
P-3197	5- 0	117	117	80	2 ¹ / ₂ x2 ¹ / ₁₆	D	3 ⁷ / ₈	3 ³ / ₁₆	3 ¹ / ₂
P-3177	15-10	117	105-115-125	350	3 ¹ / ₂ x3 ³ / ₄	DE	5 ⁵ / ₁₆	4 ¹ / ₂	5 ¹ / ₄
P-3198	6- 6	117	117	100	3 ³ / ₄ x2 ¹¹ / ₁₆	DE	4 ¹ / ₄	3 ³ / ₁₆	3 ³ / ₄
P-3202	7- 0	117	117	175	2 ³ / ₄ x3 ³ / ₈	J	4 ¹ / ₄	4 ⁷ / ₁₆	3 ³ / ₈
P-3199	12- 2	117	117	250	3 x 3 ¹³ / ₁₆	DE	4 ⁷ / ₈	3 ¹³ / ₁₆	4 ⁷ / ₈
P-3172	21- 4	117	117	500	3 ¹ / ₂ x4 ⁷ / ₈	DE	5 ³ / ₈	4 ³ / ₈	6 ¹ / ₂

Step Down Type


P-3116	5- 0	230	115	100	2 ³ / ₄ x2 ¹ / ₁₆	DE	4 ¹ / ₄	3 ³ / ₁₆	3 ³ / ₈
P-3117	9-10	230	115	250	3 x 3 ³ / ₁₆	DE	4 ⁷ / ₈	3 ¹³ / ₁₆	4 ³ / ₈
P-3118	21- 7	230	115	500	3 ¹ / ₂ x4 ⁷ / ₈	DE	5 ⁷ / ₁₆	4 ¹ / ₁₆	6 ³ / ₈

"COMPARE IT WITH MERIT!"

Quality in Production—Speed in Delivery

Merit COIL AND TRANSFORMER CORPORATION

HOLLYWOOD, FLORIDA





AUDIO


DRIVER AND MODULATION TRANSFORMERS

"COMPARE IT WITH MERIT!"

Driver Transformers



Merit No.	Driver	Typical Outputs	Turn Ratio Pri. to 1/2 Sec.	Pri. MA	Dimensions—Inches				Mtg. Type	Shpg. Wt. Lbs.-Oz.
					Mtg. Centers	H	W	D		
A-3009	30, 1H4, etc.	PP19, 30's, 1J6, etc.	2.5:1	15	1 3/4	1 1/16	2 1/16	7/8	A	0-4
A-2920	6C5, 1H4, 30, 49, etc.	1J6, 19, PP30, 49, etc.	2.5:1	10	2 3/8	1 1/8	2 13/16	1 1/2	A	0-10
A-2921	6F6, 2A5, 42, etc.	PP6F6, 2A5, 6L6, etc.	1.7:1, 1.5:1, 1.3:1	35	2 13/16	2	3 1/4	1 1/8	A	1-0
A-2922	6A6, 6C5, 6N7, 46, etc.	6A6, 6N7, PP46, etc.	5:1, 4:1, 3:1, 2.5:1	20	2 11/16	2	3 1/4	1 1/8	A	1-0
A-3120	500 ohm line	Class B Grids 15 Watt Capacity	1:1.75, 1:1.85, 1:1.1, 1:1.25, 1:1.45		2 1/16 x 2	3 1/16	2 1/2	3 3/8	DL	3-1
A-3121	500 ohm line	Class B Grids 30 Watt Capacity	1:1.75, 1:2, 1:2.25, 1:2.5, 1:2.75, 1:3		2 1/2 x 2 1/4	3 1/16	3	3 3/4	DL	4-2
A-3123	PP6A6, 6C5, 53, etc.	PP6A6, 6N7, 6L6, T21	5:1†	15	2 x 1 11/16	3 3/8	2 1/2	2 1/2	D	2-7
A-3124	6F6, 46, 59, 42, etc.	PP46, 59, 6L6, 807	2.2:1	30	2 x 1 11/16	3 3/8	2 1/2	2 1/2	D	2-7
A-3125	6F6, 2A5, 47, 42, etc.	PP6L, 800, 812, 203A	1.4:1†	40	2 1/4 x 2	3 1/2	2 13/16	3 1/8	D	3-4
A-3126	PP6L6, 6F6, 6V6, etc.	RK18, RK58, T20, 807	2:1	40	2 x 1 11/16	3 3/8	2 1/2	2 1/2	D	2-7



Modulation Transformers

Merit No.	Class B Outputs	Ohms Impedance		Max. MA		Watts	Dimensions—Inches				Mtg. Type	Shpg. Wt. Lbs.-Oz.
		Pri.	Sec.	Pri.	Sec.		Mtg. Centers	H	W	D		
A-3007	19, 1J6, 6A6, 6N7, PP1H4	10000 c.t.	5000 8000 10000	70	50	5	1 3/4	1 1/16	2 1/16	7/8	A	0-4
A-3008	PP6AV5, 6V6, 6F6 Sgl. 6A6, 6N7, 53	10000 c.t.	4000- 5000- 7500- 10000- 12000	70	60	10	2 3/8	2 1/4	2 7/8	2 1/8	B	1-5
A-3109	PP2A3, 6A3, 6B4, 6L6, 45, 46, 59	6000 c.t. 3800 c.t. 3000 c.t.	5000 8000 10000	80	100	25	2 x 1 13/16	3 3/8	2 1/2	2 3/4	D	2-8
A-3110	PP6L6, 807, PPRK41, HY56, PP HY61, HK24	6600- 3800 c.t.	4000- 5000- 7500- 10000- 12000	175	150	60	2 3/4 x 2 11/16	4 1/4	3 1/2	3 3/4	D	6-3
A-3113	PP800, 809, TZ40, T55, HK54, RK31, HY40, 811A, 807, 812A	15000- 6900 c.t.	3000- 4000- 5000- 6000	250	300	175	3 x 4 7/16	4 3/8	3 13/16	5 1/8	D	14-10

Universal Modulation

Type No.	Pri. Impedance	Pri. MA Per Side	Sec. Impedance	Max. Sec. MA†	Watts	Dimensions—Inches				Mtg. Type	Shpg. Wt. Lbs.-Oz.
						Mtg. Centers	H	W	D		
A-3104	2000-20000	50	2000-20000	50/100	15	2 x 1 11/16	3 1/16	2 1/2	2 1/2	DL	2-4
A-3105	2000-20000	150	2000-20000	150/300	60	2 1/2 x 2 13/16	3 3/8	3 3/8	4 1/8	DL	6-12
A-3106	2000-20000	220	2000-20000	220/440	125	3 x 3 1/16	4 3/8	3 3/4	4 3/8	DL	10-1

†Series/Parallel.

Transistor Transformers




Actual size

Merit No.	Function	Impedance in Ohms		DC Resistance		DC Pri. MA	Power MW
		Pri.	Sec.	Pri.	Sec.		
A-2705	Output	250 c.t.	11	20	.80	0	175
A-2702	Output	450 c.t.	3.2	40	.40	2	100
A-2706	Output	500	12	50	2.7	15	175
A-2701	Output	725 c.t.	3.2	57	.34	0	175
A-2760	Output	1000	50/60	116	7	3	50
A-2704	Driver or Interstage	5000	2500c.t.	230	39 v	1.5	350
A-2700	Driver or Output	10,000	16	640	2.7	2	150
A-2703	Driver or Interstage	10,000	2000	370	198	2	100
A-2740	Input or Interstage	20,000	1000	1400	210	.5	150
A-2741	Input or Interstage	20,000	1000	1100	109	.5	150
A-2720	Input	200,000	1000	2800	145	0	150

AUDIO

OUTPUT TRANSFORMERS




"COMPARE IT

WITH MERIT!"


Standard Type

*Type "B" mounting.

Mounting Type "A"




Merit No.	Tube	Ohms Impedance		Pri. Ma.	Max. Watts	Dimensions—Inches				Shgs. Wt. Lbs.-Oz.
		Primary	Sec.			Mtg. Centers	H	W	D	
A-2928	Single	2000	3-4	60	5	2	1 3/8	2 3/8	1 1/4	0-6
A-3025	Single	2500	3-4	50	3	1 3/4	1 3/16	2 1/16	7/8	0-4
A-3018	Single	3500	3-4	60	8	2 3/8	1 3/8	2 13/16	1 1/2	0-10
A-3026	Single	5000	3-4	40	3	1 3/4	1 3/16	2 1/16	7/8	0-4
A-2930	Single	5000	3-4	40	5	2	1 3/8	2 3/8	1 1/4	0-6
A-3019	Single	5000	3-4	50	8	2 3/8	1 3/8	2 13/16	1 1/2	0-10
A-2935	Single or Push-Pull	5000 c.t.	3-4	150	18	2 13/16	2	3 1/4	1 3/8	1-0
A-2931	Single	7000	3-4	30	5	2	1 3/8	2 3/8	1 1/4	0-6
A-3020	Single	7000	3-4	40	8	2 3/8	1 3/8	2 13/16	1 1/2	0-10
A-2927*	Single	8000	3-4	20	3	1 1/2	1 3/8	1 7/8	1	0-4
A-2932	Single	10000	3-4	30	5	2	1 3/8	2 3/8	1 1/4	0-6
A-2938	Single or Push-Pull	10000 c.t.	3-4	40	5	2	1 3/8	2 3/8	1 1/4	0-6
A-2936	Single or Push-Pull	10000 c.t.	3-4	75	10	2 3/8	1 5/8	2 13/16	1 1/2	0-10
A-2933	Single	12000	3-4	10	5	2	1 3/8	2 3/8	1 1/4	0-6
A-3021	Single or Push-Pull	14000 c.t.	3-4	35	12	2 13/16	2	3 1/4	1 3/8	1-0
A-2934	Single	15000	3-4	10	5	2	1 3/8	2 3/8	1 1/4	0-6
A-2937	Single or Push-Pull	25000 c.t.	3-4	10	5	2	1 3/8	2 3/8	1 1/4	0-6
A-3012	Single or Push-Pull	10000 c.t.	3-4	25	10	1 23/32	1 11/16	2	1 1/2	0-10
A-3017	Single or Push-Pull	50000 c.t.	3-4	10	5	2	1 3/8	2 3/8	1 1/4	0-6
A-3010		Exact for Delco 6061					1 5/8	1 3/8	1 1/4	0-6



Universal Type

Mounting Type "F" except

*Type "G" mounting.



A-2900	Single or Push-Pull	4000-7000-8000-10000-14000 c.t.	.17 to 32	35	4	2	1 3/8	2 3/8	1 1/4	0-6
A-2901	Single or Push-Pull	4000-7000-8000-10000-14000 c.t.	.17 to 32	40	8	2 3/8	1 3/8	2 13/16	1 1/2	0-10
A-2902	Single	1500-2000-4000-5000-7000-10000	.1 to 40	55	10	2 3/8	1 3/8	2 13/16	1 1/2	0-10
A-2903	Single	2000-4500-7000-10000	3.2	30	4	2	1 3/8	2 3/8	1 1/4	0-6
A-2904*	Single or Push-Pull	4000-7000-8000-10000-14000 c.t.	.17 to 32	40	18	2 3/8	2 1/4	2 7/8	1 7/8	1-1
A-2905	Single or Push-Pull	3000-5000-7000-8000-10000 c.t.	.17 to 32	70	24	3 3/8	2 1/4	3 11/16	2 3/8	1-10
A-2998	Single	3500-5000-7000-10000	3.2	35	3	1 3/4	1 1/8	2 1/8	1 1/8	0-4
A-2999	Single	12000-15000-18000-25000	3.2	10	3	1 3/4	1 1/8	2 1/8	1 1/8	0-4

Filter Tapped

Mounting Type "A"

A-3031	Single	3000	3-4	50	5	2	1 3/8	2 3/8	1 1/4	0-6
A-3032	Single	6000	3-4	40	5	2	1 3/8	2 3/8	1 1/4	0-6


*Primary has 30% and 6% humbucking taps. Secondary to match 3-4 ohm speaker


Special Type

Mounting Type "F"

A-3027	PP6F6, 6V6, etc.	10000 c.t.	‡	45*	15	2 13/16	2	3 1/4	1 3/4	1-0
A-3028	PP6L6, etc.	5000 c.t.	‡	70*	20	3 3/8	2 3/8	3 11/16	2	1-8


‡Sec. Impedance 2-4-8-15-250-500 Ohms. *Pri. M.A. Per Side.



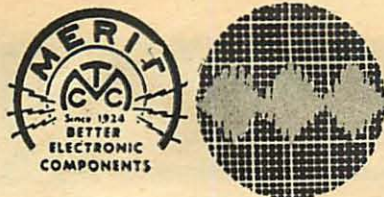


AUDIO


LINE TRANSFORMERS




A




DL



F



G



JO

Constant Voltage Line Transformers

Merit No.	Ohms Impedance		Watts	Dimensions—Inches				Mtg. Type	Shpg. Wt. Lbs.-Oz.
	Pri.	Sec.		Mtg. Ctrs.	H	W	D		
A-2800	1000-1250-1667-2500-5000	3.2, 8	1- 5	2	1 $\frac{1}{8}$	2 $\frac{3}{8}$	1 $\frac{3}{8}$	F	0- 7
A-2801	500-555-625-715-833	3.2, 8	6-10	2 $\frac{3}{8}$	1 $\frac{1}{8}$	2 $\frac{13}{16}$	1 $\frac{1}{2}$	F	0-10
A-2802	333-357-384-417-455	8, 16	11-15	2 $\frac{13}{16}$	2	3 $\frac{1}{4}$	1 $\frac{1}{8}$	F	1- 0
A-2803	250-263-278-294-312	8, 16	16-20	2 $\frac{3}{8}$	2 $\frac{1}{4}$	2 $\frac{13}{16}$	2 $\frac{3}{8}$	G	1- 4
A-2804	200-208-217-227-238	8, 16	21-25	2 $\frac{3}{8}$	2 $\frac{3}{8}$	3 $\frac{1}{16}$	1 $\frac{1}{8}$	G	1- 6
A-3013	1000-2000-4000-8000-16000	3.5, 7	5	2	1 $\frac{1}{8}$	2 $\frac{3}{8}$	1 $\frac{1}{2}$	F	0- 7
A-3014	500-1000-2000-4000-8000	4.8-16	10	2 $\frac{3}{8}$	1 $\frac{1}{8}$	2 $\frac{13}{16}$	1 $\frac{1}{2}$	F	0- 7
A-3015	275-550-1100-2200-4400-8800	4.8-16	18	2 $\frac{3}{8}$	2 $\frac{1}{4}$	2 $\frac{7}{8}$	1 $\frac{7}{8}$	G	1- 0
A-3016	210-420-840-1680-3360-6720	4.8-16	24	3 $\frac{1}{8}$	2 $\frac{1}{4}$	3 $\frac{11}{16}$	2 $\frac{1}{8}$	F	1-10
A-2805	125-250-500-1000-2000	3.5, 7	5	2	1 $\frac{1}{8}$	2 $\frac{3}{8}$	1 $\frac{1}{2}$	F	0- 7
A-2806	62.5-125-250-500-1000	4.8-16	10	2 $\frac{3}{8}$	1 $\frac{1}{8}$	2 $\frac{13}{16}$	1 $\frac{1}{2}$	F	0- 7
A-2807	34.5-68.75-137.5-275-550-1100	4.8-16	18	2 $\frac{3}{8}$	2 $\frac{1}{4}$	2 $\frac{7}{8}$	1 $\frac{7}{8}$	G	1- 0
A-2808	26-52-104-208-416-832	4.8-16	24	2 $\frac{3}{8}$	2 $\frac{1}{4}$	2 $\frac{7}{8}$	1 $\frac{7}{8}$	F	1-10

*Used to match speaker to 25V constant voltage line.

Universal Line Transformers

A-2810	500-1000-1500-2000	3.2, 4.8, 6.8	10	2 $\frac{3}{8}$	1 $\frac{1}{8}$	2 $\frac{13}{16}$	1 $\frac{1}{2}$	F	0-10
A-2811	500-1000-1500-2000	3.2, 4.8, 6.8	18	2 $\frac{3}{8}$	2 $\frac{1}{4}$	2 $\frac{13}{16}$	1 $\frac{1}{2}$	F	1- 0
A-2812	500-1000-1500-2000	3.2, 4.8, 6.8	25	2 $\frac{13}{16}$	2 $\frac{3}{8}$	3 $\frac{1}{8}$	1 $\frac{3}{8}$	G	1- 6
A-2813	2500-5000-7000-10000	4.8, 6, 8	5	2	1 $\frac{1}{8}$	2 $\frac{3}{8}$	1 $\frac{3}{8}$	F	1- 7
A-2814	31-62-125-250	4.8, 6, 8	20	2 $\frac{3}{8}$	2 $\frac{1}{4}$	2 $\frac{13}{16}$	1 $\frac{1}{8}$	G	1- 4
A-2906	500-1000-1500-2000	3.2, 6-8	10	2 $\frac{3}{8}$	1 $\frac{1}{8}$	2 $\frac{13}{16}$	1 $\frac{1}{2}$	F	0-10
A-2907	500-1000-1500-2000	3.2, 6-8	18	2 $\frac{3}{8}$	2 $\frac{1}{4}$	2 $\frac{7}{8}$	1 $\frac{1}{8}$	G	1- 0
A-2908	500-1000-1500-2000	6-8, 16	24	3 $\frac{1}{8}$	2 $\frac{1}{4}$	3 $\frac{11}{16}$	2 $\frac{3}{8}$	F	1- 8
A-2909	45-50	3.2, 6-8	8	2	1 $\frac{1}{8}$	2 $\frac{13}{16}$	1 $\frac{1}{2}$	G	0-10
A-3005	500	3.2, 6-8	5	2	1 $\frac{1}{8}$	2 $\frac{3}{8}$	1 $\frac{1}{4}$	A	0- 6
A-4040	250-500-1000-1500-2000	4-8-16	8	2 $\frac{3}{4}$ x3 $\frac{3}{8}$	4 $\frac{1}{4}$	4 $\frac{7}{16}$	3 $\frac{3}{16}$	JO	4- 0
A-4041	250-500-1000-1500-2000	4-8-16	12	2 $\frac{3}{4}$ x3 $\frac{3}{8}$	4 $\frac{1}{4}$	4 $\frac{7}{16}$	3 $\frac{3}{16}$	JO	4- 4
A-4042	250-500-1000-1500-2000	4-8-16	25	2 $\frac{3}{4}$ x3 $\frac{3}{8}$	4 $\frac{1}{4}$	4 $\frac{7}{16}$	3 $\frac{3}{16}$	JO	5- 6

Tube to Line Transformers

A-2925	20000 c.t.	500-125	10	2 $\frac{13}{16}$	2	3 $\frac{1}{4}$	1 $\frac{1}{8}$	A	1- 0
A-2926	20000 c.t.	200-50	10	2 $\frac{13}{16}$	2	3 $\frac{1}{4}$	1 $\frac{1}{8}$	A	1- 0
†A-3023	5000-10000-20000 c.t.	500-333-200-125-50	15	2 $\frac{13}{16}$	2	3 $\frac{1}{4}$	1 $\frac{1}{4}$	F	1- 0
†A-3024	5000-10000-20000 c.t.	500-333-200-125-50	50	2x1 $\frac{11}{16}$	3 $\frac{3}{16}$	2 $\frac{3}{8}$	2 $\frac{3}{4}$	DL	2- 8

†20000 Ohm Center Tapped.

ATTENTION!

THE MERIT LINE INCLUDES FLYBACKS, YOKES, WIDTH AND LINEARITY COILS, VERTICAL OUTPUTS, VERTICAL BLOCKING OSCILLATORS, PEAKING COILS AND MANY OTHER TV AND RADIO COMPONENTS NOT LISTED IN THIS EDITION OF THE RADIO-ELECTRONIC MASTER.

THE MERIT LINE IS AVAILABLE AT LEADING DISTRIBUTORS. CONTACT YOUR FAVORITE DISTRIBUTOR FOR ANY INFORMATION ABOUT MERIT PRODUCTS NOT LISTED HEREIN.

Merit COIL AND TRANSFORMER CORPORATION

HOLLYWOOD, FLORIDA

Quality in
Production—

—Speed in
Delivery

**"COMPARE IT
WITH MERIT!"**