



2006 Owner's Manual

All Portable Spas

Manufactured after December 1, 2005 • International
© 2006 California Acrylic Industries, Inc.

www.calspas.com



Due to our continuous improvement programs, all models, operation, and/or specifications are subject to change without prior notice.





CONTACT INFORMATION

For customer service, please contact your authorized dealer immediately. If you need additional information and/or assistance, please contact:

C.A.I. Customer Service Department
1462 East Ninth Street
Pomona, CA 91766

Toll Free: 1-800-CAL-SPAS
Fax: 1-909-629-3890

www.calspas.com

Copyright 2004, 2005, 2006 California Acrylic Industries, Inc. All rights reserved.
Duplication without written consent is strictly prohibited.

Cal Spas™, Adjustable Therapy System™, ATS™, Bio-Clean™, Cal Balance™, Cal Entertainment System™, Cal Zone Quest 1000™ and Cal Zone Quest 2000™, Cal Sweep™, Cal Select™, Fitness Spa Series™, Spa Cal™, and XL Heat Exchanger are registered trademarks.

Due to continuous improvement programs, all models, operation, and/or specifications are subject to change without prior notice.

LTR20061001, Rev. B

1/17/2006

Table of Contents

Read This First!

<i>Important Safety Instructions</i>	1
<i>Basic Spa Information</i>	2

Preparing for Your New Portable Spa

<i>Planning the Best Location For Your Spa</i>	4
<i>Preparing a Good Foundation for Your Portable Spa</i>	5
<i>Electrical Set-up Before Delivery of Your Spa</i>	6
<i>230 Volt Electrical Installation</i>	7
<i>Filling and Powering Up Your Portable Spa</i>	9

Operating Your Spa

<i>5005 Electronic Control Operation</i>	10
<i>8005 Electronic Control Operation</i>	14
<i>Auxiliary Control Operation</i>	20
<i>Adjustable Jets</i>	20
<i>Diverter Knobs</i>	20
<i>Air Venturis</i>	21
<i>Adjustable Therapy System™</i>	21
<i>Multi-Colored Spa Light Operation</i>	23
<i>Spa Cover</i>	24
<i>Aromatherapy</i>	24
<i>Waterfalls</i>	24
<i>Removing and Reseating the Pillows</i>	24
<i>Draining Your Portable Spa</i>	25

Water Quality Maintenance

<i>Cal Spas Clear Water Plan</i>	27
<i>Alternative Sanitation Options</i>	27
<i>Before You Begin</i>	27
<i>Chemical Overview</i>	28
<i>Chemical Descriptions</i>	30

Table of Contents

<i>Traditional Chemical Start Up</i>	33
<i>Cal Zone Quest 2000 Ozonator Clear Water Plan</i>	36
<i>Cal Clarity Automatic Bromine Generator Clear Water Plan</i>	37
<i>Cal Inline Sanitation System Clear Water Plan</i>	39
<i>Maintenance</i>	41
Using the Cal Entertainment System	
<i>The Marine Grade Stereo Receiver</i>	42
<i>The DVD Multimedia Player</i>	43
<i>Raising and Lowering the TV Monitor</i>	45
<i>Universal Remote Control Operation</i>	46
Appendix	
<i>Keeping Fit with your Cal Spa</i>	48
<i>Replacement Parts</i>	51
<i>Replacement Parts</i>	51
<i>Cal Spas™ Chemicals</i>	67
<i>2006 Warranty Information</i>	68

Read This First!

Important Safety Instructions

When installing and using this electrical equipment, always follow basic safety precautions. Following these instructions will help make your first spa session a pleasurable one.

READ AND FOLLOW ALL INSTRUCTIONS.

WARNING: To reduce the risk of injury, do not allow children to use the spa unless they are supervised at all times.

A licensed electrician may be required to upgrade your standard receptacle and/or circuit breaker.

DANGER -- RISK OF ACCIDENTAL DROWNING: Do not allow children to be in or around a spa unless a responsible adult supervises them. Keep the spa cover on and locked when not in use. See instructions enclosed with your cover for locking procedures.

DANGER -- RISK OF INJURY: The suction fittings in this spa are sized to match the specific water flow created by the pump. Should the need arise to replace the suction fittings, or the pump, be sure the flow rates are compatible.

DANGER -- RISK OF INJURY: Never operate the spa if the suction fitting or filter baskets are broken or missing.

DANGER -- RISK OF INJURY: Never replace a suction fitting with one that is rated less than the flow rate marked on the original suction fitting.

DANGER -- RISK OF ELECTRIC SHOCK: Install the spa at least 1.5 meters from all metal surfaces. As an alternative, a spa may be installed within 1.5 meters of metal surfaces if each metal surface is permanently bonded by a minimum #8 AWG solid copper conductor to the outside of the spa's control box.

DANGER -- RISK OF ELECTRIC SHOCK: Do not permit any external electrical appliances, such as lights, telephones, radios, televisions, and etc., within 1.5 meters of the spa. Never attempt to operate any electrical device from inside the spa. This does not apply to lights, stereos and televisions that are built in to the spa as factory options from Cal Spas™.

Warning – Risk of Injury

- The spa water should never exceed 40°C. Water temperatures between 38°C and 40°C are considered safe for a healthy adult. Lower water temperatures are recommended for young children and when spa use exceeds 10 minutes.
- High water temperatures have a high potential for causing fetal damage during pregnancy. Women who are pregnant, or who think they are pregnant, should always check with their physician prior to spa usage.
- The use of alcohol, drugs or medication before or during spa use may lead to unconsciousness, with the possibility of drowning.
- Persons suffering from obesity, a medical history of heart disease, low or high blood pressure, circulatory system problems or diabetes should consult a physician before using the spa.

Read This First!

- Persons using medications should consult a physician before using the spa since some medications may induce drowsiness while others may affect heart rate, blood pressure and circulation.

Hyperthermia Danger

Prolonged exposure to hot air or water can induce hyperthermia. Hyperthermia occurs when the internal temperature of the body reaches a level 2°C to 4°C above the normal body temperature of 37°C. While hyperthermia has many health benefits, it is important not to allow your body's core temperature to rise above 39.5°C. Symptoms of excessive hyperthermia include dizziness, lethargy, drowsiness and fainting. The effects of excessive hyperthermia may include:

- Failure to perceive heat
- Failure to recognize the need to exit spa or hot tub
- Unawareness of impending hazard
- Fetal damage in pregnant women
- Physical inability to exit the spa
- Unconsciousness

WARNING: The use of alcohol, drugs, or medication can greatly increase the risk of fatal hyperthermia.

Basic Spa Information

The following operating and maintenance instructions are very important and must be followed carefully. With the proper care and maintenance, your Cal Spa will provide you with years of satisfaction and performance.

Do not be afraid to push buttons or turn knobs to learn about your new Cal Spa, as it is built with quality materials and excellent craftsmanship.

Your new Cal Spa has been engineered with a high-powered water pump that pushes water through various therapy jets, which will relax even the tightest muscles. In addition to the water pressure, you can add air into the spa water with air venturi handles located seat-side that increase the intensity of your massage.

The filtering of this spa is very important. It will minimize cleaning time and the amount of chemicals needed to keep your spa water balanced. The two daily pre-programmed filter cycles of two hours in duration can be increased to six hour cycles if the need arises. This can be accomplished through the topside control panel.

IMPORTANT: Keep the spa covered when not in use!

- Covered spas use less electricity while maintaining a set temperature.
- Covering your spa will protect your spa's finish from the sun's ultraviolet rays.
- You are required to keep the spa covered to maintain warranty coverage.
- Covering your spa helps prevent children from drowning in the spa.

Your new Cal Spa comes equipped with an electric heater. Following the directions listed below will ensure the most efficient operation:

NOTE: This method is only for spa usage under two hours a week.

- Keep the spa's operating temperature 3°C below the desired usage temperature when not in use. One or two hours before use, set the temperature to the desired temperature.
- If the spa usage exceeds two hours a week, the set temperature should remain at the desired usage temperature.
- The air venturis should be used sparingly. When open, water temperature drops quite rapidly and can also dissipate chemicals.

Allowing the water temperature to lower more than 6°C below the desired usage temperature and reheating it prior to usage will cause the heater to operate longer than it normally would maintaining the desired temperature. Doing this will increase your operating cost and makes your heater work more than necessary.

The filter needs to be cleaned or changed on a regular basis. This process takes only a few minutes and the result is increased water clarity and equipment longevity.

Water level is very important to the operation of your spa. If the water level is too low or too high, your spa will not operate properly. The water level should be to the middle of the skimmer area when the spa is not being used.

We recommend that your spa water be changed every 4 to 6 months. You may find the need to change your spa water more frequently with heavy use. When empty, your spa should be cleaned with a non-abrasive cleaner, such as Cal Spas™ All Surface Cleaner, and then rinsed thoroughly.

See the section "Cleaning and Maintaining Your Spa" for instructions on draining your spa.

When filling your spa, always fill through the skimmer filter canister. Use only regular tap water.

WARNING: DO NOT USE SOFT WATER.

Preparing for Your New Portable Spa

Congratulations! You have purchased a Cal Spa™. With a little preparation and care, your spa will give you many years of enjoyment. This section has been designed to ensure that your new spa is installed safely and is ready to enjoy as quickly as possible.

Most cities and counties require permits for exterior construction and electrical circuits. In addition, some communities have codes requiring residential barriers such as fencing and/or self-closing gates on property to prevent unsupervised access to the property by children. Your dealer can provide information on which permits may be required and how to obtain them prior to the delivery of your Cal Spa™.

Planning the Best Location For Your Spa

Here are some of the things that you will need to consider when determining where to place your new spa.

Safety First

- Do not place your spa within 3 meters of overhead power lines.
- Make sure the spa is positioned so that access to the equipment compartment and all side panels will not be blocked. Be certain that your installation will meet all city and local safety codes and requirements.

Consider How You Will Use Your Spa

How you intend to use your spa will help you determine where you should position it. For example, will you use your spa for recreational or therapeutic purposes? If your spa is mainly used for family recreation, be sure to leave plenty of room around it for activity. If you will use it for relaxation and therapy, you'll probably want to create a specific mood around it.

Plan for Your Environment

If you live in a region where it snows in the winter or rains frequently, place the spa near a house entry. By doing this, you will have a place to change clothes and not be uncomfortable.

Consider Your Privacy

In a cold-weather climate, bare trees won't provide much privacy. Think of your spa's surroundings during all seasons to determine your best privacy options. Consider the view of your neighbors as well when you plan the location of your spa.

Provide A View With Your Spa

Think about the direction you will be facing when sitting in your spa. Do you have a special landscaped area in your yard that you find enjoyable? Perhaps there is an area that catches a soothing breeze during the day or a lovely sunset in the evening.

Keep Your Spa Clean

Prevent dirt and contaminants from being tracked into your spa by placing a foot mat at the spa's entrance where the bather's can clean their feet before entering your spa. You may also consider keeping a small water-filled basin nearby for bathers to rinse their feet before enter your spa.

In planning your spa's location, consider a location where the path to and from the house can be kept clean and free of debris.

Allow For Service Access

Many people choose to install a decorative structure around their spa. If you are installing your spa with any type of structure on the outside, such as a gazebo, remember to allow access for service. It is always best to design special installations so that the spa can still be moved, or lifted off the ground.

Preparing a Good Foundation for Your Portable Spa

Your spa needs a solid and level foundation. The area that it sits on must be able to support the weight of the spa and the occupants who use it. If the foundation is inadequate, it may shift or settle after the spa is in place, causing stress that could damage your spa shell or finish.

Damage caused by inadequate or improper foundation support is not covered by the warranty. It is the responsibility of the spa owner to provide a proper foundation for the spa. We strongly recommended that you have a qualified, licensed contractor prepare the foundation for your spa.

Place the spa on a level foundation (preferably a 10 cm concrete slab). If you are installing the spa indoors, pay close attention to the flooring beneath it. Choose flooring that will not be damaged or stained.

If you are installing your spa on an elevated wood deck or other structure, consult a structural engineer or a contractor to ensure the structure will support the weight of **68 kg per square foot**.

Your Cal Spas™ retailer can help you with your foundation and more. Your retailer has a wealth of information and experience about how to get the most out of your spa and can provide you with a full line of accessories that are designed to compliment your spa and increase your enjoyment.

Electrical Set-up Before Delivery of Your Spa

When installed internationally, the electrical wiring of the spa must meet the requirements of any applicable national, state or local codes. The electrical circuit must be installed by an electrical contractor and approved by a local building / electrical inspector.

All 230V spas must be permanently connected (hard wired) to the power supply. Supplying power to a spa that is not in accordance with these instructions will void both the independent testing agency listing and the manufacturer's warranty.

The power supplied to the spa must be on a dedicated RCD protected circuit with no other appliances or lights sharing the power.

To determine the current, voltage, and wire size required for the spa configuration to be connected, refer to the following:

- Wire size must comply with applicable local, state, and national codes.
- Wire size is determined by length of run from breaker box to spa and maximum current draw.
- We recommend copper wire with THHN insulation or equivalent.
- All wiring must be copper to ensure adequate connections. Do not use aluminum wire.
- When code requires the use of wires larger than #6 (10mm²), install a junction box near the spa and use #6 (10mm²) wire between the junction box and the spa.

IMPORTANT: A clearly labeled emergency shutoff or control switch for the purpose of disconnecting all electrical power to the spa including the motors, recirculation system and jet system(s) shall be installed at a point readily accessible to the users and not less than 1.5 meters away, adjacent to, and within sight of the spa or as applicable per national code.

230 Volt Electrical Installation

All 230V spas are required to have a residual current device (RCD) breaker and should only be wired by a licensed electrician. To ensure proper wiring of your RCD, follow the wiring diagram on the next page.

Always follow applicable local, state, and federal codes and guidelines.

- Your new 230V Cal Spa™ requires a dedicated 20-Amp RCD Service with three #10 AWG copper wires. This will include a BROWN load wire for your incoming power, a BLUE wire for your neutral, and a GREEN/YELLOW wire for your ground.

-

#10 AWG wire is acceptable on wire run up to 20 meters. Wire run over 20 meters must increase to #8 AWG gauge.

- Please note that this is the only acceptable electrical wiring procedure. Spas wired in any other way will void your warranty and may result in serious injury.


Before each use of your spa, you should check the RCD. During this test, the spa should be operational.

1. Press the test button on the RCD. The RCD will trip and the spa will shut off.
2. Wait 30 seconds and reset the RCD breaker. This is accomplished by turning the breaker off then back on. Your spa will be operational in about five seconds.
3. Your spa is now safe to use.



Preparing for Your New Portable Spa

RCD Hook-Up

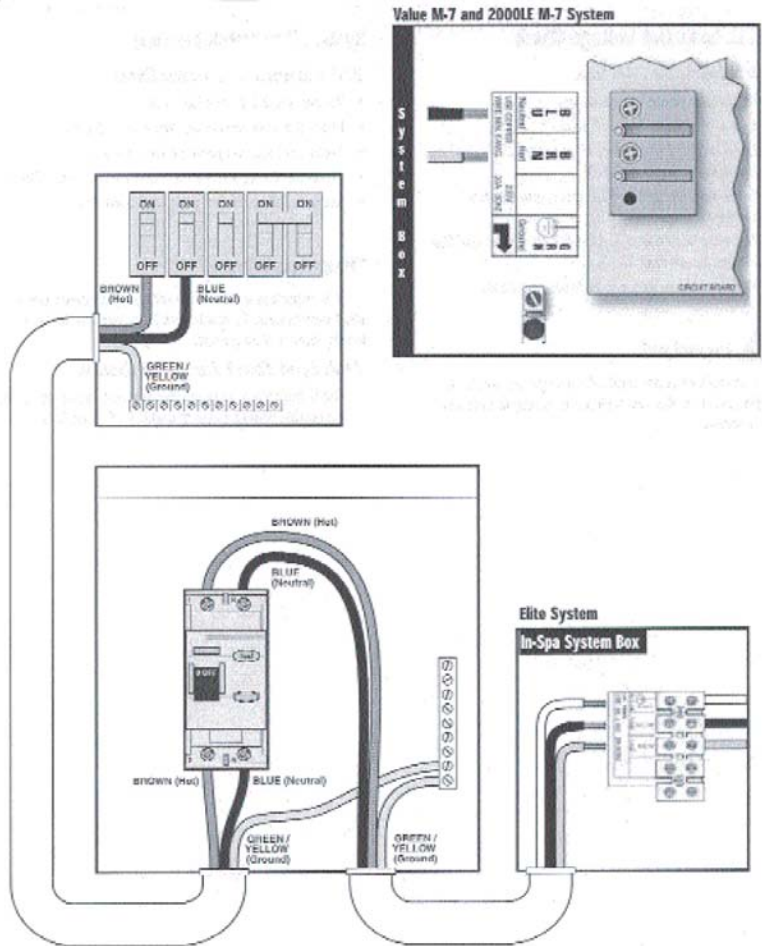

Two-Phase Incoming Power



Figure 1. RCD Hook-Up

Filling and Powering Up Your Portable Spa

Never fill your spa with soft water. Soft water makes it impossible to maintain the proper water chemistry and may cause the water to foam, which will ultimately harm the finish of the spa and void your warranty.

1. Once the spa has been placed on an approved surface and has been correctly wired by a licensed electrician, inspect all plumbing connections in the equipment area of your spa. Ensure that these connections are secure and that they did not loosen during shipment.
2. If equipped, open all gate valves in the equipment area. Before operating the spa, these valves must be in the UP or OPEN position.
3. Remove the filter basket and cartridge from skimmer/filter canister.
4. Place a garden hose in the skimmer/filter canister and fill your spa with regular tap water to the proper water level (halfway up the skimmer area).
5. (For owners of the automatic bromine generator) Make sure the dial on the face of the bromine generator unit is turned to the OFF position.
6. Open the air relief valve (located next to the two filters, if equipped) after the air bubbles stop coming out of it. Close the valve hand-tight.
7. Once the water is at the correct level and air is bled, turn on the power at the GFCI breaker. (Ensure that the 120V spas are connected to the proper electrical outlet.)

NOTE: When the power is turned on to the spa, it will perform a diagnostic check for 30 seconds. When the diagnostic is complete, the spa will automatically operate at filter speed and continue heating until the spa water temperature reaches the default temperature of 37.7°C.

8. If no water is flowing when the pump is running there could be an air pocket at the suction side of the pump. Shut off power to the spa and loosen the pump union on the suction side of the pump to bleed the air. When air is bled, turn power back on.
9. Re-install the filter and the filter basket into the skimmer/filter canister.

The spa is now ready for use.

NOTE: Never run the spa with the gate valves closed or without water circulating for long periods of time. Be careful not to over-tighten the plumbing fittings.

Operating Your Spa

5005 Electronic Control Operation



Figure 2. 5005 Electronic Control

Initial Start up

When first powered up, the 5005 system (Figure 2) performs a self-diagnostic check, then automatically heats to and maintains 37.5C until you change the set temperature as described in the “Temperature Adjustment” section below.

Temperature Adjustment (Range 26.6°C to 40°C)



The electronic control panel displays the actual water temperature in centigrade.

To display the temperature that the spa is set to:

- Press the TEMP button. The set temperature setting will flash.
- While the display is flashing, each time you press the TEMP button, the set temperature will increase or decrease by one degree.

Letting the display revert back to the actual water temperature, then pressing the TEMP button again will allow you to change the direction of temperature adjustment.

Standard and Economy Modes



Your new spa is equipped with a heating feature that gives you complete control of the heating system. When the spa is powered up, it will automatically start in the standard heating mode. In this mode, the heating system will automatically activate whenever the water temperature drops more than one degree below the set temperature. In the economy heating mode, the heating system will only activate during filtration times.

To switch from the standard heating mode to the economy heating mode, simply press the TEMP button followed by the LIGHT button. Press the same sequence to switch back to the standard heating mode. Once in the economy heating mode, Ec will display in the center of the control panel and flash alternately with the water temperature.

NOTE: There is no control panel message displayed while in the standard heating mode; only the actual water temperature is displayed.

Some spa models are equipped with the exclusive XL Heat Exchanger™, the most efficient spa heater available anywhere. This highly innovative device heats water faster and more efficiently with no chemical build-up. For your protection, it includes a High Limit Overheat Protection safety device that prevents spa equipment from overheating. The XL Heat Exchanger™ works automatically and requires no maintenance.

Jets



Press the JETS button:

One pump equipment:

- Once to activate the low speed pump
- Twice to activate the high speed pump
- Three times to turn off the high-speed

One pump equipment with circulation pump:

- Once to activate the circulation pump
- Twice to activate the circulation pump and the high-speed pump
- Three times to turn off both the circulation pump and the high-speed pump

Two pump equipment without circulation pump:

- Once to activate the low-speed pump
- Twice to activate the high speed on pump 1
- Three times to activate the high speed on pump 1 and high speed on pump 2
- Four times to turn off the high speed on pump 1. The high-speed on pump 2 will remain on.
- Five times to turn the high speed off on pump 2.

Two pump equipment with circulation pump:

- Once to activate the circulation pump
- Twice to activate the circulation pump and the high-speed pump 1
- Three times to activate the circulation pump, high-speed pump 1 and high-speed pump 2
- Four times to turn off the circulation pump and high speed pump 1. High-speed pump 2 will remain on.
- Five times to turn off the high-speed on pump 2

NOTE: The filtration cycle settings of F8 and FC are only intended for use with the optional Spa Cal™ Filtration System.

Safety Suction System



Your new Cal Spa™ is equipped with a state-of-the-art Safety Suction System. This will automatically shutdown the spa in the event of a filtration or suction restriction, and display SF on the topside control panel. If this happens, check all suction fittings and filter cartridge(s) for obstructions. Then, reset the system by pressing any control panel button.

Diagnostic Messages

Message	Meaning
OH	Overheat protection (spa is shutdown) DO NOT ENTER THE WATER! If the spa has reached 45°C, remove the spa cover to cool the water. Overheating may occur if the filter cycle is set too long. At 43°C, the spa should reset itself. If the high-limit sensor detects 48°C at the heater, the spa will shut down. When the heater cools down to 43°C, press any button to reset the spa. If the spa will not reset, then shut the power off to the spa and call your dealer or service organization.
FL	Flow Detection Switch. Pressure switch is not working correctly. Call your dealer or service organization.
Sn	Sensor (Spa is shut down). The high limit or water temperature sensor is not working correctly. Call your dealer or service organization.
Sf	Vacuum Switch (Spa is shut down). The display will show “SF” as soon as the vacuum switch closes. All functions will turn off and the system will be disabled until a panel button is pressed.
LED	<ul style="list-style-type: none"> - Heater LED will come on when the heater is on (and goes off when heater is off). - Ozone LED will come on when in filtration cycles. - Safety switch is a status LED noting power and system monitoring.

8005 Electronic Control Operation

When first powered up, the 8005 electronic system (Figure 3) will perform a self-diagnostic check and then it will automatically heat to and maintain a temperature of 37.5°C until you change the set temperature as listed in the “Temperature Adjustment” section below.

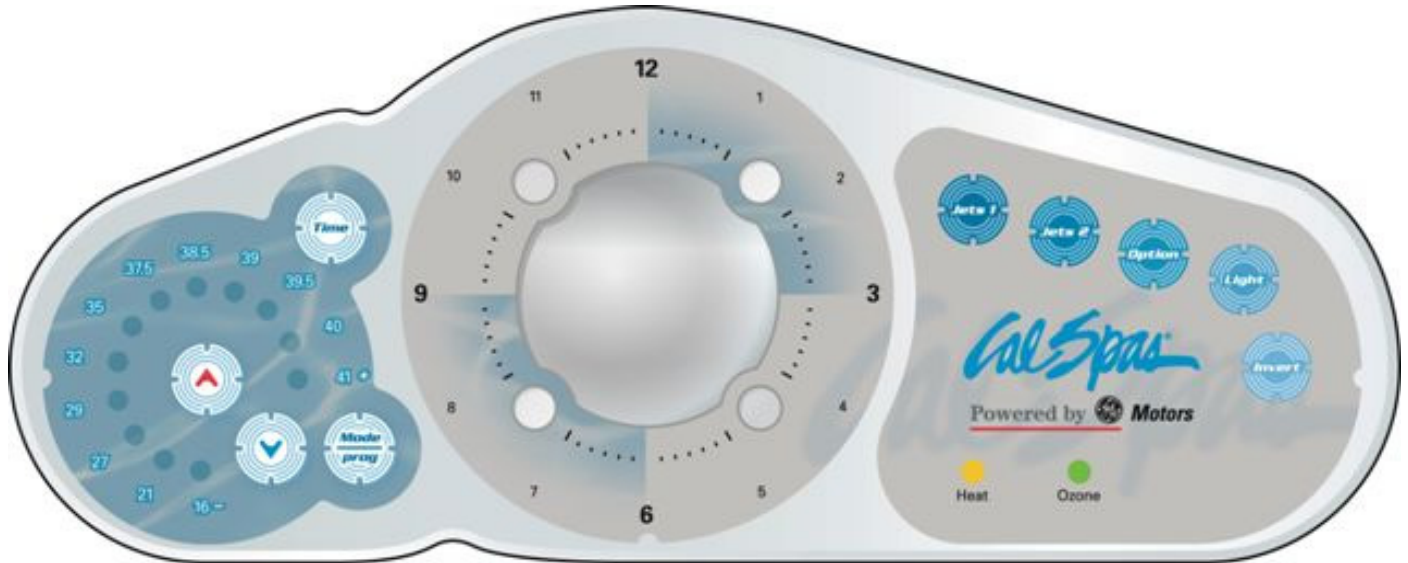


Figure 3. 8005 Electronic Control Panel

These instructions will describe features and options that your particular spa may not be equipped with.

Initial Start-up

When your spa is first powered up, it displays some configuration codes and then goes into priming mode (Pr will appear on the display panel). This mode lasts up to four minutes and then the spa begins to heat to its pre-programmed temperature of 37.7°C. You can exit the priming mode early by pressing UP or DOWN buttons.

Temperature Adjustment (26.0°C - 40.0°C)

The start-up temperature is set at 37.5°C. The last measured temperature is constantly displayed on the control panel. Note that the last measured spa temperature is displayed. The displayed temperature will be updated when the pump has been running for at least two minutes.

Press the UP or DOWN buttons once to display the set temperature. Each time either button is pressed again, the set temperature will increase or decrease depending on which button is pressed. After three seconds, the control panel will automatically display the last measured spa temperature.

Note: Some spa models are equipped with the exclusive XL Heat Exchanger™, the most efficient spa heater available anywhere. This highly innovative device heats water faster and more efficiently with no chemical build-up. For your protection, it includes a High Limit Overheat Protection safety device that prevents spa equipment from overheating. The XL Heat Exchanger™ works automatically and requires no maintenance.

Time

When time hasn't been programmed, the TIME icon flashes. To set the time, press the TIME button and then the MODE/PROG button. Use the UP and DOWN buttons to adjust time. See the next page for more detailed instructions.

Standard, Economy, Sleep, and Standby Modes

Mode/Prog: This button is used to switch between standard, economy, and sleep modes.

1. Press MODE/PROG to enter mode programming.
2. Press the DOWN button to cycle through to the desired mode.
3. Press MODE/PROG to confirm selection.

Standard Mode: This is programmed to maintain the desired temperature. Note that the last measured spa temperature displayed is current only when the pump has been running for at least two minutes. The "STAND" icon will display until the mode is changed.

Economy Mode: Economy mode heats the spa to the set temperature only during filter cycles. The "ECON" icon will display until the mode is changed. Pressing the JETS 1 button while in economy mode puts the spa in standard-in-economy mode, which operates the same as standard mode but reverts back to economy mode automatically after one hour. During this time, pressing the MODE/PROG button will revert to economy mode immediately.

Sleep Mode: Sleep mode heats the spa to within 11°C of the set temperature only during filter cycles. The "SLEEP" icon will display until the mode is changed.

Standby Mode: Pressing "Warm" or "Cool" then "Jets 2" will turn off all spa functions temporarily. This is helpful when changing a filter. Pressing any button resets the spa.

Jets 1 and Jets 2

Press the JETS 1 button once to turn pump 1 on or off and to shift between low and high speeds if equipped. If left running, the low speed turns off after two hours and the high speed turns off after 15 minutes. On non-circulation systems, the low speed of pump 1 runs when the blower or any other pump is on. It may also activate for at least two minutes every 30 minutes to detect the spa temperature and then to heat to the set temperature if needed, depending upon the mode. When the low speed turns on automatically, it cannot be deactivated from the panel; however, the high speed may be started.

Option (Optional Blower)

Press the OPTION button to turn the optional equipment on and off. If left on, the equipment will automatically turn off after 15 minutes.

Light

Press the LIGHT button to turn the spa light on and off.

Invert

Press the INVERT button to change the numbers in the display to read upside down. Another press returns the display to the right-side-up position. This enables you to read the display while you are in the spa.

Locking the Panel

To lock the panel:

- Press TIME, JETS 1, and the UP button within three seconds. When locked, the panel will display “LOCK”. All buttons are frozen except the TIME button.

To unlock the panel:

- Press TIME, JETS ,1 then the DOWN button within three seconds.

Setting the Temperature Lock

To activate the temperature lock:

- Press the UP or DOWN button, TIME, JETS 1, then the UP button within three seconds. The panel will display “TEMP LOCK” when the set temperature is locked.

To unlock the set temperature:

- Press the UP or DOWN button, TIME, JETS 1, then the DOWN button..

Circulation Pump (optional)

If your system is equipped with a circulation pump, it may be configured to work in one of two different ways:

1. The circulation pump operates continuously (24 hours) with the exception of turning off for 30 minutes at a time when the water temperature reaches 1.7°C above the set temperature (most likely to happen in very hot climates).
2. The circulation pump will come on when the system is checking temperature, during filter cycles, during freeze conditions, or when another pump is on.

Preset Filter Cycles

There are two filter cycles per day. The start and end times of each cycle are programmable. To program, set the time as instructed above, then press MODE/PROG to advance to the next setting (or to exit after the last setting). The default filter cycles are as follows:

- The first filter cycle is automatically activated at 8:00 AM and operates the pump until 10:00 AM. The “FILTER 1” indicator icon will light when filter 1 is running.
- The second filter cycle is automatically activated at 8:00 PM and operates the pump until 10:00 PM. The “FILTER 2” indicator icon will light when filter 2 is running.

The pump and the ozone generator will run during filtration. At the start of each filter cycle, the blower will run on highest speed for 30 seconds to clean out the air channels. The lowest speed of pump 2 and pump 3 will run for five minutes. In the event of power loss or shut down, the time of day will need to be reset for filter cycles to run according to your desired programming.

Clean-up Cycle

When the pump or blower is turned on by a button press, a clean-up cycle begins 30 minutes after the pump or blower is turned off or times out. The pump and the ozone generator will run for one hour.

Ozone (optional)

On most systems, the ozone generator (if installed) runs during filter cycles (except when pump 1 is operating at high speed on a non-circulation system) and during clean-up cycles. On some systems, the ozone generator operates whenever the pump runs. If your system is configured with the optional ozone disable feature, the ozone generator will turn off for one hour any time a function button (JETS 1, JETS 2, OPTION etc.) is pressed.

Freeze Protection

If the temperature sensors detect a drop to 6.7°C within the heater, the pump automatically activates to provide freeze protection. The equipment stays on until four minutes after the sensors detect that the spa temperature has risen to 7.2°C or higher. In colder climates, an optional additional freeze sensor may be added to protect against freeze conditions that may not be sensed by the standard sensors. Auxiliary freeze sensor protection acts similarly except with the temperature thresholds determined by the switch and without a four minute delay in turnoff.

Periodic Reminder Messages

Press the “Mode” button to reset a displayed reminder)

Message	Frequency	Action Require
rPH	Every 7 days	Test and adjust chemical levels per manufacturer’s instructions.
rSA	Every 7 days	Test and adjust chemical levels per manufacturer’s instructions.
rCL	Every 30 days	Remove, clean, and reinstall filter per manufacturer’s instructions.
rtg	Every 30 days	Test & reset GFCI per manufacturer’s instructions. Drain and refill spa per manufacturer’s instructions.
rdr	Every 90 days	Drain and refill spa per manufacturer’s instructions.
RCO	Every 180 days	Clean and condition spa cover
RCH	Every 365 days	Install New Bio-Clean™ Filter

Diagnostic Messages

Message	Meaning	Action Required
	No message on display. Power has been cut off to the spa.	The control panel will be disabled until power returns.
OHH	“Overheat” - The spa has shut down. One of the sensors has detected 47.7°C at the heater.	DO NOT ENTER THE WATER. Remove the spa cover and allow water to cool. Once the heater has cooled, reset by pushing any button. If spa does not reset, shut off the power to the spa and call your dealer or service organization.
OHS	“Overheat” - The spa has shut down. One of the sensors has detected that the spa water is 43.3°C.	DO NOT ENTER THE WATER. Remove the spa cover and allow water to cool. At 41.6°C, the spa should automatically reset. If spa does not reset, shut off the power to the spa and call your dealer or service organization.
ICE	“Ice” - Potential freeze condition detected.	No action required. The pumps and the blower will automatically activate regardless of spa status.
Sna	Spa is shut down. The sensor that is plugged into the Sensor “B” jack is not working.	If the problem persists, contact your dealer or service organization. (May appear temporarily in an overheat situation and disappear when the heater cools.)
Snb	Spa is shut down. The sensor that is plugged into the Sensor “A” jack is not working.	If the problem persists, contact your dealer or service organization. (May appear temporarily in an overheat situation and disappear when the heater cools.)
Sns	Sensors are out of balance. If this is Alternating with the temperature, it may just be a temporary Condition. If the display shows only this message (periodically blinking), the spa is shut down.	If the problem persists, contact your dealer or service organization.
HFL	A substantial difference between the temperature sensors was detected. This could indicate a flow problem.	If the water level is okay, make sure the pumps have been primed. If problem persists, contact your dealer or service organization.
LF	Persistent low flow problems. (Displays on the fifth occurrence of the “HFL” message within 24 hours.) Heater is shut down, but other spa functions continue to run normally.	Follow action required for “HFL” message. Heating capacity of the spa will not reset automatically; you may press any button to reset.

Message	Meaning	Action Required
dr	Inadequate water detected in heater.	Check water level in spa. Refill if necessary. If the water level is okay, make sure the pumps have been primed. Press any button to reset.
dry	Inadequate water detected in heater. (Displays on third occurrence of “dr” message.) Spa is shut down.	Follow action required for “dr” message. Spa will not automatically reset; you may press any button to reset.
Pr	When your spa is first actuated, it will go into Priming mode.	The Priming mode will last for up to four minutes and then the spa will begin to heat and maintain the water temperature in the Standard mode.
--For C	Temperature unknown	After the pump has been running for two minutes, the temperature will be displayed.
-----	Temperature not current in Economy or Sleep mode.	In Economy or Sleep mode, the pump may be off for hours outside a filter. If you wish to see the current spa temperature, either switch to Standard mode or turn Jets1 on for at least two minutes.
BUF	Internal problem detected.	Repair required. Contact your dealer or service organization.
Stby	Standby Mode has been activated by pressing a button combination on the user panel.	Press any button to leave Standby Mode and return to normal operation.
SF	Safety Suction.	Spa is shut down. The display will show “SF” when a vacuum switch closes. All functions will turn off and the system will be disabled until a panel button is pressed.

Auxiliary Control Operation

The auxiliary control option is available with the 8005 control only. It is a small panel with four buttons: JETS1, JETS2, LIGHT, and OPTION (see Figure 4). By duplicating some of the functions from the main 8005 control panel, it conveniently puts the control of several spa functions at your fingertips without having to get up. For operation, see the previous section, “8005 Electric Control Operation.”



Figure 4. Auxiliary control panel

Adjustable Jets

Almost all of the jets in your spa are adjustable. Rotating the face of an adjustable jet to the left (counter-clockwise) will decrease the amount of water flow through the jet. Rotating the face of an adjustable jet to the right (clockwise) will increase the amount of water flow through the jet. (See example shown in Figure 5 below.)

NOTE: Neck jets adjust in the opposite directions (counter-clockwise to increase, clockwise to decrease).

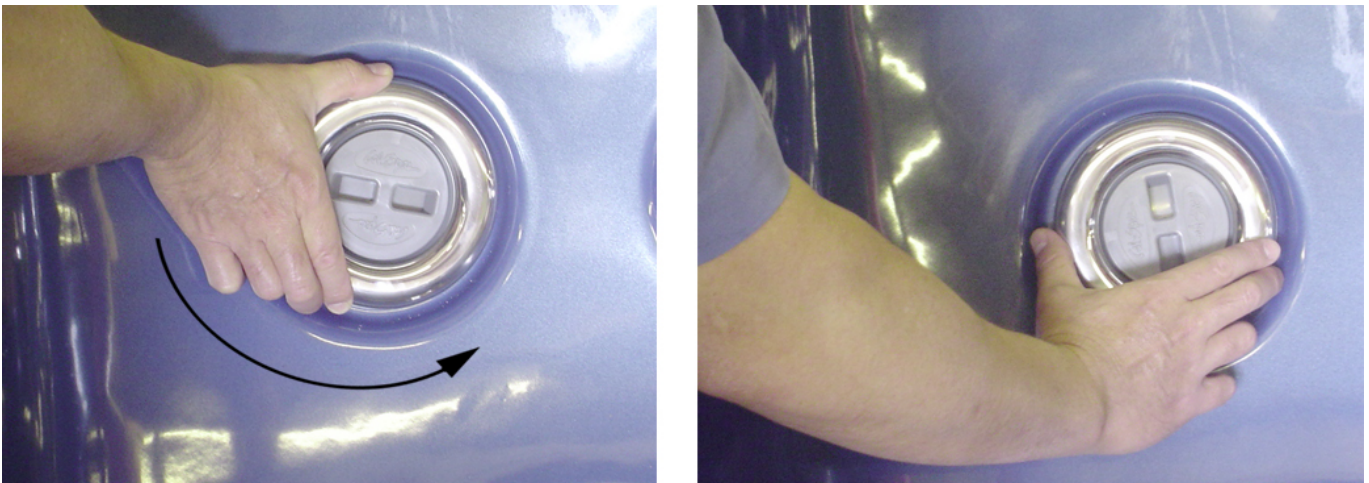


Figure 5. Rotating an adjustable jet

Diverter Knobs

Diverter knobs are the larger knobs located around the top of your spa (Figure 6). They allow you to divert water through jets from one side of the spa to the other, or in most cases from floor jets to wall jets.

This is accomplished by rotating the diverter knob to the left (counterclockwise), decreasing the amount of water flow through a section of jets. To increase the amount of water flow through the other section of jets, rotate the handle to the right (clockwise).



Figure 6. Diverter knob

Air Venturis

Air venturis are the smaller knobs located around the top of your spa. They can also be distinguished from diverter knobs by the arrows and the words “OFF”, “ON” and “AIR” marked on them (Figure 7). Each one will let you add a mixture of air with the jet pressure. This is accomplished by rotating the air venturi knob to the left (counter-clockwise) to increase the amount of airflow through the jets. To decrease the amount of airflow through the jets, rotate the handle to the right (clockwise).



Figure 7. Air Venturis

Adjustable Therapy System™

Spas equipped with the Adjustable Therapy System™ (ATS) allow you complete control of the therapy seat and/or lounger. This unique system offers convenient operation with its seat side controls, seven different massage modes, and a soothing demo mode -- all at the touch of a button (Figure 8).

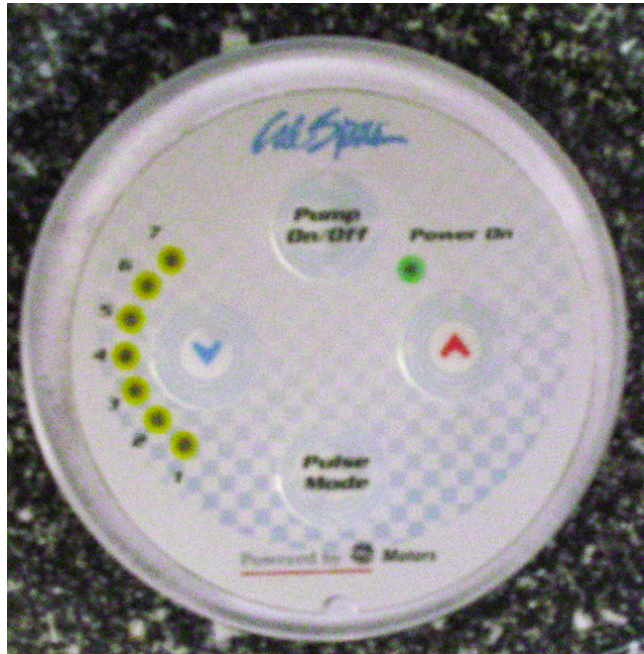


Figure 8. Adjustable Therapy System™ seat side control

Pump On/Off

This button allows the user to turn on and off the ATST™ seat pump. Press this button once to turn the pump on. Once on, the green LED light on the control panel will illuminate, indicating that the system is operational. To turn off the pump, press the “PUMP ON/OFF” button a second time. Note: The pump must be on prior to operating any other features of this system.

Pulse Mode

This button allows the user to turn the ATST™ massage control on and off. Press the pulse button once to turn on the massage control. Once pressed, the orange LED in position number 1 will light, indicating the number one pulse mode. Each press of either the up or down button will move the orange LED up or down to the next pulse mode.

Note: Allow one second between each button press. Pressing the button quickly may cause improper operation. To turn the pulse mode off and return to normal pump operation, press the “PULSE MODE” button a second time.

Up

This button allows the user to cycle up from one through seven massage modes one at a time. Each mode offers a different pulsating massage. Some modes are faster than others, so just cycle through them to find the massage you like best.

Down

This button allows the user to cycle down through all seven massage modes, one at a time.

Demo Mode

After turning on the pump and pulse modes, press and hold both the “UP” and “PULSE MODE” buttons together for two seconds then release. In this mode, every 20 seconds this system will automatically

switch to the next massage mode. Once the user finds the perfect massage mode, pressing either the “UP” or “DOWN” button will stop the demo in that massage mode.

Time Reset Mode

Pulse mode will normally run for 15 minutes then automatically shut off. For another 15-minute session, press the “PUMP ON/OFF” button and the “PULSE MODE” button. A green LED will blink and the pump will run on high-speed mode as part of a 15-minute cool down period. After that, the pump will stop automatically and the green LED light on the panel will continue to blink for one minute then shut off automatically. After the second 15-minute session, the system will run through a cool down cycle for up to two hours. In this cool down mode, the user will only be able to operate the pump (by again pressing the “PUMP ON/OFF” button). However, the massage mode will remain off until the cool down mode is completed.

Pulse Mode System

Pulse mode system will shut off for two hours unless reset by the following procedure. During this time the pump will run at a maximum speed.

- In the off position, press the “PULSE MODE” button once.
- The green power light will flash to indicate reset.

Multi-Colored Spa Light Operation

10 Dramatic Lighting Modes

Experience each different lighting mode by turning the spa light off and on to change lighting effects:

- WHITE: Pure, bright white
- SPECTRUM SLOW DANCE: Vibrant, slow fade through all colors
- SUNBURST: Yellow and orange color swirl
- BLUE: Clear and brilliant blue
- RED: Radiant and invigorating red
- GREEN: Nature’s lush green
- MAGENTA: Rejuvenating glow of pink, blue and red
- TIDAL FADE: Fade through blues and greens
- AFTERBURNER FADE: Fade through red, orange, pink, yellow & purple
- COLOR BURST: Energetic strobe through all colors

Operating the Multi-Colored Spa Light

1. Turn the spa light on by pressing the “LIGHT” button on the topside control panel.
2. To filter through the different color choices, press the button on and off. Each time you press the button, you advance to the next color.
3. To turn the spa light off when not in use, press the “LIGHT” button.

Using the Random Light Feature

1. Turn the spa light on by pressing the “LIGHT” button on the topside control panel.
2. Cycle through the color range twice. After the last light from the second cycle has been lit, the random light feature turns on and the spa light cycles through each individual light.
3. To turn the spa light off when not in use, press the “LIGHT” button.

The slow fade feature comes on right after the color white. The first color for the feature is green and then slowly goes through the color spectrum. The last fade does the same thing as the slow fade, only faster.

Spa Cover

Important! Keep the spa covered when not in use!

- Covered spas will use less electricity in maintaining your set temperature.
- Covering your spa will protect your spa’s finish from the sun’s ultraviolet rays.
- You are required to keep the spa covered to maintain warranty coverage.
- Covering your spa helps prevent children from drowning in the spa.

See the manual enclosed with your cover for instructions on mounting the locks and how to lock and unlock the cover.

In addition, while the spa cover is rigid, it is not designed to support any weight. Therefore, as a safety precaution and to preserve the life of your cover, you must not sit, stand, or lie on it; nor should you place objects of any kind on top of it.

Aromatherapy

This optional accessory is very easy to use. Unscrew the cap on the aromatherapy chamber and drop in a bag of scented aromatherapy beads and replace the cap.

Waterfalls

Some spa series include optional waterfalls. When the booster pump is on, turn the knob near the waterfall. Water will immediately start flowing through it.

Removing and Reseating the Pillows

You can remove the pillows for cleaning and maintenance quickly and easily. This method works for all types of pillows.

Grab the lower edge of the pillow with both hands firmly and pull up. As you do this, the pillow inserts will pop out of the holes. (See Figure 9.)



Figure 9. Removing a pillow

Reseat the pillows by aligning the pillow inserts with the holes and striking the pillow hard enough to insert the pegs back into the holes. (See Figure 10).



Figure 10. Reseating a pillow

Draining Your Portable Spa

Your spa should be drained every four to six months, and refilled with fresh tap water. The following is the recommended method for draining your spa.

1. Turn off the power at the breaker.
2. Remove all filters.

If your drain valve is mounted on the side of the spa cabinet (as shown in Figure 11), proceed to step 5.



Figure 11. Cabinet mounted drain valve

If your drain valve is located inside the spa cabinet:

3. Using a Phillips screwdriver, remove the screws to the access panel and open it.
4. Locate hose ending with the 3/4 inch hose-bib fixture (Figure 12).

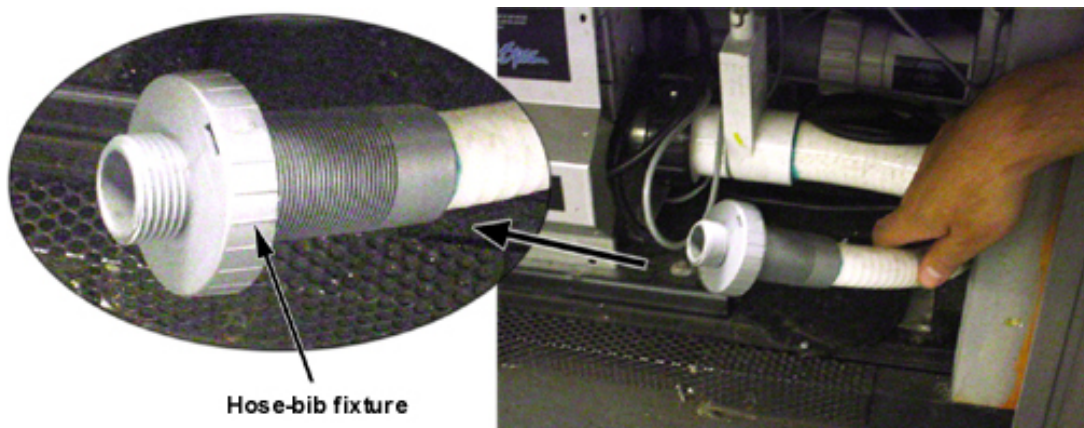


Figure 12. 3/4 inch hose-bib fixture

5. Hook up the female end of a garden hose to the drain fitting.
6. Place the other end of the garden hose where you would like the water to drain to.
7. Twist the hose-bib fixture counterclockwise and pull to open the drain.
8. Let spa drain completely, then remove garden hose.
9. Twist the hose-bib fixture clockwise to close it.

Water Quality Maintenance

Cal Spas Clear Water Plan

Great spa water is easily achieved when the right chemicals and / or systems are used and the Cal Spas “Clear Water Plan” is implemented. The key to clean, clear, and safe water is to fully understand how spa water reacts to users, system operation and chemical use. The “Clear Water Plan” will help give you that understanding.

The first thing to understand about taking care of your spa water is that preventive actions are much easier to do than correcting water quality issues. For this reason, we offer the “Clear Water Plan” as a simple, easy to follow guide to clean, safe spa water.

Follow the Right Plan

You will need to decide which chemical plan or alternative sanitation option works best for your spa water. Consult your Cal Spas dealer for the right decision with regards to your lifestyle and spa usage. Whichever plan you decide on, follow it completely and don't take shortcuts. These plans will provide you with clean, safe, clear spa water with a minimum of effort.

Traditional Chemical Options

Choose from either Bromine tablets or Chlorinating granules as your sanitizer of choice. Both work well when the appropriate “Clear Water Plan” is followed. Make sure you follow all instructions and use only Cal Spas brand chemicals.

Alternative Sanitation Options

Cal Zone Quest 2000 Ozonator

This system automatically generates ozone gas and injects it into the spa water. Ozone gas is far superior to chemical bromine or chlorine in sanitizing spa water. Saves replacement chemical cost and guards against forgetting to add chemicals.

Cal Clarity Automatic Bromine Generator

This system automatically generates and releases free bromine into the spa water. No more need to add chemical bromine tablets or chlorine granules. Saves replacement chemical cost and circumvents the need to add chemicals on a regular basis.

Cal Inline Sanitation System

This system incorporates minerals that work continuously with low levels of Bromine to sanitize the spa while creating water that feels soft and is crystal clear. Uses pre-filled cartridges that save on measurement hassle and works for weeks without replacing.

Before You Begin

Before you begin a “Clear Water Plan”, you should understand that chemicals or systems alone will not take care of your spa water. Other factors such as Filtration and Bather Load also play an important part.

Filtration

The filter is the part of your spa that removes the debris from the water. Even though Cal Spas uses the advanced Bio Clean filter cartridge that protects itself from bacterial growth, the filter still needs to be cleaned on a regular basis to maximize your spa's filtering performance and heating efficiency.

In addition to spraying off the filter weekly to remove surface debris, your filter should be deep cleaned periodically to dissolve scale and other contaminants that get lodged deep within the filter fibers and impede the filtration process. Even if the filter looks clean, the contaminants can clog the fibers and prevent water from flowing through the filter resulting in the most common spa problem—no heat, caused by a dirty filter.

Filter Cleaning

- Place the dirty filter into a bucket of water deep enough to cover the filter. Add 8oz of Cal Spas "Liquid Filter Cleaner" to the bucket of water.
- Note: It is a good idea to keep a spare filter to be deep cleaned while the regular filter is in the spa. This way, you can rotate the filters and both will last longer.
- Soak the filter for a minimum of 24 hours.
- Remove the filter and spray clean with a water hose. Spray each pleat carefully.
- Allow filter to dry completely (a minimum of 2 days drying time is recommended).
- Reinstall filter as described in the "Clear Water Plan".

Filtration Cycles

The filtration cycle of your spa is the process that allows the water to flow through the filter. Your spa will filter automatically twice each day. The factory set default time for filtration is usually enough for normal use, however heavy bather load or frequent use may require longer filtration times or more frequent filtration cycles to keep the spa water clean. Consult your Owner's Manual for setting your spa's filtration times.

Bather Load

"Bather Load" is the term used to describe the number of people using a spa, combined with the length of usage, and the frequency of usage. All these factors have a great effect on the spa water. The higher the bather load, the more chemicals need to be added and a longer filtration time will be needed.

All versions of the Cal Spas "Clear Water Plan" are designed for spas with average bather load. (3-4 people, 15 minutes of usage, 3 times a week at 100 degrees) If your bather load exceeds these guidelines, and you experience water quality problems, increase the amount of filtration first, (go to the next higher filtration number) then if water quality is still not adequate, consult the advise of your Cal Spas dealer for additional chemical or system recommendations. Be sure to give them your bather load information.

Chemical Overview

The following information is intended for use with Cal Spas chemicals only. Other brands of chemicals may have similar names and/or usage descriptions but due to manufacturing differences, use of other chemicals can increase the likelihood of under or over-dosing the spa chemicals. Damage to the spa or spa's components from improper chemicals or chemical usage is not covered under the spa's warranty.

Chemical Safety

- Failure to follow chemical directions may result in serious injury, sickness, or even death.
- Read and follow all printed instructions listed on bottles, packages and in your owner's manual.
- Do not exceed chemical dosages as recommended in the "Clear Water Plan", or on chemical bottles and packages. (Most chemical instructions are figured for a 500 gallon spa however, most spas hold less than 500 gallons, consult your Owner's Manual for the approximate gallons of your spa)
- Never mix chemicals together.
- Never change chemical brands or types without completely draining, flushing and thoroughly cleaning the spa and cover first.
- Always protect your eyes while introducing chemicals into the spa. Wear protective eyeglasses to prevent powdered chemicals from blowing into the eyes or liquid chemicals from splashing into the eyes.
- In the event of overdosing a sanitizing chemical (chlorine or bromine), immediately turn off the power to the spa and drain water to a safe and approved area. Refill with fresh water and proceed with the "Clear Water Plan" start up.

Physical Chemical Hazards

- Do not allow chemicals to come in contact with skin, eyes or clothing.
- Always wear rubber gloves, protective eye wear and clothing to reduce the risk of chemical contact and irritation.
- Remove and wash clothing that may have been exposed to chemical contact prior to wearing them again.
- Inhaling or ingesting chemicals will cause serious injury, sickness, or even death.
- Do not mix chemicals. Mixing chemicals together can cause dangerous chemical reactions including the release of toxic gas, fire and explosions.







Chemical Storage

Chemicals must be stored completely out of the reach of children in an area that is well vented, cool, and dry. Failure to provide a proper area for chemical storage may result in serious injury, sickness, fire explosion and even death. Do not store your chemicals inside the equipment area of your spa.







Chemical Descriptions



The following descriptions and recommendations are intended for use with Cal Spas chemicals only. Many of these chemicals will be used with alternative sanitation systems as well.

	<p>Test Strips -- Bromine Provides accurate spa water testing for Bromine, pH, and total Alkalinity. For use with bromine “Clear Water Plan”</p>
	<p>Test Strips -- Sodium Bromide Provides accurate spa water testing for Sodium Bromide. For use with Cal Clarity Automatic Bromine Generator “Clear Water Plan”.</p>
	<p>Test Strips – Chlorine Provides accurate spa water testing for Bromine, pH, and total Alkalinity. For use with chlorine “Clear Water Plan”</p>
	<p>Go Brom Establishes a bromide reserve in spa water. Use during start up. For use with bromine “Clear Water Plan”.</p>
	<p>Brominating Tablets Long lasting sanitizer / disinfectant for spa water. Add to bromine floater. For use with bromine “Clear Water Plan”.</p>
	<p>Chlorinating Granules Quick acting sanitizer / disinfectant for spa water. For use with chlorine “Clear Water Plan”.</p>

	<p>Oxidizer Shock Destroys ammonia, organic contaminants, and odor causing wastes in spa water. Use with any “Clear Water Plan”.</p>
	<p>Metal Protector Helps prevent metals in water from staining spa. Use during start up. Use with any “Clear Water Plan”</p>
	<p>Stain And Scale Defense Helps prevent minerals from damaging spa components. Use with any “Clear Water Plan”</p>
	<p>Ph / Alkalinity Up Raises pH and alkalinity levels in spa water. Use with any “Clear Water Plan”</p>
	<p>Ph / Alkalinity Down Raises pH and alkalinity levels in spa water. Use with any “Clear Water Plan”</p>
	<p>Liquid Hardness Increaser Helps reduce foaming and corrosion by increasing hardness levels in spa water. Use with any “Clear Water Plan”.</p>

Water Quality Maintenance

	<p>Spa Brite Helps to quickly clear up cloudy spa water. Use with any “Clear Water Plan”.</p>
	<p>Foam Gone Quickly breaks up existing foam on spa water. Use with any “Clear Water Plan”</p>
	<p>Fast Sheen Water based, reactive, silicone polish that seals, shines, and protects spa acrylic surfaces. Use with any “Clear Water Plan”.</p>
	<p>Filter Cartridge Cleaner Deep cleans filter cartridge. Dissolves scale and removes imbedded organic contaminants from filter cartridge fibers. Use with any “Clear Water Plan”</p>
	<p>Enzyme Formula Biodegrades body oils, suntan lotions, and organic contaminants in spa water. Do not on same day as adding Chlorine Granules. Use with any “Clear Water Plan”.</p>
	<p>Multi-Purpose Cleaner Special formula designed to clean spa surfaces without leaving foam-causing residue. Use with any “Clear Water Plan”.</p>

	<p>Vinyl And Leather Cleaner</p> <p>Specifically designed to clean and protect spa covers and pillows from chemical and ultraviolet damage. Use with any “Clear Water Plan”.</p>
	<p>Cal Balance Magnetic Water Stabilizer</p> <p>Promotes clean water naturally by organizing water molecules into appositive charge. Helps coagulate debris for improved filtration, and also traps calcium and scale into a suspension that gives spa water a soft, silky feel.</p> <p>Use with any “Clear Water Plan”.</p>

Traditional Chemical Start Up

Prior to filling a spa for the first time, or after a routine draining, you will want to follow this start-up plan to extend water life and performance. If you are following either the Bromine or Chlorine “Clear Water Plans”, you will notice that both start-up processes are the same with the exception of Step 7. As with all chemical dosages listed in these “Clear Water Plans”, start-up dosages are intended for 500-gallon spas. Please adjust the chemical dosages to the capacity of your particular spa.

Start Up

1. Clean surface of spa with Cal Spas “Multi-Purpose Cleaner”.
2. Apply a protective coat of Cal Spas “Fast Sheen” to the acrylic surface.
3. Fill spa to proper water level with normal tap water (Do not use soft water)
4. Use test strip and balance the spa water:
5. Adjust total alkalinity (acceptable range is 80-120ppm),
6. Then adjust pH if necessary. (between 7.2 to 7.8)
7. Pour in 16 oz of Cal Spas “Metal Protector” to center of spa.
8. Add either Bromine or Chlorine (According to your preferred plan)
9. Bromine: Add 2 oz of Cal Spas “Go Brom” to establish a bromine base.
Add 2 Cal Spas “Bromine Tablets” to Bromine Floater.
Set floater opening at #2.
10. Chlorine: Add two tablespoons of Cal Spas “Chorine Granules” to the spa water.
11. Sprinkle 2 oz of Cal Spas “Oxidizer Shock” in the center of the spa and turn on jets for 15 minutes.
Leave spa uncovered during this time.
12. Put cover on spa and allow to heat up to desired temperature.

Bromine Clear Water Plan

This plan and its chemical dosages are intended for Cal Spas chemicals only. Most chemical manufacturers use different chemical formulas and strengths. Only Cal spas chemicals are specially formulated to provide chemical balance at lower dosages. Always read and follow printed instructions on chemical bottles and packages.

Day One (Monday)

1. Test spa water using “Bromine Test Strips”.
2. Based on the Test Strip readings:
 - Adjust total alkalinity first (acceptable range of 80-120 ppm)
 - Then adjust the pH if needed. (range is between 7.2 to 7.8)
 - Add “Bromine Tablet(s)” if needed. (Do not add more than 2)
 - The recommended level of bromine is 3-5 ppm.
3. Add 2 oz of “Stain and Scale Defense”.
4. Remove dirty filter from the spa and rinse off. Allow to dry.
5. Place your extra clean filter cartridge back into the spa.
6. Vacuum debris from the bottom of your spa with the “Spa Vacuum”.

Day Two (Wednesday)

1. Test spa water using Bromine Test Strips.
2. Based on the Test Strip reading: Adjust total alkalinity, then the pH if needed.

Day Three (Friday)

1. Test spa water using Bromine Test Strips.
2. Based on the Test Strip reading:
 - Adjust total alkalinity, then the pH if needed.
 - Add one Bromine Tablet (if needed).
3. Add 2 oz of Oxidizer Shock to spa. Run Spa for 15 minutes with cover off.
4. Replace cover.

Chlorine Clear Water Plan

This plan and its chemical dosages are intended for Cal Spas chemicals only. Most chemical manufacturers use different chemical formulas and strengths. Only Cal spas chemicals are specially formulated to provide chemical balance at lower dosages. Always read and follow printed instructions on chemical bottles and packages.

Day One (Monday)

1. Test spa water using “Chlorine Test Strips”.
2. Based on the Test Strip readings:
 - First adjust total alkalinity (acceptable range of 80-120 ppm)
 - Then adjust the pH if needed. (range is between 7.2 to 7.8)
 - Add 2 tablespoons of Chlorine Granules.
 - The recommended level of Chlorine is 3-5 ppm.
3. Add 2 oz of “Stain and Scale Defense”.
4. Remove dirty filter from the spa and rinse off.
5. Place your extra clean filter cartridge back into the spa.
6. Vacuum debris from the bottom of your spa with the “Spa Vacuum”.

Day Two (Wednesday)

1. Test spa water using Chlorine Test Strips.
2. Based on the Test Strip reading: Adjust total alkalinity, then the pH if needed.

Day Three (Friday)

1. Test spa water using Chlorine Test Strips.
2. Based on the Test Strip reading:
 - Adjust total alkalinity, then the pH if needed.
 - Add 2 tablespoons of Chlorine Granules. (if needed)
3. Add 2 oz of Oxidizer Shock to spa. Run Spa for 15 minutes with cover off.
4. Replace cover.

Cal Zone Quest 2000 Ozonator Clear Water Plan

This plan and its chemical dosages are intended for spas equipped with the optional Cal Zone Quest 2000 Ozonator (portable spas only) or Del Zone Eclipse (in-ground models only). The chemical references are designed for Cal Spas chemicals only.

Start Up

1. Follow the Spa Start Up procedures for Chlorine “Clear Water Plan”.
2. Set the spa’s filtration time for “F-4”. This activates the ozonator and produces the ozone gas. (Follow the instructions in the owner’s manual)
3. Note: Filtration time may need to be increased with heavy bather load.

Day One (Monday)

1. Test spa water using chlorine “Test Strips”. (you will need to use a small amount of chlorine as a supplemental sanitizer)
2. Based on the Test Strip readings:
 - First adjust total alkalinity (acceptable range of 80-120 ppm),
 - Then adjust the pH if needed. (range is between 7.2 to 7.8)
 - Add 1 tablespoon of Chlorine Granules.
 - The recommended level of Chlorine is 1-3 ppm.
3. Add 2 oz of “Stain and Scale Defense”.
4. Remove dirty filter from the spa and rinse off.
5. Place your extra clean filter cartridge back into the spa.
6. Vacuum debris from the bottom of your spa with the “Spa Vacuum”.

Day Two (Friday)

1. Test spa water using Chlorine Test Strips.
2. Based on the Test Strip reading:
 - Adjust total alkalinity, then the pH if needed.
 - Add 1 tablespoon of Chlorine Granules. (if needed)
3. Add 2 oz of Oxidizer Shock to spa. Run Spa for 15 minutes with cover off.
4. Replace cover.



Cal Clarity Automatic Bromine Generator Clear Water Plan

This plan and its chemical dosages are intended for spas equipped with the optional Cal Clarity Automatic Bromine Generator. The chemical references are designed for Cal Spas chemicals only. Note: Following these instructions is very important to ensure proper operation of your Cal Clarity Automatic Bromine Generator.

Start Up

- Clean surface of spa with Cal Spas "Multi-Purpose Cleaner".
- Apply a protective coat of Cal Spas "Fast Sheen" to the acrylic surface.
- Fill spa to proper water level with normal tap water. (Do not use soft water.)
- Use Bromine Test Strip and balance the spa water:
 - Adjust total alkalinity (acceptable range is 80-120 ppm)
 - Then adjust pH if necessary (between 7.2 to 7.8)
- Pour in 16 oz. of Cal Spas "Metal Protector" to center of spa.
- Test for TDS (total dissolved solids, also known as conductivity) .
 - The ideal range is 50 to 300 ppm.
 - TDS / conductivity **must** be less than 500 to start with.
- Phosphate level should be below 200 ppb. Remove phosphates if necessary.
- Determine the gallons capacity of the spa. Be accurate as this determines the amount of TRU BLU that will be added. Consult the Pre-Delivery Guide for spa gallons.
- Power up the spa and make sure all the spa's pumps are set to high speed. Turn the dial on the face of the Cal Clarity Bromine Generator to "OFF".
- Sprinkle evenly over the surface of the spa, one 2lb bottle of TRU BLU sodium bromide per 100 US gallons (370 liters) of water. **DO NOT ADD TOO MUCH!**

Note: Since each bottle of TRU BLU will raise TDS / conductivity amount approximately 500 ppm in a 500 gallon spa, the amount needed for your spa could be less. It is recommended that you add half the required amount, then follow steps 11 and 12 before adding additional TRU BLU sodium bromide.
- Allow spa to run for 15 minutes so the TRU BLU can dissolve completely before proceeding to the next step.



Water Quality Maintenance

12. Use Sodium Bromide Test Strips (not Bromine) and adjust sodium bromide level to 7.4 to 8.2 (equates to 1700 to 2500 ppm TDS / conductivity level)
13. Add 2 oz. of Cal Spas “Oxidizer Shock” to help burn out impurities in fill water.
14. Turn the dial on the bromine generator clockwise until the LED display reads 10.
15. This will initiate the build up of a bromine bank.
16. Set the filtration cycle to “continuous” (F-C) for the first 24 hours.
17. Put the cover on and allow the spa to heat to desired temperature.

Adjusting The Proper Bromine Levels

1. After start up, decrease the filtration cycle to F-4 and monitor the bromine level until it is within the recommended range.
2. Use bromine test strips to achieve a 3-5 ppm recommended level.
3. Note: It can take several days for the bromine level to stabilize because the fill water that was used sometimes contains contaminants that need to be neutralized, thereby using up the initial bromine that is generated.
4. Once the desired level has been achieved, turn the dial down until a maintenance setting is achieved.
5. The common maintenance setting for an average bather load is #4.

Note: When changing the setting, use bromine test strips to determine when you have reached the level you want.

Once A Week



1. Test spa water with bromine test strip.
2. Based on test strip readings:
 - First, adjust alkalinity if necessary.
 - Then, adjust pH if necessary.
 - Increase / decrease bromine production with dial if required.
3. Remove dirty filter from the spa and rinse off.
4. Place your clean, extra filter cartridge back into the spa.
5. Add 2 oz of Cal Spas “Oxidizer Shock” to spa. Run spa for 15 minutes
6. Vacuum debris from the bottom of your spa with the “Spa Vacuum”.
7. Replace cover.

Cal Inline Sanitation System Clear Water Plan

This plan and its chemical dosages are intended for spas equipped with the optional Cal Inline Sanitation System. The chemical references are designed for Cal Spas chemicals only. Note: Following these instructions is very important to ensure proper operation of your Cal Inline Sanitation System.

Start Up -- First Day

1. Clean surface of spa with Cal Spas “Multi-Purpose Cleaner”.
2. Apply a protective coat of Cal Spas “Fast Sheen” to the acrylic surface.
3. Fill spa to proper water level with normal tap water (Do not use soft water)
4. Use Bromine Test Strip and balance the spa water:
 - a. First, adjust total alkalinity (acceptable range is 80-120ppm),
 - b. Then adjust pH if necessary. (between 7.2 to 7.8)
 - c. Pour in 16 oz of Cal Spas “Metal Protector” to center of spa.
 - d. Sprinkle 1 oz of Cal Spas Chlorinating Granules over surface of water.
 - e. Power up spa and allow it to heat to desired temperature.

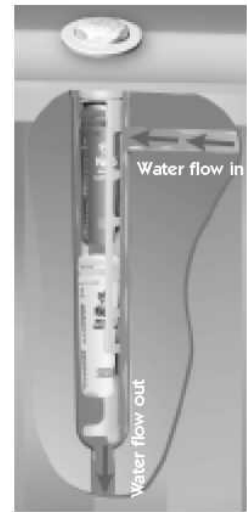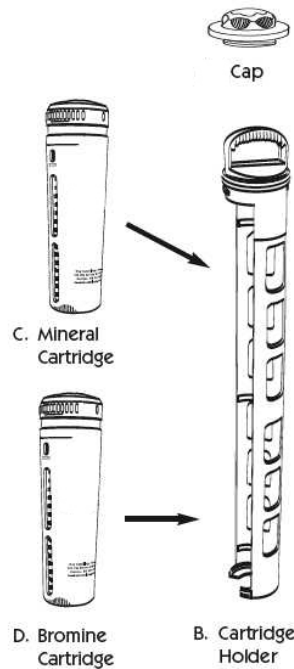

Cut-away view of cartridges snapped into holder and placed into the In-Line System

Start Up--Next Day

Now that the spa has reached its normal operating temperature, it is time to add the pre-filled mineral cartridge and bromine cartridge.

1. Turn the power off to the spa.
2. Take a new Cal Spas “Mineral Cartridge” and open to #6. (Hold the top of the cartridge and turn the bottom counter clockwise)
3. Take a new Cal Spas “Bromine Cartridge” and open to #3 (if the spa is less than 400 gallons, open to #2) Note: These settings are start up settings only. They may need to be adjusted up or down depending on your spa usage.
4. Unscrew the Cal Inline Sanitation System Cap located on the top lip of the spa.
5. Grasp the handle of the cartridge holder and turn counter-clockwise then pull up.
6. Remove the cartridge holder and discard spent cartridges (if any)
7. Snap the Bromine Cartridge into the bottom portion of the holder and the Mineral Cartridge into the top portion of the holder. (make sure the cartridges go into the correct position as over-bromination will occur if they are switched).
8. Line up the arrow on the top of the cartridge holder with the arrow on the top of the system.

Water Quality Maintenance

9. Lower the holder containing the cartridges down into the system until the tabs on the holder line up with the tabs on the system. Rotate the cartridge holder clockwise until it stops. (To ensure a locked position, attempt to pull the holder up. If it stays in place, the lock is secure)
10. Screw cap back on. Do not over-tighten.
11. Power spa back up and set to desired temperature.

Once A Week

1. Test water using Bromine Test Strips.
2. Based on the Test Strip readings:
 - First, adjust total alkalinity. (acceptable range of 80-120 ppm)
 - Then, adjust the pH if needed. (between 7.2 to 7.8)
 - Check level of Bromine. (Maintain bromine at 1-2 ppm.)
 - Note: adjust bromine cartridge setting up or down if needed.
3. Add 2 oz of Cal Spas "Stain and Scale Defense".
4. Add 2 oz of Cal Spas "Oxidizer Shock". Run spa for 15 minutes on High speed.
5. Remove dirty filter from the spa and rinse off. Set aside to dry.
6. Place your clean, extra filter cartridge back into the spa.
7. Vacuum debris from the bottom of your spa with the "Spa Vacuum".
8. Replace cover.

Maintenance

Regardless of which “Clear Water Plan” you are using, you should also do the following:

Every Month

1. Deep clean your spa’s filter. (Follow “filter cleaning” instruction at beginning of “Clear Water Plan”)
2. Check inside the equipment area for leaks, rodents, and insects.
3. If a leak is discovered, contact your Cal Spas dealer for service.
4. If you see evidence of rodents or insects, take necessary actions to remove them and precautions to prevent them from returning.

Every 3 To 4 Months

1. Drain and clean your spa with “Multi-Purpose Cleaner”.
2. Polish the acrylic surface with “Fast Sheen”.
3. Clean and treat spa cover, pillows, and Cal Select cabinet (if equipped) with “Cover Protector”.
4. When re-filling your spa, follow your specific “Clear Water Plan” Start Up procedures.
5. If you are using the Cal Clarity Automatic Bromine Generator Clear Water Plan, don’t forget to add new TRU BLU sodium bromide to the water.
6. If you use the Cal Inline Sanitation System “Clear Water Plan”, don’t forget to replace the Mineral and Bromine Cartridges.

Once A Year

1. Clean and treat redwood spa cabinets and gazebos with “Nu-Spa Redwood Stain Renew and Brightener”.
2. If you use the Cal Zone Quest 2000 Ozonator, you will need to replace the ozone cartridge.

Check the filter cartridge pleats. If they are frayed, replace the cartridge.

Using the Cal Entertainment System™

Some Cal Spas may be equipped with an optional entertainment system. Each Cal Spa™ unit equipped with an audio system is delivered with the manufacturer’s operating instructions. We strongly recommend that you read these instructions prior to operating the unit.

These instructions describe basic functions. See the manufacturer’s operating instructions for other features and functions. These instructions are delivered with the Cal Spas™ owner’s manual in a clear plastic bag.

The Marine Grade Stereo Receiver

The marine grade audio system uses either the Clarion CMD4 audio system (Figure 13) or the Kenwood KTS-MP400 audio system (Figure 14). The Clarion CMD4 marine grade stereo is the standard stereo for spa owners with this option.



Figure 13. Clarion marine grade stereo



Figure 14. Kenwood marine grade stereo

The DVD Multimedia Player

Spas equipped with a DVD player and TV monitor use the Jenson all-in-one receiver, amplifier and CD / DVD player (see Figure 15). The manufacturer's operating instructions are delivered with your spa. We strongly recommend that you read these instructions prior to operating this unit.

This owner's manual describes basic functions. See the manufacturer's operating instructions for other features and functions. These instructions are delivered with the Cal Spas™ owner's manual in a clear plastic bag.



Figure 15. CD / DVD stereo system

NOTE: Although the system is encased in a plastic housing with weather seals, the system is NOT marine grade and is NOT waterproof. You must take every precaution to keep this system dry! Water damage is not covered by the manufacturer's warranty.

- Do not place wet CD's into this unit at any time.
- Always close the CD protection door.

Programming DVD Control with the Universal Remote Control

1. Turn on the DVD player manually.
2. On the remote control, press DVD once.
3. Press and hold SETUP until the LED blinks twice, then release SETUP.
4. Enter code #1142 for your DVD player. If you perform this procedure correctly, the LED will blink twice. If not, repeat steps 2 through 4.

Powering up the System and Playing the Radio

1. Press the POWER button on the unit or the remote control to turn the system on. The system automatically starts in the mode it was in when it was last shut off.
2. Press the MOD button to switch to the radio mode.
3. Press the left and right arrows located at the far right of the panel to tune the radio to a station.

Operating the TV

1. Press the MOD button on the stereo unit until AU IN appears on the front display.
2. Raise the TV as described in the next section.
3. Turn on the power to the TV by either pressing the ON button or using the remote control.
4. Use the remote control to select a channel.

Opening the Player and Playing a Disk

1. Press the OPEN button on the unit. The faceplate will gently lower and expose the disk drive (Figure 16).



Figure 16. Opening the faceplate

2. Insert a disk in the disk drive.
3. Flip up the faceplate.

WARNING: DO NOT INSERT WET CDs or DVDs! The stereo system is NOT waterproof or water-resistant. Water damage is not covered by the manufacturers warranty. Make sure that hands and DVDs are dry before coming in contact with this or any electronic option.

Playing a CD

1. Insert a disk in the disk drive as described above. The player will identify the type of disk and begin playing it.
2. Use either the remote control to start and stop the player and to jump to selections or use the buttons on the faceplate.
3. To remove the disk, press the small EJECT button beneath the disk drive slot.

Playing a DVD

1. Raise the TV monitor as described in the following section.
2. Turn on the TV at set the TV/VIDEO setting to VIDEO.
3. Insert a disk in the disk drive as described above. The player will identify the type of disk and begin playing it. Either the DVD menu will appear on the TV screen or the movie will begin playing automatically.
4. Use the remote control to navigate the DVD menu. To play the movie without the remote control, press the PLAY button in the center of the row of buttons along the bottom of the faceplate.
5. To remove the disk, press the small EJECT button beneath the disk drive slot.

Strap Removal

Manual and automatic TVs are shipped with two large plastic tie straps to prevent shipping damage. These straps must be removed prior to operation Remove the straps using the following these steps:

1. Remove the rear cabinet panel behind the TV monitor.
2. Locate the two white plastic tie straps.
3. Cut the two white plastic tie straps. **USE EXTREME CAUTION** not to cut any wires!
4. Replace the cabinet panel.

The TV monitor is ready for use.

Raising and Lowering the TV Monitor

43 cm TV Monitor

Use the TV button located on the auxiliary control panel to mechanically raise and lower the TV monitor.

- Press the button once to raise the TV. Press once to lower.
- Press it once again to lower the TV.

The TV monitor will automatically lower after two hours of non-operation.

Programming the 43 cm TV control with the Universal Remote Control

1. Turn on the TV monitor with the manufacturer's remote control.
2. Press TV once on the waterproof remote control.
3. On the waterproof remote control, press and hold SETUP until the LED blinks twice, then release SETUP.
4. Enter code #0844 (if your spa was built after 6/27/05, enter code #1262) for your TV. If you perform this procedure correctly, the LED will blink twice. If not, repeat steps 2 through 4.

WARNING: The TV monitor is NOT waterproof or water-resistant. Water damage is not covered by the manufacturer's warranty. Make sure that hands are dry before coming in contact with this or any electronic option. **DO NOT SPLASH WATER ON THE TV MONITOR!**

43 cm Swivel TV Monitor

With this option, the 43 cm TV monitor is mounted on a swivel and can be turned manually left or right in order to increase screen visibility from all spa seats. If the TV is turned when you press the RAISE/LOWER button, it will not lower until you turn the TV back to its original position.

Programming the 106 cm TV Monitor with the Universal Remote Control

1. Turn on the CD player and the TV tuner using the manufacturer's remote control.
2. On the waterproof remote control, press TV once.
3. Press and hold SETUP until the LED blinks twice, then release SETUP.
4. Enter code #0731 for the 106 cm plasma monitor. If you perform this procedure correctly, the LED will blink twice.
5. Turn on the TV tuner using the manufacturer's remote control.
6. On the waterproof remote control, press RCVR (receiver) once.
7. Press and hold SETUP until the LED blinks twice, then release SETUP.
8. Enter code #1598 for the TV tuner. If you perform this procedure correctly the LED will blink twice.
9. Press the TV button for monitor adjustments (volume, mute, etc.) and press the RCVR (receiver) button for TV channel selection.

Universal Remote Control Operation

The Cal Spas universal remote (Figure 17) has been pre-programmed to function with the entertainment system the spa has been configured with. However, in case you need to reprogram the remote, use the following device list for the programming code.

Device Manufacturer	Device Type	Code
JVC 106 cm plasma	Monitor	0731
Signet 38 cm	TV	0800
Signet 43 cm	TV	0844
Signet 43 cm (Mfg. after 6/27/05)	TV	1262
Fahrenheit	DVD	1142
Jensen	DVD	1700

Programming Instructions

1. Locate the brand name of your device.
2. Turn the device manually or with the manufacturer's remote control provided.
3. On the waterproof remote control, press either TV, RCVR, DVD, or CD button once. (This will depend on the type of device you want to program.)
4. While pointing the remote at the unit, press and hold the SETUP button until the LED blinks twice, then release SETUP.
5. Enter the four digit code listed above. If you entered the code correctly, the LED will blink twice. If not, repeat steps 2 through 4.



Figure 17. Universal remote for all spa and entertainment functions

- Power - Turns the TV on and off
- Device selection buttons - Selects among six devices: TV, VCR, CD player, DVD player, stereo receiver, and satellite
- Navigation and menu selection buttons - Selects among set-up, menu, and channel guide functions
- Channel and volume control - Adjusts the volume up and down and
- Spa controls - Selects among eight functions specific to the spa, such as blower, pumps and light
- Keypad - Used to enter TV channels
- VCR and DVD controls - Use to control a VCR or DVD player

Appendix

Keeping Fit with your Cal Spa

The fitness series spas put the fun back into fitness. This comes with everything you need for a high powered, low impact, result achieving workout in total comfort and privacy. Plus you get a spa loaded with incredible therapeutic seating, variable jet massage and generous control options, and the most gorgeous cabinetry on the planet.

The fitness equipment consists of two exercise arm bars, two exercise band cords, two exercise bands and grips, and an exercise belt. This equipment attaches quickly and easily to the exercise anchors located on the spa walls.

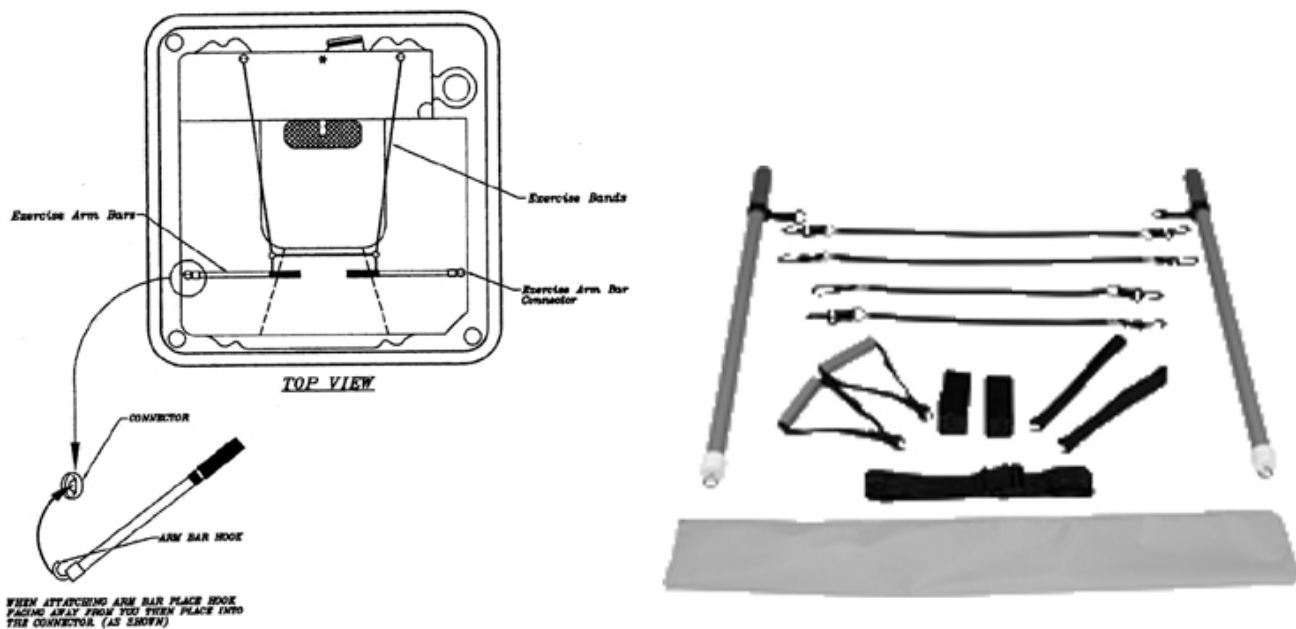


Figure 18. Fitness Series™ Equipment

IMPORTANT: Always consult your physician before starting any exercise activity or program. The fitness series spas feature rubber exercise bands. When stretched, these bands create a hi-tension condition. Improper use or failure to connect the exercise bands properly may cause injury. Always inspect all of the exercise equipment prior to beginning any exercise. Do not use any damaged equipment

Fitness Series™ Exercise Program

Many people have never performed resistance training and/or may not fully understand the benefits of this extremely important form of exercise for the goal of improving your health, appearance and overall confidence.

Resistance training is necessary when trying to loose body fat, maintain and improve lean muscle structure and increase energy levels while improving flexibility.

Hydrotherapy is a remarkable way of utilizing water and heating to promote health and wellness. The majority of people are turning back to natural methods of healing and health practices to improve their

body externally, but most of all internally. Hydrotherapy provides specific benefits for increased blood circulation, detoxification, reduction of body fat, replenish minerals and nutrients in the body and relieve stress.

Fitness Series™ Exercise Program

20 to 30 min. session three times a week

1. **Seated Row:** An all around exercise that focuses on the muscles of the upper back, shoulders and arms. Using the exercise bars in a seated position with your feet stable, abs tight and lower back stable. Palms down, arms extended with elbows slightly bent. Pull towards your chest squeezing your shoulder blades to the middle back and returning slowly to the starting position.
2. **Standing Chest Fly:** An excellent upper body exercise that focuses on the muscles of the chest, shoulders and arms. Using the exercise grips, place palms sideways facing your body with your elbows slightly bent. Pull forward toward your body bringing hands together, squeezing and flexing chest muscles, then slowly returning to the starting position.
3. **Standing Chest Press:** Using the exercise grips, place your palms down with your elbows bent at 90°. Press forward bringing your hands together, squeezing and flexing your chest muscles, then slowly return to the start position.
4. **Standing Shoulder Press:** Using the exercise grips, place your palms facing away from your body with your elbows bent at 90°. Press upward bringing your hands together in front of you, above your head and slowly return to the start position.
5. **Arm Curls:** Using the exercise grips, place your hands face up with your elbows slightly bent, pull upward towards your chin squeezing and flexing your biceps then slowly return to start position.
6. **Hydro Squats:** Excellent for defining and firming the buttocks, thighs and legs. From a standing position, slowly sink down into the water until your buttocks is level with your knees (90°). Squeezing your muscles tightly like sitting in a chair with abs tight and your back straight then slowly returning to standing position.
7. **Hydro Leg Extensions:** Sitting with your feet flat, knees bent (90°) and abs tight. Lift your foot upwards straightening the leg while squeezing and flexing the thigh muscles and slowly lowering the foot to start position.

Important: Consult your physician before starting any exercise activity or program. The fitness series spas feature rubber exercise bands. When stretched, these bands create a hi-tension condition. Improper use or failure to connect the exercise bands properly may result in injury. Always inspect all exercise equipment prior to beginning any exercise. Do not use any damaged equipment.

Warm Water Workouts

Almost any exercise that can be done on land, including walking or jogging, can be also done in water. If you have arthritis and you're exercising in a spa you will probably focus on range-of-motion exercises that work the toe, ankle, knee, leg, hip, hand, wrist and shoulder. The size and shape of the spa will determine the specific types of exercises you can do in it. Following are some low impact exercises that can assist in improving flexibility and strength.

Forward Arm Reach

With both arms, reach straight in front of you. Raise your hands overhead as high as possible, keeping your elbows as straight as you can. If one arm is very weak, use your other arm to help raise it.

Appendix

Elbow Bend

Start with your elbows as straight as possible, fingers pointing down. Bend your elbows and try to touch your thumbs to your shoulders. Keep your elbows close to your body. You do not have to touch your shoulders. Then relax your elbows and straighten your arms down at your sides.

Wrist Bend

Bend both of your wrists upward and then downward. You can also exercise one wrist at a time by placing your free hand, thumb out, under the exercising wrist. Hands and fingers should be relaxed.

Finger Curl

Curl your fingers into your palm to make a loose fist then straighten them out.

Ankle Circles

While seated, make large inward circles with your left foot, moving it from the ankle. Repeat circles in the opposite direction. Then repeat the exercise with your right foot.



















Spread Eagle

While sitting on the edge of a bath seat, straighten one knee. While holding it straight, slowly move it out to the side. Hold it out for three seconds, then bring it back to the center and relax. Repeat these instructions with your other leg.

Replacement Parts

Replacement Parts

Jets

 <p>PLU21703429 (SJW)5", POWER STORM JET W/DRK EYEBALL</p>	 <p>PLU21703430 (MFLW) 4.25", STORM JET, MAXI FLOW W/ DRK EYEBALL,</p>	 <p>PLU21703431 (MFRW) 3.25", STORM JET, MAXI FLOW W/DRK EYEBALL,</p>
 <p>PLU21703432 (MFW) 3.25", STORM JET, MICRO FLOW W/DRK EYEBALL,</p>	 <p>PLU21703433 (MSRW) 3", STORM JET, MICRO SWIRL W/DRK EYEBALL,</p>	 <p>PLU21703420 INTERNAL CLUSTER STORM, PULSATOR, [EURO]</p>
 <p>PLU21703421 CXLW 6.5" POWER STORM JET DIRECTIONAL,</p>	 <p>PLU21703422 MJLW 6.5", POWER STORM JET, DIRECTIONAL,</p>	 <p>PLU21703423 MJW 5.5", POWER STORM JET, DIRECTIONAL</p>
 <p>PLU21703424 SXW 5.5", POWER STORM JET, SWIRLEY</p>	 <p>PLU21703425 CXW 5.5". POWER STORM JET, DIRECTIONAL</p>	 <p>PLU21703426 SFW 5.5", POWER STORM JET, SURE-FLO</p>
 <p>PLU21703427 MNW 2.5", NECK JET, (QUAD BLASTER)</p>	 <p>PLU21703428 TW, 4.75", POWER SWIM JET TORNADO</p>	 <p>PLU21700818 OZONE INJECTOR JET</p>
 <p>PLU21700565 SW, STREAM (SWIM) JET COMPLETE</p>	 <p>LU21703630 (MFLW) 4.25", STORM JET, MAXI FLOW W/SS ESC & DRK EYEBALL,</p>	 <p>PLU21703630 MJLW 6.5", POWER STORM JET W/SS ESC, DIRECTIONAL,</p>

Appendix

 <p>PLU21703631 (MFW) 3.25", STORM JET, MICRO FLOW W/SS ESC & DRK EYEBALL,</p>	 <p>PLU21703632 (MSRW) 3" STORM JET, MICRO SWIRL W/SS ESC & DRK EYEBALL</p>	
 <p>PLU21703621 EP 2", INT. CLUSTER STORM, [EURO], SS W/MTL ESC</p>	 <p>PLU21703622 CXLW 6.5" POWER STORM JET W/SS ESC DIRECTIONAL</p>	 <p>PLU21703623 SXRW 5.5", POWER STORM JET W/SS ESC, DIRECTIONAL,</p>
 <p>PLU21703624 CXW 5.5", POWER STORM JET W/SS ESC, DIRECTIONAL</p>	 <p>PLU21703625 MJLW 5.5", POWER STORM JET W/SS ESC, DIRECTIONAL,</p>	 <p>PLU21703626 SFW 5.5", STORM JET W/SS ESC, SURE-FLO,</p>
 <p>PLU21703627 (MFRW) 3.25", STORM JET, MAXI FLOW W/SS ESC & DRK EYEBALL,</p>	 <p>PLU21703628 MNW 2.75", NECK JET W/SS ESC, QUAD BLASTER,</p>	 <p>PLU21703629 TW 4.75", POWER SWIM JET W/SS ESC TORNADO,</p>
 <p>PLU21700378 VENT, 1" AIR CONTROL SILVER, TEARDROP (2 TONE) , 05'</p>	 <p>PLU21300062 DIVERTER VALVE 2" (2 WAY) SILVER, TEARDROP HANDLE (2 TONE)</p>	 <p>PLU21300052 DIVERTER VALVE 1"(2 WAY) SILVER, TEARDROP HANDLE (2 TONE)</p>

Pillows

 ACC01400884 QUAD BLASTER PILLOW	 ACC01400874 NECK JET/ BLASTER PILLOW	 ACC01400864 STD PILLOW, #965 RECTANGULAR
 ACC01400886 NECK PILLOW, INFINITY	 ACC01400479 PILLOW, FLOATING, GREY	 ACC01400481 BOOSTER SEAT, GREY

Drains

PLU21400132	MAIN DRAIN - SUPER HI FLO SUCTION 2" SILVER
PLU21400065	HI FLO SUCTION SILVER 1 1/2"-
PLU21400195	BOTTOM DRAIN OZONE FITTING-
PLU21400196	BOTTOM DRAIN WALL FITTING-
PLU21400197	BOTTOM DRAIN STAR SUCTION COVER
OZO18300005	BOTTOM DRAIN-FILTRATION RETURN ASSY

Waterfalls

PLU21800618	WATERFALL SILVER
PLU21800611	WATERFALL SILVER, 4 PORT LED
PLU21800614	S/S WATERFALLH-SERIES, SUB ASSY, WATERFALL, (4 PORT LED)

Lights

LIT16100153	WALLFITTING, CLEAR LENS CAP, JUMBO SPA LIGHT, 5"
LIT16000151	LIGHT MINI 2-1/2 DIA
LIT16000100	LIGHT INGROUND 100W 120V 30'
LIT16100155	RED LENS INSERT, JUMBO SPA LIGHT
LIT16100156	BLUE LENS INSERT, JUMBO SPA LIGHT,

Filters

FIL11100190	FILTER CARTRIDGE, 50 SQ FT. ANTI-BACTERIAL RED
FIL11100191	FILTER CARTRIDGE, 75 SQ FT. ANTI-BACTERIAL WHITE
FIL11100193	FILTER CARTRIDGE, 35 SQ FT. ANTI-BACTERIAL WHITE
FIL11100125	FILTER CARTRIDGE CAL 75 SQ" 10 1/16 X 15 1/6 (REMOTE EQUIPMENT)

<i>Pumps</i>	
PUM22000951	PUMP, 5.0 HP 2 SP SWITCHLESS, DBL SEAL 240V
PUM22000941	PUMP 6.0 HP 2SP 145T DBL SEAL, SWITCHLESS 2" 240V
PUM22000031	PUM 1.5 HP 2 SP 2" WET END 120V -
PUM22000916	PUMP DUALY, DBL SEAL SWITCHLESS 2" ULTIMA-240V
PUM22000952	PUMP 1.0 HP ATS – 240V
PUM22200051	PUMP, 1.5 BHP DUALY GE-56 FRAME, DBL SEAL-120V
PUM22000075	DYNA-MAX PUMP, 2.5 HP 2 SPEED 240V
PUM22000745	PUMP, SPECK 4 HP 2 SP W/O TRAP 240V
PUM22000802	PUMP 5BHP 2 SPEED INTERNATIONAL 50 HZ 230V
PUM22000977	24 HOUR FILTRATION PUMP ASSEMBLY 240V
PUM22100944	SPA CAL FILTRATION CIRC PUMP 240V
PUM22000973	24 HOUR FILTRATION PUMP ASSY INTERNATIONAL 50 HZ 230V
PUM22000531	SPA CAL FILTRATION CIRC PUMP INTERNATIONAL 50 HZ 230V
BLO05000085	BLOWER W/CORD COMPLETE 1.5 HP 240V 3.5 AMPS
PLU21100160	CHECK VALVE 1 ¼ lb.
<i>LED Lights</i>	
LIT16100157	LED (12EA) SPA LIGHT ASSEMBLY
LIT16100160	LED (9 EA) FOR SPA LIGHT AREA #LSL9-S
LIT16100162	LED CABLE HARNESS 6' LED TO LED 4 WIRE
LIT16100163	LED CABLE HARNESS - 8' LED TO LED 4 WIRE
LIT16100164	LED CABLE HARNESS FOR SPA LIGHT
LIT16100165	LED CABLE HARNESS-3' LED TO LED 4 WIRE
LIT16100166	RUBBER SEALING GROMMET LED SPA LIGHT
LIT16100167	ROUND LED LIGHT LENS ASSEMBLY
<i>Cover Lifts</i>	
ACC01600116	COVER LIFT KIT, BOTTOM MOUNTING
ACC01600117	COVER LIFT ADJUSTABLE(top mount)
<i>Hand Rails</i>	
FIX12400002	SWIVEL HAND RAIL
FIX12400003	SWIVEL HAND RAIL (BLACK)
<i>Filter Lids</i>	
FIL11300252	FILTER LID, DUAL
FIL11300253	FILTER LID, SINGLE

Covers

Basic Rust

Part No.	Description	Series
ACC01000592	SPA COVER BASIC RD	FF-100/150
ACC01000594	SPA COVER BASIC	V-200/300
ACC01000596	SPA COVER BASIC	CP-22/36, CT-22/36, V-400/500/700/800
ACC01000598	SPA COVER BASIC	C-22/36: M, A, S, R, BA, V-600, V-850
ACC10000927	SPA COVER BASIC	CV-22
ACC01000960	SPA COVER BASIC	CB-22, FF-90
ACC01000963	SPA COVER BASIC	CK-22, FF-390
ACC01000966	SPA COVER BASIC	CO-22, FF-190
ACC01000930	SPA COVER BASIC	CJ-22
ACC01000572	SPA COVER BASIC	CD-22

Basic Grey

Part No.	Description	Series
ACC01000593	SPA COVER BASIC RD	FF-100/150
ACC01000595	SPA COVER, BASIC	V-200/300
ACC01000597	SPA COVER BASIC	V-400/500/700/800, CP-22/36, CT-22/36
ACC01000599	SPA COVER BASIC	V-600/850, C-22/ 36: M, A, S, R, BA
ACC01000928	SPA COVER BASIC	CV-22
ACC01000961	SPA COVER BASIC	CB-22, FF-90
ACC01000964	SPA COVER BASIC	CK-22, FF-390
ACC01000967	SPA COVER BASIC	CO-22, FF-190
ACC01000931	SPA COVER BASIC	CJ-22
ACC01000573	SPA COVER BASIC	CD-22

Basic Slate

Part No.	Description	Series
ACC01000602	SPA COVER BASIC	FF-100/150
ACC01000603	SPA COVER BASIC	V-200/300
ACC01000604	SPA COVER BASIC	V-400/500/700/800, CP-22/36, CT-22/36
ACC01000605	SPA COVER BASIC	V-600/850, C-22/36: M, A, S, R, BA
ACC01000929	SPA COVER BASIC	CV-22
ACC01000962	SPA COVER BASIC	CB-22, FF-90
ACC01000965	SPA COVER BASIC	CK-22, FF-390
ACC01000968	SPA COVER BASIC	CO-22, FF-190
ACC01000932	SPA COVER BASIC	CJ-22
ACC01000574	SPA COVER BASIC	CD-22

Appendix

Standard Rust 5 to 3

Part No.	Description	Series
ACC01200408	SPA COVER STD	J-501
ACC01200560	SPA COVER STD	H-901
ACC01200400	SPA COVER STD	S-704
ACC01200410	SPA COVER STD	J-503, 505, 506 S-703, 706, H-903, 704, 705, 706, 708
ACC01200420	SPA COVER STD	C- A, C, M, LBA, J-507, J-508, S-707, S-708, H-903, 904, 905, 906, 907, 908
ACC01200430	SPA COVER STD	CD-51
ACC01200450	SPA COVER STD	CN-36/51, S-709
ACC01200440	SPA COVER STD	CE-36/51

Standard Grey 5 to 3

Part No.	Description	Series
ACC01200409	SPA COVER STD	J-501
ACC01200561	SPA COVER STD	H-901
ACC01200401	SPA COVER STD	S-704
ACC01200411	SPA COVER STD	C-P, C-T, J-503, J-505, J-506, S-703, S-706
ACC01200421	SPA COVER STD	C- A, C, M, LBA, J-507, J-508, S-707, S-708, H-903, 904, 905, 906, 907, 908
ACC01200431	SPA COVER STD	CD-51
ACC01200451	SPA COVER STD	CN-36/51, S-709
ACC01200441	SPA COVER STD	CE-36/51

Standard Slate 5 to 3

Part No.	Description	Series
ACC01200510	SPA COVER STD	J-501
ACC01200562	SPA COVER STD	H-901
ACC01200402	SPA COVER STD	S-704
ACC01200412	SPA COVER STD	C-P,C-T,J-503,J-505,J-506, S-703, S-706
ACC01200422	SPA COVER STD	C- A, C, M, LBA, J-507, J-508, S-707, S-708, H-903, 904, 905, 906, 907, 908
ACC01200432	SPA COVER STD	CD-51
ACC01200452	SPA COVER STD	CN-36/51, S-709
ACC01200444	SPA COVER STD	CE-36/51

Deluxe Rust 5 to 3

Part No.	Description	Series
ACU02200210	SPA COVER UL	C - B
ACU02200220	SPA COVER UL	C - K
ACU02200364	SPA COVER UL	J-501
ACU02200320	SPA COVER UL	C - O
ACU02200240	SPA COVER UL	C - V , S-704
ACU02200250	SPA COVER UL	C-P,C-T,J-503,J-505,J-506, S-703, S-706
ACU02200260	SPA COVER UL	C- A, C, M, LBA, J-507, J-508, S-707, S-708, H-903, 904, 905, 906, 907, 908, GX49
ACU02200270	SPA COVER UL	C - D
ACU02200290	SPA COVER UL	C - N, S-709
ACU02200280	SPA COVER UL	C - E
ACU02200310	SPA COVER UL	C - R
ACU02200330	SPA COVER UL	C - A
ACU02200340	SPA COVER UL	DI-406
ACU02001155	SPA COVER UL	CHAMPION

Deluxe Grey 5 to 3

Part No.	Description	Series
ACU02200211	SPA COVER UL	C - B
ACU02200221	SPA COVER UL	C - K
ACU02200365	SPA COVER UL	J-501
ACU02200321	SPA COVER UL	C - O
ACU02200241	SPA COVER UL	C - V, S-704
ACU02200251	SPA COVER UL	C-P, C-T, J503, J505, J506, S703, S706
ACU02200261	SPA COVER UL	C- A, C, M, LBA, J-507, J-508, S-707, S-708, H-903, 904, 905, 906, 907, 908, GX-49
ACU02200271	SPA COVER UL	C - D
ACU02200291	SPA COVER UL	C - N, S-709
ACU02200281	SPA COVER UL	C - E
ACU02200311	SPA COVER UL	C - R
ACU02200331	SPA COVER UL	C - A
ACU02200343	SPA COVER UL 5-3 SMOKE	DI-405
ACU02200341	SPA COVER UL	DI-406

Appendix

Deluxe Slate 5 to 3

Part No.	Description	Series
ACU02200216	SPA COVER UL	C - B
ACU02200225	SPA COVER UL	C - K
ACU02200368	SPA COVER UL	J-501
ACU02200325	SPA COVER UL	C - O
ACU02200246	SPA COVER UL	C - V, S-704
ACU02200256	SPA COVER UL	C-P,C-T,J-503,J-505,J-506, S-703, S-706
ACU02200266	SPA COVER UL	C- A,C,M,LBA, J-507,J-508, S-707, S-708, H903,904,905,906,907,908, GX-49
ACU02200275	SPA COVER UL	C - D
ACU02200295	SPA COVER UL	C - N, S-709
ACU02200285	SPA COVER UL	C - E

Deluxe Teal 5 to 3

Part No.	Description	Series
ACU02200212	SPA COVER UL	C - B
ACU02200222	SPA COVER UL	C - K
ACU02200369	SPA COVER UL	J-501
ACU02200242	SPA COVER UL	C - O
ACU02200252	SPA COVER UL	C - V, S-704
ACU02200262	SPA COVER UL	C-P, C-T, J-503, J-505, J-506, S-703, S-706
ACU02200272	SPA COVER UL	C- A, C, M, LBA, J-507, J-508, S-707, S-708, H-903, 904, 905, 906, 907, 908, GX-49
ACU02200292	SPA COVER UL	C - D
ACU02200282	SPA COVER UL	C - N, S-709

Deluxe Navy 5 to 3

Part No.	Description	Series
ACU02200213	SPA COVER UL	C - B
ACU02200223	SPA COVER UL	C - K
ACU02200370	SPA COVER UL	J-501
ACU02200323	SPA COVER UL	C - O
ACU02200243	SPA COVER UL	S-704
ACU02200253	SPA COVER UL	C-P, C-T, J-503, J-505, J-506, S-703, S-706
ACU02200263	SPA COVER UL	C- A, C, M, LBA, J-507, J-508, S-707, S-708, H-903, 904, 905, 906, 907, 908, GX-49
ACU02200273	SPA COVER UL	C - D
ACU02200293	SPA COVER UL	C - N, S-709
ACU02200283	SPA COVER UL	C - E

Cabinets

Color codes for all cabinets					
Redwood		Cal Select		Stone Cabinet	
-R	Red	(R)	Red	[G]	Gold Stone
-G	Grey	(G)	Grey	[S]	Slate Stone
		(S)	Smoke	[M]	Mocha Stone
		(N)	Natural	[P]	Platinum Stone
		(C)	Cedar		

Family Fun Series

Cal Wood (Red Stained)

	Door	Front Access	Round Corner	Side Panel	Back Panel	Complete Set
FF-90	WOO27513054-R	WOO27513055-R	WOO27504382-R	WOO27513056-R	WOO27513057-R	WOO27513053-R
FF-390	WOO27513051-R	WOO27513203-R	WOO27504382-R	WOO27513204-R WOO27513205-R	WOO27513202-R WOO27513207-R	WOO27500405-R
FF-190	WOO27500486-R	WOO27500487-R	N/A	WOO27500485-R	N/A	WOO27500404-R
FF-100/150	WOO27500484-R	N/A	N/A	WOO27500402-R	N/A	WOO27500403-R

Cal Select

FF-90	WOO27513342()	WOO27513363()	WOO27513324()	WOO27513428()	WOO27513310()	WOO27517523()
FF-390	WOO27513343()	WOO27513367()	WOO27513333()	WOO27513414() WOO27513418()	WOO27513432() WOO27513425()	WOO27517528()
FF-190	WOO27513491()	WOO27513581()	N/A	WOO27513474()	N/A	WOO27500351()
FF100/150	N/A	N/A	N/A	N/A	N/A	N/A

Victory Series

Cal Wood (Standard Panels)

V-200	WOO27513051-	WOO27513049-	WOO27504382-	WOO27513052-	N/A	WOO27513050-
V-300	WOO27513051-	WOO27513049-	WOO27504382-	WOO27513052-	N/A	WOO27513050-
V-400	WOO27513044-	WOO27513045-	WOO27518761-	WOO27513043-	N/A	WOO27513042-
V-500	WOO27513044-	WOO27513045-	WOO27518761-	WOO27513043-	N/A	WOO27513042-
V-600	WOO27513044-	WOO27513048-	WOO27518761-	WOO27513047-	N/A	WOO27513046-
V-700	WOO27513044-	WOO27513045-	WOO27518761-	WOO27513043-	N/A	WOO27513042-
V-800	WOO27513044-	WOO27513045-	WOO27518761-	WOO27513043-	N/A	WOO27513042-
V-850	WOO27513044-	WOO27513048-	WOO27518761-	WOO27513047-	N/A	WOO27513046-

Cal Select (Optional Panel)

V-200	WOO27513343()	WOO27513371()	WOO27513333()	WOO27513427()	N/A	WOO27517568()
V-300	WOO27513343()	WOO27513371()	WOO27513333()	WOO27513427()	N/A	WOO27517568()
V-400	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
V-500	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
V-600	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
V-700	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
V-800	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
V-850	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()

Journey Series						
Cal Select						
	Door	Front Access	Round Corner	Side Panel	Back Panel	Complete Set
J-501	WOO27513354()	WOO27513386()	WOO27513333()	WOO27513444()	WOO27513316()	WOO27517558()
J-502	WOO27513347()	WOO27513387()	WOO27513327()	WOO27513446()	WOO27513318()	WOO27517557()
J-503	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
J-504	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513442()	WOO27513452()	WOO27517561()
J-505	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
J-506	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
J-507	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
J-508	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517554()
Stone Cabinet						
J-501	N/A	N/A	N/A	N/A	N/A	N/A
J-502	N/A	N/A	N/A	N/A	N/A	N/A
J-503	N/A	N/A	N/A	N/A	N/A	N/A
J-504	N/A	N/A	N/A	N/A	N/A	N/A
J-505	N/A	N/A	N/A	N/A	N/A	N/A
J-506	N/A	N/A	N/A	N/A	N/A	N/A
J-507	WOO27519200 []	N/A	WOO27519210 []	N/A	N/A	WOO27519208 []
J-508	WOO27519200 []	N/A	WOO27519210 []	N/A	N/A	WOO27519208 []

Signature Series						
Cal Select						
	Door	Front Access	Round Corner	Side Panel	Back Panel	Complete Set
S-702	WOO27513342()	WOO27513369()	WOO27513324()	WOO27513432()	WOO27513421()	WOO27517525()
S-703	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
S-704	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513437()	WOO27513442()	WOO27517686()
S-705	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513452()	WOO27513442()	WOO27517596()
S-706	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
S-707	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
S-708	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
S-709	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513435()	WOO27513452()	WOO27517529()
Stone Cabinet						
S-702	N/A	N/A	N/A	N/A	N/A	N/A
S-703	N/A	N/A	N/A	N/A	N/A	N/A
S-704	N/A	N/A	N/A	N/A	N/A	N/A
S-705	N/A	N/A	N/A	N/A	N/A	N/A
S-706	N/A	N/A	N/A	N/A	N/A	N/A
S-707	WOO27519200 []	N/A	WOO27519210 []	N/A	N/A	WOO27519208 []
S-708	WOO27519200 []	N/A	WOO27519210 []	N/A	N/A	WOO27519208 []
S-709	N/A	N/A	N/A	N/A	N/A	N/A

Home Series

Cal Select

	Door	Front Access	Round Corner	Side Panel	Back Panel	Complete Set
H-901-1	WOO27513586()	WOO27513690()	WOO27513588()	WOO27513587()	WOO27513589()	WOO27513595()
H-902	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513452()	WOO27513442()	WOO27517596()
H-903	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
H-904	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
H-905	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
H-906	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
H-907	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
H-908	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()

Stone Cabinet

H-901	N/A	N/A	N/A	N/A	N/A	N/A
H-902	N/A	N/A	N/A	N/A	N/A	N/A
H-903	WOO27519200 []	N/A	WOO27519210 []	N/A	N/A	WOO27519208 []
H-904	WOO27519200 []	N/A	WOO27519210 []	N/A	N/A	WOO27519208 []
H-905	WOO27519200 []	N/A	WOO27519210 []	N/A	N/A	WOO27519208 []
H-906	WOO27519200 []	N/A	WOO27519210 []	N/A	N/A	WOO27519208 []
H-907	WOO27519200 []	N/A	WOO27519210 []	N/A	N/A	WOO27519208 []
H-908	WOO27519200 []	N/A	WOO27519210 []	N/A	N/A	WOO27519208 []

Infiniti Series

Redwood

I-600	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
I-601	WOO27504330-	WOO27516289-	WOO27518761-	WOO27516381-	N/A	WOO27515143-
I-602	WOO27504330-	WOO27516289-	WOO27518761-	WOO27516381-	N/A	WOO27515143-
I-603	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
I-604	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-

Cal Select

I-600	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
I-601	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
I-602	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
I-603	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
I-604	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()

Stone Cabinet

I-600	N/A		N/A			N/A
I-601	N/A		N/A			N/A
I-602	N/A		N/A			N/A
I-603	WOO27519200 []		WOO27519210 []			N/A
I-604	WOO27519200 []		WOO27519210 []			WOO27519208 []

Classic 22 Series						
Redwood						
	Door	Front Access	Round Corner	Side Panel	Back Panel	Complete Set
CP-22	WOO27504330-	WOO27516289-	WOO27518761-	WOO27516381-	N/A	WOO27515143-
CT-22	WOO27504330-	WOO27516289-	WOO27518761-	WOO27516381-	N/A	WOO27515143-
CV-22	WOO27504330-	WOO27501562-	WOO27518761-	WOO27516381-	WOO27501642-	WOO27504203-
CA-22	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
CBA-22	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
CM-22	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
CD-22	WOO27504334-	WOO27518821-	WOO27518741-	WOO27518921-	N/A	WOO27504356- W/ TOP RAIL
CS-22	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
CR-22	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
CB-22	WOO27504336-	WOO27502922-	WOO27504382-	WOO27502962-	WOO27502782-	WOO27517690-
CK-22	WOO27504333-	WOO27504402-	WOO27504382-	WOO27504662- WOO27504642-	WOO27504602- WOO27504622-	WOO27504602-
CO-22	WOO27500260-		N/A	WOO27500400-	N/A	WOO27500342-
CJ-22	WOO27504322-	WOO27519801-	WOO27519802-	WOO27519804-	WOO27519803-	WOO27504322-
Cal Select						
CP-22	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
CT-22	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
CV-22	WOO27513350()	WOO27513379()	WOO27513329()	WOO27513442()	WOO27513437()	WOO27517534()
CA-22	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CBA-22	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CM-22	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CD-22	WOO27513356()	WOO27513392()	WOO27513335()	WOO27513454()	N/A	WOO27517539() W/ TOP RAIL
CS-22	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CR-22	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CB-22	WOO27513342()	WOO27513363()	WOO27513324()	WOO27513428()	WOO27513310()	WOO27517523()
CK-22	WOO27513343()	WOO27513367()	WOO27513333()	WOO27513414() WOO27513418()	WOO27513432() WOO27513425()	WOO27517528()
CO-22	WOO27513491()	WOO27513581()	N/A	WOO27513474()	N/A	WOO27500351()
CJ-22	WOO27513354()	WOO27513386()	WOO27513333()	WOO27513316()	WOO27513444()	WOO27517558()
Stone Cabinet						
CP-22						WOO27519250[]
CT-22						WOO27519250[]
CV-22						
CA-22	WOO27519200[]		WOO27519210[]			WOO27519208[]
CBA-22	WOO27519200[]		WOO27519210[]			WOO27519208[]
CM-22	WOO27519200[]		WOO27519210[]			WOO27519208[]
CS-22	WOO27519200[]		WOO27519200[]		N/A	
CR-22	WOO27519200[]		WOO27519200[]		N/A	
CB-22	N/A		N/A			N/A
CJ-22	N/A		N/A			N/A
CK-22	N/A		N/A			N/A
CO-22	N/A		N/A			N/A
CD-22	N/A		N/A			N/A

Classic 36 Series

Redwood

	Door	Front Access	Round Corner	Side Panel	Back Panel	Complete Set
CP-36	WOO27504330-	WOO27516289-	WOO27518761-	WOO27516381-	N/A	WOO27515143-
CT-36	WOO27504330-	WOO27516289-	WOO27518761-	WOO27516381-	N/A	WOO27515143-
CA-36	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
CBA-36	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
CD-36	WOO27504334-	WOO27518821-	WOO27518741-	WOO27518921-	N/A	WOO27504356- W/ TOP RAIL
CM-36	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
CR-36	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
CS-36	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
CN-36	WOO27504330-	WOO27518842-	WOO27518761-	WOO27501642- WOO27501643-	WOO27518940-	WOO27500226-
CE-36	WOO27504334-	WOO27518821-	WOO27518741-	WOO27501622- WOO27501630-	WOO27518921-	WOO27517590- W/ TOP RAIL

Cal Select

CP-36	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
CT-36	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
CA-36	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CBA-36	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CD-36	WOO27513356()	WOO27513392()	WOO27513335()	WOO27513454()	N/A	WOO27517539() W/ TOP RAIL
CM-36	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CR-36	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CS-36	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CN-36	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513435()	WOO27513452()	WOO27517529()
CE-36	WOO27513356()	WOO27513392()	WOO27513335()	WOO27513312()	WOO27513454()	WOO27517544() W/ TOP RAIL

Smoke Cabinet

CP-36						
CT-36						
CA-36	WOO27519200[]		WOO27519210[]			WOO27519208[]
CBA-36	WOO27519200[]		WOO27519210[]			WOO27519208[]
CD-36	WOO27519200[]		WOO27519210[]			WOO27519208[]
CM-36	WOO27519200[]		WOO27519210[]			WOO27519208[]
CR-36	WOO27519200[]		WOO27519210[]			WOO27519208[]
CS-36	WOO27519200[]		WOO27519210[]			WOO27519208[]
CN-36						
CE-36						

Classic 51 Series						
Redwood						
	Door	Front Access	Round Corner	Side Panel	Back Panel	Complete Set
CP-51	WOO27504330-	WOO27516289-	WOO27518761-	WOO27516381-	N/A	WOO27515143-
CT-51	WOO27504330-	WOO27516289-	WOO27518761-	WOO27516381-	N/A	WOO27515143-
CA-51	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
CBA-51	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
CM-51	WOO27504330-	WOO27518840-	WOO27518761-	WOO27518940-	N/A	WOO27515646-
CD-36	WOO27504334-	WOO27518821-	WOO27518741-	WOO27518921-	N/A	WOO27504356- W/ TOP RAIL
CS-51	WOO27504330-	WOO27518840-	WOO27518761-	WOO27518940-	N/A	WOO27515646-
CR-51	WOO27504330-	WOO27518840-	WOO27518761-	WOO27518940-	N/A	WOO27515646-
CN-51	WOO27504330-	WOO27518842-	WOO27518761-	WOO27501642- WOO27501643-	WOO27518940-	WOO27500226-
CE-51	WOO27504334-	WOO27518821-	WOO27518741-	WOO27501622- WOO27501630-	WOO27518921-	WOO27517590-
Cal Select						
CP-51	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
CT-51	WOO27513350()	WOO27513375()	WOO27513329()	WOO27513442()	N/A	WOO27517570()
CA-51	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CBA-51	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CM-51	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CD-51	WOO27513356()	WOO27513392()	WOO27513335()	WOO27513454()	N/A	WOO27517539() W/ TOP RAIL
CS-51	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CR-51	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
CN-51	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513435()	WOO27513452()	WOO27517529()
CE-51	WOO27513356()	WOO27513392()	WOO27513335()	WOO27513312()	WOO27513454()	WOO27517544() W/ TOP RAIL
Stone Cabinet						
CP-51						
CT-51						
CA-51	WOO27519200[]		WOO27519210[]			WOO27519208[]
CBA-51	WOO27519200[]		WOO27519210[]			WOO27519208[]
CM-51	WOO27519200[]		WOO27519210[]			WOO27519208[]
CD-51	WOO27519200[]		WOO27519210[]			WOO27519208[]
CS-51	WOO27519200[]		WOO27519210[]			WOO27519208[]
CR-51	WOO27519200[]		WOO27519210[]			WOO27519208[]
CN-51						
CE-51						

Aqua Series**Redwood**

	Door	Front Access	Round Corner	Side Panel	Back Panel	Complete Set
SQ-400	WOO27504300-	WOO27518680-	WOO27514360-	WOO27518780-	N/A	WOO27517593-
SQ-500	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
SQ-700	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
SQ-800	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
SQ-92	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
SQ-88	WOO27504330-	WOO27518842-	WOO27518761-	WOO27518942-	N/A	WOO27517489-
SQ-43	WOO27504330-	WOO27518842-	WOO27518761-	WOO27501642- WOO27501643-	WOO27518940-	WOO2750026-
SQ-63	WOO27504330-	WOO27518842-	WOO27518761-	WOO27501642- WOO27501643-	WOO27518940-	WOO2750026-

Cal Select

SQ-400	WOO27513343()	WOO27513371()	WOO27513333()	WOO27513427()	N/A	WOO27517568()
SQ-500	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
SQ-700	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
SQ-800	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
SQ-92	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
SQ-88	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
SQ-43	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513435()	WOO27513452()	WOO27517529()
SQ-63	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513435()	WOO27513452()	WOO27517529()

Stone Cabinet

SQ-400	WOO27513343()	WOO27513371()	WOO27513333()	WOO27513427()	N/A	WOO27517568()
SQ-500	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
SQ-700	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
SQ-800	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
SQ-92	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
SQ-88	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
SQ-43	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513435()	WOO27513452()	WOO27517529()
SQ-63	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513435()	WOO27513452()	WOO27517529()

Galaxy Series**Stainless Steel**

GX-49	WOO27519300		WOO27519310		N/A	WOO27519311
--------------	-------------	--	-------------	--	-----	-------------

Cal Select

GX-49	WOO27513350()	WOO27513377()	WOO27513329()	WOO27513452()	N/A	WOO27517575()
--------------	---------------	---------------	---------------	---------------	-----	---------------

Ultimate Series

Redwood

	Door	Front Access	Round Corner	Side Panel	Back Panel	Port Panel	Complete Set
SKS24	N/A	WOO27500128-	WOO27510635-	WOO27500136- WOO27500137-	WOO27510636-	WOO27510632-	WOO27500116-
SKS25 SKS47	WOO27510634-	WOO27510633-	WOO27510635-	WOO27510630- WOO27510631-	WOO27510636-	WOO27510632-	WOO27517991-

Cal Select

SKS24	N/A	WOO27500396()	WOO27500367()	WOO27500393() WOO27500390()	WOO27500376()	WOO27500381()	WOO27517995()
SKS25 SKS47	WOO27500361()	WOO27500364()	WOO27500367()	WOO27500370() WOO27500373()	WOO27500376()	WOO27500381()	WOO27517992()

Cal Spas™ Chemicals



Bromine/Chlorine Starter Kit

#CHE07000290/#CHE07000295

When used as directed, this product is effective as a spa and hot tub sanitizer/disinfectant. Treats 250 gallons for up to three weeks.



Vinyl & Leather Cleaner

#CHE07000620

Specifically designed to protect spa covers and pillows from chemical and ultraviolet damage.



Fast Sheen

#CHE07000610

Unique water-based, chemically reactive silicone sealant and polish. Seals, shines, and protects spa surfaces.



Brominating Tablets

#CHE07000760/#CHE07000770

Sanitizer, disinfectant for spas and hot tubs.



Chlorinating Granules

#CHE07000865/#CHE07000880

When used as directed, this product is effective as a spa and hot tub water disinfecting agent.



Go Brom

#CHE07000830

Establishes a bromide bank in spas and hot tubs.



Filter Cartridge Cleaner

#CHE07000690

Breaks down organic and inorganic material. Removes calcium scale and mineral deposits.



Liquid Hardness Increaser

#CHE07000250

Increases water hardness to reduce corrosion. Helps reduce foaming.



Spa Brite

#CHE07000580/#CHE07000590

Clears up cloudy water in spas and hot tubs. Effective at all spa and hot tub temperatures.



Foam Gone

#CHE07000800/#CHE07000810

Breaks up existing foam in spa water. Effective at all spa and hot tub temperatures.



pH-Alkalinity Up

#CHE07000720/#CHE07000730

Helps maintain pH in spas and hot tubs.



pH-Alkalinity Down

#CHE07000750

Lowers pH in spas and hot tubs.



Enzyme Formula

#CHE07000600/#CHE07000605

Emulsifies and biodegrades bodily oils, suntan lotion, and other contaminants in spas and hot tubs.



Metal Protector

#CHE07000630/#CHE07000640

Controls water discoloration caused by minerals. Special Extra Strength formula for spas and hot tubs.



Stain & Scale Prevention

#CHE07000650/#CHE07000660

Prevents minerals from damaging spa components and affecting performance.



Oxidizer Shock

#CHE07000680/#CHE07000710

Destroys organic contaminants and odor-causing wastes.

2006 Warranty Information

See your Cal Spas™ dealer for a copy of the applicable warranty, details, and any questions you may have regarding the warranty coverage on your spa.

Warranty Limitations

The 2006 Limited Warranty is void if the spa has been subject to negligence, alteration, misuse, abuse, repairs by non-C.A.I. authorized representatives, incorrect electrical installation, acts of God and any other cases beyond the control of C.A.I. Examples of common acts invalidating this warranty include, but are not limited to:

- Use of spa in a non-residential application.
- Scratches caused by normal use.
- Operation of spas water temperature out of the normal operating range of 0°C to 47.8°C.
- Damage caused by incorrect water level (low, overflow, etc.).
- Damage caused by extreme weather conditions (hot, cold, etc.).
- Damage caused by dirt, sand and calcium.
- Damage caused by clogged filter cartridges. See filter cleaning recommendations in this Owner's Manual.
- Damage caused by continued operation of this spa with either a known or an unknown problem.
- Damage caused by tri-chlor, acids, chlorine tablets, and any other spa chemicals not authorized by C.A.I.
- Damage caused by improper water chemistry. (High levels of chlorine, bromine, calcium, pH and other excessive chemical levels.)
- Damage caused by direct sunlight. Spas should always be covered when not in use.
- Damage caused as a result of failure to follow operating instructions as defined within this Owner's Manual.
- Damage caused by incorrect electrical installation, electrical brownout, voltage spikes, or operation of spa out of voltage range by more than $\pm 10\%$.
- Spas improperly installed in-ground or placed on non-approved surfaces.

The Limited Warranty applies only to spas normally used for personal, family or household purposes.

Warranty Exclusions

Replaceable service items such as filters, pump seals, light bulbs, ozonator cartridge, pillows, jet inserts, spa covers, and filter covers are specifically excluded from the limited warranty.

Spa covers and stereo systems are delivered with their own manufacturer's warranty. For more info, please see their warranties in the owner's information package that was delivered with your spa for more information.

Customer Service

For customer service, contact the authorized selling dealer immediately. If you need additional information and assistance, please contact the C.A.I. Customer Relations Department at 1462 East Ninth Street, Pomona, CA 91766, or call 909-623-8781.

2006 WARRANTY

This limited warranty is effective for portable spas manufactured after December 8, 2005.



Spa Shell / Structural Warranty

Portable Cal Spas™ hot tubs: C.A.I. warrants against the loss of water through the spa shell due to defects in materials and / or workmanship for a period of five years from the original date of purchase.



Plumbing Warranty

Portable Cal Spas™ hot tubs: C.A.I. warrants all factory installed plumbing and "Eliminator Plus™" Wet Ends from loss of water due to defects in material and / or workmanship for a period of three years from the original date of purchase.



Interior Surface Warranty

Portable Cal Spas™ hot tubs: C.A.I. warrants against cracks, blisters, peeling, discoloration and delamination of Altair Plus, Quarite Plus, Standard Acrylic or Quarite interior surfaces for a period of three years from the original date of purchase.



Equipment Warranty

Portable Cal Spas™ hot tubs: C.A.I. warrants the spa's electrical and electronic components, specifically: the control system, pumps and air blowers against malfunction due to defects in materials and / or workmanship for a period of three years from the original date of purchase.



Cabinet Warranty

C.A.I. warrants Cal Select™ and Cal Stone panels against cracking and warping for a period of three years from the original date of purchase. C.A.I. warrants Cal Wood and Redwood spa cabinets to be free from defects in material and workmanship for a period of 90 days from the original date of purchase. Seasonal checking and surface cracks are not considered defects in material and workmanship, as they are normal characteristics of all wood. Surface stain is specifically excluded from this warranty.



LED Light Source

C.A.I. warrants the LED light source for a period of one year from the original date of purchase. LED replacement lights are specifically excluded from this warranty.

Extent of Warranty

This limited warranty is only valid on portable hot tubs delivered outside the continental United States and Canada. However, it does not apply to special offers and events and extends through the selling dealer to the original purchaser at the original site of installation. This warranty becomes valid at time of purchase and ends either by specified time-frame listed above, owner-transfer, relocation, or installation of any component other than by manufacturer. The Designer series spas are excluded from this warranty.

Manufacturer Warranty

All Cal Spas hot tubs are manufactured with the highest quality appliances and are warranted to be free from defect in material and workmanship at the time of delivery. The appliance warranty is extended through the manufacturer of the product including, but not limited to: televisions, stereos, DVD players, etc.

Warranty Performance

In the event of a malfunction or defect covered under the terms of this warranty, the factory authorized selling dealer is responsible for performing all necessary repairs. To obtain service, contact the selling dealer. In the event the consumer is unable to obtain satisfactory customer service from the selling dealer, written notification must be given to the C.A.I. Customer Relations Department within 10 days of the reported failure. There will be no charge for parts or labor on a covered item. However, the service agent may assess a reasonable travel or mileage charge per service call. If C.A.I. determines that repair of a covered item is not feasible, C.A.I. reserves the right to replace the defective merchandise with merchandise equal in value to the original purchase price. In the event of any warranty replacement, all removal, replacement, installation and shipping costs are the responsibility of the spa owner.

Warranty Exclusions & Limitations

This warranty is void if the spa has been subject to negligence, alteration, misuse, abuse, repairs by non-C.A.I. authorized personnel, incorrect electrical installation, installation of any component other than by the manufacturer, acts of God (including, but not limited to, acts of nature and surrounding environments), and any other cases beyond the control of C.A.I. Please refer to the owner's manuals for examples of exclusions and of common acts invalidating this warranty. This warranty excludes Designer Series Spas.

Disclaimers

This limited warranty is made with the express understanding that the spa is not an essential device or medical device as defined under State and Federal Law. C.A.I. shall not be liable for loss of use of the spa or other incidental or consequential costs, expense or damages, which may include but are not limited to removal of permanent deck or other custom fixtures or the necessity for crane removal. Any implied warranty shall have duration equal of the applicable warranty stated above. Under no circumstances shall C.A.I. or any of its representatives be held liable for injury to any person or damage to any property, however arising.

Legal Remedies

This limited warranty gives you specific legal rights. You may have other rights, which may vary from state to state.

Customer Service

For customer service, contact the authorized selling dealer immediately. If you need additional information or assistance, please contact the C.A.I. Customer Relations Department at 1462 E. Ninth St., Pomona CA 91766 or call (800) 225-7727.

**Please make a record of the following.
It will be valuable if service is required.**

Cal Spa Model:

Cal Spa Serial Number:

Date Purchased:

Date Installed:

Cal Spa Dealer's Phone Number:

Cal Spa Dealer's Address:

C.A.I. Customer Service Department
1462 East Ninth Street
Pomona, CA 91766

Toll Free: 1-800-CAL-SPAS
Fax: 1-909-629-3890

www.calspas.com