


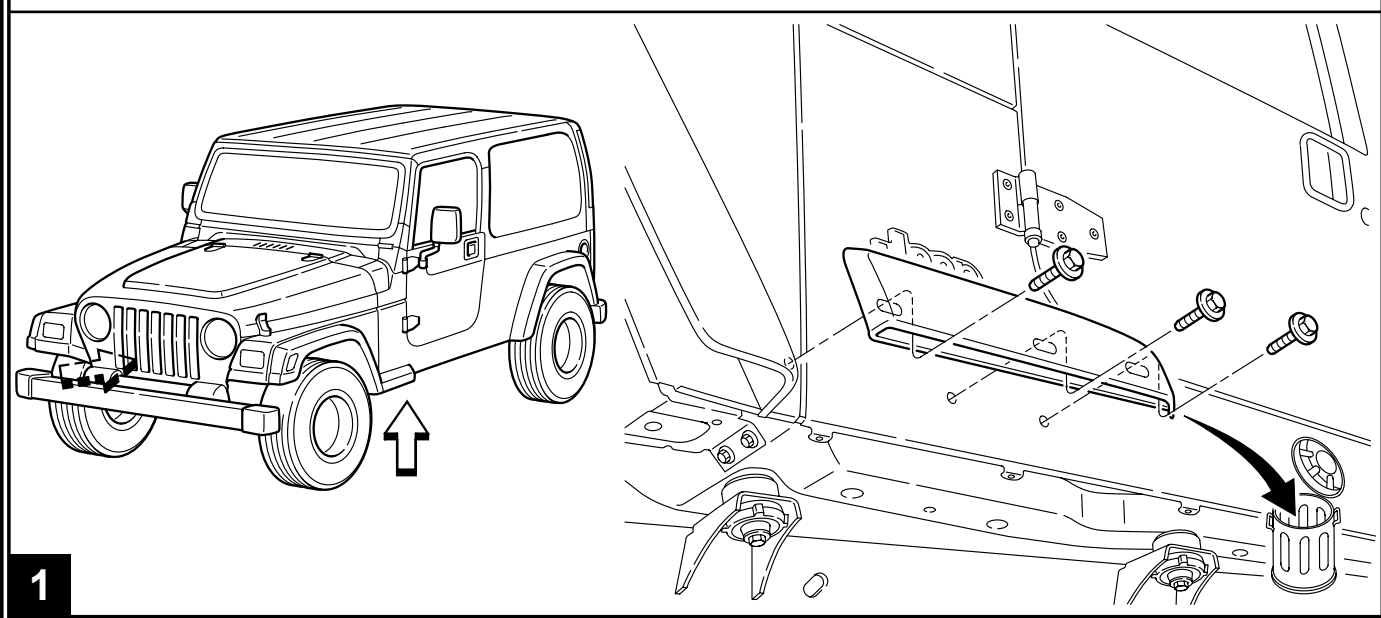


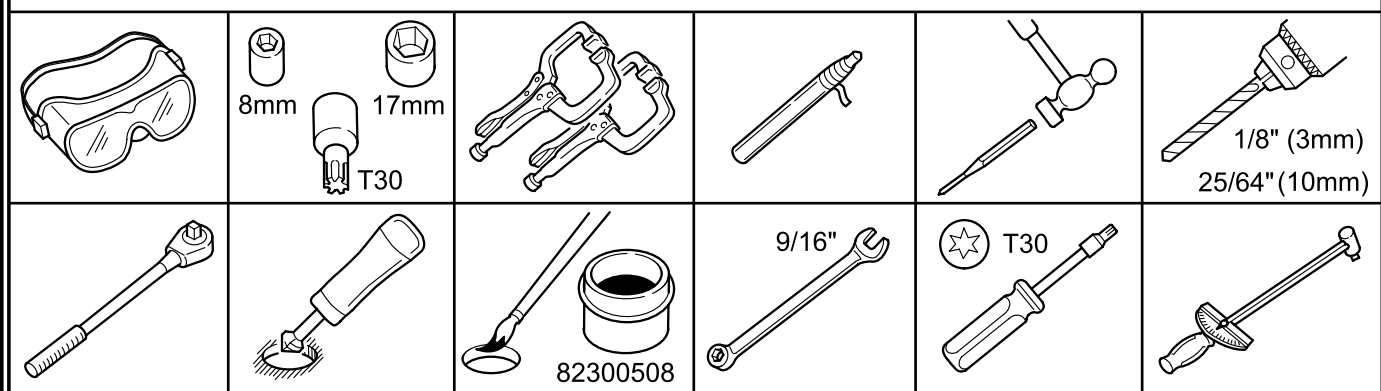


JEEP WRANGLER (Long Wheel Base)

Rock Rails with Rub Bars

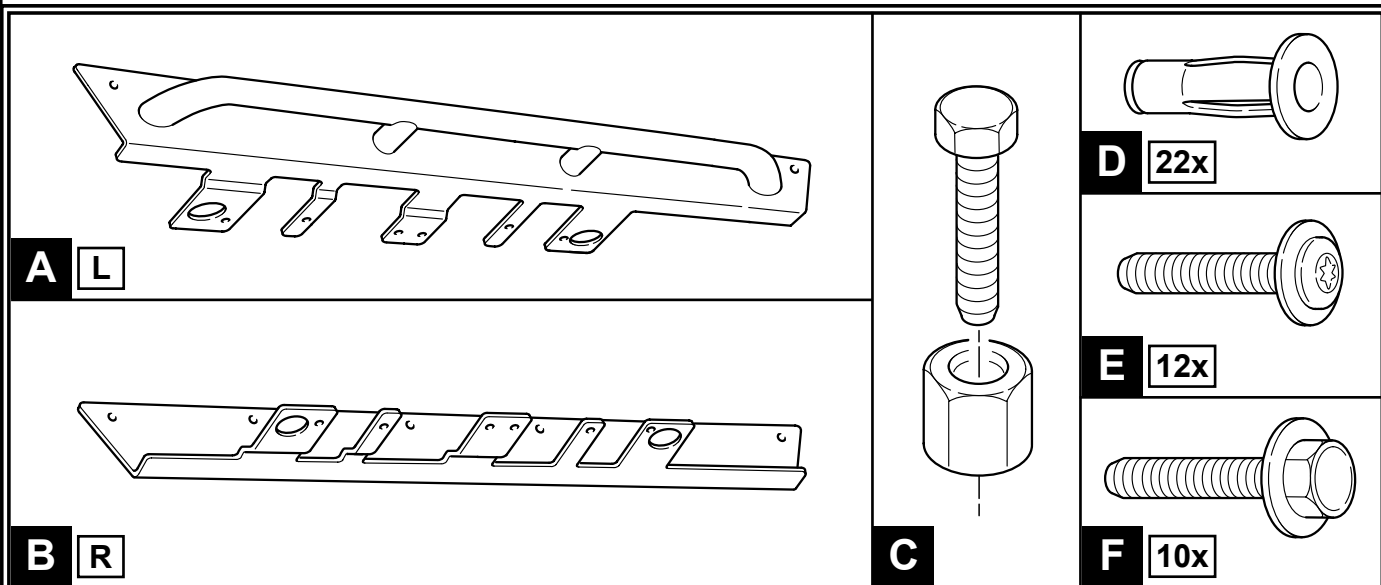


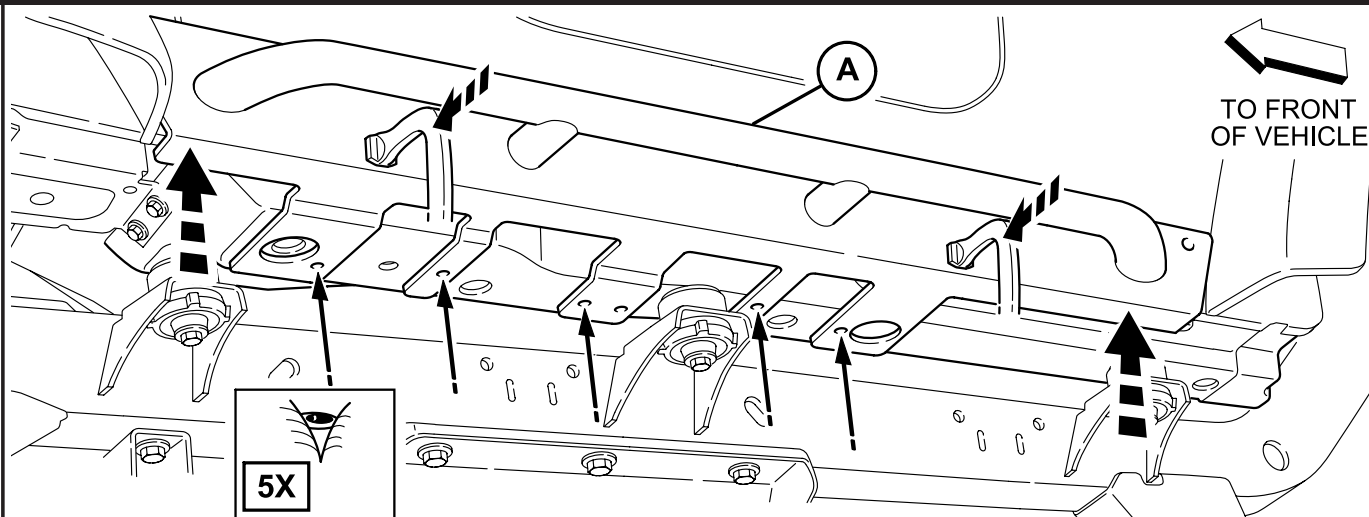



- 2** Align (5) holes in bottom of rock rail to (5) holes in the lower side sill. Apply (2) clamps to hold rock rail snug to the vehicle.

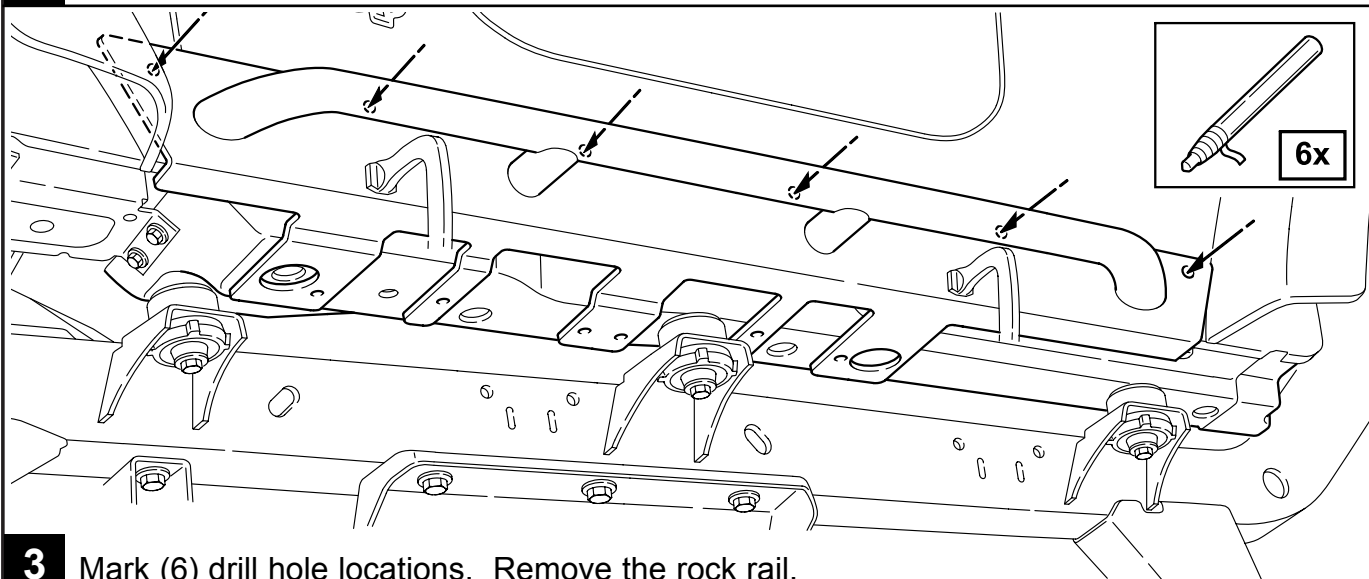


- 3** Mark (6) drill hole locations. Remove the rock rail.

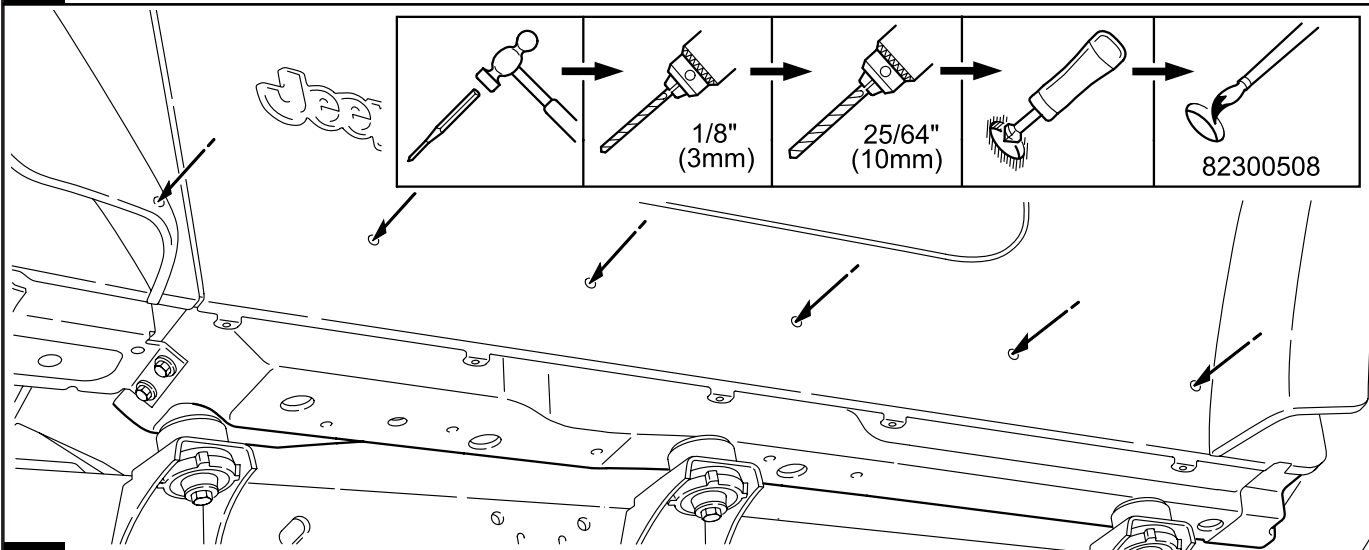

- 4** Drill, prep, and prime (6) holes each side of vehicle.

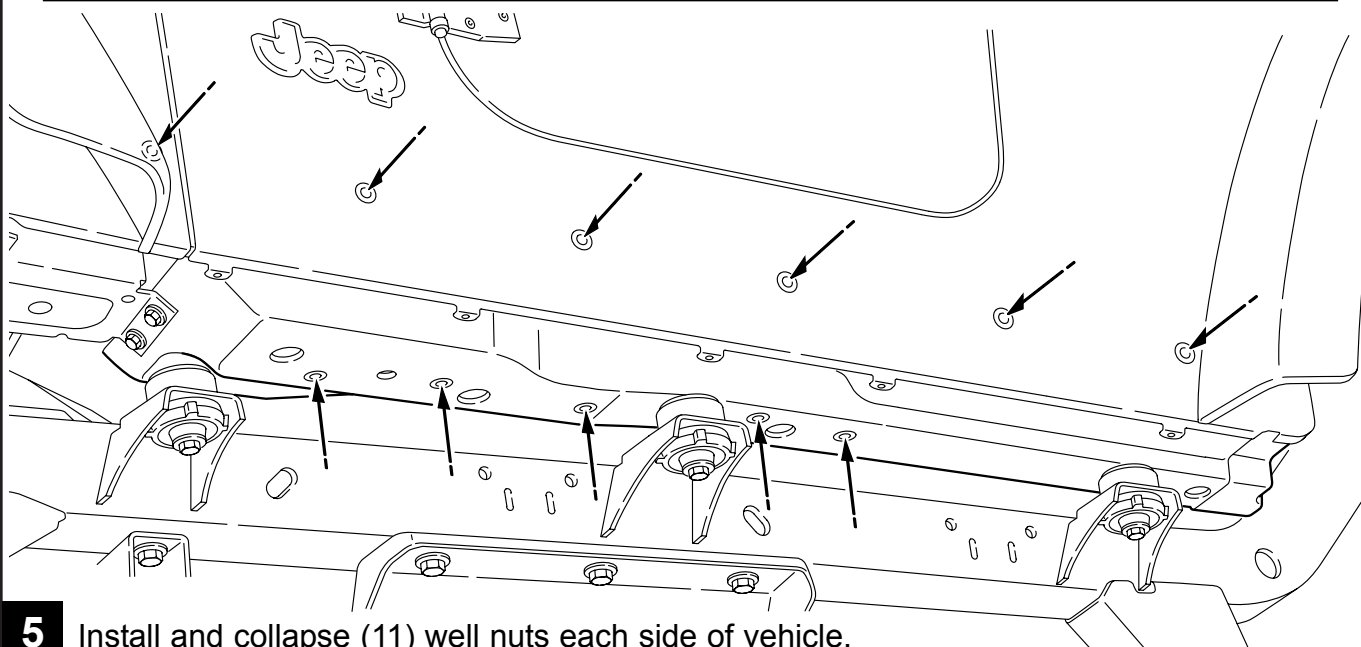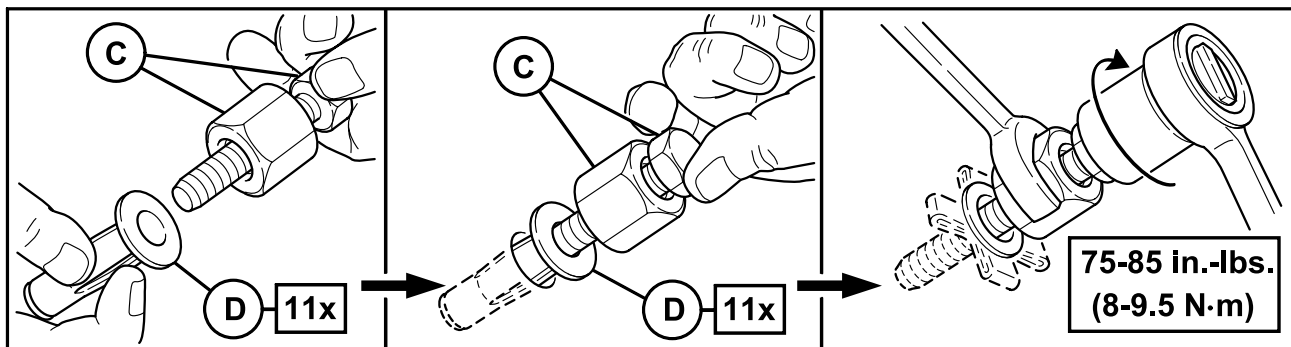

5 Install and collapse (11) well nuts each side of vehicle.

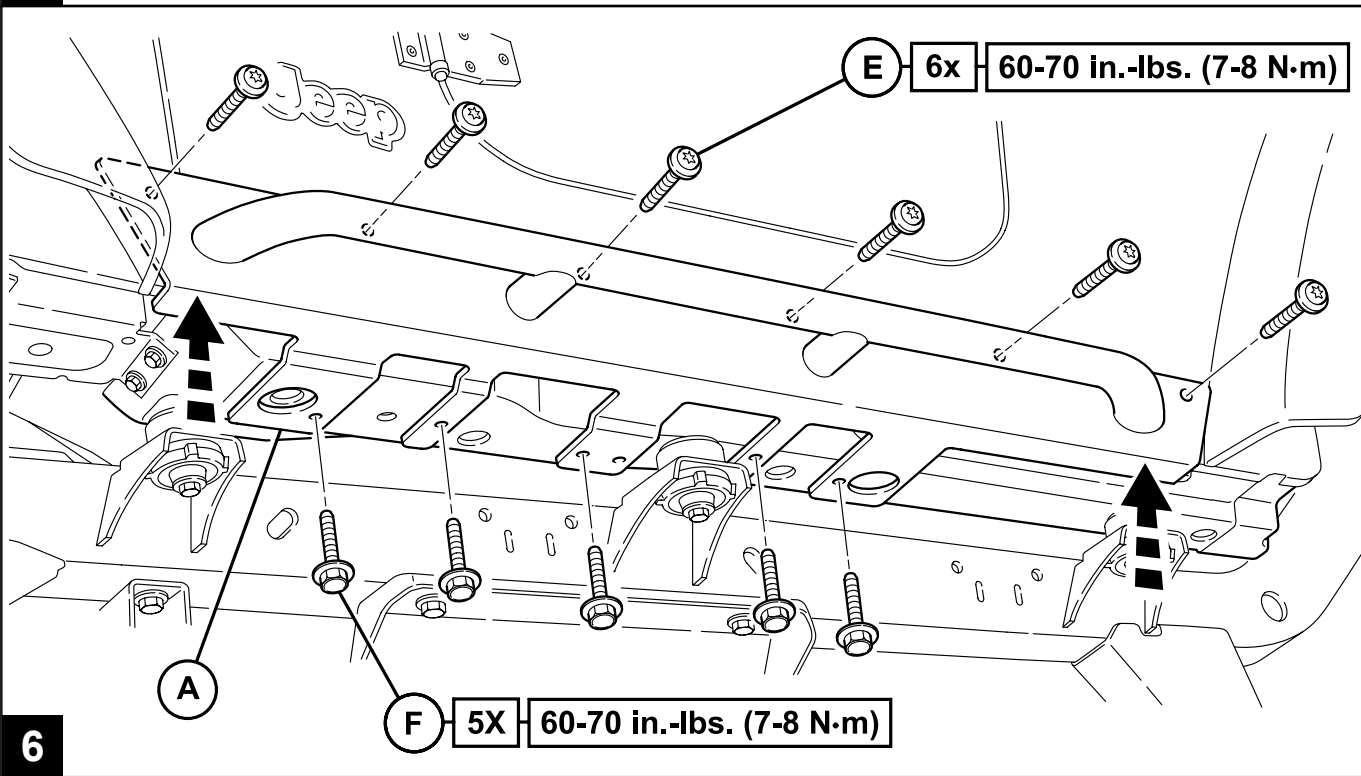

6