

Twin Airpot Coffee Brewer

Features

Twin Airpot Coffee Brewer

- Brews 15 gallons (56.8 litres) of perfect coffee per hour.
- Brews directly into 1.9 to 3 litre airpots.
- Twin brew head system.
- Hot water faucet.
- Convenient airpots keep coffee hot and fresh for hours.
- Airpots are easily transported to remote meeting rooms, breakfast bars, etc.
- Digital timer enables users to make brew cycle adjustments from the front panel.
- Pourover feature on both sides.
- SplashGard® funnel deflects hot liquids away from the hand.
- Gourmet funnel model available for use with heavier throw weights of coffee.



Model CWTF Twin APS with Airpots

(airpots sold separately)

Dimensions: 23.5" H x 16" W x 19.7" D
(59.7cm H x 40.6cm W x 50.0cm D)

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004



Easy Clear® EQHP-10L
Product No. : 39000.0001

Paper Filter Pack
Product No. : 20115.0000
Packed per case: 1,000

Dimensions: 4 1/4" Base x 2 3/4" Sidewall
10.8 cm Base x 6.98 cm Sidewall



2.2 liter Push-Button Airpot
Product No. : 28696.0002
Capacity: 74 oz. (2.19 L)



2.5 liter Push-Button Airpot
Product No. : 13041.0001
Capacity: 84 oz. (2.48 L)

2.5 liter Lever-Action Airpot
Product No. : 32125.0000
Capacity: 84 oz. (2.48 L)



3.0 liter Lever-Action Airpot
Product No. : 32130.0000
Capacity: 102 oz. (3.0 L)

Universal Airpot Racks
for push-button and lever-action airpots.
See page A3.9 for more information.



Gourmet C Funnel
Product No.: 34559.0000 (7.12 inch width)
34559.0001 (7.62 inch width)

- Universal design – handle may be moved to appropriate side
- Allows brewing with heavier throw weights of coffee.
- Paper Filter Pack
Product No. : 20100.0000
Packed per case: 1,000



Model

CWTF Twin APS

Agency Listing



Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cu. Ft.	Shipping Weight	Cord Attached
CWTF Twin APS	23400.0041	120/240	25.8	2 @ 3000	6250	15 gal./hr.	6.4	60 lbs.	No
CWTF Twin APS*	23400.0046	120/240	27	2 @ 3000	6250	15 gal./hr.	8.4	60 lbs.	No


Airpots not included *Model has gourmet funnel.

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: 3-wires plus ground service rated 120/240V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 3/8" male flare fitting.

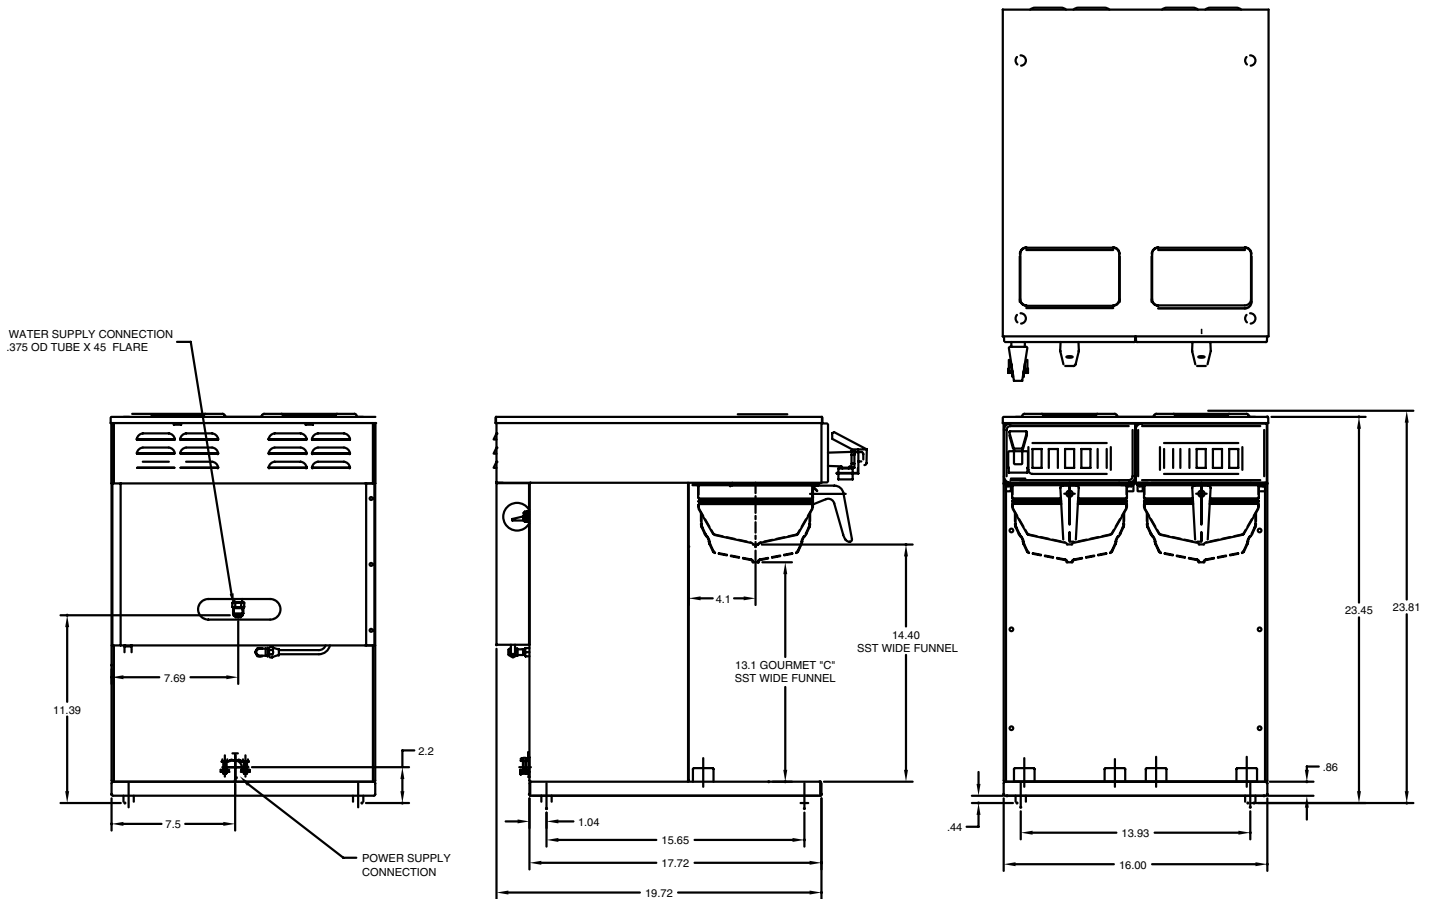

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn-O-Matic Corporation owns all copyrights relating to materials in this publication. Please contact BUNN to request permission to reproduce any portion of this publication.

Central Restaurant Products