



STEP 4 Add additional keypad codes. Repeat Step 3 for each keypad code required. Be sure to press the receiver's program button *each time* a new code is entered. If the LED doesn't come on when the receiver's program button is pressed, the receiver's memory is full. If required, use the erase function (see INFO 2) to remove transmitters from the receiver's memory.

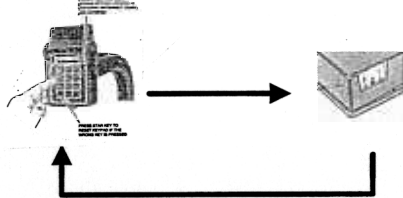


STEP 5 Review memory. Press and hold the receiver's program button (channel one or two) until the LED begins to flash (about 3 seconds) and then release the button. Count the number of flashes. The number of flashes equals the number of transmitters and keypad codes programmed into that channel of the receiver.


NOTE: Don't hold down the programming button longer than 5 seconds, the receiver's memory for that channel will be erased.

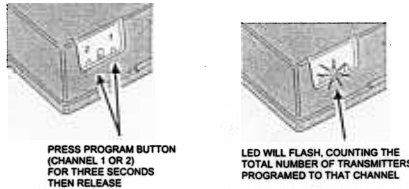


STEP 6 Test receiver. Be sure door area is clear. Try each keypad code. The operator should activate when the START/STOP button is pressed after entering a valid keypad code.

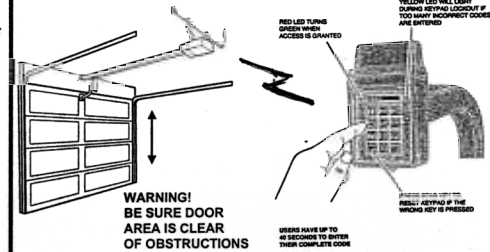


STEP 7 Mount keypad. Use the two screws and screw anchors provided to mount the keypad to the wall. Be sure the keypad is at least five feet above the ground. After mounting the keypad, cover the screw heads using the two plugs supplied.

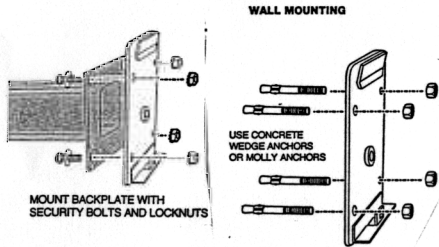


INFO 1A Opening battery compartment. The MDTK battery should last up to 5 years with normal use. To remove the battery door to replace the battery, remove the battery door retaining screws and slide the battery door off.

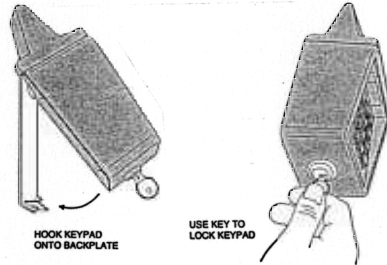

INFO 1B Replacing battery. Remove the low battery and replace it with a fresh 9-volt alkaline or lithium battery. Replace the battery door and retaining screws.



INFO 2 Erasing receiver memory. Transmitters may be erased from the receiver's memory by pressing and holding the receiver's program button (channel one or two) for 5 seconds or more. After the LED blinks (count of transmitters and keypad codes programmed) it will blink one more time for channel one and twice for channel 2 as the receiver's memory for that channel is erased. All transmitters for each receiver channel are erased at the same time.

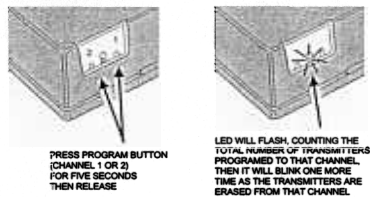

INFO 3 Operation keystrokes. See the illustration for examples of daytime and nighttime operation.

DAYTIME OPERATION

PRESS: 1 → 2 → 3 → START/STOP

USER'S SECRET CODE

NIGHTTIME OPERATION

PRESS: START/STOP → 1 → 2 → 3 → START/STOP

LIGHTS KEYPAD USER'S SECRET CODE

PRESS: START/STOP → START/STOP → LIGHTS KEYPAD

LIMITED WARRANTY

This product is warranted to the consumer against defects in material and workmanship for one year from the date of purchase. This warranty applies to first retail buyers of new devices. Warrantor will repair, or at its option, replace, any device it finds that requires service under this warranty, and will return the repaired or replaced device to the consumer at the warrantor's cost. For warranty service and shipping instructions contact warrantor at the address shown below. Devices must be sent to warrantor for service at owner's expense. The remedies provided by this warranty are exclusive. Implied warranties under state law are to the one year period of this written warranty. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. In order to be protected by this warranty, save your proof of purchase and send copy with equipment should repair be required. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

All products returned for warranty service require a Return Product Authorization Number (RPA#). Contact Linear Technical Services at 1-800-421-1587 for an RPA# and other important details.

IMPORTANT !!!

- Linear radio controls provide a reliable communications link and fill an important need in portable wireless signaling. However, there are some limitations which must be observed.
- For U.S. installations only: The radios are required to comply with FCC Rules and Regulations as Part 15 devices. As such, they have limited transmitter power and therefore limited range.
- A receiver cannot respond to more than one transmitted signal at a time and may be blocked by radio signals that occur on or near their operating frequencies, regardless of code settings.
- Changes or modifications to the device may void FCC compliance.
- Frequently used radio links should be tested regularly to protect against undetected interference or fault.
- A general knowledge of radio and its vagaries should be gained prior to acting as a wholesale distributor or dealer, and these facts should be communicated to the ultimate users.