

DATA SHEET

B426-AB1510

*Wireless Stereo Speaker Module
For Intensive Audio Applications*

Specification

VERSION 0.40 15-Sep-2015

Revision History

Version	Change Summary	Date	Author
0.10	Created	Dec, 25 th , 13	LY Kuo
0.20	Update Bluetooth Specification Version	Jun, 15 th , 14	LY Kuo
0.30	Remove PCM function support	Oct, 15 th , 14	LY Kuo
0.40	Modify maximum RF transmit Power descriptions	Sep, 15 th , 15	LY Kuo

1 System Overview

1.1 General Description

B426-AB1510 is a stereo module, which are highly integrated, cost effective, low power consumptions with Airoha AB1510 chip for intensive audio applications. It complies with Bluetooth system version 4.1 with EDR function. The built-in noise reduction and echo cancellation functions enhance the voice quality. Advanced multipoint supports HFP connection to two handsets for voice, or two A2DP sources for music play back. The voice prompt function can be customized by customers for different voice commands.

1.2 Features

- Bluetooth 4.1+EDR compliant
- A2DP 1.3 and AVRCP 1.5 profile enable
- HFP profile version 1.6 compliant
- HSP profile version 1.2 compliant
- AVRCP profile version 1.5 compliant
- SBC decode
- Class 1 or 2 type output power
- Support for noise reduction and echo cancellation
- Multi-band configurable EQ
- Multipoint for HFP and A2DP
- Support for voice prompt
- Support SPI flash application
- Support NFC application with wake-up and pairing function
- Audio I/F:I2S
- Integrated Li-ion battery charger supports 400mA fast charging

2 Module Package Information

2.1 Module Pin Definition

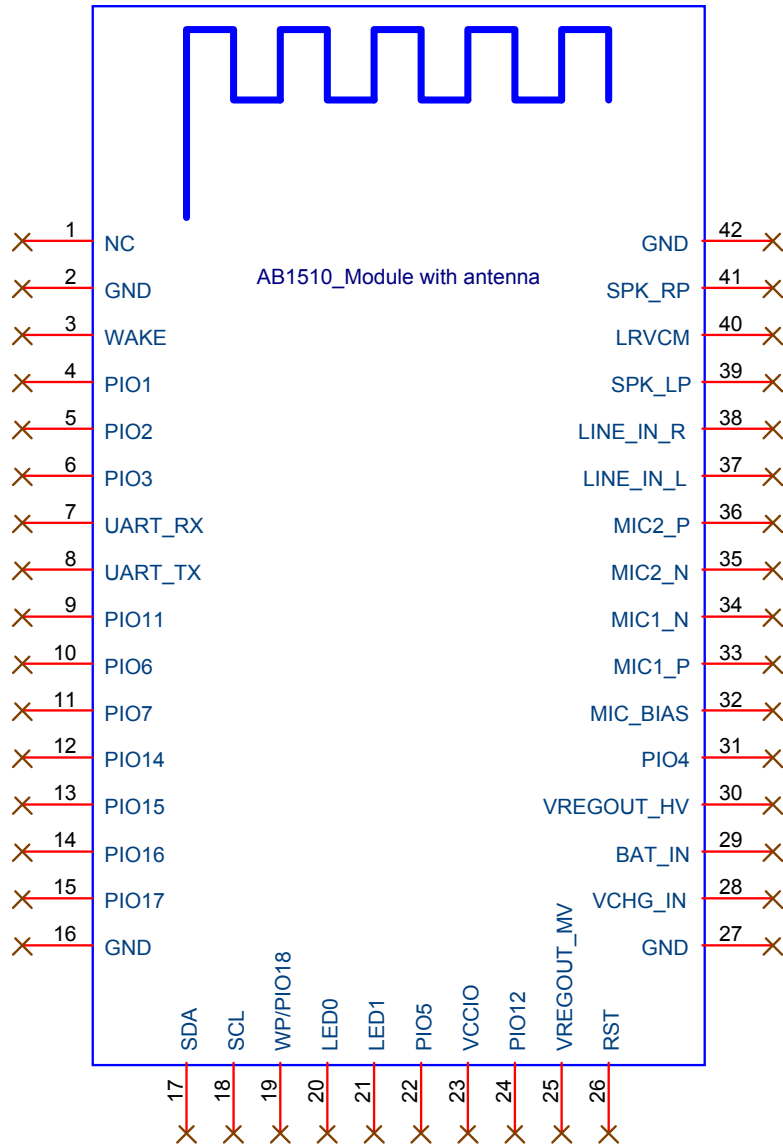


Figure 2-1 Pin Definition

2.2 Pin Description

PIN	SIGNAL	TYPE	DESCRIPTION	ALTERNATIVE
1	NC		NC	
2	GND			
3	WAKE	Input, Digital	Input Pin with 125K pull up	
4	PIO1	Input, Digital	Input Pin with 750K pull up	
5	PIO2	Input, Digital	Input Pin with 750K pull up	
6	PIO3	Input, Digital	Input Pin with 750K pull up	
7	UART_RX	Input, Digital	UART RX	
8	UART_TX	Output, Digital	UART TX	
9	PIO11	Input/Output, Digital	Programmable IO	
10	PIO6	Input/Output, Digital	Programmable IO	
11	PIO7	Input/Output, Digital	Programmable IO	
12	PIO14	Input/Output, Digital	Programmable IO	SPI/I2S
13	PIO15	Input/Output, Digital	Programmable IO	SPI/I2S
14	PIO16	Input/Output, Digital	Programmable IO	SPI/I2S
15	PIO17	Input/Output, Digital	Programmable IO	SPI/I2S
16	GND			
17	SDA	Input/Output, Digital	I2C data line	
18	SCL	Input/Output, Digital	I2C clock line	
19	WP/PIO18	Output, Digital	Write Protect Control for EEPROM	WP
20	LED0	Open Drain	LED 0 for Red Light	
21	LED1	Open Drain	LED 1 for Blue Light	
22	PIO5	Input/Output, Digital AIO, Analog	Programmable IO	UART_RTS
23	VCCIO	Supply, 1.8V~3.3V	VCC for IO	
24	PIO12	Input/Output, Digital	Programmable IO	LED3
25	VREGOUT_MV	Analog	LDO output	
26	RST	Input, Digital	Global reset	
27	GND			
28	VCHG_IN	Supply, 5V	VCC for Charger	

B426-AB1510
Stereo Speaker Module For Intensive Audio Applications

29	BAT_IN	Supply	Battery input P, as Switching/Linear regulator input	
30	VREGOUT_HV	Analog	LDO output	
31	PIO4	Input/Output, Digital AIO, Analog	Programmable IO	UART_CTS
32	MIC_BIAS	Analog	Microphone bias	
33	MIC1_P	Analog	Microphone 1 P-path	
34	MIC1_N	Analog	Microphone 1 N-path	
35	MIC2_N	Analog	Microphone 2 N-path	
36	MIC2_P	Analog	Microphone 2 P-path	
37	LINE_IN_L	Analog	Line in L-path	
38	LINE_IN_R	Analog	Line in R-path	
39	SPK_LP	Analog	Speaker output LP	
40	LRVCM	Analog	Speaker output LRVCM	
41	SPK_RP	Analog	Speaker output RP	
42	GND			

Table 2-1 Pin Description

2.3 Module package and PCB footprint dimensions

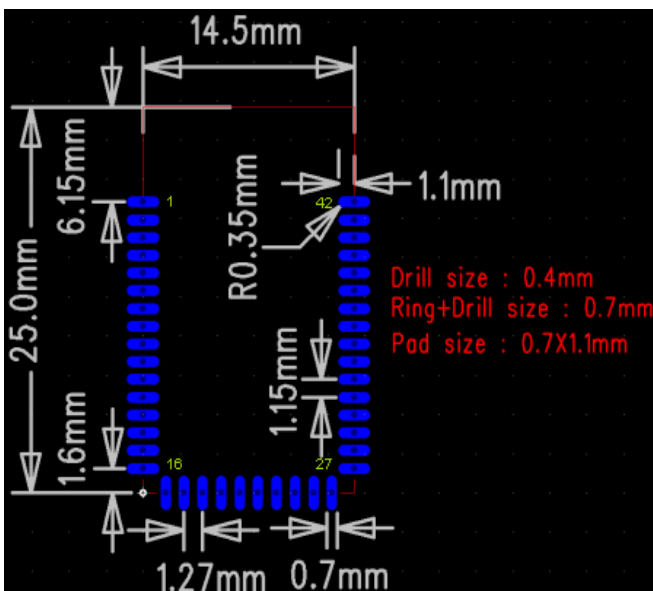


Figure 2-2 Module package dimensions





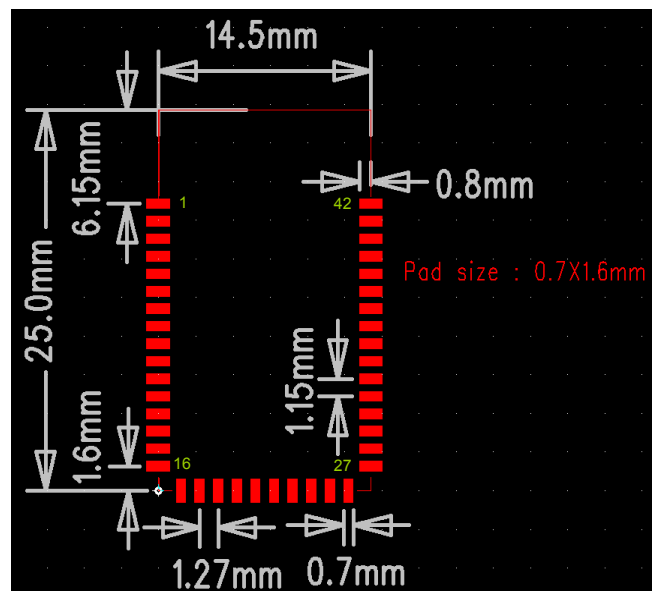








Figure 2-3 Module PCB footprint dimensions

Dimension: 25mm(L)x14.5mm(W)x0.8mm(H)

3 General Application Schematic

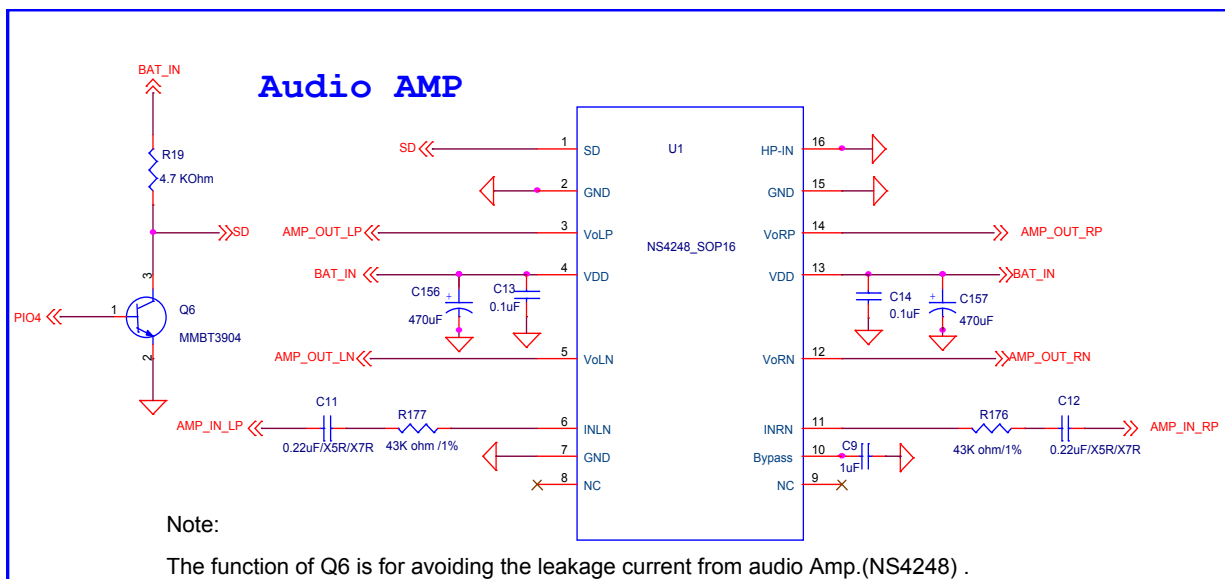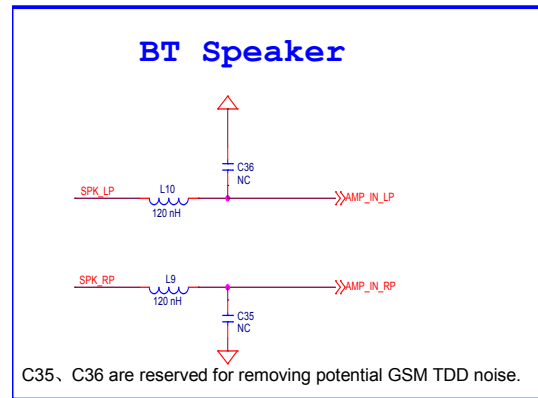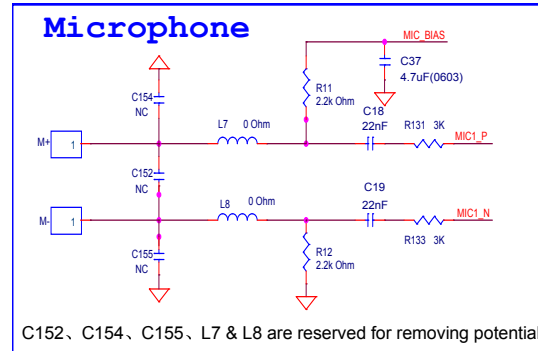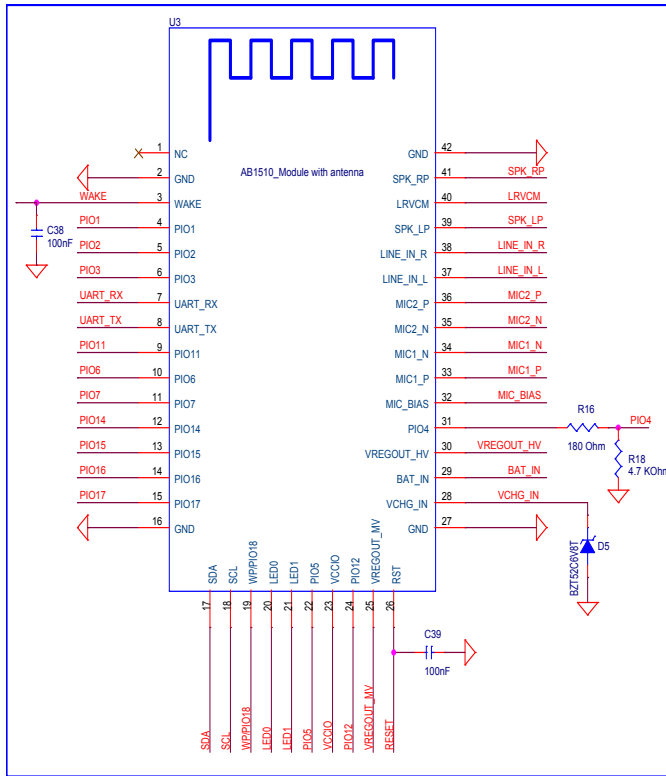


B426-AB1510
Stereo Speaker Module For Intensive Audio Applications

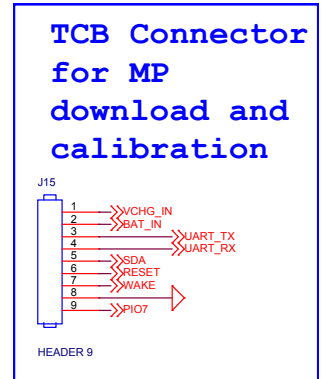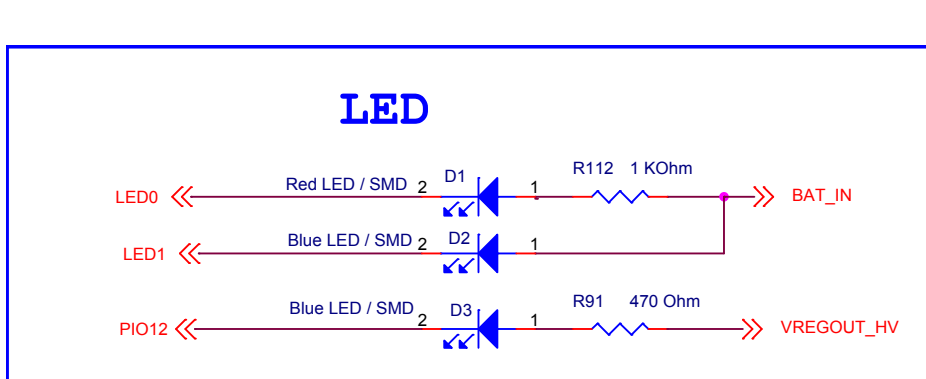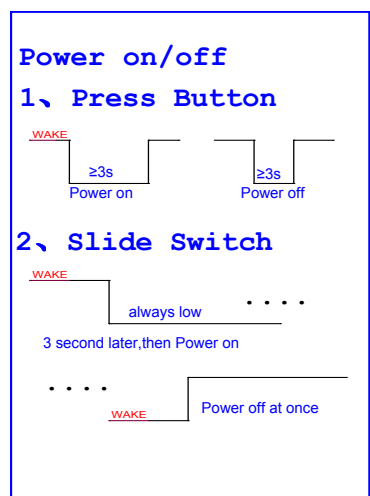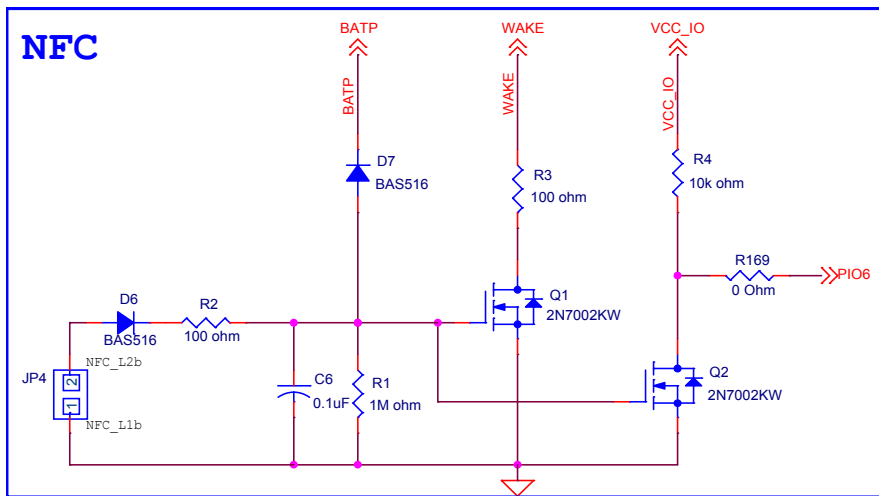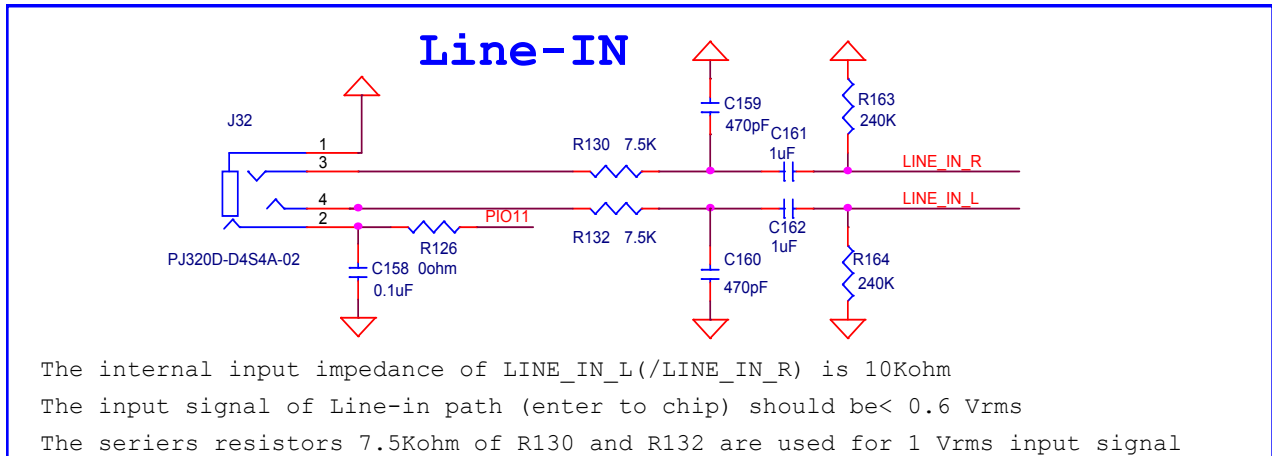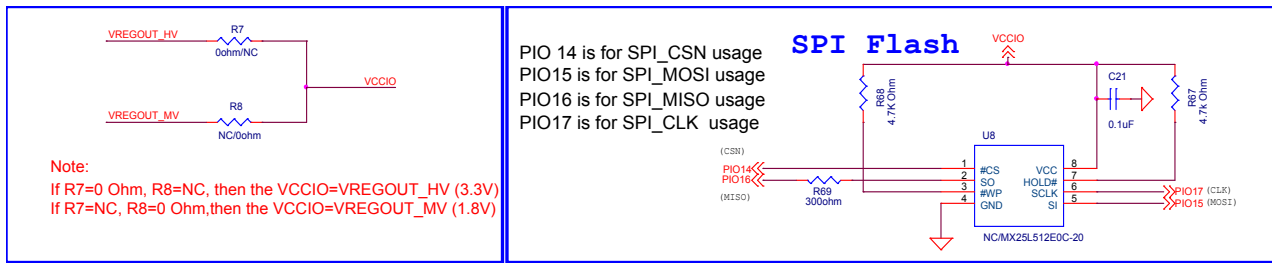


Conditional Hardware Reset

Under the condition of pressing PIO1 to Low, then plug battery charger

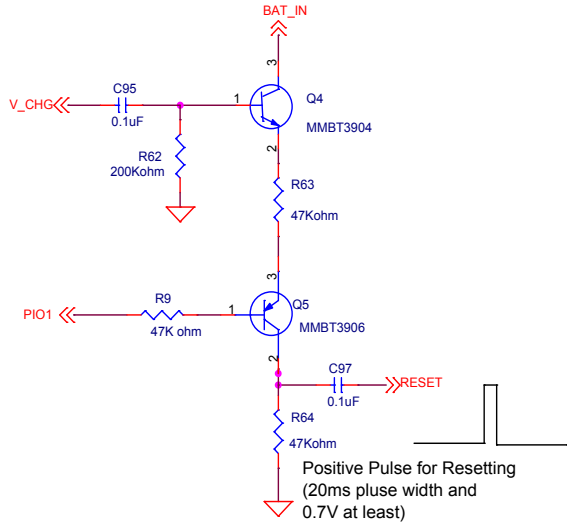

Charger

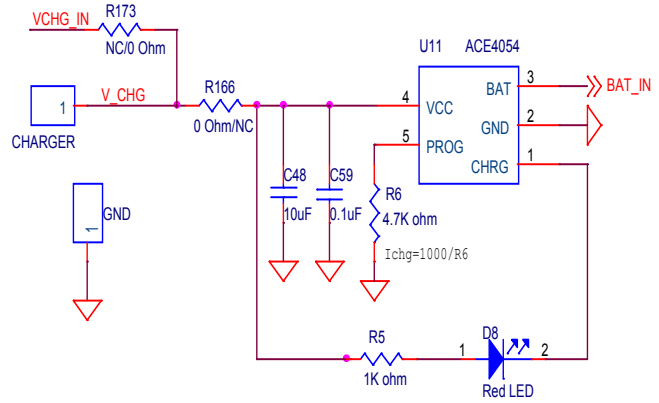

R173=0 Ohm, R166=NC -->Internal charger
 R173=NC,R166=0 Ohm -->External charger

4 Electrical Characteristics

4.1 Recommended Operating Conditions

Item	Min.	Typ.	Max.	Unit
I/O supply voltage (VCCIO)	1.7		3.6	V
Battery supply voltage (BAT_P)	2.7		4.2	V
Internal charger supply voltage (V_CHG)	4.5	5	6.5	V

Table 4-1 Recommended Operating Conditions

4.2 Power

4.2.1 High-Voltage LDO (VREGOUT_HV)

Item	Condition	Min.	Typ.	Max.	Unit
Input Voltage (BAT_P)		2.7		4.2	V
Output Voltage	Input voltage > 3.3V		3		V
Rated Output Current (Iout)	Input voltage = 4.2V			300	mA

Table 4-2 High-Voltage LDO

4.2.2 Medium Voltage LDO (VREGOUT_MV)

Item	Condition	Min.	Typ.	Max.	Unit
Input Voltage (BAT_P)		2.7		4.2	V
Output Voltage			1.8		V
Rated Output Current (Iout)	Input voltage = 4.2V			100	mA

Table 4-3 Medium-Voltage LDO

4.3 Battery Charger

B426-AB1510
Stereo Speaker Module For Intensive Audio Applications

Item	Min.	Typ.	Max.	Unit
Input Voltage	4.5	5	6.5	V
Charge Current (CC Mode)	25		400	mA
Trickle Charge Current		4		mA
Trickle Charge Threshold Voltage		2.92		V
Regulated Output (Float) Voltage		4.2		V

Table 4-4 Battery Charger

4.4 Radio Characteristics

4.4.1 Transmitter

Basic Data Rate

Core Supply Voltage = 1.8V @ 25°C

Item	Min.	Typ.	Max.	Unit
Maximum RF transmit Power		4	7	dBm
RF power control range		25		dB
20dB bandwidth for modulated carrier		900		KHz
Adjacent channel transmit power	+2MHz		-20	dBm
	-2MHz		-20	dBm
	+3MHz		-40	dBm
	-3MHz		-40	dBm
Frequency deviation	Δf_{1avg} Maximum Modulation	165		KHz
	Δf_{2max} Minimum Modulation	140		KHz
	$\Delta f_{1avg}/\Delta f_{2avg}$	0.9		
Initial carrier frequency tolerance	-75		75	KHz
Freq. Drift	DH1 packet	-25	25	KHz
	DH3 packet	-40	40	KHz
	DH5 packet	-40	40	KHz
Freq. Drift Rate	-20		20	KHz/50us
Harmonic Content		-45		dBm

Table 4-5 Transmitter Basic Data Rate

B426-AB1510
Stereo Speaker Module For Intensive Audio Applications

Enhanced Data Rate

Core Supply Voltage = 1.8V @ 25°C

Item	Min.	Typ.	Max.	Unit
Relative transmit power		-1.5		dB
$\pi/4$ DQPSK max carrier frequency stability $ \omega_o $	-10		10	KHz
$\pi/4$ DQPSK max carrier frequency stability $ \omega_i $	-75		75	KHz
$\pi/4$ DQPSK max carrier frequency stability $ \omega_o+\omega_i $	-75		75	KHz
8DPSK max carrier frequency stability $ \omega_o $	-10		10	KHz
8DPSK max carrier frequency stability $ \omega_i $	-75		75	KHz
8DPSK max carrier frequency stability $ \omega_o+\omega_i $	-75		75	KHz
$\pi/4$ DQPSK Modulation Accuracy	RMS DEVM		20	%
	99% DEVM	99		%
	Peak DEVM		35	%
8DPSK Modulation Accuracy	RMS DEVM		13	%
	99% DEVM	99		%
	Peak DEVM		25	%
In-band spurious emissions	$F > F_0 + 3\text{MHz}$		-40	dBm
	$F < F_0 - 3\text{MHz}$		-40	dBm
	$F = F_0 + 3\text{MHz}$		-40	dBm
	$F = F_0 - 3\text{MHz}$		-40	dBm
	$F = F_0 + 2\text{MHz}$		-20	dBm
	$F = F_0 - 2\text{MHz}$		-20	dBm
	$F = F_0 + 1\text{MHz}$		-26	dB
	$F = F_0 - 1\text{MHz}$		-26	dB
EDR Differential Phase Encoding	99			%

Table 4-6 Transmitter Enhanced Data Rate

4.4.2 Receiver

Basic Data Rate

Core Supply Voltage = 1.35V @ 25°C

Item	Min.	Typ.	Max.	Unit
------	------	------	------	------

B426-AB1510
Stereo Speaker Module For Intensive Audio Applications

Sensitivity at 0.1% BER	2.402GHz		-92		dBm
	2.441GHz		-92		dBm
	2.480GHz		-92		dBm
Maximum input power at 0.1% BER			-20		dBm
Co-Channel interference				11	dB
Adjacent channel selectivity C/I	F = F ₀ +1MHz			0	dB
	F = F ₀ -1MHz			0	dB
	F = F ₀ +2MHz			-30	dB
	F = F ₀ -2MHz			-20	dB
	F = F ₀ +3MHz			-40	dB
	F = F _{image}			-9	dB
Maximum level of intermodulation interference			-39		dBm
Blocking @Pin=-67dBm with 0.1%BER	30-2000 MHz		-10		dBm
	2000-2400 MHz		-27		dBm
	2500-3000 MHz		-27		dBm
	3000-12750 MHz		-10		dBm

Table 4-7 Receiver Basic Data Rate

Enhanced Data Rate

Core Supply Voltage = 1.8V @ 25°C

Item		Min.	Typ.	Max.	Unit
Sensitivity at 0.01% EDR	π/4 DQPSK		-91		dBm
	8DPSK		-83		dBm
Maximum input power at 0.1% BER	π/4 DQPSK	-20			dBm
	8DPSK	-20			dBm
Co-Channel interference	π/4 DQPSK			13	dB
	8DPSK			21	dB
Adjacent channel selectivity C/I	F = F ₀ +1MHz	π/4 DQPSK		0	dB
		8DPSK		5	dB
	F = F ₀ -1MHz	π/4 DQPSK		0	dB
		8DPSK		5	dB
	F = F ₀ +2MHz	π/4 DQPSK		-30	dB
		8DPSK		-25	dB

B426-AB1510
Stereo Speaker Module For Intensive Audio Applications

	F = F ₀ -2MHz	π/4 DQPSK			-20	dB
		8DPSK			-13	dB
	F = F ₀ +3MHz	π/4 DQPSK			-40	dB
		8DPSK			-33	dB
	F = F _{image}	π/4 DQPSK			-7	dB
		8DPSK			0	dB

Table 4-8 Receiver Enhanced Data Rate

4.5 Audio ADC

Item	Condition	Min.	Typ.	Max.	Unit
SNR	Microphone amplifier (A-Weighted 1kHz@ full scale, microphone input BW=20~20kHz)		84		dB
	Codec bypass mode (A-Weighted 1kHz@ full scale, line-input BW=20~20kHz, VCCSPK=3V EAR_AMP=0dB)		95		dB
THD+N	Microphone amplifier gain=42dB (A-Weighted 1kHz@-10dBFS, microphone input BW=20~4kHz)			-55	dB
	Microphone amplifier gain=21dB (A-Weighted 1kHz@-10dBFS, microphone input BW=20~20kHz)		-66.7		DB
	Microphone amplifier gain=0dB (A-Weighted 1kHz@ -10dBFS, line-input BW=20~20kHz)		0.05		%
Digital Gain		-21		24	dB
Analog Gain		0		42	dB
Input Full-Scale at MAX gain			2.24		MVrms
Input Full-Scale at Min gain			282		MVrms
Microphone in level	(Microphone input, full scale)			0.8	Vpp
Input in level	(Line-input, full scale)			1.7	Vpp
Mic_bias_voltage			2.7		V

Table 4-9 Audio ADC

4.6 Stereo DAC

Item	Condition	Min.	Typ.	Max.	Unit
SNR			94		dB
THD+N	16 ohm load Analog gain=0dB			0.1	%
Output swing	SPK_LP or SPK_RP Output Full-Scale at load=16Ohm SPK_RP -- (16Ohm) LRVCM SPK_LP -- (16Ohm) speaker gain=3dB		2.1		Vpp
Digital Gain		-21		24	dB
Analog Gain		-12		9	dB
Allow load	VCCSPK=3V	8	16		Ohm
Cross talk	Load =16Ohm		-50		dB
Noise floor power	Analog gain=0dB		-100		dBV

Table 4-10 Stereo DAC

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution:

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter module must not be co-located or operating in conjunction with any other antenna or transmitter.

IMPORTANT NOTE:

In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

End Product Labeling

The final end product must be labeled in a visible area with the following:

"Contains FCC ID: **ATMCR375**".

Manual Information to the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

[Part 15B \(as the un-intentional emission requirement\) shall be further evaluated while module is being installed to the end product or end host.](#)

Canada Statement

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Caution Exposure:

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS102 and users can obtain Canadian information on RF exposure and compliance.

Le dispositif répond à l'exemption des limites d'évaluation de routine dans la section 2.5 de RSS102 et les utilisateurs peuvent obtenir des renseignements canadiens sur l'exposition aux RF et le respect.

The final end product must be labelled in a visible area with the following:

The Industry Canada certification label of a module shall be clearly visible at all times when installed in the host device, otherwise the host device must be labelled to display the Industry Canada certification number of the module, preceded by the words "Contains transmitter module", or the word "Contains", or similar wording expressing the same meaning, as follows:

Contains transmitter module IC: **6547A-CR375**

The end user manual shall include all required regulatory information/warning as show in this manual.