

TECHNICAL SPECIFICATIONS ASV7652

DESCRIPTION

A three-way triamp full range system in a horizontal configuration trapezoidal enclosure. Includes two 15-in woofers, two horn-loaded 10-in midrange cones and a 2-in exit compression driver on a 60 x 40 constant directivity horn.

APPLICATIONS

The ASV7652 is engineered as a true three-way device for very large format arrays. Three-way design dramatically improves the quality of vocal reproduction while the cone-driven large format midbass horn extends pattern control into the lower octaves. An effective tool in large-scale permanent installations. Comprehensive mounting/suspension points. Also available in a biamp version (passive mid/high) as the ASV7652x. Six year warranty.

Applications include:

Large Church Large Arenas Stadiums

DESCRIPTIVE DATA

	Part Number
	Product Group
LF	Subsystem & Loading
MF	Subsystem & Loading
HF	Subsystem & Loading

System Configuration Powering Configuration(s) Recommended High-Pass Frequency (24 dB/Octave) Cabinet Type (shape) Enclosure Materials Finish Connectors Suspension Hardware


М
2x 15-in Cone, Tuned Dipolar Array
2x 10-in Horn loaded cone
2-in Exit compression driver on constant directivity horn
Three-way, full range
Triamplified (MX series processor)
50Hz Trapezoid Baltic birch plywood Black catalyzed polyurethane
6-Terminal barrier strip
(16) 3/8"-16 Threaded mounting/ suspension points (4 each on top, bottom and sides)
Vinyl coated perforated steel

999707 (ASV7652x - 999316)

Nominal Data

Frequency Response				
±3 dB	60 Hz to 19 kHz			
-10 dB	40 Hz			
Axial Sensitivity (dB SPL, 1 Watt @ 1m)				
LF	110			
MF	112			
HF	112			

Grill

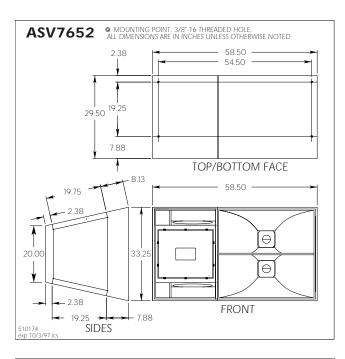

Impedance (Ohms)					
LF	4				
MF	5				
HF	10				
Power Handling (Watts)					
LF AES Standard	1000				
MF AES Standard	700				
HF AES Standard	200				
Calculated Maximum Output (dB SPL @ 1m)					
LF Peak	146.0				
MF Peak	147.0				
HF Peak	141.0				
LF Long Term	140.0				
MF Long Term	141.0				
HF Long Term	135.0				
Nominal Coverage Angle/-6 dB points (degrees)					
Horizontal	60				
Vertical	45				
Dimensions & Weights	inches	millimeters			
Height (Front)	33.25	845			
Height (Rear)	20.00	508			
Width	58.50	1486			
Depth	29.50	749			
Trapezoid Angle	15 degre	es per side			
Weights	pounds	kilograms			
Net Weight	285	129.3			
Shipping Weight	300	136.1			
-	-				

