



TX SERIES




TX SERIES


Alto Professional, the market-leading innovator in portable PA with its best-selling Truesonic series loudspeakers, proudly introduces an exciting new line of 2-way active loudspeakers—the TX series. Engineered from the ground-up to deliver simple and powerful live sound for musicians and performers, the TX series leverages core technologies from the Truesonic line. The bi-amplified designs feature high-efficiency drivers, resonance-reducing durable trapezoidal multipurpose enclosures, and rugged steel grilles to provide accurate, transparent sound in a lightweight system. The TX series empowers musicians, acoustic bands, singer-songwriters, and DJs to hit the road with true professional sound quality at an affordable price. TX series models include the TX8, TX10, TX12 and TX15. All are designed and tuned in the USA to Alto Professional's exacting quality standards.

altoproaudio.com

All information subject to change.

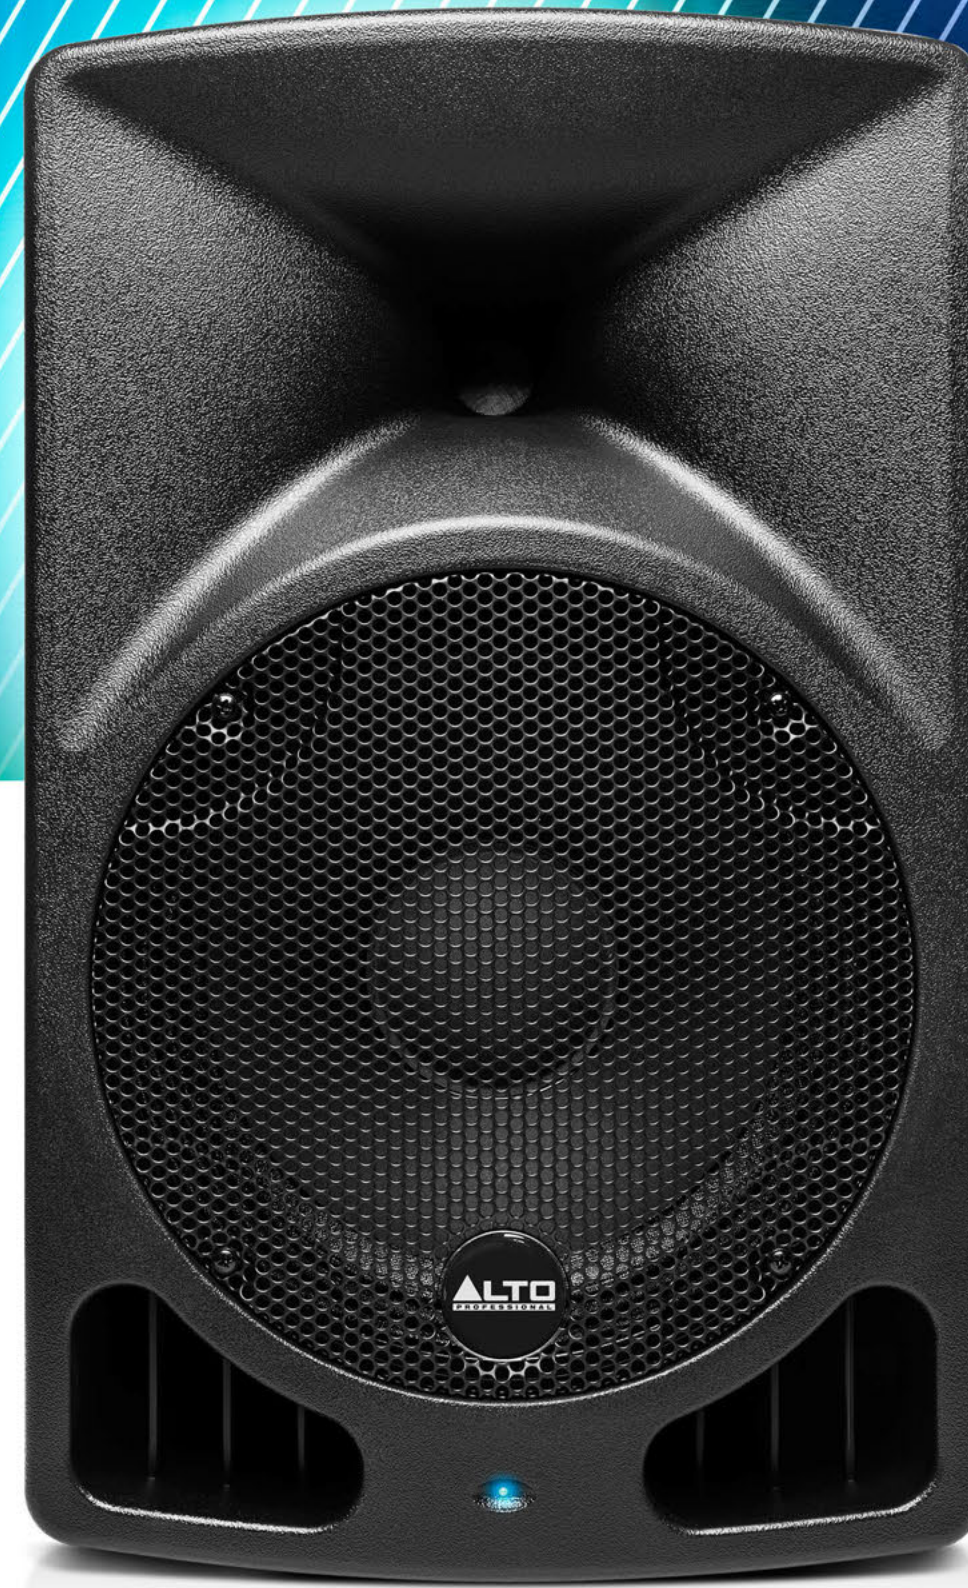


SPECIFICATIONS

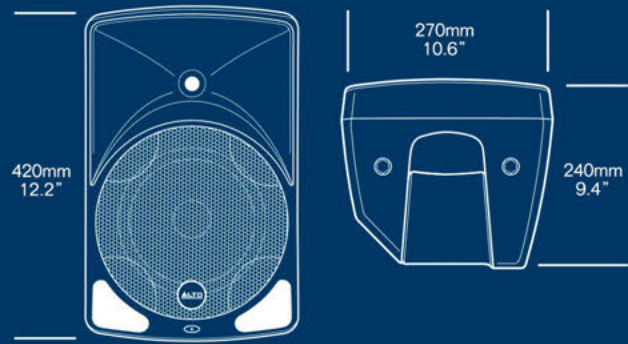


TX8

System Type	2-Way Active Ported Speaker
Woofers	8" Woofer, 1.5" voice coil
HF Driver	1" titanium diaphragm, 1" voice coil
Amplifier	Class D SMPS, 280 Watts Peak
Horn Coverage H° x V°	90°H x 45°V
Frequency Responce(-3dB)	75 Hz - 20 KHz
Crossover Frequency	2.5 KHz
Max SPL	113 dB at 1m
Connector	Mic/Line In & Link with XLR
External Controls	Volume Control / Power ON with green LED / Clip Limiter with Red LED
Electronic Protection	Thermal/Overload/Analog limiter/Compressor
Power Supply	100V-240V ~ 50/60Hz
Enclosure Construction	Plastic cabinet, Trapezoidal & Monitor shape, Metal grille, rubber feet, 1 handle on top
Mounting	36mm standard pole mount
Dimensions (HxWxD)	16.5 x 10.6 x 9.4 in 420 x 270 x 240 mm
Net Weight	12.2 lbs / 5.53 kg

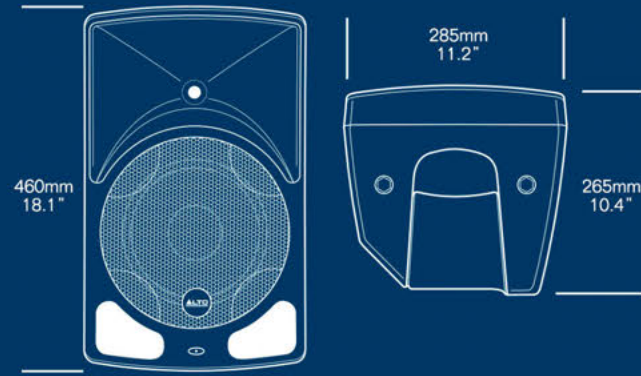


TX10

System Type	2-Way Active Ported Speaker
Woofers	10" Woofer, 1.5" voice coil
HF Driver	1" titanium diaphragm, 1" voice coil
Amplifier	Class D SMPS, 280 Watts Peak
Horn Coverage H° x V°	90°H x 45°V
Frequency Responce(-3dB)	75 Hz - 20 KHz
Crossover Frequency	2.5 KHz
Max SPL	116 dB at 1m
Connector	Mic/Line In & Link with XLR
External Controls	Volume Control / Power ON with green LED / Clip Limiter with Red LED
Electronic Protection	Thermal/Overload/Analog limiter/Compressor
Power Supply	110V-240V ~ 50/60Hz
Enclosure Construction	Plastic cabinet, Trapezoidal & Monitor shape, Metal grille, rubber feet, 1 handle on top
Mounting	36mm standard pole mount
Dimensions (HxWxD)	18.1 x 11.2 x 10.4 in 460 x 285 x 265 mm
Net Weight	15.26 lbs / 6.92 kg

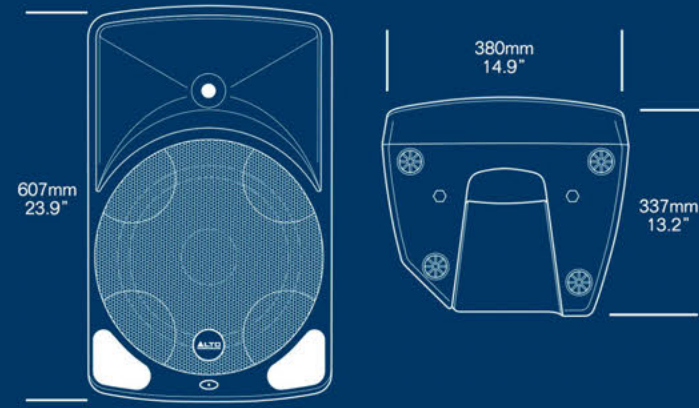

TX12

System Type	2-Way Active Ported Speaker
Woofers	12" Woofer, 2" voice coil
HF Driver	1" Neodymium HF Compression Driver with 1" Voice Coil
Amplifier	Class D SMPS, 600 Watts Peak
Horn Coverage H° x V°	90°H x 45°V
Frequency Responce(-3dB)	70 Hz - 20 KHz
Crossover Frequency	2.5 KHz
Max SPL	118 dB at 1m
EQ presets	Contour on/off
Connector	Line/Mic with with XLR
External Controls	Volume Control / Power ON with green LED Contour/MIC & Line Switch / Clip Limiter with Red LED / Ground Lift
Electronic Protection	Thermal/Overload/Analog limiter/Compressor
Power Supply	110V-240V ~ 50/60 Hz
Enclosure Construction	Plastic cabinet, Trapezoidal & Monitor shape, Metal grille, rubber feet, 2 handles (both sides)
Mounting	36mm standard pole mount
Dimensions (HxWxD)	23.9 x 14.9 x 13.2 in 607 x 380 x 337 mm
Net Weight	30.31 lbs / 13.75 kg

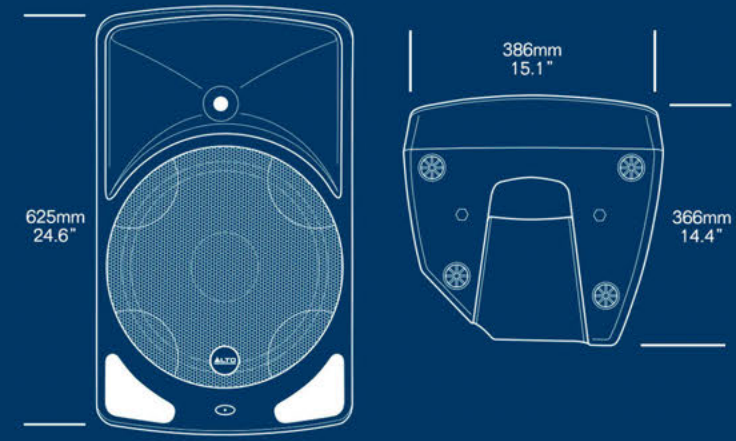

TX15

System Type	2-Way Active Ported Speaker
Woofers	15" Woofer, 2" voice coil
HF Driver	1" Neodymium HF Compression Driver with 1" Voice Coil
Amplifier	Class D SMPS, 600 Watts Peak
Horn Coverage H° x V°	90°H x 45°V
Frequency Responce(-3dB)	65 Hz - 20 KHz
Crossover Frequency	2.2KHz
Max SPL	119 dB at 1 m
EQ presets	Contour on/off
Connector	Line/Mic with XLR
External Controls	Volume Control / Power ON with green LED Contour/MIC & Line Switch / Clip Limiter with Red LED / Ground Lift
Electronic Protection	Thermal/Overload/Analog limiter/Compressor
Power Supply	110V-240V ~ 50/60 Hz
Enclosure Construction	Plastic cabinet, Trapezoidal & Monitor shape, Metal grille, rubber feet, 2 handles (both sides)
Mounting	36mm standard pole mount
Dimensions (HxWxD)	24.6 x 15.1 x 14.4 in 625 x 386 x 366 mm
Net Weight	32.8 lbs / 14.86 kg



altoproaudio.com

All information subject to change.