













# Table of contents Safety information

1	Safety information	3
1.1	Equipment Approval Information	3
1.2	Interference Information	4
1.3	Hearing Aid Compatibility (HAC)	5
1.4	FCC RF Radiation Exposure Statement	5
2	Important	7
2.1	Power requirements	7
2.2	Safety Information	8
2.3	Conformity	8
2.4	Electric, Magnetic and Electromagnetic Fields ("EMF")	8
2.5	Recycle your batteries	9
2.6	Service Centers	9
3	Your phone	10
3.1	What's in the box	10
3.2	Overview of your phone	11
3.3	Display icons	13
3.4	Overview of the base station	14
4	Getting started	15
4.1	Connect the base station	15
4.2	Install your phone	15

1.3	Menu structure	17
5	Using your phone	
5.1	Make a call	20
5.2	Answer a call	21
5.3	End a call	
5	Use more of your phone	22
5.1	Switch the handset on/off	22
5.2	Keypad lock/unlock	22
5.3	Text or number entry	22
5.4	Call in progress	22
5.5	Call waiting	23
5.6	Caller Line Identification	23
5.7	Using your Phonebook	24
5.8	Using the Redial list	26
5.9	Using the Call log	27
5.10	Using the Intercom	28
5.11	Paging	29
7	Personal settings	30
7.1	Change the Handset Name	30
7.2	Handset Tones	30
7.3	Change the Display Language	31
7.4	Set Contrast Level	31



Table of contents
















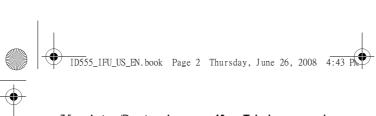





7.5	Activate/Deactivate Auto Hang-up	31
8	Clock and Alarm settings	32
8.1	Set date and time	32
8.2	Set date/time format	32
8.3	Set alarm	33
8.4	Set alarm tone	33
9	Advanced settings	34
9.1	Easy Call	34
9.2	Activate/Deactivate Conference mode	34
9.3	Call Barring	35
9.4	Change master PIN	35
9.5	Registration	36
9.6	Unregister a handset	37
9.7	Reset Unit	37
9.8	Default settings	37
9.9	Set area code	38
9.10	Set Auto Prefix	38
9.11	Change Flash time	39
9.12	Change the Dial Mode	39
9.13	Set first ring	39

10	Telephone answering machine (TAM)	41
10.1	Play	41
10.2	Delete all messages	43
10.3	Set the Answer mode	43
10.4	Personalised Outgoing Message	43
10.5	Switch the Answering Machine On/Off via handset	44
10.6	Answering Machine settings	44
10.7	Call Screening	46
11	Technical data	48
12	Frequently asked questions	49
13	Index	52





























# 1.1 Equipment Approval Information

Your telephone equipment is approved for connection to the Public Switched Telephone Network and is in compliance with parts 15 and 68, FCC Rules and Regulations and the Technical Requirements for Telephone Terminal Equipment published by ACTA.

# 1.1.1 Notification to the Local Telephone Company

On the bottom of this equipment is a label indicating, among other information, the US number and Ringer Equivalence Number (REN) for the equipment. You must, upon request, provide this information to your telephone company.

your telephone company. The REN is useful in determining the number of devices you may connect to your telephone line and still have all of these devices ring when your telephone number is called. In most (but not all) areas, the sum of the RENs of all devices connected to one line should not exceed 5. To be certain of the number of devices you may connect to your line as determined by the REN, you should contact your local telephone company.

Safety information

A plug and jack used to connect this equipment to the premises wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by the ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible modular jack that is also compliant. See installation instructions for details.

- This equipment may not be used on coin service provided by the telephone company.
- Party lines are subject to state tariffs, and therefore, you may not be able to use your own telephone equipment if you are on a party line. Check with your local telephone company.
- Notice must be given to the telephone company upon permanent disconnection of your telephone from your line.
- If your home has specially wired alarm equipment connected to the telephone line, ensure the installation of this product does not disable your alarm equipment.
   If you have questions about what will disable alarm equipment, consult your telephone company or a qualified installer.

US Number is located on the cabinet bottom.

REN Number is located on the cabinet bottom.
























#### 1.1.2 Rights of the Telephone Company

Should your equipment cause trouble on your line which may harm the telephone network, the telephone company shall, where practicable, notify you that temporary discontinuance of service may be required. Where prior notice is not practicable and the circumstances warrant such action, the telephone company may temporarily discontinue service immediately. In case of such temporary discontinuance, the telephone company must: (1) promptly notify you of such temporary discontinuance; (2) afford you the opportunity to correct the situation; and (3) inform you of your right to bring a complaint to the Commission pursuant to procedures set forth in Subpart E of Part 68, FCC Rules and Regulations.

The telephone company may make changes in its communications facilities, equipment, operations or procedures where such action is required in the operation of its business and not inconsistent with FCC Rules and Regulations. If these changes are expected to affect the use or performance of your telephone equipment, the telephone company must give you adequate notice, in writing, to allow you to maintain uninterrupted service.

#### 1.2 Interference Information

This equipment generates and uses radio frequency energy which may interfere with residential radio and television reception if not properly installed and used in accordance with instructions contained in this manual. Reasonable protection against such interference is ensured, although there is no guarantee this will not occur in a given installation. If interference is suspected and verified by switching this equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient the radio/television receiver's antenna, relocate the equipment with respect to the receiver, plug the equipment and receiver into separate circuit outlets. The user may also wish to consult a qualified radio/television technician for additional suggestions. This equipment has been fully tested and complies with all limits for Class B computing devices pursuant to part 15 FCC Rules and Regulations. This device complies with RSS-210 of Industry Canada. Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device. This device complies with Part 15 of the FCC Rules. Operation is subject

























to the following two conditions: (1) This device may not cause harmful interference; and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

Privacy of Communications may not be ensured when using this product. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna (that is, the antenna for radio or television that is "receiving" the interference).
- Reorient or relocate and increase the separation between the telecommunications equipment

and receiving antenna.

 Connect the telecommunications equipment into an outlet on a circuit different from that to which the receiving antenna is connected.

If these measures do not eliminate the interference, please consult your dealer or an experienced radio/ television technician for additional suggestions. Also, the Federal Communications Commission has prepared a helpful booklet, "How To Identify and Resolve Radio/TV Interference Problems." This booklet is available from the U.S. Government Printing Office, Washington, D.C. 20402. Please specify stock number 004-000-00345-4 when ordering copies.

Notice: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

# 1.3 Hearing Aid Compatibility (HAC)

This telephone system meets FCC/ Industry Canada standards for Hearing Aid Compatibility.

#### 1.4 FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed


















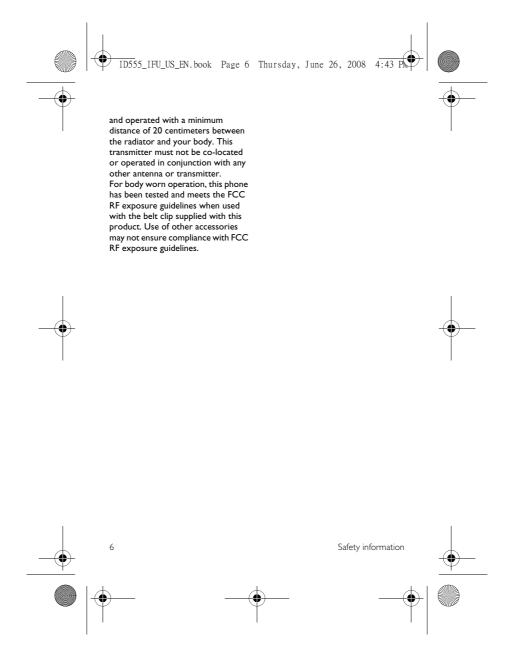







# 2 Important

Take time to read this user manual before you use your phone. It contains important information and notes regarding your phone.

NOTICE: This product meets the applicable Industry Canada technical specifications.

The equipment must be installed using an acceptable method of connection. The customer should be aware that compliance with the above conditions may not prevent degradation of service in some situations.

Repairs to certified equipment should be made by an authorized Canadian maintenance facility designated by the supplier. Any repairs or alterations made by the user to this equipment, or equipment malfunctions, may give the telecommunications company cause to request the user to disconnect the equipment. Users should ensure for their own protection that the electrical ground connections of the power utility. telephone lines and internal metallic water pipe systems, if present, are connected together. This precaution may be particularly important in rural

CAUTION: Users should not attempt to make such connections themselves, but should contact the

appropriate electric inspection authority, or electrician, as appropriate.

NOTES: This equipment may not be used on coin service provided by the telephone company.

### 2.1 Power requirements

- This product requires an electrical supply of 220-240 volts AC. In case of power failure, the communication can be lost.
- The Electrical network is classified as hazardous. The only way to power down the charger is to unplug the power supply from the electrical outlet. Ensure that the electrical outlet is always easily accessible.
- The voltage on the network is classified as TNV-3 (Telecommunication Network Voltages), as defined in the standard EN 60-950.

### Warning

To avoid damage or malfunction:

- Do not allow the charging contacts or the battery to come into contact with metal objects.
- Do not open it as you could be exposed to high voltages.
- Never use any other battery than the one delivered with the product or recommended by Philips: risk of explosion.
- Always use the cables provided with the product.























vicinity may cause interference.

temperatures:

- temperature is always between 0 and 35° C (32 to 95° F).
- temperature is always between -20 and 45° C (-4 to 113° F).
- low temperature conditions.

#### Conformity

We, Philips declare that the product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. This product can only be connected to the analogue telephone networks of the countries mentioned on the packaging.

You can find the Declaration of Conformity on www.p4c.philips.com.

#### Electric, Magnetic and **Electromagnetic Fields** ("EMF")

Philips Royal Electronics manufactures and sells many

Important























• Use only with provided batteries: a) TCL, PL-043043, Li-ion

b) Mcnair, MC-163-500, Li-ion

polymer battery, 3.7V 500mAH

polymer battery, 3.7V 500mAH


b) Electronic Sales Ltd, TR5075G,


#### 7.5V 500mA Charger pod

- a) Electonic Sales Ltd, TR1575G, 7.5V 150mA
- b) Electonic Sales Ltd, IW157, 7.5V 150mA

#### Safety Information

- Handsfree activation could suddenly increase the volume in the earpiece to a very high level: make sure the handset is not too close to your ear.
- This equipment is not designed to make emergency calls when the power fails. An alternative has to be made available to allow emergency calls.
- Do not expose the phone to excessive heat caused by heating equipment or direct sunlight.
- Do not drop your phone or allow objects to fall on your phone.
- Do not use any cleaning agents containing alcohol, ammonia, benzene, or abrasives as these may harm the set.





- Do not allow the charger to come into contact with liquids.
- Active mobile phones in the

About operating and storage

- Operate in a place where
- Store in a place where
- Battery life may be shortened in









consumer oriented products which usually, as with any electronic apparatus, have the ability to emit and receive electro magnetic signals.

- One of Philips' leading Business Principles is to take all necessary health and safety precautions for our products, to comply with all applicable legal requirements and to stay well within the EMF standards applicable at the time of producing the products.
- Philips is committed to develop, produce and market products that cause no adverse health effects.
- Philips confirms that if its products are handled properly for their intended use, they are safe to use according to scientific evidence available today.
- Philips plays an active role in the development of international EMF and safety standards, enabling Philips to anticipate further developments in standardisation for early integration in its products.

#### 2.5 Recycle your batteries

Do not dispose your rechargeable batteries. Call the toll fee number 1-800-822-8837 to get instructions on how to recycle your batteries. The RBRC® Seal on the nickel metal hydride battery indicates that Philips Royal Electronics is voluntarily

participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service within the United States and Canada.

The RBRC® program provides a convenient alternative to placing used nickel metal hydride batteries into the trash or municipal waste, which may be illegal in your area. Philips's participation in RBRC® makes it easy for you to drop off the spent battery at local retailers participating in the RBRC® program or at authorized Philips product service centers.

Please call 1-800-8-BATTERY for information on Ni-MH battery recycling and disposal bans/ restrictions in your area. Philips's involvement in this program is part of its commitment to protecting our environment and conserving natural resources.

RBRC® is a registered trademark of Rechargeable Battery Recycling Corporation.

### 2.6 Service Centers

Call Center (USA and Canada): 800-233-8413 E-mail support: accessorysupport@philips.com



Important


















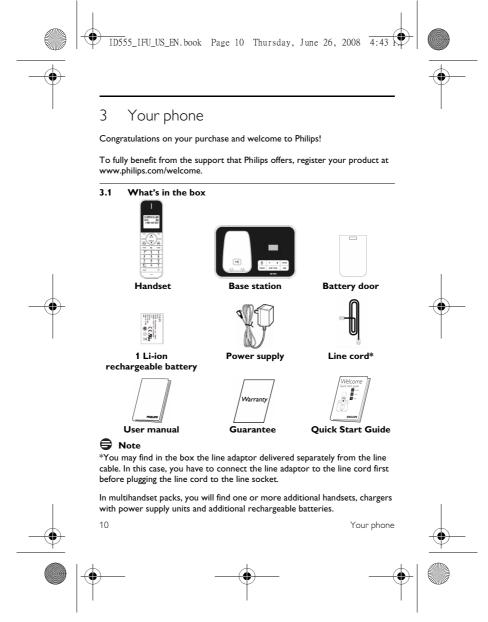









#### Overview of your phone



#### **Earpiece** В Display

See page 13 for an overview of the display icons.

C Left Softkey

Select the function displayed on the handset screen directly above it. During a call: Initiate a second call, consult phonebook or transfer a call. Switch on the backlight.

D Right Softkey Select the function displayed on the handset screen directly above it. Switch on the backlight.

E Navigation keys (4)
In idle mode: Scroll up to access the Call log and scroll down to access the Phonebook.

During a call: Scroll up/down to increase or decrease earpiece and speaker volume.

In editing mode: Scroll up/down to go to the previous character or next

In other modes: Scroll up/down a menu list or go to the previous or next record in the Phonebook, Redial list or Call log.

F Talk key TALK
In idle mode: Answer an incoming

external or internal call.

During a call: Activate the recall function.

In other modes: Dial the selected number in the Phonebook, Redial list or Call log.

### G Hang-up key

In idle mode: Long press to switch on/ off the handset.

During a call: Hang up a call. In other modes: Return to the idle

# mode. H Menu key menu

In idle mode: Go to the main menu.

### Loudspeaker key 🗖

In idle mode: Turn on the loudspeaker and dial the number. Answer an incoming call using

handsfree mode. During a call: Toggle the loudspeaker on/off.

### Redial key redial

In idle mode: Access the Redial list.



Your phone















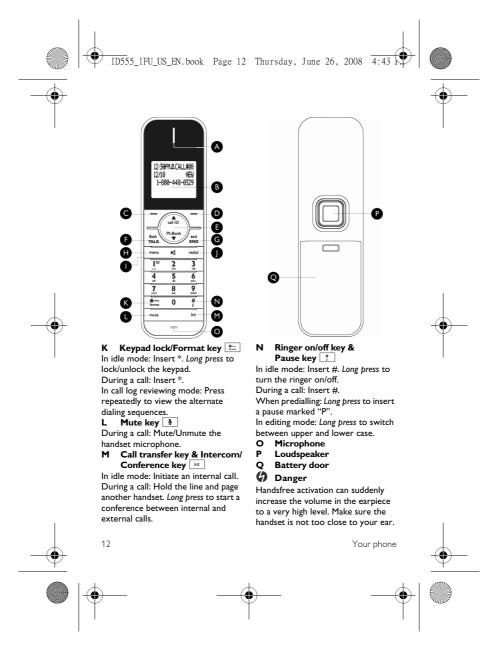

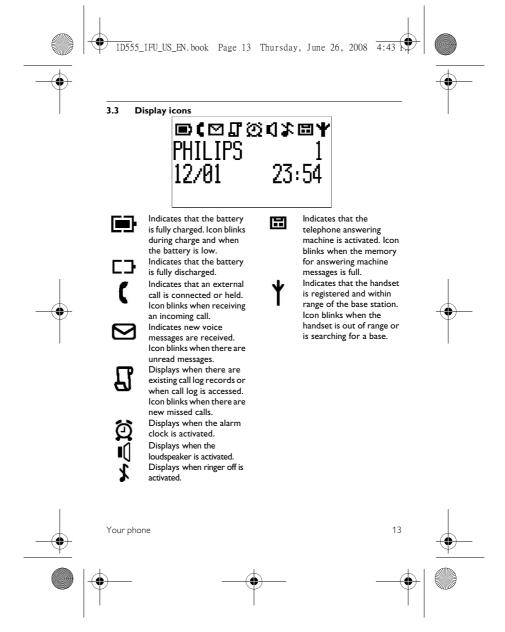










#### 3.4 Overview of the base station



#### A Message Counter

Blinking. Indicates number of new messages. Steady: Indicates number of old

messages. 2 bars flashing. Indicates that there is

no more memory left.
Indicates the volume level (L0 - L5)
when - + is pressed. Indicates the current message number during playback.

B On/Off key on off

In idle mode, short press to switch on/ off the answering machine.

C Volume keys - +

Increase/Decrease speaker volume during message playback. There are 5 volume levels. The call screening is activated if the speaker volume is not set to off.

### D Erase key [crase]

Delete current message during message playback. Long press to delete all messages when the answering machine is in idle mode (unread messages will not be

deleted). E Repeat key repeat

Go to previous message if pressed twice during message playback. Replay current message if pressed

once during message playback.

F Play/Stop key | Play/stop |
Play phone messages (the first recorded will be played first).

Stop message playback.

G Skip key skip

Skip to the next message during message playback.

H Handset locator key ••)

Page handset.

Long press to start registration procedure.



Your phone























#### 4 Getting started

#### 4.1 Connect the base station

- Place the base station in a central location near the telephone line socket and electricity socket.
- Connect the line cord and the power cable to their corresponding connectors at the bottom of the base station as shown.



Connect the other end of the line cord to the telephone line socket and the other end of the power cable to the electricity socket.

# Note

The line adaptor may not be attached to the line cord. In this case, you have to connect the line adaptor to the line cord first before plugging the line cord to the line socket.

# ⚠ Warning

Avoid placing the base station too close to large metal objects such as filing cabinets, radiators or electrical appliances. This can impair the range and sound quality. Buildings with thick internal and external walls may impair transmission of signals to and from the base.

### ⚠ Warning

The base station does not have an ON/OFF switch. Power is applied when the power adaptor is plugged into the unit and connected to the electricity socket. The only way to power down the unit is to unplug the power adaptor from the electricity socket. Therefore, ensure that the electricity socket is easily accessible. The power adaptor and telephone line cord have to be connected correctly, as incorrect connection could damage the unit.

Always use the telephone line cord supplied with the unit. Otherwise, you may not get a dial tone.

## 4.2 Install your phone

Before using the handset, the batteries have to be installed and fully charged.



Getting started



























# 4.2.1 Install battery

## ♠ Warning

Always use Li-ion rechargeable battery supplied with your unit. There could be risk of battery leakage if you use other battery types.

Slide out the battery cover.



Place the batteries and replace



# 4.2.2 Charge battery

## **⚠** Warning

The handset must be charged for at least 24 hours before using it for the first time.

When the battery level becomes low, the low battery sensor alerts you by sounding an audible tone and blinking

the battery icon.

If the battery level becomes exceedingly low, the phone automatically switches off and any function in progress will not be saved.

- Place the handset on the charging cradle of the base station. A melody is emitted if the handset is
- placed correctly.

  The battery icon on the
- display blinks during charge.
  The battery icon becomes steady when the handset is fully charged.



Optimal battery life is reached after 3 cycles of complete charging (over 15 hours) and discharging, allowing approximately 12 hours of talk-time and 150 hours of stand-by time.



























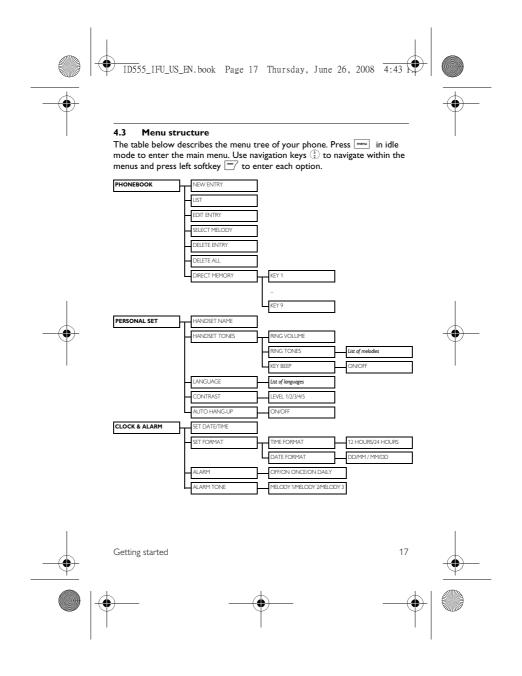

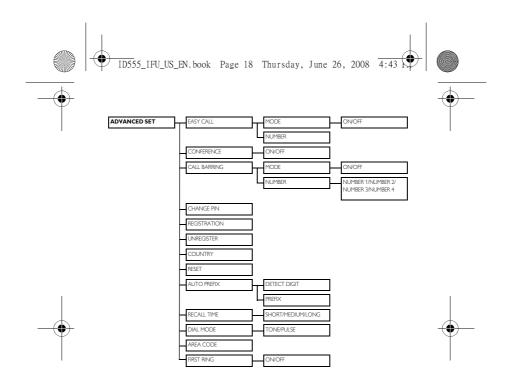



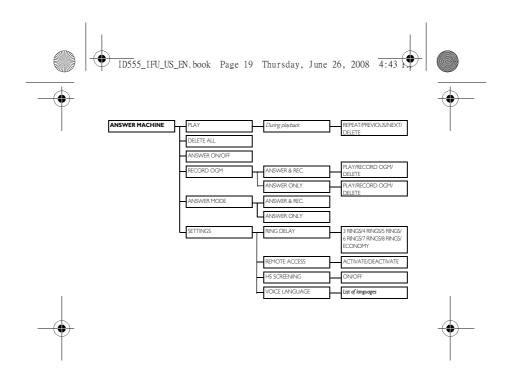












#### 5 Using your phone

#### 5.1 Make a call

## 5.1.1 Predialling

- Dial the number (maximum 24
- digits).
  Press TALK or key.



You may insert a prefix number to the beginning of your predial number, see "Set area code" on page 38 for more information.

## 5.1.2 Direct dialling

- Press hack or we key to take the line.
- Dial the number.
  - The call is initiated.

### 5.1.3 Call from redial list

- Press redai key in idle mode.
   Scroll to an entry in the
- redial list.

  Press ALL or 4 key.
- · The call is initiated.



The handset stores the last 20 numbers dialled. The last number dialled will appear first in the redial list. If the redial number matches a phonebook entry, the name will be displayed instead.

### 5.1.4 Call from the call log

- Press in idle mode.
  Scroll to CALL LIST or 1
- 2 **ANSWER MACHINE** and press SELECT to enter the respective sub-menus.
- Scroll to an entry.

  Press TALK or key.
- - · The call is initiated.

## Note

You need to subscribe to Caller Line Identification service to be able to see the caller's number or name in the call log (see "Access Call log" on page 27).

#### 5.1.4.1 To choose the format for call log display

You must choose the correct format to dial the area code and number of the call log record chosen. The original incoming number from the call log will appear as a 7, 10 or 11-digit number. If it is a long distance call, the prefix digit 1 will automatically appear in front of the 10-digit local calls.

- When viewing the call log, press to change the format of the call log display as it should be dialled from your location. For example, if the call log entry appears as
  - "234-567-8900":
- Press 🐮 once to display "1-234<u>-56</u>7-8900"
- Press twice to display "567-8900"
- Press 🐮 3 times to display "1-567-8900"



Using your phone
























- To dial the current displayed number, press 🚈 key.
  - · The call is initiated.



You need to subscribe to Caller Line Identification service to be able to see the caller's number or name in the call log (see "Access Call log" on chapter 6.9.1).

When saving the call list entry to phonebook, the original incoming number will be saved instead of the current displayed number.

If the first 3 digits of the incoming number corresponds to the local area code set in your phone, they will be filtered automatically when you press the TALK or d key to dial. To change the local area code, please refer to see "Set area code" on chapter 9.10.

#### 5.1.5 Call from the phonebook

- Press to a phonebook entry.

  Press to a phonebook entry.

  key.
- The call is initiated.

# 😵 Тір

Instead of scrolling 🕏 to browse the phonebook entries, you can press the numeric key corresponding to the first letter of the entry you wish to locate. For example, pressing 2 will show the entries starting with A. Pressing again will show the entries starting with B, etc...

Using your phone

#### 5.2 Answer a call

When the phone rings, press TALL key.

• The call is established.

#### Note

Incoming call has priority over other events. Whenever there is an incoming call, other status in progress such as phone setting, menu navigation, etc will be aborted.

# ( Danger

When the handset rings during an incoming call, please do not hold the handset too close to your ear, as the volume of the ringing tone may damage your hearing.

### 5.2.1 Handsfree answering

When the phone rings, press [4] key.

• The handset loudspeaker is activated.

# **(1)** Danger

Handsfree activation can suddenly increase the volume in the earpiece to a very high level. Make sure the handset is not too close to your ear.

#### 5.3 End a call

To end a conversation, press key.

### **❸** Тір

If **AUTO HANG-UP** mode is activated (see "Activate/Deactivate Auto Hang-up" on page 31), you can simply place the handset back to its base station to end the call. This feature is activated by default.

### Note

The call duration will be displayed on the handset screen for about 5 seconds.

















ID555\_IFU\_US\_EN.book Page 22 Thursday, June 26, 2008 4:43





#### 6 Use more of your phone

#### 6.1 Switch the handset on/off Press and hold END key for 3 seconds to switch on/off the handset in idle mode.

# Keypad lock/unlock

Press and hold key for 2 seconds to lock/unlock the keypad in idle mode.

#### Text or number entry

When you select a field in which you can enter text, you can enter the letters that are printed on the keys by pressing the relevant key once or several times. For example, to enter the name "PAUL":

- Press Once: P
  conce: P
  ress once: PA
  ress twice: PAU
  ress three times: PAUL

The table below gives you the character assignment during text or number entry:

Keys	Assigned characters
<b>I</b> <sup>⊗</sup> ]	space 1 @ _ # = < > ( ) & € £ \$ ¥ [ ] { } ¤ §
2	abc2àäçåæ
3	def3èéΔΦ
4	ghi4ìΓ

<b>5</b>	j k l 5 Λ
6	m n o 6 ñ ò ö
7	ρ q r s 7 β Π Θ Σ
8	t u v 8 ù ü
9	w x y z 9 ø Ω Ξ Ψ
0	.0,/:;"'!;?;*+-%\
# \$	Long press to switch between upper and lower case.
<b>*</b> o−v format	*

# 🚷 Тір

Press BACK to delete the last digit or character entered.

# Call in progress

Some options are available to you during a call. The available options are:

# 6.4.1 Adjust earpiece volume During a call, press to select from **VOLUME 1** to **VOLUME 3**.

### 6.4.2 Mute/Unmute microphone

When the microphone is muted, your

- correspondent cannot hear you.

  During a call, press to turn off the microphone.

  Press again to turn on the
- microphone.

Use more of your phone















#### 6.4.3 Activate/Deactivate loudspeaker mode

## Danger

Handsfree activation can suddenly increase the volume in the earpiece to a very high level. Make sure the handset is not too close to your ear.

- During a call, press 🔟 key to activate the loudspeaker mode.
- Press 🔳 key again to return to normal mode.

#### 6.4.4 Adjust loudspeaker volume

During a call in handsfree mode, press to select from **VOLUME 1** to **VOLUME 5**.

#### 6.4.5 Initiate a second call (subscription dependent)

During a call, press TOPTION and select START 2ND CALL to put the current call on hold and initiate a second external call. Then enter the phone number of the second call.

# 6.4.6 Consult phonebook During a call, press $\bigcirc$ **OPTION** and

select **PHONEBOOK** to access and review phonebook entries.

### 6.5 Call waiting

If you have subscribed to Call Waiting service, the earpiece will emit a beep tone to inform you that there is a second incoming call. The number or

name of the second caller will also be displayed on your phone if you have subscribed to Caller Line Identification service (CLI). Please contact your network provider for more

incoming call while on the phone, press track + 2 to put the current call on hold and answer the second call

#### OR

- Press TALK + [100] to end the current call and answer the
- toggle between these 2 calls.



The call waiting indicator displays during 40 seconds. The missed call information will be displayed in the call log. (see "Access Call log" on

# **Caller Line Identification**

Caller Line Identification (CLI) is a special service that you may subscribe from your network operator. If you have subscribed to CLI service, the identity of the caller (caller's number or name) will be displayed on your handset during an incoming call. If you have not subscribed to this service, or if the caller has chosen to withhold the number, the identity of the caller will not be displayed. Please contact

































your network provider for more information on this service.

#### Using your Phonebook Your phone can store up to 200

phonebook memories, including 10 2). Depending on your country, Key 1 and Key 2 may be preset to the voice mail number and information service number of your network operator respectively. Each phonebook entry can have a maximum of 24 digits for the phone number and 14 characters for name.

#### 6.7.1 Access phonebook

- Press \* in idle mode and scroll to browse the phonebook.
  - The phonebook entries are listed in alphabetical order.
- To view the details of a phonebook entry, scroll  $\begin{tabular}{l} \textcircled{\pm} \end{tabular}$  to the phonebook entry and press SELECT.
- To dial a number from the phonebook, scroll to the phonebook entry and press TALK.

# **₩** Тір

Instead of scrolling 🖨 to browse the phonebook entries, you can press the numeric key corresponding to the first letter of the entry you wish to locate. For example, pressing 2 will show the entries starting with A. Pressing 2 again will show the entries starting with B, etc...

#### 6.7.2 Store a contact in the phonebook

- Press menu in idle mode, press
  SELECT to enter
  PHONEBOOK, press SELECT to enter NEW ENTRY.
- Enter the name of the contact (maximum 14 characters) and press **OK**.
- Enter the phone number (maximum 24 digits) and press
  - A validation tone is emitted.

# 🚯 Тір

You cannot store a new phonebook entry when the memory is full. In this case, you have to delete existing entries to make space for new entries.

# 6.7.3 Edit a phonebook entry

- 1 Press menu in idle mode, press SELECT to enter PHONEBOOK, scroll 😩 to **EDIT ENTRY** and press SELECT.
- Scroll 😩 to select an entry you wish to edit and press **SELECT**.
- Press CLEAR to erase the letters one by one, enter the name and press OK.
  Press CLEAR to erase the
- digits one by one, enter the phone number and press \( \bar{\to} \) **OK**.

   A validation tone is emitted.
















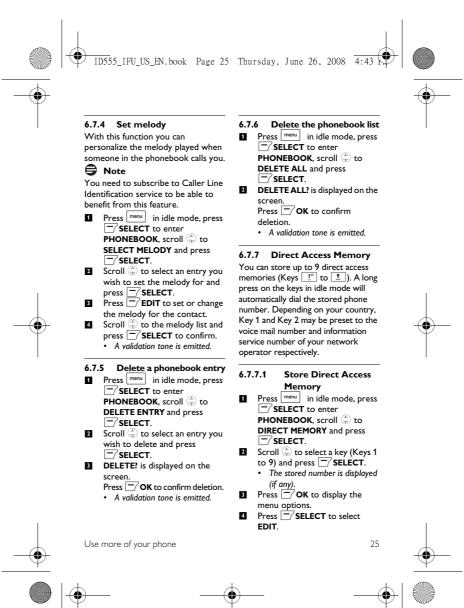



ID555\_IFU\_US\_EN.book Page 26 Thursday, June 26, 2008 4:43





Scroll  $\begin{tabular}{l} \textcircled{\ } \end{tabular}$  to the entry you wish to store as direct access memory and press SELECT

to view the details.

Press SELECT to confirm. • A validation tone is emitted.

#### 6.7.7.2 **Delete Direct Access** Memory

Press in idle mode, press SELECT to enter **PHONEBOOK**, scroll 2 to **DIRECT MEMORY** and press SELECT.

Scroll to select a key (Keys 1 to 9) and press SELECT. The stored number is displayed

(if any).

Press SELECT to display the

menu options.
Scroll to DELETE and press
SELECT.

A validation tone is emitted.

### 6.8 Using the Redial list

The redial list stores the last 20 numbers dialled. A maximum of 24 digits can be displayed for each entry.

### 6.8.1 Access Redial list

1 Press redial in idle mode and scroll to browse the redial list.

• The last number dialled will appear first in the redial list. If the redial number matches a phonebook entry, the name will be displayed instead.

## Note

To return to idle mode, press  $\frac{e^{ikt}}{END}$  key.

#### Save a redial number into the phonebook

Press redul in idle mode and scroll to select an entry.
Press SELECT to view the details.

Press redial and press
SELECT to select

### SAVE NUMBER.

Enter the name of the contact (maximum 14 characters) and press OK.

one s in order of necessary and press of OK.

• A validarian

A validation tone is emitted.

# **⊜** Note

Press CLEAR to delete the last digit or character entered.

#### 6.8.3 Delete a redial number

Press redal in idle mode and scroll to select an entry.

Press redail, scroll (a) to DELETE and press (T) OK.

 DELETE? is displayed on the screen.
Press OK again to confirm

· A validation tone is emitted.

### 6.8.4 Delete the redial list

deletion.

Press redal in idle mode.
Press redal, scroll to DELETE
ALL and press OK. 2















ID555\_IFU\_US\_EN.book Page 27 Thursday, June 26, 2008 4:43

**DELETE ALL?** is displayed on the screen

Press OK again to confirm deletion.

· A validation tone is emitted.

#### Using the Call log

The call log offers quick access to the **CALL LIST and ANSWER MACHINE** events. If you have subscribed to Caller Line Identification service, the identity of the caller (caller's number or name) will be displayed together with the date and time of the call\*. The CALL LIST records the last 50 entries of the incoming calls. The calls (missed and received) are displayed in chronological order with the most recent call at the top of the list. When the call list is empty, the screen



\* If the identity of the caller is withheld or the network does not provide the date and time information, then only the date and time of the call will be displayed. If you have not subscribed to Caller Line Identification service, there will not be any information displayed in the call log.

#### 6.9.1 Access Call log

Press all in idle mode, scroll ⊕ to CALL LIST and ANSWER MACHINE and press SELECT to enter the respective sub-menus.

6.9.2 Save a call list entry into the phonebook

- Press and in idle mode and scroll to select an entry. Press SELECT to view the details.
- Press redial and press SELECT to select SAVE NUMBER.
- Enter the name of the contact (maximum 14 characters) and press **OK**.
- Edit the number (if necessary) and press **OK**.
  - A validation tone is emitted.

#### 6.9.3 Delete a call list entry

- Press on in idle mode, press SELECT to enter CALL LIST, scroll (a) to an entry in the call list and press (T) OPTION.
- Scroll to DELETE ENTRY and press SELECT.

  Press OK to confirm deletion.
- · A validation tone is emitted.

#### 6.9.4 Delete the call list

- Press and in idle mode, press SELECT to enter CALL LIST, scroll (a) to an entry in the call list and press OPTION.
- Scroll to DELETE ALL and press SELECT.

  DELETE ALL? is displayed on the
- screen.
  Press OK to confirm deletion.
  - A validation tone is emitted.























### 6.10 Using the Intercom

#### Warning

Intercom and call transfer is only possible with handsets registered to the same base station.

This feature is only available when there are at least 2 registered handsets. It allows you to make free internal calls, transfer external calls from one handset to another and use the conference option.

#### 6.10.1 Intercom another handset



**⊜** Note

If the handset does not belong to ID555 range, this function may not be available.

- Press int key in idle mode.
  - Intercom is established immediately if there are only 2 registered handsets.
- If there are more than 2 registered handsets, the handset numbers which are available for intercom will be displayed. Scroll (a) to the specific handset you want to call and press

  SELECT.

#### 6.10.2 Transfer an external call to another handset

During the call, press and hold int key to put the external call on hold (the caller can no longer hear you).

- Intercom is established immediately if there are only 2 registered handsets.
- If there are more than 2 registered handsets, the handset numbers which are available for intercom will be displayed. Scroll (a) to the specific handset you want to call and press SELECT.
- The called handset rings. Press TALK key on the called handset to answer the internal call, where both internal callers can talk.
- Intercom is established. Press key on the first handset to transfer the external call to the called handset.
  - · The external call is transferred.



If there is no answer from the called handset, press int key to resume the external call.

#### 6.10.3 Answer an external call during intercom

- When there is an incoming external call during an intercom, a new call tone is emitted.
- To end the intercom and answer the external call, press (END). The handset will ring. Press (TALK) to answer the external call.
  - Connection with the external call is established.

Use more of your phone















ID555\_IFU\_US\_EN.book Page 29 Thursday, June 26, 2008 4:43





### **❸** Тір

To put the internal call on hold and answer the incoming external call, press TALK key.

#### 6.10.4 Switch between an internal and external call

To switch between an internal or external call, press int key.

#### 6.10.5 Establish a three-party conference call

The conference call feature allows one external call to be shared with two handsets (in intercom). The three parties can share the conversation and no network subscription is required.

- During the call, press int key to put the external call on hold (the caller can no longer hear you).
  - Intercom is established immediately if there are only 2 registered handsets.
- If there are more than 2 registered handsets, the handset numbers which are available for intercom will be displayed.

  Scroll to the specific handset you want to call and press

  SELECT.
- The called handset rings. Press TALK key on the called handset to answer the internal call, where both internal callers can talk.
  - · Intercom is established.

- Press and hold int key for 2 seconds on the first handset to start the three-party
  - **CONFERENCE** will be displayed on the screen once the conference call is established.



If CONFERENCE mode is activated (see "Activate/Deactivate Conference mode" on page 34), a three-party conference call is automatically established if the second handset takes the line when there is already an external call in progress.

#### 6.11 Paging

The paging feature enables you to locate a missing handset if the handset is in range and contains charged batteries.

- 1 Press (\*)) key on the base station.
  - · All the registered handsets start to ring.
- 2 Once retrieved, press any key on the handset to end the paging.

#### Note

If there are no key presses within 30 seconds, the handset and base station will automatically return to idle mode.

# 🚯 Тір

To stop paging, press ••) key on the base station again.





















# 7 Personal settings

# 7.1 Change the Handset Name

You can name the handset and display the handset name in idle mode. The default handset name of your handset is BUILDE

- Press in idle mode, scroll to PERSONAL SET and press SELECT, press SELECT to enter HANDSET NAME.
- Edit the handset name (maximum 12 characters) and press OK to confirm.
  - A validation tone is emitted and the screen returns to previous menu.

#### 7.2 Handset Tones

# 7.2.1 Set the Ring Volume

# **6** Danger

When setting the ring volume of your phone or when the handset rings during an incoming call, please do not hold the handset too close to your ear as the volume of the ringing tone may damage your hearing.

There are 5 levels of ring volume, including progressive volume.

Press in idle mode, scroll to PERSONAL SET and press 7 SELECT, scroll to to

HANDSET TONES and press
SELECT. Press SELECT
again to enter RING VOLUME

- 2 Scroll to your desired volume level and press OK to confirm.
  - A validation tone is emitted and the screen returns to previous menu.



When the volume is set to off, the icon will be displayed on the screen.

### 7.2.2 Set the Ring Melody

There are 15 polyphonic ring melodies available on your handset.

Press menu in idle mode, scroll

- Scroll (a) to your desired
- melody to play the melody.

  Press OK to set the ring melody.
  - A validation tone is emitted and the screen returns to previous

    menu.

# 7.2.3 Activate/Deactivate Key Beep

A single beep is emitted when a key is pressed. You can enable or disable the key beep. By default, the key beep is **ON**.

Press in idle mode, scroll to PERSONAL SET and

Personal settings



















press SELECT, scroll to HANDSET TONES and press TONES and press

SELECT. Scroll \$\hat{\text{\phi}}\$ to KEY

BEEP and press \$\overline{\text{\phi}}\$ SELECT.

Scroll \$\hat{\text{\phi}}\$ to ON or OFF and press \$\overline{\text{\phi}}\$ OK to confirm.

2

 A validation tone is emitted and the screen returns to previous menu.

#### Change the Display Language

Your handset can support different display languages.

1 Press menu in idle mode, scroll

- to PERSONAL SET and press SELECT, scroll 🗘 to LANGUAGE and press SELECT.
- Scroll 😩 to your desired language and press SELECT to confirm.
  - A validation tone is emitted and the screen returns to previous menu.

### ❸ Tip

Once the display language is set, the option menus on the handset will switch to display in the selected language immediately. However, it will not change the language of the predefined outgoing message of your answering machine.

#### 7.4 Set Contrast Level

There are 5 contrast level options (LEVEL 1, LEVEL 2, LEVEL 3, LEVEL 4 or LEVEL 5). The default contrast

- level is LEVEL 2.

  1 Press menu in idle mode, scroll to PERSONAL SET and press SELECT, scroll to CONTRAST and press SELECT.
- Scroll 🕏 to your desired contrast level (LEVEL 1, LEVEL 2, LEVEL 3, LEVEL 4 or LEVEL 5) and press SELECT to confirm.
  - · A validation tone is emitted and the screen returns to previous menu.

#### Activate/Deactivate Auto Hang-up

This function enables you to end a call automatically by simply replacing the handset on the base station. By default, the Auto Hang-up feature is ON.

- Press in idle mode, scroll to PERSONAL SET and press SELECT, scroll to AUTO HANG-UP and press
  SELECT.
- Scroll to ON or OFF and press SELECT to confirm.
  - A validation tone is emitted and the screen returns to previous menu.



Personal settings















ID555\_IFU\_US\_EN.book Page 32 Thursday, June 26, 2008 4:43



# 8 Clock and Alarm settings

This feature allows you to set the date, time and alarm settings for your phone. The default date and time is **01-01** and **00:00** respectively.

#### 8.1 Set date and time

- Press menu in idle mode, scroll
  to CLOCK & ALARM and
  press OK, press
  SELECT to enter SET
  DATE/TIME.
- The last stored date is displayed.
  Enter the current date (dd-mm)
  and press OK.
- The last stored time is displayed.
  Enter the current time (hh-mm).
  Press to select A (am) or
   to select P (pm) if the time
  is in 12 hours format. Press
   OK to confirm.
  - A validation tone is emitted.



An error tone will be emitted if an invalid digit is entered in the date/ time fields.

Hour: 00 to 12; Minute: 00 to 59 Date: 01 to 31; Month: 01 to 12

### **⚠** Warning

If your phone is connected to an ISDN line through an adaptor, the date & time may be updated after each call. The availability of date & time update is dependent on your network provider.

Please check the date & time settings in your ISDN system or contact your network provider.

#### 8.2 Set date/time format

You can set your preferred date/time format for your phone. The default format is **DD/MM** and **24 HOURS**.

#### 8.2.1 Set time format

- Press in idle mode, scroll to CLOCK & ALARM and press OK, scroll to SET FORMAT and press SELECT.
- Press OK to enter TIME FORMAT.
- The current setting is displayed.

  Scroll to select time format display (12 HOURS or 24 HOURS) and press OK to confirm.
  - A validation tone is emitted and the screen returns to previous menu.

### 8.2.2 Set date format

- Press in idle mode, scroll to CLOCK & ALARM and press OK, scroll to SET FORMAT and press
- SELECT.
  Scroll © to enter DATE
  FORMAT and press OK.
- The current setting is displayed.
  Coroll (a) to select date format display (DD/MM or MM/DD) and press (b) OK to confirm.
  A validation tone is emitted and
  - A validation tone is emitted and the screen returns to previous

Clock and Alarm settings














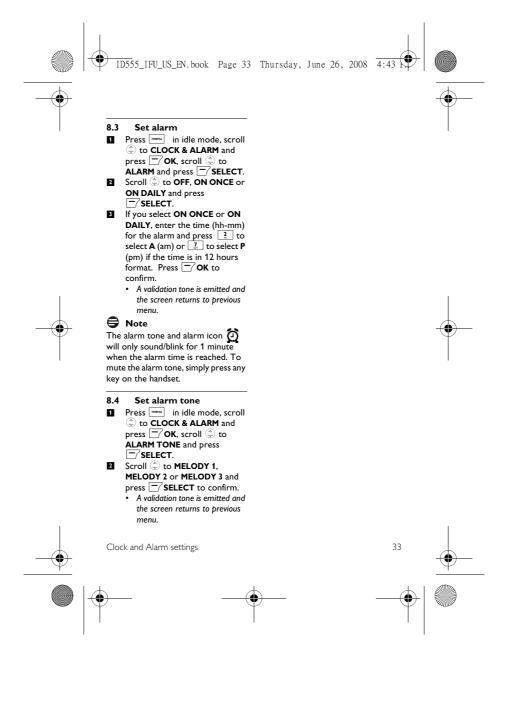







#### 9 Advanced settings

#### 9.1 Easy Call

When activated, the Easy Call feature enables you to dial a number by pressing any key on your handset. This feature is very useful for direct access to emergency services. You can enter up to 24 digits for easy call number.

#### 9.1.1 To activate Easy Call mode

- Press menu in idle mode, scroll to ADVANCED SET and press SELECT, press SELECT to enter EASY CALL
- Press SELECT to enter MODE.
- Scroll (a) to **ON** and press SELECT to confirm.
- Enter the Easy Call number and press OK to confirm. A validation tone is emitted.

#### 9.1.2 To deactivate Easy Call mode

- Long press menu (when Easy Call mode has been activated
- before).
  Scroll (a) to OFF and press
  SELECT to confirm.

#### 9.1.3 To change Easy Call number

- Press in idle mode, scroll to ADVANCED SET and press SELECT, press SELECT to enter EASY CALL.
- Scroll to NUMBER and press
  SELECT.
  - The last stored Easy Call number is displayed (if any).
- Enter the easy call number (maximum 24 digits) and press OK to confirm.
  - A validation tone is emitted and the screen returns to previous menu.

#### 9.2 Activate/Deactivate Conference mode

When conference mode is activated, you can initiate a three-party conference call with a second handset registered to your base station automatically if the second handset takes the line when there is already an external call in progress.

The default setting for this mode is **ON**.

Press in idle mode, scroll

- to ADVANCED SET and press SELECT, scroll to CONFERENCE and press SELECT.
- Scroll to ON or OFF and press SELECT to confirm.
  - A validation tone is emitted and the screen returns to previous menu.

Advanced settings















9.3 Call Barring

Call barring enables you to restrict selected handsets from dialling a phone number beginning with certain digits. You can set up to 4 different barring numbers, with each number containing up to 4 digits.

#### To activate/deactivate **Call Barring**

- Press menu in idle mode, scroll to **ADVANCED SET** and press SELECT, scroll 🕏 to CALL BARRING and press SELECT.
- Enter the master PIN when prompted and press **OK** to confirm.
- Note

By default, the master PIN is 0000.

- Press SELECT to enter MODE.
- Scroll 😩 to **ON** or **OFF** and press **SELECT** to confirm.
  - A validation tone is emitted and the screen returns to previous menu.

#### 9.3.2 To modify Call Barring number

- Press in idle mode, scroll to ADVANCED SET and press SELECT, scroll to CALL BARRING and press
  SELECT.
- Enter the master PIN when prompted and press  $\boxed{-}$  **OK** to confirm.

Note

By default, the master PIN is 0000.

Scroll to NUMBER and press
SELECT.

- Scroll ( to NUMBER 1, NUMBER 2, NUMBER 3 or **NUMBER 4** and press SELECT.
- Enter the barring number (maximum 4 digits) and press  $\bigcirc$  **OK** to confirm.
  - A validation tone is emitted and the screen returns to previous menu.

#### Note

If a restricted number is dialled, the call will not be connected. When this happens, the phone emits an error tone and returns to idle mode.

#### 9.4 Change master PIN

The master PIN is used for setting call barring, registration/unregistration of handsets and for accessing the answering machine remotely. The default master PIN number is 0000. The maximum length of the master PIN is 4 digits. Your handset will prompt you whenever the PIN is required.

#### Note

The default PIN code is preset to 0000. If you change this PIN code, keep the PIN details in a safe place where you have easy access to them.

Do not lose the PIN code.

Press menu in idle mode, scroll to ADVANCED SET and






















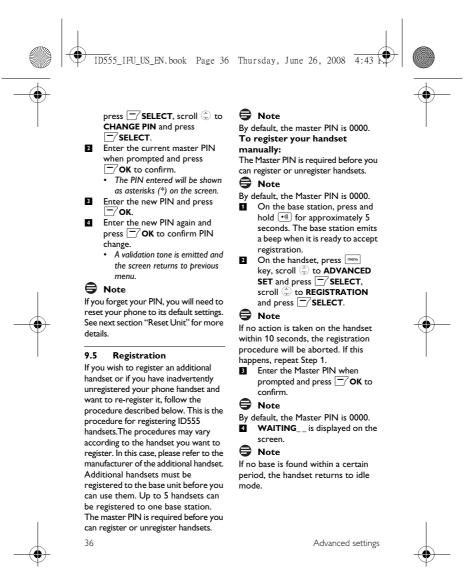







#### 9.6 Unregister a handset

- Press in idle mode, scroll 0 to ADVANCED SET and press SELECT, scroll 🕏 to UNREGISTER and press SELECT.
- Enter the master PIN when prompted and press **OK** to confirm.



By default, the master PIN is 0000.

- Scroll (a) to select the handset number to unregister and press

  SELECT.
  - A validation tone is emitted to indicate successful unregistration and the screen shows UNREGISTERED.



If no action is taken on the handset within 15 seconds, the unregistration procedure will be aborted and the handset returns to idle mode.

To unregister a handset that does not belong to the ID555 range, you can only use the ID555 handset to unregister it.

#### 9.7 Reset Unit

You can reset your phone to its default settings with this feature.

#### ⚠ Warning

Upon reset, all your personal settings, call log and redial list entries will be deleted and the phone will return to its default settings. However, your phonebook as well as the unread

messages of your answering machine will remain unchanged after reset.

#### **⊜** Note

You may have to configure your

- phone once again.

  1 Press menu in idle mode, scroll ⊕ to ADVANCED SET and press ¬ SELECT, scroll ⊕ to RESET and press ¬ SELECT.
- RESET? is displayed on the screen. Press OK to confirm.
  - A validation tone is emitted.
  - The unit is reset to its default settings (see "Default settings" on page 37).

#### 9.8 Default settings

Ringer Volume	LEVEL 2
Ringer Melody	FLICK
Earpiece	VOLUME 3
Volume	
Speaker	VOLUME 3
Volume	
Key Beep	ON
Contrast	LEVEL 2
Auto Hang-up	ON
Alarm clock	OFF
Barring mode	OFF
Easy call	OFF
Handset Name	PHILIPS
Date/Time	01/01/2008;
	00:00
Master PIN	0000
Conference	OFF



















ID555\_IFU\_US\_EN.book Page 38 Thursday, June 26, 2008 4:43





Answering Machine		
Answer Mode	ANSWER & REC.	
Number of rings before answer	5	
Outgoing Messages	Predefined for ANSWER & REC. mode	
Handset screening	OFF	
Base speaker	LEVEL 5	
Remote access	DEACTIVATED	

#### Set area code

This feature is useful when you have subscribed to Caller Line Identification service. It allows you to set an area code in your ID555. Once the local area code is set, the phone automatically filters the area code for all incoming calls, by removing the area code for local calls and retaining the area code for calls from other areas. If it is a local call, then only the phone number of the caller is displayed during an incoming call or when you call the number from the call log. If it is a long distance call, then both the area code and phone number will be displayed in a proper format to be dialed out directly from the call log, or saved into the phonebook.



You can enter a maximum of 3 digits for the area code. You need to subscribe to Caller Line Identification service to be able to see the caller's number or name in the call log. See "Using the call log" on chapter 6.9 for details.

- 1 Press menu in idle mode, scroll to ADVANCED SET and press SELECT, scroll to to AREA CODE and press
- SELECT. Enter the local area code (maximum 3 digits) and press OK to save.
  - A validation tone is emitted and the screen returns to previous menu.

#### 9.10 Set Auto Prefix

This feature allows you to define a prefix number to be added to the beginning of a number during predialling (see "Predialling" on page 20). You can also use this feature to add a detect string to match and replace the first few digits of the number during predialling.
You can enter up to a maximum of 5 digits for the detect string and 14 digits for the auto prefix number.

#### Note

The use of your ID555 cannot be guaranteed with all types of PABX.

- Press in idle mode, scroll in idle mode, scroll to ADVANCED SET and press SESLECT, scroll to AUTO PREFIX and press SESLECT SELECT.
- **DETECT DIGIT** is displayed on the screen.

Advanced settings

























- The last stored detect string is displayed (if any).
- Enter a detect string number (maximum 5 digits) and press

  OK to confirm.
- PREFIX is displayed on the screen.
  - The last stored prefix number is displayed (if any).
- Enter the prefix number (maximum 14 digits) and press

  OK to confirm.
  - A validation tone is emitted and the screen returns to previous menu.



If no detect string (blank) is entered, the prefix number will be automatically added to the predial number after with the pressed. For numbers starting with \*, # or a pause (P), the prefix number will not be added to the predial number after with the predial number after with the pressed.

#### 9.11 Change Flash time

Flash time (or dial delay) is the time delay by which the line will be disconnected after you press key. It can be set to short, medium or long.

The default value of flash time that is preset in your handset should be the best suited for your country network and therefore you should not need to change it.

not need to change it.

Press in idle mode, scroll
to ADVANCED SET and
press SELECT, scroll to

Advanced settings

FLASH TIME and press SELECT.

- Scroll to SHORT, MEDIUM or LONG and press SELECT to confirm.
  - A validation tone is emitted and the screen returns to previous menu.

#### 9.12 Change the Dial Mode

The default value for dial mode that is preset in your handset should be the best suited for your country network and therefore you should not need to change it.

- Press we in idle mode, scroll
  to ADVANCED SET and
  press SELECT, scroll to
  DIAL MODE and press
  SELECT.
- 2 Scroll to TONE or PULSE and press SELECT to confirm.
  - A validation tone is emitted and the screen returns to previous menu.

#### 9.13 Set first ring

When this function is set to Off, the first ring from a voice call will not sound. This is particularly useful in countries where calling line identity is sent after the first ring.

Consequently, the phones in the house will not ring when a message arrives.

Press menu in idle mode, scroll to ADVANCED SET and press SELECT, scroll to to


















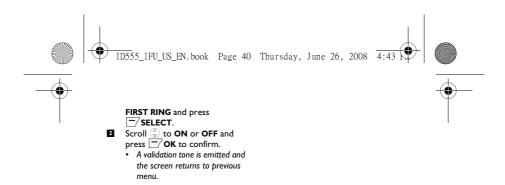













### 10 Telephone answering machine (TAM)

Your phone features an answering machine that records unanswered calls when it is activated. The answering machine can store up to 99 messages. The maximum recording time is 30 minutes (including all your personalised outgoing messages).

You can use the control keys on the base station to perform the basic functions of the answering machine such as message playback, deleting messages and adjustment of volume on the base station. For a description of each function of the control keys on the base station, please see "Overview of the base station" on page 14 for more details.

You can also use the answer machine menu on the handset to access the answering machine functions. There is also a menu to set the answering machine options

machine options.

To begin, press (a) key on your base station to switch on the answering machine (if it is switched off). Alternatively, you may switch on the answering machine via your handset (see "Switch the Answering Machine On/Off via handset" on page 44).



## 10.1 Play

10.1.1 Answering machine control keys on the base station

Buttons on the	Description
base station	
on off	Press to turn on/off the answering machine
play/stop	Press to play the message or stop the message playback
erase	Press to delete the current message Press and hold for two seconds to delete all the old messages in idle mode
repeat	Press once to replay current message during message playback Press twice to go back to previous message during message playback
skip	Press to skip the current message and play the next message



Telephone answering machine (TAM)

















ID555\_IFU\_US\_EN.book Page 42 Thursday, June 26, 2008 4:43





- +	Decrease (-) or increase (+) speaker volume during
	message playback
•1))	Press to page the handset
	Press and hold for more than three seconds to start
	registration procedure

### 10.1.2 Playback of new messages via handset

The last recorded message is played first via the loudspeaker. When  $\underline{\mathsf{all}}\ \mathsf{new}$ messages have been played, the answering machine will stop and the 🔡 icon

stops blinking.

Press meau in idle mode, scroll to ANSWER MACHINE and press SELECT, press SELECT again to enter PLAY menu.

During playback, you can:

During playback, you can.		
Adjust volume	Press 😩 key.	
Stop playback	Press TOP to end the message.	
Repeat	Press OPTION, scroll to REPEAT and press SELECT to play the message again.	
Next message	Press OPTION, scroll to NEXT and press SELECT.	
Previous message	Press OPTION, scroll to PREVIOUS and press SELECT.	
Delete message	Press OPTION, scroll to DELETE and press SELECT.	
Switch the playback to earpiece	Press d key.	



You can also playback messages by pressing and key in idle mode, scroll to ANSWER MACHINE and press SELECT, press SELECT again to enter **PLAY** menu.

#### 10.1.3 Playback of old messages via handset

Old messages can only be played if there are no new messages. The first recorded message will be played first and the next message will be played automatically until there are no more messages.





Telephone answering machine (TAM)














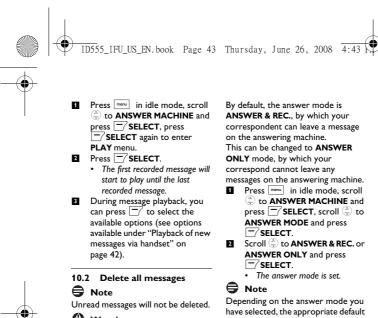

10.4 Personalised Outgoing Message


outgoing message is played once the answering machine picks up an

incoming call.

#### 10.4.1 Record your Personalised Outgoing Message

This personal outgoing message replaces the default ones. To revert to the default outgoing message, simply delete the personal outgoing message you have recorded. If you are not satisfied with the recorded outgoing message, simply record a new message to overwrite the old one.

1 Press in idle mode, scroll



menu.

⚠ Warning

recovered.

Messages deleted cannot be

Press in idle mode, scroll to ANSWER MACHINE and press SELECT, scroll \$\hfrac{1}{4}\$ to

**DELETE ALL?** is displayed on the

screen. Press **OK** to confirm

A validation tone is emitted and

the screen returns to previous

deletion of all your messages.

DELETE ALL and press SELECT.

10.3 Set the Answer mode

There are 2 answer modes available:

Answer only, and Answer & record.
















ID555\_IFU\_US\_EN.book Page 44 Thursday, June 26, 2008 4:43







- 2 Scroll \$\hat{\Phi}\$ to ANSWER & REC. or ANSWER ONLY and press
- Scroll to RECORD OGM and press SELECT.

   The recording
- The recording starts.
   Press SAVE to save your recording.
  - The recorded message will be played and the screen returns to previous menu once it has finished playing. To stop the playback, press (CK)



The maximum length of an outgoing message is 2 minutes.

#### 10.4.2 Playback your Personalised Outgoing Message

- Press in idle mode, scroll to ANSWER MACHINE and press SELECT, scroll to RECORD OGM and press
- 2 Scroll to ANSWER & REC. or ANSWER ONLY and press SELECT.
- Press SELECT to enter PLAY.
  - The previously recorded outgoing message (if any) is played, and then the screen returns to previous menu.

# 10.4.3 Delete your Personalised Outgoing Message

- Press menu in idle mode, scroll to ANSWER MACHINE and press SELECT, scroll to to RECORD OGM and press SELECT.
- 2 Scroll to ANSWER & REC. or ANSWER ONLY and press SELECT.
- Scroll (a) to DELETE and press SELECT.
  - The recorded message is deleted.

# 10.5 Switch the Answering Machine On/Off via handset

- Press in idle mode, scroll to ANSWER MACHINE and press SELECT, scroll to ANSWER ON/OFF and press SELECT.
- 2 Scroll (a) to ON or OFF and press SELECT to confirm.
  - A validation tone is emitted and the screen returns to previous menu.

# 10.6 Answering Machine settings

#### 10.6.1 Ring Delay

This is the number of rings before the answering machine answers and starts playing your greeting message.

Telephone answering machine (TAM)















ID555\_IFU\_US\_EN.book Page 45 Thursday, June 26, 2008 4:43





You can set the answering machine to start playing your greeting message after 3 to 8 rings or ECONOMY. The

- default ring delay is 5.

  Press mess in idle mode, scroll
  to ANSWER MACHINE and press SELECT, scroll to SETTINGS and press
  SELECT, scroil & to to enter RING DELAY.
- Scroll 🕏 to your desired ring delay setting (3 to 8 rings or **ECONOMY**) and press SELECT to confirm.
  - A validation tone is emitted and the screen returns to previous



Economy mode can save you the cost of a long-distance call when you check your messages remotely. If there are new messages in your answering machine, the outgoing message will start playing after 3 rings. If there are no new messages, the outgoing message will be played after 5 rings. Hence, if you want to check if you have any messages without incurring call charges, you can hang up the call after the 4th ring.

#### 10.6.2 Remote Control Access

If you are far away from home and want to check the messages on your answering machine, you can make use of the remote access feature to check your messages using another phone. Once you dial your home number

from any other phone and enter the remote access code\*, you will be able to obtain the messages on your answering machine. The keypad on the phone you use to dial acts like the functions on your answering machine where you can play or delete messages, turn your answering machine on or off, etc.

#### Note

This feature is deactivated by default. \* Remote access code (which is the same as your master PIN code) prevents any unauthorised remote access of your answering machine. See chapter 10.6.2.2 for more information.

#### 10.6.2.1 Activate/Deactivate Remote Access

- Press menu in idle mode, scroll to ANSWER MACHINE and press SELECT, scroll to SETTINGS and press

  SELECT, scroll (2) to **REMOTE ACCESS** and press SELECT.
- Scroll to **ACTIVATE** or **DEACTIVATE** and press SELECT to confirm.
  - A validation tone is emitted and the screen returns to previous



Telephone answering machine (TAM)




























#### 10.6.2.2 Controlling the Answering Machine from an external call

- 1 From another phone, dial home. The answering machine answers and starts playing your greeting
- message. Within 8 seconds, press # key on the phone you use to dial and enter the remote access code (same as your master PIN code).
  - If the remote access code is incorrect, an error tone is  $% \frac{\partial f}{\partial x} = \frac{\partial f}{\partial x}$ emitted. Enter the access code again until you get the correct number.
  - If you did not enter the remote access code within 10 seconds, the answering machine will drop the line immediately.
  - If the remote access code (same as your master PIN code) is correct, you will hear a validation tone.
  - New messages (if any), will be played automatically and stop when there are no more new messages.



If there are no new messages, the answering machine will not play any messages.

The following table indicates how to access the below features during remote access procedure:



machine is on and

outgoing message is



#### 10.7 Call Screening

playing

#### 10.7.1 Call screening on handset

If Handset call screening is set to ON, you can hear incoming messages via the handset speaker and decide whether or not to take the call. To take the call, press make.

This feature is deactivated by default.





Telephone answering machine (TAM)














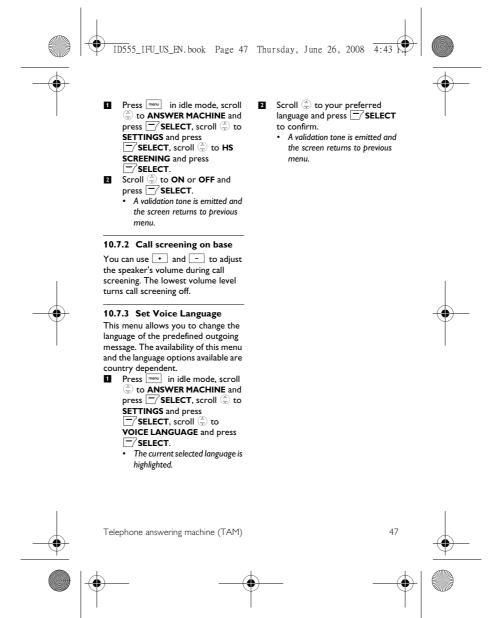









#### 11 Technical data

#### Display

Progressive LCD backlight

#### **General telephone features**

- Dual mode caller name & number identification
- 15 polyphonic ringer melodies

#### Phonebook list, Redial list and Call log

- Phonebook list with 200 entries
- Redial list with 20 entries
- Call log with 50 entries

• 1 Li-ion polymer 500mAh battery

- Radio specifications
   Frequence Band: 1880 1900 MHz
- Maximum output power: 250 mW

#### **Power Consumption**

Power consumption at idle mode: around 800mW

#### Weight and dimensions

- Handset: 74 grams 144 x 13 x 43 mm (H x D x W)
- Base: 143 grams 70 x 85 x 128 mm (H x D x W)

- Temperature range
   Operation: Between 0 and 35° C (32 to 95° F). Storage: Between -20 and 45° C
- (-4 to 113° F).

- Relative humidity
   Operation: Up to 95% at 40°C
- Storage: Up to 95% at 40°C







48

Technical data



















#### 12 Frequently asked questions

www.philips.com/support

In this chapter, you will find the most frequently asked questions and answers about your phone.

#### Connection

#### The handset does not switch on!

Charge the batteries: Put the handset on the base station to charge. After a few moments, the phone will switch on.

#### The handset does not charge!

Check charger connections.

#### icon is not blinking during charge!

- Battery is full: There is no need to charge the battery.
- Bad battery contact: Adjust the handset slightly.
  Dirty contact: Clean the batteries
- contact with a dry cloth.
- Wrong batteries installed: Use only AAA rechargeable batteries supplied with your unit There could be risk of battery leakage if you use alkaline batteries or other battery types.

## Communication is lost during a

Frequently asked questions

Charge the battery

Move closer to the base station.

#### The phone is "Out of range"!

· Move closer to the base station.

#### WARNING BATT. is displayed on handset!

Use only AAA rechargeable batteries supplied with your unit. There could be risk of battery leakage if you use alkaline batteries or other battery types.

#### Set-up

# SEARCHING... is displayed on handset and † icon is blinking! • Move closer to the base station.

- Make sure that your base station is
- Reset your unit and restart handset registration (see "Registration" on page 36).

#### Sound

### Handset does not ring!

Check that the RING VOLUME is not set to off, and make sure 🕻 icon is

























not displayed on the screen (see "Set the Ring Volume" in chapter 7.2.1).

#### Caller cannot hear me at all! Microphone may be muted: During a call, press mute.

#### There's no dialling tone!

- No power: Check the connections.
- Batteries are empty: Charge the batteries.
- Move closer to the base station.
- Wrong line cable used: Use the line cable provided.
- Line adaptor is required: Connect the line adaptor to the line cord.

#### Caller cannot hear me clearly!

- Move closer to the base station.
- Move the base station at least one metre away from any electronic appliances.

# Frequent noise interference on my radio or television!

 Move the base station as far away as possible from the electrical appliances.

#### Product behaviour

#### Keypad does not work!

• Unlock your keypad: Long press in idle mode.

# The handset warms up when making a long call!

 This is a normal behavior. The handset consumes energy while calling.

## The handset cannot be registered to the base station!

- Maximum number of handsets (5)
  has been reached. To register a
  new handset, unregister an
  existing handset.
- Remove and replace the handset batteries.
- Try again by disconnecting and connecting the base station power supply and follow the procedure to register a handset.
- Make sure that you have entered the correct PIN code. If you have not changed it, by default it is 0000.

#### Caller's number is not displayed!

 Service is not activated: Check your subscription with your network operator.

## I cannot change the settings of my voice mail

 Operator voice mail is managed by your operator and not the phone itself. Please contact your operator should you want to change the settings.

# Poor audio quality and the antenna icon $\psi$ is blinking! • The indoor and outdoor range of

 The indoor and outdoor range of the phone is up to 50 metres and 300 metres respectively. When the handset moves beyond the operation range, the antenna icon will blink.























#### My handset keeps going into idle mode!

If there are no key presses for 30 seconds, the handset will automatically return to idle mode. It will also return to idle mode automatically when you place the handset back on the base station.

#### Phonebook entry cannot be stored and MEMORY FULL is displayed!

Delete an entry to free memory before saving your contact again.

#### The Master PIN code is wrong!

- The default master PIN is 0000.
- If it has been changed before, and you cannot remember the new one, reset the handset to revert to the default master PIN code (see "Reset Unit" in chapter 9.8).

## The answering machine does not record messages! • Memory is full: Delete your old

- messages.
- The **ANSWER ONLY** mode has been activated. Deactivate ANSWER ONLY and activate ANSWER & REC. mode (see "Set the Answer mode" in chapter 10.3).

## Remote control access does not

Activate Remote Control Access (see "Remote Control Access" in chapter 10.6.2).

#### The phone hangs up during remote access!

You have taken more than 8 seconds to enter the Master  $\mbox{PIN}$ code. Enter the code again within 8 seconds.

#### Answering machine stops before the recording is finished!

Memory is full: Delete your old messages.







Frequently asked questions
















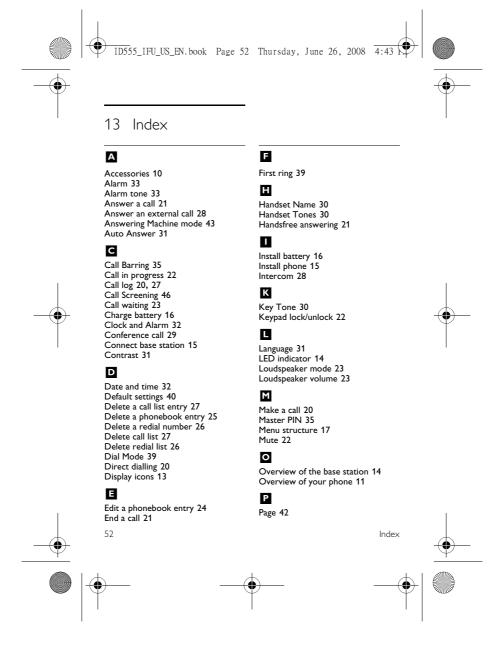

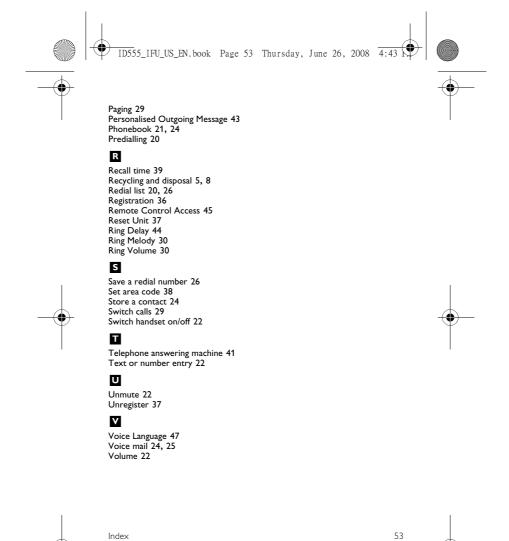

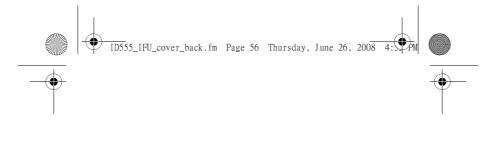





© 2008 Koninklijke Philips Electronics N.V.

All rights reserved

Reproduction in whole or in part is prohibited

without the written consent of the copyright owner



Document number: 3111 285 48871











