



# MS 500V Power Supply

[www.majorsci.com](http://www.majorsci.com)  
[info@majorsci.com](mailto:info@majorsci.com)

V.2.1



# MS 500V Power Supply

The MP 500V power supply is a microprocessor-controlled power supply to cover the broadest range of applications. It offers constant voltage, constant current or constant wattage and pause/resume run capability during timed or continuous operation. MP 500V is a fully programmable mode, offering up to 6 multi-step setting and saving up to 30 programs, and capable for running 4 cells simultaneously. Its design provides a compact and modern stackable case, and a 2.6" LCD screen, showing all the running / setting conditions. Safety devices include no load detection, leakage detection, sudden load change detection, over temperature protection, and over load detection.

## Features

- >500V maximum voltage
- >800mA maximum current
- >300W maximum power
- >Four pairs of outlet terminator
- >Timer with alarm function
- >Advanced fully programmable capability
- >2.6" LCD screen shows all the parameters during run
- >Advanced safety device design
- >Compact size
- >Stackable case
- >Wide applications for DNA, RNA and protein electrophoresis



CE

Cat. No. :MP-500V




- Maximum outputs

300W

- Maximum watt



- Programmable mode

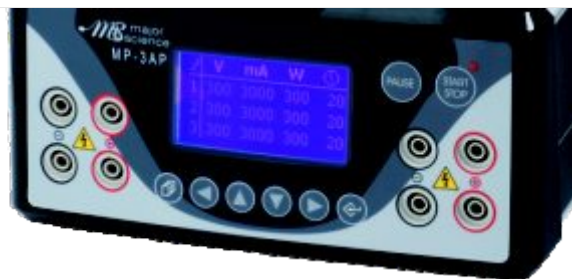

- Four pairs of outlet terminator



MP-500V & MP 3AP

- Stackable case

**Specification**

**MP-500V**

Display	2.6" LCD
Output Voltage / Inc	5 ~ 500V / 1V
Output Current / Inc	1 ~ 800mA / 1mA
Output Watt / Inc	300W / 1W
Operating Constant	Voltage or current or power
Control	Microprocessor controller
Program Storage	30 programmed files
Program Multi-Step	Up to 6 steps
Terminator Pairs	4 Pairs
Timer	Constant mode: 1~9999 mins with alarm, continuous Programmable mode: 1~999 mins with alarm, continuous
Pause Function	Yes
Safety Device	No load detection Leakage detection Sudden load change detection Over temperature protection Over voltage detection Over current detection
Crossover	Shrouded plug and sockets Yes
Operation Temperature	Ambient to 40 °C
Unit Dimension	190 x 305 x 95mm (W x L x H)
Construction Material	Frame retard ABS plates and aluminum
Weight	approx. 2.5kg
Rated Voltage	100 ~ 240V
Stackable	Yes

**Ordering information**

MP-500V      MS 500V Power Supply



## Contact Information

[www.majorsci.com](http://www.majorsci.com)

[info@majorsci.com](mailto:info@majorsci.com)

19959 Sea Gull Way  
Saratoga, CA 95070  
U.S.A

T/1-408-366-9866

F/1-408-446-1107

*Innovative Life Sciences Tools*



Distributore:

Via di Grotte Portella 6/8  
00044 Frascati RM  
Tel. 06 72632108  
Fax 06 72676527