

TABLE OF CONTENTS

▶ Speakers & Accessories pages 1-14	▶ Audio Processor/Messaging page 51
▶ Easy Design/Easy Install Speakers pages 15-21	▶ Paging & Telephone Electronics pages 52-54
▶ Self-Amplified (24V) Systems pages 22-29	▶ Music & Input Sources, Microphones ... pages 55-60
▶ Power Supplies page 30	▶ Office Communications pages 61-62
▶ Paging Control pages 31-36	▶ System Design Guide pages 63-77
▶ Amplifiers pages 37-47	▶ Charts (Amplifiers/Accessories) pages 78-81
▶ Mixers pages 48-50	▶ Information & Index pages 82-84



ABOUT THIS CATALOG

This catalog provides information about Bogen's products and services. In addition, it functions as a System Design & Buying Guide. You will find answers to your questions about how a paging system works or how to set one up. Our Design Guide is filled with helpful information and reference material. Each product has its features clearly highlighted and a list of accessories. Say goodbye to guesswork and waiting. Now, you can have the answers you need when you want them.

Please be sure to visit our web site, www.bogen.com, for the latest product information, downloads, and updates.

CONTACT BOGEN

- Customer Service/Orders
- Free Application Design Service
- Literature on Bogen Products
- Technical Support Assistance*
- Factory Service/Parts
- Sales Offices/Distributors

CALL BOGEN
TOLL-FREE:

1-800-999-2809

ON THE
WEB:

www.bogen.com

Fax Orders to: **1-800-999-9016** Fax for Tech Support: **201-934-6532**

Corporate Headquarters Tel: **201-934-8500** Fax: **201-934-9832**

Business hours are 8:30 a.m. to 5:00 p.m. (EST), Monday to Friday

Bogen Product Literature Online: www.bogen.com/documentindex

To Order Bogen Literature: By Fax: **201-934-9832**

By E-Mail: literature@bogen.com

PRO AUDIO LOUDSPEAKERS

BP12DSP



BP15DSP

Powered Loudspeakers BP15DSP, BP12DSP

The Bogen Pro BP15DSP and BP12DSP Powered Loudspeakers are capable of high sound pressure levels and have been designed to give you performance that is better than any loudspeaker in this range, thanks to the quality of its transducers and built-in amplifier.

Product Features:

- 2-way Powered Speaker, Built-in Amplifier
- 350-watt Bi-amp configuration: Low 300W RMS, High 50W RMS
- DSP processing
- Combo XLR/ 1/4" TRS MIC/LINE Input
- LF EQ Presets (cut/hi-pass filter, flat/no effect, boost/LF shelf)
- Signal/Clip & Power indicator LED's
- Precision tuned by Apogee Sound International Engineering in the U.S.
- Multi-angle, multi-purpose polyethylene cabinet
- Pole cup for tripod mounting
- 6 Rigging points
- Listed to UL Standard 60065 for U.S. and Canada
- FCC Part 15 Class B Compliant

Accessories
See Page 80

Technical Specifications:

Model	Transducer	Horn Coverage	Frequency Response	Crossover Frequency	Maximum SPL (1m)	Dimensions	Product Weight
BP15DSP	Low: 15" Neodymium Woofer; 2.5" Voice Coil High: 1" Compression Driver; 1.75" Voice Coil	90° H x 45° V	45 Hz to 20 kHz with FLAT (-6 dB)	2.2 kHz-DSP Processor 12 dB/oct	124 dB	15-1/2" W x 26-1/8" H x 15-7/8" D	40.5 lb.
BP12DSP	Low: 12" Neodymium Woofer; 2.5" Voice Coil High: 1" Compression Driver; 1.75" Voice Coil		50 Hz to 20 kHz with FLAT (-6 dB)	2.4 kHz-DSP Processor 12 dB/oct	123 dB	15-1/2" W x 26-1/8" H x 14-1/4" D	38.5 lb.

Professional Loudspeakers AMT-15, AMT-12

The AMT-15 and AMT-12 speakers are designed to deliver high-output music and sound reinforcement in a cost-efficient package.

Product Features:

- Molded polypropylene construction
- Heavy gauge steel grilles with powder-coated finish
- Large, high-sensitivity woofers
- Ferrofluid-cooled and damped, high-output titanium alloy compression drivers
- Up to 300W power handling capability for AMT-15; 200W for AMT-12
- Rich, dynamic bass response
- Top-side sockets to receive speaker feet for stacking
- Lightweight, with integral carrying handle molded into speaker housing
- Two combo input connectors: 1/4" Phone and Speakon™
- Smooth, precise passive crossover

Accessories
See Page 80

Technical Specifications:

Model	Drivers	Frequency Response	Sensitivity	Dispersion	Impedance	Power Handling	Dimensions	Product Weight
AMT-15	15" Woofer; 45mm Compression Driver	50 Hz - 20 kHz	98 dB (1W @ 1m)	Horizontal: 65 degrees Vertical: 65 degrees	8-ohm	300 watts	19" W x 27" H x 15" D	47 lb.
AMT-12	12" Woofer; 45mm Compression Driver	60 Hz - 20 kHz	96 dB (1W @ 1m)		8-ohm	200 watts	16-1/4" W x 23" H x 13" D	37 lb.



AMT-15

AMT-12

ORBIT SERIES SPEAKERS



ORBIT Ceiling Speakers OCS1W, OCS1B

Orbit Ceiling Speakers are the ideal choice for installations where the quality of music and vocal reinforcement are crucial.

OCS1 Product Features:

- Computer-matched venting system and large back can provide exceptionally full bass output
- Easy wiring with snap-on connector
- Front-mounted tap selector under grille
- Attachment point for seismic (safety) cable
- Input terminal cover with knockouts provides protection for connections
- Heavy-gauge steel back can
- Integral swing-out clamps secure installation in the ceiling
- Attractive heavy-gauge steel grille assembly with fine perforations
- Available in Black and White textured, paintable finish
- Complies with UL-2043

2 COLOR CHOICES*:



*Actual color may vary from these catalog samples.

ORBIT Pendant Speakers OPS1W, OPS1B

Orbit Pendant Speakers provide an ideal sound solution for open space environments that require clear, quality sound evenly distributed throughout the area. These speakers offer a pleasing industrial design and mount from above.

OPS1 Product Features:

- Specially designed to provide full-range bass in open space environments
- Easy-to-use cable suspension system includes three suspension cables with attached forged eyebolts
- Large cabinet volume and computer-matched venting system for superior bass output
- Snap-lock input connector for easy wiring to drop cables
- Low-resonance cabinet structure
- Threaded brass insert point for optional safety cable eyebolt
- Color-matched suspension cables and hardware
- Powder-coated, perforated sturdy steel grille
- Available in Dark Gray and White textured, paintable finish



Also available as a smaller Pendant (see page 6)



OPS1B

OPS1W

2 COLOR CHOICES*:



*Actual color may vary from these catalog samples.


OCS1 & OPS1 Technical Specifications:

Impedance	Power Handling	Dimensions	Product Weight
16 ohms	100W	OCS1: 12-3/8" dia. x 12" D	10 lb.
70V	32, 16, 8, 4, 2, & 1 W taps	OPS1: 14" dia. x 9-1/4" D	
100V	32, 16, 8, 4, & 2 W taps		

Product Features for both OCS1 & OPS1:

- 140-degree wide-dispersion coaxial driver for broad, even coverage
- Stable, high-definition metal-alloy woofer cone
- 6-1/2" MDT metal-alloy cone delivers detailed sound; 3/4" polycarbonate tweeter
- MLS voice coil centering system
- High-efficiency drivers deliver superior performance
- Extremely good off-axis response
- For 16-ohm, 70V, and 100V systems
- Frequency response: 45 Hz to 19 kHz
- Sensitivity: 89.5 dBspl
- Connector provides loop-through to next speaker
- Fire-rated (UL 94V0) ABS baffle
- Listed to UL Standard 60065 for US and Canada

Accessories



TBCR
Tile Bridge
Support Ring
(OCS1 only)



CK10B
(Black)
CK10W
(Off-white)
CK10
(Silver)
10 ft. Cable Kits

SIGNATURE SERIES LOUDSPEAKERS



SIGNATURE Series High-Performance Foreground Loudspeakers S4/S4T & S5/S5T

Signature Series S4 & S5 Loudspeakers are compact, versatile, and feature unique driver technologies, which produce impeccable sound quality. With their compact form factor, these speakers are an excellent fit for most indoor environments or protected outdoor locations.

Designed to both sound and look great, these speakers employ unique MDT and MLS technologies; thick-walled, low-resonance ABS enclosures; scratch-resistant, powder-coated aluminum grilles; and compact, powder-coated cast aluminum adjustable swivel mounts.

S4/S4T Product Features:


- Two models: S4 for 8 ohms; S4T for 70V & 8 ohms
- 75W at 8 ohms (S4 & S4T)
- 70V Power settings: 16, 8, 4, 2, 1 watts (S4T Only)
- 4-1/2" metal-alloy MDT™ mid/bass speaker cone is extremely stable in all environments

S4/S4T & S5/S5T Product Features:


- High sensitivity and exceptional power handling
- Hemispherical mounting system makes it simple to mount, aim, and lock-in position of loudspeaker
- MLS™ Ferrofluid voice coil centering replaces distortion-causing mechanical spider and seals magnet gap
- Unique MDT™ provides an extremely stable cone structure, fast transmission of sound, and efficiently heat-sinks the voice coils
- Wide, even coverage over listening area
- Low-resonance cabinet structure
- Precisely designed low-frequency tuning for proper balance
- Advanced polymer compound cone surrounds resist UV rays, chemicals, and salt spray
- Aluminum-alloy & titanium cones, UV-protected ABS cabinets, and powder-coated aluminum grilles and mounting brackets assure long-term cosmetic and sonic durability
- Pressure clamping input terminals for quick installation
- Color-matched mounting bracket included (see sidebar)

S5/S5T Product Features:


- Two models: S5 for 8 ohms; S5T for 70V & 8 ohms
- 150W at 8 ohms (S5 & S5T)
- 70V Power settings: 32, 16, 8, 4, 2, 1 watts (S5T Only)
- 5-1/4" metal-alloy MDT™ mid/bass speaker cone is extremely stable in all environments
- Professional Grade 1-1/2" diameter woofer voice coil provides higher output level and ultra-low distortion

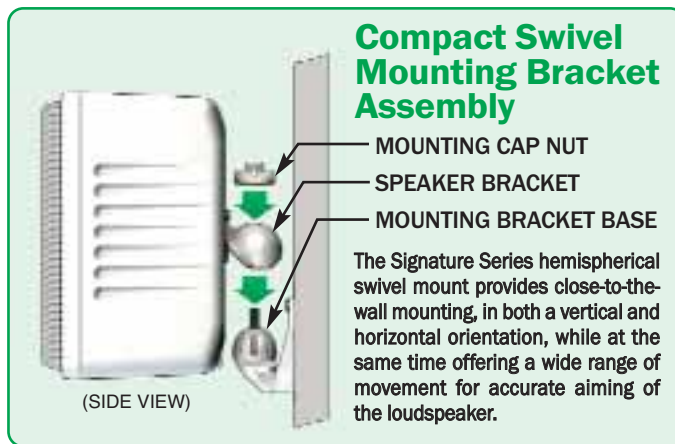

2 COLOR CHOICES*:



BLACK



OFF-WHITE

*Actual color may vary from these catalog samples.

Technical Specifications:

Model**	Drivers	Frequency Response (-10dB)*	Sensitivity (1W@1m)	Dispersion	Power Handling	Dimensions	Product Weight
S4	HF: 1" Nominal Dia. LF: 4-1/2" Nominal Dia.	58 Hz- 18 kHz	86 dB SPL	Hor.: 150° Ver.: 120°	75W @ 8Ω	5-1/4" W x 8-1/4" H x 5-3/8" D <small>(without bracket)</small>	5 lb.
75W @ 8Ω or 16, 8, 4, 2, & 1W @ 70V					5-1/4" W x 8-1/4" H x 7-3/8" D <small>(with bracket)</small>	6 lb.	
S5	HF: 1" Horn-Loaded LF: 5-1/4" Nominal Dia.	48 Hz- 17 kHz	89 dB SPL	Hor.: 130° Ver.: 110°	150W @ 8Ω	6-7/8" W x 9-3/4" H x 6-1/8" D <small>(without bracket)</small>	8 lb.
150W @ 8Ω or 32, 16, 8, 4, 2, & 1W @ 70V					6-7/8" W x 9-3/4" H x 8-1/8" D <small>(with bracket)</small>	9 lb.	

* Half Space Response

** Colors specified by adding suffix to Model number: B (black) or W (white)

Armadillo Speakers

Form follows function in the A-Series, a.k.a., the "armadillo" line. Its unique rounded ends and side corrugations, which give the speakers their characteristic "armadillo" shell look, are constructed of mineral-filled polypropylene. This dense molded material creates an extremely durable cabinet with excellent acoustic properties. Cabinet and components are impervious to salt spray and dust.

Tough, Through and Through

The A-Series is made of premium material components: die cast aluminum frames, hard anodized aluminum cones, anodized aluminum voice coil formers, compound rubber cone surrounds, high-temperature adhesives, UV-inhibited mineral-filled polypropylene enclosure, powder-coated aluminum, perforated PVC plastic grilles, threaded brass inserts, and gold-plated connectors. These are the most durable materials used in any speaker in the industry!

Accessories

ASTB4

Terminal Block Cover

(Protects wires and connections from water and effects of weather)



(For A2, A6, and A8 models)

COLOR CHOICES*



BLACK **WHITE**

*Actual color may vary from these catalog samples.

A-SERIES LOUDSPEAKERS



A2, A2T

A6, A6T

A8, A8T

A-Series Loudspeakers set the standard for smooth, accurate sound, attractive appearance, constant and reliable high performance, and rugged construction. Metal Diaphragm Technology (MDT) ensures speaker cone stability in all environmental conditions. Magnetic Liquid Suspension (MLS) is a Ferrofluid seal around the magnet gap and voice coil that provides protection from moisture and corrosion, as well as perfect voice coil alignment.

Product Features:

- Maximum speaker power capacities of 100, 150, and 175 watts at 8 ohms; and 16, 32, and 64 watts at 70V (*T versions*)
- Coaxial and 2-way
- High-precision, high-performance sound
- Long-term power handling for constant use
- Reduced distortion at all output levels
- Unsurpassed sound quality
- Completely weatherproof, fully-sealed cabinet for indoor & outdoor applications
- Withstands harsh weather conditions including sun, wind, rain, freezing temperatures, ice, and snow without affecting audio clarity or intelligibility
- Corrosion-resistant mounting hardware
- Special rubber surrounds
- Dual-layer aluminum voice coils, combined with Ferrofluid, provide efficient heat-sinking under long-term, high power situations
- Over-sized mounting knobs to secure mounting easily

A-Series Mounting Bracket



- Slots allow for the speaker to slide in with side knobs attached
- Color finish matches speaker cabinet
- Heavy-gauge brackets powder-coated to resist chipping and scratching

A-Series, A12, and G8G Loudspeaker Technical Specifications

Model*	Drivers	Frequency Response**	Sensitivity (1W@ 1m)	Dispersion	Impedance	Power Handling	Design Type	Dimensions	Product Weight
A2*	6" metal-alloy hard anodized woofer;	55 Hz-20 kHz	88 dBspl	Horizontal: 80 degrees;	8-ohm	100 watts	Coaxial	9" W x 8" dia. x 8-1/4" D (with knob & bracket)	8 lb.
A2T*	1/2" polycarbonate tweeter			Vertical: 80 degrees		16 watts (16W, 8W, 4W tap settings)			10 lb.
A6*	6" metal-alloy hard anodized woofer;	50 Hz-20 kHz	89 dBspl	Horizontal: 110 degrees;	8-ohm	150 watts	2-way	13-7/8" W x 7-1/8" H x 7-3/4" D (with bracket)	11 lb.
A6T*	1-1/8" pure titanium low diffraction inverted tweeter			Vertical: 45 degrees (up), 35 degrees (down)		32 watts (32W, 16W, 8W tap settings)			12 lb.
A8*	8" metal-alloy hard anodized woofer;	45 Hz-20 kHz	91 dBspl	Horizontal: 100 degrees;	8-ohm	175 watts	2-way	17-7/8" W x 10-1/4" H x 10" D (with bracket)	18 lb.
A8T*	1-1/8" pure titanium low diffraction inverted tweeter			Vertical: 35 degrees (up), 45 degrees (down)		64 watts (64W, 32W, 16W tap settings)			20 lb.
A12	(2) Metal Composite 6-1/2" Woofers, 1.9" Mylar HF Diaphragm	55 Hz-17.5 kHz	94.5 dBspl	Horizontal: 90 degrees; Vertical: 45 degrees	16-ohm/70V	225W at 16-ohm, 128W at 70V (128W, 64W, 32W, 16W, 8W tap settings)	2-way, 3-Driver	10-1/4" W x 17-7/8" H x 11-3/4" D	22 lb.
G8G	LF: 8" Nominal Dia. Metal Alloy Cone utilizing MLS HF: Co-axial; 1" Titanium Cone	45 Hz-20 kHz	91 dBspl (@ 8-ohm)	Horizontal: 160 degrees	Nominal 8-ohm/70V	150W at 8-ohm, 64W at 70V	Coaxial	13" W x 17-1/4" H x 12-1/4" D	14 lb.

* Colors specified by adding suffix to Model number: BLK (black) or WHT (white). ** (-10 dB)

A-SERIES LOUDSPEAKER



High-Output, Long-Throw Loudspeaker A12



The **A12 High-Output, Long-Throw Loudspeaker** provides deep, rich bass and smooth highs as a complement to other A-Series loudspeakers.

The A12 is a high-powered speaker that projects well in far-field applications as well as in more intimate settings. A built-in transformer means one speaker will work with 70V or 16-ohm systems. Dual metal-alloy mid/bass drivers and a Mylar high-frequency compression driver combine to minimize distortion and provide precise sound reproduction at any volume level.

The A12 is ideal for both music and voice reproduction, and its powerful, highly directional output and weatherproof design make it the perfect speaker for sound reinforcement in outdoor venues.

Product Features:

- Dual 6-1/2" LF driver with horn-loaded HF driver
- One model for both 70V systems & low-impedance (16-ohm) systems
- Dual metal-alloy MDT™ mid/bass speaker cones are extremely stable in all environments
- MLS™ Ferrofluid voice coil suspension replaces distortion-causing mechanical spider
- Rigid MDT diaphragm design delivers clear sound & low distortion
- Dual-layer voice coil with separate inner and outer windings for improved thermal path
- Horn-loaded compression driver features Mylar diaphragm for long-term, consistent performance
- High sensitivity and power handling for unmatched sound coverage
- Vented cabinet with specially-designed vent covers that resist water entry
- Improved compound rubber surrounds resist UV rays, chemicals, and salt spray
- Corrosion-resistant woofer frames and mounting hardware for long-lasting "like new" appearance
- Attractive styling with "armadillo" ridges improve durability as well as sound
- Gold-plated, rustproof input connectors
- Optional multi-angle tilting bracket for pole/wall mounting

Accessories

TMA812

Tilt Mount Adapter

Stainless Steel



(For A8 and A12 models)

BLACK ONLY

See A12 Technical Specifications in chart on page 4.

IN-GROUND LOUDSPEAKER




In-Ground, All-Weather Loudspeaker G8G

The **G8G In-Ground, All-Weather Loudspeaker** features superior sound and superior weather durability. Its fully-sealed enclosure makes it ideal for outdoor commercial and industrial applications.

Product Features:

- Sloped cabinet panels ensure pull-out resistance of the speaker when buried
- 8-ohm and 70V taps included
- Extremely stable, long-lasting Metal Diaphragm Technology (MDT) cone structure
- High efficiency and power handling for optimum performance
- Dual-layer voice coil with separate inner and outer windings for high output and ultra-low distortion
- Magnetic Liquid Suspension (MLS) provides constant lubrication of the gap, preventing oxidation when used outdoors
- Compound rubber surrounds resist UV rays, salt spray, and chemicals
- Stainless steel grille protects the driver elements
- Molded polyethylene enclosure resists chipping, scratching, and damage from impact
- Corrosion-resistant driver frames
- Wide coverage angles produce broad, even sound field
- Available in green

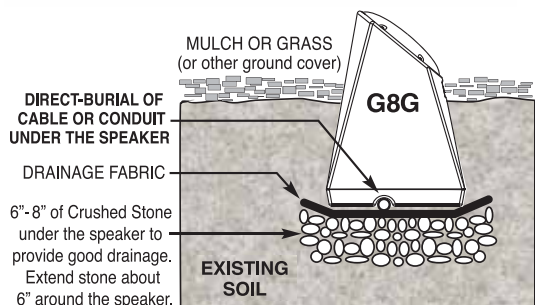

GREEN ONLY

See G8G Technical Specifications in chart on page 4.

CEILING SPEAKERS

High-Fidelity Ceiling Speakers



HFCS1 & HFCS1LP

Bogen's coaxial and 2-way, High-Fidelity Ceiling Speakers deliver unsurpassed performance and value.




Product Features:

- Installs into a variety of ceiling environments including suspended ceilings and hard-surfaced ceilings
- Large steel back can for extended bass response (HFCS1)
- Low-profile housing allows greater range of installation depths (HFCS1LP)
- Computer-matched venting system for excellent bass output
- Wide dispersion coaxial driver provides broad, even coverage
- Good off-axis response with smooth contouring
- Easy-to-install mounting system for a variety of ceiling types
- High power handling capability for foreground sound
- Selectable power taps via front-mounted rotary control under grille
- Easy wiring with 4-terminal snap-on input connector (providing loop-through)
- 3/4" durable polycarbonate tweeter cone
- 6-1/2" highly stable polypropylene cone
- Sensitivity: 89 dBspl @ 1W/1m
- Available in Black or White ABS baffle ring and perforated steel grille (both paintable)
- Attachment point for seismic cable
- Fire-rated (94VO) ABS baffle
- Listed to UL Standard 60065 for US & Canada



Technical Specifications:

Model	Impedance	Power Handling	Frequency Response	Dimensions	Product Weight
HFCS1/ HFCS1LP	16 ohms	75W	HFCS1: 65 Hz-19 kHz	HFCS1: 12-5/16" dia. x 12" D	HFCS1: 9 lb.
	70V	32, 16, 8, 4, 2, & 1 W taps	HFCS1LP: 78 Hz-19 kHz	HFCS1LP: 12-5/16" dia. x 7-3/4" D	HFCS1LP: 8 lb.
	100V	32, 16, 8, 4, & 2 W taps			

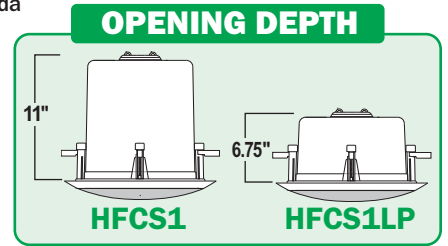


Mini Pendant Speakers MPS1 & MPS2

The Bogen MPS1 and MPS2 Mini-Pendant Speakers are an excellent choice for high ceiling and open space environments.

Product Features:


- Wide dispersion 4-1/2" driver for broad, even coverage; superb off-axis response
- High-power handling capability for foreground sound/high-ambient noise environments
- Selectable power taps via rear-mounted control; 32, 16, 8, 4, 2, 1 watts @ 70V
- Low-resonance cabinet structure improves mid-range clarity
- Computer-matched venting system for extended bass output
- High-efficiency drivers deliver superior performance
- Central attachment point for suspension and second point provided for safety cable
- For 70V and 16-ohm low-impedance systems
- Quick & Easy wiring with snap-on connector
- Simple single point suspension method
- Powder-coated perforated steel grille
- Available in Black or White

Also available as a larger Pendant (see page 2)



Technical Specifications:

Model	Impedance	Sensitivity (1W @ 1m)	Frequency Response (-10 dB)	Dimensions	Product Weight
MPS1	Low (16 ohms)/ High (70V)	86 dB (Avg. 100 Hz-10 kHz)	50 Hz-14 kHz	10" dia. x 7-7/8" H	4.5 lb.
MPS2	Low (16 ohms)/ High (70V)	87 dB (Avg. 100 Hz-15 kHz)	50 Hz-22 kHz		

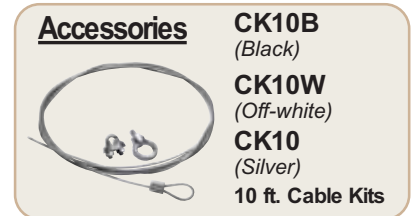

CEILING SPEAKERS



High-Fidelity Ceiling Subwoofer CSUB

The Bogen **CSUB Ceiling Subwoofer** delivers outstanding bass response in both suspended ceiling and hard-surfaced installations. The CSUB can provide deep, rich bass response to any speaker system. Perfect accompaniments to the CSUB are the HFSF1, HFCS1/LP, and OCS1 ceiling loudspeakers.

The CSUB offers six levels of power output settings plus an 8-ohm position controlled via a front-mounted, rotary tap selector switch (under grille). The low-distortion speaker design, coupled with a computer-matched venting system, delivers exceptional low-frequency response for music. The mechanical CSUB design features four swing-out mounting clamps that eliminate the need for a separate tile bridge when used in suspended ceiling applications.

Product Features:

- Flat bass response down to 40 Hz
- Computer-matched venting system for full bass output
- 11" deep enclosure clearance
- Integral swing-out mounting clamps eliminate need for tile bridge
- High power handling capability for foreground sound
- Selectable power taps via front-mounted control
- Power taps: 64, 32, 16, 8, 4, and 2 watts @ 70V
- 8-ohm selector position for low-impedance systems
- Compound rubber surround for lasting performance
- Easy wiring with plug-in connector providing loop-through terminals
- Fire-rated (94VO) ABS baffle

- Attachment point for seismic safety cable
- Input terminal cover with conduit knockout
- Attractive, contemporary, sturdy steel grille assembly with fine perforations
- Off-white, paintable finish
- Listed to UL Standard 60065 for US and Canada

Accessories

CK10
10 ft. Cable Kit
(Silver)

Technical Specifications:

Impedance	Power Handling	Sensitivity	Frequency Response	Dimensions	Product Weight
8 -ohm Nominal	150W (8-ohm)	91 dBspl @ 1W/1m	40 Hz -125 Hz	15-1/2" dia. x 12-1/2" D	20 lb.
70V Settings	64, 32, 16, 8, 4, 2W taps (70V)				

High-Fidelity Ceiling Speaker HFSF1

The Bogen **HFSF1 High-Fidelity, Small-Footprint Ceiling Loudspeaker** delivers superior sound in a very compact enclosure. The speaker is unobtrusive at only 7-1/4" in diameter, and mounts easily in all types of ceilings including existing hard-surface types and suspended ceilings.

The low-distortion, coaxial-design speaker, coupled with a computer-matched venting system, delivers superb fidelity for music as well as high intelligibility for voice reinforcement. Coupled with the Bogen CSUB Ceiling Subwoofer, it provides the perfect solution for environments that require the highest-quality sound with minimal visual impact.



Product Features:

- Superior sound in a very compact enclosure
- Wide-dispersion coaxial driver for broad, even coverage; superb off-axis response
- Small footprint, visually appealing
- Only 6-1/4" diameter ceiling opening required
- Installs in wide range of ceiling types
- For 70V and low-impedance systems
- Selectable power taps via control mounted under grille; 16, 8, 4, 2, 1 watts at 70V
- 16-ohm selector position for low-impedance systems
- Quick wiring with removable plug-in connector providing loop-through terminals
- Attachment point for seismic safety cable
- Input terminal cover with conduit knockout
- Fire-rated (94VO) ABS baffle

- Compound rubber surround for lasting performance year after year
- Integral mounting clamps tighten quickly and firmly
- Tile bridge (TBSF) accessory recommended for suspended ceiling installations
- Off-white, paintable finish
- Listed to UL Standard 60065 for US and Canada

Accessories

CK10
10 ft. Cable Kit
(Silver)

TBSF
Tile Bridge Support Ring

Technical Specifications:

Impedance	Power Handling	Sensitivity	Frequency Response	Dimensions	Product Weight
16-ohm Nominal	50W (16-ohm)	86 dBspl @ 1W/1m	78 Hz -20 kHz	7-1/4" dia. x 7-1/2" D	4.5 lb.
70V Settings	16, 8, 4, 2, 1W taps (70V)				

DROP-IN CEILING SPEAKERS

Drop-In Ceiling Speakers

Bogen's **Drop-In Ceiling Speakers** are full-range loudspeakers that allow fast and simple installation, which saves time, effort, and cost. Depending on whether your ceiling grid is 2' x 2' or 2' x 4', the speaker can be dropped directly into place or by simply making a single cut to the ceiling tile, placing the tile support rail, and then inserting the speaker into position.

Models CSD2X2(U), CSD2X2VR(U) 70V and 25V Operation

- 2ft. X 2ft. with back can enclosure
- 4-watt, 70V/25V transformer
- 4, 2, 1, 1/2, & 1/4-watt tap settings; selectable by rotary switch
- Fully enclosed, industrial grade steel construction
- 8" main cone with secondary high-frequency cone; 10 oz. magnet weight
- Plenum-rated — meets the requirements of UL standard 2043 for smoke and heat release
- Front-mounted, recessed volume control versions available (VR)
- Listed to UL Standard 60065 for U.S. & Canada; and UL Standard 1480 for U.S.



Models CSD2X2L(U) Low-impedance (8-ohm) Operation

- 2ft. X 2ft. with back can enclosure
- Low-impedance: 8-ohm speaker, 15W maximum power
- Fully enclosed, industrial grade steel construction
- 8" main cone with secondary high-frequency cone; 10 oz. magnet weight
- Plenum-rated — meets the requirements of UL standard 2043 for smoke and heat release
- Listed to UL Standard 60065 for U.S. & Canada; and UL Standard 1480 for U.S.



Models CSD1X2(U), CSD1X2VR(U) 70V and 25V Operation

- 1ft. X 2ft. with back can enclosure
- 4-watt, 70V/25V transformer
- 4, 2, 1, 1/2, & 1/4-watt tap settings; selectable by rotary switch
- Fully enclosed, industrial grade steel construction
- 8" main cone with secondary high-frequency cone; 10 oz. magnet weight
- Plenum-rated — meets requirements of UL standard 2043 for smoke and heat release
- Front-mounted, recessed volume control versions available (VR)
- Listed to UL Standard 60065 for U.S. & Canada; and UL Standard 1480 for U.S.



Model	Speaker Size		Grille Color	Impedance		Speaker Back Can	Recessed Volume Control (VR)
	1 ft. x 2 ft.	2 ft. x 2 ft.	Off-white Bright White (U)	70V/25V (4W max.)	8-ohm (L) (15W max.)		
CSD1X2	●		●	●		●	
CSD1X2U	●		●	●		●	
CSD1X2VR	●		●	●		●	●
CSD1X2VRU	●		●	●		●	●
CSD2X2		●	●	●		●	
CSD2X2U		●	●	●		●	
CSD2X2VR		●	●	●		●	●
CSD2X2VRU		●	●	●		●	●
CSD2X2L		●	●		●	●	
CSD2X2LU		●	●		●	●	

All Drop-In Ceiling Speakers Feature:


- Finely perforated grille over entire front of speaker
- Tile Support Rail crossbar (included) for use with 2' x 4' and 2' x 2' suspended tile ceilings
- Bright White ("U") versions or Off-white finish
- Seismic attachment points

Now available in
Bright White & Off-white

Model	Dimensions	Product Weight
CSD1X2/VR	12-1/4" W x 5" H x 24" D	10 lb.
CSD2X2/VR/L	24" W x 4-7/8" H x 24" D	12 lb.

NOTE: For Bright White versions, add "U" to end of model number.

"VR" Versions (with front-mounted recessed volume control)

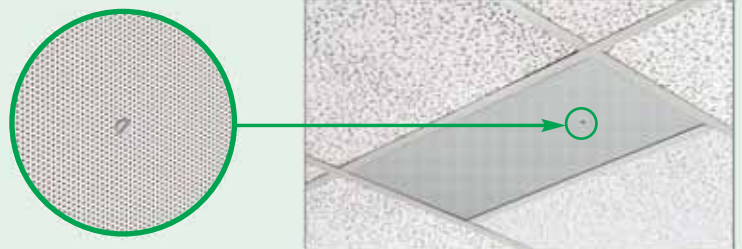

DROP-IN CEILING SPEAKERS

Modular Drop-In Ceiling Speakers

The **MCD-Series** Speakers offer installers a low-cost alternative to pre-assembled drop-in ceiling speakers. The speaker assembly consists of the speaker module and a grille, which are easily assembled. The MCDMOD simply snaps securely onto a grille. Since the module is not attached to the grille, it allows installers the option of making wire connections before or after grille placement in the ceiling. The assemblies fit into 2' x 2' or 2' x 4' ceiling grids.



Speaker Module

This compact speaker module is a component of your speaker assembly. Both the MCD1X2U and MCD2X2U assemblies utilize the MCDMOD speaker module to reinforce sound.

Module Features:

- Fully-enclosed speaker module
- 4-1/2" full-range speaker with a secondary high-frequency radiator
- 120-degree wide dispersion angles
- Broad sound field for even coverage throughout the listening area
- Rotary switch selects 4, 2, 1, 1/2, and 1/4 watt power tap settings
- Compatible with 70V/25V systems
- 160 Hz to 10.5 kHz frequency response
- Sensitivity: 85 dB (1W/1m)
- Listed to UL Standard 60065 for U.S. and Canada; and UL Standard 1480 for U.S.

Ceiling Grilles: 1' x 2' or 2' x 2' Grilles

Depending on the application's aesthetics or grid configuration, you may select either the 1' x 2' MCD1X2UGRILLE or the 2' x 2' MCD2X2UGRILLE to fit in 2' x 2' or 2' x 4' suspended ceilings.



MCD1X2UGRILLE Features:

- 1' x 2' Grille, constructed of industrial grade steel
- 3 Seismic attachment points
- Bright White, powder-coated finish
- Tile Support Rail crossbar (included)



MCD2X2UGRILLE Features:

- 2' x 2' Grille, constructed of industrial grade steel
- 3 Seismic attachment points
- Bright White, powder-coated finish
- Tile Support Rail crossbar (included)

Individual Components	Dimensions	Product Weight
MCDMOD	5-3/4" W x 3-1/2" H x 6-3/4" D	2.5 lb.
MCD1X2UGRILLE	11-7/8" W x 5/8" H x 23-3/4" D	2.5 lb.
MCD2X2UGRILLE	23-3/4" W x 5/8" H x 23-3/4" D	4.5 lb.

Order Complete Kits (Assembly Required)

MCD1X2U Kit

Consists of a MCDMOD Speaker Module and a MCD1X2UGRILLE 1' x 2' Metal Grille

MCD2X2U Kit

Consists of a MCDMOD Speaker Module and a MCD2X2UGRILLE 2' x 2' Metal Grille



METAL BOX SPEAKERS



Metal Box Speakers

MB8TSL, MB8TSLVR, MB8TSQ, MB8TSQVR

Bogen's Metal Box Speakers feature all-steel construction, surface-mounted enclosure with an 8" cone loudspeaker and 4-watt 70V/25V transformer. The MB8TSL is designed primarily for wall mounting, and its face is angled downward 12.5 degrees. The MB8TSQ is suitable for ceiling or wall mounting. "VR" versions include a recessed volume control.

Product Features:


- Rugged all-steel, surface-mounted, off-white painted enclosure
- Full-range 8" cone speaker for excellent intelligibility
- Compatible with 70V/25V amplifier systems
- 4-watt maximum power
- 6 power taps available (4, 2, 1, 1/2, 1/4, 1/8 watts)
- Mounting hardware included
- Wiremold® knockouts
- "VR" versions include a recessed volume control

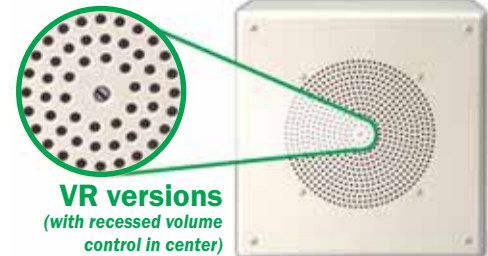

Models	Front Panel Design	Frequency Response	Sensitivity (dBspl @ 1W)	Dimensions	Product Weight
MB8TSL/VR	Slant/Angle	110 Hz -15 kHz	96	11-5/8" W x 11-3/8" H x 5-3/8" D (Top Dimension) 11-5/8" W x 11-3/8" H x 2-3/4" D (Bottom Dimension)	9 lb.
MB8TSQ/VR	Square/Flat	110 Hz -15 kHz	96	11-5/8" W x 11-5/8" H x 4-1/4" D	9 lb.

Wiremold® is a registered trademark of Wiremold/Legrand.

WALL BAFFLE SPEAKERS



WBS8T725, WBS8T725V, WBS8T725BR, WBS8T725BRV, WBS810T725

Bogen Wall Baffle Speakers consist of 8" cone speakers (S86 or S810) pre-assembled into a simulated walnut-finished wooden enclosure with a black grille cloth on front. These wall baffles are handsomely styled and ruggedly built with 3/8" particle board reinforced at the corners. Designed for wall mounting, the face is angled downward 13.5 degrees. Recessed volume control and terminal strip are available options on the WBS8T725 model.

Product Features:

- 4-watt capacity
- 6 power taps available (4, 2, 1, 1/2, 1/4, 1/8 watts)
- Simulated walnut finish
- Works with both 70V and 25V amplifier outputs
- Pre-assembled for faster installation
- 8" cone speaker for excellent audio quality
- 6 oz. or 10 oz. magnet weights
- Recessed volume control available (V models only)
- Screw terminals available (BR models only)
- Easy wall-mount installation
- Mounting hardware included

Dimensions
9-1/2" W x 9-1/2" H x 5-1/4" D (3-1/4" D @ bottom)

Model	Magnet Weight	Frequency Response	Sensitivity (4ft./1W)	No Volume Control	Recessed Volume Control (V)	Screw Terminals (BR)	Shipping Weight (4/carton)
WBS8T725	6 oz.	50 Hz-12 kHz	95 dBspl	●			18 lb. / carton
WBS8T725V					●		
WBS8T725BR						●	19 lb. / carton
WBS8T725BRV						●	
WBS810T725	10 oz.	70 Hz-15 kHz	96 dBspl	●			20 lb. / carton

CEILING SPEAKER ASSEMBLIES

SEC4T



Bogen's **SEC4T Compact Ceiling Speaker Assembly** consists of a 4" Cone Speaker pre-assembled onto a 7-1/4" steel ceiling grille, painted with bright-white enamel finish.

Both the **S86 & S810 Ceiling Speaker Assemblies** consist of an 8" Cone Speaker pre-assembled onto a 13" steel ceiling grille painted with off-white (PG8W) or bright white (PG8U) enamel. Options for these assemblies are recessed volume control (VR), volume control with knob (VK), and rear-mounted screw terminal strip for power taps (BR).


Product Features:

- 4-watt capacity /4-watt transformer
- 8" cone speaker (S86 & S810) and 4" cone speaker (SEC4T) provides excellent audio quality
- 6 different power taps available (4, 2, 1, 1/2, 1/4, 1/8 W)
- Pre-assembled for faster installation
- S86/S810 available in Off-white (W) or Bright White (U) enamel over steel grille; SEC4T available in Bright White only
- Works with both 70V and 25V amplifier outputs
- Some S86/S810 models available with recessed volume control knob (see chart below)
- Screw terminals (BR models only)

Model	Magnet Weight	Frequency Response	Sensitivity (4ft./1W)	No Volume Control	Recessed Volume Control (VR)	Volume Control w/Knob (VK)	Screw Terminals (BR)	Shipping Weight (6/carton)
S86T725PG8W	6 oz.	50 Hz-12 kHz	95 dBspl	●				27 lb. / carton
S86T725PG8WVR					●			
S86T725PG8WVK						●		
S86T725PG8WBR				●			●	28 lb. / carton
S86T725PG8WBRVR					●		●	
S86T725PG8WBRVK						●	●	
S810T725PG8W	10 oz.	70 Hz-15 kHz	96 dBspl	●				30 lb. / carton
S810T725PG8WVR					●			
S810T725PG8WVK						●		
SEC4T	4 oz.	75 Hz-20 kHz	86 dBspl (1W @ 1m)	●				19 lb. / 10 per carton

For Bright White versions of the above models, replace the "W" in each model number with a "U".

S810T725PG8W(U) & Variations



S86 & S810 available in Bright White ("U" versions) & Off-white ("W" versions)

Model	Dimensions:
S86/S810	13" dia. x 3-1/4" D
SEC4T	7-1/8" dia. x 3" D


S86T725PG8W(U) & Variations




Ceiling Speaker Assembly Variations

Bogen ceiling speaker assemblies consist of an 8" cone speaker (S86 or S810) mounted in an enamel, steel-finished ceiling grille (PG8W or PG8U) with a transformer (T725). The assemblies are available in several options, as outlined here:


- Recessed Volume Control - S86/S810T725PG8WVR*



- Volume Control Knob - S86/S810T725PG8WVK*



- Screw Terminal Strip - S86T725PG8WBR*

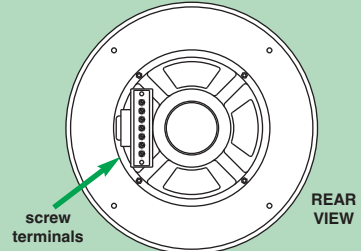

Accessories (for S86 & S810)



FOREGROUND SPEAKERS

FG-Series Speakers

The FG-Series of 2-way speakers is designed to deliver high-quality, wide frequency response audio in a compact cabinet. These speakers are perfect for supplying foreground as well as background music.

Product Features:

- 15-watt models
- Smooth, wide frequency response
- Compact and rugged plastic cabinets
- Works with both 70V and 8-ohm speaker systems
- U-Mounting bracket included
- Rotary switch-selected power rating for 70V systems
- Available in Black (B) and Off-white (W)



FG15B
(Black)



FG15W
(Off-White)

Model	Power Capacity (watts)		Frequency Response	Sensitivity (dBspl @ 1W)	Low-Freq Driver	High-Freq Driver	Dimensions	Product Weight
	70V Systems	8 ohms						
FG15B	15, 7.5, 4, 2 & 1	15	100 Hz - 20 kHz	86	3-1/2"	3/4" Mylar	4-5/8" W x 7-1/4" H x 5" D	4 lb.
FG15W								

SOUND COLUMNS

SCW20, SCW35

Bogen's Sound Columns provide effective sound reinforcement for installations with large areas, using a minimum number of speakers. Each column has a vertical array of speakers producing a highly directed sound dispersion pattern for reduced reflection from the room's floor and ceiling.

Product Features:

- 20- or 35-watt models
- Works with 8-ohm speaker systems
- Four 5" speakers (SCW20) or six 6" speakers (SCW35)
- Controlled sound projection
- Uniform sound level & reduced feedback
- Clear and intelligible speech reproduction
- Polarized screw terminals
- Acoustically lined, particle board construction: 3/8" (SCW20), 1/2" (SCW35)
- Simulated oiled walnut, black grille
- Mounting hardware included



SCW35



SCW20

Model	Maximum Power Capacity (Watts)	Frequency Response	Sensitivity (dBspl @ 1W)	Dispersion Angle (degrees)	Dimensions	Product Weight
SCW20	20	80 Hz - 14 kHz	100	Vert: 45, Hor: 90	7-1/2" W x 20" H x 5" D	10 lb.
SCW35	35	70 Hz - 16 kHz	105	Vert: 25, Hor: 120	9-1/2" W x 42" H x 6" D	21 lb.

FLANGE-MOUNTED HORN SPEAKER

FMH15T

The Bogen FMH15T is a flange-mounted, high-intelligibility, reentrant-type loudspeaker. Its sturdy, weatherproof, vandal-resistant, all-metal construction is ideal for indoor and outdoor use. It has a built-in tap selector switch for selecting the speaker power in 70V or 25V constant-voltage systems.

Product Features:

- Excellent efficiency and voice intelligibility
- Weather-sealed tap selector switch
- 15 watts max. @ 70V or 25V
- Select flush (BBFM6) or surface (BBSM6) mount enclosure for installation (each sold separately)
- Vandal-resistant accessory components for hostile-environment applications
- Heavy-duty cast aluminum grille (SGHD8) and adapter ring (FMHAR8) for installation (each sold separately)
- All-metal with black enamel finish

Power Taps (Watts)		Frequency Response	Sensitivity (dBspl @ 1W)	Dispersion Angle	Dimensions	Product Weight
70V	25V					
15, 7.5, 3.6, 1.8, 0.9	15, 7.0, 1.8, 0.9, 0.5, 0.25, 0.125	600 Hz - 14 kHz	104	100°	6-7/8" dia. x 5-1/2" D	3 lb.



Accessory Components



HORN LOUDSPEAKERS



**SPT5A,
SP58A**



**SPT15A, SP158A,
SPT30A+, SP308A+**



BDT30A*

Bogen's Horn Loudspeakers offer high efficiency and excellent intelligibility. Rotary switch-selected power taps make installation quick and easy. SPT and BDT models are compatible with 70V and 25V paging systems, SP models are 8-ohm versions. The KFLDS30T is a 70V/25V wide dispersion, high-intelligibility, reentrant type loudspeaker. The IH8A is a paging horn.

Product Features:

- Maximum speaker power capacities of 7.5, 15, and 30 watts
- Rotary switch-selected power taps on transformer models
- Constant voltage (70V/25V) and 8-ohm versions (KFLDS30T and BDT30A are 70V/25V only)
- Tilt & swivel base for easy positioning
- Sturdy, all-metal construction with mocha enamel finish (KFLDS30T horn flare is constructed of polycarbonate)
- Weatherproof design
- Twin reentrant horns for bi-directional projection (BDT30A only)
- KFLDS30T provides wide-angle projection with a rotatable horn flare

+ For style only, product is larger

* Some assembly required




KFLDS30T



IH8A

Special Protection

The SPT15A, SPT30A, BDT30A and KFLDS30T use a cast aluminum end bell specially designed to make them weatherproof. A rotary selector switch is used to set the specific power tap for the speaker. This switch's entry into the end bell is sealed by a special mounting nut with an integral O-ring. A removable plastic panel protects both the rotary switch and the electrical connections. This panel provides a narrow opening for the speaker wires to exit, reducing the chance of water infiltration.



Tilt & Swivel Base

Bogen's 15- and 30-watt horns include a unique and easy-to-use tilt and swivel mounting base that provides nearly 180 degrees of tilt and a full 360 degrees of swivel. A single wing nut locks in the angle of the speaker. Loosening the wing nut frees the speaker in each rotational axis, making it fast and easy to precisely aim the speakers where the sound is needed. The base provides three holes for screw mounting and a slot to allow strapping the speakers to beams. The actual mounting base can easily be removed so that the base can be installed separately. The speakers can then be attached to the bases at a later time.

Model	Max Power Capacity (Watts)	Frequency Response	Sensitivity (dBspl, 1W @ 4ft.)	Max Sound Level (dBspl, full power @ 4ft.)	Power Taps (Watts)		Low-Impedance 8-ohm	Dispersion Angle (degrees)	Connection	Dimensions	Product Weight
					70V	25V					
SPT5A	7.5	250 Hz-14 kHz	96	105	7.5, 5, 2.5, 1.25, 0.65	1, 0.62, 0.31	No	120°	Wire Lead	6" dia. x 4" D	1.5lb.
SP58A					N/A	N/A	Yes				
SPT15A	15	275 Hz-14 kHz	109	121	15, 7.5, 3.8, 1.8, 0.9	15, 7.5, 1.8, 0.94, 0.46	No	110°	Screw Terminal	9" dia. x 9-1/4" D	4 lb.
SP158A					N/A	N/A	Yes				3 lb.
SPT30A	30	225 Hz-14 kHz	110	125	30, 15, 7.5, 3.7, 1.8	15, 7.5, 3.7, 1.8	No	100°	Screw Terminal	11" dia. x 10-1/2" D	6 lb.
SP308A					N/A	N/A	Yes				5 lb.
BDT30A	30	225 Hz-14 kHz	106**	121**	30, 15, 7.5, 3.7, 1.8	15, 7.5, 3.7, 1.8	No	100°**	Screw Terminal	9-5/8" dia. x 12-1/8" D**	7 lb.
IH8A	15	350 Hz-14 kHz	108	120	N/A	N/A	Yes	130°	Wire Lead	6-1/4" dia. x 6" D	2.5lb.
KFLDS30T	30	300 Hz-12 kHz	104	119	30, 15, 7.5, 3.7, 1.8	15, 7.5, 3.7, 1.8, 0.9, 0.5, 0.25	No	70°(Vert.) x 95°(Horiz.)	Screw Terminal	14-3/8" W x 8-1/4" H x 12-7/8" D	6 lb.

** Each Horn

Accessories



BC1
Beam Clamp



TCSPT1
Terminal Cover for Conduit
(For BDT30A, KFLDS30T, SP158A, SP308A, SPT15A, & SPT30A)



HSES10
Horn Speaker Electrical Box Strap
(pack of 10)
(Not for SP58A & SPT5A)

Bypass Feature

In certain rooms such as training or conference rooms where meetings or presentations are held, paging announcements are considered interruptions. To avoid or eliminate such interruptions, speakers installed in these rooms may use attenuators to set speaker volume low or off. In these cases, emergency messages would not be heard by individuals in these rooms.

To ensure critical messages are heard, the ATP-Series Attenuators include a Bypass Function that sets emergency messages to full volume - to all speakers the attenuator controls - even if the speakers' volume control knobs are set low or off. A trip voltage of between 9V and 30V DC causes the attenuator to bypass the volume control function and provides full volume audio to the speakers. This is a critical and ideal function in emergency situations when a message must be sent to all individuals in a building.

Extreme Human Environments

It takes a specially-engineered speaker to stand up to the extreme abuse of human beings. The VRS-Series has been installed in some of the most demanding applications, from high-crime area door-answer systems to some of the most notorious correctional facilities.

What Tough Is (Exploded View)

The VRS-Series features an 11-gauge stainless steel faceplate (#1). That's a solid 1/8" of the hardest steel around.

Behind that, there's a heavy-duty steel barrier (#2) which is designed to let sound out and nothing in. The barrier is baffled so that knives, nails, paper clips, and anything else that might fit into the grille openings will not enter the speaker nor make contact with the speaker's cone.

Then for further protection, a finely perforated metal grille (#3) covers the entire speaker to intercept any object that might snake its way through the baffles of the steel barrier.

The VRS-Series not only keeps objects out, but fluids also cannot damage the speaker because the speaker's cone is made of weather-resistant plastic (#4).

ATTENUATORS

AT10A, AT35A & ATP10, ATP35

Both Attenuator Series (AT and ATP) allow the output level of a group of loudspeakers to be set from a wall-mounted volume control, without affecting overall amplifier volume settings. The ATP-Series also has a priority bypass function which overrides the volume control knob to provide full volume audio to the speakers.

Product Features:

- Adjusts loudspeaker output levels on 25V & 70V systems
- 2 Models control up to 10-watt or 35-watt speaker systems
- Priority override of volume/Emergency Bypass feature (ATP models)
- 10 Attenuation steps and an off setting
- Mounts in standard electrical box; single (AT10A, ATP10) or double (AT35A, ATP35)
- Simple connections



AT35A

AT10A



ATP35

ATP10

Model	Power Rating	Gang Box	Emergency Bypass	Dimensions*	Product Weight
AT10A	10 watts	Single		2-3/4" W x 4-1/2" H x 2-3/4" D	13 oz.
AT35A	35 watts	Dual		4-5/8" W x 4-5/8" H x 3" D	14 oz.
ATP10	10 watts	Single	●	2-3/4" W x 4-1/2" H x 2-5/8" D	13 oz.
ATP35	35 watts	Dual	●	4-5/8" W x 4-5/8" H x 3" D	14 oz.

*Depth from front of plate

VANDAL-RESISTANT SPEAKERS

VRS1, VRS2


These Vandal-Resistant Speaker assemblies ensure that sound communication gets through reliably, despite being located in environments susceptible to damage and destruction. The assembly includes a 3" plastic cone speaker, securely located and protected behind steel barriers. Available with or without call button.



VRS1

VRS2

EXPLODED VIEW (see sidebar)

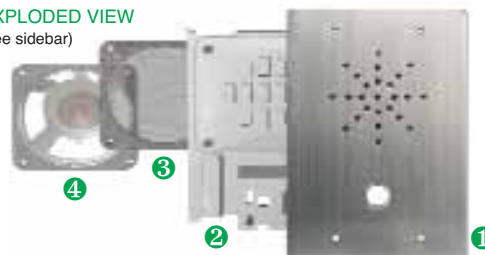

Product Features:

- Withstands attempts at vandalism in hostile environments
- Four layers of defense: ① a heavy-duty 11-gauge stainless steel faceplate, ② a baffled steel guard protects the speaker from puncture, ③ a finely perforated screen stops thin, flexible objects from damaging the moisture-resistant plastic speaker cone, and ④ weather-resistant cone
- Grille openings are cross-positioned so that nothing can enter the speaker, not even the smallest or sharpest objects
- Unbreakable metal call button (VRS1 only); VRS2 available without call button
- Optional low-impedance, 8-ohm speaker operation
- Mounts with one-way security screws (included)
- 1/2-Watt speaker power on 25V speaker line
- 3" Weather-resistant cone speaker

Model	Dimensions	Product Weight
VRS1	5-1/2" W x 7-3/4" H x 2.5" D	2.5 lb.
VRS2	5-1/2" W x 7-3/4" H x 2" D	2 lb.

EASY INSTALL®/EASY DESIGN™ SPEAKERS

Surface-Mount Ceiling Speakers SM1EZ, SM4T

Easy Install Speakers drastically cut system installation time because each speaker can be completely installed — mounted in the ceiling, secured, and connected — in less than a minute! This versatile speaker carries voice messages with clarity anywhere dependable communication is required. It can be installed in any suspended ceiling with ceiling tiles... quick, easy, and trouble-free. Compatible with both 70V and 25V systems.



Product Features:

- **Installs in Seconds.** Each speaker assembly is specially designed for immediate installation as soon as you take it out of the box... complete installation takes less than a minute.
- **No-Tool Installation.** No tools needed; everything you need is right in the box.
- **Contemporary, Low-Profile Design.** Looks good in any environment.
- **No Clean-Up.** Installation means piercing ceiling tiles, *NOT* cutting them. So, there's virtually no mess and no ceiling tile pieces to clean up.

Model Variations:

- **SM1EZ** is a one-watt, single tap speaker.
- **SM4T** is a four-watt, multi-tap speaker with settings of 4, 2, 1, 1/2, and 1/4 watts. Settings are rotary switch selectable (there are no transformer wires to deal with).

Technical Specifications:

Dimensions:	9-1/2" diameter
Depth:	3" (from tile surface)
Frequency Response:	125 Hz – 15 kHz
Sensitivity:	90 dBspl (1 watt @ 1 meter)
Product Weight:	2 lb. each
Shipping Weight:	15 lb./carton (5/carton)

Complies with NFPA National code 160b that allows speakers to be installed in plenums and other air handling spaces. Complies with UL-2043.

For System Design for SM1EZ, see pages 17-21; for SM4T, see pages 64-67.

INSTALLS IN SECONDS!



A

The speaker's two specially designed mounting studs easily pierce through the ceiling tile.




B

Wide-based wing nuts secure the speaker assembly to the ceiling tile.



C

Two standard wire nuts connect the speaker wires to the mounting studs, making the electrical connection. That's all it takes!

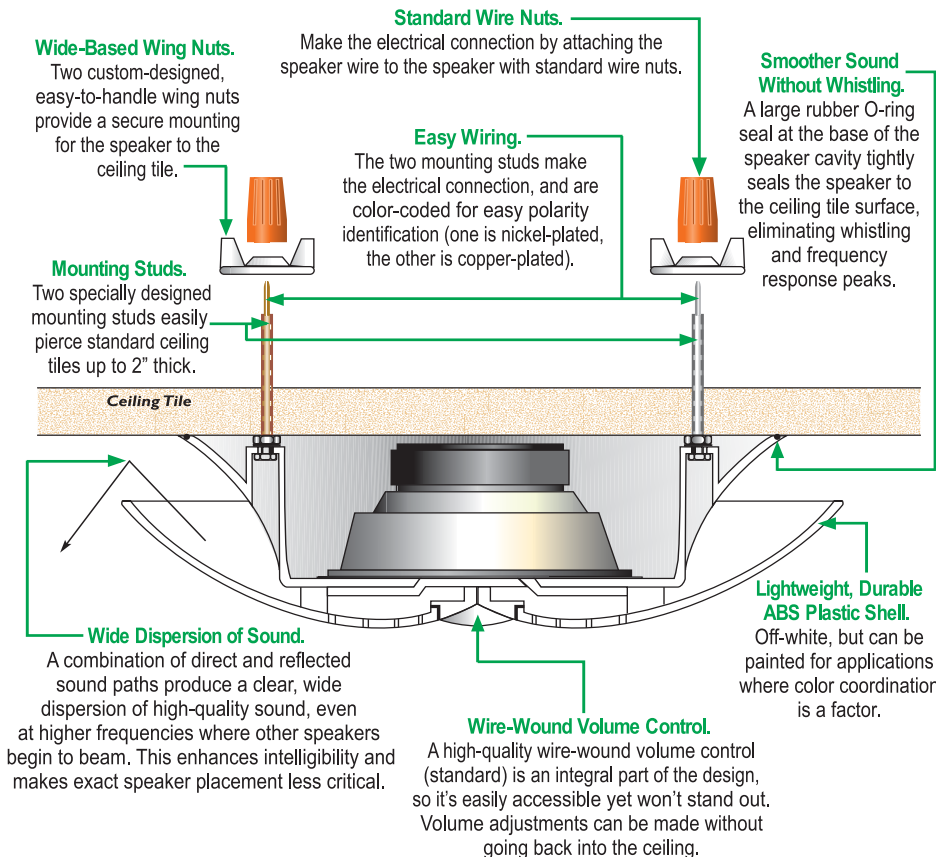

Accessories



SMTB
Tile Bridge

EASY DESIGN™ SPEAKERS



See pages 17-21 for Easy Design.

Dimensions	Product Weight
13" dia. x 3-1/4" D	3 lb.

Ceiling Speaker CS1EZ

Bogen's **CS1EZ** is a pre-assembled ceiling speaker comprised of an 8" cone speaker and steel ceiling grille painted with enamel. The CS1EZ includes a volume control knob and rear-mounted screw terminal board for easier electrical connection.

Product Features:

- 1-watt, single-tap design
- Screw terminal connections for fast installation
- Designed for 70V amplifier output
- 8" cone speaker for excellent audio quality
- Heavy-duty, wire-wound volume control with knob
- 50 Hz-12 kHz frequency response
- 95 dBspl @ 4 ft. /1W input sensitivity
- Off-white finish

Horn Loudspeakers HS7EZ, HS15EZ, HS30EZ

Bogen's line of **Easy Design Horn Loudspeakers** are made of weatherproof all-metal construction, thereby making them ideal for both indoor and outdoor use in industrial plants, warehouses, schools, construction sites, and recreational areas. All models come with swivel and tilt mounting bases for greater flexibility in setting the angle of projection.



Product Features:


- 7.5-, 15-, and 30-watt models
- Single-tap design
- HS7EZ features 12" lead wire for electrical connections
- HS15EZ and HS30EZ feature screw terminal connections for fast installation
- Designed for 70V amplifier outputs
- Weatherproof design
- Stepped attenuator volume control
- Tilt and swivel mounting base for flexibility in coverage
- Textured mocha enamel

See pages 17-21 for Easy Design.

Model	Frequency Response	Sensitivity	Dispersion	Dimensions	Product Weight
HS7EZ	250 Hz - 14 kHz	105 dBspl (4 ft./7.5W) input (@1 kHz)	120°	6" dia. x 4" D	2 lb.
HS15EZ	275 Hz - 14 kHz	121 dBspl (4 ft./15W) input (@1 kHz)	110°	9" dia. x 9-1/4" D	4 lb.
HS30EZ	225 Hz - 14 kHz	125 dBspl (4 ft./30W) input (@1 kHz)	100°	11" dia. x 10-1/2" D	6 lb.

Wall Baffle Speaker WB1EZ

The **WB1EZ** comes pre-assembled with an 8" cone speaker enclosed in a simulated walnut-finished wooden enclosure with a black grille cloth on front and a recessed volume control.



Product Features:

- 1-watt, single-tap design
- Screw terminal connections for fast installation
- Designed for 70V amplifier output
- 8" cone speaker for excellent audio quality
- Recessed volume control
- Designed for easy wall-mount installation; face has 13.5 degree downward angle
- 50 Hz -12 kHz frequency response
- 95 dBspl @ 4ft./1W input sensitivity



See pages 17-21 for Easy Design.

Dimensions	Product Weight
9-1/2" W x 9-1/2" H x 5-1/4" D (3-1/4" D @ bottom)	4 lb.

Accessories

<p>BC1 Beam Clamp (for HS-EZs)</p>	<p>TB8 Tile Bridge (for CS1EZ)</p>	<p>RE84 Ceiling Enclosure (for CS1EZ)</p>	<p>MR8 Mounting Ring (for CS1EZ)</p>	<p>TCSPT1 Terminal Cover for Conduit (for HS15EZ and HS30EZ)</p>	<p>HSES10 Horn Speaker Electrical Box Strap (Pack of 10) (for HS15EZ and HS30EZ)</p>
---	---	--	---	---	---

What is Easy Design?



Armed with just 3 pieces of information, you can quickly create a bill of material for speaker paging jobs. Bogen's Easy Design line of products was created specifically to make the design process easier and less time consuming for the installer.

You supply some basic pieces of information – type of application, dimensions of the area to be covered, ambient noise level, and ceiling height*. Then, a few simple and direct charts will immediately provide you with the best type of speaker to use, the number of speakers needed, and the amplifier power required for the job.

Each speaker in the Easy Design line is designed with a single power tap and a volume control. Any paging system you create using the Easy Design products will be flexible, robust, and powerful. If noise levels increase in the future, just turn up the volume controls on the speakers – the amplifier will not overload!

You get all the benefits of a 70V central-amplified system – full power capability, high-quality sound and performance, 2-wire installation, long speaker runs, flexibility in amplifier location, no distributed power supplies – and now, super simple system design (we've eliminated the multiple power taps). Easy Design speakers have the high quality and reliability you expect from Bogen.

* Not all dimensions needed for all speaker types. Refer to section 2 for specific dimensions needed for each speaker.

1 Select Speaker Type

- Determine the **ambient noise level and type of environment** in which the speakers will be installed.
- Then select the **speaker(s) best suited** for the area.

Example:

- The ambient noise level in a machine shop in an industrial area is 90 dB. By referring to the chart, you will find that the HS30EZ horn loudspeaker is best suited for this environment.

For applications with mixed noise levels, such as a location with quiet waiting rooms, medium noise level office areas, and very noisy manufacturing, select an appropriate speaker type for each different area.

Once you have selected the speaker type(s), the next step is to determine how many speakers you will need to cover the area sufficiently.

SPEAKER MODELS		SM1EZ WB1EZ CS1EZ <small>see charts on pages 18 & 20</small>	HS7EZ <small>see chart on page 19</small>	HS15EZ HS30EZ <small>see charts on page 19</small>
TYPICAL AMBIENT NOISE LEVEL	TYPICAL ENVIRONMENTS			
VERY HIGH NOISE 85-95 dB <small>Speech Almost Impossible To Hear</small>	<ul style="list-style-type: none"> • Construction Site • Loud Machine Shop • Noisy Manufacturing • Printing Shop 			
HIGH NOISE 75-85 dB <small>Speech Is Difficult To Hear</small>	<ul style="list-style-type: none"> • Assembly Line • Crowded Transit Waiting Area • Machine/Print Shop • Shipping Warehouse • Supermarket (Peak) • Very Noisy Bar or Restaurant 			
MEDIUM NOISE 65-75 dB <small>Must Raise Voice To Be Heard</small>	<ul style="list-style-type: none"> • Bank/Public Area • Transit Waiting Area • Department Store • Noisy Office Setting • Supermarket (Normal) • Bar or Restaurant 			
LOW NOISE 55-65 dB <small>Speech Is Easy To Hear</small>	<ul style="list-style-type: none"> • Conversational Speech • Doctor's Office • Hospital • Hotel Lobby • Quiet Office • Quiet Bar or Restaurant 			

*For applications over 100 dB, contact Bogen for assistance.

NOW, TURN TO PAGE 18 TO DETERMINE THE NUMBER OF SPEAKERS NEEDED.

2 Determine the Number of Speakers Needed



CS1EZ



SM1EZ

CS1EZ Ceiling Speaker SM1EZ Surface-Mount Ceiling Speaker

Use this chart to determine the number of CS1EZ Ceiling Speakers and/or SM1EZ Surface-Mount Ceiling Speakers a particular installation will require, based on the dimensions of the area and the ceiling height.

RED for 8' Ceiling
BLUE for 10' Ceiling
GREEN for 12' Ceiling

Look Up LONGER Dimension Of Area On This Side

	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200
20	1	2	3	4	5	6	6	7	8	9	10	10	11	12	13	13	14	15	16
30	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10
40	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	7	7	7
50	2	3	4	5	5	6	7	8	8	9	10	11	12	13	14	15	16	17	18
60	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	11	11
70	4	5	6	7	8	10	11	12	13	14	15	16	17	19	20	22	24	25	27
80	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
90	3	4	4	5	6	6	7	8	8	9	10	11	12	13	14	15	16	17	18
100	6	8	9	11	13	14	16	17	19	20	22	24	26	28	29	32	33	35	37
110	4	5	6	7	8	9	10	11	13	14	15	16	18	19	20	21	23	24	25
120	6	8	9	10	11	13	14	15	16	18	19	20	21	23	24	26	27	29	30
130	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	21
140	9	11	12	14	15	17	18	20	21	23	25	26	28	30	32	34	36	38	40
150	6	7	8	9	11	12	13	14	15	16	17	18	20	21	22	24	25	27	28
160	19	22	25	27	30	33	36	39	41	44	47	50	54	56	60	63	66	70	73
170	12	14	16	18	19	21	23	25	26	28	30	32	34	36	38	41	43	45	47
180	9	10	11	12	13	15	16	17	18	20	21	22	24	25	27	28	30	31	32
190	11	13	14	15	17	18	20	21	23	24	26	28	30	32	34	36	38	40	42
200	11	13	14	15	17	18	20	21	23	24	26	28	30	32	34	36	38	40	42

Look Up SHORTER Dimension Of Area On This Side

Ceiling Speakers (CS1EZ, SM1EZ)

- Obtain the length, width, and ceiling height of the area.
- Look up where the **length** and **width** of the area meet on the chart.
- You will find three color-coded numbers. Use the **RED** number for 8 ft. ceilings, **BLUE** for 10 ft. ceilings, and **GREEN** for 12 ft. ceilings. The color-coded number that corresponds to the area's **ceiling height** is the general number of speakers the installation requires.


The **minimum amplifier power** needed (in watts) is equal to the total number of CS1EZ or SM1EZ speakers required in the area for uniform coverage.

Amplifier Power (min.) = Number of CS1EZ or SM1EZ Speakers

Example:

An office area, using CS1EZ Ceiling Speakers (or SM1EZ Surface-Mount Ceiling Speakers), is 100 feet long by 70 feet wide by 10 feet high. Crisscross the length (100 feet) and width (70 feet) on the chart. You will find three color-coded numbers: **27**, **18**, and **12**. Since blue numbers are used for ceiling heights of 10 feet, 18 is the recommended quantity of CS1EZ speakers needed for this application. This number (18) is also the minimum amplifier power needed (in watts) for this area.

NOW, TURN TO PAGE 21 TO SELECT AMPLIFIER.



Horn Loudspeakers (HS7EZ, HS15EZ, HS30EZ)

- Obtain the **square footage** of the area to be covered and its ambient noise level.
- Where the area's square footage intersects the area's **ambient noise level**, you will find two numbers.

The number in **BLUE** is the typical number of horn loudspeakers the installation requires. Additional speakers may be needed in areas that have obstructions, like shelving, that block sound dispersion.

The number in **RED** is the minimum amplifier power needed (in watts) for the installation.

Amplifier Power (min.) = Number in RED

Example:

A factory has 35,000 square feet of open area and an average ambient noise level of 80 dB. Thus, it will require HS15EZ Horn Loudspeakers. Using the chart for the HS15EZ speaker, crisscross the square footage and the ambient noise level. The number of horn loudspeakers needed for an installation is shown in **BLUE** and the minimum amplifier power for this number of speakers is shown in **RED**. As you can see, 6 speakers are needed for this application and the minimum amplifier power needed is 90 watts.

HS7EZ Horn Loudspeaker

Use this chart to determine the number of HS7EZ Horn Loudspeakers a particular installation will require, based on the size of the area and the ambient noise level of the environment.



HORN QTY. & MIN. POWER (WATTS) BASED ON AMBIENT NOISE	SIZE OF AREA TO BE COVERED (THOUSANDS OF SQUARE FEET)																				
	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	
55-65 dB Low Noise - speech is easy	HORNS	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10
	POWER	8	8	15	15	23	23	30	30	38	38	45	45	53	53	60	60	68	68	75	75
65-75 dB Medium Noise - must raise voice to be heard	HORNS	1	2	3	4	5	5	6	7	8	9	10	10	11	12	13	14	15	15	16	17
	POWER	8	15	23	30	38	38	45	53	60	68	75	75	83	90	98	105	113	113	120	128

The # in **BLUE** is the # of speakers.

The # in **RED** is the minimum amplifier power required.

NOW, TURN TO PAGE 21 TO SELECT AMPLIFIER.

HS15EZ Horn Loudspeaker

Use this chart to determine the number of HS15EZ Horn Loudspeakers a particular installation will require, based on the size of the area and the ambient noise level of the environment.



HORN QTY. & MIN. POWER (WATTS) BASED ON AMBIENT NOISE	SIZE OF AREA TO BE COVERED (THOUSANDS OF SQUARE FEET)																				
	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	
75-85 dB High Noise - speech is difficult	HORNS	1	2	3	4	5	5	6	7	8	9	10	10	11	12	13	14	15	15	16	17
	POWER	15	30	45	60	75	75	90	105	120	135	150	150	165	180	195	210	225	225	240	255
85-95 dB Very High Noise - speech almost impossible	HORNS	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40
	POWER	30	60	90	120	150	180	210	240	270	300	330	360	390	420	450	480	510	540	570	600

The # in **BLUE** is the # of speakers.

The # in **RED** is the minimum amplifier power required.

NOW, TURN TO PAGE 21 TO SELECT AMPLIFIER.

HS30EZ Horn Loudspeaker

Use this chart to determine the number of HS30EZ Horn Loudspeakers a particular installation will require, based on the size of the area and the ambient noise level of the environment.



For Applications over 100 dB, Contact Bogen for Assistance.

HORN QTY. & MIN. POWER (WATTS) BASED ON AMBIENT NOISE	SIZE OF AREA TO BE COVERED (THOUSANDS OF SQUARE FEET)																				
	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	
85-95 dB Very High Noise - speech almost impossible	HORNS	1	2	3	4	6	7	8	9	10	11	12	13	14	16	17	18	19	20	21	22
	POWER	30	60	90	120	180	210	240	270	300	330	360	390	420	480	510	540	570	600	630	660

The # in **BLUE** is the # of speakers.

The # in **RED** is the minimum amplifier power required.

NOW, TURN TO PAGE 21 TO SELECT AMPLIFIER.

2 Determine the Number of Speakers Needed (cont.)



WB1EZ Wall Baffle Speaker

Use this chart to determine the number of WB1EZ speakers a particular installation will require, based on the dimensions of the area.

Look Up LONGER Dimension Of Area On This Side		20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200
20	1	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	6	6
30	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	10	10
40	3	3	4	5	5	6	7	7	8	9	9	10	11	11	12	12	13	13	13	13
50	4	4	5	6	7	7	8	9	10	10	11	12	12	13	14	14	15	16	16	17
60	5	5	6	7	8	9	9	10	11	12	12	13	14	15	16	17	18	18	19	20
70	6	6	7	8	9	10	11	11	12	13	14	15	16	17	18	19	20	21	22	23
80	7	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
90	8	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	27
100	9	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	28
110	10	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	30
120	11	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	33
130	12	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	35
140	13	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	37
150	14	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	39
160	15	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	40
170	16	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	42
180	17	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	44
190	18	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	47
200	19	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	50

Wall Baffle Speaker (WB1EZ)

- Obtain the **length** and **width** of the area.
- Where the length and width of the area crisscross on the chart, you will find the typical **number of speakers** that the installation requires.

The **minimum amplifier power** needed (*in watts*) is equal to the total number of WB1EZ speakers required in the area for uniform coverage.

Amplifier Power (min.) = Number of WB1EZ Speakers

Example:

An area's dimensions are 150 ft. long by 110 ft. wide. Crisscross these two dimensions on the chart and you will find that 28 WB1EZ Wall Baffle Speakers are needed for this application. This number (28) is also the minimum amplifier power needed (*in watts*) for this area.

Mixed Speaker Type Applications

For applications with more than one type of speaker:

- Determine the number of speakers and the minimum amplifier power needed for each type of speaker separately.
- Add together the minimum amplifier power needed for each type of speaker to obtain the minimum amplifier power needed for the entire application.

Example:

An application requires 10 SM1EZ Surface-Mount Ceiling Speakers (*minimum amplifier power needed is 10 watts*), 5 HS15EZ Horn Loudspeakers (*minimum amplifier power needed is 75 watts*), and 10 WB1EZ Wall Baffle Speakers (*minimum amplifier power needed is 10 watts*). Add together the minimum amplifier power needed for each type of speaker: 10 watts + 75 watts + 10 watts. The sum is 95 watts. This is the minimum amplifier power needed (*in watts*) for the entire application.

NOW, GO TO PAGE 21 TO SELECT AMPLIFIER.

3 Select An Amplifier

Once you determine the number of speakers and the minimum amplifier power for the installation, you are ready to select the system amplifier. A 70V paging amplifier is very easy to select.

- Locate amplifiers on the chart on page 78 that have a **wattage equal to or higher** than the minimum amplifier power of your application. (*Amplifiers with power capacities greater than this number will not damage the speakers. The extra power available is simply not used.*)
- Determine the **amplifier features** needed for the application (see the *Site Survey Check List on page 72 and the Amplifier Features Chart on page 78*).
- Using the chart on page 78, **find an amplifier** that offers these features. As long as the wattage of the selected amplifier is equal to or higher than the minimum amplifier power, the amplifier will work well for the application.

If you think the application's system may need to expand in the future (*this is often the case with new constructions and relocating companies*), you may want to select an amplifier with a greater power capacity now.

Example:

An application requiring 18 CS1EZ Ceiling Speakers requires a minimum amplifier power of 18 watts, so an amplifier with a power rating of 18 watts minimum is needed. Now, look at the chart on page 78 to determine which amplifiers provide the necessary wattage to drive the speakers as well as provide the amplifier features that are most appropriate for the installation. Since the minimum wattage needed is 18, the amplifier with the lowest power usable for this installation is 20 watts (*model C20*). However, if the C20 does not have the features required for the application, such as bass and treble controls, you can select any amplifier of greater wattage that offers the specific features. For instance, you might select the TPU35B or C35. Both of these amplifiers have a higher wattage than the application's minimum amplifier power needed and provide the desired features because they have bass and treble controls. Either of these amplifiers will work well for this application. Plus, there is room to expand the system on a 35W or higher amplifier without the need to purchase an additional amplifier in the future.

The Amplifier Features Chart outlines the features and power ratings of Bogen amplifiers that can be used for a variety of application needs. For complete chart, see page 78.

A POWER

Locate a power rating that is higher than the application requires (*allowing for future system expansion*).

B FEATURES

Find the amplifier features that the application requires.

Amplifier Input Power Rating Channel	Model Numbers	Input Type				Signal Processing		Music Mixing				Mounting				Page Number	
		1/8" Jack	1/4" XLR	1/4" XLR + 1/8" Jack	1/4" XLR + 1/8" Jack + 1/4" XLR	None	EQ	Bass/Treble	Equalizer	Reverb	Auto Mute	Auto Mute	1/8" Jack	1/4" XLR	1/4" XLR + 1/8" Jack		1/4" XLR + 1/8" Jack + 1/4" XLR
15W	15A2	1															41
18W	20A	1															42
18W	21A	1															42
18W	TPU18A	1															42
20W	C20	1															42
20W	C35	1															42
25W	C35E	1															43
30W	TPU30B	1															42
35W	35A	1															42

C MODEL NUMBER

Select the amplifier model(s) best suited for your application.

D REFERENCE PAGE

Turn to the page number indicated for more information about the product you need.

REFER TO CHART ON PAGE 78


Easy Design™ Is Easy!

That's all it takes to design a robust, high-quality paging system with Bogen's Easy Design line.

SELF-AMPLIFIED (24V) SYSTEMS


Bogen introduces the next generation in self-amplified (24V) paging equipment. Only Bogen offers high-efficiency horn speakers that use digital switching amplifiers and constant dispersion horn technology; single- and multi-zone telephone paging interfaces that provide a new level of features and flexibility with programmable AUX relay contacts and installer programmable dialing codes; and an extensive line of 24V switching power supplies with secure mounting holsters and pluggable screw terminal connectors on models above 1 amp.

To locate Bogen's Self-Amplified (24V) Paging Products, simply look for the upward-pointing **GREEN** triangles and the downward-pointing **RED** triangles. The numbers inside the triangles indicate "Current Units", which determine how much power that product provides to or consumes from the system.

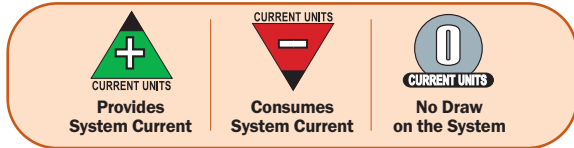

Other products such as telephone interfaces, buffered level controls and 24V power supplies that are well suited for use in self-amplified paging systems carry these same icons for easy identification. Suitable products that neither provide nor consume power are shown with the neutral **GRAY** icon with a zero inside it.

For more information on understanding Current Units for your system, see pages 68-69.

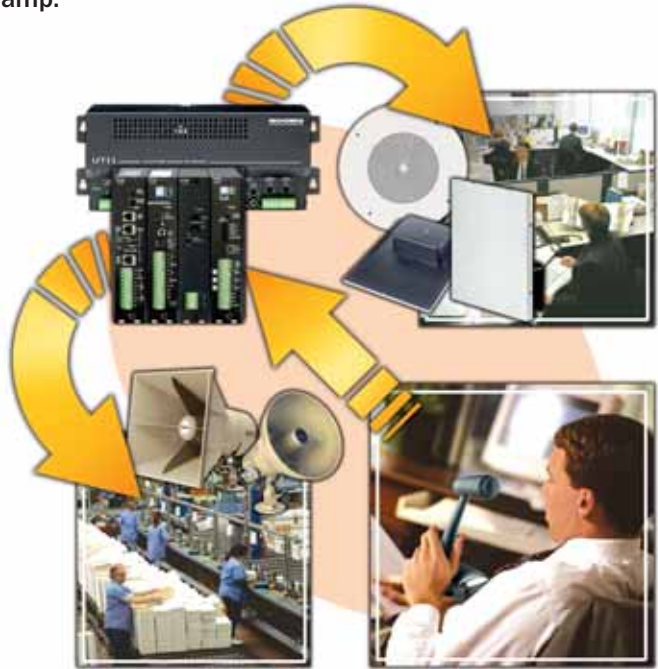

Getting Started

1. Select Self-Amplified Speaker Type (Use this chart)
2. Select a Telephone Interface (pages 31-33)
3. Select Power Supplies (page 30)

SPEAKER MODELS		ASWB1 ACD2X2	ASWG1 ASM1	ASWG1DK AMBS	SAH5 AH5A	SAH15, SAH30 AH15A
TYPICAL AMBIENT NOISE LEVEL	TYPICAL ENVIRONMENTS	see pages 23 - 25			see pages 26 - 28	see pages 26 - 28
VERY HIGH NOISE 85-95 dB Speech Almost Impossible To Hear	<ul style="list-style-type: none"> Construction Site Loud Machine Shop Noisy Manufacturing Printing Shop 					
HIGH NOISE 75-85 dB Speech Is Difficult To Hear	<ul style="list-style-type: none"> Assembly Line Crowded Transit Waiting Area Machine/Print Shop Shipping Warehouse Supermarket (Peak) Very Noisy Bar or Restaurant 					
MEDIUM NOISE 65-75 dB Must Raise Voice To Be Heard	<ul style="list-style-type: none"> Bank/Public Area Transit Waiting Area Department Store Noisy Office Setting Supermarket (Normal) Bar or Restaurant 					
LOW NOISE 55-65 dB Speech Is Easy To Hear	<ul style="list-style-type: none"> Conversational Speech Doctor's Office Hospital Hotel Lobby Quiet Office Quiet Bar or Restaurant 					

SELF-AMPLIFIED CEILING SPEAKERS

Drop-In Ceiling Speakers

ACD2X2, ACD2X2U CURRENT UNITS **-1**



Tile Support Rail (Included)

The ACD2X2 full-range speaker is quick and easy to install. Simply wire it and drop it into place. This saves installation time, effort, and cost.

Now available in Bright White ("U" version) & Off-white

Product Features:

- 2' x 2' design fits into 2' x 2' and 2' x 4' suspended ceiling tile spaces (tile support rail included for 2' x 4' ceilings)
- Finely perforated grille covers entire front of speaker panel
- Fully enclosed, industrial-grade steel construction
- Front-mounted, recessed volume control
- Self-contained 1-watt amplifier
- 8" main cone speaker, with secondary cone
- Non-reflective finish, off-white (ACD2X2) or bright white (ACD2X2U)
- Listed to UL Standard 60065 for US & Canada
- Complies with UL-2043

Dimensions:	23-7/8" W x 5" H x 23-7/8" D
Product Weight:	12 lb. each

See page 30 to select a Power Supply.

Ceiling Speaker Assemblies

These traditional style, recessed ceiling speakers are available with a fixed or detachable volume control knob.

CURRENT UNITS **-1**



Product Features:

- 8" cone speaker
- Front-mounted volume control with knob (knob is detachable on "DK" versions)
- Steel grille with enamel finish, off-white ("W" versions) or bright white ("U" versions)
- Self-contained 1-watt amplifier
- 90° dispersion pattern

ASWG1, ASUG1

ASWG1DK, ASUG1DK
(w/detachable knob)

Now available in Bright White ("U" versions) & Off-white ("W" versions)

Accessories



TB8
Tile Bridge



RE84
Ceiling Enclosure



MR8
Mounting Ring

Dimensions:	12-7/8" dia. x 3-1/4" D (without knob)
Product Weight:	2.5 lb. each

See page 30 to select a Power Supply.

Determine Speaker Quantity

Using the chart:


1. Locate the dimensions of the room (length and width).
2. Where these two measurements meet will be the number of speakers required. Use the number in **GREEN** for 8' ceilings; **BLUE** for 10' ceilings; and **PURPLE** for 12' ceilings.

(You may need to increase the number of speakers in areas where large objects or shelving project into the coverage area, blocking sound.)

3. The number of Current Units needed is the same as the number of speakers (1W models, ACD2X2(U), ASWG1/DK, ASUG1/DK, ASM1, AMBSL/Q1).

Current Units (min.) = Number of Ceiling Speakers

GREEN for 8 ft. Ceiling
BLUE for 10 ft. Ceiling
PURPLE for 12 ft. Ceiling

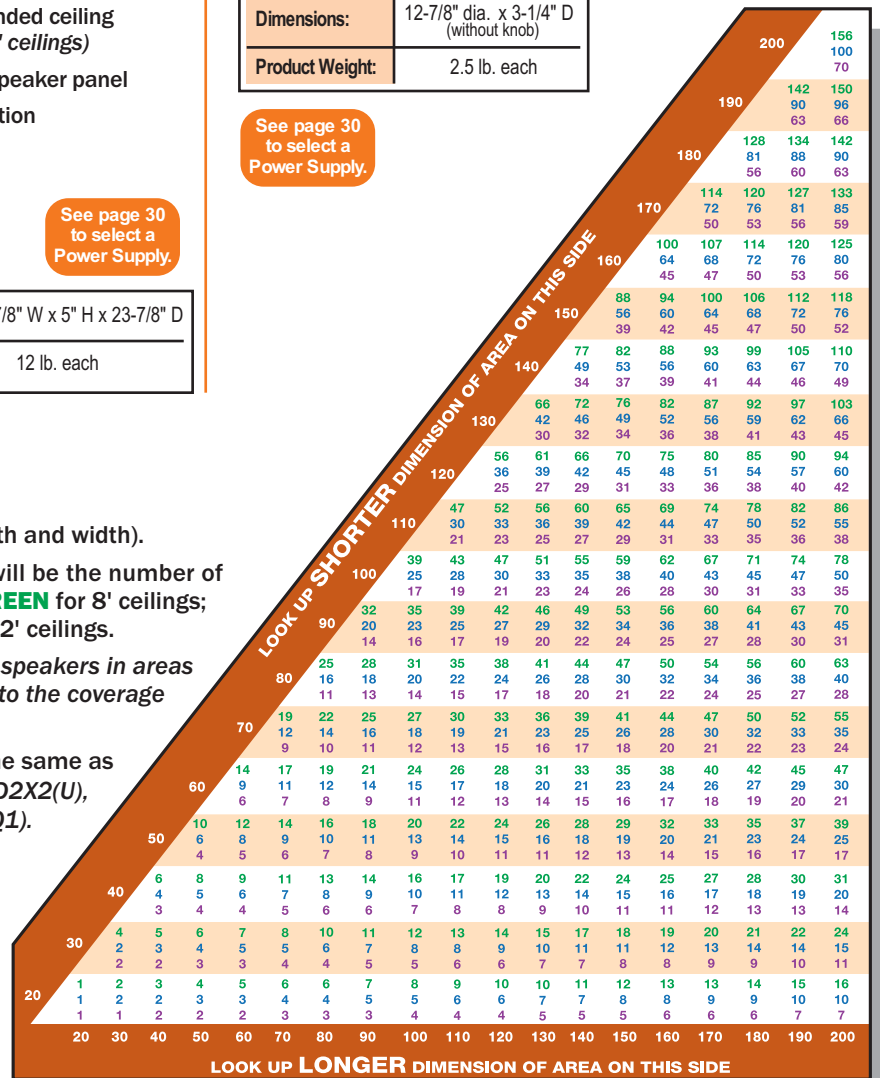

SELF-AMPLIFIED SURFACE-MOUNT SPEAKERS

Easy Install® Ceiling Speakers

ASM1

Bogen's Self-Amplified Easy Install Speakers can be installed in a ceiling tile in less than a minute in any drop ceiling with standard ceiling tiles. Installation is a simple, three-step process that requires no tools. Simply pierce the ceiling tile with the specially-designed studs, use wing nuts to secure the speaker to the ceiling, and fasten wire nuts to make the 24V DC power and audio connections.



Product Features:

- Installs in less than a minute
- No-tool installation eliminates need to cut ceiling tiles
- Built-in 1-watt amplifier
- Direct and reflected sound paths create wide dispersion angle
- Lightweight and durable, off-white plastic shell with paintable finish
- Contemporary, low-profile design
- O-ring seal prevents whistling and ensures smoother sound without peaks
- Front-mounted volume control
- Complies with NFPA National Code 160b for installation in plenums and other air handling spaces
- Complies with UL-2043

Refer to Speaker Quantity Chart on page 23.

Frequency Response	Maximum dBspl	Depth	Dimensions	Product Weight
125 Hz - 15 kHz	90	3" from tile surface	9-1/2" diameter	2 lb.




Metal Box Speakers

AMBSQ1, AMBSL1

Bogen's Self-Amplified Metal Box Speakers are available in two models, AMBSQ1 and AMBSL1, and are suitable for both ceiling and wall mounting.

Product Features:

- Rugged all-steel, surface-mounted, off-white painted enclosure
- Speaker front is available flat (AMBSQ1) or angled downward by 12.5 degrees for wall mounting (AMBSL1)
- Full-range 8" cone loudspeaker for excellent intelligibility
- Built-in volume control with detachable knob
- Self-contained 1-watt amplifier
- Wiremold® knockouts
- Mounting hardware included



Refer to Speaker Quantity Chart on pg. 23 for ceiling mount or chart on pg. 25 for wall mount.

Models	Front Panel Design	Frequency Response	Maximum dBspl	Dimensions	Product Weight
AMBSL1	Slant/Angle	110 Hz -15 kHz	92	11-5/8" W x 11-3/8" H x 5-3/8" D <i>(Top Dimension)</i>	9 lb.
				11-5/8" W x 11-3/8" H x 3-1/8" D <i>(Bottom Dimension)</i>	
AMBSQ1	Square/Flat	110 Hz -15 kHz	92	11-5/8" W x 11-5/8" H x 4-1/4" D	9 lb.

Wiremold® is a registered trademark of Wiremold/Legrand.

SELF-AMPLIFIED HORN SPEAKERS

High-Efficiency, Digital Switching, Horn Loudspeakers

SAH5 (5W) ^{CURRENT UNITS} -4, **SAH15** (15W) ^{CURRENT UNITS} -9, **SAH30** (30W) ^{CURRENT UNITS} -17


Using digital switching amplifier technology, these **Self-Amplified Horn Loudspeakers** provide unprecedented low DC current draw and heat dissipation, allowing them to use fewer power supplies, run on longer cable runs, and work at higher ambient temperatures than conventional analog self-amplified horn speakers. The shape of the horn's flare provides a controlled dispersion of sound for better intelligibility. The horn can be rotated on its axis, offering wide dispersion patterns, vertically or horizontally, depending on its position. In addition, these weatherproof, plastic horns are extremely durable and rugged. They can be used in any environment, indoors or outdoors, without affecting sound quality.



Product Features:

- 5-, 15-, and 30-watt models with built-in amplifiers
- All models operate from 24V DC power source
- Digital switching amplifier technology greatly reduces current consumption when compared to conventional analog self-amplified horn loudspeakers
- Low heat dissipation of the digital switching amplifier allows units to operate with continuous background music and in higher ambient temperatures than conventional analog amplifiers
- Excellent extended frequency response from 1.6" diameter voice coil and 90 mm, 12-ounce magnet structure (SAH5/15), or 100mm, 16-ounce magnet structure (SAH30)
- Rotatable horn allows for the use of a wider (120°) vertical or horizontal dispersion pattern
- Predictable dispersion pattern over the full frequency range ensures excellent intelligibility and ease of layout
- Removable access cover protects terminals and volume control
- Weatherproof, UV-protected mocha finish plastic housing
- Simple, secure, cast aluminum swivel mount
- Screw terminal strip for easy wire connections
- Electrical box mounting strap included

3 Ways To Position SAH Speakers

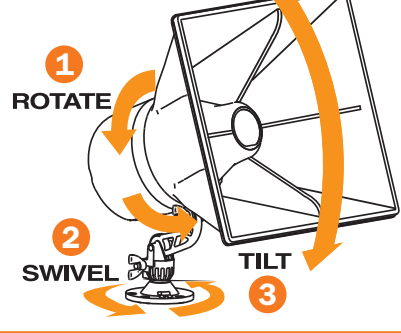

See page 30 to select a Power Supply.

Accessories




BC1
Beam Clamp

Models	Maximum Power Level	Frequency Response	Maximum dBspl	Dimensions	Product Weight
SAH5	5 watts	275 Hz -14 kHz	119	10-5/8" W x 12" H x 11-1/2" D	6 lb.
SAH15	15 watts		124		
SAH30	30 watts		127		

Controlled Dispersion

Many horns in the market disperse sound frequencies in a wild and uncontrolled manner. This reduces intelligibility and causes inconsistent sound quality over the horn's coverage angle. Bogen's SAH horns benefit from Bogen's long history as a commercial and

pro audio company. Bogen's SAH horns disperse the various frequencies that make up the sound of a page in a very carefully controlled manner. This means that the listener hears clean, crisp intelligible pages over the full coverage area of the horn.

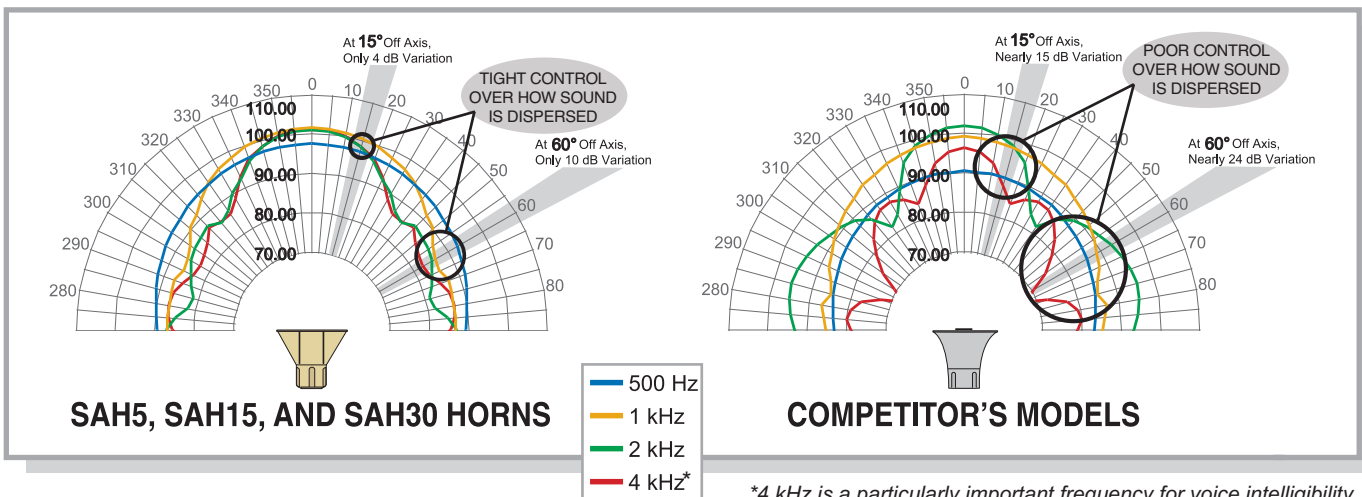




*4 kHz is a particularly important frequency for voice intelligibility

Determine Speaker Quantity

Use the chart for the speaker you will use (SAH5, SAH15 or SAH30):



1. Choose the level of ambient noise in the area to be covered.
2. Locate the area's square footage.
3. Where these two measurements meet are two numbers. The number in **GREEN** is the number of speakers required. The number in **RED** is the number of Current Units (CU) needed for that many speakers. (You may need to increase the number of speakers in areas where large objects or shelving project into the coverage area, blocking sound.)

Current Units (min.) = Number in RED

SAH5	HORN QTY. & MIN. CURRENT UNITS (CU) BASED ON AMBIENT NOISE	SIZE OF AREA TO BE COVERED (THOUSANDS OF SQUARE FEET)																			
		5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
	55-65 dB Low Noise – speech is easy	HORNS 1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10
	CU	4	4	8	8	12	12	16	16	20	20	24	24	28	28	32	32	36	36	40	40
	75-85 dB High Noise – speech is difficult	HORNS 1	2	3	4	5	5	6	7	8	9	10	10	11	12	13	14	15	15	16	17
	CU	9	18	27	36	45	45	54	63	72	81	90	90	99	108	117	126	135	135	144	153
	85-95 dB Very High Noise – speech almost impossible	HORNS 2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40
	CU	18	36	54	72	90	108	126	144	162	180	198	216	234	252	270	288	306	324	342	360

Lower Currents = Lower Voltage Drops

Bogen's SAH self-amplified horn speakers consume significantly less current than equivalently sized conventional analog self-amplified horns. Lower current draw means less voltage drop, and longer cable runs than those allowed by conventional analog self-amplified horns. This allows more flexibility as to where you mount your power supplies and how many individual power supplies need to be installed.

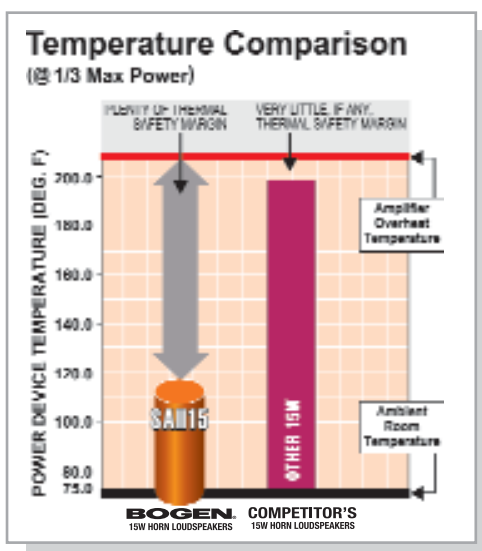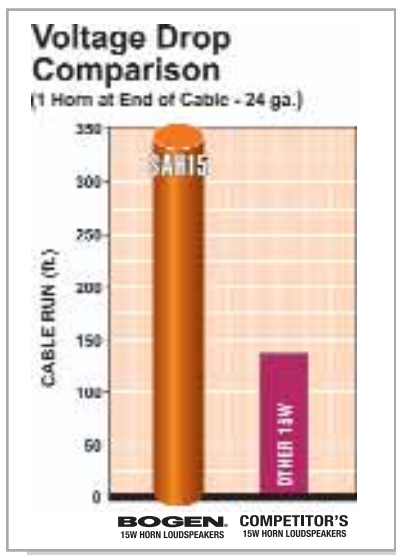

Thermally Rugged

The SAH self-amplified horn speaker's amplifier, by virtue of its high-efficiency digital switching technology, produces very little wasted heat. Lower amplifier operating temperatures mean these horns can work harder in higher temperature environments than conventional analog self-amplified horns. Lower operating temperatures also mean less stress on critical internal components and better reliability. Continuous background music is no sweat for these cool-running horns.

SELF-AMPLIFIED METAL HORN SPEAKERS

Traditional Metal Horn Speakers

AH5A (5W) ^{CURRENT UNITS} -6, **AH15A** (15W) ^{CURRENT UNITS} -18

The AH5A and AH15A Metal Horn Speakers are rugged, self-contained amplified paging horn assemblies that can be used for high noise paging areas indoors as well as for outdoor use. Their sturdy, weatherproof, all-metal construction allows them to withstand any environment while continuing to provide excellent audio intelligibility for paging and background music.



AH5A



AH15A

Product Features:

- 5- and 15-watt models with built-in amplifiers
- Screwdriver-adjustable volume controls
- Universal tilt-and-swivel mount
- Banding slots easily secure horns to beams and pillars
- 4-conductor, color-coded cable for quick connections to audio and power sources
- Plastic cover protects volume control and provides cable strain relief
- Self-aligning, field-replaceable diaphragm
- Weatherproof, all-aluminum housing
- Speaker and brackets have textured mocha enamel finish
- 110° dispersion pattern

Dimensions	Product Weight
9" dia. x 9-1/4" "D	4 lb. each

See page 30 to select a Power Supply.

Accessories



BC1 Beam Clamp



TCSPT1 Terminal Cover for Conduit



HSES10 Horn Speaker Electrical Box Strap (Pack of 10)

Determine Speaker Quantity

Use the chart for the speaker you will use (AH5A or AH15A):

1. Choose the level of ambient noise in the area to be covered.
2. Locate the area's square footage.
3. Where these two measurements meet are two numbers. The number in **GREEN** is the number of speakers required. The number in **RED** is the number of Current Units (CU) needed for that many speakers. (You may need to increase the number of speakers in areas where large objects or shelving project into the coverage area, blocking sound.)

Current Units (min.) = Number in RED



AH5A

HORN QTY. & MIN. CURRENT UNITS (CU) BASED ON AMBIENT NOISE	SIZE OF AREA TO BE COVERED (THOUSANDS OF SQUARE FEET)																			
	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
55-65 dB Low Noise – speech is easy	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10
	6	6	12	12	18	18	24	24	30	30	36	36	42	42	48	48	54	54	60	60
65-75 dB Medium Noise – must raise voice to be heard	1	2	3	4	5	5	6	7	8	9	10	10	11	12	13	14	15	15	16	17
	6	12	18	24	30	30	36	42	48	54	60	60	66	72	78	84	90	90	96	102



AH15A

HORN QTY. & MIN. CURRENT UNITS (CU) BASED ON AMBIENT NOISE	SIZE OF AREA TO BE COVERED (THOUSANDS OF SQUARE FEET)																			
	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
75-85 dB High Noise – speech is difficult	1	2	3	4	5	5	6	7	8	9	10	10	11	12	13	14	15	15	16	17
	18	36	54	72	90	90	108	126	144	162	180	180	198	216	234	252	270	270	288	306
85-95 dB Very High Noise – speech almost impossible	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40
	36	72	108	144	180	216	252	288	324	360	396	432	468	504	540	576	612	648	684	720

LEVEL CONTROLS

Buffer/Expander/Volume Control

BUFEX CURRENT UNITS -1

Used with 24V systems, the **BUFEX** is a multi-purpose device that can work as a volume control for a network of speakers, and as a buffer that can drive up to 150 speakers. It also functions as a system expander when connecting to 100V, 70V, and 25V speaker systems.

To address the needs of emergency announcements, the BUFEX has a Bypass feature that allows emergency announcements to be heard at high levels regardless of the volume setting on the BUFEX. The BUFEX contains a Bypass Trim feature that allows some adjustment to the Bypass level.



Product Features:


- Local volume control for a group of speakers
- Provides buffering for up to 150 self-amplified speakers
- Allows self-amplified speakers to work with 100V/70V/25V systems, expanding existing systems
- Continuously variable attenuator
- Rugged and attractive stainless steel wall plate with engraved lettering
- Mounts in single gang wall box
- Easy and secure terminal strip connections
- Jumper selectable 100V, 70V, or 25V speaker selections as well as T/R
- Bypass feature overrides local volume setting for high importance messages
- Bypass trim allows a maximum 12 dB attenuation over bypass announcements

Bypass Feature

Local volume controls allow people working in an area to control the level of paging and background music for their needs. However, in paging systems where alert announcements are made as well as general announcements, local volume controls can be a problem. When users set volume controls for very low levels or off, the alert announcements may not be heard.

When the BUFEX's Bypass feature is activated (by an external contact closure), it overrides the local level setting of the BUFEX and allows important messages to be heard.

In certain circumstances, full level audio messages may be overpowering. The BUFEX includes a Bypass Trim that allows a maximum 12 dB of attenuation to the alert message when the local level is set to 0. As the local level is increased, the Bypass Trim will track this and increase the alert message level proportionally.

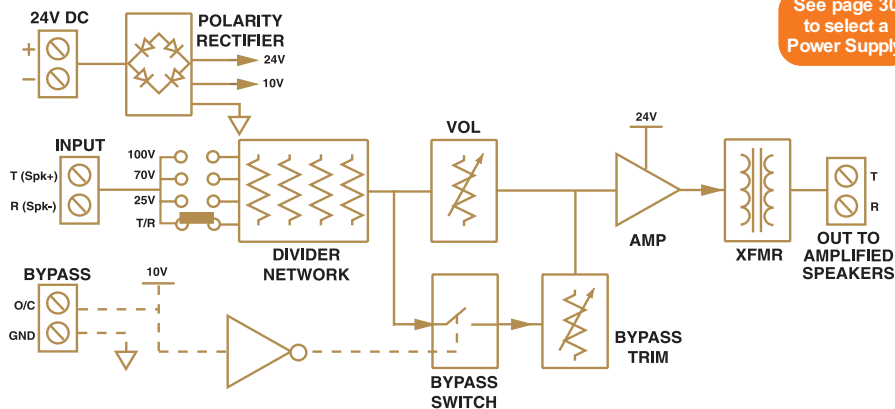

See page 30 to select a Power Supply.

Dimensions	Product Weight
2-7/8" W x 4-5/8" H x 2-1/2" D	3 oz.




Signal Level Control

SLC CURRENT UNITS 0

The **SLC** provides a simple and cost effective way to remotely control the volume level of a network of up to 150 speakers. Simply wire in series with the audio feed to the desired group of amplified speakers. For 24V systems.

Product Features:

- Continuously variable attenuator
- Rugged and attractive stainless steel wall plate with engraved lettering
- Mounts in single gang wall box
- Easy and secure terminal strip connections
- Passive (requires no DC power)

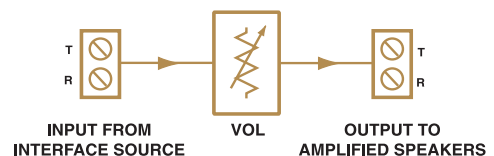

Dimensions	Product Weight
2-7/8" W x 4-5/8" H x 2" D	2 oz.

Switch-Mode Power Supplies

The SPS versions of power supplies use switching technology to provide large current capacities in very small packages. Unlike more conventional linear power supplies that use large and heavy transformers, switching supplies gate energy directly to the storage caps at the power supply output. This is a highly efficient way to convert voltages and because of this the power supplies generate very little heat.

Mounting Holsters

Most wall-mounted SPS versions of power supplies come with special mounting holsters for easy and secure wall mounting. The holsters are fastened to the wall and then the power supply is slipped in. A broad spring tang ensures the power supply remains snug in the holster. A broad spring tang ensures the power supply remains snug in the holster. A side-mounted PCB provides a means of breaking out the power supply's cable connector into multiple screw terminals. The screw terminals are also pluggable for added ease of installation.

Product Features:

- Specially designed for use with 24V Bogen equipment
- Wide range of current outputs
- UL and C-UL listed

POWER SUPPLIES

24V Switch-Mode and Linear Power Supplies



Actual Products may differ in appearance from those shown here.

Model	CU	Ratings	Mounting	Connections	Dimensions	Product Weight
SPS2466	+132	24V DC @ 6.6A	Holster	Pluggable Terminal Strip	2-7/8" W x 6-3/4" H x 1-5/8" D	2 lb.
SPS2425	+50	24V DC @ 2.50A	Holster	Pluggable Terminal Strip	3" W x 5-3/4" H x 1-3/4" D	2 lb.
SPS2410	+20	24V DC @ 1.00A	Holster	Pluggable Terminal Strip	2-1/2" W x 4-1/4" H x 1-1/4" D	2 lb.
SPS2406	+12	24V DC @ 0.60A	Receptacle	Wires, Barrel-Type	2" W x 3-3/8" H x 1-1/4" D	2 lb.
PRS2403	+6	24V DC @ 0.30A	Plug-In	Wires, Barrel-Type	2-1/4" W x 3-1/4" H x 2" D	1 lb.

Power Supplies



These Power Supplies are designed to supply low voltage DC requirements. Corded or outlet mounted.

Product Features:

- Specially designed for use with Bogen equipment
- Wide range of voltages and current outputs
- UL and C-UL listed

Model	Output	120V AC Input Style	Output Connections	Dimensions	Product Weight
PRS40C	12V DC @ 0.3A	Plug-in	Barrel Connector	2" W x 2-3/8" H x 1-5/8" D	1 lb.
PRS48	48V DC @ 0.1A	Plug-in	Screw Terminals	2-1/2" W x 3" H x 2" D	1 lb.
PCMPS2	12V DC @ 1.5A	Plug-in	Barrel Connector	2-1/4" W x 4" H x 1-3/8" D	1 lb.

SINGLE-ZONE TELEPHONE INTERFACE

Single-Zone Universal Telephone Interface

UTI1 



Bogen's **UTI1** is a single-zone telephone interface that is compatible with all standard analog port types. A background music (BGM) input with variable muting coordinates music and page announcements. An additional audio output provides a "page only" function (*no BGM*) for application flexibility. A built-in 24V DC, 1A power supply is provided for powering amplified speakers. Paging volume controls are provided for each of the outputs. An output limiter function, with limiter active indicator, provides consistent page volume regardless of loud or soft paging announcements. Contact-triggered tones and night ring signals, as well as programmable AUX relay contacts, are all programmed using DTMF tones through the dual-purpose override input. Plug-in terminal strips provide for easy installation. An optional security cover/rack mount kit (*RPKUTI1*) is available.

UTI1 Control Panel



Product Features:

- Emergency override & general paging
- One-way paging only
- Interfaces to Loop Start, Ground Start, Analog Station, and Page Ports (*with or without contact closure activation*)
- Simple 2-switch interface setup
- Background music (BGM) input with level control and variable muting
- Separate Page & BGM and Page Only (*no BGM*) outputs
- Level control for each output
- 24V DC, 1A power supply
- 150 Speaker T/R drive capacity per output
- Page level limiter with active indicator
- Adjustable automatic level control
- Override input (loop start or page port)
- Contact-triggered Night Ring input
- Programmable AUX Relay
- Pre-announce/confirmation tone
- Tone burst (2 to 7 sec), chime, and slow whoop tone selections
- Microcontroller operated, DTMF programmable
- Night ring tone or chime selection
- Setup test tone
- Pluggable terminal strip connectors
- Programming through override jack
- Programmable timeout for station mode
- Programmable trunk port timeout
- Responds to CPC disconnect signal
- Wall-mount design
- Rack-mountable with *RPKUTI1* kit (*optional*)
- FCC Part 68 Registered
- Listed to UL Standard 60950 for US and Canada



UTI1 shown with optional rack mount / security cover kit

Power Requirements	Dimensions	Product Weight
120V AC, 0.5A	12-1/4" W X 5-1/4" H X 2-1/2" D (without rack mount kit)	5 lb.



Programmable AUX Relay

The UTI1 provides a way for installers to decide how the AUX relay contacts will trip based on which inputs on the UTI1 are active. The UTI1 has 4 inputs: override, tone trigger, paging, and night ring. The installer can program the AUX relay to respond to one or any combination of these inputs. The UTI1 prioritizes these inputs (in the order shown above) so that higher priority inputs preempt lower ones, but the AUX relay contacts can be programmed to work independently of this hierarchy.


For example, the AUX relay could be programmed to respond only to a night ring trigger independent of anything else the UTI1 was doing. The UTI1 would suppress the night ring tone if a general page were made; however with the AUX relay programmed this way, the AUX relay contacts would remain active until the night ring input stopped regardless of the other UTI1 inputs.

The AUX relay contacts can also be programmed to operate after the triggering event has finished. In this case, the AUX relay contact activates for 1 second and then stops. This type of operation allows external equipment to be triggered after an event has occurred.

All this selectable functionality allows the installer improved ways to control external equipment in conjunction with the UTI1 operation. Programming is accomplished through simple DTMF programming codes.

Accessories

RPKUTI1
Security Cover & Rack Mount Kit
(sold as a set)



TELEPHONE INTERFACE

Telephone Access Module

TAMB2



TAMB2PS



The **TAMB2** interfaces a telephone system with a paging system allowing announcements to be made through any telephone. Any of three types of analog ports can be connected using the **TAMB2**: loop start trunk, ground start trunk, and station port (90V ring up). This wide range of port compatibility makes the **TAMB2** indispensable for any telephone paging application because it eliminates the possibility of mismatching paging interfaces and port types. **TAMB2PS** includes power supply.

Product Features:

- Loop start, ground start, and station port (90V ring up) compatibility
- 600-ohm output
- Built-in confirmation tone indicating access to paging system (defeatable)
- Built-in pre-announce tone produced over paging system before announcement (defeatable)
- Adjustable tone volume
- Works with one-way and two-way (talk back) zones
- Background music input with volume control
- Suppresses background music during paging
- Station access disconnect is dynamically controlled using a combination of disconnect timer, silence interval timer, and Calling Party Control (CPC) signal detection
- Disconnect VOX timer is adjustable from 1 to 11 seconds (defeatable)
- Station Port maximum page times from 1 - 200 seconds
- VOX and default timers independently inhibitable
- Calling Party Control (CPC) signal from switch immediately disconnects station port
- 1 C-Form (N.O. and N.C.) contact pair available for operating external equipment
- Trunk Timer feature helps prevent system blockage
- 24V Talk Battery
- 24V DC @ 150mA power supply required (included with TAMB2PS only)
- FCC Part 68 Registered
- Listed to UL Standard 60950 for US and Canada



Power Requirements*	Dimensions	Product Weight
24V DC @ 150mA	8-1/2" W x 1-3/4" H x 3" D	2 lb.

* Included with TAMB2PS


Accessories



Multiple Interface Options

The problem with selecting a telephone line interface device is knowing exactly what type of line will be available at the site. Because of mistakes in planning, a return trip to the supply house is not that uncommon. The **TAMB2/PS** was designed to eliminate this problem.

The **TAMB2/PS** has the ability to interface to ground start, loop start, and analog ring-up lines.

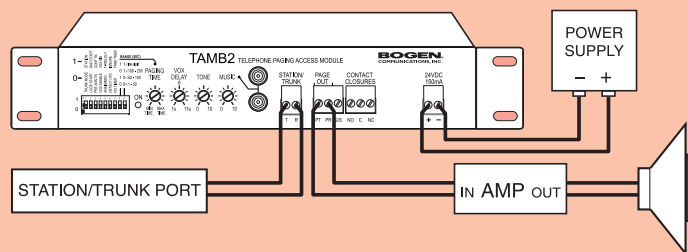

MULTI-ZONE TELEPHONE INTERFACE

Multi-Zone Universal Telephone Interface

UTI312



Bogen's **UTI312** is a multi-zone paging controller with universal telephone interface. It is expandable from 3 to 12 zones in 3-zone increments using ZX3 expansion modules. Each zone has its own buffered paging output (150 speaker drive capacity) with volume control, a C-form relay contact and "zone active" indicator. Each module includes a pluggable 24V DC power distribution terminal strip and pluggable terminal strips for each zone for easy wiring. A built-in 24V DC, 1A power supply is provided for powering amplified speakers. The UTI312's universal telephone interface is identical to the UTI1 (page 31). Two background music (BGM) inputs, with volume controls, provide each zone with a choice of BGM sources or no BGM. Two tone triggers are available as well as a 90V night ringer input. Separate volume controls for the night ring and tone triggers, along with an adjustable page level limiter, make it easy to set appropriate levels.

Powerful software features provide the UTI312 enormous flexibility for demanding applications. 2-, 3-, 4-, or 5-digit dialing plans allow the UTI312 to fit into any dialing structure. Twenty-four zone groups, zone groups for each tone input and night ring as well as a zone group for the override input, provide plenty of installer flexibility. A programmable AUX relay contact, in addition to the zone relay contact, provides flexibility for controlling external equipment based on the UTI312's activity.

Product Features:

- Expandable from 3 to 12 zones (in 3 zone increments using ZX3 modules; one ZX3 module included)
- One-way paging only
- Interfaces to Loop Start, Ground Start, Analog Station, and Page Ports (with or without contact closure activation)
- Simple 2-switch interface setup
- 2 Background music (BGM) inputs with level controls
- BGM sources assignable per zone
- Level control for each zone output
- Zone active indicators
- C-form contact per zone
- 150 Speaker T/R drive capacity per zone
- 24V DC, 1A power supply
- Programmable AUX Relay
- Page level limiter with active indicator
- Adjustable automatic level control
- Override input (loop start or page port)
- Code calling capability
- 2 Tone trigger inputs for tone burst, chime, double chime, and slow whoop tone selections
- Contact and 90V Night Ring inputs
- Pre-announce tone
- Confirmation tone
- Separate night ring and tone volume controls
- 24 User-assignable zone groups
- Separate override, all-call, tone trigger, night ring, and code call zone groups
- Auto select paging zone group
- 2-, 3-, 4-, or 5-digit dialing plans
- Microcontroller operated, DTMF programmable
- Night ring tone or chime selection
- Setup test tone
- Pluggable terminal strip connectors
- Programming through override jack
- Programmable timeout for station mode
- Programmable trunk port timeout
- Responds to CPC disconnect signal
- Includes wall or rack brackets
- FCC Part 68 Registered
- Listed to UL Standard 60950 for US and Canada



UTI312 shown with 3 optional ZX3 Modules; one (1) ZX3 is included.

Power Requirements	Dimensions	Product Weight
120V AC, 0.75A	16-3/8" W x 3-1/2" H x 4-7/8" D (without mounting flanges) 19" W (with mounting flanges)	8 lb.



Override Zone Group

The override input on the UTI312 has the highest priority of all the inputs but does not have to provide an All-Call function. Since the override has a zone group associated with it, the installer can determine which zones receive pages during an override.

For example, assume that in a 12-zone system 11 zones are used to provide audio to different parts of a building, but one zone is not used for audio purposes. The contact closure for this zone is used to control a door latch. When this zone is active, the latch is open. If the override was predefined to activate all zones, then the door latch would open during override operation which may not be desirable. By programming the override zone group with all zones except the one connected to the door latch, an override can be made and the door will remain locked.

Two Background Music Inputs

In a system with multiple zones, it is not uncommon to find applications that have different background music (BGM) requirements in different zones. To provide flexibility in these situations, the UTI312 has 2 BGM inputs. Each zone, through jumper assignments on the ZX3 module, can select one or the other BGM source, or none at all.

Auto Select Paging

When using the auto select paging feature, there is no need to dial a zone or zone group. Whenever the paging input becomes active, the auto select paging zone group, with user-assigned zones, will determine what zones are active. This may seem to be an unusual function for a multi-zone paging application. However, often the need for zoning is determined not by voice paging needs, but by the need to play tones in different zones.

In these instances, a shift change tone may need to be produced in the factory areas but not in the office areas. So a tone trigger zone group will be set up to channel the tone just into the factory. In this case, voice paging is done like an All-Call, but the tones are zoned.

Accessories

ZX3
3-Zone Plug-In Expansion Module
(one included with UTI312)



PAGING CONTROL MODULES

PCM2000 Zone Paging System

The PCM2000 Zone Paging System provides robust zone paging for applications requiring 1 to 99 zones, and up to 32 paging zone groups. Its multi-function modules ensure flexibility and future expansion with minimum time and expense.

Product Features:

Paging Features:


- Allows for 1 to 99 paging zones, in 3-zone increments
- Up to 32 programmable paging zone groups
- Emergency All-Zone Override Paging input
- All-Call function can be disabled
- 250-watt power handling capacity (*separate amplifier required*)
- Works with systems that are central- or self-amplified, or mixed
- Drives up to 40 self-amplified speakers per zone module in low-power mode

Installation Features:

- Operates with 70V and self-amplified (24V) paging systems
- Future expandability up to 99 paging zones using 10 PCM2000 slave assemblies
- Universal Telephone Interface allows simple connection to loop and ground start trunks, to PBX or KEY paging ports, and to analog 90V station lines
- Easy connections using standard RJ11 and Euro-style terminal blocks
- Relay driver outputs mirror the operation of each paging zone to control external equipment
- Two C-form relay contacts change state when system is activated to control external equipment
- A setup tone can be produced by the system to check system operation and volume levels
- Easy programming of system features through the telephone
- System programming can be reset to factory defaults
- Wall-mountable (*brackets included*)
- FCC Part 68 Registered
- Listed to UL Standard 60950 for US and Canada

Background Music:

- No interruption of background music in zones not being paged (two amplifiers required)
- Inhibit background music in any zone
- Zone modules can accept separate background music sources

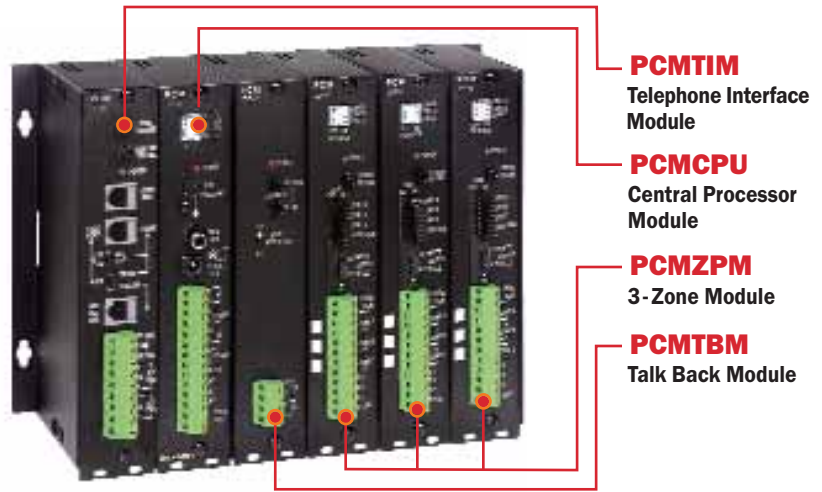

PCM2000
(shown with modules for a 9-Zone Paging System)

Works with both central- and self-amplified systems.

Night Ringer:

- Night Ring activated from 90V ring signal or contact closure
- Night Ring tone can be selected as either simulated ringer sound or chime
- Night Ring tone can be directed to a specific group of zones
- RJ11 input connector

Code Calling:

- Code-Call capability using pleasant chime sound
- Code calling can be directed into a specific group of zones
- Directly dial number of chimes produced or use preset table of chime patterns
- 1 or 2 automatic replays of the code call

Signal Tones:

- Contact closure input controlled tone annunciation
- Tone signaling can be directed into a specific group of zones
- Tone can be selected as tone burst, chime, or 4 quick beeps
- Tone can be selected to follow state of contact closure input or preset burst length

Number of Modules Required For Zone Paging Applications:


	Total Number of Zones in System										
	3	6	9	12	15	18	21	24	27	More Than 27 Zones	99 Zones
PCMTIM	← 1 Module Required For Each Total System →										
PCMCPU*	1		2			3			1 PCMCPU for every 9 Zones		11
PCMZPM	1	2	3	4	5	6	7	8	9	1 PCMZPM for every 3 Zones	
PCMTBM	← 1 Module Required For Each Total System (optional module for talk back or time tone options) →										

*Note: One PCMPS2 Power Supply (not included) is required for each PCMCPU Module.

FREE DESIGN GUIDE

PCM2000 CONFIGURATION GUIDE

This system configuration guide will assist you in designing zone paging applications.



It illustrates many popular applications for the PCM2000. This valuable guide is available to you at no cost. Download online at:

www.bogen.com/documentindex

Time Tones*:

- Built-in real-time clock
- Controls up to 8 time-triggered tone-signaled events
- Each time-triggered event's tone can be directed to a specific group of zones
- Time-triggered tone burst length adjustable (2-8 seconds) or chime tone
- Simple programming of times and events through the telephone
- Master clock synchronization ability



Two-Way Communications*:

- Provides hands-free, 2-way talk back communications in 70V paging systems (amplifier required)
- Zones can be individually selected to be talk back or one-way only
- "Privacy Beep" can be enabled in talk back zones to prevent eavesdropping

*Requires PCMTBM Module

Technical Specifications for PCM2000:

System	Power Requirements	Audio Power Capability*	Operating Current	Dimensions	Product Weight
PCM2000	12V DC@1.5A Power Supply (not included – PCMPS2 recommended)	250W (9-zone system)	1.5A max. (9-zone system)	1-1/2" W x 7-1/2" H x 4-1/4" D, each module	1 lb., each module

+ Separate Amplifier Required

Pre-Assembled Paging System

PCMSYS3

The **PCMSYS3** is a pre-assembled and tested 3-zone PCM system with a PCMPS2 power supply. Use it right out of the box for 1 to 3 zone applications or expand it with other PCM modules.



Ready-To-Go, right out of the box.

Contains:

- 1 **PCMTIM** - Telephone Interface module
- 1 **PCMCPUCPU** - Central Processor module
- 1 **PCMZPM** - 3-Zone Paging module
- 1 **PCMPS2** - System Power Supply


Expansion:

- Add PCMZPM modules for up to 9 zones
- Add PCMTBM module for talk back and realtime clock/tone applications
- Add satellite assemblies for up to 99 zones

Accessories

RPK88 Rack Mount Kit

Module housing for 10 modules max., with 12 wiring saddles, knockouts for wire access, and 8 mounting brackets.



RPK84
Rack Mount Kit
2 panel adapter,
6 modules max.



PCMPS2
Power Supply
(12V DC)



To Order a PCM2000 System, select from the following Modules:



PCMTIM

Telephone Interface Module

A universal interface connects to any type of telephone port, rapidly and trouble-free. Provides input for night ringer and emergency page override. **One required per system.**



PCMCPUCPU

Central Processor Module

The PCMCPUCPU controls system operation and holds all programmed parameters. **One required for every 3 PCMZPM modules (9 paging zones).**



PCMZPM

3-Zone Module

The 3-Zone module provides 3 paging zone outputs. Increase system capacity by adding additional modules, up to 3 zones at a time. The zone outputs can drive 70V or self-amplified speaker systems. Relay driver outputs mirror the state of each paging zone to control external equipment. If desired, the system-wide background music can be disconnected and a separate music source can be connected to any PCMZPM module. Background music can also be inhibited in any zone. **One for every 3 paging zones.**



PCMTBM

Talk Back Module (optional)

Allows 2-way, hands-free talk back communications throughout the paging system. The built-in real-time clock allows up to 8 user-scheduled time tones to be emitted in a specific group of zones. The clock can be synchronized with an external master clock. **Only one PCMTBM is required for the entire system, when needed.**

Zone Groups

One unique feature of the ZPM3 is its ability to group together a number of zones and page in to them at the same time. However, the people you are trying to contact may spend their time in more than one zone area. By grouping zones, you increase your chance of contacting that person.

An example of a typical 3-zone facility is a medium size location with an office area, manufacturing area, and warehouse. Each area is set up as an individual zone. By grouping two zones and paging simultaneously into both, the chances of the page being heard by the specific individual are greatly improved.

For this same facility, the ZPM3 can also produce a tone that will be heard only in a specific group of areas. An external contact closure from a master clock is typically used to trigger the tones.

Accessories



PRS48
Power Supply
(48V DC)



PRSLSI
Power Supply
(24V DC)



TAMB2
Telephone Access
Module



TBA15
Talk Back Amplifier

ZONE CONTROL MODULE



3-Zone Paging Module ZPM3

The ZPM3 allows for economical one- or two-way paging (with TBA15 Talk Back Amplifier) to be directed to any of up to 3 different paging areas. Zones can be grouped together so that more than one zone is paged at the same time. All areas can also be paged at once. Zone selection can be made using DTMF tones or pulse dialing.

Product Features:

- 3-Zone paging plus All-Call; 3 easily programmable zone groups (1-3 zones in each)
- One-way and two-way paging (talk back operation requires TBA15 Talk Back Amplifier)
- Directly interfaces to paging ports (requires contact closures), loop start, and ground start trunks
- Interfaces to station ports using TAMB2 Telephone Access Module
- Operates with central-amplified (70V) and self-amplified (24V) paging systems
- Pre-announce, confirmation tones, privacy beep, night ringer, selectable tones
- Separate volume controls for tones, night ring, and background music
- 24V or 48V talk battery option (requires additional PRS48 power supply)
- 100 watts total power handling capability
- Background music input
- FCC Part 68 Registered



Power Requirements	Dimensions	Product Weight
External 24V DC @ 350 mA	9" W x 7-1/4" H x 1-3/8" D	3 lb.

VOIP GATEWAYS FOR PAGING

Network-Enabled Paging MVP130BG, MVP210BG, MVP410BG, MVP810BG

Bogen's Voice Over IP Gateways (VoIP) allow paging communications to be sent over the Internet or Intranet. Each gateway connects directly to Bogen paging systems and equipment to provide overhead paging to all locations in a facility or across a campus without running new lines.

Product Features:

- Ethernet connectivity and full IP compatibility with existing routers and WAN infrastructure
- Single- or multi-zone paging at any or all locations when used with Bogen's Multi-Zone Universal Telephone Interface (UTI312); 1-, 2-, 4-, and 8-port/zone models available
- Efficiently communicate company-wide emergency alerts or general announcements, saving both time and money while improving communication
- Connects directly to phones or PBX; compatible with virtually any telephone port type
- One-port model supports FXS and FXO; multi-port models support FXS, FXO, and E&M
- FXS/FXO connector on each port for direct analog connection to Bogen's telephone paging interfaces
- Multi-port models provide contact closure Receive & Transmit in E&M mode capabilities



- Gateways are easily managed using a Windows®-based software application or remotely with a web browser or SNMP
- Can also be used for toll-free voice and fax communication when connected to phones, fax machines, key systems, PSTN lines, or a PBX to provide real-time, toll-quality voice connections to any office on your VoIP network
- FCC Part 68 Registered/UL and C-UL listed

	Max. Port Capacity	Dimensions	Product Weight
MVP130BG	1	4-3/8" W x 1" H x 5-5/8" D	1 lb.
MVP210BG	2	6-1/4" W x 1-1/2" H x 9" D	2 lb.
MVP410BG	4	17-1/2" W x 3-7/8" H x 8" D	8 lb.
MVP810BG	8	17-1/2" W x 3-7/8" H x 8" D	8 lb.

Windows® is a registered trademark of Microsoft.

COMPACT AMPLIFIER SERIES

CC-Series Compact Mixer-Amplifiers

The **CC-Series** consists of five compact mixer-amplifiers, each providing 40 watts of output power. The features available and number of inputs vary per model (see chart below). Each unit measures 2 rack spaces in height but only 8-1/4" wide, allowing 2 units to be placed side-by-side without requiring additional rack spaces.


Product Features:

- 40 watts of output power
- Total Inputs: 2 to 5 for external equipment (inputs vary per model, see chart below)
- 6th Input for Media Player on CC4052M and CC4062MBT
- 7th Input for Bluetooth on CC4062MBT
- Individual volume control for each Input
- Individual phantom power for MIC inputs
- Media player accepts SD card and USB thumb drive; button controls for playback, volume, and EQ (Models CC4052M and CC4062MBT)
- MOH output with 1W/8-ohm and 600-ohm transformer-balanced outputs (Models CC4052M and CC4062MBT only)
- MOH source selectable from Media Player or Input 4
- 2 levels of priority: TEL is 1st priority, Input 1 is 2nd priority
- Audio-activated & Defeatable muting
- Bass and treble controls
- Compatible with 70V, 25V, 4-ohm, and 8-ohm systems
- REC output
- Peak and signal indicators
- External 24V DC supply input
- Listed to UL Standard 60065 for US and Canada
- Optional rack mount adapter (RPK93) available for single and side-by-side configurations (sold separately)

Technical Specifications, Dimensions, and Weights can be found on Page 79

Model	Total Number of Inputs	Number of MIC/Line Inputs (balanced)	Number of AUX Inputs (unbalanced)	TEL Input	Media Player Built-in	EQ for Media Player	Bluetooth Capability	Audio-activated Muting Priority Levels	MOH Output	Product Weight
CC4021	2	1	1					1		11 lb.
CC4041	4	3	1					1		11 lb.
CC4052	5	3	1	1				2		11 lb.
CC4052M	6	3	1	1	1	●		2	●	11 lb.
CC4062MBT	7	3	1	1	1	●	●	2	●	11 lb.

Dimensions
8-1/4" W
x
3-1/2" H
x
10-3/8" D



CC4021



CC4041



CC4052




CC4052m



CC4062MBT

CC-Series Front & Rear Panels (CC4062MBT shown here)

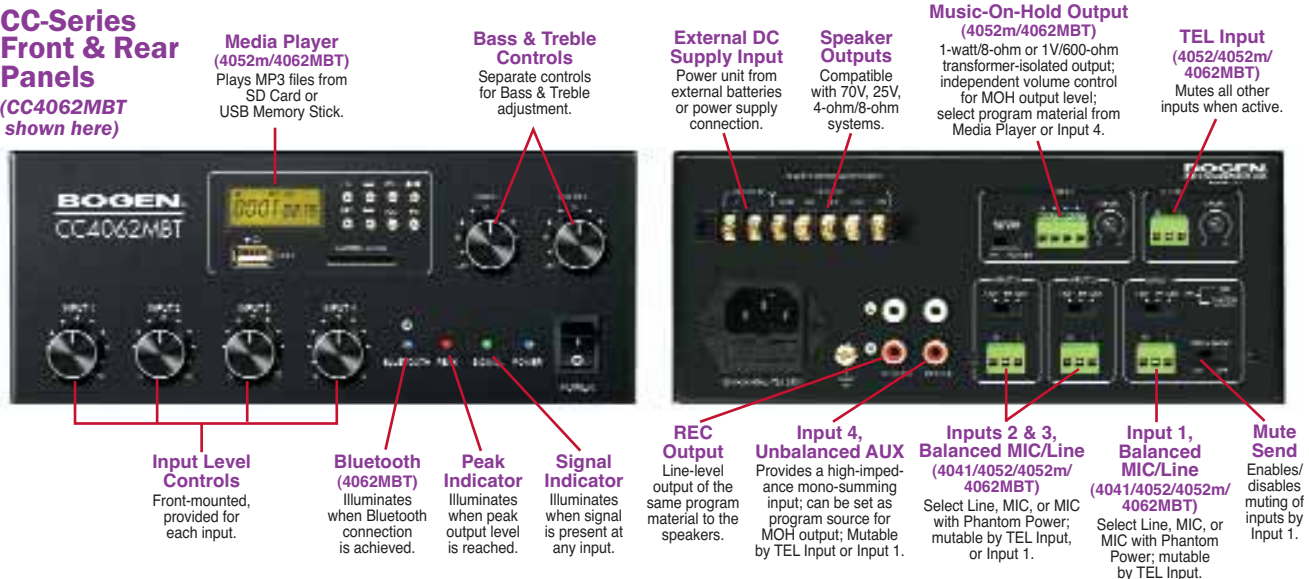

Media Player (4052m/4062MBT)
Plays MP3 files from SD Card or USB Memory Stick.

Bass & Treble Controls
Separate controls for Bass & Treble adjustment.

External DC Supply Input
Power unit from external batteries or power supply connection.

Speaker Outputs
Compatible with 70V, 25V, 4-ohm/8-ohm systems.

Music-On-Hold Output (4052m/4062MBT)
1-watt/8-ohm or 1V/600-ohm transformer-isolated output; independent volume control for MOH output level; select program material from Media Player or Input 4.

TEL Input (4052/4052m/4062MBT)
Mutes all other inputs when active.

Input Level Controls
Front-mounted, provided for each input.

Bluetooth (4062MBT)
Illuminates when Bluetooth connection is achieved.

Peak Indicator
Illuminates when peak output level is reached.

Signal Indicator
Illuminates when signal is present at any input.

REC Output
Line-level output of the same program material to the speakers.

Input 4, Unbalanced AUX
Provides a high-impedance mono-summing input; can be set as program source for MOH output; Mutable by TEL Input or Input 1.

Inputs 2 & 3, Balanced MIC/Line (4041/4052/4052m/4062MBT)
Select Line, MIC, or MIC with Phantom Power; mutable by TEL Input, or Input 1.

Input 1, Balanced MIC/Line (4041/4052/4052m/4062MBT)
Select Line, MIC, or MIC with Phantom Power; mutable by TEL Input.

Mute Send
Enables/disables muting of inputs by Input 1.

Signal-Processing Modules

When signal-processing output modules are installed into the Power Vector's last two module bays, they automatically insert themselves into the mix bus signal path leading to the power amplifier stage. When two of these output modules are installed, their effects are cascaded with the second to last bay's module, processing the signal first and then passing it to the module in the last bay. Two benefits are gained by this innovation: (1) the effects insert jacks are still available for use by external processing equipment, (2) the signal-processing output modules act on the raw mix bus signal before any other user controls, like master volume, bass, and treble. This then ensures that signal level dependent processors, such as the CMP1R Compressor/Limiter and the AN51R Ambient Noise Sensor modules, perform as intended regardless of front panel master control changes.

Remote Volume Control


The master volume control is motorized. By using a motor to physically move the control knob, a new level of remote control adjustability is achieved.

Regardless of where the master volume control is set on the amplifier, the remote can move it up or down. Since the remote control signal is now the drive signal to the motor, noise on the remote control leads cannot mix in with the amplifier signals. This gives the Power Vector a fully functional and clean way of remotely controlling overall system level.


Traditionally, remote volume control was accomplished by having the remote control vary an analog control signal to an opto-resistor in the amplifier. This opto-resistor would further attenuate the signal level in the amplifier, based on the remote control setting. This approach has two drawbacks: (1) the maximum volume that can be achieved by changing the remote control was limited by the master volume control setting on the amplifier, or vice-versa depending on how the amplifier was designed, the remote could lower volume, but could not further increase it; (2) the control signal, because it is analog, is vulnerable to noise. If a 60 Hz hum was picked up by the long remote volume leads, it could cause the opto-resistor to modulate the volume level at the hum frequency.

Accessories

PVSC
Power Vector Security Cover



RVCP
Remote Volume Control Panel



RPK87
Rack Mounting Kit



PVMC
Module Security Cover

MODULAR AMPLIFIERS

Power Vector Modular Amplifiers V35, V60, V100, V150, V250

WALL-MOUNTABLE version on Page 40

MIXER version on Page 48




Bogen's Power Vector modular input amplifier series offers a wide range of power levels from which to choose, with five models ranging from 35W to 250W. The amplifiers are designed to work with both high- (70V/25V) and low- (4/8-ohm) impedance speaker systems. Each model includes eight module bays for input modules and allows up to four levels of priority between modules. Two module bays are also capable of accepting signal-processing output modules. Each input channel has an associated signal/clip LED for signal status. An 11-segment LED output meter monitors output signal level, which can be controlled by the Remote Volume Control Panel (RVCP, sold separately). Modules required, but sold separately.

Product Features:

- 5 models ranging from 35W to 250W, each with a large power reserve
- Capable of handling 70V, 25V, 8-ohm, and 4-ohm speaker loads
- 8 input module bays (modules sold separately)
- Wide selection of advanced input modules
- 2 module bays capable of handling signal-processing output modules
- 4 levels of priority between modules
- 11-segment LED output level meter with Average/Peak switch
- Motorized master volume control that can be remotely operated (requires RVCP)
- Bass and treble controls
- Two-color LED for each channel indicates signal active/signal clipping
- Lockable switch permits user to select either transformer-coupled outputs or a direct low-impedance output
- Master mute control mutes all audio from the mixer section of the amplifier
- Bass and treble control bypass switch
- 125 Hz Low Cut feature
- 2 rack spaces high (3-1/2")
- Listed to UL Standard 60065 for US and Canada
- Signal-processing insert jacks allow external equipment to be inserted between the pre-amp output and the power amp input
- Pre-EQ unbalanced buffer output signal "post" all unit controls, but "pre" any external signal-processing equipment connected
- Grounded, unswitched AC convenience receptacle with a 500W maximum capacity provided for external equipment
- Security cover to protect volume, bass, and treble controls (PVSC, sold separately)
- Module security cover prevents tampering with module controls (PVMC, 8 included)
- Rack mountable (mounting kit RPK87, sold separately)

POWER HANDLING

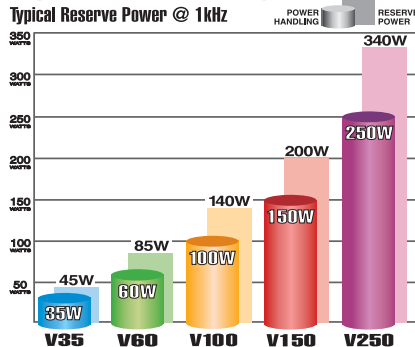

MODULES

Input & Signal Processing Modules- See Pages 39 & 40



Technical Specifications, Dimensions, and Weights can be found on Page 79

ADVANCED INPUT MODULES

Input Modules (Output Modules on Page 40)

Bogen's advanced plug-in input modules provide a wide range of functions to support a variety of applications. (Shipping weight: 1 lb. each)

STEREO AUX INPUT - SAX1R

Unbalanced Stereo Input



- Gain/Trim control
- Bass & Treble controls
- Gate feature mutes lower priority modules
- Mutable by higher priority modules
- Variable ducking level when muted
- Fade back from mute
- Stereo-to-mono summing option
- Bus assignable
- RCA connectors

MONO AUX INPUT - MAX1R

Unbalanced Mono Input



- Gain/Trim control
- Bass & Treble controls
- Gate feature mutes lower priority modules
- Mutable by higher priority modules
- Variable ducking level when muted
- Fade back from mute
- Bus assignable
- RCA connector

BRIDGING INPUT - BRG1R

Daisy Chain Multiple Amplifier Inputs



- Gain/Trim control
- Ground isolated input to eliminate ground loop
- Input signal available at buffered output
- Priority assignable
- Variable ducking level when muted
- Fade back from mute
- Buffered output not muted
- Bus assignable
- RCA input and output connector

TRANSFORMER-BALANCED INPUT - TBL1S

Transformer-Balanced AUX Input



- Gain/Trim control
- Bass & Treble controls
- Transformer-isolated, dual-impedance, line-level input
- Variable ducking level when muted
- Mute send & receive
- Fade back from mute
- Mute send threshold & duration adjustments
- Priority & Bus assignable
- Pluggable screw terminal connections

TONE GENERATOR - TNG1S

Multiple Tone Generator Input



- Level control
- Select 4 of 8 tones to trigger
- Burst/steady, slow whoop, siren, mechanical bell, Klaxon, night ringer, double chime, & doorbell tones
- Momentary & continuous playback modes
- Microprocessor-controlled
- Priority assignable
- Mute send & receive
- Screw terminal trigger connections



LISTEN TO TONES ON THE WEB
www.bogen.com/tones

Accessories

MA3
Module
Adapter



Adapts Modules for use with D-Series, WMA, and DPAmps

LINE/MIC INPUTS - LMM1S, LMR1S

Actively Balanced Emulated Transformer Inputs

REMOTE VOLUME CONTROL



LMM1S

- Input level controlled by remote panel or direct voltage (LMR1S)
- Wall Plate Control included (with LMR1S only)
- Limiter with LED activity indicator (LMR1S)
- Line/MIC gain switch
- Gain/Trim control
- Bass & Treble controls
- Noise gate w/threshold control
- Fade back from mute
- 24V phantom power
- Priority & bus assignments
- Screw terminal input
- Mutes lower priority modules
- Mutable by higher priority modules



LMR1S
with Remote Volume Control



MICROPHONE INPUTS - MIC1S, MIC1X

Low-impedance, Transformer-balanced Microphone Inputs



MIC1S

- Gain/Trim control
- Bass & Treble controls
- Noise gate w/Threshold & Duration control
- Limiter w/Threshold control
- 24V Phantom power
- Priority & Bus assignable
- Balanced, transformer-isolated
- Screw terminals (MIC1S); XLR connector (MIC1X)



MIC1X

MICROPHONE INPUTS - MIC2S, MIC2X

Low-impedance, Electronic-balanced Microphone Inputs



MIC2S

- Gain/Trim control
- High Cut/Low Cut controls
- Enhance control
- Noise gate w/Threshold control
- Limiter w/Threshold control
- 24V Phantom power
- Priority & Bus assignable
- Screw terminals (MIC2S); XLR connector (MIC2X)



MIC2X

TELEPHONE INPUT - TEL1S

Interfaces to Telephone System's Loop Start/Ground Start Trunks or Paging Ports



- Loop start or ground start trunk interfacing
- Dry loop interface to paging ports
- Audio-activated paging in dry loop
- Gain/Trim control; Noise gate & Limiter
- Mutes lower priority modules
- Mutable by higher priority modules
- Bus assignable & Transformer-isolated
- Screw terminal connections

Accessories

PRS48
48V DC
Power
Supply



BALANCED INPUT - BAL2S

Stereo, Balanced Input



- Stereo, high-impedance, electronically balanced inputs
- Professional-quality, low noise performance
- Selectable gain of 0 or 18 dB
- Compatible with telephone system page ports
- Mutable by higher priority modules
- Variable ducking level when muted
- Fade back from mute
- Screw terminal connections

ADVANCED OUTPUT MODULES

Signal-Processing Output Modules (Input Modules on Page 39)

Bogen's plug-in signal-processing output modules automatically insert themselves into the mix bus signal path leading to the power amplifier stage when installed. (Shipping weight: 1 lb. each.)

RELAY INPUT/OUTPUT - RIO1S



- Transformer-isolated, balanced line-level input
- 600-ohm or 10k jumper-selectable input impedance
- 8-ohm, 750mW output
- Input and output level controls
- Relay responds to selectable priority level
- External control of priority muting
- N.O. or N.C. relay contacts
- Input can be muted from higher priority modules, with signal fade back
- Output can gate with relay priority level
- Screw terminal strips
- RJ11 connection with line output and dedicated N.O. relay contact


AMBIENT NOISE SENSOR - ANS1R



ANS1R with Sensor Microphone

- Maximum Gain control
- Ramp Speed control
- Activity Threshold control
- Ambient MIC input threshold control
- Stereo AUX input (summed mono)
- AUX level input control
- Gradual fade back from mute
- Connect up to 4 sensor mics (1 included)
- Mutable input (lowest priority only)
- RCA connectors

Accessories **ANS500M**
 Sensor Microphone
(One included; additional available)



COMPRESSOR/LIMITER - CMP1R



- Compressor Ratio control
- Threshold control
- Make-up Gain control
- Bypass switch
- Unbalanced input
- Gradual fade back from mute
- Mutable input (lowest priority only)
- RCA connector

PARAMETRIC EQUALIZER - PEQ1R



- 2 full parametric bands
- Frequency control
- 'Q' bandwidth control
- Gain control
- Bass and Treble control
- Unbalanced input
- Bypass switch
- Mutable input (lowest priority only)
- Gradual fade back from mute
- RCA connector

MODULAR AMPLIFIERS

Wall-Mount Power Vector Amplifiers WV100, WV150, WV250

The Wall-Mount Power Vector Series combines up to 8 modular inputs and signal-processing outputs to meet various application requirements. The amplifier's convenient and efficient wall-mount design provides a protected and accessible audio system in a permanent and inconspicuous mounting.

Product Features:

- 100-, 150-, and 250-watt models; each with large power reserve
- 8 module input bays, accepts up to 2 signal-processing output modules and 8 input modules
- Wide selection of advanced input and signal-processing output modules
- Four priority levels between modules
- 4-ohm, 8-ohm, 25V, and 70V outputs
- Secure, permanent wall mounting (*in-wall with BBF or surface-mount with BBS*)
- 11-segment LED output level meter registers Peak or Average output
- Adjustable output level limiter with active indicator
- Front-mounted tape output provides unbalanced signal level output
- Independent volume controls for each input
- Motorized master volume control, with optional accessory RVCP for remote operation
- External mute control
- Bass and treble controls with center detent
- 125 Hz Low Cut switch
- Tone control bypass switch
- Optionally installable front-mounted input combo jack with 1/4" stereo phone and female XLR capabilities for connection to user-supplied modules
- Thermal, short-circuit, and overload protection
- Thermally controlled 3-speed fan
- Listed to UL Standard 60065 for US and Canada
- Components required for installation: Door (WMAD) and Back Box (BBF or BBS), both sold separately
- Modules required, but sold separately



RACK-MOUNTABLE version on Page 38

Technical Specifications, Dimensions, and Weights can be found on Page 79

MODULES



Input Modules- See Page 39; Output Modules- See Above

Accessories

RVCP Remote Volume Control Panel



Components

NOTE: These items are required for installation: One WMAD, and either one BBF or one BBS.



WMAD Front Cover/Door



BBF Flush-Mount Back Box



BBS Surface-Mount Back Box

PUBLIC ADDRESS AMPLIFIERS

Gold Seal Series Amplifiers


GS35, GS60, GS100, GS150, GS250



Gold Seal Series amplifiers were designed with the sound contractor in mind, offering professional performance and installation convenience. Each Gold Seal Series amplifier offers a unique combination of built-in features, ultra-high reliability, and extensive input flexibility and input options.



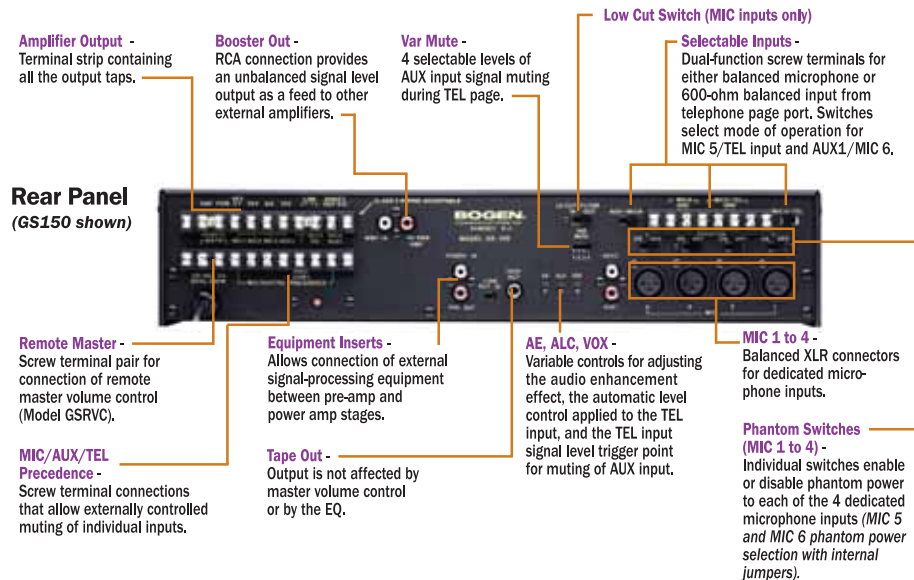

Product Features:

- 35-, 60-, 100-, 150-, and 250-watt models
- 7 inputs: 4 MIC (Lo-Z), 1 AUX (Hi-Z), 1 MIC/TEL, 1 MIC/AUX
- 4-ohm, 8-ohm, 25V, 25VCT, and 70V outputs
- Dual-function, 10-band graphic equalizer (acoustic EQ/feedback control)
- True loudness contour function
- Audio enhancement circuitry
- Automatic level control
- Switchable phantom power supply (15V DC)
- Variable AUX input muting
- Remote master volume control capability
- Input muting via contact on all inputs
- Voice-activated AUX muting on TEL input
- AUX fade-back after TEL page
- Pre-amp out/power amp in connections
- Booster amp output connection
- Tape output connection
- Low Cut filter for MIC channels
- Thermal and overload protection
- 3-speed cooling fan (GS250 only)
- Rack-mountable w/accessory mounting kit (2 rack spaces)
- Listed to UL Standard 60065 for US and Canada



Technical Specifications, Dimensions, and Weights can be found on Page 79

Accessories

			
GSTRC Tamper-Resistant Cover	GSRPK Rack Panel Mounting Kit	GSRVC Remote Volume Control	WMT1A Line-Matching Transformer

Dual Band EQ

The unique dual-function equalizer can be used for acoustic shaping or for feedback control.

• **Acoustic Shaping** - Full range equalization is provided for correcting general frequency response issues that exist in the application venue. The full audio spectrum is covered on 1-octave centers with a boost/cut of 12 dB. In this mode, the equalizer can be used to compensate for room acoustics, or to satisfy the listening preference of the user.

• **Feedback Control** - In this mode, the equalizer's control range is reduced to cover only the lower half of the audio spectrum (where feedback howls occur), but the individual filters are now on closer 2/3-octave spacing. This allows narrower bands of frequencies to be controlled, which is particularly useful to reduce feedback of live sources that can increase the effective loudness the system can achieve.

Variable Music Mute

This feature allows control over the level of background music (fed though the AUX inputs) heard during a telephone page announcement. The convention used to be to completely mute background music during pages. The Gold Seal Series amplifiers provide full muting as well as no muting and intermediate attenuation levels of -10 dB and -21 dB. After the telephone page has ended, the background music smoothly fades back to its original level for a very professional sound.

Telephone Paging Control

Input 5 serves a dual function as either a balanced MIC input or a 600-ohm balanced telephone input. The TEL input includes both voice-activated triggering for muting the AUX inputs and automatic level control for providing constant paging level. ALC compensates for different voice levels and speaking styles of the individuals using the system. Controls are provided on the rear of the amplifier to adjust trigger threshold of the voice-activated muting so that it will not falsely trigger from noise on the input. An ALC adjustment is also provided to allow control over the amount of compression applied to loud signals to keep them at a nominal signal level.

Audio Enhancement

Crisp, clean, intelligible sound is the goal of every paging system. The audio enhancement circuit adds back the high frequency harmonics that are lost through the handsets and speakers. With one simple control, you can adjust the amount of high frequency content the audio enhancement circuit adds back until optimum intelligibility is reached.

PUBLIC ADDRESS AMPLIFIERS

Classic Series Amplifiers



C10, C20

The **Classic Series** mixer amplifiers provide mixing of microphones, telephone, and auxiliary sources. Bogen's Classic Series amplifiers offer high performance, flexibility, and reliability for most applications requiring a variety of inputs.

Product Features:

- 35-, 60-, and 100-watt models as well as 10- and 20-watt models
- 4 inputs (C35/60/100 models): 1 MIC (Lo-Z), 1 AUX (Hi-Z), 1 TEL, plus 1 selectable MIC or AUX
- 3 inputs (all C10/C20 models): 1 MIC (Lo-Z), 1 TEL, plus 1 selectable MIC or AUX
- AUX muting w/ external contact closure or automatic w/ TEL
- TEL input voice-activated (VOX) mute over AUX input
- Variable threshold for voice-activated AUX mute
- Separate volume controls for each input plus overall bass and treble (C35/60/100 models) or tone (all C10/20 models)
- Outputs for 4-ohm, 8-ohm (not C100 model), 16-ohm, 25V, and 70V speaker systems
- Screw terminal connection for microphones
- Input Sensitivity: 600 μ V, MIC; 85 mV, AUX; 75 mV, TEL



C35, C60, C100


- Thermal protection and electronic shutdown
- Record output jack (C35/60/100 models only)
- Easy-to-understand and easy-to-operate controls
- Rack-mountable w/ accessory mounting kit (2 rack spaces)
- Listed to UL Standard 60065 for US and Canada

Model	Number of Inputs	MIC precedence over AUX input(s)	Bass/Treble control	4-, 16-ohm, 25V, 70V speaker outputs	8-ohm speaker outputs	VOX muting of AUX input (TEL input only)	Variable VOX threshold	Tape/Booster Output
C100	4 - 1 MIC, 1 AUX, 1 TEL, 1 MIC/AUX	●	●	●	●	●	●	●
C35/C60	4 - 1 MIC, 1 AUX, 1 TEL, 1 MIC/AUX	●	●	●	●	●	●	●
C10/C20	3 - 1 MIC, 1 TEL, 1 MIC/AUX	●	*	●	●	●	●	●

* Treble Cut only

Technical Specifications, Dimensions, and Weights can be found on Page 79

Accessories



RPK35B
Rack Panel Kit
(for C10 and C20 models)



RPK50
Rack Panel Kit
(for C35/60/100 models)



WMK1
In-Wall Mounting Kit
(for C10 and C20 models)



WMT1A
Matching Transformer

UTILITY AMPLIFIERS



Utility Amplifier GA2

The **GA2** is a rugged, compact amplifier designed to meet the requirements of continuous low-power audio applications, especially telephone line "music-on-hold" amplification; to drive monitor speakers and headphones; or as a line amplifier.

Product Features:

- 1.5-watt utility amplifier
- 1 input: AUX (Hi-Z)
- 8-ohm or 600-ohm outputs
- 200 Hz - 15 kHz frequency response
- 50 mV sensitivity
- Volume control
- 120V AC operation
- 4W power consumption
- 5-1/2 ft. AC power cord included
- Wall-mountable design
- Listed to UL Standard 60065 for US and Canada

Accessories



WMT1A
Matching Transformer

Technical Specifications, Dimensions, and Weights can be found on Page 79



Utility Amplifier GA6

The **GA6A** is a dual-input amplifier with a wide variety of smaller applications including background music, relaying communication from one room to another, or sound reinforcement.

Product Features:

- 6-watt utility amplifier
- 2 inputs: 1 MIC (Lo-Z), 1 AUX (Hi-Z)
- 8-ohm, 25V, or 70V outputs
- 30 Hz - 12 kHz frequency response
- Sensitivity: 0.3 mV, MIC; 0.2V, AUX
- Adjustable tone control
- Thermal and over-current circuit breakers
- 16W power consumption
- Listed to UL Standard 60065 for US and Canada

TELEPHONE PAGING AMPLIFIERS

TPU250



TPU35B, TPU60B, TPU100B



TPU100B shown

TPU15A



Bogen's TPU-Series of amplifiers are the ideal choice within the telephone paging industry. With five models to choose from, ranging in power from 15 watts to 250 watts, each model provides signal-activated, automatic muting of background music during a telephone page, and gradual return of music following a page.

Product Features:

- 15-, 35-, 60-, 100- and 250-watt models specially designed for telephone paging systems
- 3 inputs on TPU250 and TPU-B models: 1 TEL, 1 MIC (Lo-Z), 1 AUX (Hi-Z)
- 2 inputs on TPU15A: 1 TEL, 1 AUX (Hi-Z)
- 600-ohm balanced TEL input for direct connection to page ports and adapters
- TEL input has Automatic Level Control (ALC) for constant page announcement level
- Separate MIC input for a low-impedance push-to-talk microphone (excluding TPU15A model)
- Audio enhancement circuitry (excluding TPU15A model)
- Music input – mutable by external contact closure (excluding TPU15A model) or activity on TEL input
- Separate volume controls for mic, paging, background music, and night ringer
- Built-in night ringer can be activated from 90V ring signal (excluding TPU15A model) or external contact closure
- 25V and 70V constant-voltage outputs, balanced and unbalanced; also 8-ohm on TPU15A
- Wall-mount design provides minimum protrusion from backboard
- TPU-B models may be rack-mounted using RPK82 rack mounting kit (sold separately)
- TPU15A & TPU250 designed to rack mount directly, no kit necessary
- Easily accessible, recessed front-panel controls (excluding TPU15A model) for setting volume, muting, music, etc.
- RCA jacks provided to allow amplifier bridging to double the number of amplifier inputs and outputs (excluding TPU15A model); a TPU250 can only be bridged with one other TPU250
- Thermal and electronic overload protection (excluding TPU15A model), resettable circuit breaker (except TPU250), Slo-Blo fuse on TPU250
- Listed to UL Standard 60065 for US and Canada

Model	Output Power (Watts)	Inputs			Adjustable Mute Threshold	Automatic Level Control	Bass/Treble Controls	Peak Level LED	Adjustable Mute Level	Fade Back From Mute	Audio Enhancement	Night Ringer		Outputs						
		Telephone	Music	Microphone								90V Activation	Contact Closure	70V	25V	25VCT	8 Ohms	16 Ohms		
TPU250	250	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
TPU100B	100	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
TPU60B	60	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
TPU35B	35	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
TPU15A	15	●	●		●		*	●				●	●	●	●	●	●	●	●	●

* Treble Cut only

Technical Specifications, Dimensions, and Weights can be found on Page 79

Specialized Telephone Input

The TPU-Series' 600-ohm transformer balanced input is perfectly suited to connect to paging ports and paging adapters such as Bogen's TAMB2. Here are a few specially designed features:

- The background music will mute whenever paging activity is present on the telephone input, even if control contacts are not available. (Separate mute control contacts are also available.)
- To avoid problems with noise on the lines falsely muting the background music, a built-in VOX threshold control (not on TPU15A) lets you decide what's a real signal and what's noise.
- Because not everyone speaks at the same level, the Automatic Level Control feature keeps loud voices from booming out of the paging system's speakers.

Audio Enhancement

Crisp, clean, intelligible sound is the goal of every paging system. The audio enhancement circuit adds back the high frequency harmonics that are lost through the handsets and speakers. With one simple control, you can adjust the amount of high frequency content the audio enhancement circuit adds back until optimum intelligibility is reached.

Variable Music Mute

Add some polish to announcements by using the TPU's built-in variable mute feature. Variable mute allows you to control the level of the music heard in the background during a page. It's fully adjustable from no muting of music to full suppression of music. The TPU also gracefully fades the muted music back in after the page is finished for a smooth, professional sound (not available on TPU15A).

Bridging

Bridging two TPU amplifiers permits them to be used in tandem with one another to increase the total output power of the system, thereby permitting additional speakers to be added. For example, when two 250-watt amplifiers are bridged, the total output capacity of the system is 500 watts. Also, both amplifiers will receive the same input signal, amplify it, and deliver it to the speaker loads connected to each amplifier (not available on TPU15A).

Accessories



WMT1A
Line-Matching
Transformer



RPK82
Rack Mounting Kit
(TPU-Bs only)

DUAL-CHANNEL POWER AMPLIFIERS

Black Max™ Power Amplifiers X300, X450, X600




Bogen's Black Max amplifiers are designed to provide maximum performance in constant voltage speaker systems. Dual 70V transformerless outputs deliver exceptionally clean audio to speaker systems requiring two channels of audio up to 600W per channel in a single package. High-efficiency class H amplifier design and the auto-sleep feature aid in reducing power consumption on continuously-powered systems. Rear-mounted volume controls, independent low cut filters on each input, and pluggable input terminal strips were specifically designed for the fixed install market. Built-in power sequencing for multiple Black Max amplifiers combats current in-rush problems of large audio systems. Massive power toroid and heat sinks; heavy 14-gauge chassis; patented Back-Slope™ AC voltage stabilization; clip limiters; and DC voltage, over-current, and thermal protection circuits make the Black Max both an efficient and reliable workhorse amplifier.

Product Features:

- Dual 70V amplifier channels
- 300W, 450W, or 600W per channel for 70V speaker systems
- Low noise, low distortion, and high slew rate
- High-efficiency class H amplifier design
- Transformerless direct drive outputs
- Electronically balanced high-impedance inputs
- Pluggable terminal strips for input connections
- Independent Low Cut filters for each channel
- Built-in power sequencing with other Black Max amplifiers
- Pluggable terminal strip for sequencing wiring
- Rear panel power sequencing status indicator
- DC, overload, short circuit, and thermal protection circuits
- Clip limiting circuits for speaker protection
- Power-saving sleep mode for intermittent use applications
- Status, Signal, and Limit indicators
- Back-Slope AC voltage stabilization for dependable performance over varying AC line voltages ($\pm 10\%$)
- Heavy-gauge steel chassis with cast aluminum front panel
- Rear-mounted volume controls
- Mounts in 2 rack spaces (3-1/2") directly stackable without need for extra space above or below
- 2 independent, continuously variable cooling fans for dependable and quiet operation
- Easily removable front fan grilles with filters
- Listed to UL Standard 60065 for US and Canada

Accessories



RPK86
Rear Rack
Mounting Kit

Inside the Black Max™ X600



14 Large Output Transistors
Per Channel for
Extra Reliability



74,600µf of Capacitance
Creates Enormous Amounts
of Reserve Energy



The Black Max Transformer
Weighs in at 17 lb. with
2 kVA of Power



Two Independent Variable
Speed Fans Provide for
Quiet Cooling



Two Custom Extruded Heat
Sinks Provide Heat Transfer
from Output Transistors

Technical Specifications, Dimensions,
and Weights can be found on Page 79

DUAL-CHANNEL POWER AMPLIFIERS

M-Class Amplifiers M300, M450, M600



Bogen's M-Class amplifiers provide professional sound installers with exactly what they need from an amplifier: 3 modes of operation — stereo (4-ohm), 70V mono, dual mono (4-ohm); 2 bays for a variety of input modules; up to 600W/ch stereo (4-ohm) or 1200W of 70V mono power; massive power toroid and heat sinks; heavy 14-gauge chassis; patented Back-Slope™ AC voltage stabilization; clip limiters; and DC voltage, over-current, and thermal protection circuits.

Product Features:

- 3 Mono power levels: 600W, 900W, or 1200W for 70V speaker systems
- 3 Stereo power levels: 300W, 450W, or 600W per channel @ 4 ohms
- 3 Modes of operation to choose from: Stereo (4-ohm), Dual Mono (4-ohm), or 70V Mono
- 2 Module input bays for flexible modular input capability
- Low noise, low distortion, and high slew rate
- Professional, high-impedance, balanced stereo input module included (BAL2S)
- 3 Selectable low-frequency roll-off choices
- 2:1 Mixer function when in mono modes
- Insert connections for outboard equipment (in mono modes)
- Post- and Pre-EQ Output Feeds (summed mono out in stereo mode)
- DC, overload, short circuit, and thermal protection circuits
- Clip limiting circuits for speaker protection
- Power-saving Sleep Mode for intermittent use
- Status, Signal, and Clip/Limit indicators
- Back-Slope AC voltage stabilization for dependable performance over varying AC line voltages
- Recessed volume control knobs (behind cover)
- Mounts in 2 rack spaces (3-1/2") directly stackable
- 2 Independent, continuously variable cooling fans
- Easily removable front fan grilles with filters
- Stable into 2-ohm loads
- Listed to UL Standard 60065 for US and Canada

70V Speaker Output -

For 70V constant voltage speaker systems. Provides a single channel of amplification.

Low Cut Filter Switch - Select a low-frequency roll-off of 65 Hz or 125 Hz for transformer-coupled and horn speakers. Flat position allows full low-frequency performance.

Module Bays - The unit can accept one or two Bogen input modules. Each amplifier comes with a balanced, high-impedance stereo input module.

Cooling Fans - Two independent, variable-speed cooling fans respond only as needed to keep the amplifiers cool and reduce dust build-up.

Rear Panel



Low-Impedance Outputs -

For 4- to 8-ohm speaker loads. Unit is stable into loads as low as 2 ohms.

Effects Loop - Provides insert point for outboard signal-processing equipment when the amplifier is in either 70V Mono or Dual Mono modes (modular inputs are in a 2:1 mixer configuration).

Operational Mode Selector - Choose one of three settings to meet application needs: 70V Mono, Dual Mono (4-ohm), or Stereo (4-ohm). See the sidebar on this page for description of operating modes.

Output Feeds - In mono modes, the connectors provide output signal feeds both before and after any outboard signal-processing. In stereo mode, the Pre-EQ connector provides mono mix output of the stereo input signal.

Channel Balance Control (in Dual Mono operation mode) - Allows the output level of one channel to be lower than the other channel's output level.

Technical Specifications, Dimensions, and Weights can be found on Page 79

Modular Amplifier


The M-Class Series of amplifiers are modular amps that can accept up to two input modules per unit. These modules offer a cost effective and convenient way to add a variety of features to a system. A balanced line input module (BAL2S) is shipped with each unit. See page 39.

Modes of Operation

Each model includes a 3-position switch that can be set to one of three modes of operation: Stereo mode, 70V Mono mode, or Dual Mono mode.


• Stereo

In this mode, the amp supplies two independent channels of low-impedance amplification. These channels can be used to supply left and right audio for stereo installations of 2 separate zones of amplification with different audio programs.




• 70V Mono

In this mode, the amp supplies a single channel of amplification. This mode also mixes the signals from each input module into a mono program. By assigning each module to a different bus, a 2:1 mixer is formed with the front-mounted level controls adjusting the mix. In addition, one module can be set to mute the other when it is active, thereby providing an effective paging system.

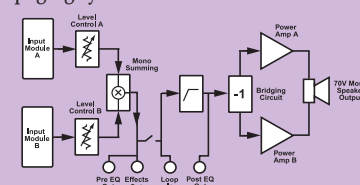

• Dual Mono

This mode is similar to the 70V Mono mode except that in this mode the amp supplies two channels of low-impedance amplification. This mode still mixes the input signal from the different modules but a Channel Balance control is provided to adjust the output levels of one channel against the other.

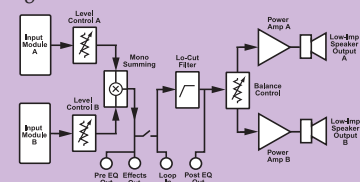

MODULES



Input Modules - See Page 39

Accessories



RPK86 Rear Rack Mounting Kit



PVMC Module Security Cover

Heavy-Duty Operation

The HTA line of amplifiers are designed to be workhorses. Large heat sinks and huge transformers allow these amplifiers to supply continuous, full (RMS) power to loads, even at high ambient temperatures. The HTA amplifiers are convection-cooled, so they provide the ultimate in set-and-forget operation.

More amazing than the heavy-duty capability of the HTA amplifiers is the quality of the output. The frequency response will remain within +/- 1 dB and have less than 0.5% distortion over the entire audio range (20 Hz – 20 kHz). What is so special about this? The output is transformer-coupled. Few transformer-isolated amplifiers can even come close to these specifications. An enormous output transformer using proprietary coil winding techniques is what allows the HTA to reach this level of performance.

A Power MOSFET output stage completes the extremely reliable and durable performance of these amplifiers. This type of transistor does not suffer from many of the failure modes of the more typical transistors (bi-polar types). The result is an amplifier that can operate reliably at full power and supply transformer-isolated, high-quality, full bandwidth (20 Hz – 20 kHz) audio.

MONO-CHANNEL POWER AMPLIFIERS



HTA125A, HTA250A

The HTA Series high-performance power amplifiers can safely drive loads continuously at full (RMS) power. Overload protection includes an electronic shutdown circuit and a thermal breaker.

Product Features:

- 125- and 250-watt models
- Convection-cooled
- Power MOSFET output circuitry
- Thermal protection and automatic electronic overload protection
- Hi-Z unbalanced and Lo-Z balanced or unbalanced input w/ accessory transformer (TL600)
- Internal Low Cut filter switch
- 90 dB signal-to-noise
- 4- and 8-ohm, 25V, 25VCT and 70V outputs
- Input sensitivity: Hi-Z, 500 mV; Lo-Z, 150 mV (HTA125A), 150 mV (HTA250A)
- Power Consumption: 260W (HTA125A); 520W (HTA250A)
- Line bridging (*driving multiple amplifiers*) is possible w/ an accessory transformer (TL100)
- 19" rack-mount design (3 rack spaces)
- Listed to UL Standard 60065 for US and Canada

Technical Specifications, Dimensions, and Weights can be found on Page 79

Accessories



WMT1A
Matching Transformer



TL100
1:1 Bridging Transformer



TL600
600-ohm Impedance-Matching Transformer

MONO-CHANNEL POWER AMPLIFIER



BPA60

The BPA60 supplies 60 watts of power amplification for professional and commercial sound systems requiring continuous high-quality sound.

Product Features:

- 60 watts
- 1 input: Hi-Z unbalanced
- Lo-Z balanced input with accessory transformer
- Input level control and Low Cut filter switch
- 8-ohm/25V, 16-ohm, 25VCT, and 70V outputs
- Sensitivity: 300mV, Hi-Z; 75mV, Lo-Z
- Resettable circuit breaker and thermal protection
- Operates with 25V and 70V systems
- 120V AC, 60 Hz, 180W @ full rated output
- Rack-mountable with accessory mounting kit: RPK53 (2 rack spaces)
- Listed to UL Standard 60065 for US and Canada

Technical Specifications, Dimensions, and Weights can be found on Page 79

Accessories



RPK53
Rack Panel Kit



TL100
1:1 Bridging Transformer



TL600
600-ohm Impedance-Matching Transformer

PRO-MATRIX AMPLIFIER

Digitally Matrixed Amplifier PM3180



Removable front panel for optional wall mounting

The Pro-Matrix was developed expressly for the needs of restaurants, lounges, fitness centers, and other venues that require numerous input sources but have areas with distinctly different audio requirements. The Pro-Matrix amplifier provides 3 fully independent audio channels that can use any of the 6 different inputs in vastly different ways.

Installer Programmable Features:

- Large 10-character alphanumeric display with prompted programming for quick setup
- Password-protected system settings for consistent, foolproof operation
- 6 user-assigned priority levels for inputs
- Each input can be assigned different priority levels for each of the 3 output channels
- Volume and tone control lockout, independently on each audio channel
- Configure microphone input (ALC, phantom power, VOX or contact triggered)
- Programmable variable music mute levels during MIC or TEL page
- Preset bass and treble response of each input for each audio channel

Product Features:

- 3 Independent amplifier channels
- 100-, 60-, and 20-watt amplifier channels
- 8-ohm, 70V, and 25V transformer-coupled outputs
- 4-ohm direct output
- Audio inserts for connection to external signal-processing equipment
- Auto-switching of inputs based on custom assigned priorities and input audio activity
- 4 High-impedance, unbalanced auxiliary inputs
- 2 Microphone inputs; one input can be programmed to accept a telephone line for paging

What Does The Pro-Matrix Do?

The Pro-Matrix Amplifier is ideally suited for restaurants and similar venues. It provides 4 AUX and 2 MIC inputs that can be distributed into 3 different zones. The Pro-Matrix automatically switches the different audio sources based on a preset, user-programmed priority hierarchy. This allows the correct audio to reach the correct areas without any user intervention, making operation ultra simple.

In addition to flexible priority assignment of inputs, the Pro-Matrix has 10 different menus that allow control of a host of system operations from applying phantom power to mics to setting the muting level of music during mic pages and much more.

- Volume, bass, and treble controls for each audio channel
- Wireless infrared remote control unit
- Detachable front panel can be mounted up to 25 ft. away from main unit using included accessory cable or up to 250 ft. with an optional mounting kit (RMPWMK3)
- Phantom power for microphones (13V DC), selectable
- Rack-mountable with accessory kit (RPK79)
- Listed to UL Standard 60065 for US and Canada

Technical Specifications, Dimensions, and Weights can be found on Page 79

Accessories

RPK79
Rack Mount Kit



RMPWMK3
Remote Wall Mounting Kit for Removable Front Panel



AMPLIFIER MONITOR



Automatic Failure Detector/Substitutor AFDS2

The AFDS2 continuously supervises the operation of any main power amplifier and its standby amplifier in a sound system. If a fault is detected on the main amplifier causing a loss of as little as 2 dB, the AFDS2 automatically switches operation to the standby amplifier. When the fault to the main amplifier is corrected, operation is automatically switched back to the main amplifier.

Product Features:

- Monitors both main and standby power amplifiers
- 40 kHz Supervision frequency
- Automatically transfers operation to standby power amplifier
- LEDs and fault alert tone notify user of a 2 dB (adjustable up to 12 dB) drop in either amplifier's output
- Automatically restores operation to main power amplifier when problem is corrected
- Operates with 25V or 70V systems
- Screw terminal or phono jack connections
- Rear-panel adjustable controls for oscillator levels and detector sensitivities
- Rack-mountable

Power Requirements	Dimensions	Product Weight
120V AC, 15W or 12V DC @ 0.5A	19" W x 3-1/2" H x 7-1/2" D	8 lb.

Flexible Output Levels

The VMIX was designed to make connections to other sound system components as easy as possible. Its transformer-balanced output provides ground loop isolation and high noise immunity when connected to other balanced inputs of downstream components. This output can provide 3 distinct output voltage ranges to accommodate just about any input type from a microphone input at -50 dBμ to a professional audio input requiring +4 dBμ, as well as a more common commercial level of -10 dBμ. Setting the proper output range is as easy as moving a slide switch. The VMIX provides a separate unbalanced RCA output, which makes simple equipment interconnects a snap.

Signal-Processing Modules

When signal-processing output modules are installed into the Power Vector's last two module bays, they automatically insert themselves into the mix bus signal path leading to the output stage. When two of these output modules are installed, their effects are cascaded with the second to last bay's module processing the signal first and then passing it to the module in the last bay. Two benefits are gained by this innovation: (1) the effects insert jacks are still available for use by external processing equipment, (2) the signal-processing output modules act on the signal on the raw mix bus signal before any other user controls, like master volume, bass, and treble can affect it. This then ensures that signal level dependent processors, such as the CMP1R Compressor/Limiter and the ANS1R Ambient Noise Sensor modules, perform as intended regardless of front panel control changes.

MODULAR MIXER

Power Vector Mixer VMIX



AMPLIFIED
VERSIONS
on
Pages 38 & 40

This 8-channel Power Vector mixer/pre-amplifier offers a wide variety of operational features and functions for superior audio performance. Eight module bays accept plug-in modules, allowing up to four levels of priority between modules. Security covers for both the front and rear of the unit prevent tampering with settings. For large applications, several Power Vector Mixers can be bridged together.

Product Features:

- Wide selection of plug-in modules (sold separately)
- 8 module bays
- 2 module bays capable of handling signal-processing plug-in output modules
- 4 levels of priority between modules
- 8 inputs, with independent volume controls for each
- LED signal/clip indicator for each channel
- Bass and treble controls
- 11-segment LED output level meter monitors the output level of the mixer with Avg./Peak switch
- Balanced transformer-isolated output
- Balanced output signal level switch (-50, -10, and +4 dBμ)
- Unbalanced signal output jack
- Join multiple Power Vector mixers together using bridging jack and mute terminals
- Motorized master volume control that can be remotely operated (with RVCP Remote Volume Control Panel, sold separately)
- 125 Hz Low Cut feature (switch located in module bay 6)
- Tone control bypass switch (located in module bay 6)
- Module security cover prevents tampering with module controls (PVMC, 8 included)
- Resettable circuit breaker
- Grounded, unswitched AC convenience receptacle with a 500W maximum capacity provided for external equipment
- Power indicator
- Rack mountable (rack mounting kit RPK87, sold separately)
- Security cover to protect front controls and allow access to installer selected controls (PVSC, sold separately)
- Listed to UL Standard 60065 for US and Canada

Accessories

PVMC
Module
Security Cover



PVSC
Power Vector
Security Cover



RVCP
Remote Volume
Control Panel



RPK87
Rack
Mounting Kit



MODULES



Input & Signal-
Processing Modules-
See Pages 39 & 40



Rear View

ALL MODULES
SOLD SEPARATELY

Technical Specifications:

Output Level Meter	Frequency Response	Output Impedance	Signal-To-Noise Ratio	Dimensions	Product Weight
11 Segments	±1 dB (20 Hz-20 kHz) balanced-out	100 ohms, unbalanced; 50 ohms @ +4 dBμ, 600 ohms @ -10 dBμ, 5 ohms @ -50 dBμ, balanced	-99 dB, fundamental	17-1/4" W x 3-7/8" H x 14-3/4" D	15 lb.

MIXERS

MIC/LINE Mixer CAM8PRO




The Bogen **CAM8PRO** is an 8-input, dual-bus MIC/Line mixer that combines superb performance with a generous array of simple-to-use features in a single rack space design. It features 8 independently assignable inputs switchable between MIC and Line. Each input has a trim control, a switchable low cut filter, and a Main/Auxiliary bus output selector. Phantom Power can be universally applied to all MIC-selected inputs for condenser microphones. The CAM8PRO also features a built-in Compressor/Limiter with adjustable Threshold and Ratio Controls, a Bar Graph Output Meter that indicates input signal levels, and a headphone jack.

Product Features:

- 8 independently assignable inputs
- Dual-bus design with Main/AUX output selector for each input
- Pluggable terminal strip connections
- Separate Auxiliary input
- Balanced inputs and outputs
- Direct bus connection for cascading multiple mixers
- MIC/Line switch for each input and Main output
- Gain/Trim Control for each input
- Low Cut Filter for each input
- Switchable Phantom Power for condenser MIC inputs
- Input Level Control knob for each input
- Output Level Control knob for Main and AUX outputs
- Heavy-duty construction
- External power supply included
- Single-rack space design
- Compressor/Limiter (Main output)
- Compressor/Limiter Bypass switch
- Adjustable Threshold and Ratio Controls
- LED Bar Graph Output Meter (Peak or Average)
- Headphone Output

See page 50 for
CAM Mixers Selection Chart.

Dimensions	Product Weight
19" W x 1-3/4" H x 7-1/2" D	7 lb.

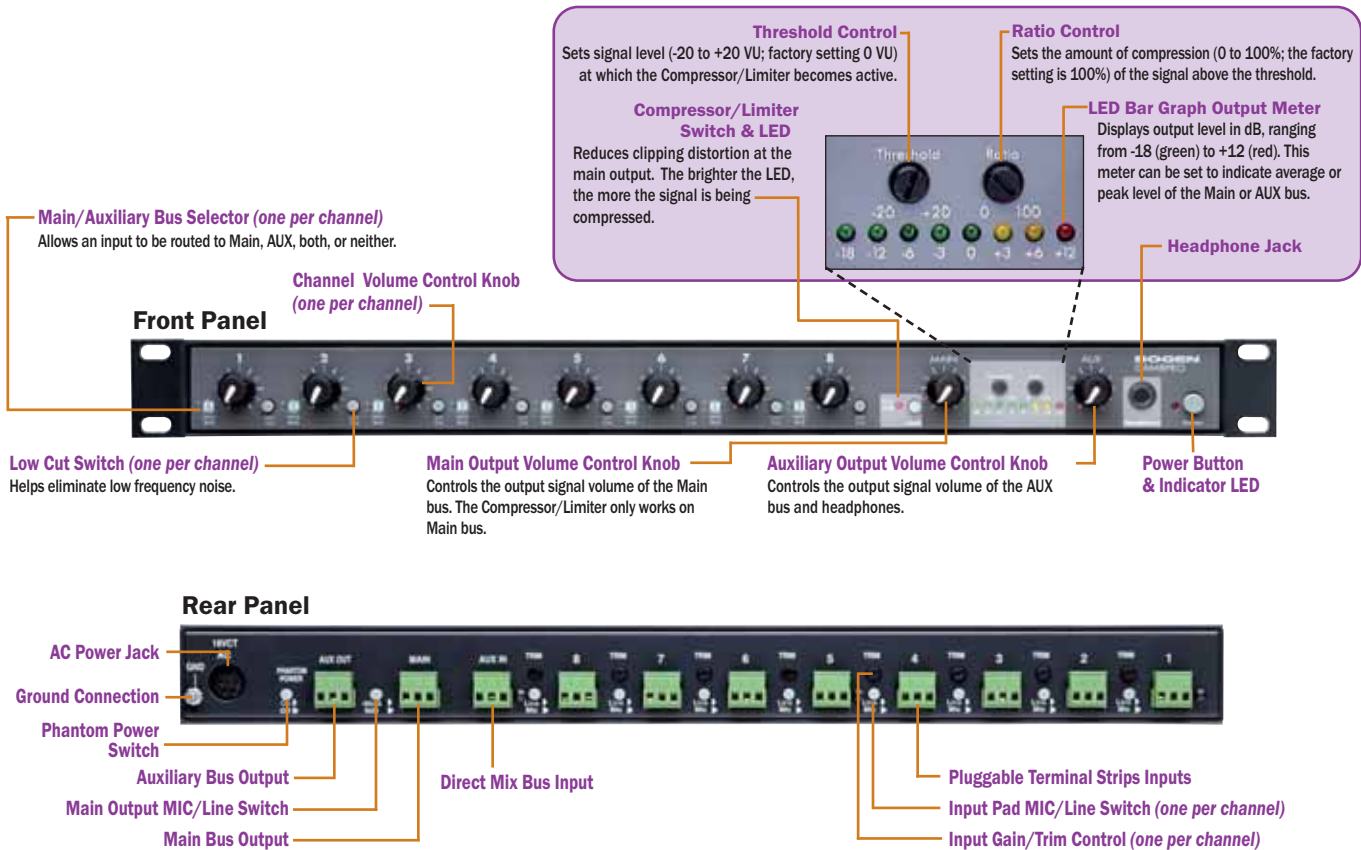

MIXERS



Mixer/Pre-Amplifier CAM2

The CAM2 is a 5-input mixer/pre-amplifier suitable for a wide variety of applications, particularly for expanding the number of inputs on Bogen or other public address amplifiers. The CAM2 provides four professional, low-impedance, balanced microphone inputs through XLR connectors and one auxiliary input.

Individual phantom power switches for each input allow the use of both dynamic and condenser microphones on the same unit. A bridging input permits simple interconnection of multiple CAM2 mixers for system expansion without the need to sacrifice any mixer inputs. Clipping indicators for each input and an output level meter provide information to the system operator about sound integrity. Wide frequency response, low distortion, low noise, and high channel crosstalk isolation ensure superior sound quality. The CAM2's balanced mixer output can be switched between line-level (+4 dB μ) or microphone-level (-50 dB μ) for compatibility with a wide range of sound processing equipment.

Product Features:

- 4 Microphone inputs
- Low-impedance, balanced MIC inputs
- 1 High-impedance AUX input
- Low-noise, active mixing
- Master volume control
- Input clipping indicator for each channel
- 5-Segment LED output level meter
- XLR microphone input connectors
- Phantom power selectable per MIC input
- Unbalanced line-level output
- Balanced XLR output
- Illuminated power switch
- Switchable output level (+4/-50 dB μ)
- Compact size
- Bridging input for connecting together multiple CAM2 mixers
- Rack- or wall-mounted with RPK35B or WMK1
- Listed to UL Standard 60065 for US & Canada

Dimensions	Product Weight
11-3/8" W x 2-5/8" H x 7-1/2" D	3 lb.

Accessories



RPK35B
Rack Mounting Kit



WMK1
In-Wall Mounting Kit

Output Level Switch - Switch changes the nominal signal level of the XLR output from +4 dB μ to -50 dB μ .

Bridging - The bridging jacks facilitate the connecting together of mixers to obtain additional inputs without using any of the CAM2's inputs.

Phantom Power - The CAM2 provides power for electret condenser microphones. The Phantom ON/OFF switch controls the applications of DC voltage to each MIC input.

Rear Panel



Output XLR Connector - Provides a balanced output compatible with most professional equipment.

Line Output Connector (Line Out) - RCA jack provides unbalanced output signal compatible with most amplifiers, recording equipment, and other audio equipment. Not affected by Output Level switch.

Auxiliary Input (AUX In) - A dedicated unbalanced auxiliary input for tuner, CD player, etc.

MIC Inputs - Balanced MIC level XLR inputs.

CAM MIXERS SELECTION CHART

Model	Inputs	Phantom Power/Voltage	Bridging Input	Clipping Indicator/Channel	Compressor/Limiter	Output Level Meter	Frequency Response	MIC Equiv. Input Noise	MIC/AUX Input Impedance	Signal-To-Noise Ratio	Output Impedance	Crosstalk (adjacent channels)	For Product Info, See:
CAM8PRO	8	30V DC	●		●	● (8 segments)	±1 dB, 20 Hz-20 kHz	-129 dBV	3.5k/15k ohms	90 dB	220-ohm unbalanced, 440-ohm balanced	> -90 dB	Page 49
CAM2	5 (4 MIC, 1 AUX)	12V DC	●	●		● (5 segments)	±1 dB, 20 Hz-20 kHz	-123 dBV	600/10k ohms	75 dB	140 ohms	> -90 dB	Above

AUDIO PROCESSOR

Universal Audio Processor CORE



The Bogen **CORE** is a highly versatile digital mixer/processor designed for small to medium installations. Flexible hardware configurations, in blocks of 4: for 4 in/12 out, 8 in/8 out, etc. The CORE's PC-based software allows for design, downloading, reversal of in-box designs, and live monitoring, calibration, and routing. Three system hardware configurations are available: CORE8X8 (8 inputs, 8 outputs), CORE4X12 (4 inputs, 12 outputs), and CORE12X4 (12 inputs, 4 outputs).

Product Features:

- Configurable using PC/laptop software
- Programmable, scalable front panel knobs for analog control functions
- Full DSP drag-and-drop component library
- Third-party control via RS-232 serial and Ethernet
- Stack up to 12 units to increase number of inputs and outputs
- Listed to CE and UL standards

Hardware Components:

- Main Frame: 4 slots for input/output cards, 16 TTL/Analog Inputs, 8 TTL Outputs, RS485, RS232 Port, Ethernet Port
- Output Card: 4 channels with individual overload indicator, mute, meter, signal present, level control, and adjustable overload threshold
- Input Card: 4 balanced audio input channels with individual bypass, mute, -66dB to 0dB sensitivity select, phantom power, mute, RTO (route to output), VU meter, signal present, level control, and adjustable overload threshold

Software Components:

- Auto Gate, Noise Sensing, Compressor, Comp-limiter, Expander, and Ducker
- Equalizers: Mono & Stereo GEQ (1 Octave, 2/3 Octave, 1/3 Octave), Mono & Stereo PEQ (2, 4, 6, 8, 10, 16 bands)
- Dynamic Feedback Control
- Programmable Level Controls
- Stores up to 53 minutes of digital audio WAV file storage, triggered via calendar-based schedule or dry contact; 2 separate messages can be simultaneously output to independent zones
- Mixers: Auto, Matrix, Standard, and Room Combiner
- Noise Generators: White, Pink, Tone
- Page Control Module: for zone paging applications
- Create custom control interface screens via integral monitor window

Accessories
See Page 81

Dimensions	Weight
17-1/8" W x 1-3/4" H x 11-5/8" D	8 lb.

MESSAGING & CALL STACKING SYSTEM

BOMDMU



Bogen's **BOMDMU** is a comprehensive system that provides page stacking, feedback elimination or pre-recorded messaging, and background music control in a single device.

Product Features:

- 3-Channel page stacker
- Record and temporarily store up to 16 pages or 4 minutes of audio per channel
- Feedback elimination; opens loop between input microphone and speakers
- Priority input with immediate, real-time access to paging system; overrides background music, stacking and messaging functions
- Record and Play up to 99 messages or 8 minutes or audio
- Message triggering via start input or host telephone system workstation
- Background music input
- Station or Dry Loop/Loop Start operation
- DTMF support for zoning
- 19" Rack mount design (1 rack space)
- 12V DC @ 1 Amp power supply included

Power Requirements	Dimensions	Product Weight
12V DC @ 1 A (included)	19" W x 1-3/4" H x 7" D	5.5 lb.

Pre-record Messages for Use in Emergencies

It is imperative that directives communicated using a public announcement system during an emergency are clear, concise, and worded so as to not cause panic or confusion. It is difficult to imagine all these criteria being met at the time an emergency is occurring. The individual making the announcement may themselves be shaken, confused, or not sure what to say.

Directive Announcements

The BOMDMU allows up to 99 messages (up to 8 minutes total in length) to be recorded in advance. These directives can include vacate the building, secure your location in the building, relocate to a particular area, etc. in cases of fire, an intruder, storm, etc. Since the individual who is aware of the emergency (and the appropriate message content that needs to be announced) is likely required to attend to the emergency situation rather than making announcements, it is best that such announcements be recorded in advance and played by an authorized individual. Messages can also be recorded in multiple languages.

AMBIENT NOISE SENSOR SYSTEM



ANS501 with Sensor Microphone



Bogen's Ambient Noise Sensor System electronically adjusts the level of a page or background music in applications where ambient noise levels are continuously changing. The ANS501 ensures that page announcements or background music are intelligible even during periods of high ambient noise levels. The system includes a sensor microphone module (ANS500M) that monitors the ambient noise level, and a 12V DC power supply.

Product Features:

- Automatically adjusts paging level as ambient noise levels rise and fall
- Balanced and unbalanced input and output
- AUX inputs bypass gain control feature
- Unbalanced stereo AUX inputs (summed mono)
- Supports up to 4 sensor microphones (one ANS500M included) wired in parallel for large areas
- Sensor microphones can be located up to 2,000 feet from control unit
- Only 2 wires needed for connection of sensor microphones
- Microphone module includes an adjustable mounting bracket for precise positioning
- Connects easily between pre-amp and power amp or to amplifier insert jacks
- Sensitivity and max boost control
- Adjustable ramp speed

Power Requirements	Dimensions	Product Weight
12V DC Power Supply (included)	Control Unit: 5-1/4" W x 3" H x 1-1/4" D	1 lb.
	Sensor Microphone: 2" W x 2-1/8" H x 7/8" D	4 oz.

Accessories



ANS500M
Sensor Microphone
(one included w/system)

NIGHT RINGER



NR100

The NR100 converts any paging system into an after-hours night bell alert system. The NR100 connects to the paging system's amplifier and emits a ringer tone through the paging system's speakers, thus eliminating the need for loud old-fashioned bells positioned throughout a facility. The NR100 is an efficient and easy way to alert security or personnel of incoming calls during non-business hours.

Product Features:

- Responds to 90V ring signals or external contact closures
- Produces dual-frequency electronic ringer tone
- Easily connects to any paging system
- Automatically mutes background music while ringing
- Ringer volume control
- Compact size
- Low current draw
- No maintenance
- FCC Part 68 Registered

Power Requirements	Dimensions	Product Weight
External 24V DC @ 25 mA, power supply <i>(not included)</i>	5-1/4" W x 3-1/4" H x 1-1/4" D	1 lb.

Accessories

PRS2403
24V DC
Power Supply



VOICE-ACTIVATED RELAY



VAR1

The VAR1 is a relay device that monitors audio activity over a wide range of input voltages and operates two sets of C-Form relay contacts in response to detected activity. The VAR1 can be used to detect voltages as low as signals directly from a microphone or as high as signals from 70V speaker systems. A low-level output of the detected audio, transformer-isolated from the input, is also available for use with other equipment. The VAR1 can also be used as a balanced, low-impedance MIC pre-amp.

Product Features:

- Two sets of C-Form (both N.O. and N.C.) relay contacts respond to audio activity
- 4 levels of input signals: microphone, 600-ohm line, 25V, and 70V speaker systems
- Built-in balanced, low noise, high gain microphone pre-amp
- A transformer-isolated, 600-ohm small signal level output of detected audio available
- Works with self-amplified or central-amplified paging systems
- Separate microphone pre-amp gain control
- Adjustable release delay – 0.25s to 25s
- Trigger threshold adjustment
- Relay active indicator light

Power Requirements	Dimensions	Product Weight
External 12V to 24V DC @ 100 mA <i>(not included)</i>	5-3/8" W x 3-7/8" H x 1-3/8" D	1 lb.

Accessories

PRS40C
12V DC Power
Supply



DIGITAL FEEDBACK ELIMINATION



Digital Feedback Terminator DFT120

The **DFT120** eliminates the acoustical feedback loop created by the telephone handset and the paging speaker while providing high-capacity, high-quality recording and playback of audio pages.

Product Features:

- High sampling rate for excellent playback quality
- Able to record a message while another is being played
- Stacks up to 16 messages for playback
- 240 seconds of total audio memory
- Automatic or externally controlled unit operation for recording, play, and stop
- Activates recording by loop start trunk, 4-wire dry loop, audio trigger, or DTMF
- Digital recording and playback of pages, 60-second maximum message length
- Adjustable delay between messages
- Message repeat, abort, stop, and pre-page tone option
- 8- or 600-ohm output impedances
- Zone control DTMF tones stripped from message and regenerated
- Volume control
- Adapter included

Power Requirements	Dimensions	Product Weight
12V Power Supply (included)	10" W x 6-3/4" H x 1-1/2" D	3 lb.

Accessories



TAMB2
Telephone Access Module

TALK BACK AMPLIFIER



TBA15

The **TBA15** is a unique amplifier that permits loudspeakers to be used as microphones to provide hands-free, two-way conversations through the paging system*. In the idle state, the TBA15 uses the attached speakers as microphones and feeds this signal out to a telephone line. When the TBA15 senses a paging signal on the telephone line, it will switch on its 15W amplifier and use the speakers conventionally.

Product Features:

- Hands-free 2-way conversations through the paging system
- 15 watts of speaker power
- Works on 25V and 70V speaker systems
- Adjustable switching sensitivity control for switching from listen to talk
- Adjustable switch-back delay prevents chopping of pages and provides smooth 2-way conversations
- Talk Back and page volume controls
- Mute input forces amplifier into page mode
- Perfect accessory for zone paging applications
- Resettable circuit breaker with thermal protection

* Page port connection should be a duplex line for talk back applications.

Power Requirements	Dimensions	Product Weight
120V AC	19" W x 5-1/4" H x 2-5/8" D	7 lb.

Accessories



TAMB2
Telephone Access Module



ZPM3
Zone Paging Module

TONE GENERATOR



TG4C

The **TG4C** is designed to produce four different types of tones for use as alarm or announcement signals in paging systems. An audio signal can be routed through the TG4C to allow easy installation in paging systems. During generation of the tones, the routed audio will be suppressed.

Product Features:

- 4 types of tones: slow whoop, steady, pulsed alarm, and chime
- Tones triggered by external contact closure (momentary or long duration)
- Choice of continuous generation of tone or two-burst operation (except for steady tone)
- External audio signal can pass through the TG4C and is suppressed during tone generation
- Adjustable tone level & pitch
- 600-ohm output
- Tone generation reset available



Power Requirements	Dimensions	Product Weight
Wide power supply range, 12V to 48V DC @ 30 mA (power supply not included)	6-3/4" W x 5-3/4" H x 2" D	2 lb.

Accessories



PRS40C
12V DC Power Supply



WMT1A
Matching Transformer

DOOR PHONE



Shown with bezel frame (included)



Shown without bezel frame

Analog Door Phone ADP1

Bogen's **ADP1 Door Phone** provides convenient remote, hands-free two-way communication between two locations. Durable, weather-resistant, stainless steel construction protects against vandals and varying weather conditions.

Product Features:

- Weather-resistant
- Vandal-resistant brushed stainless steel faceplate with mounting gasket and heavy-duty call button
- Suitable for indoor or outdoor station, door, or gate communication
- Secure entry access to commercial, industrial, or residential locations
- Push button initiates the call at remote location
- Connect directly to an analog PABX/KSU station programmed for ringdown operation
- Adjustable microphone and speaker volume
- Adjustable call timeout (15 seconds to 2 minutes)
- Call limit timer can be disabled
- Responds to CPC pulses
- Hands-free communications
- Auto-answer feature allows monitoring of remote location
- Powered by telephone line; no power supply needed
- Fits interior and exterior dual gang electrical boxes (user supplied)

Dimensions	Product Weight
5" W x 5" H x 1-7/8" D; 6-3/8" W x 6-3/8" H x 1-7/8" D (with bezel frame)	2 lb.


Connecting Amps to Other Equipment

When connecting amplifiers to other equipment, these transformers are a "must have" because they can solve a variety of problems.

- Where signal levels are insufficient to drive an amplifier's AUX input to full volume, installing either model on the input will increase the voltage to the input by about 5 times, providing plenty of level.
- Where input ground loops are causing a hum problem, the isolation transformer on either transformer can break the loop and eliminate the hum.
- When unbalanced signals need to be sent over long distances, either model can balance them at both the send and receive sides and reduce the possibility of noise pickup.
- Both models allow a microphone input to be used with an AUX-level signal input. By moving a jumper, the attenuation is changed on the high-impedance side to be 100 times less than the signal level on the 600-ohm side.
- The WMT1AS model can also convert 25V and 70V speaker levels down to the levels appropriate for AUX inputs on amplifiers.

MATCHING TRANSFORMERS

WMT1A, WMT1AS

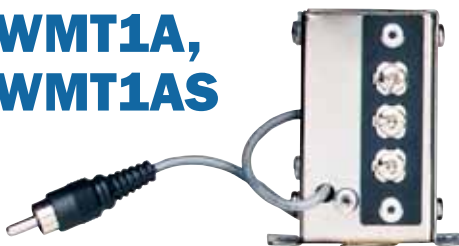


WMT1AS adapts speaker-level signals to AUX level.

Models **WMT1A** and **WMT1AS** are general-purpose matching transformers that allow proper connections between high (10k-ohm) and low (600-ohm) inputs and outputs. Both models can be used to balance an unbalanced line or provide isolation between two pieces of equipment. Both models can be configured to produce a balanced, microphone level signal from a line-level signal such as that from a pre-amp or music source. In addition, Model **WMT1AS** can adapt speaker level signals (25V/70V systems) to a level suitable for the AUX input of an amplifier.

Product Features:

- Hi-Z, 10k-ohm primary impedance
- Lo-Z, 600-ohm secondary impedance, balanced with center tap
- Matches high-to-low impedance or low-to-high impedance
- Adapts line-level signals to microphone inputs
- RCA connector for Hi-Z side
- Screw terminals for Lo-Z side
- Small steel enclosure w/ mounting ears allows easy mounting anyplace

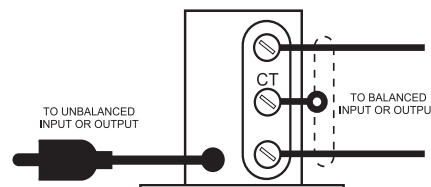

Dimensions	Product Weight
2" W x 2-3/8" H x 1-1/4" D	4 oz.

DIGITAL SOUND PRESSURE LEVEL METER

SPLM

The Bogen **SPLM** is a digital sound pressure level meter used to measure SPL in decibels (dB). It is portable and easy to use. It is ideal for measuring and monitoring noise and sound in any environment.

Product Features:

- 1/2" Condenser microphone with removable windscreen
- Large 2-1/8" LCD screen, 4-digit readout, auto backlight
- Tripod fixed screw mount for field work
- Light sensor
- High accuracy: +/- 1.5 dB
- Wide measuring range: 30 to 130 dB
- AC analog signal output jack
- Fast/Slow time weighting selections
- A and C Frequency weighting
- Requires 4 AA batteries (included), or 6V DC power supply
- Designed to IEC 651 Type2 and ANSI S1.4 Type2 standards
- USB jack for PC connection for data record downloading, real-time data sampling analysis, and printing graph and data functions (requires software download from Bogen website)
- On/Off power button, with auto off feature



SPLM unit comes equipped with sturdy carrying case

Dimensions:	2-3/4" W x 9-3/8" H x 1-3/8" D (Handheld Unit)
Product Weight:	11 oz. (with batteries)

DIGITAL STEREO TUNER



DST1

The **DST1** Digital Tuner incorporates a digital PLL-synthesized tuner for precise reception of FM and AM signals. The DST1 features the ability to store up to 60 total presets (FM and AM). It is designed for shelf- or rack-mounted installation and is one rack space (1 RU) high. Removable rack ears are included with the unit.

Product Features:

- PLL-synthesized tuning with digital readout
- 60 Presets total (FM and AM), with scan feature
- Stereo and Mono outputs
- Volume control (rear panel-mounted)
- Connectors for 75-ohm FM, 300-ohm FM, and AM loop antennas
- FM dipole and AM loop antennas included
- Bright alphanumeric, fluorescent display panel
- Operates from nominal 120V AC, 60 Hz
- Handheld remote control
- Stereo output cable
- Shelf- or rack-mounted installation, one rack space high (1 RU, removable rack ears included)
- Listed to UL Standard 60065 for US and Canada


Actual Product may differ slightly in appearance from image shown here.



Remote Control (included)

Antenna Connections

Anyone who has installed a tuner inside an industrial building knows that radio signals don't penetrate too far into these steel-laced structures. Because the DST1 is designed for industrial installations, it contains inputs for both external 300-ohm (twin line) and 75-ohm (coaxial) antenna feeds. The 75-ohm input uses an "f" connector and can receive feeds from antenna distribution systems or cable systems.

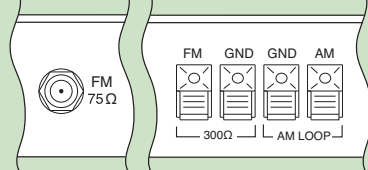

Whether sitting on a shelf or mounted in a rack, the DST1 is a great choice for an industrial-grade tuner.

Power Requirements:	120V AC nominal @ 60Hz
Dimensions:	16-7/8" W x 1-3/4" H x 10" D
Product Weight:	5 lb.

Paging Input Details

The DRZ35 has a full-featured microphone paging input. The microphone input is a low-impedance balanced input that works with dynamic or condenser microphones. Whenever a page is made, the AUX or Tuner feed is muted via a VOX detector. When the page is completed, the other source smoothly fades back in.

By using a WMT1A matching transformer, the MIC input can be connected to the paging port of a telephone system.

Speaker Zones

Built into the DRZ35 is a convenient 4-zone selector switch group. These push-on/push-off switches allow you to control how paging is distributed throughout a facility. Simply turn on and off groups of speakers as needs change.

Power Requirements:	120V AC @ 60Hz
Dimensions:	17" W x 5-1/4" H x 13-5/8" D
Product Weight:	20 lb.

AM/FM 35-WATT RECEIVER

DRZ35




The DRZ35 is a unique, self-contained 4-zone music and paging system for small-to medium-sized applications. It has a digital AM/FM tuner, as well as MIC, LINE, and AUX inputs. It has 35 watts of output power, and is capable of driving 4-ohm, 25- or 70-volt speaker systems.

The DRZ35 permits connection of up to four switch-selectable paging zones. It also features Bass and Treble controls and a Master Volume control with a 5-segment LED output meter. The built-in tuner uses a PLL synthesizer to provide accurate frequency selection.

Product Features:

- Self-contained, 4-zone music and paging system with Tuner
- 35 watts of output power
- For use with 4-ohm, 25- or 70-volt speaker systems
- Select 1-4 zones for music or paging
- 3 external audio inputs: MIC, LINE, & AUX
- MIC input uses a standard XLR three-pin connector for balanced Lo-Z microphone
- Phantom power (21V DC)
- Microphone paging priority with VOX-activated music muting
- LINE and AUX stereo combining RCA inputs
- Built-in digital AM/FM Tuner, with PLL synthesizer to provide accurate frequency selection
- Auto station search and manual tuning
- Backlit tuner display, LCD
- 10 FM and 10 AM station presets
- Tuner has sleep mode/auto shut-off feature
- FM 75-ohm coaxial (F-type), FM 300-ohm, and AM Loop terminals antenna
- Large master volume control
- Bass and treble controls
- 5-segment LED output level meter
- Booster amplifier output with Pre- or Post-Volume selector
- Power on LED indicator
- Rack-mountable with included brackets
- FM dipole and AM loop antennas (included)
- FCC Compliant
- Listed to UL Standard 60065 for US and Canada

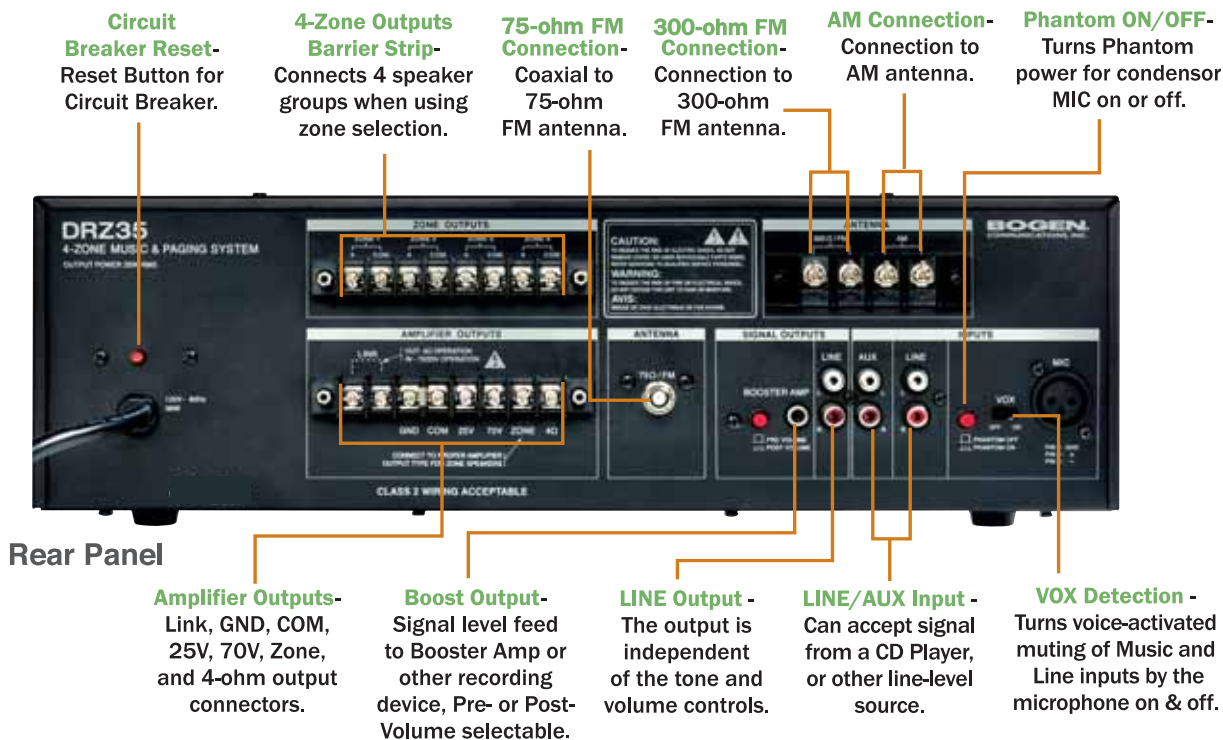

CD PLAYER & AM/FM RECEIVER

CDR1

The **CDR1** is a combination CD Player and AM/FM Receiver.



Actual Display may differ in appearance from image shown here.

Product Features:

- Single Disc CD Player & AM/FM Receiver
- Stereo & Mono signal out
- 1W minimum, @ 8-ohm stereo output
- Adjustable loudness contour
- 12-hour time display
- AUX input via 1/8" stereo jack
- Pluggable screw terminal connector for antenna & speaker wiring
- Rack-mountable (2 rack spaces) w/ accessory mounting kit
- External power supply (UL and C-UL listed) included

Power Requirements:	12V DC/3A
Dimensions:	7-1/4" W x 2-1/8" H x 9-1/4" D
Product Weight:	4 lb.

- CD Player:**
- Plays CD, CD-R, and CD-RW discs (including MP3 files)
 - Browse, Repeat, Random Play, and Pause functions

- Receiver:**
- 30 Station presets: 5 selectable bands (3 FM and 2 AM) can be programmed with 6 stations each
 - Manual Tuner, Auto Seek, and Preset Scan features
 - Pluggable screw terminal inputs for AM loop and FM dipole antennas
 - F-Type connector for coaxial 75-ohm antenna


Space Saving

The CDR1 incorporates a full-featured AM/FM receiver and CD player in an extremely compact size. When rack-mounted using the optional mounting kit, the CDR1 fits in 2 rack spaces.

Dual Outputs

A unique feature of the CDR1 is its dual outputs. Since it is designed for paging systems, a set of signal level RCA outputs is available on the rear of the unit. These outputs can feed the music or AUX inputs of a paging system directly. But the CDR1 also contains a pair of 1-watt outputs that can drive 8-ohm speakers directly. These outputs provide a convenient way to supply local speakers or to monitor the receiver tuning, without the need to run paging speakers into the equipment room.

Accessories



RK78
Rack
Mount Kit

Now You Can Receive Bogen Product Updates... In Your E-mail.



Visit www.bogen.com, click on the yellow button located on our homepage, fill out the simple form... and that's it!

Product Updates via e-mail

BOGEN[®]
COMMUNICATIONS, INC.

MICROPHONES

Bogen's microphone line includes a variety of types and styles (handheld, wireless handheld/lavaliere, desktop, gooseneck, boundary, and overhead hanging) to meet your application needs, from paging systems to instrument and vocal reproduction. These microphones provide clear, natural, intelligible sound reproduction with accurate response and dependable performance.

WIRELESS SYSTEMS

UHF Wireless Microphone Systems UDMS800HH, UDMS800BP

These **Wireless Microphone Systems** offer users the freedom to move around while speaking. System choices consist of a 800-channel PLL-synthesized UHF Receiver with either a handheld microphone or lavaliere microphone and body-pack transmitter. Headset microphone available.

UHT800 Handheld Microphone

- Sleek metal housing with internal antenna for optimum aesthetics and durable long life
- Uni-directional neodymium dynamic cartridge for optimum sound, maximum feedback rejection, and minimal handling noise
- Audio mute switch allows convenient audio muting while leaving the transmitter "ON"
- LED indicator: Unit "ON", and "Low Battery Alert"
- Convenient, economical operation with AA alkaline or NiMH batteries (2x)
- 9-1/8" long x 2" dia.; 10 oz. (without batteries)

UBP800 Body-Pack w/Lavaliere Microphone

- Audio mute switch allows convenient audio muting while leaving the transmitter "ON"
- LED indicator: Unit "ON", and "Low Battery Alert"
- Locking 3.5mm mini-jack provides secure connection for removable microphone
- Convenient, economical operation with AAA alkaline or NiMH batteries (2x)
- 2-1/4" W x 3-3/8" H x 1" D; 2.8 oz. (without batteries)
- Lavaliere Mic: 4 ft. long cord; 0.6 oz.

UDR800 800-Channel PLL-Synthesized UHF Receiver

- Offers 800 user-selectable frequencies in UHF 470-490 MHz band; 120 dB dynamic range; operation up to 500 feet line-of-sight
- DigITRU Diversity™ for maximum range and dropout protection, full LED indicators, 1/4" unbalanced and XLR balanced outputs, Tone Squelch™ for locking out potential interference, noiseless transmitter ON/OFF switching, and level control for unbalanced output
- Half-rack receiver design with front panel dual antennas, powered by wall power adapter (included)
- 8" W x 1-5/8" H x 5-1/8" D; antenna 2-3/4"; 1 lb.

UDMS800HH

includes:

- UHT800 Handheld Mic
- UDR800 UHF Receiver

UDR800



UHT800

UDMS800BP

includes:


- UBP800 Body-Pack & Lavaliere Mic
- UDR800 UHF Receiver

UDR800



UBP800


Accessories



MC28 Microphone Clip
(for UHT800)



RPK89 Rack Mount
(Single Unit)



BCHM
Headset Microphone
(UBP800 Body-Pack required)



RPK90
Rack Mount
(Double Unit)

DESKTOPS



Dynamic Desktop Microphone DDU250

The **DDU250** is a high-quality, dynamic, gooseneck desktop microphone ideal for any PA system. The gooseneck permits the user to adjust the microphone's angle and height to suit the user's needs. 4-1/4" W x 18-1/4" H x 6-1/4" D; 3.5 lb.

- Cardioid pickup pattern
- Push-to-lock and push-to-talk switches
- Excellent speech intelligibility with low ambient noise
- Effective feedback control
- 16" long, fully flexible gooseneck stalk shock-mounted to a heavy zinc die cast base
- 10-ft. cable with external contact closure outputs for the talk switches
- 500-ohm Impedance
- Frequency response range of 100 Hz to 12 kHz
- Sensitivity of -76 dB +/- 3 dB



Desktop Paging Microphone MBS1000A

The **MBS1000A** is a dynamic, dual-impedance, desktop microphone designed for all industrial and commercial public address and paging applications. 4-3/8" W x 9-3/8" H x 5-7/8" D; 1.25 lb.

- Cardioid pickup pattern
- Locking mechanism with push-to-talk bar for long announcements
- Push-to-talk or lift-to-talk operation
- Impedance: Hi-Z, 50k ohms; Lo-Z, 500 ohms
- Frequency response range of 45 Hz to 15 kHz
- Sensitivity: Lo-Z: -72 dB +/- 3 dB; Hi-Z: -52 dB +/- 3 dB
- ABS plastic with rubberized black finish, and die cast base
- 7-ft. long; 4-conductor, 2-shielded cable included

HANDHELDS



Professional Handheld Stage Microphone
HDU250

The **HDU250** is a dynamic microphone that is ideal for acoustically demanding environments. It features a heavy zinc die cast case with a rigid, low noise cable-mount system and a lockable silent reed switch. 7" D x 2" dia.; 13 oz.

- Cardioid pickup pattern
- High-output design with excellent gain before feedback characteristics
- High sound pressure capability without distortion
- Low sensitivity to breath/pop noise
- Efficient shock-mount system prevents handling and transmission noise
- High sensitivity Neodymium capsule
- 250-ohm Low-impedance
- Frequency response range of 50 Hz to 18 kHz
- Sensitivity of -72 dB +/- 3 dB
- Integral multi-layer breath/wind filter; includes mic clip
- Rubberized black finish; rugged, reliable construction



Handheld Stage Microphone
HDU150

The **HDU150** is an attractive, dynamic, all-purpose microphone ideally suited for a wide variety of vocal and sound reinforcement applications. 6-1/2" D x 1-1/2" dia.; 13 oz.

- Cardioid pickup pattern
- Wide dynamic range with high-end sparkle and minimum feedback
- Low sensitivity to breath and popping sounds
- Lockable, silent on/off reed switch
- 500-ohm Impedance
- Frequency response range of 70 Hz to 15 kHz
- Sensitivity of -70 dB +/- 3 dB
- Rubber shock-mount system for attenuation of handling & cable noise
- Rigid, low-noise cable-mount system
- Rubberized black finish; durable ball-shaped design; includes mic clip




Handheld Public Address Microphone
HDO100

The **HDO100** is an attractive, dynamic microphone perfectly suited for public address applications and instrument sound reproduction. 6-1/2" D x 1-1/2" dia.; 13 oz.

- Omni-directional pickup pattern
- Clean, clear reproduction with minimal ambient sound
- Low sensitivity to handling noise and stage vibrations
- Lockable, silent on/off reed switch
- 500-ohm Impedance
- Frequency response range of 70 Hz to 15 kHz
- Sensitivity of -72 dB +/- 3 dB
- Internal rubber shock isolation system
- Rugged, reliable construction; includes mic clip
- Rubberized black finish


GOOSENECKS



Condenser Gooseneck Microphone
GCU250

The **GCU250** is a high-performance, partially rigid, adjustable gooseneck condenser microphone capable of meeting the stringent demands of today's conference and PA systems. It is an intelligent choice for sound reinforcement applications. It has an integral XLR male connector mounting base and requires a 9V-52V DC phantom power source. Slim and compact, the GCU250 is designed to minimize intrusion between the user and the audience. 18-1/2" Long; 4 oz.

- Cardioid pickup pattern
- Clean, accurate vocal reproduction with low ambient noise
- Integral breath/wind filter
- 250-ohm Impedance
- Frequency response range of 50 Hz to 18 kHz
- Sensitivity of -65 dB +/- 3 dB
- Snap-on windscreen
- Durable all-metal case with non-glare black finish
- 5-1/2" adjustable lower stalk, with 9-1/2" rigid upper section



Dynamic Gooseneck Microphone
GDU150

The **GDU150** is a dynamic, gooseneck microphone that features a durable all-metal case with a non-glare black finish. It has a 10" long, fully flexible neck section with an integral XLR mounting base. 16-3/4" Long; 11 oz.

- Cardioid pickup pattern
- Outstanding speech intelligibility, feedback rejection, and user sound isolation
- High sound pressure capability and low sensitivity to breath/pop noise
- Superior shock-mount system to reject handling and cable noise
- Integral multi-layer breath/wind filter
- 500-ohm Impedance
- Frequency response range of 100 Hz to 12 kHz
- Sensitivity of -75 dB +/- 3 dB
- Silent push-on/push-off talk switch on base
- Rugged, reliable construction



Industrial Gooseneck Microphone
MGN19

The **MGN19** is a dynamic, push-button activated microphone designed for all industrial and commercial public address and paging applications. 23-1/2" Long; 1.25 lb.

- Omni-directional pickup pattern
- Rugged, reliable design for quality, long-term use under strenuous handling conditions
- 400-ohm Impedance
- Frequency response range of 50 Hz to 12 kHz, w/2 kHz boost
- Sensitivity of -76 dB +/- 3 dB
- Push-to-talk switch on MIC housing
- Chrome-plated screen & gooseneck with black plastic housing
- 4-conductor, 2-shielded cable included
- 19" flexible neck with mounting flange

Accessories

More Microphone Accessories on Page 60

WSGCU250
Mic Windscreen
(for GCU250)



MC27
Mic Clip
(for HD Handhelds)



MICROPHONES

OVERHEAD

Professional Overhead Hanging Microphone

WCU250

The overhead **WCU250** is a back electret condenser, professional microphone perfectly suited for picking up audio from large groups. Because it can hang from the ceiling and is compact in size, the **WCU250** is very useful in minimizing visual distraction for the performers and the audience alike, and limits intrusion into the working space.

The **WCU250** cable is terminated by a mini-XLR (female). A mini-XLR to standard XLR adapter (included) houses the pre-amplifier. It requires an external 9V to 52V DC phantom power supply. 1-1/4" D x 1/2" dia.; 5 oz.

- Cardioid pickup pattern
- Clear, crisp sound with outstanding ambient noise isolation
- Utilizes a superior-quality, state-of-the-art transducer element and circuitry
- Transformerless, direct-coupled design to ensure clear, transparent reproduction of even the most delicate transients at the highest output levels
- Phantom power operated
- 250-ohm Impedance
- Frequency response range of 50 Hz to 18 kHz
- Sensitivity of -65 dB +/- 3 dB
- Integrated metal hanger; matte black finish; 20-ft. cable included
- Stainless steel, adjustable black hanger

BOUNDARY

Professional Boundary Microphone

SCU250



The **SCU250** is an unobtrusive, surface-mount, boundary, condenser microphone ideal for meeting rooms, conferences, and stage productions where minimum visibility is ideal. It requires an external 9V to 52V DC phantom power supply. 2-3/4" W x 3/4" H x 3-1/4" D; 11 oz.

- Cardioid pickup pattern
- Full, rich reproduction of voice and music
- Low sensitivity to stage vibration and thumping noise
- Well-suited in capturing the sound source and immediate surroundings
- Excellent user sound isolation with excellent feedback rejection
- Phantom power operated
- 250-ohm Impedance
- Frequency response range of 20 Hz to 18 kHz
- Sensitivity of -58 dB +/- 3 dB
- Low-impedance balanced output
- Mounting keyways for hanging or for secure attachment to the mounting surface
- Heavy-duty metal case; matte black finish
- Outputs for interfacing with auxiliary equipment
- 26-ft. long Quad cable, attached

MICROPHONE ACCESSORIES

(other accessories listed on page 59)

STANDS

SF4 - Floor Stand

- 34" to 62" adjustable height
- Round 10" diameter die cast base, 9 lb.
- Grip-action clutch and chrome-plated tubing

SB6 - Floor Boom Stand

- Telescopic floor stand
- Sliding 30" boom arm
- 34" to 62" adjustable height, 6 lb.
- Chrome-plated tubing
- Tripod base

DS3 - Desk Stand

- 3" chrome-finish tube; 4" high with base
- 6" dia. cast iron base, 3 lb.



MOUNTS

MSM - Shock-Isolated Microphone Base

- For use with models GCU250 & GDU150
- Provides superior mechanical noise and vibration handling
- Lightweight ABS material housing
- XLR (female) connector
- Thick, shock-absorbing rubber cushion
- 4-3/4" W x 1-3/4" H x 4" D; 6 oz.



CABLES

XLR25 - Microphone Cable

- For use with models HDU250, HDU150, & HDO100
- 25' cable; Male XLR to female XLR, 2-conductor plus shield; 12 oz.



MAC - Microphone Cable Assembly

- For use with models HDU250, HDU150, & HDO100
- 25' cable; Female XLR to stripped and tinned wires, 2-conductor plus shield; 1 lb.



INTERCOMS



SI35A

Desktop Intercoms



PI35A

The **SI35A** and **PI35A** High-Powered Desktop Control Centers are dual-channel intercom and program distribution systems for applications with numerous locations, requiring maximum intelligibility of voice announcements and other sources.

Product Features:

- Communicate with 25 to 75 rooms or remote locations, using up to three 25-room capacity room selector panels (PI35A – 25-room maximum; SI35A – expand to 75-room maximum)
- Distribute program material from microphones, CD player/tuner or other background music sources, tone signals, and emergency announcements to all or select locations
- 5 inputs: 2- MIC (1 built-in console mic), 1- AUX (Hi-Z) unbalanced, 1- TEL, 1- 25V booster amplifier
- Built-in 20W intercom amplifier and 35W program amplifier permit instant communication with any location without interrupting the distribution of program to other locations
- Built-in panel speaker to monitor program or listen to a station via intercom channel
- Instant Emergency/All-Call paging with a single push button
- Push-to-talk switch to communicate with selected intercom stations
- Station call-in annunciated with tone and illuminated light
- Time signal tone activated from external contact closure
- Telephone paging capabilities
- 25V balanced line output to drive a distributed speaker system
- Remote stations can be wall- or ceiling-mounted loudspeakers or horn-type loudspeaker
- Call-in switch can be used where call initiation is desired
- Privacy beep generation available to prevent eavesdropping
- Easy to understand and operate; instructions for intercom, program, and emergency page permanently printed on front panel
- External booster amplifier can be used when more than 35W is required
- 15V DC Phantom power supply
- Color-coded controls for easy operation
- 3-conductor, shielded 18, 20, or 22 AWG wire is recommended
- Sturdy desktop cabinet with simulated oak finish

Power Requirements:	120V AC
Dimensions:	PI35A - 20-1/2" W x 8-1/2" H x 11" D SI35A - 20-1/2" W x 12" H x 11" D
Product Weight:	PI35A - 24 lb.; SI35A - 29 lb.

Targeted Communication

The PI35A and SI35A allow background music to play, without interruption, in selected areas while one or more rooms communicate directly with the main unit. This feature is useful in a number of applications, including:

Schools: A live news broadcast can be played over the system into all rooms. If an administrator needs a student, the call for the student can be placed directly into the classroom the student is in, without interrupting the live news broadcast to all the other classrooms.

Medical Center: If a nurse at the main desk needs to communicate immediately with one of the physicians, the nurse can call directly into the exam room where the physician is without interrupting the background music being played in all patient areas. This keeps the physician's demand and schedule private, so patients do not become concerned about the length of their wait before they get to see the physician.

Connects To Existing Phone Systems

With the WMT1A Line-Matching Transformer, a connection can be made to the page port from the phone system. This allows an All-Call/Emergency notice to be made using the in-house phone system.

Accessories



Connector Kits:
2518 – 18-gauge
2520 – 20-gauge
2522 – 22-gauge



TL156
Insertion Tool
for connector kits

CA10A
Call-in Switch,
2-position



CA11A
Call Privacy Switch,
3-position




CA17
Call-in Switch,
push-button
(use w/SCR25A)



CDR1
CD Player
& AM/FM Receiver



MBS1000A
Desktop Paging
Microphone



DDU250
Dynamic Desktop
Microphone



SBA225
25-Station Selector
Panel for SI35A

SCR25A
Call-in Module
for SBA225

TWK351
2-Wire Call-In
Adapter Kit



WMT1A
Line-Matching
Transformer

VOICE REINFORCEMENT

Voice Reinforcement System

ORATOR

The **Bogen Orator** is a dual-channel, infrared (IR) wireless microphone/transmitter and mixer-amplifier system that is designed to enhance a presenter's voice in all areas of the room. IR technology eliminates the interference and cross-talk from adjacent rooms that occurs with FM-based wireless products.

ORB35 Orator Base Unit Features:

- 7-Input mixer/amplifier/receiver with 4 AUX inputs, 1 priority paging (25V/70V/line), and 2 MIC/Transmitter inputs
- Dual front-mounted charging dock for MIC/Transmitter
- Amplifier output power: 35W
- Master Volume, plus separate volume controls for each input
- 8-band EQ – front-mounted bass and treble controls, plus 6-band rear-mounted graphic EQ
- Speaker impedances: 70V, 25V or 8-ohms
- Output feeds: booster amp, subwoofer
- Front-mounted AUX input
- Front-mounted system output (for assistive listening devices, recording, etc.)
- Page input with VOX-triggered priority override function
- Rotating, lockable front cover for tamper protection and secure storage of MIC/Transmitters and accessories
- Listed to UL Standard 60065 for US and Canada

OMX1 MIC/Transmitter Features:

- Can be used as a handheld microphone as well as worn on a lanyard around the neck or as a body-pack with a user-supplied external microphone
- Built-in microphone with volume control
- Adjustable lanyard with break-away clasp for neck-worn applications
- Rugged, reliable, spring-wire belt clip
- Use built-in microphone or external microphone depending on wear style
- AUX input for wireless connection of audio sources (computers, MP3 players, etc.)
- Rechargeable, high-capacity Li-ion battery included
- Comprehensive battery/status indicator

ORS IR Sensor Features:

- Remotely mounted sensor connects via standard coaxial cable
- Add multiple sensors to improve reception in trouble spots

Accessories



ORATOR

Orator System consists of:

- 1 Receiver/Base Unit (ORB35)
- 1 MIC/Transmitter (OMX1)
- 1 Infrared Sensor (ORS)
- Security Cover Locking Keys (2)
- Rechargeable Lithium Battery
- Adjustable Microphone Lanyard


2 Pre-packaged System Options Available:

ORATOR1 1 MIC/Transmitter (OMX1)

ORATOR2 2 MIC/Transmitters (OMX1)

DISTRIBUTE SOUND EVENLY THROUGHOUT A ROOM

Typical room in which listeners sitting in the rear of the room hear only 25% of what the presenter says.

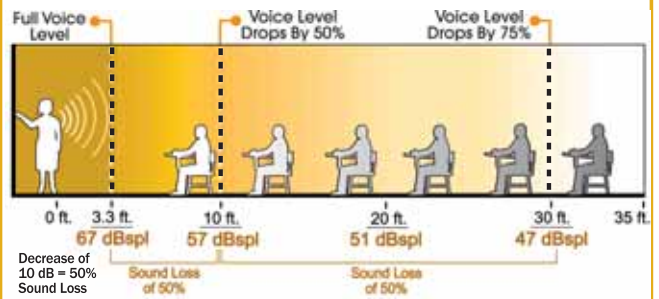

With Bogen **ORATOR**, individuals sitting at the back of the room can hear just as well as those who are sitting up front.

Easy Mount Wall Bracket

Specifically designed for easy 1-person mounting, special support stops help to locate receiver unit while installing hardware. The removal of 2 screws allows the ORB35 unit to rotate downward into a service position, allowing for easy access to rear controls and connections.



BOGEN[®]

SYSTEM DESIGN

Bogen created the System Design Guide (pages 64-77) to help you to understand how a paging system works and how to set one up. It is filled with helpful information and reference material that is sure to help answer your questions about centralized 70V amplifier and 24V self-amplified systems and products, how and when to use them, and how to correctly set them up.

Actually, all you need to design a proper paging system is a few simple measurements. Then follow the step-by-step process to select the type and quantity of system components needed. At any point you can contact Bogen's toll-free Technical Support Department for assistance, or take advantage of Bogen's Free Application Design Service (see page 82).

Bogen System Design Guide

- **Design Your Own Systems** • **Learn Design Principles**
 - **Master the Basics of Paging System Technology**
- **Understand the Benefits of both 70V and 24V Systems**

INDEX:

Paging System Technology (Introduction)	Page 64
70V Systems (Central Amplified)	Pages 64-67
• What is a 70V System?	Page 64
• Why Use 70V Outputs?	Page 64
• What Makes a 70V Speaker?.....	Page 65
• Amplifier Output Types	Page 65
• Amplifier Input Types.....	Page 66
• Designing 70V Systems	Page 67
• Amplifier Selection	Page 67
24V Systems (Self-Amplified)	Pages 68-69
• What is a Self-Amplified System?	Page 68
• Why Use Self-Amplified Technology?	Page 68
• What Makes a Self-Amplified Speaker?.....	Page 69
• Designing Self-Amplified Systems	Page 69
Speaker Layout	Pages 70-71
Site Survey	Page 72
Site Survey Check List	Page 72
Speaker Wiring	Page 73
Speaker Phasing	Page 73
Wire Types	Page 74
Wire-Related Losses	Page 75
Telephone Interfaces	Page 76
Sound Pressure Levels Chart	Page 77

PAGING SYSTEM TECHNOLOGY

The aim of a paging system is to deliver important audio announcements, at the proper level and with sufficient clarity, to people working in a facility and to make those announcements easily understood. The two most common ways to accomplish this are to use either 70V centralized amplifiers with passive speakers or self-amplified speakers operating from a 24V DC power supply.

Pages 64-67 explain 70V systems and pages 68-69 explain self-amplified systems. Speaker layout, wiring methods, and phasing are the same for either technology and are covered on pages 70-76.


Central-Amplified Systems - pages 64-67

Self-Amplified Systems - pages 68-69

WHAT IS A 70V SYSTEM?

70V Paging Systems consist of:

- **A Centralized Amplifier** which offers a variety of features to enhance voice and music reproduction as well as easy system expansion.
- **Speakers** that connect with a simple 2-wire installation because the audio power is supplied from the centralized amplifier.
- **An Interface Device** that connects the paging system to the telephone system. (Depending on the telephone system and amplifier, an interface device may not be needed.)

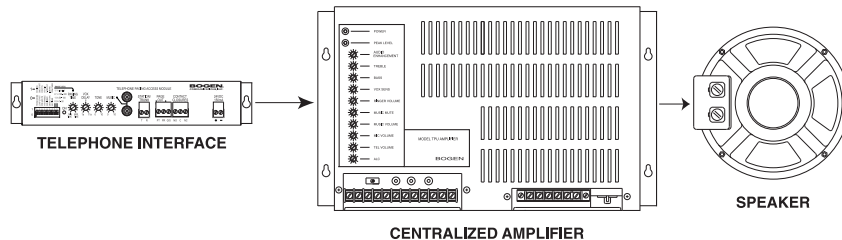

WHY USE 70V OUTPUTS?

Low Currents Allow Long Runs

Why do distributed sound systems use centralized amplifiers with 70V output signals? Because 70V systems can handle extremely long lengths of wire to connect the speakers to the amplifier, and they can power a large number of speakers in each system.

When sending power signals over long distances, it is important to minimize the amount of current flowing in the wire. High currents allow too much power, or electrical energy, to be wasted in wires in the form of heat.

The power (P) lost in the wire is related to the square of the current (I), so reducing the current in the wires a little reduces the power lost in them considerably. In fact, reducing the current flowing in a wire by a factor of 2 will reduce the power loss by a factor of 4.

$$P = I^2 * R$$

Power Lost In Wires (Watts) = Current Flowing In Wire (Amps) squared * Resistance of Wire (Ohms)

However, the power the load demands and the output level of the amplifier determine the amount of current that must flow in the speaker wires (Ohm's law in action).

$$I = P / V$$

Current Flowing In Wire (Amps) = Power Needed By Load (Watts) / Amplifier Output Voltage (Volts)

So to lower the amount of power lost in the wires, the voltage that the amplifier uses to drive the load is increased. By doing this, the current in the wires can be reduced while still supplying the same power to the load (for the same power P, any increase in V will lower I).

Of course you cannot just change the voltage driving a load from one level to another without also making the load compatible with the new voltage level. To ensure compatibility, 70V systems use transformers on the speakers that change the high 70V amplifier output levels to lower levels that are compatible with typical 8-ohm speakers.

Easy To Control Speaker Power Draw


The output of a central paging amplifier is designed to limit the maximum output voltage that can be supplied to the speakers. This maximum output voltage remains the same regardless of the amplifier's power capacity. Because the output voltage is limited, speaker manufacturers can design products that consume a specific amount of power from the amplifier. This is beneficial in two ways.

First, the speakers will not consume more power than they are designed for; so, they cannot blow out from using an amplifier that's too powerful. Second, since each speaker's power consumption is known, the correct amplifier power for the paging system is simply the total power consumed by all the speakers.

WHAT MAKES A 70V SPEAKER?

Step-Down Transformer

70V paging speakers have a step-down transformer, which is used to convert the high-voltage/low-current amplifier signal of the central paging amplifier to the low-voltage/high-current signal that speakers use.



Taps

The primary side of the step-down transformer (*the side that connects to the amplifier*) has a number of connections (*called taps or power taps*) that can be used to select the peak power the speaker will consume from the amplifier.

Why Taps?

The selection of the power tap has an effect on both the amplifier power needed for the system and the volume of the speaker. The more power a speaker consumes, the louder the sound from the speaker. By tapping speakers for lower power in quiet areas and for higher power in noisier areas, the sound level of the paging system can be controlled and balanced.

It is important that speakers be tapped correctly for the area that they will be used in. Setting all the speakers for the same power regardless of the amount of noise in different areas will cause balance problems. If the amplifier is adjusted to produce adequate paging levels

in the noisy areas, the paging levels in the quiet areas will be too loud or vice versa. Selecting the proper tap setting is not difficult, but it does require knowing the level of ambient noise in different areas. (See Sound Pressure Levels Chart on page 77.) It is always better to use the next highest wattage tap if there is any doubt about the speaker being sufficiently loud for the area.

Of course, the best way to determine how effectively a system covers an area is to test it. Never install a paging system and leave the site without testing it. Sound adjustments or additional speakers may be needed. Some paging equipment, such as Bogen's PCM2000, UTI1, and UTI312 paging interfaces include a test tone that is sent to all speakers in the system so installers can check the system installation. For other systems, the installer can have pages made while the installer walks the area to listen for appropriate sound levels and uniform coverage of the system to find out if and where adjustments need to be made, and to make sure that all speakers are properly connected.

Easy Design™ Without Taps

To make designing paging systems as easy as possible, Bogen offers a line of Easy Design™ speakers. These speakers do not require tapping and allow for on-the-fly adjustment of speaker paging levels. All the information that is needed to design a complete system are the dimensions of the different paging areas and the type of environment. With this basic information, you can use the Easy Design speaker line to quickly design a robust, professional, and powerful paging system. (See pages 15-21 for more information.)

AMPLIFIER OUTPUT TYPES

70V Output


A 70V output is available on Bogen amplifiers and is the primary type of output for paging systems. A step-up output transformer in the amplifier provides the high 70V output signal. All speakers with step-down transformers (rated for 70V systems) are connected to this output.

Other Output Types (25V, 16- and 8-ohm)

There are a number of other standard speaker impedances that Bogen amplifiers can be connected to. These outputs provide the correct speaker signal level for different configurations of low-impedance speakers. The lower voltage (25V) output is provided on many Bogen amplifiers for use in paging installations that require a speaker voltage of less than 70V to meet building code requirements.

Direct Output


Direct outputs are used with low-impedance speakers. These outputs have an exceptional low frequency (bass) response, providing the fuller sound that low-impedance speakers can reproduce. Certain Bogen amplifiers, designed for general purpose sound reinforcement applications, include this feature which allows the step-up output transformer to be bypassed for direct connection to the power amplifier's output.

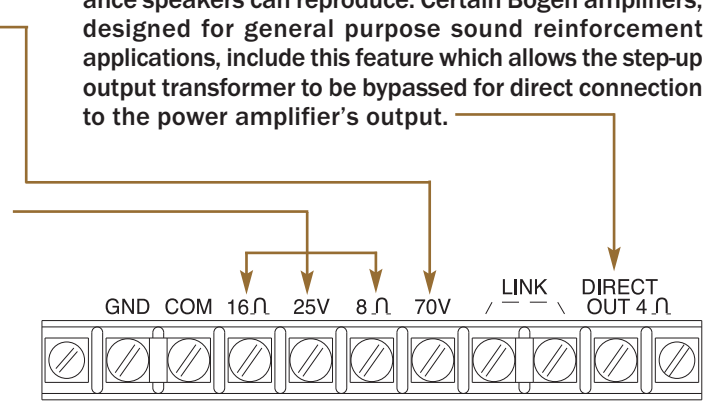

AMPLIFIER INPUT TYPES

Auxiliary Input (AUX)

The Auxiliary input is the most common type of input used in paging. This input is designed to connect to most music sources, such as a CD player or tuner. Usually the connector for such an input is a Phono jack (also called an RCA jack). It connects to other equipment using standard audio cables.

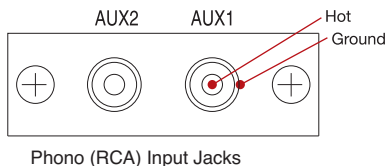


The AUX input has an outer connection that is directly connected to the equipment's ground and a center connection that is the "hot" input. AUX inputs, sometimes referred to as Hi-Z or high-impedance inputs, have a high input impedance so that they won't put too much of a load on the source equipment's output. This type of input is "unbalanced". You must use shielded cable with this type of input in order to avoid getting noise induced into the system.

Normally, connections between source equipment and the amplifier's AUX input should not be too long, about 6 feet. The problem with long connections is that the cable acts like an antenna, picking up any electrical noise in the area. The longer the cable, the more noise that is picked up.

Telephone Input (TEL)

The TEL Input is so named because it was designed to be compatible with page port outputs of telephone systems. The TEL input is a 600-ohm transformer-coupled input that:

- matches the impedance of the telephone port to provide proper interfacing
- electrically isolates the amplifier from the PBX or Key System
- provides a balanced input with a great deal of noise immunity

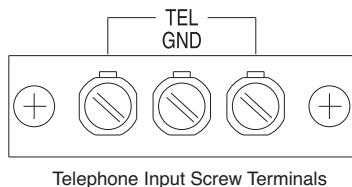

Bogen's TEL inputs do not have to be shielded, but it is always a good idea to provide more noise immunity (normally a ground terminal is available on the input for the shield connection). Higher noise immunity allows the amplifier to be located much farther away from the source equipment than what an unbalanced input will allow.


The input transformer is not designed to pass loop current from a telephone line. Any time you want to connect to a telephone station or trunk port, you will need to use a telephone interface module like the TAMB2, which converts the telephone signal into a "dry" audio signal compatible with the amplifier's TEL input.

Microphone Input (MIC)


The traditional paging amplifier input is the Microphone input. MIC inputs were the primary announcement source until connection to the telephone system became possible. MIC inputs are still used in public address applications today.

When connected properly, a microphone can be hundreds of feet away from the amplifier and still provide clear, quiet audio.

MIC inputs are the most sensitive of all the amplifier inputs and tend to pick up the stray electrical noise in an area. To combat the noise pickup problem, MIC inputs are balanced. Just like TEL inputs, the balancing of the input provides a high level of noise immunity. MIC inputs are also made to have a fairly low input impedance, which makes it difficult for electrical noise to get induced. The low impedance effectively keeps down noise, which makes its signal level smaller.



Balanced Microphone "XLR" Type Connector



Balanced Microphone Screw Terminals

Microphone cable is always shielded. The input requires three connections – two for the balanced signal and one for the shield ground. You can reverse the balanced signal leads and the system will still work properly. However, if you mis-wire the ground connections, the amplifier can become unstable and start to oscillate. When this occurs, the amplifier may heat up enough to cause its protection circuits to shut it down or it may produce very distorted sound.



LET US DESIGN IT FOR YOU...
FOR FREE!!!

- see page 82

DESIGNING 70V SYSTEMS

1 Determining Quantities

Figuring out how many speakers you need for your application is simple. You only need the dimensions of the area in which the paging system will be installed.

- For Bogen's Easy Design™ line speakers, refer to the charts on pages 18-20.
- For speakers with multiple tap settings, refer to this section for information.

CEILING SPEAKERS

To determine the number of ceiling speakers your installation requires, simply divide the area's total square footage by the speaker coverage as indicated in this chart.

Ceiling Height (ft.)	Coverage (sq. ft.)
8	250
10	400
12	580
14	780

$$\text{Total Area (Sq. ft.)} \div \text{Speaker Coverage} = \text{\# of Speakers}$$

WALL BAFFLE SPEAKERS

To determine the number of wall baffle speakers your installation requires, simply divide the area's total square footage by 600 square feet.

Coverage is 600 sq. ft. per speaker

$$\text{Total Area (Sq. ft.)} \div 600 \text{ Sq. ft.} = \text{\# of Speakers}$$

HORN LOUDSPEAKERS

To determine the number of horn loudspeakers your installation requires, simply divide the area's total square footage by the speaker coverage as indicated in the chart below.

See chart below

$$\text{Total Area (Sq. ft.)} \div \text{Speaker Coverage} = \text{\# of Speakers}$$

2 Determining Taps

To determine tap settings, use the appropriate chart.

Recommended Ceiling Speaker Tap Settings

Ambient Noise Range	Ceiling Height (ft.)			
	8	10	12	14
Low Noise (55 dB-65 dB)	1/2W* 1/4W**	1/2W* 1/4W**	1W	1W
Medium Noise (65 dB-75 dB)	1W* 1/2W**	1W* 1/2W**	2W	4W
High Noise (75 dB-85 dB)	4W			
Very High Noise (85 dB-95 dB)				

*SM4T Tap Settings **S86/S810 Tap Settings

Recommended Wall Baffle Tap Settings

Ambient Noise Range	Tap Setting
Low Noise (55 dB-65 dB)	1W
Medium Noise (65 dB-75 dB)	4W
High Noise (75 dB-85 dB)	
Very High Noise (85 dB-95 dB)	

Recommended Horn Tap Settings

	Ambient Noise Range	Speaker Power Taps (Watts)	Coverage (sq. ft.)
SPT5A	Low Noise (55 dB-65 dB)	1.25W	6,500
	Medium Noise (65 dB-75 dB)	7.5W	6,500
SPT15A	Medium Noise (65 dB-75 dB)	0.9W	7,000
	High Noise (75 dB-85 dB)	3.8W	6,500
	Very High Noise (85 dB-95 dB)	15W	2,500
SPT30A	High Noise (75 dB-85 dB)	3.8W	7,000
	Very High Noise (85 dB-95 dB)	30W	5,500

3 Determining Amplifier Power

To determine the total power your installation will require, simply multiply the number of speakers by the tap wattage.

$$\text{Total Speakers} \times \text{Tap Wattage} = \text{Minimum Amplifier Power}$$

See page 75 for Wire Loss Information


AMPLIFIER SELECTION

Once you know the minimum amplifier power your system requires, refer to the *Amplifier Charts* on pages 78-79.

WHAT IS A SELF-AMPLIFIED SYSTEM?

Self-Amplified Paging Systems consist of:

- **Self-Amplified Speakers** each contain an individual, built-in, miniature amplifier that drives the speaker directly. Each speaker requires 4 wires. Two wires supply the raw 24V DC voltage to power the speaker's internal amplifier and another 2 wires supply the low-level audio paging signal to the amplifier's input. All amplified speakers contain volume controls to adjust output level.
- **A Power Supply** or multiple power supplies provide the raw 24V DC voltage that will power the amplifier built in to each self-amplified speaker. Several power supplies can be located in convenient areas in the facility.
- **An Interface Device** that connects the paging system to background music sources and the telephone system and supplies a telephone level audio paging signal to all the speakers in the system. *(Depending on the telephone system and number of speakers in the system, an interface device may not be needed.)*

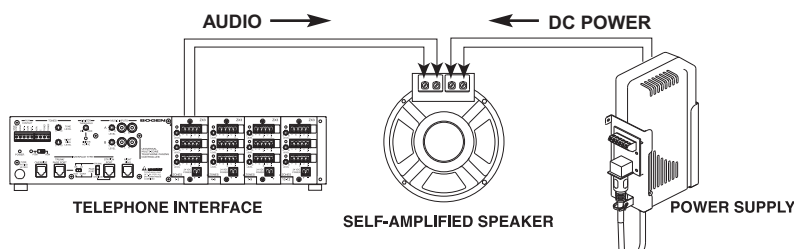

WHY USE SELF-AMPLIFIED TECHNOLOGY?

Low Signal Levels Prevent Crosstalk

In certain installations it may be desirable to use conductors in an existing telecommunication cable to deliver paging to different floors or areas in a facility. 70V amplifier signals would not be appropriate to run in the same cable with analog telephone signals since their high level could cause crosstalk in the other telephone circuits in the cable. Because the audio signal levels supplied to the inputs of the amplified speakers are similar in level to analog telephone levels, there will be no crosstalk of the paging system in the telephone lines.

The raw 24V DC power needed by the self-amplified speaker can also be carried in the telecom cable since it contains no interfering signals, but care must be exercised to make sure the length of cable will not cause too much voltage to be lost in the cable. (See Page 75 for more information.)

Convenient System Expansion

A self-amplified system can be expanded by adding extra speakers and power supplies as required. They are extremely scalable due to the fact that each speaker is an amplifier unto itself. It is also easy to connect additional power supplies where needed to power the speakers. In some instances there may not be sufficient audio signal level available for the speaker's input. In these instances, a small buffer can be installed inline to boost the signal level.

Self-amplified speakers can also be used to expand 70V paging systems in cases where the added speakers would overload an existing central 70V amplifier. The same buffer that is used to boost signal level can be used to reduce the large 70V speaker signal to a level that is compatible with the input of self-amplified speakers. A suitable power supply can be located near the expansion speakers to power their internal amplifiers. This approach can be used instead of replacing the central 70V amplifier with a larger one to handle the extra speakers.

Cost Effective for Small Installations

Self-amplified speakers can be very cost effective in small systems since they provide scalability in small increments. The centralized amplifiers in 70V systems are typically available in set output power level steps that start at 6 or 10 watts and increment by 10 watts or more from model to next higher powered model. In small applications that require only a few watts of paging, the extra power capability of the 70V amplifiers may not be an advantage due to the higher cost associated with the amplifier's extra power, especially if it will not be used in the future.


Self-amplified systems can be designed with much smaller output level power steps so that only the necessary audio power is installed in the facility. This can result in a lower cost of equipment especially where the desired power level is considerably less than the smallest applicable 70V amplifier output level.

Understanding Current Units

Self-Amplified paging systems are made up of equipment that consume or provide operating current. To operate properly, the system needs to provide at least as much 24V current as it consumes.

Each product has a Current Units number. This number is either positive, negative, or zero to indicate how much current it provides to or consumes from the system.

Note: One Current Unit = 50 mA, 24V DC

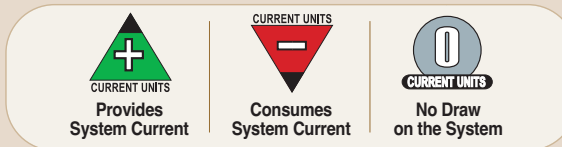

WHAT MAKES A SELF-AMPLIFIED SPEAKER?

Built-In Amplifier

As the name suggests, all self-amplified speakers contain their own built-in, miniature amplifier. These amplifiers range in size from 1 watt, which are used on cone speakers, up to 30 watts, which are used on the SAH30 horn speakers.

Bogen's latest line of self-amplified horns use a revolutionary digital switching amplifier. Unlike conventional analog amplifiers, this advanced technology produces very little heat when it operates. It produces so little heat that all it needs to dissipate the waste heat are the copper interconnecting traces on the printed circuit board instead of the typical large aluminum heat sinks. Because it produces so little heat, it also draws considerably less power from the power supply. Why? Because it is not wasting half of the power supply energy it consumes as heat.

More typical in the industry are speakers that employ analog amplifiers, which produce considerable waste heat while operating. They typically release half the 24V power they consume in the form of heat, and heat is a major contributor to the failure of an amplifier.

The amplifiers in Bogen's AH series of self-amplified horns are analog but rid themselves of waste heat through their large cast aluminum end bell that works as an excellent heat sink, quickly and effectively removing excess heat. Competitive products using plastic end bells don't have this cooling advantage.

4 Wires

All self-amplified speakers require 4 wires to make the necessary connections. Two of the connections are used to provide 24V DC power to the built-in amplifier. The other connection pair to a self-amplified speaker is for the audio signal input.

The general audio signal level is the same as what you would find on any analog telephone line. The input is transformer balanced, also similar to the inputs found on telephone systems. The balanced nature of the input greatly reduces interference and noise caused by equipment running in the facility. The use of an actual transformer provides electrical isolation between the input leads and the actual amplifier, which protects it from ground loops and RF interference, and provides an all-around rugged input.

DESIGNING SELF-AMPLIFIED SYSTEMS

1 Determining Quantities

Figuring out how many speakers you need for your application is simple.

- For Bogen's Ceiling and Wall Baffle Speakers, you will need room dimensions.
- For Bogen's Horn Speakers, you will need room dimensions and ambient noise levels.

CEILING SPEAKERS

Self-Amplified

To determine the number of ceiling speakers your installation requires, simply divide the area's total square footage by the speaker coverage as indicated in this chart.

Ceiling Height (ft.)	Coverage (sq. ft.)
8	250
10	400
12	580
14	780

$$\text{Total Area (Sq. ft.)} \div \text{Speaker Coverage} = \text{\# of Speakers}$$

WALL BAFFLE SPEAKERS

Self-Amplified

To determine the number of wall baffle speakers your installation requires, simply divide the area's total square footage by 600 square feet.

Coverage is 600 sq. ft. per speaker

$$\text{Total Area (Sq. ft.)} \div 600 \text{ Sq. ft.} = \text{\# of Speakers}$$

HORN LOUDSPEAKERS

Self-Amplified




To determine the number of horn loudspeakers your installation requires, simply divide the area's total square footage by the speaker coverage for the noise level in the area as indicated in the chart below.

	Ambient Noise Range	Coverage (sq. ft.)	Volume Setting
SAH5, AH5A	Low Noise (55 dB-65 dB)	8050	LOW
	Medium Noise (65 dB-75 dB)	6955	HIGH
SAH15, AH15A	Medium Noise (65 dB-75 dB)	6955	LOW
	High Noise (75 dB-85 dB)	6500	MEDIUM
SAH30	Very High Noise (85 dB-95 dB)	2600	HIGH
	Very High Noise (85 dB-95 dB)	5500	HIGH

$$\text{Total Area (Sq. ft.)} \div \text{Speaker Coverage} = \text{\# of Speakers}$$

2 Determining Power Supply Capacity

To determine total 24V DC Power Supply size requirement, follow the steps below.

1. Add all the  numbers of the Self-Amplified speakers for the system and volume controls together.
2. Select a Power Supply (or power supplies) with a  number(s) equal to or greater than the total  amount for the system.

See pages 22 and 68 for more information.

SPEAKER LAYOUT

The layout of the speakers should be planned before installation begins. The spacing of the speakers can be adjusted so that the speakers are evenly spaced in a row. Some adjustments may need to be made due to sound obstructions that may be in the area such as high shelving, cubicle walls, etc.

Ceiling Speakers

Layout starts in one corner of the area. The first speaker should be positioned from each wall a distance approximately equal to the ceiling height of the room (dimension **A**).


The next speaker in row 1 should be spaced a distance approximately equal to twice the height of the ceiling (dimension **B**). Each additional speaker in the row should use this same spacing.

Row 2 starts at twice the ceiling height distance (**B**) from row 1 and twice the ceiling height (**B**) from the wall. The other speakers in this row are also spaced at twice the ceiling height.

Row 3 is again spaced at twice the ceiling height (**B**) from the previous row. The first speaker starting this row is positioned at one ceiling height distance (**A**) from the wall (similar to row 1).

Continue this pattern of alternating rows until the room is covered.

The spacing of the speakers can be adjusted so that the speakers are evenly spaced in a row and are more aesthetically pleasing.

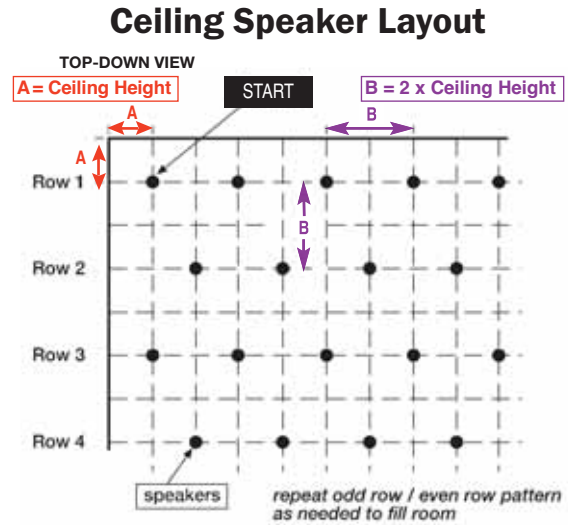


Horn Loudspeakers

Desired mounting height, barring obstructions, is 15 to 20 feet, with the speakers angled downward toward the listening area and facing in the same direction. Follow the diagram for the layout of the horn speakers while using the charts below to define the lettered dimensions for each specific speaker.

Begin in one corner of the area. The first speaker in Row 1 is positioned a distance equivalent to $(1/2 C)$. The next speaker in Row 1 should be a distance equivalent to (**C**) from the first speaker. Each additional speaker in the row should use this same spacing. Row 2 starts at the indicated distance (**D**) from Row 1. Using the diagram as a guide, fill in the remaining rows in this same alternating pattern until the entire area is appropriately covered.

For areas that include high shelving or corridors, speakers should be installed so that they project down the aisles between the shelves or down through the corridors.

The spacing of the speakers can be adjusted so that the speakers are evenly spaced in a row.

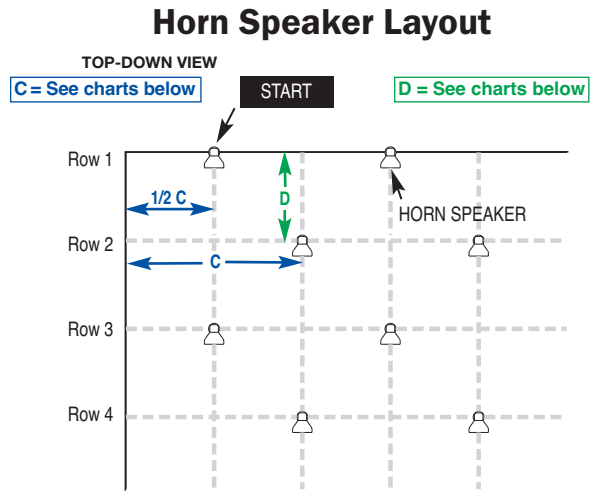

NOTE: Each environment is unique. This layout plan is general in nature and may not be applicable for every installation.

	Ambient Noise Range	C	D	Volume Setting
HS7EZ	Low Noise (55 dB-65 dB)	120 ft.	80 ft.	1/2 Rotation
	Medium Noise (65 dB-75 dB)	100 ft.	60 ft.	Full Clockwise
HS15EZ	High Noise (75 dB-85 dB)	100 ft.	60 ft.	1/2 Rotation
	Very High Noise (85 dB-95 dB)	65 ft.	40 ft.	Full Clockwise
HS30EZ	Very High Noise (85 dB-95 dB)	90 ft.	55 ft.	Full Clockwise

	Ambient Noise Range	C	D	Volume Setting
SAH5, AH5A	Low Noise (55 dB-65 dB)	115 ft.	70 ft.	LOW
	Medium Noise (65 dB-75 dB)	107 ft.	65 ft.	HIGH
SAH15, AH15A	Medium Noise (65 dB-75 dB)	107 ft.	65 ft.	LOW
	High Noise (75 dB-85 dB)	100 ft.	65 ft.	MEDIUM
SAH30	Very High Noise (85 dB-95 dB)	65 ft.	40 ft.	HIGH
	Very High Noise (85 dB-95 dB)	97 ft.	57 ft.	HIGH

	Ambient Noise Range	Speaker Power Taps (Watts)	C	D
SPT5A	Low Noise (55 dB-65 dB)	1.25W	100 ft.	65 ft.
	Medium Noise (65 dB-75 dB)	7.5W	100 ft.	65 ft.
SPT15A	Medium Noise (65 dB-75 dB)	0.9W	105 ft.	67 ft.
	High Noise (75 dB-85 dB)	3.8W	100 ft.	65 ft.
SPT30A	Very High Noise (85 dB-95 dB)	15W	63 ft.	40 ft.
	High Noise (75 dB-85 dB)	3.8W	103 ft.	68 ft.
SPT30A	Very High Noise (85 dB-95 dB)	30W	97 ft.	57 ft.

SPEAKER LAYOUT

Wall Baffle Speakers

The layout of the speakers should be planned prior to installation. Because wall baffle speakers are designed to project forward, it is best to aim them in the same direction, as this provides for both greater coverage and clarity. You can use the building's roof pillars or other available supports for mounting the wall baffles. In some cases, it may be necessary to mount the wall baffles on opposing walls. In these cases, the speakers will project sound in opposing directions.

Chart for 70V & 25V passive speakers

Ambient Noise Range	Tap Setting
Low Noise (55 dB - 65 dB)	1W
Medium Noise (65 dB - 75 dB)	4W
High Noise (75 dB - 85 dB)	
Very High Noise (85 dB - 95 dB)	

Chart for 24V self-amplified speakers

Ambient Noise Range	Facing Speaker Distance	Volume
Low Noise (55 dB - 65 dB)	< 40 ft.	Med
	40 to 60 ft.	High

• Hallway/Room

Wall baffle speakers work well with rooms and hallways that are 20' to 60' wide. Layout starts at one end of the hallway or room. The first speaker should be installed 10' from the end of the hallway or room. The next speaker on that wall should be installed 20' from the first speaker, as should any additional speakers required to cover the length of the hallway or room.

The first speaker on the opposing wall should be installed 20' from the end of the hallway or room, thereby staggering the speakers. Each additional speaker should also be installed 20' apart from the previous one. (See Figure 1.)

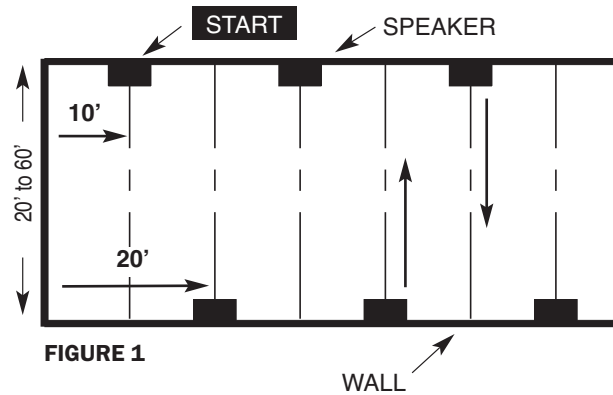


FIGURE 1

• Open Area

The number of speakers needed to cover an open area and the layout of those speakers is contingent upon the availability of suitable mounting points in the area to be covered.

Layout starts in one corner of the room. The first speaker should be installed 10' from the corner of the room with each additional speaker in the first row installed in increments of 20' from the first. Based on Figure 2, install the next row of speakers 30' from the first row and 20' from the wall with increments of 20' between each speaker. The third row would follow the example of the first and each additional row would continue this pattern of alternating rows until the whole area is covered. (See Figure 2.)

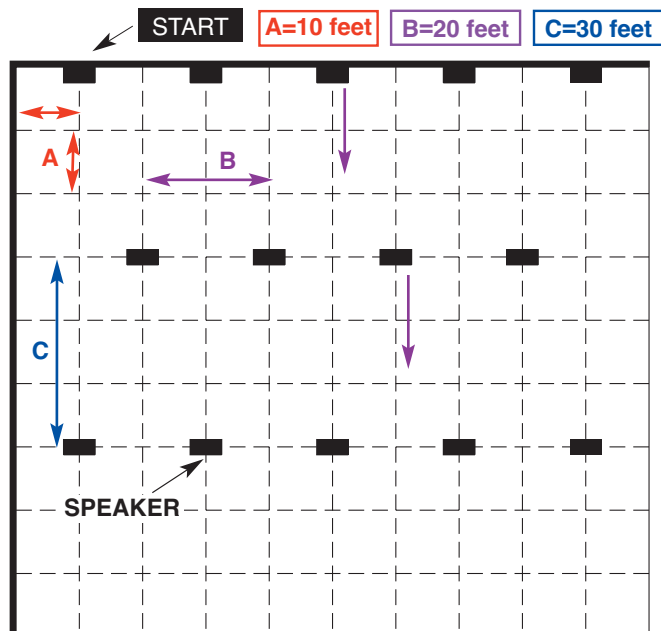


FIGURE 2

SITE SURVEY

Designing a system and determining an installation's requirements are quite simple. After you set up your first system, the steps will appear logical and soon the process will become routine. However, before you begin designing or quoting a job you will need some basic information regarding the site and the end-user's needs.

Use the **Site Survey Check List** below to ensure that you collect all the information you will need to complete the design of the paging system. When you have completed the check list, create a bill of material for the equipment you need for the installation's sound system. Refer to the Easy Design™ Guide (pages 17-21), page 67 for 70V systems, or page 69 for 24V systems.

Tools Needed (for Site Survey Check List below)

You will need to bring the following tools with you when you visit the installation site:

- measuring wheel/tape measure • sound pressure meter • calculator
- Bogen Products catalog • Photocopies of **Site Survey Check List** (this page)

Obtain a copy of the floor plan, or create sketches of any areas that may require special design considerations (high shelving, speaker mounting locations, exposed beams, amplifier location, etc.).

A successful paging system depends on more than just understanding the physical requirements of the installation site, it also depends on knowing which special paging features the user will benefit from and use on a daily basis. These include zone paging, tone controls, night ringer, feedback elimination, ambient noise sensors, multiple inputs, etc.

SITE SURVEY CHECK LIST

To Use Bogen's **FREE DESIGN SERVICE**, **DO NOT** Use This Checklist. Use the Online Form at: www.bogen.com/requestform.pdf

This **Site Survey Check List** will help to determine the paging system equipment needed for installations. Photocopy this page and bring it with you when you visit installation sites. You may need several copies of this chart for each installation.

Section I – **SYSTEM NEEDS** concerns the requirements of the entire installation.

Section II – **SPECIFIC AREA NEEDS** concerns specific areas within the installation.

NOTE: Installations that contain areas with different style environments or sound levels may require Section II to be filled out separately for each area. Be sure to make enough photocopies of this page for this purpose.

I. SYSTEM NEEDS

a. What Type of Telephone Port Will Be Available for Connection to the Paging System? (see page 76)

- Loop Start Ground Start
 Page Port Analog Station Port
 Other: _____

b. How Many MIC Inputs Needed? _____ (see page 66)

c. How Many AUX Inputs Needed? _____ (see page 66)

d. Is Zone Paging Required? Yes No (see pages 33-36)

If yes, how many zones: _____

e. Is Talk Back Required? Yes No (see page 53)

If yes, in individual zones? Yes No (see pages 34-35)

If yes, system-wide (no zones)? Yes No (see page 53)

f. Is Group Paging Required? Yes No (see pages 33-36)

g. Are Time Tones Needed to Signal Shift Changes?

- Yes No (see pages 33-36)

h. How Can Headend Equipment Be Mounted?

- Rack Wall Shelf

i. System Features Needed:

- Automatic Level Control (ALC) Variable Loudness Contour Control
 Bass & Treble Controls Graphic Equalizer
 Automatic Mute Variable Mute
 MOH Output Manual Mute
 Audio Enhancement Night Ringer Subwoofer

j. Any Technology Preference?

- 70V Central Amplifier Self-Amplified 24V Equipment No

II. SPECIFIC AREA NEEDS

a. Area Name/Description: _____

b. Area Dimensions:

- Length _____ ft. Width _____ ft.
 Square Footage _____ sq. ft. Ceiling Height _____ ft.

c. Ambient Noise Level: _____ dB

(to estimate, see chart on page 77)

d. Will There Be Large Changes in Ambient Noise Levels in the Area? Yes No (see pages 40, 52)

If yes, note range: _____ dB to _____ dB

e. Environment:

- Office/Professional/Retail Store Factory/Industrial
 Institutional/Remote Public Area Warehouse
 Aisles created by high storage racks Hallways
 Cafeteria/Break Room Auditorium
 Loading Docks/Outdoor Areas Other: _____

f. Where Will the Speakers Be Placed?

- Indoors Outdoors

g. How Can the Speakers Be Mounted?

- Suspended/Drop Ceiling* Wall**
 Beams, Columns, Other Structures Ground

* Make note of any changes in surfaces or positions for actual speaker mounting.

** Make note of any changes in wall angles, surfaces, or height.

h. Are Volume Controls Mounted on Each Speaker Needed?

- Yes No

i. Are Wall-Mounted Attenuators Needed for Area's Volume Control? Yes No (see pages 14, 29)

j. Is Feedback Elimination Equipment Needed? Yes No (see page 53)

k. Is Background Music Needed? Yes No

If yes, BGM source: (see pages 55-57)

- Tuner
 • Antenna available for tuners? Yes No
 CD Player/Receiver
 Other: _____

SPEAKER WIRING



Speaker Wiring Patterns

Because distributed paging systems involve a great number of speakers and long distances, the manner in which the speakers are wired is of interest. Deciding on how to wire the speakers depends on whether separate zones of speakers are needed, how many lines back to the amplifier are reasonable, and how easy it will be to troubleshoot the system in the future.

How you wire a speaker system may require some tradeoffs. The simplest way is to parallel all the speakers on one very long run of wire. This approach leads to some problems. First, the amount of power lost in a long run of wire may not allow the required amount of 70V speaker signal, or 24V DC voltage for self-amplified paging systems, to get to the farthest speakers. Second, if there should be a short on the wire run, it would take down the entire run. In order to locate it, you would need to disconnect each speaker until the failed one is found.

Multiple Wire Runs

A more practical approach is to wire each row of speakers in an area together and run a lead wire from this row back to the amplifier. The objective is not to have so many speakers daisy-chained together that it makes troubleshooting impossible. Wire runs can be separated to determine in which run the problem exists.

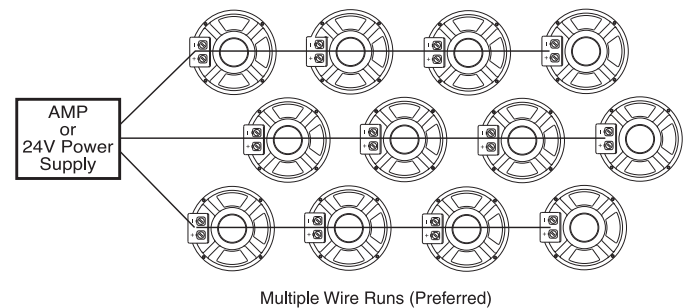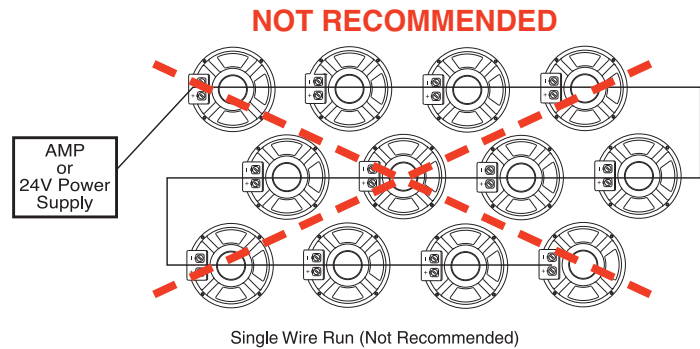


SPEAKER PHASING

As the voltage on a speaker changes from plus to minus, the speaker cone moves from pushing out to pulling in. If you reverse the polarity, the speaker responds in the opposite manner.

If a speaker is pushing out and an adjacent speaker is pulling in, some of the pressure caused by the speaker pushing out will be absorbed by the speaker pulling in. These two speakers are out of phase.

In a paging system, all the speakers should be in phase so that they all push out at the same time. Out of phase speakers operate perfectly well and will not cause any harm to a paging system, but will tend to diminish the bass response in the area around the out of phase speaker.


The important thing is to wire all the same polarity (+ or -) connections together. This will ensure that the speakers in the system all work in unison. All paging speaker connections have a polarity indicator. It may be a color code, plus (+) and minus (-) symbols, or a red dot.

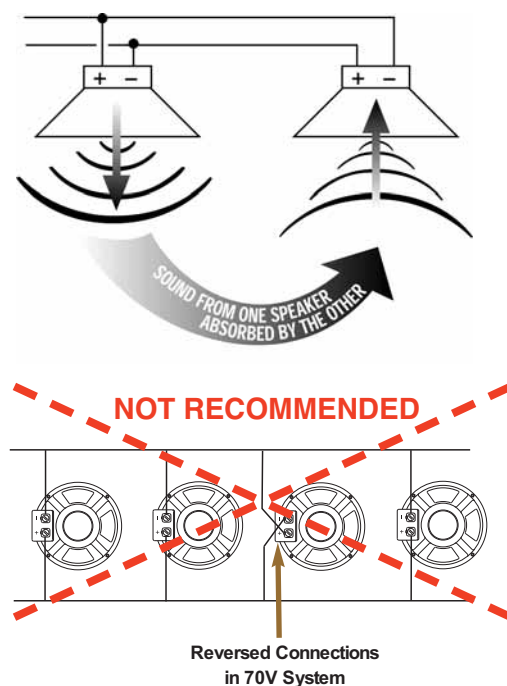

WIRE TYPES

Speaker Wire


The speaker wire best suited for paging systems is 2 conductors in a jacket. The gauge of the conductors varies depending on the installation. In many instances, a shielded version of the speaker wire is used. The shield can be useful to help protect the conductors from receiving electrical interference from other electrical equipment in the area. The shield is particularly useful when speakers are to be used as microphones in talk back applications (see page 53 for more information on talk back).

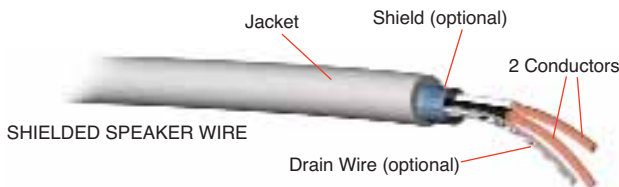

SHIELDED SPEAKER WIRE

UTP

Unshielded Twisted Pair (UTP) wire has many uses but is most common in data and telecom installations. It uses solid conductors, typically 24 gauge. It has insulation to withstand voltages similar to speaker wire and can be used in 70V and self-amplified applications, as long as the thin gauge and the associated higher resistance is accounted for. Also because there is no shield, the use of UTP in talk back applications (where the speaker acts as a microphone) may lead to higher electrical noise on the talk back signal. There are normally several twisted pairs in a single cable and these can be paralleled to approximate lower gauge wires (see page 75).

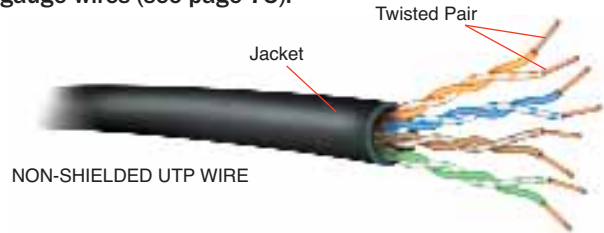


NON-SHIELDED UTP WIRE

Shielded Cable

Shielded cable refers to any conductor (or conductors) wrapped in an electrically conductive shield. The two types of cable most prevalent for audio installations are:

• Single-Conductor Shielded Cable

Single-conductor shielded cable is used to connect external equipment to the unbalanced AUX inputs of amplifiers. The center conductor carries the signal source and the shield carries the ground between the amplifier and external equipment. In addition to completing the ground return between the electrical equipment, the cable provides a large amount of noise and interference protection for the center conductor. The most common connector for this type of cable is the Phono connector (*a.k.a. the RCA connector*). The connector's center pin connects to the internal conductor and the skirt around the connector's perimeter connects to the shield of the cable.

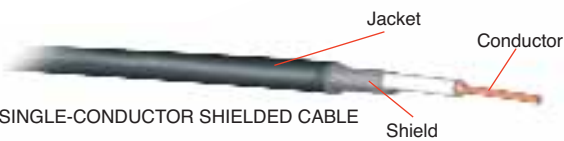

SINGLE-CONDUCTOR SHIELDED CABLE

• Two-Conductor Shielded Cable

Two-conductor shielded cable is typically used with balanced microphones. Two internal conductors are required for the low-impedance balanced microphones used in paging systems. The shield is wrapped around these conductors and provides the same protection against electrical interference and noise as single-conductor cable. Balanced microphone inputs provide a ground connection point for the shield. Without the ground connection, the shield would be ineffective. Some microphones with push-to-talk switches require two more conductors to carry the switch closure back to the amplifier. In this cable, the conductors for the switch closure are not wrapped in the shield but rather carried in the cable jacket outside of the shield. The most popular types of connectors for microphone cable are screw terminals and XLR connectors.



TWO-CONDUCTOR SHIELDED CABLE (BALANCED MIC CABLE)



LET US DESIGN IT FOR YOU...
FOR FREE!!!
 — SEE PAGE 82 FOR DETAILS

WIRE-RELATED LOSSES

Wire is an important but often ignored component of a paging system. Because all wire has resistance, some of the voltage at the source is lost or dropped in the wire before it reaches the target destination. The amount of voltage lost in the wires is affected by the resistance or gauge of the wire and the current flowing in the wire. This is classic Ohm's law in action. If the drops in the cables are not anticipated, the final volume level at the passive speaker may not meet the requirement or, for a self-amplified speaker, there may not be enough DC voltage available to the speaker to allow the built-in amplifier to operate cleanly, or at all.

There are different charts for centralized and self-amplified speakers to determine the maximum cable lengths that

should be allowed. In the case of central amplifier systems, try to keep the system power lost in the wires to 10% or less. However, less power at the speaker is the only negative effect larger losses have on the system. Clarity, intelligibility and frequency response are unaffected by larger losses in the wiring of centrally amplified systems.

Self-amplified systems are particularly sensitive to losses in the wire, especially the amount of supply voltage that is lost in the wires on the way to the self-amplified speaker. When the drop in the wiring becomes too large, the speakers may begin to distort or stop functioning altogether. For this reason it is important to adhere to the maximums shown in the tables below.

Wire Loss In Central Amplifier Systems

Once you have an idea of how many speakers are to be wired together in a run, estimate how long the wire run will be from the first to the last speaker in each run. Include the lead-in wire length from the amplifier to the first speaker in each run in your overall run length. For each run, sum up the speaker power and cable lengths.

With that information, refer to the Wire Loss Chart to ensure that the wire gauge is sufficient to support the power and cable length for the run. It may be necessary to increase the wire gauge, split the speaker loads, or shorten the wire run lengths if they exceed the chart maximums.

Wire Loss Chart*
(10% of Power Lost in Wire)

Wire Gauge	Load Power Per Wire Run (Watts)						
	5	10	15	30	50	100	200
16	10,000	7000	4600	2300	1400	700	350
18	9000	4500	2800	1400	830	415	205
20	5500	2700	1800	900	540	270	135
22	3400	1700	1100	550	330	115	60
24	2100	1000	700	350	210	105	50
Maximum Wire Run Cable Length (ft.)							

* Use for 70V Speaker Systems Only

Voltage Drop In Self-Amplified Systems

The most important wiring consideration with self-amplified speakers is to ensure that there will be enough voltage available at each device to allow its internal amplifier to operate correctly. If too much voltage is dropped in the wires leading to a speaker, this may not be the case.

Once you have an idea of how many speakers are to be wired together in a run, estimate how long the wire run will be from the first to the last speaker in each run. Include the lead-in wire length from the power supply to the first speaker in each run. Also sum up the CU ratings of all the speakers on the run.

With that information, refer to the Voltage Drop Chart to ensure that there are not too many speakers loading the wire used in the run or that the wire gauge is sufficient to support the power and cable length desired. To stay within the chart length limits, it may be necessary to either create a shorter run containing less speakers or double up on conductors in the cable to effectively lower the gauge of the supply wire. The Reducing Gauge Chart can be used to determine what effective gauge is achieved by doubling or tripling up on pairs in the cable.

Voltage Drop Chart

		Wire Gauge (AWG)					
		26	24	22	20	18	16
Total CU (Current Units) on cable run	10	220	351	557	887	1413	2237
	20	110	175	279	443	706	1118
	30	73	117	186	296	471	746
	40	55	88	139	222	353	559
	50	44	70	111	177	283	447
	60	37	58	93	148	235	373
	70	31	50	80	127	202	320
	80	28	44	70	111	177	280
	90	24	39	62	99	157	249
	100	22	35	56	89	141	224
110	20	32	51	81	128	203	

Maximum Wire Run Cable Length (ft.)


Reducing Gauge		
Wire Gauge (AWG)	GAUGE OF 2 PARALLEL PAIR	GAUGE OF 3 PARALLEL PAIR
26	24	22
24	22	20
22	20	18
20	18	16
18	16	14
16	14	12

TELEPHONE INTERFACES

The most common way to make announcements over a paging system is through the telephone system. It is a convenient and readily available live input source. However, audio and telephone technologies are different. This sometimes makes it necessary to use an adapter to link the two systems together.


There are many types of telephone ports possible in telephone switches. The four types presented here – Page Port, Loop Start trunk, Ground Start trunk, and Analog ring-up station – are the only ones Bogen recommends as interfaces to telephone systems. Other port types and specifically digital station ports are not suitable for connection to amplifiers and interface devices.

Page Ports

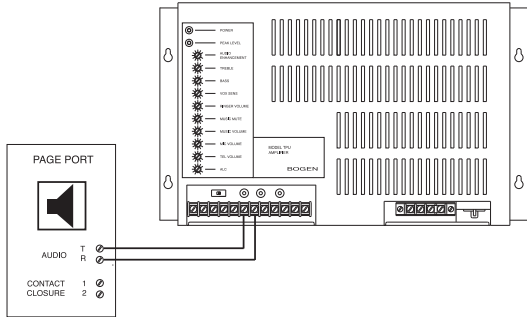


- Dedicated audio output available standard on most telephone systems
- Can be connected directly to the input of most amplifiers
- Traditionally, a 600-ohm dry audio signal and a normally open control contact closure
- Control contacts, if available, activate during a page and typically control the muting of background music
- Some page ports provide only an audio pair, which requires that audio equipment have voice-activated (VOX) functions such as background music muting
- Paging ports are not always bi-directional like telephone lines (bi-directionality is necessary when including talk back capability in a paging system)
- Not all paging ports will produce DTMF tones which are necessary when using zone paging equipment

Loop And Ground Start

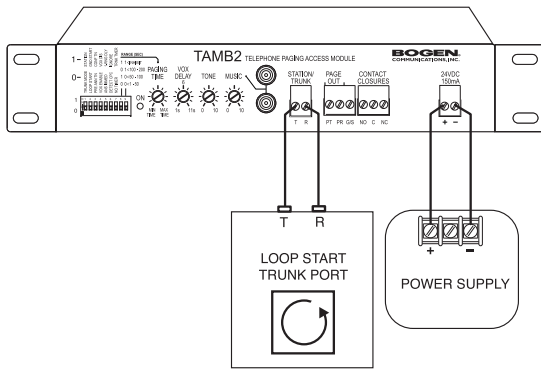

- The Loop Start, or CO port, is the most popular type of paging interface to use when a page port is not available or suitable
- A Ground Start trunk uses loop current but employs a request and acknowledgment handshake for making the initial connection
- An interface device is necessary when connecting a trunk to an amplifier
- When paging, an interface adapter detects the off-hook condition of the trunk and connects the amplifier to the trunk port through signal conditioning electronics
- When the trunk is released, the adapter detects the on-hook condition and immediately disconnects the amplifier from the trunk
- A pop at the end of a page is typically present due to the large change in telephone line voltage between on- and off-hook conditions

Analog Station

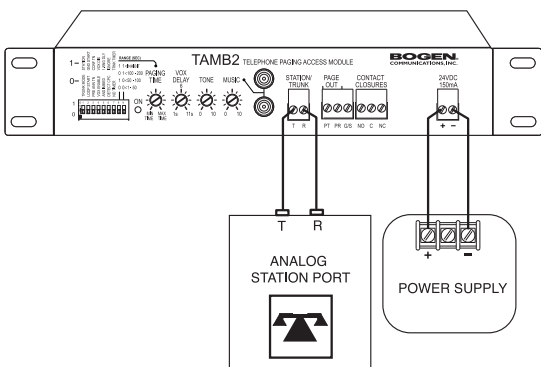

- An analog station allows interfacing when neither a paging port nor a trunk port is available
- Analog ring-up interfacing requires a more sophisticated interface than other methods
- The interface must detect a high-voltage ring signal and answer the call to start the page
- To determine when to disconnect the page, typically two system timers are used—one limits the maximum length of the page to ensure disconnection, the other senses audio activity and disconnects after a preset length of silence
- Many telephone switches now provide a calling party control (CPC) signal, which indicates to the interface that the caller has disconnected; Bogen interfaces disconnect immediately upon detecting a CPC signal

SOUND PRESSURE LEVELS CHART

Typical Ambient Noise Level			Typical Environments
Very High Noise	85-95 dB	Speech Almost Impossible To Hear	Construction Site Loud Machine Shop Noisy Manufacturing Printing Shop 95 dB
High Noise	75-85 dB	Speech is Difficult To Hear	Assembly Line Crowded Bus/Transit Waiting Area Machine Shop Shipping/Warehouse Supermarket (Peak Time) Very Noisy Restaurant/Bar 85 dB
Medium Noise	65-75 dB	Must Raise Voice to be Heard	Bank/Public Area Department Store Noisy Office Restaurant/Bar Supermarket Transportation Waiting Room 75 dB
Low Noise	55-65 dB	Speech is Easy To Hear	Conversational Speech Doctor's Office Hospital Hotel Lobby Quiet Office Very Quiet Restaurant/Bar 65 dB 55 dB



AMPLIFIER SPECS CHART

Model Numbers	Output Power Rating/Channel	Channels	Frequency Response*	Distortion**	Speaker Outputs	AC Line Draw***	Dimensions	Product Weight
BPA60	60W	1	20 Hz to 20 kHz	2% Max	8-ohm/25V, 16-ohm, 25VCT, 70V	180W	15-1/4" W x 3-1/2" H x 8-3/4" D	16 lb.
C10	10W	1	70 Hz to 16 kHz	1% Max	70V, 25V, 16-ohm, 8-ohm, 4-ohm	38W	11-3/8" W x 2-7/8" H x 7-3/8" D	5 lb.
C20	20W					6 lb.		
C35	35W	1	70 Hz to 16 kHz - Transformer; 20 Hz to 20 kHz - Direct	1% Max	70V, 25V, 16-ohm, 4-ohm direct 8-ohm on C35 and C60	85W	14-1/2" W x 3-3/4" H x 11" D	15 lb.
C60	60W					148W		17 lb.
C100	100W					220W		19 lb.
CC-Series	40W	1	80 Hz to 20 kHz	1% Max	70V, 25V, 8-ohm, 4-ohm	2.0A	8-1/4" W x 3-1/2" H x 10-3/8" D	11 lb.
GA2	1.5W	1	200 Hz to 15 kHz	2% Max	8- & 600-ohm	4W	5-1/2" W x 4-1/8" H x 2-1/4" D	2 lb.
GA6A	6W	1	30 Hz to 12 kHz	2% Max	70V, 25V, 8-ohm	16W	8-1/2" W x 2-3/4" H x 6" D	5 lb.
GS35	35W	1	65 Hz to 20 kHz - Transformer; 20 Hz to 20 kHz - Direct	0.5% Max	70V, 25V, 25VCT, 8-ohm, 4-ohm direct	0.9A	16-1/2" W x 3-1/2" H x 13-1/2" D	17 lb.
GS60	60W					1.3A		20 lb.
GS100	100W					2.2A		23 lb.
GS150	150W					3.0A		29 lb.
GS250	250W					5.0A		30 lb.
HTA125A	125W	1	20 Hz to 20 kHz	0.5% Max	70V, 25VCT, 25V, 8-ohm, 4-ohm	260W	19" W x 5-1/4" H x 11" D	36 lb.
HTA250A	250W					520W		50 lb.
M300	300/600W	2	20 Hz to 20 kHz	0.5% Max	4- to 8-ohm (2 channel mode); 70V (1 channel mode)	12A	17" W x 3-1/2" H x 18-1/2" D (not including brackets)	41 lb.
M450	450/900W	or				15A		44 lb.
M600	600/1200W	1				20A		46 lb.
PM3180	100W 60W 20W	3	70 Hz to 20 kHz - Trans (Amp 1 & 2); 70 Hz to 15 kHz - Trans (Amp 3); 20 Hz to 20 kHz - Direct (Amp 1 & 2); 20 Hz to 15 kHz - Direct (Amp 3)	0.5% - Amp 1&2; 1% - Amp 3 (Max)	70V, 25V, 8-ohm, 4-ohm direct	430W	17" W x 5-1/2" H x 14" D	38 lb.
TPU15A	15W	1	70 Hz to 12 kHz	2% Max	70V, 25V, 8-ohm	0.5A	11" W x 2-3/4" H x 2-3/8" D	4 lb.
TPU35B	35W					0.75A		12 lb.
TPU60B	60W					1.5A		15 lb.
TPU100B	100W					2A		18 lb.
TPU250	250W					5A		28 lb.
V35	35W	1	45 Hz to 20 kHz - Transformer; 20 Hz to 20 kHz - Direct	0.5% - Transformer; 0.1% - Direct (Max)	70V, 25V, 8-ohm, 4-ohm direct	0.6A	17-1/4" W x 3-7/8" H x 14-3/4" D	22 lb.
V60	60W					1.3A		26 lb.
V100	100W					2.0A		28 lb.
V150	150W					3.5A		31 lb.
V250	250W					5.5A		32 lb.
WV100	100W	1	45 Hz to 20 kHz - Transformer; 20 Hz to 20 kHz - Direct	0.5% - Transformer; 0.1% - Direct (Max)	70V, 25V, 8-ohm, 4-ohm direct	2.0A	14-1/8" W x 21" H	27 lb.
WV150	150W					3.5A		29 lb.
WV250	250W					5.5A		28 lb.
X300	300W	2	20 Hz to 20 kHz	0.5% Max	70V direct	12A	17" W x 3-1/2" H x 18-1/4" D (not including brackets)	41 lb.
X450	450W					15A		44 lb.
X600	600W					20A		46 lb.

* @ -2dB FRP Transformer output;
@ FRP for Direct outputs

** Bandwidth limited to frequency response

*** FRP @ 120V AC line voltage

Specifications subject to change without notice.

PRODUCT ACCESSORIES

	Model #	Accessory Description	Associated Model(s)	Dimensions	Prod. Wt.	Page #	Images
AMPLIFIERS	GSRVC	Remote Volume Control	Gold Seal Series Amps	2-3/4" W x 4-1/2" H x 1-3/8" D	2 oz.	41	
	GSTRC	Gold Seal Series Security Cover	Gold Seal Series Amps	14-3/4" W x 3-1/2" H x 1" D	5 oz.	41	
	MA3	Module Adapter	D-Series, WMA, DPA Amps	Works with advanced modules	1 lb.	39	
	PVMC	Power Vector Module Cover	V-Series Amps, M-Class, VMIX	1-1/2" W x 3-1/8" H x 3/8" D	1 oz.	38, 45, 48	
	PVSC	Power Vector Security Cover	V-Series Amps, VMIX	15-1/2" W x 3-1/8" H x 1/2" D	2 oz.	38, 48	
	RVCP	Remote Volume Control Panel	V- & WV-Series Amps, VMIX	1-3/4" W x 4" H	2 oz.	38, 40, 48	
	TL100	1:1 Ratio Plug-In Transformer	BPA60/HTA125A/HTA250A	1" dia. x 1-1/4" D	1 oz.	46	
	TL600	Plug-In: 600-ohm Transformer	BPA60/HTA125A/HTA250A	1" dia. x 1-1/4" D	1 oz.	46	

	Model #	Accessory Description	Associated Model(s)	Dimensions	Prod. Wt.	Page #	Images
MOUNTING/RIGGING KITS	108-2120	Yoke Assembly	AMT-12	24-1/2" W x 12" H x 3" D	7 lb.	1	
	108-2150	Yoke Assembly	AMT-15	27-1/4" W x 13" H x 3" D	8 lb.	1	
	109-2140	Rigging Beam Assembly	AMT Series	22" W x 3" H x 2" D	15 lb.	1	
	109-2151	Rigging Kit	AMT Series	10" W x 1-1/2" H x 1/4" D	2 lb.	1	
	AT570GB	Tripod Speaker Stand	AMT Series, BP-Series	H: 50"-77"; Base dia.: 40"	6 lb.	1	
	BBF	Back Box for Flush Mounting	WV-Series	14-1/2" W x 24-3/4" H x 3-7/8" D	12 lb.	40	
	BBS	Back Box for Surface Mounting	WV-Series	16-1/4" W x 26-3/4" H x 3-7/8" D	16 lb.	40	
	BC1	Beam Clamp	Horn Loudspeakers	2-1/8" W x 2" H x 3/4" D	6 oz.	13, 16, 26, 28	
	CK10	Cable Kit (Silver)	HFCS1/OCS1/OPS1/HFSF1/CSUB/MPS1/MPS2	10 feet long	4 oz.	2, 6, 7	
	CK10B	Cable Kit (Black)	OPS1B/MPS1B/MPS2B	10 feet long	4 oz.	2, 6	
	CK10W	Cable Kit (Off-White)	OPS1W/MPS1W/MPS2W	10 feet long	4 oz.	2, 6	
	GSRPK	Rack Kit	Gold Seal Series Amps	1-1/4" W x 3-1/2" H x 10-1/4" D	2 lb.	41	
	HSES10	Horn Speaker Electrical Box Strap	Horn Speakers**	1/2" W x 5-1/2" long	3 oz.	13, 16, 28	
	MR8	Mounting Ring	S86, S810, CS1EZ, ASWG1/DK	12" dia. x 3/4" D	15 lb.*	11, 16, 23	
	RE84	Round Enclosure	S86, S810, CS1EZ, ASWG1/DK	12-1/4" dia. x 4-1/2" D	24 lb.*	11, 16, 23	
	RK78	Rack Panel Kit	CDR1	19" W x 3-1/2" H x 7" D	3 lb.	57	
	RMPWMK3	Remote Panel Mounting Kit	PM3180	9-1/8" W x 4-3/4" H x 3/4" D	2 lb.	47	
	RPK35B	Rack Panel Kit	C10/C20/CAM2	19" W x 3-1/2" H x 6-1/2" D	3 lb.	42, 50	
	RPK50	Rack Mount Kit	C35/C60/C100	2-1/2" W x 3-1/2" H x 2-1/8" D	10 oz.	42	
	RPK53	Rack Mount Kit	BPA60	2" W x 3-1/2" H x 1" D	7 oz.	46	
	RPK79	Rack Mount Kit	PM3180	1" W x 5-1/4" H x 3-1/2" D	14 oz.	47	
	RPK82	Rack Mount Kit	TPU35B/60B/100B	3" W x 8-3/4" H	14 oz.	43	
	RPK84	Rack Mount Kit	PCM2000	7" W x 8" H	2 lb.	35	
	RPK86	Rear Rack Support Brackets	M-Class/Black Max Amplifiers	3-3/4" W x 3-1/2" H	7 oz.	44, 45	
	RPK87	Rack Mount Kit	V-Series, VMIX	1" W x 3-1/2" H x 3-3/4" D	1 lb.	38, 48	
	RPK88	Rack Mount Kit	PCM2000	19" W x 10-1/2" H x 2" D	3 lb.	35	
	RPK89	Rack Mount Kit (Single)	UDR800	2 Pieces; 1 Rack Space	6 oz.	58	
	RPK90	Rack Mount Kit (Double)	UDR800	3 Pieces; 1 Rack Space	4 oz.	58	
	RPK91	Rack Mount Kit	TAMB2/TAMB2PS	2 Pieces; 1 Rack Space	7 oz.	32	
	RPK93	Rack Mount Kit	CC-Series	1-1/4" W x 3-1/2" H x 8-1/4" D	2 lb.	37	
	RPKUT1	Rack Mount Kit/Security Cover	UT1	19" W x 5-1/4" H x 2-3/8" D	2 lb.	31	
	SMTB	Tile Bridge for Easy Install Speakers	ASM1, SM1EZ/SM4T	4-3/8" W x 1-1/4" H x 23-3/4" D	5 lb.*	15, 24	
	TB8	Tile Bridge	S86, S810, CS1EZ, ASWG1/DK	23-3/4" W x 3/4" H x 14-1/2" D	17 lb.*	11, 16, 23	
	TBCR	Tile Bridge Support Ring	HFCS1/OCS1	17" W x 1-1/8" H x 24" D	2 lb.	2, 6	
	TBSF	Tile Bridge	HFSF1, SEC4T	10" W x 1/2" H x 24" D	14 oz.	7, 11	
	TCSPT1	Terminal Cover for Conduit	Horn Speakers***	1-3/4" W x 3" H x 1-1/4" D	2 oz.	13, 16, 28	
	TMA812	Tilt Mount Adapter	A12 & A8	7" W x 4-3/4" H x 4-1/2" D	2 lb.	5	
	WMAD	Door for WV-Series Amps	WV-Series	16-1/4" W x 26-3/4" H x 1" D	9 lb.	40	
	WMK1	Wall Mounting Kit	C10/C20/CAM2	14-1/2" W x 16" H x 4" D	10 lb.	42, 50	

*Weight based on per carton. Check with Bogen for quantity per carton.

**Horn Speakers: AH5A, AH15A, BDT30A, HS15EZ, HS30EZ, IH8A, KFLDS30T, SP158A, SP308A, SPT15A, & SPT30A.

***Horn Speakers: AH5A, AH15A, BDT30A, HS15EZ, HS30EZ, KFLDS30T, SP158A, SP308A, SPT15A, & SPT30A.

PRODUCT ACCESSORIES (cont.)

	Model #	Accessory Description	Associated Model(s)	Dimensions	Prod. Wt.	Page #	Images
PAGING/INTERCOM	2518	18-Gauge Connector	PI35A/SI35A	5/8" W x 1/4" H x 3/4" D	2 oz./30	61	<p>CA10A CA11A CA17 SBA225 SCR25A PCMPS2 TWK351</p> <p>2518, 2520, 2522, TL156</p>
	2520	20-Gauge Connector	PI35A/SI35A	5/8" W x 1/4" H x 3/4" D	2 oz./30	61	
	2522	22-Gauge Connector	PI35A/SI35A	5/8" W x 1/4" H x 3/4" D	2 oz./30	61	
	CA10A	Call-In Switch	PI35A/SI35A	2-3/4" W x 4-1/2" H x 2" D	2 oz.	61	
	CA11A	Call Privacy Switch	PI35A/SI35A	2-3/4" W x 4-1/2" H x 1-3/4" D	2 oz.	61	
	CA17	Call-In Switch	PI35A/SI35A	2-3/4" W x 4-1/2" H x 1" D	1 oz.	61	
	PCMPS2	12V DC/1.5A Power Supply	PCM2000	2-1/4" W x 4" H x 1-3/8" D	1 lb.	30, 35	
	SBA225	25-Key Station Panel Selector	SI35A	19" W x 1-3/4" H x 1-1/4" D	2 lb.	61	
	SCR25A	Call-In Module	SBA225/SI35A	17" W x 1-1/4" H x 4" D	2 lb.	61	
	TL156	Insertion Tool	PI35A/SI35A	2" W x 3-1/4" H x 1" D	1 oz.	61	
TWK351	2-Wire Call-In Adapter Kit	PI35A/SI35A	5-1/2" W x 4" H x 2-1/4" D	2 lb.	61		

	Model #	Accessory Description	Associated Model(s)	Dimensions	Prod. Wt.	Page #	Images
CORE AUDIO PROCESSOR	DSM2000	Desktop Paging Microphone	CORE	N/A	2 lb.	51	<p>JB NSM PPMKEYPAD PPM8 (shown with 2-PPMKEYPAD units) RAC5 RAC8 URC PPMIT5 URC200</p>
	JB	Junction Box	CORE	3" W x 3-3/8" H x 1" D	0.1 lb.	51	
	NSM	Noise Sensing Microphone	CORE	2-1/2" dia. x 3-3/4" H	0.1 lb.	51	
	PPM8	8-Button Paging Microphone	CORE	4-1/4" W x 8" H x 13 1/4" D	1.4 lb	51	
	PPM8SP	8-Button Paging MIC w/Stack Paging	CORE	4-1/4" W x 8" H x 2" D	1.4 lb	51	
	PPM8WJB	8-Button Paging MIC with JB	CORE	4-1/4" W x 8" H x 2" D	1.4 lb.	51	
	PPM8WJBSP	PPM8WJBSP w/Page Stacking Chip	CORE	4-1/4" W x 8" H x 2" D	1.4 lb.	51	
	PPMIT5	IP Touchscreen Paging Station	CORE	9-7/8" W x 13-3/4" H x 5-5/8" D	2.4 lb	51	
	PPMKEYPAD	Additional Keypad	PPM8	4-1/4" W x 8" H x 2" D	1.4 lb	81	
	RAC5	Remote Analog Controller (5 sources)	CORE	2" W x 4-1/2" H x 2-3/4" D	0.1 lb.	51	
	RAC8	Remote Analog Controller (8 sources)	CORE	2" W x 4-1/2" H x 2-3/4" D	0.1 lb.	51	
	URC	Programmable Remote Controller	CORE	3-1/2" W x 3-1/2" H x 2" D	0.1 lb.	51	
	URC200	IP-Based Remote Controller	CORE	5 1/2" W x 4-1/2" H x 1-1/2" D	0.8 lb.	51	

	Model #	Accessory Description	Associated Model(s)	Dimensions	Prod. Wt.	Page #	Images
ORATOR	OSC50PLENUM	50 ft. Plenum-Rated Cable	Orator	50 feet long	2 lb.	62	<p>OXC1 WMK2 RPK92 OSC50PLENUM</p>
	OXC1	External Sync-Charger	Orator	8" W x 5" H x 3" D	3 lb.	62	
	RPK92	Rack Mount Brackets	Orator	1" W x 3-1/2" H x 3-3/4" D	10 oz.	62	
	WMK2	Easy Wall Mount Bracket Kit	Orator	16" W x 9" H x 7-7/8" D	2 lb.	62	

	Model #	Accessory Description	Associated Model(s)	Dimensions	Prod. Wt.	Page #	Images
MISC.	ASTB4	Electrical Cover	A2/T, A6/T, A8/T	2-7/8" W x 1-7/8" H x 2-3/16" D	2 oz.	4	<p>ASTB4 BCHM SRCA6 T725 T72510 XLR25</p>
	BCHM	Headset Microphone	UDMS800HH/BP	5" W x 6-1/2" H x 2" D (5-ft. cable)	1.1 oz.	58	
	SRCA6	Stereo 6 ft. RCA Cable	Music & Input Sources	6 feet long	5 oz.	--	
	T725	Transformer, Speaker Matching 4-watt (Taps: 4, 2, 1, 1/2, 1/4, 1/8)	8-ohm Speakers	2-1/2" W x 1-1/4" H x 1-3/8" D	6 oz.	--	
	T72510	Transformer, Speaker Matching 10-watt (Taps: 10, 5, 2-1/2, 1-1/4, 5/8)	8-ohm Speakers	3" W x 1-1/2" H x 1-1/2" D	10 oz.	--	
	XLR25	Microphone Cable	BP-Series, Mics	25 feet long	12 oz.	1, 60	

DISCLAIMER

Bogen endeavors to provide correct and current product information in this catalog. However, product information changes from time to time. Contact Bogen to confirm current product specifications and information. Bogen is not responsible for any claims arising from the improper use of products, even if incorrect information is included in this catalog.

FREE APPLICATION DESIGN SERVICE

Bogen's Application Design Service was created to assist with the design of paging systems for any and every project encountered. It's fast, comprehensive, and **FREE**. So let us design it for you!

The Application Design Service provides:

- **Speaker Placement Design**
- **Complete Bill of Material** – This includes product description, model number, and quantity. We can even fax it to the distributor of your choice for pricing, if you wish.
- **Connectivity Drawings**
- **Scope of Work**
- **Detailed Assumptions**
- **Red-lined Blueprints** (*blueprints must be supplied; AutoCAD® accepted**)


How the Application Design Service works:

1. You provide the information about your project (see the *Design Request Form* on our website: www.bogen.com/requestform.pdf). For any large or complex applications, your local Bogen Field Sales Manager can visit the site for exact specifications.
2. Bogen will provide you with a working technical bid response document... and then all you have to do is deliver it.

Then a copy of the bid will also be sent to your local Bogen Field Sales Manager for immediate follow-up, and to see if you have any questions or need additional assistance.

Put Bogen's Resources and Expertise to Work for You.

No application is too big, small, simple, or complex for Bogen Paging Products.

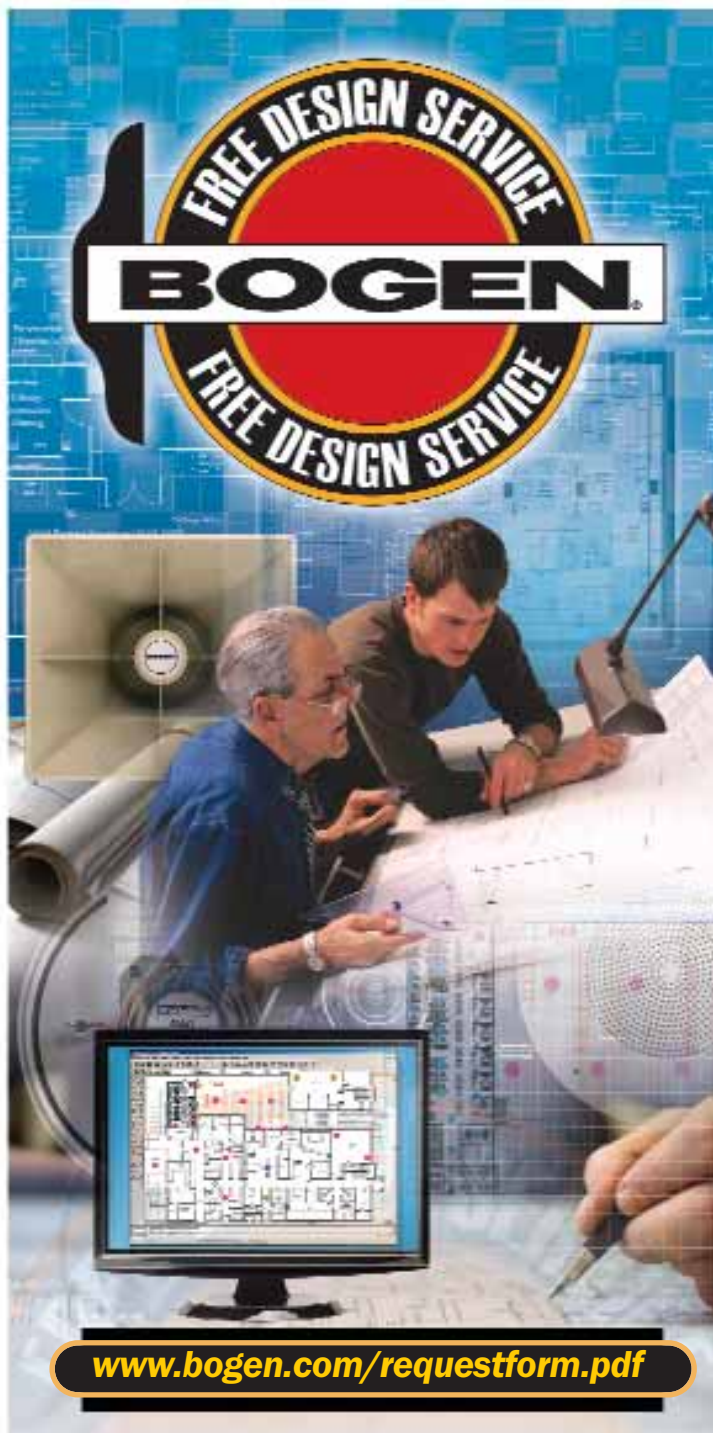

www.bogen.com/requestform.pdf

Call 1-800-999-2809

for more information or to send in a project for us to work on right now.

*AutoCAD® is a registered trademark of Autodesk, Inc.

Accessories, Product*	80-81	High-Fidelity Ceiling Speakers	6-7	Speakers, Ceiling	2, 6-9, 11, 15-16
Ambient Noise Sensor Output Module	40	Horn Speakers	12-13, 16	Speakers, Ceiling, Self-Amplified (24V)	23-24
Ambient Noise Sensor Systems	52	Horn Speakers, Self-Amplified (24V)	26-28	Speakers, Cone	11
Amplifier Features Chart	78	In-ground Speaker	5	Speakers, Drop-In Ceiling	8-9
Amplifier Monitor	47	Input Modules, Advanced	39	Speakers, Drop-In Ceiling, Self-Amplified (24V)	23
Amplifier Specs Chart	79	Insertion Tool	81	Speakers, Easy Design	15-16
Amplifiers	37-47, 53	Intercoms, Desktop	61	Speakers, Easy Install	15
Amplifiers, Black Max Power	44	Interfaces, Telephone	31-33	Speakers, Easy Install, Self-Amplified (24V)	24
Amplifiers, CC-Series Compact	37	Level Controls, 24V Systems	29	Speakers, Foreground	3, 12
Amplifiers, Classic Series	42	Line/MIC Input Modules	39	Speakers, Horn	12-13, 16
Amplifiers, Dual-Channel	44-45	Loop Start Interface/Power Supply	25	Speakers, Horn, Self-Amplified (24V)	26-28
Amplifiers, GA-Series	42	Matching Transformers	54	Speakers, In-ground	5
Amplifiers, Gold Seal Series	41	M-Class Amplifiers	45	Speakers, Metal Box	10
Amplifiers, HTA-Series	46	Messaging & Call Stacking System	51	Speakers, Metal Box, Self-Amplified (24V)	24
Amplifiers, M-Class	45	Metal Box Speakers	10	Speakers, Outdoor	4-5, 12-13, 16
Amplifiers, Modular	38, 40	Metal Box Speakers, Self-Amplified (24V)	24	Speakers, Outdoor, Self-Amplified (24V)	26-28
Amplifiers, Power	44-46	MIC Input Modules	39	Speakers, Passive	1-16
Amplifiers, Power Vector Series	38, 40	Microphones & Accessories	58-60	Speakers, Pendant	2, 6
Amplifiers, Pro-Matrix Digital	47	Microphones, Boundary	60	Speakers, Powered	1
Amplifiers, Public Address	41-42	Microphones, Desktop	58	Speakers, Self-Amplified (24V)	22-29
Amplifiers, Talk Back	53	Microphones, Gooseneck	59	Speakers, Sound Columns	12
Amplifiers, Telephone Paging	43	Microphones, Handheld	59	Speakers, Surface-Mount Ceiling	15
Amplifiers, TPU-Series	43	Microphones, Overhead	60	Speakers, Surface-Mount Ceiling (24V)	24
Amplifiers, Utility	42	Microphones, Wireless	58	Speakers, Vandal-Resistant	12, 14
Amplifiers, Wall-Mount	40	Mini Pendant Speakers	6	Speakers, Wall-Mount	3, 10, 12, 16
Analog Door Phone	54	Mixers	48-51	Speakers, Wall-Mount, Self-Amplified (24V)	24-25
Apogee Sound Intl Speakers	1	Module Adapter	39, 80	Speakers, Weatherproof	4-5, 12-13
Application Design Service, Free	82	Modules, Advanced Input/Output	39-40	Speakers, Weatherproof, Self-Amplified (24V)	26-28
Armadillo Speakers	4-5	Mono AUX Input Module	39	SPL Meter	55
A-Series Speakers	4-5	Mounting Kits	80	Stereo AUX Input Module	39
Attenuators	14, 29	Music & Input Sources	55-57	Stereo Tuner, Digital	55
Audio Enhancement Systems	62	Night Ringer	52	Subwoofer, Ceiling	7
Audio Processor	51	Noise Sensor Systems, Ambient	40, 52	Surface-Mount Ceiling Speakers	15
Automatic Failure Detector Substitutor	47	Office Communications	61-62	Surface-Mount Ceiling Speakers, Self-Amplified (24V)	24
Balanced Input Module	39	Orator	62	System Design Guide	63-77
Beam Clamp	13, 16, 26, 28, 80	Orbit Ceiling Speakers	2	System Design, Free Service	82
Bi-Directional Horn Speaker	13	Orbit Pendant Speakers	2	System Guide, Easy Design	17-21
Black Max Power Amplifiers	44	Outdoor Loudspeakers	4-5, 12-13, 16	Talk Back Amplifier	53
Bogen Signature	3	Outdoor Loudspeakers, Self-Amplified (24V)	26-28	Telephone Access Module	32
Bridging Input Module	39	Output Modules, Advanced	40	Telephone Electronics	54
Buffer/Expander/Volume Control, 24V Systems	29	Paging Controllers	31-36	Telephone Input Module	39
Call Stacking / Messaging	51	Paging Electronics	51-53	Telephone Interfaces	31-33
Call-In Switches	61, 81	Paging Horn Speaker	13	Telephone Paging Amplifiers	43
CD Player	57	Parametric Equalizer Module	40	Tile Bridges	80
Ceiling Speakers	2, 6-9, 11, 15-16	Pendant Speakers	2, 6	Tone Generator	53
Ceiling Speakers, Self-Amplified (24V)	23-24	Power Supplies	25, 30	Tone Generator Input Module	39
Charts	77-81	Power Supply/Loop Start Interface	25	Transformer-Balanced Input Module	39
Classic Series Amplifiers	42	Power Vector Amplifiers	38, 40	Transformers	54, 80
Compressor/Limiter Module	40	Power Vector Mixer	48	Tuners, AM/FM	55
Cone Speakers	11	Powered Loudspeakers	1	Universal Audio Processor	51
Connector Kits	61, 81	Pre-Amplifiers	48-50	Utility Amplifiers	42
Current Units (24V Systems)	22, 68	Pro Audio Speakers	1	Vandal-Resistant Speakers	12, 14
Digital Feedback Elimination	53	Professional Loudspeakers	1	Voice Reinforcement System	62
Digital Stereo Tuner	55	Pro-Matrix Amplifier	47	Voice-Activated Relay	52
Door Phone, Analog	54	Receivers, AM/FM	56-57	VoIP Gateways for Paging	36
Drop-In Ceiling Speakers	8-9	Relay Input/Output Module	40	Volume Control/Buffer/Expander, 24V Systems	29
Drop-In Ceiling Speakers, Self-Amplified (24V)	23	Rigging Kits	80	Wall Baffle Speakers	10, 16
Easy Design Speaker Guide	17-21	Safety Cables	2, 6, 7, 80	Wall Baffle Speakers, Self-Amplified (24V)	25
Easy Design Speakers	15-16	Self-Amplified (24V) Systems	22-30	Wall-Mount Amplifiers	40
Easy Install Speakers	15	Signal Level Control, 24V Systems	29	Weatherproof Speakers	4-5, 12-13, 16
Easy Install Speakers, Self-Amplified (24V)	24	Signal-Processing Output Modules	40	Weatherproof Speakers, Self-Amplified (24V)	26-28
Emergency Bypass Function	14, 29	Signature Series	3	Wide-Angle Horn Speaker	13
Expander/Buffer/Volume Control, 24V Systems	29	Site Survey Check List	72	Zone Paging	33-36
EZ-Series, Speakers	15-16	Sound Column Speakers	12		
Feedback Elimination, Digital	53	Sound Pressure Level Meter	55		
Foreground Speakers	3, 12	Sound Pressure Levels Chart	77		
Free Application Design Service	82	Speakers & Accessories	1-29		
Gold Seal Series Amplifiers	41	Speakers, A-Series	4-5		

* Accessories also shown on product pages.

MODEL INDEX

NOTE: Products are featured on pages
which are listed in boldface type.

Category Index on Page 83

108-2120	80	HSES10	13, 16, 28, 80	S86T725PG8U/WBRVK	11
108-2150	80	HS715/30EZ	16	S86T725PG8U/WBRVR	11
109-2140	80	HTA125/250A	46	S86T725PG8U/WVK	11
109-2151	80	IH8A	13	S86T725PG8U/WVR	11
2518/2520/2522	61, 81	JB	81	S810T725PG8U/W	11
A2/T	4	KFLDS30T	13	S810T725PG8U/WVK	11
A6/T	4	LMM/R1S	39	S810T725PG8U/WVR	11
A8/T	4	M300/450/600	45	SAH5/15/30	26
A12	5	MA3	39, 80	SAX1R	39
ACD2X2U	23	MAC	60	SB6	60
ADP1	54	MAX1R	39	SBA225	61, 81
AFDS2	47	MB8TSL/VR	10	SCR25A	61, 81
AH5/15A	28	MB8TSQ/VR	10	SCU250	60
AMBSL/Q1	24	MBS1000A	58, 61	SCW20/35	12
AMT-12/15	1	MC27	59	SEC4T	11
ANS1R	40	MC28	58	SF4	60
ANS500M	40, 52	MCD1X2/2X2U	9	SGHD8	12
ANS501	52	MCD1X2/2X2UGRILLE	9	SI35A	61
ASM1	24	MCDMOD	9	SLC	29
ASTB4	4, 81	MGN19	59	SM1EZ	15
ASUG1/DK	23	MIC1S/X	39	SM4T	15
ASWB1	25	MIC2S/X	39	SMTB	15, 24, 80
ASWG1/DK	23	MPS1/2 (B/W)	6	SP58A/158A/308A	13
AT10/35A	14	MR8	11, 16, 23, 80	SPS2406/10/25/66	30
ATP10/35	14	MSM	60	SPLM	55
ATS70GB	80	MVP130/210/410/810BG	36	SPT5/15/30A	13
BAL2S	39	NR100	52	SRCA6	81
BBF/S	40, 80	NSM	81	T725/10	81
BBFM6/BBSM6	12	OCS1B/W	2	TAMB2/PS	32, 36, 53
BC1	13, 16, 26, 28, 80	OPS1B/W	2	TB8	11, 16, 23, 80
BCHM	58, 81	ORATOR	62	TBA15	36, 53
BDT30A	13	OSC50PLENUM	62, 81	TBCR	2, 6, 80
BOMDMU	51	OXC1	62, 81	TBL1S	39
BPA60	46	PCM2000	34-35	TBSF	7, 11, 80
BP12DSP, BP15DSP	1	PCMCPUI/TBM/TIM/ZPM	34-35	TCSPT1	13, 16, 28, 80
BRG1R	39	PCMPS2	30, 35, 81	TEL1S	39
BUFEX	29	PCMSYS3	35	TG4C	53
C10, C20	42	PEQ1R	40	TL100/600	46, 80
C35/60/100	42	PI35A	61	TL156	61, 81
CA10A/11A/17	61, 81	PM3180	47	TMA812	5, 80
CAM2	50	PPM8/SP/WJB/WJBSP	81	TNG1S	39
CAM8PRO	49	PPMIT5	81	TPU15A	43
CC4021/41/52	37	PPMKEYPAD	81	TPU35/60/100B	43
CC4052M, CC4062MBT	37	PRS2403	30, 32, 52	TPU250	43
CDR1	57, 61	PRS40C	30, 52, 53	TWK351	61, 81
CK10/B/W	2, 6, 7, 80	PRS48	30, 36, 39	UBP800	58
CMP1R	40	PRSLSI	25, 32, 36	UDMS800BP/HH	58
CORE	51	PVMC	38, 45, 48, 80	UDR800	58
CS1EZ	16	PVSC	38, 48, 80	UHT800	58
CSD1X2/VR(U)	8	RAC5/8	81	URC/200	81
CSD2X2L(U)	8	RE84	11, 16, 23, 80	UT11	31
CSD2X2/VR(U)	8	RIO1S	40	UT1312	33
CSUB	7	RK78	57, 80	V35/60/100/150/250	38
DDU250	58, 61	RMPWMMK3	47, 80	VAR1	52
DFT120	53	RPK35B	42, 50, 80	VMIX	48
DRZ35	56	RPK50	42, 80	VRS1/2	14
DS3	60	RPK53	46, 80	WB1EZ	16
DSM2000	81	RPK79	47, 80	WBS8T725/BR/BRV/V	10
DST1	55	RPK82	43, 80	WBS810T725	10
FG15B/W	12	RPK84	35, 80	WCU250	60
FMH15T	12	RPK86	44, 45, 80	WMAD	40, 80
FMHAR8	12	RPK87	38, 48, 80	WMK1	42, 50, 80
G8G	5	RPK88	35, 80	WMK2	62, 81
GA2/GA6A	42	RPK89	58, 80	WMT1A	41, 42, 43, 46, 53, 54, 61
GCU250	59	RPK90	58, 80	WMT1AS	54
GDU150	59	RPK91	32, 80	WSGCU250	59
GS35/60/100/150/250	41	RPK92	62, 81	WV100/150/250	40
GSRPK	41, 80	RPK93	37, 80	X300/450/600	44
GSRVC	41, 80	RPKUT11	31, 80	XLR25	60, 81
GSTRC	41, 80	RVCP	38, 40, 48, 80	ZPM3	36, 53
HDO100	59	S4/T	3	ZX3	33
HDU150/250	59	S5/T	3		
HFCS1/LP (B/W)	6	S86T725PG8U/W	11		
HFSF1	7	S86T725PG8U/WBR	11		

ABOUT BOGEN



Bogen - Early 1950s

Founded in 1932, Bogen's dedication to providing superior sound reinforcement products has won the continued loyalty of an ever-increasing network of distributors, dealers, contractors, and installers worldwide.

What's our secret? It's not a secret, it's focus. Focus on our customer's needs!

Focused salespeople, focused customer service and technical support reps, focused research and development engineers, focused production and manufacturing teams – all dedicated to improving and changing our products, support, and service to meet the changing needs of customers. This is why Bogen is the industry leader of communications equipment and technology used in offices, commercial establishments, and schools.

Bogen's products include audio amplifiers and speakers; related sound, intercom, and communications systems equipment; and background and foreground music equipment.

Our objective is to provide installers with a high-quality sound system that is easy to design, high-quality products that are easy to install, dependable products that are reliable and expandable with convenient features that are easy to understand, operate, and which produce exceptional voice and music reproduction when and where it is needed. We offer a full line of products and are always adding new electronics equipment to meet your technical requirements.

When you order from us, you can do so confidently, knowing that Bogen's experience and innovative technology will provide your customers with products they will appreciate and be pleased with...well into the future.

Our goal is to satisfy you – by providing products that are easy to design, easy to order, easy to install, and easy to use.



Bogen - 2010s

OTHER MATERIALS AVAILABLE

The following materials are available at no charge* to help you with your installations. To order, visit www.bogen.com/litform or fax your literature request on company letterhead to 201-934-9832. Most materials are also available online from our website.

- **PCM2000 Configuration Guide**

This system configuration guide will assist you in designing zone paging applications. It illustrates many popular applications for the PCM2000.

- **Free Design Service Brochure**

This publication describes Bogen's Free Application Design Service and includes a Design Request Form. Let Bogen assist with the design of paging systems for your install project.

- **Loudspeaker Installation Methods and Connection Techniques**

This pamphlet describes direct connections, power distribution without transformers, line-power loss, 70V and 25V systems, matching transformers, balanced and unbalanced line operation, and speaker phasing.

- **Paging Site Survey Sheet** (see page 72)

Use this helpful checklist to determine the equipment needed for paging systems installations.

In addition, technical specification sheets are available for the products shown in this catalog.

*Product literature sent by USPS First Class Mail or UPS Ground, at Bogen's option.

CONTACT BOGEN

- Customer Service/Orders
- Free Application Design Service
- Literature on Bogen Products
- Technical Support Assistance*
- Factory Service/Parts
- Sales Offices/Distributors

CALL BOGEN
TOLL-FREE:

1-800-999-2809

ON THE
WEB:

www.bogen.com

Fax Orders to: **1-800-999-9016** Fax for Tech Support: **201-934-6532**

Corporate Headquarters Tel: **201-934-8500** Fax: **201-934-9832**

Business hours are 8:30 a.m. to 5:00 p.m. (EST), Monday to Friday

Bogen Product Literature Online: www.bogen.com/documentindex

To Order Bogen Literature: By Fax: **201-934-9832**

By E-Mail: literature@bogen.com

INSTALLATION CASE STUDIES

Bogen products have been used in numerous types of applications, each with its own unique requirements. Whether simple or sophisticated, installations around the world benefit from Bogen products. Here is a small sampling of case studies showing venues where our systems have been installed. Read more about each of these and more online at: www.bogen.com/applications/casestudies



DISTRIBUTION CENTERS
**ACE Hardware
 Regional Warehouse**
 Gainesville, GA



CONVENTION CENTERS
**Carlisle Exposition
 Center**
 Carlisle, PA



FACTORIES
**Crown Beverage
 Packaging Division**
 Lawrence, MA



RESTAURANTS
**Fanatico Italian
 Bistro Restaurant**
 Jericho, NY



MOTORCYCLE DEALERSHIP
**Harley-Davidson
 of Jamestown**
 Falconer, NY



FIRE STATIONS
**North Royalton
 Fire Department**
 North Royalton, OH



MANUFACTURING
**Fabri-Kal Plastic
 Manufacturer**
 Hazleton, PA



STADIUMS & ARENAS
**Sazka
 Arena**
 Prague, Czech Republic



OUTDOOR INSTALLATION
**Historic Newaygo
 Downtown**
 Newaygo, MI



MUSEUMS
**U.S.S. Potomac
 Presidential Yacht**
 Docked in Oakland, CA



AUTO DEALERSHIPS
**Stockburger
 Chevrolet/Chrysler**
 Newtown, PA



BANQUET HALLS
**Le Mirage Loft
 at "New York, NY"**
 Taipei, Taiwan



THEME PARKS
**KIDZANIA
 Cuicuilco**
 Mexico City, Mexico



PRINTING PLANTS
**Color Graphics
 Printers**
 Costa Mesa, CA