

# Preventa™ Machine Safety Products

Catalog  
2014

## Chapter 3 Safety Relays





**Safety relay modules**

**Selection guide: Preventa™ safety relay modules** ..... 3/6

**Electrical ratings** ..... 3/16

**For Emergency stop and switch monitoring**

- Types XPSAC, XPSAXE ..... 3/18
- Types XPSAV, XPSABV, XPSATE ..... 3/22
- Type XPSATR ..... 3/32
- Type XPSAF ..... 3/36
- Type XPSAFL ..... 3/40

**For Emergency stop, switch or light curtain monitoring**

- Type XPSAR ..... 3/44

**For Emergency stop, switch, sensing mat/edges or light curtain monitoring**

- Type XPSAK ..... 3/50

**For electrical monitoring of two-hand control stations**

- Types XPSBAE, XPSBCE, XPSBF ..... 3/56

**For forming a type 2 light curtain**

- Types XPSCM, XU2S (single-beam photoelectric sensor) ..... 3/64

**For monitoring 2 to 4 light curtains type 2 and type 4**

- Type XPSLCD ..... 3/72

**For “muting” function of type 2 and type 4 light curtains**

- Type XPSLCM ..... 3/76

**For increasing the number of safety contacts**

- Types XPSECME, XPSECPE ..... 3/84

**For safety time delays**

- Types XPSTSA, XPSTSW ..... 3/88

**For non-contact safety interlock (coded magnetic) switch monitoring**

- Types XPSDMB, XPSDME ..... 3/92

**For zero speed detection**

- Type XPSVNE ..... 3/98

**For dynamic monitoring of hydraulic valves on linear presses**

- Type XPSPVT ..... 3/104

**For dynamic monitoring of double-bodied solenoid valves**

- Type XPSPVK ..... 3/108

**For safety stop with automatic overtravel monitoring and control**

- Type XPSOT ..... 3/112

**Dimensions** ..... 3/116

**Safety solutions on AS-Interface™ cabling system**

**Selection guide: Safety monitors and interfaces** ..... 3/118

**AS-Interface “Safety at work” monitors** ..... 3/120

**Safety interfaces** ..... 3/124

**Safety reliability values**

**Safety reliability values according to standard EN/ISO 13849-1 and EN/IEC 62061** ..... 3/128

**Product reference index** ..... 3/132






Go online to [www.schneider-electric.com](http://www.schneider-electric.com) for information about Preventa™ products listed in this catalog, including:

- 1 Go to: [www.schneider-electric.com](http://www.schneider-electric.com) and select **“Products”** on the “Products and Services” tab.




- 2 On the “Products” page, find the “Machine Safety Products” icon and select **“All Machine Safety Products”**.

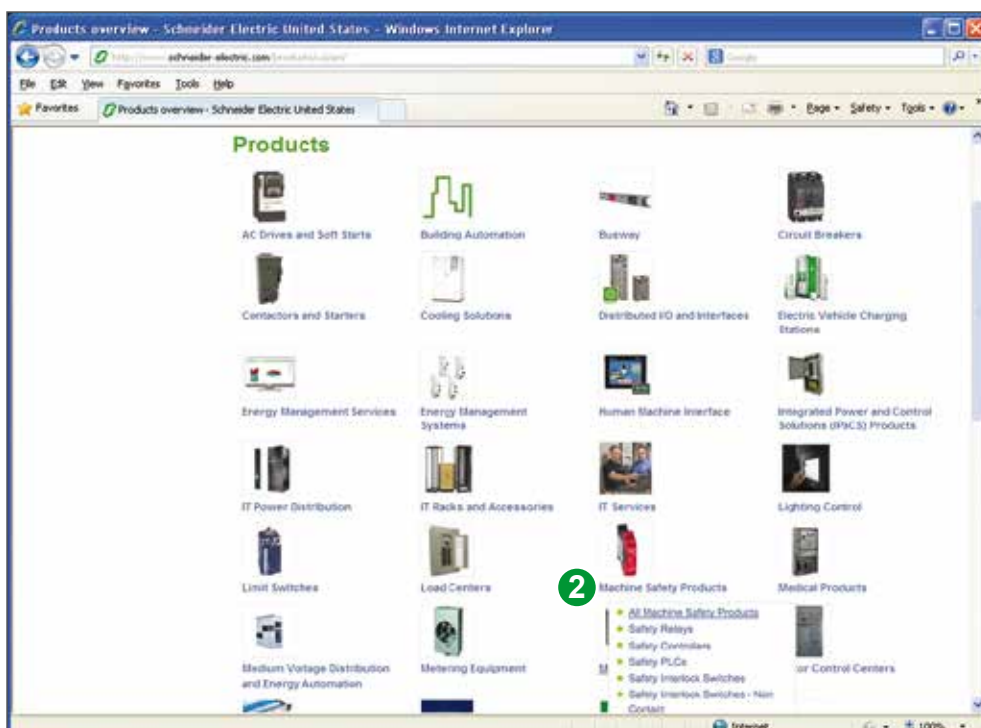


> Specifications > Dimensions > References  
> Curves > Links to user guides and CAD files




- 3 On the “Machine Safety Products” page, select the product you are interested in, for example: **“Safety Relays - Preventa XPS - Safety Modules”**.

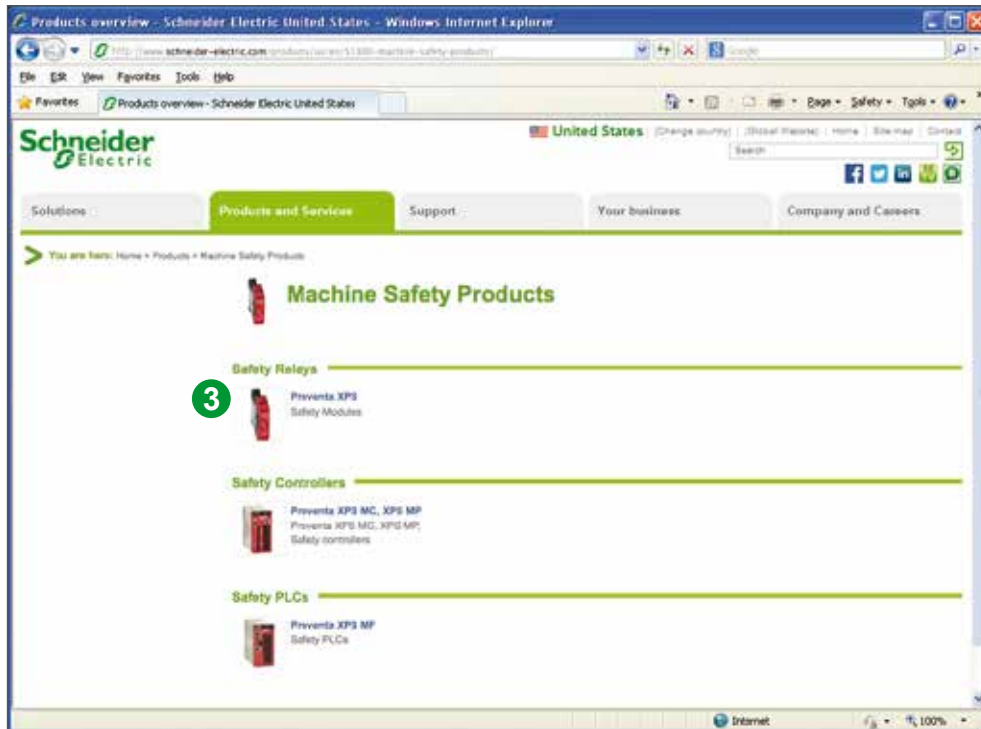

- 4 Explore the product page you have selected, including the “Product Information” tabs: **“Documents & Downloads”** and **“Support”**.

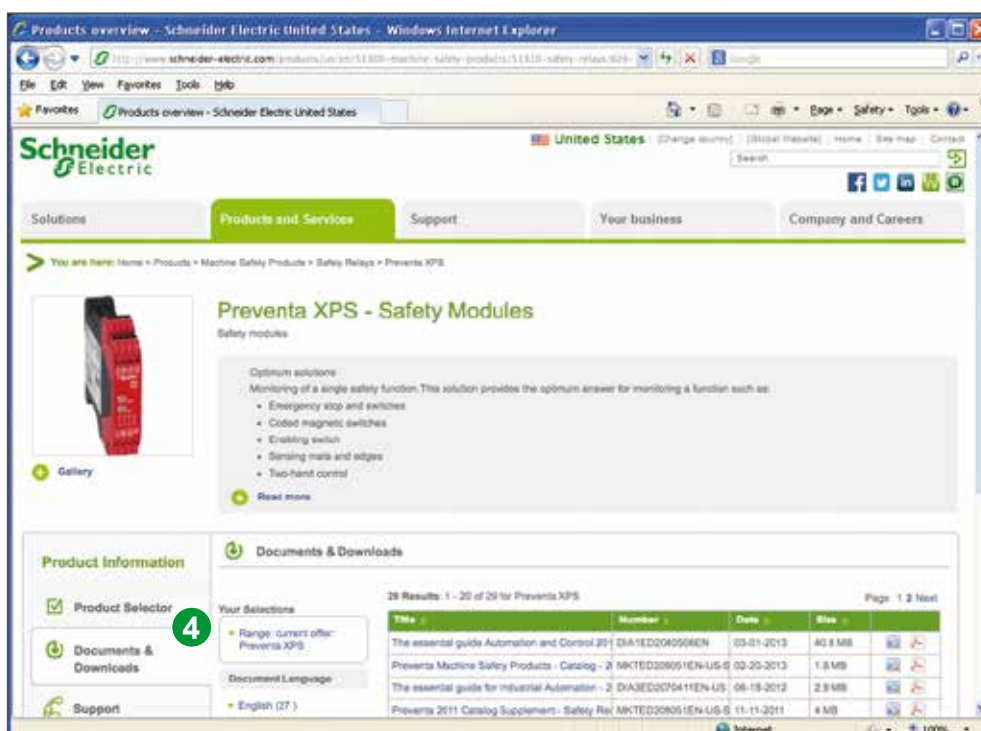

# Save time and money with our Preventa™ machine safety solutions offer

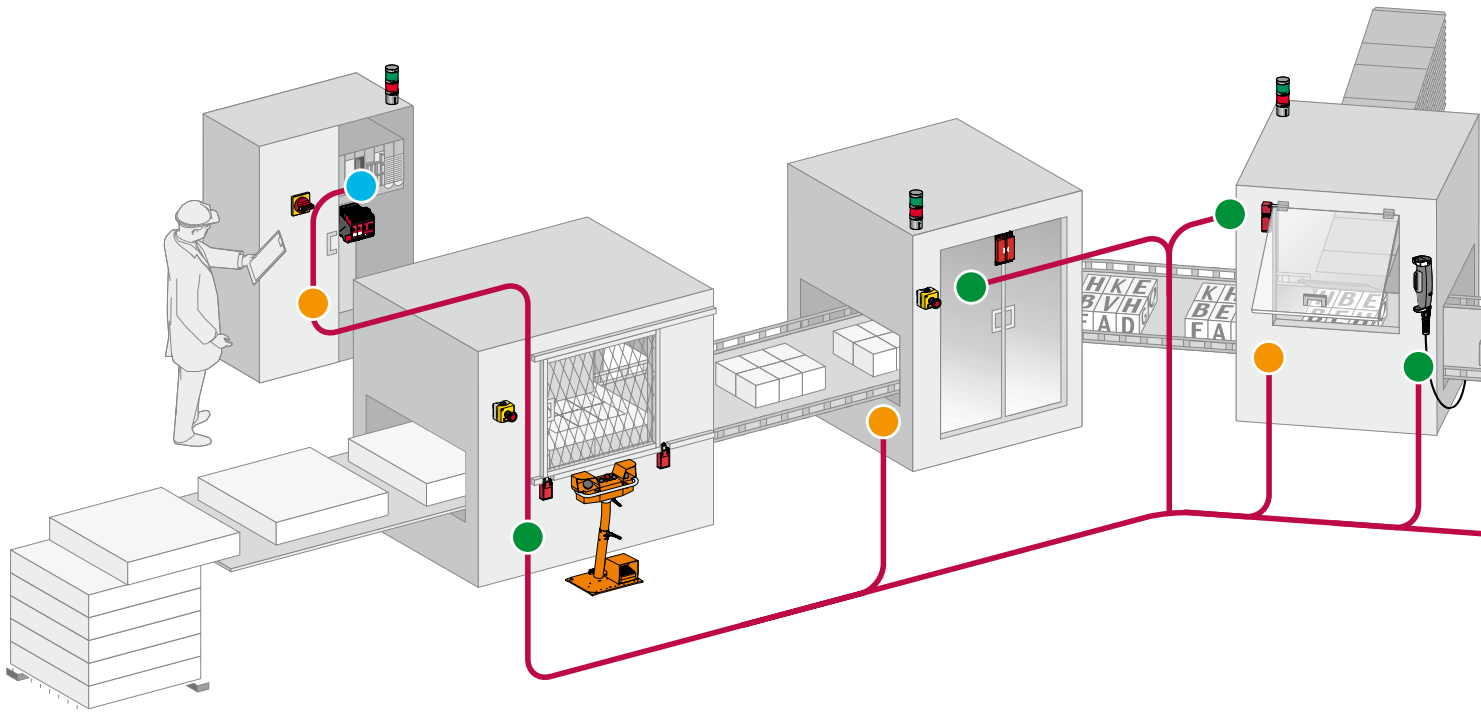

## Safety-related signal transmission

### Acquiring information...

- > Safety interlock devices used as part of safeguarding systems to control access, under specific conditions of reduced risk.
- > Light curtains to detect approach to dangerous and limited areas.
- > Emergency stop buttons and cable pull switches for emergency shut down.



Safety interlocks

### Monitoring and processing...

- > Safety relay modules with specific safety functions – to monitor input signals from safety-related devices, and to interface with contactors and drives – by switching off output safety contacts.
- > Safety Controller: configurable safety device capable of centralizing a range of safety monitoring functions.
- > Safety PLCs: programmable electronic systems to carry out safety or non-safety related tasks for machinery and equipment.
- > “As-interface safety at work”: safety field bus network certified to work with safety-related devices to provide safety functions.



Light curtains



Emergency stop



Cable pull switch



Safety relays




Safety Controller



Safety PLCs



As-interface safety at work

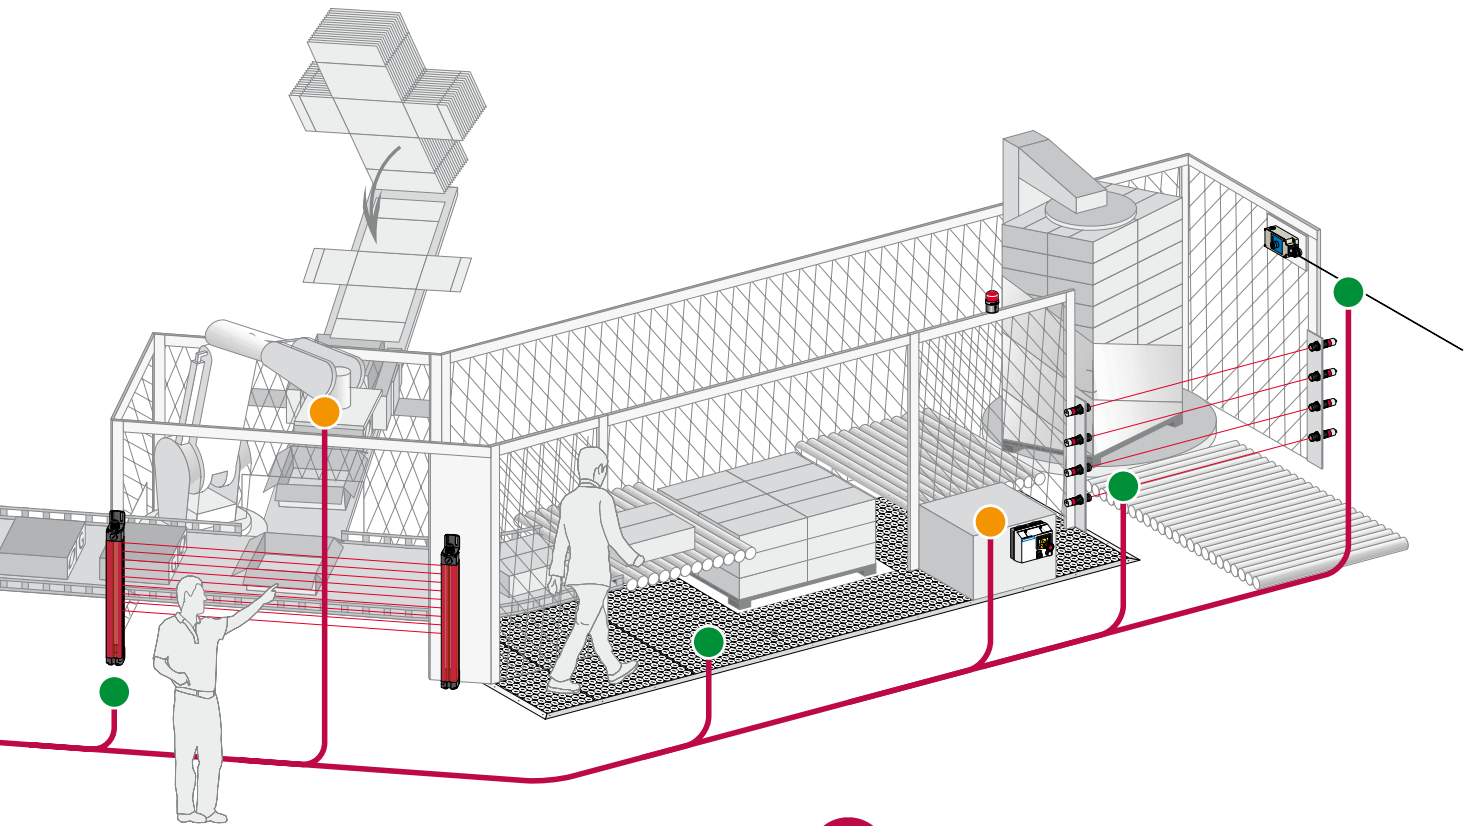

### Stopping the machine...

- > Contactors to cut-off the electrical power supply to motors – with mechanically linked or mirrored auxiliary contacts – integrated for feedback loop diagnosis of safety relay modules, safety controllers, or safety PLCs.
- > Variable speed drives and servo drives with integrated safety functions...control stopping of dangerous movements.

**Up to 50%  
better space  
optimization**

Compact components  
have smaller footprint

**Save up  
to 30%  
on installation  
time**

Reduce installation  
time with quick and  
easy wiring



Variable  
speed drives





Servo drives



Contactors

Applications



Modules

For Emergency stop and switch monitoring



3

|  |
|--|
| <b>Maximum achievable safety level</b> |
| <b>Conformity to standards</b>         |
| <b>Product certifications</b>          |

|   |
|---|
| PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061 |
| EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1               |
| UL, CSA, TÜV  |

|   |
|---|
| PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061 |
| EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1               |
| UL, CSA, BG   |

|                           |            |
|---------------------------|------------|
| <b>Number of circuits</b> | Safety     |
|                           | Additional |
| <b>Display</b>            |            |
| <b>Supply voltage</b>     |            |

|   |
|---|
| 3 N.O.  |
| 1 solid-state output for signalling to PLC  |
| 2 LEDs  |
| ~ and 24 V $\overline{\text{---}}$<br>48 V $\sim$<br>115 V $\sim$<br>230 V $\sim$ |

|                                      |
|--------------------------------------|
| 3 N.O.                               |
| 1 relay output for signalling to PLC |
| 2 LEDs                               |
| ~ and 24 V $\overline{\text{---}}$   |

|  |  |
|--|--|
| <b>Synchronization time between inputs</b> |  |
| <b>Input channel voltage</b>               | 24 V/48 V version                      |
|  | 24 V/48 V or 110 V/120 V/230 V version |

|   |
|---|
| Unlimited                                       |
| ~ and 24 V $\overline{\text{---}}$ /48 V $\sim$ |
| 115 V $\sim$ /230 V<br>–                        |

|                              |
|------------------------------|
| Unlimited                    |
| 24 V $\overline{\text{---}}$ |
| –                            |

Module type

XPSAC


XPSAXE

Pages


3/19

3/19






**For Emergency stop and switch monitoring**



**For Emergency stop and protective guard applications**






**For Emergency stop and switch monitoring**



|  |   |  |  |
|--|---|--|--|
| <p>PLe/Category 4 (instantaneous safety outputs) and PLd/Category 3 (time delay safety outputs) conforming to EN/ISO 13849-1, SILCL3 (instantaneous safety outputs) and SILCL2 (time delay safety outputs) conforming to EN/IEC 61508 and EN/IEC 62061</p> | <p>PLe/Category 4 conforming to EN ISO 13849-1, SILCL3 conforming to EN/IEC 62061</p>     | <p>PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061</p> | <p>PLe/Category 4 (instantaneous safety outputs) and PLd/Category 3 (time delay safety outputs) conforming to EN/ISO 13849-1, SILCL3 (instantaneous safety outputs) and SILCL2 (time delay safety outputs) conforming to EN/IEC 61508 and EN/IEC 62061</p> |
| <p>EN/IEC 60204-1, EN/ISO 13850, EN 1088/ISO 14119, EN/IEC 60947-1, EN/IEC 60947-5-1</p>   | <p>EN 62061, EN ISO 13849-1, EN 50156-1, EN 60204-1, EN/IEC 61496-1, EN/IEC 60947-5-1</p> | <p>EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1</p>               | <p>EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1, EN/ISO 13850, EN 1088/ISO 14119</p>   |
| <p>UL, CSA, TÜV</p>  | <p>UL, CSA, TÜV</p>   | <p>UL, CSA, TÜV</p>  | <p>UL, CSA, BG</p>   |
| <p>2 N.O. instantaneous + 3 N.O. time delay</p>  | <p>3 N.O. instantaneous + 3 N.O. time delay</p>   | <p>3 N.O. instantaneous + 3 N.O. time delay</p>  | <p>2 N.O. instantaneous + 1 N.O. time delay</p>  |
| <p>4 solid-state outputs for signalling to PLC</p>   | <p>1 N.C.</p>   | <p>3 solid-state outputs for signalling to PLC</p>   | <p>–</p>   |
| <p>4 LEDs<br/>~ and 24 V ---<br/>115 V ~<br/>230 V ~</p>   | <p>5 LEDs<br/>--- 24 V<br/>~ 115...230 V</p>  | <p>11 LEDs<br/>24 V ---</p>  | <p>3 LEDs<br/>24 V ---</p>   |
| <p>75 ms (automatic start)</p>   | <p>1</p>  | <p>Unlimited or 1.5 s (depending on wiring)</p>  | <p>Unlimited</p>   |
| <p>24 V ---/-</p>  | <p>24 V ---/-</p>   | <p>24 V ---/-</p>  | <p>24 V ---/-</p>  |
| <p>48 V ~/48 V<br/>–</p>   | <p>24 V ---/-</p>   | <p>–<br/>–</p>   | <p>–<br/>–</p>   |
| <p><b>XPSATE</b></p>   | <p><b>XPSATR</b></p>  | <p><b>XPSAV</b></p>  | <p><b>XPSABV</b></p>   |
| <p>3/24</p>  | <p>3/33</p>   | <p>3/24</p>  | <p>3/24</p>  |

Applications



Modules

For Emergency stop and switch monitoring

For Emergency stop, switch or solid-state output safety light curtain monitoring



|  |
|--|
| <b>Maximum achievable safety level</b> |
| <b>Conformity to standards</b>         |
| <b>Product certifications</b>          |

|   |  |   |
|---|--|---|
| PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061 | PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061            | PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061 |
| EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1               | EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 61496-1 (type 4) | EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1               |
| UL, CSA, TÜV  | UL, CSA, TÜV   | UL, CSA, TÜV  |

|                           |            |
|---------------------------|------------|
| <b>Number of circuits</b> | Safety     |
|                           | Additional |
| <b>Display</b>            |            |
| <b>Supply voltage</b>     |            |

|              |  |
|--------------|--|
| 3 N.O.       | 7 N.O.   |
| –            | 2 N.C. + 4 solid-state outputs for signalling to PLC     |
| 3 LEDs       | 4 LEDs   |
| ~ and 24 V ⎓ | ~ and 24 V ⎓<br>115 V ~ and 24 V ⎓<br>230 V ~ and 24 V ⎓ |

|  |  |
|--|--|
| <b>Synchronization time between inputs</b> |  |
| <b>Input channel voltage</b>               | 24 V/48 V version                      |
|  | 24 V/48 V or 110 V/120 V/230 V version |


|           |             |
|-----------|-------------|
| Unlimited |             |
| ⎓ 24 V/–  | 24 V ⎓/–    |
| –         | 24 V ~/24 V |
| –         | –           |

Module type

|              |               |              |
|--------------|---------------|--------------|
| <b>XPSAF</b> | <b>XPSAFL</b> | <b>XPSAR</b> |
|--------------|---------------|--------------|

Pages

|      |      |      |
|------|------|------|
| 3/37 | 3/41 | 3/45 |
|------|------|------|



**For Emergency stop, switch, sensing mat/edges or solid-state output safety light curtain monitoring**

**For electrical monitoring of two-hand control stations**



PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061

PLC/Category 1 conforming to EN/ISO 13849-1  
SILCL1 conforming to EN/IEC 62061

PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061

PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061

EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1

EN 574 type III A, EN/IEC 60204-1, EN/IEC 60947-5-1, EN 62061

EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1, EN 574 type III C/ISO 13851

EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1, EN 574 type III C/ISO 13851

UL, CSA, TÜV

UL, CSA, TÜV

UL, CSA, BG

UL, CSA, TÜV

3 N.O. instantaneous

1 N.O.

2 N.O.

2 N.O.

1 N.C. + 4 solid-state outputs for signalling to PLC

1 N.C.

1 N.C.

2 solid-state outputs for signalling to PLC

4 LEDs

2 LEDs

3 LEDs

3 LEDs

~ and 24 V  $\overline{\text{---}}$   
48 V ~  
110 V ~ and 24 V  $\overline{\text{---}}$   
120 V ~ and 24 V  $\overline{\text{---}}$   
230 V ~ and 24 V  $\overline{\text{---}}$

~ and 24 V  $\overline{\text{---}}$   
115/230 V ~

~ and 24 V  $\overline{\text{---}}$   
115/120 V ~  
230 V ~

24 V  $\overline{\text{---}}$

Unlimited or 2 s, 4 s (depending on wiring)

500 ms

500 ms

500 ms

24 V  $\overline{\text{---}}$ /-

24 V  $\overline{\text{---}}$ /-

24 V  $\overline{\text{---}}$

24 V  $\overline{\text{---}}$ /-

-  
24 V  $\overline{\text{---}}$ /24 V/24 V

-  
24 V ~/24 V

-

-

**XPSAK**

**XPSBAE**

**XPSBCE**

**XPSBF**



3/51

3/59

3/59

3/59

Applications



Modules

For control of 1 to 4 single-beam photo-electric sensors XU2 S (transmitter-receiver pair)

For monitoring 2 to 4 type 2 and type 4 light curtains (transmitter-receiver pair)



3

|  |
|--|
| <b>Maximum achievable safety level</b> |
| <b>Conformity to standards</b>         |
| <b>Product certifications</b>          |

|   |
|---|
| PLC/Category 2 conforming to EN/ISO 13849-1, SILCL1 conforming to EN/IEC 61508 and EN/IEC 62061 |
| EN/IEC 61496-1, EN/IEC 61496-2, EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1                |
| UL, CSA, IFA  |

|  |
|--|
| PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061 |
| EN 954-1 - category 4/EN/ISO 13849-1, EN/IEC 61496-1, EN/IEC 61496-2             |
| UL, CSA, TÜV   |

|                           |            |
|---------------------------|------------|
| <b>Number of circuits</b> | Safety     |
|                           | Additional |
| <b>Display</b>            |            |
| <b>Supply voltage</b>     |            |

|  |
|--|
| 2 N.O.   |
| 4 solid-state PNP N.O. outputs for signalling to PLC |
| 4 LEDs   |
| 24 V $\overline{\text{--}}$                          |

|  |
|--|
| 2 solid-state PNP (N.O.)                             |
| 1 PNP N.O. + 1 NPN N.O. output for signalling to PLC |
| 9 LEDs + 2-digit display                             |
| $\overline{\text{--}}$ 24 V                          |

|  |                     |
|--|---------------------|
| <b>Synchronization time between inputs</b> |                     |
| <b>Input channel voltage</b>               | 24 V/48 V version   |
|  | 115 V/230 V version |

|   |
|---|
| – |
| – |
| – |

|        |
|--------|
| –      |
| 24 V/– |
| –      |

Module type

**XPSCM**




**XPSLCD**

Pages

3/66

3/73





**For monitoring type 2 and type 4 light curtains**  
Compact and slim ranges

**For extending the number of safety contacts**



|  |
|--|
| <p>PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061</p> |
| <p>EN/IEC 61496-1, EN/IEC 61496-2, EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1</p>                |
| <p>UL, CSA, TÜV</p>  |

|   |
|---|
| <p>PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061 (when connected to the appropriate module)</p> |
| <p>EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1</p>   |
| <p>UL, CSA, BG</p>  |

|   |
|---|
| <p>PLe/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061 (when connected to the appropriate module)</p> |
| <p>EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1</p>   |
| <p>UL, CSA, TÜV</p>   |

|  |                          |  |
|--|--------------------------|--|
| 2 solid-state                              | 4 N.O.                   | 8 N.O.   |
| 1 PNP + 1 NPN output for signalling to PLC | 2 N.C.                   | 1 N.C.   |
| 14 LEDs + 2-digit display                  | 2 LEDs                   | 3 LEDs   |
| 24 V $\equiv$                              | $\sim$ and 24 V $\equiv$ | $\sim$ and 24 V $\equiv$<br>115 V $\sim$<br>230 V $\sim$ |
| 3 s or infinite                            | -                        | -  |
| -  | -                        | -  |
| -  | -                        | -  |

**XPSLCM**

**XPSECME**


**XPSECPE**

3/78

3/85

3/85

Applications



Modules

For the monitoring of applications requiring safety time delays

3



|  |
|--|
| <b>Maximum achievable safety level</b> |
| <b>Conformity to standards</b>         |
| <b>Product certifications</b>          |

|   |   |
|---|---|
| PLd/Category 3 conforming to EN/ISO 13849-1, SILCL2 conforming to EN/IEC 61508 and EN/IEC 62061 | PLd/Category 3 conforming to EN/ISO 13849-1, SILCL2 conforming to EN/IEC 61508 and EN/IEC 62061 |
| EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1  | EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1  |
| UL, CSA, TÜV  | UL, CSA, TÜV  |

|                           |
|---------------------------|
| <b>Number of circuits</b> |
| Safety                    |
| Additional                |
| <b>Display</b>            |
| <b>Supply voltage</b>     |

|   |                   |
|---|-------------------|
| 1 N.O. time delayed   | 1 N.O. pulse type |
| 2 N.C. + 2 solid-state outputs for signalling to PLC              |                   |
| 4 LEDs  |                   |
| ~ and 24 V $\overline{\text{DC}}$<br>115 V $\sim$<br>230 V $\sim$ |                   |

Synchronization time between inputs



|   |   |
|---|---|
| – | – |
|---|---|

Module type

|               |               |
|---------------|---------------|
| <b>XPSTSA</b> | <b>XPSTSW</b> |
|---------------|---------------|

Pages

|      |      |
|------|------|
| 3/89 | 3/89 |
|------|------|



**For coded magnetic switch monitoring** **For zero speed detection of AC or DC motors which produce a remanent voltage in their windings due to residual magnetism**

**For 2 max.** **For 6 max.**




|  |  |  |
|--|--|--|
| <p>PLe/Category 4 conforming to EN/ISO 13849-1<br/>SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061</p>    | <p>PLe/Category 4 conforming to EN/ISO 13849-1<br/>SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061</p>    | <p>PLd/Category 3 conforming to EN/ISO 13849-1,<br/>SILCL2 conforming to EN/IEC 61508 and EN/IEC 62061</p> |
| <p>EN/IEC 60204-1,<br/>EN 1088/ISO 14119,<br/>EN/IEC 60947-1,<br/>EN/IEC 60947-5-1,<br/>EN/IEC 60947-5-3</p> | <p>EN/IEC 60204-1,<br/>EN 1088/ISO 14119,<br/>EN/IEC 60947-1,<br/>EN/IEC 60947-5-1,<br/>EN/IEC 60947-5-3</p> | <p>EN/IEC 60204-1,<br/>EN/IEC 60947-1,<br/>EN/IEC 60947-5-1</p>  |
| <p>UL, CSA, TÜV</p>  | <p>UL, CSA, TÜV</p>  | <p>UL, CSA, TÜV</p>  |

|  |  |
|--|--|
| <p>2 N.O.</p>                                      | <p>1 N.O. + 1 N.C.</p>                             |
| <p>2 solid-state outputs for signalling to PLC</p> | <p>2 solid-state outputs for signalling to PLC</p> |
| <p>3 LEDs</p>                                      | <p>15 LEDs</p>                                     |
| <p>24 V</p>  | <p>24 V<br/>115 V<br/>230 V</p>                    |
| <p>500 ms</p>                                      | <p>-</p>   |

**XPSDMB** **XPSDME** **XPSVNE**

3/93 3/93 3/99

Applications



3

**Modules**

For dynamic monitoring of hydraulic valves on linear presses



**Functions**

PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061

**Conformity to standards**

EN 954-1 - category 4/EN/ISO 13849-1,  
EN/IEC 60204-1,  
EN/IEC 60947-5-1,  
EN 693,  
EN 50082-2

**Product certifications**

UL, CSA

**Number of circuits**

|            |                 |
|------------|-----------------|
| Safety     | 2 N.O. + 1 N.C. |
| Additional | -               |

2 N.O. + 1 N.C.  
-

**Display**

8 LEDs

**Supply voltage**

⎓ 24 V

**Synchronization time between inputs**

-



**Module type**

**XPSPVT**

**Pages**

3/105





**For dynamic monitoring of double-bodied solenoid valves**

**For safety stop at top dead center with automatic overtravel monitoring and control**



PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061

PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061

EN 954-1 - category 4/EN/ISO 13849-1,  
EN/IEC 60204-1,  
EN/IEC 60947-5-1,  
EN 692,  
EN 50082-2  
UL, CSA

EN 954-1 - category 4/EN/ISO 13849-1,  
EN/IEC 60204-1,  
EN/IEC 60947-5-1,  
EN 692,  
EN 50082-2  
UL, CSA

1 N.O. + 1 N.C.  
4 solid-state outputs for signalling to PLC  
8 LEDs  
— 24 V  
~ 115 V  
~ 230 V  
—

3 N.O.  
4 solid-state outputs for signalling to PLC  
8 LEDs  
—  
~ 115 V  
~ 230 V  
—


**XPSPVK**  
3/109

**XPSOT**  
3/114


**Electrical life**

Electrical life curves of safety contacts conforming to EN 60947-5-1, table C2


XPSAC, XPSTSA, XPSTSW, XPSBAE, XPSCM, XPSOT, XPSPVK, XPSPVT, XPSVNE

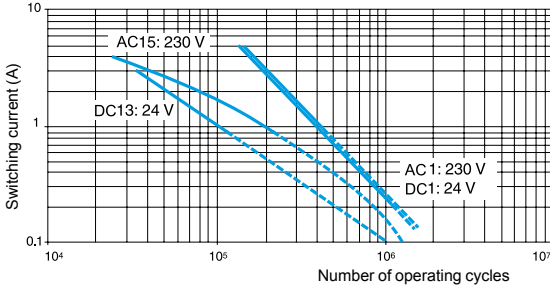


XPSAXE, XPSECME

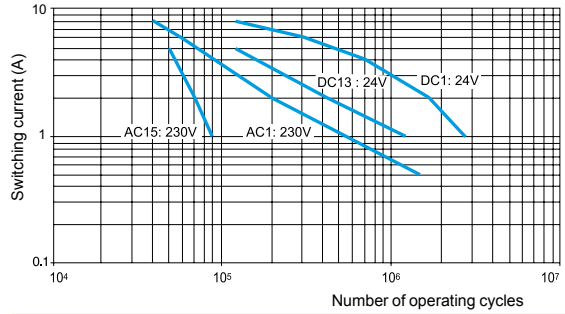

XPSATR

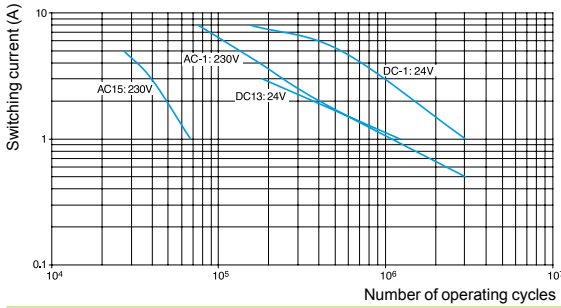


XPSECPE

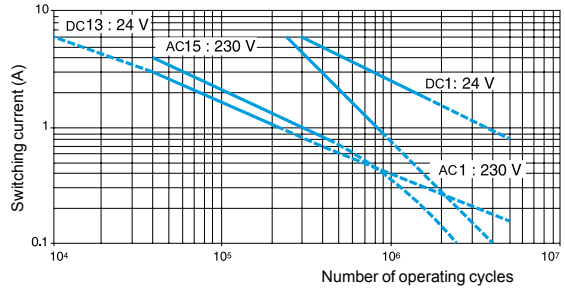


XPSATE


24 V ~ version

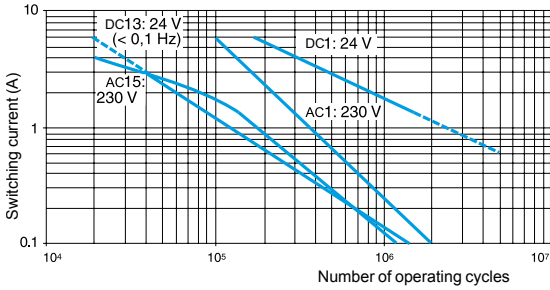


115 V ~ + 230 V ~ version

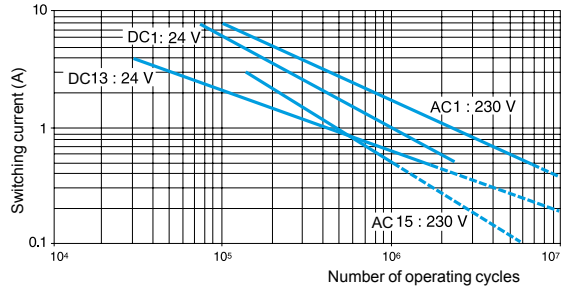

XPSAF, XPSAK, XPSAFL

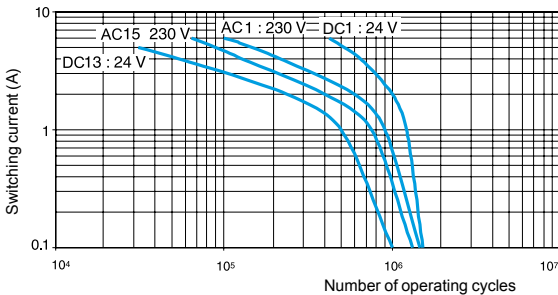


XPSAV, XPSMP, XPSVC, XPSBF, XPSMC

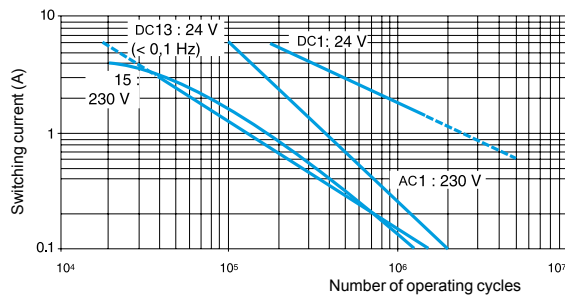


XPSABV

Contacts 13-14, 23-24

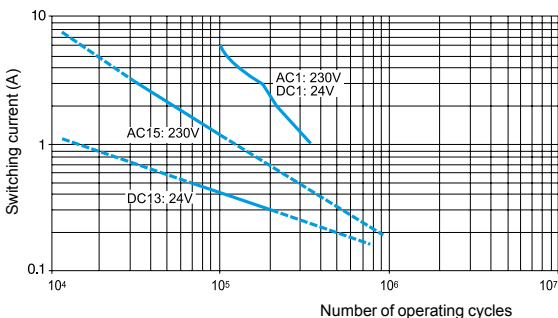


Contacts 37-38

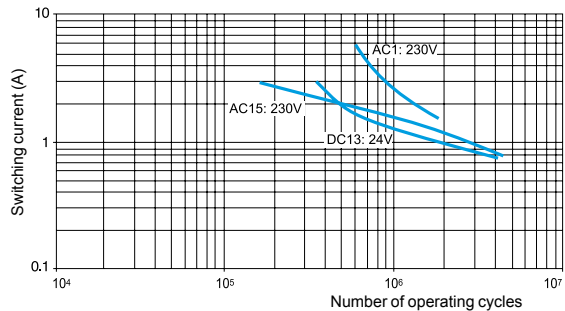


**Electrical life (continued)**

**Electrical life curves of safety contacts conforming to EN 60947-5-1, table C2**


**XPSBCE**

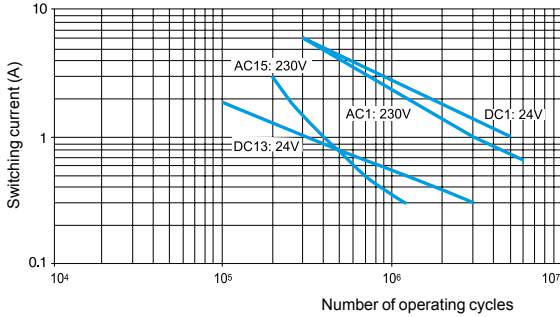

**XPSAR**

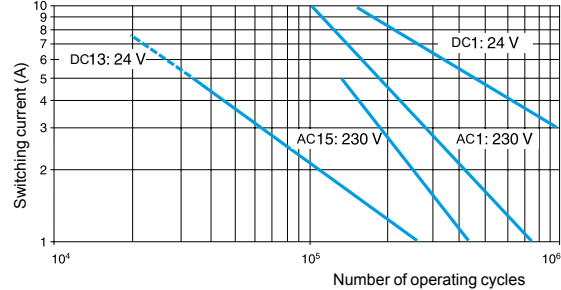

**XPSDMB, XPSDME**

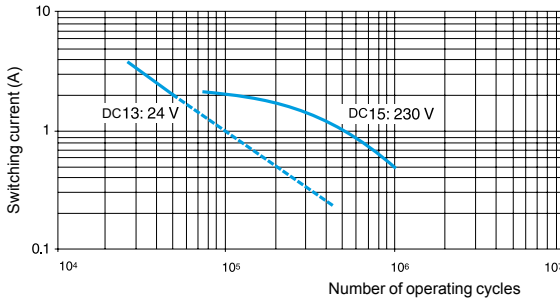

**Electrical life**

The product life expressed is based on average usage and normal operating conditions. The above statements are not intended to nor shall they create any express or implied warranties as to product operation or life. For information on the limited warranty offered on this product please refer to the Square D terms and conditions of sale found in the "Square D by Schneider Electric" Digest.

**Definition of tests**

**Determination of electrical life conforming to EN 60947-5-1 (table C2)**

| Type of current | Utilization category | Start-up            |                |                   | Breaking       |                |                   |
|-----------------|----------------------|---------------------|----------------|-------------------|----------------|----------------|-------------------|
|                 |                      | Current             | Voltage        | Cos φ             | Current        | Voltage        | Cos φ             |
| a.c. supply     | AC-15                | 10 x I <sub>e</sub> | U <sub>e</sub> | 0.7               | I <sub>e</sub> | U <sub>e</sub> | 0.4               |
| Type of current | Utilization category | Start-up            |                |                   | Breaking       |                |                   |
|                 |                      | Current             | Voltage        | T <sub>0.95</sub> | Current        | Voltage        | T <sub>0.95</sub> |
| d.c. supply     | DC-13                | I <sub>e</sub>      | U <sub>e</sub> | 50 ms             | I <sub>e</sub> | U <sub>e</sub> | 50 ms             |

I<sub>e</sub>: operational current measured. U<sub>e</sub>: operational voltage measured. Cos φ: power factor. T<sub>0.95</sub>: time taken to reach 95% of nominal current.

**Notes**

The tests are carried out with a frequency of 6 switching operations per minute and with no additional protection of the components connected to the safety outputs.

The use of additional protection for the components connected to the safety outputs significantly increases the durability of the safety outputs.

**Determination of the breaking capacity conforming to EN 60947-5-1 (table 4)**

| Utilization category | Start-up            |                |                   | Breaking       |                |                   | Total number of switching operations | Switching operations per minute for 1 to 1000 switching operations | Switching operations per minute for 1001 to 6050 switching operations | Minimum duration of switching operation |
|----------------------|---------------------|----------------|-------------------|----------------|----------------|-------------------|--------------------------------------|--|---|---|
|                      | Current             | Voltage        | Cos φ             | Current        | Voltage        | Cos φ             |                                      |  |   |   |
| AC-15                | 10 x I <sub>e</sub> | U <sub>e</sub> | 0.3               | I <sub>e</sub> | U <sub>e</sub> | 0.3               | 6050                                 | 60   | 6   | 50 ms                                   |
| Utilization category | Start-up            |                |                   | Breaking       |                |                   | Total number of switching operations | Switching operations per minute for 1 to 1000 switching operations | Switching operations per minute for 1001 to 6050 switching operations | Minimum duration of switching operation |
|                      | Current             | Voltage        | T <sub>0.95</sub> | Current        | Voltage        | T <sub>0.95</sub> |                                      |  |   |   |
| DC-13                | I <sub>e</sub>      | U <sub>e</sub> | 50 ms             | I <sub>e</sub> | U <sub>e</sub> | 50 ms             | 6050                                 | 60   | 6   | 50 ms                                   |

I<sub>e</sub>: operational current measured. U<sub>e</sub>: operational voltage measured. Cos φ: power factor. T<sub>0.95</sub>: time taken to reach 95% of nominal current.

**Notes**

The maximum values for the breaking capacity of the safety outputs in the various utilization categories are not fixed and depend on the power factor and on the switching frequency. The test definition for the "breaking capacity" and "durability" tables in the European standard EN 60947-5-1 uses different values for the power factor and the switching frequency.

The power factor (cos φ) in the "breaking capacity" table (0.3) is greater than that in the "durability" table (0.7).

In the "breaking capacity" table, the switching frequency of the safety outputs is higher for the first 1000 switching operations (60 per minute) than that for 1001 to 6050 switching operations (6 per minute).

Consequently, the maximum breaking capacity values determined using the "breaking capacity" table are lower than those in the "durability" table.

# Safety relays

## Preventa™ safety relay modules types XPSAC, XPSAXE

For Emergency stop and switch monitoring

### Operating principle

Safety relay modules XPSAC and XPSAXE are used for monitoring Emergency stop circuits conforming to standards EN/ISO 13850 and EN/IEC 60204-1 and also meet the requirements for the electrical monitoring of switches in protection devices conforming to standard EN 1088/ISO 14119. They provide protection for both the machine operator and the machine by immediately stopping the dangerous movement on receipt of a stop instruction from the operator, or on detection of an anomaly in the safety circuit itself.

To aid diagnostics, the modules have LEDs which provide information on the monitoring circuit status.

The XPSAC module has 3 safety outputs and a solid-state output for signaling to the PLC.  
The XPSAXE module has 3 safety outputs and a relay output for signaling to the PLC.

### Specifications

| Module type   |   | XPSAC, XPSAC●●●●P   | XPSAXE●●●●P, XPSAXE●●●●C  |
|---|---|---|---|
| Maximum achievable safety level                     |   | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061  | PL e/Category 4 conforming to EN/ISO 13849-1 SILCL 3 conforming to EN/IEC 62061   |
| Reliability data (1)                                | Mean Time To dangerous Failure (MTTF <sub>d</sub> )                                     | Years   | 210.4   |
|   | Diagnostic Coverage (DC)  | %   | > 99  |
|   | Probability of dangerous Failure per Hour (PFH <sub>d</sub> )                           | 1/h   | 3.56 x 10 <sup>-9</sup>   |
| Conformity to standards                             |   | EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1 | EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1   |
| Product certifications                              |   | UL, CSA, TÜV  | UL, CSA, BG   |
| Supply  | Voltage   | V   | ~ and 24 ---, 48 ~, 115 ~, 230 ~  |
|   | Voltage limits  |   | - 20 to + 10% (24 V ~)<br>- 20 to + 20% (24 V ---)<br>- 15 to + 10% (48 V ~)<br>- 15 to + 15 % (115 V)<br>- 15 to + 10% (230 V) |
|   | Frequency   | Hz  | 50/60   |
| Power consumption                                   |   | W   | < 1.2 (24 V ---)  |
|   |   | VA  | < 2.5 (24 V ~)<br>< 6 (48 V ~)<br>< 7 (115 V ~)<br>< 6 (230 V ~)  |
| Start button monitoring                             |   | No  | No  |
| Control unit voltage (at nominal supply voltage)    |   | Identical to supply voltage   |   |
|   | 24 V version  | V   | 24 ~ (approx. 90 mA), 24 --- (approx. 40 mA)  |
|   | 48 V version  | V   | 48 ~ (approx. 100 mA)   |
|   | 115 V version   | V   | 115 ~ (approx. 60 mA)   |
|   | 230 V version   | V   | 230 ~ (approx. 25 mA)   |
| Outputs   | Voltage reference   |   | Relay hard contacts   |
|   | Number and type of safety circuits  |   | 3 N.O. (13-14, 23-24, 33-34)  |
|   | Number and type of additional circuits  |   | 1 solid-state   |
|   | Breaking capacity in AC-15  | VA  | C300: inrush 1800, maintained 180   |
|   | Breaking capacity in DC-13  |   | 24 V/2 A L/R = 50 ms  |
|   | Max. thermal current (I <sub>the</sub> )  | A   | 6   |
|   | Max. total thermal current  | A   | 10.5  |
|   | Output fuse protection, using fuses conforming to IEC/EN 947-5-1, DIN VDE 0660 part 200 | A   | 4 gG (gl) or 6 fast acting  |
|   | Minimum current   | mA  | 10  |
|   | Minimum voltage   | V   | 17  |
| Electrical life                                     |   | See page 3/16   |   |
| Response time on input opening                      |   | ms  | < 100   |
| Rated insulation voltage (U <sub>i</sub> )          |   | V   | 300 (degree of pollution 2 conforming to IEC/EN 60947-5-1, DIN VDE 0110 parts 1 & 2)  |
| Rated impulse withstand voltage (U <sub>imp</sub> ) |   | kV  | 3 (overvoltage category III, conforming to IEC/EN 60947-5-1, DIN VDE 0110 parts 1 & 2)  |
| LED display   |   |   | 2   |
| Operating temperature                               |   | °F (°C)   | + 14 to + 131 (- 10 to + 55)  |
| Storage temperature                                 |   | °F (°C)   | - 13 to +185 (- 25 to + 85)   |
| Degree of protection conforming to IEC/EN 60529     | Terminals   |   | IP 20   |
|   | Enclosure   |   | IP 40   |

(1) Per EN/ISO 13849-1 and EN/IEC 62061



## Safety relays





Preventa™ safety relay modules  
types XPSAC, XPSAXE

For Emergency stop and switch monitoring

### Specifications (continued)

| Module type       |                   |                | XPSAC   | XPSAC●●●●P  | XPSAXE●●●●P  | XPSAXE●●●●C  |
|-------------------|-------------------|----------------|---|---|--|--|
| Connection        | Type              | Terminals      | Captive screw clamp terminals   | Captive screw clamp terminals   | Captive screw clamp terminals  | Spring terminals   |
|                   |                   | Terminal block | Integrated in module  | Removable from module   | Removable from module  | Removable from module  |
| 1-wire connection | Without cable end |                | Solid or flexible cable: 26-14 AWG (0.14 to 2.5 mm <sup>2</sup> )           | Solid or flexible cable: 24-14 AWG (0.2 to 2.5 mm <sup>2</sup> )  |  |  |
|                   |                   | With cable end | Without bezel, flexible cable: 24-14 AWG (0.25 to 2.5 mm <sup>2</sup> )     |   |  |  |
|                   | With cable end    |                | With bezel, flexible cable: 24-16 AWG (0.25 to 1.5 mm <sup>2</sup> )        | With bezel, flexible cable: 0.25 to 2.5 mm <sup>2</sup>   | With bezel, flexible cable: 24-16 AWG (0.25 to 1.5 mm <sup>2</sup> ) | With bezel, flexible cable: 24-14 AWG (0.25 to 2.5 mm <sup>2</sup> )     |
|                   |                   |                |   |   |  |  |
| 2-wire connection | Without cable end |                | Solid or flexible cable: 26-20 AWG (0.14 to 0.75 mm <sup>2</sup> )          | Solid cable: 24-18 AWG (0.2 to 1 mm <sup>2</sup> ), flexible cable: 24-16 AWG (0.2 to 1.5 mm <sup>2</sup> ) | Solid or flexible cable: 24-18 AWG (0.2 to 1 mm <sup>2</sup> )       | –  |
|                   |                   | With cable end | Without bezel, flexible cable: 24-18 AWG (0.25 – 1.0 mm <sup>2</sup> )      |   |  |  |
|                   | With cable end    |                | Double, with bezel, flexible cable: 20-16 AWG (0.5 to 1.5 mm <sup>2</sup> ) |   |  |  |
|                   |                   |                |   |   |  | Double, with bezel, flexible cable: 0-18 AWG (0.5 to 1 mm <sup>2</sup> ) |

### References

|  | Description  | Connection  | Number of instantaneous opening safety circuits | Additional outputs | Supply        | Reference   | Weight oz (kg) |
|--|--|---|---|--------------------|---------------|-------------|----------------|
| <br>XPSAC●●●●    | <b>Safety modules for Emergency stop and switch monitoring</b> | Captive screw clamp terminals<br>Terminal block integrated in module  | 3   | 1 solid-state      | ~ and ☐, 24 V | XPSAC5121   | 5.643 (0.160)  |
|  |  |   |   |                    | 48 V ~        | XPSAC1321   | 7.408 (0.210)  |
|  |  |   |   |                    | 115 V ~       | XPSAC3421   | 7.408 (0.210)  |
|  |  |   |   |                    | 230 V ~       | XPSAC3721   | 7.408 (0.210)  |
| <br>XPSAC●●●●P  |  | Captive screw clamp terminals<br>Terminal block removable from module | 3   | 1 solid-state      | ~ and ☐, 24 V | XPSAC5121P  | 5.643 (0.160)  |
|  |  |   |   |                    | 48 V ~        | XPSAC1321P  | 7.408 (0.210)  |
|  |  |   |   |                    | 115 V ~       | XPSAC3421P  | 7.408 (0.210)  |
|  |  |   |   |                    | 230 V ~       | XPSAC3721P  | 7.408 (0.210)  |
| <br>XPSAXE5120P |  |   |   | 1 relay            | ~ and ☐, 24 V | XPSAXE5120P | 8.078 (0.229)  |
|  |  |   |   |                    |               |             |                |
| <br>XPSAXE5120C |  |   | 3   | 1 relay            | ~ and ☐, 24 V | XPSAXE5120C | 8.078 (0.229)  |
|  |  |   |   |                    |               |             |                |


# Safety relays

Preventa™ safety relay modules type XPSAC  
For Emergency stop and switch monitoring


3

### XPSAC


Module XPSAC associated with an Emergency stop button with 1 N.C. contact

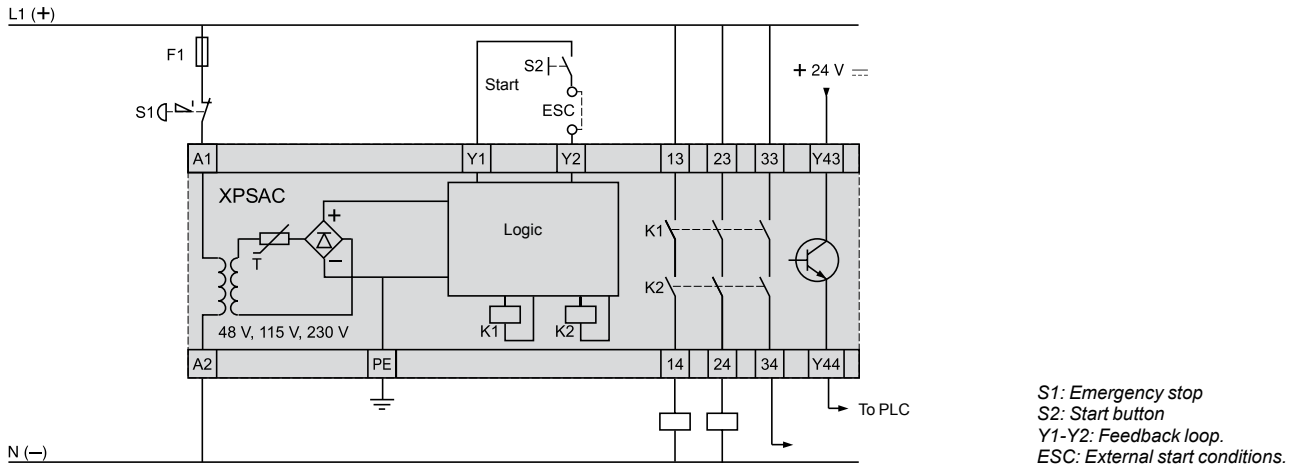


Module XPSAC associated with an Emergency stop button with 2 N.C. contacts (recommended application)

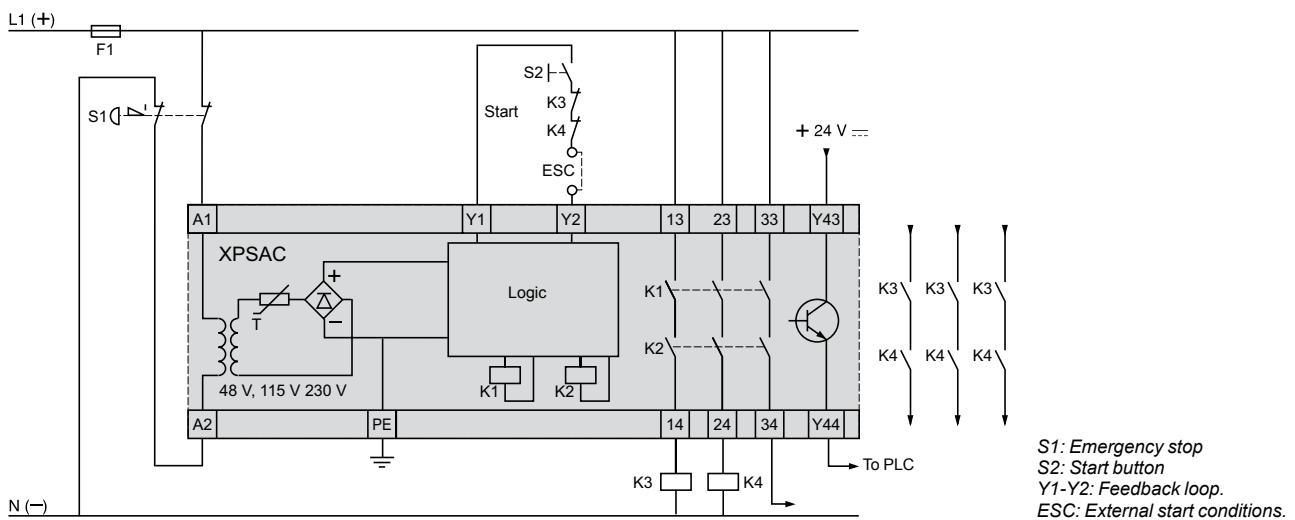

### Functional diagram of module XPSAC

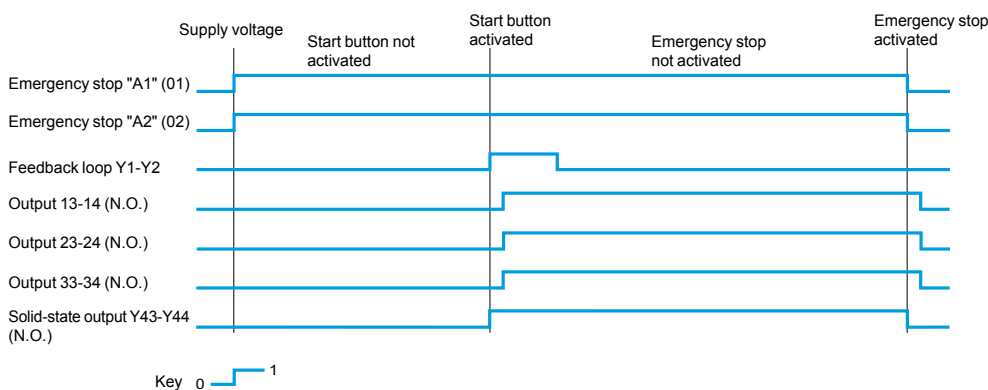

### LED details




- 1 Supply voltage A1-A2.
- 2 K1-K2 status (N.O. safety outputs closed).


# Safety relays

Preventa™ safety relay modules type XPSAXE  
For Emergency stop and switch monitoring


**XPSAXE**  
Module XPSAXE associated with an Emergency stop button with 1 N.C. contact

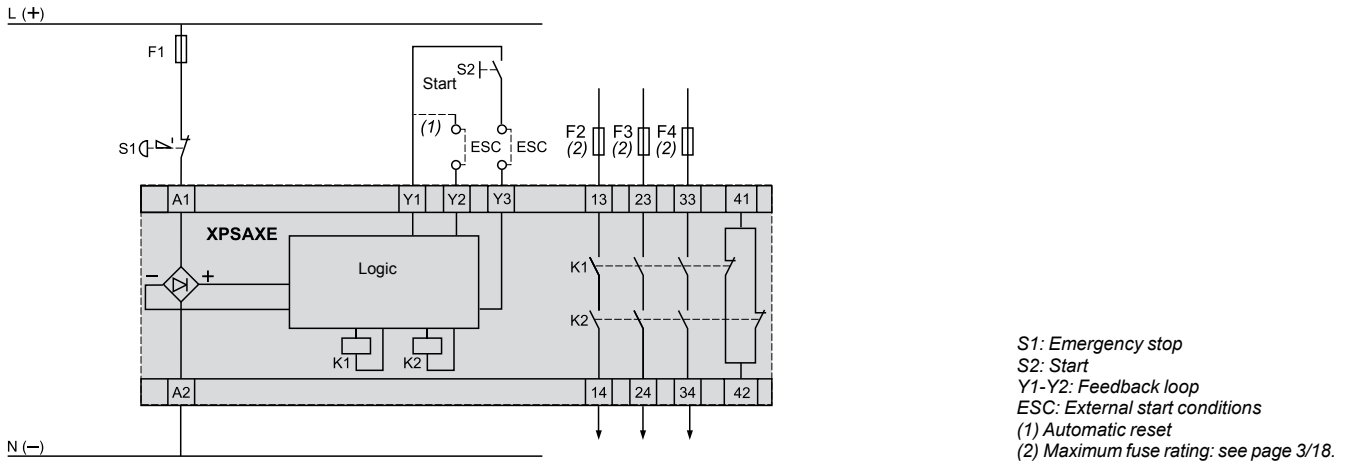

Module XPSAXE associated with an Emergency stop button with 2 N.C. contacts (recommended application)

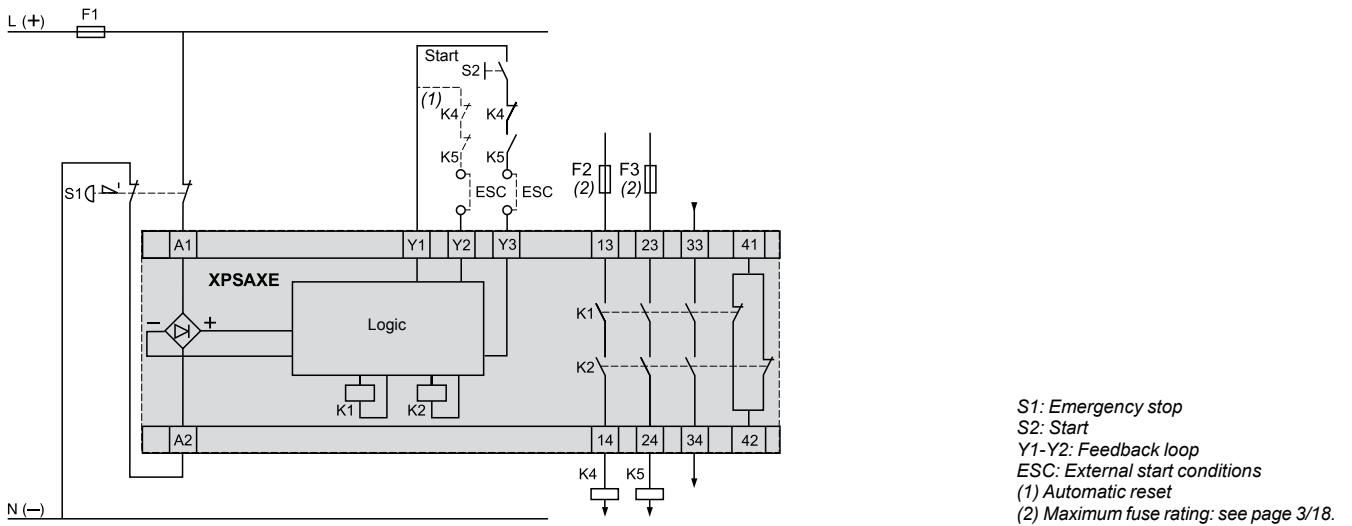

**Functional diagram of module XPSAXE**

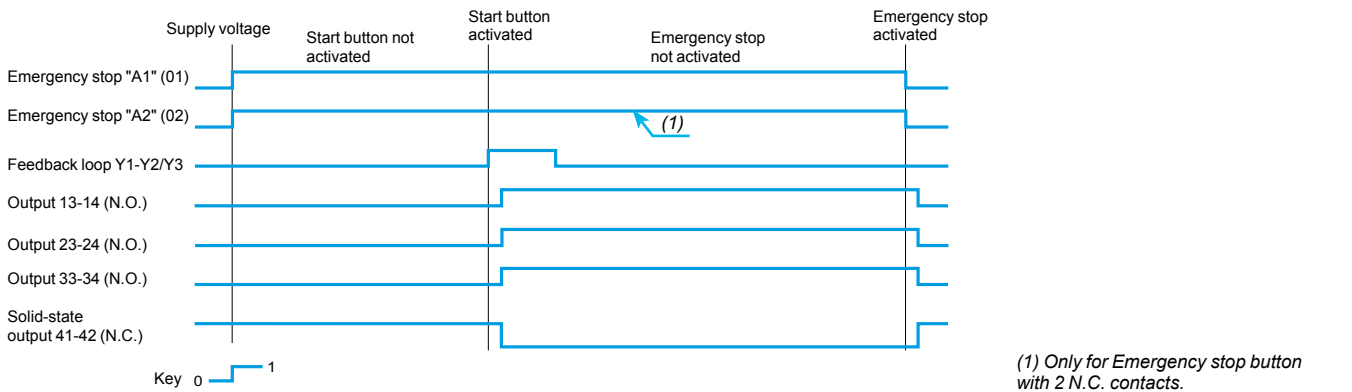

**LED details**



# Safety relays

Preventa™ safety relay modules  
types XPSAV, XPSABV, XPSATE  
For Emergency stop and switch monitoring

## Operating principle

Safety relay modules XPSAV, XPSABV and XPSATE are used for monitoring Emergency stop circuits conforming to standards EN/ISO 13850 and EN/IEC 60204-1 and also meet the requirements for the electrical monitoring of switches in protection devices conforming to standard EN 1088 / ISO 14119.

They provide protection for both the machine operator and the machine by immediately stopping the dangerous movement on receipt of a stop instruction from the operator, or on detection of an anomaly in the safety circuit itself.

In addition to the stop category 0 instantaneous opening safety outputs (3 for XPSAV, 2 for XPSABV and 2 for XPSATE), the modules incorporate stop category 1 time delay outputs (3 for XPSAV, 1 for XPSABV and 3 for XPSATE) which allow for controlled deceleration of the motor components until a complete stop is achieved (for example, motor braking by variable speed drive).

At the end of the preset delay, the supply is disconnected by opening the time delay output circuits.

For module XPSAV, the time delay of the 3 output circuits is adjustable, in 15 preset values, between 0 and 300 seconds using selector buttons.

For module XPSABV, the time delay of the output circuit is adjustable between 0.15 and 3 seconds or 1.5 and 30 seconds, depending on the model, using a selector switch.

For module XPSATE, the time delay of the 3 output circuits is adjustable between 0 and 30 seconds using a 12-position selector switch.

Module XPSAV also incorporates 3 solid-state signaling outputs for signaling to the process PLC.

Module XPSATE incorporates 4 solid-state signaling outputs for signaling to the process PLC.

To aid diagnostics, the modules have LEDs which provide information on the monitoring circuit status.

The Start button monitoring function is configurable depending on the wiring.

## Specifications

| Module type   |   | XPSAV11113,<br>XPSAV1113P  | XPSABV●●●●C,<br>XPSABV●●●●P  | XPSATE●●●●,<br>XPSATE●●●●P   |  |
|---|---|--|--|--|--|
| <b>Maximum achievable safety level</b>                        |   | PL e/Category 4 conforming to EN/ISO 13849-1 SILCL 3 (instantaneous safety outputs and time delay safety outputs) conforming to EN/IEC 62061 | PL e/Category 4 (instantaneous safety outputs) and PL d/Category 3 (time delay safety outputs) conforming to EN/ISO 13849-1, SILCL 3 (instantaneous safety outputs) and SILCL 2 (time delay safety outputs) conforming to EN/IEC 62061 | PL e/Category 4 (instantaneous safety outputs) and PL d/Category 3 (time delay safety outputs) conforming to EN/ISO 13849-1, SILCL 3 (instantaneous safety outputs) and SILCL 2 (time delay safety outputs) conforming to EN/IEC 62061 |  |
| <b>Reliability data (1)</b><br>(instantaneous safety outputs) | Mean Time To dangerous Failure (MTTF <sub>d</sub> )           | Years  | 75.8   | 53   | 134.8  |
|   | Diagnostic coverage (DC)                                      | %  | > 99   | > 99   | > 99   |
|   | Probability of dangerous Failure per Hour (PFH <sub>d</sub> ) | 1/h  | 7.95 x 10 <sup>-9</sup>  | 3 x 10 <sup>-8</sup>   | 6.81 x 10 <sup>-9</sup>  |
| <b>Reliability data (1)</b><br>(time delay safety outputs)    | Mean Time To dangerous Failure (MTTF <sub>d</sub> )           | Years  | 75.8   | 53   | 54.5   |
|   | Diagnostic coverage (DC)                                      | %  | > 99   | > 60 and < 90  | 98.4   |
|   | Probability of dangerous Failure per Hour (PFH <sub>d</sub> ) | 1/h  | 7.95 x 10 <sup>-9</sup>  | 2 x 10 <sup>-7</sup>   | 1.96 x 10 <sup>-8</sup>  |
| <b>Conformity to standards</b>                                |   | EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1, EN/ISO 13850, EN 1088/ISO 14119,   | EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1, EN/ISO 13850, EN 1088/ISO 14119  | EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1, EN/ISO 13850, EN 1088/ISO 14119  |  |
| <b>Product certifications</b>                                 |   | UL, CSA, TÜV   | UL, CSA, BG  | UL, CSA, TÜV   |  |
| <b>Supply</b>   | Voltage   | V  | 24 ---   | 24 ---   | ~ and 24 ---, 115 ~, 230 ~   |
|   | Voltage limits  |  | - 20 to + 20%  | - 15 to + 10%  | - 20 to + 10% (24 V)<br>- 15 to + 15% (115 V)<br>- 15 to + 10% (230 V) |
|   | Frequency   | Hz   | –  | –  | 50/60  |
| <b>Power consumption</b>                                      |   | W  | < 5  | < 3  | < 8  |
| <b>Module inputs fuse protection</b>                          |   | Internal, electronic   |  |  |  |
| <b>Adjustable time delay</b>                                  |   | s  | 0 to 300   | 0.15 to 3 or 1.5 to 30   | 0 to 30  |
| <b>Start button monitoring</b>                                |   | Yes/No (configurable by terminal wiring diagrams)  |  |  |  |
| <b>Control unit voltage</b><br>(at nominal supply voltage)    |   |  | Between input terminals S21-S22, S31-S32 or S11-S12  | Between input terminals S11-S12, S21-S22 or S11-S31  | Between input terminals S11-S12, S21-S22 or S11-B1                     |
|   | 24 V version  | V  | 24   | 24   | 24   |
|   | 115 V, 230 V version  | V  | –  | –  | 48   |

(1) Per EN/ISO 13849-1 and EN/IEC 62061

# Safety relays

Preventa™ safety relay modules  
types XPSAV, XPSABV, XPSATE

For Emergency stop and switch monitoring

| Specifications (continued)                                  |   |                       |  |   |  |   |  |   |  |
|---|---|-----------------------|--|---|--|---|--|---|--|
| Module type   |   | XPS...                | AV11113  | AV11113P  | ABV.....P  | ABV.....C   | ATE.....   | ATE.....P   |  |
| Calculation of wiring resistance RL between input terminals |   | Ω                     | 100 max.<br>Maximum cable length:<br>2000 m  |   | $RL = \frac{U_e}{U_n} \times 160-127$<br><br>Ue = true voltage applied to terminals A1-A2<br>Un = nominal supply voltage |   | $RL \text{ max.} = \frac{U_{int} - U_{min.}}{I \text{ min.}}$<br><br>Ue = true voltage applied to terminals A1-A2<br>U int (terminals S11-S21) = supply voltage Ue - 3 V (24 V version)<br>U int between 42 V and 45 V, with typical value = 45 V (115 V, 230 V version)<br>Calculated max. RL must be equal to or greater than the true value |   |  |
| Synchronization time between inputs                         |   | s                     | For guard: 1.5<br>For Emergency stop:<br>unlimited                                     |   | < 0.5  |   | Approx. 0.075<br>For automatic start, terminals S33-Y2 and Y3-Y4 linked  |   |  |
| Outputs   | Voltage reference   |                       | Relay hard contacts  |   |  |   |  |   |  |
|   | No. and type of instantaneous opening safety circuits                                     |                       | 3 N.O. (03-04, 13-14, 23-24)   |   | 2 N.O. (13-14, 23-24)  |   | 2 N.O. (13-14, 23-24, 33-34)   |   |  |
|   | No. and type of time delay opening safety circuits  |                       | 3 N.O. (37-38, 47-48, 57-58)   |   | 1 N.O. (37-38)   |   | 3 N.O. (57-58, 67-68, 77-78)   |   |  |
|   | Number and type of additional circuits  |                       | 3 solid-state  |   | –  |   | 4 solid-state  |   |  |
|   | Breaking capacity in AC-15  | Instantaneous outputs | VA   | C300: inrush 1800, maintained 180   |  | B300: inrush 3600, maintained 360                       |  | C300: inrush 1800, maintained 180   |  |
|   |   | Time delay outputs    | VA   | C300: inrush 1800, maintained 180   |  | B300: inrush 3600, maintained 360                       |  | C300: inrush 1800, maintained 180   |  |
|   | Breaking capacity in DC-13  | Instantaneous outputs |  | 24 V/1.25 A L/R = 50 ms   |  | 24 V/1.5 A L/R = 50 ms                                  |  | 24 V/1.0 A L/R = 50 ms  |  |
|   |   | Time delay outputs    |  | 24 V/1.25 A L/R = 50 ms   |  | 24 V/1.5 A L/R = 50 ms                                  |  | 24 V/1.0 A L/R = 50 ms  |  |
|   | Breaking capacity of solid-state outputs  |                       |  | 24 V/20 mA  |  | –   |  | –   |  |
|   | Max. thermal current (Ithe)   | Instantaneous outputs | A  | 3.3 for all 3, or 6 for 1 and 2 for 2, or 4 for 2 and 2 for 1                       |  | 6   |  | 5   |  |
|   |   | Time delay outputs    | A  | 3.3 for all 3, or 6 for 1 and 2 for 2, or 4 for 2 and 2 for 1                       |  | 6   |  | 2.5   |  |
|   | Max. total thermal current  |                       | A  | 20  |  | 12  |  | 8   |  |
|   | Output fuse protection, using fuses conforming to IEC/EN 60947-5-1, DIN VDE 0660 part 200 | Instantaneous outputs | A  | 4 gG or 6 fast acting   |  | 6 gG  |  | 6 gG  |  |
|   |   | Time delay outputs    | A  | 4 gG or 6 fast acting   |  | 6 gG  |  | 4 gG  |  |
| Minimum current   |   | mA                    | 10 (1)   |   | 10   |   | 10 (1)   |   |  |
| Minimum voltage   |   | V                     | 17 (1)   |   | 17   |   | 17 (1)   |   |  |
| Electrical life   |   |                       | See page 3/16  |   |  |   |  |   |  |
| Response time on instantaneous opening inputs               |   | ms                    | < 30   |   | < 200  |   | < 20   |   |  |
| Rated insulation voltage (Ui)                               |   | V                     | 300 (degree of pollution 2 conforming to IEC/EN 60947-5-1, DIN VDE 0110 parts 1 & 2)   |   |  |   |  |   |  |
| Rated impulse withstand voltage (Uimp)                      |   | kV                    | 4 (overvoltage category III, conforming to IEC/EN 60947-5-1, DIN VDE 0110 parts 1 & 2) |   |  |   |  |   |  |
| LED display   |   |                       | 11   |   | 3  |   | 4  |   |  |
| Operating temperature                                       |   | °F (°C)               | + 14 to + 131 (- 10 to + 55)   |   | - 13 to +131 (- 25 to + 55)  |   | + 14 to + 131 (- 10 to + 55)   |   |  |
| Storage temperature   |   | °F (°C)               | - 13 to +185 (- 25 to + 85)  |   | - 13 to +167 (- 25 to + 75)  |   | - 13 to +185 (- 25 to + 85)  |   |  |
| Degree of protection conforming to IEC/EN 60529             | Terminals   |                       | IP 20  |   |  |   |  |   |  |
|   | Enclosure   |                       | IP 40  |   |  |   |  |   |  |
| Wiring diagrams   | Type of terminals   |                       | Captive screw clamp terminals  |   |  | Spring terminals  | Captive screw clamp terminals  |   |  |
|   | Type of terminal block  |                       | Integrated in module   | Removable from module   |  |   |  |   |  |
| 1-wire connection   | Without cable end   |                       | Solid or flexible cable: 26-14 AWG (0.14 to 2.5 mm²)                                   | Solid or flexible cable: 24-14 AWG (0.2 to 2.5 mm²)                                 |  |   | Solid or flexible cable: 26-14 AWG (0.14 to 2.5 mm²)   | Solid or flexible cable: 24-14 AWG (0.25 to 2.5 mm²)                                |  |
|   | With cable end  |                       | Without bezel, flexible cable: 24-14 AWG (0.25 to 2.5 mm²)                             |   |  |   |  |   |  |
| 2-wire connection   | Without cable end   |                       | With bezel, flexible cable: 24-16 AWG (0.25 to 1.5 mm²)                                | With bezel, flexible cable: 24-14 AWG (0.25 to 2.5 mm²)                             | With bezel, flexible cable: 24-16 AWG (0.25 to 1.5 mm²)  | With bezel, flexible cable: 24-14 AWG (0.25 to 2.5 mm²) | With bezel, flexible cable: 24-16 AWG (0.25 to 1.5 mm²)  | With bezel, flexible cable: 24-14 AWG (0.25 to 2.5 mm²)                             |  |
|   |   |                       | Solid or flexible cable: 26-20 AWG (0.14 to 0.75 mm²)                                  | Solid cable: 24-18 AWG (0.2 to 1 mm²)<br>Flexible cable: 24-16 AWG (0.2 to 1.5 mm²) | Solid or flexible cable: 24-18 AWG (0.2 to 1 mm²)  | –   | Solid or flexible cable: 24-18 AWG (0.25 to 1 mm²)   | Solid cable: 24-18 AWG (0.2 to 1 mm²)<br>Flexible cable: 24-16 AWG (0.2 to 1.5 mm²) |  |
|   | With cable end  |                       | Without bezel, flexible cable: 24-18 AWG (0.25 to 1 mm²)                               |   |  | –   | Without bezel, flexible cable: 24-18 AWG (0.25 to 1 mm²)   |   |  |
|   |   |                       | Double, with bezel, flexible cable: 20-16 AWG (0.5 to 1.5 mm²)                         |   | Double, with bezel, flexible cable: 20-18 AWG (0.5 to 1 mm²)   |   | Double, with bezel, flexible cable: 20-16 AWG (0.5 to 1.5 mm²)   |   |  |

(1) The module is also capable of switching low power loads (17 V/10 mA) provided that the contact has not been used for switching high power loads (possible contamination or wear of the gold layer on the contact tips).

# Safety relays

Preventa™ safety relay modules  
types XPSAV, XPSABV, XPSATE

For Emergency stop and switch monitoring

## References

| Description   | Number of safety circuits     | Additional outputs | Setting range of time delay | Supply                               | Connection  | Reference           | Weight oz (kg)    |
|---|-------------------------------|--------------------|-----------------------------|--------------------------------------|---|---------------------|-------------------|
| Safety modules for Emergency stop and switch monitoring | 6 N.O.<br>(3 N.O. time delay) | 3 solid-state      | 0 to 300 s                  | 24 V $\overline{\text{---}}$         | Captive screw clamp terminals<br>Terminal block integrated in module  | <b>XPSAV11113</b>   | 11.288<br>(0.320) |
|   | 6 N.O.<br>(3 N.O. time delay) | 3 solid-state      | 0 to 300 s                  | 24 V $\overline{\text{---}}$         | Captive screw clamp terminals<br>Terminal block removable from module | <b>XPSAV11113P</b>  | 11.288<br>(0.320) |
|   | 3 N.O.<br>(1 N.O. time delay) | –                  | 0.15 to 3 s                 | 24 V $\overline{\text{---}}$         | Captive screw clamp terminals<br>Terminal block removable from module | <b>XPSABV1133P</b>  | 9.877<br>(0.280)  |
|   |                               |                    |                             | 24 V $\overline{\text{---}}$         | Spring terminals<br>Terminal block removable from module              | <b>XPSABV1133C</b>  | 9.700<br>(0.275)  |
|   |                               |                    | 1.5 to 30 s                 | 24 V $\overline{\text{---}}$         | Captive screw clamp terminals<br>Terminal block removable from module | <b>XPSABV11330P</b> | 9.877<br>(0.280)  |
|   |                               |                    |                             | 24 V $\overline{\text{---}}$         | Spring terminals<br>Terminal block removable from module              | <b>XPSABV11330C</b> | 9.700<br>(0.275)  |
|   | 5 N.O.<br>(3 N.O. time delay) | 4 solid-state      | 0 to 30 s                   | $\sim$ /24 V $\overline{\text{---}}$ | Captive screw clamp terminals<br>Terminal block integrated in module  | <b>XPSATE5110</b>   | 9.877<br>(0.280)  |
|   |                               |                    |                             |                                      | Captive screw clamp terminals<br>Terminal block removable from module | <b>XPSATE5110P</b>  | 9.877<br>(0.280)  |
|   |                               |                    |                             | 115 V $\sim$                         | Captive screw clamp terminals<br>Terminal block integrated in module  | <b>XPSATE3410</b>   | 13.404<br>(0.380) |
|   |                               |                    |                             |                                      | Captive screw clamp terminals<br>Terminal block removable from module | <b>XPSATE3410P</b>  | 13.404<br>(0.380) |
|   |                               |                    |                             | 230 V $\sim$                         | Captive screw clamp terminals<br>Terminal block integrated in module  | <b>XPSATE3710</b>   | 13.404<br>(0.380) |
|   |                               |                    |                             |                                      | Captive screw clamp terminals<br>Terminal block removable from module | <b>XPSATE3710P</b>  | 13.404<br>(0.380) |



XPSAV11113



XPSAV11113P



XPSABV●●●●P



XPSABV●●●●C




XPSATE5110



# Safety relays


Preventa™ safety relay modules type XPSAV  
For Emergency stop and switch monitoring

**XPSAV**  
Module XPSAV associated with an Emergency stop button with 1 N.C. contact, automatic start or unmonitored start

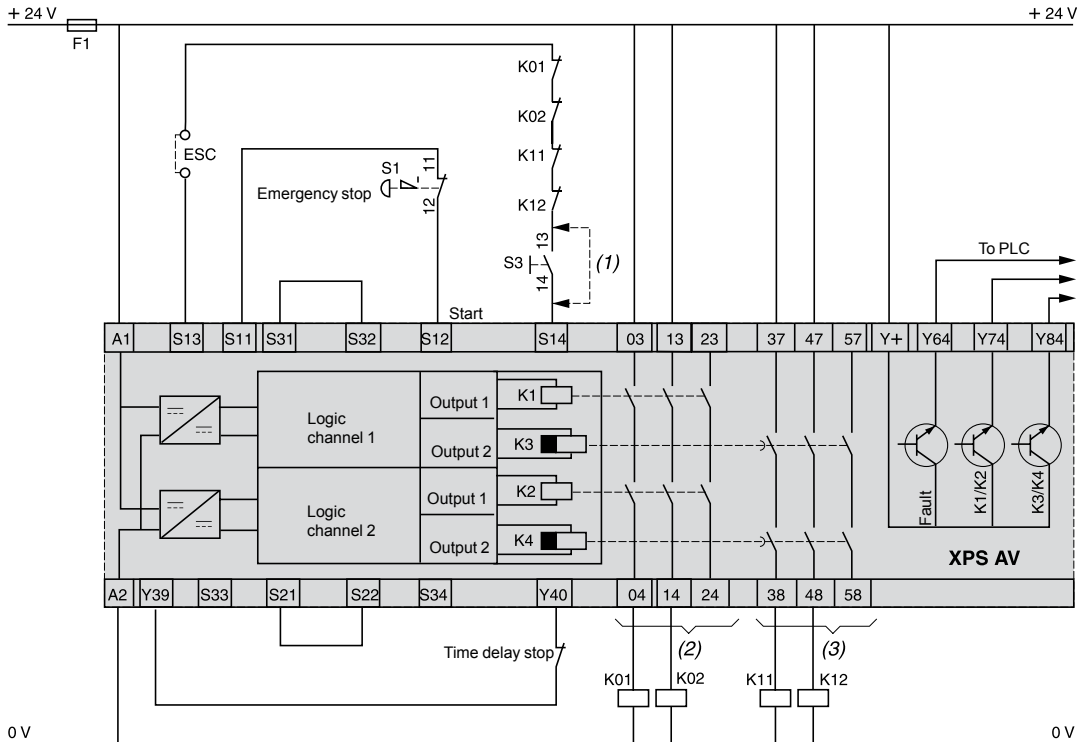

- (1) Link for automatic start.
  - (2) Instantaneous opening safety outputs (stop category 0).
  - (3) Time delay opening safety outputs (stop category 1).
- ESC = External start conditions.

**Functional diagrams**

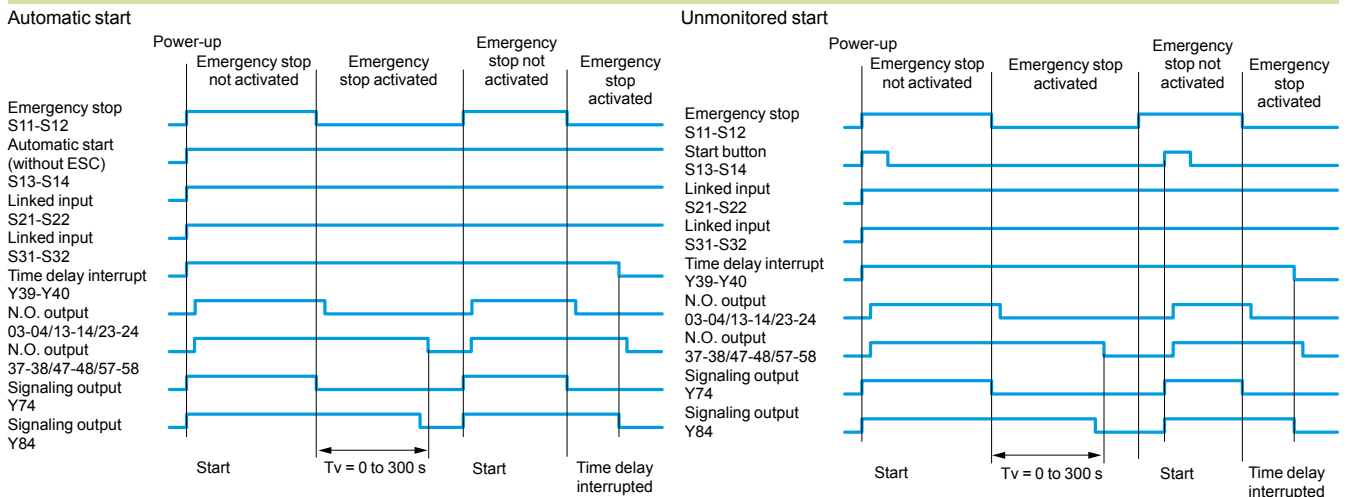

**Automatic start**

There is no start contact or it is jumpered (wiring between terminals S13 - S14).  
Note: Automatic start function is not available on the XPSAV with 2 channel wiring on the inputs. Automatic start function is only available on single channel wiring on the inputs.

**Unmonitored start**

The output is activated on closing of the start contact.

**Monitored start**

The start input is monitored so that there is no start-up in the event of the start contact being jumpered or the start circuit being closed for more than 10 seconds. Start-up is triggered following activation of the start button (push-release function) on opening of the contact (wiring between terminals S33-S34).


# Safety relays

Preventa™ safety relay modules type XPSAV  
For Emergency stop and switch monitoring

3

**XPSAV**


Module XPSAV associated with an Emergency stop button with 2 N.C. contacts, monitored start\*

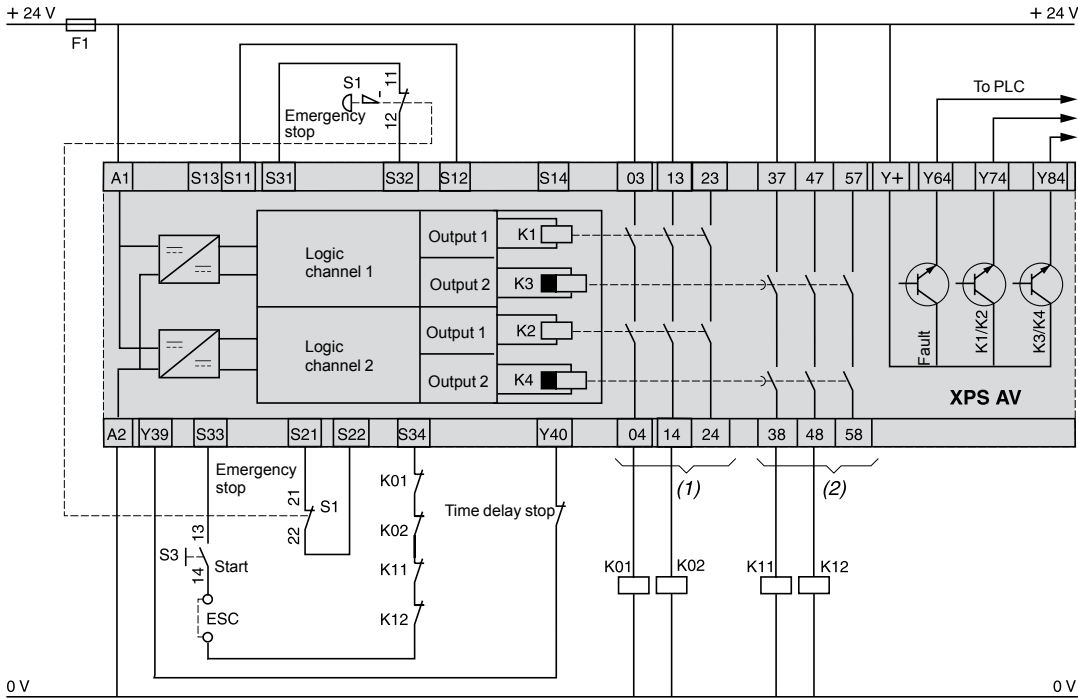

(1) Instantaneous opening safety outputs (stop category 0).  
(2) Time delay opening safety outputs (stop category 1).  
ESC = External start conditions.


\*Automatic start function is not available on the XPSAV with 2 channel wiring on the inputs. Automatic start function is only available on single channel wiring on the inputs.

**Functional diagram**

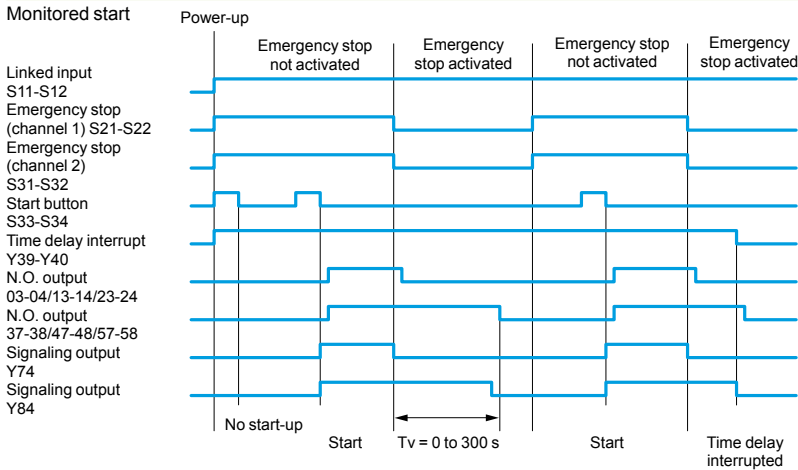


**Emergency stop monitoring function configuration**

1-channel wiring




2-channel wiring, with short-circuit detection



# Safety relays


Preventa™ safety relay modules type XPSAV  
For Emergency stop and switch monitoring

**XPSAV**  
Monitoring of a movable guard associated with 2 switches  
Automatic start (diagram shown for guard closed)

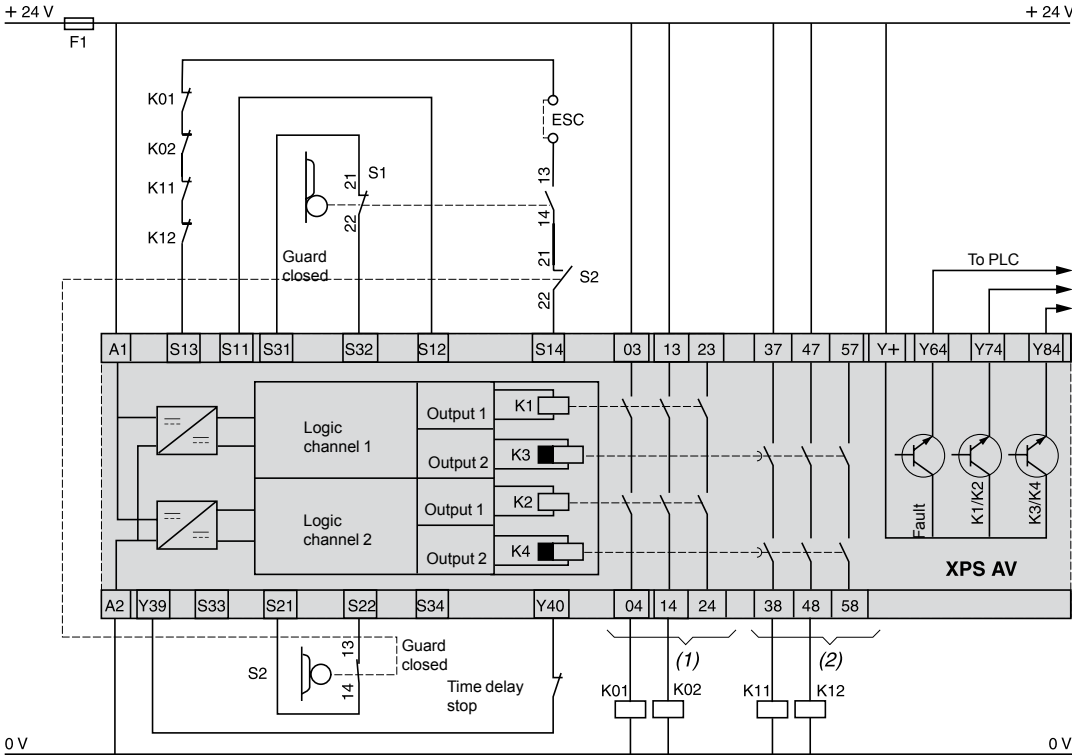


(1) Instantaneous opening safety outputs (stop category 0).  
(2) Time delay opening safety outputs (stop category 1).  
ESC = External start conditions.

**Functional diagram**

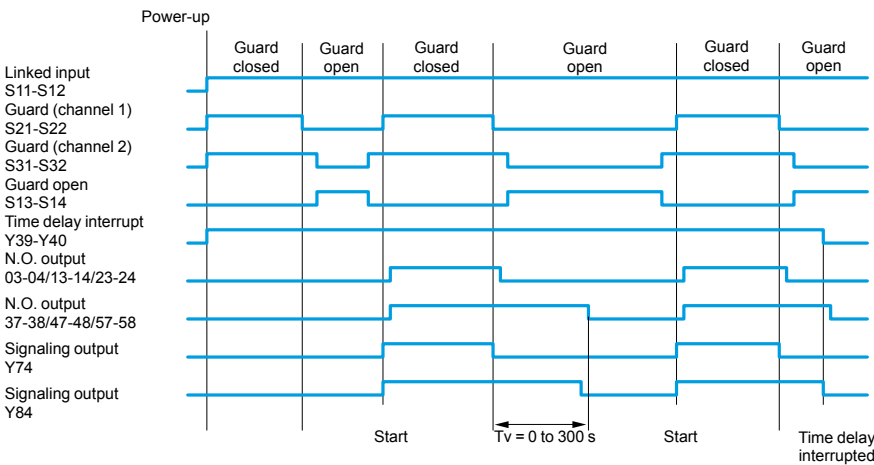

**LED details**




- 1 S12 input status.
- 2 S22 input status.
- 3 S32 input status.
- 4 S34 input status.
- 5 S14 input status.
- 6 Y40 input status (time delay stop).
- 7 K1/K2 status (N.O. instantaneous opening safety outputs).
- 8 K3/K4 status (time delay opening safety outputs).
- 9 Supply voltage A1-A2.
- 10 Fault.
- 11 Configuration mode.

# Safety relays

Preventa™ safety relay modules type XPSABV  
For Emergency stop and switch monitoring


3

**XPSABV**  
Module XPSABV associated with an Emergency stop button with 2 N.C. contacts, monitored start

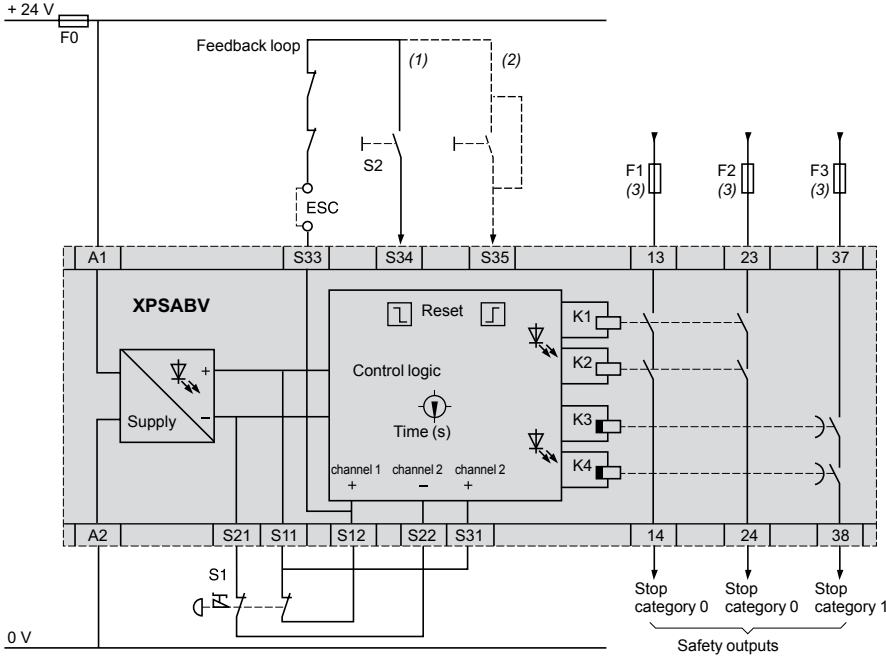


S1: Emergency stop  
S2: Start button  
ESC = External start conditions.  
(1) With start button monitoring.  
(2) Without start button monitoring or automatic start.  
(3) Maximum fuse rating: see page 3/22.


**Emergency stop or switch monitoring function configurations**

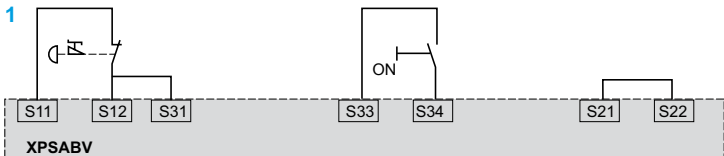


1-channel Emergency stop, manual start      Start with S34 button monitoring      Jumper

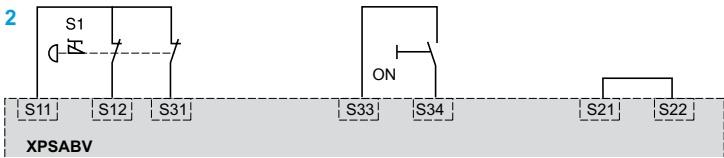

Short-circuit monitoring 2-channel Emergency stop, manual start      Start with S34 button monitoring      Jumper

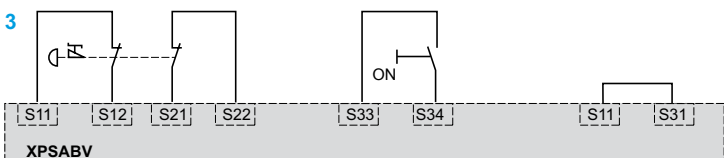

Short-circuit monitoring 2-channel Emergency stop, manual start      Start with S34 button monitoring      Jumper

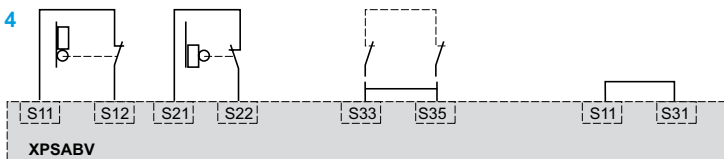


Machine guard with short-circuit monitoring, automatic start      Jumper or feedback loop for external contactors (automatic start S35)      Jumper

**XPSABV**


**Functional diagrams**

**Emergency stop monitoring: configurations 1, 2 and 3**

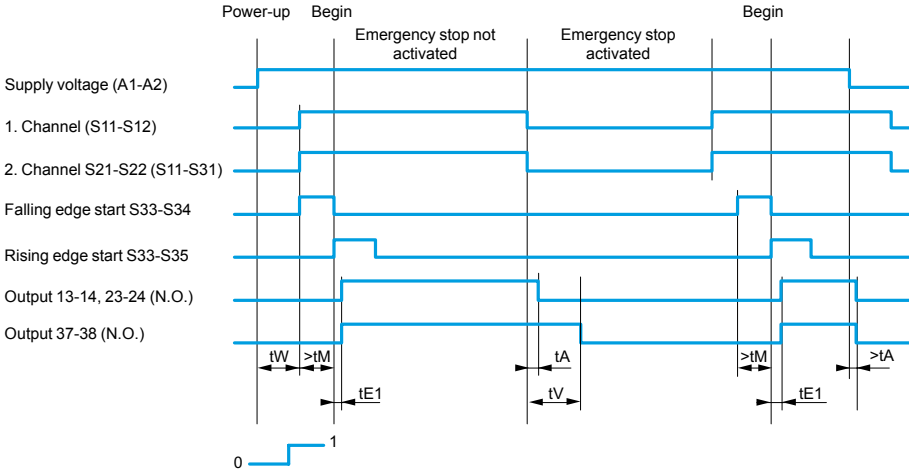


tW: Recovery time  
tE: On-delay  
tm: Min. ON time  
tA: Response time  
tV: Off-delay (adjustable)  
tS: Synchronization time

**Switch monitoring: configuration 4**

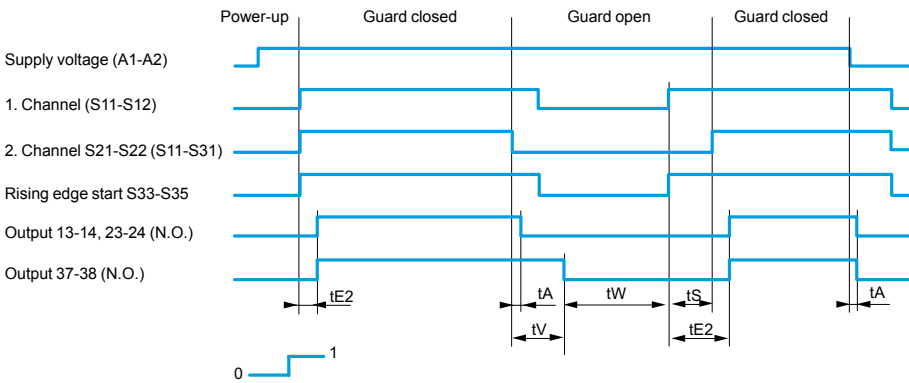

tW: Recovery time  
tE: On-delay  
tm: Min. ON time  
tA: Response time  
tV: Off-delay (adjustable)  
tS: Synchronization time

**LED details**



1 Supply voltage A1-A2  
2 K1/K2 status  
3 K3/K4 status


# Safety relays

Preventa™ safety relay modules type XPSATE  
For Emergency stop and switch monitoring

3

## XPSATE

Module XPSATE associated with an Emergency stop button\*

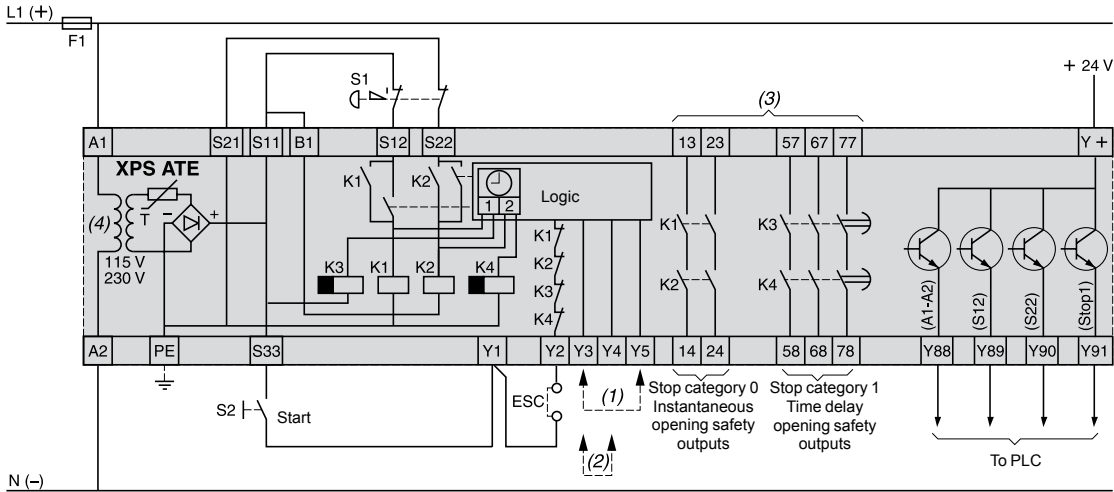

S1: Emergency stop button with 2 N.C. contacts (recommended application).

S2: Start button.

ESC: External start conditions.

Y1 (S33) - Y2: Feedback loop.

F1: 4 A max.

(1) With start button monitoring.


(2) Without start button monitoring.

(3) The outputs must be fuse protected. Technical specifications for maximum rating of fuses, see page 3/22.

(4) ~ 115/230 V only.

\*For automatic start, jumper S2 (N.O. start button between terminals S33-Y1). This is only feasible when configured without start button monitoring (Y3 and Y4 jumpered). If S2 is jumpered and the module is configured for start button monitoring (Y3 and Y5 jumpered), the N.O. safety contacts will not close.

## Functional diagram of module XPSATE with Emergency stop button monitoring

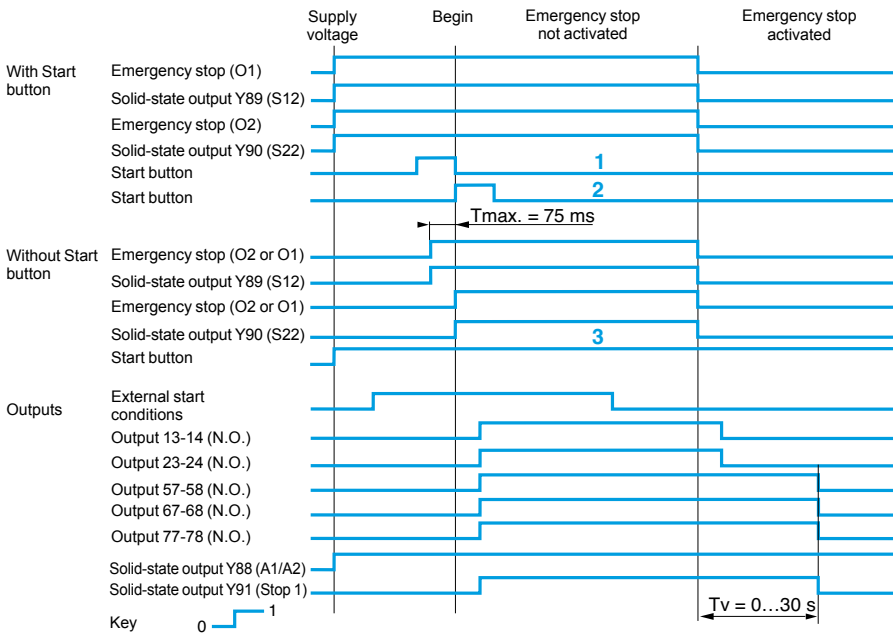


1 With start button monitoring (Y3-Y5 connection).

2 Without start button monitoring (Y3-Y4 connection).

3 Without start button (connection Y3-Y4 and S33-Y1).

Tv: adjustable time.

## LED details



1 1Supply voltage A1-A2, internal electronic fuse status.

2 S12 (A) input status.


3 S22 (B) input status.

4 Stop category 1 outputs closed.




### XPSATE

Example of a circuit combining an Emergency stop module with a variable speed drive

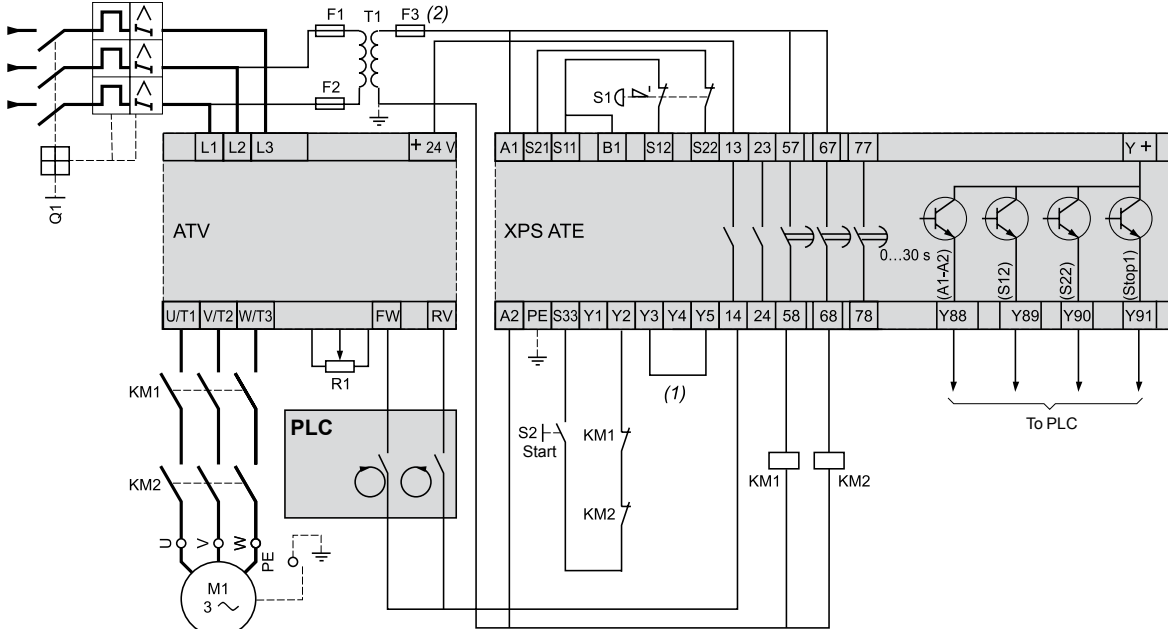


- S1: Emergency stop button with 2 N.C. contacts (recommended application).
- S2: Start button
- (1) With start button monitoring.
- (2) Technical specifications for establishing maximum rating of fuses, see page 3/22.

#### Connection with 1 Emergency stop button

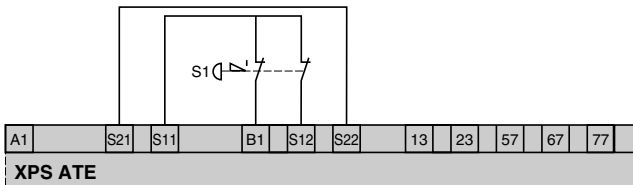


Both input channels are supplied at the same potential.  
S1: Emergency stop button with 2 N.C. contacts  
A short-circuit between the 2 inputs is not detected.

#### Connection with multiple Emergency stop buttons

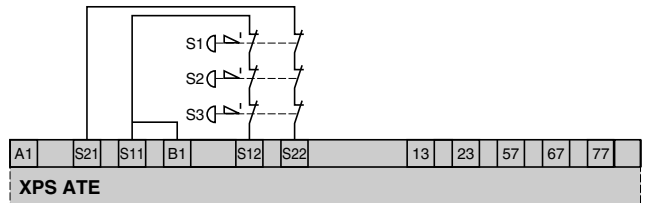


The 2 input channels are supplied at different potentials.  
A short-circuit between the 2 inputs is detected.

#### Configuration with start button monitoring (functional diagram for Start button 1, see page 3/25)

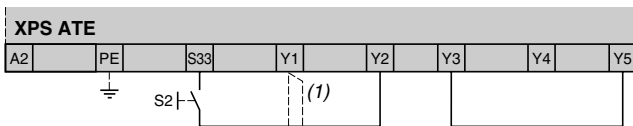


(1) Auxiliary terminal (to be used to separate the feedback loop from the wiring to the start button).

#### Monitoring an Emergency stop button with 1 N.C. contact

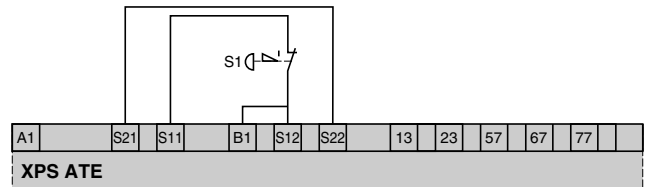

S1: Emergency stop button with 1 N.C. contact.  
Not all faults are detected: a short-circuit on the Emergency stop pushbutton is not detected.

#### Configuration without start button monitoring (functional diagram for Start button 2, see page 3/25)

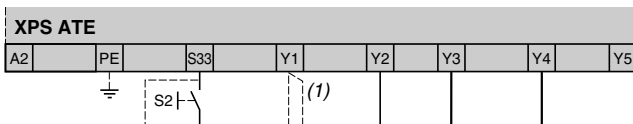

(1) Auxiliary terminal (to be used to separate the feedback loop from the wiring to the start button).

| Specifications  |   |                       | XPSATR●●●●P   | XPSATR●●●●C   |   |
|---|---|-----------------------|---|---|---|
| <b>Module type</b>  |   |                       |   |   |   |
| <b>Maximum achievable safety level</b>  |   |                       | PL e/Category 4 (instantaneous safety outputs and time delay safety outputs) conforming to EN/ISO 13849-1, SIL CL 3 (instantaneous safety outputs and time delay safety outputs) conforming to EN/IEC 62061 |   |   |
| <b>Reliability data (1)</b><br>(instantaneous safety outputs and time delay safety outputs) | Mean Time To dangerous Failure (MTTF <sub>d</sub> )           | <b>Years</b>          | 85  |   |   |
|   | Diagnostic coverage (DC)                                      | <b>%</b>              | > 99  |   |   |
|   | Probability of dangerous Failure per Hour (PFH <sub>d</sub> ) | <b>1/h</b>            | 2 x 10 <sup>-9</sup>  |   |   |
| <b>Conformity to standards</b>  |   |                       | EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1, EN/ISO 13850, EN 1088/ISO 14119   |   |   |
| <b>Product certifications</b>   |   |                       | UL, CSA, BG   |   |   |
| <b>Supply</b>   | Voltage   | <b>V</b>              | 24 V $\overline{\text{---}}$ , 115–230 V $\sim$   |   |   |
|   | Voltage limits  |                       | - 15 to + 10% (24 V $\overline{\text{---}}$ )<br>- 15 to + 10% (115–230 V $\sim$ )  |   |   |
|   | Frequency   | <b>Hz</b>             | 50/60   |   |   |
| <b>Power consumption</b>  |   |                       | <b>W/VA</b>   | 24 V $\overline{\text{---}}$ : 2.8 W<br>115–230 V $\sim$ : 3.2 W/6.3 VA   |   |
| <b>Module inputs fuse protection</b>  |   |                       | Internal, electronic  |   |   |
| <b>Adjustable time delay</b>  |   |                       | <b>s</b>  | 0.1 to 3 or 0.1 to 30   |   |
| <b>Outputs</b>  | Voltage reference   |                       | Relay hard contacts   |   |   |
|   | No. and type of instantaneous opening safety circuits         |                       | 3 N.O. (13-14, 23-24, 33-34)  |   |   |
|   | No. and type of time delay opening safety circuits            |                       | 3 N.O. (57-58, 67-68, 77-78)  |   |   |
|   | Number and type of additional circuits                        |                       | 1 N.C. (41-42)  |   |   |
|   | Breaking capacity in AC-15                                    | Instantaneous outputs | <b>VA</b>   | C300: inrush 1800, maintained 180   |   |
|   |   | Time delay outputs    | <b>VA</b>   | C300: inrush 1800, maintained 180   |   |
|   | Breaking capacity in DC-13                                    | Instantaneous outputs |   | 24 V/1.5 A L/R = 50 ms  |   |
|   |   | Time delay outputs    |   | 24 V/1.5 A L/R = 50 ms  |   |
|   | Max. total thermal current                                    |                       | <b>A</b>  | 8   |   |
|   | Output fuse protection  |                       | <b>A</b>  | 6 gG, conforming to IEC/EN 60947-5-1, DIN VDE 0660 part 200   |   |
| Minimum current   |   | <b>mA</b>             | 5   |   |   |
| Minimum voltage   |   | <b>V</b>              | 17  |   |   |
| <b>Electrical life</b>  |   |                       | See page 3/16   |   |   |
| <b>Response time on instantaneous opening inputs</b>  |   |                       | <b>ms</b>   | < 200   |   |
| <b>Rated insulation voltage (Ui)</b>  |   |                       | <b>V</b>  | 300 (degree of pollution 2 conforming to IEC/EN 60947-5-1, DIN VDE 0110 parts 1 & 2)                            |   |
| <b>Rated impulse withstand voltage (Uimp)</b>   |   |                       | <b>kV</b>   | 4 (overvoltage category III, conforming to IEC/EN 60947-5-1, DIN VDE 0110 parts 1 & 2)                          |   |
| <b>LED display</b>  |   |                       | 5   |   |   |
| <b>Operating temperature</b>  |   |                       | <b>°F (°C)</b>  | - 13 to +131 (- 25 to + 55)   |   |
| <b>Storage temperature</b>  |   |                       | <b>°F (°C)</b>  | - 13 to +167 (- 25 to + 75)   |   |
| <b>Degree of protection</b><br>conforming to IEC/EN 60529                                   | Terminals   |                       | IP20  |   |   |
|   | Enclosure   |                       | IP40  |   |   |
| <b>Wiring diagrams</b>  | Type of terminals   |                       | Captive screw clamp terminals   | Spring terminals  |   |
|   | Type of terminal block  |                       | Removable from module   |   |   |
|   | 1-wire connection   | Without cable end     |   | Solid or flexible cable:<br>24-12 AWG (0.2 to 2.5 mm <sup>2</sup> )   |   |
|   |   | With cable end        |   | Solid or flexible cable:<br>24-12 AWG (0.2 to 2.5 mm <sup>2</sup> )   |   |
|   | 2-wire connection   | Without cable end     |   | With bezel, flexible cable:<br>24-16 AWG (0.25 to 1.5 mm <sup>2</sup> )   | With bezel, flexible cable:<br>24-14 AWG (0.25 to 2.5 mm <sup>2</sup> ) |
|   |   |                       |   | Solid cable: 24-18 AWG (0.2 to 1.0 mm <sup>2</sup> )<br>Flexible cable: 24-16 AWG (0.2 to 1.5 mm <sup>2</sup> ) | -   |
|   |   | With cable end        |   | Without bezel, flexible cable: 22-18 AWG (0.25 to 1.0 mm <sup>2</sup> )   | -   |
|   |   |                       |   | With bezel, flexible cable: 20-16 AWG (0.5 to 1.5 mm <sup>2</sup> )   | With bezel, flexible cable: 20-18 AWG (0.5 to 1.0 mm <sup>2</sup> )     |

(1) Per EN/ISO 13849-1 and EN/IEC 62061

# Safety relays

Preventa™ safety relay modules type XPSATR  
For Emergency stop and switch monitoring

## Operating principle

Safety relay modules XPSATR meet the requirements of Performance Level PL e/ Category 4 conforming to standard EN ISO 13849-1.

Safety relay modules XPSATR are electronic, redundant and self-monitoring devices with positively driven relays.

They are used for monitoring Emergency stop circuits (single or two-channel) and protective guarding applications.  
The modules conform to standards EN/ISO 13850 and EN 60204-1.

They provide protection for both the machine operator and the machine by immediately stopping the hazardous movement on receipt of a stop instruction from the operator or guarding switches, or on detection of an anomaly in the safety circuit itself. XPSATR incorporates 3 N.O. and 1 N.C. instantaneous contacts and 3 time-delayed N.O. contacts.

To aid diagnostics, the modules have 5 LEDs on the front face which provide information on the monitoring circuit status.

## References

| Description  | Connection  | Number of safety circuits     | Additional outputs | Time setting range | Supply        | Reference           | Weight oz (kg) |
|--|---|-------------------------------|--------------------|--------------------|---------------|---------------------|----------------|
| Safety relay modules for emergency stop and safety guards monitoring | Captive screw clamp terminals<br>Terminal block removable from module | 3 N.O.<br>+ 3 N.O. time delay | 1 N.C.             | 0.1...3 s          | ≡ 24 V        | <b>XPSATR1153P</b>  | 11.640 (0.330) |
|  |   |                               |                    | 0.1...3 s          | ~ 115...230 V | <b>XPSATR3953P</b>  | 12.346 (0.350) |
|  |   |                               |                    | 0...30 s           | ≡ 24 V        | <b>XPSATR11530P</b> | 11.640 (0.330) |
|  |   |                               |                    | 0...30 s           | ~ 115...230 V | <b>XPSATR39530P</b> | 12.346 (0.350) |
|  | Cage clamp terminals<br>Terminal block removable from module          | 3 N.O.<br>+ 3 N.O. time delay | 1 N.C.             | 0.1...3 s          | ≡ 24 V        | <b>XPSATR1153C</b>  | 11.640 (0.330) |
|  |   |                               |                    | 0.1...3 s          | ~ 115...230 V | <b>XPSATR3953C</b>  | 12.346 (0.350) |
|  |   |                               |                    | 0...30 s           | ≡ 24 V        | <b>XPSATR11530C</b> | 11.640 (0.330) |
|  |   |                               |                    | 0...30 s           | ~ 115...230 V | <b>XPSATR39530C</b> | 12.346 (0.350) |



XPSATR●●●●P



XPSATR●●●●C


# Safety relays

Preventa™ safety relay modules type XPSATR  
For Emergency stop and switch monitoring

3

## XPSATR


Module XPSATR associated with an Emergency stop button with 2 N.C. contacts, monitored start

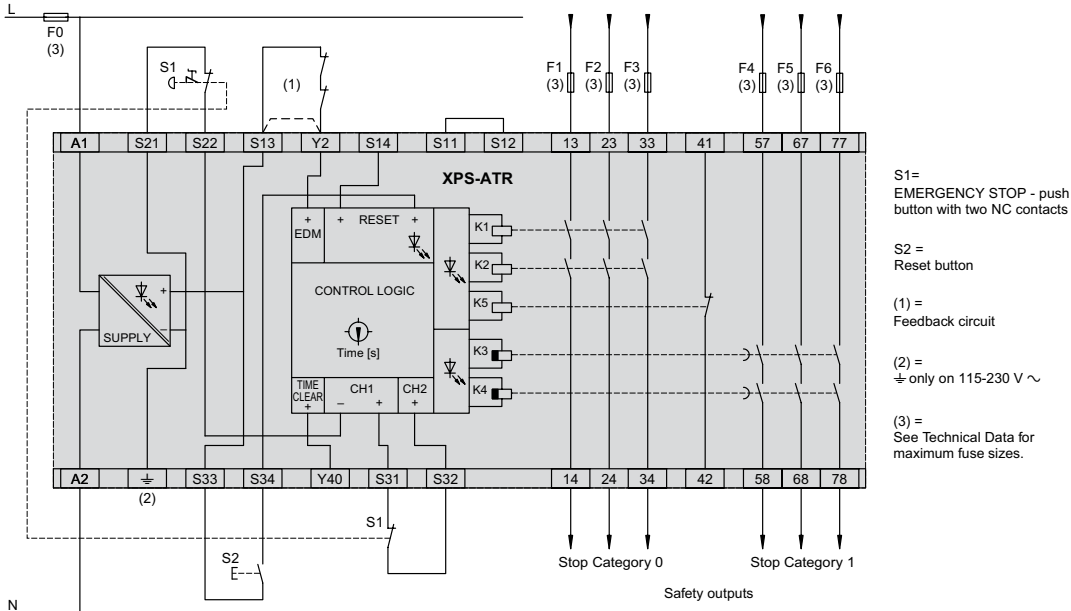

### Emergency stop monitoring function configuration


1-channel wiring

Emergency stop button with single N.C. contact




2-channel wiring

Emergency stop button with 2 N.C. contacts, without short circuit protection




2-channel wiring


Emergency stop button with 2 N.C. contacts, with short circuit protection



### ESPE (light curtain) without short circuit protection




### Time clear, end delay time




### Start configurations

Automatic start with feedback loop




With start button monitoring and feedback loop




**XPSATR**

**Functional diagrams**


**Switch monitoring with automatic start**

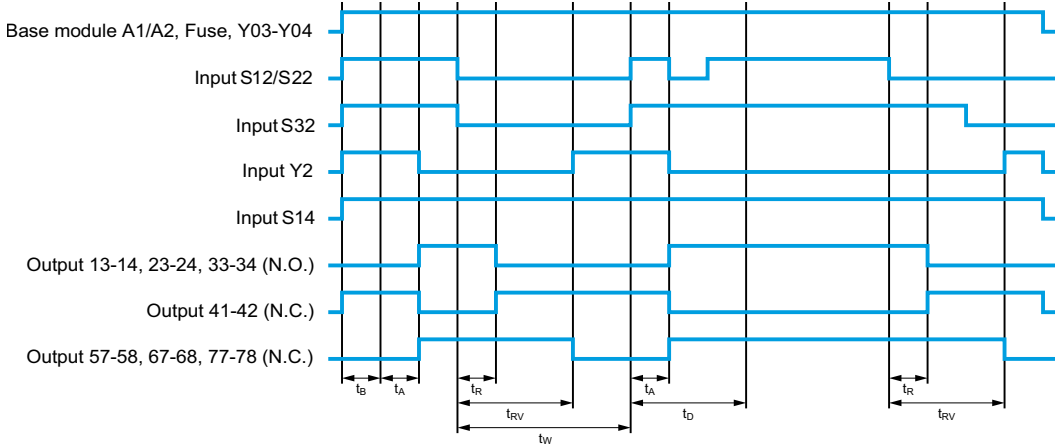

**Switch monitoring with monitored start**

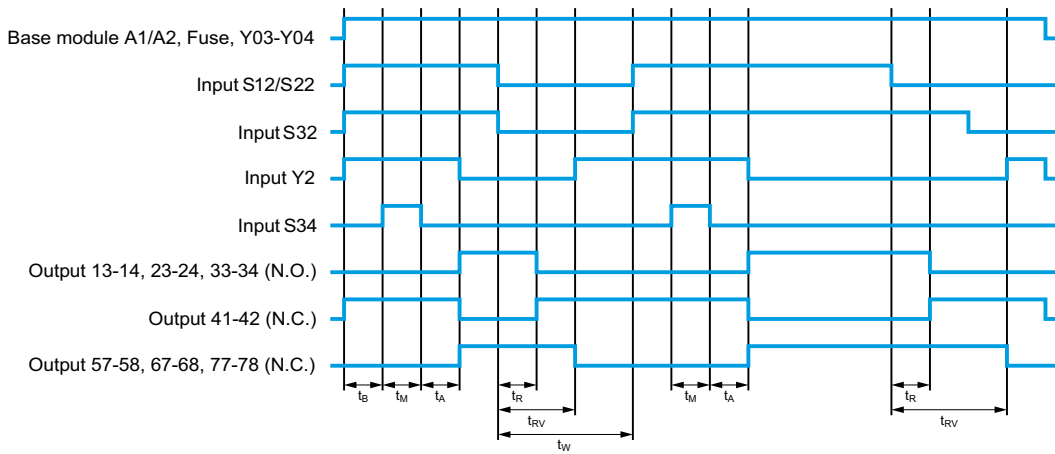

**Switch monitoring with end time delay function**

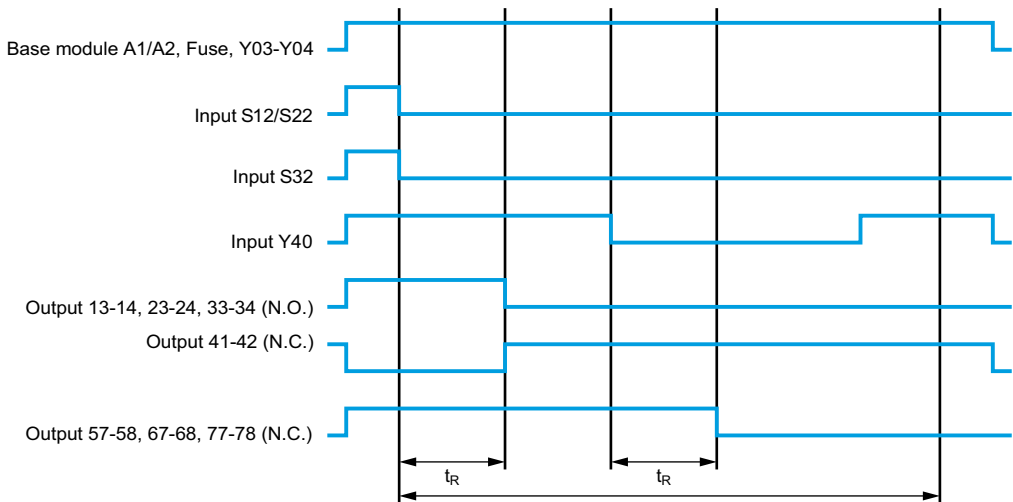

- $t_B$  Ready time
- $t_A$  Response time
- $t_M$  Minimum actuation time
- $t_R$  Release time
- $t_{RV}$  Release delay time
- $t_W$  Recovery time
- $t_D$  Discrepancy time



# Safety relays

Preventa™ safety relay modules type XPSAF  
For Emergency stop and switch monitoring

## Operating principle

Safety relay modules XPSAF are used for:

- Monitoring Emergency stop circuits conforming to standards EN/ISO 13850 and EN/IEC 60204-1.
- Electrical monitoring of switches activated by protection devices conforming to standard EN 1088/ISO 14119.

Housed in a compact enclosure, the modules have 3 safety outputs.

Preventa™ safety relay modules XPSAF●●●●P incorporate removable terminal blocks, thus optimizing machine maintenance.

To aid diagnostics, the modules have 3 LEDs on the front cover which provide information on the monitoring circuit status.

The Start button monitoring function is configurable depending on the wiring.

## Specifications

| Module type  |  | XPSAF5130  | XPSAF5130P   |   |
|--|--|--|--|---|
| <b>Maximum achievable safety level</b>                 |  | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061 |  |   |
| <b>Reliability data (1)</b>                            | Mean Time To dangerous Failure (MTTFd)           | <b>Years</b>   | 243  |   |
|  | Diagnostic Coverage (DC)                         | <b>%</b>   | > 99   |   |
|  | Probability of dangerous Failure per Hour (PFHd) | <b>1/h</b>   | $4.62 \times 10^{-9}$  |   |
| <b>Conformity to standards</b>                         |  | EN/IEC 60204-1, EN 1088/ISO 14119, EN/IEC 60947-5-1, EN/ISO 13850, EN 50082-2    |  |   |
| <b>Product certifications</b>                          |  | UL, CSA, BG  |  |   |
| <b>Supply</b>  | Voltage  | <b>V</b>   | ~ and --- 24   |   |
|  | Voltage limits                                   |  | - 15...+ 10%   |   |
|  | Frequency  | <b>Hz</b>  | 50/60  |   |
| <b>Power consumption</b>                               |  | <b>VA</b>  | ≤ 5  |   |
| <b>Module inputs fuse protection</b>                   |  | Internal, electronic   |  |   |
| <b>Start button monitoring</b>                         |  | Yes/No (configurable by terminal connections)                                    |  |   |
| <b>Control unit voltage and current</b>                |  | --- 24 V/30 mA approx. (at nominal supply voltage)                               |  |   |
| <b>Maximum wiring resistance RL</b>                    |  | <b>Ω</b>   | 90   |   |
| <b>Synchronization time between inputs A and B</b>     |  | Unlimited  |  |   |
| <b>Outputs</b>   | Voltage reference                                | Relay hard contacts  |  |   |
|  | Number and type of safety circuits               | 3 N.O. (13-14, 23-24, 33-34)   |  |   |
|  | Breaking capacity in AC-15                       | <b>VA</b>  | C300: inrush 1800, maintained 180  |   |
|  | Breaking capacity in DC-13                       | 24 V/1.5 A - L/R = 50 ms   |  |   |
|  | Max. thermal current (Ithe)                      | <b>A</b>   | 6  |   |
|  | Max. total thermal current                       | <b>A</b>   | 18   |   |
|  | Output fuse protection                           | <b>A</b>   | 4 gG or 6 fast acting, conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200           |   |
|  | Minimum current                                  | <b>mA</b>  | 10   |   |
|  | Minimum voltage                                  | <b>V</b>   | 17   |   |
| <b>Electrical life</b>                                 |  | See page 3/16  |  |   |
| <b>Response time on input opening</b>                  |  | <b>ms</b>  | ≤ 40   |   |
| <b>Rated insulation voltage (Ui)</b>                   |  | <b>V</b>   | 300 (degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2)   |   |
| <b>Rated impulse withstand voltage (Uimp.)</b>         |  | <b>kV</b>  | 4 (overvoltage category III, conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2) |   |
| <b>LED display</b>                                     |  | 3  |  |   |
| <b>Operating temperature</b>                           |  | <b>°F (°C)</b>   | + 14...+ 131 (- 10...+ 55)   |   |
| <b>Storage temperature</b>                             |  | <b>°F (°C)</b>   | - 13...+ 267.8 (- 25...+ 85)   |   |
| <b>Degree of protection conforming to IEC/EN 60529</b> | Terminals  | IP 20  |  |   |
|  | Enclosure  | IP 40  |  |   |
| <b>Connections</b>                                     | Type   |  | Captive screw clamp terminals  | Captive screw clamp terminals, removable terminal block   |
|  | 1-wire connection                                | Without cable end  | Solid or flexible cable: 26-14 AWG (0.14...2.5 mm <sup>2</sup> )                       | Solid or flexible cable: 24-14 AWG (0.2...2.5 mm <sup>2</sup> )   |
|  |  | With cable end   | Without bezel, flexible cable: 24-14 AWG (0.25...2.5 mm <sup>2</sup> )                 |   |
|  |  | With cable end   | With bezel, flexible cable: 24-16 AWG (0.25...1.5 mm <sup>2</sup> )                    | With bezel, flexible cable: 24-14 AWG (0.25...2.5 mm <sup>2</sup> )                                       |
|  | 2-wire connection                                | Without cable end  | Solid or flexible cable: 26-18 AWG (0.14...0.75 mm <sup>2</sup> )                      | Solid cable: 24-18 AWG (0.2...1 mm <sup>2</sup> ), flexible cable: 24-16 AWG (0.2...1.5 mm <sup>2</sup> ) |
|  |  | With cable end   | Without bezel, flexible cable: 24-18 AWG (0.25...1 mm <sup>2</sup> )                   |   |
|  |  | With cable end   | Double, with bezel, flexible cable: 20-16 AWG (0.5...1.5 mm <sup>2</sup> )             | Double, with bezel, flexible cable: 20-16 AWG (0.5...1.5 mm <sup>2</sup> )                                |

(1) Per EN/ISO 13849-1 and EN/IEC 62061



# Safety relays

Preventa™ safety relay modules type XPSAF  
For Emergency stop and switch monitoring

## References



XPSAF5130



XPSAF5130P


| Description   | Type of terminal block connection | Number of safety circuits | Supply       | Reference  | Weight oz (kg) |
|---|-----------------------------------|---------------------------|--------------|------------|----------------|
| Safety modules for Emergency stop and limit switch monitoring | Integrated in module              | 3                         | ~ and ≡ 24 V | XPSAF5130  | 8.818 (0.250)  |
|   | Removable from module             | 3                         | ~ and ≡ 24 V | XPSAF5130P | 8.818 (0.250)  |

3

## Wiring diagrams

### XPSAF

Module XPSAF associated with an Emergency stop button with 2 N.C. contacts

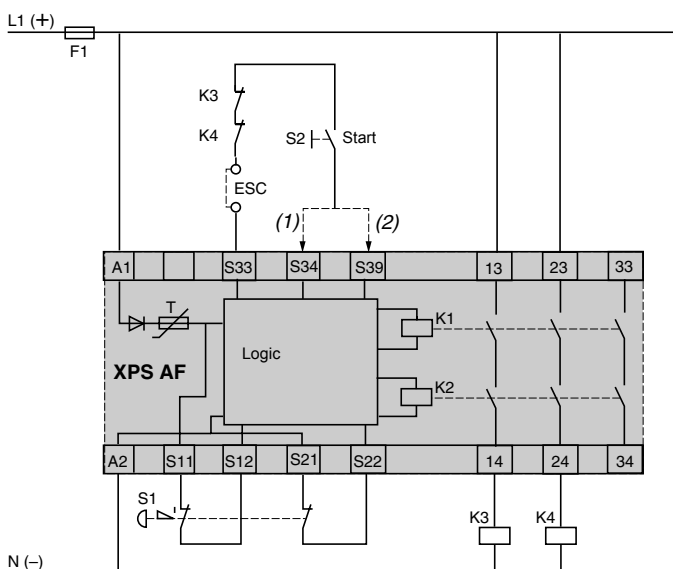


(1) With start button monitoring.  
(2) Without start button monitoring.  
ESC = External start conditions.


### XPSAF

#### Functional diagrams

Emergency stop function

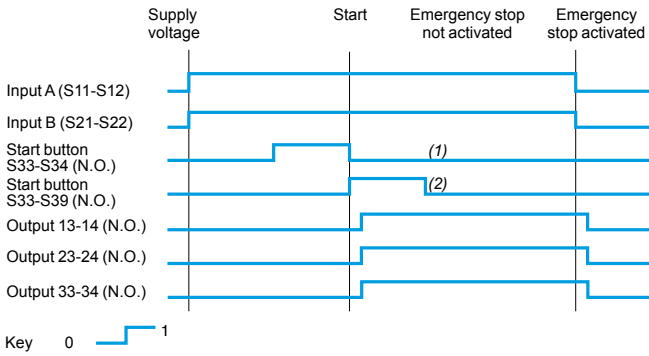


Guard function with automatic start

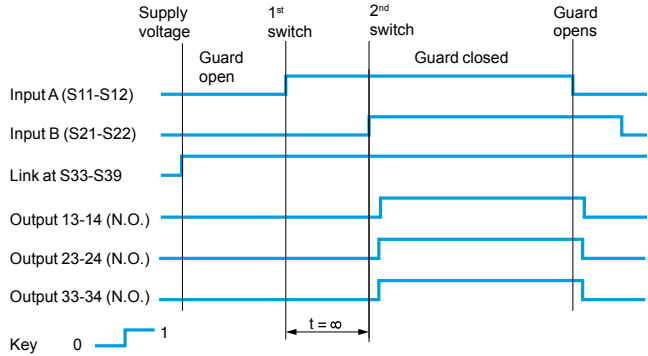

- (1) With start button monitoring.
- (2) Without start button monitoring.

#### Module XPSAF with connection of multiple Emergency stop buttons, combined with a PLC

L1 (+)

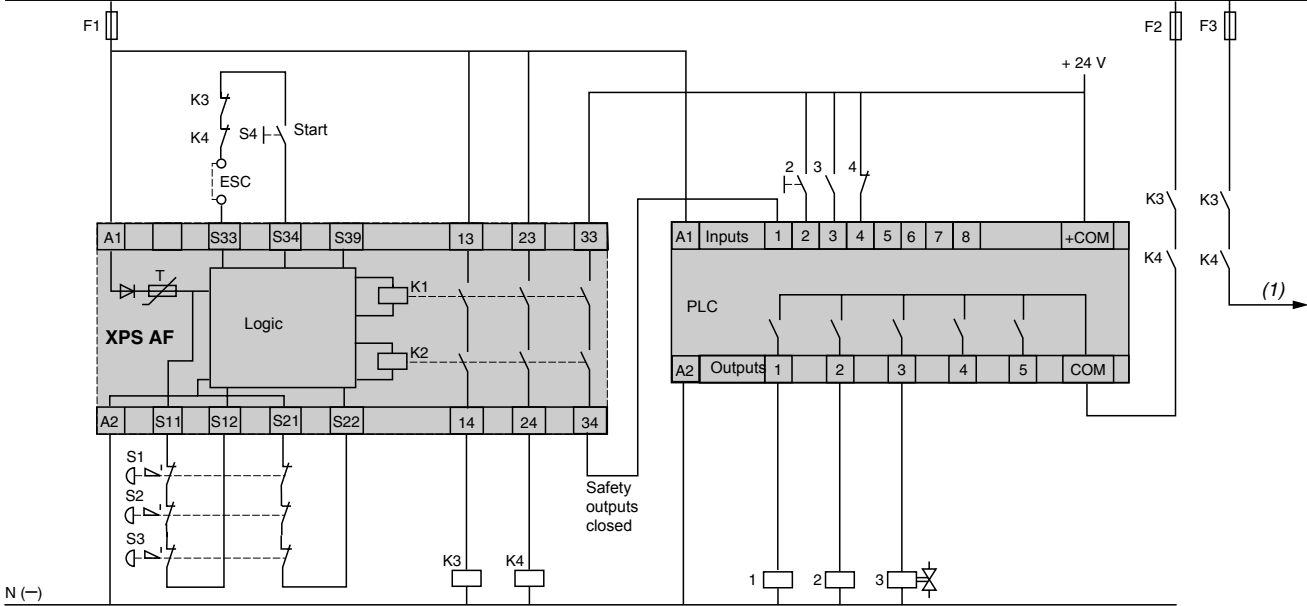


- (1) Other circuits controlled by the XPSAF module.
- ESC = External start conditions.

### XPSAF


#### Emergency stop monitoring function configuration

1-channel wiring

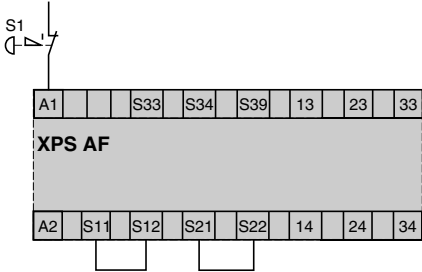


Emergency stop button with a single N.C. contact.  
Not all anomalies are detected: a short-circuit on the Emergency stop push button is not detected.

2-channel wiring

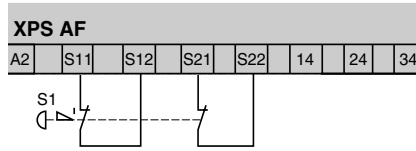


Emergency stop button with 2 N.C. contacts (recommended application).  
The 2 input channels are supplied at different potentials. A short-circuit between the 2 inputs is detected.

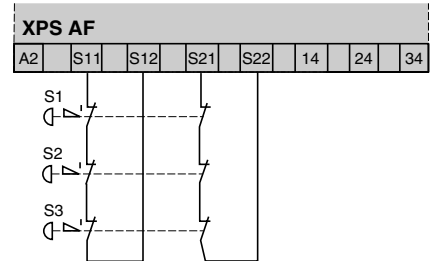


Connection of multiple Emergency stop buttons with 2 N.C. contacts (recommended application).  
The 2 input channels are supplied at different potentials. A short-circuit between the 2 inputs is detected.


#### Monitoring of a movable guard associated with 2 switches with 1 contact each in combined mode (switch 1 with N.O. contact, switch 2 with N.C. contact)

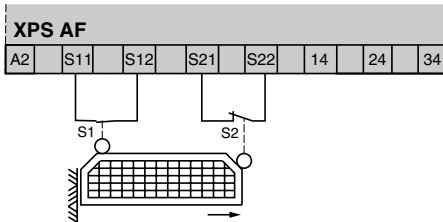


#### Configuration with automatic or manual start



Automatic start.

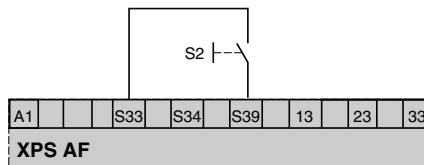


Without start button monitoring, manual reset.

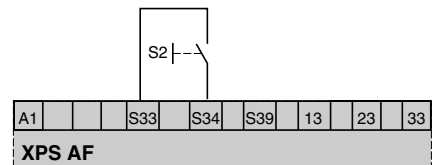

Function: push-release.  
With start button monitoring, manual reset.

#### LED details



- 1 Supply voltage A1-A2 internal electronic, fuse status.
- 2 Relay K1 energized.
- 3 Relay K2 energized.

## Operating principle

Safety relay modules XPSAFL are used for:

- Monitoring Emergency stop circuits conforming to standards EN/ISO 13850 and EN/IEC 60204-1.
- Electrical monitoring of switches activated by protection devices conforming to standard EN 1088/ISO 14119, devices such as safety interlocks or safety limit switches.

They can also be used for monitoring type 4 light curtains conforming to EN/IEC 61496-1 which have solid-state safety outputs with test function (for example, light curtains type XUSL, see Section 5).

Housed in a compact enclosure, the modules have 3 safety outputs. Preventa™ safety relay modules XPSAFL●●●●P incorporate removable terminal blocks, thus optimizing machine maintenance.

To aid diagnostics, the modules have 3 LEDs on the front cover which provide information on the monitoring circuit status.

The Start button monitoring function is configurable depending on the wiring.

## Specifications

| Module type   |  | XPSAFL5130   | XPSAFL5130P  |  |
|---|--|--|--|--|
| <b>Maximum achievable safety level</b>                    |  | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061                       |  |  |
| <b>Reliability data (1)</b>                               | Mean Time To dangerous Failure (MTTFd)           | <b>Years</b>   | 172.1  |  |
|   | Diagnostic Coverage (DC)                         | <b>%</b>   | > 99   |  |
|   | Probability of dangerous Failure per Hour (PFHd) | <b>1/h</b>   | $5.61 \times 10^{-9}$  |  |
| <b>Conformity to standards</b>                            |  | EN/IEC 60204-1, EN 1088/ISO 14119, EN/IEC 60947-5-1, EN/ISO 13850, EN 50082-2, EN/IEC 61496-1 (type 4) |  |  |
| <b>Product certifications</b>                             |  | UL, CSA, BG  |  |  |
| <b>Supply</b>   | Voltage  | <b>V</b>   | ~ and --- 24   |  |
|   | Voltage limits                                   |  | - 15...+ 10%   |  |
|   | Frequency  | <b>Hz</b>  | 50/60  |  |
| <b>Power consumption</b>                                  |  | <b>VA</b>  | ≤ 5  |  |
| <b>Module inputs fuse protection</b>                      |  | Internal, electronic   |  |  |
| <b>Start button monitoring</b>                            |  | No (configurable by terminal connections)  |  |  |
| <b>Control unit voltage and current</b>                   |  | --- 24 V/30 mA approx. (at nominal supply voltage)   |  |  |
| <b>Maximum wiring resistance RL</b>                       |  | <b>Ω</b>   | 90   |  |
| <b>Synchronization time between inputs A and B</b>        |  | Unlimited  |  |  |
| <b>Outputs</b>  | Voltage reference                                | Relay hard contacts  |  |  |
|   | Number and type of safety circuits               | 3 N.O. (13-14, 23-24, 33-34)   |  |  |
|   | Breaking capacity in AC-15                       | <b>VA</b>  | C300: inrush 1800, maintained 180  |  |
|   | Breaking capacity in DC-13                       | 24 V/1.5 A - L/R = 50 ms   |  |  |
|   | Max. thermal current (Ithe)                      | <b>A</b>   | 6  |  |
|   | Max. total thermal current                       | <b>A</b>   | 18   |  |
|   | Output fuse protection                           | <b>A</b>   | 4 gG or 6 fast acting, conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200           |  |
|   | Minimum current                                  | <b>mA</b>  | 10   |  |
|   | Minimum voltage                                  | <b>V</b>   | 17   |  |
| <b>Electrical life</b>                                    |  | See page 3/16  |  |  |
| <b>Response time on input opening</b>                     |  | <b>ms</b>  | ≤ 20   |  |
| <b>Rated insulation voltage (Ui)</b>                      |  | <b>V</b>   | 300 (degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2)   |  |
| <b>Rated impulse withstand voltage (Uimp.)</b>            |  | <b>kV</b>  | 4 (overvoltage category III, conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2) |  |
| <b>LED display</b>  |  | 3  |  |  |
| <b>Operating temperature</b>                              |  | <b>°F (°C)</b>   | + 14...+ 131 (- 10...+ 55)   |  |
| <b>Storage temperature</b>                                |  | <b>°F (°C)</b>   | - 13...+ 267.8 (- 25...+ 85)   |  |
| <b>Degree of protection</b><br>conforming to IEC/EN 60529 | Terminals  | IP 20  |  |  |
|   | Enclosure  | IP 40  |  |  |
| <b>Connection</b>   | Type   | Captive screw clamp terminals  |  |  |
|   | 1-wire connection                                | Without cable end  | Solid or flexible cable: 26-14 AWG (0.14...2.5 mm <sup>2</sup> )                       | Captive screw clamp terminals, removable terminal block<br>Solid or flexible cable: 24-14 AWG (0.2...2.5 mm <sup>2</sup> ) |
|   |  | With cable end   | Without bezel, flexible cable: 24-14 AWG (0.25...2.5 mm <sup>2</sup> )                 |  |
|   |  | With cable end   | With bezel, flexible cable: 24-16 AWG (0.25...1.5 mm <sup>2</sup> )                    | With bezel, flexible cable: 24-14 AWG (0.25...2.5 mm <sup>2</sup> )  |
|   | 2-wire connection                                | Without cable end  | Solid or flexible cable: 26-18 AWG (0.14...0.75 mm <sup>2</sup> )                      | Solid cable: 24-18 AWG (0.2...1 mm <sup>2</sup> ), flexible cable: 24-16 AWG (0.2...1.5 mm <sup>2</sup> )                  |
|   |  | With cable end   | Without bezel, flexible cable: 24-18 AWG (0.25...1 mm <sup>2</sup> )                   |  |
| With cable end  |  | Double, with bezel, flexible cable: 20-16 AWG (0.5...1.5 mm <sup>2</sup> )                             |  |  |

(1) Per EN/ISO 13849-1 and EN/IEC 62061

# Safety relays

Preventa™ safety relay modules type XPSAFL  
For Emergency stop, switch and light curtain monitoring

**References**

| Description  | Type of terminal block connection | Number of safety circuits | Supply         | Reference   | Weight oz (kg) |
|--|-----------------------------------|---------------------------|----------------|-------------|----------------|
| Safety modules for Emergency stop, switch and light curtain monitoring | Integrated in module              | 3                         | ~ and --- 24 V | XPSAFL5130  | 8.818 (0.250)  |
|  | Removable from module             | 3                         | ~ and --- 24 V | XPSAFL5130P | 8.818 (0.250)  |




XPSAFL5130



XPSAFL5130P

## XPSAFL


Module XPSAFL associated with an Emergency stop button with 2 N.C. contacts

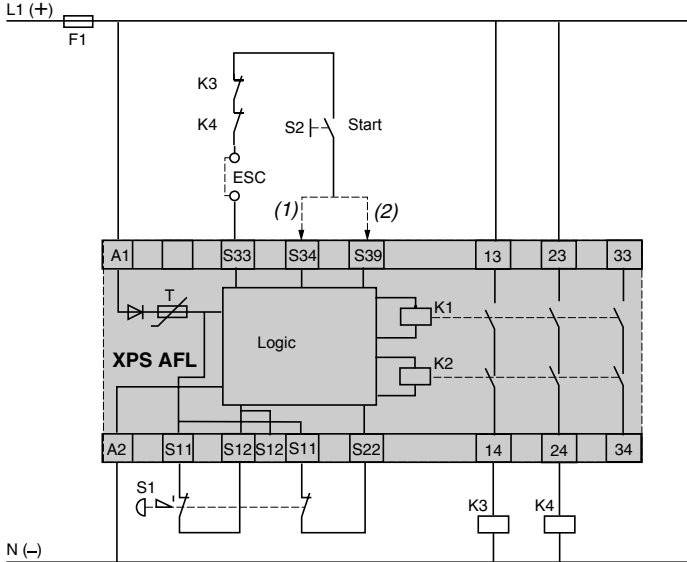

- (1) With start button monitoring.
  - (2) Without start button monitoring.
- ESC: External start conditions.

## Functional diagrams


Emergency stop function

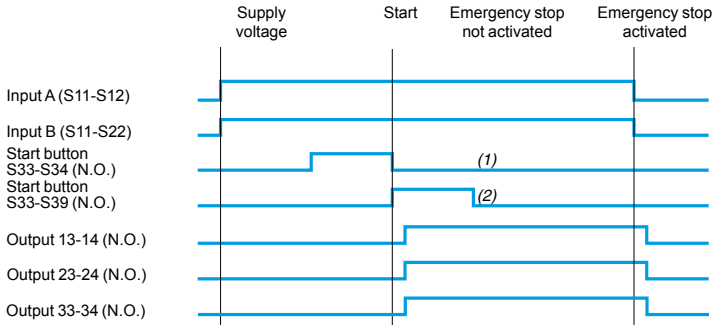

Key 0 1

- (1) With start button monitoring.
- (2) Without start button monitoring.

Guard function with automatic start

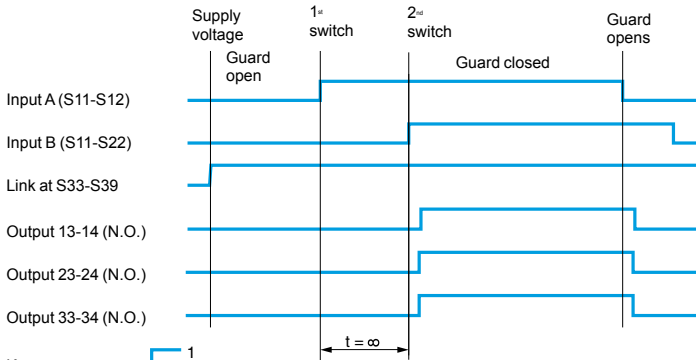

Key 0 1




# Safety relays

Preventa™ safety relay modules type XPSAFL  
For Emergency stop, switch and light curtain monitoring

## XPSAFL


### Emergency stop monitoring function configuration

1-channel wiring  
Emergency stop button with a single N.C. contact

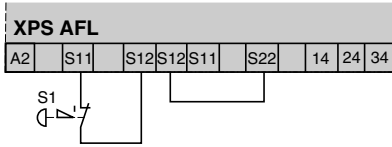


A short-circuit on the Emergency stop push button is not detected.

2-channel wiring  
Emergency stop button with 2 N.C. contacts

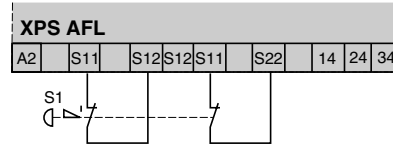

A short-circuit between the 2 inputs is not detected.


2-channel wiring  
Connection of multiple Emergency stop buttons

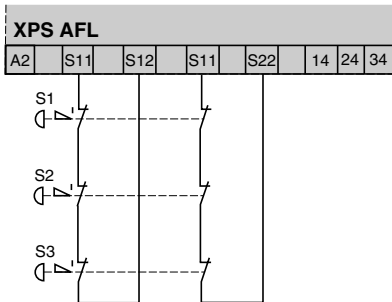


A short-circuit between the 2 inputs is not detected.

### Monitoring of a movable guard associated with 2 switches with 1 contact each in combined mode (switch 1 with N.O. contact, switch 2 with N.C. contact)


Without short-circuit detection

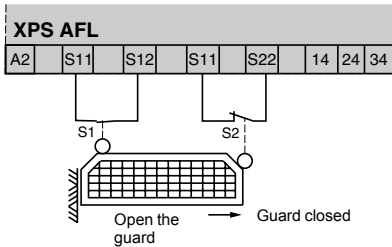

### Monitoring of electro-sensitive protection equipment (ESPE)

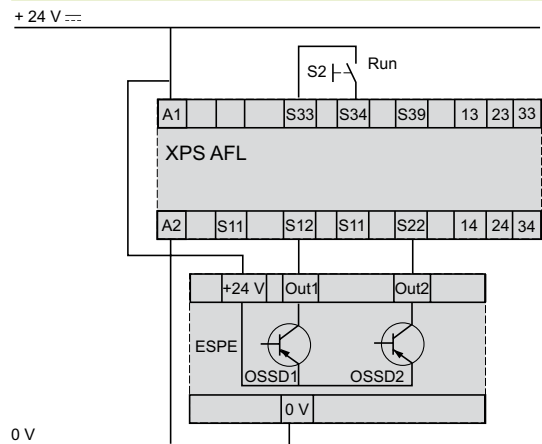

### LED details



- 1 Supply voltage A1-A2, fuse status.
- 2 Relay K1 energized.
- 3 Relay K2 energized.

## Operating principle

Safety relay modules XPSAR are designed for the following safety applications:

- Monitoring Emergency stop circuits conforming to EN/ISO 13850 and EN/IEC 60204-1.
- Electrical monitoring of switches activated by protection devices conforming to standard EN 1088/ISO 14119.
- Monitoring type 4 light curtains conforming to EN/IEC 61496-1 which have solid-state safety outputs with test function, for example, light curtains type XUSL.

In addition to 7 safety outputs, modules XPSAR incorporate 2 relay signalling outputs and 4 solid-state signalling outputs for signalling to the process PLC.

Safety modules XPSAR●●●●●P incorporate removable terminal blocks, thus optimizing machine maintenance. To aid diagnostics, the modules have 4 LEDs on the front cover which provide information on the monitoring circuit status. The Start button monitoring function is configurable depending on the wiring.

## Specifications

| Module type  |  | XPSAR3●1144   | XPSAR3●1144P   |   |
|--|--|---|--|---|
| <b>Maximum achievable safety level</b>   |  | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061  |  |   |
| <b>Reliability data (1)</b>  | Mean Time To dangerous Failure (MTTFd)           | <b>Years</b>  | 277.8  |   |
|  | Diagnostic Coverage (DC)                         | <b>%</b>  | > 99   |   |
|  | Probability of dangerous Failure per Hour (PFHD) | <b>1/h</b>  | 2.22 x 10 <sup>-9</sup>  |   |
| <b>Conformity to standards</b>   |  | EN/IEC 60204-1, EN 1088/ISO 14119, EN/ISO 13850, EN/IEC 60947-1, EN/IEC 60947-5-1 |  |   |
| <b>Product certifications</b>  |  | UL, CSA, BG   |  |   |
| <b>Supply</b>  | Voltage  | <b>V</b>  | ~ and --- 24, ~ 115, ~ 230   |   |
|  | Voltage limits                                   | --- 24 V  | <b>%</b>   | - 15...+ 10   |
|  |  | ~ 24 V  | <b>%</b>   | - 15...+ 10   |
|  |  | ~ 115 V   | <b>%</b>   | - 15...+ 15   |
|  |  | ~ 230 V   | <b>%</b>   | - 15...+ 10   |
| Frequency  | <b>Hz</b>  | 50/60   |  |   |
| <b>Power consumption</b>   |  | --- 24 V version: < 4 W, ~24 V version: < 7 VA, 115/230 V version: < 9 VA         |  |   |
| <b>Module inputs fuse protection</b>   |  | Internal, electronic  |  |   |
| <b>Start button monitoring</b>   |  | Yes/No (configurable by terminal connections)                                     |  |   |
| <b>Control unit voltage and current</b> (between terminals S11-S52 and S21-S22). 24 V, 115 V and 230 V version |  | <b>V</b>  | --- 24 (20 mA approx.) (at nominal supply voltage)                                     |   |
| <b>Maximum wiring resistance RL</b> (between terminals S11-S52 and S21-S22)                                    |  | <b>Ω</b>  | 50   |   |
| <b>Synchronization time between inputs A and B</b> Automatic start, terminals S33, S34 linked                  |  | <b>ms</b>   | 100  |   |
| <b>Safety outputs</b>  | Voltage reference                                | Relay hard contacts   |  |   |
|  | Number and type of safety circuits               | 7 N.O. (13-14/23-24/33-34/43-44/53-54/63-64/73-74)                                |  |   |
|  | Number and type of additional outputs            | 4 solid-state (Y31-Y32, Y31-Y64, Y31-Y74, Y31-Y35)                                |  |   |
|  | Number and type of auxiliary contacts            | 2 N.C. (81-82/91-92)  |  |   |
|  | Breaking capacity in AC-15                       | <b>VA</b>   | B300 (inrush: 3600, maintained: 360)   |   |
|  | Breaking capacity in DC-13                       | 24 V/2 A, L/R = 50 ms   |  |   |
|  | Breaking capacity of solid-state outputs         | 24 V/20mA   |  |   |
|  | Max. thermal current (I <sub>the</sub> )         | <b>A</b>  | 10   |   |
|  | Max. total thermal current                       | <b>A</b>  | 40   |   |
|  | Output fuse protection                           | <b>A</b>  | 6 gG or 10 fast acting, conforming to EN/IEC 947-5-1, DIN VDE0660 part 200             |   |
| Minimum current  | <b>mA</b>  | 170   |  |   |
| Minimum voltage  | <b>V</b>   | 17  |  |   |
| <b>Electrical life</b>   |  | See page 3/16   |  |   |
| <b>Response time on input opening</b>  |  | <b>ms</b>   | < 20   |   |
| <b>Rated insulation voltage (U<sub>i</sub>)</b>  |  | <b>V</b>  | 300 (degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2)   |   |
| <b>Rated impulse withstand voltage (U<sub>imp</sub>)</b>   |  | <b>kV</b>   | 4 (overvoltage category III, conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2) |   |
| <b>LED display</b>   |  | 4   |  |   |
| <b>Operating temperature</b>   |  | <b>°F (°C)</b>  | + 14...+ 131 (- 10...+ 55)   |   |
| <b>Storage temperature</b>   |  | <b>°F (°C)</b>  | - 13...+ 267.8 (- 25...+ 85)   |   |
| <b>Degree of protection</b> conforming to IEC 529  |  | Terminals: IP 20, enclosure: IP 40  |  |   |
| <b>Connection</b>  | Type   | Captive screw clamp terminals   |  |   |
|  | 1-wire connection                                | Without cable end   | Solid or flexible cable: 26-14 AWG (0.14...2.5 mm <sup>2</sup> )                       | Captive screw clamp terminals, removable terminal block   |
|  |  | With cable end  | Without bezel, flexible cable: 24-14 AWG (0.25...2.5 mm <sup>2</sup> )                 |   |
|  |  | With cable end  | With bezel, flexible cable: 24-16 AWG (0.25...1.5 mm <sup>2</sup> )                    | With bezel, flexible cable: 24-14 AWG (0.25...2.5 mm <sup>2</sup> )                                       |
|  | 2-wire connection                                | Without cable end   | Solid or flexible cable: 26-18 AWG (0.14...0.75 mm <sup>2</sup> )                      | Solid cable: 24-18 AWG (0.2...1 mm <sup>2</sup> ), flexible cable: 24-16 AWG (0.2...1.5 mm <sup>2</sup> ) |
|  |  | With cable end  | Without bezel, flexible cable: 24-18 AWG (0.25...1 mm <sup>2</sup> )                   |   |
|  |  | With cable end  | Double, with bezel, flexible cable: 20-16 AWG (0.5...1.5 mm <sup>2</sup> )             |   |

(1) Per EN/ISO 13849-1 and EN/IEC 62061

# Safety relays

Preventa™ safety relay modules type XPSAR  
For Emergency stop, switch or light curtain monitoring



XPSAR31144

| References  |                                   |                           |  |               |              |                   |
|---|-----------------------------------|---------------------------|--|---------------|--------------|-------------------|
| Description   | Type of terminal block connection | Number of safety circuits | Additional outputs/ solid-state outputs to PLC | Supply        | Reference    | Weight            |
|   |                                   |                           |  | V             |              | oz (kg)           |
| Safety modules for Emergency stop, switch or light curtain monitoring | Integrated in module              | 7                         | 2 / 4  | ~ 24<br>= 24  | XPSAR311144  | 10.582<br>(0.300) |
|   |                                   |                           |  | ~ 115<br>= 24 | XPSAR351144  | 14.110<br>(0.400) |
|   |                                   |                           |  | ~ 230<br>= 24 | XPSAR371144  | 14.110<br>(0.400) |
| Removable from module   |                                   | 7                         | 2 / 4  | ~ 24<br>= 24  | XPSAR311144P | 10.582<br>(0.300) |
|   |                                   |                           |  | ~ 115<br>= 24 | XPSAR351144P | 14.110<br>(0.400) |
|   |                                   |                           |  | ~ 230<br>= 24 | XPSAR371144P | 14.110<br>(0.400) |


3

### XPSAR

#### Emergency stop monitoring function configuration


1-channel wiring

Emergency stop button with a single N.C. contact




2-channel wiring


Emergency stop button with 2 N.C. contacts, without short-circuit detection



Emergency stop button with 2 N.C. contacts, with short-circuit detection (recommended application)



Connection of multiple Emergency stop buttons with 2 N.C. contacts (recommended application)

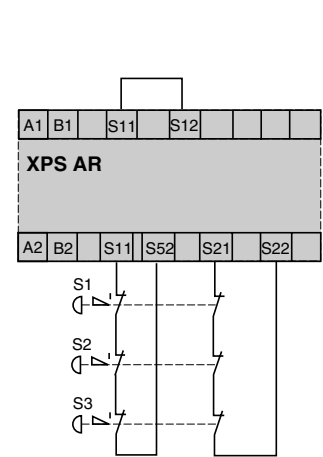


Not all faults are detected: a short-circuit on the Emergency stop push button is not detected


The 2 input channels are supplied at different potentials. A short-circuit between the 2 inputs is detected

#### Start configurations


Automatic start



With start button monitoring



Without start button monitoring



# Safety relays



Preventa™ safety relay modules type XPSAR  
For Emergency stop, switch or light curtain monitoring

### XPSAR


Monitoring of a movable guard associated with 2 switches with 1 contact each in combined mode (switch 1 with N.O. contact, switch 2 with N.C. contact)

Automatic start, without synchronization time monitoring


Manual start by start button

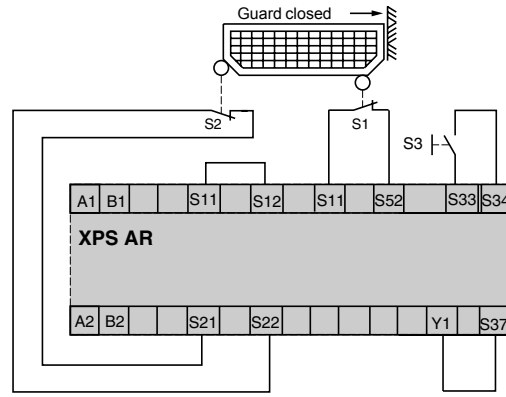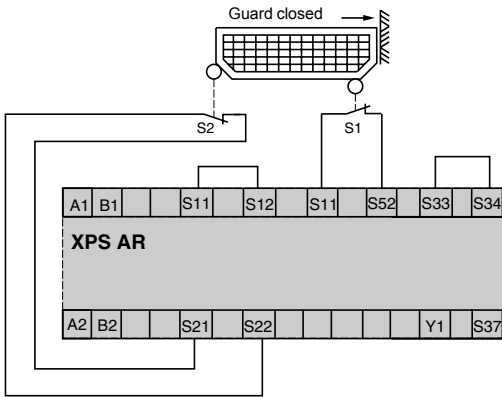

Monitoring of a movable guard associated with 2 switches in combined mode and automatic start (shown with guard open)

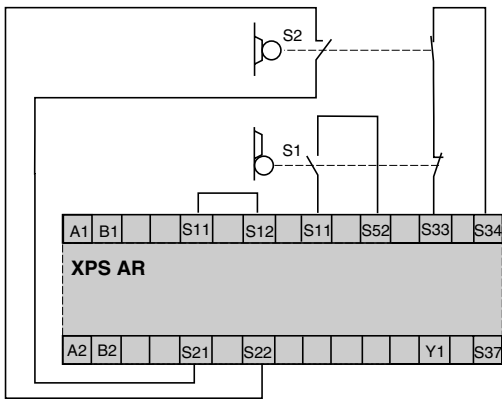

Module XPSAR associated with an Emergency stop button with 2 N.C. contacts

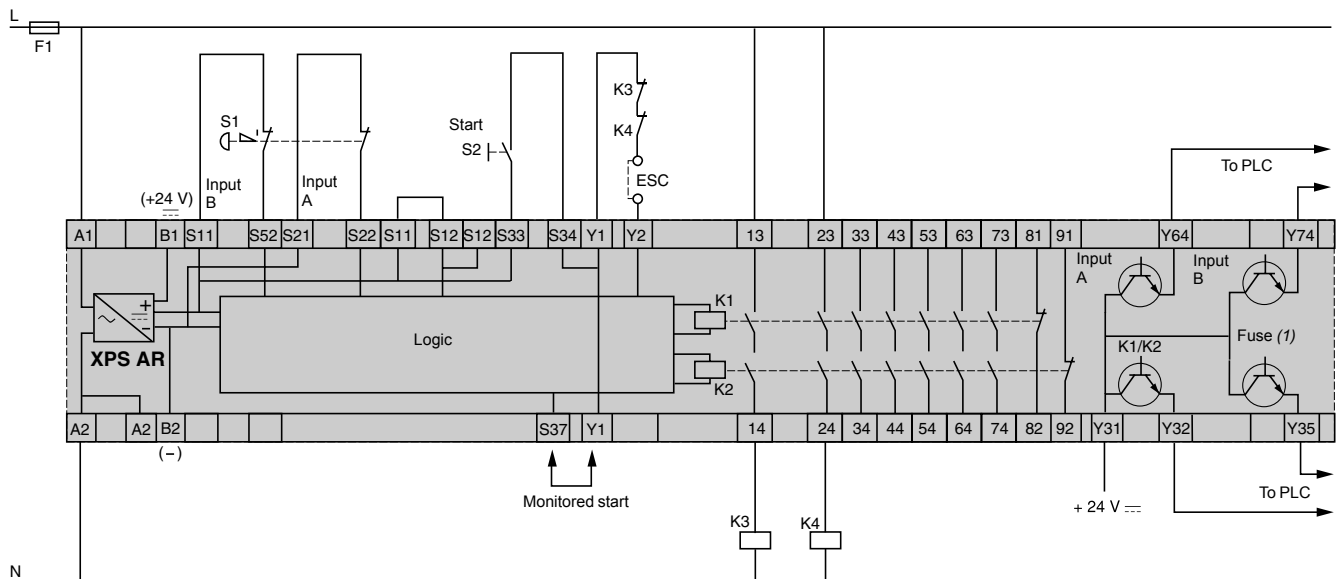

Supply connection according to voltage:  
~ across terminals A1/A2, or --- 24 V across terminals B1/B2

ESC: External start conditions  
(1) Operating status of internal electronic fuse


# Safety relays

Preventa™ safety relay modules type XPSAR

For Emergency stop, switch or light curtain monitoring


## XPSAR

Module XPSAR for monitoring electro-sensitive protection equipment (ESPE)

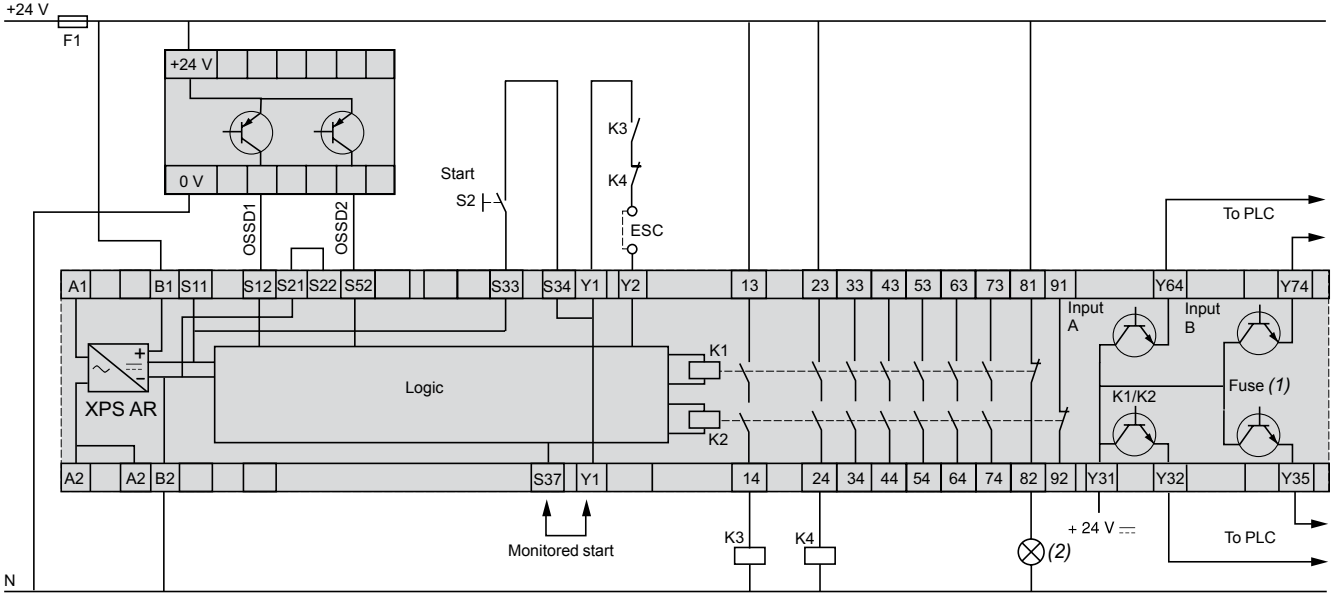

ESC: External start conditions  
 (1) Operating status of internal electronic fuse  
 (2) ESPE indicator light deactivated


## Example of safety circuit combining module XPSAR for switch monitoring and a PLC

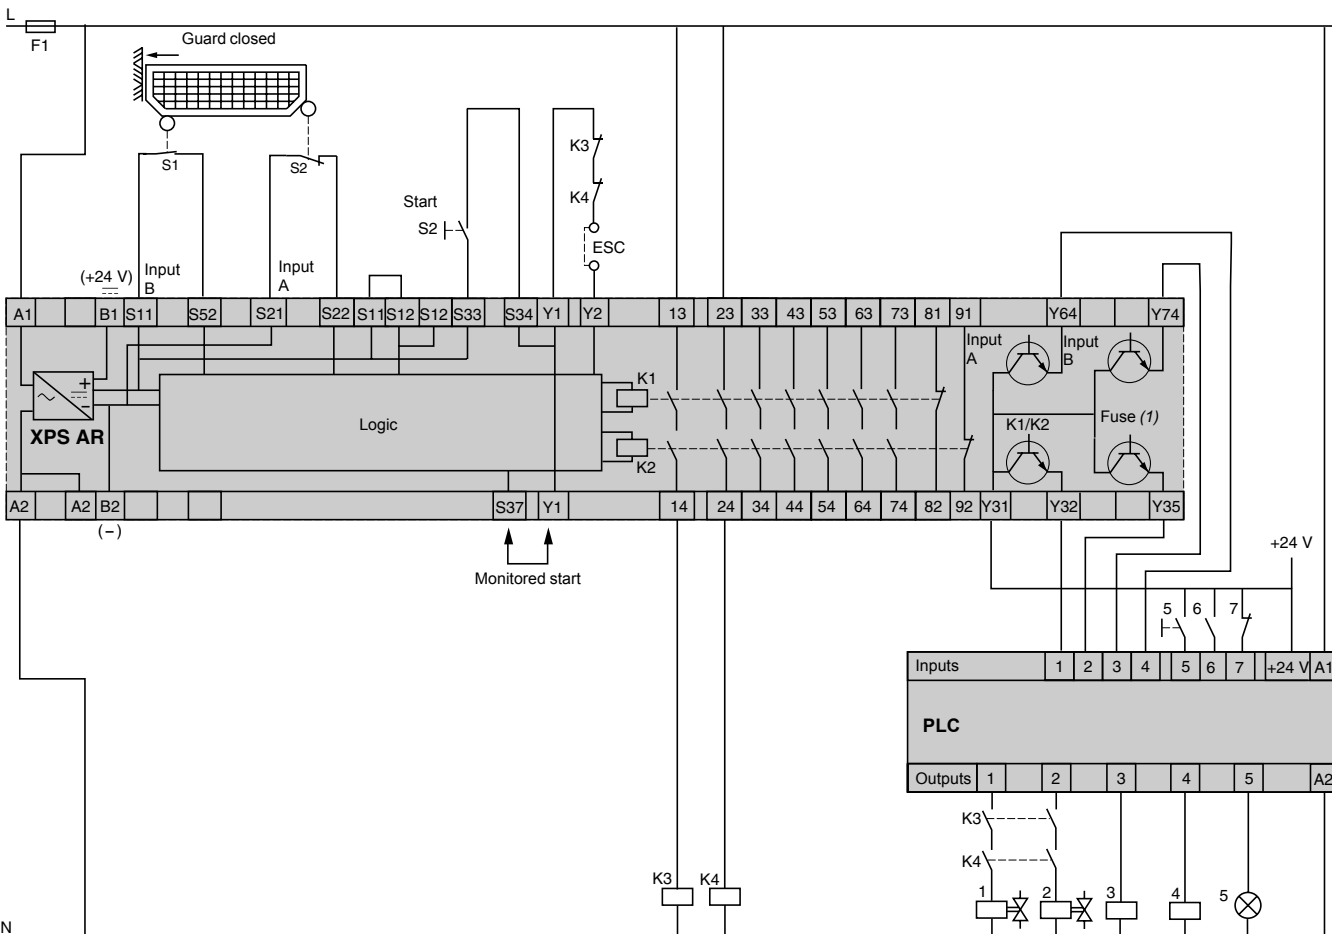


ESC: External start conditions  
 (1) Operating status of internal electronic fuse

### Functional diagrams of module XPSAR


#### Limit switch monitoring function with automatic start

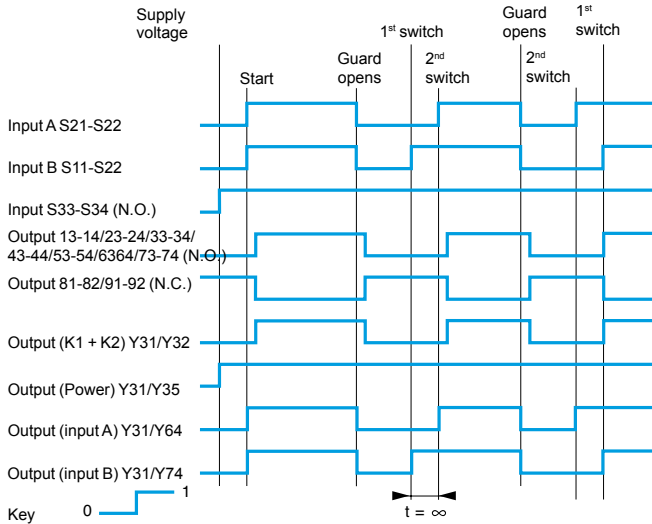


#### Limit switch monitoring function with automatic start and synchronization time monitoring

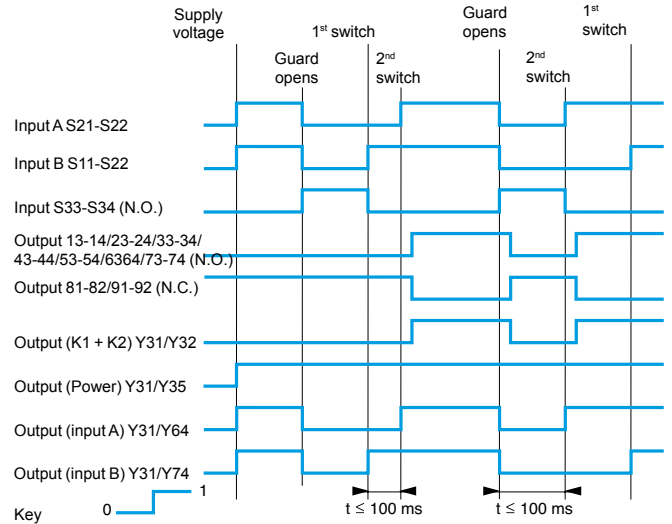


#### Emergency stop monitoring or limit switch monitoring function with monitored start

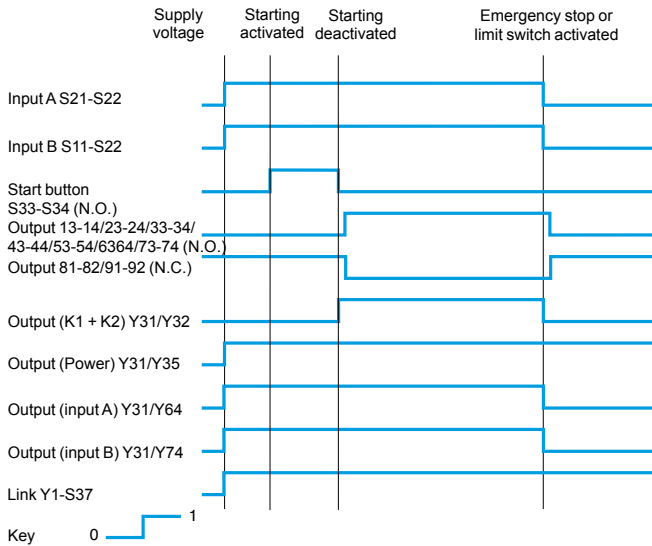

#### Light curtain monitoring (ESPE) function, curtains with solid-state outputs, and monitored start

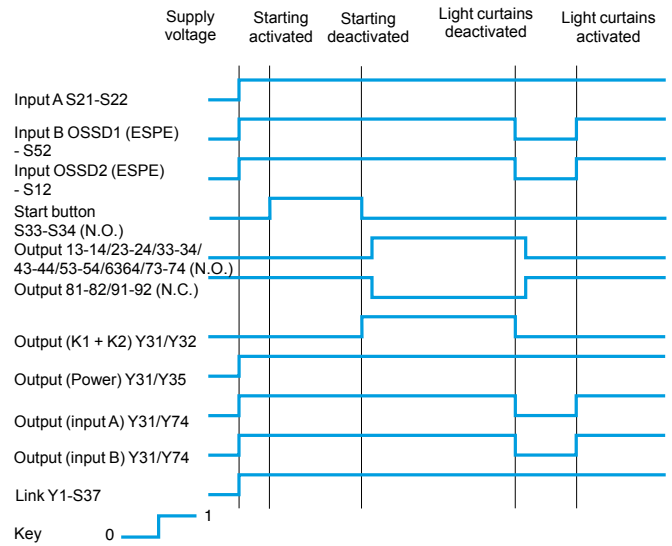

### LED details

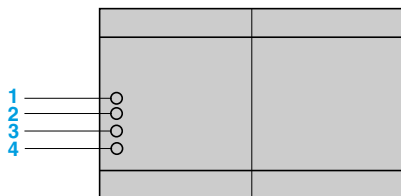

- 1 Supply voltage A1-A2, internal electronic fuse status
- 2 Input S22 (A)
- 3 Input S52 (B)
- 4 K1/K2 status (N.O. safety outputs closed)



### Operating principle

Safety relay modules XPSAK are used for:

- Monitoring Emergency stop circuits conforming to standards EN/ISO 13850 and EN/IEC 60204-1.
- Electrical monitoring of switches activated by protection devices, with optional selection of synchronization time between signals.
- Monitoring 4-wire sensing mats or edges.
- Monitoring type 4 light curtains conforming to EN/IEC 61496-1 which have solid-state safety outputs with test function, for example, light curtains type XUSL.

Housed in a compact enclosure, the modules have 3 safety outputs, a relay signalling output and 4 solid-state signalling outputs for signalling to the process PLC.

Preventa™ safety relay modules XPSAK●●●●P incorporate removable terminal blocks, thus optimizing machine maintenance.

To aid diagnostics, the modules have 4 LEDs on the front cover which provide information on the monitoring circuit status.

The Start button monitoring function is configurable depending on the wiring.

### Specifications

| Module type  |  | XPSAK3●1144   | XPSAK3●1144P  |   |
|--|--|---|---|---|
| <b>Maximum achievable safety level</b>   |  | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061      |   |   |
| <b>Reliability data</b><br>(1)   | Mean Time To dangerous Failure (MTTFd)           | <b>Years</b>  | 154.5   |   |
|  | Diagnostic Coverage (DC)                         | <b>%</b>  | > 99  |   |
|  | Probability of dangerous Failure per Hour (PFHd) | <b>1/h</b>  | $7.39 \times 10^{-9}$   |   |
| <b>Conformity to standards</b>   |  | EN/IEC 60204-1, EN 1088/ISO 14119, EN/IEC 60947-5-1, EN/ISO 13850, EN/IEC 60947-1+A11 |   |   |
| <b>Product certifications</b>  |  | UL, CSA, BG   |   |   |
| <b>Supply</b>  | Voltage  | <b>V</b>  | ~ and --- 24, ~ 48, ~ 110 and --- 24, ~ 120 and --- 24, ~ 230 and --- 24                                  |   |
|  | Voltage limits                                   |   | - 15...+ 10%  |   |
|  | Frequency  | <b>Hz</b>   | 50/60   |   |
| <b>Power consumption</b>   | 24 V version                                     | <b>VA</b>   | ≤ 5   |   |
|  | 110/120/230 V versions                           |   | ≤ 6   |   |
| <b>Module inputs fuse protection</b>   |  | Internal, electronic  |   |   |
| <b>Start button monitoring</b>   |  | Yes/No (configurable by terminal connections)   |   |   |
| <b>Control unit voltage and current</b><br>between terminals S21-S22, S31-S32      |  | --- 24 V/30 mA approx. (at nominal supply voltage)                                    |   |   |
| <b>Maximum wiring resistance RL</b><br>between terminals S21-S22, S31-S32          |  | <b>Ω</b>  | 28  |   |
| <b>Synchronization time between inputs A and B</b><br>(terminals S21-S22, S31-S32) |  | <b>s</b>  | Automatic start: 2 or 4 depending on wiring<br>Manual start (start button between S33 and S34): unlimited |   |
| <b>Outputs</b>   | Voltage reference                                |   | Relay hard contacts   |   |
|  | Number and type of safety circuits               |   | 3 N.O. (13-14, 23-24, 33-34)  |   |
|  | Number and type of additional circuits           |   | 1 N.C. (41-42) + 4 solid-state  |   |
|  | Breaking capacity in AC-15                       |   | <b>VA</b>   | C300: inrush 1800, maintained 180   |
|  | Breaking capacity in DC-13                       |   |   | 24 V/1.5 A - L/R = 50 ms  |
|  | Breaking capacity of solid-state outputs         |   |   | 24 V/20 mA, 48 V/10 mA  |
|  | Max. thermal current (I <sub>the</sub> )         |   | <b>A</b>  | 6   |
|  | Max. total thermal current                       |   | <b>A</b>  | 18  |
|  | Output fuse protection                           |   | <b>A</b>  | 4 gG or 6 fast acting, conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200                              |
|  | Minimum current                                  |   | <b>mA</b>   | 10  |
|  | Minimum voltage                                  |   | <b>V</b>  | 17  |
| <b>Electrical life</b>   |  | See page 3/16   |   |   |
| <b>Response time on input opening</b>  |  | <b>ms</b>   | ≤ 40  |   |
| <b>Rated insulation voltage (U<sub>i</sub>)</b>                                    |  | <b>V</b>  | 300 (degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2)                      |   |
| <b>Rated impulse withstand voltage (U<sub>imp</sub>)</b>                           |  | <b>kV</b>   | 4 (overvoltage category III, conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2)                    |   |
| <b>LED display</b>   |  |   | 4   |   |
| <b>Operating temperature</b>   |  | <b>°F (°C)</b>  | + 14...+ 131 (- 10...+ 55)  |   |
| <b>Storage temperature</b>   |  | <b>°F (°C)</b>  | - 13...+ 267.8 (- 25...+ 85)  |   |
| <b>Degree of protection</b>  | Conforming to IEC 60529                          | Terminals   | IP 20   |   |
|  |  | Enclosure   | IP 40   |   |
| <b>Connections</b>   | Type   |   | Captive screw clamp terminals   |   |
|  |  |   | Captive screw clamp terminals, removable terminal block   |   |
|  | 1-wire connection                                | Without cable end   |   | Solid or flexible cable: 26-14 AWG (0.14...2.5 mm <sup>2</sup> )  |
|  |  | With cable end  |   | Solid or flexible cable: 24-14 AWG (0.2...2.5 mm <sup>2</sup> )   |
|  |  | Without bezel, flexible cable: 24-14 AWG (0.25...2.5 mm <sup>2</sup> )                |   |   |
|  |  | With bezel, flexible cable: 24-16 AWG (0.25...1.5 mm <sup>2</sup> )                   |   | With bezel, flexible cable: 24-14 AWG (0.25...2.5 mm <sup>2</sup> )                                       |
|  | 2-wire connection                                | Without cable end   |   | Solid or flexible cable: 26-18 AWG (0.14...0.75 mm <sup>2</sup> )   |
|  |  | With cable end  |   | Solid cable: 24-18 AWG (0.2...1 mm <sup>2</sup> ), flexible cable: 24-16 AWG (0.2...1.5 mm <sup>2</sup> ) |
|  |  | Without bezel, flexible cable: 24-18 AWG (0.25...1 mm <sup>2</sup> )                  |   |   |
|  |  | Double, with bezel, flexible cable: 20-16 AWG (0.5...1.5 mm <sup>2</sup> )            |   |   |

(1) Per EN/ISO 13849-1 and EN/IEC 62061

# Safety relays

Preventa™ safety relay modules type XPSAK  
 For Emergency stop, switch, sensing mat/edges or light curtain monitoring

## References



XPSAK31144



XPSAK31144P

| Description  | Type of terminal block connection | Number of safety circuits | Outputs: Additional / Solid-state for PLC | Supply  | Reference    | Weight<br>oz (kg) |                |
|--|-----------------------------------|---------------------------|---|---------|--------------|-------------------|----------------|
| Safety modules for Emergency stop, switch, sensing mat/edges or light curtain monitoring | Integrated in module              | 3                         | 1 / 4                                     | ~ 24 V  | XPSAK311144  | 10.582 (0.300)    |                |
|  |                                   |                           |   | ≡ 24 V  |              |                   |                |
|  |                                   |                           |   | ~ 120 V |              |                   |                |
|  | Removable from module             | 3                         | 1 / 4                                     | 1 / 4   | ~ 24 V       | XPSAK311144P      | 10.582 (0.300) |
|  |                                   |                           |   |         | ≡ 24 V       |                   |                |
|  |                                   |                           |   |         | ~ 120 V      |                   |                |
|  |                                   |                           |   | ~ 230 V | XPSAK371144  | 14.110 (0.400)    |                |
|  |                                   |                           |   | ≡ 24 V  |              |                   |                |
|  |                                   |                           |   | ~ 230 V |              |                   |                |
|  |                                   |                           |   | ~ 24 V  | XPSAK351144  | 14.110 (0.400)    |                |
|  |                                   |                           |   | ≡ 24 V  |              |                   |                |
|  |                                   |                           |   | ~ 230 V |              |                   |                |
|  |                                   |                           |   | ~ 24 V  | XPSAK351144P | 14.110 (0.400)    |                |
|  |                                   |                           |   | ≡ 24 V  |              |                   |                |
|  |                                   |                           |   | ~ 230 V |              |                   |                |
|  |                                   |                           |   | ~ 24 V  | XPSAK371144P | 14.110 (0.400)    |                |
|  |                                   |                           |   | ≡ 24 V  |              |                   |                |
|  |                                   |                           |   | ~ 230 V |              |                   |                |

# Safety relays

## Preventa™ safety relay modules type XPSAK


For Emergency stop, switch, sensing mat/edges or light curtain monitoring

### XPSAK

#### Emergency stop monitoring function configuration

##### 1-channel wiring


Emergency stop button with a single N.C. contact




Not all anomalies are detected: a short-circuit on the Emergency stop push button is not detected.

##### 2-channel wiring

Emergency stop button with 2 N.C. contacts, without short-circuit detection




Emergency stop button with 2 N.C. contacts, with short-circuit detection (recommended application)



The 2 input channels are supplied at different potentials. A short-circuit between the 2 inputs is detected.

3


#### Connection of multiple Emergency stop buttons with 2 N.C. contacts (recommended application).

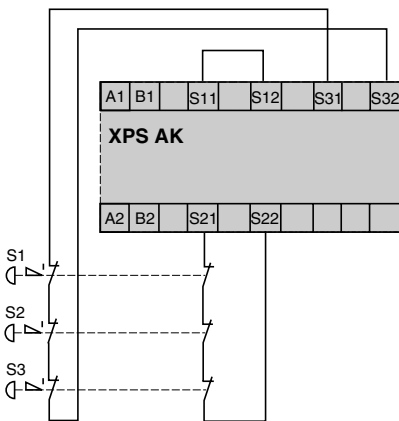


The 2 input channels are supplied at different potentials. A short-circuit between the 2 inputs is detected.

#### Start configurations

##### Automatic start




##### With start button monitoring




#### Proximity sensor monitoring


Proximity sensors with PNP outputs  
Without short-circuit detection

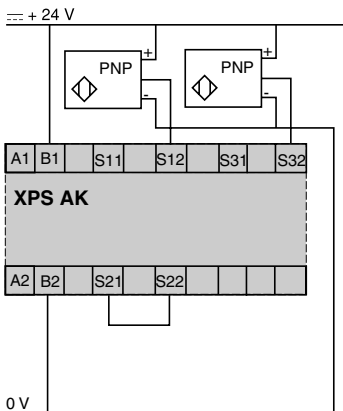

Proximity sensors with NPN and PNP outputs  
With short-circuit detection

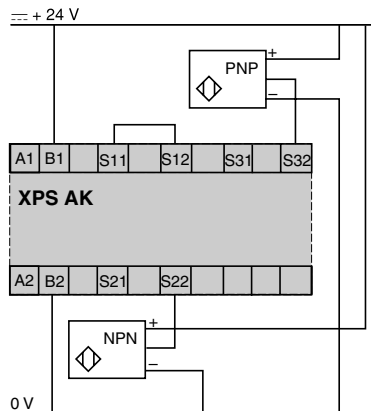

#### Sensing mat or edges monitoring

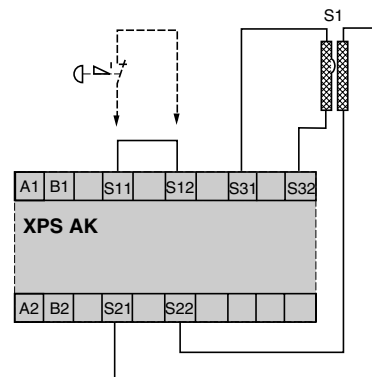


# Safety relays


Preventa™ safety relay modules type XPSAK  
For Emergency stop, switch, sensing mat/edges or light curtain monitoring

### XPSAK

**Monitoring of a movable guard associated with 2 switches with 1 contact each in combined mode (switch 1 with N.O. contact, switch 2 with N.C. contact)**  
Automatic start, without synchronization time monitoring      Manual start by Start button

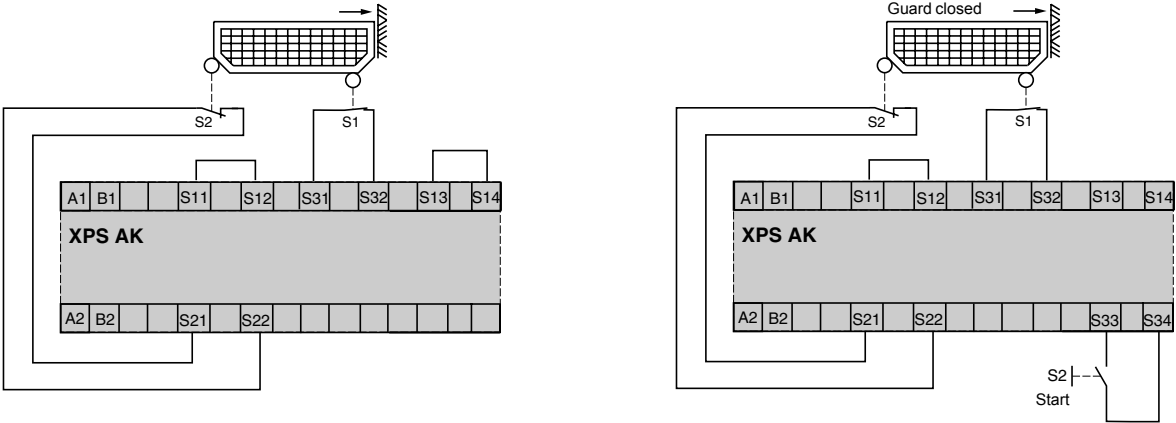


### Monitoring of a movable guard associated with 2 switches and automatic start (shown with guard open)

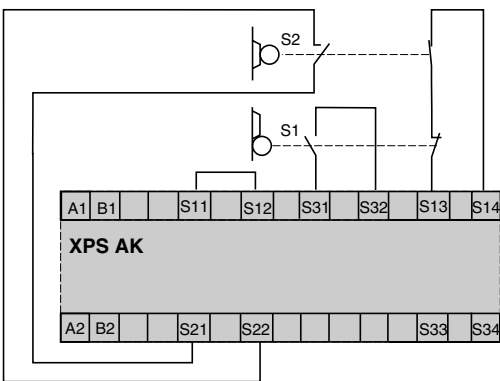


For synchronization monitoring of the inputs, S13 and S14 must be wired per the diagram to the left (if S13 and S14 are jumpered, the result would be automatic start without synchronization monitoring). The synchronization time is determined by the first limit switch that is activated.  
If S1 is actuated before S2, then the synchronization time is two seconds on closing.  
If S2 is actuated before S1, then the synchronization time is four seconds on closing.  
There is no synchronization on opening the door or guard.

Functional diagram of outputs

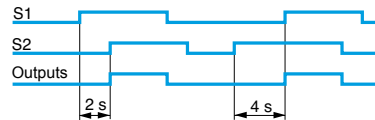

### Module XPSAK associated with an Emergency stop button with 2 N.C. contacts

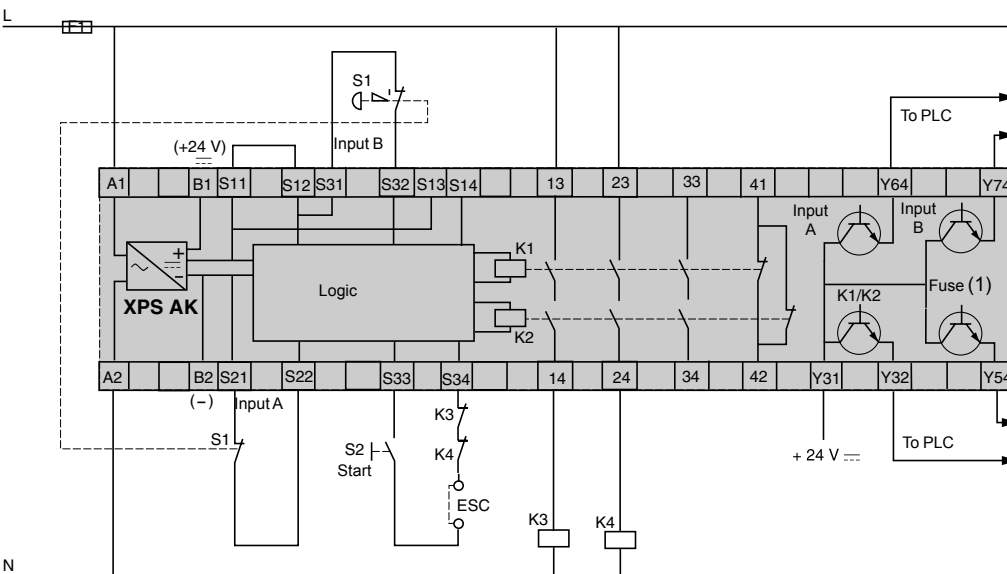

Supply connection according to voltage: ~ across terminals A1/A2, or --- 24 V across terminals B1/B2.

(1) Operating status of internal electronic fuse.  
ESC: External start conditions.


# Safety relays

Preventa™ safety relay modules type XPSAK

For Emergency stop, switch, sensing mat/edges or light curtain monitoring

## XPSAK

Module XPSAK for monitoring electro-sensitive protection equipment (ESPE)

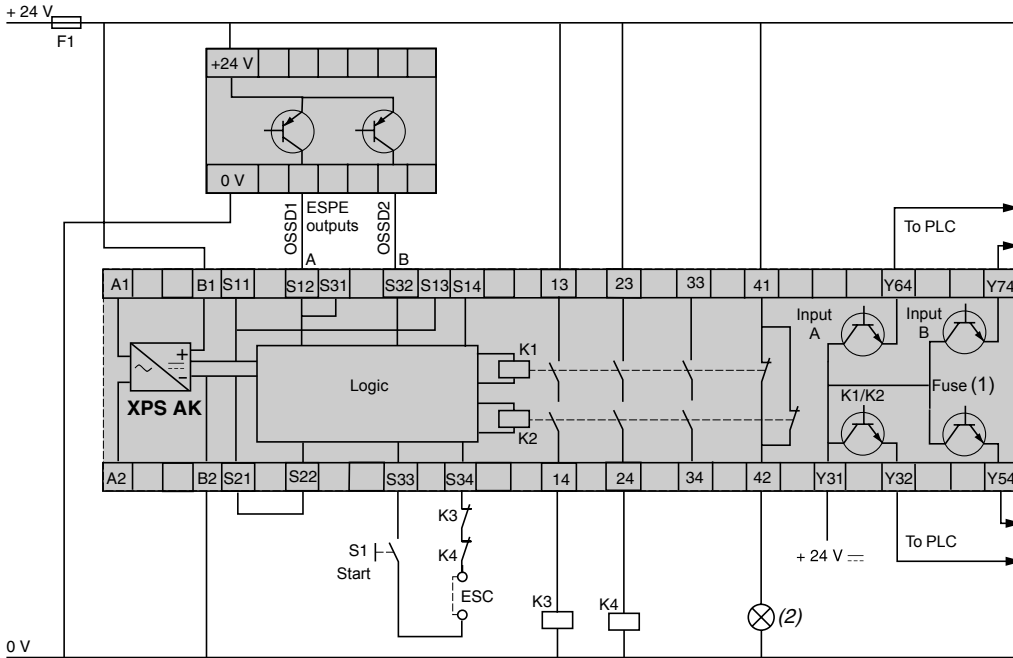


(1) Operating status of internal electronic fuse.

(2) ESPE indicator light deactivated.

ESC: External start conditions.

## Example of safety circuit combining module XPSAK for limit switch monitoring and a PLC

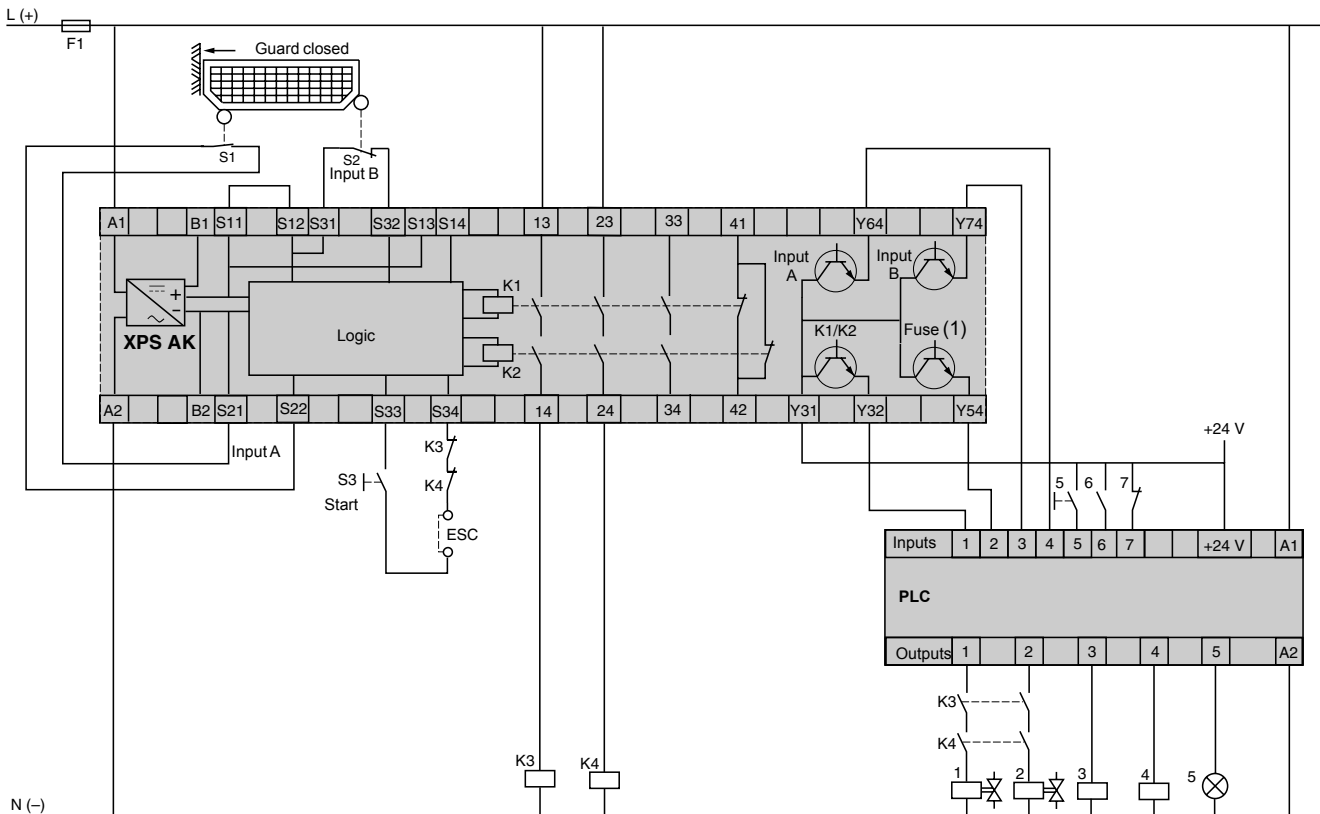


(1) Operating status of internal electronic fuse.

ESC: External start conditions.


**XPSAK**

**Functional diagrams**


Switch monitoring function with automatic start

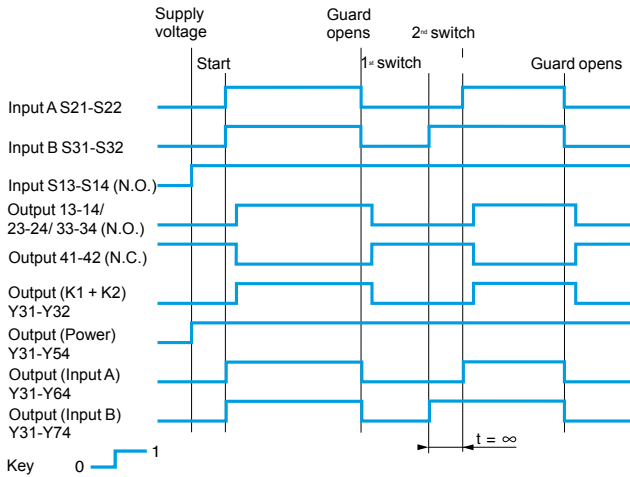


Switch monitoring function with automatic start and synchronization time monitoring

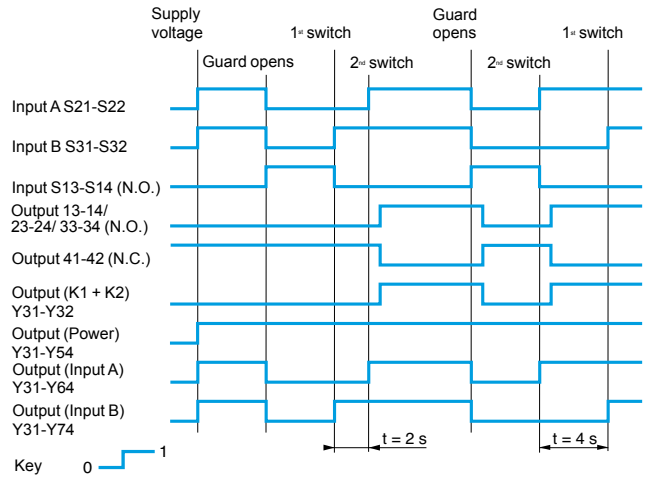


Emergency stop monitoring or switch monitoring function

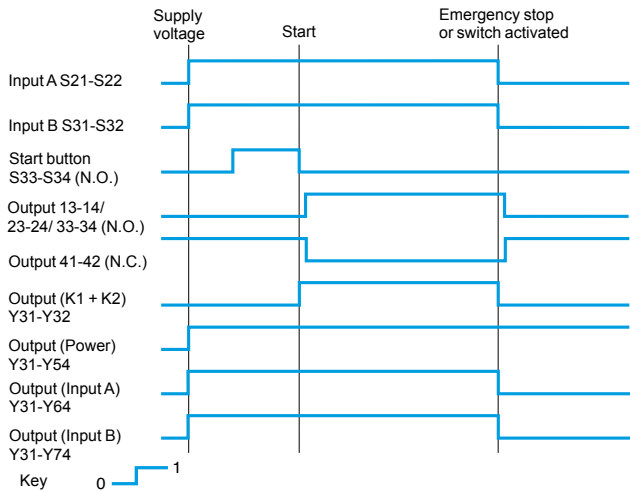


Light curtain monitoring (ESPE) function, curtains with solid-state outputs

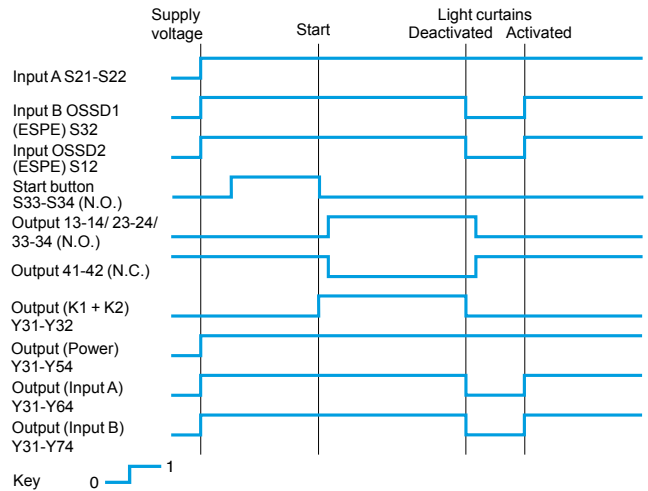

Sensing mat or edge monitoring function, with monitored start

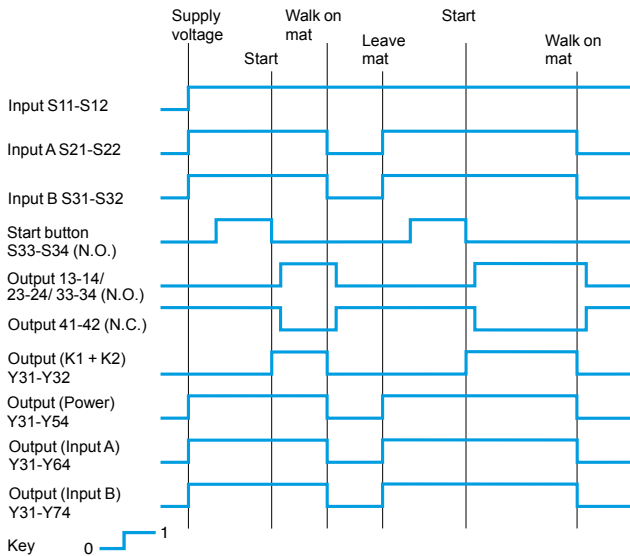

**LED details**



- 1 Supply voltage A1-A2, fuse status.
- 2 Input S22 (A).
- 3 Input S32 (B).
- 4 K1/K2 status (N.O. safety outputs closed).

# Safety relays

Preventa™ safety relay modules types XPSBAE, XPSBCE, XPSBF

For electrical monitoring of two-hand control stations

## Operating principle

Two-hand control stations are designed to provide protection against hand injury. They require machine operators to keep their hands clear of the hazardous movement zone.

The use of two-hand control is an individual protective measure, which can protect only one operator. Separate two-hand control stations must be provided for each operator in a multiple-worker environment.

Safety relay modules XPSBAE, XPSBCE and XPSBF for two-hand control stations comply with the requirements of European standard EN 574/ISO 13851 for two-hand control systems.

The control stations must be designed and installed such that they cannot be activated involuntarily or easily rendered inoperative. Depending on the application, the requirements of type C standards specific to the machinery involved must be met (additional personal protection methods may have to be considered).

To initiate a hazardous movement, both operators (two-hand control pushbuttons) must be activated within an interval  $\leq 0.5$  s (synchronous activation). If one of the two pushbuttons is released during a hazardous operation, the control sequence is cancelled. Resumption of the hazardous operation is possible only if both pushbuttons are returned to their initial position and reactivated within the required time interval.

### The control sequence does not occur if:

- Both two-hand control push buttons are pressed during a time period greater than 0.5 seconds,
- A short-circuit is present in a push button contact,
- The feedback loop is not closed at start-up.

The safety distance between the control units and the hazardous zone must be sufficient that when only one operator is released, the hazardous zone cannot be reached before the hazardous movement has been completed or stopped.

## XPSBAE

This module is designed for use on lighter duty applications where a two-hand control function is desired, but where the Performance Level required (PLr) is PLa, b, or c and the two-hand control requirements meet Type III A (per EN 574/ISO 13851). **This module is not to be used for applications, such as presses, which require a Type III C module or where the application is not PLa, b, or c.** For press applications, for applications in PLd or e, or if application calls for a Type III C module, use XPSBCE or XPSBF module.

## XPSBCE and XPSBF

These modules can be used on applications, such as presses, which require a Type III C module. The XPSBCE and XPSBF can be used for a two-hand control application, including presses and similar equipment.



# Safety relays

Preventa™ safety relay modules types  
XPSBAE, XPSBCE

For electrical monitoring of two-hand control stations

| Specifications   |   |   |   |   |   |  |
|--|---|---|---|---|---|--|
| Module type  |   | XPSBAE●●●●P   | XPSBAE●●●●C   | XPSBCE●●●●P   | XPSBCE●●●●C   |  |
| <b>Maximum achievable safety level</b>   |   | PL c/Category 1 conforming to EN/ISO 13849-1, SILCL1 conforming to EN/IEC 62061 |   | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL3 conforming to EN/IEC 62061   |   |  |
| <b>Reliability data (1)</b> Mean Time To dangerous Failure (MTTF <sub>d</sub> )                    |   | <b>Years</b>  | 55  | 37  |   |  |
| Diagnostic Coverage (DC)   |   | <b>%</b>  | –   | > 99  |   |  |
| Probability of dangerous Failure per Hour (PFH <sub>d</sub> )                                      |   | <b>1/h</b>  | 2.1 x 10 <sup>-6</sup>  | 3 x 10 <sup>-8</sup>  |   |  |
| <b>Conformity to standards</b>   |   | EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1, EN 574 type III A/ISO 13851   |   | EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1, EN 574 type III C/ISO 13851   |   |  |
| <b>Product certifications</b>  |   | UL, CSA, TÜV  |   | UL, CSA, BG   |   |  |
| <b>Supply</b>  | Voltage   | <b>V</b>  | 24 ~, 115/230 ~   | 24 ~, 24 ~, 115 ~, 230 ~  |   |  |
|  | Voltage limits  |   | - 15 to + 10% (24 V ~),<br>- 15 to + 10% (115/230 V ~)  | - 15 to + 10% (24 V ~, 24 V ~),<br>- 15 to + 15% (115 V ~),<br>- 15 to + 10% (230 V ~)  |   |  |
|  | Frequency   | <b>Hz</b>   | 50/60   |   |   |  |
| <b>Power consumption</b>   |   | <b>VA</b>   | 24 V ~ 0.7 W/2 VA<br>115/230 V ~ 3 VA   | < 4   |   |  |
| <b>Module inputs fuse protection</b>   |   | Internal, electronic  |   |   |   |  |
| <b>Inputs</b>  |   | S1: 1 N.C. + N.O., S2: 1 N.C. + N.O.  |   |   |   |  |
| <b>Two-hand control type</b><br>Conforming to EN 574   |   | III A   |   | III C   |   |  |
| <b>Synchronization time</b>  |   | <b>s</b>  | 0.5 maximum   |   |   |  |
| <b>Control unit voltage</b>  | 24 V ~ version  | <b>V</b>  | 24  | 24  |   |  |
|  | 24 V ~, 115 V, 230 V version  | <b>V</b>  | 24  | 24  |   |  |
| <b>Calculation of wiring resistance RL (for XPSBCE only)</b><br>between terminals S11-S13, S21-S23 |   | <b>Ω</b>  | –   | $RL = \frac{U_e}{U_n} \times 160-127$ Ue = true voltage applied to terminals A1-A2<br>$RL = \frac{U_e}{U_n} \times 160-135$ Un = nominal supply voltage |   |  |
| <b>Outputs</b>   | Voltage reference   | Relay hard contacts   |   |   |   |  |
|  | Number and type of safety circuits  | 1 N.O. (11-14)  |   | 2 N.O. (13-14, 23-24)   |   |  |
|  | Number and type of additional circuits  | 1 N.C. (11-12)  |   | 1 N.C. (31-32)  |   |  |
|  | Breaking capacity in AC-15  | <b>VA</b>   | C300: inrush 1800, maintained 180   |   | B300: inrush 3600, maintained 360   |  |
|  | Breaking capacity in DC-13  |   | 24 V/1.5 A to L/R = 50 ms   |   |   |  |
|  | Max. thermal current (Ithe)   | <b>A</b>  | 5   | 6   |   |  |
|  | Output fuse protection, using fuses conforming to IEC/EN 60947-5-1, VDE 0660 part 200 | <b>A</b>  | 4 gG  | 6 gG  |   |  |
|  | Minimum current   | <b>mA</b>   | 10  |   |   |  |
|  | Minimum voltage   | <b>V</b>  | 17  |   |   |  |
| <b>Electrical life</b>   |   | See page 3/16   |   |   |   |  |
| <b>Response time</b>   |   | <b>ms</b>   | < 20  | < 50  |   |  |
| <b>Rated insulation voltage (Ui)</b>   |   | <b>V</b>  | 300 (degree of pollution 2 conforming to IEC/EN 60947-5-1, DIN VDE 0110 parts 1 & 2)                |   |   |  |
| <b>Rated impulse withstand voltage (Uimp)</b>  |   | <b>kV</b>   | 4 (overvoltage category III, conforming to IEC/EN 60947-5-1, DIN VDE 0110 parts 1 & 2)              |   |   |  |
| <b>LED display</b>   |   |   | 2   | 3   |   |  |
| <b>Operating temperature</b>   |   | <b>°F (°C)</b>  | - 13 to + 131 (- 25 to + 55)  |   | - 13 to + 131 (- 25 to + 55)  |  |
| <b>Storage temperature</b>   |   | <b>°F (°C)</b>  | - 13 to + 167 (- 25 to + 75)  |   | - 13 to + 167 (- 25 to + 75)  |  |
| <b>Degree of protection</b><br>conforming to IEC/EN 60529  | Terminals   | IP 20   |   |   |   |  |
|  | Enclosure   | IP 40   |   |   |   |  |
| <b>Wiring diagrams</b> Type  | Terminals   | Captive screw clamp terminals   | Spring terminals  | Captive screw clamp terminals   | Spring terminals  |  |
|  | Terminal block  | Removable from module   |   | Removable from module   |   |  |
|  | 1-wire connection   | Without cable end   | Solid or flexible cable: 26-14 AWG (0.2 to 2.5 mm <sup>2</sup> )                                    |   | Solid or flexible cable: 24-14 AWG (0.2 to 2.5 mm <sup>2</sup> )            |  |
|  |   | With wire end   | Without bezel, flexible cable: 24-14 AWG (0.25 to 2.5 mm <sup>2</sup> )                             |   |   |  |
|  | 2-wire connection   | With cable end  | With bezel, flexible cable: 24-16 AWG (0.25 to 1.5 mm <sup>2</sup> )                                | With bezel, flexible cable: 24-14 AWG (0.25 to 2.5 mm <sup>2</sup> )  | With bezel, flexible cable: 24-16 AWG (0.25 to 1.5 mm <sup>2</sup> )        | With bezel, flexible cable: 24-14 AWG (0.25 to 2.5 mm <sup>2</sup> ) |
|  |   | Without cable end   | Solid: 26-18 AWG (0.2 to 1.0 mm <sup>2</sup> )<br>Stranded: 26-16 AWG (0.2 to 1.5 mm <sup>2</sup> ) | –   | Solid or flexible cable: 24-18 AWG (0.2 to 1.0 mm <sup>2</sup> )            | –  |
|  |   | With cable end  | Without bezel, flexible cable: 24-18 AWG (0.25 to 1.0 mm <sup>2</sup> )                             | –   | Without bezel, flexible cable: 24-18 AWG (0.25 to 1.0 mm <sup>2</sup> )     | –  |
|  | With cable end  | Double, with bezel, flexible cable: 20-16 AWG (0.5 to 1.5 mm <sup>2</sup> )     | Double, with bezel, flexible cable: 20-18 AWG (0.5 to 1.0 mm <sup>2</sup> )                         | Double, with bezel, flexible cable: 20-16 AWG (0.5 to 1.5 mm <sup>2</sup> )   | Double, with bezel, flexible cable: 20-18 AWG (0.5 to 1.0 mm <sup>2</sup> ) |  |

(1) Per EN/ISO 13849-1 and EN/IEC 62061

| Specifications  |   |  |  |   |
|---|---|--|--|---|
| Module type   |   | XPSBF1132  | XPSBF1132P   |   |
| <b>Maximum achievable safety level</b>                    |   | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061 |  |   |
| <b>Reliability data (1)</b>                               | Mean Time To dangerous Failure (MTTF <sub>d</sub> )                                   | <b>Years</b>   | 50.1   |   |
|   | Diagnostic Coverage (DC)  | <b>%</b>   | > 99   |   |
|   | Probability of dangerous Failure per Hour (PFH <sub>d</sub> )                         | <b>1/h</b>   | 1.3 x 10 <sup>-8</sup>   |   |
| <b>Conformity to standards</b>                            |   | EN 60204-1, EN 60947-1, EN 60947-5-1, EN 574 type III C/ISO 13851                |  |   |
| <b>Product certifications</b>                             |   | UL, CSA, TÜV   |  |   |
| <b>Supply</b>   | Voltage   | <b>V</b>   | 24 ---   |   |
|   | Voltage limits  |  | - 20 to + 20%  |   |
| <b>Power consumption</b>                                  |   | <b>W</b>   | < 2.5  |   |
| <b>Module inputs fuse protection</b>                      |   | Internal, electronic   |  |   |
| <b>Inputs</b>   |   | S1: 1 N.C. + N.O., S2: 1 N.C. + N.O.   |  |   |
| <b>Two-hand control type</b>                              |   | III C conforming to EN 574   |  |   |
| <b>Synchronization time</b>                               |   | <b>s</b>   | 0.5 maximum  |   |
| <b>Control unit voltage</b>                               |   | <b>V</b>   | 24 V/8 mA  |   |
| <b>Outputs</b>  | Voltage reference   | Relay hard contacts  |  |   |
|   | Number and type of safety circuits  | 2 N.O. (13-14, 23-24)  |  |   |
|   | Number and type of additional circuits  | 2 solid-state (type 24 V to 20 mA)   |  |   |
|   | Breaking capacity in AC-15  | <b>VA</b>  | C300: inrush 1800, maintained 180  |   |
|   | Breaking capacity in DC-13  | 24 V/1.5 A to L/R = 50 ms  |  |   |
|   | Max. thermal current (I <sub>the</sub> )  | <b>A</b>   | 4.2  |   |
|   | Max. total thermal current  | <b>A</b>   | 8.4  |   |
|   | Output fuse protection, using fuses conforming to IEC/EN 60947-5-1, VDE 0660 part 200 | <b>A</b>   | 4 gG or 6 fast acting  |   |
|   | Minimum current   | <b>mA</b>  | 10   |   |
| Minimum voltage   | <b>V</b>  | 17   |  |   |
| <b>Electrical life</b>                                    |   | See page 3/16  |  |   |
| <b>Response time</b>                                      |   | <b>ms</b>  | < 20   |   |
| <b>Rated insulation voltage (U<sub>i</sub>)</b>           |   | <b>V</b>   | 300 (degree of pollution 2 conforming to IEC/EN 60947-5-1, DIN VDE 0110 parts 1 & 2)   |   |
| <b>Rated impulse withstand voltage (U<sub>imp</sub>)</b>  |   | <b>kV</b>  | 4 (overvoltage category III, conforming to IEC/EN 60947-5-1, DIN VDE 0110 parts 1 & 2) |   |
| <b>LED display</b>  |   | 3  |  |   |
| <b>Operating temperature</b>                              |   | <b>°F (°C)</b>   | + 14 to + 131 (- 10 to + 55)   |   |
| <b>Storage temperature</b>                                |   | <b>°F (°C)</b>   | -13 to +185 (- 25 to + 85)   |   |
| <b>Degree of protection</b><br>conforming to IEC/EN 60529 | Terminals   | IP 20  |  |   |
|   | Enclosure   | IP 40  |  |   |
| <b>Connection</b>   | Type  | Terminals  | Captive screw clamp terminals  | Captive screw clamp terminals   |
|   |   | Terminal block   | Integrated in module   | Removable from module   |
|   | 1-wire connection   | Without cable end  | Solid or flexible cable: 26-14 AWG (0.14 to 2.5 mm <sup>2</sup> )                      | Solid or flexible cable: 24-14 AWG (0.2 to 2.5 mm <sup>2</sup> )  |
|   |   | With cable end   | Without bezel, flexible cable: 24-14 AWG (0.25 to 2.5 mm <sup>2</sup> )                |   |
|   | 2-wire connection   | With cable end   | With bezel, flexible cable: 24-16 AWG (0.25 to 1.5 mm <sup>2</sup> )                   | With bezel, flexible cable: 24-14 AWG (0.25 to 2.5 mm <sup>2</sup> )  |
|   |   | Without cable end  | Solid or flexible cable: 26-20 AWG (0.14 to 0.75 mm <sup>2</sup> )                     | Solid cable: 24-18 AWG (0.2 to 1 mm <sup>2</sup> ), flexible cable: 24-16 AWG (0.2 to 1.5 mm <sup>2</sup> ) |
|   |   | With cable end   | Without bezel, flexible cable: 24-18 AWG (0.25 to 1 mm <sup>2</sup> )                  |   |
|   |   | With cable end   | Double, with bezel, flexible cable: 20-16 AWG (0.5 to 1.5 mm <sup>2</sup> )            |   |

(1) Per EN/ISO 13849-1 and EN/IEC 62061

# Safety relays

Preventa™ safety relay modules types XPSBAE, XPSBCE, XPSBF

For electrical monitoring of two-hand control stations



XPSBAE●●●●P



XPSBAE●●●●C



XPSBCE●●●●P



XPSBCE●●●●C



XPSBF1132

## Selection

### Requirements of standard EN 574/ISO 13851

Standard EN 574/ISO 13851 defines the selection of two-hand controls according to the control system category. The following table details the 3 types of two-hand control conforming to EN 574/ISO 13851. For each type, it lists the operating characteristics and minimum requirements.

|   | Type I  | Type II | Type III |                 |                 |
|---|---------|---------|----------|-----------------|-----------------|
|   |         |         | A        | B               | C               |
| Use of both hands (simultaneous action)   |         |         |          |                 |                 |
| Link between input and output signals   |         |         |          |                 |                 |
| Output signal inhibited   |         |         |          |                 |                 |
| Prevention of accidental operation  |         |         |          |                 |                 |
| Tamper-proof  |         |         |          |                 |                 |
| Output signal reinitialized   |         |         |          |                 |                 |
| Synchronous action (specified time limit)   |         |         |          |                 |                 |
| Use of proven components (Category 1 conforming to EN/ISO 13849-1)                |         |         | XPSBAE   |                 |                 |
| Redundancy with partial error detection (Category 3 conforming to EN/ISO 13849-1) |         |         |          | XPSBCE<br>XPSBF |                 |
| Redundancy + Self-monitoring (Category 4 conforming to EN/ISO 13849-1)            |         |         |          |                 | XPSBCE<br>XPSBF |
| Two-hand control station  | XY2SB●● |         |          |                 |                 |

Conforming to standard EN/ISO 13849-1

Meets the requirements of standard EN 574/ISO 13851


## References

| Description   | Type conforming to standard EN 574                                 | Connection                           | Number of safety circuits            | Additional outputs | Supply       | Reference     | Weight oz (kg) |                |
|---|--|--------------------------------------|--------------------------------------|--------------------|--------------|---------------|----------------|----------------|
| Safety relay modules for electrical monitoring of two-hand control stations | III A  | Captive screw clamp terminals        | 1 N.O.                               | 1 N.C.             | ~ and 24 V ∴ | XPSBAE5120P   | 3.527 (0.100)  |                |
|   |  | Terminal block removable from module |                                      |                    | ~ 115/230V   | XPSBAE3920P   | 3.527 (0.100)  |                |
|   |  | Spring terminals                     | 1 N.O.                               | 1 N.C.             | ~ and 24 V ∴ | XPSBAE5120C   | 3.527 (0.100)  |                |
|   |  | Terminal block removable from module |                                      |                    | ~ 115/230V   | XPSBAE3920C   | 3.527 (0.100)  |                |
|   |  | III C                                | Captive screw clamp terminals        | 2 N.O.             | 1 N.C. relay | ~ and 24 V ∴  | XPSBCE3110P    | 9.594 (0.272)  |
|   |  |                                      | Terminal block removable from module |                    |              | ~ 115/120 V   | XPSBCE3410P    | 11.358 (0.322) |
|   |  |                                      |                                      |                    | ~ 230 V      | XPSBCE3710P   | 11.358 (0.322) |                |
|   | Spring terminals   |                                      | 2 N.O.                               | 1 N.C. relay       | ~ and 24 V ∴ | XPSBCE3110C   | 9.594 (0.272)  |                |
|   | Terminal block removable from module                               |                                      |                                      |                    | ~ 115/120 V  | XPSBCE3410C   | 11.358 (0.322) |                |
|   |  |                                      |                                      |                    | ~ 230 V      | XPSBCE3710C   | 11.358 (0.322) |                |
|   | Captive screw clamp terminals Terminal block removable from module | 2 N.O.                               | 2 solid-state                        | ∴ 24 V             | XPSBF1132    | 5.291 (0.150) |                |                |
|   |  | 2 N.O.                               | 2 solid-state                        | ∴ 24 V             | XPSBF1132P   | 5.291 (0.150) |                |                |

## XPSBAE

### Module XPSBAE associated with a two-hand control station


Type III A conforming to EN 574/ISO 13851

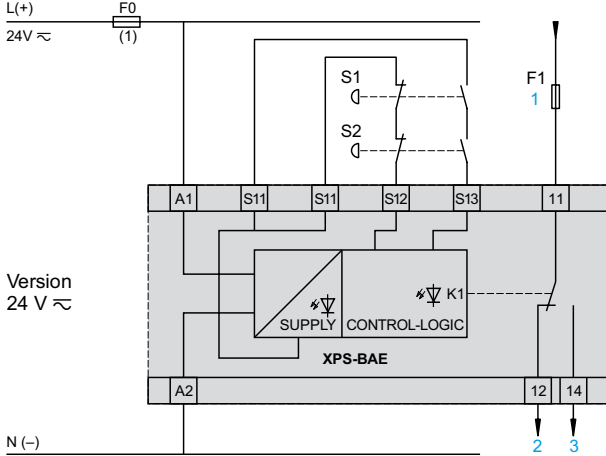


- 1 See technical data for fuse sizes
- 2 Signaling output 11-12
- 3 Safety output 11-14

S1 and S2: pushbuttons. Must not be used for applications (presses) which require a type III C module (XPSBCE or XPSBF).

### Functional diagram of module XPSBAE

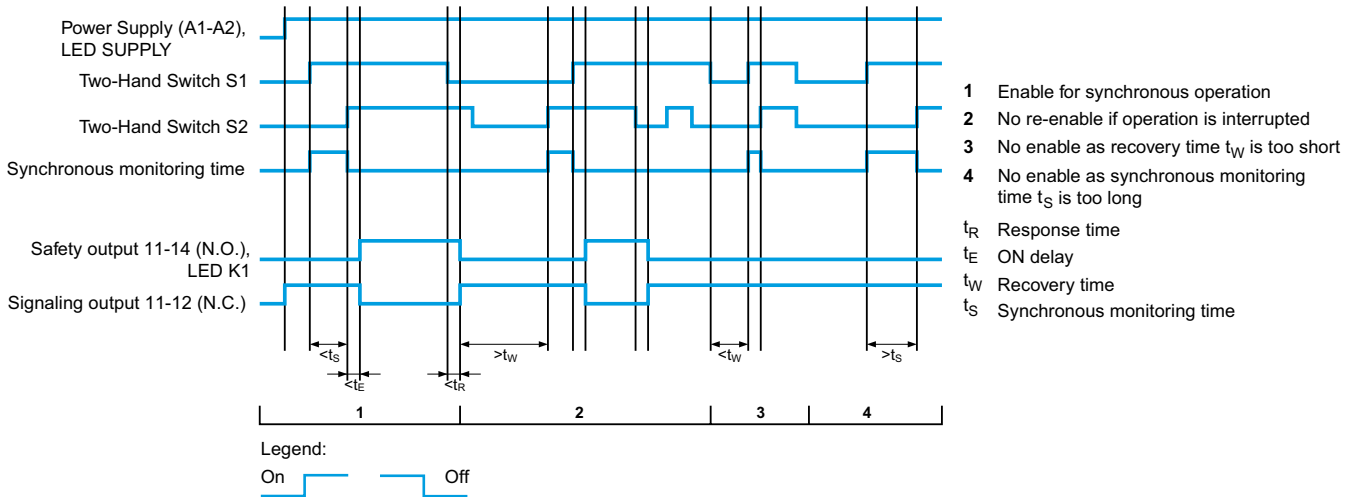

### LED details (XPSBAE)

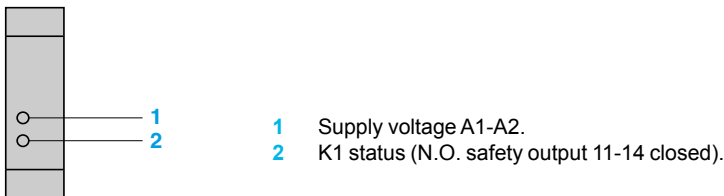


**XPSBCE**

**Module XPSBCE associated with a two-hand control station**


Type III C conforming to EN 574/ISO 13851

~ and 24 V ☰

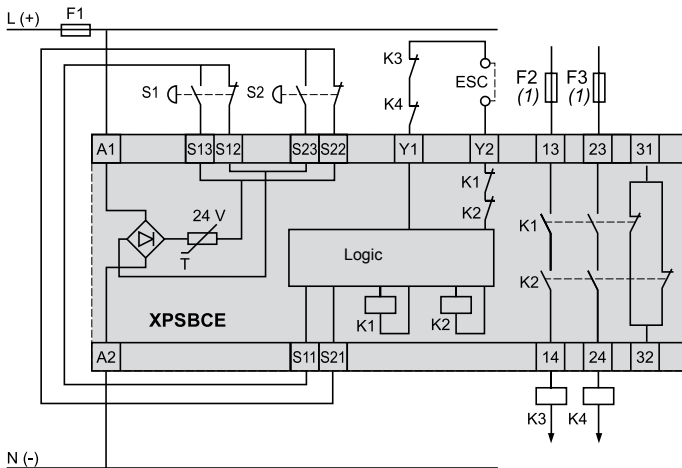

S1, S2: Two-hand control station pushbuttons  
ESC: External start conditions  
(1) Maximum fuse rating: see page 3/57.


**115 ~ and 230 V**

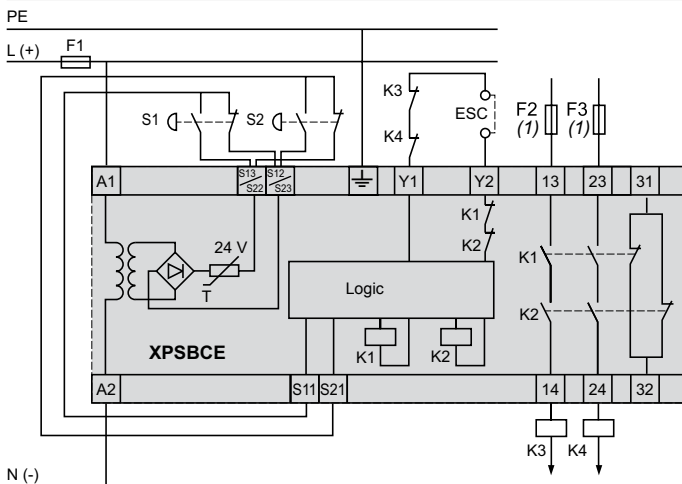


S1, S2: Two-hand control station pushbuttons  
ESC: External start conditions  
(1) Maximum fuse rating: see page 3/57.

## XPSBCE (continued)

### Functional diagram of module XPSBCE

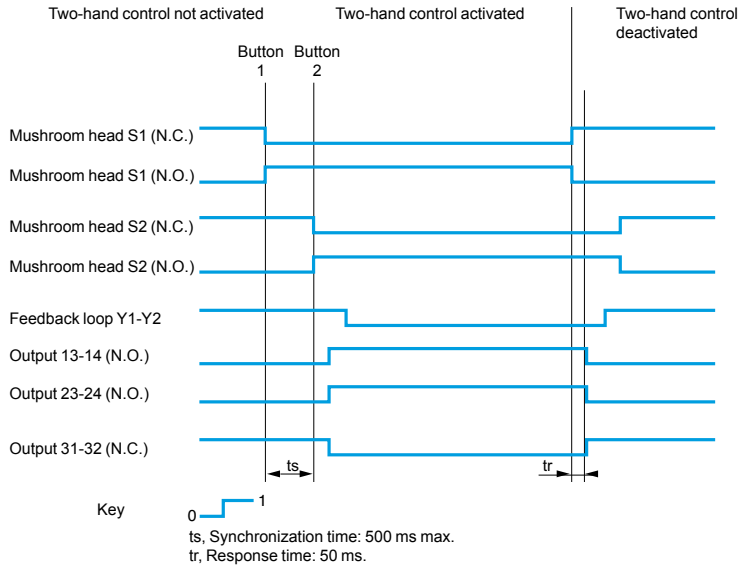


### LED details (XPSBCE)




- 1 Supply voltage A1-A2.
- 2 K1 status (N.O. safety outputs closed).
- 3 K2 status (N.O. safety outputs closed).

**XPSBF**  
Module XPSBF associated with a two-hand control station

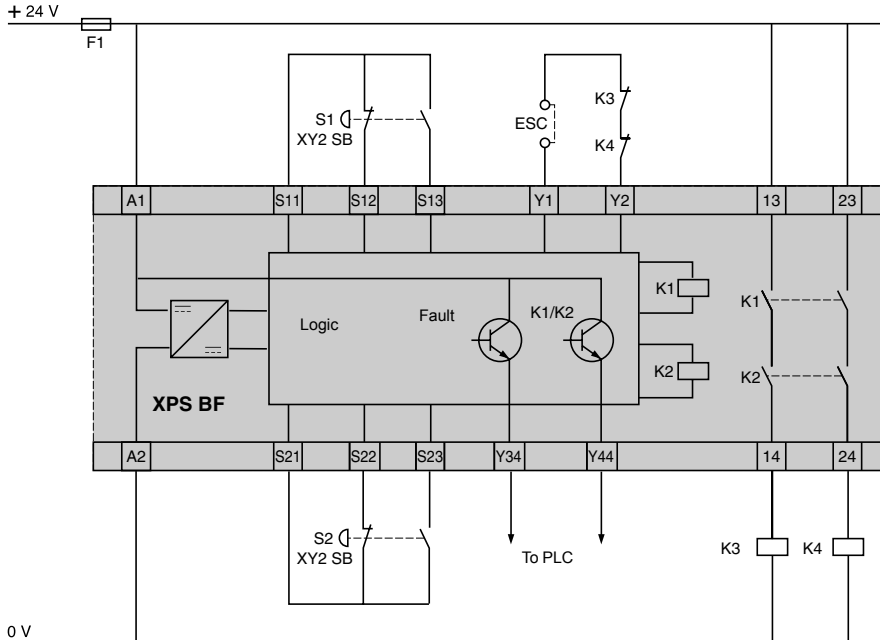


ESC: External start conditions.  
Y1-Y2: feedback loop

**Functional diagram of module XPSBF**

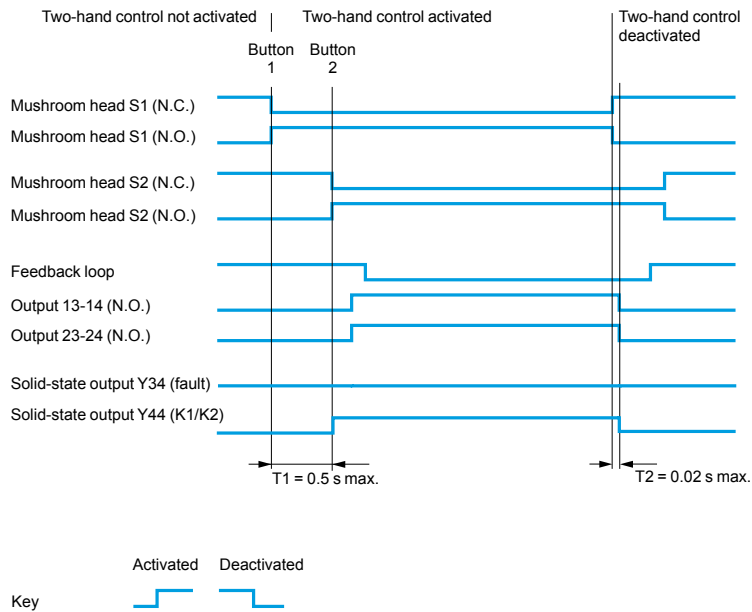

**LED details (XPSBF)**



- 1 Supply voltage A1-A2 (fuse status).
- 2 Fault signalling.
- 3 K1-K2 status (N.O. safety outputs closed).



## Safety relays

Preventa™ safety relay modules type XPSCM and single-beam photoelectric sensors type XU2S

With a test input associated with a built-in “muting” function

### Operating principle

XPSCM safety relay modules, when combined with XU2S single-beam photoelectric sensors (periodically tested), form a category 2 light curtain conforming to standards IEC/EN 61496 parts 1 and 2 and EN 60825-1.

The connection of 1–4 pairs of XU2S photoelectric sensors makes it possible to create a protected space up to 47.2 in. (1200 mm) high, conforming to EN 999/ISO 13855, and 26.2 ft (8 m) long.

The built-in “muting” function allows the automatic passage of parts for machining or loaded pallets, without interrupting the transportation movement within the zone protected by the electro-sensitive protection equipment (ESPE).


When the system is switched on by the start command, and the light protection is not interrupted, the main circuit is closed by the two safety relays of the XPSCM module.

An interruption of the protection field causes the safety outputs to open instantaneously, and the process PLC receives a stop command. The LED on the XPSCM front panel changes from green to red. The Open state is maintained until the module is restarted using the start button.

The “muting” function allows the light protection to be inhibited (muted). This function allows a trolley transporting materials to pass through without triggering the main circuit. The Muting function cannot be activated by energizing the inhibition devices unless the safety outputs have been switched on beforehand.

To trigger the “muting” function, the inhibition devices (muting sensors) must be activated within the 3-second interval. This synchronization time for the two inhibition inputs can be deactivated by connecting two configuration terminals. The muting cycle has a maximum duration of 60 seconds. During this period, materials can be transported through the protection field without deactivating the safety outputs. The 60 second limit value of the muting cycle may be made infinite by connecting two configuration terminals.

During the muting operation process, a light indicating the muting state is controlled by the XPSCM module. The indicator light comes on when a muting signal is generated, and indicates the inhibition of the protection function. An indicator light error (short-circuit, open-circuit) will be recognized, and will deactivate the Muting function.

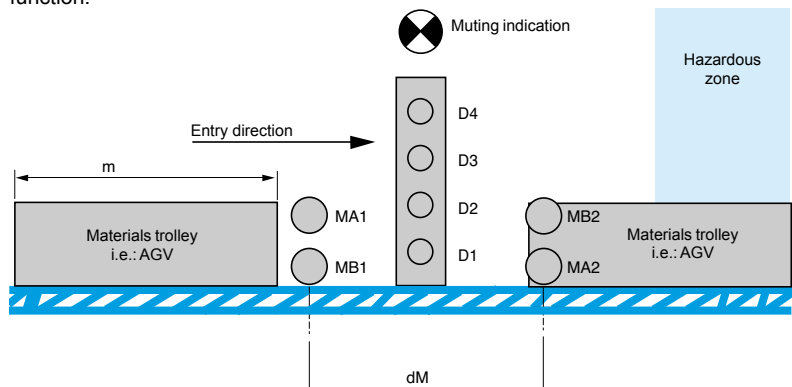

D1, D2, D3, D4: monitoring photoelectric sensors

MA1, MB1, MA2, MB2: muting photoelectric sensors

$m$  = trolley length

$dM$  = distance between MA1/MB1 and MA2/MB2

### Conditions to be observed for the “muting” function

- “Muting” sensors must be of the XU2 M18PP340 thru-beam or XU9 M18PP340 polarized reflex type, or mechanical limit switches with contacts.
- $dM \leq m$  to obtain continuous validation of the “muting” function.
- Avoid the intrusion of persons during the muting phase. This phase is indicated by an indicator light connected to the muting indicator output of the XPSCM module.
- A materials transportation trolley (i.e.: AGV) must generate the muting signal before it enters the protection field, and discontinue the muting signal on exiting once it has cleared all the sensors of the protection field.

# Safety relays

Preventa™ safety relay modules type XPSCM and single-beam photoelectric sensors type XU2S  
With a test input associated with a built-in “muting” function

| Specifications of safety modules  |  |  |   |
|---|--|--|---|
| Module type   |  | XPSCM1144  | XPSCM1144P  |
| <b>Maximum achievable safety level (1)</b>  |  | PL c/Category 2 conforming to EN/ISO 13849-1, SILCL 1 conforming to EN/IEC 62061   |   |
| <b>Reliability data</b>   | Mean Time To dangerous failure (MTTF <sub>d</sub> )                | <b>Years</b>   | 16.6  |
|   | Diagnostic Coverage (DC)   | <b>%</b>   | 95.5  |
|   | Probability of dangerous Failure per Hour (PFH <sub>d</sub> )      | <b>1/h</b>   | 3.12 x 10 <sup>-7</sup>   |
| <b>Conformity to standards</b>  |  | EN/IEC 61496-1, EN/IEC 61496-2, EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1,  |   |
| <b>Product certifications</b>   |  | UL, CSA, IFA   |   |
| <b>Ambient air temperature</b>  |  | <b>°F (°C)</b>   | Operation: +14 to +131 (-10 to +55). Storage: -13 to +185 (-25 to +85)                                      |
| <b>Degree of protection</b> conforming to IEC 529                                   |  | Terminals: IP 20, enclosure: IP 40   |   |
| <b>Supply voltage</b>   |  | <b>V</b>   | --- 24, voltage limits: ±20%  |
| <b>Maximum power consumption</b>  |  | <b>W</b>   | < 15, with thru-beam photoelectric sensors and muting signaling   |
| <b>Module fuse protection</b>   |  | Internal, electronic   |   |
| <b>Rated insulation voltage (U<sub>i</sub>)</b>                                     |  | <b>V</b>   | 300 (degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 and 2)                      |
| <b>Rated impulse withstand voltage (U<sub>imp</sub>)</b>                            |  | <b>kV</b>  | 4 (overvoltage category 3, conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 and 2)                      |
| <b>Inputs for sensors</b>   | Number of inputs to be monitored                                   | 4 (terminals Z1, Z2, Z3, Z4)   |   |
|   | Input voltage  | <b>V</b>   | --- 24  |
|   | Supply voltage of sensors  | <b>V</b>   | --- 24 (terminal U+/U-)   |
|   | Supply current of sensors  | <b>mA</b>  | < 200   |
| <b>Inputs for the Muting function</b>   | Number of muting inputs  | 2 (terminals MA, MB)   |   |
|   | Input voltage  | <b>V</b>   | --- 24 (terminal U+/U-)   |
|   | Maximum current  | <b>mA</b>  | < 200   |
|   | Synchronization time for the activation of the MA/MB muting signal | <b>s</b>   | 3 (±20%) for activation of the MA/MB “muting” signal  |
|   | Muting maximum duration  | <b>s</b>   | 60 (-10 to +30%)  |
| <b>Single-beam thru-beam photoelectric sensors</b> for input monitoring Z1-Z2-Z3-Z4 |  |  |   |
| -sensors authorized for the protection field (max. 4)                               |  | XU2S18PP340●●● (infrared)  |   |
| -muting sensors   |  | XU2 M18PP340●●● or XU9 M18PP340●●● photoelectric sensors or XC limit switches      |   |
| -sensor supply resistivity  |  | <b>Ω</b>   | 10 max.   |
| <b>Safety outputs</b>   |  |  |   |
| -number and type  |  | 2 N.O. (terminals 13-14, 23-24), hard contacts                                     |   |
| -solid-state output breaking capacity   |  | 4 N.O. 24 V/20 mA, (Y33-Y34, Y33-Y44, Y33-Y54, Y33-Y64)                            |   |
| -breaking capacity in AC-15   |  | <b>VA</b>  | C300: inrush 1800, maintained 180   |
| -breaking capacity in DC-13   |  | 24 V/1.5 A, L/R = 50 ms  |   |
| -maximum thermal current (I <sub>the</sub> )  |  | <b>A</b>   | 5.6   |
| -sum of maximum thermal current   |  | <b>A</b>   | 11  |
| -minimum current (volt-free contact)  |  | <b>mA</b>  | 10  |
| -minimum voltage (volt-free contact)  |  | <b>V</b>   | 17  |
| -short-circuit protection   |  | <b>A</b>   | 4 gG or 6 fast-acting fuse cartridge, conforming to EN/IEC 60947-5-1 and DIN VDE 0660 part 200              |
| <b>Muting signaling sensors for incandescent lamp</b>                               |  | Number 1 (terminal H1), maximum power: 6.5 W/--- 24 V, minimum power: 4 W/--- 24 V |   |
| <b>Response time on input change of state</b>                                       |  | <b>ms</b>  | < 25  |
| <b>Electrical life</b>  |  | See page 3/16.   |   |
| <b>Display</b>  |  | 4 LEDs   |   |
| <b>Connection</b>   |  | Type   |   |
| 1-wire connection   | Without cable ends   | Captive screw clamp terminals  | Captive screw clamp terminals, separate, removable terminal block   |
|   | With cable ends, without bezel                                     | Solid or flexible cable: 26-14 AWG (0.14 – 2.5 mm <sup>2</sup> )                   | Solid or flexible cable: 24-14 AWG (0.2 – 2.5 mm <sup>2</sup> )   |
|   | With cable ends, with bezel  | Flexible cable: 24-14 AWG (0.25 – 2.5 mm <sup>2</sup> )                            | Flexible cable: 24-14 AWG (0.25 – 2.5 mm <sup>2</sup> )   |
| 2-wire connection   | Without cable ends   | Flexible cable: 24-16 AWG (0.25 – 1.5 mm <sup>2</sup> )                            | Flexible cable: 24-14 AWG (0.25 – 2.5 mm <sup>2</sup> )   |
|   | With cable ends, without bezel                                     | Solid or flexible cable: 26-18 AWG (0.14 – 0.75 mm <sup>2</sup> )                  | Solid cable: 24-18 AWG (0.2 – 1.0 mm <sup>2</sup> ), Flexible cable: 24-16 AWG (0.2 – 1.5 mm <sup>2</sup> ) |
|   | With cable ends, double with bezel                                 | Flexible cable: 24-18 AWG (0.25 – 1.0 mm <sup>2</sup> )                            | Flexible cable: 24-18 AWG (0.25 – 1.0 mm <sup>2</sup> )   |
|   |  | Flexible cable: 22-14 AWG (0.5 – 1.5 mm <sup>2</sup> )                             | Flexible cable: 22-14 AWG (0.5 – 1.5 mm <sup>2</sup> )  |

(1) Using an appropriate and correctly connected control system.

## Safety relays

Preventa™ safety relay modules type XPSCM and single-beam photoelectric sensors type XU2S  
With a test input associated with a built-in “muting” function

3

### Specifications of photoelectric sensors

|   |   |   |
|---|---|---|
| <b>Conformity to standards</b>            |   | IEC 61496-1 and IEC 61496-2 (Type 2 ESPE)   |
| <b>Maximum safety level (1)</b>           |   | PL=c/category 2 conforming to EN/ISO 13849-1  |
| <b>Reliability data</b>                   | Probability of dangerous Failure per Hour (PFH <sub>d</sub> ) | 1/h<br>PFH <sub>d</sub> =4.6E <sup>-7</sup> conforming to EN/IEC 61508<br>PFH <sub>d</sub> =5.5E <sup>-7</sup> conforming to EN/IEC 61508, with “muting” function   |
| <b>Ambient air temperature</b>            |   | °F (°C)<br>Operation: -13 to +131 (-25 to +55) (infrared transmission sensors),<br>Storage: -40 to +158 (-40 to +70)  |
| <b>Vibration resistance</b>               |   | 7 gn (10–55 Hz), conforming to EN/IEC 60068-2-6   |
| <b>Shock resistance</b>                   |   | 30 gn, 3 axes: 3 times, conforming to EN/IEC 60068-2-27   |
| <b>Degree of protection</b>               |   | IP 67 conforming to EN/IEC 60529  |
| <b>Connection</b>                         | Pre-cabled<br>Connector                                       | PVC cable, diameter 0.20 in. (5 mm), 16.4 ft (5 m) long wire: 4 x 22 AWG (0.34 mm <sup>2</sup> ) for thru-beam transmitter<br>M12 male connector, 4-pin (suitable jumper cables and female connectors M12, 4-contact. See the “Machine Cabling” section.) |
| <b>Materials</b>                          |   | Case: nickel-plated brass (infrared transmission sensors). Lenses: PMMA   |
| <b>Nominal sensing distance</b>           | ft (m)  | 26.2 (8) (infrared transmission sensors)  |
| <b>Rated supply voltage</b>               | V   | — 12–24 (with protection against reverse polarity)  |
| <b>Voltage limits</b>                     | V   | — 10–30 V (including ripple)  |
| <b>Switching capacity (sealed)</b>        | mA  | ≤ 100 mA (with overload and short-circuit protection)   |
| <b>Voltage drop, closed state</b>         | V   | ≤ 1.5   |
| <b>Current power consumption, no-load</b> | mA  | ≤ 35  |
| <b>Maximum switching frequency</b>        | Hz  | 500   |
| <b>Delays</b>                             | ms  | Response: ≤ 1; recovery: ≤ 1  |

(1) Using an appropriate and correctly connected control system.

### Safety modules

| Description  | Type of terminal block connection    | Number of safety circuits | Additional outputs | Supply | References        | Weight<br>oz (kg) |
|--|--------------------------------------|---------------------------|--------------------|--------|-------------------|-------------------|
| <b>Safety modules for monitoring single-beam photoelectric sensors, with a test input associated with a built-in “muting” function</b> | Integrated in module                 | 2                         | 4                  | — 24 V | <b>XPSCM1144</b>  | 12.35<br>(0.350)  |
|  | Separate, can be removed from module | 2                         | 4                  | — 24 V | <b>XPSCM1144P</b> | 12.35<br>(0.350)  |



XPSCM1144●

## Safety relays

Preventa™ safety relay modules type XPSCM and single-beam photoelectric sensors type XU2S  
With a test input associated with a built-in “muting” function



XU2S18PP340L5



XU2S18PP340WL5



XU2S18KP340L5T



XU2S18KP340WL5T



XU2S18PP340DR



XU2S18PP340WL5R

### Single-beam photoelectric sensors with a test input

| Description  | Transmission type                        | Line of sight   | Connection                                | References             | Weight oz (kg) |
|--|--|-----------------|---|------------------------|----------------|
| <b>PNP thru-beam pair (transmitter + receiver)</b><br>Light or dark programmable switching | Infrared Sensing distance: 26.2 ft (8 m) | Along case axis | Pre-cabled 16.4 ft (5 m)                  | <b>XU2S18PP340L5</b>   | 17.11 (0.485)  |
|  |  |                 | M12 connector                             | <b>XU2S18PP340D</b>    | 5.47 (0.155)   |
|  |  |                 | 90° to case axis Pre-cabled 16.4 ft (5 m) | <b>XU2S18PP340WL5</b>  | 17.11 (0.485)  |
|  |  |                 | M12 connector                             | <b>XU2S18PP340WD</b>   | 5.47 (0.155)   |
| <b>Thru-beam transmitter alone</b><br>(for XPSCM1144●)                                     | Infrared                                 | Along case axis | Pre-cabled 16.4 ft (5 m)                  | <b>XU2S18KP340L5T</b>  | 8.29 (0.235)   |
|  |  |                 | M12 connector                             | <b>XU2S18KP340DT</b>   | 2.65 (0.075)   |
|  |  |                 | 90° to case axis Pre-cabled 16.4 ft (5 m) | <b>XU2S18KP340WL5T</b> | 8.29 (0.235)   |
|  |  |                 | M12 connector                             | <b>XU2S18KP340WDT</b>  | 5.47 (0.155)   |
| <b>PNP thru-beam receiver alone</b><br>(for XPSCM1144●)                                    | Infrared                                 | Along case axis | Pre-cabled 16.4 ft (5 m)                  | <b>XU2S18PP340L5R</b>  | 8.82 (0.250)   |
|  |  |                 | M12 connector                             | <b>XU2S18PP340DR</b>   | 2.82 (0.080)   |
|  |  |                 | 90° to case axis Pre-cabled 16.4 ft (5 m) | <b>XU2S18PP340WL5R</b> | 8.82 (0.250)   |
|  |  |                 | M12 connector                             | <b>XU2S18PP340WDR</b>  | 2.82 (0.080)   |




# Safety relays


Preventa™ safety relay modules type XPSCM and single-beam photoelectric sensors type XU2S

With a test input associated with a built-in “muting” function


## Functional diagram of XPSCM module

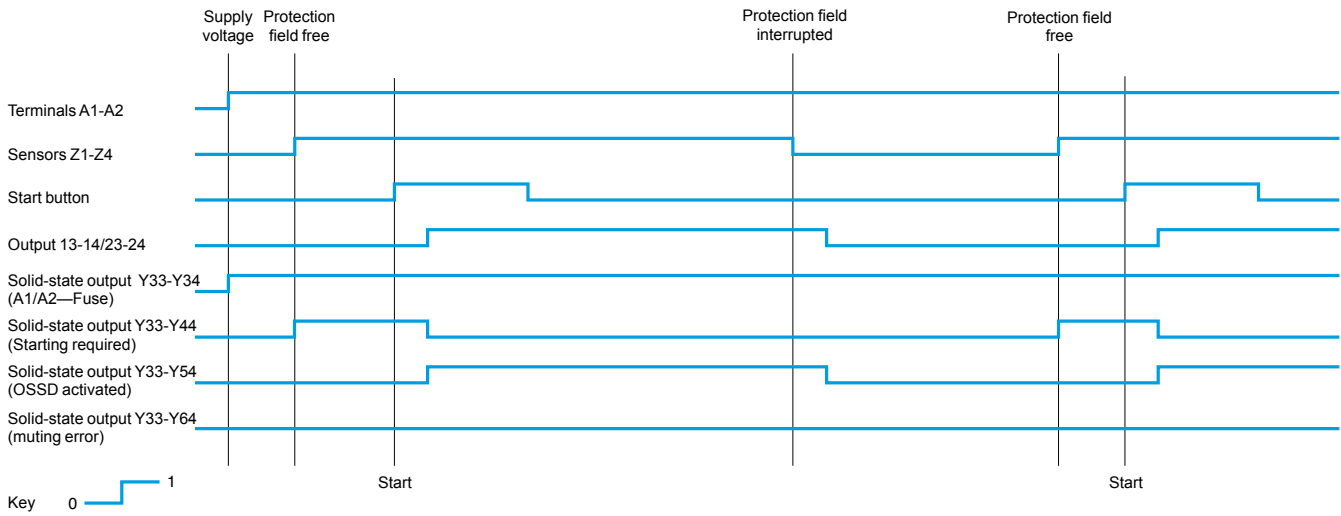

## Functional diagram of the XPSCM module with “muting” function

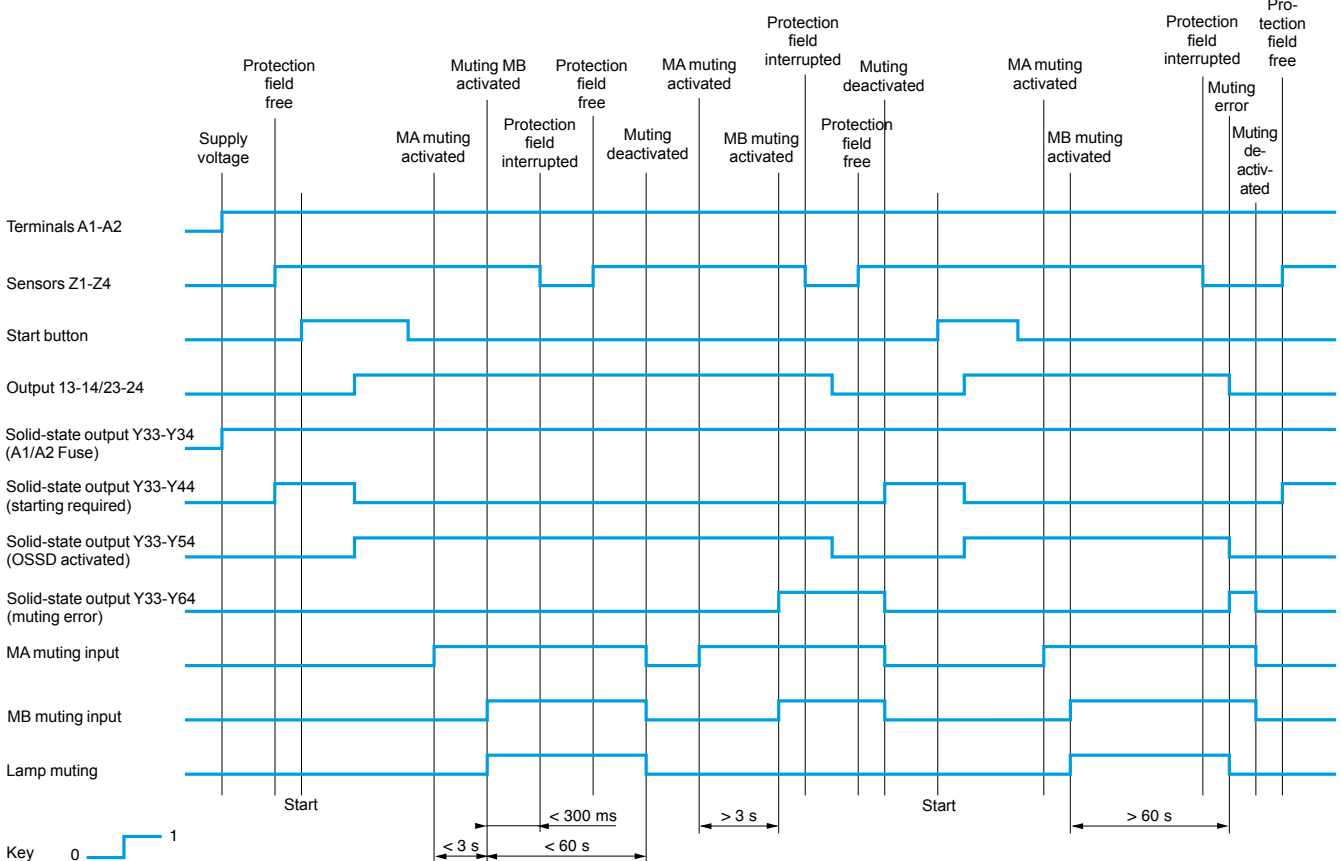

### Key to LEDs



- 1 A1-A2 supply voltage, electronic internal fuse status (Green)
- 2 Signaling for restarting (Yellow)
- 3 Safety output closed (Green)
- 4 Safety output open (Red)

# Safety relays

Preventa™ safety relay modules type XPSCM and single-beam photoelectric sensors type XU2S  
With a test input associated with a built-in “muting” function

## Operation


Output state (PNP) indicator, yellow LED (illuminated when sensor output is on)

### Light switching

No object in beam




Object in beam



### Dark switching

No object in beam




Object in beam




## Curves

### Infrared detection curve




### Functional check




## Dimensions

### XU2S18PP340L5, XU2S18PP340L5L

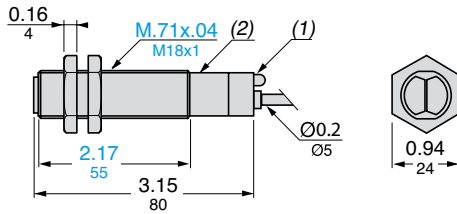

### XU2S18PP340D

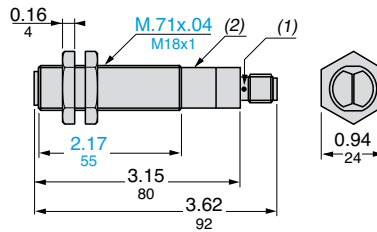


(1) LED

(2) Potentiometer


Mounting nut tightening torque: 17.7 lb-ft (24 N·m)

Connector tightening torque: 1.5 lb-ft (2 N·m)

### XU2S18PP340WL5

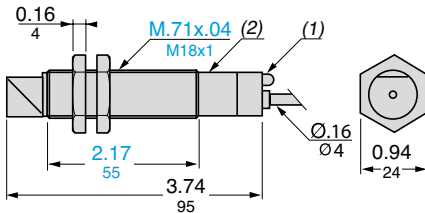

### XU2S18PP340WD

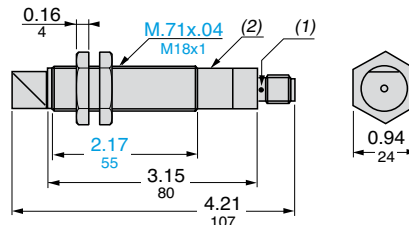

Dual Dimensions: Inches Millimeters

(1) LED

(2) Potentiometer


Mounting nut tightening torque: 17.7 lb-ft (24 N·m)

Connector tightening torque: 1.5 lb-ft (2 N·m)

## Wiring diagrams (3-wire ---)


### Cable connection

Transmitter




Receiver

Light switching (no object present). PNP output




Receiver

Dark switching (no object present). PNP output




### Plug-in connector

Transmitter




Receiver

Light switching (no object present). PNP output



Receiver

Dark switching (no object present). PNP output




### Cable connections

- (-) BU (Blue)
- (+) BN (Brown)
- (OUT) BK (Black) (receiver)
- (Prog.) OG (Orange) (receiver)
- (Test) VI (Violet) (transmitter)


### Connector diagrams

Sensor connector pin view

Transmitter




Receiver



### Beam break test (for transmitter only)

Beam made

Beam broken

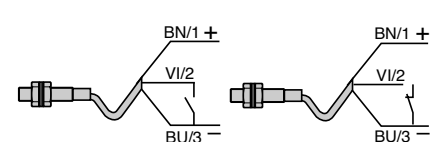


# Safety relays

Preventa™ safety relay modules type XPSCM and single-beam photoelectric sensors type XU2S  
With a test input associated with a built-in “muting” function

## Wiring diagrams (continued)

### Connection of XPSCM module with 4 pairs of XU2S single-beam sensors

(Connection of 1 to 4 pairs of XU2 S single-beam sensors to XPS CM, see page 3/71)

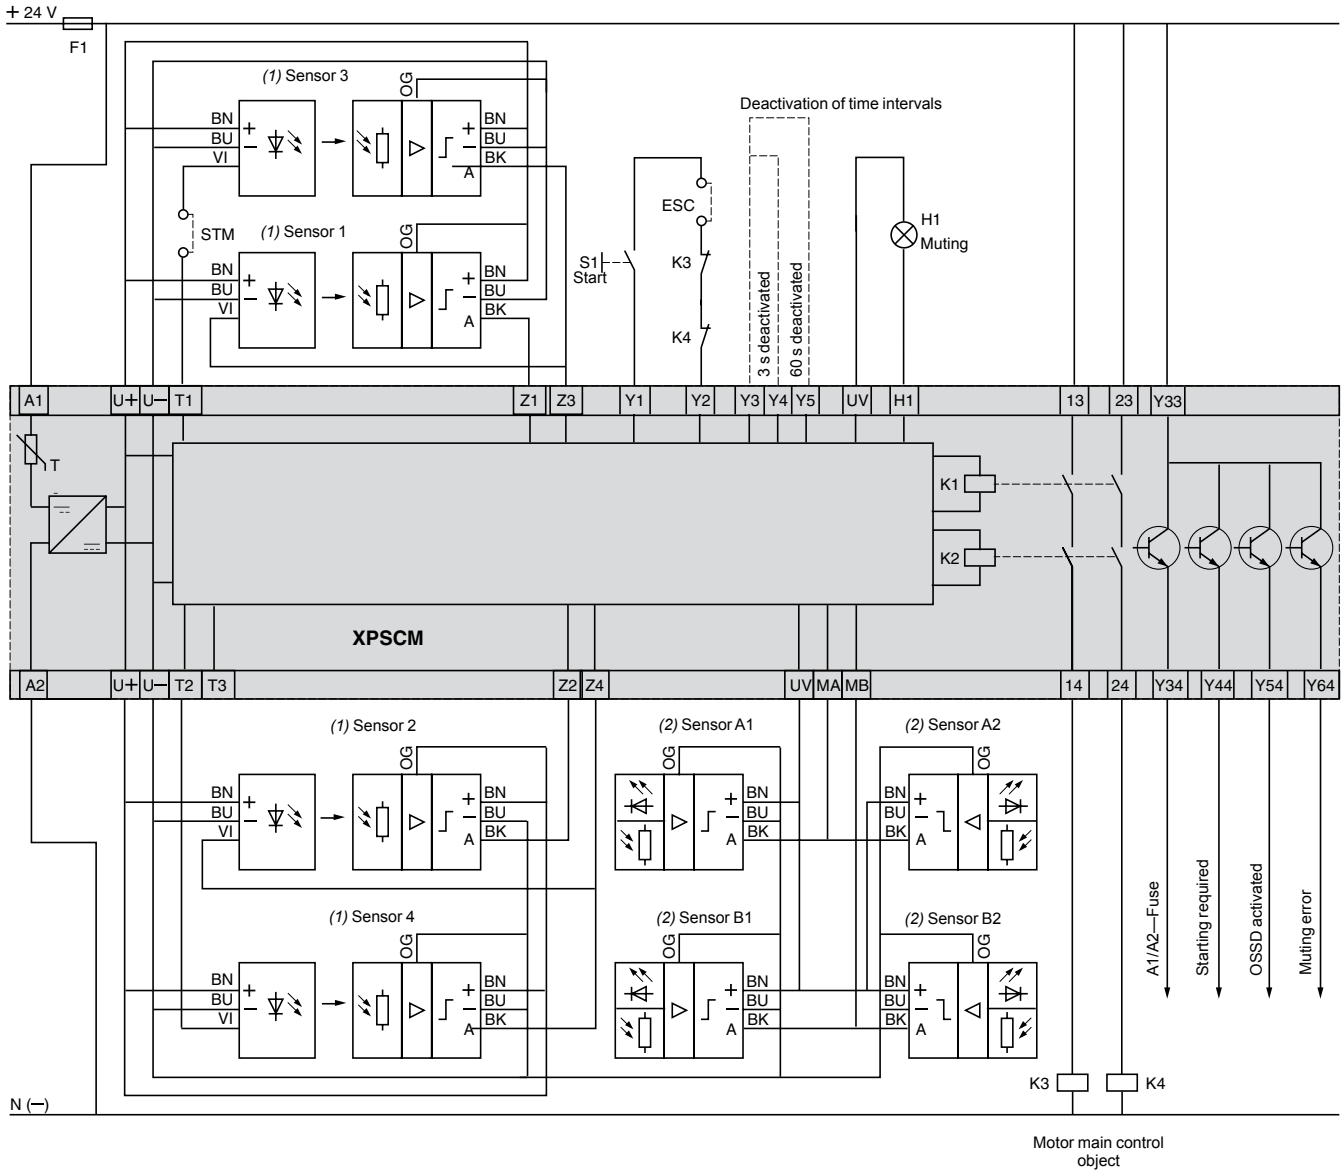

XU2S sensors can be programmed for light switching or dark switching (dark switching with sensors 1 and 3 and light switching with sensors 2 and 4, for example).

ESC: external start conditions

Y1-Y2: feedback loop.

STM: for stopping time measurement.

(1) Protection field sensors

(2) Muting sensors




# Safety relays


Preventa™ safety relay modules type XPSCM and single-beam photoelectric sensors type XU2S  
 With a test input associated with a built-in “muting” function

## Wiring diagrams (continued)


**Connection of XPSCM module with 1 pair of XU2S sensors**  
 (dark switching)

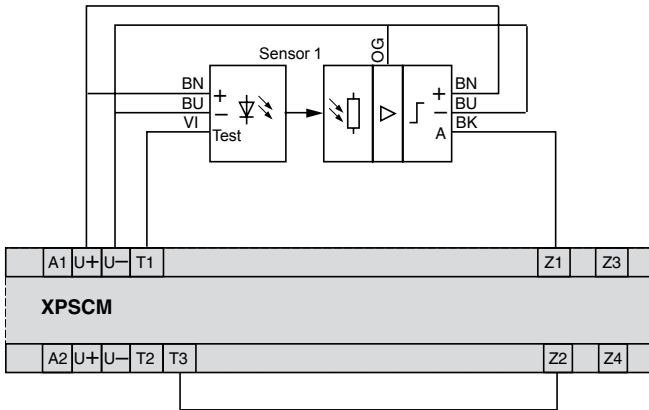


**Connection of XPSCM module with 2 pairs of XU2S sensors**  
 (dark switching)

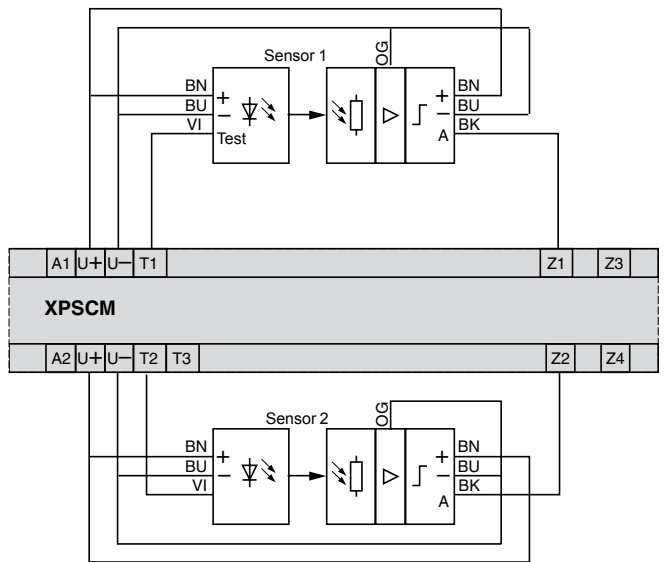

**Connection of XPSCM module with 3 pairs of XU2S sensors**  
 (2 for dark switching, 1 for light switching)

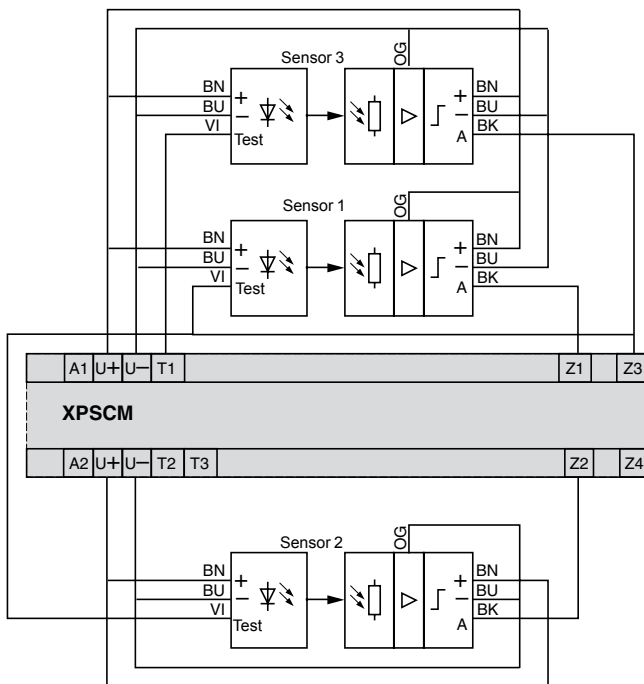

**Connection of XPSCM module with 4 pairs of XU2S sensors**  
 (2 for dark switching, 2 for light switching)

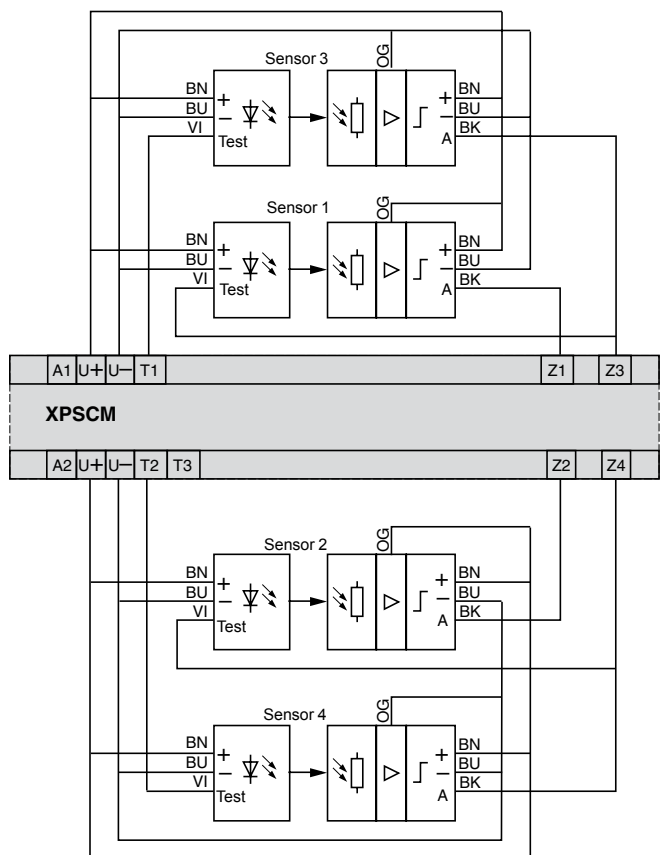

## Operating principle

The safety monitoring module XPSLCD1141 enables independent monitoring of 2 to 4 light curtains type 2 and type 4.

Each output of the light curtain is separately connected to the inputs of the safety monitoring module, which either authorises or prevents activation of its two safety outputs.

The module manages starting and EMD/MPCE functions and therefore, the light curtains connected to it must be configured for automatic start and the EDM/MPCE function deactivated. The safety monitoring module XPSLCD1141 provides the supply and also manages, in addition to its own auxiliary outputs (1 PNP and 1 NPN), the auxiliary outputs of the light curtains.

At the slightest intrusion through one or more light beams of any of the light curtains, the outputs of the safety monitoring module open. This also applies in the event of any internal fault or output relay(s) fault (subject to the EDM/MPCE configuration on the module).

The light curtain system conforms to the standard EN/IEC 61496-1 (type 4).

The Preventa™ safety monitoring module XPSLCD1141 incorporates removable terminal blocks, thus optimizing machine maintenance.

To aid diagnostics, the safety monitoring module has 9 LEDs and a 2-digit display on the front cover which provide information on the monitoring circuit status.

## Environmental specifications

| Safety monitoring module type       |                              | XPSLCD1141   |
|-------------------------------------|------------------------------|--|
| Maximum achievable safety level (1) |                              | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061             |
| Conformity to standards             |                              | EN/IEC 61496-1,<br>EN/IEC 61496-2,<br>EN/IEC 60204-1,<br>EN/IEC 60947-1,<br>EN/IEC 60947-5-1 |
| Certifications                      |                              | CE, TÜV, CSA, UL   |
| Ambient air temperature             | °F (°C)                      | Operation: 0...+ 55; storage: - 25...+ 75  |
| Relative humidity                   |                              | 95% maximum, without condensation  |
| Degree of protection                |                              | IP 20  |
| Shock and vibration resistance      | Conforming to EN/IEC 61496-1 | Shock resistance: 10 gn, impulse 16 ms. Vibration resistance: 5...55 Hz max. on all 3 axes   |
| Materials                           |                              | ABS thermoplastic enclosure  |
| Mounting                            |                              | 35 mm rail   |

## Electrical specifications

|  |                   |  |  |
|--|-------------------|--|--|
| Power supply   |                   | <b>V</b>   | ± 24 ± 10%   |
| Current  |                   | <b>A</b>   | 10 max.  |
| Response time  |                   | <b>ms</b>  | < 1  |
| Safety outputs   |                   |  | 2 solid-state PNP outputs (N.O.), 625 mA on ± 24 V   |
| Alarm or auxiliary output  |                   |  | 1 solid-state PNP (N.O.), 500 mA on ± 24 V, and 1 solid-state NPN (N.O.), 100 mA on ± 24 V, output   |
| Monitoring activation of output switching devices (EDM/MPCE)                 |                   | <b>mA</b>  | 50 ± 20% on ± 24 V   |
| Signalling   |                   |  | 9 LEDs plus 2-digit display  |
| Functions  |                   |  | -Auto/Manual, manual 1 <sup>st</sup> cycle,<br>-Monitoring of external switching devices (EDM: External Devices Monitoring),<br>-Restart request indicator light,<br>-Display of operating modes and alarm by 9 LEDs and 2-digit display. Selection of Auto/Manual, blanking relay monitoring, floating/blinking and blanking + floating/blanking relay monitoring using configuration switches behind front cover of module.<br>-Independent monitoring of 2 to 4 light curtains. |
| Monitoring of external switching devices (EDM = External Devices Monitoring) |                   |  | Monitoring of the function (open or closed) as well as the response time of the power components. Selectable by using configuration switches.  |
| Start input  |                   | <b>mA</b>  | 50 at 24 V   |
| Connection   | Type              |  | Captive screw clamp terminals, removable terminal block  |
|  | 1-wire connection | Without cable end  | Solid cable: 14 AWG (1.63 mm <sup>2</sup> )  |
| 2-wire connection  | Without cable end | With cable end   | Flexible cable: 26-16 AWG (0.14...1.5 mm <sup>2</sup> )  |
|  |                   | Without bezel, flexible cable: 26-16 AWG (0.14...1.5 mm <sup>2</sup> ) |  |
|  | Without cable end | With cable end   | Solid cable: 26-16 AWG (0.14...1.5 mm <sup>2</sup> )   |
|  |                   | Without bezel, flexible cable: 26-16 AWG (0.14...1.5 mm <sup>2</sup> ) |  |

(1) Using an appropriate and correctly connected control system.

# Safety relays

Preventa™ safety relay modules type XPSLCD  
For monitoring 2 to 4 light curtains type 2 and type 4

## Reference



XPSLCD1141

| Description  | Type of terminal block connection | Number of safety circuits | Additional outputs       | Supply    | Reference  | Weight                    |
|--|-----------------------------------|---------------------------|--------------------------|-----------|------------|---------------------------|
| Safety module for monitoring 2 to 4 light curtains type 2 and type 4 | Removable from module             | 2 PNP                     | 5 (4 PNP + 1 PNP or NPN) | V<br>24 V | XPSLCD1141 | oz (kg)<br>26.455 (0.750) |


3

## Dimensions

### Safety monitoring module

#### XPSLCD1141

Mounting on 35 mm rail

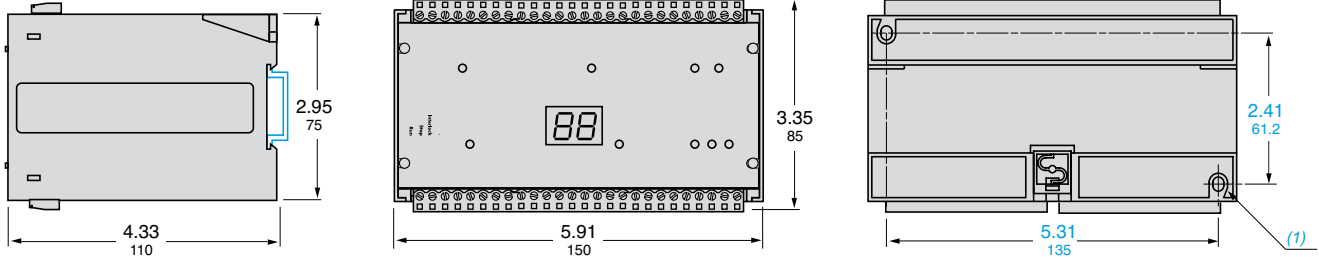


(1) 2 elongated holes Ø 4 x 5.7.

Dual Dimensions: INCHES  
Millimeters

## LED details

The safety monitoring module XPSLCD has 9 LEDs and a 2-digit display on the front cover.

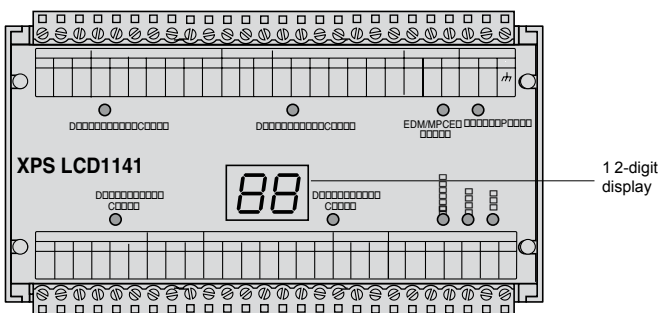


# Safety relays

Preventa™ safety relay modules type XPSLCD  
For monitoring 2 to 4 light curtains type 2 and type 4

## Connection via the safety monitoring module XPSLCD1141


Example: configuration with light curtains XUSLT, XUSLP and XUSLN

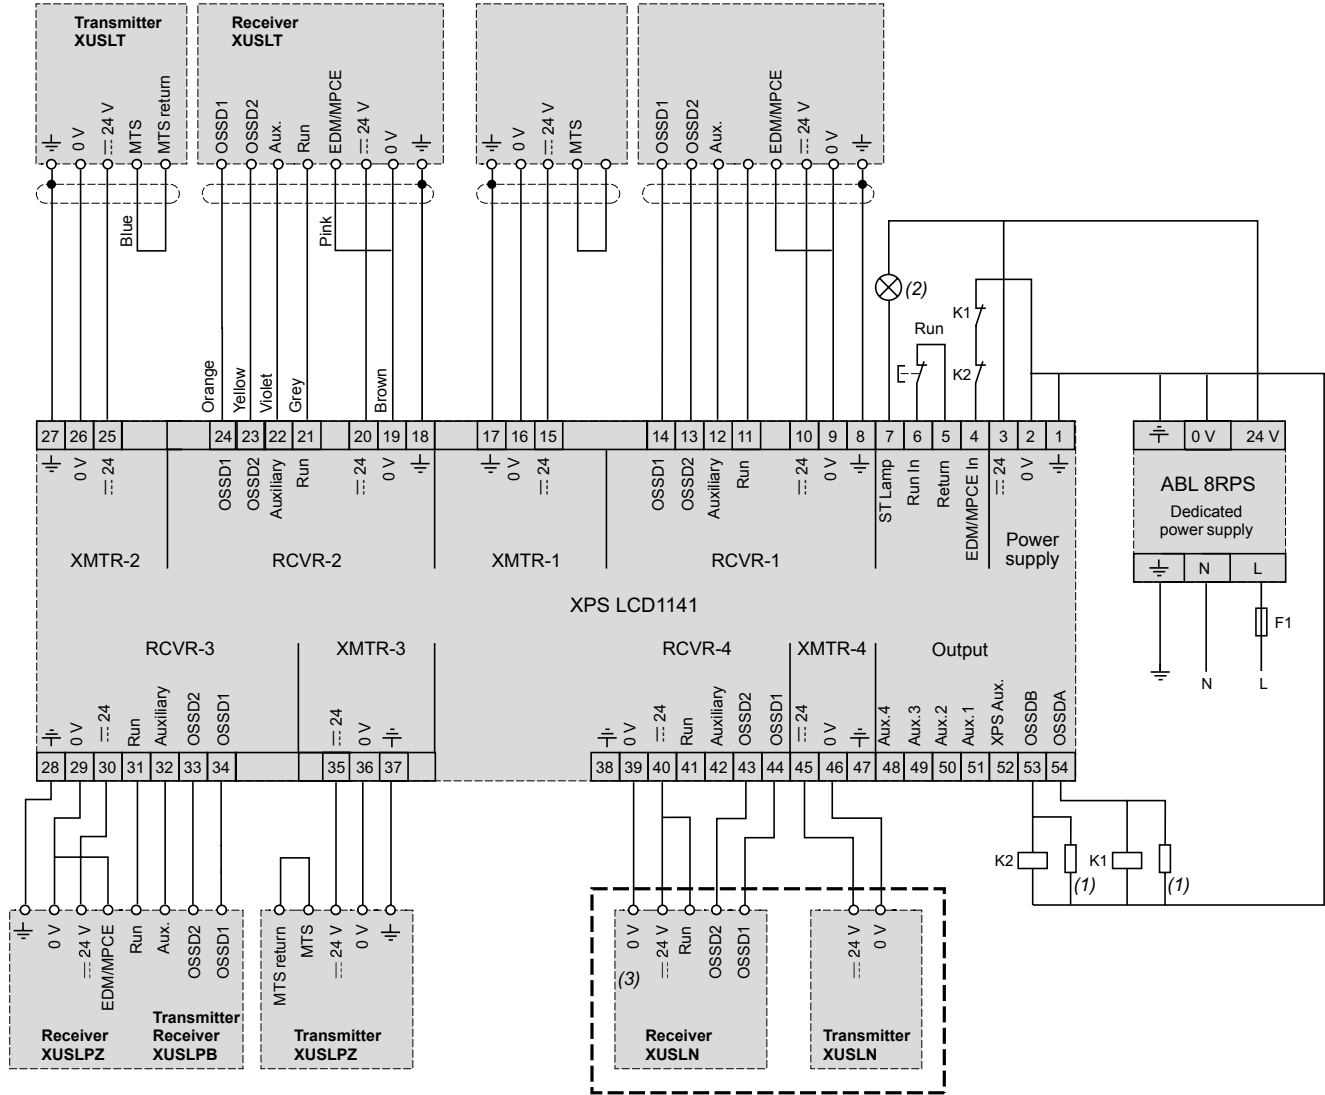


- (1) Arc suppressor.
- (2) Restart request indicator light.
- (3) When module XPSLCD1141 is used with a type 2 light curtain (example: XUSLN), the entire protection system is downgraded to category 2.

## Functional diagram of module XPSLCD1141

### Automatic start and restart mode

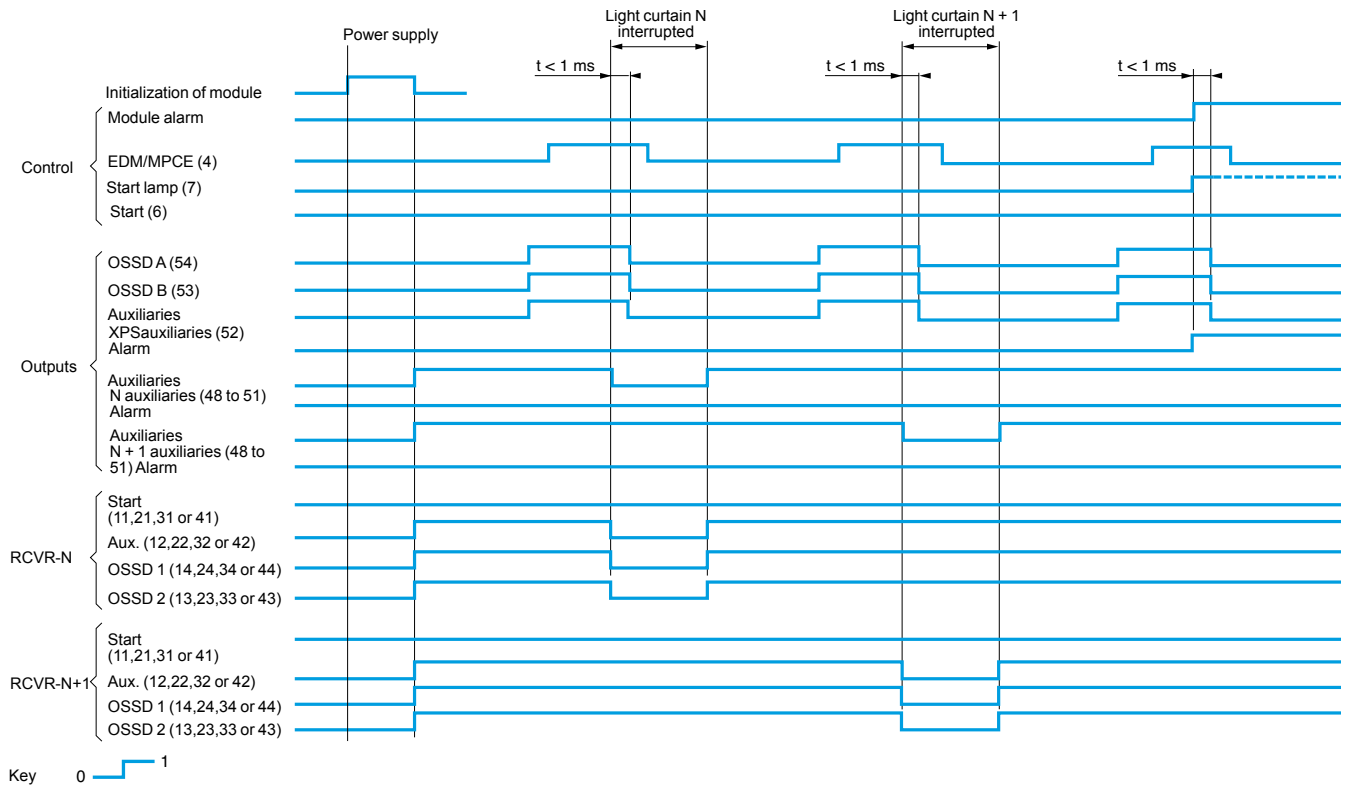

### Manual start and restart mode

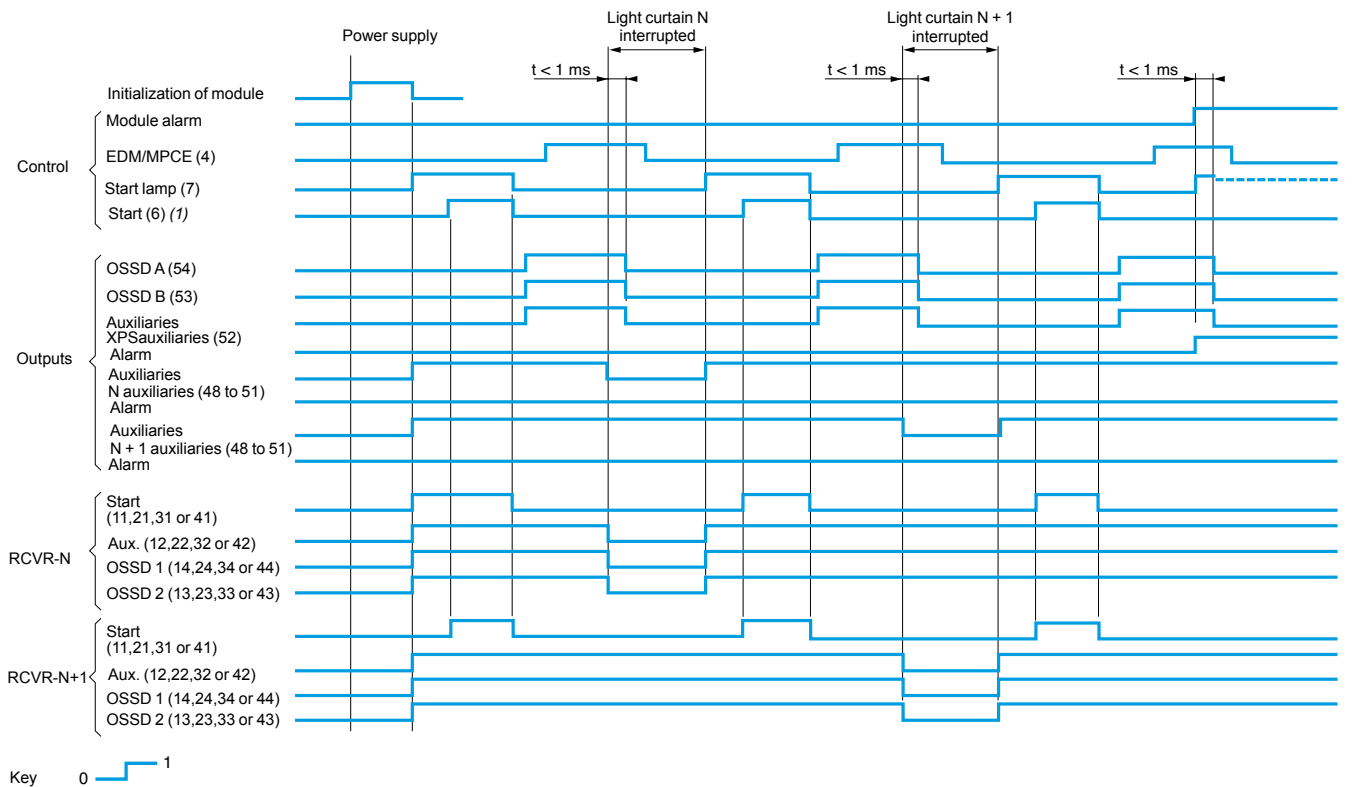

(1) Start button.

## Safety relays

### Preventa™ safety monitoring module XPSTLCM For “muting” function of type 2 and type 4 light curtains

#### Operating principle


Safety monitoring modules XPSTLCM are used with type 4 light curtains conforming to EN/IEC 61496-1 to provide a system inhibiting the light curtain protection, i.e. “muting”. This function enables the automatic passage of parts for machining or loaded pallets, without interrupting the transportation movement within the zone protected by the electro-sensitive protection equipment (ESPE) system. In addition to the electro-sensitive protection and safety relay modules XPSTLCM, the system consists of 4 to 8 inhibition sensors, 2 indicator lights and a key switch to reset the system to the initial state in the event of a sequence error.

When the system is switched on by the start command and the light curtain protection not interrupted, the main circuit is closed by the safety outputs of the XPSTLCM modules (solid-state safety outputs). In addition to safety outputs, the modules incorporate signalling outputs for sending system status information to the PLC. Either 5 or 14 LEDs and a 2-digit display, mounted on the front cover of the module, provide information on the safety circuit status.

An interruption of the protection field monitored by the electro-sensitive protection equipment causes instantaneous opening of the safety outputs; the process PLC receives a stop command and the LED display mounted on the front cover indicates the change of state of the safety circuits. The “open” state is maintained until the module is restarted using the Start button.

The “muting” function cannot be activated by supplying the inhibition sensors unless the safety outputs have been switched on beforehand. To trigger the “muting” function, the inhibition devices must be activated within the 3 second time interval. During the activated “muting” phase, materials can be transported through the protection field without deactivating the safety outputs. In the event of intrusion into the hazardous zone, a person cannot activate the inhibition sensors in the same way and the system stops.

During the muting operation process, a light indicating the muting state is controlled by the XPSTLCM module. The indicator light comes on when a muting signal is generated, and indicates the inhibition of the protection function. An indicator light error (short-circuit, open-circuit) will be recognized, and will deactivate the Muting function.

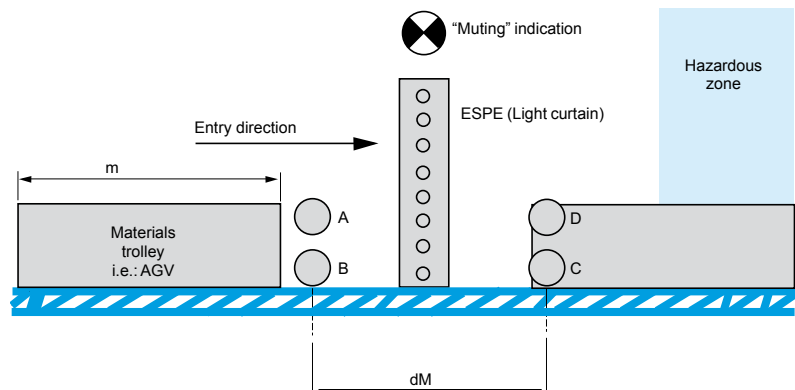

ESPE: electro-sensitive protection equipment (light curtain).

A, B, D, C: “muting” sensors.

m: trolley length and dM = distance between A, B and D, C.

#### Conditions to be observed for the “muting” function

- The “muting” sensors must either be thru-beam type XUB 0BPSNL2 + XUB 0BKSNL2T, polarized reflex type XUB 0BPSNL2 + XUC Z50 or mechanical limit switches with contacts.
- $dM \leq m$  to obtain continuous validation of the “muting” function.
- Avoid the intrusion of persons during the “muting” phase. This phase is indicated by the indicator light connected to the “muting” indicator output of the XPSTLCM module.
- A materials trolley must provide the “muting” signal before entering the protection field and cease it once it has cleared all the sensors of the protection field on exiting.

| Specifications  |  |  |  |  |
|---|--|--|--|--|
| <b>Module type</b>  |  |  | <b>XPSLCM1150</b>  |  |
| <b>Maximum achievable safety level (1)</b>                          |  |  | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061         |  |
| <b>Conformity to standards</b>                                      |  |  | EN/IEC 61496-1, EN/IEC 61496-2, EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1         |  |
| <b>Certifications</b>   |  |  | CE, TÜV, CSA, UL   |  |
| <b>Ambient air temperature</b>                                      | For operation                                | °F (°C)  | 0...+ 55   |  |
|   | For storage                                  | °F (°C)  | - 25...+ 75  |  |
| <b>Degree of protection conforming to IEC 529</b>                   | Terminals                                    |  | IP 20  |  |
|   | Enclosure                                    |  | IP 20  |  |
| <b>Power supply</b>   | Voltage                                      | <b>V</b>   | --- 24   |  |
|   | Voltage limits                               |  | - 10...+ 10%   |  |
| <b>Maximum power consumption</b>                                    |  | <b>W</b>   | < 150  |  |
| <b>Rated insulation voltage (Ui)</b>                                |  | <b>V</b>   | 300 (degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 and 2)   |  |
| <b>Rated impulse withstand voltage (Uimp)</b>                       |  | <b>kV</b>  | 4 (overvoltage category III, conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 and 2) |  |
| <b>Number of light curtains monitored</b>                           |  |  | 1 or 2 transmitter-receiver pairs  |  |
| <b>Inputs for “muting” sensors</b>                                  | Number of inputs to be monitored             |  | 2 to 4 per “muting” function   |  |
|   | Supply voltage of sensors                    | <b>V</b>   | 24   |  |
|   | Output current of each sensor                | <b>mA</b>  | < 20   |  |
| <b>Type of “muting” sensors</b>                                     |  |  | Thru-beam, polarised reflex or sensors with relay hard contacts                          |  |
| <b>Synchronization time of “muting” sensors</b>                     |  | <b>s</b>   | 3 or unlimited   |  |
| <b>Maximum “muting” time</b>  |  | <b>min</b>   | 2 or unlimited   |  |
| <b>Safety outputs</b>   |  |  | 2 PNP (terminals 1 and 2), 0.625 A at 24 V   |  |
| - number and type<br>- max. thermal current (Ithe)                  | 1 output                                     | <b>A</b>   | –  |  |
|   | 2 outputs                                    | <b>A</b>   | 2 x 0.108  |  |
|   | 3 outputs                                    | <b>A</b>   | –  |  |
|   | 3 contacts                                   | <b>A</b>   | –  |  |
| <b>Auxiliary outputs</b><br>1 PNP (terminal 5) + 1 NPN (terminal 6) | Breaking capacity of solid-state PNP outputs | <b>mA</b>  | 24 V/500   |  |
|   | Breaking capacity of solid-state NPN outputs | <b>mA</b>  | 24 V/100   |  |
| <b>“Muting” indicator light power</b>                               |  | <b>W</b>   | 1 to 7 max.  |  |
| <b>Response time on input change of state</b>                       |  | <b>ms</b>  | 1  |  |
| <b>Signalling</b>   |  |  | 14 LEDs plus 2-digit display   |  |
| <b>Connection</b>   | Type   |  | Captive screw clamp terminals, removable terminal block                                  |  |
|   |  |  |  |  |
|   | 1-wire connection                            | Without cable end  |  | Solid cable: 14 AWG (1.63 mm <sup>2</sup> )                            |
|   |  | With cable end   |  | Flexible cable: 26-16 AWG (0.14...1.5 mm <sup>2</sup> )                |
|   | 2-wire connection                            | Without bezel, flexible cable: 26-16 AWG (0.14...1.5 mm <sup>2</sup> ) |  | Without bezel, flexible cable: 26-16 AWG (0.14...1.5 mm <sup>2</sup> ) |
|   |  | Without cable end  |  | Solid cable: 26-16 AWG (0.14...1.5 mm <sup>2</sup> )                   |
|   | Without cable end                            |  | Flexible cable: 26-16 AWG (0.14...1.5 mm <sup>2</sup> )                                  |  |

(1) Using an appropriate and correctly connected control system.

# Safety relays

Preventa™ safety monitoring module XPSLCM  
For “muting” function of type 2 and type 4 light curtains



XPSLCM1150

3

## References

| Safety module                       |                                   |                           |                   |        |            |                   |
|-------------------------------------|-----------------------------------|---------------------------|-------------------|--------|------------|-------------------|
| Description                         | Type of terminal block connection | Number of safety circuits | Auxiliary outputs | Supply | Reference  | Weight<br>oz (kg) |
| Safety module for “muting” function | Removable from module             | 2 PNP                     | 1 PNP + 1 NPN     | ~ 24 V | XPSLCM1150 | 23.281 (0.660)    |


## Spare parts

| Description   | Power<br>W | Reference | Weight<br>oz (kg) |
|---|------------|-----------|-------------------|
| “Muting” indicator light kit  | 5          | XSZCM01   | 0.423 (0.012)     |
| Replacement bulbs for “muting” indicator light kit consisting of one lot of 10 replacement bulbs and 1 removal/insertion tool XBF-X13 | 1 to 7     | XSZCM02   | 0.564 (0.016)     |

## LED details

### XPSLCM1150

To aid diagnostics, the safety monitoring module has 14 LEDs and a 2-digit display on the front cover which provide information on the monitoring circuit status.

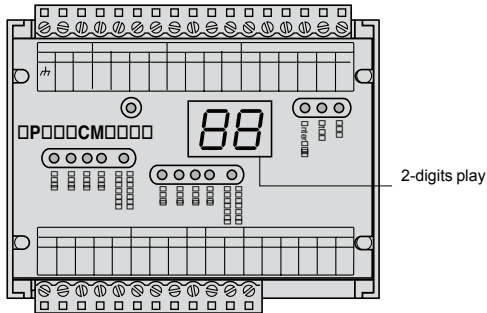





# Safety relays

Preventa™ safety monitoring module XPSLCM  
For “muting” function of type 2 and type 4 light curtains


## Dimensions

### XPSLCM1150

Mounting on 35 mm rail




Rear view



(1) 2 elongated holes Ø 4 x 5.7

### “Muting” indicator light kit XSZ CM01



Dual Dimensions: INCHES  
Millimeters


(1) Faston connector 4.7.

# Safety relays

Preventa™ safety monitoring module XPSLCM  
For “muting” function of type 2 and type 4 light curtains

## Connection via the safety monitoring module XPSLCM1150

Example: configuration with light curtains XUSL

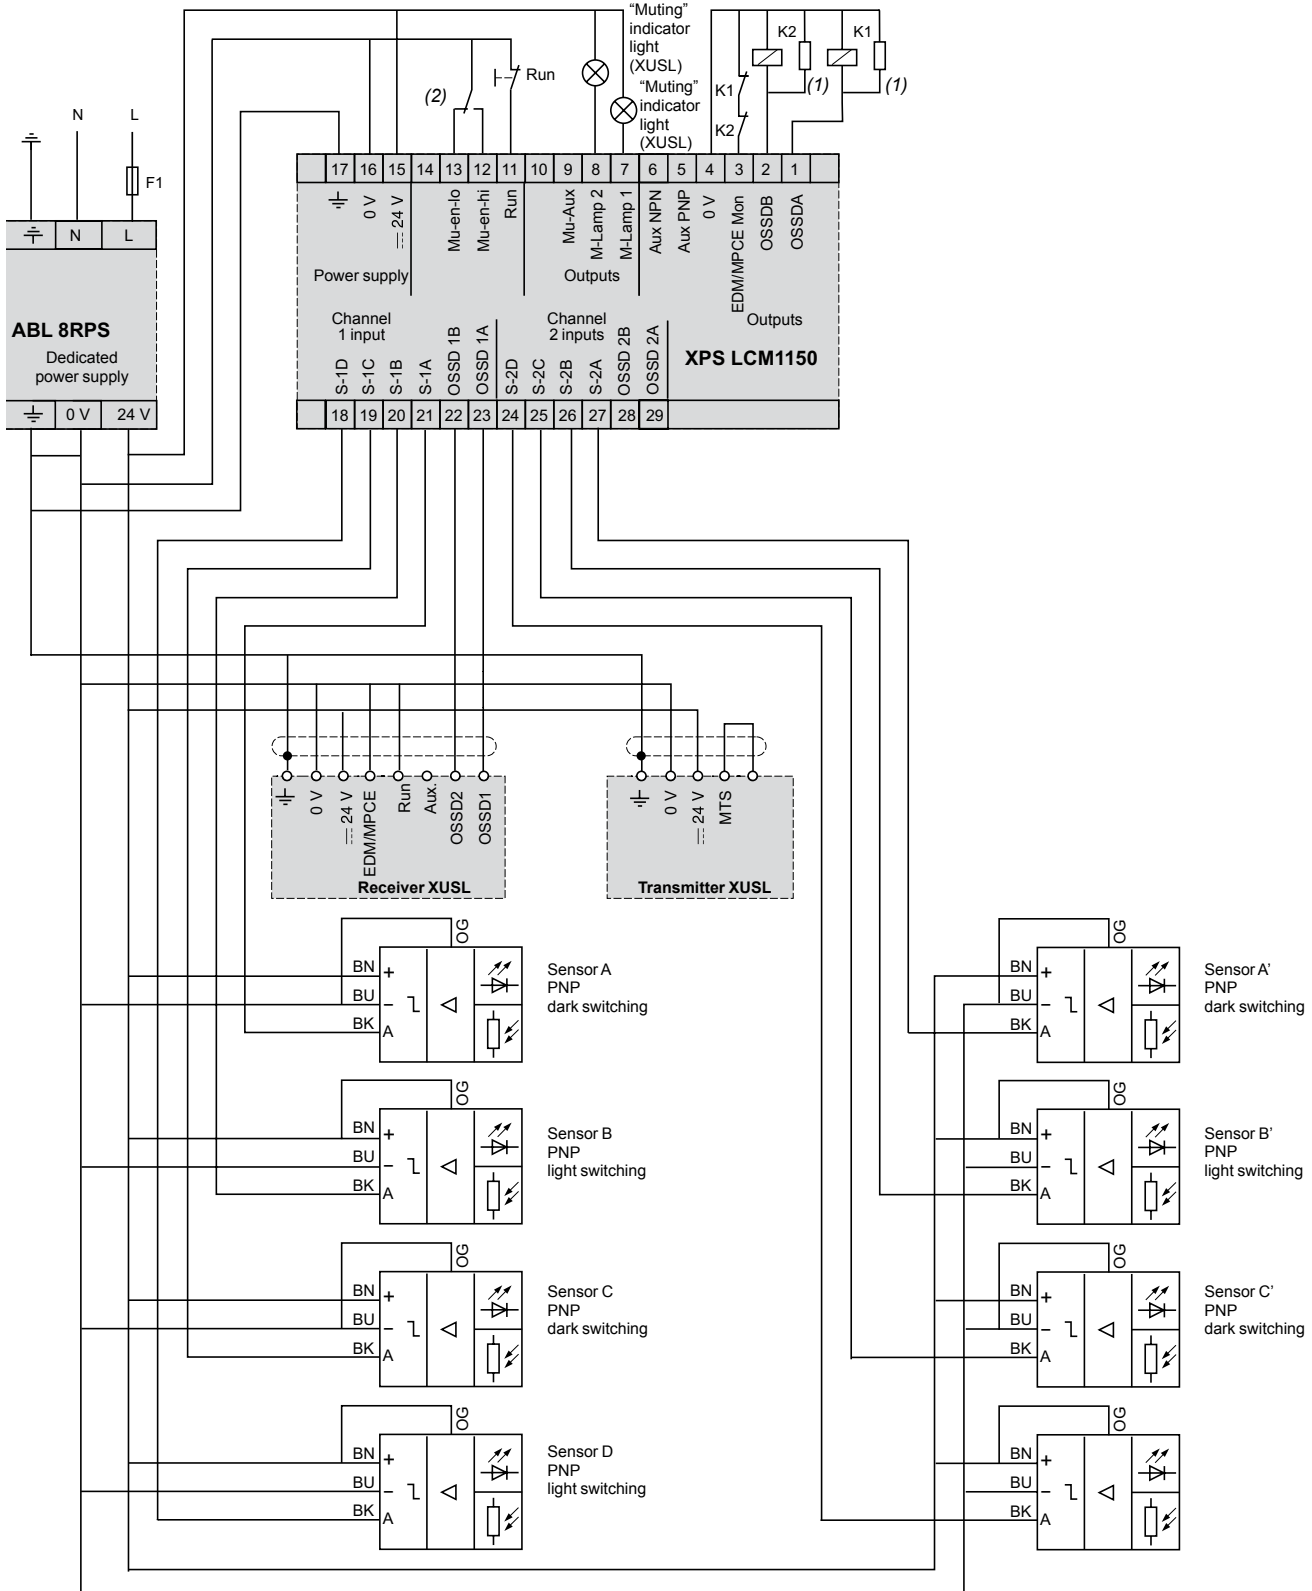


(1) Arc suppressor.  
(2) Inhibition activation/deactivation key switch.

# Safety relays

Preventa™ safety monitoring module XPSLCM  
For “muting” function of type 2 and type 4 light curtains

## Connection via the safety monitoring module XPSLCM1150

Example: configuration with 2 light curtains XUSLP and XUSLN

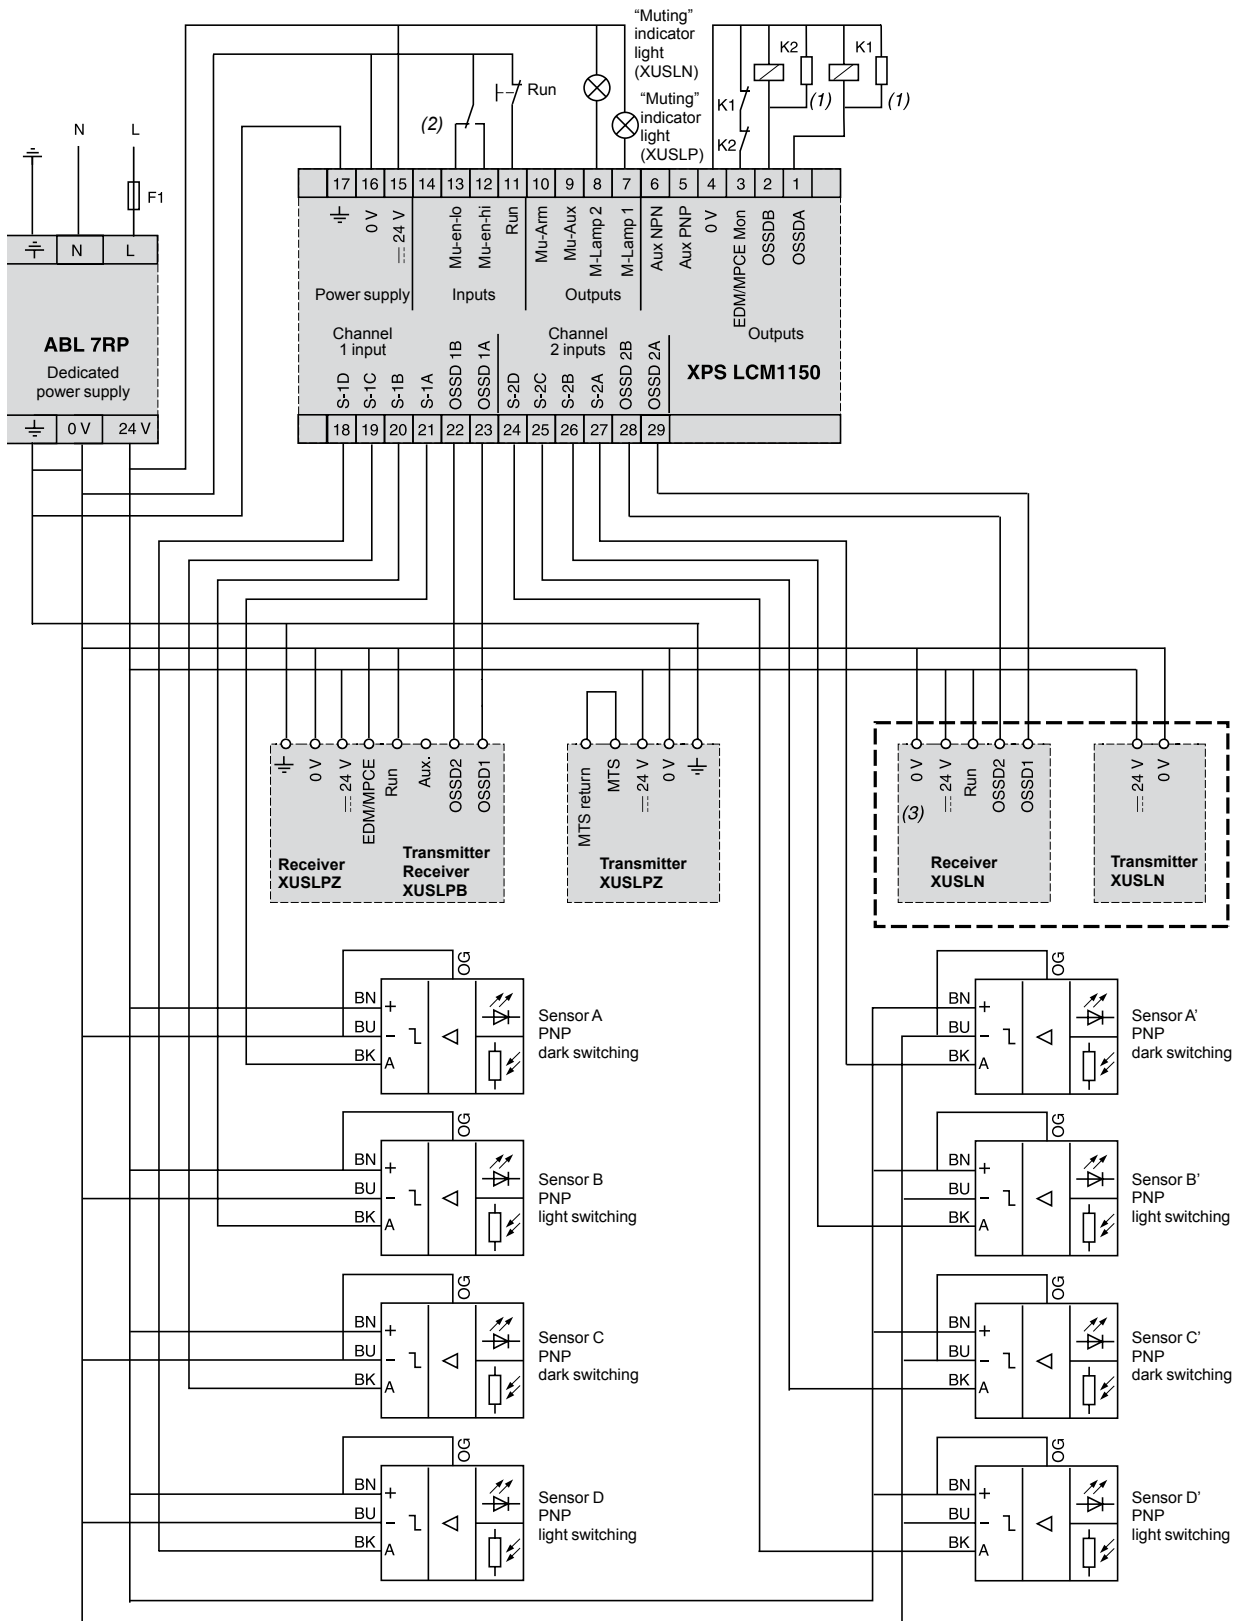


(1) Arc suppressor.

(2) Inhibition activation/deactivation key switch.

(3) When module XPSLCM1150 is used with a type 2 light curtain (example: XUSLN), the entire protection system is downgraded to category 2.

## Functional diagram of safety monitoring module XPSLCM1150

“Start/restart interlock” mode with 2 sensors

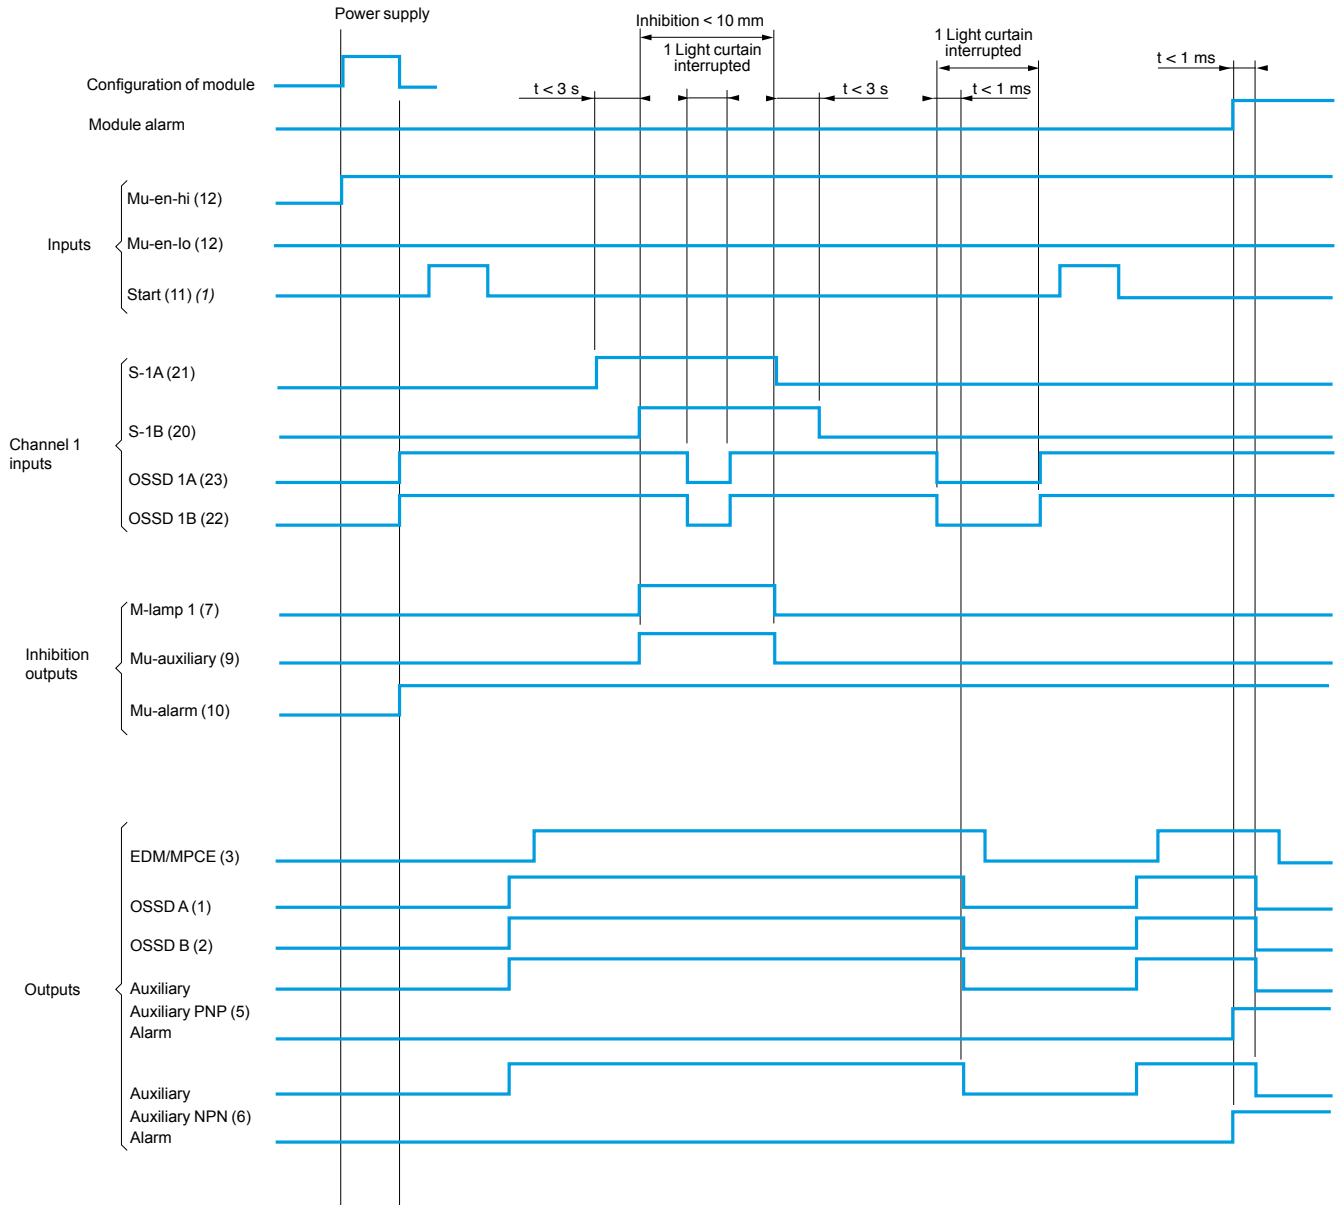


Key 0 1

(1) Press Start button.

**Functional diagram of safety monitoring module XPSLCM1150**

“Start/restart interlock” mode with 4 sensors

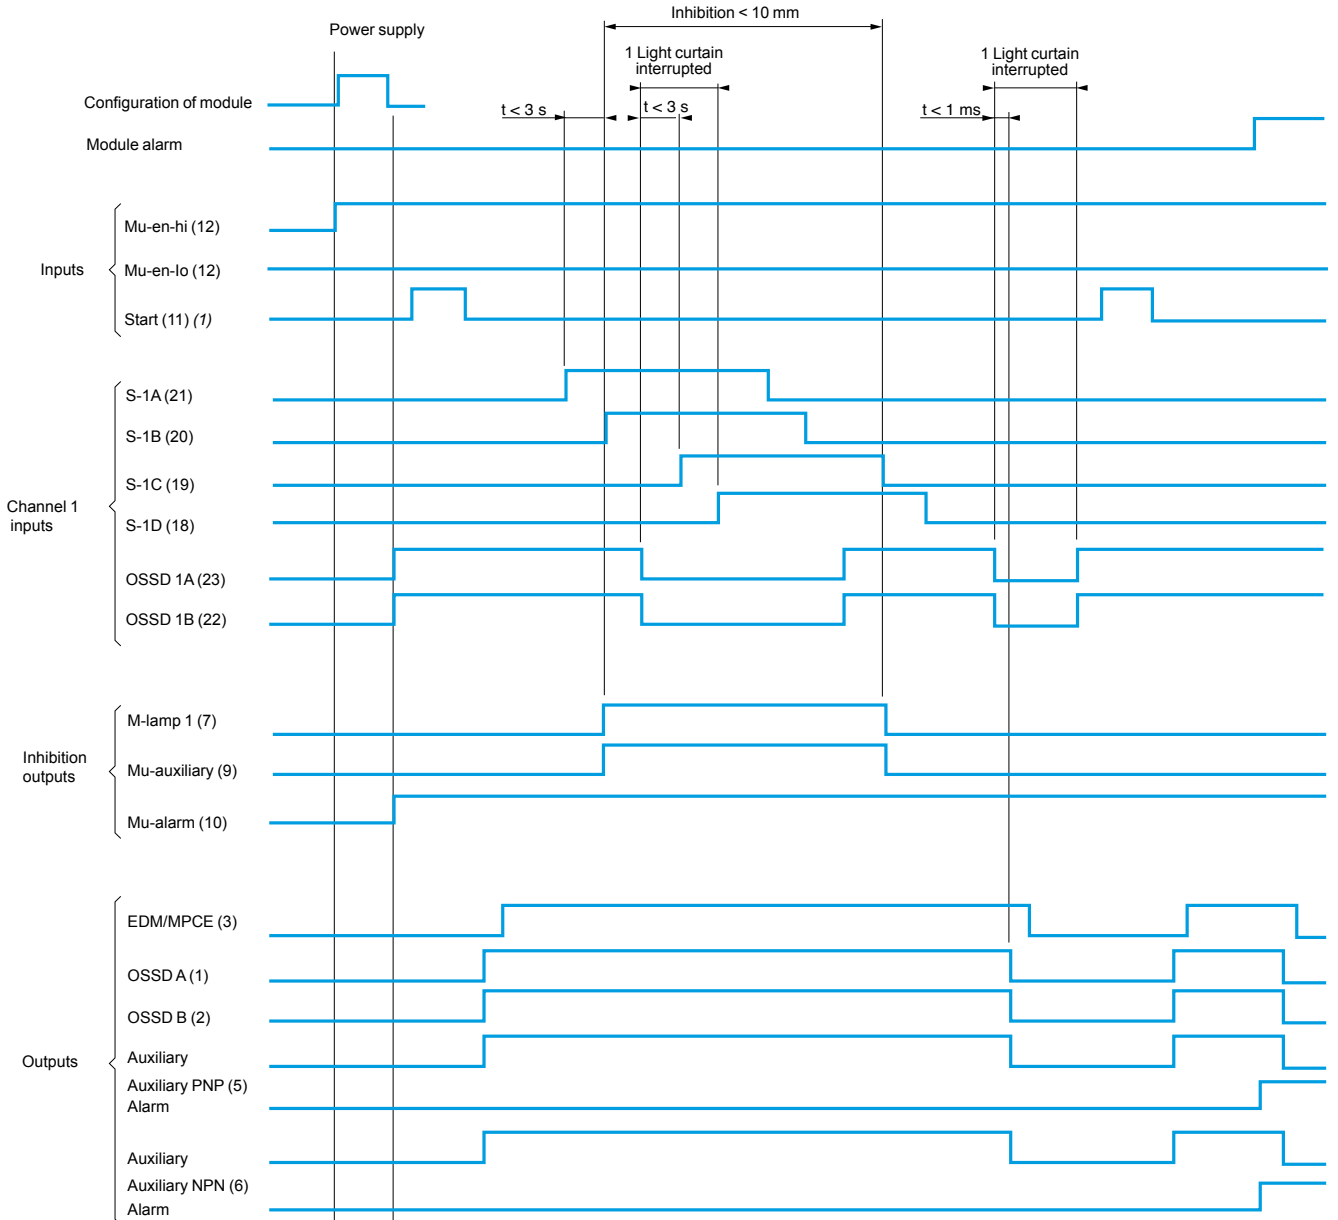

Key 0 1

(1) Press Start button.

# Safety relays

Preventa™ safety relay modules  
types XPSECME, XPSECPE

For increasing the number of safety contacts

## Operating principle

Safety relay modules XPSECME and XPSECPE, for increasing the number of safety contacts, are available as additions to Preventa XPS base modules (Emergency stop, limit switch, two-hand control, etc.). They are used to increase the number of safety output contacts of the base modules.

## Specifications

| Module type  |   | XPSECME●●●●P  | XPSECME●●●●C   | XPSECPE●●●●P  | XPSECPE●●●●C  |   |  |
|--|---|---|--|---|---|---|--|
| <b>Maximum achievable safety level</b>                   |   | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061 (when connected to the appropriate module) |  |   |   |   |  |
| <b>Reliability data (1)</b>                              | Mean Time To dangerous Failure (MTTF <sub>d</sub> )           | <b>Years</b>  | 45   | 30  |   |   |  |
|  | Diagnostic Coverage (DC)                                      | <b>%</b>  | 60 to 90   | 99  |   |   |  |
|  | Probability of dangerous Failure per Hour (PFH <sub>d</sub> ) | <b>1/h</b>  | 2.00 x 10 <sup>-7</sup>  | 3.00 x 10 <sup>-9</sup>   |   |   |  |
| <b>Conformity to standards</b>                           |   | EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1  |  |   |   |   |  |
| <b>Product certifications</b>                            |   | UL, CSA, BG   |  | UL, CSA, TÜV  |   |   |  |
| <b>Supply</b>  | Voltage   | <b>V</b>  | ~ and 24 ---   | ~ and 24 ---, 115 to 230 ~  |   |   |  |
|  | Voltage limits  |   | - 15 to + 10%  | -15 to +10%   |   |   |  |
|  | Frequency   | <b>Hz</b>   | 50/60  |   |   |   |  |
| <b>Power consumption</b>                                 | 24 V  | <b>VA</b>   | < 5  | 4   |   |   |  |
|  | 115 V/230 V   | <b>VA</b>   | -  | 6   |   |   |  |
| <b>Module inputs fuse protection</b>                     |   | Internal, electronic  |  | Internal PTC  |   |   |  |
| <b>Outputs</b>   | Voltage reference   |   | Relay hard contacts  |   |   |   |  |
|  | Number and type of safety circuits                            |   | 4 N.O.   |   | 8 N.O.  |   |  |
|  | Number and type of additional circuits                        |   | 2 N.C.   |   | 1 N.C.  |   |  |
|  | Breaking capacity in AC-15                                    |   | <b>VA</b>  | B300: inrush 3600, maintained 360   |   |   |  |
|  | Breaking capacity in DC-13                                    |   |  | 24 V/1.5 A - L/R = 50 ms  | 24 V/3 A - L/R = 50 ms  |   |  |
|  | Max. thermal current (I <sub>the</sub> )                      |   | <b>A</b>   | 6   |   |   |  |
|  | Max. total thermal current                                    |   | <b>A</b>   | 12  | 24  |   |  |
|  | Output fuse protection  |   | <b>A</b>   | 6 gG  |   |   |  |
|  | Minimum current (relay contact)                               |   | <b>mA</b>  | 10 (conforming to EN/IEC 60947-5-1, VDE 0660 part 200)                    |   |   |  |
|  | Minimum voltage (relay contact)                               |   | <b>V</b>   | 17  | 5   |   |  |
| <b>Electrical life</b>                                   |   | See page 3/16   |  |   |   |   |  |
| <b>Response time on input opening</b>                    |   | <b>ms</b>   | < 20   | 10  |   |   |  |
| <b>Rated insulation voltage (U<sub>i</sub>)</b>          |   | <b>V</b>  | 300 (degree of pollution 2 conforming to IEC/EN 60947-5-1, DIN VDE 0110 parts 1 & 2) |   |   |   |  |
| <b>Rated impulse withstand voltage (U<sub>imp</sub>)</b> |   | <b>kV</b>   | 4 (overvoltage category III, conforming to IEC/EN 60947-1, DIN VDE 0110 parts 1 & 2) |   |   |   |  |
| <b>LED display</b>                                       |   |   | 2  | 3   |   |   |  |
| <b>Operating temperature</b>                             |   | <b>°F (°C)</b>  | - 13 to + 131 (- 25 to + 55)   |   | - 13 to + 131 (- 25 to + 55)  |   |  |
| <b>Storage temperature</b>                               |   | <b>°F (°C)</b>  | - 13 to + 167 (- 25 to + 75)   |   | - 13 to + 158 (- 25 to + 70)  |   |  |
| <b>Degree of protection conforming to IEC 60529</b>      | Terminals   |   | IP 20  |   |   |   |  |
|  | Enclosure   |   | IP 40  |   |   |   |  |
| <b>Connection</b>  | Type  | Terminals   | Captive screw clamp terminals  | Spring terminals  | Captive screw clamp terminals   | Spring terminals  |  |
|  |   | Terminal block  | Removable from module  |   |   |   |  |
|  | 1-wire connection   | Without cable end   | Solid or flexible cable: 24-14 AWG (0.2 to 2.5 mm <sup>2</sup> )                     |   |   |   |  |
|  |   | With cable end  | Without bezel, flexible cable: 24-14 AWG (0.25 to 2.5 mm <sup>2</sup> )              |   |   |   |  |
|  | 2-wire connection   | Without cable end   |  | With bezel, flexible cable: 24-16 AWG (0.25 to 1.5 mm <sup>2</sup> )      | With bezel, flexible cable: 24-14 AWG (0.25 to 2.5 mm <sup>2</sup> )        | With bezel, flexible cable: 24-16 AWG (0.25 to 1.5 mm <sup>2</sup> )      | With bezel, flexible cable: 24-14 AWG (0.25 to 2.5 mm <sup>2</sup> ) |
|  |   |   |  | Solid or flexible cable: 24-18 AWG (0.2 to 1 mm <sup>2</sup> )            | -   | Solid or flexible cable: 24-18 AWG (0.2 to 1 mm <sup>2</sup> )            | -  |
| With cable end   |   |   | Without bezel, flexible cable: 24-18 AWG (0.25 to 1 mm <sup>2</sup> )                | -   | Without bezel, flexible cable: 24-18 AWG (0.25 to 1 mm <sup>2</sup> )       | -   |  |
|  |   |   | Double, with bezel, flexible cable: 20-16 AWG (0.5 to 1.5 mm <sup>2</sup> )          | Double, with bezel, flexible cable: 20-18 AWG (0.5 to 1 mm <sup>2</sup> ) | Double, with bezel, flexible cable: 20-16 AWG (0.5 to 1.5 mm <sup>2</sup> ) | Double, with bezel, flexible cable: 20-18 AWG (0.5 to 1 mm <sup>2</sup> ) |  |

(1) Per EN/ISO 13849-1 and EN/IEC 62061

# Safety relays

Preventa™ safety relay modules  
types XPSECMÉ, XPSECPE

For increasing the number of safety contacts



XPSECMÉ5131P



XPSECMÉ5131C



XPSECPE5131P




XPSECPE5131C

| References   |                           |                    |                                   |                                      |              |                |
|--|---------------------------|--------------------|-----------------------------------|--------------------------------------|--------------|----------------|
| Description  | Number of safety circuits | Additional outputs | Supply                            | Connection                           | Reference    | Weight oz (kg) |
| Safety modules for increasing the number of safety contacts, for use with XPS base modules | 4                         | 2                  | ~ and 24 V $\overline{\text{DC}}$ | Captive screw clamp terminals        | XPSECMÉ5131P | 9.524 (0.270)  |
|  |                           |                    |                                   | Terminal block removable from module |              |                |
|  |                           |                    |                                   | Spring terminals                     | XPSECMÉ5131C | 9.524 (0.270)  |
|  |                           |                    |                                   | Terminal block removable from module |              |                |
|  | 8                         | 1                  | ~ and 24 V $\overline{\text{DC}}$ | Captive screw clamp terminals        | XPSECPE5131P | 19.401 (0.550) |
|  |                           |                    |                                   | Terminal block removable from module |              |                |
|  |                           |                    |                                   | Spring terminals                     | XPSECPE5131C | 22.928 (0.650) |
|  |                           |                    |                                   | Terminal block removable from module |              |                |
|  |                           |                    | 115 to 230 V ~                    | Captive screw clamp terminals        | XPSECPE3910P | 22.928 (0.650) |
|  |                           |                    |                                   | Terminal block removable from module |              |                |
|  |                           |                    |                                   | Spring terminals                     | XPSECPE3910C | 22.928 (0.650) |
|  |                           |                    |                                   | Terminal block removable from module |              |                |


3

## XPSECME

### Wiring diagram

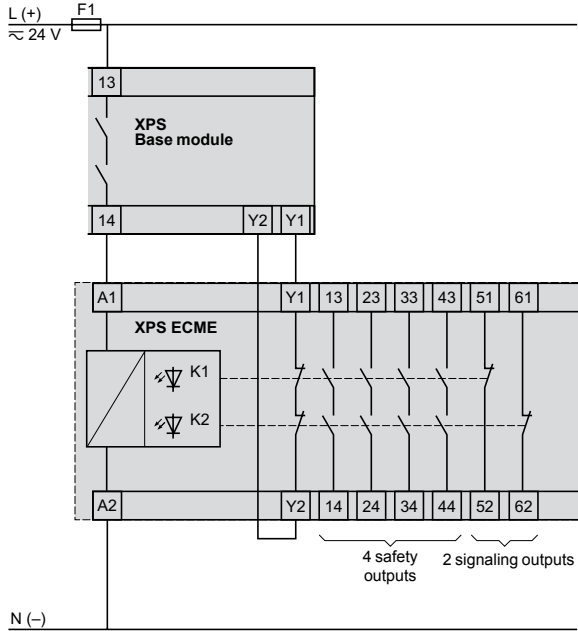


### Functional diagram

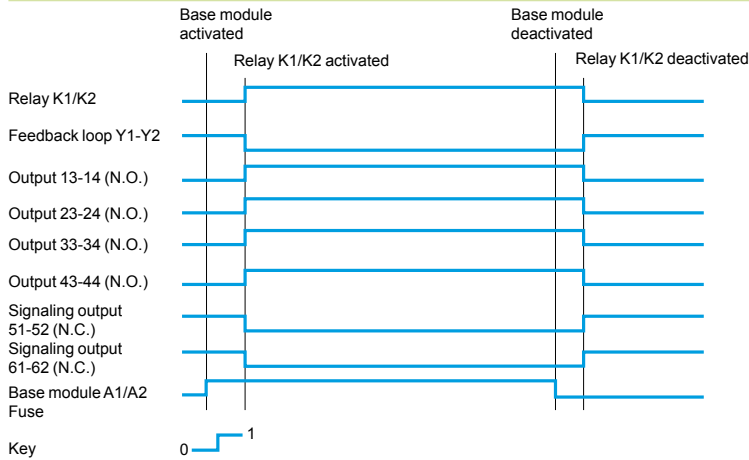




**XPSECPE**  
**Wiring diagram**

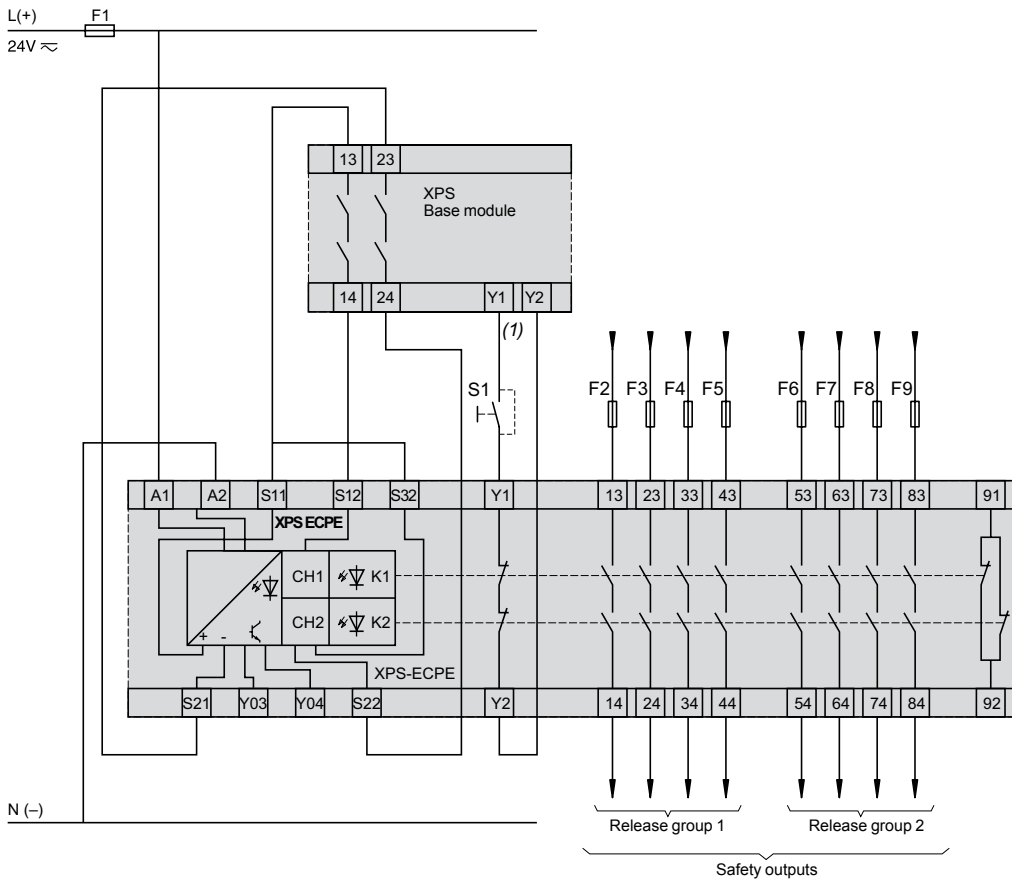

S1: Start Button.  
(1) Feedback loop.

**Functional diagram**

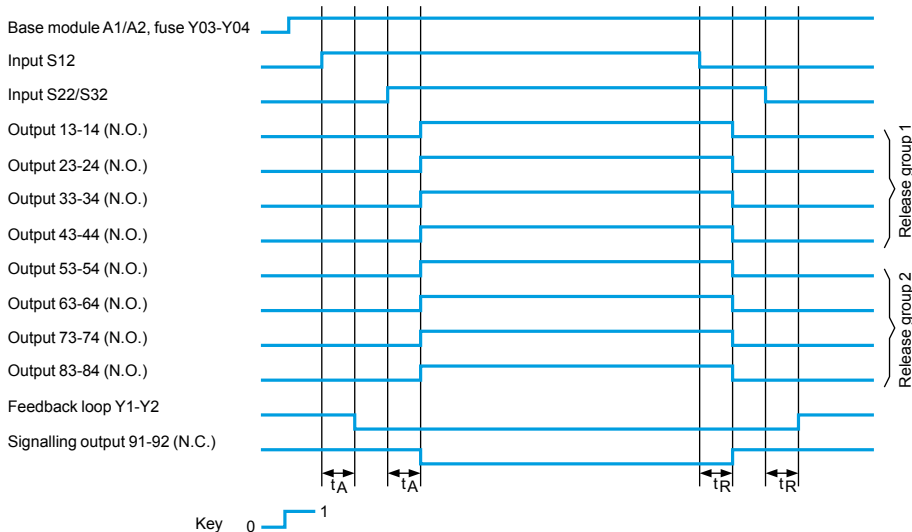

$t_A$  : response time (K1 and K2)  
 $t_R$  : release time

## Operating principle

Safety relay modules XPSTSA and XPSTSW are used in applications requiring safety time delays:

- modules XPSTSA in applications with interlocking on high inertia machines with long rundown time (guards unlocked after safety time delay has elapsed),
- modules XPSTSW in applications with a safety switchover contact (jumping contact in association with XPSVN modules for zero speed detection, solenoid valve monitoring, etc.).

The time delay of safety circuits can be set to 16 preset values, using 2 selectors located on the front cover of the modules.

To aid diagnostics, the modules have LEDs which provide information on the monitoring circuit status and 2 solid-state outputs for signalling to the process PLC.

In addition, their removable terminal blocks optimize machine maintenance.

## Specifications

| Module type  |   | XPSTSA   | XPSTSW  |
|--|---|--|---|
| <b>Maximum achievable safety level</b>                   |   | PL d/Category 3 conforming to EN/ISO 13849-1, SILCL2 conforming to EN/IEC 62061                  |   |
| <b>Reliability data (1)</b>                              | Mean Time To dangerous Failure (MTTF <sub>d</sub> )           | <b>Years</b>   | 126   |
|  | Diagnostic Coverage (DC)                                      | <b>%</b>   | 60 to 90  |
|  | Probability of dangerous Failure per Hour (PFH <sub>d</sub> ) | <b>1/h</b>   | 1.3 x 10 <sup>-7</sup>  |
| <b>Conformity to standards</b>                           |   | EN/IEC 60204-1, EN/IEC 60947-5-1   |   |
| <b>Product certifications</b>                            |   | UL, CSA, BG  |   |
| <b>Supply</b>  | Voltage   | <b>V</b>   | ~ and ~ 24, ~ 115, ~ 230  |
|  | Voltage limits  |  | - 15...+ 15% (~ 24 V)<br>- 20...+ 10% (~ 24 V)<br>- 15...+ 15% (115 V)<br>- 15...+ 10% (230 V)            |
|  | Frequency   | <b>Hz</b>  | 50/60   |
| <b>Power consumption</b>                                 | ~ 24 V  | <b>VA</b>  | < 2.3   |
|  | ~ 24 V  |  | < 4.3   |
|  | ~ 115   |  | < 6.5   |
|  | ~ 230 V   |  | < 5.5   |
| <b>Module inputs fuse protection</b>                     |   | Internal, electronic   |   |
| <b>Time delay</b>  | <b>s</b>  | 1...31 (16 positions)  | –   |
| <b>Pulse time</b>  | <b>s</b>  | –  | 0.1...3.1 (16 positions)  |
| <b>Outputs</b>   | Voltage reference   |  | Relay hard contacts   |
|  | Number and type of safety circuits                            |  | 1 N.O. (17-18) + 2 N.C. (25-26, 35-36)  |
|  | Number and type of additional circuits                        |  | 2 solid-state (Y53-Y54, Y63-Y64)  |
|  | Breaking capacity in AC-15                                    | <b>VA</b>  | C300: inrush 1800, maintained 180   |
|  | Breaking capacity in DC-13                                    |  | 24 V/1.5 A - L/R = 50 ms  |
|  | Breaking capacity of solid-state outputs                      |  | 24 V/20 mA, 48 V/10 mA  |
|  | Max. thermal current (I <sub>the</sub> )                      | <b>A</b>   | 6   |
|  | Output fuse protection  | <b>A</b>   | 4 gG (gl) or 6 fast acting, conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200                         |
|  | Minimum current   | <b>mA</b>  | 10  |
| Minimum voltage  | <b>V</b>  | 17   |   |
| <b>Electrical life</b>                                   |   | See page 3/16  |   |
| <b>Rated insulation voltage (U<sub>i</sub>)</b>          |   | <b>V</b> 300 (degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2)    |   |
| <b>Rated impulse withstand voltage (U<sub>imp</sub>)</b> |   | <b>kV</b> 4 (overvoltage category III, conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2) |   |
| <b>LED display</b>                                       |   | 4  |   |
| <b>Operating temperature</b>                             |   | <b>°F (°C)</b> + 14...+ 131 (- 10...+ 55)  |   |
| <b>Storage temperature</b>                               |   | <b>°F (°C)</b> - 13...+ 185 (- 25...+ 85)  |   |
| <b>Degree of protection</b><br>conforming to IEC 60529   | Terminals   |  | IP 20   |
|  | Enclosure   |  | IP 40   |
| <b>Connection</b>  | Type  |  | Captive screw clamp terminals, removable terminal block   |
|  | 1-wire connection   | Without cable end  | Solid or flexible cable: 24-14 AWG (0.2...2.5 mm <sup>2</sup> )   |
|  |   | With cable end   | Without bezel, flexible cable: 24-14 AWG (0.25...2.5 mm <sup>2</sup> )                                    |
|  |   | With cable end   | With bezel, flexible cable: 24-14 AWG (0.25...2.5 mm <sup>2</sup> )                                       |
|  | 2-wire connection   | Without cable end  | Solid cable: 24-18 AWG (0.2...1 mm <sup>2</sup> ), flexible cable: 24-16 AWG (0.2...1.5 mm <sup>2</sup> ) |
|  |   | With cable end   | Without bezel, flexible cable: 24-18 AWG (0.25...1 mm <sup>2</sup> )                                      |
| With cable end   |   | Double, with bezel, flexible cable: 20-16 AWG (0.5...1.5 mm <sup>2</sup> )                       |   |

(1) Using an appropriate and correctly connected control system.

# Safety relays

Preventa™ safety relay modules types  
XPSTSA, XPSTSW  
For safety time delays

## References



XPSTSA●●●●P

| Description  | Number of safety circuits | Number of additional outputs  | Supply       | Reference   | Weight oz (kg) |
|--|---------------------------|-------------------------------|--------------|-------------|----------------|
| Safety modules for applications with interlocking on high inertia machines | 1 delayed                 | 2 N.C. + 2 solid-state to PLC | ~ and ≍ 24 V | XPSTSA5142P | 8.818 (0.250)  |
|  |                           |                               | ~ 115 V      | XPSTSA3442P | 12.699 (0.360) |
|  |                           |                               | ~ 230 V      | XPSTSA3742P | 12.699 (0.360) |




XPSTSW●●●●P

|  |              |                               |              |             |                |
|--|--------------|-------------------------------|--------------|-------------|----------------|
| Safety modules for applications with safety switchover contact | 1 pulse type | 2 N.C. + 2 solid-state to PLC | ~ and ≍ 24 V | XPSTSW5142P | 8.818 (0.250)  |
|  |              |                               | ~ 115 V      | XPSTSW3442P | 12.699 (0.360) |
|  |              |                               | ~ 230 V      | XPSTSW3742P | 12.699 (0.360) |

## Wiring diagrams

### XPSTSA


#### Delayed unlocking of a guard application

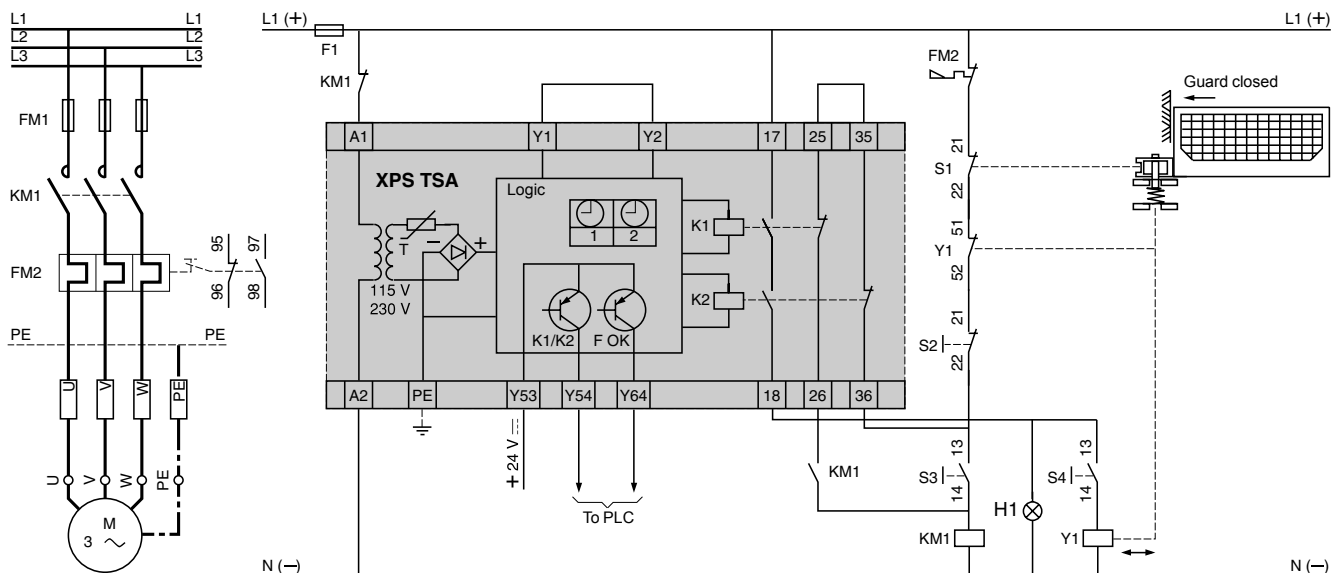

- Contacts 95/96 and 97/98 are trip contacts for an overload relay.
- S1 is one of the N.C. safety contacts in an XCSE switch
- Y1 is the N.C. solenoid contact in the XCSE switch (wired in series with the S1)
- S2 is the motor stop push button
- S3 is the motor start push button, in parallel of KM1 contact
- S4 is the push button to energize the XCSE solenoid to unlock the guard


## XPSTSA

### Wiring diagram

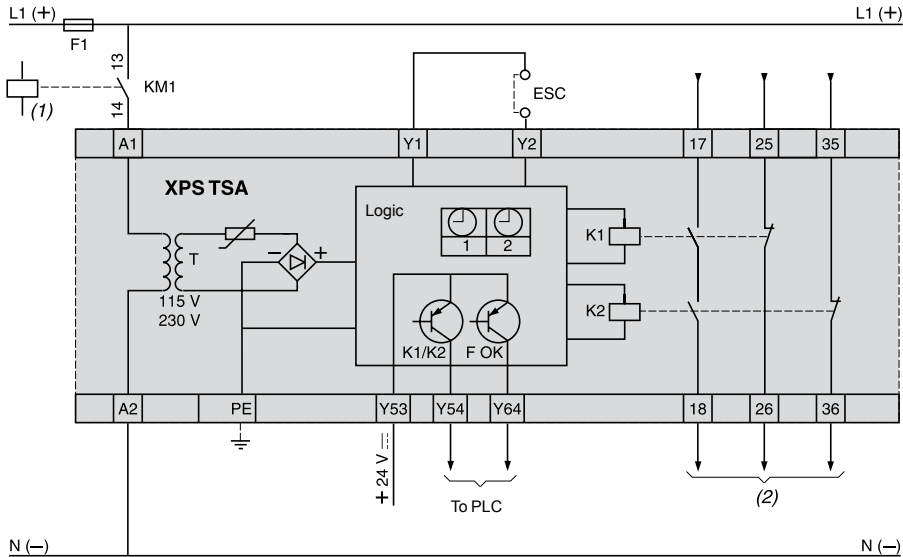


(1) Signal to be delayed.  
(2) Relay hard contact outputs with on-delay.  
ESC: External start conditions.

### Functional diagram of module XPSTSA

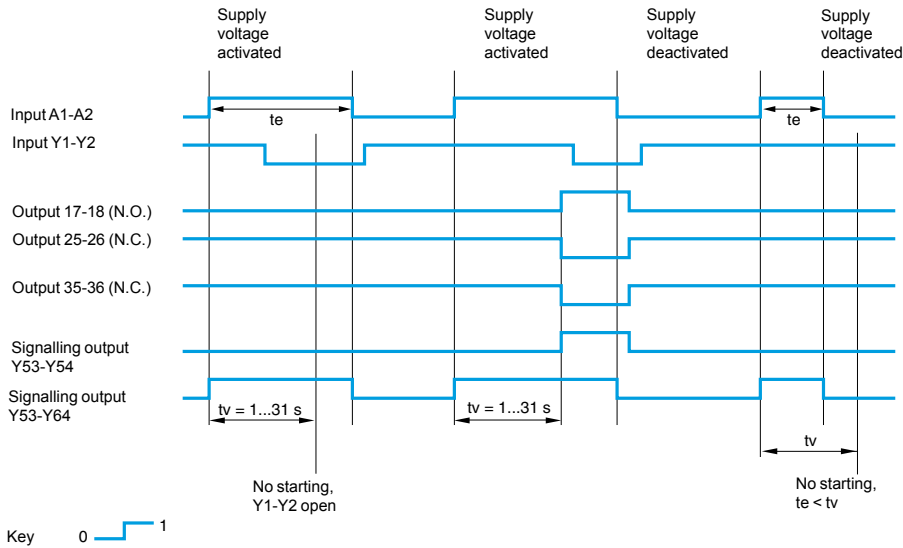


### LED details (XPSTSA, XPA TSW)

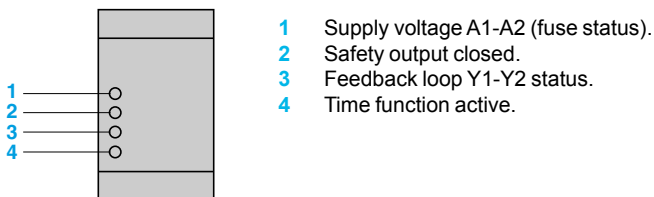


### XPSTSW

#### Guard unlocking application using zero speed detection

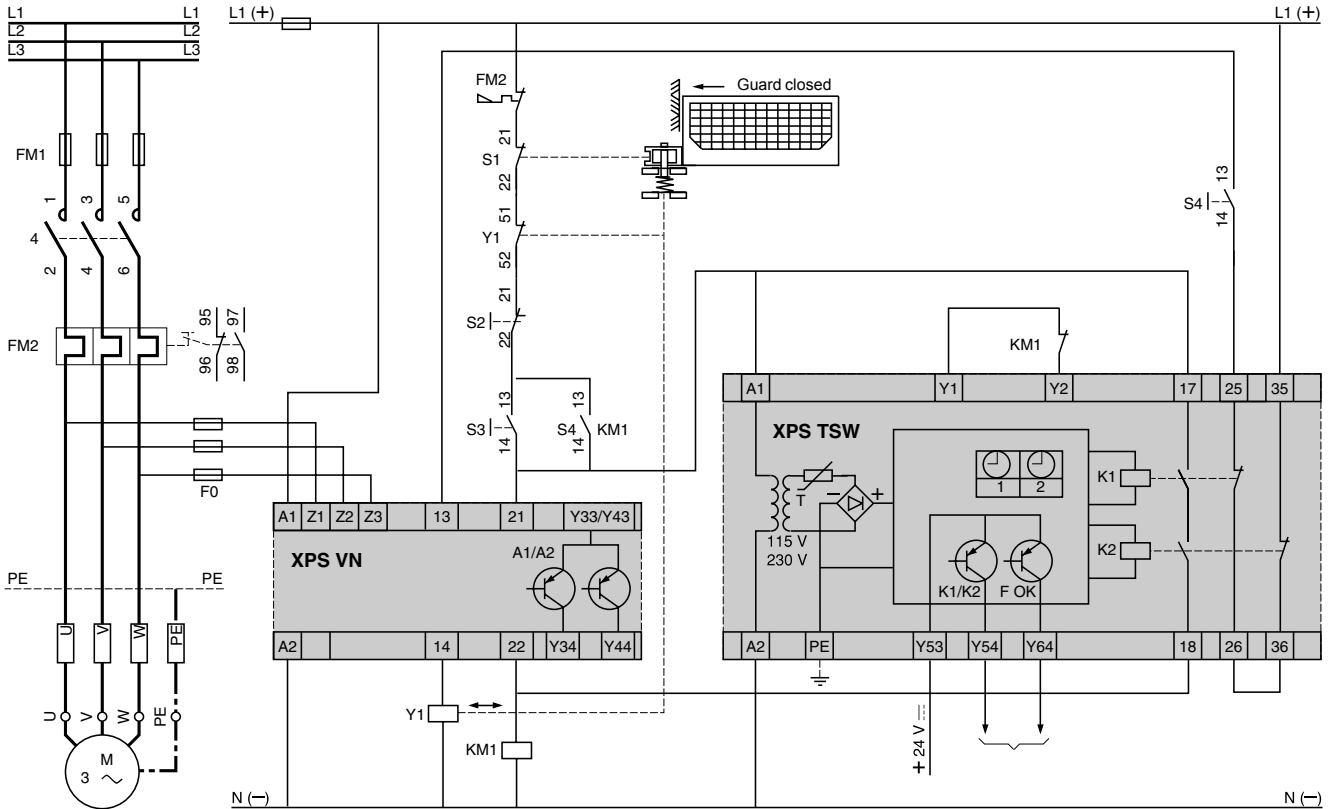


#### Wiring diagram

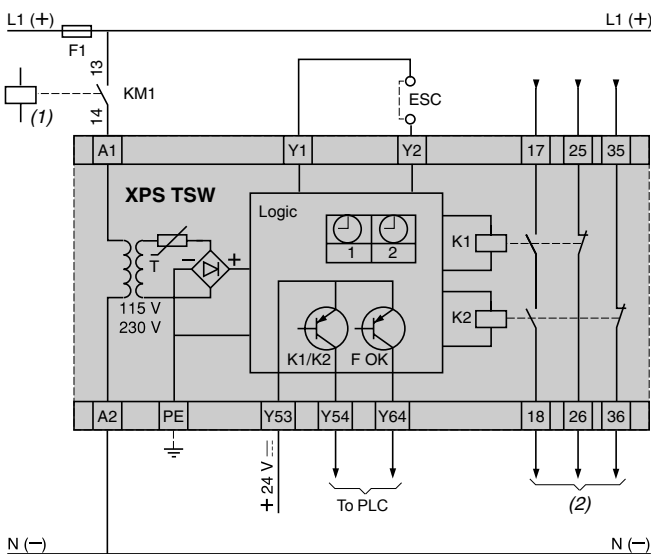

(1) Control signal.  
(2) Relay hard contact outputs with pulse time delay.  
ESC: External start conditions.  
LED details: see page 3/90.

#### Functional diagram of module XPSTSW

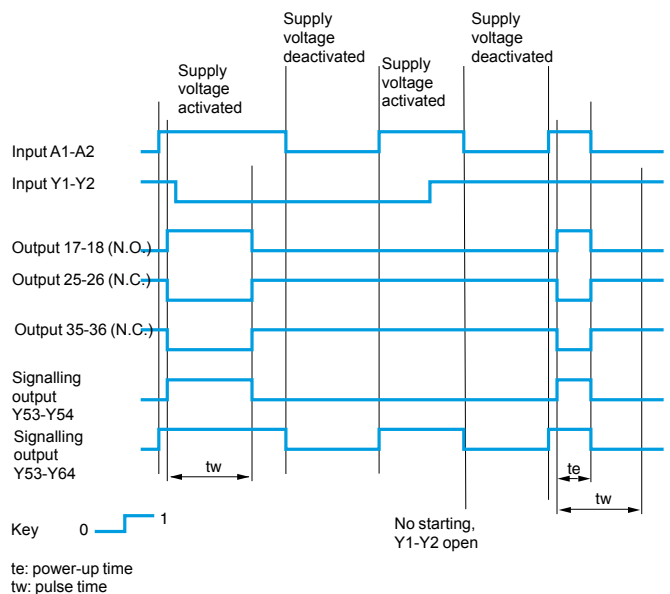

# Safety relays

Preventa™ safety relay modules types  
XPSDMB, XPSDME

For non-contact safety interlock (coded magnetic)  
switch monitoring

## Operating principle

Safety relay modules XPSDMB and XPSDME are specifically designed for monitoring coded magnetic safety switches. They incorporate two safety outputs and two solid-state outputs for signalling to the process PLC.

XPSDMB safety relay modules can monitor two independent sensors and modules XPSDME can monitor up to six independent sensors.

To monitor a higher number of magnetic switches using these safety modules, the magnetic switches can be connected in series, while meeting the requirements of category 3 of EN/ISO 13849-1.

Safety modules XPSDM●●●●●P incorporate removable terminal blocks, thus optimizing machine maintenance.

To aid diagnostics, the modules have LEDs on the front cover which provide information on the monitoring circuit status.

## Specifications

| Module type   |   | XPSDMB1132   | XPSDME1132   | XPSDMB1132P   | XPSDME1132P   |                         |
|---|---|--|--|---|---|-------------------------|
| <b>Maximum achievable safety level</b>  |   | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061                                       |  |   |   |                         |
| <b>Reliability data (1)</b>   | Mean Time To dangerous Failure (MTTF <sub>d</sub> )           | <b>Years</b>   | 83.1   | 82.4  | 83.1  | 82.4                    |
|   | Diagnostic Coverage (DC)                                      | <b>%</b>   | > 99   |   |   |                         |
|   | Probability of dangerous Failure per Hour (PFH <sub>d</sub> ) | <b>1/h</b>   | 3.92 x 10 <sup>-9</sup>  | 3.97 x 10 <sup>-9</sup>                                 | 3.92 x 10 <sup>-9</sup>   | 3.97 x 10 <sup>-9</sup> |
| <b>Conformity to standards</b>  |   | EN/IEC 60204-1, EN 1088/ISO 14119, EN/IEC 60947-5-1, EN/IEC 60947-5-3, DIN V VDE 0801 (1990), DIN V VDE 0801 A1 (1994) |  |   |   |                         |
| <b>Product certifications</b>   |   | UL, CSA, BIA   |  |   |   |                         |
| <b>Supply (U<sub>e</sub>)</b>   | Voltage conforming to IEC 38                                  | <b>V</b>   | --- 24   |   |   |                         |
|   | Voltage limits  |  | - 20... + 20%  |   |   |                         |
| <b>Power consumption</b>  |   | <b>W</b>   | < 2.5  | < 3.5   | < 2.5   | < 3.5                   |
| <b>Module inputs fuse protection</b>  |   | Internal, electronic   |  |   |   |                         |
| <b>Maximum wiring resistance R<sub>L</sub></b> between the module and the coded magnetic switches |   | <b>Ω</b>   | 100  |   |   |                         |
| <b>Control unit voltage and current</b>   |   | 28 V/8 mA  |  |   |   |                         |
| <b>Synchronization time between magnetic switch inputs</b>  |   | <b>s</b>   | < 0.5  |   |   |                         |
| <b>Safety outputs</b>   | Voltage reference   | Relay hard contacts  |  |   |   |                         |
|   | Number and type of safety circuits                            | 2 N.O.   |  |   |   |                         |
|   | Number and type of solid-state outputs                        | 2  |  |   |   |                         |
|   | Breaking capacity in AC-15                                    | <b>VA</b>  | C300: inrush 1800, sealed: 180   |   |   |                         |
|   | Breaking capacity in DC-13                                    |  | 24 V/1.5 A, L/R = 50 ms  |   |   |                         |
|   | Max. thermal current (I <sub>the</sub> )                      | <b>A</b>   | 6  |   |   |                         |
|   | Max. total thermal current                                    | <b>A</b>   | 12   |   |   |                         |
|   | Output fuse protection  | <b>A</b>   | 4 gG or 6 fast acting  |   |   |                         |
|   | Minimum current   | <b>mA</b>  | 10   |   |   |                         |
|   | Minimum voltage   | <b>V</b>   | 17   |   |   |                         |
| <b>Electrical life</b>  |   | See page 3/16  |  |   |   |                         |
| <b>Response time on input opening</b>   |   | <b>ms</b>  | < 20   |   |   |                         |
| <b>Rated insulation voltage (U<sub>i</sub>)</b>   |   | <b>V</b>   | 300 (degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2)   |   |   |                         |
| <b>Rated impulse withstand voltage (U<sub>imp</sub>)</b>  |   | <b>kV</b>  | 4 (overvoltage category III, conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2) |   |   |                         |
| <b>LED display</b>  |   |  | 3  | 15  | 3   | 15                      |
| <b>Ambient air temperature</b>  |   | <b>°F (°C)</b>   | For operation: + 14... + 131 (- 10... + 55), for storage: - 13... + 185 (- 25... + 85) |   |   |                         |
| <b>Degree of protection</b> conforming to IEC 60529   |   | Terminals: IP 20, enclosure: IP 40   |  |   |   |                         |
| <b>Connection</b>   | Type  | Captive screw clamp terminals  |  | Captive screw clamp terminals, removable terminal block |   |                         |
|   | 1-wire connection   | Without cable end  | Solid or flexible cable: 26-14 AWG (0.14... 2.5 mm <sup>2</sup> )                      |   | Solid or flexible cable: 24-14 AWG (0.2... 2.5 mm <sup>2</sup> )  |                         |
|   |   | With cable end   | Without bezel, flexible cable: 24-14 AWG (0.25... 2.5 mm <sup>2</sup> )                |   |   |                         |
|   | 2-wire connection   | Without cable end  | Solid or flexible cable: 26-18 AWG (0.14... 0.75 mm <sup>2</sup> )                     |   | Solid cable: 24-18 AWG (0.2... 1 mm <sup>2</sup> ), flexible cable: 24-16 AWG (0.2... 1.5 mm <sup>2</sup> ) |                         |
|   |   | With cable end   | Without bezel, flexible cable: 24-18 AWG (0.25... 1 mm <sup>2</sup> )                  |   |   |                         |
|   |   | With cable end   | With bezel, flexible cable: 20-16 AWG (0.5... 1.5 mm <sup>2</sup> )                    |   |   |                         |

(1) Per EN/ISO 13849-1 and EN/IEC 62061

# Safety relays

Preventa™ safety relay modules types  
XPSDMB, XPSDME

For non-contact safety interlock (coded magnetic)  
switch monitoring



XPSDMB1132●



XPSDME1132

## References

| Description   | Type of terminal block connection | Number of safety circuits | Solid-state outputs for PLC | Supply<br>V | Reference   | Weight<br>oz (kg) |
|---|-----------------------------------|---------------------------|-----------------------------|-------------|-------------|-------------------|
| Safety module for monitoring<br>2 coded magnetic switches | Integrated in module              | 2 N.O.                    | 2                           | 24          | XPSDMB1132  | 8.818<br>(0.250)  |
| Safety module for monitoring<br>6 coded magnetic switches | Integrated in module              | 2 N.O.                    | 2                           | 24          | XPSDME1132  | 10.582<br>(0.300) |
| Safety module for monitoring<br>2 coded magnetic switches | Removable from module             | 2 N.O.                    | 2                           | 24          | XPSDMB1132P | 8.818<br>(0.250)  |
| Safety module for monitoring<br>6 coded magnetic switches | Removable from module             | 2 N.O.                    | 2                           | 24          | XPSDME1132P | 10.582<br>(0.300) |


# Safety relays

Preventa™ safety relay modules types  
XPSDMB, XPSDME

For non-contact safety interlock (coded magnetic)  
switch monitoring


## XPSDMB

Wiring to category 4 conforming to EN/ISO 13849-1. Example with 2-pole N.C. + N.O. (N.C. staggered) contact.

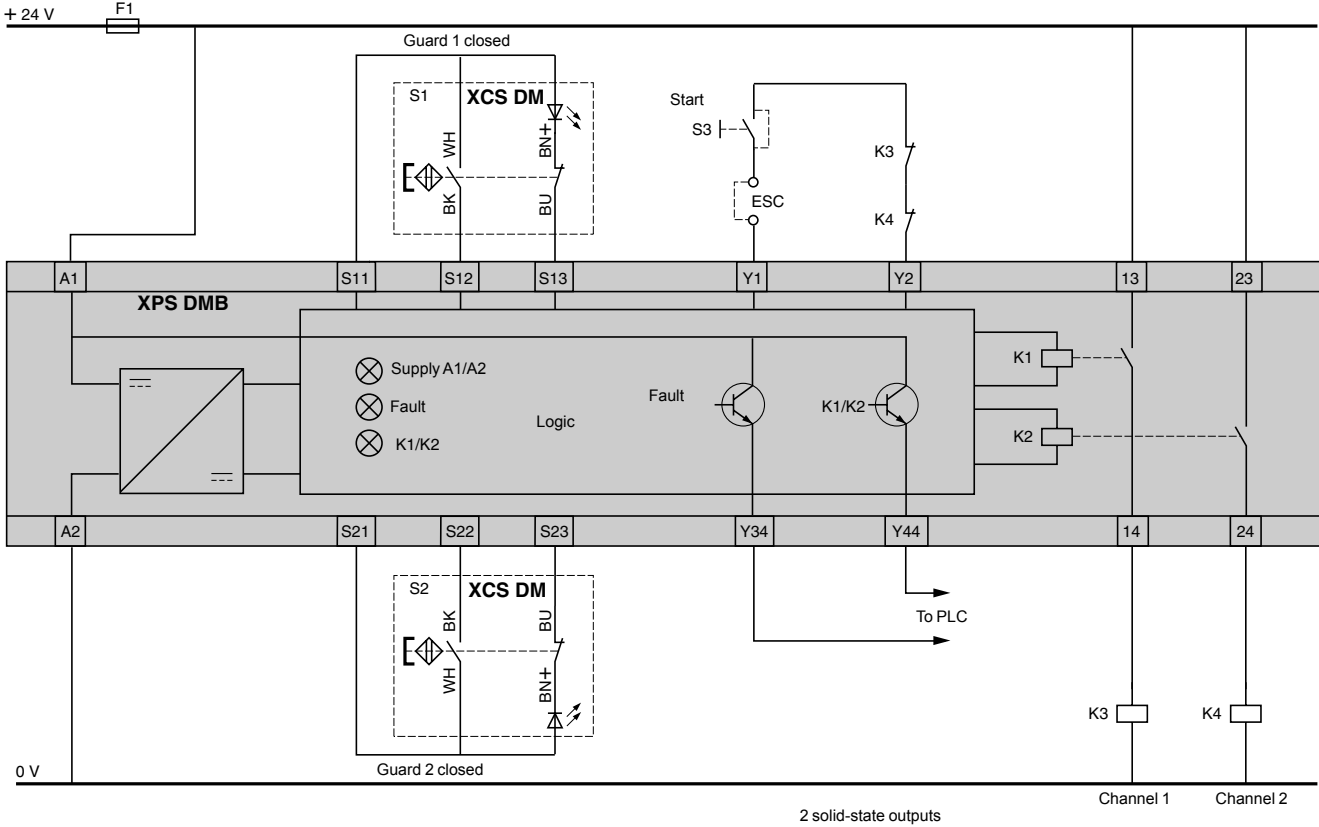

ESC: External start conditions.

Wiring to category 3 conforming to EN/ISO 13849-1. Example with 3 switches with 2-pole N.C. + N.O. (N.C. staggered) contacts.

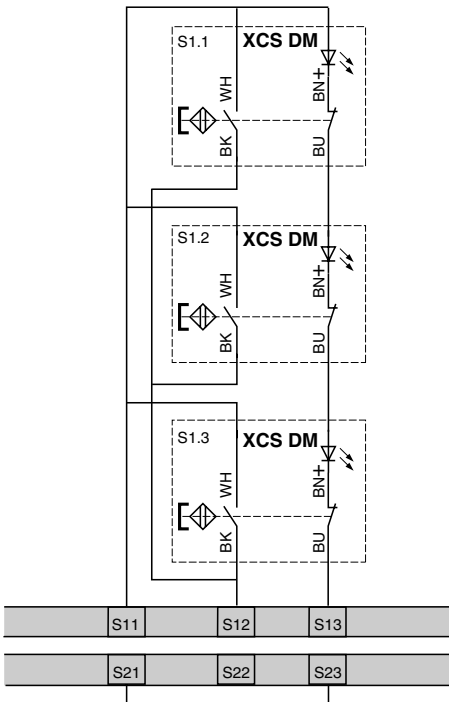

Input: S11, S12, S13 or S21, S22, S23.

Unused inputs must be jumpered: i.e.: if only input S11, S12, S13 is used, then terminals S21 and S23 must be jumpered.

The order in which the inputs are wired or jumpered will not affect operation.




# Safety relays

Preventa™ safety relay modules types  
XPSDMB, XPSDME

For non-contact safety interlock (coded magnetic)  
switch monitoring


**XPSDME**

Wiring to category 4 conforming to EN/ISO 13849-1. Example with 2-pole N.C. + N.O. (N.C. staggered) contact

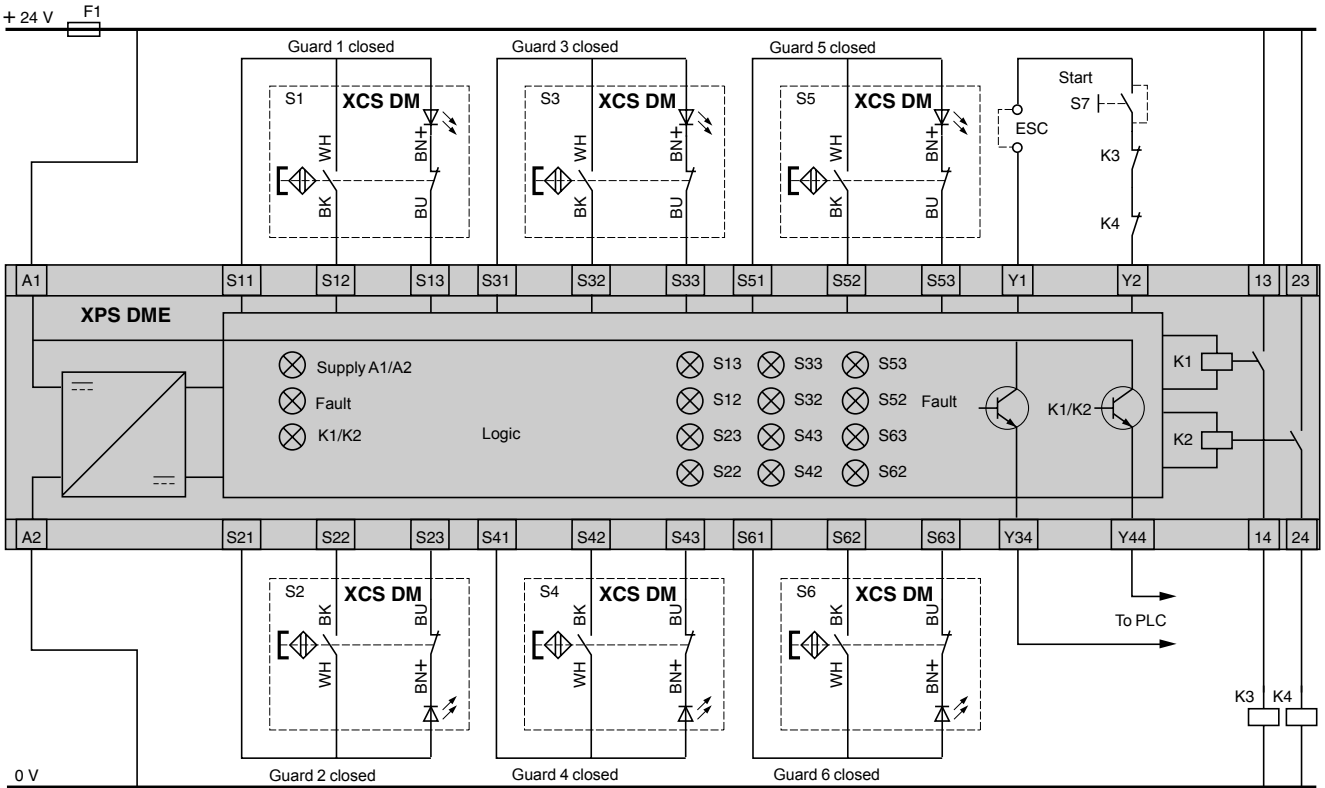

ESC: External start conditions.

Wiring to category 3 conforming to EN/ISO 13849-1. Example with 3 switches with 2-pole N.C. + N.O. (N.C. staggered) contacts.

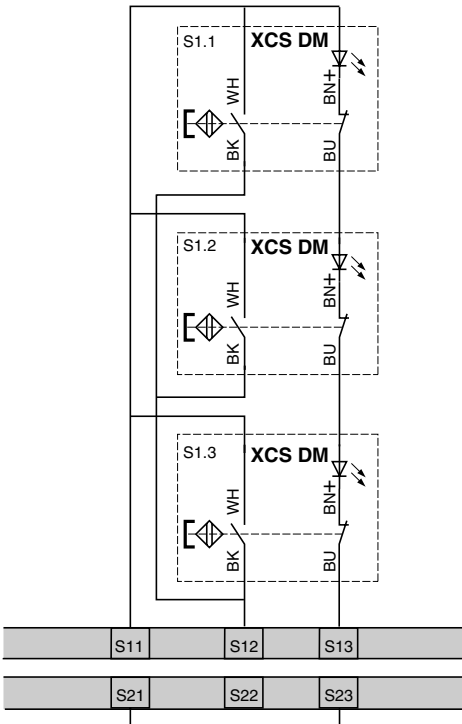

Input: S11, S12, S13 or S21, S22, S23 or S31, S32, S33 or S41, S42, S43 or S51, S52, S53 or S61, S62, S63.  
Unused inputs must be jumpered i.e.: if input S61, S62, S63 is not used, then terminals S61 and S63 must be jumpered.  
Terminals to be jumpered if the input is not used are: S11 and S13, S21 and S23, S31 and S33, S41 and S43, S51 and S53, S61 and S63.

The order in which the inputs are wired will not affect device operation.


## Safety relays

Preventa™ safety relay modules types  
XPSDMB, XPSDME


For non-contact safety interlock (coded magnetic)  
switch monitoring

### XPSDMB

#### Functional diagram

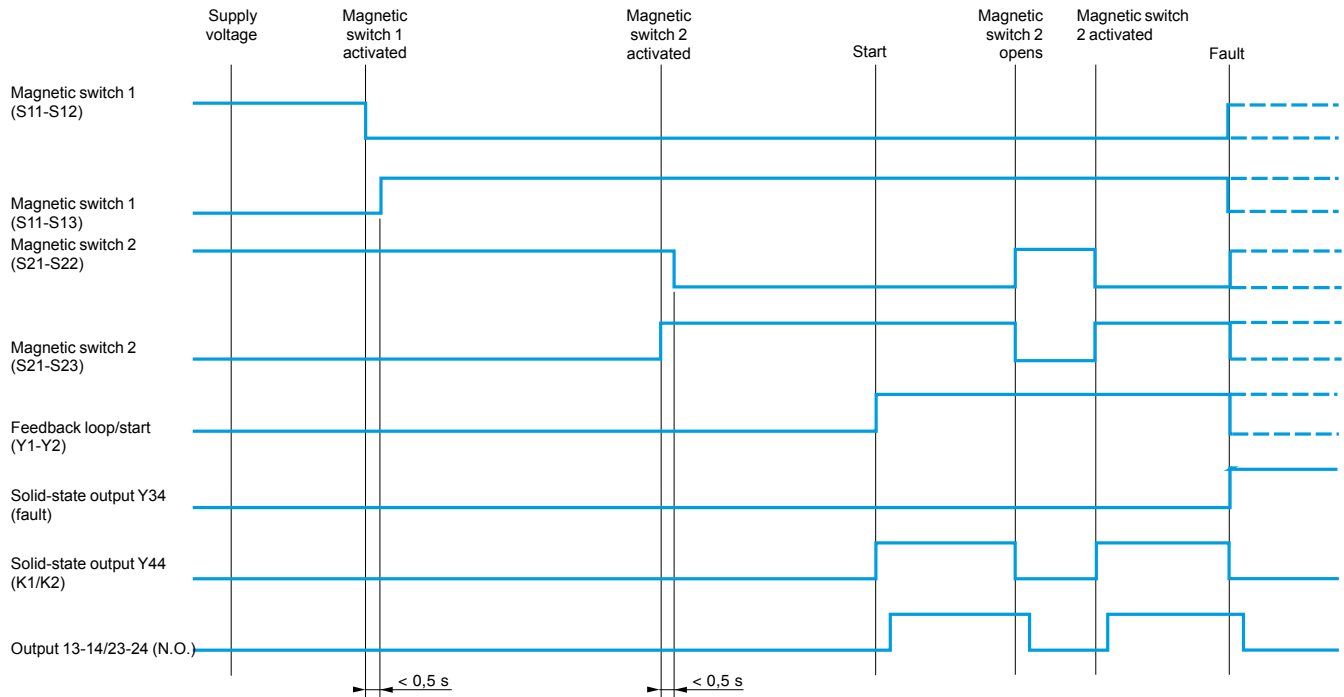

#### LED details




- 1 Supply voltage A1-A2, internal electronic fuse status.
- 2 Fault signalling.
- 3 Safety outputs closed.

# Safety relays


Preventa™ safety relay modules types  
XPSDMB, XPSDME

For non-contact safety interlock (coded magnetic)  
switch monitoring

**XPSDME**  
**Functional diagram**

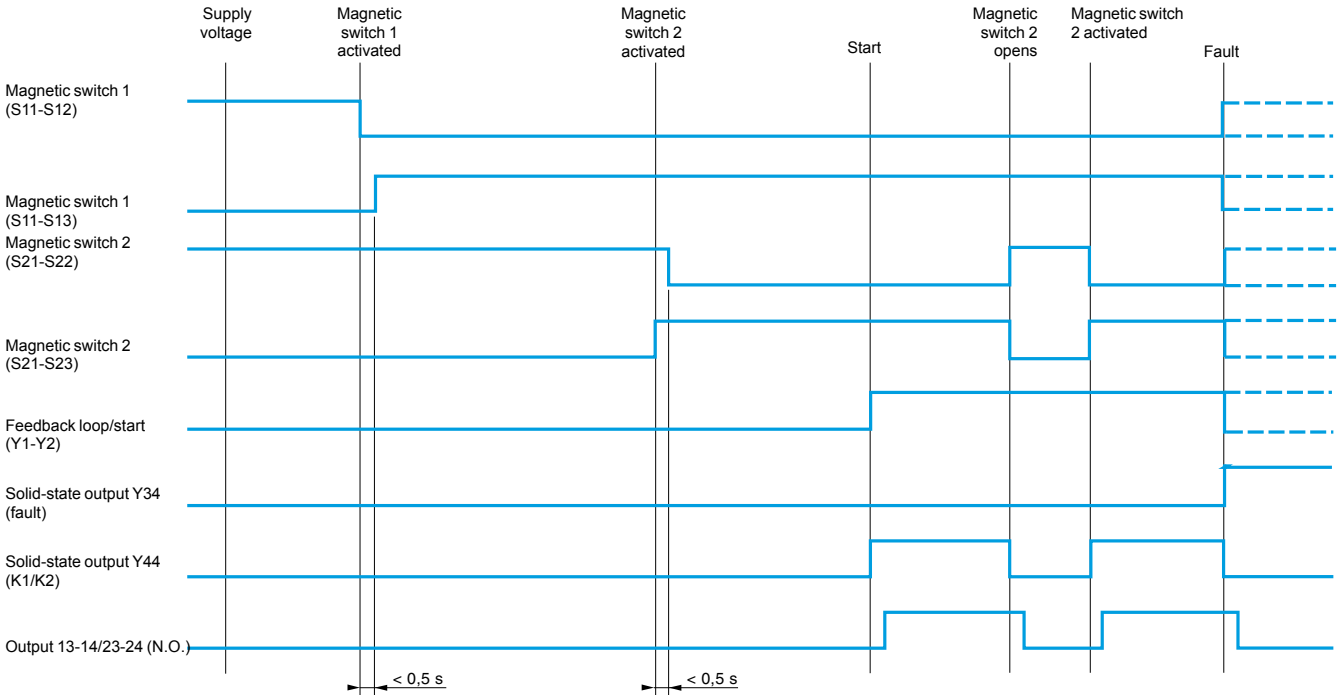

**LED details**



- 1 Supply voltage A1-A2, internal electronic fuse status.
- 2 Fault signalling.
- 3 Safety outputs closed.
- 4 Magnetic switch 1 activated.
- 5 Magnetic switch 1 deactivated.
- 6 Magnetic switch 2 activated.
- 7 Magnetic switch 2 deactivated.
- 8 Magnetic switch 3 activated.
- 9 Magnetic switch 3 deactivated.
- 10 Magnetic switch 4 activated.
- 11 Magnetic switch 4 deactivated.
- 12 Magnetic switch 5 activated.
- 13 Magnetic switch 5 deactivated.
- 14 Magnetic switch 6 activated.
- 15 Magnetic switch 6 deactivated.

# Safety relays

## Preventa™ safety relay modules type XPSVNE For zero speed detection

### Operating principle

Preventa™ safety relay modules type XPSVNE for zero speed detection are used to detect the stop condition of electric motors. Their most common applications include: providing the unlock signal for electrically interlocked sliding or removable machine guards, controlling rotation direction signals for reversing motors and engaging locking brakes after a motor has come to a standstill.

As electric motors run down, a remanent voltage is produced in the windings of the motor due to residual magnetism. This voltage is proportional to the speed of the motor and, therefore, decreases as the motor comes to a standstill.

This remanent voltage is measured in a redundant manner so as to detect the stop condition of the motor. The cabling between the motor windings and the inputs of the XPSVNE module is also monitored to prevent a cabling breakage or anomaly being seen as a stopped motor.

A transformer should not be used to connect the motor to terminals Z1, Z2 and Z3 since there is no monitoring of the connection with the motor winding via the resistance monitoring.

Modules XPSVNE are suitable for detecting the stop condition of all types of a.c. or d.c. motor driven machines which, when the motor runs down, produce a remanent voltage in the windings due to residual magnetism. These machines can be controlled by electronic devices, such as variable speed drives or d.c. injection brakes.

The input filters for standard XPSVNE modules are designed for a frequency of up to 60 Hz.

For motors operating at a frequency higher than 60 Hz, which therefore produce a high frequency remanent voltage, special modules XPSVNE●●●●HS should be used.

The XPSVNE is not compatible with Wound Rotor Motors. These motors are typically used in high HP (1000+) low speed applications, where the additional windings (required for these types of motors) pay for themselves. If power is removed from stator, but rotor is left energized, then transformer coupling between the two could create a small voltage across the stator. This could make the XPSVNE think the motor is still turning, which means the safety outputs would never energize or change state. These motors do not have residual magnetism in the rotor that can act as a source of flux for generator effect, in which case the XPSVNE may think the motor is at zero speed, and could energize the safety outputs while the motor is still running. Wound Rotor motors are not in common use today, and very rare.

The XPSVNE is not designed for use with single phase motors.

The XPSVNE is not designed to detect locked rotor conditions. Here the motor still has voltage applied to it, but in essence has zero speed. Generally, a locked rotor condition is not a safe state for machinery nor the operators. The XPSVNE will sense voltage applied to the windings, and will not indicate the motor's "apparent" zero speed. The outputs of the XPSVNE will not change state, the gates or guards will not be unlocked, and operators will not be allowed access to the unsafe area.


Modules XPSVNE have 2 potentiometers mounted on the front cover of the module which allow independent adjustment of the switching threshold for each input circuit. This allows adjustment for different types of motors and application requirements.

To aid diagnostics, modules XPSVNE have 4 LEDs and 2 solid-state outputs to provide information on the status of the zero speed detection circuit.

| Specifications   |   |                   | XPSVNE  |
|--|---|-------------------|---|
| <b>Module type</b>                                       |   |                   | PL d/Category 3 conforming to EN/ISO 13849-1, SILCL 2 conforming to EN/IEC 62061  |
| <b>Maximum achievable safety level</b>                   |   |                   | 124.1   |
| <b>Reliability data (1)</b>                              | Mean Time To dangerous Failure (MTTF <sub>d</sub> )           | <b>Years</b>      | 124.1   |
|  | Diagnostic Coverage (DC)                                      | <b>%</b>          | > 99  |
|  | Probability of dangerous Failure per Hour (PFH <sub>d</sub> ) | <b>1/h</b>        | 9.26 x 10 <sup>-9</sup>   |
| <b>Conformity to standards</b>                           |   |                   | EN 60204-1, EN/IEC 60947-5-1, EN 50082-2  |
| <b>Product certifications</b>                            |   |                   | UL, CSA, BG   |
| <b>Supply</b>  | Voltage   | <b>V</b>          | --- 24<br>~ 115<br>~ 230  |
|  | Voltage limits  |                   | - 15...+ 10% (--- 24 V)<br>- 15...+ 15% (~ 115 V)<br>- 15...+ 10% (~ 230 V)   |
|  | Frequency   | <b>Hz</b>         | 50/60 (115 V, 230 V)  |
| <b>Power consumption</b>                                 |   | <b>W</b>          | ≤ 3.5 (--- 24 V)  |
|  |   | <b>VA</b>         | ≤ 7.5 (~ 115 V), ≤ 7 (~ 230 V)  |
|  | <b>Frequency of motor power supply</b>                        | <b>Hz</b>         | ≤ 60 Hz (XPSVN●●42), > 60 Hz (XPSVN●●42HS)  |
| <b>Inputs</b>  | Maximum voltage between terminals Z1 - Z2 - Z3                | <b>V</b>          | 500 rms   |
|  | Detection threshold   | <b>V</b>          | 0.01 - 0.1 (adjustable)   |
| <b>Outputs</b>   | Voltage reference   |                   | Hard contacts   |
|  | Number and type of safety circuits                            |                   | 1 N.O. (13-14), 1 N.C. (21-22)  |
|  | Number and type of additional circuits                        |                   | 2 solid-state   |
|  | Breaking capacity in AC-15                                    |                   | C300 (inrush: 1800 VA/maintained: 180 VA)   |
|  | Breaking capacity in DC-13                                    |                   | 24 V/1.5 A - L/R = 50 ms (contact 13-14)<br>24 V/1.2 A - L/R = 50 ms (contact 21-22)  |
|  | Breaking capacity of solid-state outputs                      |                   | 24 V/20 mA, 48 V/10 mA  |
|  | Max. thermal current (I <sub>the</sub> )                      | <b>A</b>          | 2.5   |
|  | Output fuse protection  | <b>A</b>          | 4 gG, conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200   |
|  | Minimum current (volt-free contact)                           | <b>mA</b>         | 10  |
|  | Minimum voltage (volt-free contact)                           | <b>V</b>          | 17  |
| <b>Electrical life</b>                                   |   |                   | See page 3/16   |
| <b>Rated insulation voltage (U<sub>i</sub>)</b>          |   | <b>V</b>          | 300 (degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2)  |
| <b>Rated impulse withstand voltage (U<sub>imp</sub>)</b> |   | <b>kV</b>         | 4 (overvoltage category III, conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2)  |
| <b>LED display</b>                                       |   |                   | 4   |
| <b>Operating temperature</b>                             |   | <b>°F (°C)</b>    | + 14...+ 131 (- 10...+ 55)  |
| <b>Storage temperature</b>                               |   | <b>°F (°C)</b>    | - 13...+ 185 (- 25...+ 85)  |
| <b>Degree of protection</b><br>Conforming to IEC 60529   | Terminals   |                   | IP 20   |
|  | Enclosure   |                   | IP 40   |
| <b>Connection</b>  | Type  |                   | Captive screw clamp terminals, removable terminal block   |
|  | 1-wire connection   | Without cable end | Solid or flexible cable: 24-14 AWG (0.2...2.5 mm <sup>2</sup> )   |
|  |   | With cable end    | Without bezel, solid or flexible cable: 24-14 AWG (0.25...2.5 mm <sup>2</sup> )<br>With bezel, solid or flexible cable: 24-14 AWG (0.25...2.5 mm <sup>2</sup> ) |
|  | 2-wire connection   | Without cable end | Solid cable: 24-18 AWG (0.2...1 mm <sup>2</sup> ), flexible cable: 24-16 AWG (0.2...1.5 mm <sup>2</sup> )   |
|  |   | With cable end    | Without bezel, flexible cable: 24-18 AWG (0.25...1 mm <sup>2</sup> )<br>With bezel, flexible cable: 22-14 AWG (0.5...1.5 mm <sup>2</sup> )                      |


(1) Per EN/ISO 13849-1 and EN/IEC 62061

### References

|   | Description                             | Number of safety circuits | Solid-state outputs for PLC | Supply   | Frequency of motor power supply | Reference     | Weight oz (kg) |
|---|---|---------------------------|-----------------------------|----------|---------------------------------|---------------|----------------|
|  <p>XPSVNE</p> | Safety modules for zero speed detection | 2                         | 2                           | --- 24 V | ≤ 60 Hz                         | XPSVNE1142P   | 17.637 (0.500) |
|   |   |                           |                             |          | > 60 Hz                         | XPSVNE1142HSP | 17.637 (0.500) |
|   |   |                           |                             | ~ 115 V  | ≤ 60 Hz                         | XPSVNE3442P   | 21.164 (0.600) |
|   |   |                           |                             |          | > 60 Hz                         | XPSVNE3442HSP | 21.164 (0.600) |
|   |   |                           |                             | ~ 230 V  | ≤ 60 Hz                         | XPSVNE3742P   | 21.164 (0.600) |
|   |   |                           |                             |          | > 60 Hz                         | XPSVNE3742HSP | 21.164 (0.600) |

**XPSVNE**

**Wiring diagram**

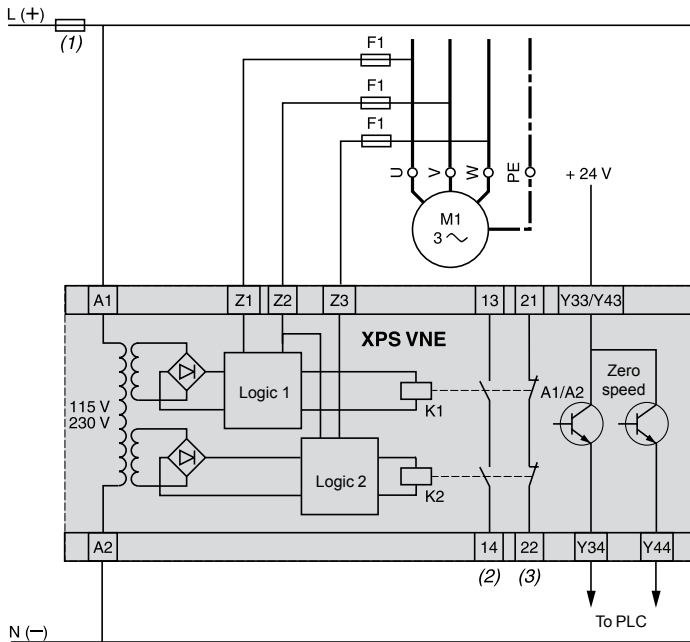


(1) Technical specifications for establishing maximum rating of fuses, see page 3/99.

(2) Contacts are open when motor is running, closed when motor is stopped.

(3) Contacts are closed when motor is running, open when motor is stopped.

F1 = 2 A


**Functional diagram of module XPSVNE**

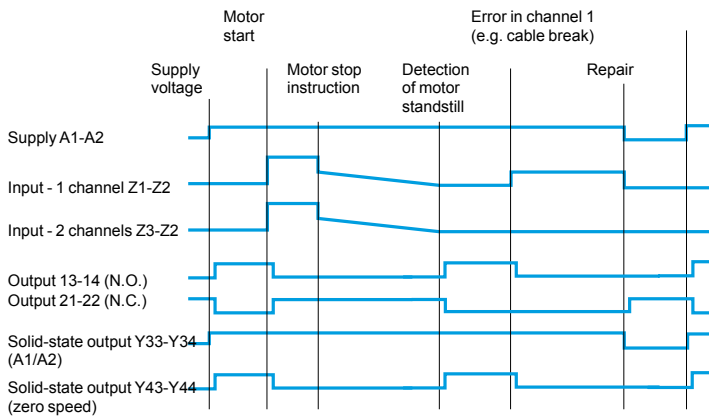

Key 0 1

The voltages at terminals Z1, Z2 and Z3 are indicated solely for the purposes of schematic diagram reintroduction.

**LED details**




- 1 Supply voltage A1-A2.
- 2 Stop detected by channel 1.
- 3 Stop detected by channel 2.
- 4 Motor stop condition detected by both channels within time window.

# Safety relays


Preventa™ safety relay modules type XPSVNE  
For zero speed detection

Module XPSVNE associated with a d.c. motor

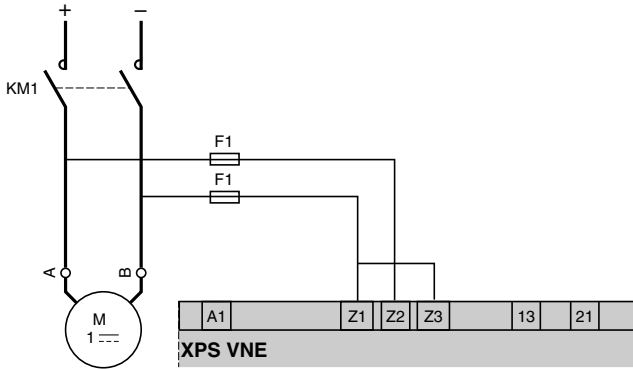


F1 = 2A

Module XPSVNE associated with a 3-phase motor

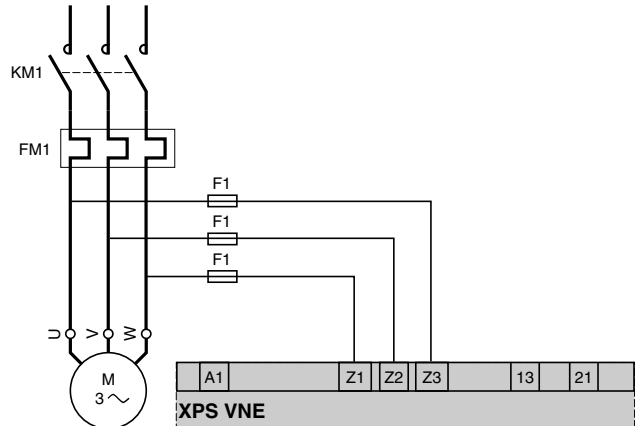


F1 = 2A

Module XPSVNE associated with a 3-phase motor + variable speed drive

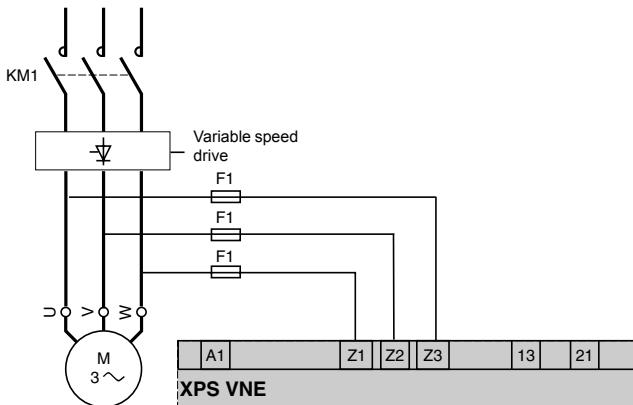

F1 = 2A

Module XPSVNE associated with a 3-phase motor with start-delta starting

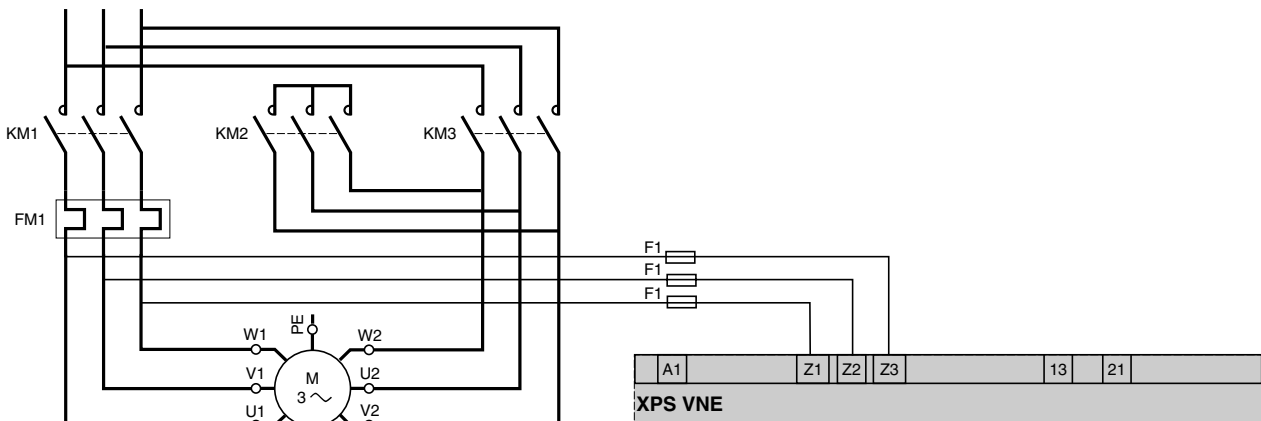

F1 = 2A


KM1: Fast rotation speed  
KM2: Slow rotation speed  
KM3: Star

The "Star" contactor (KM3) must be closed after the motor is de-energized, in order to allow detection of zero speed.

# Safety relays


Preventa™ safety relay modules type XPSVNE  
For zero speed detection

Module XPSVNE associated with a 3-phase motor with variable number of poles and star-delta starting

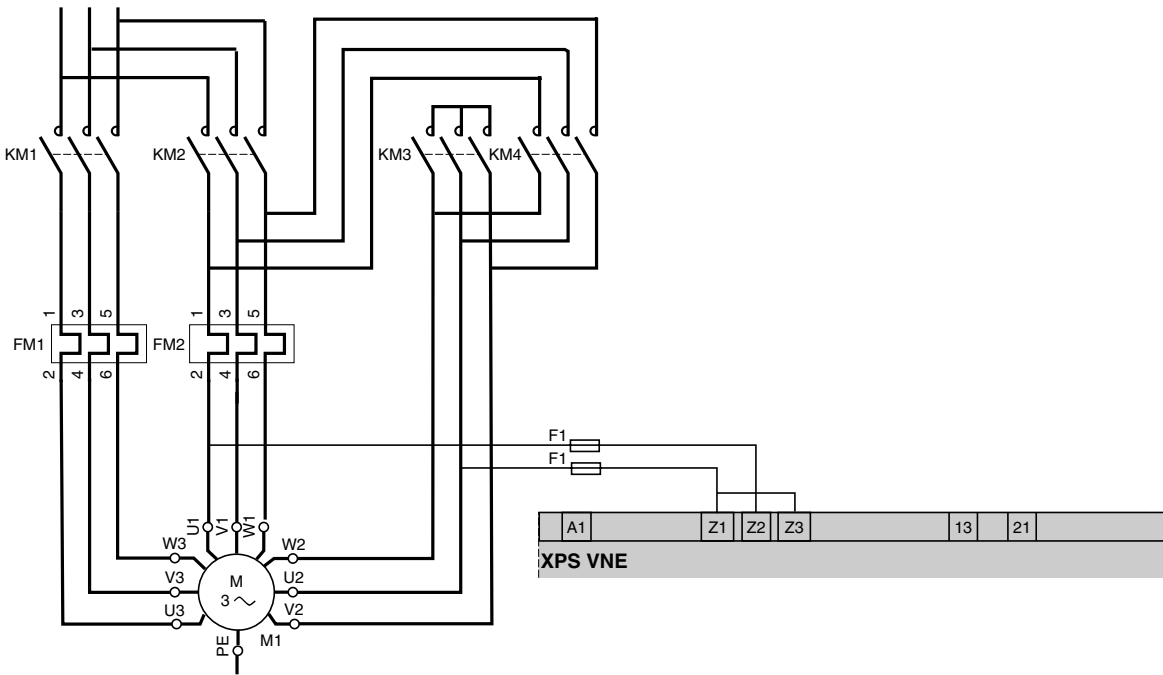

- F1 = 2 A
- KM1: Fast rotation speed
- KM2: Slow rotation speed
- KM3: Star
- KM4: Delta

Module XPSVNE associated with a star-delta motor starter and guard switch type XCS E

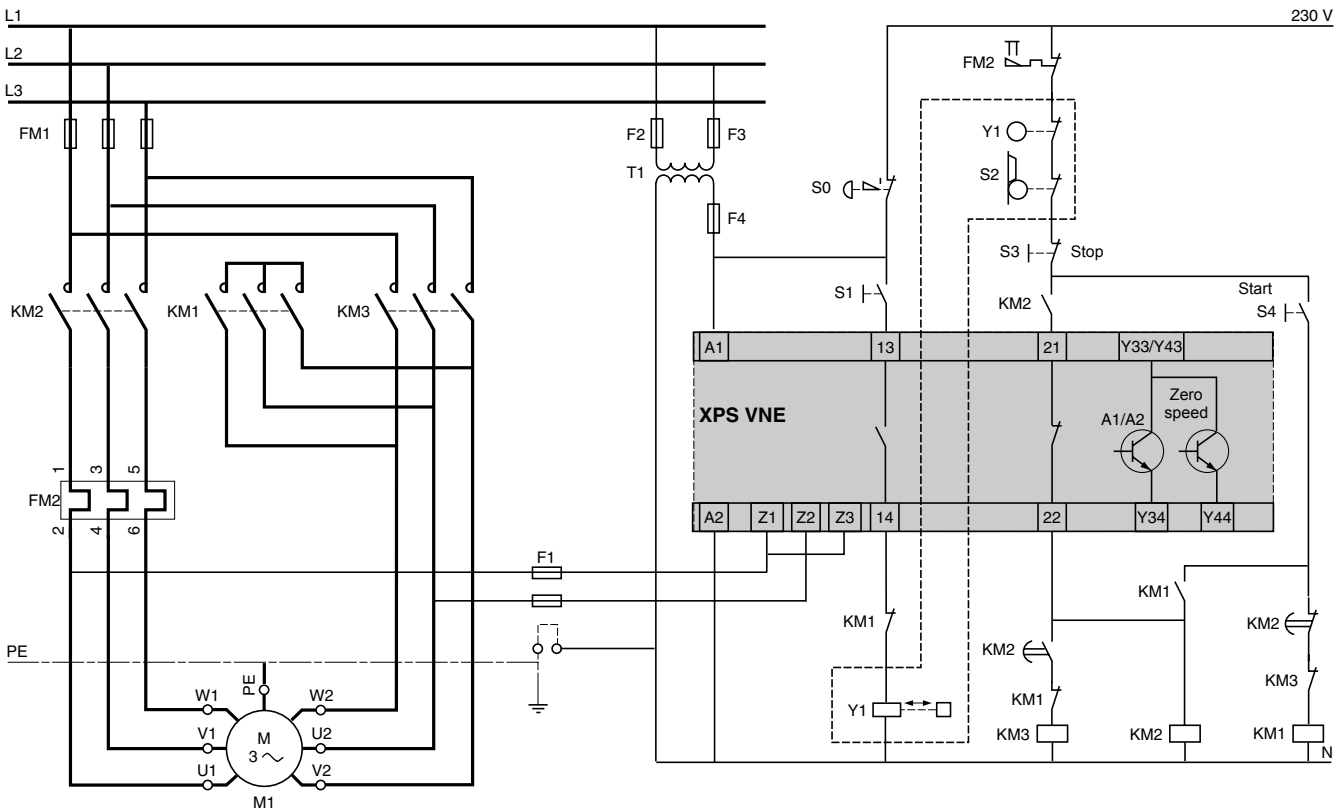




# Safety relays

Preventa™ safety relay modules type XPSVNE  
For zero speed detection

**Association of safety modules XPSVNE and XPSAK**

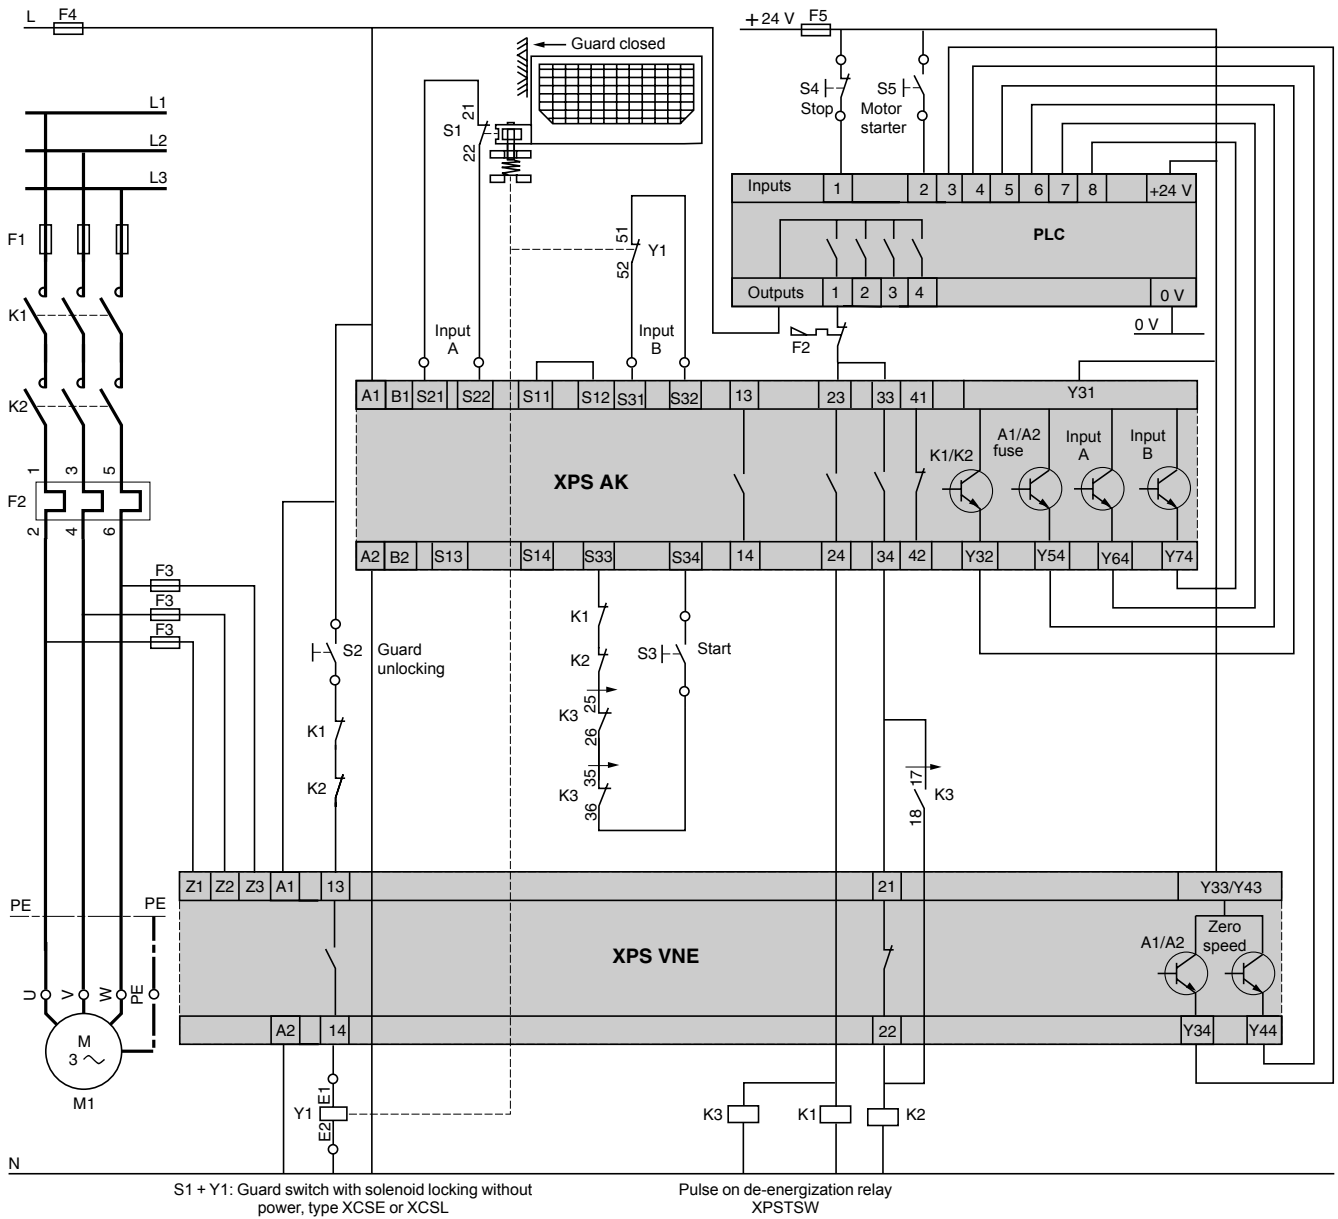

# Safety relays

Preventa™ safety relay modules type XPSPVT  
 For dynamic monitoring of hydraulic valves on  
 linear presses

3

## Operating principle

Safety relay module XPSPVT is specifically designed for monitoring hydraulic safety system valves which control the movements of potentially hazardous machines. The operating principle of this module is explained in the circuit diagram of a hydraulic safety system for linear presses (see below).

This hydraulic safety system features a 3 position piston which controls the up and down stroke of the operating cylinder. The circuit is equipped with a safety valve, to complete the redundant system. This circuit must be activated to enable the up and down stroke of the cylinder.


If either of the 2 pistons becomes defective (for example, due to a broken spring or to oil contamination), and the valve piston shifts from its normal position towards the open position, the XPSPVT module will detect it and prevent resumption of the piston stroke.

Proximity sensors integrated in the valve to detect the piston positions and connected to the XPSPVT module must be damped when the valve coils are in the de-energized state (zero position).

The sensor circuits of the XPSPVT module are designed to allow connection of NPN and PNP proximity sensors or sensing components. Either 2-wire or 3-wire types can be used.

The wiring diagram on page 3/106 shows how to connect proximity sensors.

Hydraulic safety system circuit operating on a linear press.  
 Monitoring of valves in position 0.

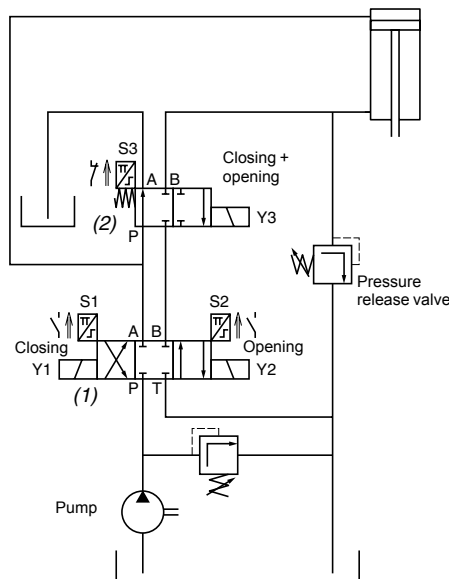

(1) 3 position hydraulic valve.  
 (2) 2 position hydraulic valve.

# Safety relays

Preventa™ safety relay modules type XPSPVT

For dynamic monitoring of hydraulic valves on linear presses

| Specifications   |   |                |   |                                   |
|--|---|----------------|---|-----------------------------------|
| <b>Module type</b>                                       |   |                | <b>XPSPVT</b>   |                                   |
| <b>Maximum achievable safety level (2)</b>               |   |                | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061  |                                   |
| <b>Reliability data (1)</b>                              | Mean Time To dangerous Failure (MTTF <sub>d</sub> )                                   | <b>Years</b>   | 50.9  |                                   |
|  | Diagnostic Coverage (DC)  | <b>%</b>       | 0 to 99   |                                   |
|  | Probability of dangerous Failure per Hour (PFH <sub>d</sub> )                         | <b>1/h</b>     | 2.24 x 10 <sup>-8</sup>   |                                   |
| <b>Conformity to standards</b>                           |   |                | EN 60204-1, EN/IEC 60947-5-1, EN 693, EN 50082-2  |                                   |
| <b>Product certifications</b>                            |   |                | UL, CSA   |                                   |
| <b>Supply</b>  | Voltage   | <b>V</b>       | ~ 24  |                                   |
|  | Voltage limits  |                | - 10...+ 10%  |                                   |
| <b>Power consumption</b>                                 |   | <b>W</b>       | < 6   |                                   |
| <b>Outputs</b>   | Voltage reference   |                | Relay hard contacts   |                                   |
|  | Number and type of safety circuits  |                | 2 N.O. (13-14, 33-34) + 1 N.C. (21-22)  |                                   |
|  | Number and type of additional circuits  |                | -   |                                   |
|  | Wiping time   | <b>ms</b>      | 100 (minimum value)   |                                   |
|  | Breaking capacity   | AC-15          | <b>VA</b>   | C300: inrush 1800, maintained 180 |
|  |   | DC-13          | <b>VA</b>   | 24 V/1.5 A - L/R = 50 ms          |
|  | Max. thermal current (I <sub>the</sub> )  | <b>A</b>       | 2.5   |                                   |
|  | Output fuse protection, using fuses conforming to EN/IEC 60947-5-1, VDE 0660 part 200 | <b>A</b>       | 4 gG  |                                   |
| Minimum current  | <b>mA</b>   | 10             |   |                                   |
| Minimum voltage  | <b>V</b>  | 17             |   |                                   |
| <b>Electrical life</b>                                   |   |                | See page 3/16   |                                   |
| <b>Response time</b>                                     |   | <b>ms</b>      | < 15  |                                   |
| <b>Rated insulation voltage (U<sub>i</sub>)</b>          |   | <b>V</b>       | 300 (degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2)  |                                   |
| <b>Rated impulse withstand voltage (U<sub>imp</sub>)</b> |   | <b>kV</b>      | 4 (overvoltage category III, conforming to EN/IEC 60947-1, DIN VDE 0110 parts 1 & 2)  |                                   |
| <b>LED display</b>                                       |   |                | 8   |                                   |
| <b>Operating temperature</b>                             |   | <b>°F (°C)</b> | + 14...+ 131 (- 10...+ 55)  |                                   |
| <b>Storage temperature</b>                               |   | <b>°F (°C)</b> | - 13...+ 185 (- 25...+ 85)  |                                   |
| <b>Degree of protection</b><br>conforming to IEC 60529   | Terminals   |                | IP 20   |                                   |
|  | Enclosure   |                | IP 40   |                                   |
| <b>Polycarbonate enclosure</b>                           | Type  |                | Removable   |                                   |
|  | Number of terminals   |                | 20  |                                   |
| <b>Connection</b>  | Type  |                | Captive screw clamp terminals: without cable end 2 x 14 AWG (2 x 2.5 mm <sup>2</sup> ), with cable end 2 x 16 AWG (2 x 1.5 mm <sup>2</sup> ), min. Ø 0.5 mm |                                   |

| Reference | Description   | Display | Supply | Reference         | Weight oz (kg) |
|-----------|---|---------|--------|-------------------|----------------|
|           | <b>Safety module for dynamic monitoring of hydraulic valves on linear presses</b> | 8 LEDs  | ~ 24 V | <b>XPSPVT1180</b> | 19.048 (0.540) |



XPSPVT

(1) Using an appropriate and correctly connected control system.

(2) The Category, the Performance Level (PL) or the Safety Integrity Level Claim Level (SILCL) are only achieved with the full connection to the base unit or start unit.


# Safety relays

Preventa™ safety relay modules type XPSPVT

For dynamic monitoring of hydraulic valves on linear presses

**XPSPVT**

**Wiring diagram for module XPSPVT**

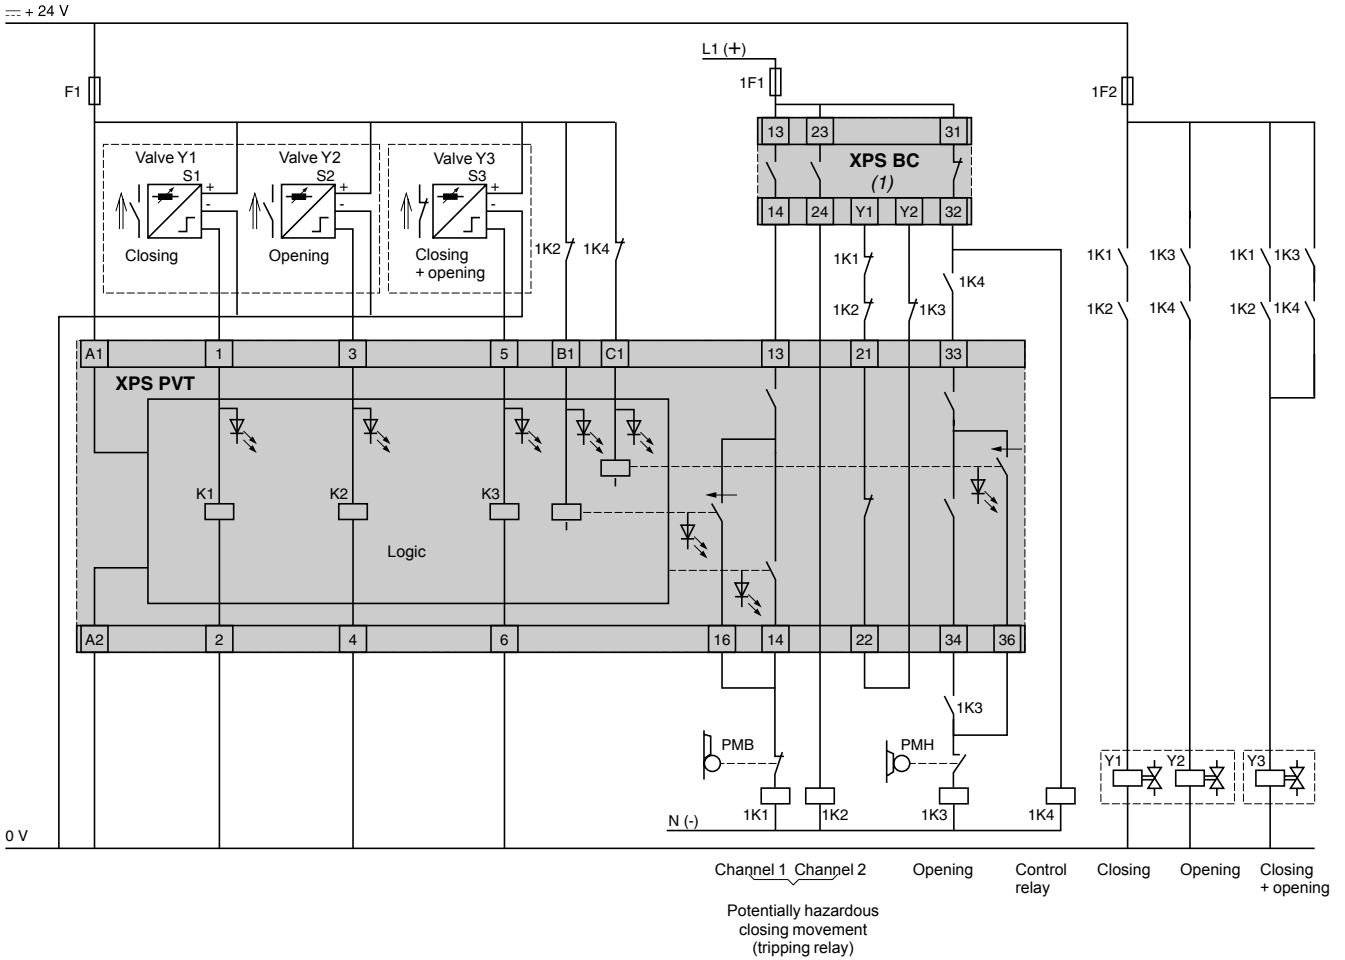


(1) Two-hand control or presence sensor outputs.

# Safety relays

Preventa™ safety relay modules type XPSPVT  
For dynamic monitoring of hydraulic valves on linear presses

## XPSPVT


### Functional diagram of module XPSPVT

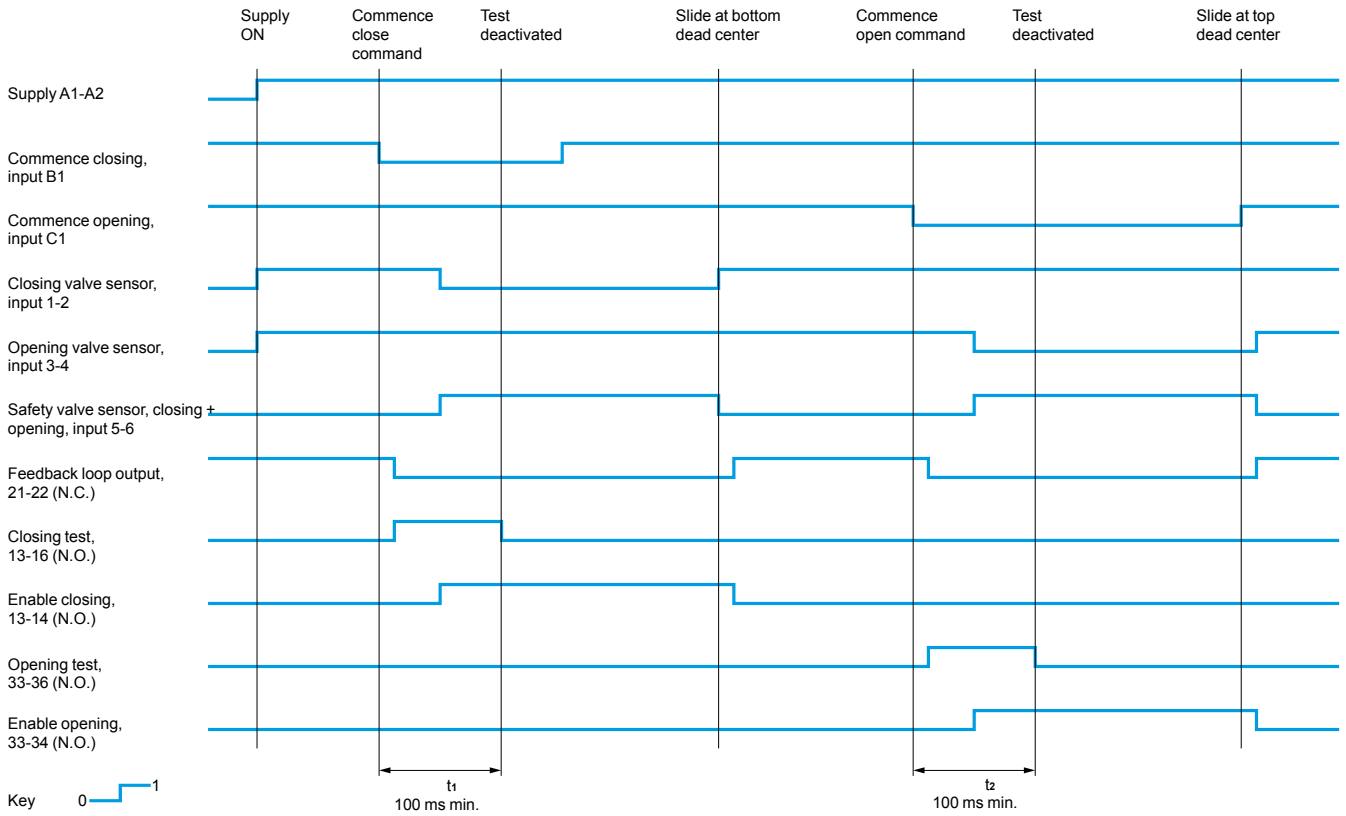

### Sensor Status During Press Cycle

| Description       | Valve Y1 Sensor S1 (N.O.) | Valve Y2 Sensor S2 (N.O.) | Valve Y3 Sensor S3 (N.C.) |
|-------------------|---------------------------|---------------------------|---------------------------|
| Press Ram Stopped | Contact closed            | Contact closed            | Contact open              |
| Press Ram Moving  | Contact open              | Contact closed            | Contact closed            |
| Press Ram Closing | Contact closed            | Contact open              | Contact closed            |

### LED details



- 1 Closing command.
- 2 Closing test.
- 3 Opening command.
- 4 Opening test.
- 5 Opening valve (Y2) in position 0.
- 6 Closing enabled.
- 7 Safety valve (Y3) activated.
- 8 Closing valve (Y2) in position 0.

## Operating principle

Safety relay module XPSPVK is specially designed for dynamic monitoring of the safety valves in eccentric presses, conforming to European standard EN 692.

This standard establishes the specifications related to safety control systems for presses equipped with friction clutches.

To meet the requirements of this standard, the clutch/brake control must be monitored dynamically.

This function is provided by a double-bodied solenoid valve (safety valve for presses) which performs the functions of two valves mounted in one body.

The position of the two valve pistons can be monitored by proximity sensors, mechanical limit switches or pressure switches.

Module XPSPVK checks for the correct operation of the double-bodied safety valves at 3 points in the cycle.

- Start at top dead center: checks the rest position of the two valves.

- Take-on point (transfer function): checks that the two valves are in the “activated” (energized) position.

- Press stop trigger point: checks that the two valves return to the rest position. Return must be simultaneous for both valves within a defined time period.

To set up an automatic disconnect of the XPSPVK module at the first machine stroke, a N.C. auxiliary contact mounted on the main control

contactor or on another contactor/relay, activated at the same time, can be wired to terminals 7 and 8 in parallel with the RESET button.

If an anomaly is detected during the cycle, the XPSPVK module will stop the slide stroke and will also inhibit the start of another cycle.

## Specifications

| Module type  |   | XPSPVK   |   |
|--|---|--|---|
| <b>Maximum achievable safety level (2)</b>               |   | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061 |   |
| <b>Reliability data (1)</b>                              | Mean Time To dangerous Failure (MTTF <sub>d</sub> )           | <b>Years</b>   | 90.2  |
|  | Diagnostic Coverage (DC)                                      | <b>%</b>   | 0 to 99   |
|  | Probability of dangerous Failure per Hour (PFH <sub>d</sub> ) | <b>1/h</b>   | 1.25 x 10 <sup>-8</sup>   |
| <b>Conformity to standards</b>                           |   | EN 60204-1, EN/IEC 60947-5-1, EN 692, EN 50082-2                                 |   |
| <b>Product certifications</b>                            |   | UL, CSA  |   |
| <b>Supply</b>  | Voltage   | <b>V</b>   | ~ 24, ~ 115, ~ 230  |
|  | Voltage limits  |  | - 10...+ 10% (~ 24 V)<br>- 15...+ 15% (~ 115 V)<br>- 15...+ 10% (~ 230 V)   |
|  | Frequency   | <b>Hz</b>  | 50/60   |
| <b>Power consumption</b>                                 | ~ 24 V  | <b>W</b>   | < 9   |
|  | ~ 115 V/230 V   | <b>VA</b>  | < 16  |
| <b>Outputs</b>   | Voltage reference   |  | Relay hard contacts   |
|  | Number and type of safety circuits                            |  | 1 N.O. (13-14) transfer function + 1 N.C. (21-22) feedback loop   |
|  | Number and type of additional circuits                        |  | 4 solid-state outputs   |
|  | Breaking capacity in AC-15                                    | <b>VA</b>  | C300: inrush 1800, maintained 180   |
|  | Breaking capacity in DC-13                                    |  | 24 V/1.5 A - L/R = 50 ms  |
|  | Max. thermal current (I <sub>the</sub> )                      | <b>A</b>   | 2.5   |
|  | Breaking capacity of solid-state outputs                      |  | 24 V/20 mA, 48 V/10 mA  |
|  | Output fuse protection  | <b>A</b>   | 4 gG, conforming to EN/IEC 60947-5-1, VDE 0660 part 200   |
|  | Minimum current (relay hard contacts)                         | <b>mA</b>  | 10  |
|  | Minimum voltage (relay hard contacts)                         | <b>V</b>   | 17  |
| <b>Response time</b>                                     |   | <b>ms</b>  | < 40  |
| <b>Electrical life</b>                                   |   |  | See page 3/16   |
| <b>Rated insulation voltage (U<sub>i</sub>)</b>          |   | <b>V</b>   | 300 (degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2)  |
| <b>Rated impulse withstand voltage (U<sub>imp</sub>)</b> |   | <b>kV</b>  | 4 (overvoltage category III, conforming to EN/IEC 60947-1, DIN VDE 0110 parts 1 & 2)  |
| <b>LED display</b>                                       |   |  | 8   |
| <b>Operating temperature</b>                             |   | <b>°F (°C)</b>   | + 14...+ 131 (- 10...+ 55)  |
| <b>Storage temperature</b>                               |   | <b>°F (°C)</b>   | - 13...+ 185 (- 25...+ 85)  |
| <b>Degree of protection</b>                              | Terminals   |  | IP 20   |
|  | Conforming to IEC 60529 Enclosure                             |  | IP 40   |
| <b>Polycarbonate enclosure</b>                           | Type  |  | Removable   |
|  | Number of terminals   |  | 32  |
| <b>Connection</b>  | Type  |  | Captive screw clamp terminals: without cable end 2 x14 AWG (2 x 2.5 mm <sup>2</sup> ), with cable end 2 x16 AWG (2 x 1.5 mm <sup>2</sup> ), min. Ø 0.5 mm |


(1) Using an appropriate and correctly connected control system.

(2) The Category, the Performance Level (PL) or the Safety Integrity Level Claim Level (SILCL) are only achieved with the full connection to the base unit or start unit.

# Safety relays

Preventa™ safety relay modules type XPSPVK  
For dynamic monitoring of double-bodied solenoid valves

## References




XPSPVK

| Description  | Display | Supply  | Reference  | Weight oz (kg) |
|--|---------|---------|------------|----------------|
| Safety modules for dynamic monitoring of double-bodied solenoid valves | 8 LEDs  | ☐ 24 V  | XPSPVK1184 | 24.692 (0.700) |
|  |         | ~ 115 V | XPSPVK3484 | 31.747 (0.900) |
|  |         | ~ 230 V | XPSPVK3784 | 31.747 (0.900) |


## Wiring diagrams

### XPSPVK

#### Monitoring of a press safety valve by an XPSPVK module

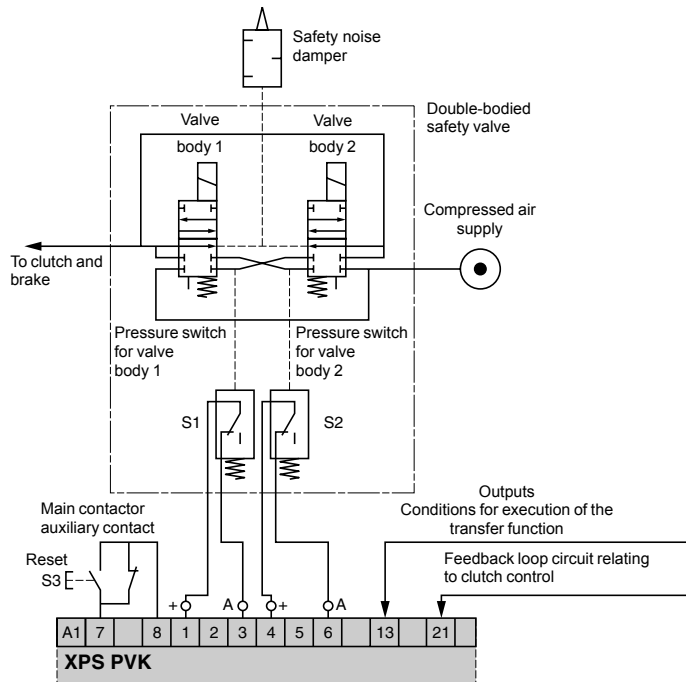

## LED details

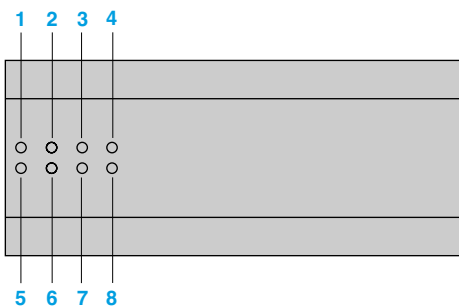

- 1 DC internal supply n° 1.
- 2 DC internal supply n° 2.
- 3 Valve n° 1 blocked.
- 4 Valve n° 2 blocked.
- 5 Ready for monitoring
- 6 Disconnect synchronized.
- 7 Reset.
- 8 Valves 1 and 2 energized.


# Safety relays

Preventa™ safety relay modules type XPSPVK

For dynamic monitoring of double-bodied solenoid valves

## XPSPVK



### Functional diagram of module XPSPVK

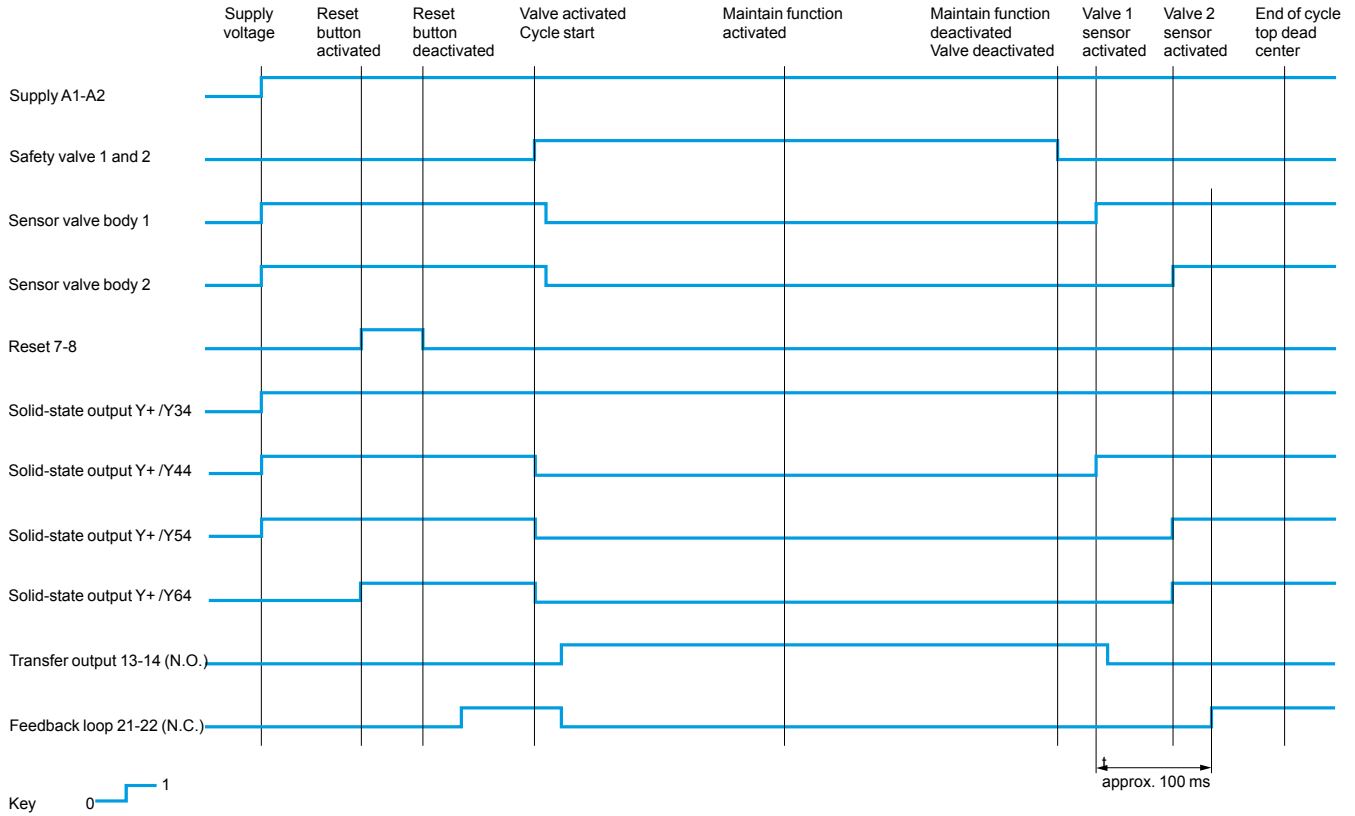

### Connection of module XPSPVK with 3-wire (or 2-wire) proximity sensors

3-wire sensors


2-wire sensors

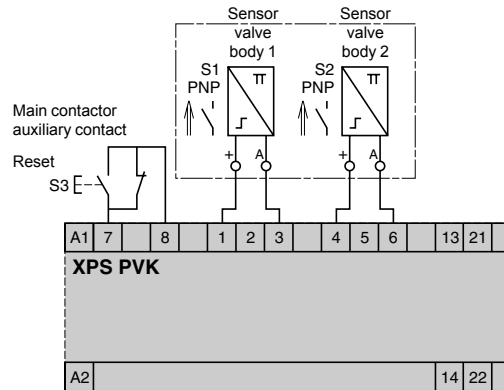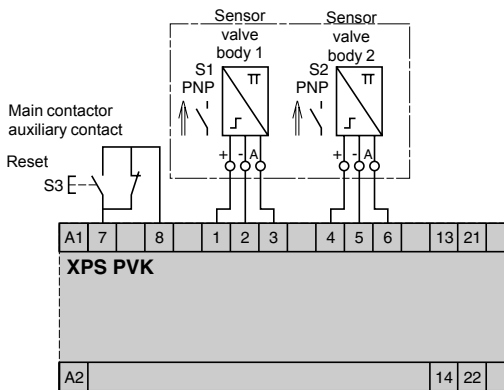



## XPSPVK

### Connection of module XPSPVK with an eccentric press safety valve

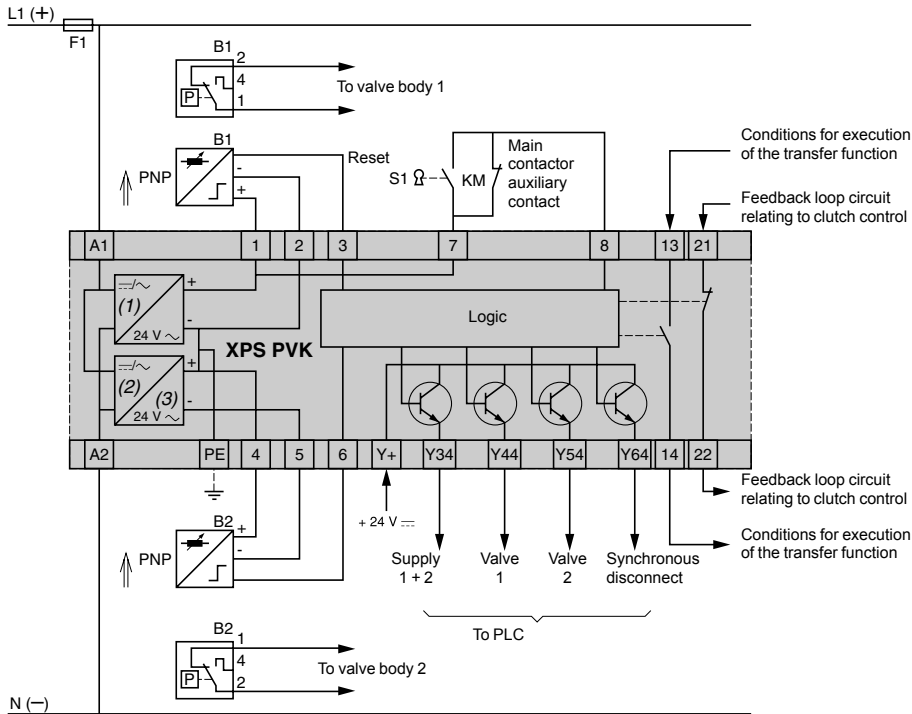

- (1) Internal supply n° 1.
- (2) Internal supply n° 2.
- (3) For a 24 V version: integrated adaptor.

## Safety relays

### Preventa™ safety relay modules type XPSOT

For safety stop with automatic overtravel monitoring and control

#### Operating principle

Safety relay module XPSOT is used on eccentric presses to monitor overtravel and ensure that the press slide stops in a non-hazardous position, that is, top dead center (TDC) during normal (non-emergency) operation. Use of this module, designed in accordance with standard EN 692 relating to mechanical press safety, makes it possible to create a redundant, self-monitoring control system.

The two essential functions of this safety module are to:

■ **Trigger the end of cycle stop sequences slightly before top dead center (at point A) so as to come to complete stop at TDC.**

After TDC, the permissible overtravel is approximately 10°. The safety module immediately detects any overtravel. Overtravel is indicative of braking device deterioration and, in this case, jog mode must be used to move the slide back to TDC. The next cycle will be inhibited to allow maintenance to be performed on the braking device (cam 1).

■ **Take over control monitoring during the dangerous part of the cycle (slide downstroke). Any stop instruction issued between TDC (0°) and point C (approximately 150° after TDC) causes an immediate stop of the press. This approximate value of 150° corresponds to the 0.315" (8mm) tool closure dimension (safety point).**


When a stop instruction is issued after this safety point, the press completes the cycle and comes to a complete stop at TDC (cam 2).

Control of the hazardous part of the cycle (generally the slide downstroke) is usually activated from a two-hand control station associated with a safety module (type XPSBC) monitoring this station to qualify as a category 4 control system according to standard EN 954-1/ISO 13849-1.


Overtravel monitoring is performed **on each cycle** by safety module XPSOT.

### Operating principle (continued)

Press diagram

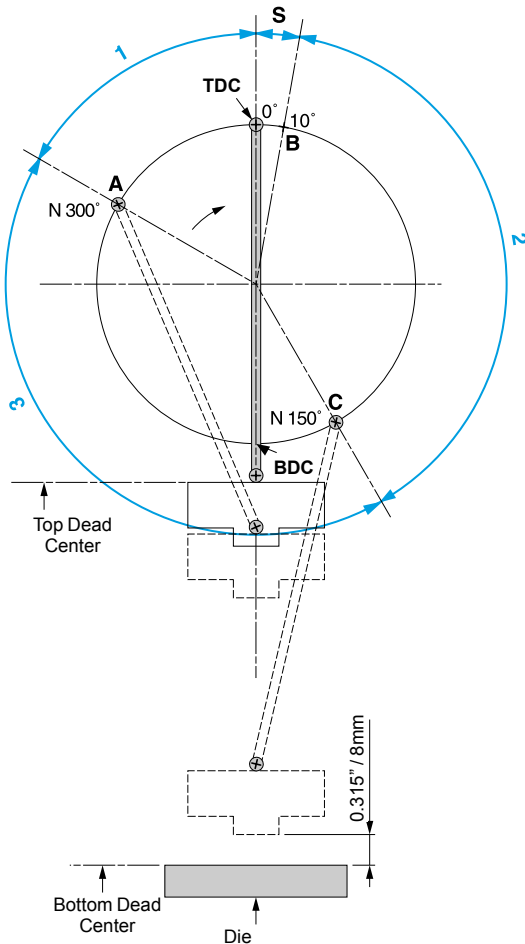

Control cams diagram

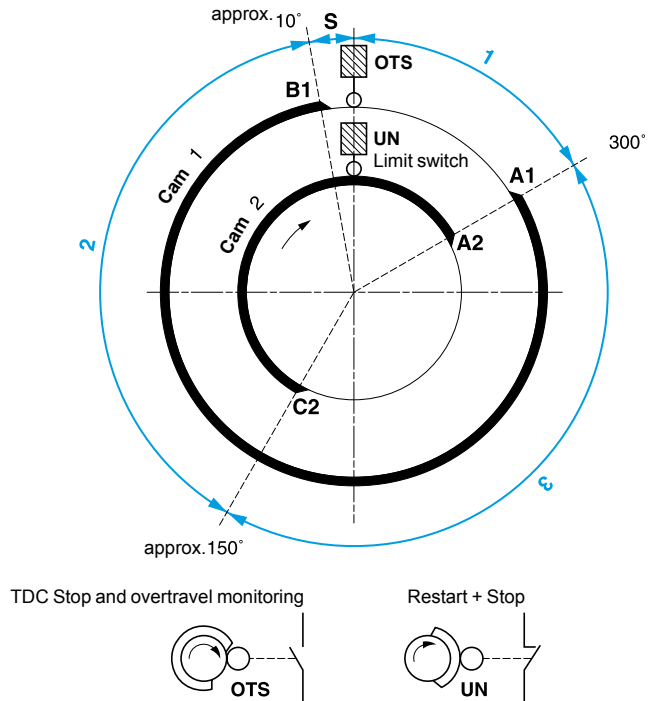

- 1 Permissible overtravel zone.
- 2 Dangerous zone (usually slide downstroke).
- 3 Non-dangerous zone (usually slide upstroke).

S Permissible overtravel.

A Stop instruction trip point.

B Point at which permissible overtravel is exceeded (a stop instruction issued after point B will lock up the press).

C Takeover point, beyond which the press will complete its cycle up to TDC.

TDC Top dead center, actual stopping zone of the press.

BDC Bottom dead center.

#### Cam operation

Cam 1 is associated with the OTS limit switch (LS), cam 2 with the UN limit switch (the limit switches must be located on different cams for safety reasons).

The OTS limit switch is deactivated at TDC, at which point the UN limit switch is activated.

Point A1 of cam 1 is located approximately 300° after TDC and, when reached, the press stops and comes to a standstill: **A1 is the press stop trigger point.**

Point B1, located approximately 10° after TDC, constitutes the end of cam 1: **If B1 is exceeded during stopping, the overtravel is abnormally long, the press locks up and the next cycle is inhibited.**

Point A2 of cam 2 functions like point A1 on cam 1 (contact state of the UN limit switch reversed in relation to the state of the OTS limit switch).

Point C2, located approximately 150° after TDC, corresponds to the 8 mm tool closing dimension. Stop instructions issued after C2 is reached are not executed until point A2 is reached.

## Safety relays


Preventa™ safety relay modules type XPSOT

For safety stop with automatic overtravel monitoring and control

3

| Specifications   |   |  |  |
|--|---|--|--|
| <b>Module type</b>                                       |   | <b>XPSOT</b>   |  |
| <b>Maximum achievable safety level (2)</b>               |   | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061   |  |
| <b>Reliability data (1)</b>                              | Mean Time To dangerous Failure (MTTF <sub>d</sub> )           | <b>Years</b>   | 60.9   |
|  | Diagnostic Coverage (DC)                                      | <b>%</b>   | 0 to 99  |
|  | Probability of dangerous Failure per Hour (PFH <sub>d</sub> ) | <b>1/h</b>   | 1.33 x 10 <sup>-8</sup>  |
| <b>Conformity to standards</b>                           |   | EN 60204-1, EN/IEC 60947-5-1, EN 692, EN 50082-2   |  |
| <b>Product certifications</b>                            |   | UL, CSA  |  |
| <b>Supply</b>  | Voltage   | <b>V</b>   | ~ 115, ~ 230   |
|  | Voltage limits  |  | - 15...+ 15% (115 V)<br>- 15...+ 10% (230 V)   |
|  | Frequency   | <b>Hz</b>  | 50/60  |
| <b>Power consumption</b>                                 |   | <b>VA</b>  | < 12   |
| <b>Module inputs fuse protection</b>                     |   | Internal, electronic   |  |
| <b>Outputs</b>   | Voltage reference   | Relay hard contacts  |  |
|  | Number and type of safety circuits                            | 3 N.O. (11-12, 11-13, 11-14)   |  |
|  | Number and type of additional circuits                        | 4 solid-state outputs  |  |
|  | Breaking capacity in AC-15                                    | <b>VA</b>  | C300: inrush 1800, maintained 180  |
|  | Breaking capacity in DC-13                                    | 24 V/1.5 A - L/R = 50 ms   |  |
|  | Breaking capacity of solid-state outputs                      | 24 V/20 mA, 48 V/10 mA   |  |
|  | Max. thermal current (I <sub>the</sub> )                      | <b>A</b>   | 2.5  |
|  | Output fuse protection  | <b>A</b>   | 4 gG, conforming to EN/IEC 60947-5-1, VDE 0660 part 200                              |
|  | Minimum current (relay hard contacts)                         | <b>mA</b>  | 10   |
|  | Minimum voltage (relay hard contacts)                         | <b>V</b>   | 17   |
| <b>Electrical life</b>                                   |   | See page 3/16  |  |
| <b>Response time</b>                                     |   | <b>ms</b>  | < 20   |
| <b>Rated insulation voltage (U<sub>i</sub>)</b>          |   | <b>V</b>   | 300 (degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2) |
| <b>Rated impulse withstand voltage (U<sub>imp</sub>)</b> |   | <b>kV</b>  | 4 (overvoltage category III, conforming to EN/IEC 60947-1, DIN VDE 0110 parts 1 & 2) |
| <b>LED display</b>                                       |   | 4  |  |
| <b>Operating temperature</b>                             |   | <b>°F (°C)</b>   | + 14...+ 131 (- 10...+ 55)   |
| <b>Storage temperature</b>                               |   | <b>°F (°C)</b>   | - 13...+ 185 (- 25...+ 85)   |
| <b>Degree of protection conforming to IEC 60529</b>      | Terminals   | IP 20  |  |
|  | Enclosure   | IP 40  |  |
| <b>Polycarbonate enclosure</b>                           | Type  | Removable  |  |
|  | Number of terminals   | 42   |  |
| <b>Connection</b>  | Type  | Captive screw clamp terminals:<br>- - without cable end 2 x 14 AWG (2 x 2.5 mm <sup>2</sup> ),<br>- - with cable end 2 x 16 AWG (2 x 1.5 mm <sup>2</sup> ),<br>- - min. Ø 0.5 mm |  |

### References

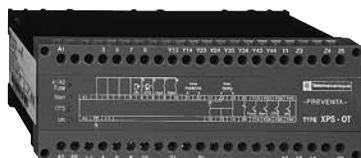

| Description   | Display | Supply  | Reference        | Weight oz (kg) |
|---|---------|---------|------------------|----------------|
| Safety modules for safety stop with automatic overtravel monitoring and control | 4 LEDs  | ~ 115 V | <b>XPSOT3444</b> | 38.801 (1.100) |
|   |         | ~ 230 V | <b>XPSOT3744</b> | 38.801 (1.100) |

XPSOT


(1) Using an appropriate and correctly connected control system.

(2) The Category, the Performance Level (PL) or the Safety Integrity Level Claim Level (SILCL) are only achieved with the full connection to the base unit or start unit.

# Safety relays

Preventa™ safety relay modules type XPSOT  
For safety stop with automatic overtravel monitoring and control



**XPSOT**  
**Wiring diagram**

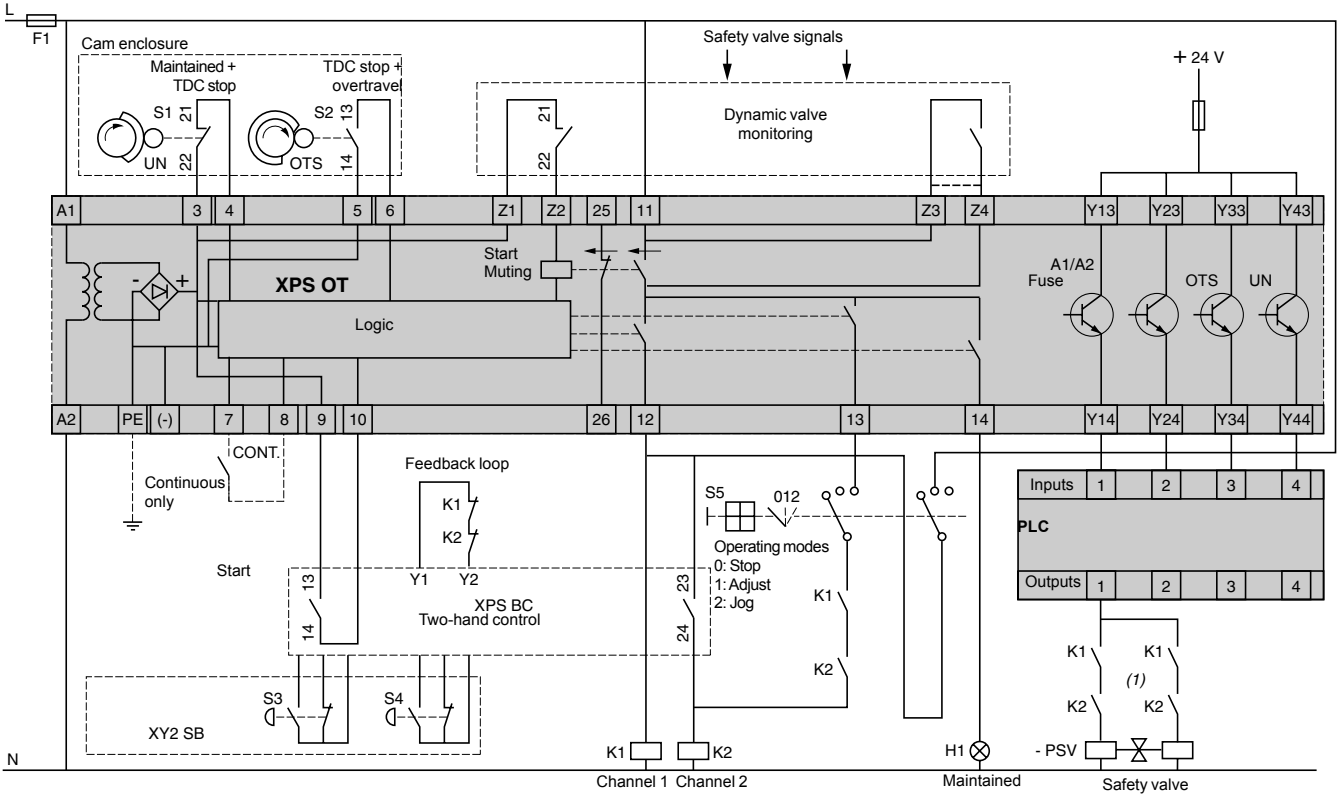

(1) The 2 coils of the safety valve must be wired separately.

**Functional diagram**

**LED details**

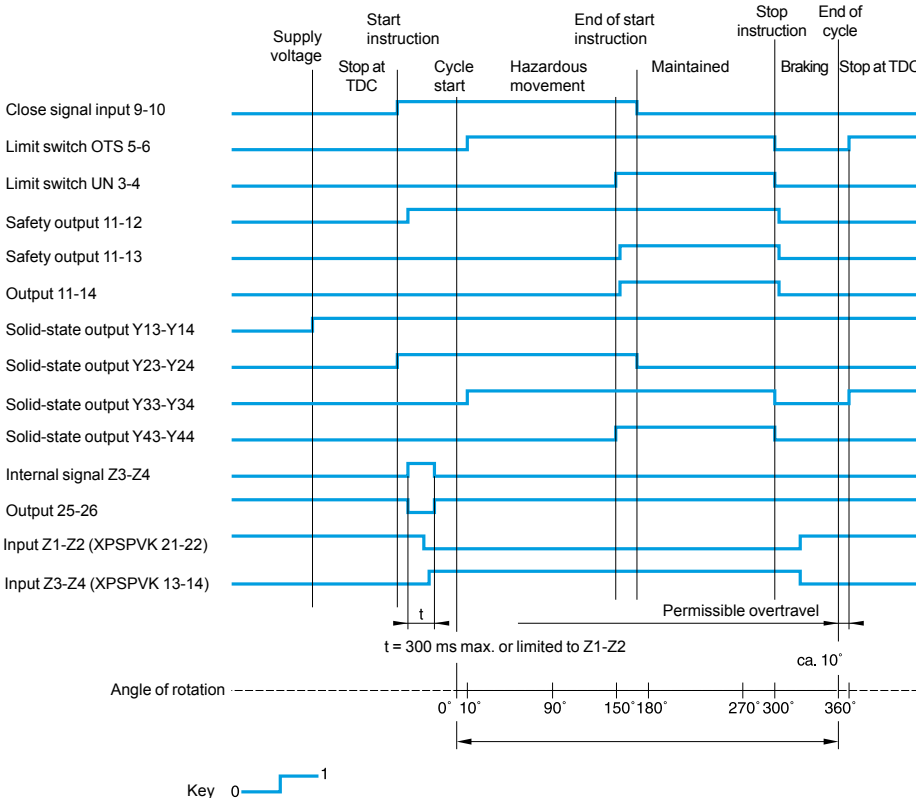

- 1 Voltage present on terminals A1/A2.
- 2 Close instruction.
- 3 OTS limit switch activated.
- 4 UN limit switch activated.

# Safety relays


Preventa™ safety relay modules  
AM1 DP200 rail mounting

3

**Dimensions**


XPSAC●●●●, XPSAF●●●●, XPSAFL●●●●, XPSDMB●●●●, XPSVC●●●●, XPSEDA

XPSAC●●●●P, XPSABV●●●●P, XPSAXE●●●●P, XPSAF●●●●P, XPSAFL●●●●P, XPSBCE●●●●P, XPSBF●●●●P, XPSECME●●●●P, XPSDMB●●●●P, XPSVC●●●●P

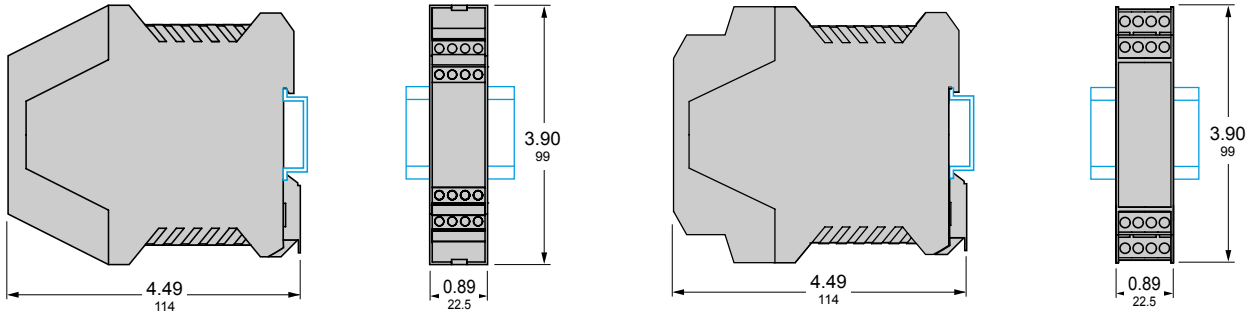


XPSABV●●●●C, XPSAXE●●●●C, XPSBCE●●●●C, XPSECME●●●●C

XPSAK●●●●, XPSAV●●●●, XPSCM●●●●, XPSDME●●●●, XPSATE●●●●, XPSECPE●●●●P

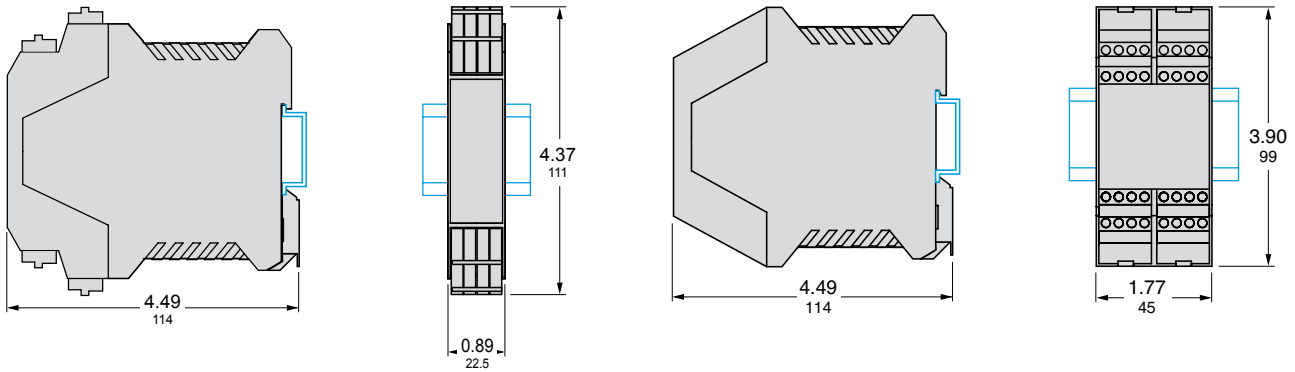

XPSAK●●●●P, XPSAV●●●●P, XPSCM●●●●P, XPSTSA●●●●P, XPSTSW●●●●P, XPSDME●●●●P, XPSATE●●●●P, XPSVNE●●●●P

XPSAK●●●●C, XPSAV●●●●C, XPSCM●●●●C, XPSTSA●●●●C, XPSTSW●●●●C, XPSDME●●●●C, XPSATE●●●●C, XPSVNE●●●●C

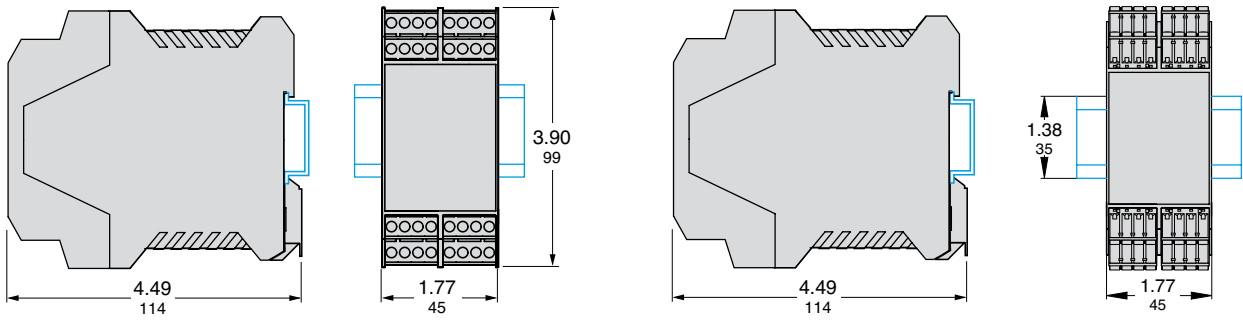


Dual Dimensions: INCHES  
Millimeters

## Dimensions

XPSAR●●●●●●

XPSAR●●●●●●P

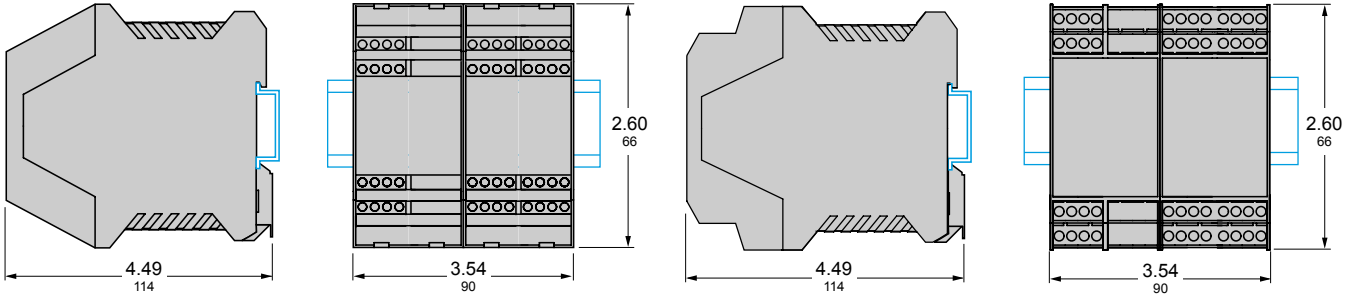


## XPSPVT, XPSPVK


Common side view

XPSPVT

XPSPVK

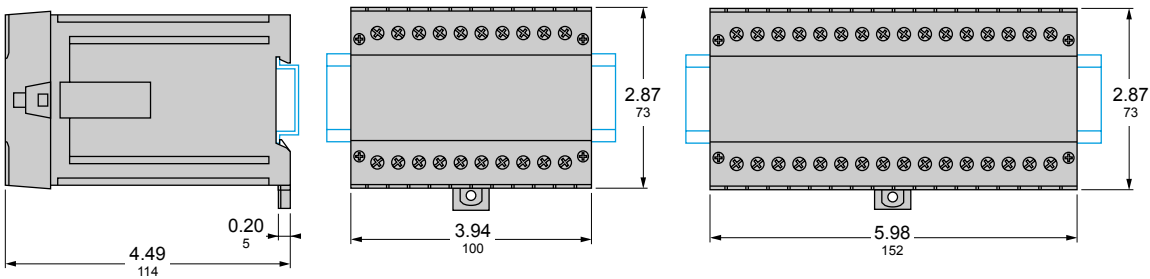

## XPST

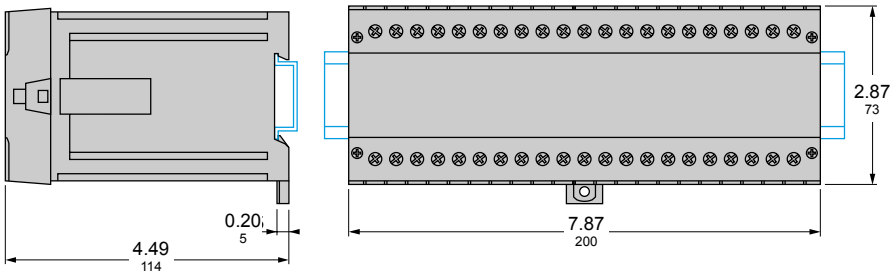

Dual Dimensions: INCHES  
Millimeters


## Mounting

All safety modules: 1.38 in (35 mm) DIN rail mounting.


**Applications**



**Safety monitors on AS-Interface cabling system**

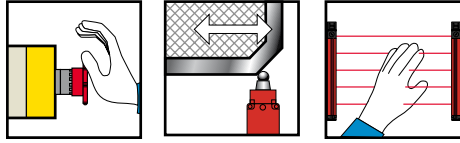

**Safety interfaces on AS-Interface cabling system**



**AS-Interface "Safety at work"**

Safety is incorporated into the AS-Interface cabling system by adding a monitor and a safety interface connected together with other standard AS-Interface components on the AS-Interface line



|                             |
|-----------------------------|
| <b>Functions</b>            |
| <b>AS-Interface profile</b> |
| <b>Addressing</b>           |

|   |
|---|
| Safety applications integrated on the AS-Interface line<br>Emergency stop, safety switches and light curtain monitoring |
| 7.F   |
| Using configuration software ASISWIN2   |

|  |         |
|--|---------|
| Emergency stop interfaces                                |         |
| Metal  | Plastic |
| 0.B.F.F  | 0.B.F.F |
| Using adjustment terminal ASI Terv2 and adaptor ASI SAD1 |         |

|  |
|--|
| <b>Maximum achievable safety level</b> |
| <b>Conformity to standards</b>         |
| <b>Product certifications</b>          |

|  |
|--|
| PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 61508             |
| EN 50295, EN/IEC 60204-1, EN/IEC 61496-1, EN 574/ISO 13851, EN/IEC 60947-1, EN/IEC 60947-5-1 |
| UL, CSA, TÜV   |

|  |
|--|
| PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061 |
| EN 50295, EN/ISO 13850, EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1         |
| UL, CSA, TÜV   |

|                                      |
|--------------------------------------|
| <b>Number of safety circuits</b>     |
| <b>Number of additional circuits</b> |
| <b>Display</b>                       |
| <b>Supply voltage</b>                |

|  |                       |
|--|-----------------------|
| 2 N.O.                                     | 2 x 2 N.O.            |
| 1 solid-state output for signalling to PLC | 2 solid-state outputs |
| 5 LEDs                                     | 8 LEDs                |
| 24 V ~                                     |                       |

|                      |
|----------------------|
| –                    |
| –                    |
| 2 LEDs               |
| By AS-Interface line |






**Type**

|                     |                     |                 |
|---------------------|---------------------|-----------------|
| <b>ASISAFEMON1●</b> | <b>ASISAFEMON2●</b> | <b>ASISSLB●</b> |
|---------------------|---------------------|-----------------|

**Pages**

|       |       |
|-------|-------|
| 3/122 | 3/126 |
|-------|-------|





|  |                 |                   |
|--|-----------------|-------------------|
| Interfaces for safety products                           |                 |                   |
| 1 x M12 entry  | 2 x M12 entries | 1 x ISO M16 entry |
| 0.B.F.F  | 0.B.F.F         | 0.B.F.F           |
| Using adjustment terminal ASI Terv2 and adaptor ASI SAD1 |                 |                   |

|   |  |
|---|--|
| Interfaces premounted in Emergency stop mushroom head pushbutton stations XAL K | Interfaces for mounting in enclosure for Harmony® Ø 22 mm Emergency stop mushroom head pushbuttons |
| 1 x M12 entry   | Connector  |
| 0.B.F.F   |  |
| Using adjustment terminal ASI Terv2   |  |

PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061  
 EN 50295,  
 EN/IEC 60204-1,  
 EN 1088/ISO 14119,  
 EN 574/ISO 13851,  
 EN/IEC 61496-1,  
 EN/IEC 60947-5-3,  
 EN/IEC 60947-1,  
 EN/IEC 60947-5-1  
 UL, CSA, TÜV

PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061  
 EN 50295,  
 EN/ISO 13850,  
 EN/IEC 60204-1,  
 EN/IEC 60947-1,  
 EN/IEC 60947-5-1  
 UL, CSA, TÜV

–  
 –  
 2 LEDs  
 By AS-Interface line

–  
 –  
 –  
 By AS-Interface line


**ASISSLC●**      **ASISLLS**

**ASISE●1C**      **ASISLE●**

3/126

3/126

### Operating principle

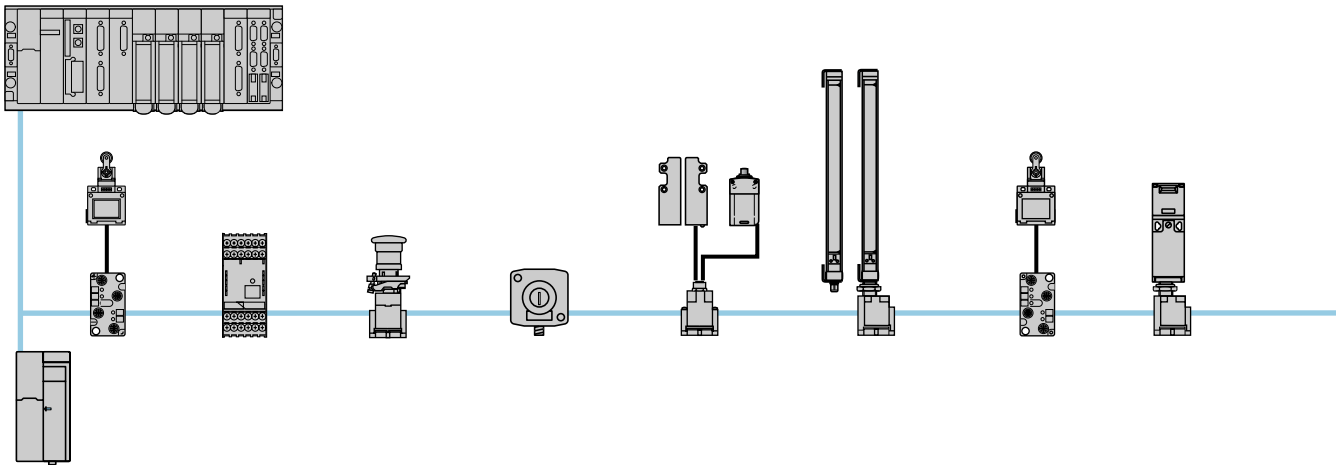

AS-Interface, the recognized cabling system for sensors and actuators, has evolved. Standard process information and information relating to safety can now be transmitted over the same cable. Capable of managing safety functions up to Performance Level PL e/Category 4 conforming to standard EN/ISO 13849-1 and SILCL 3 conforming to standard EN/IEC 61508, the AS-Interface “Safety at work” system meets the needs of the most common safety applications, such as:

- monitoring of Emergency stops with instantaneous break contacts (stop category 0),
- monitoring of Emergency stops with delayed break contacts (stop category 1),
- monitoring of switches with and without interlocking,
- monitoring of light curtains, etc.

Parameters for options relative to the selected safety function (for example, start button monitoring) may be set for all pre-defined, certified functions.

Safety is incorporated into the AS-Interface cabling system by adding a safety monitor and safety interfaces connected together with other standard AS-Interface components on the yellow cable.

Safety information is exchanged only between the safety monitor, the AS-Interface line master and the safety interfaces. This is transparent for the other standard AS-Interface components.

Based on this principle, AS-Interface cabling systems that are already installed can be updated with safety functions without having to replace the existing components (masters, I/O interfaces, power supplies, etc.). Safety circuits are diagnosed readily, and with no additional wiring, by the standard AS-Interface cabling system master communicating with the safety monitor(s) via the yellow cable.

The AS-Interface “Safety at work” system is configured using software ASISWIN2 running on Windows®. A library of pre-defined and certified safety functions is made available by the software and the user can graphically select the desired safety functions, even at the last minute, by using the “Drag and drop” method in the configuration software. Knowledge of a programming language or specific tools is not necessary to parameter the system. The configuration is loaded into the safety monitor(s) by means of a PC by carrying out a secure serial transmission and using the parameter setting connector on the front cover of the monitor.

The AS-Interface “Safety and work” enhanced monitor is available with:

- 1 safety output with 2 contacts, or
- 2 independent safety outputs with 2 x 2 contacts.

In addition to safety outputs with relay hard contacts, AS-Interface “Safety at work” safety monitors are equipped, depending on the model, with one or two solid-state signalling outputs and LEDs on the front cover to indicate the status of the system and of the monitoring circuits. To monitor more safety functions simultaneously or to stop several safety circuits at different locations, an increased number of safety monitors can be used in an AS-Interface cabling system.

The safety interfaces are connected directly on the yellow cable via an insulation displacement connector (IDC). Their addressing is carried out using self-addressing via the AS-Interface cabling system master or manually, using addressing terminal ASISTERV2.

The compactness of the safety interfaces enables their direct attachment to control devices such as Emergency stop buttons or switches. In addition to interfaces that can be attached to products, versions with 1 or 2 M12 connectors are also available.

| Monitoring functions              |  |
|-----------------------------------|--|
|                                   | <b>AS-Interface “Safety at work” monitors</b><br>For enhanced monitoring of safety devices ASISAFEMON1B, ASISAFEMON2B  |
| Monitoring of safety devices      | <ul style="list-style-type: none"> <li>■ Emergency stops</li> <li>■ Safety switches</li> <li>■ Light curtains</li> <li>■ Button for validation of linked devices</li> <li>■ Conditionally dependent devices</li> <li>■ Devices with bouncing contacts</li> </ul> |
| Logic functions                   | <ul style="list-style-type: none"> <li>■ “OR” (up to 6 devices)</li> <li>■ “AND”</li> <li>■ “FLIP FLOP”</li> <li>■ On-delay</li> <li>■ Off-delay</li> <li>■ “PULSE” on positive edge</li> </ul>  |
| External devices monitoring (EDM) | <ul style="list-style-type: none"> <li>■ Feedback loop</li> <li>■ Feedback loop monitoring over the AS-Interface cabling system</li> </ul>   |
| Start devices                     | <ul style="list-style-type: none"> <li>■ Automatic start</li> <li>■ Start monitored by the AS-Interface cabling system slave</li> <li>■ Start monitored by connection to monitor</li> <li>■ Start monitored by the safety interface</li> </ul>                   |
| Output devices                    | <ul style="list-style-type: none"> <li>■ Stop category 1</li> <li>■ Stop category 0</li> </ul>   |

| Specifications  |   |   |  |
|---|---|---|--|
| AS-Interface “Safety at work” monitor type  |   | ASISAFEMON1B<br>ASISAFEMON2B  |  |
| Maximum achievable safety level   |   | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061              |  |
| Reliability data (1)  | Mean Time To dangerous Failure (MTTF <sub>d</sub> )           | Years   | 451                                    |
|   | Diagnostic Coverage (DC)                                      | %   | > 99                                   |
|   | Probability of dangerous Failure per Hour (PFH <sub>d</sub> ) | 1/h   | 9 x 10 <sup>-9</sup>                   |
| Conformity to standards   |   | EN 50295, EN/IEC 60204-1, EN/IEC 61496-1, EN 574/ISO 13851, EN/IEC 60947-1, EN/IEC 60947-5-1  |  |
| Product certifications  |   | UL, CSA, TÜV  |  |
| AS-Interface profile  |   | 7.F   |  |
| Power consumption on AS-Interface line  |   | mA  | 44                                     |
| Type of protection (suitable only for use in electronic rooms/ electrical enclosures with a minimum IP 54 degree of protection) |   | IP 20   |  |
| Operating voltage U <sub>b</sub>  |   | V   | ± 24 ± 15%                             |
| Rated operating current   |   | mA  | 150: ASISAFEMON1B<br>200: ASISAFEMON2B |
| Response duration   |   | ms  | < 40                                   |
| Pick-up delay   |   | s   | < 10                                   |
| Inputs  | “Start”   | Opto-electronic coupler input (active when High), input current approximately 10 mA at ± 24 V |  |
|   | “Protection control (EDM)”                                    | Opto-electronic coupler input (active when High), input current approximately 10 mA at ± 24 V |  |
| Outputs   | “Safety on” indication  | PNP transistor output, 200 mA   |  |
|   | Safety  | Relay hard contacts N.O. contacts, max. contact load  |  |
| Fuse protection   |   | External, with max. of 4 A MT   |  |
| Operating temperature   |   | °F (°C)   | - 4...+ 140 (- 20...+ 60)              |
| Storage temperature   |   | °F (°C)   | - 22...+ 158 (- 30...+ 70)             |
| Enclosure   | Material  | Polyamide PA66  |  |
|   | Mounting  | Clip-on mounting on DIN rail conforming to EN 50022   |  |

(1) Using an appropriate and correctly connected control system.

Note: The impedance of a safety monitor must be taken into account when selecting the number of interfaces on the AS-Interface cabling system, even if it is used in “watchdog” mode.

# Safety relays

Safety solutions on AS-Interface™ cabling system  
AS-Interface “Safety at work” monitors

## References

### AS-Interface “Safety at work” monitors

| Type                                      | Number of safety circuits | Solid-state outputs for PLC | Supply | Reference           | Weight oz (kg) |
|---|---------------------------|-----------------------------|--------|---------------------|----------------|
| For enhanced monitoring of safety devices | 2 N.O.                    | 1                           | ≡ 24 V | <b>ASISAFEMON1B</b> | 12.346 (0.350) |
|   | 2 x 2 N.O.                | 2                           | ≡ 24 V | <b>ASISAFEMON2B</b> | 15.874 (0.450) |

### Configuration software

| Description   | For use with   | Operating system  | Languages                             | Reference       | Weight oz (kg) |
|---|--|---|---------------------------------------|-----------------|----------------|
| <b>AS-Interface “Safety at work” configuration software</b><br>CD-ROM + user manual | Safety monitors ASISAFEMON1B for enhanced monitoring of safety devices | Windows® 95,<br>Windows® 98,<br>Windows® ME,<br>Windows® NT,<br>Windows® 2000,<br>Windows® XP | EN,<br>FR,<br>DE,<br>IT,<br>ES,<br>PT | <b>ASISWIN2</b> | 18.342 (0.520) |

### Setting-up and diagnostic tools

| Description                       | Application  | Reference       | Weight oz (kg) |
|-----------------------------------|--|-----------------|----------------|
| <b>Adjustment terminal</b>        | Addressing and diagnostics of AS-Interface V2.1 interfaces<br>AS-Interface I/O test while powered-up<br>AS-Interface interface diagnostics | <b>ASITERV2</b> | 17.637 (0.500) |
| <b>AS-Interface line analyzer</b> | Identification of transmission errors on the AS-Interface line   | <b>ASISA01</b>  | 5.644 (0.160)  |



ASITERV2




ASISA01

### Accessories

| Description   | Function   | Reference      | Weight oz (kg) |
|---------------|--|----------------|----------------|
| <b>Cables</b> | For configuring AS-Interface “Safety at work” monitors, RS 232 | <b>ASISPCP</b> | 3.527 (0.100)  |
|               | Transfer between 2 monitors                                    | <b>ASISCM</b>  | 17.637 (0.500) |


### Dimensions

ASISAFEMON●, ASISAFEMON●B

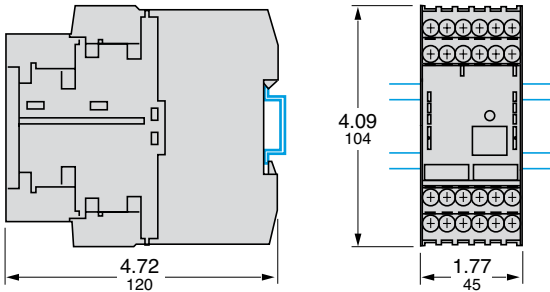

Dual Dimensions: INCHES  
Millimeters

### LED details

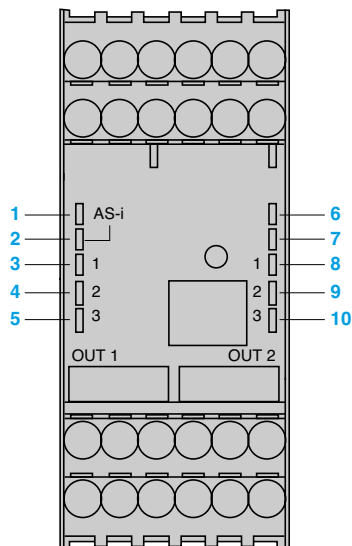

#### ASISAFEMON1B

- 1 AS-Interface line supply (green)
- 2 AS-Interface line fault (red)
- 3 Restart signal (yellow)
- 4 Safety outputs closed (green)
- 5 Safety outputs open (red) or output error (flashing red)

#### ASISAFEMON2B

##### Output 1

- 1 AS-Interface line supply (green)
- 2 AS-Interface line fault (red)
- 3 Restart signal (yellow)
- 4 Safety outputs closed (green)
- 5 Safety outputs open (red) or output error (flashing red)

##### Output 2

- 6 AS-Interface line supply (green)
- 7 AS-Interface line fault (red)
- 8 Restart signal (yellow)
- 9 Safety outputs closed (green)
- 10 Safety outputs open (red) or output error (flashing red)

## Operating principle


Safety is incorporated into the AS-Interface cabling system by adding a safety monitor and safety interfaces connected together with other standard AS-Interface components on the yellow cable.

Safety information is exchanged only between the safety monitor, the AS-Interface line master and the safety interfaces. This is transparent for the other standard AS-Interface components. Based on this principle, AS-Interface cabling systems that are already installed can be updated with safety functions without having to replace the existing components (master, I/O interfaces, power supplies, etc.).


Safety circuits are diagnosed readily, and with no additional wiring, by the standard AS-Interface cabling system master communicating with the safety monitor via the yellow cable.

## Introduction

### Interfaces for Harmony™ Ø 22 mm Emergency stop




Metal




Plastic

### Interfaces for products with M12 connector




1 x M12 entry




2 x M12 entries

### Interfaces for products with ISO entry




ISO M16 or M20 entry

### Interfaces pre-mounted in Emergency stop mushroom head push button stations XAL K, with M12 entry




"Turn to release"




Key release (n° 455)

### Interfaces for mounting in enclosure for Harmony™ Ø 22 mm Emergency stop mushroom head push buttons



Metal



Plastic

| Safety interface type                         |   | ASI SSLB4  | ASI SSLB5                  | ASI SSLC1 | ASI SSLC2   | ASI SSLLS | ASI SEA1C    | ASI SEK1C  | ASI SSLE4 | ASI SSLE5 |
|---|---|--|----------------------------|-----------|---|-----------|--------------|--|-----------|-----------|
| <b>Environment</b>                            |   |  |                            |           |   |           |              |  |           |           |
| <b>Maximum achievable safety level</b>        |   | PL e/Category 4 conforming to EN/ISO 13849-1, SILCL 3 conforming to EN/IEC 62061 |                            |           |   |           |              |  |           |           |
| <b>Reliability data (1)</b>                   | Mean Time To dangerous Failure (MTTF <sub>d</sub> )           | <b>Years</b>   | 103                        |           |   |           |              |  |           |           |
|   | Diagnostic Coverage (DC)                                      | <b>%</b>   | > 99                       |           |   |           |              |  |           |           |
|   | Probability of dangerous Failure per Hour (PFH <sub>d</sub> ) | <b>1/h</b>   | 1.82 x 10 <sup>-8</sup>    |           |   |           |              |  |           |           |
| <b>Conformity to standards</b>                |   | EN 50295, EN/ISO 13850, EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1         |                            |           | EN 50295, EN/IEC 60204-1, EN 1088/ISO 14119, EN 574/ISO 13851, EN/IEC 61496-1, EN/IEC 60947-5-3, EN/IEC 60947-1, EN/IEC 60947-5-1 |           |              | EN 50295, EN/ISO 13850, EN/IEC 60204-1, EN/IEC 60947-1, EN/IEC 60947-5-1 |           |           |
| <b>Product certifications</b>                 |   | UL, CSA, TÜV   |                            |           |   |           | UL, CSA, TÜV |  |           |           |
| <b>Degree of protection</b>                   | Conforming to IEC 529   | IP 20  |                            | IP 67     |   |           | IP 65        |  | IP 00     |           |
| <b>AS-Interface profile</b>                   |   | O.B.F.F  |                            |           |   |           |              |  |           |           |
| <b>Addressing</b>                             |   | Using adjustment terminal ASITERV2   |                            |           |   |           |              |  |           |           |
| <b>Ambient air temperature</b>                | For operation   | <b>°F (°C)</b>   | + 14...+ 131 (- 10...+ 55) |           |   |           |              |  |           |           |
|   | For storage   | <b>°F (°C)</b>   | - 13...+ 185 (- 25...+ 85) |           |   |           |              |  |           |           |
| <b>Mechanical specifications</b>              |   |  |                            |           |   |           |              |  |           |           |
| <b>Mechanical life*</b>                       | In thousands of operating cycles                              | 0.3  | –                          | –         | –   | 0.3       | –            | –  | –         | –         |
| <b>Shock resistance</b>                       |   | 10 gn  |                            |           |   |           |              |  |           |           |
| <b>Vibration resistance</b>                   |   | 5 gn   |                            |           |   |           |              |  |           |           |
| <b>Electrical specifications</b>              |   |  |                            |           |   |           |              |  |           |           |
| <b>Supply by AS-Interface line</b>            | Voltage   | <b>V</b>   | Via AS-Interface, --- 24   |           |   |           |              |  |           |           |
|   | Voltage limits  |  | - 15...+ 15%               |           |   |           |              |  |           |           |
| <b>Power consumption</b>                      |   | <b>W</b>   | 1.2                        |           |   |           |              |  |           |           |
| <b>Power consumption on AS-Interface line</b> |   | <b>mA</b>  | 45                         |           |   |           |              |  |           |           |
| <b>Connection on AS-Interface line</b>        | IDC (Insulation Displacement Connector)                       | ■  | –                          | ■         | –   | –         | –            | –  | –         | –         |
|   | Connector (type)  | –  | ■ (M12)                    | –         | ■ (M12)   | –         | ■ (M12)      | –  | ■         | –         |

(1) Using an appropriate and correctly connected control system.

**\*Mechanical Life**

The product life expressed is based on average usage and normal operating conditions. The above statements are not intended to nor shall they create any express or implied warranties as to product operation or life. For information on the limited warranty offered on this product please refer to the Square D terms and conditions of sale found in the "Square D by Schneider Electric" Digest.



ASISSLB4 + ZB4BS844



ASISSLB5 + ZB5AS844



ASISSLC1



ASISSLC2



ASISSLLS



ASISEA1C



ASISSE5



ASISSE4



ASISAD1

## References

### Interfaces for Ø 22 Emergency stop

| Type    | Type of contact | Connection on AS-Interface line | Reference | Weight oz (kg) |
|---------|-----------------|---------------------------------|-----------|----------------|
| Metal   | N.C. + N.C.     | IDC                             | ASISSLB4  | 2.822 (0.080)  |
| Plastic | N.C. + N.C.     | IDC                             | ASISSLB5  | 1.411 (0.040)  |

### Interfaces for products with connector

| Type                    | Number of contacts | Connection on AS-Interface line | Reference | Weight oz (kg) |
|-------------------------|--------------------|---------------------------------|-----------|----------------|
| 1 x M12 entry (1)       | 2                  | Connector                       | ASISSLC1  | 1.411 (0.040)  |
| 2 x M12 entries (1) (2) | 2                  | Connector                       | ASISSLC2  | 1.764 (0.050)  |

### Interfaces for products with ISO entry

| Type                      | Number of contacts | Connection on AS-Interface line | Reference | Weight oz (kg) |
|---------------------------|--------------------|---------------------------------|-----------|----------------|
| 1 x ISO M16 entry (1) (3) | 2                  | IDC                             | ASISSLLS  | 1.411 (0.040)  |

### Interfaces pre-mounted in Emergency stop mushroom head push button stations XAL K

| Type                 | Number of contacts | Connection on AS-Interface line | Reference | Weight oz (kg) |
|----------------------|--------------------|---------------------------------|-----------|----------------|
| “Turn to release”    | 2                  | Connector                       | ASISEA1C  | 5.997 (0.170)  |
| Key release (n° 455) | 2                  | Connector                       | ASISEK1C  | 6.702 (0.190)  |

### Interfaces for mounting in enclosure for Harmony™ Ø 22 mm Emergency stop mushroom head push buttons

| Type    | Number of contacts | Connection on AS-Interface line | Reference | Weight oz (kg) |
|---------|--------------------|---------------------------------|-----------|----------------|
| Metal   | 2                  | Connector                       | ASISSE4   | 2.116 (0.060)  |
| Plastic | 2                  | Connector                       | ASISSE5   | 0.882 (0.025)  |

### Addressing accessories

| Description  | Application                                | Reference | Weight oz (kg) |
|--|--|-----------|----------------|
| Adaptor specifically for safety interfaces type ASISSLB●, ASISSLC●, ASISSLLS | Connection to adjustment terminal ASITERV2 | ASISAD1   | 2.116 (0.060)  |

### Setting-up and diagnostic tools

| Description                | Application  | Reference | Weight oz (kg) |
|----------------------------|--|-----------|----------------|
| Adjustment terminal        | Addressing and diagnostics of AS-Interface V2.1 interfaces<br>AS-Interface I/O test while powered-up<br>AS-Interface interface diagnostics | ASITERV2  | 17.637 (0.500) |
| AS-Interface line analyzer | Identification of transmission errors on the AS-Interface line   | ASISA01   | 5.644 (0.160)  |

### Accessories

| Type  | Material | Unit reference | Weight oz (kg) |
|---|----------|----------------|----------------|
| Adaptor for ISO M20 (sold in lots of 5)                                 | Metal    | DE9RI2016      | 1.411 (0.040)  |
| Ø 40 red mushroom head Emergency stop buttons, turn to release (4)      | Metal    | ZB4BS844       | 2.116 (0.060)  |
|   | Plastic  | ZB5AS844       | 1.764 (0.050)  |
| Ø 40 red mushroom head Emergency stop buttons, key release (n° 455) (4) | Metal    | ZB4BS944       | 3.457 (0.098)  |
|   | Plastic  | ZB5AS944       | 2.504 (0.071)  |

(1) To be used with yellow AS-Interface “standard” version cable XZCB●●●●●●. The yellow AS-Interface “TPE” version cable XZCB●●●●●●H cannot be used with the safety interfaces ASISSLC● and ASISSLLS.



(2) Only use pre-wired connectors XZCP1541L●, refer to our Sensors catalog 9007CT1007R06/12.

(3) For ISO M20 product, see adaptor DE9R12016.





## Dimensions



ASISSLB4

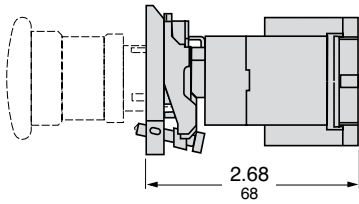



ASISSLB5





ASISSLC1





ASISSLC2






ASISLLS



ASISAD1





ASISE•1C





Dual Dimensions: INCHES  
Millimeters

ASISLE4




ASISLE5




## Connections


ASISSLC1




ASISSLC2




ASISLLS



ASISE•1C



ASISLE•



Principle:  
page 3/124

Specifications:  
page 3/125

References:  
page 3/126

Dimensions:  
page 3/127

Wiring diagrams:  
page 3/127

# Safety relays

## Safety reliability values

according to standard EN/ISO 13849-1 and EN/IEC 62061

3

| EN/ISO 13849-1                      |                                     |  |   |                                     |                                     |   |
|-------------------------------------|-------------------------------------|--|---|-------------------------------------|-------------------------------------|---|
| Category for the device internal    |                                     | MTTF <sub>d</sub> (mean time to dangerous failure, in years) |   | PL (Performance Level): up to...    |                                     |   |
| Device + outputs in Stop category 0 | Device + outputs in Stop category 1 | Single channel with output in Stop category 0                | Single channel with output in Stop category 1 | Device + outputs in Stop category 0 | Device + outputs in Stop category 1 |   |
| <b>Preventa safety Modules</b>      |                                     |  |   |                                     |                                     |   |
| XPSABV1133P                         | 4                                   | 3  | 53  | 53                                  | e                                   | d |
| XPSABV11330P                        | 4                                   | 3  | 53  | 53                                  | e                                   | d |
| XPSABV1133C                         | 4                                   | 3  | 53  | 53                                  | e                                   | d |
| XPSABV11330C                        | 4                                   | 3  | 53  | 53                                  | e                                   | d |
| XPSAC3421P                          | 4                                   | —  | 210.4   | —                                   | e                                   | — |
| XPSAC3721P                          | 4                                   | —  | 210.4   | —                                   | e                                   | — |
| XPSAC5121P                          | 4                                   | —  | 210.4   | —                                   | e                                   | — |
| XPSAC3721                           | 4                                   | —  | 210.4   | —                                   | e                                   | — |
| XPSAC1321                           | 4                                   | —  | 210.4   | —                                   | e                                   | — |
| XPSAC5121                           | 4                                   | —  | 210.4   | —                                   | e                                   | — |
| XPSAC3421                           | 4                                   | —  | 210.4   | —                                   | e                                   | — |
| XPSAC1321P                          | 4                                   | —  | 210.4   | —                                   | e                                   | — |
| XPSAF5130                           | 4                                   | —  | 243.0   | —                                   | e                                   | — |
| XPSAF5130P                          | 4                                   | —  | 243.0   | —                                   | e                                   | — |
| XPSAFL5130P                         | 4                                   | —  | 172.1   | —                                   | e                                   | — |
| XPSAFL5130                          | 4                                   | —  | 172.1   | —                                   | e                                   | — |
| XPSAK371144P                        | 4                                   | —  | 154.5   | —                                   | e                                   | — |
| XPSAK351144P                        | 4                                   | —  | 154.5   | —                                   | e                                   | — |
| XPSAK371144                         | 4                                   | —  | 154.5   | —                                   | e                                   | — |
| XPSAK351144                         | 4                                   | —  | 154.5   | —                                   | e                                   | — |
| XPSAK361144                         | 4                                   | —  | 154.5   | —                                   | e                                   | — |
| XPSAK311144                         | 4                                   | —  | 154.5   | —                                   | e                                   | — |
| XPSAK311144P                        | 4                                   | —  | 154.5   | —                                   | e                                   | — |
| XPSAK361144P                        | 4                                   | —  | 154.5   | —                                   | e                                   | — |
| XPSAR351144                         | 4                                   | —  | 277.8   | —                                   | e                                   | — |
| XPSAR371144                         | 4                                   | —  | 277.8   | —                                   | e                                   | — |
| XPSAR311144                         | 4                                   | —  | 277.8   | —                                   | e                                   | — |
| XPSAR351144P                        | 4                                   | —  | 277.8   | —                                   | e                                   | — |
| XPSAR371144P                        | 4                                   | —  | 277.8   | —                                   | e                                   | — |
| XPSAR311144P                        | 4                                   | —  | 277.8   | —                                   | e                                   | — |
| XPSAT5110                           | 4                                   | 3  | 139.7   | 54.0                                | e                                   | d |
| XPSAT3410                           | 4                                   | 3  | 139.7   | 54.0                                | e                                   | d |
| XPSAT3710                           | 4                                   | 3  | 139.7   | 54.0                                | e                                   | d |
| XPSAT5110T100                       | 4                                   | 3  | 139.7   | 54.0                                | e                                   | d |
| XPSATE5110                          | 4                                   | 3  | 134.8   | 54.5                                | e                                   | d |
| XPSATE5110P                         | 4                                   | 3  | 134.8   | 54.5                                | e                                   | d |
| XPSATE3410                          | 4                                   | 3  | 134.8   | 54.5                                | e                                   | d |
| XPSATE3410P                         | 4                                   | 3  | 134.8   | 54.5                                | e                                   | d |
| XPSATE3710                          | 4                                   | 3  | 134.8   | 54.5                                | e                                   | d |
| XPSATE3710P                         | 4                                   | 3  | 134.8   | 54.5                                | e                                   | d |
| XPSAV11113P                         | 4                                   | 4  | 75.8  | 75.8                                | e                                   | e |
| XPSAV11113T050                      | 4                                   | 4  | 75.8  | 75.8                                | e                                   | e |
| XPSAV11113                          | 4                                   | 4  | 75.8  | 75.8                                | e                                   | e |
| XPSAX5120                           | 4                                   | —  | 222.2   | —                                   | e                                   | — |
| XPSAXE5120P                         | 4                                   | —  | 457.0   | —                                   | e                                   | — |
| XPSAXE5120C                         | 4                                   | —  | 457.0   | —                                   | e                                   | — |
| XPSBAE5120P                         | 1                                   | —  | 55  | —                                   | c                                   | — |
| XPSBAE3920P                         | 1                                   | —  | 55  | —                                   | c                                   | — |
| XPSBAE5120C                         | 1                                   | —  | 55  | —                                   | c                                   | — |
| XPSBAE3920C                         | 1                                   | —  | 55  | —                                   | c                                   | — |
| XPSBC1110                           | 4                                   | —  | 63.9  | —                                   | e                                   | — |
| XPSBC3110                           | 4                                   | —  | 63.9  | —                                   | e                                   | — |
| XPSBC3410                           | 4                                   | —  | 63.9  | —                                   | e                                   | — |
| XPSBC3710                           | 4                                   | —  | 63.9  | —                                   | e                                   | — |
| XPSBCE3110P                         | 4                                   | —  | 37.0  | —                                   | e                                   | — |
| XPSBCE3110C                         | 4                                   | —  | 37.0  | —                                   | e                                   | — |
| XPSBCE3410P                         | 4                                   | —  | 37.0  | —                                   | e                                   | — |
| XPSBCE3410C                         | 4                                   | —  | 37.0  | —                                   | e                                   | — |
| XPSBCE3710P                         | 4                                   | —  | 37.0  | —                                   | e                                   | — |
| XPSBCE3710C                         | 4                                   | —  | 37.0  | —                                   | e                                   | — |
| XPSBF1132                           | 4                                   | —  | 50.1  | —                                   | e                                   | — |
| XPSBF1132P                          | 4                                   | —  | 50.1  | —                                   | e                                   | — |

| DC (diagnostic capability) for the device internal |                                     | PFH <sub>d</sub> (Dangerous Failure per Hour) |                                     | SILCL (Safety Integrity Level Claim Level) |                                     | HFT (Hardware Fault Tolerance) |
|--|-------------------------------------|---|-------------------------------------|--|-------------------------------------|--------------------------------|
| Device + outputs in Stop category 0                | Device + outputs in Stop category 1 | Device + outputs in Stop category 0           | Device + outputs in Stop category 1 | Device + outputs in Stop category 0        | Device + outputs in Stop category 1 |                                |
| > 99 %   | 60...90 %                           | 3.00 x 10 <sup>-8</sup>                       | 2.00 x 10 <sup>-7</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | 60...90 %                           | 3.00 x 10 <sup>-8</sup>                       | 2.00 x 10 <sup>-7</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | 60...90 %                           | 3.00 x 10 <sup>-8</sup>                       | 2.00 x 10 <sup>-7</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | 60...90 %                           | 3.00 x 10 <sup>-8</sup>                       | 2.00 x 10 <sup>-7</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | —                                   | 3.56 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.56 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.56 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.56 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.56 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.56 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.56 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 4.62 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 4.62 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 5.61 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 5.61 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 7.39 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 7.39 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 7.39 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 7.39 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 7.39 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 7.39 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 7.39 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 7.39 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 2.22 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 2.22 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 2.22 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 2.22 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 2.22 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | 96.9 %                              | 6.84 x 10 <sup>-9</sup>                       | 2.05 x 10 <sup>-8</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | 96.9 %                              | 6.84 x 10 <sup>-9</sup>                       | 2.05 x 10 <sup>-8</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | 96.9 %                              | 6.84 x 10 <sup>-9</sup>                       | 2.05 x 10 <sup>-8</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | 96.9 %                              | 6.84 x 10 <sup>-9</sup>                       | 2.05 x 10 <sup>-8</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | 98.4 %                              | 6.81 x 10 <sup>-9</sup>                       | 1.96 x 10 <sup>-8</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | 98.4 %                              | 6.81 x 10 <sup>-9</sup>                       | 1.96 x 10 <sup>-8</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | 98.4 %                              | 6.81 x 10 <sup>-9</sup>                       | 1.96 x 10 <sup>-8</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | 98.4 %                              | 6.81 x 10 <sup>-9</sup>                       | 1.96 x 10 <sup>-8</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | 98.4 %                              | 6.81 x 10 <sup>-9</sup>                       | 1.96 x 10 <sup>-8</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | 98.4 %                              | 6.81 x 10 <sup>-9</sup>                       | 1.96 x 10 <sup>-8</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | 98.4 %                              | 6.81 x 10 <sup>-9</sup>                       | 1.96 x 10 <sup>-8</sup>             | 3  | 2                                   | 1                              |
| > 99 %   | > 99 %                              | 7.95 x 10 <sup>-9</sup>                       | 7.95 x 10 <sup>-9</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 7.95 x 10 <sup>-9</sup>                       | 7.95 x 10 <sup>-9</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 7.95 x 10 <sup>-9</sup>                       | 7.95 x 10 <sup>-9</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | —                                   | 1.90 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.00 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.00 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| —  | —                                   | 2.1 x 10 <sup>-6</sup>                        | —                                   | 1  | —                                   | 0                              |
| —  | —                                   | 2.1 x 10 <sup>-6</sup>                        | —                                   | 1  | —                                   | 0                              |
| —  | —                                   | 2.1 x 10 <sup>-6</sup>                        | —                                   | 1  | —                                   | 0                              |
| —  | —                                   | 2.1 x 10 <sup>-6</sup>                        | —                                   | 1  | —                                   | 0                              |
| > 99 %   | —                                   | 1.75 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 1.75 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 1.75 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 1.75 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.00 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.00 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.00 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.00 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.00 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.00 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.00 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 1.30 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 1.30 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |

| EN/ISO 13849-1   |                                     |   |   |                                     |                                     |   |
|--|-------------------------------------|---|---|-------------------------------------|-------------------------------------|---|
| Category for the device internal                                     |                                     | MTTF <sub>d</sub> (mean time to dangerous failure in years) |   | PL (Performance Level): up to...    |                                     |   |
| Device + outputs in Stop category 0                                  | Device + outputs in Stop category 1 | Single channel with output in Stop category 0               | Single channel with output in Stop category 1 | Device + outputs in Stop category 0 | Device + outputs in Stop category 1 |   |
| <b>Preventa safety Modules (continued)</b>                           |                                     |   |   |                                     |                                     |   |
| XPSCM1144P   | 2                                   | —   | 16.6  | —                                   | c                                   | — |
| XPSCM1144  | 2                                   | —   | 16.6  | —                                   | c                                   | — |
| XPSCM1132P   | 4                                   | —   | 83.1  | —                                   | e                                   | — |
| XPSCM1132  | 4                                   | —   | 83.1  | —                                   | e                                   | — |
| XPSCM1132TS220   | 4                                   | —   | 82.4  | —                                   | e                                   | — |
| XPSCM1132  | 4                                   | —   | 82.4  | —                                   | e                                   | — |
| XPSCM1132P   | 4                                   | —   | 82.4  | —                                   | e                                   | — |
| XPSCM3431  | 4 (1)                               | —   | 346.2   | —                                   | e (1)                               | — |
| XPSCM5131  | 4 (1)                               | —   | 346.2   | —                                   | e (1)                               | — |
| XPSCM3731  | 4 (1)                               | —   | 346.2   | —                                   | e (1)                               | — |
| XPSCME5131P  | 4 (1)                               | —   | 45  | —                                   | e (1)                               | — |
| XPSCME5131C  | 4 (1)                               | —   | 45  | —                                   | e (1)                               | — |
| XPSECP5131   | 4 (1)                               | —   | 346.2   | —                                   | e (1)                               | — |
| XPSECP3431   | 4 (1)                               | —   | 346.2   | —                                   | e (1)                               | — |
| XPSECP3731   | 4 (1)                               | —   | 346.2   | —                                   | e (1)                               | — |
| XPSECPE5131P   | 4 (1)                               | —   | 30  | —                                   | e (1)                               | — |
| XPSECPE5131C   | 4 (1)                               | —   | 30  | —                                   | e (1)                               | — |
| XPSECPE3910P   | 4 (1)                               | —   | 30  | —                                   | e (1)                               | — |
| XPSECPE3910C   | 4 (1)                               | —   | 30  | —                                   | e (1)                               | — |
| XPSFB3411  | 4                                   | —   | 55.8  | —                                   | e                                   | — |
| XPSFB3711  | 4                                   | —   | 55.8  | —                                   | e                                   | — |
| XPSFB5111  | 4                                   | —   | 55.8  | —                                   | e                                   | — |
| XPSFB5311  | 4                                   | —   | 55.8  | —                                   | e                                   | — |
| XPSTSA3442P  | 3                                   | —   | 126   | —                                   | d                                   | — |
| XPSTSA3742P  | 3                                   | —   | 126   | —                                   | d                                   | — |
| XPSTSA5142P  | 3                                   | —   | 126   | —                                   | d                                   | — |
| XPSTSW3742P  | 3                                   | —   | 126   | —                                   | d                                   | — |
| XPSTSW3442P  | 3                                   | —   | 126   | —                                   | d                                   | — |
| XPSTSW5142P  | 3                                   | —   | 126   | —                                   | d                                   | — |
| XPSVC1132  | 4                                   | —   | 50.0  | —                                   | e                                   | — |
| XPSVC1132P   | 4                                   | —   | 50.0  | —                                   | e                                   | — |
| XPSVNE1142P  | 3                                   | —   | 124.1   | —                                   | d                                   | — |
| XPSVNE1142HSP  | 3                                   | —   | 124.1   | —                                   | d                                   | — |
| XPSVNE1142LFP  | 3                                   | —   | 124.1   | —                                   | d                                   | — |
| XPSVNE3442P  | 3                                   | —   | 124.1   | —                                   | d                                   | — |
| XPSVNE3442HSP  | 3                                   | —   | 124.1   | —                                   | d                                   | — |
| XPSVNE3442LFP  | 3                                   | —   | 124.1   | —                                   | d                                   | — |
| XPSVNE3742P  | 3                                   | —   | 124.1   | —                                   | d                                   | — |
| XPSVNE3742HSP  | 3                                   | —   | 124.1   | —                                   | d                                   | — |
| <b>Preventa safety controllers</b>                                   |                                     |   |   |                                     |                                     |   |
| XPSMP11123P  | 4                                   | —   | 75.8  | —                                   | e                                   | — |
| XPSMP11123   | 4                                   | —   | 75.8  | —                                   | e                                   | — |
| XPSMC●●Z● (transistor outputs)                                       | 4                                   | 4   | 76.6  | 76.6                                | e                                   | e |
| XPSMC●●Z● (Relay outputs)  | 4                                   | 4   | 71.0  | 71.0                                | e                                   | e |
| <b>Safety monitors and interfaces on AS-Interface cabling system</b> |                                     |   |   |                                     |                                     |   |
| ASISAFEMON1  | 4                                   | 4   | 451   | 451                                 | e                                   | e |
| ASISAFEMON1B   | 4                                   | 4   | 451   | 451                                 | e                                   | e |
| ASISAFEMON2  | 4                                   | 4   | 451   | 451                                 | e                                   | e |
| ASISAFEMON2B   | 4                                   | 4   | 451   | 451                                 | e                                   | e |
| ASISSLB5   | 4                                   | 4   | 103.4   | 103.4                               | e                                   | e |
| ASISSLB4   | 4                                   | 4   | 103.4   | 103.4                               | e                                   | e |
| ASISSLC1   | 4                                   | 4   | 103.6   | 103.6                               | e                                   | e |
| ASISSLC2   | 4                                   | 4   | 103.6   | 103.6                               | e                                   | e |
| ASISLLS  | 4                                   | 4   | 103.6   | 103.6                               | e                                   | e |
| ASISEA1C   | 4                                   | 4   | 103.9   | 103.9                               | e                                   | e |
| ASISEK1C   | 4                                   | 4   | 103.9   | 103.9                               | e                                   | e |
| ASISLE4  | 4                                   | 4   | 103.9   | 103.9                               | e                                   | e |
| ASISLE5  | 4                                   | 4   | 103.9   | 103.9                               | e                                   | e |

(1) The Category, the Performance Level (PL) or the Safety Integrity Level Claim Level (SILCL) are only achieved with the full connection to the base unit or start unit.

| EN/IEC 62061 (EN/IEC 61508)                        |                                     |   |                                     |  |                                     |                                |
|--|-------------------------------------|---|-------------------------------------|--|-------------------------------------|--------------------------------|
| DC (diagnostic capability) for the device internal |                                     | PFH <sub>d</sub> (Dangerous Failure per Hour) |                                     | SILCL (Safety Integrity Level Claim Level) |                                     | HFT (Hardware Fault Tolerance) |
| Device + outputs in Stop category 0                | Device + outputs in Stop category 1 | Device + outputs in Stop category 0           | Device + outputs in Stop category 1 | Device + outputs in Stop category 0        | Device + outputs in Stop category 1 |                                |
| 95.5 %   | —                                   | 3.12 x 10 <sup>-7</sup>                       | —                                   | 1  | —                                   | 1                              |
| 95.5 %   | —                                   | 3.12 x 10 <sup>-7</sup>                       | —                                   | 1  | —                                   | 1                              |
| > 99 %   | —                                   | 3.92 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.92 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.97 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.97 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 3.97 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| 0...99 % (1)                                       | —                                   | 7.51 x 10 <sup>-9</sup>                       | —                                   | 3 (1)                                      | —                                   | 1                              |
| 0...99 % (1)                                       | —                                   | 7.51 x 10 <sup>-9</sup>                       | —                                   | 3 (1)                                      | —                                   | 1                              |
| 0...99 % (1)                                       | —                                   | 7.51 x 10 <sup>-9</sup>                       | —                                   | 3 (1)                                      | —                                   | 1                              |
| 60...90 %  | —                                   | 2.00 x 10 <sup>-7</sup>                       | —                                   | 3 (1)                                      | —                                   | 1                              |
| 60...90 %  | —                                   | 2.00 x 10 <sup>-7</sup>                       | —                                   | 3 (1)                                      | —                                   | 1                              |
| 0...99 % (1)                                       | —                                   | 7.51 x 10 <sup>-9</sup>                       | —                                   | 3 (1)                                      | —                                   | 1                              |
| 0...99 % (1)                                       | —                                   | 7.51 x 10 <sup>-9</sup>                       | —                                   | 3 (1)                                      | —                                   | 1                              |
| 0...99 % (1)                                       | —                                   | 7.51 x 10 <sup>-9</sup>                       | —                                   | 3 (1)                                      | —                                   | 1                              |
| 0...99 % (1)                                       | —                                   | 3.00 x 10 <sup>-9</sup>                       | —                                   | 3 (1)                                      | —                                   | 1                              |
| 0...99 % (1)                                       | —                                   | 3.00 x 10 <sup>-9</sup>                       | —                                   | 3 (1)                                      | —                                   | 1                              |
| 0...99 % (1)                                       | —                                   | 3.00 x 10 <sup>-9</sup>                       | —                                   | 3 (1)                                      | —                                   | 1                              |
| 0...99 % (1)                                       | —                                   | 3.00 x 10 <sup>-9</sup>                       | —                                   | 3 (1)                                      | —                                   | 1                              |
| > 99 %   | —                                   | 1.13 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 1.13 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 1.13 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 1.13 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| 60...90 %  | —                                   | 1.30 x 10 <sup>-7</sup>                       | —                                   | 2  | —                                   | 1                              |
| 60...90 %  | —                                   | 1.30 x 10 <sup>-7</sup>                       | —                                   | 2  | —                                   | 1                              |
| 60...90 %  | —                                   | 1.30 x 10 <sup>-7</sup>                       | —                                   | 2  | —                                   | 1                              |
| 60...90 %  | —                                   | 1.30 x 10 <sup>-7</sup>                       | —                                   | 2  | —                                   | 1                              |
| 60...90 %  | —                                   | 1.30 x 10 <sup>-7</sup>                       | —                                   | 2  | —                                   | 1                              |
| 60...90 %  | —                                   | 1.30 x 10 <sup>-7</sup>                       | —                                   | 2  | —                                   | 1                              |
| > 99 %   | —                                   | 1.30 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 1.30 x 10 <sup>-8</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 9.26 x 10 <sup>-9</sup>                       | —                                   | 2  | —                                   | 1                              |
| > 99 %   | —                                   | 9.26 x 10 <sup>-9</sup>                       | —                                   | 2  | —                                   | 1                              |
| > 99 %   | —                                   | 9.26 x 10 <sup>-9</sup>                       | —                                   | 2  | —                                   | 1                              |
| > 99 %   | —                                   | 9.26 x 10 <sup>-9</sup>                       | —                                   | 2  | —                                   | 1                              |
| > 99 %   | —                                   | 9.26 x 10 <sup>-9</sup>                       | —                                   | 2  | —                                   | 1                              |
| > 99 %   | —                                   | 9.26 x 10 <sup>-9</sup>                       | —                                   | 2  | —                                   | 1                              |
| > 99 %   | —                                   | 9.26 x 10 <sup>-9</sup>                       | —                                   | 2  | —                                   | 1                              |
| > 99 %   | —                                   | 9.26 x 10 <sup>-9</sup>                       | —                                   | 2  | —                                   | 1                              |
| > 99 %   | —                                   | 9.26 x 10 <sup>-9</sup>                       | —                                   | 2  | —                                   | 1                              |
| > 99 %   | —                                   | 9.26 x 10 <sup>-9</sup>                       | —                                   | 2  | —                                   | 1                              |
| > 99 %   | —                                   | 7.95 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | —                                   | 7.95 x 10 <sup>-9</sup>                       | —                                   | 3  | —                                   | 1                              |
| > 99 %   | > 99 %                              | 1.29 x 10 <sup>-8</sup>                       | 1.29 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.40 x 10 <sup>-8</sup>                       | 1.40 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 9.00 x 10 <sup>-9</sup>                       | 9.00 x 10 <sup>-9</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 9.00 x 10 <sup>-9</sup>                       | 9.00 x 10 <sup>-9</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 9.00 x 10 <sup>-9</sup>                       | 9.00 x 10 <sup>-9</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 9.00 x 10 <sup>-9</sup>                       | 9.00 x 10 <sup>-9</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |
| > 99 %   | > 99 %                              | 1.82 x 10 <sup>-8</sup>                       | 1.82 x 10 <sup>-8</sup>             | 3  | 3                                   | 1                              |

| <b>A</b>     |       |                 |       | <b>Z</b> |       |
|--------------|-------|-----------------|-------|----------|-------|
| ASISA01      | 3/122 | XPSATR3953P     | 3/33  | ZB4BS844 | 3/126 |
|              | 3/126 | XPSAV11113      | 3/24  | ZB4BS944 | 3/126 |
| ASISAD1      | 3/126 | XPSAV11113P     | 3/24  | ZB5AS844 | 3/126 |
| ASISAFEMON1B | 3/122 | XPSAXE5120C     | 3/19  | ZB5AS944 | 3/126 |
| ASISAFEMON2B | 3/122 | XPSAXE5120P     | 3/19  |          |       |
| ASISCM       | 3/122 | XPSBAE3920C     | 3/59  |          |       |
| ASISCP       | 3/122 | XPSBAE3920P     | 3/59  |          |       |
| ASISEA1C     | 3/126 | XPSBAE5120C     | 3/59  |          |       |
| ASISEK1C     | 3/126 | XPSBAE5120P     | 3/59  |          |       |
| ASISLB4      | 3/126 | XPSBCE3110C     | 3/59  |          |       |
| ASISLB5      | 3/126 | XPSBCE3110P     | 3/59  |          |       |
| ASISL1C      | 3/126 | XPSBCE3410C     | 3/59  |          |       |
| ASISL2C      | 3/126 | XPSBCE3410P     | 3/59  |          |       |
| ASISL4       | 3/126 | XPSBCE3710C     | 3/59  |          |       |
| ASISL5       | 3/126 | XPSBCE3710P     | 3/59  |          |       |
| ASISL1S      | 3/126 | XPSBF1132       | 3/59  |          |       |
| ASISWIN2     | 3/122 | XPSBF1132P      | 3/59  |          |       |
| ASITERV2     | 3/122 | XPSCM1144       | 3/66  |          |       |
|              | 3/126 | XPSCM1144P      | 3/66  |          |       |
|              |       | XPSCM1144P      | 3/66  |          |       |
|              |       | XPSDMB1132      | 3/93  |          |       |
|              |       | XPSDMB1132P     | 3/93  |          |       |
|              |       | XPSDME1132      | 3/93  |          |       |
|              |       | XPSDME1132P     | 3/93  |          |       |
|              |       | XPSECME5131C    | 3/85  |          |       |
|              |       | XPSECME5131P    | 3/85  |          |       |
|              |       | XPSECPE3910C    | 3/85  |          |       |
|              |       | XPSECPE3910P    | 3/85  |          |       |
|              |       | XPSECPE5131C    | 3/85  |          |       |
|              |       | XPSECPE5131P    | 3/85  |          |       |
|              |       | XPSLCD1141      | 3/73  |          |       |
|              |       | XPSLCM1150      | 3/78  |          |       |
|              |       | XPSOT3444       | 3/114 |          |       |
|              |       | XPSOT3744       | 3/114 |          |       |
|              |       | XPSPVK1184      | 3/109 |          |       |
|              |       | XPSPVK3484      | 3/109 |          |       |
|              |       | XPSPVK3784      | 3/109 |          |       |
|              |       | XPSPVT1180      | 3/105 |          |       |
|              |       | XPSTSA3442P     | 3/89  |          |       |
|              |       | XPSTSA3742P     | 3/89  |          |       |
|              |       | XPSTSA5142P     | 3/89  |          |       |
|              |       | XPSTSW3442P     | 3/89  |          |       |
|              |       | XPSTSW3742P     | 3/89  |          |       |
|              |       | XPSTSW5142P     | 3/89  |          |       |
|              |       | XPSVNE1142HSP   | 3/99  |          |       |
|              |       | XPSVNE1142P     | 3/99  |          |       |
|              |       | XPSVNE3442HSP   | 3/99  |          |       |
|              |       | XPSVNE3442P     | 3/99  |          |       |
|              |       | XPSVNE3742HSP   | 3/99  |          |       |
|              |       | XPSVNE3742P     | 3/99  |          |       |
|              |       | XSZCM01         | 3/78  |          |       |
|              |       | XSZCM02         | 3/78  |          |       |
|              |       | XU2S18KP340DT   | 3/67  |          |       |
|              |       | XU2S18KP340L5T  | 3/67  |          |       |
|              |       | XU2S18KP340WDT  | 3/67  |          |       |
|              |       | XU2S18KP340WL5T | 3/67  |          |       |
|              |       | XU2S18PP340D    | 3/67  |          |       |
|              |       | XU2S18PP340DR   | 3/67  |          |       |
|              |       | XU2S18PP340L5   | 3/67  |          |       |
|              |       | XU2S18PP340L5R  | 3/67  |          |       |
|              |       | XU2S18PP340WD   | 3/67  |          |       |
|              |       | XU2S18PP340WDR  | 3/67  |          |       |
|              |       | XU2S18PP340WL5  | 3/67  |          |       |
|              |       | XU2S18PP340WL5R | 3/67  |          |       |





**Schneider Electric USA, Inc.**

8001 Knightdale Blvd.  
Knightdale, NC 27545

USA Customer Care Center  
Tel: 888-778-2733

**Schneider Electric Canada**

5985 McLaughlin Rd.  
Mississauga, Ontario, Canada L5R 1B8

Canada Customer Care Center  
Tel: 800-565-6699

[www.schneider-electric.com](http://www.schneider-electric.com)

© 2009–2013 Schneider Electric. All rights reserved. Schneider Electric, Advantys, AS-Interface, Harmony, Magelis, Modbus, Momentum, Phaseo, Premium, Preventa, Transparent Ready, and “Make the most of your energy” are trademarks owned by Schneider Electric Industries SAS or its affiliated companies. All other trademarks are property of their respective owners.

Design: Schneider Electric  
Photos: Schneider Electric

MKTED208051EN-US Rev. 01, Chapter 3  
12/2013