



FL199-HVN



## METRO FLAVOR LOCK™ HIGH MOISTURE HOLDING CABINETS

**Designed for holding moist and crisp prepared foods.**

- **Flavor Lock™ Technology:** Keeps flavor and temperature of hot prepared foods for longer periods. Flavor Lock™ moisture control system keeps moist foods moist and crisp foods crisp.
- **Reliable:** Separate enclosed heat and moisture generating module is insulated from the interior cabinet environment, improving reliability.
- **Easy to Use:** Controls for setting temperature and humidity. Precise digital readouts provide consistent easy to see temperature and humidity readings. Readable and accessible with doors closed.
- **Removable Water Reservoir:** Easy to fill, empty, and clean.
- **Conserve Energy:** FL2000 holding module circulates heated air inside FL199 series holding cabinets to keep prepared food warm until it is served. Fiberglass insulation (1" [25mm] in top, back, sides and doors) retains the heat.
- **Dutch Doors Prevent Excess Heat and Moisture Loss:** Insulated Dutch doors keep heat loss to a minimum while food is being loaded into cabinet or served. Only one door need be opened at a time. Continuous gaskets on both doors. Doors are field reversible.
- **Easy to Clean:** Slide racks and module can be removed easily, without tools, for thorough cleaning. Doors and top exterior surfaces are epoxy coated for improved durability and cleanability.
- **Cord Protection and Storage:** A cord holder is attached to the back of the cabinet to keep the cord off the ground.
- **Accommodates Various Tray Sizes:** Three slide options — 1½" (38mm), 3" (76mm) and variable — permit cabinets to accommodate various tray sizes. (See specifications on back.) Model 4 and V racks — with 3" (76mm) spacing — also adjust laterally to take both 18" (457mm) and 20" (508mm) width trays and pans.

# METRO FLAVOR LOCK™ HIGH MOISTURE HOLDING CABINETS

## SPECIFICATIONS:

- Material:** .063" (1.8mm) high-strength, natural-finish aluminum alloy . . 188" (4.8mm) chassis.
- Top & Bottom:** brake-formed from flat sheet into box section.
- Sides & Back:** Smooth wrap-around body, brake-formed at ends forming front corner post and vertical reinforcing rib at center back.
- Doors:** Extruded aluminum frame with double-walled, insulated interior. Double-hinged; each door swings 270 degrees against side; extruded aluminum handle; continuous gasket; dual magnetic latches with transport latch. Doors are field reversible. Exterior of top and doors are gray epoxy coated.

- Tray Slide Racks:**

**Model 4:** Nickel-chrome plated wire rack; 3" (76mm) slide spacing.



**Model 8:** Custom-designed aluminum extrusions with 1" x 1½" x 1/8" (25 x 38 x 3mm) angle uprights and 1½" x 1/2" x .063" (38 x 12 x 1.8mm) channel slides.

**Model V:** Custom-designed aluminum extrusions with 1" x 1½" x 1/8" (25 x 38 x

3mm) angle uprights and 3" x 4½" x .100" (76 x 121 x 2.5mm) extruded vari-slides adjustable on 1½" (38mm) centers. 3" (76mm) minimum spacing. All slide racks remove for thorough cleaning.

- Casters:** Two B5DN on back — 5" (127mm) double ball bearing swivel, ball bearing axle, nickel-plated, donut neoprene-tired, pre-lubricated, bolted through chassis. Two B5DNB on front — same as above, with wheel brake.

- Electrical:** FL2000 Holding Module — 2100 watt, 120 VAC, 60hz, controlled by an adjustable electronic thermostat with digital temperature and humidity displays. Cabinet operating range is 80°-200° Fahrenheit under normal room temperature conditions. Master switch "Power On" light; 7-foot (1829mm), 3-wire lead cord; blower-forced air circulation through perforated air duct at back. Entire unit may be removed without tools. UL, CUL and NSF listed.

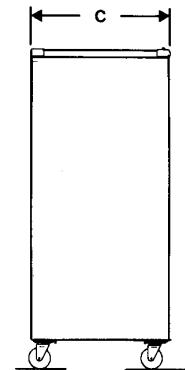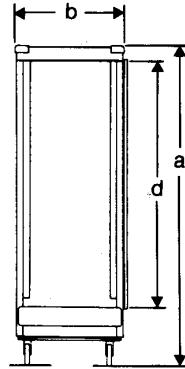

## DIMENSIONS:

Model No.	(a) Height (in.) (mm)	(b) Width (in.) (mm)	(c) Depth (in.) (mm)	(d) Inside Height (in.) (mm)	Slide Spacing (in.) (mm)	Pan no.	Capacity size (in.)	Approx. Pkd. Wt. (lbs.) (kg)
FL199-H8N	69¾ 1772	28 724	33½ 851	52¾ 1340	1½ 38	34	18 x 26	258 117
FL199-H4N	69¾ 1772	28 724	33½ 851	52¾ 1340	3 76	17	18 x 26	271 123
						17	14 x 18	
						14	20 x 24	
						34	12 x 20	
FL199-HVN	69¾ 1772	28 724	33½ 851	52¾ 1340	Adjustable Min. 3 76	16*	15 x 20	287 130
						32*	10⅞ x 19¾	
						16*	18 x 26	
						22*	11⅓ x 20	
						11*	20 x 20	
						22*	12 x 18	
						11*	20 x 22	
						22*	12 x 20	
						11*	20 x 24	
						22*	13 x 18	
						22*	14 x 18	

NOTE: Brakes are standard on two casters, for the units listed above.

## ACCESSORY

### Model

VS4N Extra Vari-slides (for FL199-HVN only)  
(will take 5 extra pr. max.)

Standard on unit listed above. May be added to previously purchased units.

\*Based on 4½" spacing