


DL- BR 60-200/ T plus



Technical Specifications:

Type:	DL- BR 60-200/ T plus
Power:	60/30/15/7,5 W
Frequency Range:	90-19.160 Hz
SPL 1W/1m:	91,9 dB
SPL Pmax/1m:	110,9 dB
Dimensions:	270x190 mm
Ceiling Cut- out:	245 mm
Temperature range:	°C
Dispersion angle (-10dB):	180° (H) / 180° (V)
Weight:	4,30 kg
Packing Unit:	8
Protection Class:	
Fire Protection (DIN4102):	
Mounting:	Screws
Connector:	
Colour:	RAL 9010

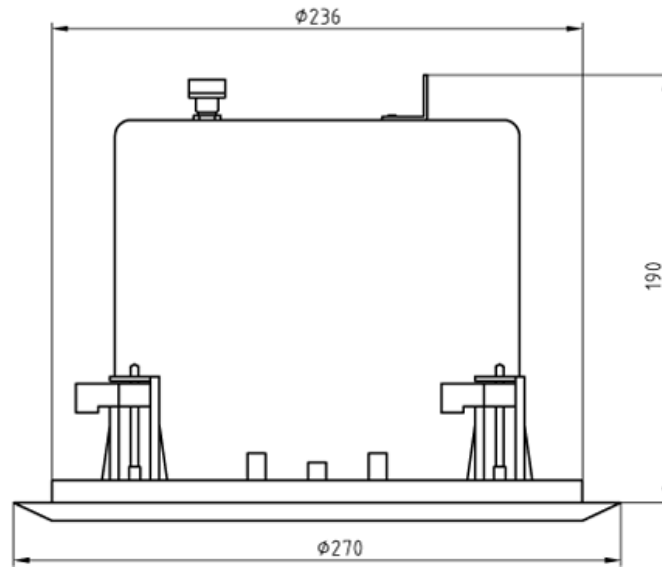


Product Attributes:




DL- BR 60-200/ T plus

Frequency Diagrams:

Sound Pressure Level

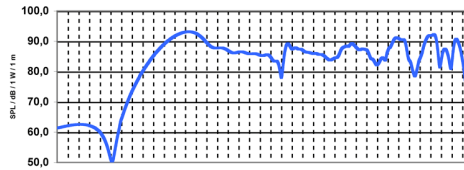


Impedance

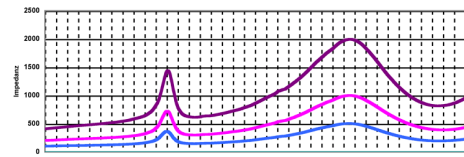


Polar Diagrams (H)


Top View Hor. Polarplots 250 Hz Octave 6 dB/div

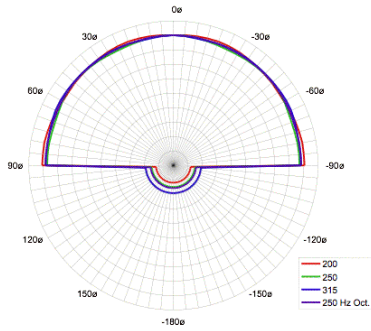


Top View Hor. Polarplots 500 Hz Octave 6 dB/div

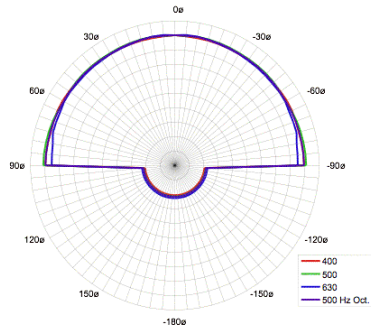


Top View Hor. Polarplots 1k Hz Octave 6 dB/div

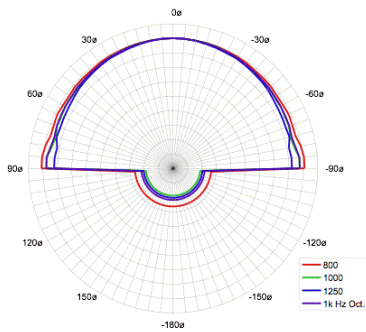


Top View Hor. Polarplots 2k Hz Octave 6 dB/div

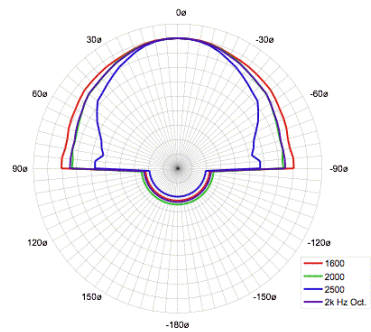

Top View Hor. Polarplots 4k Hz Octave 6 dB/div

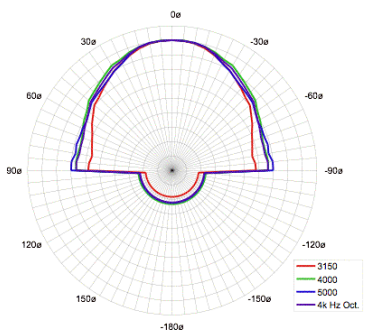

Top View Hor. Polarplots 8k Hz Octave 6 dB/div

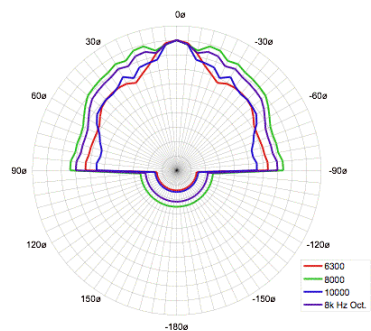

Measurements according to DIN IEC 268-5 | RoHS compliant (2002/95/ EG)

Please note: Because of many different types of ceiling materials and ceiling strengths we recommend to build in a sample of the speaker to match the requirements accurately.