

Datalogic Gryphon/GM4100 QuickScan Lite/QW2100 Configuration Barcodes

If the scanner is not scanning anything relink it to the base
Scan the Unlink barcode and then put the scanner in the base.




Unlink


Disable UPC check Digits.



ENTER/EXIT PROGRAMMING MODE

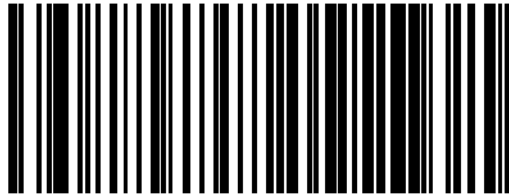

UPC-A Check Character Transmission = Don't Send

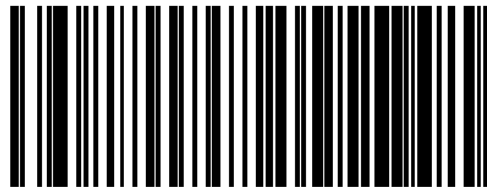

UPC-E Check Character Transmission = Don't Send



ENTER/EXIT PROGRAMMING MODE



Add Enter After Scan

Enter (CR) Suffix



Remove Enter After Scan

Disable Suffix

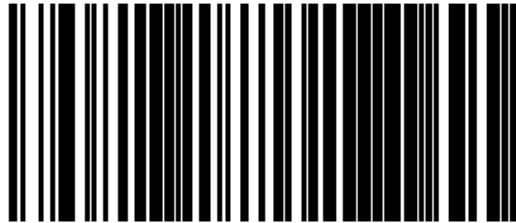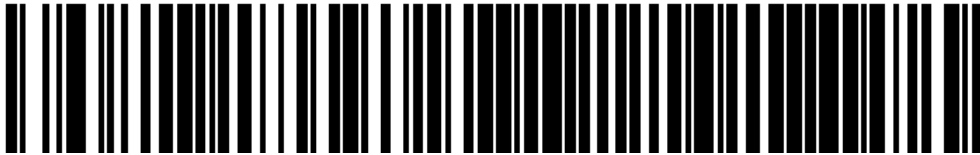

Restore USA Factory Configuration