

Thank you for purchasing the Wouxun KG-905G portable GMRS radio.

Your feedback makes our products better. Please share your thoughts.

[feedback@buytwowayradios.com](mailto:feedback@buytwowayradios.com)  
[www.buytwowayradios.com](http://www.buytwowayradios.com)

## Contents

<b>Safety Information</b> .....	<b>5</b>
FCC Licensing Information.....	8
<b>Getting Started</b> .....	<b>9</b>
Feature Summary.....	9
Front Panel Guide .....	10
Right / Left Side Guide .....	11
Display Guide.....	12
<b>Operation</b> .....	<b>13</b>
Introducing GMRS and the KG-905G.....	13
Your First Transmit.....	14
Channels and Channel Groups.....	16
Using the Repeater Channels .....	17
Adjusting Volume and Power On/Off.....	20
Channel Scan.....	20

Scanning CTCSS / DCS Codes .....	21
<b>Menu Functions .....</b>	<b>22</b>
[01: ABR] Backlight.....	22
[02: SAVE] Battery Saver.....	22
[03: TXPOW] Output Power .....	22
[04: VOX] Voice Activated Transmit.....	23
[05: VOX-DLY] VOX Delay .....	23
[06: SQL] Squelch.....	24
[07: ROGER] Roger Beep .....	24
[08: TOT] Transmit Overtime Timer .....	25
[09: TOA] Transmit Overtime Alarm .....	25
[10: VOICE] Voice Guide.....	25
[11: BEEP] Button Beeps.....	26
[12: BCL] Busy Channel Lockout .....	26

[13: RX-DTC] Receive CTCSS/DCS Tone.....	26
[14: TX-DTC] Transmit CTCSS/DCS Tone.....	27
[15: SC-REV] Scan Method.....	28
[16: CH-NAME] Channel Name.....	28
[17: PRI-CH] Priority Channel.....	29
[18: PRI-SCN] Priority Scan .....	29
[19: S-TONE] Single Tone Pulse Transmission.....	30
[20: SC-QT] CTCSS/DCS Scan Save Options .....	30
[21: PONMSG] Power On Message.....	30
[22: SCN-ADD] Scan Add / Delete.....	31
[23: SCN-GP] Scan Group.....	31
[24: SCN-CD] CTCSS/DCS Scanning.....	32
[25: AU-LOCK] Auto Lock.....	33
[26: LOCK-M] Lock Mode .....	33

[27: SECOND] Stopwatch Timer .....	33
[28: PF1] Side Key PF1 Assignment.....	34
[29: PF2] Side Key PF2 Assignment.....	34
[30: RPT-RCT] Repeater Reception Confirmation .....	34
[31: DC-VLT] Battery Voltage Display .....	35
[32: QT-SW] Tone Scanning Compatibility Check.....	35
[33: CH-MDF] Channel Display Mode.....	35
[34: RESET] Factory Reset.....	36
<b>Troubleshooting .....</b>	<b>37</b>
<b>Technical Information .....</b>	<b>39</b>
Specifications .....	39
Standard CTCSS and DCS Tones .....	41
Default GMRS Channels and Frequencies .....	43
<b>Optional Accessories.....</b>	<b>45</b>



<b>Limited Warranty .....</b>	<b>46</b>
-------------------------------	-----------

The KG-905G is an electrical apparatus, as well as a generator of RF (Radio Frequency) energy, and you should exercise all safety precautions as are appropriate for this type of device.

Please read the suggestions and warnings below before using the transceiver.

- ⚠ Keep the transceiver and accessories out of the reach of children.
- ⚠ Do not disassemble the transceiver.
- ⚠ Only use the supplied battery pack and charger or genuine Wouxun branded replacements purchased from an authorized dealer. Using improper batteries and charging accessories can damage the transceiver.
- ⚠ The supplied antenna is tuned for the frequencies supported by this transceiver. Using an aftermarket antenna can damage the transceiver.
- ⚠ Do not leave the transceiver exposed to direct sunlight or in overheated areas for an extended period of time.
- ⚠ Keep the transceiver away from dusty or humid areas.

## Safety Information

- ⚠ The transceiver should be cleaned with mild detergents and a soft brush or cloth. Avoid cleaning with aggressive chemicals.
- ⚠ NEVER transmit without a properly connected antenna.
- ⚠ If an abnormal odor or smoke is detected from the transceiver, power it off immediately, then remove the battery pack. Contact your dealer for further assistance.

### Notice

- These tips are important for safe operation of your KG-905G radio and its accessories. If the transceiver does not function normally, please get in touch with your dealer immediately.
- If you use components or accessories not produced by the Wouxun Company, Wouxun will not guarantee the safety and usability of the transceiver.



### Caution

Please read this manual before using the radio, as it includes important instructions for the safe handling, use and operation of your radio.

### FCC Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

**WARNING: MODIFICATION OF THIS DEVICE TO RECEIVE CELLULAR RADIOTELEPHONE SERVICE SIGNALS IS PROHIBITED UNDER FCC RULES AND US FEDERAL LAW.**

## **Safety Information**

### **Radio Operation and EME Exposure**

Use only an antenna designed for use with this radio and its operating frequencies. Unauthorized modifications or attachments may damage the radio and violate FCC rules.

DO NOT hold the antenna while the radio is in use.

DO NOT attempt to use the radio with a damaged antenna.

### **FCC Licensing Information**


The Wouxun KG-905G is FCC Part 95E type accepted for use on the GMRS. The KG-905G operates on General Mobile Radio Service (GMRS) frequencies according to the Federal Communications Commission (FCC) Rules in the United States. As such, a GMRS license is required to transmit on these frequencies. To obtain an FCC license for the GMRS, please go to the FCC's web site and complete the online application or request FCC Form 605.

### Feature Summary


- 30 GMRS Channels
- 8 Built-In GMRS Repeater Channels
- Up to 5 Watts Output Power
- IP67 Waterproof
- Easy-To-Read Text Display
- 16 Channel Groups
- Up to 256 Custom Channels
- Display Channel Name, Number, or Frequency
- CTCSS/DCS Tone Scan
- Split CTCSS/DCS Tone Support
- Standard and Non-Std CTCSS/DCS
- High/Low Power Selectable
- 2 Configurable Side Keys
- English Voice Guide
- PC Programming Software Support
- Channel Scan
- Priority Channel Scanning
- Single Tone Pulse Frequency
- Stopwatch Timer
- Receive (RX) Frequency Range:  
462.5500-462.7250MHz;  
467.5500-467.7250MHz
- Transmit (TX) Frequency Range:  
462.550-462.725MHz (GMRS  
Channels 1-7 and 15-22)  
467.550-467.725MHz (GMRS  
Channels 8-14 & Repeater 23-30)

## Getting Started


### Front Panel Guide

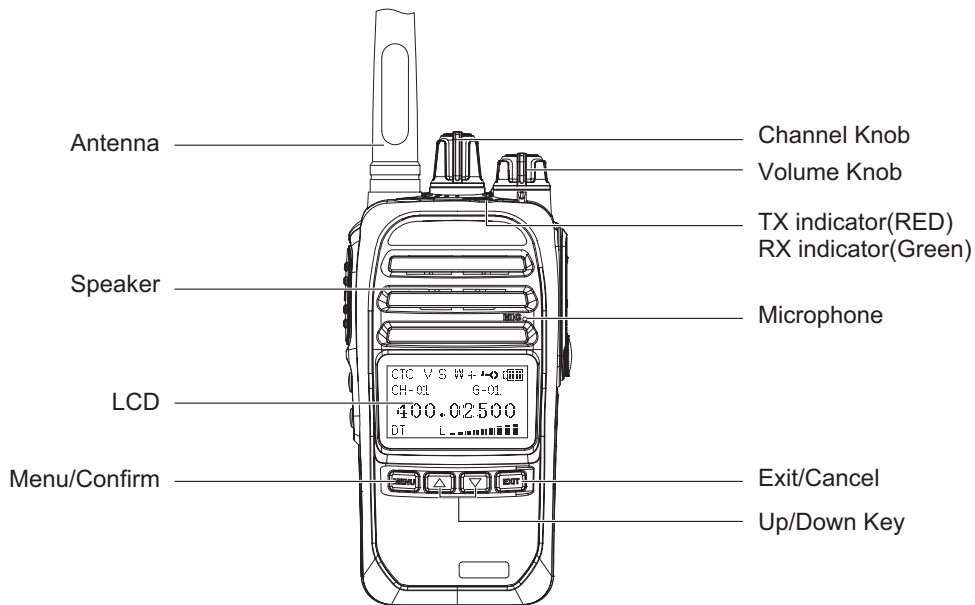

### Right / Left Side Guide

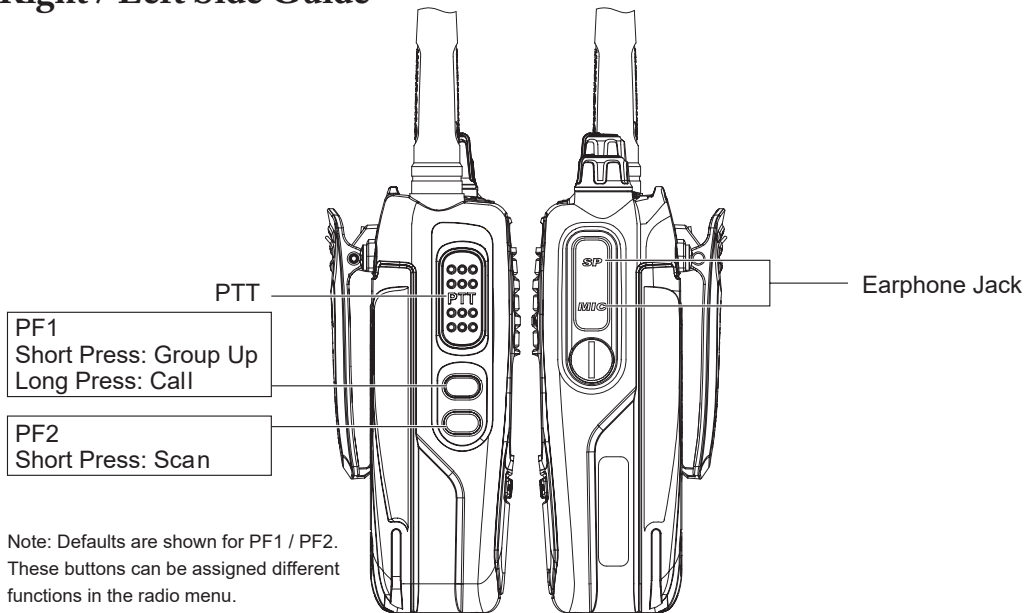

### Display Guide

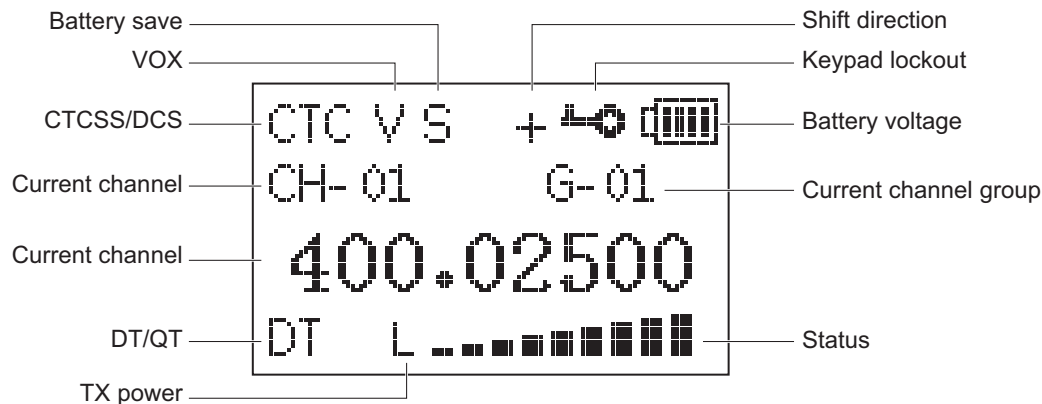

## Introducing GMRS and the KG-905G

The General Mobile Radio Service (GMRS) is a two way radio service that offers some powerful benefits. Users are allowed to transmit at high power, up to 50 watts, and use advanced equipment, such as repeaters that enable you to transmit over large areas. The GMRS requires the user to purchase a license, and a single license covers the user and their extended family for 10 years.

The KG-905G was designed to allow you to take advantage of all that GMRS has to offer and more. Right out of the box this radio is configured to allow you to transmit on the 15 high powered GMRS simplex channels, 8 low powered simplex channels, as well as the 8 repeater channels.

Read this chapter to learn the basics of using your new KG-905G radio, such as selecting a channel, transmitting and receiving, and scanning.

# Your First Transmit

## Selecting a Channel

When you power on your KG-905G for the first time, the display will likely show “GMRS01” in the center with “CH-01” and “G-01” just above. GMRS01 is the name of the currently selected channel. G-01 is the currently selected channel group, and CH-01 is the channel number within the group. Turn the Channel Knob or the [UP] / [DOWN] arrow keys to navigate through the list of channels.

As a licensed GMRS user you are allowed to use any of the channels. The channel you choose isn't as important as making sure it's the same channel the rest of your group is using. Be sure the channel you select is also supported by the equipment everyone else in your group is using.

Most rules for GMRS are the same for all channels, but there are a few differences, particularly concerning output power. The KG-905G divides the GMRS channels into 4 groups, with the following differences:

- Group 01: Standard GMRS channels 1-7. These channels are limited to 5 watts of



output power.

- Group 02: Standard GMRS channels 8-14 are limited to a half watt of output power and are for use on Low power only. Prior to FCC changes made in 2017, these channels were part of the FRS service only and were not available for GMRS.
- Group 03: Standard GMRS channels 15-22. These channels are authorized for up to 50 watts of output power. Prior to FCC changes made in 2017, this group was exclusive to GMRS (not part of FRS).
- Group 04: This is the repeater group. These channels correspond to the channels in group 03, but transmit on a special offset frequency set aside for repeaters. See page 19 for more information about using the KG-905G with repeaters.

## Transmitting and Receiving

With a channel selected, the radio is actively “listening” for an incoming signal on that channel. When a signal is detected, the transmission will be heard through the radio’s speaker. Please note, the Squelch setting (page 26) determines how strong a signal needs to be in order to be detected.

## Operation

To transmit, first be sure the channel is clear and then hold the radio a few inches from your mouth. Hold down the PTT button on the side while talking and release the PTT when finished.

## Channels and Channel Groups

The KG-905G supports channel groups, which allow you to essentially categorize channels for easier access. By default the 30 built-in channels are divided into 4 channel groups, described in the Selecting a Channel section (page 16).

The transceiver is configured out of the box to function similar to typical radios that do not support channel groups. Using the Channel Knob or the [UP] / [DOWN] keys will move to the next/previous channel. Once you reach the last assigned channel in the current group, moving to the next channel will automatically move to the first channel of the next group.

By default the [PF1] side key is assigned to the [Group-Up] function. Pressing [PF1] will move to the first channel of the next group. If currently on the highest group number with assigned channels, the radio will move back to the first channel of the first

group (G-01).

Channel groups are a great tool for power users, particularly those managing a large number of channels or who operate in various regions. Groups allow you to skip more quickly to the channel that you need. Groups also allow selective scanning. Use the [SCN-GP] menu option (page 33) to adjust the scan function to only scan a specific group number.

The KG-905G supports 16 groups with 16 channels per group. Channels can be added, deleted or reordered via the PC programming software.

## **Using the Repeater Channels**

The KG-905G is pre-configured with 8 GMRS repeater channels. The channels are in Group 04 and are named RPT-15 through RPT-22.

### **What is a Repeater?**

In basic terms, a repeater is a device that is used to increase the range of two way radios. Repeaters will receive a transmission on one frequency and simultaneously rebroadcast

## Operation

that transmission on a different frequency. Repeaters are often set up in a fixed location and connected to an antenna that is mounted at a higher elevation to provide better range than is normally available with radio-to-radio (simplex) communications.

### Locating a Repeater

Using GMRS repeaters can significantly increase the range of your radio, but just tuning to one of the repeater channels isn't necessarily going to work. You first have to be sure there is a repeater listening on that channel's frequency, and you have to be within range of that repeater.

The best resource for locating GMRS repeaters is the website [www.myGMRS.com](http://www.myGMRS.com). This site has an extensive database of GMRS repeaters throughout the United States. It is important to keep in mind that a GMRS repeater is not necessarily intended for public use. They are owned by individuals and are sometimes intended for private use or require permission to use. Before connecting to a GMRS repeater, be sure that you have permission or that the owner is fine with public use. The description on the myGMRS website usually indicates if permission is required and provides a way to get in touch with the owner.

## KG-905G Repeater Channels

Group 04 channels (RPT-15 through RPT-22) have the same receive frequency as Group 03 channels (GMRS-15 through GMRS-22). However, the transmit frequency for these channels is assigned to a frequency specifically designated as a GMRS repeater input frequency. The following are the default frequencies for these channels.

Number	Channel	Receive Frequency	Transmit Frequency
G4-1	RPT-15	462.5500	467.5500
G4-2	RPT-16	462.5750	467.5750
G4-3	RPT-17	462.6000	467.6000
G4-4	RPT-18	462.6250	467.6250
G4-5	RPT-19	462.6500	467.6500
G4-6	RPT-20	462.6750	467.6750
G4-7	RPT-21	462.7000	467.7000
G4-8	RPT-22	462.7250	467.7250

### Adjusting Volume and Power On/Off

Rotate the volume knob clockwise to power on the radio. To power off the radio, rotate the volume knob counter-clockwise until a click is felt.

To adjust the volume, use the volume knob when the radio is powered on. Turning the knob clockwise increases the volume, counter-clockwise decreases it.

### Channel Scan

By default the [PF2] key is assigned to the SCAN function. In standby, press the [PF2] key to initiate a channel scan. The radio will scan each channel for activity, starting from the current channel. Pressing the [UP] / [DOWN] keys while scanning will change the direction of the scan from low to high ([UP]) or high to low ([DOWN]). Press any other key to stop the scan. Refer to the Scan Method menu item (p 30) for more information on the types of scans available.

Scan can be configured to scan all channel groups (default), or any specific channel group. Refer to the Scan Group menu item (p 33) to adjust this setting.

Individual channels can be added or removed from the scan list using the Scan Add menu item (p 33).

## **Scanning CTCSS / DCS Codes**

The KG-905G is equipped with the ability to scan an incoming signal for a CTCSS or DCS tone and update the current channel's tone settings once the tone is identified.

To activate CTCSS / DCS scan, press the [MENU] key and navigate to the SCN-CD menu item. Press [MENU] again to enter the menu item and you will see "SEEK QT" on the screen.

The scan will begin when a signal is received. The scan will stop when the signal ends and resume from where it left off the next time the signal is received, until it identifies the correct tone. Use the [UP]/[DOWN] arrow keys to scan in a different direction. Use the [PF2] side key to toggle between scanning the standard CTCSS, positive DCS, and negative DCS tone list.

See the SCN-CD menu item (p 34) for more information.

## **Menu Functions**

### **[01: ABR] Backlight**

Function: Sets the timeout of the LCD display backlight while the radio is in standby. The timer can be set from 1-30 seconds in one second increments. It can also be set to turn off immediately or always remain on.

Options: OFF/1-30S

Default: 10 Seconds

### **[02: SAVE] Battery Saver**

Function: Activate the battery saver feature.

Options: ON/OFF

Default: ON

### **[03: TXPOW] Output Power**

Function: Sets the transmit power of the radio. High power is 5 watts, Low power is one half watt. Note, the transmit power for GMRS channels 8-14 (channel group 2) are restricted by the FCC to .5 watts and can be used on low power only.



Options: HIGH/LOW

Default: HIGH

### [04: VOX] Voice Activated Transmit

Function: The VOX function allows you to transmit without pressing the PTT key. The VOX function will detect that you are speaking into the microphone and then automatically begin transmitting. VOX gain levels of 1-9 are provided to allow you to adjust the voice detection sensitivity. Use the VOX Delay menu option (menu 5) to adjust the time to wait to turn off transmit after a VOX transmission begins.

Options: OFF/1-9 (level)

Default: OFF

### [05: VOX-DLY] VOX Delay

Function: Set the number of seconds to delay turning off transmit after the VOX function no longer detects audio.

Options: OFF/1-5 (seconds)

Default: OFF

## Menu Functions

### [06: SQL] Squelch

Function: The squelch function mutes the speaker when no signal is detected. Adjusting the squelch sensitivity allows you to control how strong of a signal is required in order to unmute the speaker. Selecting a lower number will allow weaker signals to be heard, higher numbers require a stronger signal. Selecting [0] will unmute the speaker at all times.

Options: 0-9

Default: 5

### [07: ROGER] Roger Beep

Function: Enables an audible roger beep prompt during transmission.

Options: OFF/BOT/EOT/BOTH

Default: OFF

BOT: Sets the roger beep prompt at the beginning of transmission

EOT: Sets the roger beep at the end of transmission

BOTH: Sets the roger beep at the beginning and end of transmission

### [08: TOT] Transmit Overtime Timer

Function: When the transmission time exceeds the time set by the Transmit Overtime Timer, the unit will emit an error prompt and stop transmitting.

Options: 15-900 seconds (15 second increments)

Default: 60 seconds

### [09: TOA] Transmit Overtime Alarm

Function: The Transmit Overtime Alarm warns when the Transmit Overtime Timer (TOT) is about to be exceeded. The red TX indicator LED (top of the radio) flashes to indicate an alarm. The alarm can be set to a maximum time limit of 10 seconds and indicates the amount of time prior to the Transmit Overtime Timer expiring that the warning will begin.

Options: OFF/1S-10S

Default: 5S

### [10: VOICE] Voice Guide

Function: Disable or select language for voice prompts.

## Menu Functions

Selectable: OFF/ENGLISH/CHINESE

Default: ENGLISH

### [11: BEEP] Button Beeps

Function: Enables an audio prompt to alert the operator of a key press, input or fault.

Selectable: ON/OFF

Default: ON

### [12: BCL] Busy Channel Lockout

Function: Enabling Busy Channel Lockout prevents the transceiver from transmitting on a selected channel while another station or group is transmitting on it.

Options: ON/OFF

Default: ON

### [13: RX-DTC] Receive CTCSS/DCS Tone

Function: Sets the receiving CTCSS or DCS code for the selected channel. Use the arrow keys to select your preferred code and then MENU to confirm. Once the menu option is selected, use the PF2 side key to toggle between the standard

CTCSS, positive DCS, and negative DCS tone list.

Options: OFF/CTCSS/DCS+/DCS-

Default: OFF

### [14: TX-DTC] Transmit CTCSS/DCS Tone

Function: Sets the transmitting CTCSS or DCS code for the selected channel. Use the arrow keys to select your preferred code and then [MENU] to confirm. Once the menu option is selected, use the [PF2] side key to toggle between the standard CTCSS, positive DCS, and negative DCS tone list.

Options: OFF/CTCSS/DCS+/DCS-

Default: OFF

### Note

- Use the PF2 side key to toggle between CTCSS and DCS tone lists.
- Non-standard CTCSS/DCS codes can be assigned using the PC programming software.

## Menu Functions

### [15: SC-REV] Scan Method

Function: Scan mode settings

Options: TO/CO/SE

Default: TO

TO: When a signal is detected, scanning stops. Scanning will resume if no operation is carried out within 5 seconds. Pressing PTT will transmit on the currently selected channel.

CO: When a signal is detected, scanning stops and resumes 5 seconds after the signal is lost. Pressing PTT will transmit on the currently selected channel.

SE: When a signal is detected, scanning stops. Pressing PTT will transmit on the channel where the signal was detected.

### [16: CH-NAME] Channel Name

Function: Allows you to edit the name for a channel. To edit a channel name, press the [UP] and [DOWN] keys to select a character. Use the [PF2] side key to move to the next character. The [PF1] side key will move to the previous character. When you finish editing the name, press [MENU] to save.

Options: 6 Characters

Default: None

### [17: PRI-CH] Priority Channel

Function: Selects the priority channel. This is used during scanning when the Priority Scan (menu option 18) feature is enabled. To select a priority channel, use the [UP] and [DOWN] keys to select a channel number and the channel knob to select the channel group. Note, “NULL” will be shown to the right of non-assigned channels.

Options: 16 channels in 16 groups

Default: CHGP: 01, CH: 01

### [18: PRI-SCN] Priority Scan

Function: Activates scanning of the Priority Channel (menu option 17).

Options: ON/OFF

Default: OFF

## Menu Functions

### [19: S-TONE] Single Tone Pulse Transmission

Function: Activates the tone alert. Some relay systems used for single-tone pulse transmissions need a single-tone pulse signal to activate. To send the tone, press the [PF1] side key while holding down [PTT].

Options: 1000Hz/1450Hz/1750Hz/2100Hz

Default: 1750Hz

### [20: SC-QT] CTCSS/DCS Scan Save Options

Function: This item determines how a CTCSS or DCS tone is saved after a CTCSS/DCS scan.

Options: R-CT/T-CT/RT-CT

Default: R-CT

R-CT: Saves the scanned tone to the RX-DTC setting

T-CT: Saves the scanned tone to the TX-DTC setting.

RT-CT: Saves the scanned tone to both.

### [21: PONMSG] Power On Message



Function: Select the item displayed when the radio is powered on.

Options: WELCOM/BATT-V

Default: WELCOM

WELCOM: A customizable message. Set to “KG-905G” by default, and can be customized in the programming software.

BATT-V: Battery voltage

### [22: SCN-ADD] Scan Add / Delete

Function: Add or remove a channel to/from the list of channels to scan.

Options: ADD/DEL

Default: Repeater channels (channel group 4) are removed from the scan list by default. Other channels are added to the list.

### [23: SCN-GP] Scan Group

Function: Allows selection of a specific channel group for scan, or all groups. When a group number is selected, only channels in that group will be scanned when the Scan feature is activated.

Options: ALL/1-16

## Menu Functions

Default: ALL

### [24: SCN-CD] CTCSS/DCS Scanning

Function: Scans the incoming signal for CTCSS or DCS tones to identify or confirm the correct tone. This function must be activated while receiving a signal.

Options: None. Choose the function and press [MENU] to activate the scan.

Note: The scan will stop when the signal ends and resume from where it left off the next time the signal is received, until it identifies the correct tone. Use the [UP]/[DOWN] arrow keys to scan in a different direction. Use the [PF2] side key to toggle between the standard CTCSS, positive DCS, and negative DCS tone list.

### Note

- Use the [UP]/[DOWN] arrow keys to scan in a different direction.
- Use the PF2 side key to toggle between CTCSS and DCS tone lists.

### [25: AU-LOCK] Auto Lock

Function: Automatically locks the keypad after a specified number of seconds.

Options: OFF/10-60 seconds (10 second increments)

Default: OFF

Note: To unlock the radio, hold the [EXIT] key for 3 seconds.

### [26: LOCK-M] Lock Mode

Function: Select which keys are disabled when the radio is locked.

Options: KEY/KEY+PTT/KEY+ENC/ALL

Default: KEY

KEY: Locks the front keypad and [PF1] and [PF2] side keys.

KEY+PTT: Locks the front keypad, [PF1] and [PF2] side keys, and [PTT].

KEY+ENC: Locks the front keypad, [PF1] and [PF2] side keys, and channel knob.

ALL: Locks the front keypad, [PF1] and [PF2] side keys, [PTT], and channel knob.

### [27: SECOND] Stopwatch Timer

Function: Activates the radio's stopwatch feature. If ON, activate the stopwatch by

## Menu Functions

pressing [EXIT] from the main screen.

Options: ON/OFF

Default: OFF

### [28: PF1] Side Key PF1 Assignment

Function: Assigns a function to the [PF1] side key. A function can be assigned to both a short and a long button press.

Options: OFF/SCAN/LAMP/VOX/TXPOW/CALL/ALARM/SOS/TALK-A/  
GRP-UP/GRP-DO

Default: GRP-UP (Short), CALL (Long)

### [29: PF2] Side Key PF2 Assignment

Function: Assigns a function to the [PF2] side key.

Options: OFF/SCAN/LAMP/CALL/ALARM/SOS/TALK-A/GRP-UP/GRP-DO

Default: SCAN

### [30: RPT-RCT] Repeater Reception Confirmation

Function: Provide a reception confirmation when the receiving repeater is offline.

Options: ON/OFF

Default: OFF

### [31: DC-VLT] Battery Voltage Display

Function: Provides the current battery voltage.

Options: None

Default: None

### [32: QT-SW] Tone Scanning Compatibility Check

Function: Check that the detected tones are compatible when scanning.

Options: ON/OFF

Default: OFF

### [33: CH-MDF] Channel Display Mode

Function: Select how a channel is displayed on the main screen.

Options: CH/NAME/CHFREQ

Default: NAME

CH: Display only the internal radio channel number (Example: CH-01)

## Menu Functions

NAME: Display the name assigned to the channel (Example: GMRS01)

CHFREQ: Display the receive frequency (Example: 462.56250)

### [34: RESET] Factory Reset

Function: Resets the transceiver to factory defaults.

Options: ALL

Default: ALL

ALL: Resets all of the function settings and channel parameters to factory defaults.

Before assuming your KG-905G is defective, please check the following list of possible problems and solutions. The RESET option provided in the menu can be used to restore factory standard settings and programming, and will often solve issues.

Problem	Solution
Receive indicator is on but no sound is heard.	<ul style="list-style-type: none"><li>■ Check volume level.</li><li>■ Disable CTCSS/DCS or be sure setting matches incoming transmission.</li><li>■ Check squelch settings.</li></ul>
Keypad is unresponsive	<ul style="list-style-type: none"><li>■ Check if keypad has been locked.</li><li>■ Check if other keys are currently pressed</li></ul>
Unwanted interference is being received	<ul style="list-style-type: none"><li>■ Enable CTCSS or DCS tone to filter out unwanted transmissions.</li><li>■ Use a different channel</li></ul>
Transceiver transmits without PTT being pressed	Check if the VOX hands-free mode is active. If intentionally using VOX mode, adjust the sensitivity level.

## Troubleshooting

Problem	Solution
Cannot power on	<ul style="list-style-type: none"><li>■ Check that the battery pack is attached correctly.</li><li>■ Check that the battery pack is fully charged.</li></ul>
Battery life lower than expected	<ul style="list-style-type: none"><li>■ Be sure the charger indicates the battery is fully charged.</li><li>■ The battery pack capacity will naturally diminish over a number of charge cycles. This is the case with all lithium batteries.</li></ul>



## Specifications

<b>Entire Radio</b>	
Frequency Range	462.5500-462.7250MHz (Group 3) 462.5625-462.7125MHz (Group 1) 467.5500-467.7250MHz (Group 4) 467.5675-467.7125MHz (Group 2)
Work Mode	F3E
Work Temperature	-20°C~40°C / -4°F~104°F
Antenna Impedance	50Ω
Power Supply	7.4VDC
Weight	12oz / 340g
Size	5.25 × 2.5 × 1.5 (in) / 132 × 62 × 37(mm)

<i>Receiver band</i>	<i>Group 1/3/4</i>	<i>Group 2</i>	<i>Transmitter band</i>	<i>Group 1/3/4</i>	<i>Group 2</i>
Adjacent Channel Selectivity	≤70dB	≤60dB	Modulation	16K F3E	11K F3E
Inter-modulation	≤65dB	≤60dB	Adjacent Channel Power	≥70dB	≥60dB
Spurious Response	≤70dB	≤70dB	Spurious	≥60dB	≥60dB
Audio Response	+1~3dB (0.3~3KHz)	+1~3dB (0.3~2.55KHz)	Audio Response	+1~3dB (0.3~3KHz)	+1~3dB (0.3~2.55KHz)
Squelch Rate	≥45dB	≥40dB	Max Frequency Offset	±5KHz	±2.5KHz
Audio Distortion	≤5%		Frequency Stability	±2.5ppm	
			Audio Distortion	≤5%	

## Standard CTCSS and DCS Tones

The following is a list of the standard CTCSS and DCS tones supported by the KG-905G. Many FRS or GMRS radios display a number instead of a specific tone. The number to the left of the tone matches what is used by most manufacturers.

### CTCSS

1	67.0	11	94.8	21	131.8	31	171.3	41	203.5
2	69.3	12	97.4	22	136.5	32	173.8	42	206.5
3	71.9	13	100.0	23	141.3	33	177.3	43	210.7
4	74.4	14	103.5	24	146.2	34	179.9	44	218.1
5	77.0	15	107.2	25	151.4	35	183.5	45	225.7
6	79.7	16	110.9	26	156.7	36	186.2	46	229.1
7	82.5	17	114.8	27	159.8	37	189.9	47	233.6
8	85.4	18	118.8	28	162.2	38	192.8	48	241.8
9	88.5	19	123.0	29	165.5	39	196.6	49	250.3
10	91.5	20	127.3	30	167.9	40	199.5	50	254.1

## Technical Information

DCS										76	D454N	92	D624N
1	DN017	16	D072N	31	D156N	46	D252N	61	D346N	77	D455N	93	D627N
2	D023N	17	D073N	32	D162N	47	D255N	62	D351N	78	D462N	94	D631N
3	D025N	18	D074N	33	D165N	48	D261N	63	D356N	79	D464N	95	D632N
4	D026N	19	D114N	34	D172N	49	D263N	64	D364N	80	D465N	96	D645N
5	D031N	20	D115N	35	D174N	50	D265N	65	D365N	81	D466N	97	D654N
6	D032N	21	D116N	36	D205N	51	D266N	66	D371N	82	D503N	98	D662N
7	D036N	22	D122N	37	D212N	52	D271N	67	D411N	83	D506N	99	D664N
8	D043N	23	D125N	38	D223N	53	D274N	68	D412N	84	D516N	100	D703N
9	D047N	24	D131N	39	D225N	54	D306N	69	D413N	85	D523N	101	D712N
10	D050N	25	D132N	40	D226N	55	D311N	70	D423N	86	D526N	102	D723N
11	D051N	26	D134N	41	D243N	56	D315N	71	D431N	87	D532N	103	D731N
12	D053N	27	D143N	42	D244N	57	D325N	72	D432N	88	D546N	104	D732N
13	D054N	28	D145N	43	D245N	58	D331N	73	D445N	89	D565N	105	D734N
14	D065N	29	D152N	44	D246N	59	D332N	74	D446N	90	D606N	106	D743N
15	D071N	30	D155N	45	D251N	60	D343N	75	D452N	91	D612N	107	D754N

## Default GMRS Channels and Frequencies

### Simplex Channels

Ch.	Name	Frequency	Power
G1-1	GMRS01	462.5625	5W
G1-2	GMRS02	462.5875	5W
G1-3	GMRS03	462.6125	5W
G1-4	GMRS04	462.6375	5W
G1-5	GMRS05	462.6625	5W
G1-6	GMRS06	462.6875	5W
G1-7	GMRS07	462.7125	5W
G2-1	GMRS08	467.5675	0.5W
G2-2	GMRS09	467.5875	0.5W
G2-3	GMRS10	467.6125	0.5W
G2-4	GMRS11	467.6375	0.5W


Ch.	Name	Frequency	Power
G2-5	GMRS12	467.6625	0.5W
G2-6	GMRS13	467.6875	0.5W
G2-7	GMRS14	467.7125	0.5W
G3-1	GMRS15	462.5500	5W
G3-2	GMRS16	462.5750	5W
G3-3	GMRS17	462.6000	5W
G3-4	GMRS18	462.6250	5W
G3-5	GMRS19	462.6500	5W
G3-6	GMRS20	462.6750	5W
G3-7	GMRS21	462.7000	5W
G3-8	GMRS22	462.7250	5W

## Technical Information


### Repeater Channels

Ch.	Name	Receive Frequency	Transmit Frequency	Max Power
G4-1	RPT-15	462.5500	467.5500	5 Watts
G4-2	RPT-16	462.5750	467.5750	5 Watts
G4-3	RPT-17	462.6000	467.6000	5 Watts
G4-4	RPT-18	462.6250	467.6250	5 Watts
G4-5	RPT-19	462.6500	467.6500	5 Watts
G4-6	RPT-20	462.6750	467.6750	5 Watts
G4-7	RPT-21	462.7000	467.7000	5 Watts
G4-8	RPT-22	462.7250	467.7250	5 Watts


The scanning receiver frequency is 400-480MHz.




Eliminator



Car charger



Speaker/Mic



USB programming cable



Headset

**Shop Wouxun Accessories:**

[www.buytwowayradios.com/accessories/by-radio-brand/wouxun-radio-accessories.html](http://www.buytwowayradios.com/accessories/by-radio-brand/wouxun-radio-accessories.html)

## Limited Warranty

We warrant this product against defects in material and workmanship as follows:

Radio and its original primary components for a period of one (1) year from date of purchase.

Accessories (including battery, charger, belt clip, antenna and adapter) for a period of six (6) months from date of purchase.

This warranty is limited to the repair and replacement of the defective components and is not valid if the radio has been tampered with, misused, abused, used with unapproved accessories, subjected to unauthorized disassembly, unauthorized repair, replacement of unauthorized parts, unavoidable conditions, human destruction, water damage or environmental damage. This warranty is void if the serial number is defaced or altered.

If service, repair or replacement is required within the warranty period, such repair or replacement will be made free of charge by the dealer through whom the equipment was purchased. If the owner requires any service or repair from any dealer through whom the equipment was not purchased, the cost of repair must be made by the owner.

This warranty is valid for the original purchaser or owner of the product and is not



transferable.

THIS LIMITED WARRANTY IS THE ENTIRE WARRANTY FOR THIS PRODUCT AND IS IN LIEU OF ALL OTHER WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY DOES NOT COVER OR PROVIDE FOR THE REIMBURSEMENT OR PAYMENT OF ANY DAMAGES, INCLUDING INCIDENTAL OR CONSEQUENTIAL DAMAGES RELATED TO THE USE OF THIS PRODUCT. Some states do not allow this exclusion or limitation of damages so the above limitation or exclusion may not apply to you. This warranty is valid only within the United States of America.

Note: Product features, specifications and warranty terms are subject to revision by the manufacturer without notice. We are not responsible for unintentional errors or omissions on product packaging.

#### FCC Warning:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

SAR tests are conducted using standard operating positions accepted by the FCC with the device transmitting at its highest certified power level in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value. Before a new model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the exposure limit established by the FCC. Tests on each product are performed in positions and locations as required by the FCC.

For body worn operation, this device has been tested and meets the FCC RF exposure guidelines when used with an accessory designated for this product or when used with an accessory that contains no metal.

To maintain compliance with the FCC's RF exposure guidelines, hold the transmitter at least 2.5cm from your face and speak in a normal voice, with the antenna pointed up and away from the face.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to comply with the FCC RF exposure requirements, the antenna installation must comply with following:

Users must be fully aware of the hazards of the exposure and able to exercise control over their RF exposure to qualify for the higher exposure limits.

Your wireless hand-held portable transceiver contains a low power transmitter. This product sends out radio frequency (RF) signals when the Push-to-Talk (PTT) button is pressed.

The device is authorized to operate at a duty factor not to exceed 50%.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.