

# **Mini 30mW**

# **User's Manual**

## Copyright

Copyright of this manual belongs to R-TRON, Inc.

Reproduction, distribution or revision of part or all of contents in this manual in any form without written permission of R-TRON, Inc. is prohibited.

## Registered Trademark

R-TRON  are registered trademarks of R-TRON, Inc.

Other products and company names mentioned herein this manual might be trade marks or trade names of their respective owners.

# RF Repeater

Band Selective Type

## Sprint PCS

The results of using the information not mentioned in this manual or the risk of misunderstanding this document remain with the user.

The information in this manual is subject to change due to function enhancement, change of design, etc. If you want the modified manual or have any question on this manual, please contact us with information below:

Address : Customer Support Center, Jisan IT Venture Bldg., 2/3F, 1004-9/10, Doksan-Dong, Gumcheon-Gu, Seoul 153-829 , South Korea

Tel : +82-2-896-4101

Copyright © 2005 R-TRON, Inc. All Rights Reserved

## **Revision History**

| Version | Date of revision | Reason for revision | Revision Description |
|---------|------------------|---------------------|----------------------|
| V0.1    | Agust.11, 2005   |                     |                      |
|         |                  |                     |                      |

## **RF EXPOSURE INFORMATION**

*The antenna used for this transmitter must not exceed 12dBi and must be installed to provide a minimum separation distance of 20cm from all persons.*

# Contents

|  |    |
|--|----|
| <b>1. Overview</b>                         | 6  |
| <b>2. Repeater Design</b>                  | 7  |
| 2.1 System specifications                  | 7  |
| 1. Mechanical and Environmental conditions | 7  |
| 2. System Electrical Specifications        | 7  |
| A. Mini 30 (30mW) Repeater                 | 7  |
| B. Mini 30 (30mW) Antenna                  | 9  |
| <b>3. Repeater Configurations</b>          | 10 |
| 3.1 Body                                   | 10 |
| 3.2 Antenna Unit                           | 11 |
| 1. Donor Antenna (Yagi Antenna)            | 11 |
| 2. Distribution Antenna                    | 11 |
| A. Internal Patch Antenna                  | 11 |
| B. External Omni Antenna (Optional)        | 12 |
| 3.3 AC to DC SMPS Adapter                  | 12 |
| <b>4. Block Diagram</b>                    | 13 |
| 4.1 Downlink signal path                   | 13 |
| 4.2 Uplink signal path                     | 13 |

## 1. Overview

Mini 30 will bring in those weak cellular phone signals reducing dropped calls and allowing you to use cell phones ...even deep inside a building.

At the heart of all of our systems is a Mini 30 designed to improve coverage for wireless products within a facility. Combined with interior ceiling mounted low profile antennas, and an exterior mounted Yagi or Patch Antenna, the Mini 30 boosts the signal level for distribution within the interior areas, reducing the problem of dropped calls and signal fades. The Mini 30 can also be used in mobile applications, improving voice quality and range in areas of poor coverage.

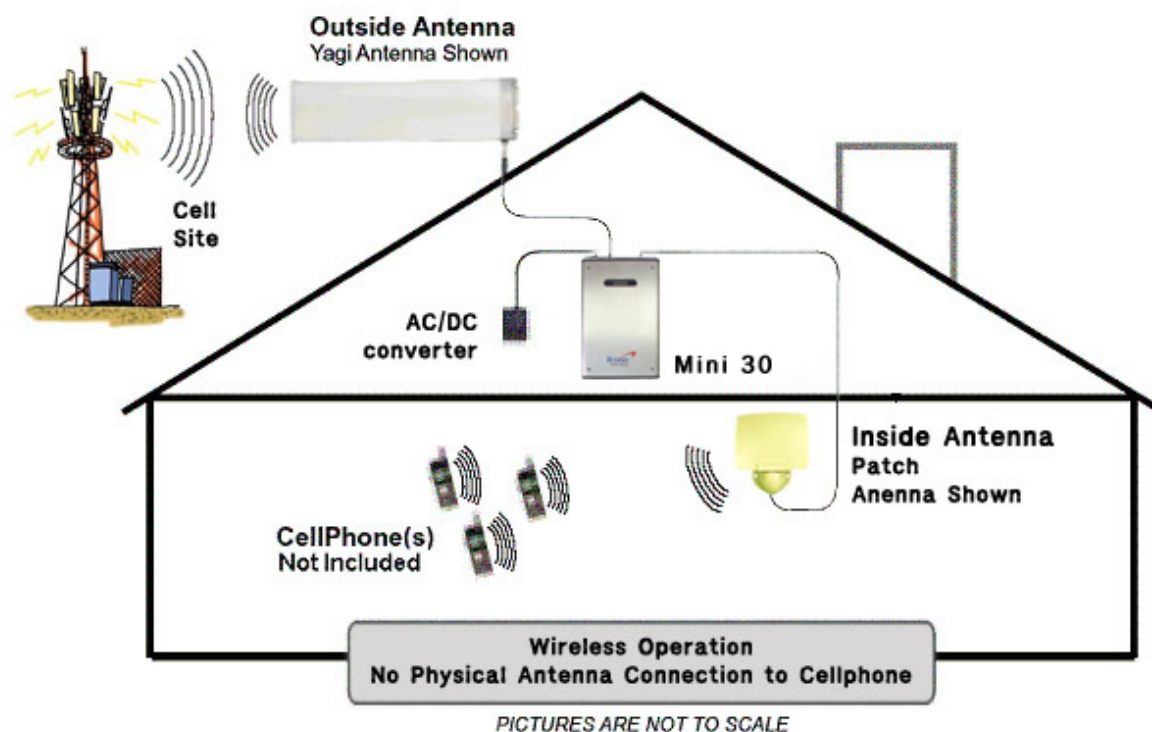


Figure 2.1 Fundamental configuration of **Mini 30**

All of our packages are engineered using only FCC approved amplified components. They are designed not to disrupt local wireless communication but to add service to areas that otherwise would not have the coverage that the customer requires. All of Mini 30 is easily installed.

## 2 Repeater Design

The Mini 30 is housed in an aluminum chassis that is waterproof for indoor use. The chassis has a design suited for indoor use.

The Mini 30 has several RF amplifiers and components on a board with an aluminum body. Furthermore, the RF components are implemented within RF CMOS IC or MMIC technologies. A board that contains several RF amplifiers and components is shielded under a metal cover. This amplifier board is different types depending on the supported system.

The followings are the Technical Specification of Mini 30.

### 2.1 System specification

#### 2.1.1 Mechanical and Environmental conditions

| Parameter             | Specification                                 |
|-----------------------|---|
| Power supply          | AC 100~240V ; 50/60Hz $\pm$ 5%                |
| Operating temperature | 0 ~ +50 °C                                    |
| Humidity              | 10% ~ 85%                                     |
| Consumption power     | < 24W   |
| RF connector          | N-female                                      |
| Size(W X L X H)       | 160 X 252 X 80(mm) / 6.29 X 9.92 X 3.15(Inch) |
| Weight                | 3.7(kg) / 8.16 (lbs)                          |

Table 2-1. Mechanical & Environmental Conditions

## 2.1.2 Electrical Specifications

### A. Mini 30 Repeater

| Parameter                               |                      | Specification             | Remark  |
|---|----------------------|---------------------------|---|
| Frequency Band                          | Down Link            | 1930 – 1990 MHz           | Total 60 MHz  |
|   | Up Link              | 1850 – 1910 MHz           | Total 60 MHz  |
| Transmit<br>Maximum Power               | Down Link            | +14.8 dBm (30mW)          | Total Power on CDMA   |
|   | Up Link              |                           |   |
| Output Power on Coupled<br>Service Port |                      | MAX. 5 dBm                | Total Power on CDMA   |
| Gain                                    |                      | 70dB ± 1 dB               |   |
| Gain Range                              |                      | 60 ~ 70dB                 |   |
| Gain Step                               |                      | 10 dB (1 dB Step)         |   |
| Noise Figure                            |                      | < 5 dB                    |   |
| Bandwidth(Type 1)                       |                      | 5 MHz BW(Max. 3FA)        | Any 5MHz of Total 60MHz<br>(A1,A2,A3,D,B1,B2,B3,E,F,C1,C2,C3)                           |
| Bandwidth(Type 2)                       |                      | 10 MHz BW(Max. 7FA)       | Any 10MHz of Total 60MHz<br>(A1A2,A2A3,A3D,DB1,B1B2,B2B3,<br>B3E,EF,FC1,C1C2,C2C3)      |
| Bandwidth(Type 3)                       |                      | 15 MHz BW(Max. 7FA)       | Any 15MHz of Total 60MHz<br>(A,A2A3D,A3DB1,DB1B2,B,B2B3E,<br>B3EF,EFC1,FC1C2,C)         |
| Bandwidth(Type 4)                       |                      | 20 MHz BW(Max. 7FA)       | Any 20MHz of Total 60MHz<br>(AD,A2A3DB1,A3DB1B2,DB,BE,B2<br>B3EF,B3EFC1,EFC1C2,FC1C2C3) |
| Passband Ripple                         |                      | ≤ 2.5 dB P-P              | Operating Bandwidth   |
| Delay                                   |                      | < 12 microseconds         |   |
| VSWR                                    |                      | ≤1.5                      |   |
| In-band Noise                           | Fc±885kHz ≥ -45 dBc  |                           | RBW = 30 kHz  |
|   | Fc±1.98MHz ≥ -50 dBc |                           | RBW = 30 kHz  |
| Spurious Emissions                      |                      | < -13 dBm (Fc ± 2.25 MHz) | RBW = 1 MHz   |

Table 2-2. Repeater Features

**B. Mini 30 (30mW) Antenna**

| Parameter                   |            | Specification  |                       |                                  |                           |
|-----------------------------|------------|----------------|-----------------------|----------------------------------|---------------------------|
|                             |            | Donor          | Internal Distribution | External Distribution (Optional) |                           |
|                             |            | Yagi           | Patch                 | Patch                            | Omni                      |
| Frequency range             |            | 1850 - 1990MHz |                       |                                  |                           |
| Frequency bandwidth         |            | 140MHz         |                       |                                  |                           |
| Antenna gain                |            | Min. 12dBi     | 2dBi                  | 8dBi                             | 2dBi                      |
| Beam width                  | Horizontal | Min. 28°       | 70°                   | 70°                              | 360°                      |
|                             | Vertical   | Min. 28°       | 70°                   | 70°                              | 70°                       |
| Polarization                |            | Vertical       |                       |                                  |                           |
| VSWR                        |            | Max. 1: 1.5    | Max. 1 : 1.3          | Max. 1 : 1.3                     | Max. 1 : 1.5              |
| Power Capability            |            | 50Watts        | 10Watts               | 10Watts                          | 10Watts                   |
| Antenna Connector Port Type |            | N-Female       | -                     | N-Female (-10dB Coupling)        | N-Female (-10dB Coupling) |
| 670 / 1.48                  |            | 670 / 1.48     | 50 / 0.11             | 225 / 0.5                        | 270 / 0.6                 |
| Dimension (W x H x D)(inch) |            | 19.7x4.21x3.23 | 4.25x3.34x0.35        | 5.04x4.06x1.54                   | Φ 4.49 x 1.85             |
| Impedance                   |            | 50 Ω           |                       |                                  |                           |

Table 2-3 Antenna Features



### **3. Repeater Configurations**

The Mini 30 consists largely of a body and an AC to DC SMPS Adapter. The body of the Mini 30 has an RF unit, and a main control unit.

#### **3.1 Body**

The following is the picture of the body of Mini 30.



Figure 3.1 A body of the Mini 30

## **3.2 Antenna Unit**

The Mini 30 has two antennas, a donor antenna and a distribution antenna, to provide a good communication service.

### **3.2.1 Donor Antenna (Yagi Antenna)**

A donor antenna is used for receiving the transmitted signal from a base station.

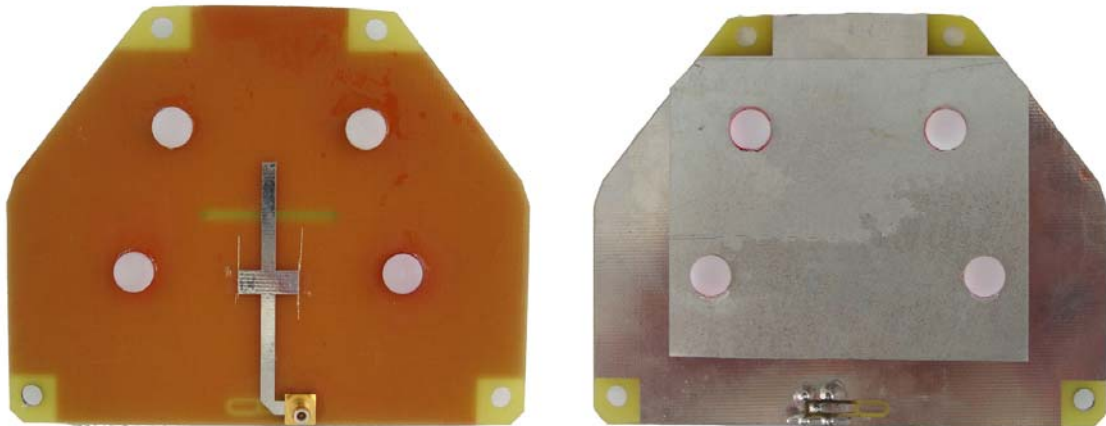


Figure 3.2 A Yagi antenna (Donor antenna)

### 3.2.2 Distribution Antenna

A distribution antenna serves to transmit the amplified signal to individual mobile station in the shaded area.

#### A. Internal Patch Antenna



a. Rear view

b. Front view

Figure 3.3 Internal Patch Antenna

#### B. External Patch Antenna (Optional)



Figure 3.4 External Patch Antenna

C. External Omni Antenna (Optional)



Figure 3.5 External Omni Antenna

### 3.3 AC to DC SMPS Adapter

A SMPS Adapter supply DC power to an Mini 30.



Figure 3.6 AC to DC SMPS Adapter

#### A. Specification overview

| Item       |         | Input                              | Output   |
|------------|---------|------------------------------------|--|
| AC to DC   | Voltage | AC 90 to 264V<br>50/60Hz $\pm 5\%$ | DC 12V<br>Output Voltage Variation<br>Ratio: less than $\pm 5\%$ |
|            | Current |                                    | 3.0A   |
| Efficiency |         | 75% Min. at full load              |  |
| Power      |         | 36Watts                            |  |

Table 3.1 The specification of AC to DC SMPS Adapter

## 4. Block Diagram

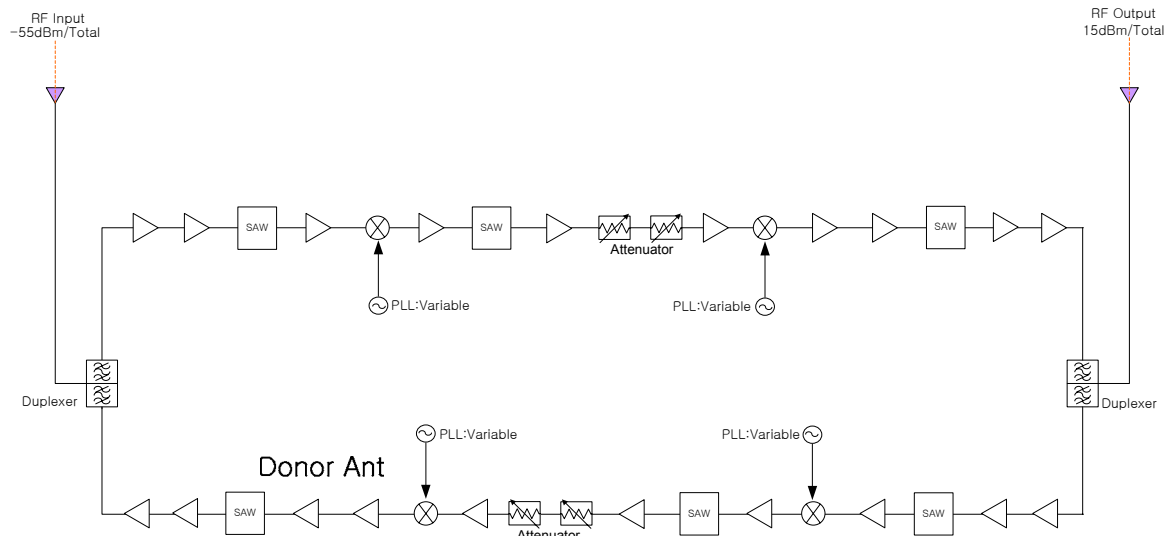


Figure 4.1 Block Diagram of Band Selective Repeater

Figure 4.1 shows a block diagram of a band selective repeater. This diagram is applicable to repeaters for CDMA systems.

### 4.1 Downlink signal path

The downlink signal path, i.e. from the base station through the repeater to the mobile station, is described for Mini 30 in the above block diagrams.

### 4.2 Uplink signal path

The uplink signal path, i.e. from the mobile station through the repeater to the base station, is identical to the downlink path but the other way round. Only some levels and component values differ.

## **Mini 30 Repeater System User's Manual**

Copyright © 2005 R-TRON, Inc.  
All Rights Reserved

Copyright of this manual belongs to R-TRON, Inc.  
Reproduction, distribution or revision of part or all of contents in this manual in any form without written permission of R-TRON, Inc. is prohibited.

The information in this manual is subject to change for the reason of function improvement, design alteration, etc. without any prior notification.

