

Wireless Remote Control Doorbell

RL-3930

Version 1.0


Package Contents

Wireless Remote Control Doorbell

Package Contents: Receiver×1, Remote Control×1, Screw Pack x1, Battery (LR44×3)

Operation Instruction

Main Unit

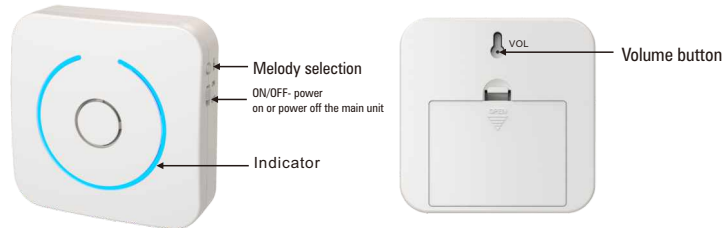

Remote Control



Pairing: Long press "🎵" on the side of the receiver for above 3 seconds, it will sound "Ding-Dong" to indicate that the receiver enters into the Learning Code state. Now, press the Sound-Reproducing button on the remote control, the receiver will sound the selected melody to indicate that the pairing has been successful.

(Follow the instruction to pair one remote control to the receiver. To pair more, repeat the instruction.
Max 20 remote controls can be paired to one receiver)

Clearing Code: Long press "VOL" button on the back of the receiver for above 5 seconds, it will sound "Ding-Dong, Ding-Dong" to indicate that clearing code is successful (This action will clear the code for all remote controls).

Indicator light:

Working: The blue light will flash under working state.

Low voltage: The blue light will be on steadily when the voltage is lower than 3.3V.

Note: Please change batteries in time to ensure normal use when there is a low voltage indicator.

Technical Specification

Main Unit

Battery	DC 4.5V AA/LR6*3
Standby Average Current	<350uA
Working Average Current	<100mA
Max. Volume	>85dB
Frequency	433.92MHZ±250KHZ
Distance	≥ 150m(Open Area)
Demodulation	FSK
Working Temperature	-10°C~50°C

Remote Control

Battery	DC 4.5V (LR44*3)
Standby Current	<10uA
Working Current	<40mA
Transmitting Power	+10dBm
Transmitting Time	2s/transmission
Antenna Gain	2dBi
Frequency	433.92MHZ±250KHZ
Modulation	FSK
Working Temperature	-10°C~50°C

FCC Statement

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in residential installation. This equipment generates, uses and can radiate radiofrequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.