

# User's Manual

Product name : InforTab

Model name : R154/213/290

Date Created : 2017.05.24

# 1 InforTab Product release & preparing to install

## 1-1 InforTab product release

- ▶ The release of the product.



- ▶ Remove display protective sheet.



## 1-2 InforTab mounted on rails


- ▶ Fit the InforTab on the rails.



## 2 InforTab Registration & Updates


### 2-1 InforTab Registration (InforTab-ASSIGN)

InforTab assign will register the equipment about this product update.

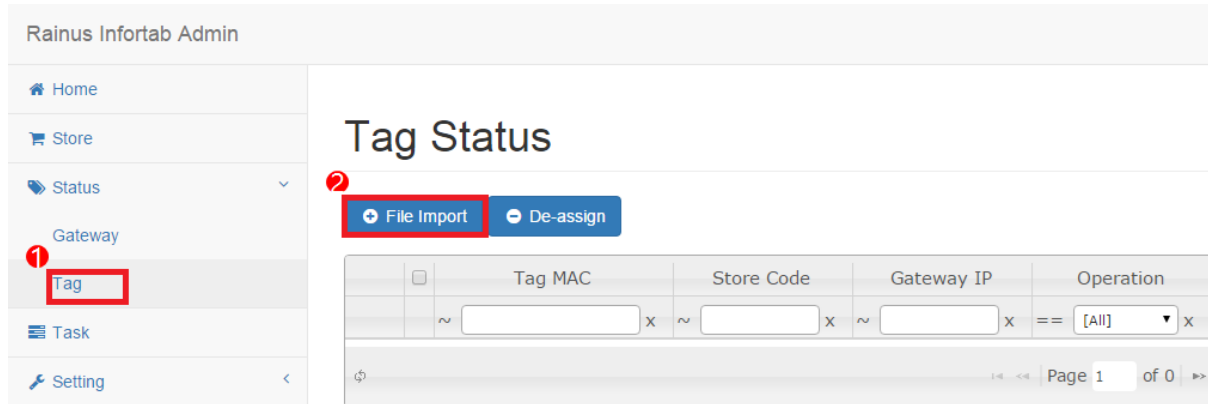

**Figure 1 Tag Status**

Status > Tag → After selecting a menu, click the button File Import.

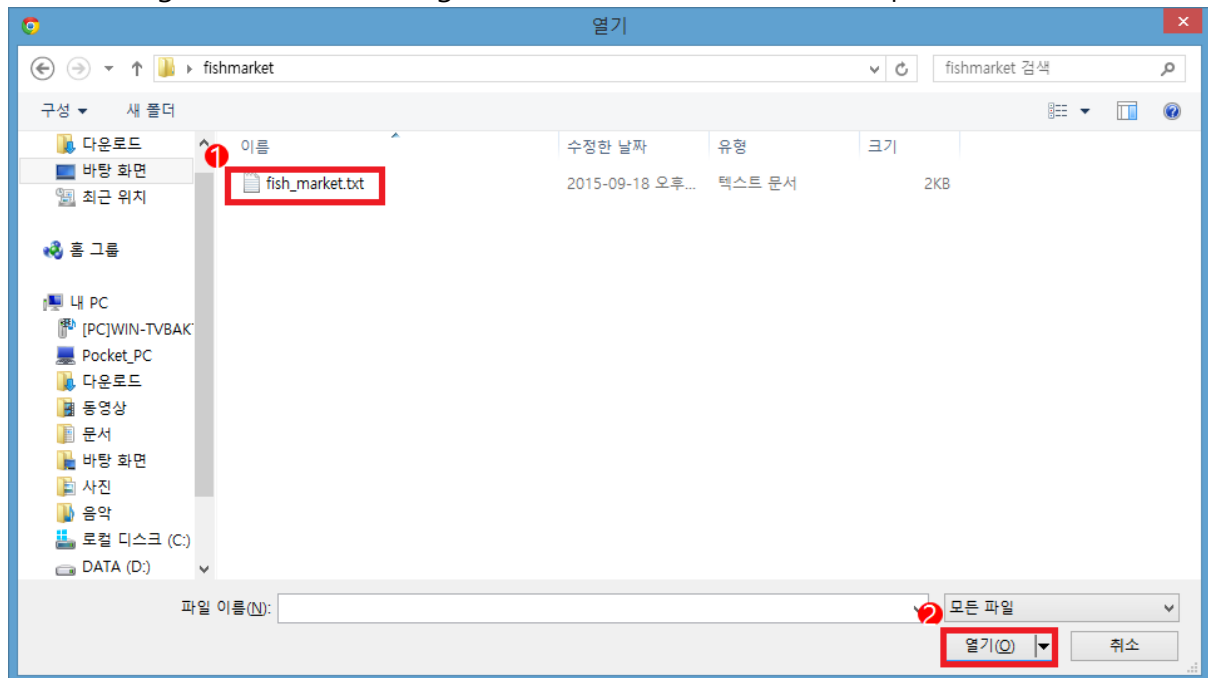

**Figure 2 Tag Assign File Dialog**

Opens a File Dialog and InforTab to register the information, select the saved file.

The format of the file is saved to the new line as a separator between the ID InforTab.

The following are an examples of the registration file InforTab.

```
702C1F00005D13
702C1F00005B13
702C1F00005A13
702C1F00005C13
```

702C1F00000713  
 702C1F00001713  
 702C1F00006313  
 702C1F00000D13  
 702C1F00006113  
 702C1F00000413

## 2-2 InforTab Deregistration (InforTab DE-ASSIGN)

InforTab De-assign is an operation that removes InforTab you no longer use. InforTab De-assign operation is complete, you can no longer perform the updated product information.

Rainus Infortab Admin

Home  
 Store  
 Status  
 Gateway  
**1 Tag**  
 Task  
 Setting  
 Product Update  
 P/G Upgrade

### Tag Status

File Import **3 De-assign**

	<input type="checkbox"/>	Tag MAC	Store Code	Gateway IP	Operation
	<input type="checkbox"/>	~ [ ] x	~ [ ] x	~ [ ] x	== [All] ▾ x
1	<input checked="" type="checkbox"/>	154B15FFFE4B154B	store-1	localhost:8080	UPDATE
2	<input checked="" type="checkbox"/>	290B29FFFE0B290B	store-1	localhost:8080	UPDATE
3	<input checked="" type="checkbox"/>	702C1FFFFE036A16 702C1FFFFE036A16	store-1	-	DE-ASSIGN
4	<input type="checkbox"/>	702C1FFFFE0369BD	store-1	-	DE-ASSIGN

**Figure 3 De-assign**

Select the InforTab, and then click the De-assign button to unregister.

## 2-3 Registration LAYOUT

The LAYOUT information about whether the promised to do the LAYOUT product information.


The following are examples of the LAYOUT information.



**Figure 4 Layout Sample**


To register LAYOUT information will be subject to user authentication.

Once the Product Update menu is selected, the user authentication screen appears, as Shown in Figure 6.

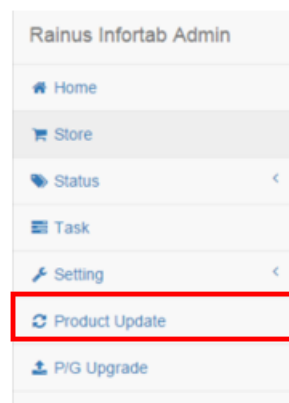

**Figure 5 Product Update menu select**

User authentication is the default username rainus and password 1234.

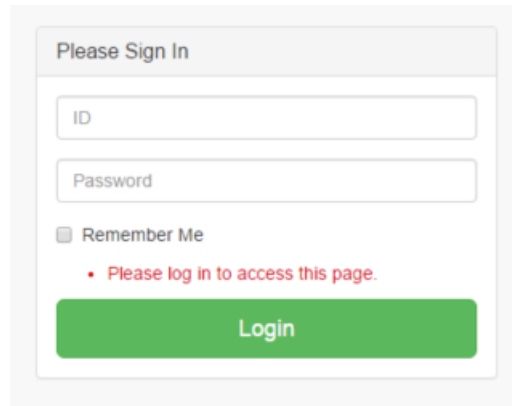

Please Sign In

ID

Password


Remember Me

• Please log in to access this page.

Login

Figure 6 Sing in

Click the Layout Import button.

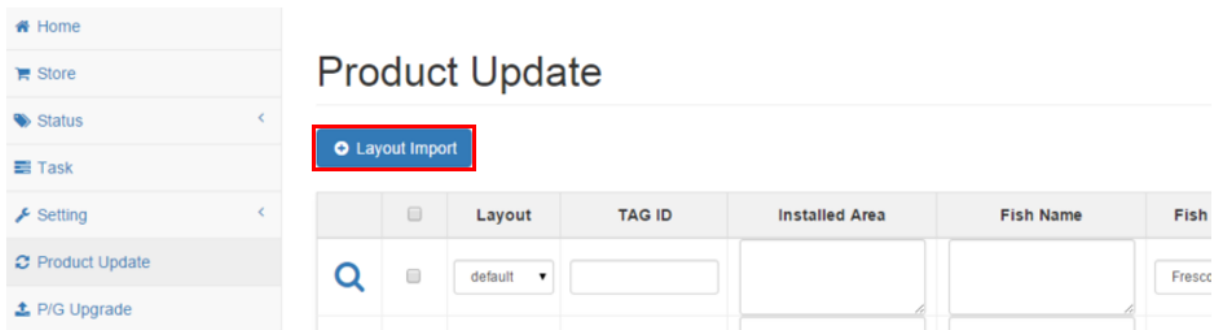


Product Update

Layout Import

		Layout	TAG ID	Installed Area	Fish Name	Fish
<input type="checkbox"/>	<input type="checkbox"/>	default	<input type="text"/>			Frescc


Figure 7 Layout Import

Opens a File Dialog, select the LAYOUT file that you want to register.

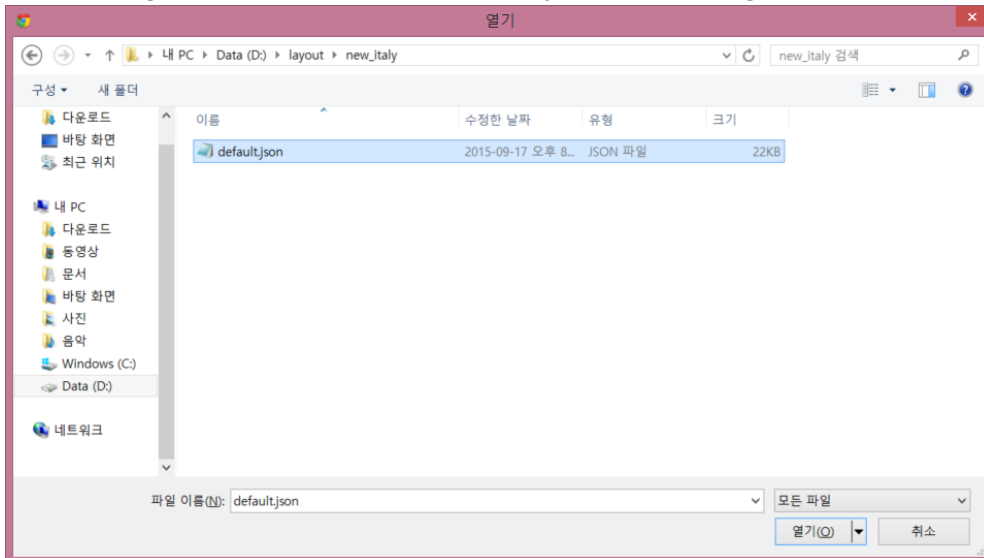

**Figure 8 Layout Import File Dialog**

The registered LAYOUT information can be checked via the combo box.

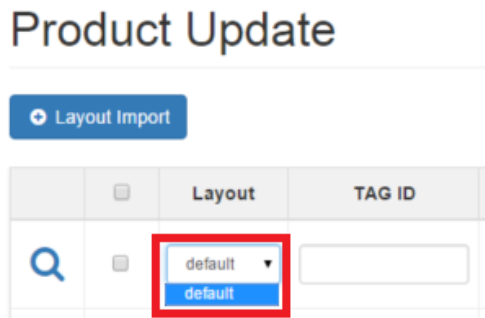

**Figure 9 Layout Confirm**



## 2-4 Product information Updates

### Product Update

Layout Import

		Layout	TAG ID	Installed Area	Fish Name	Fish Status	Price
4	5	1	2		3	Fresco	
Q		default				Fresco	
Q		default	702C1F00000413			Fresco	
Q		default	702C1F00000113			Fresco	
Q		default	702C1F00000213			Fresco	
Q		default	702C1F00000313			Fresco	
Q		default	702C1F00000513			Fresco	

6 Update

Figure 10 Product Update Screen

- ① Select the LAYOUT you want to use.
- ② Enter the Infortab ID.
- ③ Enter the product information.
- ④ The preview is based on the input image to be printed on the product information InforTab.
- ⑤ Specify the Update.
- ⑥ Click the Update button.

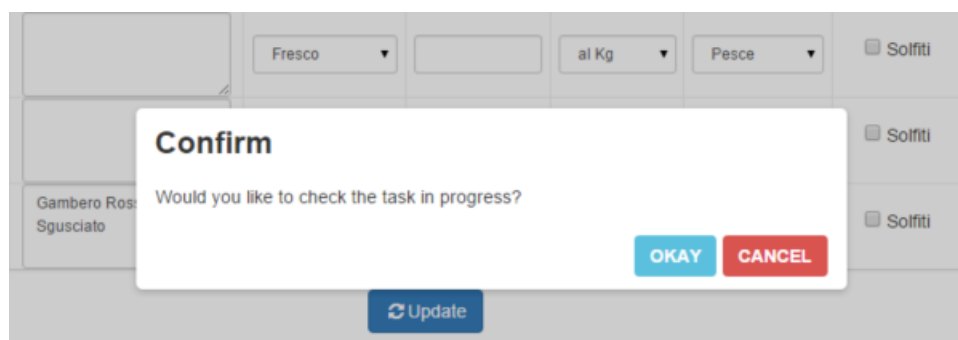


Figure 11 Confirm tasks in progress

Select whether or not to confirm the update process.

If you selected okay, you can monitor the progress of the update as follows.

If you choose to cancel. You can check via the task menu.

Task Id	Store Code	Operation	Progress(%)	Start Time	End Time	Detail
1442561953	'store-1'	UPDATE	<div style="width: 100%; height: 10px; background-color: green;"></div> 100%	2015-09-18 16:39:13	In progress	<a href="#">Detail</a>
	None	LAYOUT	<div style="width: 100%; height: 10px; background-color: green;"></div> 100%	2015-09-18 16:36:30	2015-09-18 16:39:13	<a href="#">Detail</a>
	None	LAYOUT	<div style="width: 100%; height: 10px; background-color: green;"></div> 100%	2015-09-18 16:35:41	2015-09-18 16:36:30	<a href="#">Detail</a>
	None	LAYOUT	<div style="width: 100%; height: 10px; background-color: green;"></div> 100%	2015-09-18 16:10:10	2015-09-18 16:10:46	<a href="#">Detail</a>
	None	LAYOUT	<div style="width: 100%; height: 10px; background-color: green;"></div> 100%	2015-09-18 16:09:35	2015-09-18 16:09:45	<a href="#">Detail</a>
	None	LAYOUT	<div style="width: 100%; height: 10px; background-color: green;"></div> 100%	2015-09-18 16:08:38	2015-09-18 16:08:57	<a href="#">Detail</a>
1442558472	'store-1'	UPDATE	<div style="width: 100%; height: 10px; background-color: green;"></div> 100%	2015-09-18 15:41:12	2015-09-18 15:41:37	<a href="#">Detail</a>
	'store-1'	ASSIGN	<div style="width: 100%; height: 10px; background-color: green;"></div> 100%	2015-09-18 15:41:12	2015-09-18 15:41:12	<a href="#">Detail</a>

**Figure 12 Tasks in progress Screen**

### 3 InforTab Image Display

- ▶ After inserting the battery, mount it on as shown in the picture.



- ▶ Touch the remote control with the ESL tag and press the remote control button to wake up the ESL tag.



- ▶ After the ESL tag blinks several times, the image upload is completed.



---

---

**CAUTION**  
**RISK OF EXPLOSION IF BATTERY IS REPLACED**  
**BY AN INCORRECT TYPE.**  
**DISPOSE OF USED BATTERIES ACCORDING**  
**TO THE INSTRUCTIONS**

FCC Compliance Statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions.

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to:

a) provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

b) Accept any interference received, including interference that may cause undesired operation of the device.

NOTE that any changes or modifications to this wireless communication device that are not expressly approved by the manufacturer could void the user's authority to operate the equipment.

FCC RF Radiation Exposure Statement:

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with Industry Canada's license-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

**CONFIDENTIAL**

Page Rev.	0	Page	13/22
-----------	---	------	-------