


GEAR UNIT STANDARD ACCESSORIES AND OPTIONS

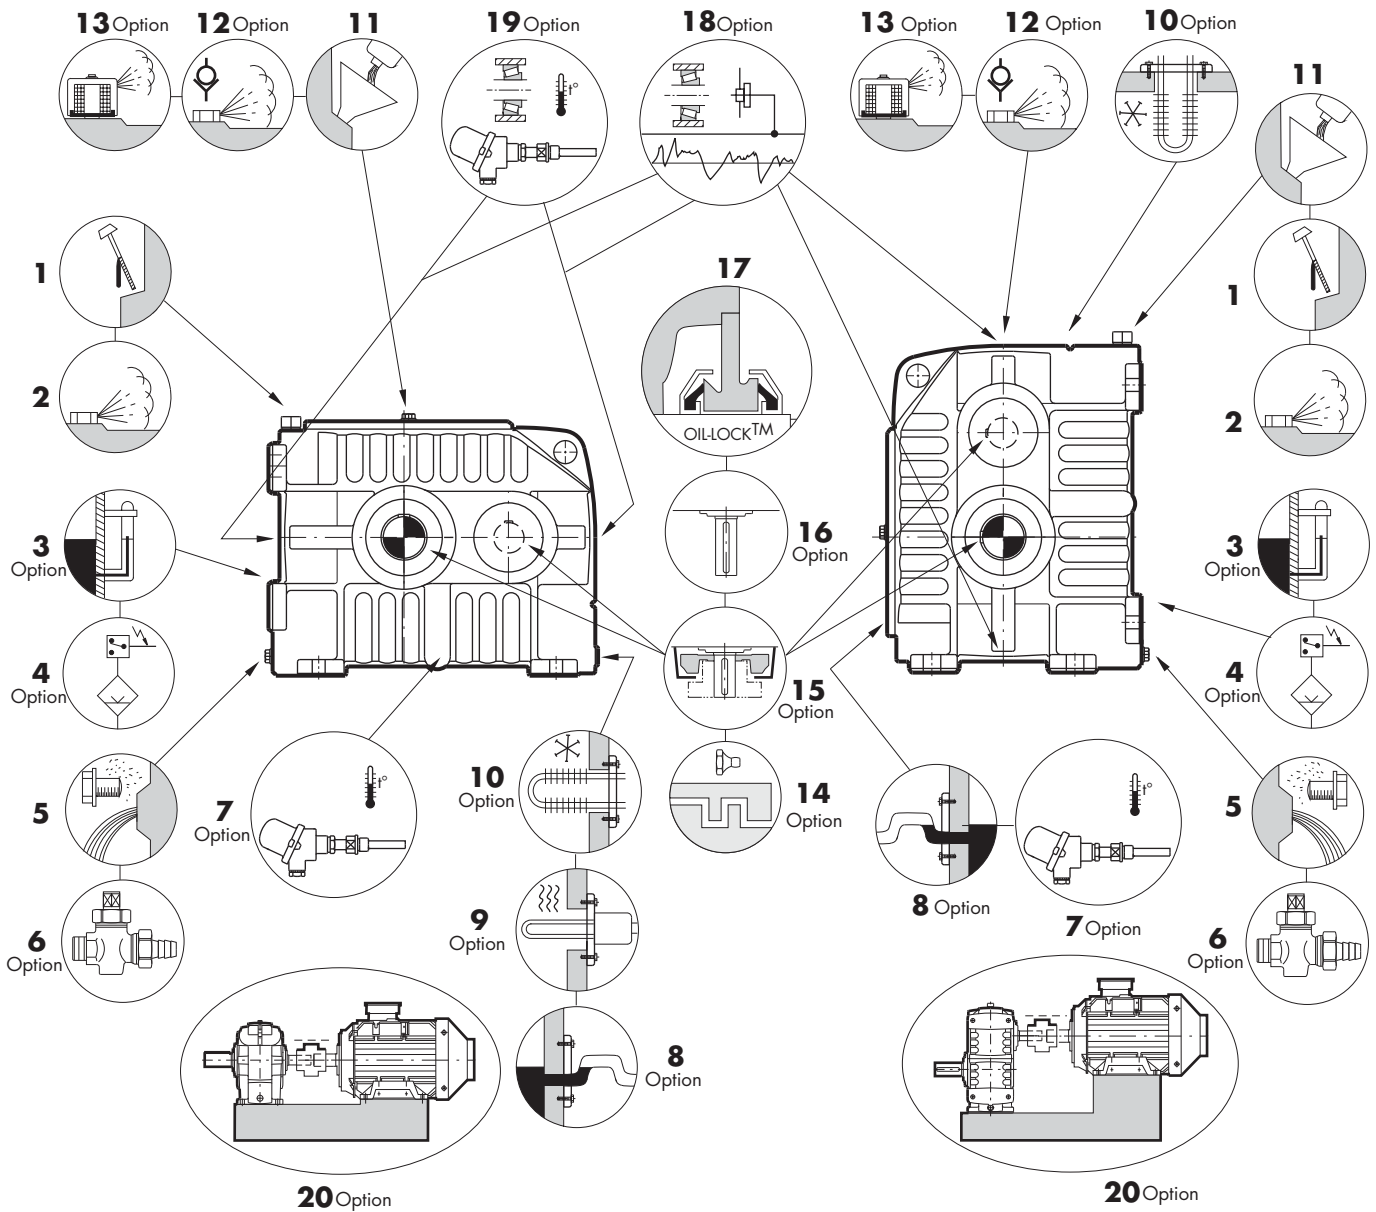

: optional

- 1 dipstick
- 2 breather plug
- 3 oil level glass
- 4 oil level switch
- 5 magnetic plug and draining plug
- 6 drain cock with hose coupling
- 7 Pt 100 meter for oil sump temperature
- 8 oil overflow
- 9 heater at ancillary cover
- 10 cooling coil at ancillary cover
- 11 oil filler plug
- 12 anti-humidity breather plug
- 13 dust-proof breather plug
- 14 regreasable labyrinth (DIN 71412):
 - at high speed shaft
 - at low speed shaft

- 15 standard fan:
 - single standard fan at high speed shaft
 - second standard fan at low speed shaft
- 16 extended shaft end
 - at high speed shaft
 - at low speed shaft
- 17 Oil-Lock™ seal at high and low speed shaft
 - at high speed shaft
 - at low speed shaft
- 18 nipple for vibration sensor
 - at high speed shaft
 - at low speed shaft
- 19 Pt 100 meter for bearing temperature:
 - at high speed shaft
 - at low speed shaft
- 20 base plate M10