

Haz-Scanner Quick Start Instructions


Step 1: Battery must be fully charged. (LED=Green) and System turned on 15 minutes prior to use. Connect to battery charger if necessary

Step 2: To view sensor data on HazScanner display, press up and down arrows to scroll through sensor list.

Step 3: To collect data, execute “logging on” function from display panel by pressing function button and then press enter button.

Step 4: To upload data, execute “logging off” function from display panel by pressing function button and then enter button OR by computer using serial cable and HazComm software

Step 5: To generate graphs and reports by computer refer to Hazcomm software manual.

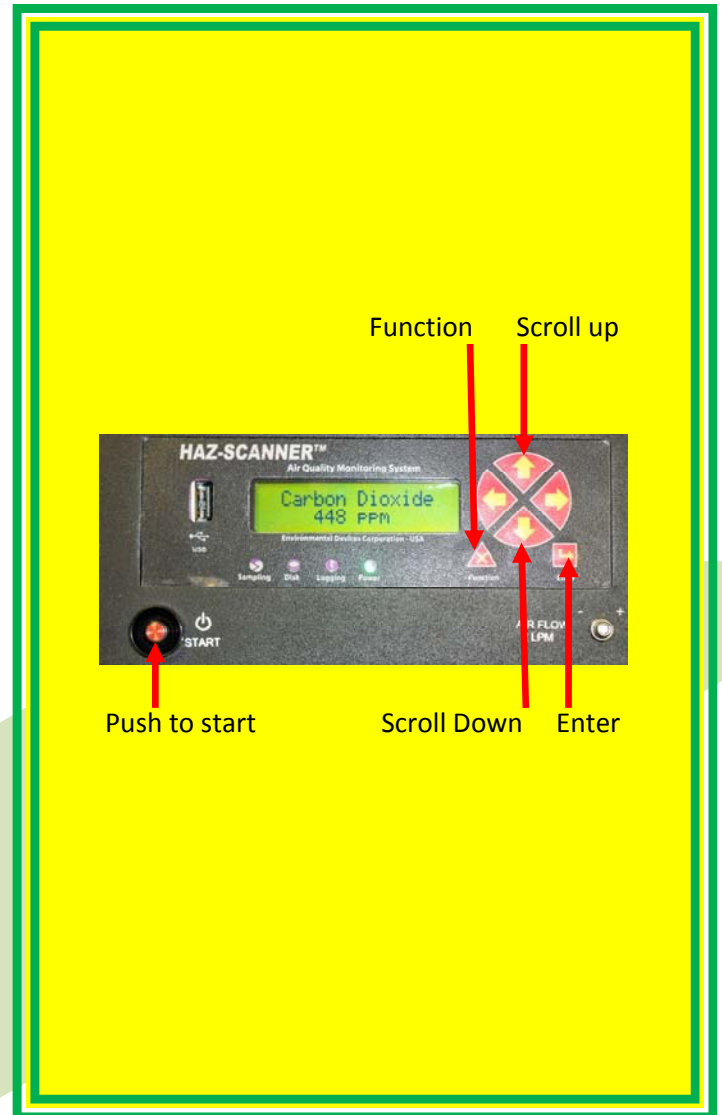

Environmental Devices Corporation, 4 Wilder Drive, Bldg 15, Plaistow, NH 03865, USA
www.hazscanner.com