



Bluetooth® Pendant type Handsfree Kit

STARTREC

Model No : SFK509



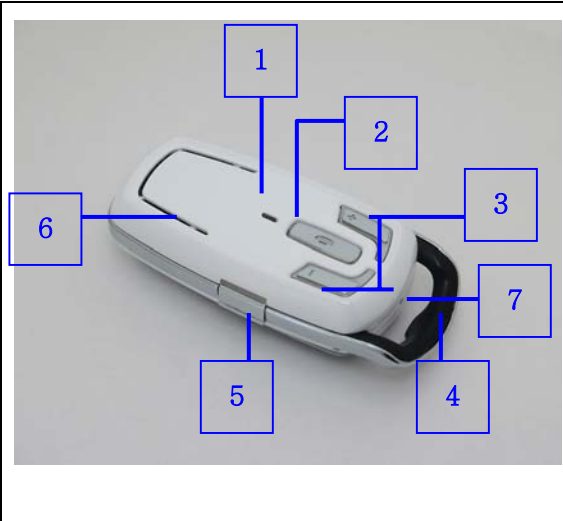
User Manual

In the Package

- STARTREC
- User Manual
- Charging Adapter (TA)
- Necklace Type Earphone

Part Description

*** Front**

	1. Charging(RED) &State LED(Blue)
	2. Call/Power Button
	3. Volume Up/down
	4. Mic
	5. Power Connector & Earphone Outlet
	6. Speaker
	7. Reset

*** Rear**

	1. Lapel Clip

1. How to Use

a. Charging

- Open the Power Connector Outlet cover.
 - Connect the supplied charger to the Power Connector Outlet.
 - ➔ When the Charger is plugged in, the LED light of the SFK509 will be Red.
- When fully charged, which may take up to 3 hours, the Red LED light will be turned off.

Tip)

- Low battery status will be indicated with a beep every 10 seconds.
It is recommended that the device should be charged immediately.

b. Power On

- Press and hold the Call/Power Button for 2 ~ 3 seconds.
 - ➔ An ascending tone indicates the device is switched on.

c. Power Off

- Press and hold the Call/Power button for 3 ~ 4 seconds.
 - ➔ A descending tone indicates the device is switched off.

d. Bluetooth Pairing

- After turning the SFK509 on, press and hold the Volume Up & Down button for more than 3 seconds.
 - ➔ You will hear a melody and the blue LED light will blink every second.
- To search and register the SFK509 to your Bluetooth enabled handset.
 - ➔ Please refer to the user manual of the handset.
 - ➔ When asked for the Pass/PIN code during the pairing procedure, please enter "0000" (4 Zeros).
 - ➔ Once pairing has completed successfully, you will hear a beep and the blue LED light will blink every 4 ~ 5 seconds.

If the LED light still blinks every second, please repeat the pairing procedure from the beginning.

e. Adding Multiple Handsets

- The SFK509 can store up to 3 different handsets in its memory. However it can only connect up to one Bluetooth device at a time.
- In the case of adding a 4th handset, the first unused registered handset will automatically be removed.
- If you want to permanently keep the first registered handset onto your SFK509, manually connect the handset to the SFK509 before adding a 4th device.

Tip)

- Once the handset is registered to SFK509, it will stay in a paired mode until it is deleted.

f. Answering a call

- When the handset receives an incoming call, the SFK509 will ring and the blue LED light will blink rapidly 4 times.
- Press the Call/Power Button while the handset is ringing.
- To answer an incoming call while listening a song, press the Call/Power Button and get back to the current song automatically after ending a call

g. Last Number Redial / Voice Dialing

- For last number redial, press the Call/Power Button once until a short beep is heard.
 - ➔ With certain types of Bluetooth handsets, the user may need to press the Call/Power Button twice.
- To activate Voice dialing, press and hold the Call/Power Button until it beeps twice.
 - ➔ Please note that some handsets don't support this function

h. Ending a call

- To end the call, press the Call/Power Button.

i. Call Waiting

- To answer an incoming call while on the phone, press and hold the Call/Power Button for more than 2 seconds.
- To get back to the first call, press and hold the Call/Power Button again.

j. Speaker Volume Control

- Press the Volume (+) Button to increase the speaker sound, and the Volume (-) Button to lower the sound.
→ The volume level can be adjusted from 1 to 8.

k. Transferring Audio

a) Handset to SFK509

- To switch from the handset to the SFK509 while on a call, press the Call/Power Button.
→ The call will be transferred to the SFK509.

b) SFK509 to Handset

- Switching from the SFK509 to the handset can be operated from the handset menu options. This functionality may vary based on the type of handset.
→ Refer to the user manual of your handset to use this function.

l. Listening Music

- After pairing the SFK509 with Handset, play the memorized song on your handset.
- Press and hold Volume(+) Button to play next song
- Press and hold Volume(-) Button to play the previous song
- To stop playback the current song, press the Call/Power Button on the SFK509 or stop playback on your handset

m. Using the Earphone

- Flip over the earphone outlet cover.
→ Do Not use sharp materials or nail to flip over the cover as this could cause damage to the SFK509 as well as to yourself.
- Plug in the supplied earphone into the earphone outlet of the SFK509.
→ No additional key presses are needed to initiate or continue a conversation when the earphone is plugged in.
→ When using the earphone, the speaker will automatically be muted.

2. LED Indication

Function	Startrec Status	LED Status
Operating (BLUE LED)	Power off	LED off
	Bootng	LED On until initialization
	Idle	On(0.5 sec) Off(10 sec. repeatedly)
	Discoverable	On(1 sec) – Off(1 sec) repeatedly until discovered
	Connecting	Blinks until connection is established
	Ringing	Blinks (3 times) & Off (2 sec) when answered.
Charging (RED LED)	No Charging	RED LED Off
	Charging	RED LED On
	Full Charging	RED LED Off

3. Summary of Button functions

Function	Startrec	How to use button
Power On	Off	Press and hold the Call/Power Button for more than 2 seconds.
Power off	On	Press and hold the Call/Power Button for more than 3 seconds.
Speaker Volume +	-	Press the Volume (+) Button.
Speaker Volume -	-	Press the Volume (-) Button.
Transferring Audio (Handset → SFK509)	-	Press the Call/Power Button.
Paring Mode	On	Press and hold the Volume (+) and (-) Button simultaneously for more than 3 seconds.
Answering a Call	Ringing	Press the Call/Power Button.
Ending a call	Talking	Press the Call/Power Button.
Last Number Redial	Ready	Press the Call/Power Button once (a short beep is heard).
Voice Dialing (This feature is available only in certain handsets)	Ready	Press and hold the Call/Power Button until you hear two consecutive beeps.
Reset	-	Press the Reset Button

4. Specifications

Item	Description
Bluetooth Specification	Ver 1.2
Supported Profile	Handsfree, Headset, A2DP,AVRCP,GAVDP
Rx.Sensitivity	Typ. 72dBm
Battery	3.7V, 200mAh Li-ion
Speaker	8 Ω / 0.5W(normal)
MIC	44dB / Omni directional
Standby Time	< 200 hours
Talking Time	< 7 hours
Music Play Time	< 7 hours
Operating Temperature	-20℃ ~ 60℃
Dimension	65.9 x 29.3 x 18.5 (mm)
Weight	22g

Limited Warranty

1. This product was produced under strict quality management and inspection.
2. All defective units within the applicable Warranty period/s will be repaired or replaced, in the case those faulty goods were handled normally.
3. To get Warranty service, return the unit to the outlet from which the unit was purchased.
4. Fill in this Warranty card and keep it.
5. Free of charge Warranty shall not apply to :
 - Defects or damage resulting from use of the unit in other than its normal and intended manner, eg, in excess of their maximum specifications or operating instructions.
 - Defects or damage from misuse, accident, neglect, improper testing, installation, alteration or modification of any kind, or spillage of food or liquid.

Products name :

Model number :

Purchased date:

Warranty period : 1year

Outlet the unit was purchased :

Tel :

Customer Address:

Name :

Tel :

FCC NOTICE TO USERS :

This device complies with part 15 of the FCC rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference and**
- (2) This device must accept any interference received, including interference that may cause undesired operation.**

IMPORTANT NOTE : To comply with the FCC RF exposure compliance requirements, no change to the antenna or the device is permitted.

Any change to the antenna or the device could result in the device exceeding the RF exposure requirements and void user's authority to operate the device.



FCC ID RPRSFK509