

Please go to www.quoizel.com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (4) Candelabra Base Bulbs 60W Maximum.

Estimated Assembly Time: 30-45 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Note: This CONVERTIBLE fixture can be mounted as pendant light or semi-flush light. Refer to respective installation steps for installations.


⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.


These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

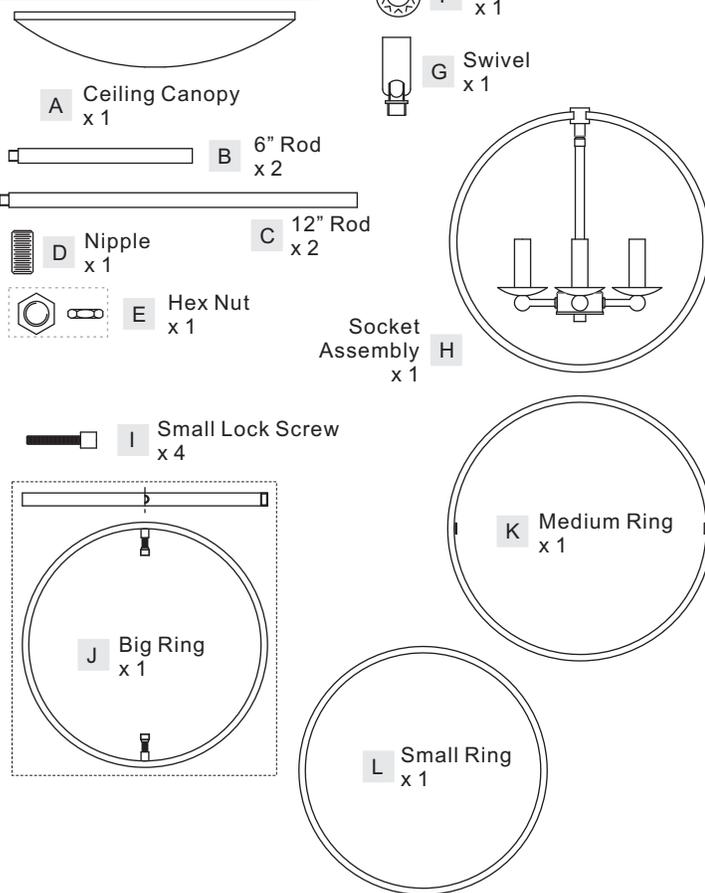


Hardware Contents

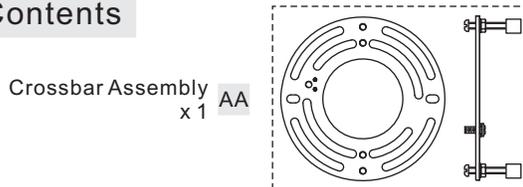

STEP 1 - Assemble Big Ring


A. Place the Big Ring (J) over the Socket Assembly (H) and align mounting holes on the Big Ring (J) to holes on the ring of Socket Assembly (H). Secure by threading Small Lock Screws (I) into mounting holes on the Big Ring (J). Hand tighten until snug.

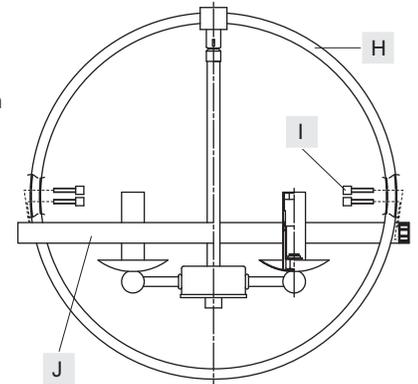

STEP 2 - Install Medium Ring and Small Ring

A. Place Small Ring (L) inside of Medium Ring (M) and align holes on Small Ring (L) to Plugs on the Medium Ring (M).
B. Remove Big Lock Screws from the Big Ring (J). Place Medium Ring with Small Ring (K&L) from bottom of Socket Assembly (H) and align holes on them to mounting holes on Couplings at the Big Ring (J). Secure them together by threading previously removed Big Lock Screws into Couplings. Hand tighten until snug.

Please refer to respective installation steps for installations.

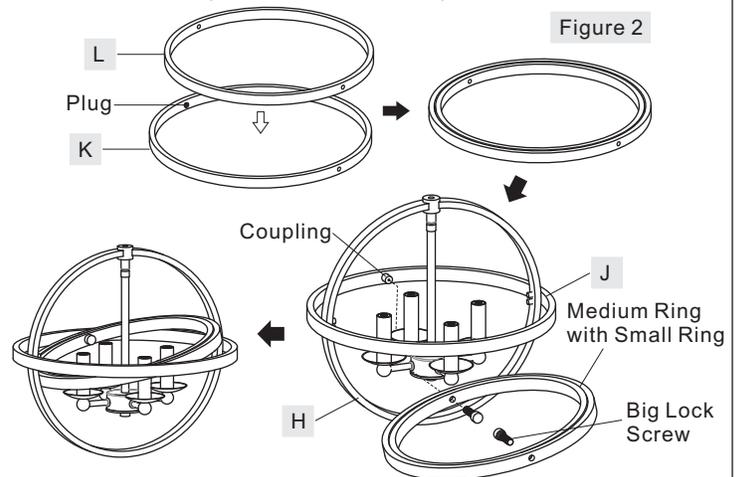

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184 or visit us on-line at www.quoizel.com

Assembly Instructions for Pendant Light (Step 1A - Step 7A)

STEP 1A – Attach Swivel and Ceiling Canopy together

- A. Thread Nipple (D) onto the Swivel (G).
B. Place Ceiling Canopy (A) and Lock Washer (F) over the Nipple (D). Secure by threading Hex Nut (E) onto the Nipple (D), tighten until snug with pliers.

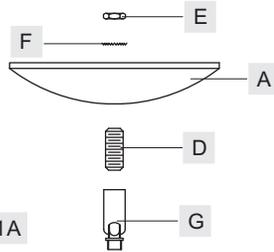


Figure 1A

STEP 2A – Assemble Rods and the Ceiling Canopy

- A. Determine Rods (B/C) to be assembled to Socket Assembly (H) according to your hanging height.
C. Pass supply wires and ground wire through the chosen rods (B/C) and Ceiling Canopy (A). Thread Socket Assembly (H), the chosen Rods (B/C) and the Swivel (G) together. Hand tighten until snug.

Suggested rods for Ceiling height :
8' ceiling : use (1) 6" rod and (1) 12" rod
9' ceiling : use (1) 6" rod and (2) 12" rods
10' ceiling: use (2) 6" rods and (2) 12" rods

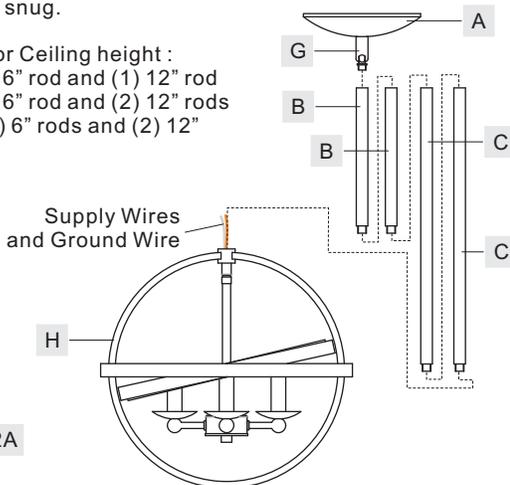


Figure 2A

STEP 3A – Install Crossbar Assembly

- A. Pass the supply wires through the Crossbar Assembly (AA). Attach the Crossbar Assembly (AA) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.

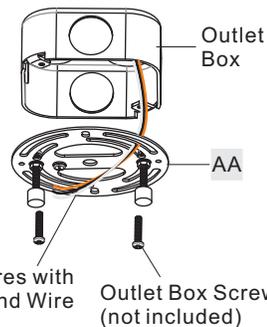


Figure 3A

Supply Wires with Ground Wire
Outlet Box Screws (not included)

STEP 4A – Test Fitting Ceiling Canopy to Crossbar Assembly

- A. Remove mounting balls from Crossbar Assembly (AA). Fit Ceiling Canopy (A) to Crossbar Assembly (AA) and secure with mounting balls. Note: The Ceiling Canopy (A) should be snug against the ceiling and the mounting balls. If Not, adjust the length of mounting screws on the Crossbar Assembly (AA) by unscrewing the preassembled hex nut and lock washer and then screwing mounting screws in or out of the crossbar until the correct length is achieved. Once the Ceiling Canopy (A) is secure, remove mounting balls and Ceiling Canopy (A) and proceed to Step 5A.

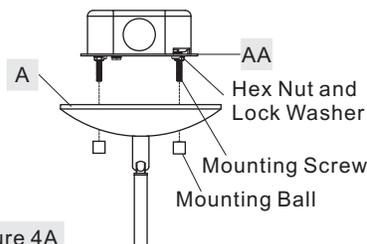


Figure 4A

STEP 5A - Wire Connections

- A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

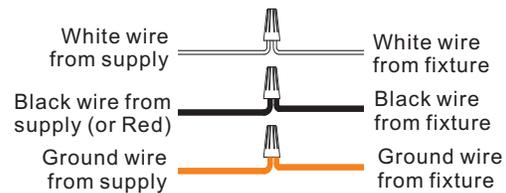


Figure 5A

STEP 6A – Install Fixture Body

- A. Carefully tuck all wires into the outlet box and position Ceiling Canopy (A) over the outlet box. Align the holes in Ceiling Canopy (A) with mounting screws, then attach Ceiling Canopy (A) using the previously removed mounting balls. Hand tighten until snug.

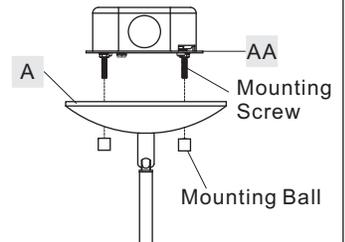


Figure 6A

STEP 7A – Install Bulbs

- A. Insert bulbs and screw snugly into place.
B. Rotate Medium Ring and Small Ring to your desired locations.

Your fixture is now assembled and ready to use. Enjoy!


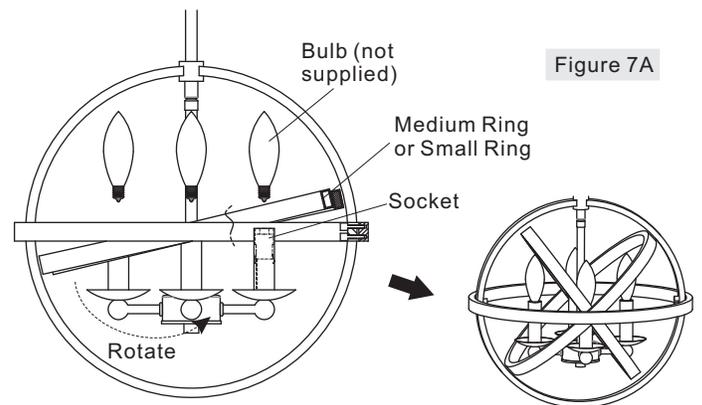


Figure 7A

Assembly Instructions for Semi-flush Light (Step 1B - Step 6B)

Part B, Part C and Part H will not be used in the assembly of the Semi-Flush Light fixture. Please set aside these parts.

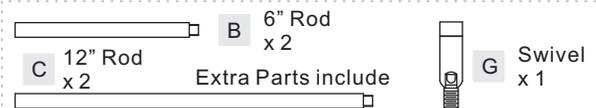


STEP 1B – Install Ceiling Canopy to Socket Assembly

- A. Pass supply wires with ground wire through Nipple (D), Ceiling Canopy (A), Lock Washer (F) and Hex Nut (E). Thread Nipple (D) onto Socket Assembly (H). Place Ceiling Canopy (A) and Lock Washer (F) onto Nipple (D). Secure by threading Hex Nut (E) onto Nipple (D). Hand tighten until snug. Cut the wires leaving approximately 6" of wire extending from the Ceiling Canopy (A).

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www.quoizel.com


(Step 1B Continued)

B. Optional Swivel: Install the swivel to Socket Assembly (H) and then attach Nipple (D) and Ceiling Canopy (A) to the Swivel using The Lock Washer (F) and Hex Nut (E) as in step A.

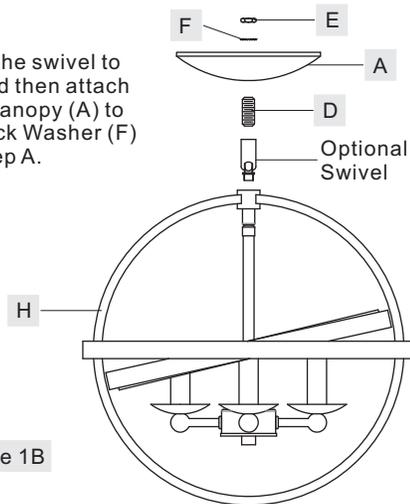


STEP 2B – Install Crossbar Assembly

A. Pass the supply wires through the Crossbar Assembly (AA). Attach the Crossbar Assembly (AA) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.

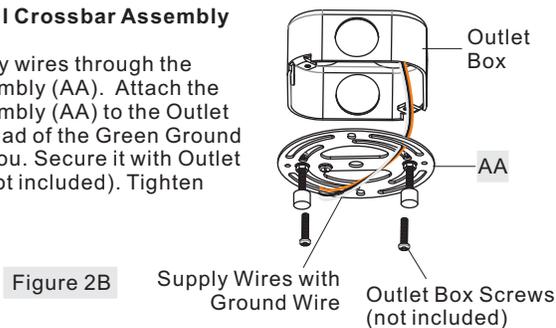


STEP 3B – Test Fitting Ceiling Canopy to Crossbar Assembly

A. Remove mounting balls from Crossbar Assembly (AA). Fit Ceiling Canopy (A) to Crossbar Assembly (AA) and secure with mounting balls. Note: The Ceiling Canopy (A) should be snug against the ceiling and the mounting balls. If Not, adjust the length of mounting screws on the Crossbar Assembly (AA) by unscrewing the preassembled hex nut and lock washer and then screwing mounting screws in or out of the crossbar until the correct length is achieved. Once the Ceiling Canopy (A) is secure, remove mounting balls and Ceiling Canopy (A) and proceed to Step 4B.

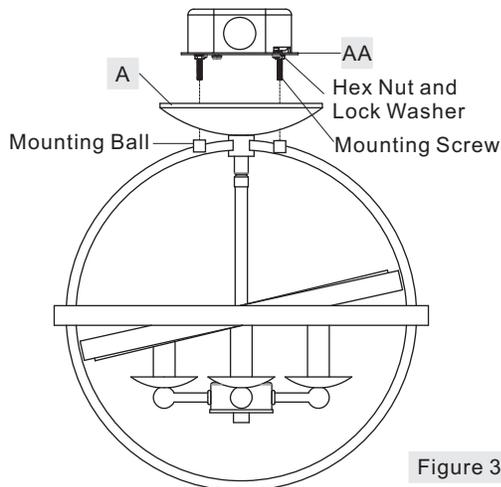


STEP 4B - Wire Connections

A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

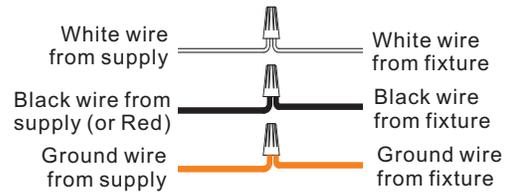

STEP 5B – Install Fixture Body


A. Carefully tuck all wires into the outlet box and position Ceiling Canopy (A) over the outlet box. Align the holes in Ceiling Canopy (A) with mounting screws, then attach Ceiling Canopy (A) using the previously removed mounting balls. Hand tighten until snug.

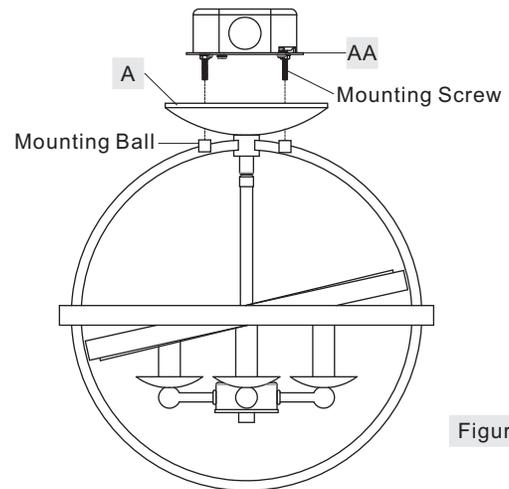

STEP 6B – Install Bulbs

A. Insert bulbs and screw snugly into place.
B. Rotate Medium Ring and Small Ring to your desired locations.

Your fixture is now assembled and ready to use. Enjoy!

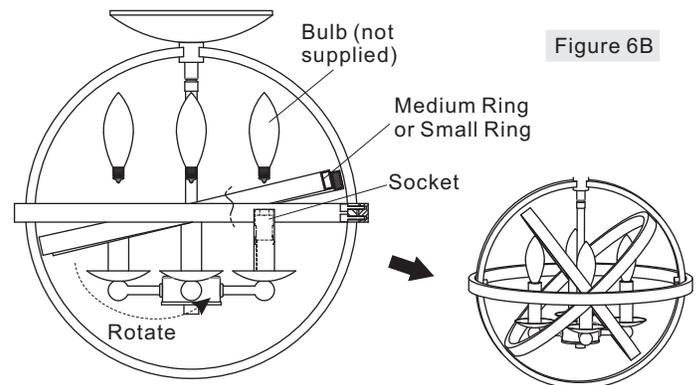




Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www.quoise.com

EON1715WT



FINISH: WESTERN BRONZE

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

PENDANT LIGHT

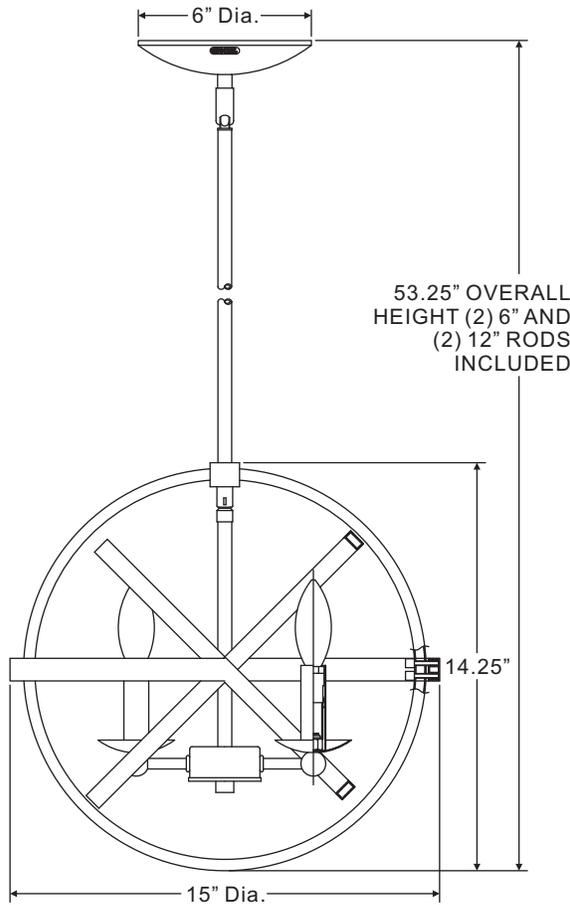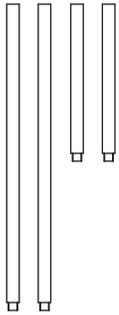

SEMI-FLUSH

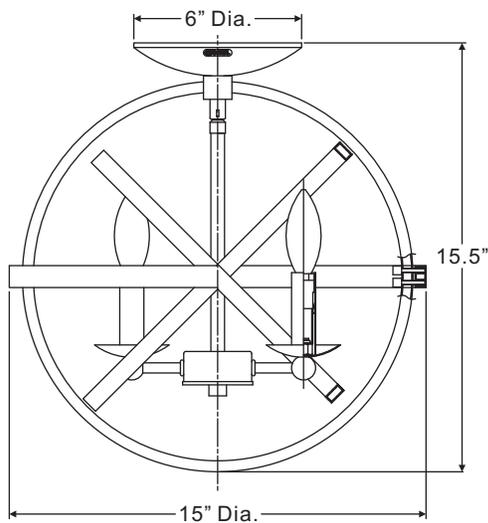

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www.quoise.com