

Jlinks Technology

The Solution to CCTV Security



Complete Solution to CCTV










JLINKS










CAMERAs

Indoor Cameras Solution

	Model Name	Fix Lens	Vari-Focal	IR LEDs	High/ Med Res	Weather/ Vandal Resist
	JV-301	v			Med Res	
	JV-390	v			High Res	
	JV-392		v		High Res	v.
	JL-136C	v		v	High Res	w.
	JL-138C	v		v	High Res	w.
	JV-910	v		v	H / M Res	w.v.
	JL-133C	v		v	High Res	

Outdoor 901 Dome Series Solution













Model Name	Fix Lens	Vari-Focal	IR LEDs	ICR	High/ Med Res	Weather/ Vandal Resist
 JV-901V37V12		v			Med Res	v
 JV-901HF36	v				High Res	v
 JV-901HV37V12/ JV-901HV28V10		v			High Res	v
 JV-901HIRF36/ JV-901IRF36	v		v		High Res	v
 JV-901ICRV37V12		v	v	v	Med Res	v
 JV-901HICRV37V12/ JV-901HICRV28V10		v	v	v	High Res	v
 JV-901HV37V12DNR/ JV-901HV37V12DNRT		v			High Res	v

Outdoor 903/905 Dome Solution





Model Name	Fix Lens	Vari-Focal	IR LEDs	ICR	High/ Med Res	Weather/ Vandal Resist
JV-903F36	v				Med Res	v
JV-903IRF36/ JV-903HIRF36	v		v		H / M Res	v
JL-905IRF36	v		v		Med Res	v



Sony 3D DNR Series Solution

Star Light Camera s (0.001 lux under b/w mode 0.01 lux under color mode)	Vari- Focal	Dual Voltage	High/ Med Res	WDR/ DNR	Heater Built-in	Weather/ Vandal Resist
  JV-902HV37V12DNR	v	v	High	DNR		v
  JV-902HV37V12DNRT	v	DC12 Only	High	DNR	v	v
  JV-B765HV37V12DNR	v	v	High	DNR		Weather Proof Only
  JV-B765HV9V22DNR	v	v	High	DNR		v
  JV-BC02DNR	v	v	High	DNR		Indoor Use Only
  JV-902HV37V12WDRT (with built-in heater)	v	DC12 Only	High	DNR & WDR	v	v

WDR Camera Solution

Model Name	Vari-Focal	TVL	IR	Low Lux	Dual Voltage	Weather/ Vandal Resist
 JV-WD01	v	480			v	Indoor Use Only
 JL-WD03	v	540	v		v	v
 JV-902HV37V12WDR	v	560		v	DC12 Only	v
 JL-WD04	v	680	v	v	DC12 Only	v

Bullet Camera Series Solution

Model Name	Fix Lens	Vari-Focal	IR LEDs	ICR	High/ Med Res	Weather Proof
JV-B700HQ			v		Med Res	v
JV-B730F36 / JV-B730HQQF36	v		v		High Res	v
JV-B750HQ		v	v		High Res	v
JV-B751HQ (Black / White)	v		v		High Res	v
JV-B761HQQV37V12/ JV-B761HQQV9V22		v	v	v	Med Res	v
JV-B601		v	v	v	High Res	v
JV-B765HV37V12DNR/ JV-B765HV9V22DNR		v	v		High Res	v









Box Camera Series Solution





Model Name	Lens Type	TVL	Bulit-in Vari-Focal	Dual Voltage	WDR	Indoor Use
JV-101	Sony Ex-view	550		v		v
JV-BC03H	Sony Super HR	550		v		v
JV-WD01	Sony WDR	480		v	v	v
JL-BCHV37V12	Sony Super HR	520	v	v		v
JV-BC02DNR	Sony Star-light 3D DNR	560		v		v











Hidden Camera Series Solution


Model Name	Lens	Wide Angel	Low Lux	TVL	Audio	Weather/ Vandal Resist
 JV-851P / JV-851AP	Sony CCD Pinhole			420	V (851AP)	
 JV-855	Sony HDD CCD	v (1.6m m)		480		v
 JV-801 / JV-801S / JV-801HQS	Sony PIR			JV-801 & JV-801S = 420 TVL JV-801HQS = 520 TVL		
 JV-831 / JV-831A	Sony CCD			420		
 JL-HS560DNR	Sony Star-Light CCD		v	560		v
 JL-HS480	Sony CCD Pinhole			480		

WDR Camera Solution

Model Name	Vari-Focal	TVL	IR	Low Lux	Dual Voltage	Weather/ Vandal Resist
 JV-WD01	v	480			v	Indoor Use Only
 JL-WD03	v	540	v		v	v
 JV-902HV37V12WDR	v	560		v	DC12 Only	v
 JL-WD04	v	680	v	v	DC12 Only	v

PTZ Camera Solution

Model Name	Lens Type	TVL	Zoom In Feature	Dimension	Mounting Bracket (Included)	PTZ Controller Suggestions
 JV-SPD01	1/4" Color Sony Super HAD	480/600	23x	420 x Φ200mm 	Wall Mount	 Small Size Controller
 JV-SPD02	1/3" Sony Color Super HAD	420	3.7~12mm Vari-focal	187 x Φ127mm 	Ceiling Mount	 Full Size Controller
 JV-SPD03	1/4" Sony Color Super HAD CCD	480	10x	187 x Φ127mm 	Ceiling Mount	




















DVRs

4 Channel DVR Solution






Model Name	Compression Types	USB #	Data Back-Up	Network Feature	3G Support	Dual Streaming	Mouse / Remote Control
 DVR401	MJPEG	2	USB				v
 DVR410	MJPEG	1	USB				
 DVR-411	MJPEG	1	USB				Remote Only
 DVR-411W	MJPEG	1	USB	v			Remote Only
 DVR782	MPEG-4	1	USB/ CD	v			Remote Only
 JV-264-004M	H.264	1	USB	v			v
 JV-264-004L	H.264	1	USB	v	v		v
 NEW JV-264-204L	H.264	2	USB	v	v	v	v
 JV-264-104L	H.264	1	USB	v	v		v
 JV-264-4	H.264	1	USB / DVD/RW (optional)	v	v		v

8 Channel DVR Solution

Model Name	Compression Types	USB #	Data Back-Up	Network Feature	3G Support	Dual Streaming	Mouse / Remote Control
 DVR810	MJPEG	0	Compact Flash				
 DVR-S008	MJPEG	2	USB	v			v
 DG824	MPEG-4	1	USB/ DVD/RW	v	v	v	
 JV-264-8	H.264	1	USB/ DVD/RW (optional)	v	v		v
 JV264-208	H.264	2	USB/ DVD/RW (optional)	v	v	v	v



16 Channel DVR Solution










Model Name	Compression Types	USB #	Data Back-Up	Network Feature	3G Support	Dual Streaming	Mouse / Remote Control
 DVR1610	MJPEG	0	Compact Flash				
 JV-264-16	H.264	1	USB/ DVD/RW	v	v		v
 JV264-216	H.264	2	USB/ DVD/RW	v	v	v	v





LCDs & Testing Monitors













Security Monitor Solution

Model Name	LCD Size	Best Suitable Use with ____	Special Order Require	Other Bracket Accessories
 JL-LCD-15	15"	4 channels system		 JLA-BRKLCD1
 JL-LCD-17	17"	4~8 channels system		 JLA-BRKLCD2
 JL-LCD-19	19"	8~16 channels system		 JLA-BRKLCD4
 JL-LCD-22	22"	16 channel system	v	
 JL-LCD35	3.5"	Testing Monitor Use		
 JL-LCD56	5.6"	Testing Monitor Use		













Power Supply

Individual Power Supply Solution

Model Name	Output Current (Max)	DC / AC	Generally Suggest for Using When	Certification	Remark	
 JLA-PSU0.5A	0.5A	DC12	1x Camera built-in without IR			
 JLA-PSU1.0A	1.0A	DC12	1x Camera built-in with IRs			
 JLA-PSU1.5A	1.5A	DC12	1x Camera built-in with large # quantity of IRs			
 JLA-PSU2.1A	2.1A	DC12	Bullet cameras built-in with IRs and Heater			
 JLA-PSU3A	3.0A	DC12	Multiple Cameras			
 JLA-PSU5A	5.0A	DC12	Multiple Cameras			
 JLA-241660A	1.6A	AC24	AC power			
 JLA-PS7A-BP	3.5A	DC12	Power Testing / Installation		Rechargeable Battery Pack with Charger	











Power Supply Box Solution

Model Name	Individual Output Current (Max)	DC / AC	Certification	Accessories to go with
 JLA-124DC-25	500mA *4	DC12		
 JLA-128DC-50	500mA *8	DC12		
 JLA-1216DC-100	500mA *16	DC12		
 JLA-124AC-25	500mA *4	AC24		
 JLA-248AC-100	500mA *8	AC24		
 JLA-2416AC-200	500mA *16	AC24		



Connector

Connectors

	Model Name	Description		Model Name	Description
	JLA-CON1	RCA Female to RF Male		JLA-CON6	RCA Male to BNC Male
	JLA-CON2	BNC Female TO RF Male		JLA-CON7	RF Male to BNC Male
	JLA-CON3	BNC Female to Female Connector		JLA-CON8	RF Female to BNC Male
	JLA-CON4	RCA Female to BNC Male		JLA-CON9	RF Female to RCA Male
	JLA-CON5	BNC Female to RCA Male		JLA-CON10	Crimp-on 59 Connector

Connectors

	Model Name	Description		Model Name	Description
	JLA-CON11	Twist-On BNC RG59 Connector		JLA-CON18	WATERPROOF (SNAP & SEAL) CONNECTOR FOR RG-59
	JLA-CON12	Twist-On BNC RG6 Connector		JLA-CON19	BNC Male to Double Female
	JLA-CON15	Lock & Seal BNC Connector for RG59 W/self seizing		JLA-CON20	BNC Male to BNC Male
	JLA-CON16	Lock & Seal BNC Connector for RG6 W/self seizing pin		JLA-CON21	Rectangle RG59 Compression
	JLA-CON17	WATERPROOF (SNAP & SEAL) CONNECTOR FOR RG-6		JLA-TL-01 JLA-TL-02	-Adjustable Compression tool for RG59 / 6 & 11 -Coaxial Cable Stripper for RG58 /59 /6 /62



Mirror, Label, & Warning Sign

Mirror, Label, & Warning Sign









Model Name	Description	Size
JLA-CGM45	Convex glass mirror for safety and security	45cm / 18"
JLA-CGM60	Convex glass mirror for safety and security	60cm / 24"
JLA-SIGN1	Warning Sign	10" x 10"
JLA-STICKER 1	Warning Sticker	4" x 4"
JLA-STICKER 2	Warning Sticker	6" x 6"
JLA-STICKER 3	Warning Sticker (Front-sided decal)	4" x 4"



UTP Solutions

Balun Solution



Model Name	Description	Remark
	Video Transceiver BNC Male To Terminal Block	Screw Terminal Type
	Video Transceiver BNC Male to RJ45 Female	RJ45 Type
	Video Transceiver with 10cm power cord	10cm Power Cord
	Video Transceiver BNC Male to RJ45 Female with 25cm power cord	RJ45 Female with 25cm Power Cordd
	Video Transceiver BNC Male to RJ45 Female With Power cord	RJ45 Female with Power Cord
	16 Port Passive Video Transceiver Hub in 1U Rack Mounting Panel	

Video Distributors Solution



Model Name	Description	Remark
VA102	Video Distribution: 1 in 2 out	
VA104	Video Distribution: 1 in 4 out	
VA108	Video Distribution: 1 in 8 out	
VA408	Video Distribution: 4 in 8 out	
VA1664	16 IN 64 OUT Video Distributor	
VAP101	Video Distribution Amplifier : 1 in 1 out	Built-in Amplifier
VAP404	Video Distribution Amplifier : 4 in 4 out	Built-in Amplifier
VAP408	Video Distribution Amplifier: 4 in 8 out	Built-in Amplifier
VAP816	8 IN 16 OUT Video Distributor Amplifier	Built-in Amplifier

Power Converter Solution

Model Name	Description	Remark
 PC1A	Power Converter 1amp	
 PCIAU	AC to DC/ DC to DC Power Converter, DC12V 1000mA	



Brackets & Housing

Brackets



Model Name	Description	Remark
JLA-VDH	Anti-Theft Vandal dome camera protection cover	901 Dome Series Use Only
JLA-BRK6	Dome Bracket (Indoor Dome Only)	Indoor Dome Series Use
JLA-BR-972	Dome Bracket (Outdoor Heavy Duty)	Outdoor Dome Series Use
JLA-BRK3	Bracket (Small, Metal, Silver)	Bracket for Bullet Cam Use (Small, Metal, Silver)
JLA-BRK4	Bracket (Large Size, Metal, Easy Adjustment, Sliver)	Bracket for Bullet Cam Use (Large Size, Metal, Easy Adjustment, Sliver)
JLA-BRK7	Outdoor Housing Bracket (Size: 293X99X86m/m)	Bracket for Heater Housing and Bullet Cam Use
JLA-BRK7L	Outdoor Housing Bracket (Size: 285X99X86m/m)	Bracket for Heater Housing and Bullet Cam Use
JLA-BRK8	Outdoor Housing Bracket (L Type Bracket)	Bracket for Heater Housing and Bullet Cam Use
JLA-BRK9	Outdoor Aluminum Bracket (silver)	Bracket for Heater Housing, Bullet and Box Cam Use


Housing





Model Name	Description	Remark
JLA-606HB	Outdoor Housing with heater and blower: Size: 410X118X107m/m (AC 24V)	
JLA-615	Vandal Proof Dome Housing	
JV-901	Vandal Proof Dome Housing	
JV-392	Vandal Proof Indoor Dome Housing	Available in Black or White Housing




Wiring Accessories

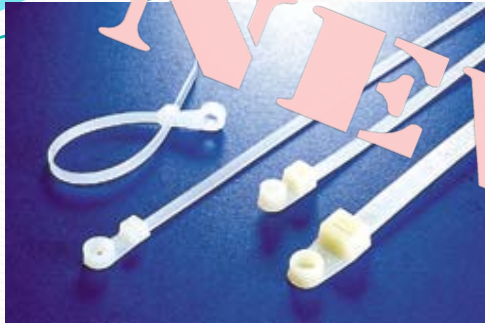

	L (mm)	W (mm)	A (mm)	Max. Bundle Dia. (mm)	Min. Tensile Strength	
					Lb	Kg
TCV-100 (White)	113	2.5	3.2	25	18	8
TCV-155 (White)	171.5	3.7	5.2	40	40	18
TVC-155 (Black)	171.5	3.7	5.2	40	40	18
TCV205(White)	221.3	4.2	5.2	60	50	22
TCV205 (Black)	221.3	4.2	5.2	60	50	22
TCV- 370(White)	370	4.8	4.9	102	50	22
TCV -370(Black)	370	4.8	4.9	102	50	22

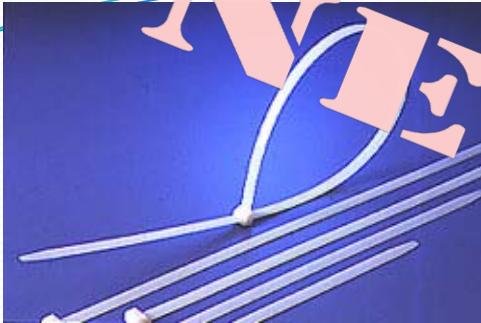

	L (mm)	W (mm)	A (mm)	Max. Bundle Dia. (mm)	Min. Tensile Strength	
					Lb	Kg
CV-200AW(White) 203x4.6	203	8"	3.6	52	40	18
CV-200A(Black) 203x4.6	204	8"	3.6	52	40	18
CV-140SW (White) 142x3.2	142	5 1/2"	2.5	35	18	8
CV-140S (Black) 142x3.2	143	5 1/2"	2.5	35	18	8
CV280 (White) 280x4.8	280	11"	4.8	77	50	22
CV280 (Black) 280x4.8	281	11"	4.8	77	50	22

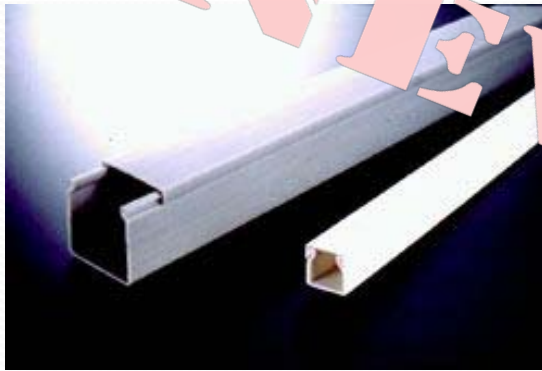


	Dimension L (mm)	Dimension W (mm)	Wires to be contained	Length
SD-2516 Milk White	16	25	5~12pcs	2M
SDM-2516 (White)	MID-WAY CONNECTOR			
SDO-2516	OUTSIDE CORNER CONNECTOR			
SDT-2516	"T" TYPE CONNECTOR			
SDL-2516	"L" TYPE CONNECTOR			
SDI-2516	INSIDE CORNER CONNECTOR			
SDE-2516	INSIDE CORNER CONNECTOR			



	Width (mm)	Height (mm)	Wire to be contained (0.8mm)	Length
TF-4T Milk White	31.8(1 1/4")	11	6-12pairs	2M
TFO-4	OUTSIDE CORNER CONNECTOR			
TFM-4	MID-WAY CONNECTOR			
TFT-4	"T" TYPE CONNECTOR			
TFL-4	"L" TYPE CONNECTOR			
TFI-4	INSIDE CORNER CONNECTOR			
TFE-4	INSIDE CORNER CONNECTOR			
TF-2T Milk White (Glue)	19.0(3/4")	11	2-6pairs	2M
TFO-2	OUTSIDE CORNER CONNECTOR			
TFM-2	MID-WAY CONNECTOR			
TFT-2	"T" TYPE CONNECTOR			
TFL-2	"L" TYPE CONNECTOR			
TFI-2	INSIDE CORNER CONNECTOR			
TFE-2	OUTSIDE CORNER CONNECTOR			

AVENUE

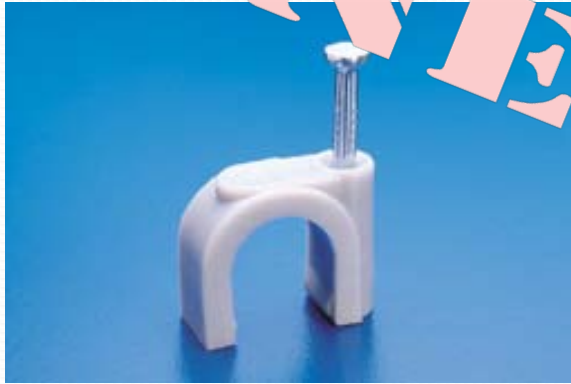

	W	Outside H	Inside H	Nails
NC-0.5N (White)	5	7.6	5	2.5X18
NC-1NB (Black)	6	9	6.6	2.5X18
NC-1NS (White)				
NC-2NS (White)	8	12.9	9	2.0X25
NC-2NB (Black)	8	12.9	9	2.0X25
NC-3NS (White)	9.3	13.8	10.4	2.0X25
NC-3NS (Black)				

ANEXA



	B	W	H
SW-72BH	7	9.8	17.6
SW-71BH	6.7	8.6	15.2



Others

TV Modulator Solution



JLA-TV06S-1

Digital TV Channel Modulator NTSC DC12V



JLA-TVM01

Video and Audio Signal to TV Modulator



ITV-900

PC to TV Converter




Model Name	Description	Remark
JLA-TV06S-1	Digital TV Channel Modulator NTSC DC12V	
JLA-TVM01	Video and Audio Signal to TV Modulator	
ITV-900	PC to TV Converter	

Quad Processor Solution



Model Name	Description	Remark
JL-CQ401	4CH Color Quad Processor with small case (with remote control)	With Remote Controller
JL-CQ801	8CH Color Quad Processor (with remote control)	With Remote Controller
JL-CQ1601	16CH Color Quad Processor (with remote control)	With Remote Controller
JL-CQ802	8CH Color Quad Processor with loop and Alarm	No Remote Controller

Other Solutions

Model Name	Description	Remark
 JLA-VBT-VGA	CAT5 VGA Extender	
 VGA-01	VGA Converter for DVR	
 VGA-02	Video to VGA Converter	

Contact Us

Telephone :

+1 (604) 207-1662

Toll Free Number:

+1-866-JLINKS-1 (1-866-554-6571)

Fax:

+1 (604) 207-1686

Web Site :

www.jlinks.com

Sales Inquiry:

sales@jlinks.com

Other Inquiry:

info@jlinks.com

Address :

328-13988 Cambie Road Richmond, BC Canada V6V2K4

Business Hours :

Monday ~ Friday from 9am ~ 5:30pm

Thank you from JLINKS and for visiting our online service. We have received your inquiry.

One of our Customer Service Representatives will begin work on your request shortly. We appreciate that your time is valuable and will take great care to provide you with a thorough response as soon as possible.

If your request is urgent, please call us at 1-866-JLINKS-1.