


---

# SC-DAS

## Installation and Operation Manual

---

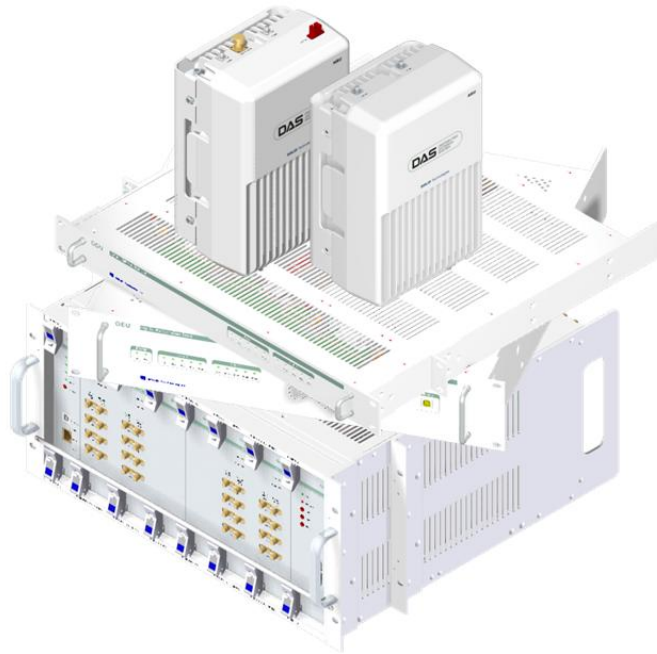

### Document Reference:

Version:	V5.0
Document Status:	Release 5
Issue Date:	Feb. 13, 2013
Author:	Kyung Eun Han
Department:	R&D Division Team 3
Authorizing Manager:	Young shin Yeo

---

## REVISION HISTORY

Version	Issue Date	No. of Pages	Initials	Details of Revision Changes
V 1.0	April. 11, 2011		Original	
V 2.0	Dec. 08,2011			Add Sprint band
V 3.0	Jan. 06,2012			Add Sprint band
V 4.0	Jan. 07,2013			Add VzW (MRU MIMO) band
V 5.0	Feb. 13,2013			Add PS (MRU) band

### Technical Support

SOLiD serial numbers must be available to authorize technical support and/or to establish a return authorization for defective units. The serial numbers are located on the back of the unit, as well as on the box in which they were delivered. Additional support information may be obtained by accessing the SOLiD, Inc. website at [www.solid.co.kr](http://www.solid.co.kr) or send email at [sjkim@solid.co.kr](mailto:sjkim@solid.co.kr)

This manual is produced by Global Business Division Business Team 1. Printed in Korea.

## Contents

<b>Section1</b>	<b><i>Safety &amp; Certification Notice</i></b> .....	<b>12</b>
<b>Section2</b>	<b><i>System Overview</i></b> .....	<b>15</b>
2.1	<b><i>General overview</i></b> .....	16
2.2	<b><i>System overview</i></b> .....	18
<b>Section3</b>	<b><i>System Specifications</i></b> .....	<b>21</b>
3.1	<b><i>System specifications</i></b> .....	22
3.1.1	<b><i>Physical Specifications</i></b> .....	22
3.1.2	<b><i>Optical wavelength and Laser power</i></b> .....	23
3.1.3	<b><i>Environmental specifications</i></b> .....	23
3.1.4	<b><i>Available Frequency Bands</i></b> .....	23
3.1.5	<b><i>Band Specifications</i></b> .....	24
<b>Section4</b>	<b><i>System Configuration and Functions</i></b> .....	<b>25</b>
4.1	<b><i>BIU (BTS Interface Unit)</i></b> .....	26
4.1.1	<b><i>BIU Specifications</i></b> .....	26
4.1.2	<b><i>BIU block diagram</i></b> .....	27
4.1.3	<b><i>BIU assemblies</i></b> .....	27
4.1.4	<b><i>Sub Assembly Description</i></b> .....	28
4.1.5	<b><i>BIU front/rear panel overview</i></b> .....	32
4.2	<b><i>ODU (Optic distribution Unit)</i></b> .....	35
4.2.1	<b><i>ODU specifications</i></b> .....	35
4.2.2	<b><i>ODU block diagram</i></b> .....	36
4.2.3	<b><i>ODU assemblies</i></b> .....	36
4.2.4	<b><i>Sub Assembly description</i></b> .....	37
4.2.5	<b><i>ODU front/rear panel overview</i></b> .....	38
4.2.6	<b><i>ODU Interface with BIU</i></b> .....	40
4.3	<b><i>OEU (Optic Expansion Unit)</i></b> .....	42
4.3.1	<b><i>Specifications of OEU</i></b> .....	42

---

4.3.2	OEU block diagram .....	43
<b>4.3.3</b>	<b>OEU assemblies .....</b>	<b>43</b>
<b>4.3.4</b>	<b>Sub Assembly description .....</b>	<b>44</b>
4.3.5	OEU front/rear panel overview.....	47
4.4	ROU (Remote Optic Unit) .....	48
4.4.1	ROU specifications .....	49
4.4.2	ROU block diagram .....	50
4.4.2.1	Combination of MRU 1900PCS+850C/ARU 700LTE+AWS-1 .....	50
4.4.2.2	Combination of MRU 1900PCS/ARU 900l+800l .....	50
4.4.2.3	Combination of MRU 700LTE+AWS-1.....	51
4.4.2.4	Combination of MRU 700PS+800PS .....	51
4.4.2.5	Combination of MRU 1900PCS+850C/ARU 700LTE+AWS-1 .....	52
4.4.2.6	Combination of MRU 1900PCS/ARU 900l+800l .....	53
4.4.2.7	Combination of MRU 700LTE+AWS-1.....	54
4.4.3	Sub Assembly description .....	56
4.4.4	Bottom of ROU .....	58
4.4.5	Top of ROU .....	60
4.4.5.1	Combination of MRU1900PCS+850C/ARU700LTE+AWS-1 .....	60
4.4.5.2	Combination of MRU1900PCS/ARU900l+800l.....	60
4.4.5.3	Combination of MRU700LTE+AWS-1 .....	61
4.4.5.4	Combination of MRU700PS+800PS.....	61
<b>Section 5</b>	<b>System Installation &amp; Operation .....</b>	<b>62</b>
5.1	BIU Installation .....	63
5.1.1	BIU Shelf Installation.....	63
5.1.2	BIU Power Cabling .....	64
5.1.3	BIU/RF interface .....	66
5.1.4	MDBU installation .....	69
5.1.5	ODU Interface .....	70
5.1.6	BIU power consumption.....	72
5.2	ODU Installation.....	73
5.2.1	ODU Shelf Installation .....	73
5.2.2	ODU Power Cabling.....	73
5.2.3	ODU Optic Cabling .....	73
5.2.4	DOU installation.....	74
5.2.5	ODU Power consumption .....	75

---

5.3	ROU Installation .....	76
5.3.1	ROU Enclosure installation .....	76
5.3.2	ROU Power Cabling .....	83
5.3.3	Optical Cabling.....	84
5.3.4	GND Terminal Connection .....	84
5.3.5	Coaxial cable and Antenna Connection .....	85
5.3.6	LED explanation on ROU .....	86
5.3.7	ROU Power consumption .....	86
5.3.8	Cable connection between MRU and ARU.....	87
5.4	OEU Installation .....	88
5.4.1	OEU chassis installation.....	88
5.4.2	OEU Power Cabling .....	88
5.4.3	OEU Optic Cabling.....	89
5.4.4	DOU installation with an OEU .....	90
5.4.5	OEU Power Consumption .....	91
<b>Section6</b>	<b>Operation.....</b>	<b>92</b>
6.1	BIU Overview .....	93
6.1.1	BIU .....	93
6.1.2	BIU TX parameters .....	93
6.1.3	BIU RX parameters .....	98
6.1.4	BIU Logic Sequence Diagram.....	99
6.1.5	Interaction with the BIU .....	101
6.2	ROU Overview .....	102
6.2.1	ROU Operation.....	102
6.3	OEU Operation.....	109
6.3.1	OEU Operation.....	109
<b>Section7</b>	<b>Additive functions.....</b>	<b>113</b>
7.1	Shutdown function (TX output shutdown) .....	114
7.2	Total Power Limit function (TX Output ALC) .....	114
7.3	Automatic Output power setting function (TX Output AGC).....	115
7.4	Input power AGC function (TX Input AGC) .....	115
7.5	Input power limit function (TX Input ALC) .....	116
7.6	Optical loss compensation.....	116



---

## Figures

Figure 1.1 – Basic system topology supporting SISO configuration.....	18
Figure 2.2 – Basic system topology supporting MIMO configuration .....	18
Figure 2.3 – Expansion system topology supporting SISO configuration .....	20
Figure 2.4 – Expansion system topology supporting MIMO configuration .....	20
Figure 4.1 – BIU front and side views .....	26
Figure 4.2 – BIU block diagram .....	27
Figure 4.3 – BIU mounting diagram.....	27
Figure 4.4 – MDBU at a glance .....	29
Figure 4.5 – MCDU at a glance .....	30
Figure 4.6 – MCPU at a glance .....	31
Figure 4.7 – MPSU at a glance.....	32
Figure 4.8 – BIU front panel view.....	32
Figure 4.9 – Rear panel view.....	34
Figure 4.10 – ODU at a glance .....	35
Figure 4.11 – ODU block diagram.....	36
Figure 4.12 – ODU Internal View .....	37
Figure 4.13 – DOU at a glance.....	38
Figure 4.14 – 2Way Divider at a glance .....	38
Figure 4.15 – ODU front panel view .....	39
Figure 4.16 – ODU Rear panel view .....	39
Figure 4.17 BIU/ODU interface .....	40
Figure 4.18 – BIU/ODU Interface rear view .....	40
Figure 4.19 – BIU/ODU interface details.....	41

---

Figure 4.20 – OEU at a glance .....	42
Figure 4.21 – OEU block diagram .....	43
Figure 4.22 – OEU internal view .....	43
Figure 4.23 – DOU at a glance .....	44
Figure 4.24 – EWDM at a glance.....	45
Figure 4.25 – ECPU at a glance .....	45
Figure 4.26 – ERFM at a glance .....	46
Figure 4.27 – EPSU at a glance .....	46
Figure 4.28 – OEU front panel view .....	47
Figure 4.29 – Rear panel view .....	47
Figure 4.30 – ROU at a glance.....	48
Figure 4.31 – ROU block diagram for MRU 1900PCS+850C and ARU 700LTE+AWS-1 .....	50
Figure 4.32 – ROU block diagram for MRU 1900PCS and ARU 900I+800I .....	50
Figure 4.33 – ROU block diagram for MRU 700LTE+AWS-1 .....	51
Figure 4.34 – ROU block diagram for MRU 700PS+800PS .....	51
Figure 4.35 – ROU internal view for MRU1900PCS+850C and ARU 700LTE+AWS-1 .....	52
Figure 4.36– ROU internal view for MRU 1900PCS and ARU 900I+800I .....	53
Figure 4.37 – ROU internal view for MRU 700LTE+AWS-1 .....	54
Figure 4.38 – ROU internal view for 700PS+800PS.....	54
Figure 4.39 – PSU at a glance.....	57
Figure 4.40 – ROU Bottom view.....	58
Figure 4.41 – ROU Power Port View .....	59



---

Figure 4.42 – ROU Top View for MRU 1900P+850C and ARU 700LTE+AWS-1 .....	60
Figure 4.42 – ROU Top View for MRU 1900P and ARU 900I+800I .....	60
Figure 4.44 – ROU Top View for MRU700LTE+AWS-1 .....	61
Figure 4.45 – ROU Top View for MRU700PS+800PS.....	61
Figure 5.1 – RACK Installation.....	63
Figure 5.2 – Power interface diagram.....	64
Figure 5.3 – PSU LED indicator information .....	65
Figure 5.4 – BIU RF interface diagram .....	67
Figure 5.5 – BTS /BIU connections.....	68
Figure 5.6 –BDA Interface using Circulator .....	68
Figure 5.7 –BDA Interface using Duplexer .....	69
Figure 5.8 –MDBU LED indicator information .....	70
Figure 5.9 –Interface port between BIU and ODU.....	71
Figure 5.10 –Cabling interface diagram between BIU and ODU.....	72
Figure 5.11 –SC/APC fiber termination.....	74
Figure 5.12 – ODU rear view with DOUs inserted.....	74
Figure 5.13 – Wall mount dimensions for the ROU.....	76
Figure 5.14 – ROU installation procedure side by side .....	77
Figure 5.15 – ROU installation diagram side by side .....	78
Figure 5.16 – ROU installation procedure for stacked mounting .....	78
Figure 5.17 – ROU installation diagram for stacked mounting.....	79
Figure 5.18 – ROU installation procedure for vertical rack .....	80
Figure 5.19 – ROU installation diagram for vertical rack.....	81
Figure 5.20 – ROU installation procedure for horizontal rack .....	82

---

Figure 5.21 – ROU installation diagram for horizontal rack .....	82
Figure 5.22 – ROU Power Port view .....	83
Figure 5.23 – ROU optical Port view .....	84
Figure 5.24 – ROU GND Port view .....	85
Figure 5.25 – ROU LED indicator information .....	86
Figure 5.26 – OEU Power interface diagram .....	89
Figure 5.27 – Optical cable with SC/ACP Type Connectors.....	90
Figure 5.28 – OEU with DOUs inserted .....	90
Figure 6.1 – SC-DAS Link budget for the BIU .....	93
Figure 6.2 –MDBU information assigned at theBIU .....	95
Figure 6.3 –MDBU menu information at the BIU.....	95
Figure 6.4 –MDBU name assignment at theBIU .....	97
Figure 6.5 –MDBU name assignment at the tree.....	97
Figure 6.6 –MDBU Module Failure information at the BIU .....	98
Figure 6.7 –Configuration of BIU-ODU-ROU for basic topology .....	99
Figure 6.8 –Configuration of BIU-ODU-ROU for expansion topology .....	100
Figure 6.9 –DOU assignment at the BIU .....	101
Figure 6.10 –ODU Menu information.....	101
Figure 6.11 –SC-DAS Link budget for ROU .....	102
Figure 6.12 –Optical information at the ROU.....	105
Figure 6.13 –ROU information assignment .....	106
Figure 6.14 –ROU Menu information .....	106
Figure 6.15 –ROU Softkey information .....	108
Figure 6.16 –SC-DAS Link Budget for OEU .....	109

---

Figure 6.17 –OEU Optical information .....	111
Figure 7.1 –Shutdown logic diagram.....	114
Figure 7.2 –Optical loss information .....	117



---

# ***Section1***

## **Safety & Certification Notice**

---

---

**“Only qualified personnel are allowed to handle this unit. Read and obey all the warning labels attached in this user manual”**

**Any personnel involved in installation, operation or service of the SOLiD Technology repeaters must understand and obey the following:**

- Obey all general and regional installation and safety regulations relating to work on high voltage installations, as well as regulations covering correct use of tools and personal protective equipment.
- The power supply unit in repeaters contains dangerous voltage levels which can cause electric shock. Switch the mains off prior to any work in such a repeater. Any local regulations are to be followed when servicing repeaters.
- The repeater cover (door) should be securely fastened in open position(with a cord), during outdoor work in order to prevent door from slamming due to wind (which could cause bodily harm or damage).
- Use this unit only for the purpose specified by the manufacturer. Do not carry out any modifications or replace any parts which are not sold or recommended by the manufacturer. This could cause fire, electric shock or other injuries.
- Repeaters generate radio signals and thereby give rise to electromagnetic fields that may be hazardous to any person in the immediate proximity of the repeater and the repeater antennas for an extended period of time.
- Due to power dissipation, this repeater may reach a very high temperature. Do not operate this unit on or close to flammable materials.
- Do not use any solvents, chemicals, or cleaning solutions containing alcohol, ammonia, or abrasives.
- Signal booster warning label message should include (Class B Industrial Booster)

**Part 90 Signal Boosters**

**WARNING.** This is **NOT** a **CONSUMER** device. It is designed for installation by **FCC LICENSEES** and **QUALIFIED INSTALLERS**. You **MUST** have an **FCC LICENSE** or express consent of an FCC Licensee to operate this device. You **MUST** register Class B signal boosters (as defined in 47 CFR 90.219) online at **[www.fcc.gov/signal-boosters/registration](http://www.fcc.gov/signal-boosters/registration)**. Unauthorized use may result in significant forfeiture penalties, including penalties in excess of \$100,000 for each continuing violation.

- Any DAS system or Fiber BDA will generate radio (RF) signals and continuously emit RF energy. Avoid prolonged exposure to the antennas. SOLiD recommends maintaining a 34.0cm (13.4 inches) minimum clearance from the antenna while the system is operating.

- Certification

- FCC: This equipment complies with the applicable sections of Title 47 CFR Parts 15,22,24 and 90
- UL/CUL: This equipment complies with UL and CUL 1950-1 Standard for safety for information technology equipment,including electrical business equipment
- FDA/CDRH: This equipment uses a Class 1 LASER according to FDA/CDRH Rules.This product conforms to all applicable standards of 21 CFR Chapter 1, Subchaper J, Part 1040

-For PLUGGABLE EQUIPMENT, the socket-outlet shall be installed near the equipment and shall be easily accessible.

## ***Section2***

### **System Overview**

---

- 2.1 General overview
- 2.2 System overview

## 2.1 General overview

SC-DAS platform is a coverage system for in-building services delivering seamless, high quality voice and data. As a distributed antenna system, it provides analog and digital phone services in multiple bands through one antenna.

The system covers public and private venues such as:

- Shopping malls
- Hotels
- Campus areas
- Airports
- Clinics
- Subways
- Multi-use stadiums, convention centers, etc.

The system enhances in-building radio environments that lack signal quality by improving the RSSI and Ec/Io. By providing communication services throughout the building, the system enables users to make a call anywhere in the coverage area.

The system uses both analog (AMPS) and digital (TDMA, CDMA and WCDMA) methods.

The SC-DAS system supports communication standards and public interface protocols in worldwide use.

- Frequencies: VHF, UHF, 700MHz, 800MHz, 850MHz, 900MHz, 1900MHz, 2100MHz, etc.
- Voice protocols: AMPS, TDMA, CDMA, GSM, IDEN, etc.
- Data protocols: EDGE, GPRS, WCDMA, CDMA2000, Paging, LTE, etc.

SC-DAS comprises frequency specific modules. Coverage for a specific frequency band is accomplished by inserting a corresponding frequency module into each unit. Because it delivers multiple signals with one strand of single mode fiber, the system, requires no additional hardware modifications whenever a new frequency is added.

The system is featured with the following:

- Flexibility & Scalability
  - Supports fiber-optic ports up to 32 or 60 (using OEU)
  - Connects multiple buildings (campus) as one DAS
- Modular structures
  - Modular frequency upgrade
  - Plug-in type modules
- Multi-Band, Single operator
  - Supports multiple services from one WSP



- 
- Support multi-operator in a band(Max. 2 operator)
  - Low OPEX / CAPEX
    - Compact design
    - Upgradable design
    - Easy installation and maintenance
    - Adopts auto ID scheme

The SC-DAS platform will serve two primary segments; first as a carrier deployed coverage enhancement product for their specific frequencies and second as a low cost, public safety / single carrier product.

## 2.2 System overview

SC-DAS comprises the components listed below.

The base system consists of a BIU (BTS Interface Unit), an ODU (Optic distribution Unit) and a ROU (Remote Optic Unit). For use with multiple ROU's, it has OEU (Optic Expansion Unit).

The BIU has two layer which support both SISO and MIMO configuration using separate optical fiber cable. Fig2.1 shows basic system topology for SISO

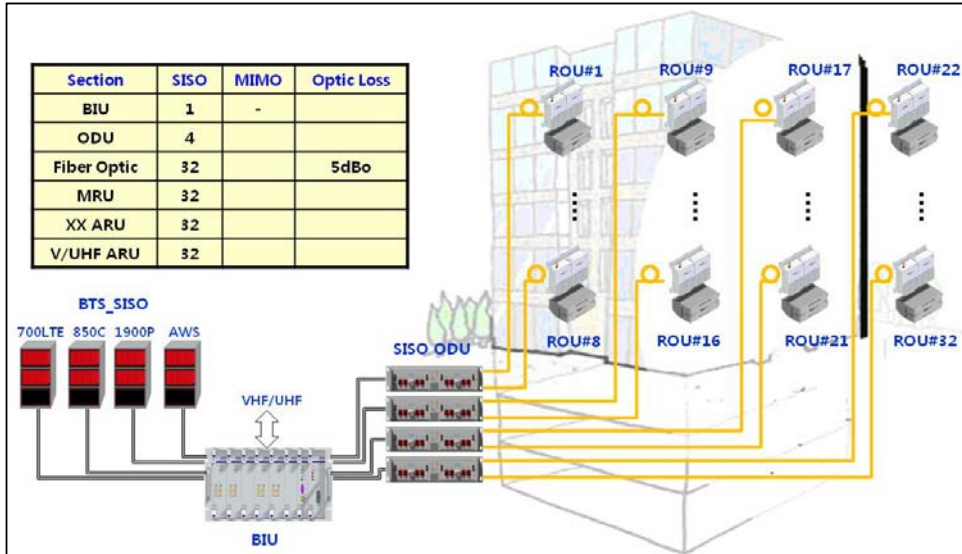


Figure 1.1 – Basic system topology supporting SISO configuration

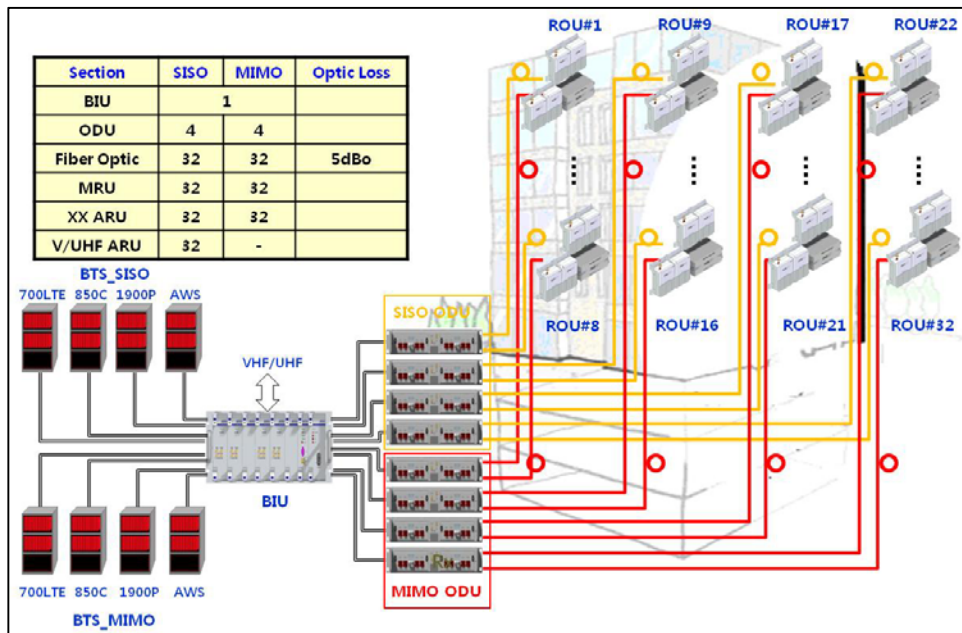


Figure 2.2 – Basic system topology supporting MIMO configuration

---

As shown at Fig.'s 2.1 and 2.2, one strand of fiber is needed for SISO configuration but two strands are needed for MIMO configuration when connected with an ROU. Applications requiring up to 32 ROU's for SISO are possible with one BIU. Each SISO ROU will require an additional strand of fiber and an additional 32 ROU's can be added to the same system for MIMO applications. MIMO requires 2 strands of fiber per ROU as well as MIMO specific ODU's.

To reduce number of optical cables between multi-building applications, we can utilize the OEU(Optical Expansion Unit)

Fig 2.3 shows expansion system topology supporting SISO configuration using OEUs

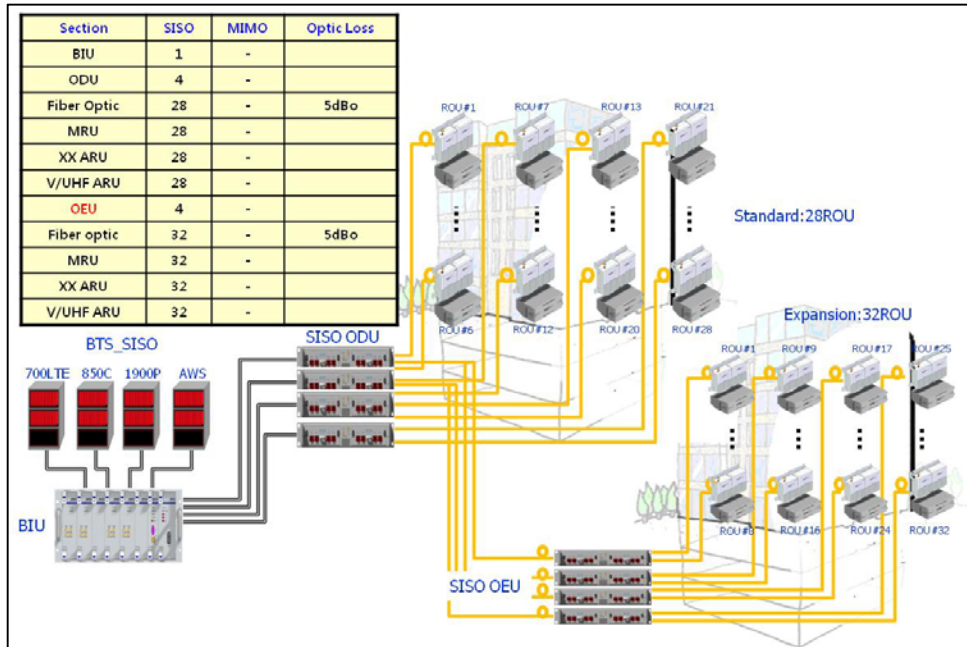


Figure 2.3 – Expansion system topology supporting SISO configuration

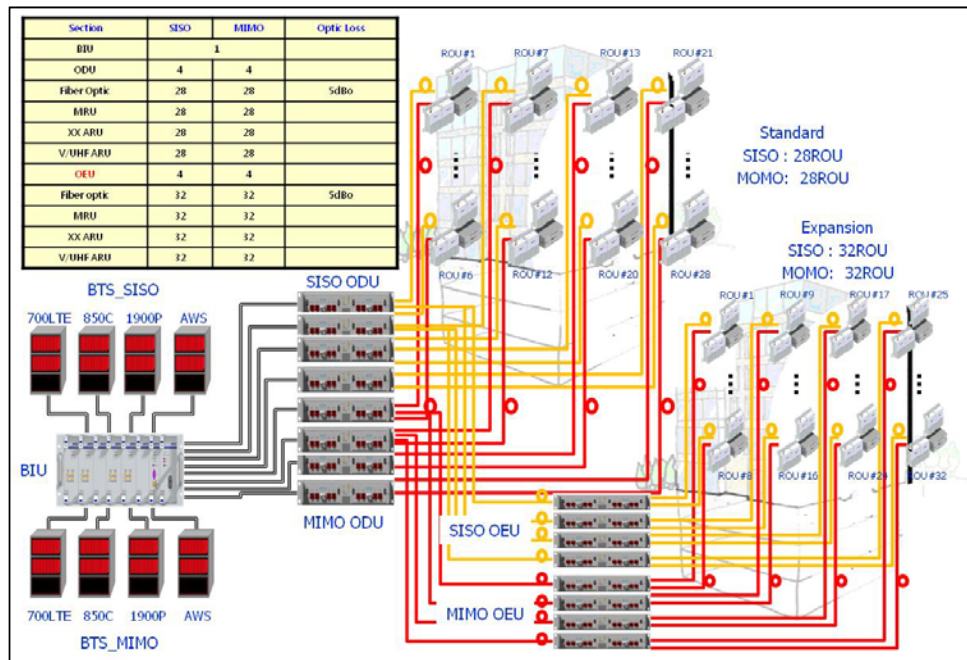


Figure 2.4 – Expansion system topology supporting MIMO configuration

Fig 2.4 shows expansion system topology supporting MIMO configuration using OEU

# **Section 3**

## **System Specifications**

---

- 3.1 System specifications**
  - 3.1.1 Physical Specifications**
  - 3.1.2 Optic wavelength and Laser power**
  - 3.1.3 Environmental specifications**
  - 3.1.4 Available frequency bands**
  - 3.1.5 Band Specifications**



### 3.1 System specifications

#### 3.1.1 Physical Specifications

Parameter	BIU	ODU	OEU	MRU	ARU
RF Connectors	4 SMA pairs(TX,RX) per MDBU	2 SMA	-	1 N-type 2SMA :optical 2SMA :RF	2SMA :optical 2SMA :RF
External Alarm connector (Dry contacts)	TB: 4pcs for output TB: 3pcs for input	-	-	-	-
Serial Interface connector	1 USB(B) type		1 USB(B) type	1 USB(B) type	1 USB(B) type
Fiber connector	-	8pcs, SC/APC for ROU	1 SC/APC for ODU 8 SC/APC for ROU	1 SC/APC for ODU	-
LED Alarm and Status Indicator	<p>MDBU Status</p> <ul style="list-style-type: none"> <li>● Power status</li> <li>● ALM status</li> </ul> <p>MCPU</p> <ul style="list-style-type: none"> <li>● Power status</li> <li>● TX Comm</li> <li>● RX Comm</li> <li>● ALM status</li> </ul> <p>MPSU</p> <ul style="list-style-type: none"> <li>● Power status</li> <li>● DC ALM status</li> </ul>	<p>DOU1 Status</p> <ul style="list-style-type: none"> <li>● LD status</li> <li>● PD1/2/3/4 status</li> </ul> <p>DOU2 Status</p> <ul style="list-style-type: none"> <li>● LD status</li> <li>● PD1/2/3/4 status</li> </ul>	<p>EWDM Status</p> <ul style="list-style-type: none"> <li>● LD status</li> <li>● PD status</li> </ul> <p>DOU1 Status</p> <ul style="list-style-type: none"> <li>● LD status</li> <li>● PD1/2/3/4 status</li> </ul> <p>DOU2 Status</p> <ul style="list-style-type: none"> <li>● LD status</li> <li>● PD1/2/3/4 status</li> </ul> <p>System status</p> <ul style="list-style-type: none"> <li>● Power status</li> <li>● TX1 Comm</li> <li>● RX1 Comm</li> <li>● TX2 Comm</li> <li>● RX2 Comm</li> <li>● ALM status</li> </ul>	<p>System status</p> <ul style="list-style-type: none"> <li>● Power status</li> <li>● TX Comm</li> <li>● RX Comm</li> <li>● ALM status</li> <li>● Opt status</li> </ul>	<p>System status</p> <ul style="list-style-type: none"> <li>● Power status</li> <li>● TX Comm</li> <li>● RX Comm</li> <li>● ALM status</li> </ul>
AC Power	-	-		Normal Range: 120VAC 50/60Hz Operating range 108~132VAC,50/60Hz	Same to left side
DC Power	Normal range: -48 VDC Operating range: -40.8 ~ -57.6VDC	Be provided by BIU		Normal: -48 VDC Operating range: -40.8 ~ -57.6VDC	Same to left side
Power consumption	SISO Mode : 162W (Including SISO ODU 4EA) MIMO Mode : 315W (Including SISO ODU 4EA+MIMO ODU 4EA)	28W (Including DOU2EA)	40W (Including DOU2EA)	MRU1900P+850C:50W MRU 1900P:45W MRU700LTE+AWS:50W MRU700P+800P:50W	ARU700LTE+AWS:40W ARU900I+800I:44W
Enclosure Dimensions	482.6(19") x 221.5(5U) x 450	482.6(19") x 43.6(1U) x 450	482.6(19") x 88.1(2U) x 450	300 x 200 x 258	300 x 200 x 258
Weight[Full Load]	26.2Kg	6Kg	9.6Kg	6.6Kg~7.1Kg	6.8Kg

### 3.1.2 Optical wavelength and Laser power

Parameter	ODU	OEU	ROU
Optical Wavelength	TX: 1310nm RX: 1550nm	West optic TX: 1550nm, RX: 1310nm East optic TX: 1310nm, RX: 1550nm	TX: 1550nm RX: 1310nm
Output power	1.5dBm±1dBm to ROU,OEU	1dBm±1dBm to ROU 7dBm±1dBm to ODU	7dBm±1dBm to ODU
Return loss	<45dB	<45dB	<45dB

### 3.1.3 Environmental specifications

Parameter	BIU, ODU, OEU	ROU/AOR
Operating Temperature	-10 to +50°C	-10 to +50°C
Operating Humidity, non condensing	-	5% to 90%

### 3.1.4 Available Frequency Bands

Standard	Unit naming	Description	Frequency range		Status
			TX(MHz)	RX(MHz)	
iDEN	700PS	Iden	758 to 775	788 to 805	Completed
iDEN	800PS+I	Iden	851 to 869	806 to 824	Completed
Cellular	850C	Cellular	869 to 894	824 to 849	Completed
iDEN	900I	Iden	935 to 940	896 to 901	Completed
Paging	900 PA	Paging	929 to 930	896 to 902	In future
PCS	1900P	PCS	1930 to 1995	1850 to 1915	Completed
AWS-1	AWS-1	AWS-1	2110 to 2155	1710 to 1755	Completed
VHF	VHF	Public safety	136 to 174	136 to 174	Completed
UHF	UHF	Public safety(Band1)	396 to 450 450 to 512	396 to 450 450 to 512	Completed
E-UHF		Public safety(Band2)	380 to 434 434 to 496	380 to 434 434 to 496	Completed
LTE	700LTE	Long Term Evolution	728 to 757	698 to 716 777 to 787	Completed

### 3.1.5 Band Specifications

SC-DAS platform allows many band combinations as well as different output power levels within the band depending on the combination.

#### 1) Output power level

Below table shows Output power level as a function of band combination

Band Combinations		700PS	700LTE	800PS/I	850C	900I	1900P	AWS	VHF	UHF
MRU	ARU									
1900P+850C	700LTE+AWS	-	24dBm	-	24dBm	-	28dBm	28dBm	24dBm	24dBm
1900P	900I+800I	-	-	26dBm	-	26dBm	31dBm	-		
700LTE+AWS	-	-	28dBm	-	-	-	-	28dBm		
700PS+800PS	-	27dBm	-	27dBm	-	-	-	-		
1900P+AWS	-	On the loadmap				-	30dBm	30dBm		
1900P+850C	700PS+800PS					-	30dBm	-		

#### 2) General Specifications

Parameter	Specifications	Remark	
Gain Control range	TX	25dB/step 1dB	ROU
	RX	20dB/step 1dB	BIU
TX input power	-20dBm~+10dBm		
Spurious Emission	< -13dBm		
Optical Link AGC	>10dB		
VSWR	1.8:1		
Pass-band Ripple	4dBp-p		
Max optical Loss	5dB <sub>o</sub>		
Optical wavelength	1310nm/1550nm with WDM		
RX output power	0dBm		
RX input power	-50dBm Max		
Noise Figure	< 8dB		



# ***Section 4***

## **System Configuration and Functions**

---

- 4.1 BIU (BTS Interface Unit)**
- 4.2 ODU (Optic distribution Unit)**
- 4.3 OEU (Optic Expansion Unit)**
- 4.4 ROU (Remote Optic Unit)**

## 4.1 BIU (BTS Interface Unit)

The BIU receives signals from the BTS or BDA through coaxial cable and transmits to four ODUs (Optic Distribution Unit).and The BIU separates RX signals received from ODUs according to their frequency band.

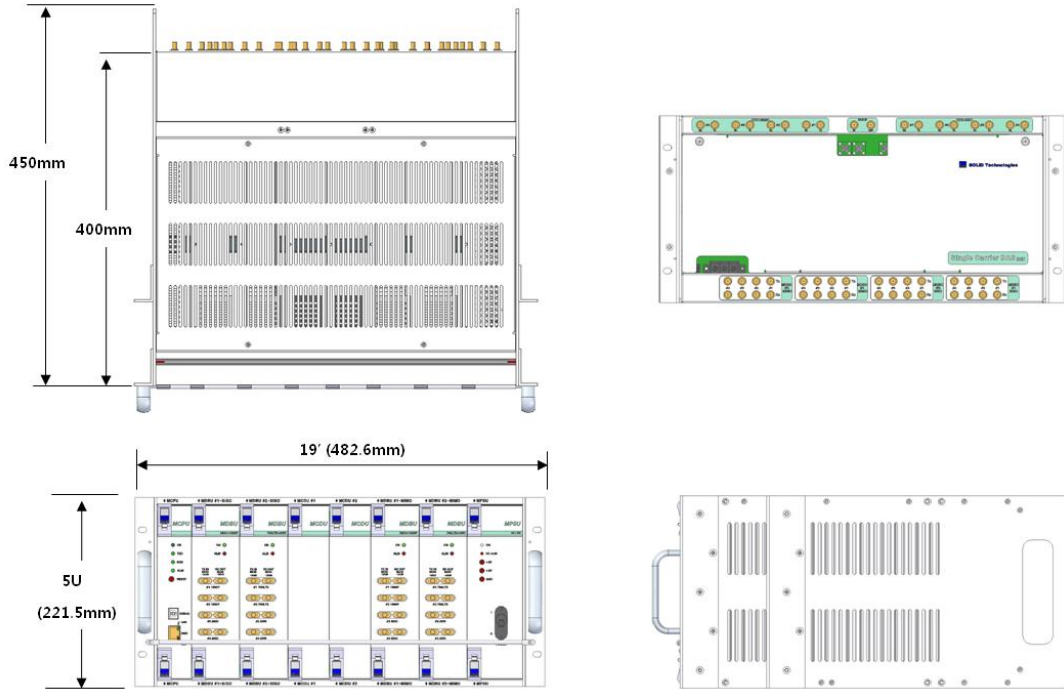


Figure 4.1 – BIU front and side views

### 4.1.1 BIU Specifications

Item	Spec.	Remark
Size	482.6(19'') x 221.5(5U) x 450	mm
Weight	26 Kg	
Power consumption	SISO Mode : 168 W(Including SISO ODU 4EA) MIMO Mode : 315W(Including SISO ODU 4EA+MIMO ODU 4EA)	Full Load

### 4.1.2 BIU block diagram

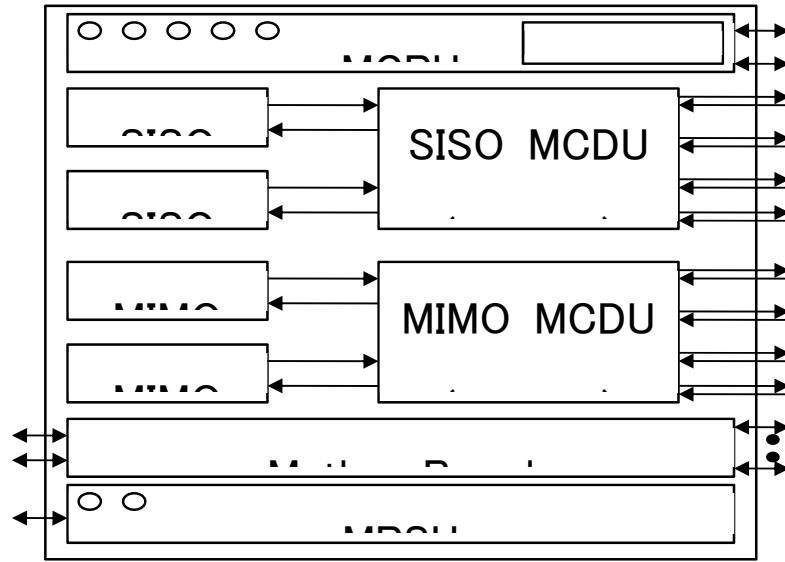


Figure 4.2 – BIU block diagram

### 4.1.3 BIU assemblies

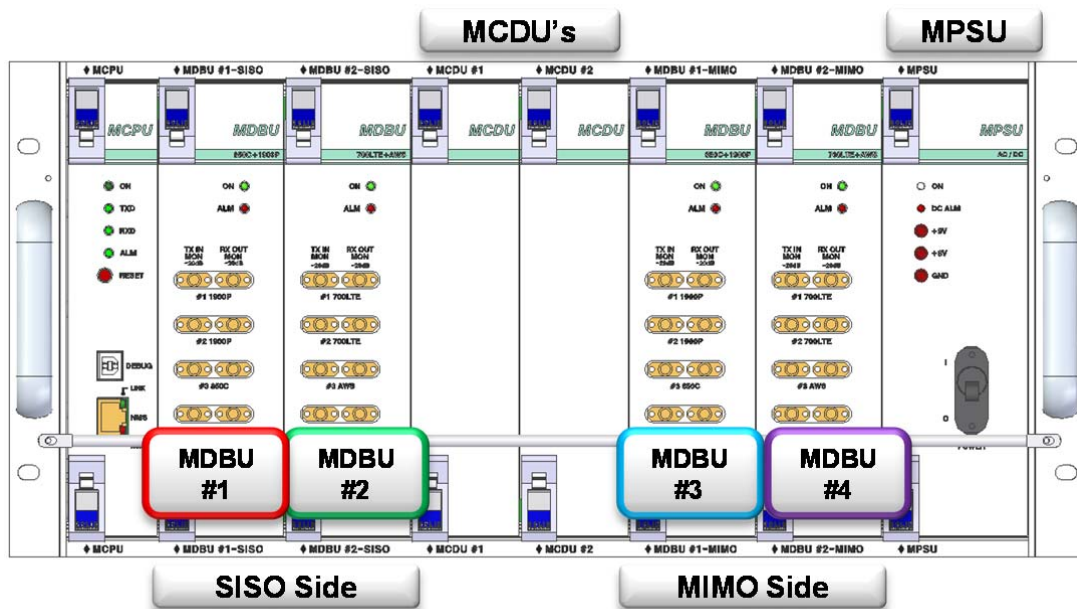


Figure 4.3 – BIU mounting diagram

No.	Unit	Description	Remark
1	MDBU	<b>Main Drive BTS Unit</b> Amplify & adjust downlink RF signal Amplify & adjust uplink RF signal	Max 4EA
2	MCDU	<b>Main Com/Div Unit</b> Combine 3EA downlink signal and divide 4EA signal to ODU Combine 4EA uplink signal and divide 3EA signal to MDBU Support VHF/UHF interface port	
3	MCPU	<b>Main Central Processor Unit</b> Control and monitoring system status Control and monitoring with USB(B) Allows access to upper-level network through GSM or Ethernet	
4	MPSU	<b>Main Power Supply Unit</b> Input power: DC -48V, Output power: 9V, 6V	
5	M/B	<b>Mother Board</b> Provide signal interface and power for each unit Provide four ports for dry contact output Provide three ports for input Provide two Aux ports for future usage	
6	Shelf	19 inch, 5U	

#### 4.1.4 Sub Assembly Description

##### 1) Main Drive BTS Unit (MDBU)

MDBU delivers TX signals from the BTS or BDA to related devices as well as delivers RX signals from these devices to the BTS or BDA. This unit also monitors TX input level. Using the input AGC function, it automatically adjusts input ATT according to input power. It also has an ATT to adjust RX gain. The MDBU varies per frequency band to including the following:

No	Unit naming	Description	In/out RF Port	
			TX	RX
1	1900P+850C	Dual Band	4 Port	4 Port
2	700LTE+AWS-1	Dual Band	4 Port	4 Port
3	1900P	Single Band	2 Port	2 Port
4	900I+800I	Dual Band	4 Port	4 Port
5	700PS+800PS	Dual Band	4 Port	4 Port
6	1900P+AWS-1	On the loadmap		4 Port
7	900I			2 Port

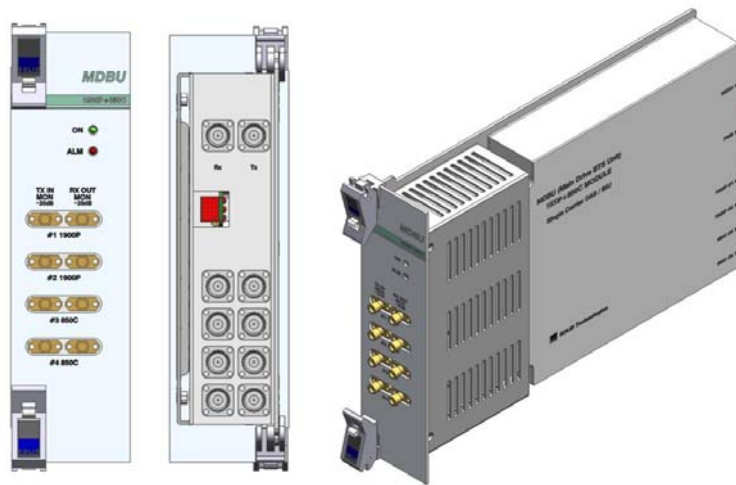


Figure 4.4 – MDBU at a glance

## 2) Main Com/Div Unit (MCDU)

MCDU combines TX signals that are delivered from MDBU per frequency band and delivers them to four ODUs. It also combines RX signals from up to four ODUs and sends them to up to four MDBUs. The unit has a port to interface with VHF&UHF signals. It has an ATT for input monitoring and input control.

The unit has a reserved port for future usage such as LMU interface, additive MDBU interface ,etc,

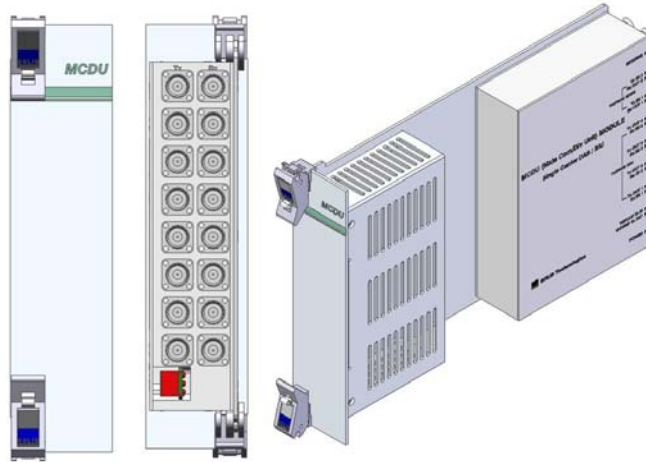


Figure 4.5 – MCDU at a glance

VHF+UHF frequency band includes the following: for use in future

No	Unit naming	Description	In/out RF Port	
			TX	RX
1	VHF+UHF	Dual Band	1 Port	1 Port


### 3) Main Central Processor Unit (MCPU)

MCPU can inquire and control the state of the modules that are installed in the BIU.

This unit can inquire and control the state of up to four ODUs. Through communication, it also can inquire and control ROUs that are connected.

In addition, the unit has USB(B) port for local monitoring so that it can inquire and control state of devices through a PC. On the front panel, it has communication LED indicators to check communication state with ROU. It also has ALM LED indicators to show whether a device is faulty.

For access to upper network, it has a port to insert an Ethernet port and GSM modem in it.

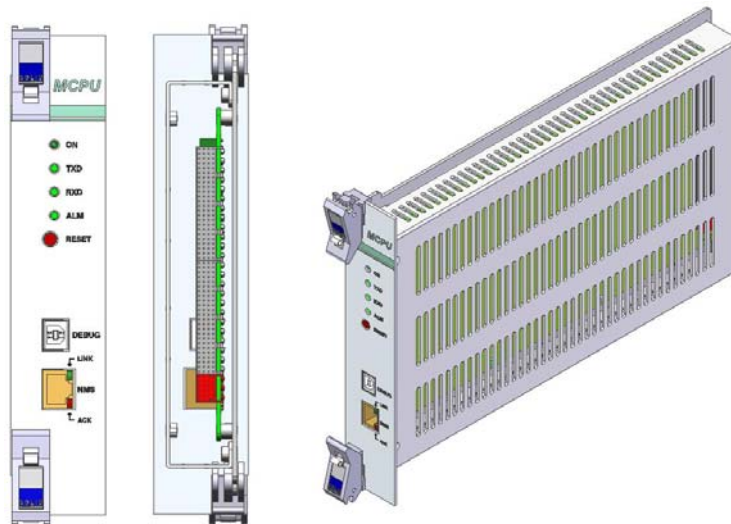

**Figure 4.6 – MCPU at a glance**

In the Main Central Processor Unit, a lithium battery is installed for RTC (Real Time Control) function.



**CAUTION**

RISK OF EXPLOSION MAY OCCUR IF BATTERY IS REPLACED BY AN INCORRECT TYPE

DIPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS

[INSTRUCTION]

The equipment and accessories including inner lithium battery are to be disposed of safely after the life span of them according to the national regulation. Do not attempt to replace the lithium battery unless authorized by a qualified service personnel, to avoid any risk of explosion.

**4) Main Power Supply Unit (MPSU)**

The MPSU takes a -48V input and outputs +6V and +9V DC power.

On the front panel, this unit has an output test port and it also has DC ALM LED Indicator to show faulty output.

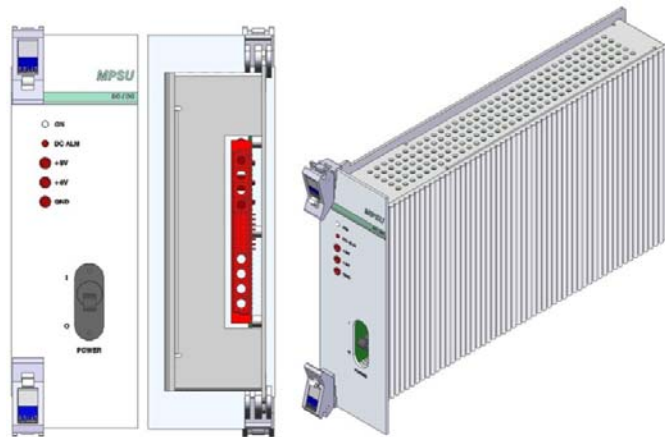


Figure 4.7 – MPSU at a glance

#### 4.1.5 BIU front/rear panel overview

##### 1) Front panel

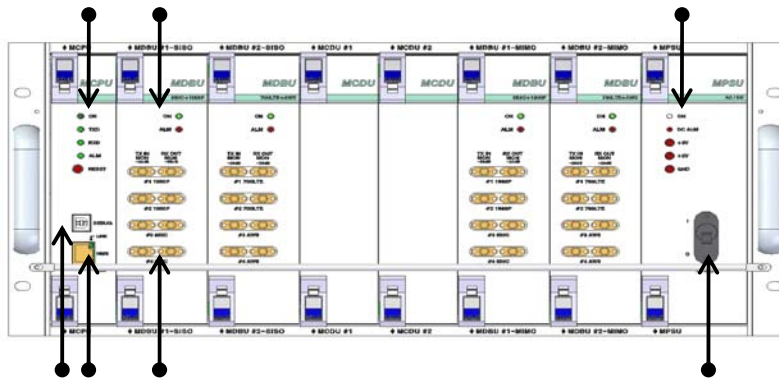


Figure 4.8 – BIU front panel view

Item	Description
1. Alarm LED & Reset	Communication state with devices, alarm status of the system and reset switch
2. DEBUG (USB B)	USB port for communication and diagnosis of devices through PC/laptop This equipment is for indoor use only and all the communication wirings are limited to indoor use as well.
3. NMS(Ethernet port)	Ethernet port for upper network The supporting network mode is UDP protocol
4. MDBU LED	LED to show whether MDBU is installed and is operating properly



---

5. RF Monitor Port	20dB Coupling compared with TX Input Level 20dB Coupling compared with RX Output Level
6. Pwr Test Port & ALM	Output DC power test port and ALM LED to show abnormal state, if any
7. Power switch	Power ON/OFF switch

## 2) Rear panel

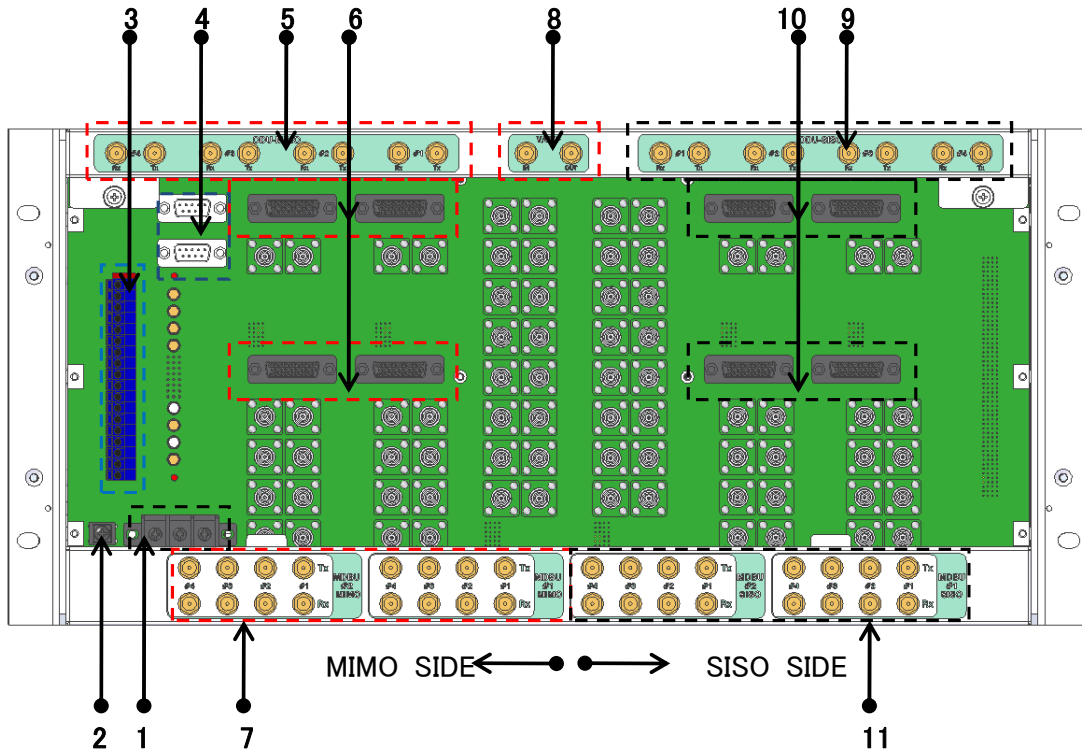


Figure 4.9 – Rear panel view

Item	Description
1. DC Input Port	Input terminal for DC -48V
2. External ALM Port	Input/output terminal for dry contact
3. GND Port	System ground terminal
4. AUX I/O Port	Reserved Port for future uses
5. MIMO ODU I/O Port	RF signal interface terminal for ODU
6. MIMO ODU signal Port	Power and signal interface terminal for ODU
7. MIMO BTS/BDA I/O Port	Input/output interface terminal of BTS/BDA
8. V/UHF I/O Port	RF signal interface terminal of VHF&UHF
9. SISO ODU I/O Port	RF signal interface terminal for ODU
10. SISO ODU signal Port	Power and signal interface terminal for ODU
11. SISO BTS/BDA I/O Port	Input/output interface terminal of BTS/BDA

## 4.2 ODU (Optic distribution Unit)

ODU receives TX RF signals from upper BIU and converts them into optical signals. The optical signals are sent to ROU through optical cables. This unit converts optical signals from ROU into RF signals and sends the converted signals to BIU.

For each shelf of the ODU, up to two DOUs (Donor Optic Unit) can be installed in it.

One DOU is supported with four optical ports. Therefore, one ODU can be connected with eight ROUs.

Up to four ODUs can be connected with BIU each SISO and MIMO path

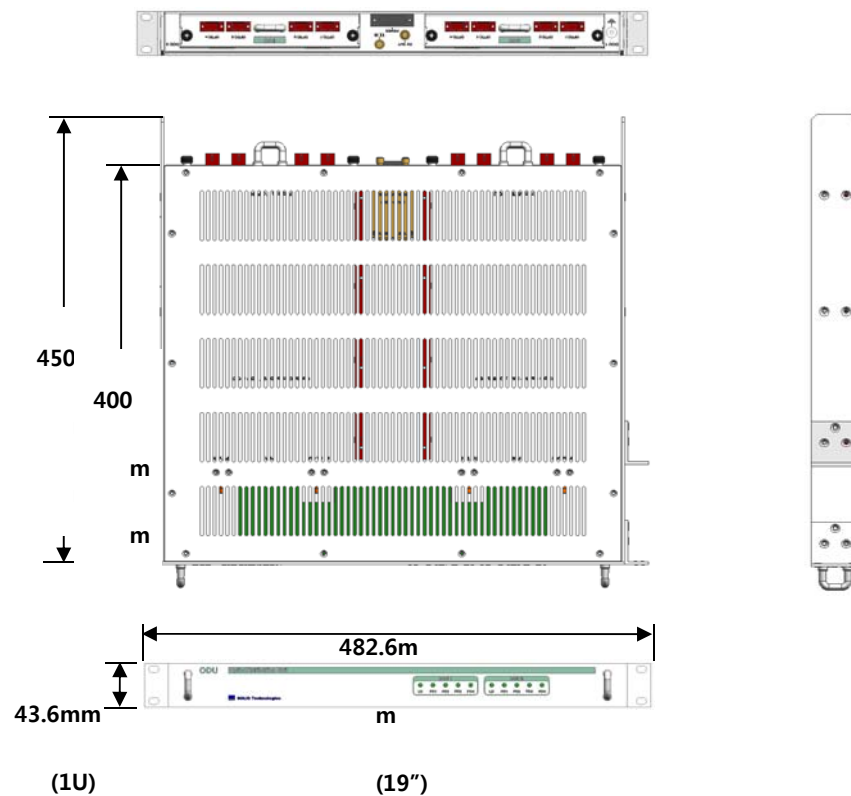


Figure 4.10 – ODU at a glance

### 4.2.1 ODU specifications

Item	Spec.	Remark
Size	482.6(19") x 43.6(1U) x 450	mm
Weight	6 kg	Full Load
Power consumption	27 W	

### 4.2.2 ODU block diagram

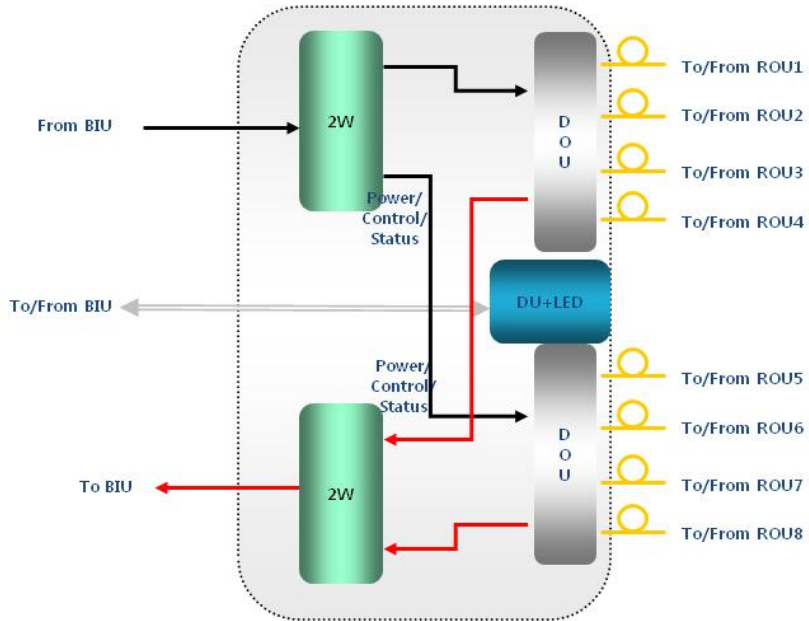


Figure 4.11 – ODU block diagram

### 4.2.3 ODU assemblies

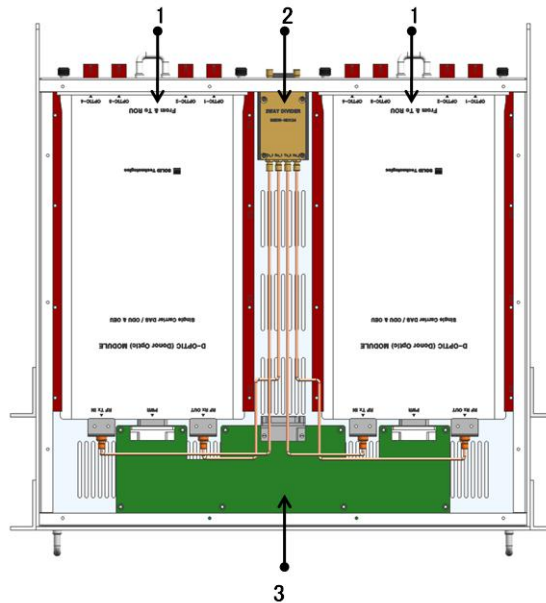


Figure 4.12 – ODU Internal View

No.	Unit	Description	Remark
1	DOU	<b>Donor Optic Unit</b> Converts TX RF signals into optical signals; Converts RX optical signals into RF signals; Provides up to four optical ports per DOU	Max 2 ea.
2	2W	<b>2Way Divider</b> Divides TX RF signals into two; Combines two RX RF signals into one	
3	DU	<b>Distribution Unit</b> Distributes power and signals to DOU	
4	Shelf	19" rack, 1RU	
5	Accessories	25PIN DSUB, Male to female 1pcs RF Coaxial Cable Assembly 2pcs	

#### 4.2.4 Sub Assembly description

##### 1) Donor Optic Unit (DOU)

The DOU performs the RF to optical conversion of TX signals as well as the optical to RF conversion of RX signals.

Using an optical splitter, this unit divides optical signals from a Laser Diode into four and then distributes them to each optical port. With a total of four Photo Diodes in RX, the DOU performs the optical to RF conversion of signals received from each optical port. In addition, the unit is equipped with an ATT to compensate for optical loss in the fiber or fiber connectors.

Since it uses a WDM, it uses only one strand of fiber for each ROU it connects to.

With internal FSK modem, it will allow operation from a remote site.

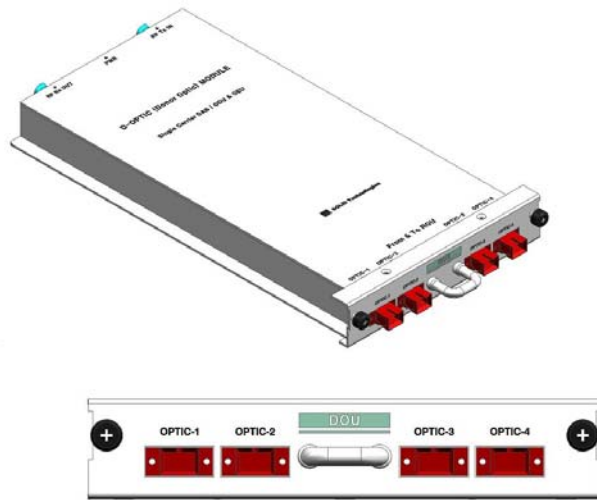


Figure 4.13 – DOU at a glance

## 2) 2Way Divider (2W)

The 2 way divider is equipped with two 2-way splitters in a single housing and the splitters work for TX/RX signals, respectively.

Designed in broadband type, the divider combines and splits signals from/to the BIU

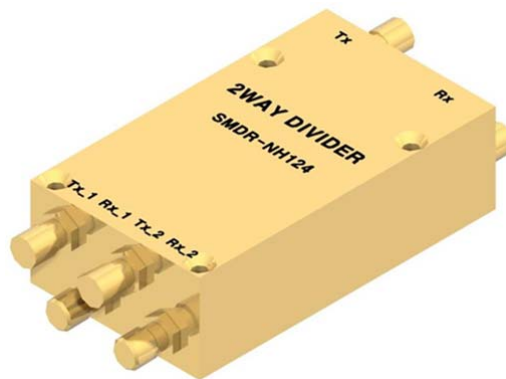


Figure 4.14 – 2Way Divider at a glance

## 4.2.5 ODU front/rear panel overview

### 1) Front panel

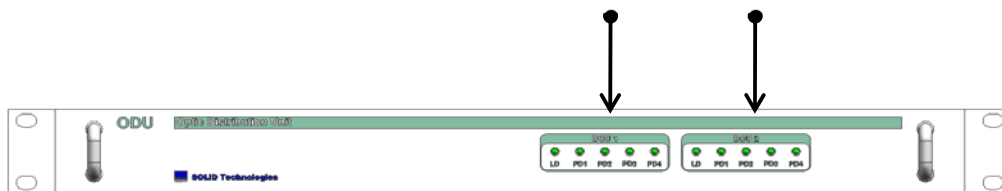


Figure 4.15 – ODU front panel view

Item	Description
1,2	LED indicator to check for faulty DOU module.

2) Rear panel

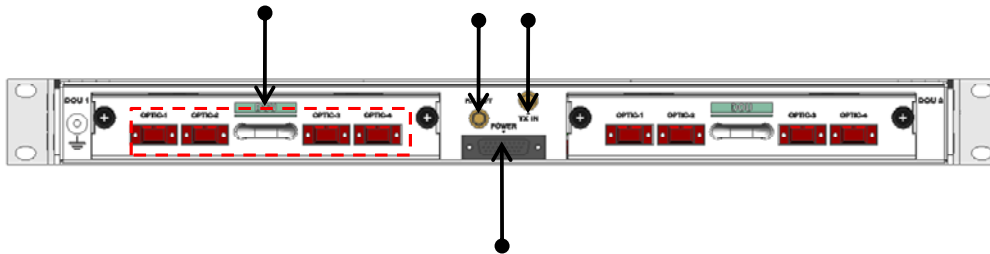


Figure 4.16 – ODU Rear panel view

Item	Description
1. Optic Port	SC/APC optical connector terminal; use one optical cable per ROU.
2. DC I/O Port	Terminal for power and state values
3. RX RF Port	RX RF signal interface terminal
4. TX RF Port	TX RF signal interface terminal