

Section 5

System Installation & Operation

- 5.1 BIU Installation**
- 5.2 ODU Installation**
- 5.3 ROU Installation**
- 5.4 OEU Installation**
- 5.5 System Operation and Alarm Status**
- 5.6 Add on V/UHF ROU Installation**

This chapter describes how to install each unit and optical cables, along with power cabling method.

In detail, the chapter describes how to install shelves or enclosures of each unit, Power Cabling method and Optic Cabling and RF Interface. Furthermore, by showing power consumption of modules to be installed in each unit, it presents Power Cabling budget in a simple way. Then, it describes the quantity of components of modules to be installed in each unit and expansion method.

5.1 BIU Installation

5.1.1 BIU Shelf Installation

Generally, BIU is inserted into a 19" Standard Rack. As this unit has handles at each side for easy move. With two fixing holes at each side, you can tightly fix the unit into a 19" rack.

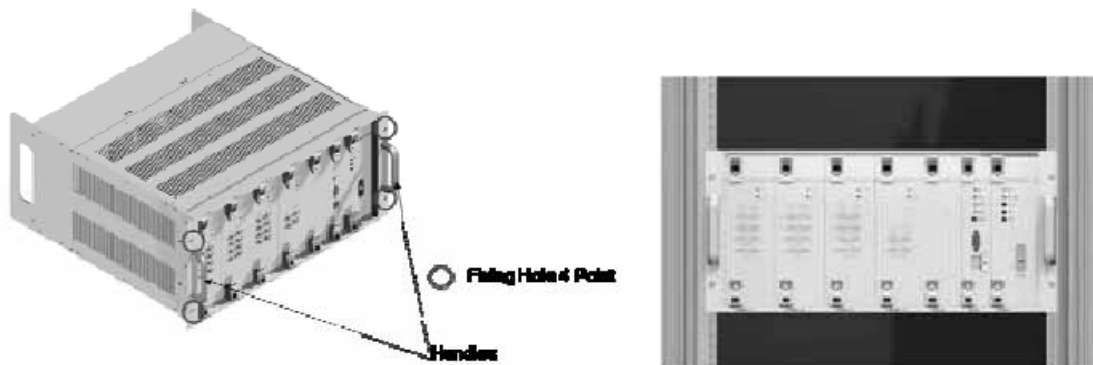


Figure 5.1 – RACK Installation

BIU has the following components:

No.	Unit	Description	Remark
Common Part	Shelf	Including Main Board, 19", 5U	1EA
	MCDU	-	1EA
	MCPU	With Ethernet Port and RS-232 Port	1EA
	MPSU	Operate -48Vdc Input	1EA
	Power Cable	-48Vdc Input with two lug terminal	1EA
Optional Part	MDBU	800PS, 800PS+900I+Paging, 850C, 850C+700P S, 1900P, AWS-1 MDBU	Up to 4EA to be inserted

Basically, the common part of BIU should have shelves and it should be equipped with MCDU to combine and divide TX/RX signals, MPSU to supply devices with power, MCDU to inquire and control state of each module and Power Cable to supply power from external rectifiers.


In addition, MDBU can be inserted and removed to provide services for desired band (Optional).

5.1.2 BIU Power Cabling

BIU has -48V of input power. This unit should connect DC cable with the Terminal Block seen at the rear of BIU.

Terminal	Color of cable	Description	Remark
-48V	Blue color	-	
GND	Black color	-	
NC	Not Connected	-	

Before connecting the power terminal, you need to connect "+" terminal of Multi Voltage Meter probe with the GND terminal and then connect "-" terminal with -48V to see if "-48Vdc" voltage is measured. After the check, you need to connect the power terminal with the terminal of the terminal block seen below.

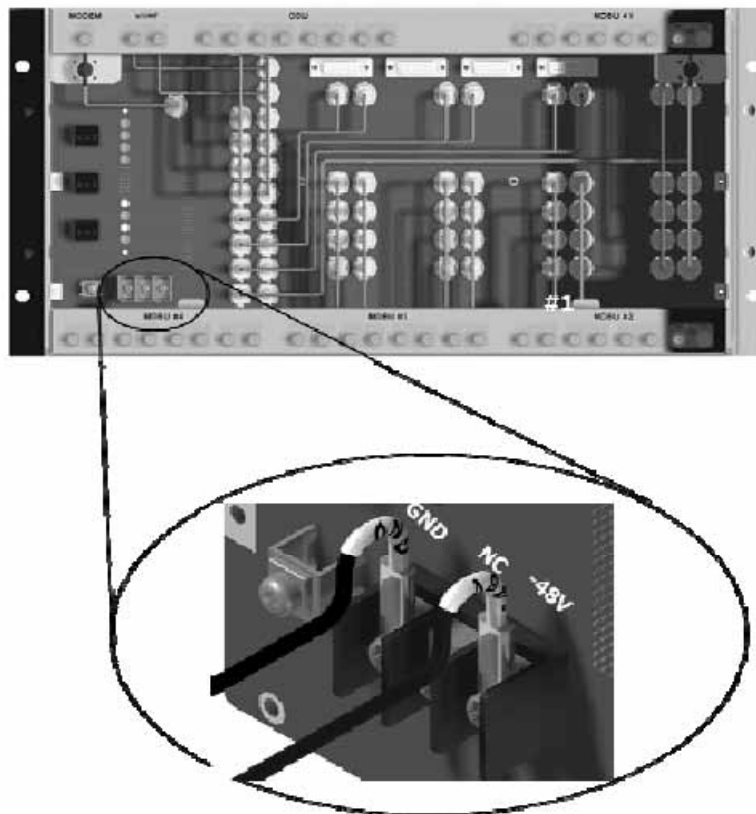



Note that BIU does not operate if the "+" terminal and the "-" terminal of the -48V power are not inserted into the accurate polarity.

When you connect -48V power with BIU, use the ON/OFF switch of MPSU located at the front of BIU to check the power.



Power Switch	LED	Description
O	ON	● Abnormal, Not supply Power -48Vdc
		● Normal supply power -48Vdc
	DC ALM	● Normal Status
		● Failure of output Power
I	ON	● Normal Status
	DC ALM	●

5.1.3 RF Interface at BIU

BIU can be connected with Bi-Directional Amplifier and Base Station Transceiver.

To connect BIU with BDA, you need to use a duplexer or a circulator to separate TX/RX signals from each other.


BIU can feed external TX/RX signals from the Back Plane.

Using MDBU separated from each carrier band, BIU can easily expand and interface with bands. As seen in the table below, MDBU is divided into Single and Dual Bands. The unit can be connected with two to four carrier signals per band. At the rear, #1~4 marks are seen in order per MDBU. The following table shows signals to be fed to corresponding ports:

No	Unit naming	Description		In/out RF Port	
				TX	RX
1	800PS MDBU	Single Band	Port #1	800PS TX(851~869MHz)	800PS RX(806~824MHz)
			Port#2	800PS TX(851~869MHz)	800PS RX(806~824MHz)
2	850C MDBU	Single Band	Port #3	850C TX(869~894MHz)	850C RX(824~849MHz)
			Port#4	850C TX(869~894MHz)	850C RX(824~849MHz)
3	1900P MDBU	Single Band	Port#1	1900P TX(1930~1995MHz)	1900P RX(1850~1915MHz)
			Port#2	1900P TX(1930~1995MHz)	1900P RX(1850~1915MHz)
			Port#3	1900P TX(1930~1995MHz)	1900P RX(1850~1915MHz)
			Port#4	1900P TX(1930~1995MHz)	1900P RX(1850~1915MHz)
4	AWS-1 MDBU	Single Band	Port#1	AWS-1 TX(2110~2155MHz)	AWS-1 RX(1710~1755MHz)
			Port#2	AWS-1 TX(2110~2155MHz)	AWS-1 RX(1710~1755MHz)
			Port#3	AWS-1 TX(2110~2155MHz)	AWS-1 RX(1710~1755MHz)
			Port#4	AWS-1 TX(2110~2155MHz)	AWS-1 RX(1710~1755MHz)
5	800PS+900I+PA MDBU	Dual Band 800PS:2Port 900I:1Port Paging:1Port	Port#1	800PS TX(851~869MHz)	800PS RX(806~869MHz)
			Port#2	800PS TX(851~869MHz)	800PS RX(806~869MHz)

			Port#3	Paging TX(929~932MHz)	Paging RX(896~902MHz)
			Port#4	900I TX(929~941MHz)	900I RX(896~902MHz)
6	850C+700PS MDBU	Dual Band 700PS:2Port 850C:2Port	Port#1	700PS TX(764~776MHz)	700PS RX(794~806MHz)
			Port#2	700PS TX(764~776MHz)	700PS RX(794~806MHz)
			Port#3	850C TX(869~894MHz)	850C RX(824~849MHz)
			Port#4	850C TX(869~894MHz)	850C RX(824~849MHz)
7	VHF+UHF MCDU	Dual Band VHF+UHF : 1Port	Port#1	VHF Tx(136~174MHz)	VHF Rx(136~174MHz)
				UHF Tx(380~512MHz)	UHF Rx(380~512MHz)
8	850C+700LTEC MDBU	Dual Band 700LTEC:2Port 850C:2Port	Port#1	700LTEC TX(746~756MHz)	700LTEC RX(777~787MHz)
			Port#2	700LTEC TX(746~756MHz)	700LTEC RX(777~787MHz)
			Port#3	850C TX(869~894MHz)	850C RX(824~849MHz)
			Port#4	850C TX(869~894MHz)	850C RX(824~849MHz)


At the rear of BIU, input and output ports are seen for each MDBU. The name of all the ports are silk printed as "#1, #2, #3 and #4." Referring to the table above, you need to feed right signals to input and output ports of corresponding MDBU.

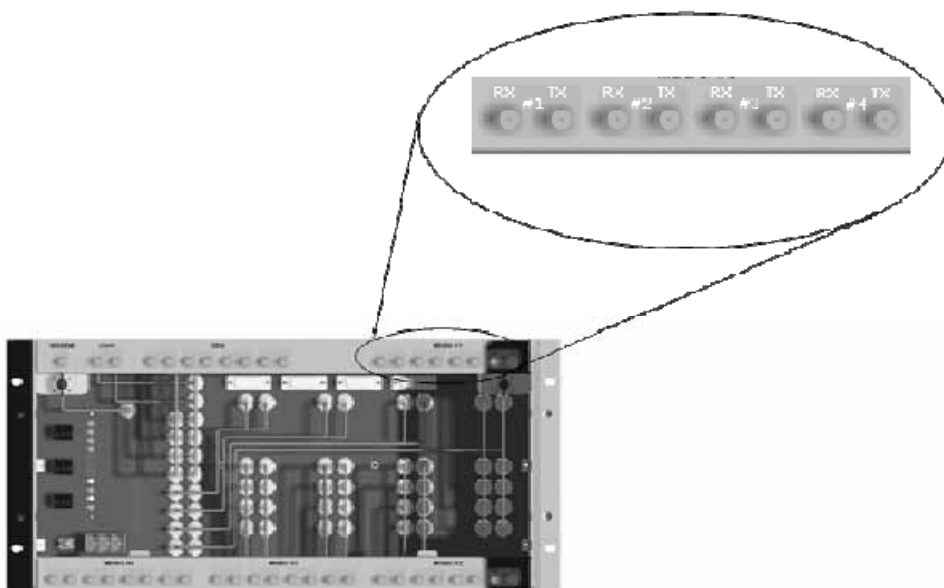

For each port, TX signals and RX signals are separated from each other. You don't have to terminate unused ports unless you want to.

BIU interface with Base station Transceiver

Basically, BIU has different TX and RX ports, and so, you have only to connect input and output ports.

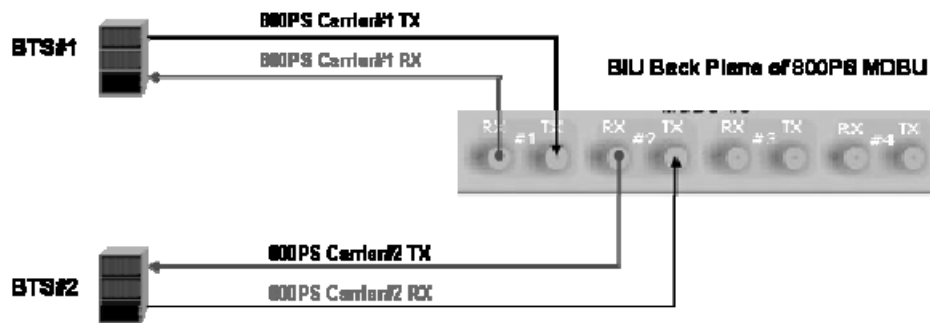

Through spectrum, you need to check signals sent from BTS TX. If the signals exceed input range (-20dBm~+10dBm), you can connect an attenuator ahead of the input port to put the signals in the input range.

BIU interface with Bi-Directional Amplifier

Basically, BIU is in Simplexer type; when you use BDA, you need to separate BDA signals from TX and RX type.

Using a duplexer or a circulator, you can separate TX/RX signals of an external device from each other.

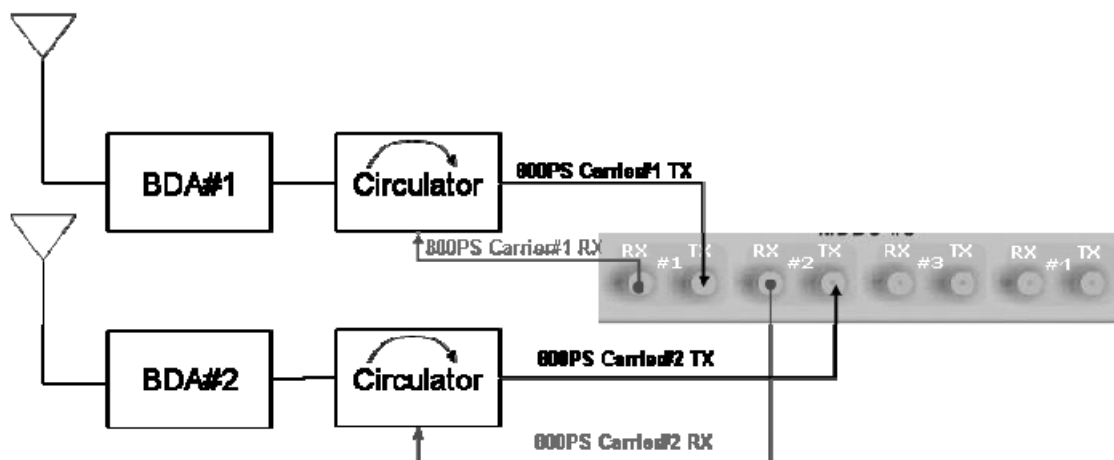


Figure 5.2 – 800PS BDA Interface using Circulator

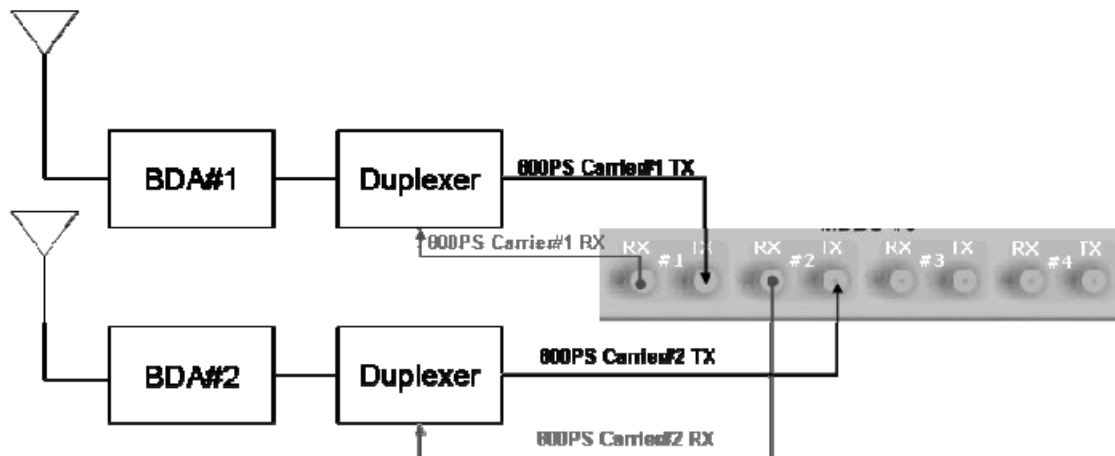


Figure 5.3 – 800PS BDA Interface using Duplexer

BIU interfaces with BDA in either of the methods above. In this case, you need to check TX input range as well.



Given the TX input range (-20dBm~+10dBm/Total per port), make sure to see if the value is in the input range, using Spectrum Analyzer, when you connect input ports.

5.1.4 MDBU insertion


MDBU is designed to let a MDBU be inserted into any slot.

BIU can be equipped with a total of four MDBUs. If only one MDBU is inserted into a slot with the other slots reserved, you need to insert BLANK cards into the other slots.



If you do not terminate input and output ports of MCDU, which combines TX signals and divides RX signals, it will cause loss and generation of spurious signals at the other party's band. Given this, make sure to insert MDBU BLANK into slots of MDBU.

When MDBU is inserted into BIU, LED at the front panel will show the following information:

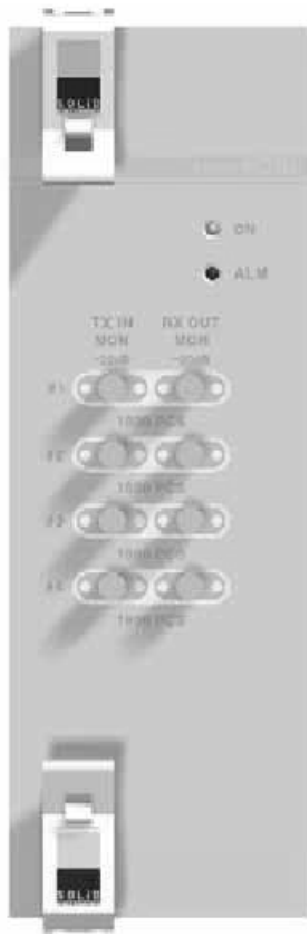

LED		Description
ON	●	Power is not supplied.
	●	Power is supplied.
ALM	●	Normal Operation
	●	Abnormal Operation


MONITOR SMA port seen at the front panel of MDBU enables you to check current level of TX input and RX output signals in current service without affecting main signals. TX MON is -20dB compared with TX Input power and RX MON is -20dB as well compared with RX Output power.

5.1.5 ODU Interface

BIU supports up to four ODUs. At the rear of BIU, eight RF input and output ports for ODU and four power ports for power supply and communication are provided. At BIU, you can check installation information of ODU.


RF Port for interface with ODU

Signal Port for interface with ODU

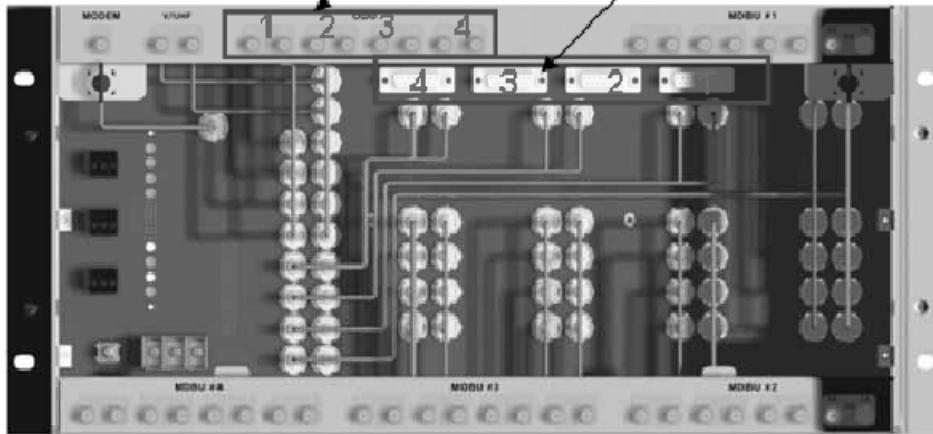

At the rear part of ODU, the number of RF Ports and Signal Ports are printed in order. Therefore, you need to be careful in case of expansion of ODU.

ODU Numbering	RF Port		Signal Port
	TX	RX	
ODU 1	#1		ODU-1
ODU 2	#2		ODU-2
ODU 3	#3		ODU-3
ODU 4	#4		ODU-4

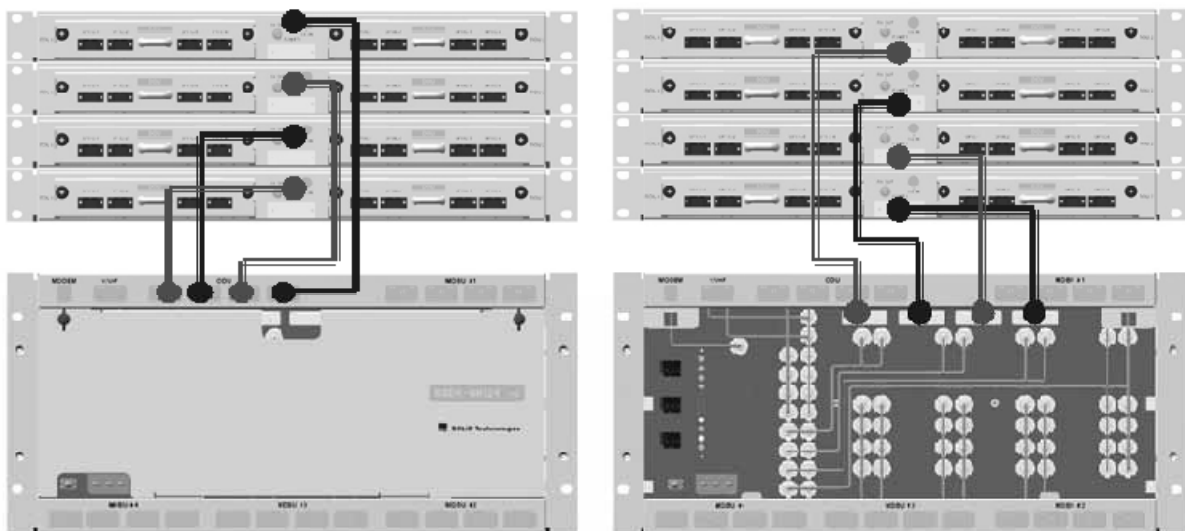



If ODU is not connected in the right order, related devices may fail to communicate with each other or the unit may read wrong information. Given this, you need to connect the unit with accurate RF Port and Signal Port in a corresponding number.



For unused RF Ports for ODU expansion, make sure to terminate them using SMA Term.



When you put ODU on the top of BIU, it is recommended to install the unit at least 1U apart from BIU. Heat from BIU climbs up to reach ODU.

5.1.6 Consumption Power of BIU

The table below shows power consumption of BIU:

Part	Unit	Consumption Power	Remark
Common Part	Shelf	7.5 W	
	MCDU		
	MCPU		
	MPSU		
MDBU	MDBU 800PS	12W	
	MDBU 800PS+900I+Paging	20W	
	MDBU 850C	12W	
	MDBU 850C+700PS	19W	
	MDBU 1900P	20W	
	MDBU AWS-1	12W	
	MDBU 850C+700LTEC	19W	

BIU supplies power for ODU. Therefore, when you want to calculate total power consumption of BIU, you need to add power consumption of ODU to the total value.

Power consumption of ODU is given in the later paragraph describing ODU.

5.2 ODU Installation

ODU should be, in any case, put on the top of BIU. This unit gets required power and RF signals from BIU. The following table shows components of ODU:

No.	Unit	Description	Remark
Common Part	Shelf	Including Main Board, 19",1U	1EA
	RF Cable	SMA(F) to SMA(F), 400mm	2EA
	Signal Cable	2Row(15P_F) to 2Row(15P_M),650mm	1EA
Optional Part	DOU	Optical Module with 4 Optic Port	Up to 2EA to be inserted

5.2.1 ODU Shelf Installation

ODU is a shelf in around 1U size. Its width is 19" and so this unit should be inserted into a 19" Standard Rack. ODU should be, in any case, put on the top of BIU. BIU should be distant around 1U when the unit is installed.

5.2.2 ODU Power Cabling

ODU does not operate independently. The unit should get power from BIU. When you connect 2-column, 15-pin D-SUB Signal cable from BIU and install DOU, LED on the front panel is lit. Through this LED, you can check state values of LD and PD of DOU.

5.2.3 ODU Optic Cabling

As optical module shelf, ODU makes electronic-optical conversion of TX signals and then makes optical-electronic conversion of RX signals. ODU can be equipped with up to two DOUs. One DOU supports four optical ports and one optical port can be connected with ROU. Optionally, only optical port 4 can be connected with OEU.

As WDM is installed in DOU, the unit can concurrently send and receive two pieces of wavelength (TX:1310nm, RX:1550nm) through one optical core. DOU has SC/APC of optical adaptor type.



Figure 5.4 – Optical cable of SC/APC Type

For optical adaptor, SC/APC type should be used. To prevent the optical access part from being marred with dirt, it should be covered with a cap during move. When devices are connected through optical cables, you need to clear them using alcohol to remove dirt.

5.2.4 Insert DOU to ODU

In an ODU Shelf, up to two DOUs can be installed. DOU module is in Plug in Play type. When you insert DOU in ODU, insert the unit into the left DOU1 slot first. You can be careful as the number is silk printed at the left.

The following figure shows installation diagram of ODU with one DOU inserted in it.



The following figure shows installation diagram of ODU with two DOUs inserted in it.



When you insert DOU into ODU, insert the unit into the left DOU1 slot first. Into unused slot, you need to insert BLANK UNIT in any case.

5.2.5 Consumption Power of ODU

ODU gets power from BIU. One ODU can be equipped with up to two DOUs. Depending on how many DOUs are installed, power consumption varies. The table below shows power consumption of ODU:

Part	Unit	Consumption Power	Remark
ODU_4	DOU 1 EA	13W	
ODU_8	DOU 2 EA	26W	

5.3 ROU Installation

5.3.1 ROU Enclosure installation

ROU is designed to be water- and dirt-proof. The unit has the structure of One-Body enclosure.

It satisfies water-proof and quake-proof standards equivalent of NEMA4.

ROU can be mounted into either of a 19" Standard Rack or on a Wall.

Basically, ROU has both of a Wall Mount Bracket and a Rack Mount Bracket.

Depending on the use of the Rack Mount Bracket, the bracket can be removed.

The following shows dimension of the fixing point for the Wall Mount Bracket.

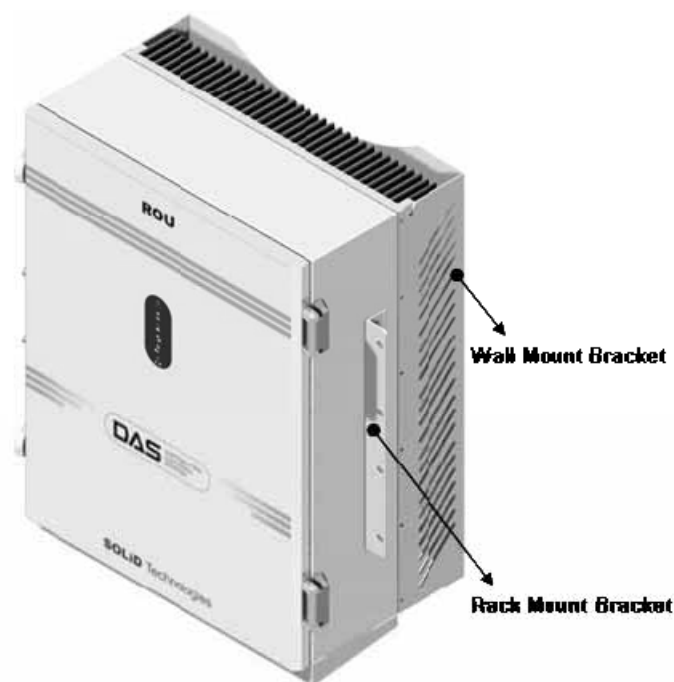


Figure 5.5 – How to install ROU

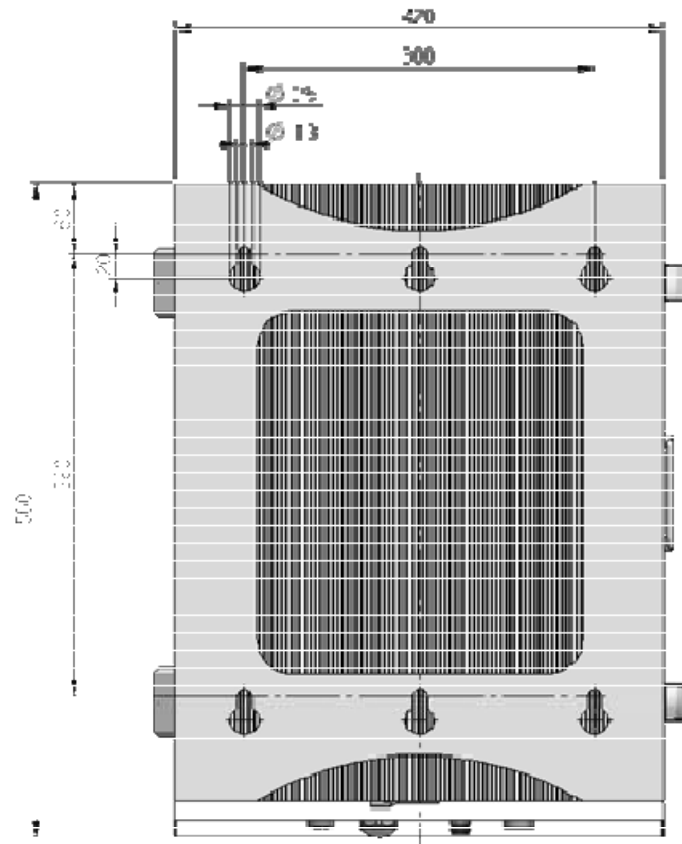



Figure 5.6 – Dimension used to install ROU on the WALL

ROU Wall Mount Installation

Turn M12 Fixing Screws by half on the wall and fully fix the screw with a Wall Mount Bracket on it.

For convenience, the Wall Mount Bracket has fixing holes to let you easily mount an enclosure.

Turn the M5 Wrench Bolt by half at each side of the Heatsink of the enclosure.

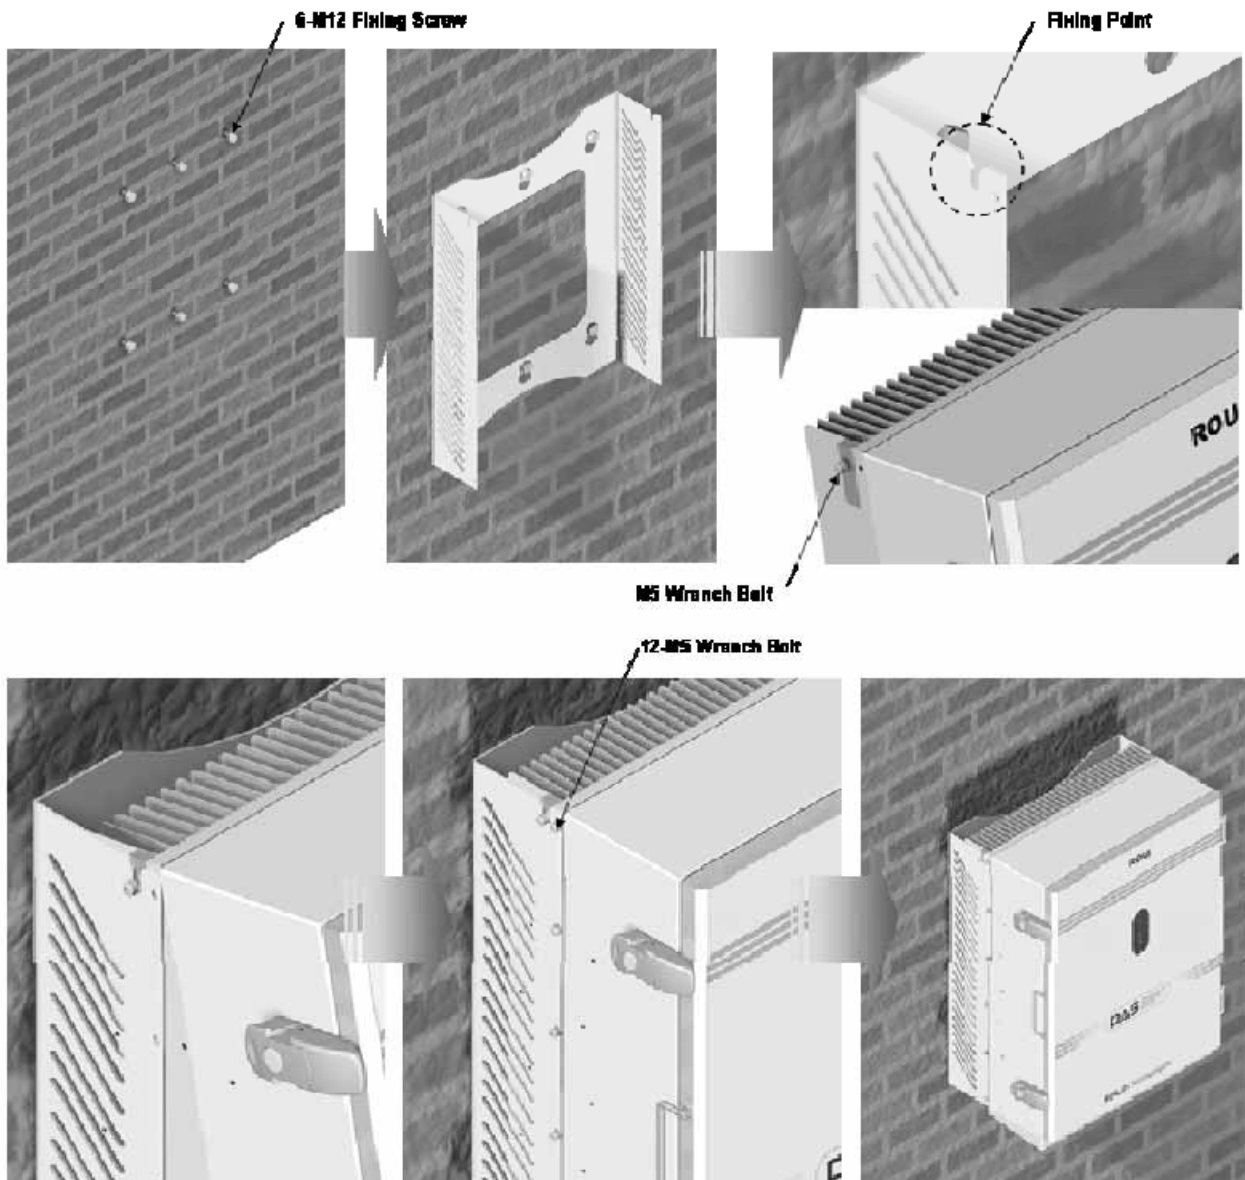


Put the enclosure with the M5 Wrench Bolt fixed on the fixing groove and fix the M5 Wrench Bolts into the remaining fixing holes.

In this case, you will use 12 M5 Wrench Bolts in total except bolts used for the fixing groove.

ROU Rack Mount Installation

Like other units, ROU is designed to be inserted into a rack. The unit occupies around 13U of space except cable connection.

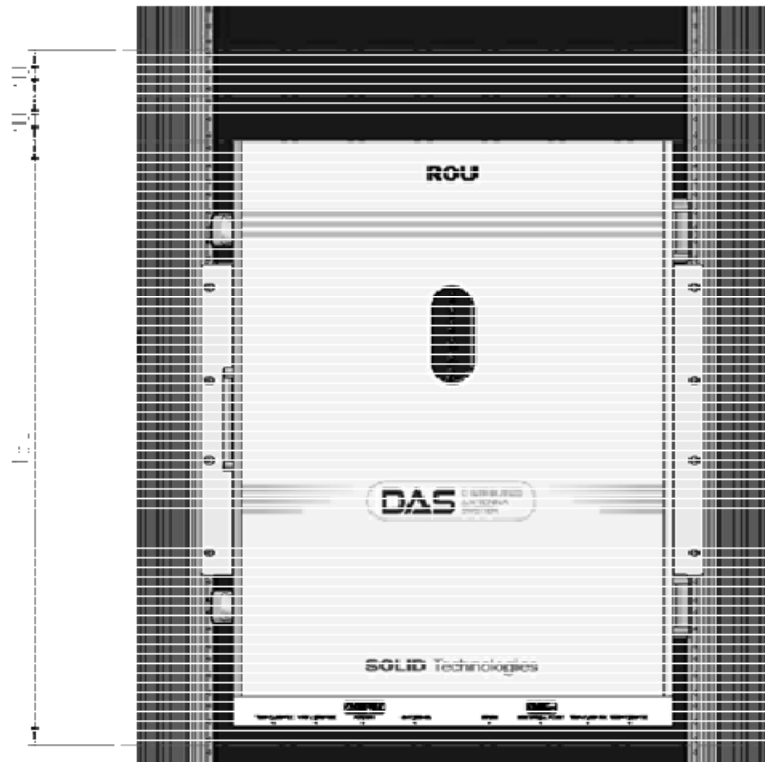

ROU component

ROU has the following components:

No.	Unit	Description	Remark
Common Part	Enclosure	Including Rack & Wall cradle	1EA
	RCPU	-	1EA
	R_OPTIC	With SC/ACP adaptor	1EA
	RPSU	Alternative DC-48V or AC 120V	1EA
	Multi-Plexer	-	1EA
	Power Cable	- MS Connector with 3 hole to AC 120 plug(AC) - MS Connector with 2 lug termination(DC)	
Optional Part	RDU+BPF	800PS,800PS+900I+Paging,850C,850C+700PS, 1900P+ AWS-1 RDU, VHF+UHF(NO BPF), 850C+700LTEC	Up to 3EA to be inserted

Basically, the common part of ROU should have an enclosure and it is equipped with RCPU to inquire and control state of each module, R_OPTIC to make both of electronic-optical and optical-electronic conversions, RPSU to supply power for ROU and a Multi-Plexer to help share multiple TX/RX signals through one antenna. It should have Power Cable for external rectifier or to supply required power.

In addition, RDU can be inserted and removed to provide service for desired band (Optional).

5.3.2 ROU Power Cabling


ROU supports both of DC-48V and AC120V of input power. As RPSU for DC-48 and RPSU for AC120V are separated from each other, you need to select one of them in case of purchase order.

RPSU for DC -48V and RSPU for AC 120V have the same configuration and capacity while each of the units uses different input voltage from each other.

The following figure shows configuration of RPSUs for DC -48V and AC 120V.




MC Connector numbering	Lug Naming		RPSU Terminal naming		Remark
	AC	DC	AC	DC	
A	AC_H	-48V	AC-H	-48V	
B	AC_N	GND	AC-N	IN_GND	
C	GND	DC NC	FG	FG	

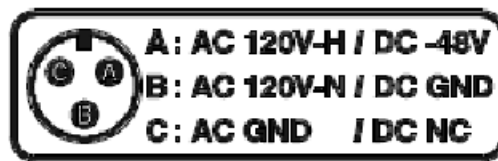

Check if the connection is the same as one seen in the table above and make sure to turn the power ON.

5.3.3 Optical Cabling

ROU makes optical-electronic conversion of TX signals from upper ODU and OEU and makes electronic- optical conversion of RX signals. ROU has one optical module in it. As WDM is installed in the R_OPTIC module, two pieces of wavelength (TX:1310nm, RX:1550nm) can be sent/received with one optical core at the same time. ROU has SC/APC of optical adaptor type. For optical adaptor, SC/APC type can be used. To prevent the optical access part from being marred with dirt, it should be covered with a cap during move. When devices are connected through optical cables, you need to clear them using alcohol to remove dirt.

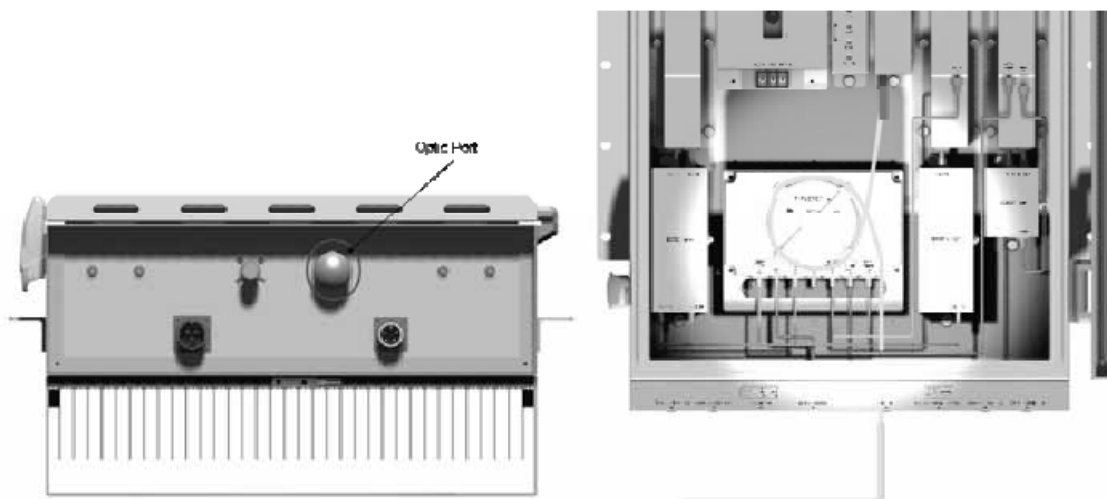


Optical cables should be inserted into Optic Port outside of ROU. Using an optical slack devices in ROU, you need to coil around one or two roll of cables to be connected with the optical adaptor of ROPTIC.

At this time, curvature of the optical cable should be at least $10\varnothing$ to prevent insertion loss from being increased.

Through GUI, check if PD value of ROPTIC is in a tolerable range (+4~-1dBm).

5.3.4 GND Terminal Connection

ROU has one GND terminal port where is on bottom side, like below

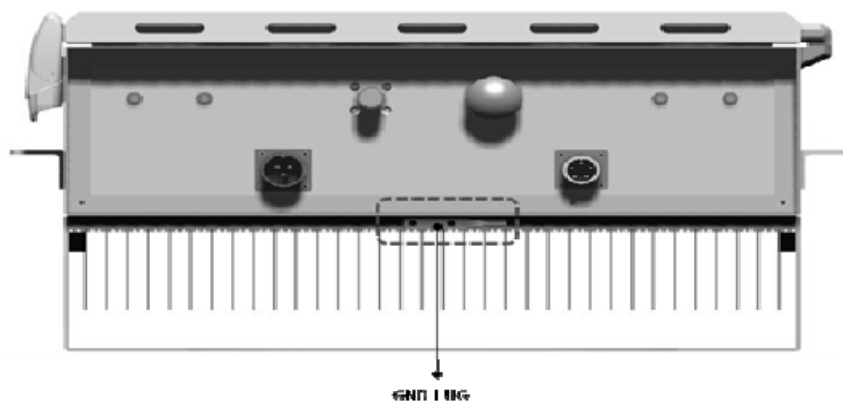

- Take off the GND terminal port from enclosure and connect to ground cable, then fix it the position of enclosure again
- The opposite end of the ground cable should connect to the communication GND of building
- The ground lug is designed meeting the SQ5.5 standard

5.3.5 Coaxial cable and Antenna Connection

- The coaxial cables which are connected to antenna distributed network connect to antenna port of ROU. Before connection, check the VSWR value of coaxial cable whether it is within specification using SITEMASTER .
- At this time, check if the Return loss have above 15Db or VSWR have below 1.5
- The part of antenna connection fasten to port not to be loosed and not to be injected the dusty and insects
- The antenna connected to ROU is only serviced in inbuilding

5.3.6 Insertion of RDU

ROU has slots to enable up to three RDU modules to be inserted into the unit.

You can insert a RDU into any slot. It is not possible to provide services with a RDU module alone; you need to connect the module with Cavity BPF in any case.

The table below shows types of RDU and CAVITY BPF:


No	Unit naming	Cavity BPF	RF CABLE	Multiplexer Interface	
				TX	RX
1	RDU 800PS	800PS BPF	TX CABLE 1EA RX CABLE 1EA	BPF OUT	RDM RX IN
2	RDU 850C	850C BPF	TX CABLE 1EA RX CABLE 1EA	BPF TX OUT	BPF RX IN
3	RDU 1900P+AWS-1	1900P DUP	TX/RX CABLE 1EA	RDM AWS+1900P	
5	RDU 800PS+900I+PA	800PS+900I+PA BPF	TX CABLE 1EA RX CABLE 1EA	RDM TX OUT	RDM RX IN
6	RDU 850C+700PS	850C+700PS BPF	TX CABLE 1EA RX CABLE 1EA	RDM TX OUT	RDM RX IN
7	RDU VHF+UHF	-	TX CABLE 1EA RX CABLE 1EA	-	-
8	RDU 850C+700LTEC	850C+700LTEC BPF	TX CABLE 1EA RX CABLE 1EA	RDM TX OUT	RDM RX IN

The following describes how to install RDU in ROU.

How to install RDU 800PS Ass'y

The following components are required:

No.	Unit	Description	Remark
1	RDU 800PS	RF Module	
2	800PS BPF	BPF	
3	800PS TX RF CABLE	SMA(M) to SMA(M), 360mm	
4	800PS RX RF CABLE	SMA(M) to SMA(M), 410mm	

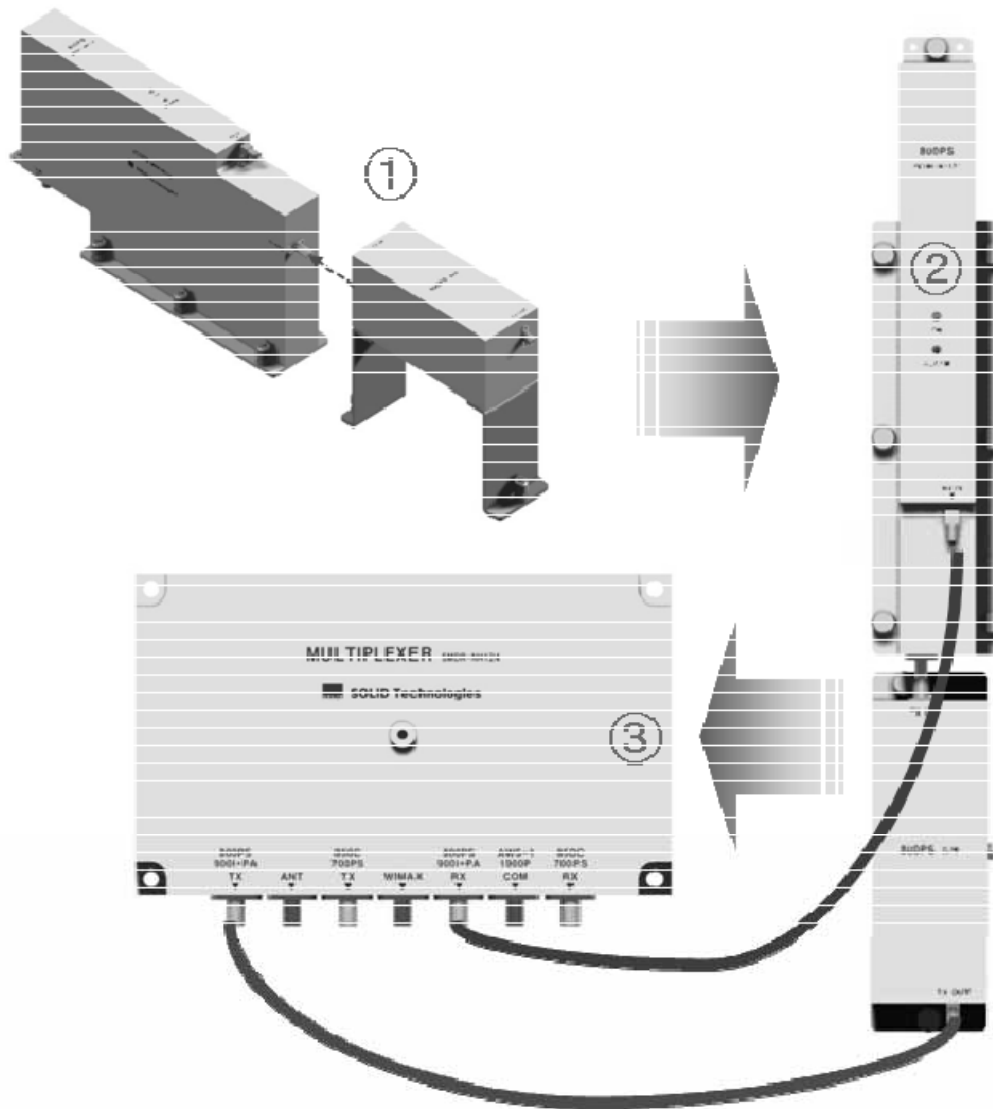


- ① Combine RDU 800PS with 800PS BPF (As it is a plug type, push the unit to combine with BPF.)
- ② Insert the combined 800PS+850C BPF Ass'y into any slot of ROU.
- ③ Combination point of 800PS+800PS BPF Ass'y of the multiplexer

Multiplexer Port naming	Interface Point		Remark
	800PS RDU	800PS BPF	
800PS+900I+PA TX	-	TX OUT	
800PS+900I+PA RX	RX IN	-	

How to RDU install 850C Ass'y

The following components are required:

No.	Unit	Description	Remark
1	RDU 850C	RF Module	
2	850C BPF	BPF	
3	850C TX RF CABLE	SMA(M) to SMA(M), 310mm	
4	850C RX RF CABLE	SMA(M) to SMA(M), 310mm	

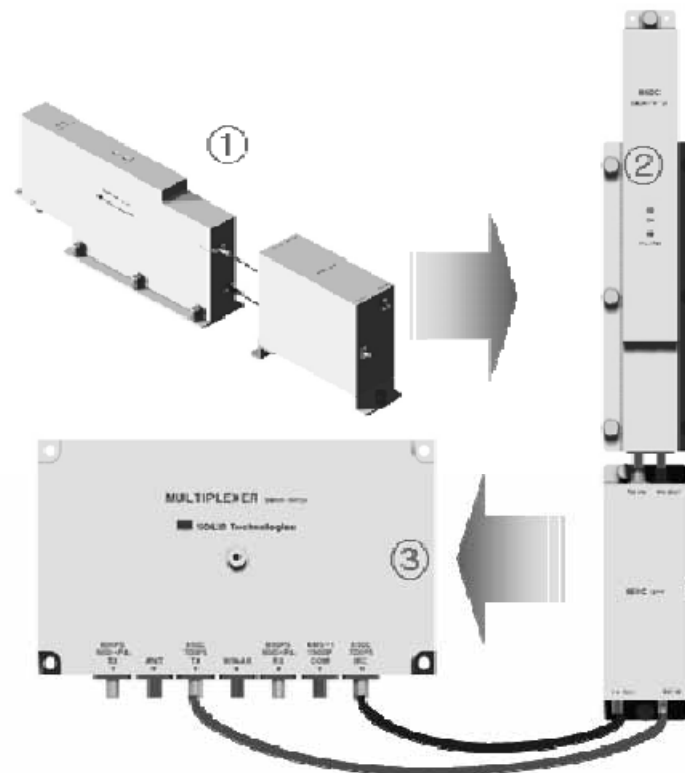


- ① Combine 850C RDU with 850C BPF (As it is a plug type, push the unit to combine with BPF.)
- ② Insert the combined 850C+850C BPF Ass'y into any slot of ROU.
- ③ Combination point of 850C+850C BPF Ass'y of the multiplexer

Multiplexer Port naming	Interface Point		Remark
	850C RDU	850C BPF	
850C TX	-	TX OUT	
850C RX	-	RX IN	

How to install RDU 800PS+900I+PA Ass'y

The following components are required:

No.	Unit	Description	Remark
1	RDU 800PS+900I+PA	RF Module	
2	800PS+900I+PA BPF	BPF	
3	800PS+900I+PA TX RF CABLE	SMA(M) to SMA(M), 460mm	
4	800PS+900I+PA RX RF CABLE	SMA(M) to SMA(M), 380mm	

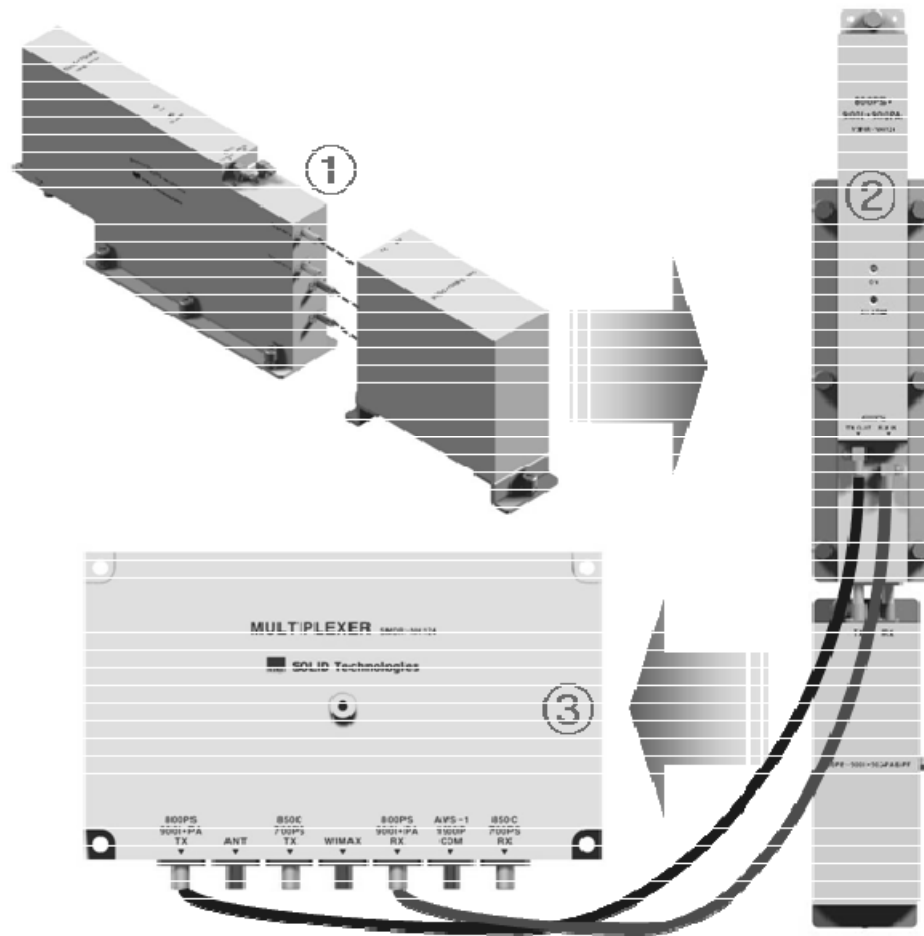

① Combine RDU 800PS+900I+PA with 800PS+900I+PA BPF (As it is a plug type, push the unit to combine with BPF.)

② Insert the combined 800PS+900I+PA BPF Ass'y into any slot of ROU.

③ Combination point of 800PS+900I+PA BPF Ass'y of the multiplexer


Multiplexer Port naming	Interface Point		Remark
	800PS+900I+PA RDU	800PS+900I+PA BPF	

800PS+900I+PA TX	TX OUT	-	
800PS+900I+PA RX	RX IN	-	

How to install RDU 850C+700PS Ass'y

The following components are required:

No.	Unit	Description	Remark
1	RDU 850C+700PS	RF Module	
2	850C+700PS BPF	BPF	
3	850C+700PS TX RF CABLE	SMA(M) to SMA(M), 470mm	
4	850C+700PS RX RF CABLE	SMA(M) to SMA(M), 400mm	

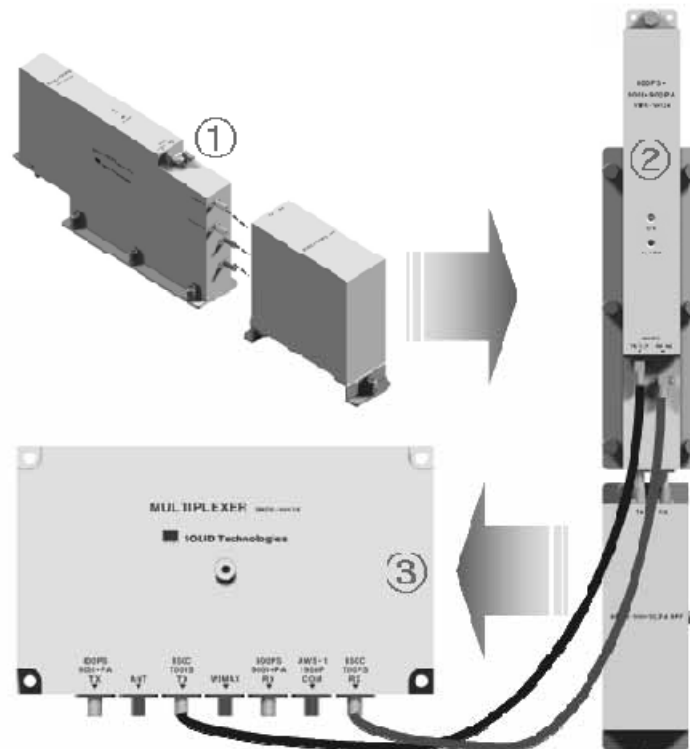

- ① Combine RDU 850C+700PS with 850C+700PS BPF (As it is a plug type, push the unit to combine with BPF.)
- ② Insert the combined 850C+700PS BPF Ass'y into any slot of ROU.
- ③ Combination point of 850C+700PS BPF Ass'y of the multiplexer


Multiplexer Port naming	Interface Point		Remark
	850C+700PS RDU	850C+700PS BPF	
850C+700PS TX	TX OUT	-	

850C+700PS RX	RX IN	-	
---------------	-------	---	--

How to install RDU 1900P+AWS-1 Ass'y

The following components are required:

No.	Unit	Description	Remark
1	RDU 1900P+AWS-1	RF Module	
2	1900P+AWS-1 BPF	BPF	
3	1900P+AWS-1 RF CABLE	SMA(M) to SMA(M), 390mm	
4	1900P+AWS-1 RF-01	SMA(M) to SMA(M)	Semirigid

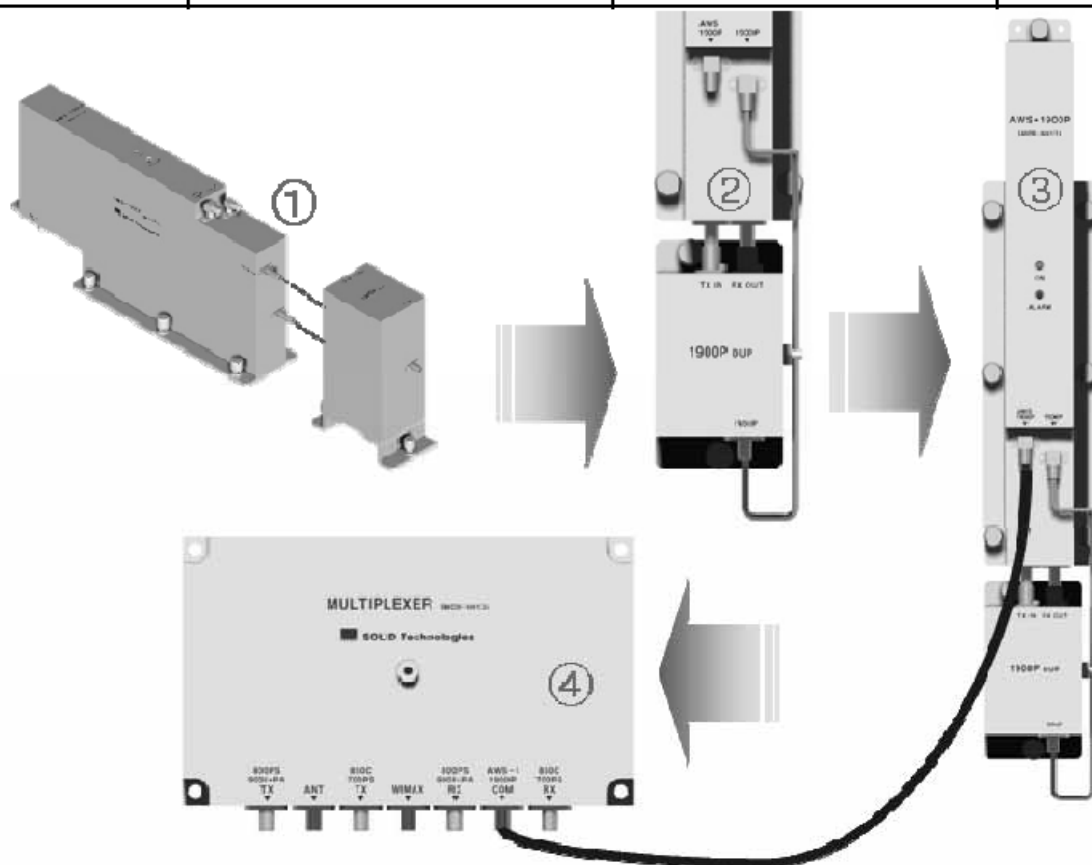

- ① Combine RDU 1900P+AWS-1 with 1900P BPF (As it is a plug type, push the unit to combine with BPF.)
- ② Connect BPF 1900P port with 1900P port of 1900P RDU through 1900P+AWS-1 RF-01 RF CABLE.
- ③ Insert the combined 1900P+AWS-1 BPF Ass'y into any slot of ROU.
- ④ Combination point of 1900P+AWS-1 BPF Ass'y of the multiplexer


Multiplexer Port naming	Interface Point	Remark
-------------------------	-----------------	--------

	1900P+AWS-1 RDU	1900P BPF	
AWS-1+1900P COM	1900P+AWS	-	

How to install RDU VHF+UHF Ass'y

The following components are required:

No.	Unit	Description	Remark
1	RDU VHF+UHF	RF Module	
2	RDU VHF+UHF RF CABLE	SMA(M) to SMA(M), 460mm	
3	RDU VHF+UHF RF CABLE	SMA(M) to SMA(M), 380mm	

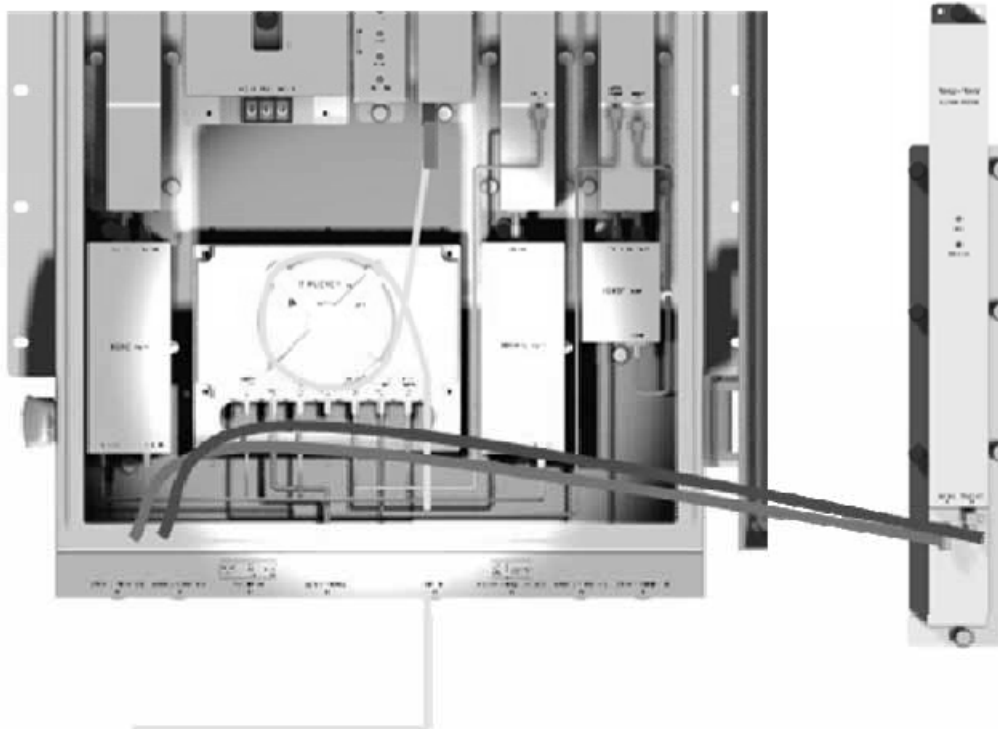


- ① Insert the combined VHF+UHF RDU into any slot of ROU.
- ② Connect RDU VHF+UHF Port with ROU VHF+UHF Port through VHF+UHF RF CABLE

How to install RDU 850C+700LTEC Ass'y

The following components are required:

No.	Unit	Description	Remark
1	RDU 850C+700LTEC	RF Module	
2	850C+700PS BPF	BPF	
3	850C+700PS TX RF CABLE	SMA(M) to SMA(M), 470mm	
4	850C+700PS RX RF CABLE	SMA(M) to SMA(M), 400mm	

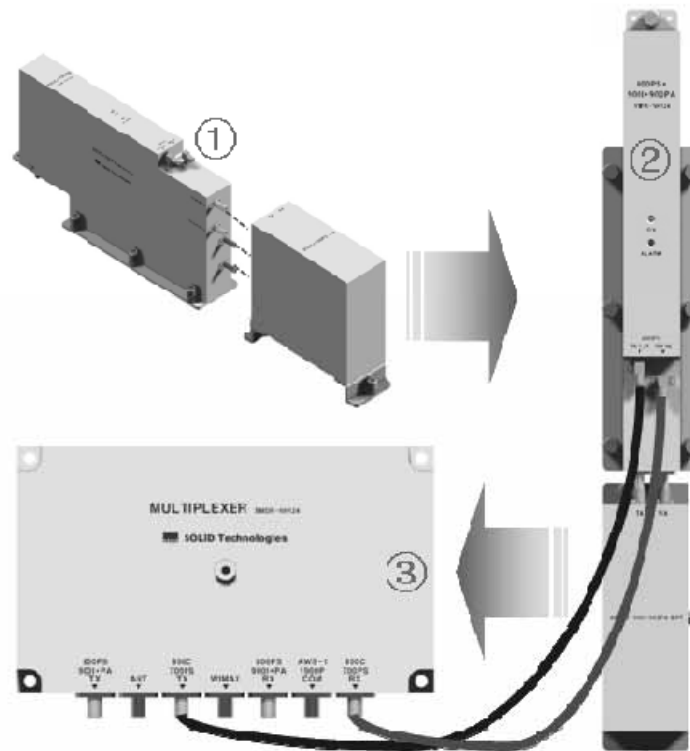

- ① Combine RDU 850C+700 LTEC with 850C+700PS BPF (As it is a plug type, push the unit to combine with BPF.)
- ② Insert the combined 850C+700 LTEC BPF Ass'y into any slot of ROU.
- ③ Combination point of 850C+700PS/700LTE BPF Ass'y of the multiplexer

Multiplexer Port naming	Interface Point		Remark
	850C+700LTEC RDU	850C+700PS BPF	
850C/700PS/700LTE TX	TX OUT	-	
850C/700PS/700LTE RX	RX IN	-	



You cannot insert the same module and band into MULTIPLEXER port at the same time. For example, you are not supposed to insert both of 800PS RDU and 800PS+900I+PA RDU into ROU at the same time. In the same way, you cannot concurrently insert both of 850C RDU, 850C+700PS RDU and 850C+700LTEC into ROU.

Information of LED at the front RDU

RDU has the structure of enabling a random RDU to be inserted into three slots. ROU can be equipped with a total of three RDUs. If only one RDU is inserted into a slot and the other slots remain reserved, you need to insert BLANK cards into the other slots.

When RDU is inserted into ROU, LED of the front panel shows the following information:



LED		Description
ON		Power is not supplied
		Power is supplied.
ALM		Normal Operation
		Abnormal Operation



Up to three RDUs can be inserted. If one or two units of them are used, then you need to terminate the unused slot of RDU with a BLANK card.

5.3.7 Consumption of RDU

The following table shows power consumption of RDU:

Part	Unit	Consumption Power		Remark
Common Part	Enclosure	17W		
	RCPU			
	ROPTIC			
	RPSU			
	Multiplexer			
RDU	RDU 800PS	39W		
	RDU 800PS+900I+Paging	800PS	49W	900I+PA HPA OFF
		900I+PA	72W	800PS HPA OFF
		FULL	79W	Both HPA ON
	RDU 850C	39W		
	RDU 850C+700PS	850C	49W	700PS HPA OFF
		700PS	58W	850C HPA OFF
		FULL	93W	Both HPA ON
	RDU 1900P+AWS-1	1900P	46W	AWS-1 HPA OFF
		AWS-1	46W	1900P HPA OFF
		FULL	68W	Both HPA ON
	RDU VHF+UHF RDU E-VHF+UHF	VHF	47W	VHF HPA OFF
		UHF	47W	UHF HPA OFF
		FULL	74W	Both HPA ON
	RDU 850C+700LTEC	850C	49W	700LTEC HPA OFF
		700LTEC	58W	850C HPA OFF
		FULL	93W	Both HPA ON

For power consumption of ROU, the common part consumes 17W. Depending on the

quantity of each RDU, you can add overall power consumption of ROU. Only, in case of Dual-Band signals, power consumption is calculated respectively when HPA of the other party is turned OFF and two HPA devices are turned ON. Note that when you calculate Power Budget.

5.4 OEU Installation

OEU is used to expand ROU in Campus Site.

OEU is located at a Remote Closet. As it can be equipped with up to two DOUs, you can expand a total of eight ROUs.

5.4.1 OEU Shelf installation

OEU is a shelf in around 2U size. Its width is 19" and so this unit should be inserted into a 19" Standard Rack. OEU is in a Remote Closet, providing optical ports of ROU.

The following table shows power consumption of OEU:


No.	Unit	Description	Remark
Common Part	Shelf	Including EWDM,ERF,EPSU,ECPU, 19",2U	1EA
	Power Cable	-48Vdc Input with two lug terminal	1EA
Optional Part	DOU	Optical Module with 4 Optic Port	Up to 2EA to be inserted

5.4.2 OEU Power Cabling

The input power of OEU is DC -48V. You need to connect DC cable with the Terminal Block seen at the rear of OEU.

Terminal	Color of cable	Description	Remark
-48V	Blue color	Input range: -42 ~ -56Vdc	
NC	Not Connected		
GND	Black color		

Before connecting the power terminal, you need to connect "+" terminal of Multi Voltage Meter probe with the GND terminal and then connect "-" terminal with -48V to see if "-48Vdc" voltage is measured. After the check, connect the power terminal through the terminal seen below.

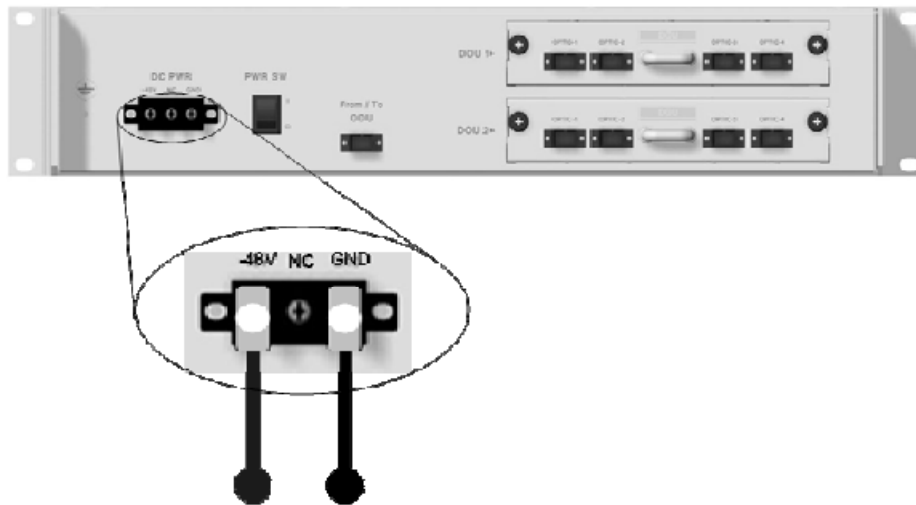

Note that OEU does not operate if the "+" terminal and the "-" terminal of the -48V power are not inserted into the accurate polarity.

5.4.3 OEU Optic Cabling

OEU is connected with upper ODU. With DOU inserted in it, the unit is connected with ROU. As OEU has a shelf with EWDM in it, the unit makes electronic-optical conversion of TX signals from ODU and makes optical-electronic conversion of RX signals. In addition, OEU can be equipped with up to two DOUs. One DOU supports four optical ports and one optical port can be connected with ROU. With WDM in DOU, the unit can concurrently send/receive two pieces of wavelength (TX:1310nm, RX:1550nm) through one optical core. DOU has SC/APC of optical adaptor type.



Figure 5.7 – Optical cable of SC/APC Type

For optical adaptor, SC/APC type should be used. To prevent the optical access part from being marred with dirt, it should be covered with a cap during move. When devices are connected through optical cables, you need to clear them using alcohol to remove dirt.


5.4.4 Insert DOU to OEU

Into OEU Shelf, up to two DOUs can be inserted. DOU module is in Plug in Play type. When you insert DOU in OEU, insert the unit into the top DOU1 slot first. You can be careful as the number is silk printed at the left.

The following figure shows installation diagram of OEU with one DOU inserted in it.



The following figure shows installation diagram of OEU with two DOUs inserted in it.

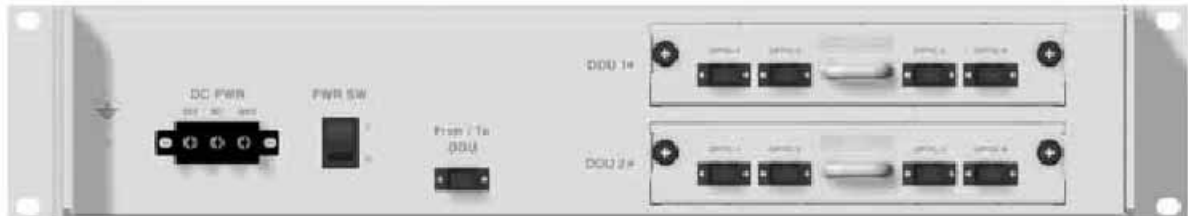

When you insert DOU into OEU, insert the unit into the top DOU1 first. For unused slots, you need to install BLANK UNIT into them.

5.4.5 Consumption Power of OEU

OEU has -48V DC Power supply in it. OEU can be equipped with up to two DOUs. Depending on the quantity of DOU, power consumption is varied.

The following table shows power consumption of OEU:

Part	Unit	Consumption Power	Remark
Common Part	Shelf	12W	
	EWDM		
	ERF		
	EPSU		
OEU_4	DOU 1 EA	23W	
OEU_8	DOU 2 EA	33W	

5.5 ADD ON V/UHF ROU Installation

5.5.1 AOR Enclosure installation

AOR is designed to be water- and dirt-proof. The unit has the structure of One-Body enclosure.

It satisfies water-proof and quake-proof standards equivalent of NEMA4 like existing ROU

AOR can be mounted into either of a 19" Standard Rack or on a Wall.

Basically, AOR has both of a Wall Mount Bracket and a Rack Mount Bracket.

Depending on the usage the Rack Mount Bracket or the Wall bracket can be removed.

The following shows dimension of the fixing point for the Wall Mount Bracket.

AOR should be installed above or under of existing ROU

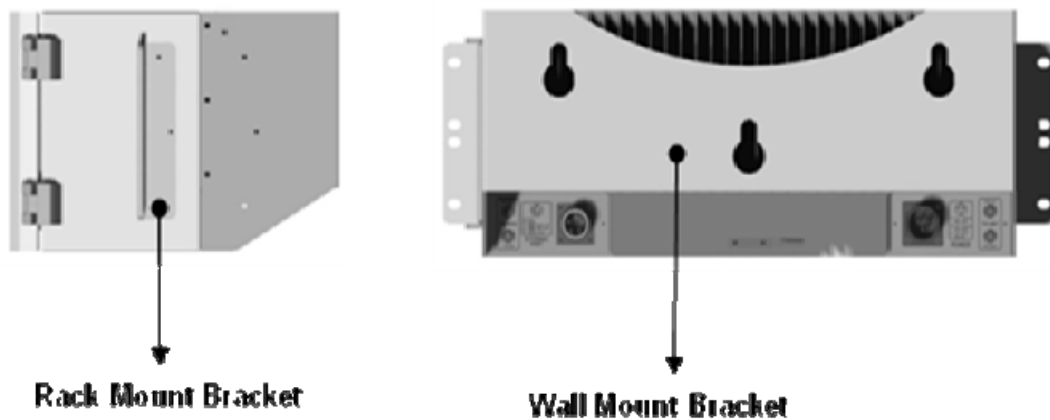


Figure 5.8 – How to install AOR

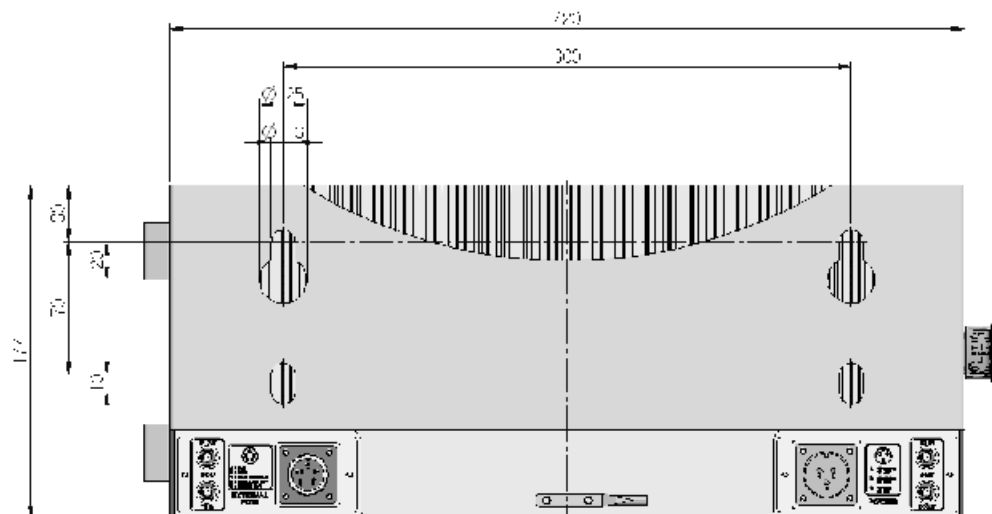


Figure 5.9 – Dimension used to install AOR on the WALL

ROU Wall Mount Installation

Turn M12 Fixing Screws by half on the wall and fully fix the screw with a Wall Mount Bracket on it. For convenience, the Wall Mount Bracket has fixing holes to let you easily mount an enclosure. Turn the M5 Wrench Bolt by half at each side of the Heatsink of the enclosure.

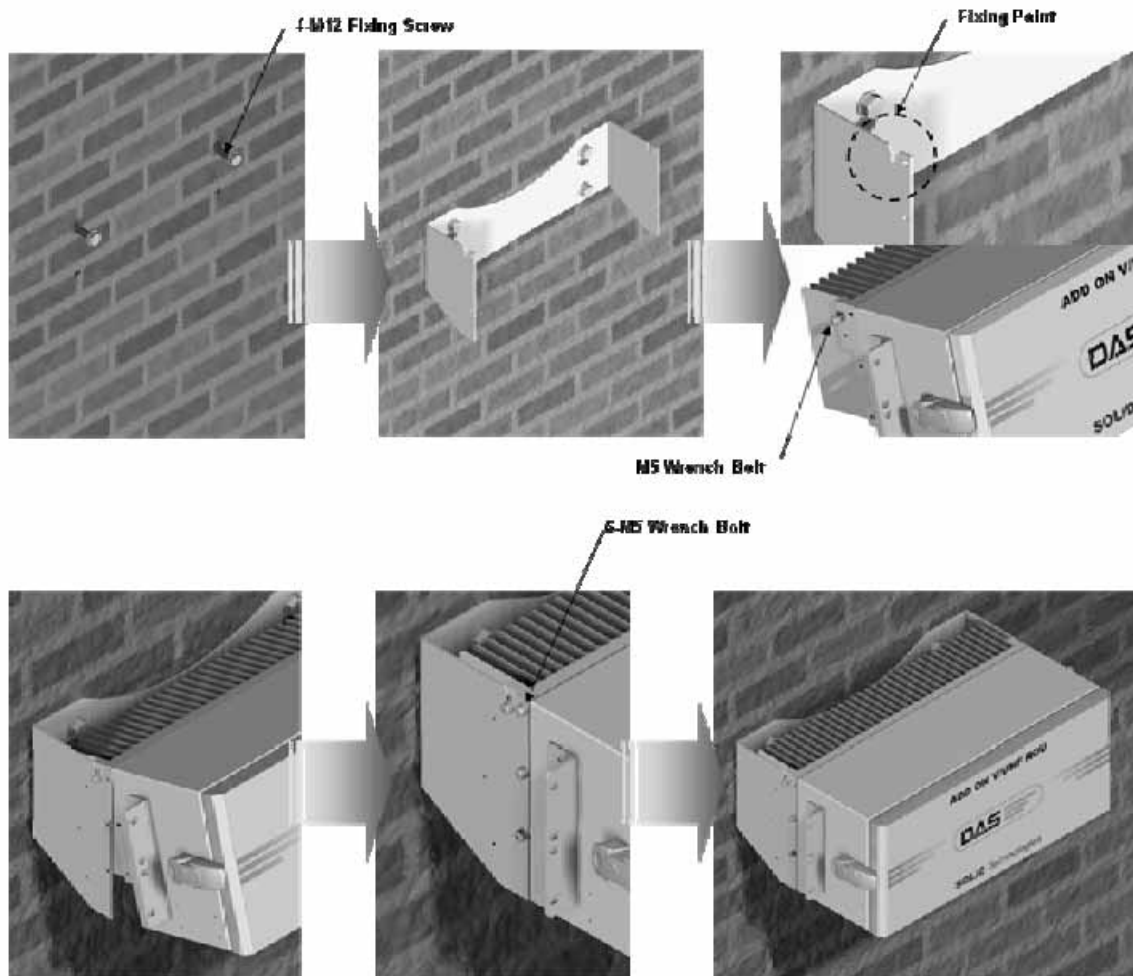


Figure 5.10 – Installation flow diagram when AOR installs on wall

Put the enclosure with the M5 Wrench Bolt fixed on the fixing groove and fix the M5 Wrench Bolts into the remaining fixing holes.

In this case, you will use 6EA of M5 Wrench Bolts in total except bolts used for the fixing groove.

ROU Rack Mount Installation

Like other units, AOR is designed to be inserted into a rack. The unit occupies about 4U of space except cable connection.

In case that AOR is installed more close above/below existing ROU, temperature of ROU/AOR increase ambient temperature, which increase ambient of AOR/ROU. Then, AOR/ROU's temperature is increased. Therefore, we recommend that AOR should be installed with at least constant space from existing ROU(above 2U)

The following shows the installed diagram on rack with existing ROU

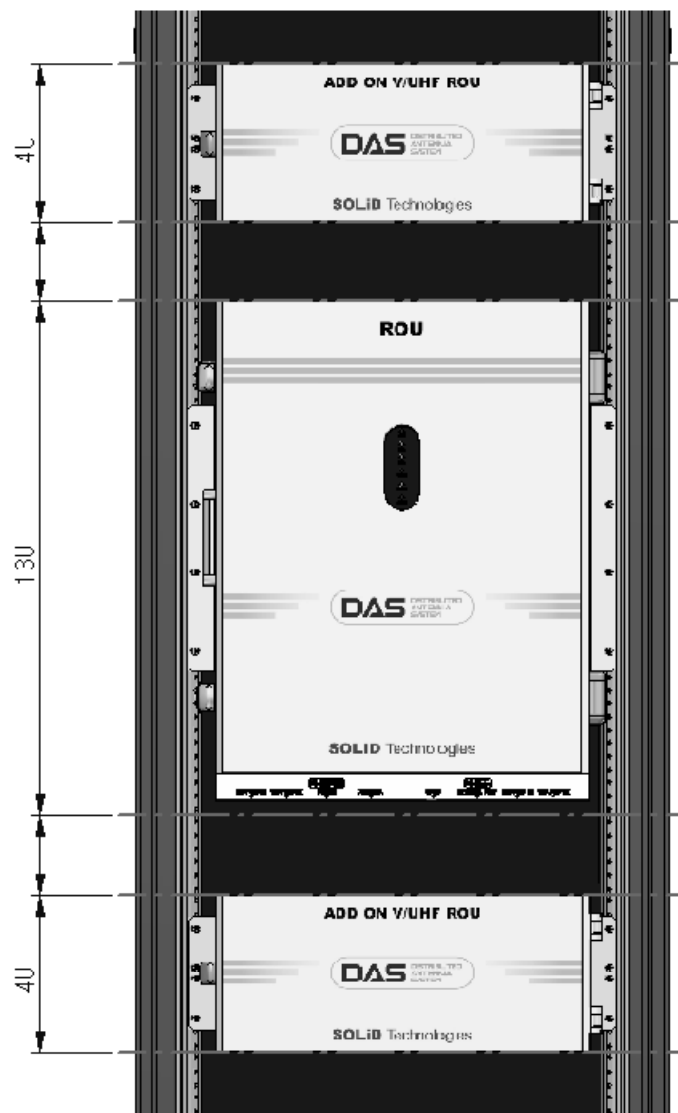


Figure 5.10 – Installation flow diagram when AOR installs in the rack

AOR components

AOR has the following components:

No.	Unit	Description	Remark
Common Part	Enclosure	Including Rack & Wall bracket	1EA
	AOR PSU	Alternative DC-48V or AC 120V	1EA
	V/UHF RDU	-	1EA
	Power Cable	- MS Connector with 3 hole to AC 120 plug(AC) - MS Connector with 2 lug termination(DC)	Each 1EA
	Comm Cable	- MS Connector which both end sides has 5hole	1EA
	RF cables	- One for interface TX signal with ROU - Another for interface RX signal with ROU	2EA


Basically, AOR supports type of one-body which include V/UHF RDU, AOR PSU and others accessories

5.5.2 AOR Power Cabling


AOR supports both of DC-48V and AC120V of input power. As PSU for DC-48 and PSU for AC120V are separated from each other, you need to select one of them in case of purchase order.

RPSU for DC -48V and RSPU for AC 120V have the same configuration and capacity while each of the units uses different input voltage from each other.

The following figure shows configuration of PSUs for DC -48V and AC 120V.

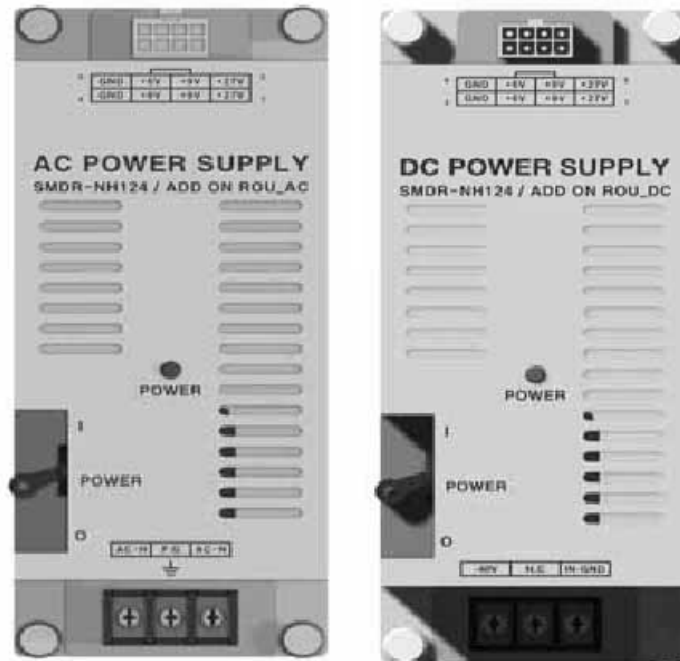

MC Connector numbering	Lug Naming		AOR PSU Terminal naming		Remark
	AC	DC	AC	DC	
A	AC_H	-48V	AC-H	-48V	
B	AC_N	GND	AC-N	IN_GND	
C	GND	DC NC	FG	FG	

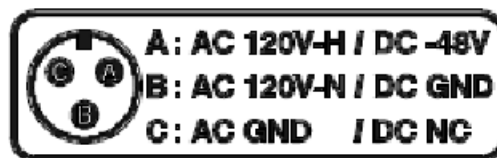


Check if the connection is the same as one seen in the table above and make sure before turn the power ON. If you want to turn on the power of AOR, move PSU's circuit break switch to "I" status

Check if the POWER LED indicator on the AOR PSU is green lights status

Information of LED at the front RDU


When power of AOR is turned on, LED of the PSU front panel shows the following information:

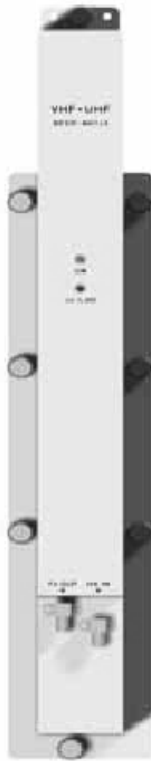

LED		Description
ON	●	Power is not supplied
	●	Power is supplied.
ALM	●	Normal Operation
	●	Abnormal Operation

5.5.3 GND Terminal Connection

AOR has one GND terminal port where is on rear side, like below

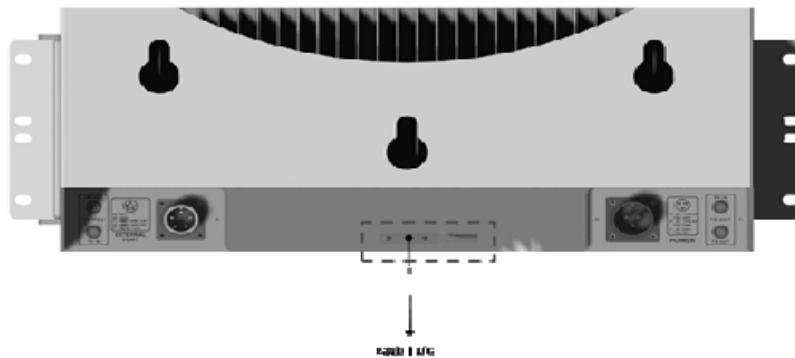

- Take off the GND terminal port from enclosure and connect to ground cable, then fix it the position of enclosure again
- The opposite end of the ground cable should connect to the communication GND of building
- The ground lug is designed meeting the SQ22 standard

5.5.4 Coaxial cable and Antenna Connection

- AOR has two antenna port, the one is TX antenna and the others is RX antenna
- The coaxial cables which are connected to antenna distributed network connect to two antenna port of AOR. Before connection, check the VSWR value of coaxial cable whether it is within specification using SITEMASTER .
- At this time, check if the Return loss have above 15Db or VSWR have below 1.5
- The part of antenna connection fasten to port not to be loosed and not to be injected the dusty and insects
- The antenna connected to AOR is only serviced in inbuilding

5.5.5 Consumption Power of AOR

The following table shows power consumptions of AOR:

Part	Unit	Consumption Power		Remark
AOR	RDU VHF+UHF (E_VHF+UHF)	VHF	47W	VHF HPA OFF
		UHF	47W	UHF HPA OFF
		FULL	74W	Both HPA ON

5.5.6 Interface with existing ROU

AOR is not operated by themselves. TX/ RX signals receive/transmite through RF port terminal of existing ROU. Also for communication with existing ROU, should connect cable on external port of each other. The following shows the connection diagram with existing ROU:

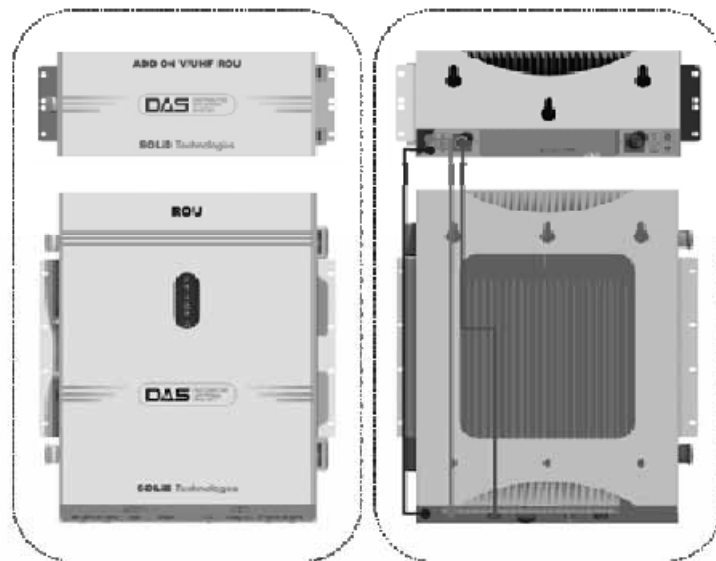


Figure 5.10 – AOR which is installed above of ROU

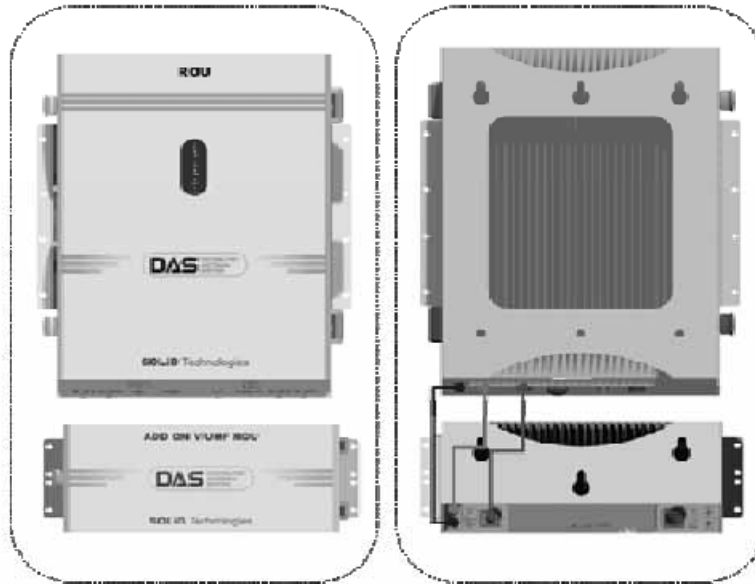


Figure 5.11 – AOR which is installed under of ROU

For connecting with existing ROU, need three sorts of cables

The following shows the interface point between existing ROU and AOR:

Items	Interface Point		Remark
	Existing ROU Port	AOR Port	
TX RF Cable	V/UHF TX	TO ROU TX IN	SMA
RX RF Cable	B/UHF RX	RX OUT	SMA
Communication signal Cable	EXTERNAL PORT	EXTERNAL PORT	MS-CON

Section 6

Operation


6.1 BIU Operation

6.2 ROU Operation

This chapter describes operation of SMDR-NH124. It deals with procedures and operations for normal system operation after installation. It also describes operations per unit and interworking methods.

6.1 BIU Operation

6.1.1 BIU

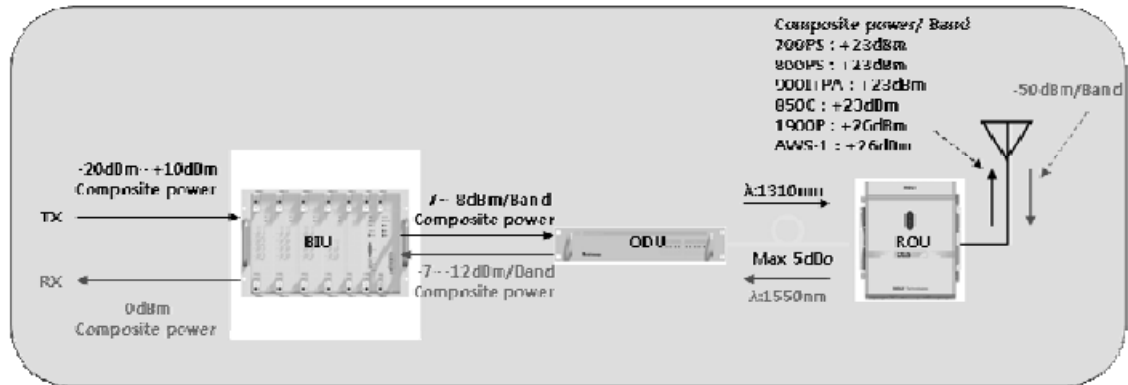

6.1.2 TX Operation at BIU

TX level to be sent to BIU should be in the range of -20dBm ~ + 10dBm. If the level exceeds the range, you need to connect an attenuator with the front end of BIU input and adjust the level in the corresponding range. Out of the range, maximal power cannot be outputted and so you need to increase output power of BDA or adjust attenuation amount of BTS's coupler or ATT to adjust the level.

For signals of all bands, you need to check, using spectrum, if they are in an appropriate level before making connection with input port of BIU and then check if there are spurious signals.

You need MDBU of a band you want to use. Insert the unit into BIU and check if it works normally. For MDBU, up to two TX inputs are provided. Input level per port is -20dBm~+10dBm. The following describe settings for 800MHz Public safety MDBU.

Checking the status of the system's LED Indicator


After turning on the switch of the power supply in BIU, check information on each module's LED of the system. The table below shows normal/abnormal cases depending on the status of each module's LED.

LED information

Unit	LED		Indicates
MDBU	ON	●	Green: MDBU is normally power-supplied.
	ALM	●	Green: MDBU is normal.
		●	Red: MDBU is abnormal; check the alarm through RS-232C.
MCPU	ON	●	Green: MCPU is normally power-supplied.
	TXD	●●	Green flicker: TX signals are transmitted to communicate with ROU.
	RXD	●●	Green flicker: RX signals are received from ROU.
	ALM	●	Green: BIU system is normal.
●		Red: BIU system is abnormal; check the alarm through RS-232C.	
MPSU	ON	●	Green: BIU is connected with power and MPSU works normally.
	ALM	●	Green: DC output is normal.
		●	Red: DC output is abnormal.

MDBU Setting


Insert MDBU into BIU. Check if the "ON" LED Indicator at the front panel of MDBU is lit green. Make connection with DEBUG port of MCU through RS-232 Cable (Direct Cable). Check if the ID of MDBU module is searched for in those 1~4 slots of MDBU through GUI. When you select the tab of a corresponding slot (MDBU 1~4) from the main window, you can inquire and set the status of a corresponding MDBU module.

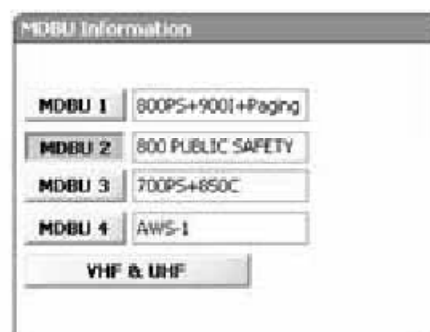

Check if MDBU is inserted into a corresponding slot of BIU. The ID screen shows the following:

- A. MDBU ID: 800Public Safety, 800PS+900I+Paging, 850C, 700PS+850C, AWS-1,1900P
- B. Not Insert: This status value appears when MDBU has not been set.
- C. Link Fail: This status value appears when MDBU has been set but it fails to communicate with modules.

Use the ON/OFF (Activation/de-activation) function for a port you want to use and turn it ON.

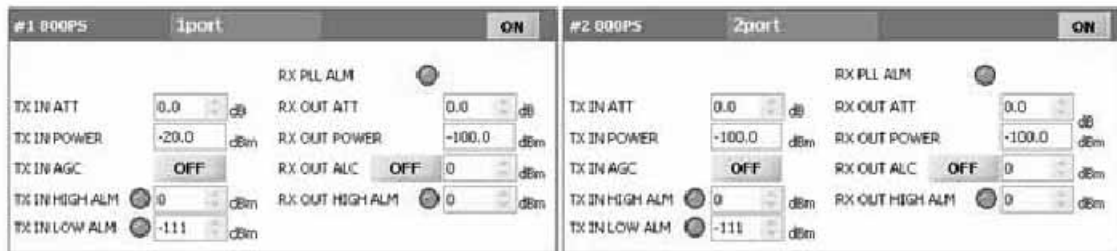

Depnding on whether to use a port, output varies. Thus, make sure to turn OFF unused ports.


The table below shows output power depnding on whether to use a port:

MDBU Band	Output level (Composite power)	No. of Max port (N)
700PS	23dBm-10*LOG(N)	2
700LTEC	23dBm-10*LOG(N)	2
800PS	23dBm-10*LOG(N)	2
850Cellular	23dBm-10*LOG(N)	2
900I+Paging	23dBm-10*LOG(N)	2
1900PCS	26dBm-10*LOG(N)	4
AWS-1	26dBm-10*LOG(N)	4
VHF	24dBm-10*LOG(N)	1
UHF	24dBm-10*LOG(N)	1

Check if the level of TX IN POWER is the same as the value measured through spectrum (Wthin ±3dB). Use TX IN AGC function and automatically set internal ATT depending on input level. ATT is automatically set based on -20dBm of input . The table below shows TX IN ATT depending on TX IN POWER. For manual setting, you can set ATT depending on input according to the table.

TX IN POWER	TX IN ATT	TX IN POWER	TX IN ATT	TX IN POWER	TX IN ATT
-20dBm	0dB	-9dBm	11dB	+1dBm	21dB
-19dBm	1dB	-8dBm	12dB	+2dBm	22dB
-18dBm	2dB	-7dBm	13dB	+3dBm	23dB
-17dBm	3dB	-6dBm	14dB	+4dBm	24dB
-16dBm	4dB	-5dBm	15dB	+5dBm	25dB
-15dBm	5dB	-4dBm	16dB	+6dBm	26dB
-14dBm	6dB	-3dBm	17dB	+7dBm	27dB
-13dBm	7dB	-2dBm	18dB	+8dBm	28dB
-12dBm	8dB	-1dBm	19dB	+9dBm	29dB
-11dBm	9dB	0dBm	20dB	+10dBm	30dB
-10dBm	10dB				

Edit Naming of a port and set it as a desired character string (up to 12 characters). For example, the figure below shows a screen when you set "SPRINT" for port 1 and "T-MOBILE" for port 2.

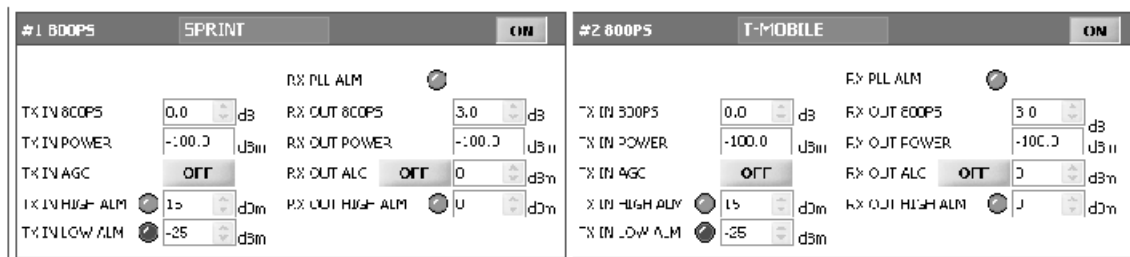

Use various upper/lower limits. The following table shows recommended limit settings:

Item	Recommended Limit	Remark
TX IN HIGH ALM	15dBm	Alarm
TX IN LOW ALM	-25dBm	Alarm
RX OUT ALC	0dBm	Auto Level control
RX OUT HIGH ALM	5dBm	Alarm

As such, when you finish setting normal input levels and alarm limits, check if the value of MODULE FAILUER LED Indicator is lit green (Normal case).

6.1.3 RX Operation at BIU

For RX operation at BIU, you need to set RX gain to prevent BTS or BDA from being affected. There is an ATT setting window to let you adjust gain per band and port.

Total RX gain is 50dB. To adjust a desired gain, you need to do the following. For RX gain of a desired gain, you can set it as 50dB-RX ATT. Use the terminal and check if TX Adjust value and Ec/Io value is appropriate.

To block high signals from entering BTS or BDA, keep ALC mode activated (ON).


6.1.4 Setting whether to use ROU/OEU at BIU

BIU controls overall system, working as common part in any equipment. Connect BIU with such units as ODU, OEU and ROU to be interfaced with the BIU and manually set whether to use the units at the INSTALL window of BIU.

To inquire and set information on units in lower level (OEU and ROU) at BIU, you need to check on a corresponding item at INSTALL Menu for a unit to be actually used. This setting makes BIU actually try to communicate with lower units while collecting the status value of units.


The menu below shows INSTALL menu, where you can see topology for overall units at a glance.

Overall topology for SMDR-NH124 Configuration of BIU-ODU-ROU

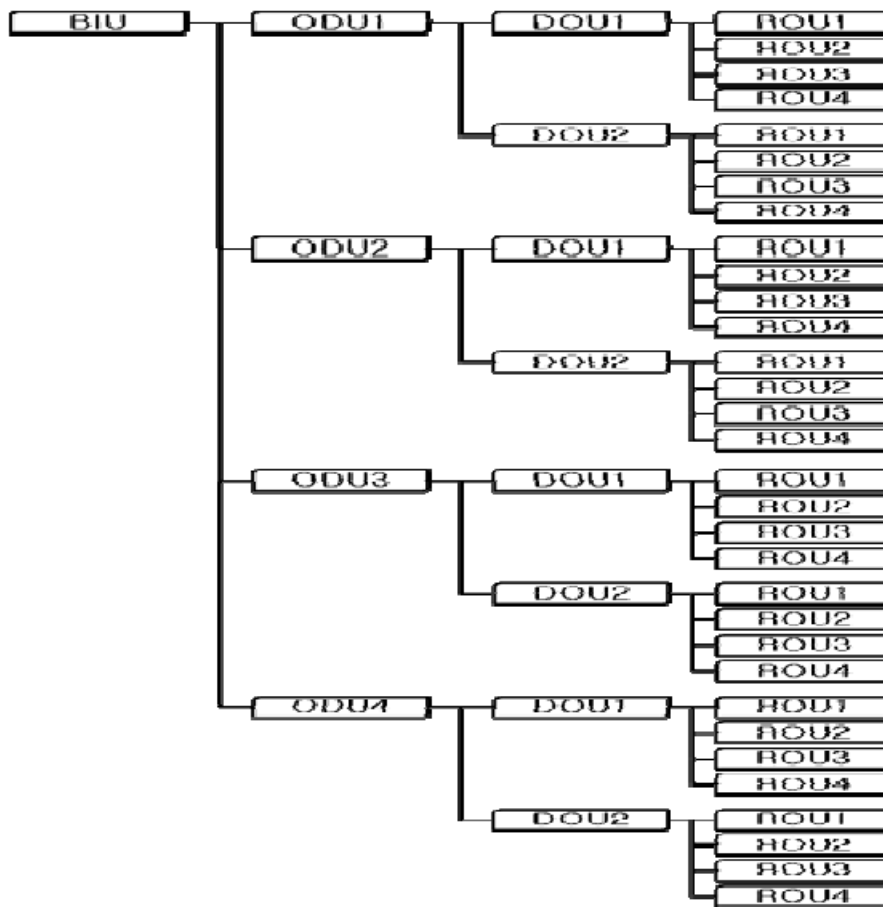


Configuration on whether to use BIU varies depending on the topology above and so you need to check on a unit to be installed.

Ex.) How to set INSTALL menu when ROU is connected with DOU1 of ODU1, which is connected with BIU:

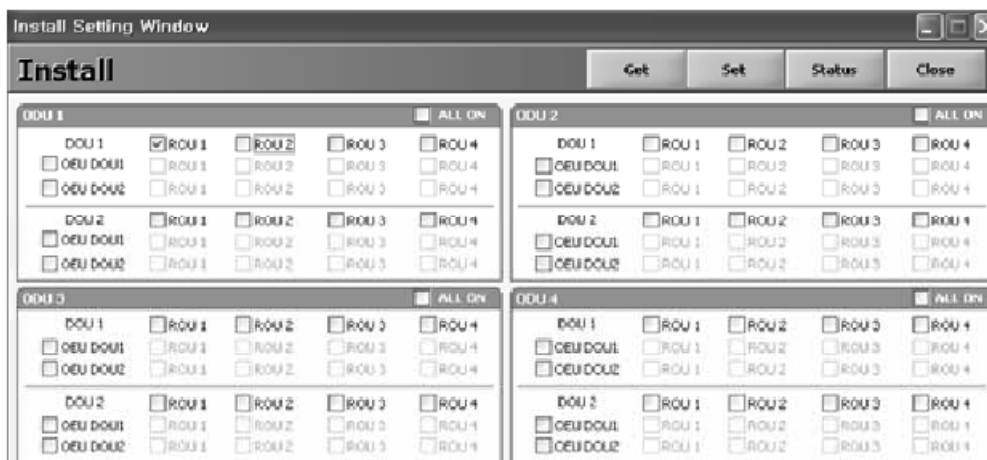

1. Select INSTALL from GUI menu.

2. Check on ODU1 menu>DOU1>ROU1.
3. Close the INSTALL menu.
4. Check if ROU is created, which was checked on at the left TREE panel.




6.1.5 ODU Operation at BIU

BIU can be equipped with up to four ODUs. One ODU can hold two DOUs in it. For information on insertion/deletion of DOU in ODU, you can see at the main window of BIU.

ODU Insert Information		
	DOU#1	DOU#2
ODU#1	<input type="radio"/>	<input type="radio"/>
ODU#2	<input type="radio"/>	<input type="radio"/>
ODU#3	<input type="radio"/>	<input type="radio"/>
ODU#4	<input type="radio"/>	<input type="radio"/>

When you select ODU screen from the left TREE panel, you can see DOU1 or DOU2 menu activated depending on whether DOU has been inserted. Then, the optical port set at the INSTALL menu is also activated to let you check PD value of the optical port. Any optical port not set at the INSTALL menu is seen de-activated in grey.

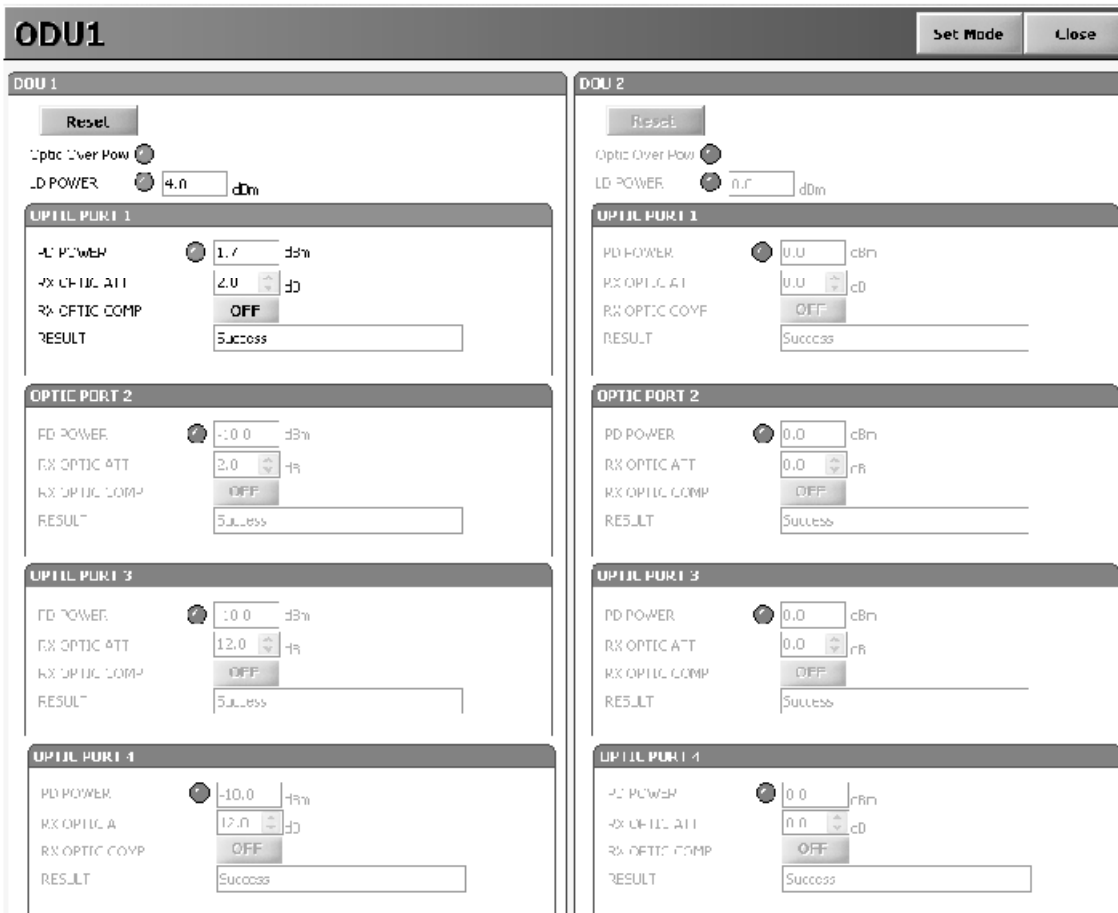

The level of Laser diode received from ROU/OEU is $+7\text{dBm} \pm 0.5\text{dB}$. The level of Photo diode will be displayed with losses related to the length of optical cables and insertion loss of optical connectors.

In general, the level of optical PD POWER should be $+6\text{dBm} \sim +2\text{dBm} \pm 1.5\text{dB}$.

What is more, ODU has the function of automatically compensating for optical cables. The following procedure is related to how to make optical compensation with ROU connected with port, at a corresponding DOU window of ODU:


1. Check if ODU is smoothly communicating with a corresponding ROU.
2. Select ODU or DOU from the left Tree panel.
3. Set "RX OPTIC COMP" of the optical port of a corresponding DOU as "ON."
4. During optical compensation, the Result window shows "Processing" and then a result value. There are three types of results as follows:
 - A. Success: The optical compensation is normally made.
 - B. Over Optic Loss: Generated optical loss is 5dB or more.
 - C. Communication Fail: Communication with ROU is in poor condition.
5. ATT of optical compensation can work based on the numerical expression of $12-2*(\text{LD})$

POWER-PD POWER).

6. Optical compensation can be made not only in ODU but also in ROU.

6.2 ROU Operation

The figure below shows the level of the system link of SMDR-NH124 (BIU-ODU-ROU). This section describes ROU-related information. ROU receives various signals through optical modules. The signals are filtered only for corresponding signal band from a corresponding RDU module and amplified with a High Power Amplifier. Then, the multiplexer combines the signals with others and sends them with an antenna.

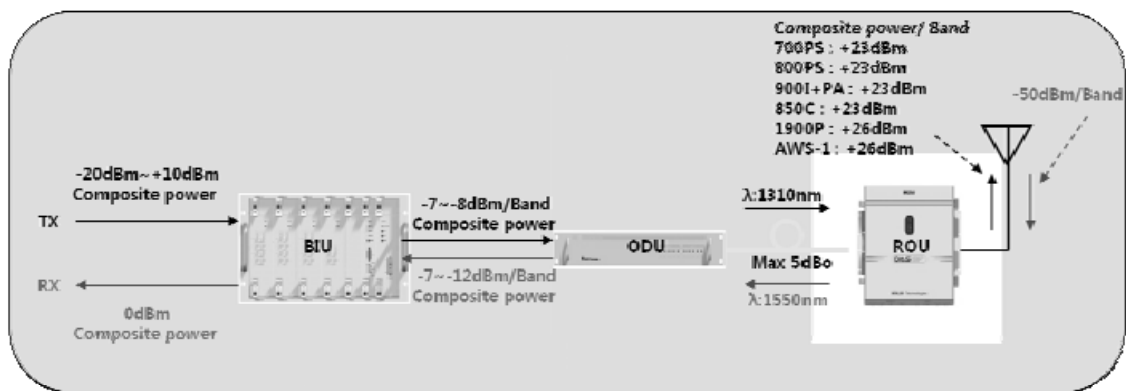

6.2.1 ROU Operation

ROU is in one-body enclosure type. ROU is located at a remote closet in a building. And it can be installed on a wall or into a rack.

Basically, one antenna is provided. To install a variety of antennas, you need such devices as a divider and a coupler. ROU can work with a DC Feeder and an Optic Cable Feeder. For power supply of ROU, a power supply in AC-DC and DC-DC type is provided to let you select a power supply suitable for an application.

For upper level, ROU can be connected with ODU and OEU. It has AGC function for 5dBo of optical cable loss.

The following show operational procedures after installation of ROU.

Checking the status of ROU's LED Indicator

After turning on the switch of the power supply in ROU, check information on each module's LED of the system. The table below shows normal/abnormal cases depending on the status of each module's LED.

Unit	LED	Indicates
RCPU	ON	● Green: ROU is normally power-supplied.
	LD	● Green: Laser Diode is normal.
		● Red: Laser Diode is abnormal.
	PD	● Green: Photo Diode is normal.
		● Red: Photo Diode is abnormal; check optical cables.
	TXD	● Green flicker: TX signals are transmitted to communicate with BIU/OEU.
	RXD	● Green flicker: RX signals are received from BIU/OEU.
ALM	● Green: ROU system is normal.	
	● Red: ROU system is abnormal; check the alarm through RS-232C.	
RDU	ON	○ The power is not supplied.
		● The power is supplied.
	ALM	● Normal Operation
		● Abnormal Operation
RPSU	ON	○ The power is not supplied or the polarity of -48V is reversed.
		● The power is supplied.

ID Setting

Use an RS-232 Cable(Direct Cable) for connection with DEBUG port of ROU RCPU. Execute GUI (Graphic User Interface). When you connect ROU directly with a Serial port, the screen will show the TREE of a direct line of units connected with ROU. Basic ROU ID is set as ODU1-DOU1-ROU1. Set it with the ID of a designed ROU. Before setting an ROU ID, you need to check if ROU is connected with the optical port of ODU or OEU (See System Topology at "Setting whether to use BIU").


ID



If multiple ROUs connected to BIU share the same ID, the screen will fail to read status information on the ROUs with the same IDs. Therefore, make sure not to redundantly set ROU ID.

Checking Communication LED of RCPU

Check if TXD and RXD LEDs in RCPU make communication. Receiving FSK signals from BIU, ROU sends requested status value to BIU. During reception, RXD LED flicks. During transmission, on the other hand, TXD LED flicks. At this time, you need to check if whether to use a corresponding ROU is checked on (See "whether to use BIU OEU/ROU").

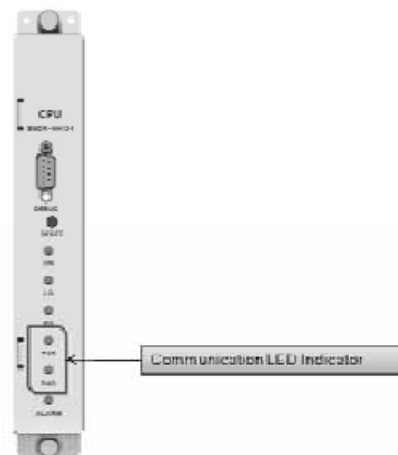

ROU Optic Comp Operation

ROU has the function of automatically compensating for optical loss. It can do the work for up to 5dBo of optical loss. Set "TX OPTIC COMP" of ROU as "ON." Optical compensation of ROU can not be made without communication with such units in upper level as ODU or OEU. For 1dBo of optical loss, basic TX OPTIC ATT is 12dB; for 5dBo of optical loss, TX OPTIC ATT is 4dB. OPTIC COMP works only one time before it stays dormant.

The figure below shows a screen for OPTIC Information in ROU GUI.

LD POWER means output level of ROU Laser Diode, which is sent to a upper unit by ROU. PD POWER means input level of Photo Diode to be received from a upper unit.

OPTIC Information	
LD POWER	<input type="radio"/> 7.5 dBm
PD POWER	<input type="radio"/> -2.0 dBm
TX OPTIC ATT	2.5 dB
TX OPTIC COMP	OFF
RESULT	Success

During optical compensation, the Result window shows "Processing" and then a result value. There are three types of results as follows:

1. Success: The optical compensation is normally made.
2. Over Optic Loss: Generated optical loss is 5dBo or more.
3. Communication Fail: Communication with ROU is in poor condition.



If ROU does not make optical compensation, there will be errors in the budget of system link. It can cause lower output level or make Spurious Emission not satisfying for a standard.

RDU Setting

Insert an RDU+BPF assembly you want to offer service with it and then connect the Multiplexer with interface cable (See Sector 5: How to install RDU at the INSTALL part).

Through GUI, check if the ID of RDU module is inquired at LEFT, MIDDLE and RIGHT slots of RDU. When you select the tab of a corresponding slot (LEFT, MIDDLE and RIGHT) from the main window of ROU, you can inquire and set the status of a corresponding RDU module.

MIDDLE RDU	AW5-1+1900P
LEFT RDU	850C+700P5
RIGHT RDU	800+900I+PA

Set HPA of a corresponding RDU as "ON." Use TX OUTPUT AGS function and set it as a desired output level.

800PS
ON

TX PLL ALM <input type="radio"/>	RX PLL ALM <input type="radio"/>
TX OUTPUT ATT <input type="text" value="12.0"/> dB	RX INPUT ATT <input type="text" value="0.0"/> dB
TX OUTPUT POWER <input type="text" value="-100.0"/> dBm	RX INPUT POWER <input type="text" value="-100.0"/> dBm
TX HPA ON/OFF <input type="button" value="OFF"/>	RX INPUT ALC <input type="button" value="OFF"/> <input type="text" value="-48"/> dBm
TX OUTPUT HIGH ALM <input type="radio"/> <input type="text" value="30"/> dBm	
TX OUTPUT LOW ALM <input type="radio"/> <input type="text" value="-111"/> dBm	
TX OUTPUT AGS <input type="button" value="OFF"/> <input type="text" value="1"/> dBm	
RESULT <input type="text" value="Success"/>	
TX OUTPUT ALC <input type="button" value="OFF"/> <input type="text" value="25"/> dBm	
TX OUTPUT SD <input type="radio"/> <input type="button" value="OFF"/> <input type="text" value="-110"/> dBm	

The table below shows maximally available Composite Powerlevels that can be set per band:

RDU Band	Power that can be maximally set	Setting range
700PS	23dBm	0 ~ 23dBm
700LTEC	23dBm	0 ~ 23dBm
800PS	23dBm	0 ~ 23dBm
850Cellular	23dBm	0 ~ 23dBm
900I+Paging	23dBm	0 ~ 23dBm
1900PCS	26dBm	0 ~ 26dBm
AWS-1	26dBm	0 ~ 26dBm
VHF	24dBm	0~24dBm
UHF	24dBm	0~24dBm

AGS function enables you to adjust output power as you like. While the AGS function is being executed, the Result window shows "Processing" and then a result value. There are three types of results as follows:

- A. Success: The AGS function is normally made.
- B. Not Operate OPTIC Comp: Optic Comp is not executed.
- C. Lack of ATT: There is no attenuation available.

Use various upper/lower limits. The following table shows recommended limit settings:

Item	Recommended Limit	Remark
TX OUTPUT HIGH ALM	Max Composit Power+ 1dB	Alarm
TX OUTPUT LOW ALM	0dBm	Alarm
TX OUTPUT ALC	Max Composit Power	Auto Level control
TX OUTPUT SD	Max Composit Power+ 2dB	Shutdown
RX ALC	-45dBm	

If TX OUTPUT HIGH ALM is higher than a setting value, alarms will be genrated.

If TX OUTPUT LOW ALM is lower than a setting value, alarms will be genrated. TX OUTPUT HIGH ALM/LOW ALM tends to work only as warning.

When you activate ("ON") TX OUTPUT ALC, outputs will be restricted depending on a setting output value.

When you activate ("ON") TX OUTPUT SD, output will be turned OFF once output power level reaches the same as SD setting value. Upon SD operation, check output level after 10 minutes and then check the status again.


When you activate ("ON") RX ALC, inputs will be restricted depending on a setting value.

As described above, when normal output level and alarm limit values are set, you need to check if the value of MODULE FAILUER LED Indicator is normally seen green.

For unused bands, you need to use band tuning-ON/-OFF function to turn them off. Once a RDU band is turned off, its status value will not be used in case of alarms.

6.3 OEU Operation

The figure below shows the level of the system link of SMDR-NH124 (BIU-ODU-OEU-ROU). This section describes OEU-related information. OEU receives various signals through optical modules. The optical signals are converted to RF signal and the RF signal also is amplified to moderate signal level. To transmit to ROU, the signal is converted to optical signal

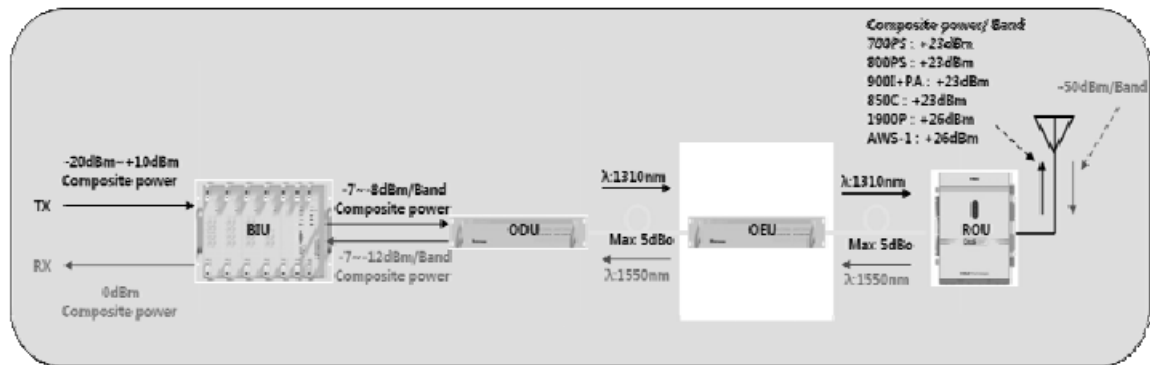

6.3.1 OEU Operation

OEU is in shelf enclosure type. OEU is located at a remote closet in a building. And it can be installed into a rack.






















OEU is for role as hub. It is to expand toward campus cluster, it is only one optical cable to expand 8ROU. This is reason why OEU supports up to 2DOU. The DOU supports up to 4optical port to connect ROU

ROU can work with a DC Feeder and an Optic Cable Feeder. For power supply of OEU, a power supply in DC-DC type is provided

For upper level, OEU can be connected with ODU. It has AGC function for 5dBo of optical cable loss. The following show operational procedures after installation of OEU.

Checking the status of OEU's LED Indicator


After turning on the switch of the power supply in OEU, check information on each module's LED of the system. The table below shows normal/abnormal cases depending on the status of each module's LED.

Unit	LED	Indicates	
EWDM	LD	 Green : Laser Diode normal status	
		 Red :Laser Diode abnormal status	
	PD	 Green : Photo Diode normal status	
		 Red : Photo Diode abnormal status, input optic power low alarm	
DOU1,2	LD	 Green : Laser Diode normal status	
		 Red :Laser Diode abnormal status	
	PD1	 Green : Photo Diode(PD) of optic port1 is normal	
		 Red : PD of optic port1 is abnormal or input optic power low	
	PD2	 Green : Photo Diode(PD) of optic port2 is normal	
		 Red : PD of optic port2 is abnormal or input optic power low	
	PD3	 Green : Photo Diode(PD) of optic port3 is normal	
		 Red : PD of optic port3 is abnormal or input optic power low	
	PD4	 Green : Photo Diode(PD) of optic port4 is normal	
		 Red : PD of optic port4 is abnormal or input optic power low	
	System	ON	 Green : Power on
		TXD1	 Green flicker : ECPU send NMS Tx data to BIU
RXD1		 Green flicker : ECPU receive NMS Rx data from BIU	
TXD2		 Green flicker : ECPU send NMS Tx data to ROU	
RXD2		 Green flicker : ECPU receive NMS Rx data from ROU	
ALM		 Green : OEU system normal (no alarm)	
	 Red :OEU system abnormal (alarm)		

ID Setting


Use an RS-232 Cable(Direct Cable) for connection with DEBUG port of OEU. Execute GUI

(Graphic User Interface). When you connect OEU directly with a Serial port, the screen will show the TREE of a direct line of units connected with OEU. Basic OEU ID is set as ODU1-DOU1. Set it with the ID of a designed OEU. Before setting an OEU ID, you need to check if ROU is connected with the optical port of ODU

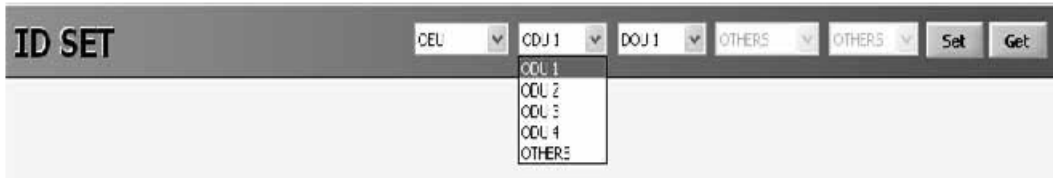

The sort of OEU ID

The sort of OEU ID is as below

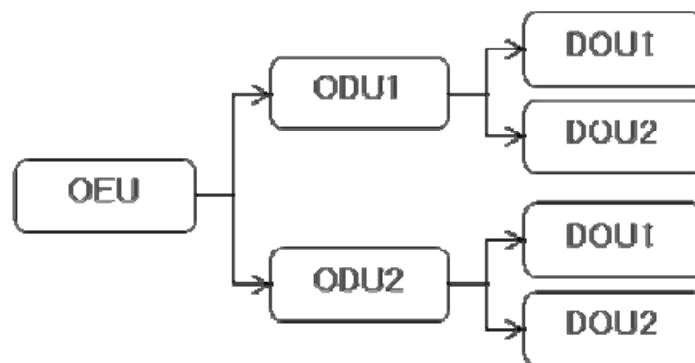

OEU is connected only to 4th optical port of DOU1/2 in the ODU1/2
Therefore, it need to assign upper unit connected to ODU#-DOU#



If multiple OEUs connected to BIU share the same ID, the screen will fail to read status information on the OEUs with the same IDs. Therefore, make sure not to redundantly set OEU ID.

Checking Communication LED of OEU

Step1 : checking whether communicate with BIU(ODU)

Check if TXD1 and RXD2 LEDs in OEU front LED make communication. Receiving FSK signals from BIU, OEU sends requested status value to BIU. During reception, RXD1 LED flicks. During transmission, on the other hand, TXD1 LED flicks. At this time, you need to check if

whether to use a corresponding OEU is checked on (See "whether to use BIU OEU/ROU").

Step2 : Checking whether communicate with ROU

OEU do as Hub. OEU has two optical port. One is connected to ODU and the others is connected to ROU. Communication with ODU is checked at above step1

Step2 is checking stage whether OEU communicate with ROU. OEU request status to ROU and then TXD2 is flicked and if responses data received from ROU RXD2 LED is flicked

OEU Optic Comp Operation

OEU has the function of automatically compensating for optical calbe loss. It can do the work for up to 5dBo of optical loss. Set "TX OPTIC COMP" of OEU's Eoptic as "ON." Optical compensation of OEU can not be made without communication with such units in upper level as ODU. For 1dBo of optical loss, basic TX OPTIC ATT is 12dB; for 5dBo of optical loss, TX OPTIC ATT is 4dB. OPTIC COMP works only one time before it stays dormant.

The figure below shows a screen for OPTIC Information in OEU GUI.

LD POWER means output level of OEU Laser Diode, which is sent to a upper unit by OEU. PD POWER means input level of Photo Diode to be received from a upper unit.



During optical compensation, the Result window shows "Processing" and then a result value.

There are three types of results as follows:

1. Success: The optical compensation is normally made.
2. Over Optic Loss: Generated optical loss is 5dBo or more.
3. Communication Fail: Communication with ROU is in poor conditin.



If OEU does not make optical compensation, there will be errors in the budget of system link. It can cause lower output level or make Spurious Emission not satisfying for a standard.

Section7

Additive functions

-
- 7.1 Shutdown function**
 - 7.2 Total power limit function**
 - 7.3 Output power automatic setting function**
 - 7.4 Input power AGC function**
 - 7.5 Input power limit function**
 - 7.6 Optic loss compensation**

This chapter describes additive functions of SMDR-NH124.


7.1 Shutdown function (TX output shutdown)

The DAS has an automatic shutdown function to protect the DAS itself and the wireless network when the normal operational conditions cannot be maintained

The DAS shut down automatically when the composite power downlink output power is above the values defined as average for the device for a period not to exceed 5seconds. Criterion level is set through GUI

After automatic shutdown, the DAS may automatically turn-on in order to assess whether the temporary condition has changed. If the condition is still detected, the DAS shall shutdown again. These actions will be repeated 5 times

After 5time repetition, if the condition is still detected, the DAS will be shutdown permanently. The following diagram shows the shutdown logic

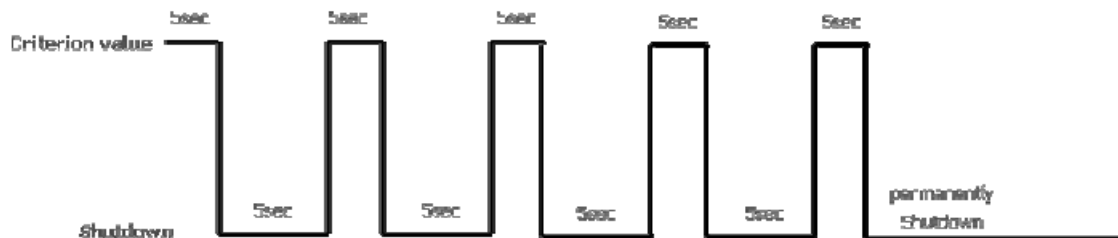

After the retry logic exhausts itself, if the DAS still detected a fault status then the DAS will shutdown permanently and illuminate the fault via visual fault indicator

Permanent shutdowns of the DAS will also be reported to the NOC through the NMS

7.2 Total Power Limit function (TX Output ALC)

In order to protect HPA and not to radiate spurious emission, output power don't radiate above defined value which operator set in advance. To execute this function, operator should turn-on the ALC function and set limit level through GUI. If the output power exceed above the defined value, output attenuator is adjusted to operate within defined value. The output attenuator's adjustment range is above 25dB. If output power decease, applied ATT by AGC function return to initial ATT

7.3 Output power automatic setting function (TX Output AGC)

To provide convenience of setting output power at initial setup automatically, operator set to wanting output level and turn-on the AGC function and then output power is automatically set to defined level.

If AGC logic finished, logic operation results show on the result window of GUI. There

are three types of results as follows

1. Success: The AGS function is normally completed.
2. Not Operate OPTIC Comp: Optic Comp is not executed.
3. Lack of ATT: There is no attenuation available.

If normal logic don't executed, changed ATT return to initial ATT

Through output AGC function, can be checked whether optic compensation is executed or not

7.4 Input power AGC function (TX Input AGC)

This function is to give convenience to operator when setting initial installation

Without spectrum analyzer, we can know input power value through power display window of GUI. Use TX IN AGC function and automatically set internal ATT depending on input level. ATT is automatically set based on -20dBm of input . The table below shows TX IN ATT depending on TX IN POWER. For manual setting, you can set ATT depending on input according to the table.

TX IN POWER	TX IN ATT	TX IN POWER	TX IN ATT	TX IN POWER	TX IN ATT
-20dBm	0dB	-9dBm	11dB	+1dBm	21dB
-19dBm	1dB	-8dBm	12dB	+2dBm	22dB
-18dBm	2dB	-7dBm	13dB	+3dBm	23dB
-17dBm	3dB	-6dBm	14dB	+4dBm	24dB
-16dBm	4dB	-5dBm	15dB	+5dBm	25dB
-15dBm	5dB	-4dBm	16dB	+6dBm	26dB
-14dBm	6dB	-3dBm	17dB	+7dBm	27dB
-13dBm	7dB	-2dBm	18dB	+8dBm	28dB
-12dBm	8dB	-1dBm	19dB	+9dBm	29dB
-11dBm	9dB	0dBm	20dB	+10dBm	30dB
-10dBm	10dB				

7.5 Input power limit function (TX Input ALC)

The DAS has TX input ALC function at the BIU to limit level when input power is increased above level by operated input AGC function

Normally, there are more than two input port in the MDBU of BIU

For example, 850cellular band has two input port to support both VzW and AT&T


Two input power may be different each other. The DAS have input attenuator in first stage of MDBU. Through input AGC function, input ATT is adjusted according to input power. If input power increase, input ATT is adjusted again to limit increased input power. Also, if input power decrease input ATT return to initial ATT

7.6 Optic loss compensation

The DAS has the function of automatically compensating for optical loss. It can do the work for up to 5dBo of optical loss. Set "TX OPTIC COMP" of ROU as "ON." Optical compensation of ROU can not be made without communication with such units in upper level as ODU or OEU. For 1dBo of optical loss, basic TX OPTIC ATT is 12dB; for 5dBo of optical loss, TX OPTIC ATT is 4dB. OPTIC COMP works only one time before it stays dormant.

The figure below shows a screen for OPTIC Information in ROU GUI.

LD POWER means output level of ROU Laser Diode, which is sent to a upper unit by ROU. PD POWER means input level of Photo Diode to be received from a upper unit.

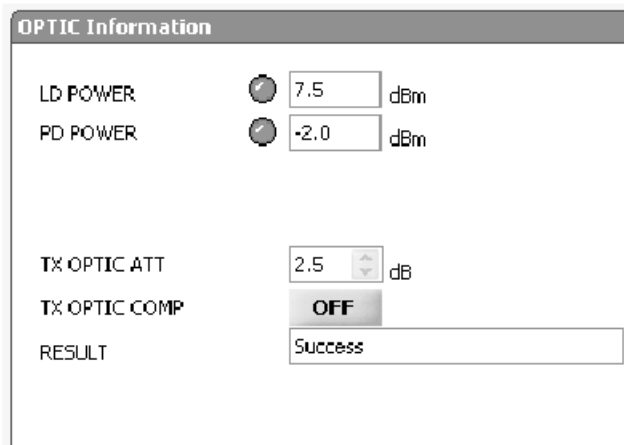

During optical compensation, the Result window shows "Processing" and then a result value. There are three types of results as follows:

1. Success: The optical compensation is normally competed
2. Over Optic Loss: Generated optical loss exceed 5dBo or more.
3. Communication Fail: Communication with ROU is under poor condition.