



T-Light™ LCU (Light Control Unit) NEMA Galaxy

User Manual

Models: LCUN3HG

Revision 1.1, November 11, 2019

Copyright © Telematics Wireless Ltd.
All rights reserved

The document contains proprietary information of **Telematics Wireless, Ltd.**; it is provided under a license agreement containing restrictions on use and disclosure, and is also protected by copyright law.

Due to continued product development this information may change without notice. The information and intellectual property contained herein is confidential between **Telematics Wireless Ltd.** and the client, and remains the exclusive property of **Telematics Wireless Ltd.** If you find any problems in the documentation, please report them to us in writing. **Telematics Wireless Ltd.** does not warrant that this document is error-free.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise without the prior written permission of **Telematics Wireless Ltd.**



Content

About Telematics Wireless Products	3
Description	3
Smart Lighting System Overview	4
LCU NEMA Galaxy	5
Standard Features	5
“Auto Detection and Verification” Software	5
Optional Features	6
LCU NEMA Supported Data Transfer	6
Technical Specifications	7
RF Radio Characteristics	7
Environment	7
LCU NEMA Dimensions	7
LCU NEMA Electrical Structure	8
LCU NEMA Contacts/Wiring	8
LCU NEMA Contact Details	9
LCU NEMA Pinout	9
Standards Compliance	10
Regulation Information	11
FCC and Industry Canada Class B Digital Device Notice	11
Industry Canada interference Notice	11
FCC interference Notice.....	12
FCC and Industry Canada Radiation Hazard Warning.....	12
Installation Requirements	13
Mandatory Customer-Supplied Equipment.....	13
Mandatory Voltage Surge Protection	13
Mandatory Current Surge Protection	13
Location	13
Post-Installation Commissioning	14
Contact Details	14

About Telematics Wireless Products

Telematics Wireless products have been evaluated as Information Technology Equipment (ITE), which may be installed in Central Offices, Telecommunication Centers, offices, computer rooms, and similar commercial type indoor or outdoor locations.

Telematics Wireless is an associate member of the TALQ Consortium, and its products are ELEXON approved. The T-Light™ Wireless Light Control Unit (LCU) is also certified by Intertek.



Description

The T-Light™ Wireless Light Control Unit (LCU) and its communication interface with the T-Light management software are key components in the Telematics Wireless Smart Lighting System. The LCU is a wireless control unit installed in one of the following locations:

- On top of the luminaire fixture (External)
- In the luminaire fixture (Internal)
- In the base of the pole (Internal)

The LCU handles the collection and transmission of luminaire data and the execution of commands on the luminaire from the Smart Lighting System Control Management Software (CMS) via a Data Communication Unit (DCU) gateway.

Smart Lighting System Overview

The Smart Lighting System collects data from and manages the operation of remote street luminaires. The System consists of the following components:

- **LCU** – Located on top of or inside the luminaire cover, or in the light pole, the LCU sends sensor data and executes scheduled and unscheduled luminaire control commands, such as on/off and dim, received from the CMS Application Server.
- **DCU Gateway** – Network gateway between LCU and CMS transmits luminaire data and luminaire control commands.
- **CMS** – Web-based backend application server provides real-time management: receives LCU communications from the DCU and sends luminaire control commands to the DCU for transmission to LCUs.

CMS usually contains a database of static and dynamic LCU information: ambient light values, lighting and dimming schedules, power usage, status, etc.



Figure 1 – System Topology

LCU NEMA Galaxy

The LCU NEMA Galaxy is an external luminaire control device which is installed on top of the luminaire cover into a standard NEMA socket. Control features offer On/Off and dimming level operations. Monitoring features include identification of lamp and electrical issues and measurement of electrical parameters.

The LCU NEMA Galaxy uses standard NEMA socket “twist and lock” installation on top of a pole or luminaire cover, according to ANSI C136.10 and C136.41 specifications.

Standard Features

- Light sensor - Operates as a photocell with the integrated microcontroller and is used as a backup light control in the event of microcontroller failure.
- Energy meter - Continuous measurement collection and aggregation.
- Integrated RF antenna.
- Over the air firmware updates.
- Each unit is configurable as a repeater, resulting in one additional ‘hop’ from the DCU.
- Real Time Clock (only when connected to the system or when unit received its time zone from the system and operates with GPS)
- Network data is protected by AES 128 encryption.
- Relay Control for LED driver/ballast power.
- Uses licensed frequency.
- Built in GPS receiver for auto-commissioning
- [“Auto Detection and Verification” Software](#)

“Auto Detection and Verification” Software

The LCU NEMA includes the Telematics “Auto Detection and Verification” software that automatically detects and stores the ballast type (1-10V or DALI) in the LCU. The ballast type is then retrieved during the commissioning process, thereby eliminating the need to enter it manually into the CMS (auto detection process also occur each time the power turns on from off state)

Optional Features

- Built-in GPS receiver for full auto-commissioning.

LCU NEMA Supported Data Transfer

With the proper matching of LED driver, the following data information will be provided.

- Current
- Voltage
- Lamp energy (kWh)
- Metered/Active power (Watt)
- Power Factor
- Lamp Burning hours
- LED Driver Temperature (depend on LED driver characteristics)

Technical Specifications

Feature	Specification
Dimming – Ballast/Driver Communication Protocols (different configurations depend on part number ordering information)	DALI Analog 0-10V PWM
Operating Input Voltage	347-480V AC @50-60Hz
Load Current	2A
Internal Surge Protection	620J (20kA)
MTBF	>1M hours
Isolation	2.5kVac/5mA/5Sec
Power Consumption	Up to 2W

RF Radio Characteristics

Parameter	Value	Unit
Operating Frequency:	450-470, License band	MHz
Network Topology	Star	
Modulation	4GFSK	
Maximum Transmitter output power	+28	dBm
Bandwidth	6.25	KHz
Data Rate	4.8kbps	
Receiver sensitivity, typical	-115dBm@4.8kbps	dBm
Antenna Type	built in Antenna	

Environment

Operating Temperature	-40° F to 158° F (-40° C to +70° C)
IP Rating	IP 66 per IEC 60529-1

LCU NEMA Dimensions

Model	Measurements
External – NEMA	3.50 in D x 3.86 in H (89 mm D x 98 mm H)
Weight	245 g



Figure 2 - LCU NEMA 480 Galaxy Enclosure

LCU NEMA Electrical Structure

LCU NEMA Contacts/Wiring

Following is a wiring diagram for a NEMA receptacle with dimming pads for use with the LCU NEMA:

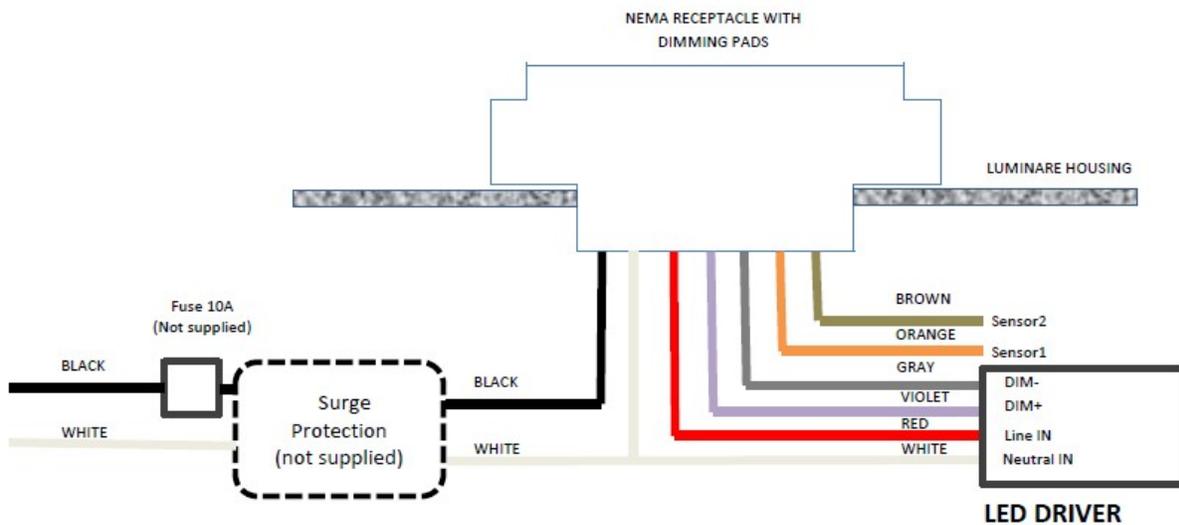


Figure 3 - NEMA Receptacle Wiring Diagram for use with LCU NEMA

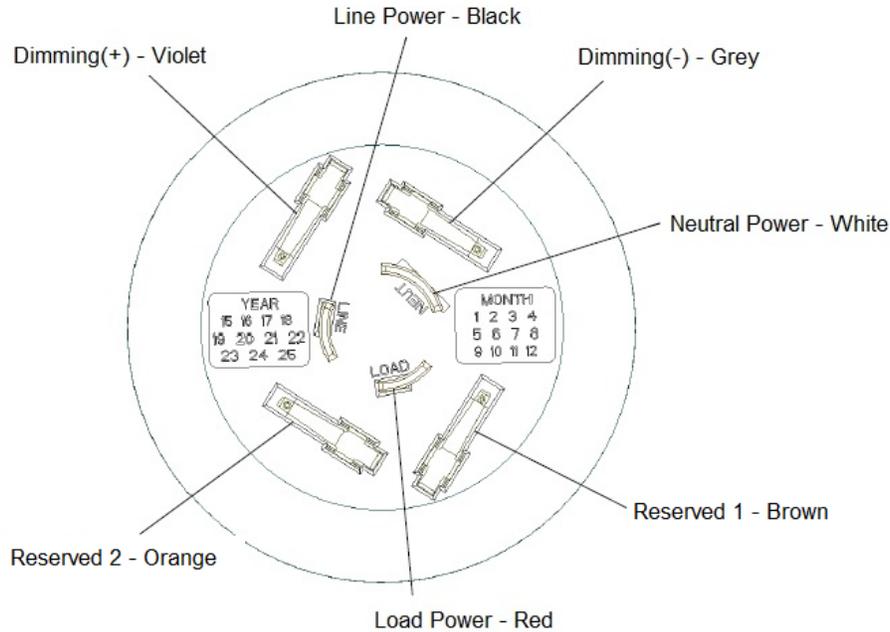


Figure 4 - LCU NEMA 7-Pin Contact Interface

LCU NEMA Contact Details

#	Wire Color	Name	Purpose
1	Black	Li	AC Line In
2	White	N	AC Neutral
3	Red	Lo	AC Line Out: Load
4	Violet	Dim+	DALI(+) or (+)0-10V or PWM or RS485-A
5	Gray	Dim-	Common GND: DALI(-) or (-) 0-10V or RS485-B
6	Brown	Reserved 1	Digital IO or Analog In or RS485-A (optional)
7	Orange	Reserved 2	Digital IO or RS485-B (optional)

LCU NEMA Pinout

Model	LED Driver			
	Pin 1-2 Black-White	Pins 3-2 Red-White	Pins 5-4 Gray-Violet	Pins 6-7 Brown-Orange
External NEMA 7-pin	Main AC Line IN Main AC Neutral IN	AC for lamp Line OUT Neutral IN	Dimming – 0-10V Analog, DALI, PWM, Modbus RS485	For future user purposes, for example, sensors, Modbus RS485, GPIO-digital or analog

Standards Compliance

Region	Category	Standard
All	Quality Management Systems	ISO 9001:2008
	Locking Type	ANSI C136.41
	IP Rating	IP 66 per IEC 60529-1
United States Canada	Safety	UL773 CSA C22.2#205
	EMC/Radio	47CFR FCC Part 90 and Part 15 subpart B Class B RSS-119 and ICES-003 Class B

Regulation Information

FCC and Industry Canada Class B Digital Device Notice

The digital circuit of this device has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAN ICES-3 (B)/NMB-3(B)

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Industry Canada interference Notice

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage;*
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.*

FCC interference Notice

This device complies with part 90 of the FCC rules.

Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

FCC and Industry Canada Radiation Hazard Warning

WARNING! To comply with FCC and IC RF exposure compliance requirements, the device should be located at a distance of at least 20 cm from all persons during normal operation. The antennas used for this product must not be co-located or operated in conjunction with any other antenna or transmitter.

Le dispositif doit être placé à une distance d'au moins 20 cm à partir de toutes les personnes au cours de son fonctionnement normal. Les antennes utilisées pour ce produit ne doivent pas être situés ou exploités conjointement avec une autre antenne ou transmetteur.

WARNING! Changes or modifications to this equipment not expressly approved by the party responsible for compliance (Telematics Wireless Ltd.) could void the user's authority to operate the equipment.

Installation Requirements

Mandatory Customer-Supplied Equipment

System integrity for the LCU NEMA is ensured with the mandatory installation of customer-supplied voltage and current surge protection equipment.

Mandatory Voltage Surge Protection



Warning: To prevent damage due to power network voltage surges, it is mandatory that you also provide and install a surge protection device to protect the LCU and the luminaire driver.

Mandatory Current Surge Protection



Warning: To prevent damage due to power network current surges, it is mandatory that you also provide and install a 10 amp slow-blow fuse or circuit breaker to protect the LCU and the luminaire driver.

Location

The LCU NEMA is installed on the top surface of the luminaire cover utilizing a standard (twist and lock) NEMA socket.



Post-Installation Commissioning

The serial numbers and GPS coordinates of the LCU NEMA units must be added to the CMS Equipment Inventory as part of the commissioning process. The level of automation in the Commissioning process depends on the optional equipment installed in the LCU NEMA:

- GPS – Commissioning is fully automated. Commissioning is complete after the CMS Administrator executes the relevant command.

- No GPS – Commissioning is a partially manual process:
 - Installer obtains the GPS coordinates of the LCU NEMA with a handheld GPS device.
 - Installer records the serial number and GPS coordinates.
 - CMS Administrator imports the recorded values into the CMS Equipment Inventory, one by one or by batch.

Contact Details

Contact your local Telematics technical support representative, or contact us at:

Telematics Wireless, Ltd.

26 Hamelacha St., POB 1911

Holon 58117

ISRAEL

Phone: +972-3-557-5763

Fax: +972-3-557-5703

Sales: sales@tlmw.com

Support: support@tlmw.com

www.telematics-wireless.com