



# LBB 9082/00 Unidirectional Gooseneck Microphone




- ▶ Unidirectional dynamic microphone
- ▶ Flexible stem
- ▶ Excellent speech reproduction
- ▶ Rugged construction
- ▶ Built-in pop shield
- ▶ Flange mounting
- ▶ Matt black finish

The gooseneck microphone is a stylish high quality unidirectional dynamic microphone, mainly intended for public address applications.


## Functions

The flexible stem has an M10 screw fitting for mounting onto (fireman's) panels, lecterns or desktops.


## Installation/Configuration Notes

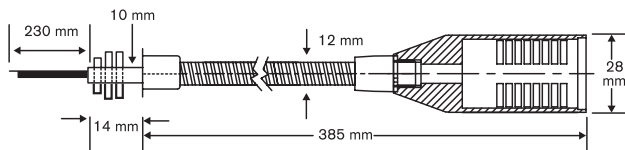

Dimensions in mm

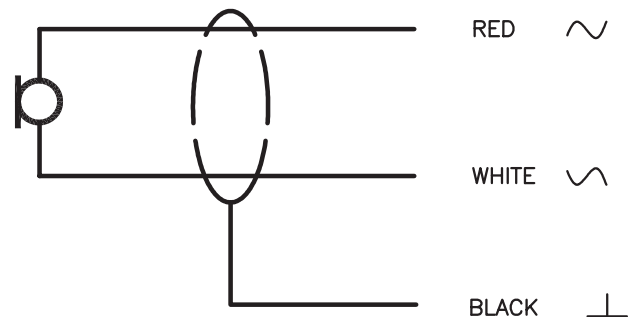

Circuit diagram

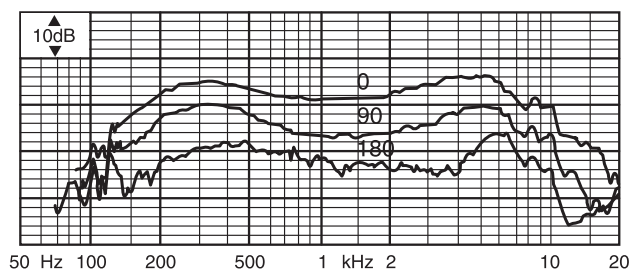

Frequency response

## Technical Specifications

### Electrical\*

Type	Gooseneck
Polar pattern	Unidirectional
Frequency response	100 Hz to 15 kHz
Sensitivity	1.2 mV/Pa ±4 dB
Rated output impedance	500 ohm

\* Technical performance data acc. to IEC 60268-4

### Mechanical

Dimensions	28 x 385 mm (1.10 x 15.16 in)
Weight	225 g (8 oz)
Color	Black
Cable type	2-core screened
Cable length	230 mm

### Environmental

Operating temperature	-25 °C to +55 °C (-13 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%

## Ordering Information

**LBB 9082/00 Unidirectional Gooseneck Microphone**      **LBB9082/00**

### Microphone

unidirectional dynamic microphone with flexible stem

**Americas:**  
Bosch Communications Systems  
12000 Portland Avenue South  
Burnsville, Minnesota, 55337, USA  
Phone: +1-800-392-3497  
Fax: +1-800-955-6831  
audiosupport@us.bosch.com  
www.boschcommunications.us

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: +31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**  
Bosch Security Systems Pte Ltd  
38C Jalan Pemimpin  
Singapore 577180  
Phone: +65 6319 3450  
Fax: +65 6319 3499  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**