MFGrounds Care

A Range of Residential & Commercial Grounds Care Equipment



VISION INNOVATION LEADERSHIP QUALITY RELIABILITY SUPPORT PRIDE COMMITMEN




Think pride...

Built on experience, growing through innovation.

Massey Ferguson grounds care equipment has come a long way, all in the name of quality and constantly strives; for more efficient products, the ethos being based around performance, reliability and a long heritage. And so, Massey Ferguson is proud to present a range of high-quality grounds care equipment, extending an already comprehensive stable of grounds care machines.



For more than 40 years, Massey-Ferguson has led the way in the design and manufacture of grounds care machinery and has a history in land management, which traces back over 160 years. We've earned a coveted reputation for rugged build quality, efficiency, reliability and excellent value for money. Our experience in machine manufacture is reflected in the awards we have won. To complement all of this, a wide choice of optional features and accessories provides the opportunity to tailor each machine to perform precisely the range of tasks required. You can rest-assured that all Massey Ferguson grounds care equipment comes with the reassurance of the best after-sales service and support package in the world from the Massey Ferguson network.

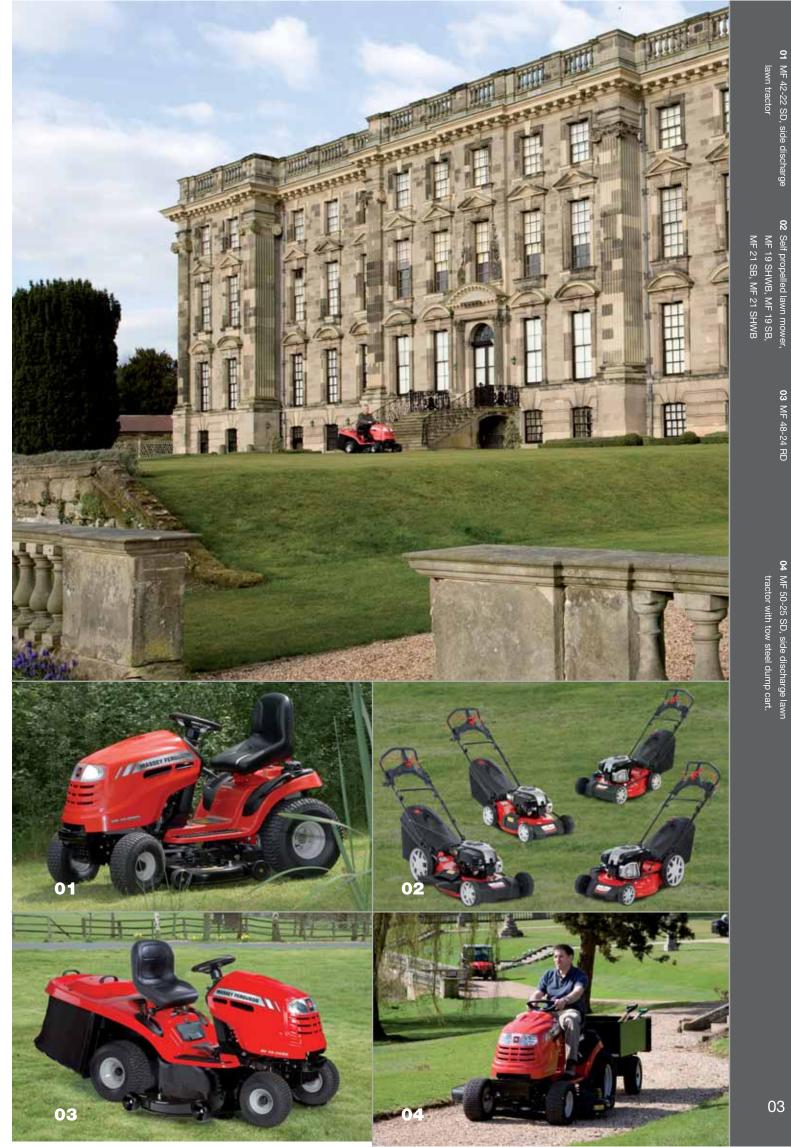

Self-propelled lawn mowers

Built to last: you can depend on your Massey Ferguson petrol mower to be with you throughout the year in the dayto-day life of your garden. The modern technology and the best workmanship see to that. Powerful engines, the easyto-empty grass bag, the ergonomically formed handle and the easy-to-handle cutting height adjustment guarantee excellent mowing results.

MF 19 SB Rotary Mower



- Briggs & Stratton engine, 750 Series DOV

- Fuel capacity 1,1 l
- Bag full indicator
- Grass bag volume 75 l
- 19" / 48 cm cutting deck
- 4 in 1 cutting system
- Mulch, collect, side or rear discharge
- Variable speed
- Rear wheel drive
- Ergonomic handle
- Deluxe handle panel and foam grip
- Ball bearings
- 18 / 20 cm wheel size (front / rear)



Mulching, bagging, discharge

There are different ways to dispose the clippings: mulching, bagging or discharge. When mulching, the grass clippings are cut several times to fine particles and can directly be used as a natural green fertilizer. Our models MF 19 SB, MF 19 SHWB, MF 21 SB and MF 21 SHWB offer you all three options simultaneously.

MF 19 SHWB Rotary Mower



- Briggs & Stratton engine, 750 Series DOV
- Fuel capacity 1,1 I
- Bag full indicator
- Grass bag volume 75 l
- 19" / 48 cm cutting deck
- 4 in 1 cutting system
- Mulch, collect, side or rear discharge
- Variable speed
- Rear wheel drive
- Ergonomic handle
- Deluxe handle panel and foam grip
- Ball bearings
- 18 / 30 cm wheel size (front / rear)

MF 21 SB Rotary Mower



- Briggs & Stratton engine, 750 Series DOV
- Fuel capacity 1,1 l
- Bag full indicator
- Grass bag volume 80 l
- 21" / 53 cm cutting deck
- 4 in 1 cutting system
- Mulch, collect, side or rear discharge
- Variable speed
- Rear wheel drive
- Ergonomic handle
- Deluxe handle panel and foam grip
- Ball bearings
- 20 / 20 cm wheel size (front / rear)

MF 21 SHWB Rotary Mower



- Briggs & Stratton engine, 750 Series DOV
- Fuel capacity 1,1 l
- Bag full indicator
- Grass bag volume 80 l
- 21" / 53 cm cutting deck
- 4 in 1 cutting system
- Mulch, collect, side or rear discharge
- Variable speed
- Rear wheel drive
- Ergonomic handle
- Deluxe handle panel and foam grip
- Ball bearings
- 20 / 30 cm wheel size (front / rear)



06 Detail: Ergonomic deluxe handle par

with foam grip and variable speed

02 Detail: high wheel MF 19 SHWB

03 Self propelled lawn

04 Detail: Briggs & Stratton engine,

05 Self propelled MF 19 SB

700 Series

MF 19 SB

Rear discharge lawn tractors

Whether on smooth, spacious lawns or smaller, uneven ground, Massey Ferguson provides you with the appropriate equipment. Our lawn tractors with rear discharge, floating cutting deck and turf saving wheels guarantee a clean and even cut.

MF 41-18 RD Lawn Tractor



- B&S Intek engine, 2600 min-1/8,4 KW
- 105 cm mowing deck
- Hydrostatic transmission
- Ball bearings
- Pivoting front axle
- Cast-iron front axle
- Mulch kit optional
- Grass bag capacity 350 I
- Toolbox & 12 V plug
- Turning radius 40 cm
- Acoustic bag full indicator
- Deck wash system
- RevTEK-reverse mowing technology



MF 30-15 RT Lawn Tractor



MF 30-15 RT / MF 36-15 RT

- B&S Intek engine,
- 2800 min⁻¹/9,2 KW / 2500 min⁻¹/8,5 KW - 76 cm / 92 cm mowing deck
- 76 cm / 92 cm mowing deck - Transmatic transmission
- Ball bearings (MF36-15 RT)
- Pivoting front axle
- Mulch kit optional (MF36-15RT)
- Grass bag capacity 210 I / 240 I
- Turning radius 46 cm
- Convenient step through frame
- Floating deck

MF 41-18 RH Lawn Tractor



MF 30-13 RH / MF 36-15 RH / MF 41-18 RH

- B&S* Intek engine

- 2800 min⁻¹/6,3 KW / 2500 min⁻¹/8,5 KW 2500 min⁻¹/8,9 KW
- 76 cm / 92 cm / 105 cm mowing deck
- Hydrostatic transmission
- Ball bearings
- (MF36-15RH + MF41-18RH) - Pivoting front axle
- Cast-iron front axle
- Mulch kit optional
- (MF36-15RH + MF41-18RH) - Grass bag capacity
- 210 | / 240 | / 240 |
- Turning radius 46 cm
- Rubber foot pads

MF 36-16 RD Lawn Tractor



choke and throttle



MF 36-16 RD / MF 41-22 RD / MF 48-24 RD

- Kawasaki* OHV engine
- 2500 min⁻¹/9,2 KW / 2400 min⁻¹/12 KW 2500 min⁻¹/12,7 KW
- 92 cm / 105 cm / 122 cm mowing deck
- 4 anti-scalping wheels
- Hydrostatic transmission
- Wheels (f/r) 15"x6" / 20"x8"
- Ball bearings
- Pivoting front axle
- Cast-iron front axle
- Mulch kit optional
- Grass bag capacity 280 I / 350 I / 400 I
- Rubber foot pads
- Toolbox & 12 V plug
- Turning radius 40 cm
- Cruise control
- Acoustic bag full indicator
- Deck wash system
- RevTEK-reverse mowing technology



Side discharge lawn tractors

Tractors with side discharge are extraordinarily versatile. These machines with working widths of 96 cm, 107 cm or 127 cm are characterised by optimal manoeuvrability on all models. Cutting the grass over larger areas is made quick and easy. Thanks to an easyto-operate cutting height adjustment and a suspended mowing deck, you will have optimum cutting results even on difficult ground. Furthermore, you can easily attach accessories, such as snow blades, lawn rollers or dump carts.

MF 38-15 ST Lawn Tractor



MF 38-15 ST

- B&S Intek engine, 2600 min⁻¹/8,9 KW
- 96 cm Mowing deck
- Transmatic transmission
- Ball bearings
- Pivoting front axle
- Mulch kit standard
- Rubber foot pads
- Turning radius 46 cm
- Convenient step through frame
- Floating deck



Detail: RevTEK, reverse mowing technology 02 Optional available: Twin bagger

03 Side discharge lawn MF 50-25SD with dump trailer tractor

2

(optional available

MF 42-18 SH Lawn Tractor



MF 38-16 SD Lawn Tractor



- Kawasaki OHV engine, 3000 min-1/13,6 KW

MF 50-25 SD Lawn Tractor

- 127 cm Mowing deck
- Hydrostatic transmission
- Electric blade engagement
- Adjustable tie rod
- Pivoting front axle
- Mulch kit standard
- Grass catcher optional
- Turning radius 40 cm

MF 42-18 SH

- B&S Intek engine, 2800 min⁻¹/9,4 KW
- 107 cm Mowing deck
- Hydrostatic transmission
- Ball bearings
- Pivoting front axle
- Cast-iron front axle
- Mulch kit standard
- Rubber foot pads
- Turning radius 46 cm - Convenient step through frame
- Floating deck

- Kawasaki OHV engine

MF 38-16 SD / MF 42-22 SD

- 2800 min⁻¹/9,7 KW / 2400 min⁻¹/12 KW
- 96 / 107 cm Mowing deck - Hydrostatic transmission
- Ball bearings
- Electric blade engagement - Pivoting front axle
- Adjustable tie rod
- Mulch kit standard
- Grass catcher optional
- Rubber foot pads
- Turning radius 40 cm
- Cruise control and hour meter
- RevTEK reverse mowing technology

MF 50-25 SD

- Ball bearings

- Cruise control and hour meter



Innovation!

The range of commercial-quality, multi-purpose tractors are designed for residential and estate users requiring a power unit capable of operating a wide range of front and rear attachments, delivering optimum versatility and cost effective operation throughout the year. All models can be equipped additionally with rear discharge cutter decks with optional grass collection systems.

The MF 21-25 RD and the MF 21-25 RD 4WD are powered by 24hp twin-cylinder petrol engines. The first MF 21-25 RD model is specified with either two-wheel or the MF 21-25 RD 4WD offers all-wheel hydrostatic drive.

The MF 31-25 RD 4 WD is intelligent, powerful, reliable and rugged. Whether you need it for lawn care, tall meadows in rough terrain, courtyards, access roads or company sites - the technique of the MF 31-25 RD 4 WD with its 24 hp makes this tractor a full professional in nearly every terrain.

MF 21-25 RD / MF 21-25 RD 4WD

Standard features designed to give these garden tractors a work capacity far greater than conventional lawn and garden tractors of similar size are their heavy-duty welded tubular steel frames, pivoting front axles and pedal-engaged differential locks. Other model specific features

include selectable high and low speed ranges, Servocom steering, electrically-engaged power take-off and dual hydraulic outlets at the front and rear of the machine.

Available is an extensive list of optional equipment and accessories for these garden tractors, including the choice of turf or agricultural tyres, high-back seats with and without armrests and rear tipping grass collectors of various capacities with electric opening and high-tip emptying.

Among the attachments also available will be trailed and mounted fertiliser/salt spreaders, a towed truck, front sweepers with collection system, a snow blade, 540rpm/1,000rpm front power takeoff, a triangular front implement attachment frame, a road legal lighting kit and a weather cab. Two conventional rear-discharge cutter decks in 1.05 m and 1.22 m widths will be offered, complemented by a four-in-one 1.02 m deck capable of cutting at a wide range of heights prior to mulching, collecting or discharging the clippings directly onto the ground.

Efficient delivery of cut grass to an optional rear grass collector is achieved by the fitting of a large diameter discharge chute to all cutter decks, which are equipped with spring-assisted deck lift mechanisms. All grass collection systems incorporate an acoustic "box full" sensor alarm.

MF 31-25 RD 4WD

This 4 WD tractor is equipped with 2 hydraulic engines pivoted assembled on the steering stub axle. This allows a direct and short transmission to each front wheel and attains an excellent thrust performance

In addition, the MF 31-25 RD 4 WD has a "second speed" available. The power of the front hydraulic engines is bypassed to the rear hydraulic engines. Thereby a maximum speed of approximately 15 km/h will be achieved





MF 21-25 RD

MF 21-25 RD 4WD

MF 31-25 RD 4WD

22 Sta

lawn tyre:

(MF 21-25RD and MF 21-25RD 4WD) ndard



MF 21-25 RD

- 24 hp Kawasaki OHV engine
- Hydraulic transmission
- Ball bearings
- Pivoting front axle
- Cast-iron front axle
- Mulch kit optional
- Hour meter - Differential lock
- Electric PTO
- Hydraulic deck lifter
- Road approval available

- MF 21-25 RD 4WD
- 24 hp Kawasaki OHV engine
- Hydraulic transmission and
- 2 hydraulic motors
- Pivoting front axle
- Cast-iron front axle - Mulch kit optional
- Hour meter
- Front bumper
- Differential lock
- Electric PTO
- Hydraulic deck lifter
- Halogen light
- Road approval available



MF 31-25 RD 4WD

- 24 hp Kawasaki OHV engine
- 4 hydraulic motors
- Pivoting front axle
- Cast-iron front axle
- Mulch kit optional
- Hour meter
- Front bumper
- Differential lock
- Electric PTO
- Hydraulic deck lifter
- Halogen light
- Road approval available



All pictures with accessories.

High grass cutting tractor

The MF 36-22 HG with a high grass cutting deck is especially suitable for wide expenses such as paddocks and meadows. Agricultural tyres allow for even better grip on difficult mowing areas.



MF 36-22 HG

- V-Twin Kawasaki OHV engine 2400 min⁻¹/12 KW
- 92 cm High grass cutting deck
 92 cm High grass cutting deck
 Hydrostatic transmission
 Agricultural rear tyres
 Cruise control

- Tool box and 12V plug
 Pivoting cast-iron front axle
 Rubber foot pads
- Turning radius 40 cm
- Ball bearings



Garden tractor

You can't get any tougher than the MF 21-25 GC. Features like a 9-gauge welded-steel frame and a cast-iron front axle stand up to the toughest terrain. Plus, power steering makes it easy to operate the mower on all types of terrain.

That's smarter. That's tougher.







MF 21-25 GC

- 25 hp V-Twin Kohler OHV engine
- Mowing decks optional
- Hydrostatic transmissionDifferential lock
- Direct shaft drive
- Hydraulic deck liftPivoting cast-iron front axle
- Cruise control and hour meterTurning radius 69 cm
- Ball bearings



Intelligent zero-turn rider

The new MF 50-24 IZ ride-on mid mower has independently-driven rear wheels and a unique steerable front axle operated by a conventional steering wheel. Drive to the two rear wheels is controlled by advanced Synchro technology (patents pending) that synchronises front wheel steering movements with speed and direction of rotation of the rear wheels. The result is zero-turn radius agility from a conventionallysteered mower, enabling 360 degree turns to be made within the length of the machine.



Tight turns are enhanced by exceptional ground-following capabilities thanks to the use of a pivoting front axle, wide track and low centre of gravity that keeps all wheels firmly on the ground to give a smoother, safer cut on level or sloping terrain. Powered by a Kawasaki twin cylinder petrol engine (3100 min⁻¹/12,5 KW), the MF 50-24 IZ is equipped with a 1.27 m heavy-duty triple bladed mowing deck with anti-scalp rollers and mulching kit. An optional collector is available for use with the quick-attach, side-discharge deck.

Other standard equipment includes an adjustable high-back seat, comfortable soft-touch steering wheel and patented Smart Jet highpressure deck washing system.



17

01 Zero turn tractor MF 50-24 IZ

03 Detail: Forward - and

04 Innovation meets design

05 Steering wheels. Inside wheel


Zero-turn front cut rotary rider

The front cut rotary riders MF 48-22 FMZ and MF 50-22 FMZ are using an advanced Synchro synchronised steering technology. These riders have front drive wheels whose speed and direction of rotation are controlled by movements of the rear steered axle, actuated through a conventional steering wheel. The result is a high-output mower with a maximum working speed of 6 mph that is able to turn within its own length, delivering superb manoeuvrability, particularly useful for cutting in awkward or confined areas.







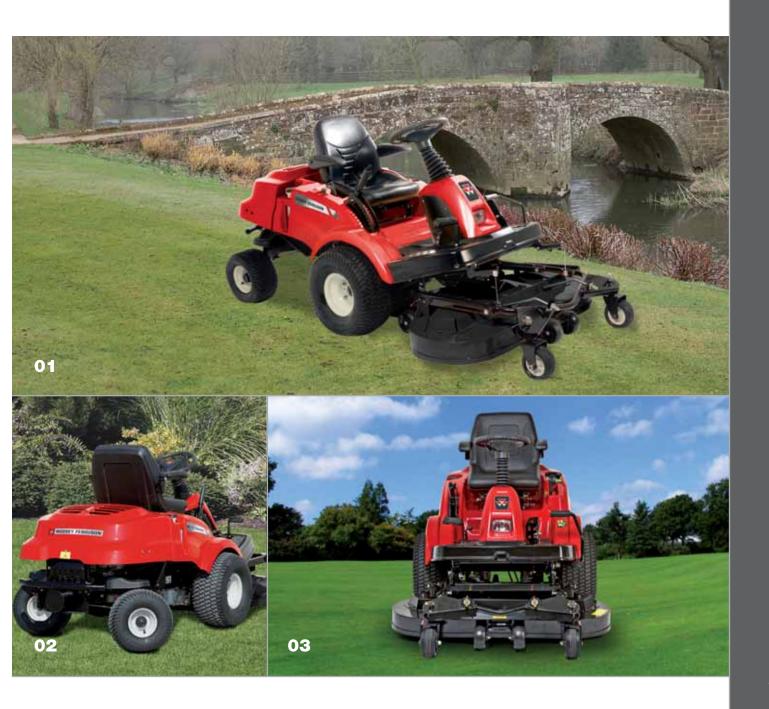

Zero-turn front cut rotary rider



The machine is powered by a Kawasaki petrol engine 3150 min⁻¹/ 13,8 KW) and has a quick-attach 1.27 m heavy-duty floating cutter deck fitted with three blades. Blade engagement is by electrically-operated clutch and height of cut is adjustable from 25 mm to 114 mm on the two swivelling front support wheels. The side-discharge deck has antiscalping rollers and incorporates the patented Smart Jet high-pressure deck washing system. A mulching kit is supplied as standard. Maximum operator comfort and convenience are assured by an easily-accessed driver's platform with fingertip controls, wellpositioned instrumentation and a multi-position high back seat with arm rests.





Dual-lever zero turn rider



Designed to cut grass and trim time. Powerful Kawasaki OHV engine. Quiet, reliable performance from an engine designed for longer life. HydroGear[™] EZT transmission - no hoses between the pump and motor gives more power to operate the deck. Pivoting front axle provides a smoother ride and a more professional cut while allowing a more enjoyable riding experience. Electric PTO for smoother deck engagement. 127 cm triple blade deck with 4 anti-scalping wheels, adjustable seat and steering levers. Deck wash hose attachment. High-pressure water blast cleans out grass and debris after each mowing. Optional baggers and mulch kits.

Dual transmission utilizes the full potential of both the engine and the transmission. No hoses between pump and motor allows more power for deck. The dual-lever steering arms let you control each wheel independently with precise movements and less effort. Zip around the bushes.Turn a full 360°.

MF 50-22 ZT Zero turn rider

- Kawasaki* V-Twin engine 2400 min⁻¹/12 KW)
- Full pressure lube
- 50"/127 cm Side discharge deck with 4 anti-scalping wheels
- Electric PTO engagement
- Mulch kit standard
- Dual lever steering
- Caster wheels / Pivoting front axle
- 2 hydrostatic transmissions



The Bull

Introducing the MF Bull, whether you need a worker out on the farm or a way to get out into the woods (or perhaps a little of both), the 4x4 Bull gets it done. With 4-wheel, fully independent double A-arm suspension and a wide stance, it offers increased stability on rough terrain. The 4x4's tight curb-to-curb turning circle and rear anti-roll bar provide superb cornering at faster speeds. Wherever you go, you'll have the ultimate in 4-wheel performance.

The new Bull 4x2 sets new standards by delivering 4x4 performance in a 4x2 UV. The 4x2 is built on the same rugged frame as the Bull 4x4 with fully independent suspension, for a steady and comfortable ride even in rough territory. The 4x2 is as strong and as quiet as it is smooth. Quite simply, it outworks and outplays the competition every time.



06 Working on slopes up to 15°

02

Utility Vehicle MF 20 MD 4x4

အ

Utility Vehicle MF 20 MD 4x4 with optional



The Bull – 2-wheel-drive

MF 20 MD 4x2

- Utility vehicle
- 22 hp Kohler V-Twin
- 4 X 2 drive
- 2 speed continuously variable transmission with reverse
- 10.5" ground clearance at axle
- Independent suspension
- Durable dual-purpose tyres
- Rugged steel frame
- Steel cargo bed

The Bull – 4-wheel-drive

MF 20 MD 4x4

- Utility vehicle
- 20 hp Perkins diesel engine
- 4 X 4 drive with auto engage front
- Axle electronic slip sensing
- Differential lock
- 2 speed continuously variable
- transmission with reverse
- 10.5" ground clearance at axle Independent suspension
- Roll bar payload capacity 408 kg
- Towing capacity 600 kg



04 Utility Vehicle MF 20 MD 4x4

Engine		MF 30-15 RT	MF 30-13 RH	MF 36-15 RT	MF 36-15 RH	MF 41-18 RH	MF 36-16 RD	MF 41-22 RD	MF 48-24 RD	MF 41-18 RD
Engine		B&S	B&S	B&S	B&S	B&S	Kawasaki	Kawasaki	Kawasaki	B&S
Engine rpm	min ⁻¹	2800	2800	2500	2500	2500	2500	2400	2500	2400
Kilowatt	kW	9,2	6,3	8,5	8,5	8,9	9,2	12,0	12,7	8,4
Cylinders	single / V-Twin	• / -	• / -	• / -	• / -	• / -	- / 🔵	- / 🔵	- / 🔵	• / -
Engine type		Intek	Intek	Intek	Intek	Intek	OHV	OHV	OHV	Intek
Fuel capacity	litre	3,8	3,8	3,8	3,8	3,8	7,5	7,5	7,5	7,5
Transmission										
Drive	transmatic / hydrostat	• / -	- / 🔵	• / -	- / 🔵	- / 🔵	- / 🔵	- / 🔵	- / 🔵	- / 🔵
Ball bearings		-	-	•	•	•	•	•		•
Pivot bar	cast	-	•	-	•	•		•		•
Adjustable tie rod		-	-	-	-	-		\bullet	\bullet	
Wheels and tyres										
Turf saving tyres	front	13x5	13x5	15x6						
	rear	18x6,5	18x6,5	18x9,5	18x9,5	18x9,5	20x8	20x8	20x8	20x8
Cutting equipment										
Blade engagement	manual									
Cutting width	cm / in	76 / 30	76 / 30	92 / 36	92 / 36	105 / 41	92 / 36	105 / 41		
Deck wheels		-	-	2	2	2	4	4	4	4
Discharge	rear	RD								
Mulch kit		-	-	0	0	0	0	0	0	0
Deflector	rear			0	0	0	0	0	0	0
Grass bag	liter.	010	010	0.40	040	0.40	000	050	400	050
Grass bag capacity	litre	210	210	240	240	240	280	350	400	350
Bag full indicator		-	-	-	-	-				
Bag lift		-	-	-	-	-	-	-		-
Weights and dimensions										
Turning radius	cm	46	46	46	46	46	40	40	40	40
Length	cm	225	225	225	225	225	250	250	250	250
Width	cm	99	99	99	99	110	99	111	124	111
Height	cm	100	100	100	100	100	110	110	110	110
Weight	kg	190	190	195	195	198	227	240	240	140
Other										
Seat	high back / medium back	- / 🔵	• / -	- / 🔵	• / -	• / -	• / -	• / -	• / -	• / -
Seat style	adjustable	-		-				\bullet		
Steering wheel	softgrip	•					•			
Cruise control		-	-	-	-	-		\bullet		
RevTEK		-	-	-	-	-	•			
Light switch								\bullet		•
Tool box		-	-	-	-	-		\bullet		
12V plug		-	-	-	-	-	\bullet	\bullet		•
Foot pads	rubber					\bullet		\bullet		•
Front bumper		0		0	•	•	•			•
Rear Hitch	extendable	•			•	•				•

Not available -Standard Optional Ο

26



Side discharge lawn tractors

Engine		MF 38-15 ST	MF 42-18 SH	MF 38-16 SD	MF 42-22 SD	MF 50-25 SD
Engine		B&S	B&S	Kawasaki	Kawasaki	Kawasaki
Engine rpm	min ⁻¹	2600	2800	2800	2400	3000
Kilowatt	kW	8,9	9,4	9,7	12,0	13,6
Cylinders	single / V-Twin	• / -	• / -	- / 🔵	- / 🔵	- / 🔵
Engine type		Intek	Intek	OHV	OHV	OHV
Fuel capacity	litre	3,8	3,8	11,4	11,4	11,4
Transmission						
Drive	transmatic / hydrostat	• / -	- / 🔵	- / 🔵	- / 🔵	- / 🔵
Ball bearings		\bullet	•	•	•	•
Pivot bar	cast	-	•	•	•	•
Adjustable tie rod		-	-	•	•	•
Wheels and tyres	fuent	15.0	15.0	15.0	15.0	10-05
Turf saving tyres	front	15x6	15x6	15x6	15x6	16x6,5
	rear	20x8	20x8	20x8	20x10	22x9,5
Cutting equipment						
Blade engagement	manual / E-PTO		• / -	- / 🔵	- / 🔵	- / •
Cutting width	cm / in	96 / 38	107 / 42	96 / 38	107 / 42	127 / 50
Deck wheels		2	2	2	4	4
Discharge	side	•				
Mulch kit		•				
Deflector	side	•				
Grass bag	3100	0	0	0	0	
Bag full indicator		-	-	-	-	-
Bag lift		-	-	-	-	-
Weights and dimensions						
uintensions						
Turning radius	cm	46	46	40	40	40
Length	cm	170	170	172	172	172
Width / with deflector	cm	107 / 130	115 / 139	107 / 139	115 / 139	130 / 136
Height	cm	100	100	116	116	116
Weight	kg	150	175	170	170	190
011						
Other						
Seat	high back / medium back	- / 🔵	• / -	• / -	• / -	• / -
Seat style	adjustable	-				
Steering wheel	softgrip	•				
Cruise control		-	-			
RevTEK		-	-			•
Hourmeter		-	-			•
Light switch		•	•	•	•	•
Tool box		-	-	-	-	-
12V plug		-	-	-	-	-
Foot pads	rubber	\bigcirc	•	•		
Front bumper		О	•	•	•	
Rear Hitch	fixed	\bigcirc	\bullet	\bullet		\bullet

High grass cutting tractor

Engine		MF 36-22 HG
Engine		Kawasaki
Engine rpm	min ⁻¹	2400
Kilowatt	kW	12
Cylinders	single / V-Twin	
· · ·		- / ● OHV
Engine type	litzo	
Fuel capacity	litre	7,5
Transmission		
Drive	automatic / hydrostat	- / 🔵
Ball bearings		
Pivot bar	cast	
Adjustable tie rod		
Wheels and tyres		
Turf saving tyres	front	15x6
Agricultural tyres	rear	18x9,5
Cutting equipment		
Blade engagement	manual / E-PTO	• / -
Cutting width	cm / in	92 / 36
Deck wheels		
Discharge	side	
Mulch kit		-
Deflector	side	-
Grass bag		-
Bag full indicator		-
Bag lift		-
Weights and dimensions		
Turning radius	cm	40
Length	cm	185
Width	cm	99
Height	cm	110
Weight	kg	240
Other Seat	high back	
Seat style		
· · · · · · · · · · · · · · · · · · ·	adjustable	
Steering wheel Cruise control	softgrip	
RevTEK		
Hourmeter		-
Light switch		seperate
Tool box		
12V plug		
Foot pads	rubber	
Front bumper		
Rear Hitch	fixed / extendable	• / -

Garden tractor

Garden tractor		
Engine		MF 21-25 GC
Engine		Kohler
Horsepower	hp	25
Kilowatt	kW	18,7
Cylinders	single / V-Twin	- / 🔵
Engine type		OHV
Fuel capacity	litre	17
Transmission		
Drive	automatic / hydrostat	
Direct shaft drive	automatic / myurostat	- / •
Differential lock		
Ball bearings		
Pivot bar	cast	
Adjustable tie rod		\bullet
Wheels and tyres		
Turf saving tyres	front	16x7,5
	rear	24x10,5
Cutting equipment		
Blade engagment	manual/ E-PTO/ E-VAC	- / • / •
Cutting width	cm / in	О
Deck wheels		О
Discharge	side	\bullet
Wash nozzle		0
Mulch kit		Ō
Deflector	side	
Power deck lift	hydaulics	
Grass bag	,	0
Bag full indicator		-
Weights and dimensions		
Turning radius	cm	69
Length	cm	195
Width		103
	cm	
Height	cm	133
Weight	kg	489
Other		
Seat	deluxe high back	
Steering wheel	adjustable	
Cruise control		
RevTEK		
Hourmeter		•
Tool box		-
12V plug		
Foot pads	rubber	
Front bumper		
	fixed (automobile	
Rear Hitch	fixed / extendable	- / -

Zero turn riders

Engine		MF 48-22 FMZ	MF 50-22 FMZ	MF 50-22 ZT	MF 50-24 IZ
Engine		Kawasaki	Kawasaki	Kawasaki	Kawasaki
Horsepower	hp	22	22	22	24
Kilowatt	kW	16,4	16,4	16,4	17,9
Cylinders	single / V-Twin	- / •	- / 🔵	- / 🔵	- / 🔵
Engine type		OHV	OHV	OHV	OHV
Fuel capacity	litre	13,25	13,25	11,4	9,5
Transmission					
Drive		hydrostat	hydrostat	hydrostat	hydrostat
Direct shaft drive		-	-	-	-
Differential lock		-	-	-	-
Ball bearings			\bullet	\bullet	\bullet
Pivot bar	cast / tube	• / -	• / -	- / 🔵	• / -
Adjustable tie rod		-	-	-	\bullet
Wheels and tyres					
Turf saving tyres	front	20x10	20x10	13x5	15x6
	rear	15x6	15x6	18x9,5	20x8
Cutting equipment					
Blade engagement	E-PTO		\bullet	•	•
Cutting width	cm / in	122 / 48	127 / 50	127 / 50	127 / 50
Cutting height	mm	10/25-114	10/25-114	6/30-95	6/35-100
Deck wheels		2 + Roller	2 + Roller	4	2
Discharge	side		\bullet	•	
Wash nozzle		•	\bullet	•	\bullet
Mulch kit			•	•	
Deflector	side		•	•	
Deck lift	manual / hydaulics	• / -	• / -	• / -	• / -
Grass bag		-	-	0	0
Bag full indicator		-	-	-	-
Weights and dimensions					
Turning radius	cm	0	0	0	0
Length	cm	228	228	175	177
Width / with deflector	cm	127/ -	155/ -	139/158	139/158
Height	cm	120	120	100	117
Weight	kg	306	306	239	270
Other					
Seat	high back				
Seat style	adjustable				
Seat style	armrest				-
Steering wheel	softgrip				
Cruise control	songrip	-	-	-	-
RevTEK					
Hourmeter				-	
Battery charging light					
Battery charging light Bumper	front / rear				
	nont / real	- / •	- / 🔵	-	• / -

Self propelled lawnmowers

Engine		MF 19 SB	MF 19 SHWB	MF 21 SB	MF 21 SHWB
Engine		Briggs&Stratton	Briggs&Stratton	Briggs&Stratton	Briggs&Stratton
Kilowatt	kW	2,8	2,8	2,75	2,75
Displacement	ccm	160	160	160	160
Engine Type	700 Series DOV	•	•	•	•
Fuel Capacity	litre	1,1	1,1	1,1	1,1
Engine Start	pull / electric	• / -	•/ -	•/ -	•/ -
Wheels and tyres					
Wheels size front	in / cm	7 / 18	7 / 18	8 / 20	8 / 20
Wheels size rear	in / cm	8 / 20	12 / 30	8 / 20	12 / 30
Ball bearings			•	•	•
Cutting equipment					
Deck size	in / cm	19 / 48	19 / 48	21 / 53	21 / 53
Cutting height	mm	25 - 90	25 - 90	20 - 90	20 - 90
Height adjustment	central	•	•	•	•
Deck material	steel	•	•	•	•
Discharge	rear / side / mulch	• / • / •	• / • / •	● / ● / ●	• / • / •
Discharge Configuration		4in1	4in1	4in1	4in1
Mulch kit		•	•	•	•
Deflector	rear / side	• / •	• / •	• / •	• / •
Grass bag		•	•	•	•
Grass bag capacity	litre	75	75	80	80
Grass bag material	soft bag / hard top	• / •	• / •	• / •	• / •
Controls & Handle					
Controls		bail	bail	bail	bail
Speed		variable	variable	variable	variable
Handle type	standard / ergo	- / 🔵	- / 🔵	- / 🔵	- / 🔵
Full fold handle		•	•	•	•
Weight					
Weight	kg	32	32	45	45



Utility vehicles

Engine	THE BULL	MF 20 MD 4x2	MF 20 MD 4x4
Engine	MASSEY FERGUSON	Kohler	Perkins
Horsepower	hp	20	22
Kilowatt	kW	14,9	14,9
Cylinders	single / V-Twin / 3	- / • / -	- / - / 🔵
Engine type	Gasoline / Diesel	• / -	- / 🔵
Fuel capacity	litre	21,5	21,5
Transmission			
Drive	CVT		•
Transmission type	2WD / 4WD	• / -	- / 🔵
Differential lock	rear / front	- / -	• / •
Ball bearings		•	•
Suspension travel front	cm / in	20 / 8	20 / 8
Suspension travel rear	cm / in	20 / 8	20 / 8
Wheels and tyres			
Turf tyres	front	25x10-12	25x10-12
	rear	25x11-12	25x11-12
Tyres type		Trail	Trail
Weights and dimensions			
Turning radius	cm	405	405
Length	cm	314	314
Width	cm	162	162
Height	cm	198	198
Weight	kg	727	727
Other			
Seats		2	2
Seats	deluxe high back	•	•
Steering type		Rack & pinion	Rack & pinion
Hourmeter		•	•
Tool box		О	О
12V plug		•	•
Battery charging light		std	std
Front bumper		std	std



High capacity rear discharge tractor

Engine		MF 21-25 RD	MF 21-25 RD 4 WD	MF 31-25 RD 4 WD
Engine		Kawasaki	Kawasaki	Kawasaki
Horsepower	hp	24	24	24
Kilowatt	kW	18,7	18,7	18,7
		,		
Cylinders	single / V-Twin	- / •	- / •	- / •
Engine type		OHV	OHV	OHV
Fuel capacity	litre	5	5	14
Transmission				
Drive	automatic / hydrostat / motors	- / 🔵 / -	- / • / 2	- / - / 4
Differential lock	left / right / front / rear	• / • / - / -	•/•/-/-	- / - / • / •
Hydraulics	front / rear	- / -	$\bigcirc / \bigcirc / \bigcirc$	\bigcirc / \bigcirc
Ball bearings				
Steering	Convocom	•		
Pivot bar	Servocom			
	steel	•		
Adjustable tie rod		•		•
Wheels and tyres				
Turf saving tyres	front	15x6,5	15x6,5	15x6,5
	rear	20x10	20x10	20x10
Agricultural tyres	front / rear	0	0	0
		U		
Cutting equipment				
Blade engagement	manual/ E-PTO	- / 🔵	- / •	- / 🔵
Cutting Deck		О	О	О
Cutting width (Deck 1) / 3 in 1	cm / in	105 / 41	105 / 41	-
Cutting width (Deck 2) / 3 in 1	cm / in	122 / 48	122 / 48	122 / 48
Cutting width (Deck 3) / 4 in 1	cm / in	102 / 40	102 / 40	102 / 40
Cutting height	mm	2,5-100	2,5-100	2,5-100
Deck wheels		4	4	4
Discharge	rear	•		ightarrow
Wash nozzle		О	О	О
Mulch kit		0	О	0
Deflector	rear	•		•
Power deck lift	manual / hydaulics	 _ / -	• / -	- / •
Grass bag capacities	350 I / 450 I	0/0	0/0	0/0
High dump capacity	400 I	<u> </u>	0	0
Power bag lift		<u> </u>	0	Ō
Bag full indicator				
Chute	standard / large / x-tra large	-/0/-	-/0/-	- / - / •
		-/0/-		
Weights and dimensions				
Turning radius	cm	64	64	64
Length (Basic tractor)	cm	200	200	200
Width (Basic tractor)	cm	100	100	100
Height (Basic tractor)	cm	140	140	140
Weight	kg			
Other				
Seat	high back	•		
Seat type	adjustable	•		•
Cruise control		-	-	-
RevTEK		-	-	-
Hourmeter		\bigcirc		\bullet
Front bumper		\bigcirc		\bullet

Accessories.

MF 38-15 ST | MF 42-18 SH

Tyre chains	196-658-699
46"/117 cm Dozer blade	OEM-190-833

42"/107 cm 2-stage snowthrower OEM-190-032

MF 38-16 SD MF 42-22 SD					
Tyre chains	196-658-678				
46"/117 cm Dozer blade	OEM-190-833				
Rubber lip for dozer blade	196-718-678				
42"/107 cm 2-stage snowt	hrower OEM-190-032				
Twin bagger	OEM-190-180				
MF 50-24 SD					
Tyre chains	196-658-678				
46"/117 cm Dozer blade	OEM-190-833				
Rubber lip for dozer blade	196-718-678				

42"/107 cm 2-stage snowthrower

10

12

Triple bagger

OEM-190-032

19A40002000

MF 36-16 RD | MF 41-22 RD | MF 48-24 RD

Front sweeper FS 105/33	196-226B678
Frontbag collector for front	t sweeper 196-227A678
46"/117 cm Dozer blade	OEM-190-833
Rubber lip for dozer blade	196-718-678
42"/107 cm 2-stage snowt	hrower OEM-190-032
Tyre chains	196-898-699
Agricultural tyres	196-721-678
Electric battery charger	196-967-678









01 Head rest kit - 39A-207-100 02 Light Bar, four lights - 39A-204-100 03 Electric bed lift - 39A-209-100

04 UV coveroversized – 39A-211-100 05 Rockinger hitch – 39A-242-600 06 Winch - 39A-205-100

09 46"/117 cm Dozer Blade -- OEM-190-833 07 Front Sweeper – 196-226-678 / Front Bag Collectc 08 42"/107 cm 2-stage Snowthrower –OEM-190-032 Front Sweeper – 196-226-678 / Front Bag Collector – 196-226B678

12 Agri Tires - 196-658-699 11 Tire Chains - 196-658-699 **10** Rear Deflector – 196-750-678

Accessories.

MF 20 MD 4x4

Light bar, four lights, mounting bar, harness, switch, mounting hardware (requires accessory harness 39A-209-100) **39A-204-100**

Winch, 3500 lb., mounting bracket, roller hawse, switch, harness, mounting hardware, front only **39A-205-100**

Head Rest Kit full screen, multi-position covered head rests, clamps, mounting hardware **39A-207-100**

Electrical accessory harness installed when electrical accessories are used 39B-209-100

UV cover oversized, UV cover for accessories, waterproof, elastic bottom 39A-211-100

Electric bed lift, lift cylinder, switch, wiring harness, mounting hardware (requires accessory harness 39B-209-100) 39A-212-100

Floor mats sectional, rubber 39A-213-100

Additional alternator 100 Amp 39A-213-100

Rockinger hitch, incl. in the road approval paper **39A-242-600**

Turf saving tyres incl. rims, black, no road approval **196-309-600**

Snow chains, front wheels 196-893-678

Snow chains, rear wheels 196-966-678

Snow Blade 72"/183 cm with electric lift and bracket, incl. Y-adapter (requires accessory harness 39B-209-100) 39A-229-100

Cabin for 4x4 MF frame, roof, wiper and windshield, grey roof **196-206-600**

Doors incl. rear window for cabin 196-303-600

Heater for dashboard cabin 196-304-600

Beacon light orange for cabin 196-305-600

2 working lights front for cabin 196-306-600

1 working light rear for cabin 196-307-600

Windscreen wash system for cabin 196-308-600

39A700001100

Plastic bed liner

MF 50-22 ZT

Twin bagger - 50"127 cm "P" deck 19A70004100

MF 50-24 IZ

Twin bagger - 50"/127 cm	"P" deck 19A70006100
Tyre chains 20 x 8.00	196-658-678
46"/117 cm Dozer blade	OEM-190-833
MF 36-22 HG	
46"/117 cm Dozer blade	OEM-190-833
Rubber lip for Dozer blade	96-718-678

42"/107 cm 2-stage snowthrower OEM-190-032



Accessories.

MF 30-15 RT | MF 30-13 RH |

46"/117 cm Dozer blade OEM-190-833 42"/107 cm 2-stage snowthrower OEM-190-032 Tyre chains 196-898-699 Electric battery charger 196-967-678

MF 36-15 RT | MF 36-15 RH | MF 36-15 RT

Rear Deflector	196-750-678	
Mulch kit	196-749-678	
46"/117 cm Dozer blade	OEM-190-833	
42"/107 cm 2-stage snowthrower OEM-190-032		
Tyre chains	196-898-699	
Electric battery charger	196-967-678	

MF 21-25 GC

Front hydr. frame (for 190-352-100 + 190-353-100) 190-414-100

Hydr. angling kit (for 190-352-100) 190-288-100

Adapter frame, rear attachments 196-195-603

50"/127 cm Deck ASM Euro 3000 (black) incl. mulch kit 19A-124-600

54"/137 cm Deck ASM Euro 3000 (black) incl. mulch kit 19A-125-600

Mulch kit for 54"/137cm 3 blades 590-507-100

Mulch kit for 48"	deck	590-506-100

Tyre chains 24 x 10.50 196-893-678

Snowblade 137 cm (angling kit 190-288-100 required to mount), 190-352-100 no rubber lip

Front sweeper 120 cm, brush for snow and dirt 196-188-603

Universal attachments and accessories for all lawn tractors

Cover for lawn tractors LMC-20L-EU Aluminium ramp ARL1EU Tow poly dump cart, size w/l/h: 30x41,5x11,6" (74,6x105,4x27,1cm) capacity max. 500 lb (227 kg) 190-2364000

Tow steel dump cart, size size w/l/h,: 32,5"x42,5"x12" (82,5x107,9x30 cm) capacity max. 500 lb (227 kg) 190-223B000

Heavy duty cart, 17 cu. ft. w/l/h: 33,8"x58"x14" (85,7x147,3x35,6cm) capacity max 1500 lb (680 kg) 190-425A000

Tow steel dump cart, size w/l/h: 29,8"x46"x12" (75,7x116,8,4x30,5 cm) capacity max. 750 lb (340 kg) 190-653A000

Tow lawn sweeper, width 38" (96cm), hopper capacity 12 cu. ft. (340 l), height adjustment 190-145A000

Tow lawn sweeper, width 42" (107cm), hopper capacity 12 cu. ft. (340 l), height adjustment 190-163A000

Push broadcast spreader, volume 50 lb (23 kg), spread width 4-8' (121-240 cm) 190-701-000

Push broadcast spreader, volume 85 lb (39 kg), spread width 8-10' (240-300 cm) 196-029-000

Push broadcast spreader, volume 125 lb (57 kg), spread width 10-12 (300-365 cm) 190-454-000

Tow broadcast spreader, volume 175 lb (80 kg), spread width 10-12' (300-365 cm) 190-438-000

Tow broadcast spreader 196-031-000

Tow broadcast spreader, volume 100 lb (45 kg), spread width 8-10' (240-300 cm) 190-525-000

Tow aerator (spiker) / spreader, volume 100 lb (45 kg), spread width 32" (81 cm) 196-033-000

Push/tow poly lawn roller, drum 18"x24" (460x610 mm), max.weight 250 lb (114 kg) with water 190-228-000

Tow poly lawn roller, drum 18"x36" (460x915 mm), max.weight 400 lb. (182kg) with water 190-229-000

Tow tine de-thatcher, width 40" (102cm), 20 teeth (heat treated) 190-526-000

Tow lawn aerator (spiker type), width 40" (102 cm), 12 spike wheels 190-2244000

Tow sprayer, capacity 15 gallon (57 l) 190-155-000

Tow Sprayer, capacity 25 gallon (95 l) 190-537-000

10

Tow Sprayer

190-537-000

Tow Tine De-Thatcher – 190-526-000



04 UV coveroversized – 39 05 Rockinger hitch – 39A-2 06 Winch – 39A-205-100

UV coveroversized - 39A-211-100 Rockinger hitch – 39A-242-600

MF Grounds Care highlights

Here's a quick reminder of some of the many features of the latest MF Grounds Care family of products which strengthens their place in the residential and commercial sectors.

- The ultimate choice of side discharge and rear discharge lawn tractors. Models, ranging from 15 hp to 25 hp and cutting widths from 76 cm to 127 cm.
- O2 Simply the best in the business, these racy Massey Ferguson Bull Utility Vehicles offer side by side 2-seater safety, a payload of 400 Kg, the choice of 2 and 4 wheel drive and a cab option to make your Bull experience complete.
- O The advanced Synchro[™] technology (patents pending) offers an unprecedented Zero Turn experience. Featured in both of the new Zero Turn ride-on mowers; the 127 mm MF 50-24 IZ provides intelligent drive to the rear wheels that synchronises front wheel steering movements with speed and direction of rotation of the rear wheels; and the Front Cut MF 48-22 FMZ which offers maximum manoeuvrability, particularly useful for cutting in awkward or confined spaces.
- Massey Ferguson self propelled walk behind lawn mowers make mowing easier. The new high wheelers provide maximum grip in every location, and whatever the weather. And a choice of cutting widths up to 84 mm's mean large areas can be cut – in very short times.
- Mulch it, bag it, or discharge it, the choice of grass disposal is yours. Most machines offer 3in1 flexibility, but with the added facility on many machines of side and rear discharge, the choices have never been greater.
- Designed with the user in mind the new Massey Ferguson Grounds Care product range offers a com prehensive choice of power matched cutting widths, the latest ergonomics features to make cutting the grass a joy, and every machine is backed by the best dealer network in the industry.





MASSEY FERGUSON is a worldwide brand of AGCO Corporation © AGGO Limited. 2012-English