



# TECHNICAL SPECIFICATIONS MQV2364

## FEATURES

- Full Range VA4™ loudspeaker system
- Optimized for permanent install only
- Dual direct radiating 15-inch woofer in optimally vented enclosure
- Dual Horn loaded 10-inch cone with VA4™ phase plug
- 2-inch exit/75mm voice coil compression driver on constant directivity horn

## DESCRIPTION

The MQV Series is part of the next generation of permanent installation loudspeakers. Using VA4™ Technology developed for the KF700 series, the MQV range replaces the ASV range of virtual array systems.

The MQV2364 uses dual direct radiating 15-inch woofers in an optimally vented enclosure.

Two horn loaded 10-inch midrange cones with special geometry are used that produce a time coherent wavefront through the upper portion of the midrange that is critical to vocal articulation. A phase plug with radial slots then serves to reduce the mechanical resistance of the subsystem without affecting the directivity of the source, allowing flawless vertical arraying of multiple MQV modules

A high power 2-inch exit/75mm voice coil compression driver is mounted on a constant directivity horn for consistent, accurate dispersal of HF information.

## APPLICATIONS

The MQV2364 is engineered as a full range component for very large format arrays and is an effective tool in large-scale permanent installations. Comprehensive mounting points allow for flexible installation.

Applications include:

Large Church Large Arenas  
Stadiums

## DESCRIPTIVE DATA

LF Subsystem	2x 15-in, Vented
MF Subsystem	2x 10-in Horn loaded cone, Radial Phase Plug
HF Subsystem	1x 2-in Exit/75mm Voice Coil Compression Driver on Constant Directivity Horn
Configuration	Three-Way, Full Range
Powering	Triamplified
Cabinet Type (shape)	Trapezoid
Enclosure Materials	Baltic Birch Plywood
Finish	Wear-resistant Textured Black Paint
Connectors	1x 6-Terminal Barrier Strip & 1x Neutrik NL8 Speakon
Suspension Hardware	(16) 3/8"-16 Threaded Mounting Points (4 each on top, bottom and sides)
Grill	Powder Coated Perforated Steel




Dimensions	Inches	Millimeters
Height (front)	36.71	932
Height (rear)	25.36	644
Width	56.25	1429
Depth	29.75	756
Trapezoid Angle	12.5 Degrees per Side	
Weights	Pounds	Kilograms
Net Weight	295	133.8
Shipping Weight	330	149.7





# TECHNICAL SPECIFICATIONS MQV2364

## DIMENSIONAL DRAWING

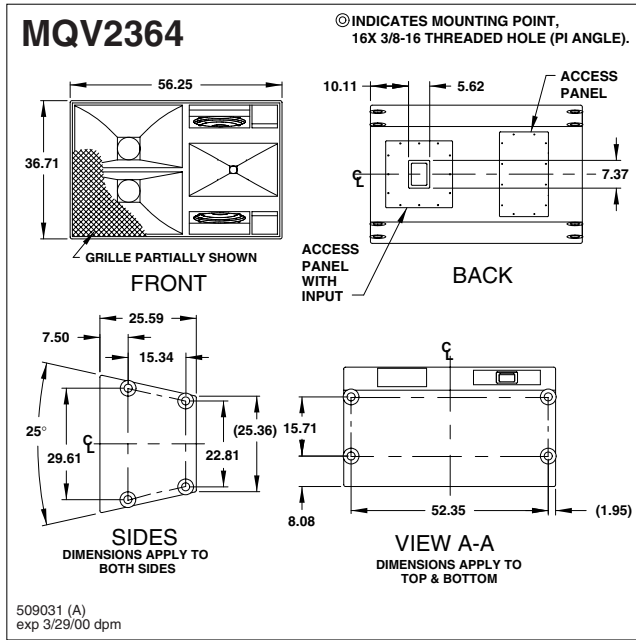

## NOMINAL DATA

### Frequency Response

±3 dB	50 Hz to 16 kHz
-10 dB	34 Hz

### Axial Sensitivity (dB SPL, 1 Watt @ 1m)

LF	100
MF	112
HF	113

### Impedance (Ohms)

LF	4
MF	4
HF	8

### Power Handling, AES Standard (Watts)

LF	1100
MF	800
HF	200

### Calculated Maximum Output (dB SPL @ 1m)

LF Peak	136.4
MF Peak	147.0
HF Peak	142.0
LF Long Term	130.4
MF Long Term	141.0
HF Long Term	136.0

### Nominal Coverage Angle, -6 dB Points (degrees)

Horizontal	60
Vertical	45

### Recommended High-Pass Frequency

24 dB/Octave	35Hz
--------------	------

## ARCHITECTURAL SPECIFICATIONS

The three-way full range loudspeaker system shall incorporate 2x 15-in woofer (vented), 2x 10-in cone MF transducer, and a 2-in exit compression driver HF transducer.

The MF driver shall be loaded into a midrange horn constructed of 3mm birch plywood reinforced with high density polyurethane foam. The MF horn shall incorporate a radial phase plug. The HF driver shall be loaded on constant directivity horn with a nominal coverage pattern of 60° (h) x 45° (v).

System frequency response shall vary no more than ±3 dB from 50 Hz to 16 kHz measured on axis. The midrange frequency section shall produce a Sound Pressure Level (SPL) of 112 dB SPL on axis at 1 meter with a power input of 1 Watt, and shall be capable of producing a peak output of 147 SPL on axis at 1 meter. The high frequency section shall produce a Sound Pressure Level (SPL) of 113 dB SPL on axis at 1 meter with a power input of 1 Watt, and shall be capable of producing a peak output of 142 SPL on axis at 1 meter. The midrange frequency section shall handle 800 Watts of amplifier power (AES Standard) and shall have a nominal impedance of 4 Ohms. The high frequency section shall handle 200 Watts of amplifier power (AES Standard) and shall have a nominal impedance of 8 Ohms.

The loudspeaker enclosure shall be trapezoidal in shape. It shall be constructed of 15mm thickness void-free cross-grain-laminated Baltic birch plywood and shall employ extensive internal bracing. It shall be finished in wear-resistant textured black paint. Input connectors shall be 1x 6-terminal barrier strip and one Neutrik NL8 Speakon. A total of sixteen 3/8"-16 threaded mounting points (4 each top, bottom and sides) shall be provided. The front of the loudspeaker shall be covered with a powder coated perforated steel grill.

The three-way full range loudspeaker shall be the EAW model MQV2364