













## Fitness band Sky band 1 User Manual

### 【Compatibility】

The Smart Wristband only supports the following selected mobile devices:


**IOS:** OS must be IOS 7.0 or later, Bluetooth 4.0; Such as, iPhone4S, iPhone5, iPhone5S, iPhone6, iPhone6Plus, iPod touch5, etc.

**Android:** OS must be Android4.3 or later, Bluetooth 4.0; Such as, Samsung S4, Note3,etc.

Time: 00:00	Steps: 	Distance: 
Calories: 	Alarm clock: 	Sleep monitor: 
Move Alert: 	Call ID Display: 	Message Push: 
Bluetooth: 	Remote camera controller: 	Bluetooth broadcast: 
Looking Phone: 		

### 【Quick Start Guide】

1.You should charge the bracelet for 30mins before using it. Pull out the host as shown below, Insert the host to a 5V/1A USB port for charging. The indicating light stops flashing when it is full charged for 30 minutes.

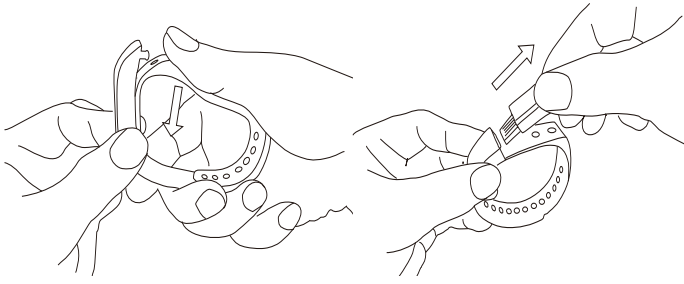


2.Install APP: Go to App store or play store, download this APP: “Zeroner” and install it. To use Zeroner APP, make sure your mobile device connected with internet via Wi-Fi or 3G.

3.Account set-up: Open the “Zeroner” App. Login if you have an account, or register a new account.

4.Bracelet Operation Instruction.

You can use the bracelet by “wrist gesture” or “screentouching”.


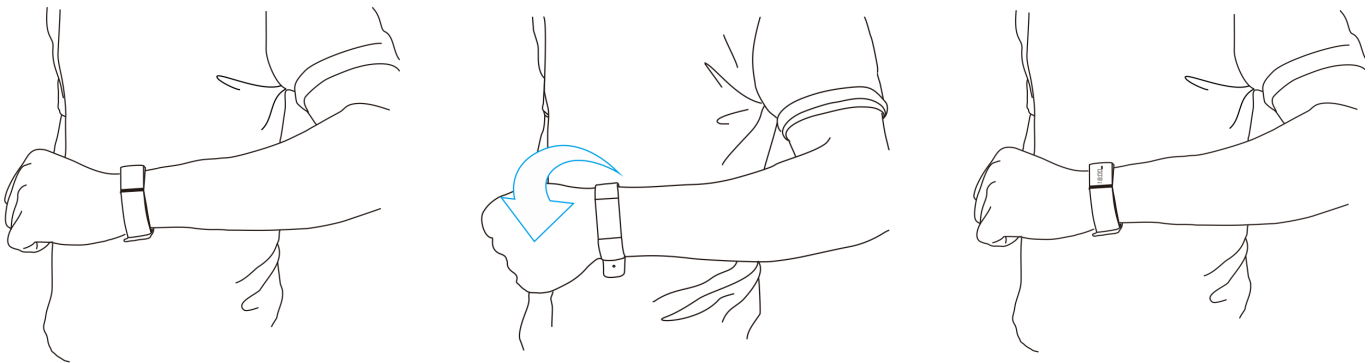





It is convenient to check the time by “wrist gesture”.



Keep the bracelet screen horizontally.  
Then turn wrist over.

The bracelet will be turned on automatically, then time shows up.

## “Screen Touching”


Function	Operation	
Starting-up		Long press the bracelet screen
Light up the screen		Click the screen or turn the wrist over
Shutdown	Swipe left and right to the interface  then switch to  Long press the screen to turn off the device	
Switchfunction		Swipe left and right
Flip-Over		Click the screen
Confirm		Long press the screen

PS:Function may be changed and upgraded according to the bracelet firmware’s update.


### 5.Pairing.

Keep your phone with Bluetooth and WIFI “on” for this step. Keep the screen lighting and the


fitness band show icon of radar. 




Login the App Zeroner, and the system shows the main page. Tap the left corner button or slide the screen from left to right, and click **【Device Connection】**

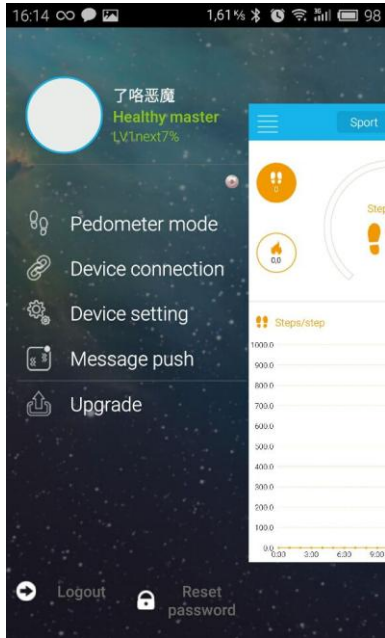


Double click the screen on the bracelet, the radar icon “📶” shows up on the bracelet, Tap the button **【Searching device】** on APP, select your right ID from the device list, and wait for 1-2 seconds

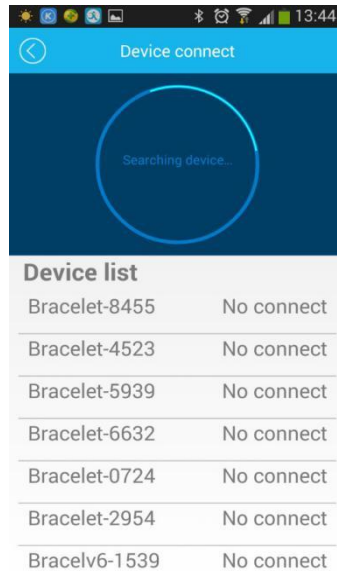

Android device will pop up **【Confirm pair with “right ID”】**, and it will be connected.

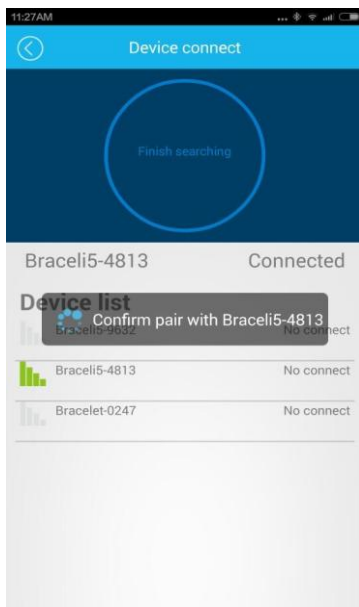

IOS device will pop up **【Pair Device Success】**, **【Bluetooth Pairing Request】**, click “pair”, and finish paring.

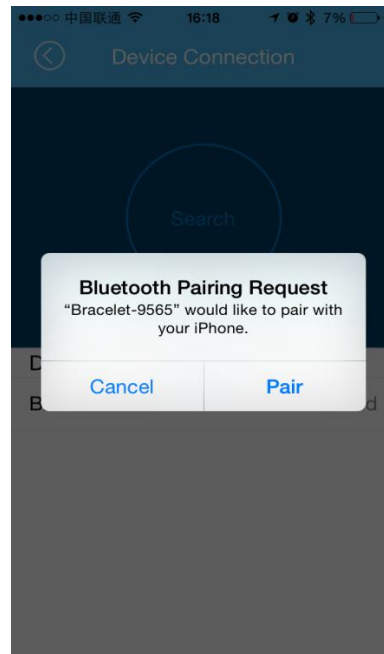



If the pairing pop-up do not appear within 1 minute,repeat the above steps.There would be a Bluetooth icon




## 6.SYNC Data


The bracelet SYNC data automatically after connected with phone by APP(Zeroner), the bracelet time will be calibrated same as the time of phone. SYNC data includes:steps,calorie,distance. You can check out if the data SYNC is completed successfully on the APP.First SYNC data takes 1-2 minutes.SYNC data can be done manually by clicking the refresh button on APP. Where unable to be data synchronous, disconnected the Bluetooth, try connection again and start data synchronization.

## 7.Sleep monitor


Turn on Sleep Mode: Slide to the moon icon , long press the icon till the band shakes, then it pop up and shows time and moon icon, , it means under sleeping mode.

Exit the sleep mode: Long press the screen to light-on the screen, long press once more till it shakes, then the moon icon will disappear and back to the original that shows time , it means sleeping-mode exit.




## 8.Auto sleeping mode



Turn on the sleeping-mode by setting, , the band will check if you are under sleeping-mode during 8:00p.m.-9:00a.m.

## 9. Looking mobile phone

Long press the looking phone icon  till in shakes, the searching mobile will ring if it is under ringing mode, will shakes one time if it under vibration mode.


## 10.Sedentary reminder

Open the Sedentary reminder  and settle the time quantum  by the Sedentary reminder setting, the time settling should be a valid time quantum, like 9:00-17:00 instead of 9:00-5:00, then it under Sedentary reminder mode successfully.  The band will shakes and

shows sedentary icon   if keep motionless for an hour.

## 11. Alarm clock




Add alarm  by the Alarm setting  Alarm setting , when it comes to the



settled time, , the band will shake to make a reminder and shows alarm

icon  


## 12. Camera remote controller

Open the camera by APP , the band will show camera icon  , Camera remote controller realized by long pressing the icon.


## 13. Calling and message reminder

Check the push reminder and open all the notification items, for IOS, it shows like the picture 13-1, for Android, it shows like the picture 13-2 and you need to reset your SMS notification and choose Message as the picture shows like the picture 13-3 and 13-4, when you are going to open the Message Notify.


If it is unable to get notifications when the band is connected with mobile phone, disconnected the band with mobile phone and shut down the notification function, then re-open it up.

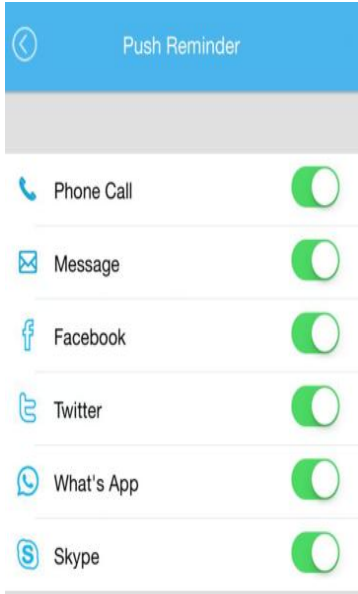


(13-1)

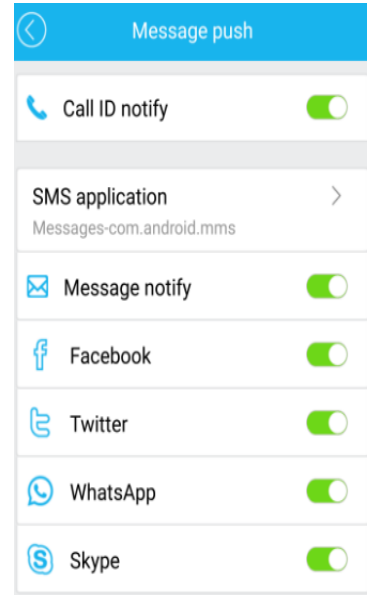

(13-2)



(13-3)

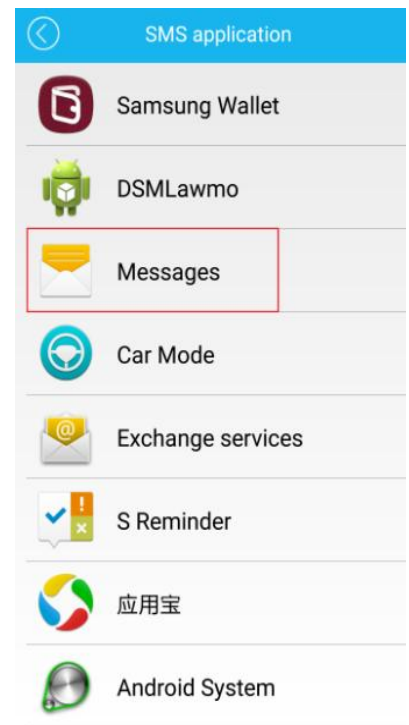

(13-4)


## 14.OTA Upgrade

Attention: the phone screen must be kept lighten when using this function in this process, the

APK, APP can't be hidden in the backstage.

When a new bracelet firmware uploaded to the server, there will be a upgrade reminder in APP,

APK, take the following steps: (14-1 to 14-5)

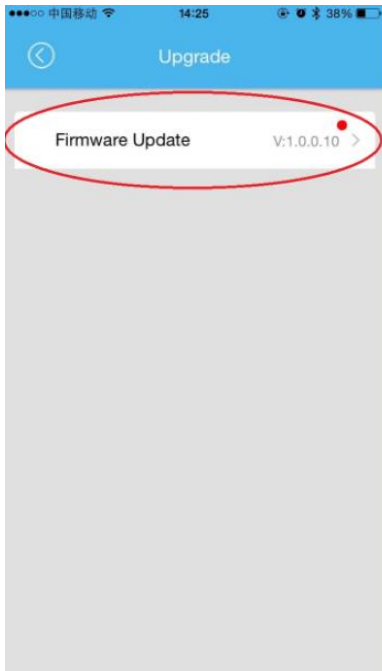


(14-1)



### Smart Bracelet

Model: I5 Plus  
Charge: 90%  
Firmware version: V1.0.0.10  
Product Serial No.: 40438cbd0ee8

(14-2)



### Smart Bracelet

Model: I5 Plus  
Charge: 89%  
Firmware version: V1.0.0.10  
Product Serial No.: 40438cbd0ee8

(14-4)



### Smart Bracelet

Model: I5 Plus  
Charge: 90%  
Firmware version: V1.0.0.10  
Product Serial No.: 40438cbd0ee8

(14-3)





### Smart Bracelet

Model: IS Plus  
Charge: 89%  
Firmware version: V1.0.0.10  
Product Serial No.: 40438cbd0ee8

(14-5)

Two situations will be existed while update:

Situation 1:



### Smart Bracelet


Model: IS Plus  
Charge: 90%  
Firmware version: V1.0.0.10  
Product Serial No.: 40438cbd0ee8




### Smart Bracelet

Model: IS Plus  
Charge: 89%  
Firmware version: V1.0.0.10  
Product Serial No.: 40438cbd0ee8


Waiting for a moment at this time:

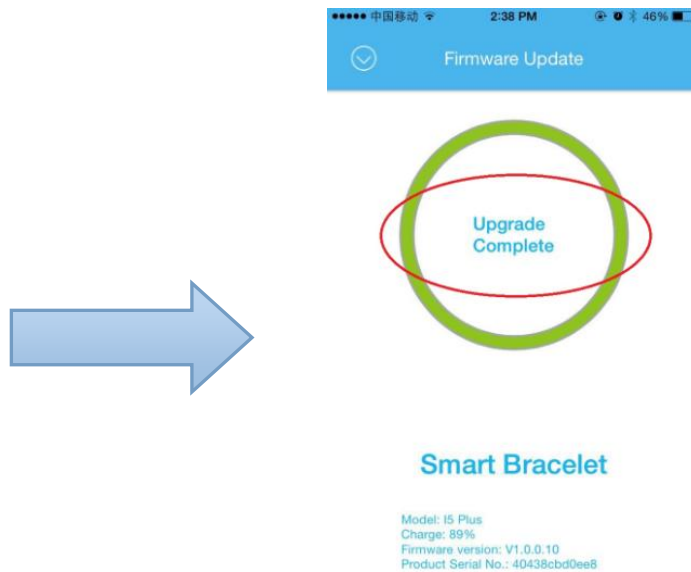

At this time, when the progress bar reaches 100% , it displays as “the upgrade is complete”, then long-press the bracelet can be switched on, next reconnect the bracelet and enter the firmware upgrade again, when there shows “Already Newest Ver.”, Congratulations, upgrade successfully! ! !

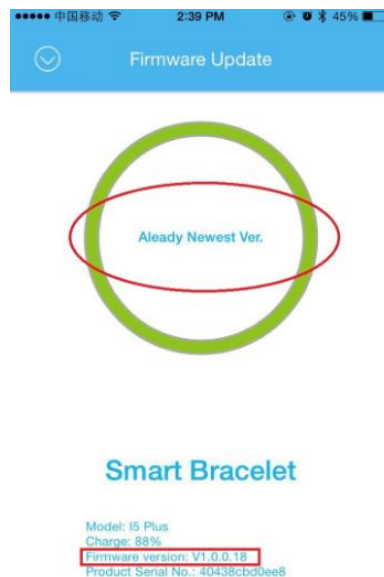

## Situation 2:

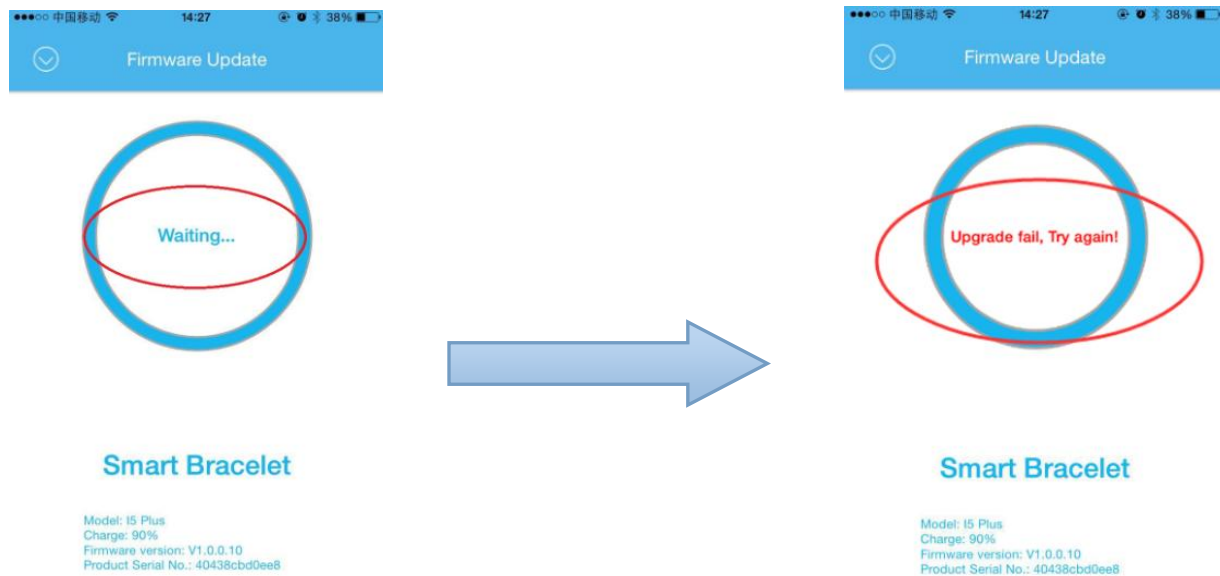

Waiting for a moment, there maybe a chance for this situation:

By this time, upgrade again, if there is no response, reconnect the bracelet, repeat the upgrade steps! When the situation 1 occurs, congratulations, upgrade successfully! ! !

## **FCC Warning**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.