

Quick-Start Guide

In-Line Switch, 277V

Model: 4773

Tools Needed


- Phillips screwdriver
- Wire cutter / stripper
- Voltage tester
- Non-conductive probe

Installation

- 1) Be sure to write down the INSTEON ID and location of the fixture you'll be controlling (e.g., 01.F7.G5, Mike's bedroom light)
- 2) At the circuit breaker or fuse panel, disable the circuit supplying power to the fixture
- 3) Remove the wallplate from the fixture you are replacing. Then, unscrew the fixture itself and pull it out from the junction box.
- 4) Disconnect the wires from the fixture you will be controlling and ensure you have 1/2" of bare wire on the ends. If the wires cannot be detached by unscrewing them, cut the wires where they enter the switch and then strip 1/2 inch of insulation off the ends.
- 5) See Figure 1 to identify and connect the LINE, LOAD, NEUTRAL, and GROUND wires on In-Line Switch. Be sure you have correctly identified the wires in the junction box before connecting them.
- 6) After you have connected all the wires, ensure that the wire connectors are firmly attached and that there is no exposed copper except for the GROUND wire
- 7) Prior to reinstalling the fixture, enable power to the fixture from the circuit breaker or fuse panel
- 8) Use the On/Off buttons to test that the module is working and controlling the load
- 9) Link In-Line Switch to the desired INSTEON Controllers:
 - a. Set the Controller to Linking Mode.* (For most Controllers, press & hold an On or Scene button for 10 seconds or the Set button for 3 seconds.)
 - b. Press & hold the Set button on In-Line Switch until it double-beeps (3 seconds)

The In-Line Switch Status LED will flash once and then turn on solid if the load is off or turn off if the load is on
 - c. Confirm that Linking was successful by tapping the button you just Linked to on the Controller

In-Line Switch will respond appropriately
- 10) Gently place In-Line Switch into the junction box, making sure that nothing could accidentally be pressing any of the buttons on its face
- 11) Reinstall the fixture

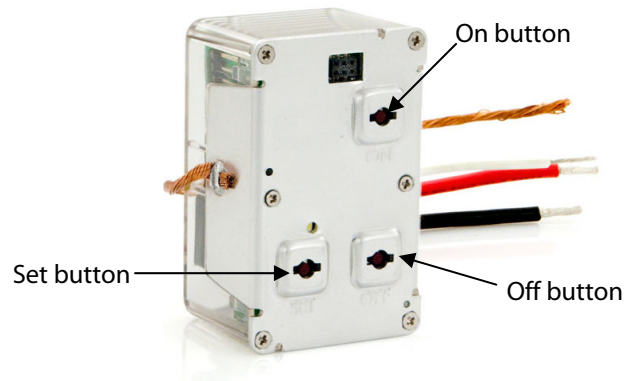

Wiring Diagram

NOTE: Home's wire color and wire location may vary

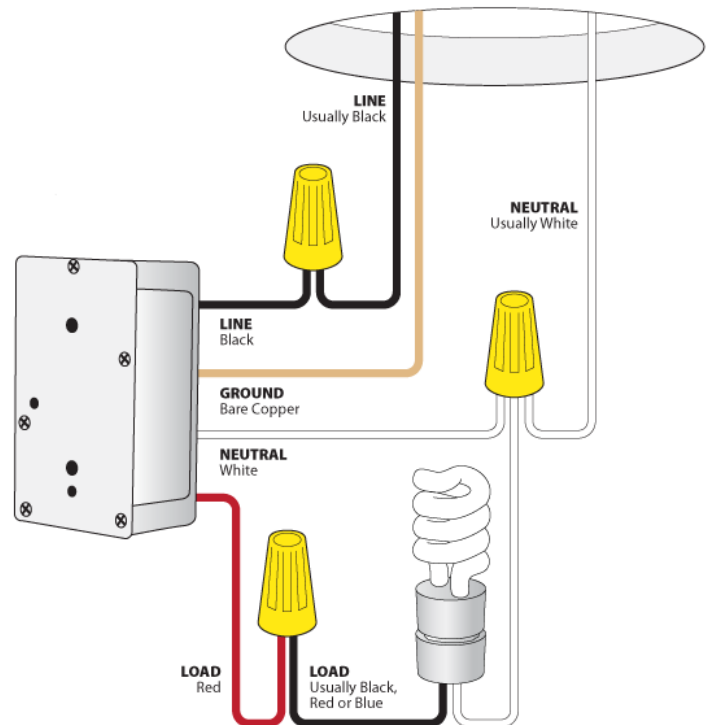


Figure 1

Complete Instructions, Troubleshooting, and Tech Support

Call: Tech. Support @ 866-883-9220

Contact Us Online: www.smartproline.com

*Setup Modes will automatically time out after 4 minutes.