




Tripp Lite
1111 West 35th Street
Chicago, IL 60609 USA
Telephone: +(773) 869 1234
E-mail: saleshelp@tripplite.com

Model #: PDUMV30NET

Switched, Metered PDU with Remote Monitoring - 0U Vertical Rackmount Power Distribution Unit for Networks with Individually Switchable Outlets, Current Metering, Remote Monitoring and Control

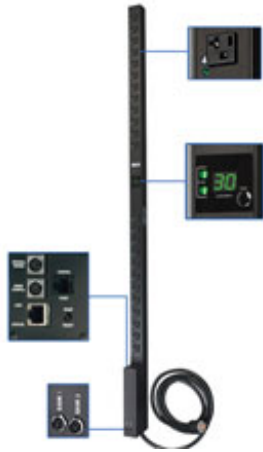

Highlights

- 70-in. 0U vertical switched rack PDU with digital current monitoring, remote control and temperature/humidity monitoring capability
- 120V 30A maximum total capacity with attached L5-30P input plug and 24 x 5-15/20R individually controllable outlets arranged in two separately breakered 12-outlet load banks
- Provides capability to turn on, turn off, recycle or lock out power to each individual outlet
- Programmable or real-time outlet power control via built-in Web/network monitoring and control card
- Automatic sequential outlet turn-on prevents inrush-related equipment interaction on startup
- Cord retention brackets keep vital equipment plugs connected

Description

Tripp Lite's PDUMV30NET Switched, Metered Rack Power Distribution Unit provide a variety of advanced network control and monitoring functions. They give IT managers the ability to remotely monitor PDU power consumption and in-rack environmental conditions, and to turn on, turn off, recycle or lock out power to each individual receptacle. Switched PDU systems can be accessed, configured and controlled through secure Web, SNMP or Telnet interfaces. Individually switched outlets can be controlled via a built-in Web/network interface, enabling remote reboots of unresponsive network hardware. User-defined power-up and power-down outlet sequences ensure proper operation of interdependent IT systems and prevent inrush-related overloads as devices are powered on. Programmable load shedding of less critical devices at user-defined intervals extends UPS uptime in response to power failures. Unused PDU outlets can be electronically locked off to prevent powering of unauthorized hardware. PDU power consumption is displayed locally and can be monitored via the Web/network interface, with user-defined alarms to warn of potential overloads before critical IT mains or branch breakers trip. An optional ENVIROSENSE temperature/humidity probe enables remote monitoring of in-rack environmental conditions and alarms for up to three user-supplied contact-closure sensors. Supports real-time monitoring, notification and logging of all on-board reporting functions with user-specified alarm thresholds and actions for each reported condition.

The PDUMV30NET supports 30A maximum capacity at 120V (agency de-rated to 24A). Includes attached L5-30P input plug and 24 x 5-15/20R switched outlets arranged in two separately breakered 12-outlet load banks. Visual and remote current monitoring tracks output current. Supports 0U vertical rackmount installation with included rackmount brackets. Toolless button-mount installation supported in compatible racks. Included cord retention brackets keeps vital network equipment plugged in and continuously powered.

Applications

- Ideal for network configurations requiring a switched, metered and monitored PDU supporting individual outlet rebooting, load shedding and remote web/network current monitoring of critical networking components

Package Includes

- Rackmount PDU
- Rackmount brackets
- PDUMVROTATEBRKT mounting accessory

Features

- 120V 30A maximum capacity (agency de-rated to 24 amps) Switched, Metered and Monitored Power Distribution Unit (PDU) with built-in web/network interface in 0U vertical rack form factor
- Includes attached L5-30P input plug and 24 x 5-15/20R controllable outlets arranged in two 12-outlet load banks
- Supports individually controllable output receptacles, current metering, network monitoring and remote control via built-in Web/network monitoring and control card
- Provides the ability to turn on, turn off, recycle or lock out power to each individual PDU receptacle on a programmable or real-time basis
- Switchable outlets enable a number of advanced networking abilities, such as remote reboot on-demand of locked IT equipment, custom power-on/power-off outlet sequencing, automatic load shedding of optional loads during power failures and disabling unused outlets to prevent the connection of unauthorized equipment loads
- Remote interface provides data regarding input power conditions, load level and individual outlet power status via secure network or web browser interface
- Supports notification and logging of all major power events and user-specified alarm thresholds
- Optional ENVIROSENSE temperature and humidity probe enables remote monitoring of environmental conditions and the ability to report conditions from up to two contact-closure sensors
- Optional ENVIROSENSE probe also supports the connection of up to three user-supplied contact-closure sensors to selectively notify, monitor and log reported conditions, such as rack door access
- DHCP/Manual configuration support enables network settings to be automatically assigned to the card, or manually assigned via permanent IP addresses
- 10/100 Mbps auto-sensing allows optimal communication compatibility with your current 10/100 Base-T network
- Real-time clock support maintains the time of day and date even if the PDU is shut down and unpowered
- 2-tier level access enables an administrator and a guest to log into the web browser for monitoring and/or management of all intelligent PDUs and similarly equipped UPS systems
- Alert notifications via email or SNMP traps provide immediate event notification
- Protocols supported include HTTP, HTTPS, PowerAlert Network Management System, SMTP, SNMPv1, SNMPv2, Telnet, FTP, DHCP, BOOTP, NTP
- Front panel ammeter with pushbutton toggle switch displays power consumption for all three loading segments (12 outlets in bank 1, 12 outlets in bank 2 and total load of banks 1 and 2 combined)
- On initial power-up, outlets are automatically energized at 250 millisecond intervals to prevent inrush-related equipment interaction and mains circuit overloads
- Each 12-outlet bank is protected by a separate 20A circuit breaker
- Included cord retention brackets keep vital network equipment plugged in and continuously powered
- 70-in. 0U vertical rack installation supported with included rackmount brackets
- Toolless mounting supported in button-mount compatible racks
- Included PDUMVROTATEBRKT enables space saving toolless installation in button-mount compatible racks with PDU outlets facing the rear

Specifications

OVERVIEW	
Model Type	Switched
SYSTEM OVERVIEW	
Voltage compatibility (VAC)	120
OUTPUT	
Frequency compatibility	50 / 60 Hz
Output nominal voltage	120V
Overload protection	Outlets are arranged in two separately breakered 20A banks. 12 upper outlets are protected by the upper circuit breaker; 12 lower outlets are protected by the lower circuit breaker
Outlet quantity / type	24 x 5-15/20R

Customized load management receptacles	Each outlet is individually controllable via remote interface
INPUT	
Recommended Electrical Service	120V
Maximum Input Amps (A)	30
Maximum Input Amps (A) Details	Agency de-rated to 24A continuous
Input connection type	Attached L5-30P input plug
Plug Type	NEMA L5-30P (30A 120V)
Input cord length (ft.)	10
Input cord length (m)	3
LEDS ALARMS & SWITCHES	
Switches	Pushbutton switch near the current display toggles the display to show load bank 1 power consumption, load bank 2 power consumption, or load banks 1 and 2 combined power consumption
Front panel LEDs	24 power availability LEDs confirm power off/on status for each built-in outlet. Two additional LEDs with toggle button identify which bank the visual current meter is reporting (load bank 1, load bank 2, or load banks 1 and 2 combined)
PHYSICAL	
Shipping weight (lbs)	16.5
Shipping weight (kg)	7.5
Unit Dimensions (HWD/in)	70 x 2.19 x 4.25
Unit Dimensions (HWD/cm)	177.8 x 5.6 x 10.8
Shipping Dimensions (HWD/in)	4 x 6 x 72.5
Shipping Dimensions (HWD/cm)	10.2 x 15.2 x 184
Unit weight (lbs)	11.5
Unit weight (kg)	5.2
Style	Vertical Rackmount
Form factors supported	0U vertical rackmount; includes rackmount brackets. Supports toolless mounting in button-mount compatible racks
ENVIRONMENTAL	
Relative Humidity	0-95% non-condensing
COMMUNICATIONS	
SNMP compatibility	Pre-installed SNMPWEBCARD provides remote monitoring via web, telnet, and SNMP management systems. Remote management gives user ability to turn connected loads on or off individually
CERTIFICATIONS	
Certifications	Tested to UL 60950-1 (USA, Canada), Class A (Emissions), NOM (Mexico), RoHS compliant
WARRANTY	

**Product Warranty
Period (U.S., Canada
& Puerto Rico)**

2 years

Related Items

Optional Products

Product Type	Related Model	Description	Qty.
Power Cables	P007-010	10-ft. Heavy-Duty 14AWG Power cord (IEC-320-C13 to NEMA 5-15P)	-
Power Cables	P010-012	12-ft. 18AWG Power cord (NEMA 5-15P to IEC-320-C13)	-
Power Cables	P049-010	10-ft. 12AWG Heavy Duty Power cord (IEC-320-C19 to NEMA 5-20P)	-
Power Cables	P044-06I	6-inch 12AWG Heavy Duty Power Adapter cord (NEMA-L5-20R to NEMA-5-20P)	-
Rack Accessories	SRCABLEDUCT1U	1U Horizontal Cable Manager (Finger duct with cover.)	1
Rack Accessories	SRCABLERING2U	2U Horizontal Cable Manager (Flexible ring type.)	1
Rack Accessories	SRCABLERING1U	1U Horizontal Cable Manager (Flexible ring type.)	1
SNMP Accessories	ENVIROSENSE	Monitors temperature, humidity and contact-closure inputs. (Requires SNMPWEBCARD or switched PDU.)	1
Extended Warranties	WEXT3-PDU-NET	3-Year Extended Warranty - For Switched PDUs ending with NET	-
Extended Warranties	WEXT5-PDU-NET	5-Year Extended Warranty - For Switched PDUs ending with NET	-
Rack Accessories	SR SWITCH	Magnetic Door Switch Kit (2-pack for front and rear doors; requires ENVIROSENSE.)	1
Power Cables	P041-001-2	1-ft. 12AWG Heavy Duty Power Splitter Cable (NEMA L6-30P to 2x NEMA L6-30R)	1
Power Cables	P012-006	6-ft. Notebook Power cord (NEMA 1-15P to IEC-320-C7)	1
Power Cables	P007-002	2-ft. Heavy-Duty 14AWG Power cord (IEC-320-C13 to NEMA 5-15P)	1
Power Cables	P007-006	6-ft. Heavy-Duty 14AWG Power cord (IEC-320-C13 to NEMA 5-15P)	1
Power Cables	P022-001	1-ft. 18AWG Power Extension cord (NEMA 5-15R to NEMA 5-15P)	1
Patch Cables	P023-001	1-ft. 14AWG Power Adapter cord (NEMA L5-15R to NEMA 5-15P)	1
Power Cables	P034-010	10-ft. 14AWG Heavy Duty Power cord (IEC-320-C19 to NEMA 5-15P)	1

More information, including related products, owner's manuals, and additional technical specifications, can be found online at www.tripplite.com/en/products/model.cfm?txtModelID=3763.

Copyright © 2010 Tripp Lite. All rights reserved. All trademarks are the sole property of their respective owners. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos may differ slightly from final products.