



**POLARIS** HARDEST WORKING. SMOOTHEST RIDING.®

**2014 | ATV**



# WHICH POLARIS ATV IS FOR ME?



Polaris reserves the right to withdraw any product from sale or change specifications and pricing without notice. Confirm model specifications and availability with your Polaris dealer prior to ordering. The Polaris range is not intended for and may not be registered for on-road use. All competitive comparisons are based on 2013 models and published manufacturer specifications available at October 2013 unless otherwise specified. See other manufacturers for latest specifications. All photography taken with professional riders under controlled conditions. Polaris strongly recommends that all riders take a safety course. Never engage in stunt riding. For your safety, always operate Polaris products as instructed in the product manual and on warning labels. Never carry passengers on any product not designed for such use. Preserve your future riding opportunities by showing respect for the environment, local laws and the rights of others. Avoid excessive speeds and be particularly careful on difficult terrain. ©Polaris Sales Australia Pty Ltd ABN 62 088 081 949, Registered Office: 36 Grimes Court, Derrimut, VIC 3030. Printed February 2014.

## I WANT TWO WHEEL DRIVE



## I WANT ON DEMAND ALL-WHEEL DRIVE



[f/PolarisAustralia](#)

[f/TeamRZR](#)

[YouTube/PolarisANZ](#)

[www.polarisindustries.com.au](http://www.polarisindustries.com.au)

1300 654 142

# YOUTH




## OUTLAW 50 KEY FEATURES

1. 49cc 4-Stroke Engine
2. Electric Start with Backup Kick-Starter
3. Polaris Variable Transmission (PVT)
4. Daytime Running Lights
5. Adjustable Speed Limiter
6. Safety Tether & Horn
7. Includes Helmet, Safety Flag & Rider Training DVD
8. For Children Age 6 or Older with Adult Supervision




## OUTLAW 90 KEY FEATURES

1. 89cc 4-Stroke Engine
2. Reverse Gear
3. Electric Start with Backup Kick-Starter
4. Polaris Variable Transmission (PVT)
5. Daytime Running Lights
6. Adjustable Speed Limiter
7. Safety Tether & Horn
8. Includes Helmet, Safety Flag & Rider Training DVD
9. For Children Age 10 or Older with Adult Supervision

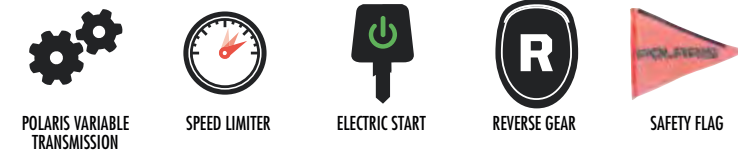

## SPORTSMAN 90 KEY FEATURES

1. 89cc 4-Stroke Engine
2. Reverse Gear
3. Electric Start with Backup Kick-Starter
4. Polaris Variable Transmission (PVT)
5. Daytime Running Lights
6. Adjustable Speed Limiter
7. Safety Tether & Horn
8. Includes Helmet, Safety Flag & Rider Training DVD
9. For Children Age 10 or Older with Adult Supervision

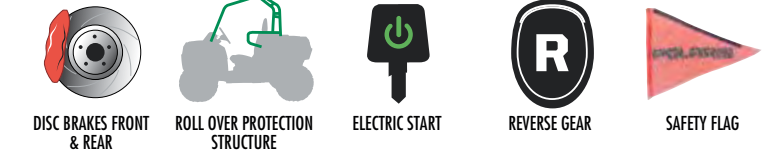

## RZR 170 KEY FEATURES


1. 169cc 4-Stroke Engine with Electric Start
2. Reverse Gear
3. Polaris Variable Transmission (PVT)
4. Side Nets & Seat Belts
5. Daytime Running Lights
6. Adjustable Speed Limiter
7. Disc Brakes Front & Rear
8. Includes Helmet, Safety Flag & Rider Training DVD
9. For Children Age 12 or Older with Adult Supervision



# HAWKEYE 400 H.D.



41KG FRONT / 82 KG REAR RACK CAPACITY




IRS WITH 24CM OF TRAVEL



HEAVY DUTY FEATURES



556KG TOWING CAPACITY



2 WHEEL DRIVE



SEALED FRONT STORAGE

## HAWKEYE 400 H.D. KEY FEATURES

1. 455cc High Output Engine with Polaris Variable Transmission (Automatic)
2. Independent Front and Rear Suspension
3. Built for Australia with Heavy Duty "HD" Features  
A - Driveshaft Spline Sealing. B - Greaseable Ball Joints.  
C - Sealed Suspension Bushings.
4. High Radiator Placement
5. Integrated Sealed Front Storage & Racks
6. Single Lever Braking
7. Digital Instrumentation

COMPARE THE FACTS	ATVs			
	HAWKEYE 400	HONDA TRX 420 TM	YAMAHA GRIZZLY 350 2X4	SUZUKI KINGQUAD 400ASI 2X4
Engine Capacity	455cc ✓	420cc	348cc	376cc
Towing Capacity (kg)	555.7 ✓	385	500	450
Front/Rear Rack Capacity (kg)	41 / 82 ✓	30/60	40/80	30/60
Suspension Travel Front/Rear (cm)	20.8 / 24.1 ✓	16.0 / 16.0	16.0/18.0	*
Ground Clearance (cm)	28.6 ✓	16.5	24.5	*
Fuel Capacity (litres)	15.5	13.3	13.5	16 ✓

\*TRX 420 TM is a registered trademark of Honda Motor Co Ltd \*Grizzly 350 2x4 is a registered trademark of Yamaha Corporation \*Kingquad 400ASI 2x4 is a registered trademark of Suzuki Motor Corporation \*Information not available. Information current as of October 2013


\*Model shown with optional accessories




# SPORTSMAN 400



41KG FRONT / 82 KG REAR RACK CAPACITY




IRS WITH 24CM OF TRAVEL



DISC BRAKES FRONT & REAR



556KG TOWING CAPACITY



ON DEMAND TRUE AWD



SEALED FRONT STORAGE

## SPORTSMAN 400 KEY FEATURES

1. 455cc High Output Engine with Polaris Variable Transmission (Automatic)
2. Independent Front and Rear Suspension
3. On Demand True All-Wheel-Drive (AWD)
4. High Radiator Placement
5. Integrated Sealed Front Storage & Racks
6. Single Lever Braking
7. Digital Instrumentation
8. Disc Brakes Front & Rear

COMPARE THE FACTS	ATVs			
	SPORTSMAN 400	HONDA TRX 420 FPA	CAN-AM OUTLANDER 400	YAMAHA GRIZZLY 450 4X4 AUTO
Engine Capacity	455cc ✓	420cc	400cc	421cc
Towing Capacity (kg)	555.7 ✓	385	500	*
Front/Rear Rack Capacity (kg)	40.8 / 81.6	30/60	45/90 ✓	120 combined
Suspension Travel Front/Rear (cm)	20.8 / 24.1 ✓	16.0 / 160	17.8 / 20.3	16.0/18.0
Ground Clearance (cm)	28.6 ✓	23	23.6	24.5
Fuel Capacity (litres)	15.5	13.3	16.3 ✓	15

\*TRX 420 FPA is a registered trademark of Honda Motor Co Ltd \*Outlander 400 is a registered trademark of BRP \*Grizzly 450 4x4 is a registered trademark of Yamaha Corporation \*Information not available. Information current as of October 2013

\*Model Shown with optional accessories



# SPORTSMAN 570 H.D.



41 KG FRONT / 82 KG REAR RACK CAPACITY

556KG TOWING CAPACITY

IRS WITH 24CM OF TRAVEL

ON DEMAND TRUE AWD

567CC EFI - 44 HP

HEAVY DUTY FEATURES

## SPORTSMAN 570 H.D. KEY FEATURES

1. 567cc EFI Engine with Polaris Variable Transmission
2. Independent Front and Rear Suspension
3. On Demand True All-Wheel-Drive (AWD)
4. Narrow Seat & Wide Floor Boards
5. Integrated Sealed Front Storage & Racks
6. Built to run Accessories with Extra Watts
7. Built for Australia with Heavy Duty "HD" Features A - Driveshaft Spline Sealing. B - Greaseable Ball Joints. C - Sealed Suspension Bushings.
8. Disc Brakes Front & Rear with Single Lever Braking

COMPARE THE FACTS	ATVs		
	SPORTSMAN 570	CF MOTO X5 FARM SPEC	HONDA TRX 500 FM
Engine Capacity	567cc ✓	493cc	475cc
Towing Capacity (kg)	556 ✓	350	385
Front/Rear Rack Capacity (kg)	41/82 ✓	35/70	30/60
Suspension Travel Front/Rear (cm)	20.8 / 24.1 ✓	*	17.0 / 17.0
Ground Clearance (cm)	27.9 ✓	27.5	19
Fuel Capacity (litres)	17	19 ✓	15.8

\*X5 Farm Spec is a registered trademark of CF Moto \*TRX 500 FM is a registered trademark of Honda Motor Co Ltd \*Information not available. Information current as of October 2013

\*Model Shown with optional accessories



# UTE 570 H.D.



HEAVY DUTY FEATURES




556KG TOWING CAPACITY




MIRRORS, INDICATORS, HORN



ELECTRONIC POWER STEERING



DUMP BOX WITH 180KG CAPACITY



ENGINE BRAKING SYSTEM & 4 WHEEL DESCENT CONTROL (4WDC)

## UTE 570 H.D. KEY FEATURES


- Built for Australia with Heavy Duty "HD" Features  
A - Driveshaft Spline Sealing. B - Sealed Ball Joints  
C - Sealed Suspension Bushings
- Mirrors, Indicators and Horn
- Dump Box with 180kg Capacity
- Engine Braking System & 4 Wheel Descent Control (4WDC)
- Electronic Power Steering
- On Demand True All Wheel Drive
- 567cc EFI Engine with Polaris Variable Transmission
- Narrow Seat and Back Rest

COMPARE THE FACTS	ATVs						
	UTE 570	ARTIC CAT TBX 700 XT	YAMAHA GRIZZLY 550 EPS 4X4 AUTO	CF MOTO X5 FARM SPEC	HONDA TRX 500 FPE		
Dump Box	Yes ✓	Yes ✓	No	No	No		
Rear Carrying Capacity (kg)	180 ✓	136	85	70	60		
Towing Capacity (kg)	556 ✓	476	*	350	385		
EFI	Yes ✓	Yes ✓	Yes ✓	No	Yes ✓		
Power Steering	Yes ✓	Yes ✓	Yes ✓	No	Yes ✓		
Mirrors, Indicators, Horn	Yes ✓	No	No	Yes ✓	No		
Tyres (ply)	6 ply ✓	3 ply	4 ply	4 ply	*		
Engine Braking	4WDC ✓	EBS ✓	Ultramatic ✓	EBS ✓	No		

\*TBX 700 XT is a registered trademark of Artic Cat. \*Grizzly 550 EPS 4x4 Auto is a registered trademark of Yamaha Corporation. \*X5 Farm Spec is a registered trademark of CF Moto. \*TRX 500 FPE is a registered trademark of Honda Motor Co Ltd. \*Information not available. Information current as of October 2013.



# SPORTSMAN ACE



## SPORTSMAN ACE KEY FEATURES

1. Unique Single Passenger Cab Design Gives a Whole New Off-Road Experience
2. 3-Point Seatbelt and Protective Netting
3. Certified Roll-Over Protection Structure (ROPS)
4. Adjustable Seat and Steering Wheel
5. Independent Front & Adjustable Rear Suspension
6. Rack and Storage Capacity - 260kg
7. 32 HP EFI Engine with Polaris Variable Transmission
8. On Demand True All-Wheel-Drive (AWD)



\*Model shown with optional accessories




# SPORTSMAN BIG BOSS 6X6 800




556KG TOWING CAPACITY



ON DEMAND TRUE SIX-WHEEL DRIVE



ACTIVE DESCENT CONTROL & ENGINE BRAKING SYSTEM



DUMP BOX - 363 KG CAPACITY



6 WHEEL DISK BRAKES



SEALED FRONT STORAGE

## SPORTSMAN BIG BOSS 6X6 800 KEY FEATURES

1. Six Wheel Independent Suspension
2. 760cc EFI Engine with Polaris Variable Transmission
3. On Demand True Six-Wheel Drive
4. Integrated Sealed Front Storage - 25 Litres
5. Towing Capacity - 680kg
6. Dump Box Capacity - 363 kg
7. Active Descent Control & Engine Braking System
8. Six Wheel Disk Brakes




\*Model shown with optional accessories



# SPORTSMAN XP 850 EPS



55KG FRONT / 110KG REAR RACK CAPACITY



ROLLED INDEPENDENT REAR SUSPENSION - 26CM




850CC EFI - 77 HP



680KG TOWING CAPACITY



ELECTRONIC POWER STEERING



ACTIVE DESCENT CONTROL & ENGINE BRAKING SYSTEM

## SPORTSMAN XP 850 EPS KEY FEATURES

1. Active Descent Control & Engine Braking System
2. 850cc EFI Engine with Polaris Variable Transmission
3. Electronic Power Steering
4. Anti-Kickback Steering
5. On Demand True All-Wheel-Drive (AWD)
6. Narrow Seat & Wide Floor Boards
7. Rolled Independent Rear Suspension - 26cm of Travel
8. High Ground Clearance - 29.2cm

COMPARE THE FACTS	ATVs					
	SPORTSMAN 850EPS	CF MOTO X8	YAMAHA GRIZZLY 700	HONDA TRX 680	CAN AM OUTLANDER 800 R	
Engine Capacity	850cc ✓	800cc	686cc	675cc	799.9cc	
Towing Capacity (kg)	680.4 ✓	450	550	*	590	
Front/Rear Rack Capacity (kg)	55 / 110 ✓	50/100	45/85	*	16 (Rear)	
Suspension Travel Front/Rear (cm)	22.9 / 26 ✓	*	*	17.5 / 20.3	22.9 / 23.6	
Ground Clearance (cm)	30.5 ✓	27.5	27.5	23.4	27.9	
Fuel Capacity (litres)	19.9	23 ✓	20	16.3	20.5	
Power Steering	Yes ✓	No	Yes ✓	No	No	

\*X8 is a registered trademark of CF Moto \*Grizzly 700 is a registered trademark of Yamaha Corporation \*TRX 680 is a registered trademark of Honda Motor Co Ltd \*Outlander 800 R is a registered trademark of BRP \*Information not available. Information current as of October 2013

\*Model shown with optional accessories




# SCRAMBLER XP 1000




952CC EFI - 89 HP




ELECTRONIC POWER STEERING




ROLLED INDEPENDENT REAR SUSPENSION - 26CM



ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



FOX PODIUM X 2.0 ADJUSTABLE SHOCKS



HIGH GROUND CLEARANCE - 29CM

## SCRAMBLER XP 1000 KEY FEATURES

1. 952cc EFI Engine with Polaris Variable Transmission
2. On Demand True All-Wheel-Drive (AWD)
3. Electronic Power Steering
4. High Flow Dual Exhaust
5. Performance Tyres for Sport & Recreation
6. Premium Fox Podium X 2.0 Adjustable Shocks
7. Rolled Independent Rear Suspension - 26cm of Travel
8. Sculpted Narrow Sport Seat

COMPARE THE FACTS	ATVs	
	SCRAMBLER XP 1000	CAN AM RENEGADE 1000
Ground clearance (cm)	29 ✓	26.7
Engine Capacity / HP	89 HP ✓	82 HP
Power Steering	Yes ✓	No
Towing Capacity	680 ✓	590
Rack Capacity Front/Rear Combined	34 ✓	16
Suspension Travel Front/Rear (cm)	22.9 / 26 ✓	22.9/23.6

\*RENEGADE 1000 is a registered trademark of BRP. Information current as of October 2013

\*Model shown with optional accessories

2014 SPECIFICATIONS		OUTLAW 50	OUTLAW 90	SPORTSMAN 90	RZR 170
ENGINE	ENGINE TYPE	4-Stroke Single Cylinder	4-Stroke Single Cylinder	4-Stroke Single Cylinder	4-Stroke Single Cylinder
	DISPLACEMENT	49cc	89cc	89cc	169cc
	FUEL SYSTEM	Carbureted	Carbureted	Carbureted	Carbureted
	COOLING	Air	Air	Air	Fan
DRIVE TRAIN	TRANSMISSION/FINAL DRIVE	Automatic PVT Forward; Chain	Automatic PVT F/N/R; O-ring Chain	Automatic PVT F/N/R; O-ring Chain	Automatic PVT F/N/R; O-ring Chain
	DRIVE SYSTEM	2WD	2WD	2WD	2WD
	ENGINE BRAKING SYSTEM/ ACTIVE DESCENT CONTROL	N.A.	N.A.	N.A.	N.A.
SUSPENSION	FRONT SUSPENSION	Single A-Arm with 3" (7.6 cm) Travel	Single A-Arm with 5" (12.7 cm) Travel	Single A-Arm with 5" (12.7 cm) Travel	Single A-Arm with 5" (12.7 cm) Travel
	REAR SUSPENSION	Mono-Shock Swingarm with 3" (7.6 cm) Travel	Mono-Shock Swingarm with 6" (15.2 cm) Travel	Mono-Shock Swingarm with 6" (15.2 cm) Travel	Swingarm Dual Shocks with 5" (12.7 cm) Travel
BRAKES	FRONT/REAR BRAKES	4-Wheel Drum	4-Wheel Drum	4-Wheel Drum	4-Wheel Hydraulic Disc
TIRES AND WHEELS	FRONT TIRES	16 x 6.5-7 Duro	19 x 7-8 Duro	19 x 7-8 Duro	19 x 7-8 Duro
	REAR TIRES	16 x 8-7 Duro	18 x 9.5-8 Duro	18 x 9.5-8 Duro	20 x 10-9 Duro
	WHEELS	Stamped Steel	Stamped Steel	Stamped Steel	Stamped Steel
DIMENSIONS/ CAPACITIES	WHEELBASE	33" (83.8 cm)	41.5" (105.4 cm)	41.5" (105.4 cm)	65" (165.1 cm)
	DRY WEIGHT	210 lb (95.3 kg)	274 lb	287 lb	493 lb
	OVERALL VEHICLE SIZE (L X W X H)	"48 x 31.5 x 28" (121.9 x 80 x 71.1 cm)"	"61.25 x 36.75 x 38.5" (155.6 x 93.3 x 97.8 cm)"	"61.75 x 36.75 x 38.5" (156.8 x 93.3 x 97.8 cm)"	"85 x 48 x 55" (215.9 x 121.9 x 139.7 cm)"
	GROUND CLEARANCE	4" (10.2 cm)	4" (10.2 cm)	4" (10.2 cm)	6" (15.2 cm)
	SEAT HEIGHT	23" (58.4 cm)	27" (68.6 cm)	27" (68.6 cm)	N.A.
	FUEL CAPACITY	1.2 gal (4.5 L)	1.7 gal (6.4 L)	2 gal (7.6 L)	2.5 gal (9.5 L)
	BED BOX DIMENSIONS (L X W X H)	N.A.	N.A.	N.A.	N.A.
	FRONT/REAR RACK BOX CAPACITY	N.A.	N.A.	15 lb/30 lb (6.8 kg/13.6 kg)	N.A.
	PAYLOAD CAPACITY	N.A.	N.A.	N.A.	N.A.
	HITCH TOWING RATING	N.A.	N.A.	N.A.	N.A.
	UNBRAKED TRAILER TOWING CAPACITY	N.A.	N.A.	N.A.	N.A.
FEATURES	ELECTRONIC POWER STEERING	N.A.	N.A.	N.A.	N.A.
	INSTRUMENTATION	N.A.	N/R Light	N/R Light	N/R Light

HAWKEYE 400 H.D.	SPORTSMAN 400	SPORTSMAN 570 H.D.	UTE 570	SPORTSMAN ACE
4-Stroke Single Cylinder	4-Stroke Single Cylinder	4-Stroke DOHC Single Cylinder	4-Stroke DOHC Single Cylinder	4-Stroke DOHC Single Cylinder
455cc High Output (H.O.)	455cc High Output (H.O.)	567cc	567 cc	32 hp
Carbureted	Carbureted	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection
Liquid	Liquid	Liquid	Liquid	Liquid
Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft
2WD	On-Demand True AWD/2WD	On-Demand True AWD/2WD	On-Demand True AWD/2WD	On-Demand True AWD/2WD
Accessory/N.A..	Accessory/N.A..	Camo only/No	EBS/4WDC	N/A
MacPherson Strut With 8.2" (20.8 cm) Travel	MacPherson Strut With 8.2" (20.8 cm) Travel	MacPherson Strut With 8.2" (20.8 cm) Travel	MacPherson Strut With 8.2" (20.8 cm) Travel	MacPherson Strut with 8.2" (20.8 cm) Travel
Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, Anti-Sway Bar 9.5" (24 cm) Travel
Single Lever 4-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake	Single Lever 4-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake	Single Lever 4-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake	Single Lever 4-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake	4-Wheel Hydraulic Disc with Dual-Bore Front Callipers
25 x 8-12; 489	25 x 8-12; 489	25 x 8-12; 489	25 x 8-12; 489	25 x 8-12; 489
25 x 10-12; 489	25 x 10-12; 489	25 x 10-12 (Camo 25 x 11-12); 489	25 x 10-12 (Camo 25 x 11-12); 489	25 x 10-12; 489
Stamped Steel	Stamped Steel	Stamped Steel	Stamped Steel	Stamped Steel
50.5" (128.3 cm)	50.5" (128.3 cm)	50.5" (128.3 cm)	56" (142.2 cm)	61.5"
688 lb (312 kg)	688 lb (312 kg)	702 lb (318 kg)	776 lb (352 kg)	835 lbs
"83 x 48 x 48" (210.8 x 121.9 x 121.9 cm)"	"83 x 48 x 48" (210.8 x 121.9 x 121.9 cm)"	"83 x 48 x 48" (210.8 x 121.9 x 121.9 cm)"	"89.8 x 48 x 48" (228 x 121.9 x 121.9 cm)"	90 x 48 x 68"
11.25" (28.6 cm)	11.25" (28.6 cm)	11.0" (27.9 cm)	11.0" (27.9 cm)	10.25"
33.75" (85.7 cm)	33.75" (85.7 cm)	33.75" (85.7 cm)	33.75" (85.7 cm)	N/A
4.1 gal (15.5 L)	4.1 gal (15.5 L)	4.5 gal (17.0 L)	4.5 gal (17.0L)	5.25 gal (19.9 L)
N.A.	N.A.	N.A.	19.5 x 37.5 x 6.5" (49.5 x 95 x 16.5 cm)	14.9 x 37.7 x 5.9" (38 x 96 x 15 cm)
90 lb(40.8 kg)/180 lb(81.6 kg)	90 lb(40.8 kg)/180 lb(81.6 kg)	90 lb(40.8 kg)/180 lb(81.6 kg)	90 lb (40.8 kg)/400 lb (180 kg)	120 lb (55 kg)/240 lb (110 kg)
450 lb. (w/ 180 lb. person) / (204kg w/81.6kg person)	450 lb. (w/ 180 lb. person) / (204kg w/81.6kg person)	485 lb. (220 kg )	705 lb. (319.7 kg)	575 lbs (261 kg)
1,225 lb (555.7 kg)	1,225 lb (555.7 kg)	1,225 lb (555.7 kg)	1,225 lb (555.7 kg)	1,500 lbs (680.4 kg)
1,786 lb (810.1 kg)	1,786 lb (810.1 kg)	1,786 lb (810.1 kg)	1,786 lb (810.1 kg)	N/A
N.A.	N.A.	N.A.	Standard	N/A
Digital Gauge, Analog Speedometer, Odometer, Tachometer, Tripmeter, Gear Indicator, Fuel Gauge, AWD Indicator, Hi-Temp/Low-Batt Lights, DC Outlet	Digital Gauge, Analog Speedometer, Odometer, Tachometer, Tripmeter, Gear Indicator, Fuel Gauge, AWD Indicator, Hi-Temp/Low-Batt Lights, DC Outlet	Digital Gauge, Analog Speedometer, Odometer, Tachometer, Tripmeter, Gear Indicator, Fuel Gauge, AWD Indicator, Hi-Temp/Low-Batt Lights, DC Outlet	Digital Gauge, Analog Speedometer, Odometer, Tachometer, Tripmeter, Gear Indicator, Fuel Gauge, AWD Indicator, Hi-Temp/Low-Batt Lights, DC Outlet, Horn	Digital Gauge, Analog Speedometer, Odometer, Tachometer, Tripmeter, Gear Indicator, Fuel Gauge, AWD Indicator, Hi-Temp/Low-Batt Lights, DC Outlet

2014 SPECIFICATIONS		SPORTSMAN BIG BOSS 6X6 800	SPORTSMAN XP 850 EPS	SCRAMBLER XP 1000
ENGINE	ENGINE TYPE	4-Stroke Twin Cylinder	4-Stroke SOHC Twin Cylinder	4-Stroke SOHC Twin Cylinder
	DISPLACEMENT	760cc	850cc High Output (H.O)	952cc
	FUEL SYSTEM	Electronic Fuel Injected	Electronic Fuel Injected	Electronic Fuel Injected
	COOLING	Liquid	Liquid	Liquid
DRIVE TRAIN	TRANSMISSION/FINAL DRIVE	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT P/R/N/L/H; Shaft
	DRIVE SYSTEM	On-Demand True 6WD/Rear 4WD	On-Demand True AWD/2WD	On-Demand True AWD/2WD
	ENGINE BRAKING SYSTEM/ ACTIVE DESCENT CONTROL	Standard/Standard	Standard/Standard	N/A
SUSPENSION	FRONT SUSPENSION	MacPherson Strut With 8.2" (20.8 cm) Travel	Dual A-Arm 9" (22.9 cm) Travel	Dual A-Arm 9" (22.9 cm) Travel
	REAR SUSPENSION	Dual A-Arm, IRS 6.12" (15.5 cm) Travel	Dual A-Arm, Rolled 10.25" (26 cm) Travel	Dual A-Arm, Rolled 10.25" (26 cm) Travel
BRAKES	FRONT/REAR BRAKES	Single Lever Hydraulic Disc Brake / Single Lever Hydraulic Rear Brake	Single Lever 4-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake	Single Lever 4-Wheel Hydraulic Disc with Hydraulic Rear Foot Brake
TIRES AND WHEELS	FRONT TIRES	25 x 8-12; K590	26 x 8-14; 489 II	26 x 8-14; 489 II
	REAR TIRES	25 x 11-12; K590	26 x 10-14; 489 II	26 x 10-14; 489 II
	WHEELS	Stamped Steel	8 Spoke Cast Aluminum	Matte Black 8 spoke Cast Aluminum
DIMENSIONS/ CAPACITIES	WHEELBASE	79.5" (201.9 cm)	53" (134.6 cm)	53" (134.6cm)
	DRY WEIGHT	1,060 lb (480.8 kg)	773 lb (351.4 kg)	767 lb (338 kg)
	OVERALL VEHICLE SIZE (L X W X H)	"112 x 48 x 48" (284.5 x 121.9 x 121.9 cm)"	"83.25 x 47.6 x 50.75" (211.4 x 120.9 x 128.9 cm)"	82.3" x 48.6" x 48.4" (209 cm x 123 cm x 123 cm)
	GROUND CLEARANCE	10.5" (26.7 cm)	11.5"	11.5" (29 cm)
	SEAT HEIGHT	33.75" (85.7 cm)	37" (94 cm)	35" (89 cm)
	FUEL CAPACITY	4.1 gal (15.5 L)	5.25 gal (19.9 L)	5.25 lb gal (19.9 L)
	BED BOX DIMENSIONS (L X W X H)	38"L x 39"W x 8"H (96.5L x 99.1W x 20.3H cm)	N.A.	N.A.
	FRONT/REAR RACK BOX CAPACITY	100 lb (45.4 kg)/800 lb (362.8 kg)	120 lb (55 kg)/240 lb (110 kg)	25 lb (11.3 kg)/50 lb (22.7 kg)
	PAYLOAD CAPACITY	1080lb (w/ 180lb person) (489.9kg w/81.6kg person)	575 lbs (261 kg)	290 lbs (131 kg)
	HITCH TOWING RATING	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 (680.4 kg)
	UNBRAKED TRAILER TOWING CAPACITY	2,127 lb (964.8 kg)	1,914 lb (868.2 kg)	1,914 lb (868.2 kg)
FEATURES	ELECTRONIC POWER STEERING	N.A.	Standard	Standard
	INSTRUMENTATION	Digital Gauge, Analog Speedometer, Odometer, Tachometer, Tripmeter, Gear Indicator, Fuel Gauge, AWD Indicator, Hi-Temp/Low-Batt Lights, DC Outlet	Digital Gauge, Speedometer, Odometer, Tachometer, Two Tripmeters, Hour Meter, Clock, Service Time, Diagnostic Indicator, Gear Indicator, Fuel Gauge, Hi-Temp/Low-Batt Lights, DC Outlet	Digital Gauge, Speedometer, Odometer, Tachometer, Two Tripmeters, Hour Meter, Clock, Service Time, Diagnostic Indicator, Gear Indicator, Fuel Gauge, Hi-Temp/Low-Batt Lights, DC Outlet



\*Model shown with optional accessories



# WHICH POLARIS RZR IS FOR ME?



\*Model shown with optional accessories

Polaris reserves the right to withdraw any product from sale or change specifications and pricing without notice. Confirm model specifications and availability with your Polaris dealer prior to ordering. The Polaris range is not intended for and may not be registered for on-road use. All competitive comparisons are based on 2013 models and published manufacturer specifications available at October 2013 unless otherwise specified. See other manufacturers for latest specifications. All photography taken with professional riders under controlled conditions. Polaris strongly recommends that all riders take a safety course. Never engage in stunt riding. For your safety, always operate Polaris products as instructed in the product manual and on warning labels. Never carry passengers on any product not designed for such use. Preserve your future riding opportunities by showing respect for the environment, local laws and the rights of others. Avoid excessive speeds and be particularly careful on difficult terrain. ©Polaris Sales Australia Pty Ltd ABN 62 088 081 949, Registered Office: 36 Grimes Court, Derrimut, VIC 3030. Printed February 2014.

## TWO SEATS

570cc



RZR 570

4x4 ■

1000cc



RZR XP 1000

4x4 ■■

## FOUR SEATS

1000cc



RZR XP 4 1000

4x4 ■■



\*Model shown with optional accessories




# RZR 570




DISC BRAKES FRONT & REAR



567CC EFI - 46 HP



INDEPENDENT REAR SUSPENSION - 24CM OF TRAVEL



ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



0 - 56 KM/H IN 4 SECONDS



TRAIL CAPABLE SIDE X SIDE

## RZR 570 KEY FEATURES

1. 567cc EFI Engine with Lightweight Polaris Variable Transmission
2. Trail Capable Side x Side - Only 5cm wider than many ATV's
3. Low Centre of Gravity
4. On Demand True All-Wheel-Drive (AWD)
5. Independent Front & Rear Suspension
6. Quick Acceleration - 0 to 56 km/h in 4 Seconds
7. Long Wheelbase - 196cm
8. Disc Brakes Front & Rear

COMPARE THE FACTS	SXS		
	RZR 570	CF MOTO Z6	ARTIC CAT PROWLER 550 XT
Engine Capacity / HP	567cc / 46 HP ✓	594cc / 37 HP	545cc / *
Dry Weight (kg)	452	450 ✓	557
Suspension Travel Front/Rear (cm)	22.9 / 24	*	25 / 25 ✓
Ground Clearance (cm)	26.7 ✓	24	25.4
Towing	680 ✓	125	680 ✓
Width (cm)	127 ✓	132	156

\* Z6 is a registered trademark of CF Moto \* PROWLER 550 XT is a registered trademark of Artic Cat \* Information not available. Information current as of October 2013




# RZR XP 1000




DISC BRAKES FRONT & REAR



999CC EFI - 107 HP



ADJUSTABLE DUAL SPRINGS WITH WALKER EVANS NEEDLE SHOCKS



HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



0 - 80 KM/H IN 5.3 SECONDS



ELECTRONIC POWER STEERING

## RZR XP 1000 KEY FEATURES

1. 999cc EFI Engine with Polaris Variable Transmission
2. Quick Acceleration - 0 to 80 km/h in 5.3 Seconds. 123 km/h Top Speed
3. 2" Front & 2.5" Rear Walker Evans Anti-Bottoming Needle Shocks
4. Dual Rate / Dual Springs with 16-Position Adjustable Clickers
5. Exclusive 29" Maxxis Bighorn Tyres
6. High Performance On Demand True All-Wheel-Drive (AWD) System
7. Factory Fitted Doors, Adjustable Driver & Passenger Seats and Adjustable Steering Wheel
8. 4 Seat model also available

COMPARE THE FACTS	SXS		
	RZR XP 1000	CAN AM MAVERICK X RS DPS 1000	ARTIC CAT WILD CAT X
Engine Capacity / HP	999cc / 107 HP ✓	976cc / 101 HP	951cc / *
Trailing Arm Rear Suspension / Rear Travel (cm)	Yes / 45.7 ✓	A-Arms / 356	Yes / 457 ✓
Ground Clearance (cm)	34.3 ✓	33	33
Power Steering	Yes ✓	Yes ✓	Yes ✓
Tyres (inch)	29 inch Maxxis Bighorn ✓	27 inch Maxxis Bighorn	27 inch

\*Maverick 1000 is a registered trademark of BRP \*Wild Cat X is a registered trademark of Artic Cat. Information current as of October 2013

\*Model shown with optional accessories




# RZR XP 4 1000




DISC BRAKES FRONT & REAR



999CC EFI - 107 HP



ADJUSTABLE DUAL SPRINGS WITH WALKER EVANS NEEDLE SHOCKS



HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



0 - 80 KM/H IN 5.3 SECONDS



ELECTRONIC POWER STEERING

## RZR XP 4 1000 KEY FEATURES

1. 999cc EFI engine with Polaris Variable Transmission
2. 120 km/h top speed
3. Bolstered Seats with Dryseat technology for 4 Passengers
4. 2" Front & 2.5" Rear Walker Evans Anti-Bottoming Needle Shocks
5. Dual rate / dual springs with 16-position adjustable clickers
6. Exclusive 29" Maxxis Bighorn Tyres
7. High Performance On Demand True All-Wheel-Drive (AWD) System
8. Factory fitted doors, adjustable driver & front passenger seats and adjustable steering wheel

COMPARE THE FACTS	SXS		
	RZR XP 4 1000	CAN AM MAVERICK MAX X RS DPS	ARTIC CAT WILD CAT 4 1000
Engine Capacity / HP	999cc / 107 HP ✓	976cc / 101 HP	951cc / *
Trailing Arm Rear Suspension / Rear Travel (cm)	Yes / 45.7 ✓	A-Arms / 35.6	Yes / 45.7 ✓
Ground Clearance (cm)	34.3 ✓	31.75	33
Power Steering	Yes ✓	Yes ✓	Yes ✓
Tyres (inch)	29 inch Maxxis Bighorn ✓	27 inch Maxxis Bighorn	26 inch

\*Maverick Max X rs DPS is a registered trademark of BRP. \*Artic Cat Wild Cat 4 1000 is a registered trademark of Artic Cat. \*Information not available. Information current as of October 2013

2014 SPECIFICATIONS		RZR 570	RZR XP 1000	RZR XP 4 1000
ENGINE	ENGINE TYPE	4-Stroke DOHC Single Cylinder	4-Stroke DOHC Twin Cylinder	4-Stroke DOHC Twin Cylinder
	DISPLACEMENT	567cc	999 cc	999 cc
	FUEL SYSTEM	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection
	COOLING	Liquid	Liquid	Liquid
PERFORMANCE	HORSEPOWER (HP)	46 hp	107 hp	107 hp
	TOP SPEED	90 kph	123 kph	120 kph
DRIVE TRAIN	TRANSMISSION/FINAL DRIVE	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H
	DRIVE SYSTEM	On-Demand True AWD/2WD	On-Demand True AWD/2WD	On-Demand True AWD/2WD
SUSPENSION	FRONT SUSPENSION	Dual A-Arm with Anti-Sway Bar 9" (22.9 cm) Travel	Dual A-Arm Walker Evans 2" Needle Shocks (comp adjust/res.) 16" (40.6 cm) Travel	Dual A-Arm Walker Evans 2" Needle Shocks (comp adjust/res.) 16" (40.6 cm) Travel
	REAR SUSPENSION	Dual A-Arm, Anti-Sway Bar 9.5" (24 cm) Travel	Trailing Arm Walker Evans 2.5" Needle Shocks (comp adjust/remote res.) 18" (45.7 cm) Travel	Trailing Arm Walker Evans 2.5" Needle Shocks (comp adjust/remote res.) 18" (45.7 cm) Travel
BRAKES	FRONT/REAR BRAKES	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers
TIRES AND WHEELS	FRONT TIRES	25 x 8-12; Ancla	29 x 9-14; Maxxis Bighorn	29 x 9-14; Maxxis Bighorn
	REAR TIRES	25 x 10-12; Ancla	29 x 11-14; Maxxis Bighorn	29 x 11-14; Maxxis Bighorn
	WHEELS	Stamped Steel / Cast Aluminum on LE's	Cast Aluminum	Cast Aluminum
DIMENSIONS/ CAPACITIES	WHEELBASE	77" (196 cm)	90.0" ( 228.6 cm)	117.0" (297.2 cm)
	DRY WEIGHT	Base 996 lb (452 kg)	1,379 lbs (625.5 kg)	1,596 lbs (723.9 kg)
	"OVERALL VEHICLE SIZE (L x W x H)"	"107.5 x 50 x 69" (273 x 127 x 175.2 cm)"	119" x 64" x 73.75" (302.2 x 162.6 x 187.3 cm)	146" x 64" x 73.75" (370.8 x 162.6 x 187.3 cm)
	GROUND CLEARANCE	10.5" (26.7 cm)	13.5" (34.3 cm)	13.5" (34.3 cm)
	FUEL CAPACITY	7.25 gal (27.4 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)
	"BED BOX DIMENSIONS (L x W x H)"	"20 x 40 x 9"" (51 x 102 x 23 cm)"	"28 x 22 x 7"" (see note) (72.0 x 57.0 x 17.8 cm)"	"28 x 22 x 7"" (see note) (72.0 x 57.0 x 17.8 cm)"
	FRONT/REAR RACK OR BOX CAPACITY	N.A./300 lb (136.1 kg)	N.A./300 lb (136.1 kg)	N.A./300 lb (136.1 kg)
	PAYLOAD CAPACITY	740 lb (335.6 kg)	740 lb (335.6 kg)	900 lb (408.2 kg)
	HITCH TOWING RATING	1,500 lb (680.4 kg)	N.A.	N.A.
	HITCH/TYPE	Standard/1.25" Receiver	None	None
FEATURES	LIGHTING	Halogen, 50W	White LED, High/Low & Red LED Tail / Brake Lights	White LED, High/Low & Red LED Tail / Brake Lights
	ELECTRONIC POWER STEERING	N/A	Standard	Standard
	INSTRUMENTATION	Digital Gauge, Speedometer, Odometer, Tripmeter, Tachometer, Coolant Temperature, Volt Meter, Hour Meter, Service Indicator, Clock, Gear Indicator, Fuel Gauge, Hi-Temp Light, Seatbelt Reminder Light, DC Outlet	Digital Gauge, Speedometer, Odometer, Tripmeter, Tachometer, Coolant Temperature, Volt Meter, Hour Meter, Service Indicator, Clock, Gear Indicator, Fuel Gauge, Hi-Temp Light, Seatbelt Reminder Light, DC Outlet	Digital Gauge, Speedometer, Odometer, Tripmeter, Tachometer, Coolant Temperature, Volt Meter, Hour Meter, Service Indicator, Clock, Gear Indicator, Fuel Gauge, Hi-Temp Light, Seatbelt Reminder Light, 2 DC Outlets (Front & Rear)



\*Model shown with optional accessories



PETROL



RANGER XP 900

4X4 ■

RANGER CREW 900

4X4 ■



RANGER 800 6X6

4X4 ■

RANGER 800

4X4 ■

DIESEL



RANGER 900 DIESEL HD

4X4 ■

RANGER CREW 900 DIESEL

4X4 ■

PETROL



RANGER 570 HD

4X4 ■

RANGER CREW 570

4X4 ■



RANGER 400

4X4 ■ ■

ELECTRIC



RANGER EV

4X4 ■

[f/PolarisAustralia](#)

[f/TeamRZR](#)

[You Tube/PolarisANZ](#)

[www.polarisindustries.com.au](http://www.polarisindustries.com.au)

1300 654 142

Polaris reserves the right to withdraw any product from sale or change specifications and pricing without notice. Confirm model specifications and availability with your Polaris dealer prior to ordering. The Polaris range is not intended for and may not be registered for on-road use. All competitive comparisons are based on 2013 models and published manufacturer specifications available at October 2013 unless otherwise specified. See other manufacturers for latest specifications. All photography taken with professional riders under controlled conditions. Polaris strongly recommends that all riders take a safety course. Never engage in stunt riding. For your safety, always operate Polaris products as instructed in the product manual and on warning labels. Never carry passengers on any product not designed for such use. Preserve your future riding opportunities by showing respect for the environment, local laws and the rights of others. Avoid excessive speeds and be particularly careful on difficult terrain. ©Polaris Sales Australia Pty Ltd ABN 62 088 081 949, Registered Office: 36 Grimes Court, Derrimut, VIC 3030. Printed February 2014.

# RANGER




## WHICH RANGER IS FOR ME?

\*Model shown with optional accessories




# RANGER 400



DUMP BOX CAPACITY - 227KG



455CC - 29HP




567KG TOWING CAPACITY



UNLOCKING REAR DIFF



ROLL OVER PROTECTION STRUCTURE



ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)

## RANGER 400 KEY FEATURES

1. 455cc Engine with Polaris Variable Transmission
2. 64 km/h Top Speed
3. Towing Capacity - 567kg
4. Dump Box Capacity - 227kg
5. On Demand True All-Wheel-Drive (AWD) with Turf Mode
6. Independent Front & Adjustable Rear Suspension
7. Certified Roll-Over Protection Structure (ROPS)
8. Mid-Size Chassis - Seats 2


COMPARE THE FACTS	SXS			
	RANGER 400	KUBOTA RTV 400	CF MOTO U5	KAWASAKI MULE 610 4X4
Towing Capacity (kg)	567 ✓	500	550	500
Dump Box Capacity (kg)	226.8 ✓	200	150	181
Suspension Travel Front/Rear (cm)	20.3 / 22.9 ✓	*	*	78 / 78.7
Fuel Capacity (litres)	34 ✓	20	27	15.5
Engine Capacity / HP	455cc / 29 HP	404cc / 16HP	493 cc / 32 HP ✓	401 cc / 13 HP

\*RTV 400 is a trademark of Kubota, Ltd \*U5 is a registered trademark of CF Moto \*Mule 610 4x4 of Kawasaki Heavy Industries Inc \*Information not available. Information current as of October 2013

\*Model shown with optional accessories



# RANGER 570 H.D.




DUMP BOX CAPACITY - 227KG



567CC - 40HP




567KG TOWING CAPACITY



UNLOCKING REAR DIFF



HEAVY DUTY "HD" FEATURES



ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)

## RANGER 570 H.D. KEY FEATURES




1. 567cc EFI Engine with Polaris Variable Transmission
2. 80 km/h Top Speed
3. Towing Capacity - 567kg
4. Dump Box Capacity - 227kg
5. On Demand True All-Wheel-Drive (AWD) with Turf Mode
6. Independent Front & Adjustable Rear Suspension
7. Built for Australia with Heavy Duty "HD" Features  
A - Greaseable Ball Joints. B - Driveshaft Spline Sealing.  
C - HD Sway Bar. D - Grease fittings.
8. Mid-Size Chassis - Seats 2

COMPARE THE FACTS	SXS				
	RANGER 570	JOHN DEERE XUV550	KUBOTA RTV500	CF MOTO U6	KYMCO UXV 500
Towing Capacity (kg)	567 ✓	499	500	550	550
Dump Box Capacity (kg)	227 ✓	181	200	150	190
Engine Capacity / HP	567cc / 40 HP ✓	570cc / 16 HP	456cc / 15.8 HP	594cc / 38 HP	498cc / 33 HP
Suspension Travel Front/Rear (cm)	20.3 / 22.9 ✓	22.9 / 20.3	*	*	*
Fuel Capacity (litres)	34 ✓	18.5	20	27	16.7

\*XUV550 is a registered trademark of Deere & Company \*RTV500 is a registered trademark of Kubota, Ltd \*U6 is a registered trademark of CF Moto \*UXV 500 is a registered trademark of Kwang Yang Motor Co., Ltd. \*Information not available. Information current as of October 2013



# RANGER EV



## RANGER EV KEY FEATURES

1. Single 48-Volt, High-Efficiency, AC-Induction Motor - 30hp
2. 40 km/h Top Speed
3. Recharge with Standard 240v AC Outlet
4. Quiet Operation for Indoors & Outdoors
5. On Demand True All-Wheel-Drive (AWD) with Turf Mode
6. Independent Front & Adjustable Rear Suspension
7. Certified Roll-Over Protection Structure (ROPS)
8. Mid-Size Chassis - Seats 2





# RANGER 800



- DUMP BOX CAPACITY - 454KG
- 760CC - 50HP
- 907KG TOWING CAPACITY
- AWD Mode  
Turf Mode
- INDEPENDENT REAR SUSPENSION - 22.9CM OF TRAVEL
- UNLOCKING REAR DIFF
- ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)

## RANGER 800 KEY FEATURES

- 760cc High Output EFI Engine with Polaris Variable Transmission
- 88 km/h Top Speed
- Towing Capacity - 907kg
- Dump Box Capacity - 454kg
- On Demand True All-Wheel-Drive (AWD) with Turf Mode
- Adjustable Independent Front & Rear Suspension
- 3-point Seat Belts
- Certified Roll-Over Protection Structure (ROPS)


COMPARE THE FACTS	SXS		
	RANGER 800	YAMAHA VIKING	HONDA PIONEER
Towing Capacity (kg)	907.2 ✓	680	680
Dump Box Capacity (kg)	453.6 ✓	272	*
Engine Capacity / HP	760cc / 50 HP ✓	686cc / 46.9 HP	675cc / 36 HP
Suspension Travel Front/Rear (cm)	24.4 / 22.9 ✓	20.6 / 20.6	20.0 / 23.0 ✓
Fuel Capacity (litres)	34.1	36.7 ✓	31

\*Viking is a registered trademark of Yamaha Corporation \*Pioneer 700 is a registered trademark of Honda Motor Co Ltd. \*Information not available. Information current as of October 2013

\*Model shown with optional accessories



# RANGER 800 6X6




DUMP BOX CAPACITY - 567KG




760CC - 50HP



907KG TOWING CAPACITY



ON DEMAND TRUE SIX-WHEEL DRIVE



ROLL OVER PROTECTION STRUCTURE



SIX WHEEL INDEPENDENT SUSPENSION

## RANGER 800 6X6 KEY FEATURES

1. 760cc EFI Engine with Polaris Variable Transmission
2. 74 km/h Top Speed
3. Towing Capacity - 907kg
4. Dump Box Capacity - 567kg
5. On Demand True Six-Wheel Drive
6. Six Wheel Independent Suspension
7. Lockable Rear Storage Boxes
8. Certified Roll-Over Protection Structure (ROPS)


COMPARE THE FACTS	SXS	
	RANGER 800 6X6	JOHN DEERE TH 6X4 GATOR
Towing Capacity (kg)	907 ✓	635
Dump Box Capacity (kg)	567 ✓	454
Seating	3 ✓	2
Engine Capacity / HP	760cc / 40 HP ✓	675cc / 15.5 HP
Suspension Travel Front/Rear (cm)	24.4 / 22.9 ✓	12.7 / *
Drive System	6x6 ✓	6x4
Fuel capacity (litres)	34.1 ✓	18.9

\*TH 6x4 Gator is a registered trademark of Deere & Company \*Information not available. Information current as of October 2013

\*Model shown with optional accessories



# RANGER 900 DIESEL H.D.




DUMP BOX CAPACITY - 454KG




904CC - 24HP



907KG TOWING CAPACITY



ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



INDEPENDENT REAR SUSPENSION - 22.9CM OF TRAVEL



HEAVY DUTY "HD" FEATURES

## RANGER 900 DIESEL H.D. KEY FEATURES

1. 904cc 3-Cylinder Diesel Engine with Polaris Variable Transmission
2. 56 km/h Top Speed
3. Towing Capacity - 907kg
4. Dump Box Capacity - 454kg
5. On Demand True All-Wheel-Drive (AWD) with Turf Mode
6. Adjustable Independent Front & Rear Suspension
7. Built for Australia with Heavy Duty "HD" Features  
A - Upgraded Rear Driveshaft. B - Grease Fittings.  
C - HD Sway Bar. D - Driveshaft Spline Sealing.
8. Certified Roll-Over Protection Structure (ROPS)


COMPARE THE FACTS	SXS			
	RANGER 900 DIESEL	KUBOTA RTV 900 DIESEL	JOHN DEERE XUV 855 D	KAWASAKI MULE 4010
Towing Capacity (kg)	907.2 ✓	590	680	545
Dump Box Capacity (kg)	453.2	500 ✓	454	499
Seating	3 ✓	2	2	2
Engine Capacity / HP	904cc / 24 ✓	893cc / 21.6	854cc / 22.8	953cc / * ✓
Suspension Travel Front/Rear (cm)	24.4 / 22.9 ✓	*	20.3 / 22.9	*
Fuel capacity (litres)	34.1 ✓	28	26.5	24.2

\*RTV 900 is a trademark of Kubota, Ltd \*XUV 855 D is a trademark of Deere & Company \*Mule 4010 is a trademark of Kawasaki Heavy Industries Inc. \*Information not available. Information current as of October 2013

\*Model shown with optional accessories



# RANGER XP 900




DUMP BOX CAPACITY - 454KG




875CC - 60HP



907KG TOWING CAPACITY



ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



INDEPENDENT REAR SUSPENSION - 22.9CM OF TRAVEL



ELECTRONIC POWER STEERING

## RANGER XP 900 KEY FEATURES

1. 875cc EFI Engine with Polaris Variable Transmission
2. 96 km/h Top Speed
3. Adjustable Seat and Steering Wheel
4. All-New Chassis, Drivetrain and Engine Management System
5. On Demand True All-Wheel-Drive (AWD) with Turf Mode
6. Adjustable Independent Front & Rear Suspension
7. LE Features including Sunset Red Paint and Decals, 12" Black Xcelerator Rims and Custom Stitched Seats with Under Seat Storage
8. Grease Nipples to Flush Joints

COMPARE THE FACTS	SXS				
	RANGER XP 900	JOHN DEERE 825I	KUBOTA RTV 900	YAMAHA VIKING	HONDA PIONEER
Towing Capacity (kg)	907.2 ✓	680	590	680	680
Dump Box Capacity (kg)	453	454	500 ✓	272.2	*
Engine Capacity / HP	875cc / 60 HP ✓	812cc / 50 HP	893cc / 21.6 HP	686cc / 46.9 HP	675cc / 36 HP
Suspension Travel Front/Rear (cm)	25.4 / 25.4 ✓	20.3 / 22.9	*	20.6 / 20.6	20.0 / 23.1
Fuel Capacity (litres)	37.9 ✓	26.5	28	36.7	31
Power Steering	Yes ✓	No	No	No	No

\*XUV 855 D is a trademark of Deere & Company \*RTV 900 is a trademark of Kubota, Ltd \*Viking is a trademark of Yamaha Corporation \*Pioneer is a registered trademark of Honda Motor Co Ltd. \*Information not available. Information current as of October 2013

# RANGER CREW



- POLARIS VARIABLE TRANSMISSION
- DUMP BOX
- ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)
- ELECTRONIC FUEL INJECTION
- ROLL OVER PROTECTION STRUCTURE
- UNLOCKING REAR DIFF
- TOWING CAPACITY  
CREW 570 - 567KG  
DIESEL CREW - 907KG  
CREW 900 - 907KG
- INDEPENDENT REAR SUSPENSION
- CREW 570 - SEATS 4  
DIESEL CREW - SEATS 5  
CREW 900 - SEATS 5

## RANGER CREW 570 KEY FEATURES

- 567cc EFI Engine with Polaris Variable Transmission
- 80 km/h Top Speed
- Towing Capacity - 567kg
- Dump Box Capacity - 227kg
- On Demand True All-Wheel-Drive (AWD) with Turf Mode
- Independent Front & Adjustable Rear Suspension
- Certified Roll-Over Protection Structure (ROPS)
- Under Seat Storage

## RANGER CREW 900 DIESEL KEY FEATURES

- 904cc 3-Cylinder Diesel Engine with Polaris Variable Transmission
- 56 km/h Top Speed
- Towing Capacity - 907kg
- Dump Box Capacity - 454kg
- On Demand True All-Wheel-Drive (AWD) with Turf Mode
- Adjustable Independent Front & Rear Suspension
- Certified Roll-Over Protection Structure (ROPS)
- Under Seat Storage

## RANGER CREW 900

- 875cc EFI Engine with Polaris Variable Transmission
- 80 km/h Top Speed
- Optional Speed Key System
- All-New Chassis, Drivetrain and Engine Management System
- On Demand True All-Wheel-Drive (AWD) with Turf Mode
- Adjustable Independent Front & Rear Suspension
- Certified Roll-Over Protection Structure (ROPS)
- Centre Console and Under Seat Storage

COMPARE THE FACTS	SXS			
	RANGER CREW 900	JOHN DEERE 825i S4	KAWASAKI MULE 4010 TRANS 4X4 DIESEL	HONDA PIONEER 700-4
Towing Capacity (kg)	907.2 ✓	680	545	680
Dump Box Capacity (kg)	454 ✓	454 ✓	363	*
Seating	5 ✓	4	4	4
Engine Capacity / HP	875cc / 60 HP ✓	812cc / 50 HP	953cc / *	675cc / 36 HP
Suspension Travel Front/Rear (cm)	25.4 / 25.4 ✓	20.3 / 22.9	10 / 7	20 / 23
Fuel Capacity (litres)	37.9 ✓	26.5	24.2	31

\*825i is a trademark of Deere & Company \*Mule 4010 is a trademark of Kawasaki Heavy Industries Inc \*Pioneer 700 is a registered trademark of Honda Motor Co Ltd. \*Information not available. Information current as of October 2013

2014 SPECIFICATIONS		RANGER 400	RANGER 570 HD	RANGER EV	RANGER 800
ENGINE	ENGINE TYPE	4-Stroke Single Cylinder	4-Stroke Single Cylinder	Single 48-Volt, High-Efficiency, AC-Induction Motor	4-Stroke Twin Cylinder
	DISPLACEMENT	455cc	567cc	N.A.	760cc High Output (H.O.)
	FUEL SYSTEM	Carbureted	Electronic Fuel Injection	N.A.	Electronic Fuel Injection
	COOLING	Liquid	Liquid	N.A.	Liquid
PERFORMANCE	HORSEPOWER (HP)	29 hp	40 hp	30 hp	50 hp
	TORQUE		46 Nm @ 5900 RPM		
	TOP SPEED	64 Kph	80 Kph	40 Kph	88 Kph
DRIVE TRAIN	TRANSMISSION/FINAL DRIVE	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft	Direct Drive With Low-Noise Gears	Automatic PVT H/L/N/R; Shaft
	DRIVE SYSTEM	"On-Demand True AWD/2WD/VersaTrac Turf Mode"	"On-Demand True AWD/2WD/VersaTrac Turf Mode"	"On-Demand True AWD/2WD/VersaTrac Turf Mode"	"On-Demand True AWD/2WD/VersaTrac Turf Mode"
SUSPENSION	FRONT SUSPENSION	"MacPherson Strut 8"" (20.3 cm) Travel"	"MacPherson Strut 8 in. (20.3 cm) Travel"	"MacPherson Strut 8"" (20.3 cm) Travel"	"Dual A-Arm 9.6"" (24.4 cm) Travel"
	REAR SUSPENSION	"Dual A-Arm, IRS 9"" (22.9 cm) Travel"	"Dual A-Arm, IRS 9 in. (22.9 cm) Travel"	"Dual A-Arm, IRS 9"" (22.9 cm) Travel"	"Dual A-Arm, IRS 9"" (22.9 cm) Travel"
BRAKES	FRONT/REAR BRAKES	4-Wheel Hydraulic Disc	4-Wheel Hydraulic Disc	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers
	PARKING BRAKE	Park In-Transmission	Park In-Transmission	Hand-Actuated	Hand-Actuated
TIRES AND WHEELS	FRONT TIRES	25 x 8-12; 489	25 x 8-12; 489	25 x 9-12; Carlisle	25 x 10-12; 489
	REAR TIRES	25 x 10-12; 489	25 x 11-12; 489	25 x 9-12; Carlisle	25 x 11-12; 489
	WHEELS	Stamped Steel	Stamped Steel	Stamped Steel	Stamped Steel
DIMENSIONS/CAPACITIES	WHEELBASE	72" (182.9 cm)	73 in. (185.4 cm)	72" (182.9 cm)	76" (193 cm)
	DRY WEIGHT	1,050 lb (476 kg)	1,046lb (474kg)	1,700 lb (771 kg)	1,237 lb (562 kg)
	OVERALL VEHICLE SIZE (L X W X H)	108 x 56.5 x 73"" (274 x 144 x 185 cm)	108 x 58.0 x 73 in. (274 x 147 x 185 cm)	108 x 56.5 x 73"" (274 x 144 x 185 cm)	114 x 60 x 76"" (290 x 152 x 193 cm)
	GROUND CLEARANCE	10" (25.4 cm)	10" (25.4 cm)	10" (25.4 cm)	12" (30.5 cm)
	FUEL CAPACITY	9 gal (34.1 L)	9 gal (34.1 L)	N.A.	9 gal (34.1 L)
	BED BOX DIMENSIONS (L X W X H)	"32 x 42 x 11.5"" (81 x 107 x 29 cm)"	"32 x 42 x 11.5"" (81 x 107 x 29 cm)"	"32 x 42 x 11.5"" (81 x 107 x 29 cm)"	"36.5 x 54 x 11.5"" (93 x 137 x 29 cm)"
	FRONT/REAR RACK BOX CAPACITY	N.A./500 lb (226.8 kg)	N.A./500 lb (226.8 kg)	N.A./500 lb (226.8 kg)	N.A./1,000 lb (453.6 kg)
	PAYLOAD CAPACITY	1,000 lb (453.6 kg)	1,000 lb (453.6 kg)	1,000 lb (453.6 kg)	1,500 lb (680.4 kg)
	HITCH TOWING RATING	1,250 lb (567 kg)	1,250 lb (567 kg)	1,250 lb (567 kg)	2,000 lb (907.2 kg)
	ELECTRONIC POWER STEERING	Not Equipped	Not Equipped	Not Equipped	Not Equipped
INSTRUMENTATION	Hour Meter, Gear Indicator, DC Outlet, Hi-Temp Light	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, DC Outlets (1)	Digital Hour Meter, Mode Indicator, DC Outlet, Hi-Temp Light, Change Cycle Indicator, Battery Life Indicator	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Hour Meter, Clock, Gear Indicator, Fuel Gauge, Hi-Temp/Low-Batt Lights, DC Outlets (2)	

RANGER 800 6X6	RANGER 900 DIESEL HD	RANGER XP 900	RANGER CREW 570	RANGER CREW 900 DIESEL	RANGER CREW 900
4-Stroke Twin Cylinder	3-Cylinder Diesel	4-Stroke Twin Cylinder	4-Stroke Single Cylinder	3-Cylinder Diesel	4-Stroke Twin Cylinder
760cc	904cc	875 cc	567cc	904cc	875cc
Electronic Fuel Injection	Indirect Injection	Electronic Fuel Injection	Electronic Fuel Injection	Indirect Injection	Electronic Fuel Injection
Liquid	Liquid	Liquid	Liquid	Liquid	Liquid
40 hp	24 hp	60 hp	40 hp	24 hp	60 hp
	55.5 Nm @ 2600 RPM	72 Nm @ 5600 RPM	46 Nm @ 5900 RPM	55.5 Nm @ 2600 RPM	72 Nm @ 5600 RPM
74 Kph	56 Kph	96 Kph	80 Kph	56 Kph	80 Kph
Automatic PVT H/L/N/R; Shaft	Automatic PVT H/L/N/R; Shaft	Automatic PVT P/R/N/L/H; Shaft	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R; Shaft	Automatic PVT H/L/N/R/P; Shaft
On-Demand True 6WD/Rear 4WD/Mid Differential Lock	"On-Demand True AWD/2WD/VersaTrac Turf Mode"	On-Demand True AWD/2WD/VersaTrac Turf Mode	"On-Demand True AWD/2WD/VersaTrac Turf Mode"	"On-Demand True AWD/2WD/VersaTrac Turf Mode"	"On-Demand True AWD/2WD/VersaTrac Turf Mode"
"Dual A-Arm 9.6"" (24.4 cm) Travel"	"Dual A-Arm 9.6"" (24.4 cm) Travel"	Dual A-Arm 10.0 in (25.4 cm) Travel	"MacPherson Strut 8 in. (20.3 cm) Travel"	"Dual A-Arm 9.6"" (24.4 cm) Travel"	"Dual A-Arm 10.0 in. (25.4 cm) Travel"
"Dual A-Arm, IRS 9"" (22.9 cm) Travel"	"Dual A-Arm, IRS 9"" (22.9 cm) Travel"	Dual A-Arm, IRS 10.0 in. (25.4 cm) Travel	"Dual A-Arm, IRS 9 in. (22.9 cm) Travel"	"Dual A-Arm, IRS 9"" (22.9 cm) Travel"	"Dual A-Arm, IRS 10.0 in. (25.4 cm) Travel"
4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers
Hand-Actuated	Hand-Actuated	Park in Transmission	Park In-Transmission	Hand-Actuated	Park In-Transmission
25 x 10-12; 489	25 x 10-12; 489	26 x 9-12; PXT	25 x 10-12; 489	26 x 9-12; PXT	26 x 9-12; PXT
25 x 11-12; 489	25 x 11-12; 489	26 x 11-12; PXT	25 x 10-12; 489	26 x 11-12; PXT	26 x 11-12; PXT
Stamped Steel	Stamped Steel	Aluminum	Stamped Steel	Stamped Steel	Stamped Steel
105" (266.7 cm)	76" (193 cm)	81 in (193 cm)	105 in. (266.7 cm)	108" (274.3 cm)	113 in. (287 cm)
1,551 lb (704 kg)	1,435 lb (652 kg)	1,376 (625 kg) EPS/1,360 (618 kg)	1274 lb (578 kg)	1,660 lb (755 kg)	1,571 lb (713kg)
137 x 60 x 76"" (348 x 152 x 193 cm)	"114 x 60 x 76"" (290 x 152 x 193 cm)"	116.5 x 60 x 76 in (296 x 152 x 193 cm)	140 x 60.0 x 73 in. (356 x 152 x 185 cm)	145 x 60 x 76"" (368 x 152 x 193 cm)	148.5 x 61 x 76 in. (377 x 155 x 193 cm)
12" (30.5 cm)	12" (30.5 cm)	12"	10" (25.4 cm)	11.3 in. (28.7 cm)	11.3 in. (28.7 cm)
9 gal (34.1 L)	9 gal (34.1 L)	10 gal (37.9 L)	9 gal (34.1 L)	9 gal (34.1 L)	10 gal (37.9 L)
"42.5 x 54 x 11.5"" (108 x 137 x 29 cm)"	"36.5 x 54 x 11.5"" (93 x 137 x 29 cm)"	36.5 x 54 x 11.5 in (93 x 137 x 29 cm)	"32 x 42 x 11.5"" (81 x 107 x 29 cm)"	"36.5 x 54 x 11.5"" (93 x 137 x 29 cm)"	"36.5 x 54 x 11.5"" (93 x 137 x 29 cm)"
N.A./1,250 lb (567 kg)	N.A./1,000 lb (453.6 kg)	NA/1,000 lbs (453.6 kg)	N.A./500 lb (226.8 kg)	N.A./1,000 lb (453.6 kg)	N.A./1,000 lb (453.6 kg)
2,000 lb (907.2 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,250 lb (567 kg)	1,750 lb (793.8 kg)	1,750 lb (793.8 kg)
2,000 lb (907.2 kg)	2,000 lb (907.2 kg)	2,000 lb (907.2 kg)	1,250 lb (567 kg)	2,000 lb (907.2 kg)	2,000 lb (907.2 kg)
Not Equipped	Not Equipped	EPS Standard	Not Equipped	Not Equipped	Not Equipped
Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Hour Meter, Clock, Gear Indicator, Fuel Gauge, Hi-Temp/Low-Batt Lights, DC Outlets (2)	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, DC Outlets (2)	Digital Gauge, Analog Speedometer, Odometer, Tachometer, Tripmeter, Gear Indicator, Fuel Gauge, AWD Indicator, Hi-Temp/Low-Batt Lights, DC Outletsn (2)	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, DC Outlets (1)	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Hour Meter, Gear Indicator, Fuel Gauge, Hi-Temp, DC Outlets (3)	Digital Gauge, Speedometer, Odometer, Tachometer, Tripmeter, Hour Meter, Clock, Gear Indicator, Fuel Gauge, Hi-Temp/Low-Batt Lights, DC Outlets (2)



**POLARIS** HARDEST WORKING. SMOOTHEST RIDING.®

**2014 | RZR | RANGER**

