


ML0304 User Manual

HOW TO USE THE LASER PRESENTER

1. Insert the receiver into the USB port of PC.
2. Your PC operation system will start to install the device automatically . And you can see the information as below display in your computer.
3. In Win98/Me operation system you need to follow the instructions on your screen .During the install process, the O/S may ask you to put Win98 CD into the CD-ROM.
4. After the installation process is done, the presenter will start working .

Better than other competition:

1. NO direction and NO level speed precise control.
2. RF (315 or 433 or 900MHZ), Any angle , reachable distance up to 7 Meters.
3. 256 ID sets and RF-technique to Anti-interference .
4. No matter what PC Off or Battery Out , The ID will not be loss.
5. Add Page-Up Page-Down Key .

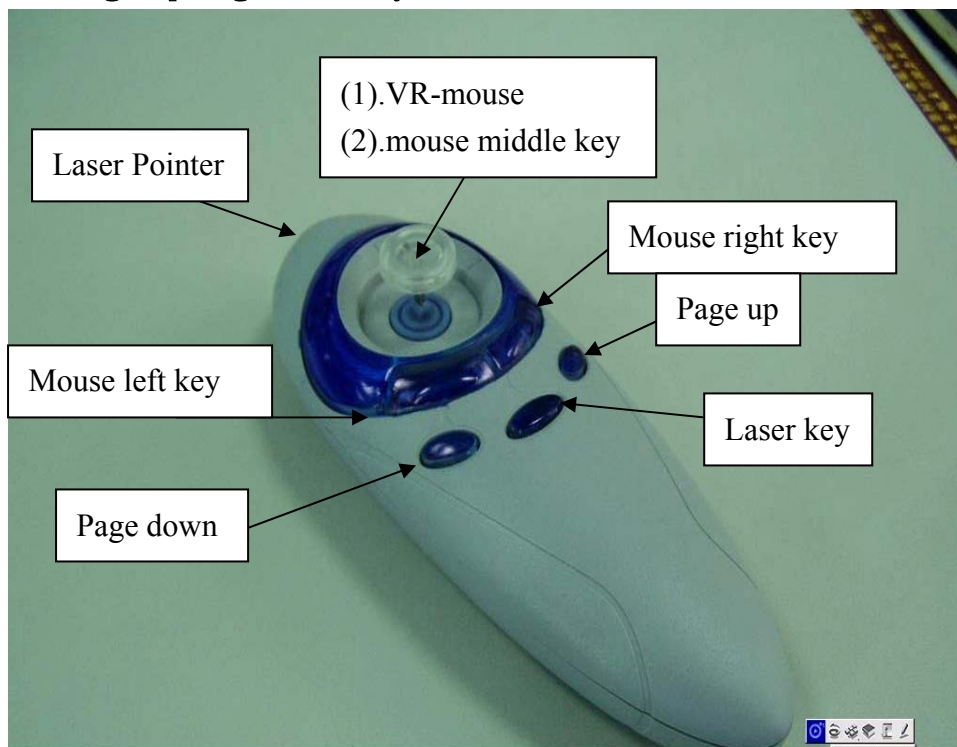

Notice : For trouble shooting

If the presenter is not working :

1. Maybe the battery power is too low , please check your battery .
2. Maybe ID code was not matched , please link ID.
(1). push the button on receiver side then press “left button” + “right button” within 10 SEC after the receiver ID button was pressed on the transmitter side.

CAUTION

LASER RADIATION. DO NOT STARE INTO THE BEAM OR VIEW DIRECTLY WITH OPTICAL INSTRUMENTS.

CLASS II LASER PRODUCT.

NEVER POINT A LASER BEAM INTO A PERSON'S EYES OR VIEW A LASER BEAM DIRECTLY, AS PROLONGED EXPOSURE CAN BE HAZARDOUS TO THE EYES. MOMENTARY EXPOSURE FROM A LASER POINTER, SUCH AS AN INADVERTENT SWEEP OF THE LIGHT ACROSS A PERSON'S EYES, MAY CAUSE TEMPORARY FLASH BLINDNESS SIMILAR TO THE EFFECT OF A CAMERA FLASH BULB. ALTHOUGH THIS CONDITION IS TEMPORARY, IT CAN BECOME MORE DANGEROUS IF THE EXPOSED PERSON IS ENGAGED IN A VISION-CRITICAL ACTIVITY SUCH AS DRIVING.

Specifications

Electrical/Presenter

Interface USB

Buttons Mouse (3), Laser (1), Function (1)

Channel Number One

ID Number 256

Battery life Up to 60 days

Input power Two AAA batteries (3 Volt, DC)

Transmission Radio Frequency

Modulation frequency 433 MHz (Europe/Australia) 900 MHz (North America)

Effective distance Up to 23.1 feet (7 m)

Power consumption Mouse – 10 mA, Laser – 18 mA

Standby Mode 0.6 mA (60 mins)

Sleep Mode 10 uA

Compatibility Fully Compatible with PC/AT

Compatibility software Windows® 98/Me/2000/XP operating system

Laser wavelength at

peak emission 645-665 nm

Laser Spot size at

16.5 feet (5 m)

Laser Cw output power 3.5 mW (maximum)

Weight (without battery) 2.1 ounces (60 g)

Dimensions (L x W x H) 5.1 inch x 1.9 inch x 1.3 inch (130 x 47 x 32 mm)

Receiver

Interface USB

Power DC 5V, 500mA Max

Button ID Setting

Weight 0.42 ounces (12 g)

Dimension (L x W x H) 3.15 inch x 0.86 inch x 0.47 inch (80 x 22 x 12 mm)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment.