


TELESIN


智能跟拍云台




使用指南

简介

智能跟拍云台是一款具有人形跟随功能的云台，通过内置的摄像头模组结合AI芯片人形识别算法使云台正面始终指向人形目标。除自动跟随功能外，使用遥控器可以实现手动控制云台自由旋转。云台通过转接手机支架、三脚架等赋予手机、微单、运动相机等摄影设备跟拍功能。可用于手机视频聊天、手机直播以及微单和运动相机跟拍。

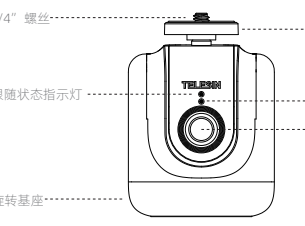

1/4" 螺丝..... 旋转锁定平台
跟随状态指示灯..... 电源指示灯
跟随底座..... 摄像头模组

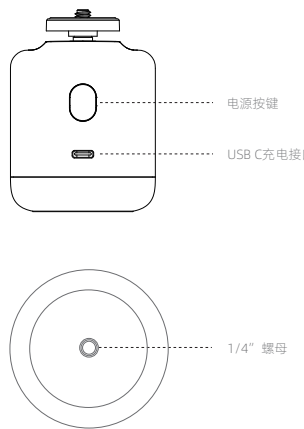


电源按键
USB C充电接口
1/4" 螺母

部件	功能
电源按键	关机状态下，短按按键开机；开机状态下，短按按键开启关闭跟随模式；开机状态下，长按3s关机。
旋转锁定平台	通过旋转固定连接的支架。
1/4" 螺丝	转接手机、相机设备。
1/4" 螺母	转接三脚架。
USB C充电接口	用于云台充电或作为网络摄像头的输出接口。

电源指示灯	状态
充电中	蓝灯慢闪
满电或关机状态	蓝灯熄灭
低电时	蓝灯快闪
开机状态	蓝灯常亮

跟随状态指示灯	状态
跟随开启时	白灯常亮
跟随关闭时	白灯熄灭

遥控器

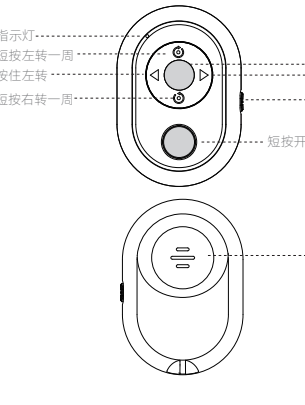


指示灯..... 短按左转一直..... 短按停止转动
短按左转..... 按住左转..... 短按右转
短按右转一直..... 短按开启关闭跟随功能

短扣电池盖


*使用时请向上拨动遥控器电源开关来启动遥控器。

安装


1.与手机配合使用方法




2.与运动相机配合使用方法



3.与三脚架配合使用方法



最佳距离



>1m <8m



*暂无多人识别模式，建议单人使用。

使用场景

1.Vlog制作
2.视频聊天：用于社交视频软件。实现QQ、微信、钉钉等视频聊天时人脸跟随。
3.直播：可用于抖音、快手、YY、淘宝等直播平台。
4.全景照片：可实现全景照片拍摄以及视频跟随录制。
5.网络摄像头：连接电脑可实现网络摄像头的功能。


产品参数

品 牌	TELESIN
产品名称	智能跟拍云台
产品型号	TE-GPYT-001
电池容量	聚合物锂电池3.7V1500mAh
输入参数	USB C 5V 800mA
最大承重	500g
充电时间	2小时
续航时间	5小时
产品净重	193g
产品尺寸	62mm*60mm*86mm
无线连接	2.4GHz
遥控距离	0~10m
旋转角度	360°
工作环境温度	5 - 40 °C

RoHS CE FC   www.telesin.cn

TELESIN


Smart Tracking Pan Tilt




User Guide

INTRODUCTION

Smart Tracking Pan Tilt is a Pan Tilt with tracking function. The built-in camera module combined with AI chip humanoid recognition algorithm makes the front of the Pan Tilt always point at the humanoid target. Besides that, you can also use the remote control to control it.
The Pan Tilt can be connected to mobile phone bracket, tripod, etc. to make the mobile phone, action camera and other photographic equipped with tracking function. It can be used for video chatting, mobile phone live broadcast, and microphones and action cameras.

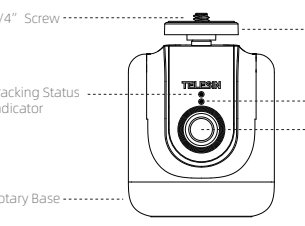

1/4" Screw.....Rotary Locking Platform
Tracking Status Indicator.....Power Indicator
Rotary Base.....Camera Module

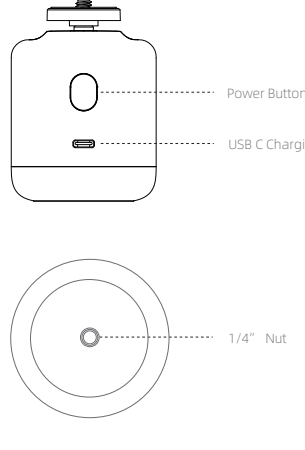


Power Button
USB C Charging Port
1/4" Nut

Component	Function
Power button	In power off status, short press to turn on Pan Tilt. In power on status, short press to turn on/off tracking function, long press to turn off Pan Tilt.
Rotary Locking Platform	Rotating fixed connection bracket.
1/4" screw	Adapter for mobile phone, camera device.
1/4" nut	Adapter for tripod.
USB C charging port	Used to charge pan tilt or as an interface of webcam.

Power indicator	Status
Charging	Blue light flashes slowly.
Full power or power off	Blue light is off.
Low battery	Blue light flashes fastly.
Power on	Blue light is on.

Tracking status indicator	Status
Tracking Function is on	White light is on.
Tracking Function is off	White light is off.

REMOTE CONTROLS

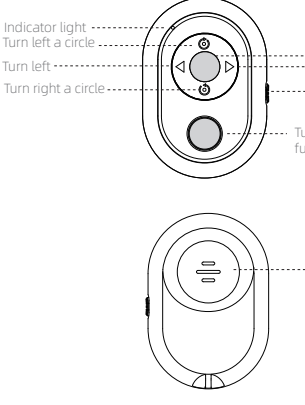


Indicator light..... 短按左转一直..... 短按停止转动
Turn left a circle..... 按住左转..... 短按右转
Turn right a circle..... 短按开启关闭跟踪功能

Button cell cover


*Toggle the power switch up to turn on the remote control when in use.

INSTALLATION


1.How to use with mobile phone

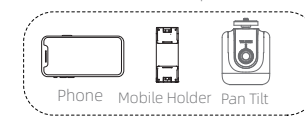


2.How to use with action camera

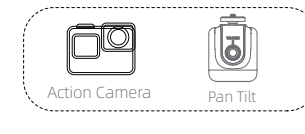

3.How to use with a tripod

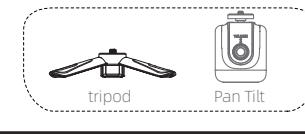

OPTIMAL DISTANCE





>1m <8m

USAGE SCENARIOS

1.Vlog Production
2.Video Chat: Used for social video software. Realize QQ, WeChat, DING talk and other video chatting face following.
3.Live Broadcast: It can be used in Tiktok, Kuaishou, YY, Taobao and other live broadcast platform.
4.Panoramic Photo: Realize panoramic photo shooting and video following recording.
5.Webcam: Connecting a computer allows for webcam functionality

PRODUCT PARAMETERS

Brand	TELESIN
Product Name	Smart Tracking Pan Tilt
Model Number	TE-GPYT-001
Battery Capacity	Li-ion Battery 3.7V 1500mAh
Input Parameter	USB C 5V 800mA
Maximum Load	500g
Charging Time	2h
Endurance Time	5h
Product Net Weight	193g
Product Size	62mm*60mm*86mm
Wireless Connection	2.4GHz
Remote Control Distance	0~10m
Rotation Angle	360°
Operating Temperature	5 - 40 °C

RoHS CE FC   www.telesin.cn

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- ▶ -Reorient or relocate the receiving antenna.
- ▶ -Increase the separation between the equipment and receiver.
- ▶ -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ▶ -Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.