




## RF12™ – Roofing Protection Mat

Carthage Mills' RF12™ Roofing Fabric is a nonwoven fabric used in the construction of ballasted roofs, and is made from 100% polypropylene staple fibers which are formed into a random network, needle-punched, and heatset for dimensional stability. RF12™ Roofing Fabric is inert to biological degradation, resistant to UV degradation, and resistant to naturally encountered chemicals, alkalis, and acids.

**Features and Benefits:** Carthage Mills Series of RF™ Roofing Fabrics provide added protection against membrane punctures, can be used in applications above or below the roofing membrane, and are UV resistant.

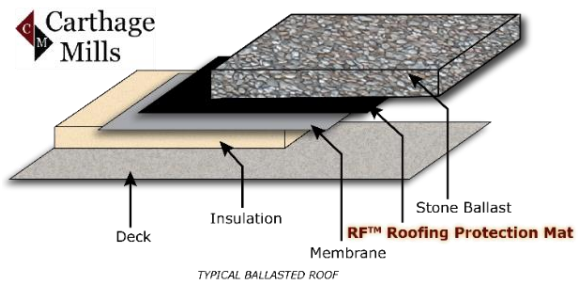

PROPERTY	TEST METHOD	DATA	
		METRIC	ENGLISH
<input type="checkbox"/> <b>Mechanical</b>			
Grab Tensile Strength	ASTM D 4632	1.34 kN	300 lbs
Grab Tensile Elongation		50%	
Trapezoidal Tear	ASTM D 4533	0.51 kN	115 lbs
CBR Puncture	ASTM D 6241	3.56 kN	800 lbs
<input type="checkbox"/> <b>Endurance</b>			
UV Resistance	ASTM D 4355	70% @ 500 hrs	
<input type="checkbox"/> <b>Hydraulics / Filtration</b>			
Permittivity <sup>(1)</sup>	ASTM D 4491	0.80 sec <sup>-1</sup>	
Water Flow Rate <sup>(1)</sup>		2648 lpm/m <sup>2</sup>	65 gpm/ft <sup>2</sup>
Apparent Opening Size (AOS) <sup>(1)</sup>	ASTM D 4751	0.150 mm	100 US Std. Sieve
<input type="checkbox"/> <b>Physical</b>			
Mass Per Unit Area (Typical)	ASTM D 5261	406.8 g/m <sup>2</sup>	12.0 oz/yd <sup>2</sup>
Thickness (Typical)	ASTM D 5199	3.04 mm	120 mils
Standard Roll Sizes / Packaging / Weight	Measured (Typical)	3.81 m x 109.7 m 418 m <sup>2</sup> 174 kg	12.5 ft x 360 ft 500 yd <sup>2</sup> 383 lbs
		4.57 m x 91.5 m 418 m <sup>2</sup> 174 kg	15.0 ft x 300 ft 500 yd <sup>2</sup> 383 lbs

NOTES: Mullen Burst Strength ASTM D 3786 is no longer recognized by ASTM D35 on Geosynthetics. Puncture Strength ASTM D 4833 is not recognized by AASHTO M 288-15 and has been replaced with CBR Puncture ASTM D 6241.

- <sup>(1)</sup> At the time of manufacturing. Handling, storage and shipping may change these properties.
- Unless otherwise stated, all values stated here are Minimum Average Roll Values (MARV).
  - The properties reported above are effective 01-01-18 and are subject to change without notice.

Carthage Mills assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. Carthage Mills disclaims any and all express, implied, or statutory standards, warranties or guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.