

GE Profile™ Reverse Osmosis Filtration System



Model# PNRQ15FBL



- - Premium filtration process
- - Twist and Lock design
- - Filter reminder light
- - Extra-large 11-gallon capacity per day
- - Designer-style high-arc faucet
- - 4-gallon storage tank
- - Quick Connect fittings

FEATURES

Faucet	GE Profile™ Designer High Arc
Faucet Monitor	Electronic Timer
Max. Filtered Water Flow (gpm)	0.75
Max. Hardness	10 Grains
Max. TDS Removal (ppm)	2000
Style	Twist and Lock
Automatic Shut-Off	Yes
Filter	FQROPF
Filter Cartridge	Carbon Block
Filter Change Indicator	LED
Filter Life	6 Months
LED Indicators	Yes
Particulate Reduction	Nominal 0.5 Micron
Percent TDS Removal (ppm)	75-92
Process Water Used (per gal.)	4
RO & Filters - RO Membrane	FQROMF
Ammonium Reduction (Percent)	90%
Arsenic Reduction (Percent)	99%
Chlorine Taste and Odor Reduction (Percent)	97%
Chromium III Reduction (Percent)	99%
Chromium VI Reduction (Percent)	99%
Copper Reduction (Percent)	95%
Cysts Reduction (Percent)	99.99%
Lead Reduction (Percent)	98%
Sodium Reduction (Percent)	86%
Sulfate Reduction (Percent)	93%
TDS Reduction (Percent)	75-92%
Turbidity Reduction (Percent)	99%
Zinc Reduction (Percent)	95%
Feed Water pH Limits	4-10
Feed Water Pressure (psi)	40 Min - 125 Max.
Feed Water Temperature	40-100 F
Fittings	1/4" - Push to Connect
Plumbing Connections	1/4" Inlet - 3/8" Outlet
Water Inlet Valve	1/2" & 3/8" NPT ball valve adaptor

Have more questions? Please contact 1-800-626-2005

GE Profile™ Reverse Osmosis Filtration System



Model# PNRQ15FBL

APPROXIMATE DIMENSIONS (HxDxW)

- 12 in x 4 1/2 in x 11 in

CAPACITY

- Filtered Water Output 11 gal/day
- Storage Tank Capacity (gals.) 4
- Unit Capacity 900 Gallons

WARRANTY

- Parts Warranty - Limited 30-day water filter cartridge
- Warranty Notes - For models produced on or after January 1, 2006
See written warranty for full details


Have more questions? Please contact 1-800-626-2005



Profile™

PNRQ15F – GE Profile™ Reverse Osmosis Filtration System

Dimensions (in inches)

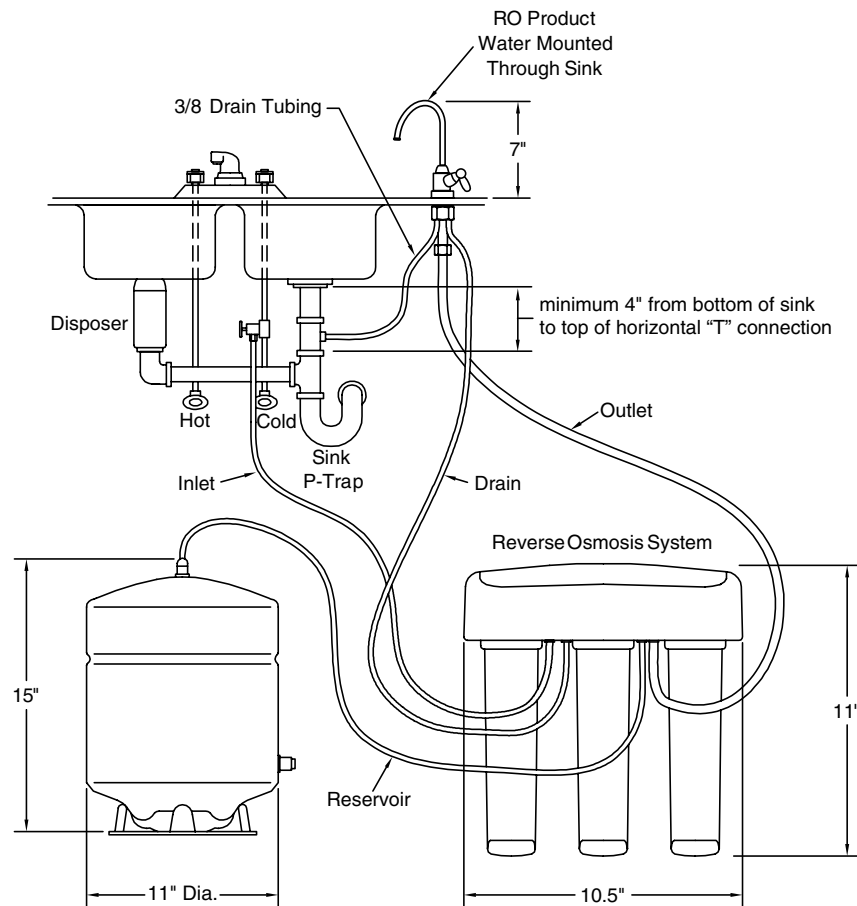

Installation and Parts Information

Note: R.O. System can be installed up to 30 feet from point-of-use/faucet.

Note: Can be installed under counter (as shown), in basement, or other convenient location. Before installing, see installation instructions packed with product for complete details.

Replacement Membranes, Pre- and Post-Filters

Call SmartWater Services, toll-free, 800.952.5039 for convenient ordering.



GE Reverse Osmosis Models PNRQ15F Series are tested and certified to ANSI/NSF Standard 58 for TDS and cyst reduction. See Performance Data Sheet for details.

Caution: Do not use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts. This reverse osmosis unit contains a replaceable membrane cartridge treatment component critical for effective removal of Total Dissolved Solids. The water should be tested periodically to verify that the system is performing satisfactorily.

Independently Tested


The GXRM10G has been independently tested by NSF and WQA, two of the most highly recognized testing institutions in the water treatment industry. The PNRQ20F and PNRQ15F have been independently tested by NSF. Product performance testing details by each test facility are specified on the Performance Data Sheet (inside the product box).

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



Profile™

PNRQ15F – GE Profile™ Reverse Osmosis Filtration System

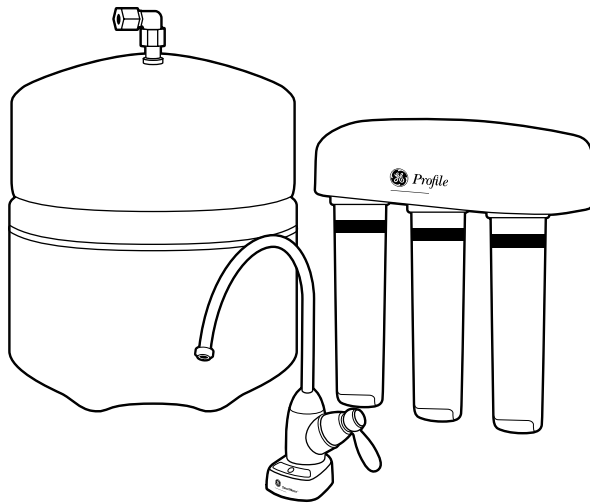

Features and Benefits

- Premium filtration process
- Twist and Lock design
- Filter reminder light
- Extra-large 15-gallon capacity
- Designer-style high-arc chrome faucet
- 2.75-gallon storage tank
- Quick Connect fittings
- Model PNRQ15FBL