



# Electrolux

## Digital Cabinets Roll-In air-o-system SMART Cabinet-930 lt 1 Door

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

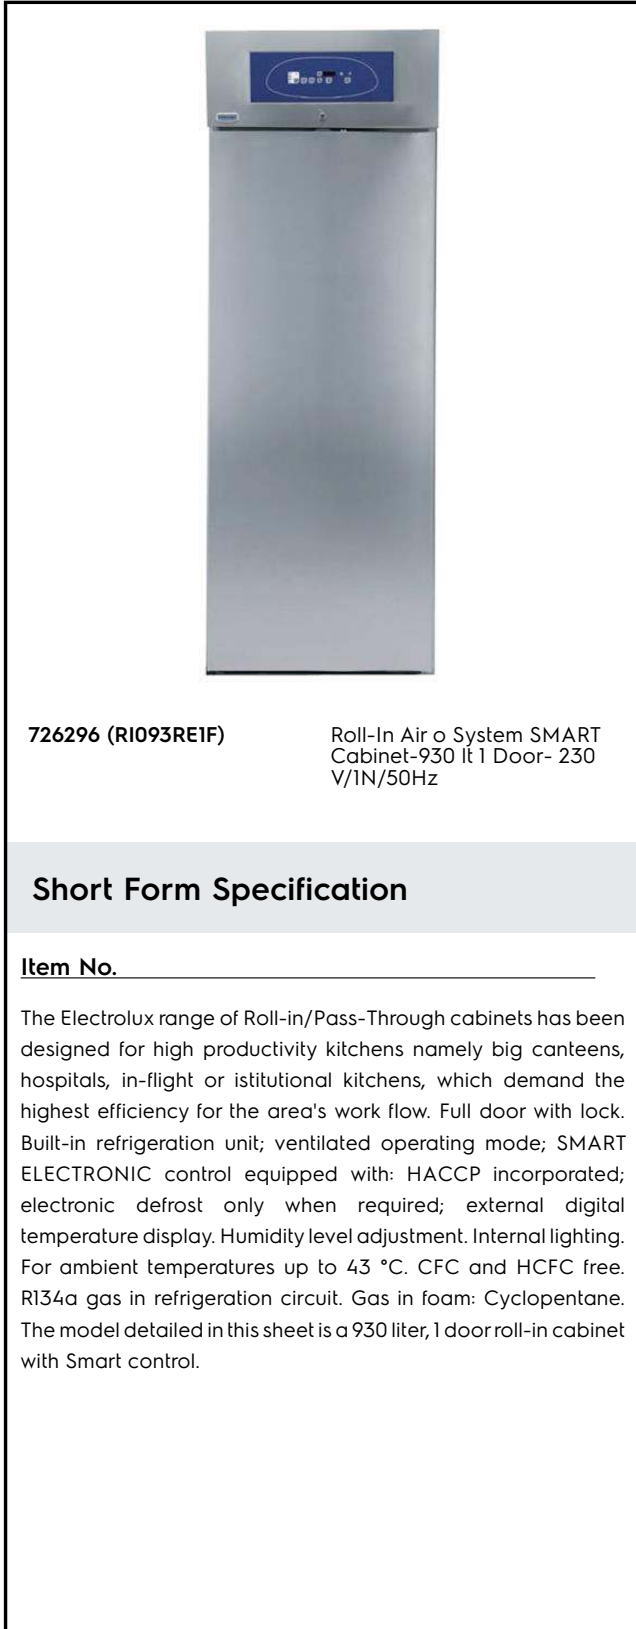
SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux

Roll-In air-o-system SMART Cabinet-930 lt 1 Door  
Digital Cabinets



726296 (R1093RE1F)

Roll-In Air o System SMART  
Cabinet-930 lt 1 Door- 230  
V/1N/50Hz

### Short Form Specification

**Item No.** \_\_\_\_\_

The Electrolux range of Roll-in/Pass-Through cabinets has been designed for high productivity kitchens namely big canteens, hospitals, in-flight or institutional kitchens, which demand the highest efficiency for the area's work flow. Full door with lock. Built-in refrigeration unit; ventilated operating mode; SMART ELECTRONIC control equipped with: HACCP incorporated; electronic defrost only when required; external digital temperature display. Humidity level adjustment. Internal lighting. For ambient temperatures up to 43 °C. CFC and HCFC free. R134a gas in refrigeration circuit. Gas in foam: Cyclopentane. The model detailed in this sheet is a 930 liter, 1 door roll-in cabinet with Smart control.

### Main Features

- Ventilated cooling for optimal temperature distribution.
- Digital control panel with temperature display.
- Interior light and lockable door.
- Advanced electronic control features:
  - HACCP: when temperature exceeds critical limits, acoustic and visual alarms are activated. All events are recorded, displaying date and time
  - IQ4 defrost: the defrost cycle is activated only when ice in the evaporator is detected by a dedicated probe
  - Intelligence when failure: when a probe breaks, the performances of the last 24h of operation are recorded and continues to work
  - Food categories: depending on the type of food stored, the appropriate temperature and humidity level can be set by just pushing a button
- Automatic defrost.
- The operating temperature can be adjusted from 0 to +10 °C to suit both meat and dairy storage requirements.

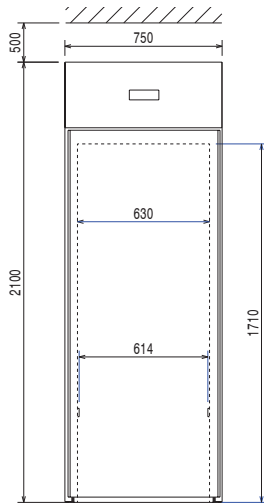
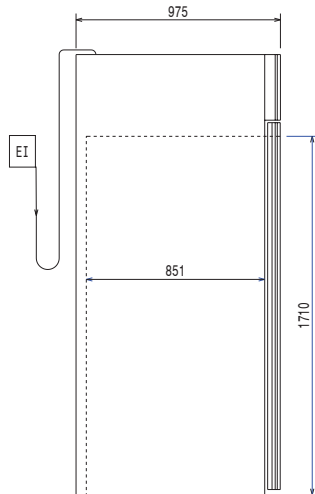
### Construction

- The whole interior cell is constructed of AISI 304 stainless steel with rounded corners for a better cleanability.
- External panels are in AISI 304 stainless steel for higher level of hygiene.
- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Evaporator cover is easily removable for service.
- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m<sup>2</sup>K). CFC and HCFC-free insulation.
- Refrigerant type: R134a.

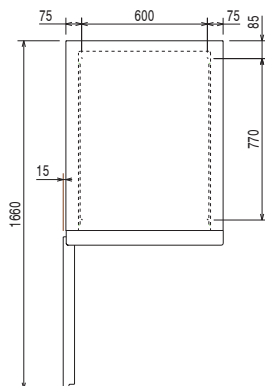
### Optional Accessories

- Kit for HACCP advanced version (for cabinets and counters with electronic control) PNC 880090
- Trolley with tray rack for 20x1/1GN ovens and bcf, 63mm pitch (std) PNC 922007
- Pastry trolley, for 16 and 20x1/1GN ovens and bcf, 80mm pitch (16 runners). Suitable for 600x400mm pastry trays in oven PNC 922068

APPROVAL: \_\_\_\_\_

**Front**

**Side**


**EI** = Electrical inlet (power)  
**RI** = Refrigerant Inlet  
**RO** = Refrigerant Outlet

**Top**


#### Electric

Supply voltage: 230 V/1 ph/50 Hz

#### Key Information:

Door hinges: Left  
 Built-in Compressor and Refrigeration Unit  
 External dimensions, Width: 750 mm  
 External dimensions, Height: 2110 mm  
 Number and type of doors: 1 Full  
 Type of external material: 304 AISI  
 Type of internal material: 304 AISI

#### Refrigeration Data

Compressor power: 3/8 hp  
 Refrigerant type: R134a  
 Refrigeration power: 456 W  
 Refrigerant weight: 260 g  
 Operating temperature min.: 0 °C  
 Operating temperature max.: 10 °C