UM1786
User Manual

Description of STM32F3 HAL and low-layer drivers

Introduction

STMCube™ is an STMicroelectronics original initiative to make developers' lives easier by reducing development effort, time and cost. STM32Cube covers the whole STM32 portfolio.

STM32Cube Version 1.x includes:

- STM32CubeMX, a graphical software configuration tool that allows the generation of C initialization code using graphical wizards.
- A comprehensive embedded software platform, delivered per Series (such as STM32CubeF3 for STM32F3 Series).
  - The STM32Cube HAL, STM32 abstraction layer embedded software ensuring maximized portability across the STM32 portfolio
  - Low-layer APIs (LL) offering a fast light-weight expert-oriented layer which is closer to the hardware than the HAL. LL APIs are available only for a set of peripherals.
  - A consistent set of middleware components such as RTOS, USB, TCP/IP, Graphics
  - All embedded software utilities, delivered with a full set of examples.

The HAL driver layer provides a generic multiinstance simple set of APIs (application programming interfaces) to interact with the upper layer (application, libraries and stacks).

The HAL driver APIs are split into two categories: generic APIs which provide common and generic functions for all the STM32 series, and extension APIs which include specific and customized functions for a given line or part number. The HAL drivers include a complete set of ready-to-use APIs which simplify the user application implementation. As an example, the communication peripherals contain APIs to initialize and configure the peripheral, manage data transfers in polling mode, handle interrupts or DMA, and manage communication errors.

The HAL drivers are feature-oriented instead of IP-oriented. As an example, the timer APIs are split into several categories following the functions offered by the IP such as basic timer, capture, or pulse width modulation (PWM). The HAL driver layer implements run-time failure detection by checking the input values of all functions. Such dynamic checking contributes to enhance the firmware robustness. Run-time detection is also suitable for user application development and debugging.

The LL drivers offer hardware services based on the available features of the STM32 peripherals. These services reflect exactly the hardware capabilities and provide atomic operations that must be called following the programming model described in the product line reference manual. As a result, the LL services are not based on standalone processes and do not require any additional memory resources to save their states, counter or data pointers: all operations are performed by changing the associated peripheral registers content. Contrary to the HAL, the LL APIs are not provided for peripherals for which optimized access is not a key feature, or for those requiring heavy software configuration and/or complex upper level stack (such as FSMC or USB).

The HAL and LL drivers are complementary and cover a wide range of applications requirements:

- The HAL offers high-level and feature-oriented APIs, with a high-portability level. They hide the MCU and peripheral complexity to end-user.
- The LL offers low-level APIs at registers level, with better optimization but less portability. They require deep knowledge of the MCU and peripherals specifications.

HAL and LL source code is developed in Strict ANSI-C which makes it independent from the development tools. It is checked with CodeSonar™ static analysis tool. It is fully documented and is MISRA-C 2004 compliant.



Contents

1 Acronyms and definitions 28
2 Overview of HAL drivers 30
2.1 HAL and user-application files 30
2.1.1 HAL driver files 30
2.1.2 User-application files 31
2.2 HAL data structures 33
2.2.1 Peripheral handle structures 33
2.2.2 Initialization and configuration structure 34
2.2.3 Specific process structures 34
2.3 API classification 34
2.4 Devices supported by HAL drivers 35
2.5 HAL driver rules 39
2.5.1 HAL API naming rules 39
2.5.2 HAL general naming rules 40
2.5.3 HAL interrupt handler and callback functions 41
2.6 HAL generic APIs 42
2.7 HAL extension APIs 43
2.7.1 HAL extension model overview 43
2.7.2 HAL extension model cases 44
2.8 File inclusion model 46
2.9 HAL common resources 46
2.10 HAL configuration 47
2.11 HAL system peripheral handling 48
2.11.1 Clock 48
2.11.2 GPIOs 49
2.11.3 Cortex NVIC and SysTick timer 50
2.11.4 PWR 51
2.11.5 EXTI 51
2.11.6 DMA 52
2.12 How to use HAL drivers 54
2.12.1 HAL usage models 54
2.12.2 HAL initialization 55
2.12.3 HAL IO operation process 57
2.12.4 Timeout and error management 60
3 Overview of low-layer drivers 64

3.1 Low-layer files 64
3.2 Overview of low-layer APIs and naming rules 66
3.2.1 Peripheral initialization functions 66
3.2.2 Peripheral register-level configuration functions 69
4 Cohabiting of HAL and LL 71
4.1 Low-layer driver used in standalone mode 71
4.2 Mixed use of low-layer APIs and HAL drivers 71
5 HAL System Driver 72
5.1 HAL Firmware driver API description 72
5.1.1 How to use this driver 72
5.1.2 Initialization and de-initialization functions 72
5.1.3 HAL Control functions 72
5.1.4 Detailed description of functions 73
5.2 HAL Firmware driver defines 77
5.2.1 HAL 77
6 HAL ADC Generic Driver 80
6.1 ADC Firmware driver registers structures 80
6.1.1 __ADC_HandleTypeDef 80
6.2 ADC Firmware driver API description 80
6.2.1 ADC peripheral features 80
6.2.2 How to use this driver 81
6.2.3 Initialization and de-initialization functions 85
6.2.4 IO operation functions 85
6.2.5 Peripheral Control functions 86
6.2.6 Peripheral state and errors functions 86
6.2.7 Detailed description of functions 86
6.3 ADC Firmware driver defines 92
6.3.1 ADC 92
7 HAL ADC Extension Driver 95
7.1 ADCEx Firmware driver registers structures 95
7.1.1 ADC_InitTypeDef 95
7.1.2 ADC_ChannelConfTypeDef 97
7.1.3 ADC_InjectionConfTypeDef 98
7.1.4 ADC_InjectionConfigTypeDef 100
7.1.5 ADC_AnalogWDGConfTypeDef 101
7.1.6 ADC_MultiModeTypeDef 101

7.2 ADCEx Firmware driver API description 102
7.2.1 Initialization and de-initialization functions 102
7.2.2 IO operation functions 102
7.2.3 Peripheral Control functions 103
7.2.4 Detailed description of functions 104
7.3 ADCEx Firmware driver defines 110
7.3.1 ADCEx 110
8 HAL CAN Generic Driver 124
8.1 CAN Firmware driver registers structures 124
8.1.1 CAN_InitTypeDef 124
8.1.2 CAN_FilterConfTypeDef 125
8.1.3 CanTxMsgTypeDef 126
8.1.4 CanRxMsgTypeDef 126
8.1.5 CAN_HandleTypeDef 127
8.2 CAN Firmware driver API description 127
8.2.1 How to use this driver 127
8.2.2 Initialization and de-initialization functions 128
8.2.3 Peripheral State and Error functions 129
8.2.4 Detailed description of functions 129
8.3 CAN Firmware driver defines 132
8.3.1 CAN 132
9 HAL CEC Generic Driver 140
9.1 CEC Firmware driver registers structures 140
9.1.1 CEC_InitTypeDef 140
9.1.2 CEC_HandleTypeDef 141
9.2 CEC Firmware driver API description 142
9.2.1 How to use this driver 142
9.2.2 Initialization and Configuration functions 142
9.2.3 IO operation functions 142
9.2.4 Peripheral Control function 143
9.2.5 Detailed description of functions 143
9.3 CEC Firmware driver defines 146
9.3.1 CEC 146
10 HAL COMP Generic Driver 155
10.1 COMP Firmware driver registers structures 155
10.1.1 COMP_InitTypeDef 155
10.1.2 COMP_HandleTypeDef 156

10.2 COMP Firmware driver API description 156
10.2.1 COMP Peripheral features 156
10.2.2 How to use this driver 156
10.2.3 Initialization and de-initialization functions 157
10.2.4 Start Stop operation functions 157
10.2.5 Peripheral Control functions 158
10.2.6 Peripheral State functions 158
10.2.7 Detailed description of functions 158
10.3 COMP Firmware driver defines 161
10.3.1 COMP 161
11 HAL COMP Extension Driver 163
11.1 COMPEx Firmware driver defines 163
11.1.1 COMPEx 163
12 HAL CORTEX Generic Driver 181
12.1 CORTEX Firmware driver registers structures 181
12.1.1 MPU_Region_InitTypeDef 181
12.2 CORTEX Firmware driver API description 182
12.2.1 How to use this driver 182
12.2.2 Initialization and de-initialization functions 182
12.2.3 Peripheral Control functions 183
12.2.4 Detailed description of functions 183
12.3 CORTEX Firmware driver defines 188
12.3.1 CORTEX 188
13 HAL CRC Generic Driver 191
13.1 CRC Firmware driver registers structures 191
13.1.1 CRC_InitTypeDef 191
13.1.2 CRC_HandleTypeDef 192
13.2 CRC Firmware driver API description 192
13.2.1 How to use this driver 192
13.2.2 Initialization and de-initialization functions 193
13.2.3 Peripheral Control functions 193
13.2.4 Peripheral State functions 193
13.2.5 Detailed description of functions 193
13.3 CRC Firmware driver defines 195
13.3.1 CRC 195
14 HAL CRC Extension Driver 198

14.1 CRCEx Firmware driver API description 198
14.1.1 How to use this driver 198
14.1.2 Detailed description of functions 198
14.2 CRCEx Firmware driver defines 199
14.2.1 CRCEx 199
15 HAL DAC Generic Driver 201
15.1 DAC Firmware driver registers structures 201
15.1.1 DAC_ChannelConfTypeDef 201
15.1.2 __DAC_HandleTypeDef 201
15.2 DAC Firmware driver API description 202
15.2.1 DAC Peripheral features 202
15.2.2 How to use this driver 203
15.2.3 Initialization and de-initialization functions 204
15.2.4 IO operation functions 204
15.2.5 Peripheral Control functions 205
15.2.6 DAC Peripheral State and Error functions 205
15.2.7 Detailed description of functions 205
15.3 DAC Firmware driver defines 210
15.3.1 DAC 210
16 HAL DAC Extension Driver 215
16.1 DACEx Firmware driver API description 215
16.1.1 How to use this driver 215
16.1.2 Peripheral Control functions 215
16.1.3 IO operation functions 215
16.1.4 Detailed description of functions 216
16.2 DACEx Firmware driver defines 219
16.2.1 DACEx 219
17 HAL DMA Generic Driver 220
17.1 DMA Firmware driver registers structures 220
17.1.1 DMA_InitTypeDef 220
17.1.2 __DMA_HandleTypeDef 220
17.2 DMA Firmware driver API description 221
17.2.1 How to use this driver 221
17.2.2 Initialization and de-initialization functions 222
17.2.3 IO operation functions 222
17.2.4 State and Errors functions 223
17.2.5 Detailed description of functions 223

17.3 DMA Firmware driver defines 226
17.3.1 DMA 226
18 HAL DMA Extension Driver 231
18.1 DMAEx Firmware driver defines 231
18.1.1 DMAEx 231
19 HAL FLASH Generic Driver 233
19.1 FLASH Firmware driver registers structures 233
19.1.1 FLASH_ProcessTypeDef 233
19.2 FLASH Firmware driver API description 233
19.2.1 FLASH peripheral features 233
19.2.2 How to use this driver 234
19.2.3 Peripheral Control functions 234
19.2.4 Peripheral Errors functions 234
19.2.5 Detailed description of functions 235
19.3 FLASH Firmware driver defines 237
19.3.1 FLASH 237
20 HAL FLASH Extension Driver 241
20.1 FLASHEx Firmware driver registers structures 241
20.1.1 FLASH_EraseInitTypeDef 241
20.1.2 FLASH_OBProgramInitTypeDef 241
20.2 FLASHEx Firmware driver API description 242
20.2.1 FLASH Erasing Programming functions 242
20.2.2 Option Bytes Programming functions 242
20.2.3 Detailed description of functions 242
20.3 FLASHEx Firmware driver defines 244
20.3.1 FLASHEx 244
21 HAL GPIO Generic Driver 247
21.1 GPIO Firmware driver registers structures 247
21.1.1 GPIO_InitTypeDef 247
21.2 GPIO Firmware driver API description 247
21.2.1 GPIO Peripheral features 247
21.2.2 How to use this driver 248
21.2.3 Initialization and de-initialization functions 248
21.2.4 IO operation functions 248
21.2.5 Detailed description of functions 249
21.3 GPIO Firmware driver defines 251

21.3.1 GPIO ... 251
22 HAL GPIO Extension Driver ... 254
22.1 GPIOEx Firmware driver defines ... 254
22.1.1 GPIOEx ... 254
23 HAL HRTIM Generic Driver ... 257
23.1 HRTIM Firmware driver registers structures ... 257
23.1.1 HRTIM_InitTypeDef ... 257
23.1.2 HRTIM_TimerParamTypeDef ... 257
23.1.3 __HRTIM_HandleTypeDef ... 258
23.1.4 HRTIM_TimeBaseCfgTypeDef ... 259
23.1.5 HRTIM_SimpleOCChannelCfgTypeDef ... 259
23.1.6 HRTIM_SimplePWMChannelCfgTypeDef ... 259
23.1.7 HRTIM_SimpleCaptureChannelCfgTypeDef ... 260
23.1.8 HRTIM_SimpleOnePulseChannelCfgTypeDef ... 260
23.1.9 HRTIM_TimerCfgTypeDef ... 261
23.1.10 HRTIM_CompareCfgTypeDef ... 263
23.1.11 HRTIM_CaptureCfgTypeDef ... 263
23.1.12 HRTIM_OutputCfgTypeDef ... 263
23.1.13 HRTIM_TimerEventFilteringCfgTypeDef ... 264
23.1.14 HRTIM_DeadTimeCfgTypeDef ... 264
23.1.15 HRTIM_ChopperModeCfgTypeDef ... 265
23.1.16 HRTIM_EventCfgTypeDef ... 265
23.1.17 HRTIM_FaultCfgTypeDef ... 266
23.1.18 HRTIM_BurstModeCfgTypeDef ... 266
23.1.19 HRTIM_ADCTriggerCfgTypeDef ... 267
23.2 HRTIM Firmware driver API description ... 267
23.2.1 Simple mode v.s. waveform mode ... 267
23.2.2 How to use this driver ... 268
23.2.3 Initialization and Time Base Configuration functions ... 271
23.2.4 Simple time base mode functions ... 272
23.2.5 Simple output compare functions ... 272
23.2.6 Simple PWM output functions ... 272
23.2.7 Simple input capture functions ... 273
23.2.8 Simple one pulse functions ... 273
23.2.9 HRTIM configuration functions ... 274
23.2.10 HRTIM timer configuration and control functions ... 274
23.2.11 Peripheral State functions ... 275
23.2.12 Detailed description of functions ... 276

23.3 HRTIM Firmware driver defines 321
23.3.1 HRTIM 321
24 HAL I2C Generic Driver 362
24.1 I2C Firmware driver registers structures 362
24.1.1 I2C_InitTypeDef 362
24.1.2 __I2C_HandleTypeDef 362
24.2 I2C Firmware driver API description 363
24.2.1 How to use this driver 363
24.2.2 Initialization and de-initialization functions 368
24.2.3 IO operation functions 368
24.2.4 Peripheral State, Mode and Error functions 370
24.2.5 Detailed description of functions 370
24.3 I2C Firmware driver defines 382
24.3.1 I2C 382
25 HAL I2C Extension Driver 389
25.1 I2CEx Firmware driver API description 389
25.1.1 I2C peripheral Extended features 389
25.1.2 How to use this driver 389
25.1.3 Extended features functions 389
25.1.4 Detailed description of functions 389
25.2 I2CEx Firmware driver defines 391
25.2.1 I2CEx 391
26 HAL I2S Generic Driver 392
26.1 I2S Firmware driver registers structures 392
26.1.1 I2S_InitTypeDef 392
26.1.2 I2S_HandleTypeDef 392
26.2 I2S Firmware driver API description 393
26.2.1 How to use this driver 393
26.2.2 Initialization and de-initialization functions 395
26.2.3 IO operation functions 395
26.2.4 Peripheral State and Errors functions 396
26.2.5 Detailed description of functions 397
26.3 I2S Firmware driver defines 402
26.3.1 I2S 402
27 HAL I2S Extension Driver 407
27.1 I2SEx Firmware driver API description 407

27.1.1 I2S Extended features ... 407
27.1.2 How to use this driver ... 407
27.1.3 Extended features Functions ... 408
27.1.4 Detailed description of functions ... 408
27.2 I2SEx Firmware driver defines ... 411
27.2.1 I2SEx ... 411
28 HAL IRDA Generic Driver ... 413
28.1 IRDA Firmware driver registers structures ... 413
28.1.1 IRDA_InitTypeDef ... 413
28.1.2 IRDA_HandleTypeDef ... 413
28.2 IRDA Firmware driver API description ... 414
28.2.1 How to use this driver ... 414
28.2.2 Initialization and Configuration functions ... 416
28.2.3 IO operation functions ... 416
28.2.4 Peripheral State and Error functions ... 418
28.2.5 Detailed description of functions ... 418
28.3 IRDA Firmware driver defines ... 426
28.3.1 IRDA ... 426
29 HAL IRDA Extension Driver ... 435
29.1 IRDAEx Firmware driver defines ... 435
29.1.1 IRDAEx ... 435
30 HAL IWDG Generic Driver ... 436
30.1 IWDG Firmware driver registers structures ... 436
30.1.1 IWDG_InitTypeDef ... 436
30.1.2 IWDG_HandleTypeDef ... 436
30.2 IWDG Firmware driver API description ... 436
30.2.1 IWDG Generic features ... 436
30.2.2 How to use this driver ... 437
30.2.3 Initialization and Start functions ... 437
30.2.4 IO operation functions ... 437
30.2.5 Detailed description of functions ... 438
30.3 IWDG Firmware driver defines ... 438
30.3.1 IWDG ... 438
31 HAL NAND Generic Driver ... 440
31.1 NAND Firmware driver registers structures ... 440
31.1.1 NAND_IDTypeDef ... 440

31.1.2 NAND_AddressTypeDef ... 440
31.1.3 NAND_DeviceConfigTypeDef ... 440
31.1.4 NAND_HandleTypeDef ... 441
31.2 NAND Firmware driver API description ... 441
31.2.1 How to use this driver ... 441
31.2.2 NAND Initialization and de-initialization functions ... 442
31.2.3 NAND Input and Output functions ... 442
31.2.4 NAND Control functions ... 443
31.2.5 NAND State functions ... 443
31.2.6 Detailed description of functions ... 443
31.3 NAND Firmware driver defines ... 449
31.3.1 NAND ... 449
32 HAL NOR Generic Driver ... 450
32.1 NOR Firmware driver registers structures ... 450
32.1.1 NOR_IDTypeDef ... 450
32.1.2 NOR_CFITypeDef ... 450
32.1.3 NOR_HandleTypeDef ... 450
32.2 NOR Firmware driver API description ... 451
32.2.1 How to use this driver ... 451
32.2.2 NOR Initialization and de_initialization functions ... 451
32.2.3 NOR Input and Output functions ... 452
32.2.4 NOR Control functions ... 452
32.2.5 NOR State functions ... 452
32.2.6 Detailed description of functions ... 452
32.3 NOR Firmware driver defines ... 457
32.3.1 NOR ... 457
33 HAL OPAMP Generic Driver ... 458
33.1 OPAMP Firmware driver registers structures ... 458
33.1.1 OPAMP_InitTypeDef ... 458
33.1.2 OPAMP_HandleTypeDef ... 459
33.2 OPAMP Firmware driver API description ... 459
33.2.1 OPAMP Peripheral Features ... 459
33.2.2 How to use this driver ... 460
33.2.3 Initialization and de-initialization functions ... 461
33.2.4 IO operation functions ... 461
33.2.5 Peripheral Control functions ... 461
33.2.6 Peripheral State functions ... 461

33.2.7 Detailed description of functions 462
33.3 OPAMP Firmware driver defines 464
33.3.1 OPAMP 464
34 HAL OPAMP Extension Driver 467
34.1 OPAMPEx Firmware driver API description 467
34.1.1 Detailed description of functions 467
35 HAL PCCARD Generic Driver 468
35.1 PCCARD Firmware driver registers structures 468
35.1.1 PCCARD_HandleTypeDef 468
35.2 PCCARD Firmware driver API description 468
35.2.1 How to use this driver 468
35.2.2 PCCARD Initialization and de-initialization functions 469
35.2.3 PCCARD Input Output and memory functions 469
35.2.4 PCCARD Peripheral State functions 469
35.2.5 Detailed description of functions 469
35.3 PCCARD Firmware driver defines 473
35.3.1 PCCARD 473
36 HAL PCD Generic Driver 474
36.1 PCD Firmware driver registers structures 474
36.1.1 PCD_InitTypeDef 474
36.1.2 PCD_EPTypeDef 474
36.1.3 PCD_HandleTypeDef 475
36.2 PCD Firmware driver API description 476
36.2.1 How to use this driver 476
36.2.2 Initialization and de-initialization functions 476
36.2.3 IO operation functions 476
36.2.4 Peripheral Control functions 477
36.2.5 Peripheral State functions 477
36.2.6 Detailed description of functions 477
36.3 PCD Firmware driver defines 484
36.3.1 PCD 484
37 HAL PCD Extension Driver 486
37.1 PCDEx Firmware driver API description 486
37.1.1 Extended Peripheral Control functions 486
37.1.2 Detailed description of functions 486
37.2 PCDEx Firmware driver defines 487

37.2.1 PCDEx ... 487
38 HAL PWR Generic Driver ... 488
38.1 PWR Firmware driver API description ... 488
38.1.1 Initialization and de-initialization functions ... 488
38.1.2 Peripheral Control functions ... 488
38.1.3 Detailed description of functions ... 490
38.2 PWR Firmware driver defines ... 493
38.2.1 PWR ... 493
39 HAL PWR Extension Driver ... 495
39.1 PWREx Firmware driver registers structures ... 495
39.1.1 PWR_PVDTypeDef ... 495
39.2 PWREx Firmware driver API description ... 495
39.2.1 Peripheral Extended control functions ... 495
39.2.2 Detailed description of functions ... 496
39.3 PWREx Firmware driver defines ... 497
39.3.1 PWREx ... 497
40 HAL RCC Generic Driver ... 500
40.1 RCC Firmware driver registers structures ... 500
40.1.1 RCC_PLLInitTypeDef ... 500
40.1.2 RCC_OscInitTypeDef ... 500
40.1.3 RCC_ClkInitTypeDef ... 501
40.2 RCC Firmware driver API description ... 501
40.2.1 RCC specific features ... 501
40.2.2 RCC Limitations ... 502
40.2.3 Initialization and de-initialization functions ... 502
40.2.4 Peripheral Control functions ... 503
40.2.5 Detailed description of functions ... 503
40.3 RCC Firmware driver defines ... 507
40.3.1 RCC ... 507
41 HAL RCC Extension Driver ... 526
41.1 RCCEx Firmware driver registers structures ... 526
41.1.1 RCC_PeriphCLKInitTypeDef ... 526
41.2 RCCEx Firmware driver API description ... 527
41.2.1 Extended Peripheral Control functions ... 527
41.2.2 Detailed description of functions ... 527
41.3 RCCEx Firmware driver defines ... 528

41.3.1 RCCEx ... 528
42 HAL RTC Generic Driver ... 544
42.1 RTC Firmware driver registers structures ... 544
42.1.1 RTC_InitTypeDef ... 544
42.1.2 RTC_TimeTypeDef ... 544
42.1.3 RTC_DateTypeDef ... 545
42.1.4 RTC_AlarmTypeDef ... 545
42.1.5 RTC_HandleTypeDef ... 546
42.2 RTC Firmware driver API description ... 546
42.2.1 RTC Operating Condition ... 546
42.2.2 Backup Domain Reset ... 547
42.2.3 Backup Domain Access ... 547
42.2.4 How to use RTC Driver ... 547
42.2.5 RTC and low power modes ... 548
42.2.6 Initialization and de-initialization functions ... 548
42.2.7 RTC Time and Date functions ... 549
42.2.8 RTC Alarm functions ... 549
42.2.9 Detailed description of functions ... 549
42.3 RTC Firmware driver defines ... 554
42.3.1 RTC ... 554
43 HAL RTC Extension Driver ... 564
43.1 RTCEx Firmware driver registers structures ... 564
43.1.1 RTC_TamperTypeDef ... 564
43.2 RTCEx Firmware driver API description ... 564
43.2.1 How to use this driver ... 564
43.2.2 RTC TimeStamp and Tamper functions ... 565
43.2.3 RTC Wake-up functions ... 565
43.2.4 Extended Peripheral Control functions ... 566
43.2.5 Extended features functions ... 566
43.2.6 Detailed description of functions ... 566
43.3 RTCEx Firmware driver defines ... 575
43.3.1 RTCEx ... 575
44 HAL SDADC Generic Driver ... 592
44.1 SDADC Firmware driver registers structures ... 592
44.1.1 SDADC_InitTypeDef ... 592
44.1.2 SDADC_HandleTypeDef ... 592
44.1.3 SDADC_ConfParamTypeDef ... 593

44.2 SDADC Firmware driver API description 593
44.2.1 SDADC specific features 593
44.2.2 How to use this driver 594
44.2.3 Initialization and de-initialization functions 596
44.2.4 Peripheral control functions 596
44.2.5 IO operation functions 596
44.2.6 ADC Peripheral State functions 598
44.2.7 Detailed description of functions 598
44.3 SDADC Firmware driver defines 610
44.3.1 SDADC 610
45 HAL SMARTCARD Generic Driver 616
45.1 SMARTCARD Firmware driver registers structures 616
45.1.1 SMARTCARD_InitTypeDef 616
45.1.2 SMARTCARD_AdvFeatureInitTypeDef 617
45.1.3 SMARTCARD_HandleTypeDef 618
45.2 SMARTCARD Firmware driver API description 619
45.2.1 How to use this driver 619
45.2.2 Initialization and Configuration functions 621
45.2.3 IO operation functions 621
45.2.4 Peripheral State and Errors functions 623
45.2.5 Detailed description of functions 623
45.3 SMARTCARD Firmware driver defines 631
45.3.1 SMARTCARD 631
46 HAL SMARTCARD Extension Driver 642
46.1 SMARTCARDEx Firmware driver API description 642
46.1.1 SMARTCARD peripheral extended features 642
46.1.2 Peripheral Control functions 642
46.1.3 Detailed description of functions 642
47 HAL SMBUS Generic Driver 644
47.1 SMBUS Firmware driver registers structures 644
47.1.1 SMBUS_InitTypeDef 644
47.1.2 SMBUS_HandleTypeDef 645
47.2 SMBUS Firmware driver API description 646
47.2.1 How to use this driver 646
47.2.2 Initialization and de-initialization functions 647
47.2.3 IO operation functions 648

47.2.4 Peripheral State and Errors functions 649
47.2.5 Detailed description of functions 649
47.3 SMBUS Firmware driver defines 656
47.3.1 SMBUS 656
48 HAL SPI Generic Driver 664
48.1 SPI Firmware driver registers structures 664
48.1.1 SPI_InitTypeDef 664
48.1.2 __SPI_HandleTypeDef 665
48.2 SPI Firmware driver API description 666
48.2.1 How to use this driver 666
48.2.2 Initialization and de-initialization functions 667
48.2.3 IO operation functions 667
48.2.4 Peripheral State and Errors functions 668
48.2.5 Detailed description of functions 668
48.3 SPI Firmware driver defines 675
48.3.1 SPI 675
49 HAL SPI Extension Driver 682
49.1 SPIEx Firmware driver API description 682
49.1.1 IO operation functions 682
49.1.2 Detailed description of functions 682
50 HAL SRAM Generic Driver 683
50.1 SRAM Firmware driver registers structures 683
50.1.1 SRAM_HandleTypeDef 683
50.2 SRAM Firmware driver API description 683
50.2.1 How to use this driver 683
50.2.2 SRAM Initialization and de_initialization functions 684
50.2.3 SRAM Input and Output functions 684
50.2.4 SRAM Control functions 684
50.2.5 SRAM State functions 685
50.2.6 Detailed description of functions 685
50.3 SRAM Firmware driver defines 689
50.3.1 SRAM 689
51 HAL TIM Generic Driver 690
51.1 TIM Firmware driver registers structures 690
51.1.1 TIM_Base_InitTypeDef 690
51.1.2 TIM_OC_InitTypeDef 690

51.1.3 TIM_OnePulse_InitTypeDef ... 691
51.1.4 TIM_IC_InitTypeDef ... 692
51.1.5 TIM_Encoder_InitTypeDef ... 692
51.1.6 TIM_ClockConfigTypeDef ... 693
51.1.7 TIM_ClearInputConfigTypeDef ... 693
51.1.8 TIM_SlaveConfigTypeDef ... 694
51.1.9 TIM_HandleTypeDef ... 694
51.2 TIM Firmware driver API description ... 695
51.2.1 TIMER Generic features ... 695
51.2.2 How to use this driver ... 695
51.2.3 Time Base functions ... 696
51.2.4 Time Output Compare functions ... 696
51.2.5 Time PWM functions ... 697
51.2.6 Time Input Capture functions ... 697
51.2.7 Time One Pulse functions ... 698
51.2.8 Time Encoder functions ... 698
51.2.9 IRQ handler management ... 699
51.2.10 Peripheral Control functions ... 699
51.2.11 TIM Callbacks functions ... 699
51.2.12 Peripheral State functions ... 700
51.2.13 Detailed description of functions ... 700
51.3 TIM Firmware driver defines ... 728
51.3.1 TIM ... 728
52 HAL TIM Extension Driver ... 746
52.1 TIMEx Firmware driver registers structures ... 746
52.1.1 TIM_HallSensor_InitTypeDef ... 746
52.1.2 TIM_BreakDeadTimeConfigTypeDef ... 746
52.1.3 TIM_MasterConfigTypeDef ... 747
52.2 TIMEx Firmware driver API description ... 747
52.2.1 TIMER Extended features ... 747
52.2.2 How to use this driver ... 748
52.2.3 Timer Hall Sensor functions ... 748
52.2.4 Timer Complementary Output Compare functions ... 749
52.2.5 Timer Complementary PWM functions ... 749
52.2.6 Timer Complementary One Pulse functions ... 750
52.2.7 Peripheral Control functions ... 750
52.2.8 Extended Callbacks functions ... 750
52.2.9 Extended Peripheral State functions ... 750

52.2.10 Detailed description of functions 751
52.3 TIMEx Firmware driver defines 762
52.3.1 TIMEx 762
53 HAL TSC Generic Driver 768
53.1 TSC Firmware driver registers structures 768
53.1.1 TSC_InitTypeDef 768
53.1.2 TSC_IOConfigTypeDef 769
53.1.3 TSC_HandleTypeDef 769
53.2 TSC Firmware driver API description 769
53.2.1 TSC specific features 769
53.2.2 How to use this driver 770
53.2.3 Initialization and de-initialization functions 770
53.2.4 IO Operation functions 770
53.2.5 Peripheral Control functions 771
53.2.6 State and Errors functions 771
53.2.7 Detailed description of functions 771
53.3 TSC Firmware driver defines 775
53.3.1 TSC 775
54 HAL UART Generic Driver 784
54.1 UART Firmware driver registers structures 784
54.1.1 UART_InitTypeDef 784
54.1.2 UART_AdvFeatureInitTypeDef 784
54.1.3 UART_WakeUpTypeDef 785
54.1.4 UART_HandleTypeDef 786
54.2 UART Firmware driver API description 787
54.2.1 How to use this driver 787
54.2.2 Initialization and Configuration functions 789
54.2.3 IO operation functions 790
54.2.4 Peripheral Control functions 790
54.2.5 Peripheral State and Error functions 790
54.2.6 Detailed description of functions 791
54.3 UART Firmware driver defines 802
54.3.1 UART 802
55 HAL UART Extension Driver 817
55.1 UARTEx Firmware driver API description 817
55.1.1 UART peripheral extended features 817
55.1.2 Initialization and Configuration functions 817

55.1.3 IO operation function ... 817
55.1.4 Peripheral Control functions ... 817
55.1.5 Detailed description of functions ... 818
55.2 UARTEx Firmware driver defines ... 820
55.2.1 UARTEx ... 820
56 HAL USART Generic Driver ... 821
56.1 USART Firmware driver registers structures ... 821
56.1.1 USART_InitTypeDef ... 821
56.1.2 USART_HandleTypeDef ... 821
56.2 USART Firmware driver API description ... 822
56.2.1 How to use this driver ... 822
56.2.2 Initialization and Configuration functions ... 824
56.2.3 IO operation functions ... 825
56.2.4 Peripheral State and Error functions ... 826
56.2.5 Detailed description of functions ... 827
56.3 USART Firmware driver defines ... 833
56.3.1 USART ... 833
57 HAL USART Extension Driver ... 842
57.1 USARTEx Firmware driver defines ... 842
57.1.1 USARTEx ... 842
58 HAL WWDG Generic Driver ... 843
58.1 WWDG Firmware driver registers structures ... 843
58.1.1 WWDG_InitTypeDef ... 843
58.1.2 WWDG_HandleTypeDef ... 843
58.2 WWDG Firmware driver API description ... 843
58.2.1 WWDG specific features ... 843
58.2.2 How to use this driver ... 844
58.2.3 Initialization and Configuration functions ... 845
58.2.4 IO operation functions ... 845
58.2.5 Detailed description of functions ... 845
58.3 WWDG Firmware driver defines ... 846
58.3.1 WWDG ... 846
59 LL ADC Generic Driver ... 850
59.1 ADC Firmware driver registers structures ... 850
59.1.1 LL_ADC_CommonInitTypeDef ... 850
59.1.2 LL_ADC_InitTypeDef ... 850

59.1.3 LL_ADC_REG_InitTypeDef ... 851
59.1.4 LL_ADC_INJ_InitTypeDef ... 852
59.2 ADC Firmware driver API description ... 852
59.2.1 Detailed description of functions ... 852
59.3 ADC Firmware driver defines ... 950
59.3.1 ADC ... 950
60 LL BUS Generic Driver ... 991
60.1 BUS Firmware driver API description ... 991
60.1.1 Detailed description of functions ... 991
60.2 BUS Firmware driver defines ... 1005
60.2.1 BUS ... 1005
61 LL COMP Generic Driver ... 1007
61.1 COMP Firmware driver registers structures ... 1007
61.1.1 LL_COMP_InitTypeDef ... 1007
61.2 COMP Firmware driver API description ... 1008
61.2.1 Detailed description of functions ... 1008
61.3 COMP Firmware driver defines ... 1022
61.3.1 COMP ... 1022
62 LL CORTEX Generic Driver ... 1035
62.1 CORTEX Firmware driver API description ... 1035
62.1.1 Detailed description of functions ... 1035
62.2 CORTEX Firmware driver defines ... 1042
62.2.1 CORTEX ... 1042
63 LL CRC Generic Driver ... 1045
63.1 CRC Firmware driver API description ... 1045
63.1.1 Detailed description of functions ... 1045
63.2 CRC Firmware driver defines ... 1051
63.2.1 CRC ... 1051
64 LL DAC Generic Driver ... 1053
64.1 DAC Firmware driver registers structures ... 1053
64.1.1 LL_DAC_InitTypeDef ... 1053
64.2 DAC Firmware driver API description ... 1053
64.2.1 Detailed description of functions ... 1053
64.3 DAC Firmware driver defines ... 1071
64.3.1 DAC ... 1071

65 LL DMA Generic Driver 1077
65.1 DMA Firmware driver registers structures 1077
65.1.1 LL_DMA_InitTypeDef 1077
65.2 DMA Firmware driver API description 1078
65.2.1 Detailed description of functions 1078
65.3 DMA Firmware driver defines 1111
65.3.1 DMA 1111
66 LL EXTI Generic Driver 1116
66.1 EXTI Firmware driver registers structures 1116
66.1.1 LL_EXTI_InitTypeDef 1116
66.2 EXTI Firmware driver API description 1116
66.2.1 Detailed description of functions 1116
66.3 EXTI Firmware driver defines 1138
66.3.1 EXTI 1138
67 LL GPIO Generic Driver 1141
67.1 GPIO Firmware driver registers structures 1141
67.1.1 LL_GPIO_InitTypeDef 1141
67.2 GPIO Firmware driver API description 1141
67.2.1 Detailed description of functions 1141
67.3 GPIO Firmware driver defines 1157
67.3.1 GPIO 1157
68 LL HRTIM Generic Driver 1159
68.1 HRTIM Firmware driver API description 1159
68.1.1 Detailed description of functions 1159
68.2 HRTIM Firmware driver defines 1324
68.2.1 HRTIM 1324
69 LL I2C Generic Driver 1348
69.1 I2C Firmware driver registers structures 1348
69.1.1 LL_I2C_InitTypeDef 1348
69.2 I2C Firmware driver API description 1349
69.2.1 Detailed description of functions 1349
69.3 I2C Firmware driver defines 1390
69.3.1 I2C 1390
70 LL I2S Generic Driver 1395
70.1 I2S Firmware driver registers structures 1395

70.1.1 LL_I2S_InitTypeDef ... 1395
70.2 I2S Firmware driver API description ... 1395
70.2.1 Detailed description of functions ... 1395
70.3 I2S Firmware driver defines ... 1409
70.3.1 I2S ... 1409
71 LL IWDG Generic Driver ... 1412
71.1 IWDG Firmware driver API description ... 1412
71.1.1 Detailed description of functions ... 1412
71.2 IWDG Firmware driver defines ... 1416
71.2.1 IWDG ... 1416
72 LL OPAMP Generic Driver ... 1417
72.1 OPAMP Firmware driver registers structures ... 1417
72.1.1 LL_OPAMP_InitTypeDef ... 1417
72.2 OPAMP Firmware driver API description ... 1417
72.2.1 Detailed description of functions ... 1417
72.3 OPAMP Firmware driver defines ... 1429
72.3.1 OPAMP ... 1429
73 LL PWR Generic Driver ... 1434
73.1 PWR Firmware driver API description ... 1434
73.1.1 Detailed description of functions ... 1434
73.2 PWR Firmware driver defines ... 1440
73.2.1 PWR ... 1440
74 LL RCC Generic Driver ... 1443
74.1 RCC Firmware driver registers structures ... 1443
74.1.1 LL_RCC_ClocksTypeDef ... 1443
74.2 RCC Firmware driver API description ... 1443
74.2.1 Detailed description of functions ... 1443
74.3 RCC Firmware driver defines ... 1474
74.3.1 RCC ... 1474
75 LL RTC Generic Driver ... 1484
75.1 RTC Firmware driver registers structures ... 1484
75.1.1 LL_RTC_InitTypeDef ... 1484
75.1.2 LL_RTC_TimeTypeDef ... 1484
75.1.3 LL_RTC_DateTypeDef ... 1485
75.1.4 LL_RTC_AlarmTypeDef ... 1485
75.2 RTC Firmware driver API description ... 1486

75.2.1 Detailed description of functions 1486
75.3 RTC Firmware driver defines 1551
75.3.1 RTC 1551
76 LL SPI Generic Driver 1560
76.1 SPI Firmware driver registers structures 1560
76.1.1 LL_SPI_InitTypeDef 1560
76.2 SPI Firmware driver API description 1561
76.2.1 Detailed description of functions 1561
76.3 SPI Firmware driver defines 1583
76.3.1 SPI 1583
77 LL SYSTEM Generic Driver 1587
77.1 SYSTEM Firmware driver API description 1587
77.1.1 Detailed description of functions 1587
77.2 SYSTEM Firmware driver defines 1610
77.2.1 SYSTEM 1610
78 LL TIM Generic Driver 1614
78.1 TIM Firmware driver registers structures 1614
78.1.1 LL_TIM_InitTypeDef 1614
78.1.2 LL_TIM_OC_InitTypeDef 1614
78.1.3 LL_TIM_IC_InitTypeDef 1615
78.1.4 LL_TIM_ENCODER_InitTypeDef 1616
78.1.5 LL_TIM_HALLSENSOR_InitTypeDef 1617
78.1.6 LL_TIM_BDTR_InitTypeDef 1617
78.2 TIM Firmware driver API description 1619
78.2.1 Detailed description of functions 1619
78.3 TIM Firmware driver defines 1693
78.3.1 TIM 1693
79 LL USART Generic Driver 1708
79.1 USART Firmware driver registers structures 1708
79.1.1 LL_USART_InitTypeDef 1708
79.1.2 LL_USART_ClockInitTypeDef 1708
79.2 USART Firmware driver API description 1709
79.2.1 Detailed description of functions 1709
79.3 USART Firmware driver defines 1778
79.3.1 USART 1778

80 LL UTILS Generic Driver 1784
80.1 UTILS Firmware driver registers structures 1784
80.1.1 LL_UTILS_PLLInitTypeDef 1784
80.1.2 LL_UTILS_ClkInitTypeDef 1784
80.2 UTILS Firmware driver API description 1784
80.2.1 System Configuration functions 1784
80.2.2 Detailed description of functions 1785
80.3 UTILS Firmware driver defines 1788
80.3.1 UTILS 1788
81 LL WWDG Generic Driver 1789
81.1 WWDG Firmware driver API description 1789
81.1.1 Detailed description of functions 1789
81.2 WWDG Firmware driver defines 1793
81.2.1 WWDG 1793
82 Correspondence between API registers and API low-layer driver functions 1794
82.1 ADC 1794
82.2 BUS 1803
82.3 COMP 1811
82.4 CORTEX 1812
82.5 CRC 1813
82.6 DAC 1814
82.7 DMA 1816
82.8 EXTI 1819
82.9 GPIO 1820
82.10 I2C 1821
82.11 I2S 1825
82.12 IWDG 1826
82.13 OPAMP 1827
82.14 PWR 1828
82.15 RCC 1829
82.16 RTC 1833
82.17 SPI 1841
82.18 SYSTEM 1844
82.19 TIM 1852

82.20 USART 1862
82.21 WWDG 1870
83 FAQs 1871
84 Revision history 1875

List of tables

Table 1: Acronyms and definitions....28
Table 2: HAL driver files....30
Table 3: User-application files....31
Table 4: API classification....35
Table 5: List of devices supported by HAL drivers....36
Table 6: HAL API naming rules....39
Table 7: Macros handling interrupts and specific clock configurations....40
Table 8: Callback functions....41
Table 9: HAL generic APIs....42
Table 10: HAL extension APIs....43
Table 11: Define statements used for HAL configuration....47
Table 12: Description of GPIO_InitTypeDef structure....49
Table 13: Description of EXTI configuration macros....51
Table 14: MSP functions....56
Table 15: Timeout values....60
Table 16: LL driver files....64
Table 17: Common peripheral initialization functions....67
Table 18: Optional peripheral initialization functions....67
Table 19: Specific Interrupt, DMA request and status flags management....69
Table 20: Available function formats....69
Table 21: Peripheral clock activation/deactivation management....69
Table 22: Peripheral activation/deactivation management....70
Table 23: Peripheral configuration management....70
Table 24: Peripheral register management....70
Table 25: Correspondence between ADC registers and ADC low-layer driver functions....1794
Table 26: Correspondence between BUS registers and BUS low-layer driver functions....1803
Table 27: Correspondence between COMP registers and COMP low-layer driver functions....1811
Table 28: Correspondence between CORTEX registers and CORTEX low-layer driver functions....1812
Table 29: Correspondence between CRC registers and CRC low-layer driver functions....1813
Table 30: Correspondence between DAC registers and DAC low-layer driver functions....1814
Table 31: Correspondence between DMA registers and DMA low-layer driver functions....1816
Table 32: Correspondence between EXTI registers and EXTI low-layer driver functions....1819
Table 33: Correspondence between GPIO registers and GPIO low-layer driver functions....1820
Table 34: Correspondence between I2C registers and I2C low-layer driver functions....1821
Table 35: Correspondence between I2S registers and I2S low-layer driver functions....1825
Table 36: Correspondence between IWDG registers and IWDG low-layer driver functions....1826
Table 37: Correspondence between OPAMP registers and OPAMP low-layer driver functions....1827
Table 38: Correspondence between PWR registers and PWR low-layer driver functions....1828
Table 39: Correspondence between RCC registers and RCC low-layer driver functions....1829
Table 40: Correspondence between RTC registers and RTC low-layer driver functions....1833
Table 41: Correspondence between SPI registers and SPI low-layer driver functions....1841
Table 42: Correspondence between SYSTEM registers and SYSTEM low-layer driver functions....1844
Table 43: Correspondence between TIM registers and TIM low-layer driver functions....1852
Table 44: Correspondence between USART registers and USART low-layer driver functions....1862
Table 45: Correspondence between WWDG registers and WWDG low-layer driver functions....1870
Table 46: Document revision history....1875

List of figures

Figure 1: Example of project template 32
Figure 2: Adding device-specific functions 44
Figure 3: Adding family-specific functions 44
Figure 4: Adding new peripherals 45
Figure 5: Updating existing APIs 45
Figure 6: File inclusion model 46
Figure 7: HAL driver model 54
Figure 8: low-layer driver folders 65
Figure 9: Low-layer driver CMSIS files 66

1 Acronyms and definitions

Table 1: Acronyms and definitions

Acronym	Definition
ADC	Analog-to-digital converter
ANSI	American National Standards Institute
API	Application Programming Interface
BSP	Board Support Package
COMP	Comparator
CMSIS	Cortex Microcontroller Software Interface Standard
CPU	Central Processing Unit
CRYP	Cryptographic processor unit
CRC	CRC calculation unit
DAC	Digital to analog converter
DMA	Direct Memory Access
EXTI	External interrupt/event controller
FLASH	Flash memory
FMC	Flexible Memory Controller
GPIO	General purpose I/Os
HAL	Hardware abstraction layer
HRTIM	High Resolution Timer
I2C	Inter-integrated circuit
I2S	Inter-integrated sound
IRDA	InfraRed Data Association
IWDG	Independent watchdog
LCD	Liquid Crystal Display Controler
MSP	MCU Specific Package
NAND	NAND Flash memory
NOR	NOR Flash memory
NVIC	Nested Vectored Interrupt Controller
PCD	USB Peripheral Controller Driver
PWR	Power controller
RCC	Reset and clock controller
RNG	Random Number Generator
RTC	Real-time clock
SD	Secure Digital
SDADC	Sigma-delta Analog-to-digital Converter
SRAM	SRAM external memory

Acronym	Definition
SMARTCARD	Smartcard IC
SPI	Serial Peripheral interface
SysTick	System tick timer
TIM	Advanced-control, general-purpose or basic timer
TSC	Touch Sensing Controller
UART	Universal asynchronous receiver/transmitter
USART	Universal synchronous receiver/transmitter
WWDG	Window watchdog
USB	Universal Serial Bus
PPP	STM32 peripheral or block

2 Overview of HAL drivers

The HAL drivers were designed to offer a rich set of APIs and to interact easily with the application upper layers.

Each driver consists of a set of functions covering the most common peripheral features. The development of each driver is driven by a common API which standardizes the driver structure, the functions and the parameter names.

The HAL drivers include a set of driver modules, each module being linked to a standalone peripheral. However, in some cases, the module is linked to a peripheral functional mode. As an example, several modules exist for the USART peripheral: UART driver module, USART driver module, SMARTCARD driver module and IRDA driver module.

The HAL main features are the following:

- Cross-family portable set of APIs covering the common peripheral features as well as extension APIs in case of specific peripheral features.
- Three API programming models: polling, interrupt and DMA.
- APIs are RTOS compliant:
  - Fully reentrant APIs
  - Systematic usage of timeouts in polling mode.
- Support of peripheral multi-instance allowing concurrent API calls for multiple instances of a given peripheral (USART1, USART2...)
- All HAL APIs implement user-callback functions mechanism:
  - Peripheral Init/DeInit HAL APIs can call user-callback functions to perform peripheral system level Initialization/De-Initialization (clock, GPIOs, interrupt, DMA)
  - Peripherals interrupt events
  - Error events.
- Object locking mechanism: safe hardware access to prevent multiple spurious accesses to shared resources.
- Timeout used for all blocking processes: the timeout can be a simple counter or a timebase.

2.1 HAL and user-application files

2.1.1 HAL driver files

A HAL drivers are composed of the following set of files:

Table 2: HAL driver files

File	Description
stm32f3xx_hal_ppp.c	Main peripheral/module driver file. It includes the APIs that are common to all STM32 devices. *Example: stm32f3xx_hal_adc.c, stm32f3xx_hal_irda.c, …*
stm32xx_hal_ppp.h	Header file of the main driver C file It includes common data, handle and enumeration structures, define statements and macros, as well as the exported generic APIs. *Example: stm32xx_hal_adc.h, stm32xx_hal_irda.h, …*

File	Description
stm32xx_hal_ppp_ex.c	Extension file of a peripheral/module driver. It includes the specific APIs for a given part number or family, as well as the newly defined APIs that overwrite the default generic APIs if the internal process is implemented in different way. *Example: stm32xx_hal_adc_ex.c, stm32xx_hal_dma_ex.c, …*
stm32xx_hal_ppp_ex.h	Header file of the extension C file. It includes the specific data and enumeration structures, define statements and macros, as well as the exported device part number specific APIs *Example: stm32xx_hal_adc_ex.h, stm32xx_hal_dma_ex.h, …*
stm32xx_hal.c	This file is used for HAL initialization and contains DBGMCU, Remap and Time Delay based on systick APIs.
stm32xx_hal.h	xx_hal.c header file
stm32xx_hal_msp_template.c	Template file to be copied to the user application folder. It contains the MSP initialization and de-initialization (main routine and callbacks) of the peripheral used in the user application.
stm32xx_hal_conf_template.h	Template file allowing to customize the drivers for a given application.
stm32xx_hal_def.h	Common HAL resources such as common define statements, enumerations, structures and macros.

2.1.2 User-application files

The minimum files required to build an application using the HAL are listed in the table below:

Table 3: User-application files

File	Description
system_stm32f3xx.c	This file contains SystemInit() which is called at startup just after reset and before branching to the main program. It does not configure the system clock at startup (contrary to the standard library). This is to be done using the HAL APIs in the user files. It allows relocating the vector table in internal SRAM.
startup_stm32f3xx.s	Toolchain specific file that contains reset handler and exception vectors. For some toolchains, it allows adapting the stack/heap size to fit the application requirements.
stm32f3xx_flash.icf (optional)	Linker file for EWARM toolchain allowing mainly to adapt the stack/heap size to fit the application requirements.
stm32f3xx_hal_msp.c	This file contains the MSP initialization and de-initialization (main routine and callbacks) of the peripheral used in the user application.
stm32f3xx_hal_conf.h	This file allows the user to customize the HAL drivers for a specific application. It is not mandatory to modify this configuration. The application can use the default configuration without any modification.

File	Description
stm32f3xx_it.c/.h	This file contains the exceptions handler and peripherals interrupt service routine, and calls HAL_IncTick() at regular time intervals to increment a local variable (declared in *stm32f3xx*_hal.c) used as HAL timebase. By default, this function is called each 1ms in SysTick ISR. . The PPP_IRQHandler() routine must call HAL_PPP_IRQHandler() if an interrupt based process is used within the application.
main.c/.h	This file contains the main program routine, mainly: • the call to HAL_Init() • assert_failed() implementation • system clock configuration • peripheral HAL initialization and user application code.

The STM32Cube package comes with ready-to-use project templates, one for each supported board. Each project contains the files listed above and a preconfigured project for the supported toolchains.


Each project template provides empty main loop function and can be used as a starting point to get familiar with project settings for STM32Cube. Its features are the following:

- It contains the sources of HAL, CMSIS and BSP drivers which are the minimal components to develop a code on a given board.
- It contains the include paths for all the firmware components.
- It defines the STM32 device supported, and allows configuring the CMSIS and HAL drivers accordingly.
- It provides ready-to-use user files preconfigured as defined below:
  – HAL is initialized
  – SysTick ISR implemented for HAL_Delay()
  – System clock configured with the maximum frequency of the device



If an existing project is copied to another location, then include paths must be updated.

Figure 1: Example of project template

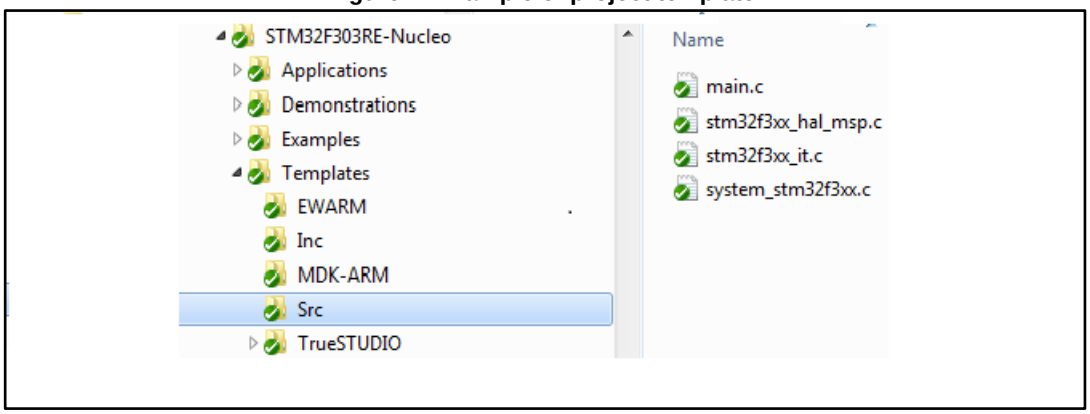

2.2 HAL data structures

Each HAL driver can contain the following data structures:

- Peripheral handle structures
- Initialization and configuration structures
- Specific process structures.

2.2.1 Peripheral handle structures

The APIs have a modular generic multi-instance architecture that allows working with several IP instances simultaneously.

PPP_HandleTypeDef *handle is the main structure that is implemented in the HAL drivers. It handles the peripheral/module configuration and registers and embeds all the structures and variables needed to follow the peripheral device flow.

The peripheral handle is used for the following purposes:

- Multi instance support: each peripheral/module instance has its own handle. As a result instance resources are independent.
- Peripheral process intercommunication: the handle is used to manage shared data resources between the process routines.
  Example: global pointers, DMA handles, state machine.
- Storage : this handle is used also to manage global variables within a given HAL driver.

An example of peripheral structure is shown below:

```
typedef struct
{
USART TypeDef *Instance; /* USART registers base address */
USART InitTypeDef Init; /* Usart communication parameters */
uint8_t *pTxBuffPtr;/* Pointer to Usart Tx transfer Buffer */
uint16_t TxXferSize; /* Usart Tx Transfer size */
__IO uint16_t TxXferCount;/* Usart Tx Transfer Counter */
uint8 t *pRxBuffPtr;/* Pointer to Usart Rx transfer Buffer */
uint16 t RxXferSize; /* Usart Rx Transfer size */
  IO uint16 t RxXferCount; /* Usart Rx Transfer Counter */
DMA_HandleTypeDef *hdmatx; /* Usart Tx DMA Handle parameters */
DMA_HandleTypeDef *hdmarx; /* Usart Rx DMA Handle parameters */
HAL_LockTypeDef Lock; /* Locking object */
  IO HAL USART StateTypeDef State; /* Usart communication state */
  IO HAL USART ErrorTypeDef ErrorCode;/* USART Error code */
}USART_HandleTypeDef;
```



1) The multi-instance feature implies that all the APIs used in the application are re-entrant and avoid using global variables because subroutines can fail to be re-entrant if they rely on a global variable to remain unchanged but that variable is modified when the subroutine is recursively invoked. For this reason, the following rules are respected:

- Re-entrant code does not hold any static (or global) non-constant data: re-entrant functions can work with global data. For example, a re-entrant interrupt service routine can grab a piece of hardware status to work with (e.g. serial port read buffer) which is not only global, but volatile. Still, typical use of static variables and global data is not advised, in the sense that only atomic read-modify-write instructions should be used in these variables. It should not be possible for an interrupt or signal to occur during the execution of such an instruction.
- Reentrant code does not modify its own code.

2) When a peripheral can manage several processes simultaneously using the DMA (full duplex case), the DMA interface handle for each process is added in the PPP_HandleTypeDef.

3) For the shared and system peripherals, no handle or instance object is used. The peripherals concerned by this exception are the following:

- GPIO
- SYSTICK
- NVIC
- PWR
- RCC
- FLASH.

2.2.2 Initialization and configuration structure

These structures are defined in the generic driver header file when it is common to all part numbers. When they can change from one part number to another, the structures are defined in the extension header file for each part number.

```
typedef struct
{
uint32 t BaudRate; /*!< This member configures the UART communication baudrate.*/
uint32 t WordLength; /*!< Specifies the number of data bits transmitted or received
in a frame.*/
uint32_t StopBits; /*!< Specifies the number of stop bits transmitted.*/
uint32_t Parity; /*!< Specifies the parity mode. */
uint32_t Mode; /*!< Specifies wether the Receive or Transmit mode is enabled or
disabled.*/
uint32 t HwFlowCtl; /*!< Specifies wether the hardware flow control mode is enabled
or disabled.*/
uint32_t OverSampling; /*!< Specifies wether the Over sampling 8 is enabled or
disabled,
to achieve higher speed (up to fPCLK/8).*/
}UART_InitTypeDef;
```

The config structure is used to initialize the sub-modules or sub-instances. See below example:

```
HAL_ADC_ConfigChannel (ADC_HandleTypeDef* hadc, ADC_ChannelConfTypeDef*
sConfig)
```

2.2.3 Specific process structures

The specific process structures are used for specific process (common APIs). They are defined in the generic driver header file.

Example:

```
HAL_PPP_Process (PPP_HandleTypeDef* hadc,PPP_ProcessConfig* sConfig)
```

2.3 API classification

The HAL APIs are classified into three categories:

- **Generic APIs:** common generic APIs applying to all STM32 devices. These APIs are consequently present in the generic HAL driver files of all STM32 microcontrollers.

```
HAL_StatusTypeDef HAL_ADC_Init(ADC_HandleTypeDef* hadc); HAL_StatusTypeDef
HAL_ADC_DeInit(ADC_HandleTypeDef *hadc); HAL_StatusTypeDef
HAL_ADC_Start(ADC_HandleTypeDef* hadc); HAL_StatusTypeDef
HAL_ADC_Stop(ADC_HandleTypeDef* hadc); HAL_StatusTypeDef
HAL ADC Start IT(ADC HandleTypeDef* hadc); HAL StatusTypeDef
HAL ADC Stop IT(ADC HandleTypeDef* hadc); void HAL ADC IRQHandler(ADC HandleTypeDef*
hadc);
```

- **Extension APIs:** This set of API is divided into two sub-categories :
  - **Family specific APIs**: APIs applying to a given family. They are located in the extension HAL driver file (see example below related to the ADC).

```
HAL_StatusTypeDef HAL_ADCEx_Calibration_Start(ADC_HandleTypeDef* hadc, uint32_t
SingleDiff); uint32_t HAL_ADCEx_Calibration_GetValue(ADC_HandleTypeDef* hadc,
uint32_t SingleDiff);
```

  - **Device part number specific APIs:** These APIs are implemented in the extension file and delimited by specific define statements relative to a given part number.

```
#if defined(STM32F302xC) || defined(STM32F303xC) || defined(STM32F358xx) || \
defined(STM32F303x8) || defined(STM32F334x8) || defined(STM32F328xx) || \
defined(STM32F301x8) || defined(STM32F302x8) || defined(STM32F318xx) || \
defined(STM32F373xC) || defined(STM32F378xx) #endif /* STM32F302xC || STM32F303xC ||
STM32F358xx || */ /* STM32F303x8 || STM32F334x8 || STM32F328xx || */ /* STM32F301x8
|| STM32F302x8 || STM32F318xx */ /* STM32F373xC || STM32F378xx */
```



The data structure related to the specific APIs is delimited by the device part number define statement. It is located in the corresponding extension header C file.

The following table summarizes the location of the different categories of HAL APIs in the driver files.

Table 4: API classification

	Generic file	Extension file
Common APIs	X	X (1)
Family specific APIs		X
Device specific APIs		X

Notes:

(1)In some cases, the implementation for a specific device part number may change . In this case the generic API is declared as weak function in the extension file. The API is implemented again to overwrite the default function



Family specific APIs are only related to a given family. This means that if a specific API is implemented in another family, and the arguments of this latter family are different, additional structures and arguments might need to be added.



The IRQ handlers are used for common and family specific processes.

2.4 Devices supported by HAL drivers

Table 5: List of devices supported by HAL drivers

IP/Module	STM32 F301x6 /x8	STM32F3 02x6/x8	STM32F30 2xB/xC	STM32F 302xE	STM32F3 03x6/x8	STM32F 303xC	STM32F 303xE	STM32F37 3xB/xC	STM32F3 34x6/x8	STM32F 318xx	STM32F 328xx	STM32F 358xx	STM32F 378xx	STM32F 398xx
stm32f3xx_hal.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_adc.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_adc_ex.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_can.c	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes
stm32f3xx_hal_cec.c	No	No	No	No	No	No	No	Yes	No	No	No	No	Yes	No
stm32f3xx_hal_comp.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_cortex.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_crc.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_crc_ex.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_dac.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_dac_ex.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_dma.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_flash.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_flash_ex.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_gpio.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_hrtim.c	No	No	No	No	No	No	No	No	Yes	No	Yes	No	No	No
stm32f3xx_hal_i2c.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_i2c_ex.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_i2s.c	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	No	Yes	No	Yes	Yes	Yes
stm32f3xx_hal_i2s_ex.c	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	No	Yes	No	Yes	Yes	Yes
stm32f3xx_hal_irda.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_iwdg.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

IP/Module	STM32F301x6/x8	STM32F302x6/x8	STM32F302xB/xC	STM32F302xE	STM32F303x6/x8	STM32F303xC	STM32F303xE	STM32F373xB/xC	STM32F334x6/x8	STM32F318xx	STM32F328xx	STM32F358xx	STM32F378xx	STM32F398xx
stm32f3xx_hal_msp_template.c	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
stm32f3xx_hal_nand.c	No	No	No	Yes	No	No	Yes	No	No	No	No	No	No	Yes
stm32f3xx_hal_nor.c	No	No	No	Yes	No	No	Yes	No	No	No	No	No	No	Yes
stm32f3xx_hal_opamp.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	No	Yes
stm32f3xx_hal_opamp_ex.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	No	Yes
stm32f3xx_hal_pcd.c	No	Yes	Yes	Yes	No	Yes	Yes	Yes	No	No	No	No	No	Yes
stm32f3xx_hal_pcd_ex.c	No	Yes	Yes	Yes	No	Yes	Yes	Yes	No	No	No	No	No	Yes
stm32f3xx_hal_pccard.c	No	No	No	Yes	No	No	Yes	No	No	No	No	No	No	Yes
stm32f3xx_hal_pwr.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_pwr_ex.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	Yes	Yes
stm32f3xx_hal_rcc.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_rcc_ex.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_rtc.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_rtc_ex.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_sdadc.c	No	No	No	No	No	No	No	Yes	No	No	No	No	Yes	No
stm32f3xx_hal_smartcard.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_smartcard_ex.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_smbus.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_spi.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_sram.c	No	No	No	Yes	No	No	Yes	No	No	No	No	No	No	Yes

IP/Module	STM32 F301x6 /x8	STM32F3 02x6/x8	STM32F30 2xB/xC	STM32F 302xE	STM32F3 03x6/x8	STM32F 303xC	STM32F 303xE	STM32F37 3xB/xC	STM32F3 34x6/x8	STM32F 318xx	STM32F 328xx	STM32F 358xx	STM32F 378xx	STM32F 398xx
stm32f3xx_hal_tim.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_tim_ex.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_tsc.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_uart.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_uart_ex.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_usart.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_hal_wwdg.c	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
stm32f3xx_ll_fmc.c	No	No	No	Yes	No	No	Yes	No	No	No	No	No	No	Yes

2.5 HAL driver rules

2.5.1 HAL API naming rules

The following naming rules are used in HAL drivers:

Table 6: HAL API naming rules

	Generic	Family specific	Device specific
File names	*stm32f3xx_hal_ppp (c/h)*	*stm32f3xx_hal_ppp_ex (c/h)*	*stm32f3xx_ hal_ppp_ex (c/h)*
Module name	*HAL_PPP_ MODULE*		
Function name	*HAL_PPP_Function HAL_PPP_FeatureFunction_ MODE*	*HAL_PPPEx_Function HAL_PPPEx_FeatureFunction_ MODE*	*HAL_PPPEx_Function HAL_PPPEx_FeatureFunction_ MODE*
Handle name	*PPP_HandleTypedef*	*NA*	*NA*
Init structure name	*PPP_InitTypeDef*	*NA*	*PPP_InitTypeDef*
Enum name	*HAL_PPP_StructnameType Def*	*NA*	*NA*

- The **PPP** prefix refers to the peripheral functional mode and not to the peripheral itself. For example, if the USART, PPP can be USART, IRDA, UART or SMARTCARD depending on the peripheral mode.
- The constants used in one file are defined within this file. A constant used in several files is defined in a header file. All constants are written in uppercase, except for peripheral driver function parameters.
- typedef variable names should be suffixed with _TypeDef.
- Registers are considered as constants. In most cases, their name is in uppercase and uses the same acronyms as in the STM32F3xx reference manuals.
- Peripheral registers are declared in the PPP_TypeDef structure (e.g. ADC_TypeDef) in the CMSIS header file corresponding to the selected platform: stm32f301x8.h, stm32f302x8.h, stm32f302xc.h, stm32f302xe.h, stm32f303x8.h, stm32f303xc.h, stm32f303xe.h, stm32f318xx.h, stm32f328xx.h, stm32f334x8.h, stm32f358xx.h, stm32f373xc.h, stm32f378xx.h and stm32f398xx.h . The platform is selected by enabling the compilation switch in the compilation toolchain directive or in the stm32f3xx.h file.
- Peripheral function names are prefixed by HAL_, then the corresponding peripheral acronym in uppercase followed by an underscore. The first letter of each word is in uppercase (e.g. HAL_UART_Transmit()). Only one underscore is allowed in a function name to separate the peripheral acronym from the rest of the function name.
- The structure containing the PPP peripheral initialization parameters are named PPP_InitTypeDef (e.g. ADC_InitTypeDef).
- The structure containing the Specific configuration parameters for the PPP peripheral are named PPP_xxxxConfTypeDef (e.g. ADC_ChannelConfTypeDef).
- Peripheral handle structures are named PPP_HandleTypedef (e.g DMA_HandleTypeDef)
- The functions used to initialize the PPP peripheral according to parameters specified in PPP_InitTypeDef are named HAL_PPP_Init (e.g. HAL_TIM_Init()).

- The functions used to reset the PPP peripheral registers to their default values are named PPP_DeInit, e.g. TIM_DeInit.
- The **MODE** suffix refers to the process mode, which can be polling, interrupt or DMA. As an example, when the DMA is used in addition to the native resources, the function should be called: *HAL_PPP_Function_DMA ().*
- The **Feature** prefix should refer to the new feature.
  Example: *HAL_ADC_Start*() refers to the injection mode

2.5.2 HAL general naming rules

- For the shared and system peripherals, no handle or instance object is used. This rule applies to the following peripherals:
  – GPIO
  – SYSTICK
  – NVIC
  – RCC
  – FLASH.

Example: The *HAL_GPIO_Init()* requires only the GPIO address and its configuration parameters.

```
HAL StatusTypeDef HAL GPIO Init (GPIO TypeDef* GPIOx, GPIO InitTypeDef *Init)
{
/*GPIO Initialization body */
}
```

- The macros that handle interrupts and specific clock configurations are defined in each peripheral/module driver. These macros are exported in the peripheral driver header files so that they can be used by the extension file. The list of these macros is defined below: This list is not exhaustive and other macros related to peripheral features can be added, so that they can be used in the user application.

Table 7: Macros handling interrupts and specific clock configurations

Macros	Description
__HAL_PPP_ENABLE_IT(__HANDLE__, __INTERRUPT__)	Enables a specific peripheral interrupt
__HAL_PPP_DISABLE_IT(__HANDLE__, __INTERRUPT__)	Disables a specific peripheral interrupt
__HAL_PPP_GET_IT (__HANDLE__, __ INTERRUPT __)	Gets a specific peripheral interrupt status
__HAL_PPP_CLEAR_IT (__HANDLE__, __ INTERRUPT __)	Clears a specific peripheral interrupt status
__HAL_PPP_GET_FLAG (__HANDLE__, __FLAG__)	Gets a specific peripheral flag status
__HAL_PPP_CLEAR_FLAG (__HANDLE__, __FLAG__)	Clears a specific peripheral flag status
__HAL_PPP_ENABLE(__HANDLE__)	Enables a peripheral
__HAL_PPP_DISABLE(__HANDLE__)	Disables a peripheral
__HAL_PPP_XXXX (__HANDLE__, __PARAM__)	Specific PPP HAL driver macro
__HAL_PPP_GET_ IT_SOURCE (__HANDLE__, __ INTERRUPT __)	Checks the source of specified interrupt

- NVIC and SYSTICK are two ARM Cortex core features. The APIs related to these features are located in the stm32f3xx_hal_cortex.c file.
- When a status bit or a flag is read from registers, it is composed of shifted values depending on the number of read values and of their size. In this case, the returned status width is 32 bits. Example : STATUS = XX | (YY << 16) or STATUS = XX | (YY << 8) | (YY << 16) | (YY << 24)".
- The PPP handles are valid before using the HAL_PPP_Init() API. The init function performs a check before modifying the handle fields.

```
HAL_PPP_Init(PPP_HandleTypeDef)
 if(hppp == NULL)
 { return HAL_ERROR; }
```

- The macros defined below are used:
  - Conditional macro:

```
#define ABS(x) (((x) > 0) ? (x) : -(x))
```

  - Pseudo-code macro (multiple instructions macro):

```
#define   HAL LINKDMA(  HANDLE  ,   PPP DMA FIELD ,   DMA HANDLE ) \
do{ \
 (__HANDLE__)->__PPP_DMA_FIELD_ = &(__DMA_HANDLE_); \
 (__DMA_HANDLE_).Parent = (__HANDLE__); \
 } while(0)
```

2.5.3 HAL interrupt handler and callback functions

Besides the APIs, HAL peripheral drivers include:

- HAL_PPP_IRQHandler() peripheral interrupt handler that should be called from stm32f3xx_it.c
- User callback functions.

The user callback functions are defined as empty functions with “weak” attribute. They have to be defined in the user code.

There are three types of user callbacks functions:

- Peripheral system level initialization/ de-Initialization callbacks: HAL_PPP_MspInit() and HAL_PPP_MspDeInit
- Process complete callbacks : HAL_PPP_ProcessCpltCallback
- Error callback: HAL_PPP_ErrorCallback.

Table 8: Callback functions

Callback functions	Example
HAL_PPP_MspInit() / _DeInit()	Ex: HAL_USART_MspInit() Called from HAL_PPP_Init() API function to perform peripheral system level initialization (GPIOs, clock, DMA, interrupt)
HAL_PPP_ProcessCpltCallback	Ex: HAL_USART_TxCpltCallback Called by peripheral or DMA interrupt handler when the process completes
HAL_PPP_ErrorCallback	Ex: HAL_USART_ErrorCallback Called by peripheral or DMA interrupt handler when an error occurs

2.6 HAL generic APIs

The generic APIs provide common generic functions applying to all STM32 devices. They are composed of four APIs groups:

- **Initialization and de-initialization functions:**HAL_PPP_Init(), HAL_PPP_DeInit()
- **IO operation functions**: HAL_PPP_Read(), HAL_PPP_Write(),HAL_PPP_Transmit(), HAL_PPP_Receive()
- **Control functions**: HAL_PPP_Set (), HAL_PPP_Get ().
- **State and Errors functions**: HAL_PPP_GetState (), HAL_PPP_GetError ().

For some peripheral/module drivers, these groups are modified depending on the peripheral/module implementation.

Example: in the timer driver, the API grouping is based on timer features (PWM, OC, IC...).

The initialization and de-initialization functions allow initializing a peripheral and configuring the low-level resources, mainly clocks, GPIO, alternate functions (AF) and possibly DMA and interrupts. The *HAL_DeInit()*function restores the peripheral default state, frees the low-level resources and removes any direct dependency with the hardware.

The IO operation functions perform a row access to the peripheral payload data in write and read modes.

The control functions are used to change dynamically the peripheral configuration and set another operating mode.

The peripheral state and errors functions allow retrieving in runtime the peripheral and data flow states, and identifying the type of errors that occurred. The example below is based on the ADC peripheral. The list of generic APIs is not exhaustive. It is only given as an example.

Table 9: HAL generic APIs

Function group	Common API name	Description
Initialization group	*HAL_ADC_Init()*	This function initializes the peripheral and configures the low -level resources (clocks, GPIO, AF..)
	HAL_ADC_DeInit()	This function restores the peripheral default state, frees the low-level resources and removes any direct dependency with the hardware.
IO operation group	*HAL_ADC_Start ()*	This function starts ADC conversions when the polling method is used
	HAL_ADC_Stop ()	This function stops ADC conversions when the polling method is used
	HAL_ADC_PollForConversion()	This function allows waiting for the end of conversions when the polling method is used. In this case, a timout value is specified by the user according to the application.
	HAL_ADC_Start_IT()	This function starts ADC conversions when the interrupt method is used
	HAL_ADC_Stop_IT()	This function stops ADC conversions when the interrupt method is used
	HAL_ADC_IRQHandler()	This function handles ADC interrupt requests

Function group	Common API name	Description
	HAL_ADC_ConvCpltCallback()	Callback function called in the IT subroutine to indicate the end of the current process or when a DMA transfer has completed
	HAL_ADC_ErrorCallback()	Callback function called in the IT subroutine if a peripheral error or a DMA transfer error occurred
Control group	*HAL_ADC_ConfigChannel()*	This function configures the selected ADC regular channel, the corresponding rank in the sequencer and the sample time
	HAL_ADC_AnalogWDGConfig	This function configures the analog watchdog for the selected ADC
State and Errors group	*HAL_ADC_GetState()*	This function allows getting in runtime the peripheral and the data flow states.
	HAL_ADC_GetError()	This fuction allows getting in runtime the error that occurred during IT routine

2.7 HAL extension APIs

2.7.1 HAL extension model overview

The extension APIs provide specific functions or overwrite modified APIs for a specific family (series) or specific part number within the same family.

The extension model consists of an additional file, stm32f3xx_hal_ppp_ex.c, that includes all the specific functions and define statements (stm32f3xx_hal_ppp_ex.h) for a given part number.

Below an example based on the ADC peripheral:

Table 10: HAL extension APIs

Function Group	Common API Name
HAL_ADCEx_Calibration_Start()	This function is used to start the automatic ADC calibration
HAL_ADCEx_Calibration_GetValue()	This function is used to get the ADC calibration factor
HAL_ADCEx_Calibration_SetValue()	This function is used to set the calibration factor to overwrite automatic conversion result


2.7.2 HAL extension model cases

The specific IP features can be handled by the HAL drivers in five different ways. They are described below.

Case 1: Adding a part number-specific function

When a new feature specific to a given device is required, the new APIs are added in the stm32f3xx_hal_adc_ex.c extension file. They are named HAL_PPPEx_Function().

Figure 2: Adding device-specific functions

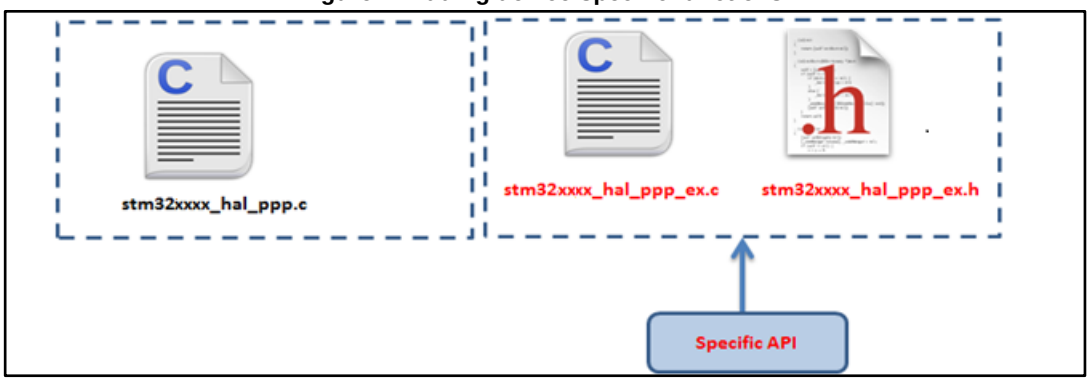


Example: stm32f3xx_hal_adc_ex.c/h

```
#if defined(STM32F302xE) || defined(STM32F303xE) || defined(STM32F398xx) || \
defined(STM32F302xC) || defined(STM32F303xC) || defined(STM32F358xx) || \
defined(STM32F303x8) || defined(STM32F334x8) || defined(STM32F328xx) || \
defined(STM32F301x8) || defined(STM32F302x8) || defined(STM32F318xx)
HAL StatusTypeDef HAL ADCEx Calibration Start(struct   ADC HandleTypeDef* hadc,
uint32_t SingleDiff);
uint32_t HAL_ADCEx_Calibration_GetValue(struct __ADC_HandleTypeDef *hadc, uint32_t
SingleDiff);
HAL StatusTypeDef HAL ADCEx Calibration SetValue(struct   ADC HandleTypeDef *hadc,
uint32 t SingleDiff, uint32 t CalibrationFactor);
#endif /* STM32F302xE || STM32F303xE || STM32F398xx || */
/* STM32F302xC || STM32F303xC || STM32F358xx || */
/* STM32F303x8 || STM32F334x8 || STM32F328xx || */
/* STM32F301x8 || STM32F302x8 || STM32F318xx */
```

Case 2: Adding a family-specific function

In this case, the API is added in the extension driver C file and named HAL_PPPEx_Function ().

Figure 3: Adding family-specific functions

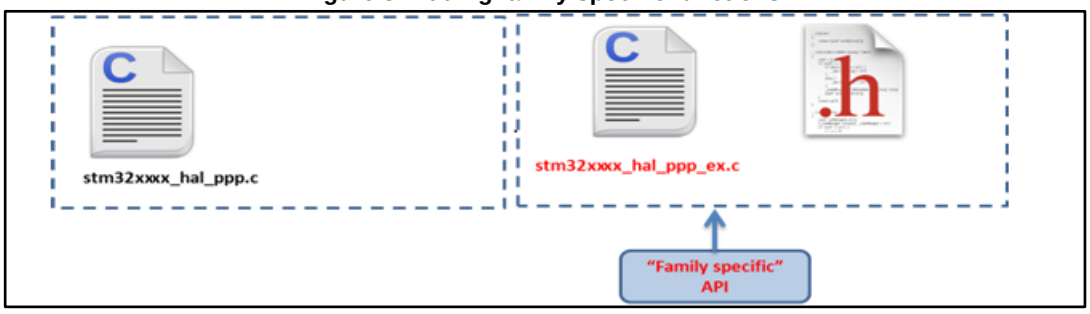


Case 3: Adding a new peripheral (specific to a device belonging to a given family)

When a peripheral which is available only in a specific device is required, the APIs corresponding to this new peripheral/module are added in stm32f3xx_hal_newppp.c. However the inclusion of this file is selected in the stm32f3xx_hal_conf.h using the macro:

```
#define HAL_NEWPPP_MODULE_ENABLED
```

Figure 4: Adding new peripherals

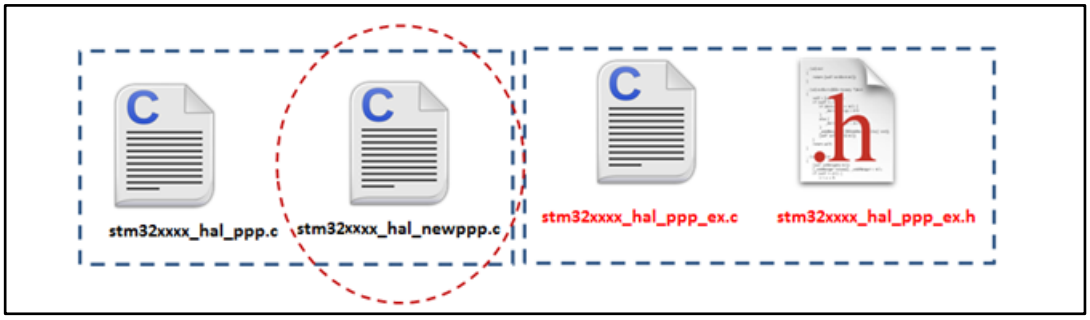


Example: xx_hal_sdadc.c/h

Case 4: Updating existing common APIs

In this case, the routines are defined with the same names in the xx_hal_ppp_ex.c extension file, while the generic API is defined as *weak*, so that the compiler will overwrite the original routine by the new defined function.

Figure 5: Updating existing APIs

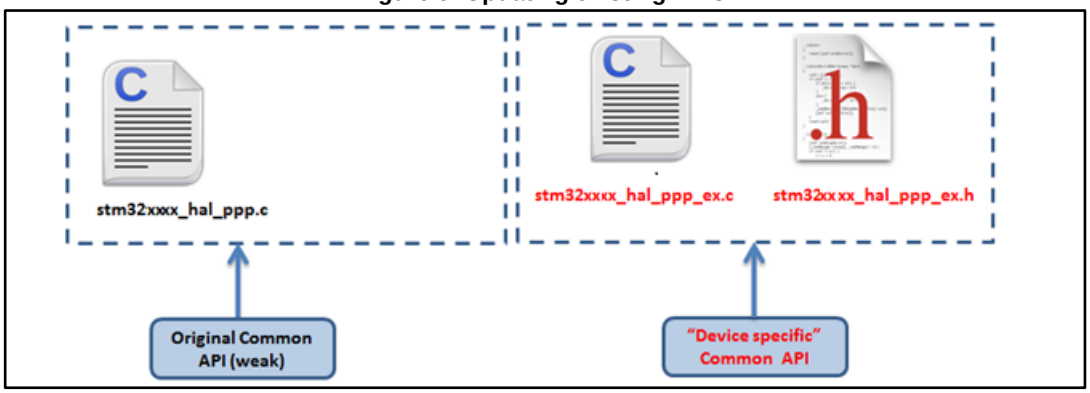

Case 5: Updating existing data structures

The data structure for a specific device part number (e.g. PPP_InitTypeDef) can be composed of different fields. In this case, the data structure is defined in the extension header file and delimited by the specific part number define statement.


Example:

```
#if defined(STM32F373xC) || defined(STM32F378xx)
typedef struct
{
(...)
}PPP InitTypeDef;
#endif /* STM32F373xC || STM32F378xx */
```

2.8 File inclusion model

The header of the common HAL driver file (stm32f3xx_hal.h) includes the common configurations for the whole HAL library. It is the only header file that is included in the user sources and the HAL C sources files to be able to use the HAL resources.

Figure 6: File inclusion model

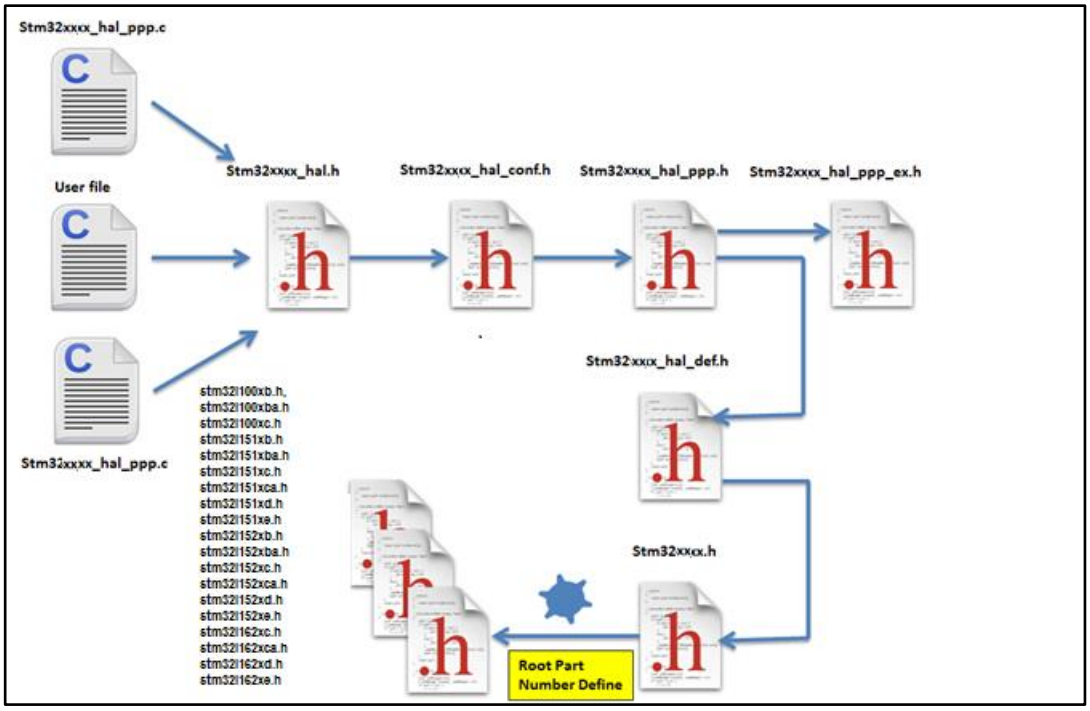

A PPP driver is a standalone module which is used in a project. The user must enable the corresponding USE_HAL_PPP_MODULE define statement in the configuration file.

```
/*****************************************************************
* @file stm32f3xx hal conf.h
* @author MCD Application Team
* @version VX.Y.Z * @date dd-mm-yyyy
* @brief This file contains the modules to be used
*****************************************************************
(…)
#define USE HAL USART MODULE
#define USE_HAL_IRDA_MODULE
#define USE_HAL_DMA_MODULE
#define USE_HAL_RCC_MODULE
(…)
```

2.9 HAL common resources

The common HAL resources, such as common define enumerations, structures and macros, are defined in *stm32f3xx_hal_def.h.*The main common define enumeration is *HAL_StatusTypeDef*.

- **HAL Status** The HAL status is used by almost all HAL APIs, except for boolean functions and IRQ handler. It returns the status of the current API operations. It has four possible values as described below:

```
Typedef enum
 { HAL_OK = 0x00, HAL_ERROR = 0x01, HAL_BUSY = 0x02, HAL_TIMEOUT = 0x03
 } HAL_StatusTypeDef;
```

- **HAL Locked**
  The HAL lock is used by all HAL APIs to prevent accessing by accident shared resources.

```
typedef enum
{ HAL_UNLOCKED = 0x00, /*!<Resources unlocked */
 HAL_LOCKED = 0x01 /*!< Resources locked */
 } HAL_LockTypeDef;
```

  In addition to common resources, the stm32f3xx_hal_def.h file calls the stm32f3xx.h file in CMSIS library to get the data structures and the address mapping for all peripherals:

  – Declarations of peripheral registers and bits definition.
  – Macros to access peripheral registers hardware (Write register, Read register…etc.).

- **Common macros**
  – Macro defining HAL_MAX_DELAY

```
#define HAL_MAX_DELAY 0xFFFFFFFF
```

  – Macro linking a PPP peripheral to a DMA structure pointer: *__HAL_LINKDMA();*

```
#define   HAL LINKDMA(  HANDLE  ,   PPP DMA FIELD ,   DMA HANDLE ) \
do{ \
 (__HANDLE__)->__PPP_DMA_FIELD_ = &(__DMA_HANDLE_); \
 (__DMA_HANDLE_).Parent = (__HANDLE__); \
 } while(0)
```

2.10 HAL configuration

The configuration file*, stm32f3xx_hal_conf.h,* allows customizing the drivers for the user application. Modifying this configuration is not mandatory: the application can use the default configuration without any modification.

To configure these parameters, the user should enable, disable or modify some options by uncommenting, commenting or modifying the values of the related define statements as described in the table below:

Table 11: Define statements used for HAL configuration

Configuration item	Description	Default Value
HSE_VALUE	Defines the value of the external oscillator (HSE) expressed in Hz. The user must adjust this define statement when using a different crystal value.	8 000 000 (Hz)
HSE_STARTUP_TIMEOUT	Timeout for HSE start-up, expressed in ms	5000
HSI_VALUE	Defines the value of the internal oscillator (HSI) expressed in Hz.	16 000 000 (Hz)
HSI_STARTUP_TIMEOUT	Timeout for HSI start-up, expressed in ms	5000
LSE_VALUE	Defines the value of the external oscillator (HSE) expressed in Hz. The user must adjust this define statement when using a different crystal value.	32768 (Hz)
LSE_STARTUP_TIMEOUT	Timeout for LSE start-up, expressed in ms	5000
LSI_VALUE	Defines the value of the Internal Low Speed oscillator expressed in Hz. The real value may vary depending on the variations in voltage and temperature.	40 000 (Hz)
VDD_VALUE	VDD value	3300 (mV)

Configuration item	Description	Default Value
USE_RTOS	Enables the use of RTOS	FALSE (for future use)
PREFETCH_ENABLE	Enables prefetch feature	TRUE



The stm32f3xx_hal_conf_template.h file is located in the HAL drivers *Inc* folder. It should be copied to the user folder, renamed and modified as described above.



By default, the values defined in the stm32f3xx_hal_conf_template.h file are the same as the ones used for the examples and demonstrations. All HAL include files are enabled so that they can be used in the user code without modifications.

2.11 HAL system peripheral handling

This chapter gives an overview of how the system peripherals are handled by the HAL drivers. The full API list is provided within each peripheral driver description section.

2.11.1 Clock

Two main functions can be used to configure the system clock:

- HAL_RCC_OscConfig (RCC_OscInitTypeDef *RCC_OscInitStruct). This function configures/enables multiple clock sources (HSE, HSI, LSE, LSI, PLL).
- HAL_RCC_ClockConfig (RCC_ClkInitTypeDef *RCC_ClkInitStruct, uint32_t FLatency). This function
  - selects the system clock source
  - configures AHB and APB clock dividers
  - configures the number of Flash memory wait states
  - updates the SysTick configuration when HCLK clock changes.

Some peripheral clocks are not derived from the system clock (RTC, USB…). In this case, the clock configuration is performed by an extended API defined in stm32f3xx_hal_rcc_ex.c: *HAL_RCCEx_PeriphCLKConfig(RCC_PeriphCLKInitTypeDef *PeriphClkInit)*.

Additional RCC HAL driver functions are available:

- HAL_RCC_DeInit() Clock de-init function that return clock configuration to reset state
- Get clock functions that allow retreiving various clock configurations (system clock, HCLK, PCLK1, …)
- MCO and CSS configuration functions

A set of macros are defined in stm32f3xx_hal_rcc.h andstm32f3xx_hal_rcc_ex.h. They allow executing elementary operations on RCC block registers, such as peripherals clock gating/reset control:

- __PPP_CLK_ENABLE/__PPP_CLK_DISABLE to enable/disable the peripheral clock
- __PPP_FORCE_RESET/__PPP_RELEASE_RESET to force/release peripheral reset
- __PPP_CLK_SLEEP_ENABLE/__PPP_CLK_SLEEP_DISABLE to enable/disable the peripheral clock during low power (Sleep) mode.

2.11.2 GPIOs

GPIO HAL APIs are the following:

- HAL_GPIO_Init() / HAL_GPIO_DeInit()
- HAL_GPIO_ReadPin() / HAL_GPIO_WritePin()
- HAL_GPIO_TogglePin ().

In addition to standard GPIO modes (input, output, analog), the pin mode can be configured as EXTI with interrupt or event generation.

When selecting EXTI mode with interrupt generation, the user must call HAL_GPIO_EXTI_IRQHandler() from stm32f3xx_it.c and implement HAL_GPIO_EXTI_Callback()

The table below describes the GPIO_InitTypeDef structure field.

Table 12: Description of GPIO_InitTypeDef structure

Structure field	Description
Pin	Specifies the GPIO pins to be configured. Possible values: GPIO_PIN_x or GPIO_PIN_All, where x[0..15]
Mode	Specifies the operating mode for the selected pins: GPIO mode or EXTI mode. Possible values are: • GPIO mode – GPIO_MODE_INPUT : Input floating – GPIO_MODE_OUTPUT_PP : Output push-pull – GPIO_MODE_OUTPUT_OD : Output open drain – GPIO_MODE_AF_PP : Alternate function push-pull – GPIO_MODE_AF_OD : Alternate function open drain – GPIO_MODE_ANALOG : Analog mode • External Interrupt mode – GPIO_MODE_IT_RISING : Rising edge trigger detection – GPIO_MODE_IT_FALLING : Falling edge trigger detection – GPIO_MODE_IT_RISING_FALLING : Rising/Falling edge trigger detection • External Event mode – GPIO_MODE_EVT_RISING : Rising edge trigger detection – GPIO_MODE_EVT_FALLING : Falling edge trigger detection – GPIO_MODE_EVT_RISING_FALLING: Rising/Falling edge trigger detection
Pull	Specifies the Pull-up or Pull-down activation for the selected pins. Possible values are: GPIO_NOPULL GPIO_PULLUP GPIO_PULLDOWN
Speed	Specifies the speed for the selected pins Possible values are: GPIO_SPEED_FREQ_LOW GPIO_SPEED_FREQ_MEDIUM GPIO_SPEED_FREQ_HIGH

Structure field	Description
Alternate	Peripheral to be connected to the selected pins. Possible values: GPIO_AFx_PPP, where AFx: is the alternate function index PPP: is the peripheral instance Example: use GPIO_AF1_TIM2 to connect TIM2 IOs on AF1. These values are defined in the GPIO extended driver, since the AF mapping may change between product lines.  Refer to the “Alternate function mapping” table in the datasheets for the detailed description of the system and peripheral I/O alternate functions.

Please find below typical GPIO configuration examples:

- Configuring GPIOs as output push-pull to drive external LEDs

```
GPIO_InitStruct.Pin = GPIO_PIN_12 | GPIO_PIN_13 | GPIO_PIN_14 | GPIO_PIN_15;
GPIO_InitStruct.Mode = GPIO_MODE_OUTPUT_PP;
GPIO InitStruct.Pull = GPIO PULLUP;
GPIO InitStruct.Speed = GPIO SPEED FREQ MEDIUM;
HAL_GPIO_Init(GPIOD, &GPIO_InitStruct);
```

- Configuring PA0 as external interrupt with falling edge sensitivity:

```
GPIO InitStructure.Mode = GPIO MODE IT FALLING;
GPIO_InitStructure.Pull = GPIO_NOPULL;
GPIO_InitStructure.Pin = GPIO_PIN_0;
HAL_GPIO_Init(GPIOA, &GPIO_InitStructure);
```

- Configuring USART1 Tx (PA9, mapped on AF4) as alternate function:

```
GPIO_InitStruct.Pin = GPIO_PIN_9;
GPIO_InitStruct.Mode = GPIO_MODE_AF_PP;
GPIO InitStruct.Pull = GPIO PULLUP;
GPIO InitStruct.Speed = GPIO SPEED FREQ HIGH;
GPIO InitStruct.Alternate = GPIO AF4 USART1;
HAL_GPIO_Init(GPIOA, &GPIO_InitStruct);
```

2.11.3 Cortex NVIC and SysTick timer

The Cortex HAL driver, stm32f3xx_hal_cortex.c, provides APIs to handle NVIC and Systick. The supported APIs include:

- HAL_NVIC_SetPriority()
- HAL_NVIC_EnableIRQ()/HAL_NVIC_DisableIRQ()
- HAL_NVIC_SystemReset()
- HAL_SYSTICK_IRQHandler()
- HAL_NVIC_GetPendingIRQ() / HAL_NVIC_SetPendingIRQ () / HAL_NVIC_ClearPendingIRQ()
- HAL_SYSTICK_Config()
- HAL_SYSTICK_CLKSourceConfig()
- HAL_SYSTICK_Callback()

2.11.4 PWR

The PWR HAL driver handles power management. The features shared between all STM32 Series are listed below:

- PVD configuration, enabling/disabling and interrupt handling
  - HAL_PWR_PVDConfig()
  - HAL_PWR_EnablePVD() / HAL_PWR_DisablePVD()
  - HAL_PWR_PVD_IRQHandler()
  - HAL_PWR_PVDCallback()
- Wakeup pin configuration
  - HAL_PWR_EnableWakeUpPin() / HAL_PWR_DisableWakeUpPin()
- Low-power mode entry
  - HAL_PWR_EnterSLEEPMode()
  - HAL_PWR_EnterSTOPMode()
  - HAL_PWR_EnterSTANDBYMode()
- Backup domain configuration
  - HAL_PWR_EnableBkUpAccess()/ HAL_PWR_DisableBkUpAccess()

2.11.5 EXTI

The EXTI is not considered as a standalone peripheral but rather as a service used by other peripheral. As a result there are no EXTI APIs but each peripheral HAL driver implements the associated EXTI configuration and EXTI function are implemented as macros in its header file.

The first 16 EXTI lines connected to the GPIOs are managed within the GPIO driver. The GPIO_InitTypeDef structure allows configuring an I/O as external interrupt or external event.

The EXTI lines connected internally to the PVD, RTC, USB, and COMP are configured within the HAL drivers of these peripheral through the macros given in the table below. The EXTI internal connections depend on the targeted STM32 microcontroller (refer to the product datasheet for more details):

Table 13: Description of EXTI configuration macros

Macros	Description
PPP_EXTI_LINE_FUNCTION	Defines the EXTI line connected to the internal peripheral. Example: #define PWR_EXTI_LINE_PVD ((uint32_t)0x00010000) /*!<External interrupt line 16 Connected to the PVD EXTI Line */
__HAL_PPP_EXTI_ENABLE_IT	Enables a given EXTI line Example: __HAL_PWR_PVD_EXTI_ENABLE_IT()
__HAL_PPP_EXTI_DISABLE_IT	Disables a given EXTI line. Example: __HAL_PWR_PVD_EXTI_DISABLE_IT()
__HAL_PPP_EXTI_GET_FLAG	Gets a given EXTI line interrupt flag pending bit status. Example: __HAL_PWR_PVD_EXTI_GET_FLAG()

Macros	Description
__HAL_PPP_EXTI_CLEAR_FLAG	Clears a given EXTI line interrupt flag pending bit. Example; __HAL_PWR_PVD_EXTI_CLEAR_FLAG()
__HAL_PPP_EXTI_GENERATE_SWIT	Generates a software interrupt for a given EXTI line. Example: __HAL_PWR_PVD_EXTI_GENERATE_SWIT()
__HAL_PPP_EXTI_ENABLE_EVENT	Enables event on a given EXTI Line Example: _HAL_PWR_PVD_EXTI_ENABLE_EVENT()
__HAL_PPP_EXTI_DISABLE_EVENT	Disables event on a given EXTI line Example: __HAL_PWR_PVD_EXTI_DISABLE_EVENT()

If the EXTI interrupt mode is selected, the user application must call HAL_PPP_FUNCTION_IRQHandler() (for example HAL_PWR_PVD_IRQHandler()), from stm32f3xx_it.c file, and implement HAL_PPP_FUNCTIONCallback() callback function (for example HAL_PWR_PVDCallback().

2.11.6 DMA

The DMA HAL driver allows enabling and configuring the peripheral to be connected to the DMA Channels (except for internal SRAM/FLASH memory which do not require any initialization). Refer to the product reference manual for details on the DMA request corresponding to each peripheral.

For a given channel, HAL_DMA_Init() API allows programming the required configuration through the following parameters:

- Transfer Direction
- Source and Destination data formats
- Circular, Normal or peripheral flow control mode
- Channels Priority level
- Source and Destination Increment mode
- FIFO mode and its Threshold (if needed)
- Burst mode for Source and/or Destination (if needed).

Two operating modes are available:

- Polling mode I/O operation
  a. Use HAL_DMA_Start() to start DMA transfer when the source and destination addresses and the Length of data to be transferred have been configured.
  b. Use HAL_DMA_PollForTransfer() to poll for the end of current transfer. In this case a fixed timeout can be configured depending on the user application.
- Interrupt mode I/O operation
  a. Configure the DMA interrupt priority using HAL_NVIC_SetPriority()
  b. Enable the DMA IRQ handler using HAL_NVIC_EnableIRQ()
  c. Use HAL_DMA_Start_IT() to start DMA transfer when the source and destination addresses and the length of data to be transferred have been confgured. In this case the DMA interrupt is configured.
  d. Use HAL_DMA_IRQHandler() called under DMA_IRQHandler() Interrupt subroutine

e. When data transfer is complete, HAL_DMA_IRQHandler() function is executed and a user function can be called by customizing XferCpltCallback and XferErrorCallback function pointer (i.e. a member of DMA handle structure).

Additional functions and macros are available to ensure efficient DMA management:

- Use HAL_DMA_GetState() function to return the DMA state and HAL_DMA_GetError() in case of error detection.
- Use HAL_DMA_Abort() function to abort the current transfer

The most used DMA HAL driver macros are the following:

- __HAL_DMA_ENABLE: enables the specified DMA Channels.
- __HAL_DMA_DISABLE: disables the specified DMA Channels.
- __HAL_DMA_GET_FLAG: gets the DMA Channels pending flags.
- __HAL_DMA_CLEAR_FLAG: clears the DMA Channels pending flags.
- __HAL_DMA_ENABLE_IT: enables the specified DMA Channels interrupts.
- __HAL_DMA_DISABLE_IT: disables the specified DMA Channels interrupts.
- __HAL_DMA_GET_IT_SOURCE: checks whether the specified DMA channel interrupt has occurred or not.



When a peripheral is used in DMA mode, the DMA initialization should be done in the HAL_PPP_MspInit() callback. In addition, the user application should associate the DMA handle to the PPP handle (refer to section “HAL IO operation functions”).




DMA channel callbacks need to be initialized by the user application only in case of memory-to-memory transfer. However when peripheral-to-memory transfers are used, these callbacks are automatically initialized by calling a process API function that uses the DMA.

2.12 How to use HAL drivers

2.12.1 HAL usage models

The following figure shows the typical use of the HAL driver and the interaction between the application user, the HAL driver and the interrupts.

Figure 7: HAL driver model

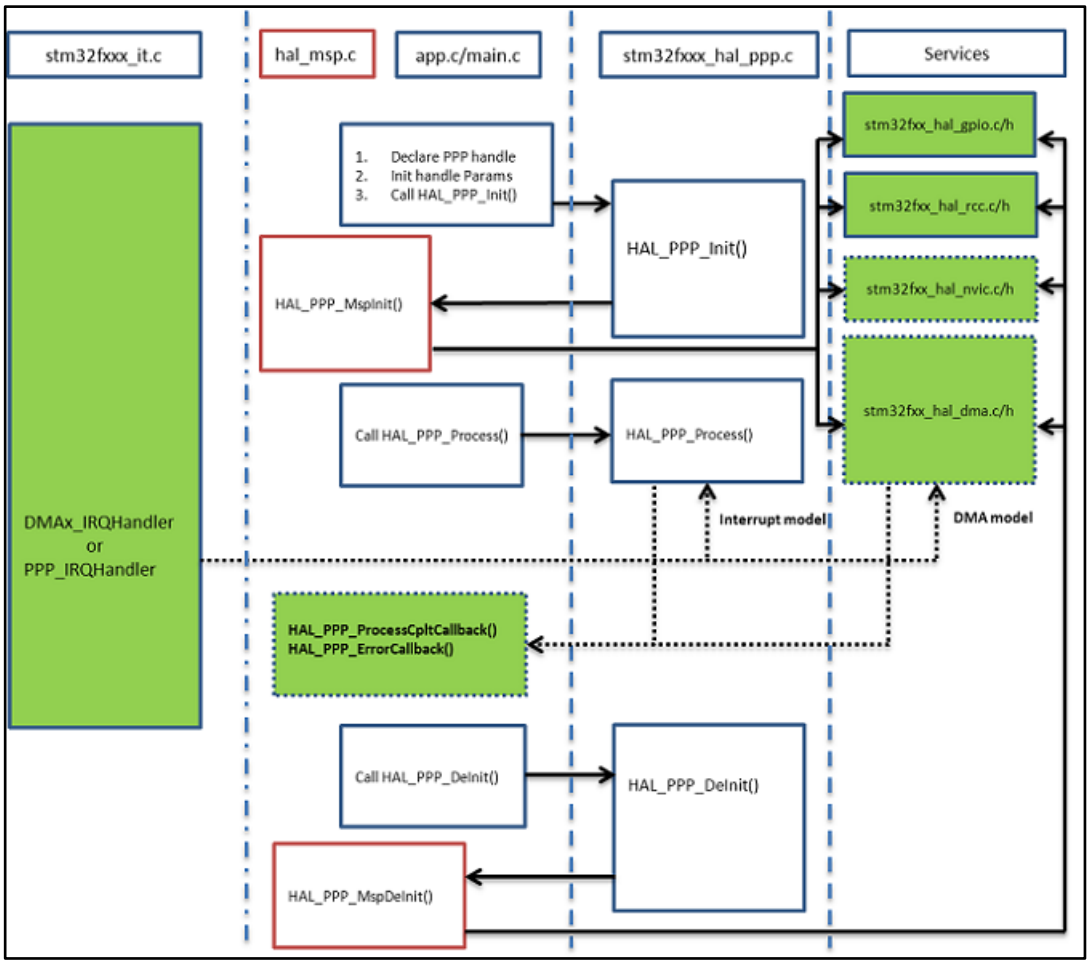

The functions implemented in the HAL driver are shown in green, the functions called from interrupt handlers in dotted lines, and the msp functions implemented in the user application in red. Non-dotted lines represent the interactions between the user application functions.

Basically, the HAL driver APIs are called from user files and optionally from interrupt handlers file when the APIs based on the DMA or the PPP peripheral dedicated interrupts are used.

When DMA or PPP peripheral interrupts are used, the PPP process complete callbacks are called to inform the user about the process completion in real-time event mode (interrupts). Note that the same process completion callbacks are used for DMA in interrupt mode.

2.12.2 HAL initialization

2.12.2.1 HAL global initialization

In addition to the peripheral initialization and de-initialization functions, a set of APIs are provided to initialize the HAL core implemented in file stm32f3xx_hal.c.

- HAL_Init(): this function must be called at application startup to
  - initialize data/instruction cache and pre-fetch queue
  - set Systick timer to generate an interrupt each 1ms (based on HSI clock) with the lowest priority
  - call HAL_MspInit() user callback function to perform system level initializations (Clock, GPIOs, DMA, interrupts). HAL_MspInit() is defined as “weak” empty function in the HAL drivers.
- HAL_DeInit()
  - resets all peripherals
  - calls function HAL_MspDeInit() which a is user callback function to do system level De-Initalizations.
- HAL_GetTick(): this function gets current SysTick counter value (incremented in SysTick interrupt) used by peripherals drivers to handle timeouts.
- HAL_Delay(). this function implements a delay (expressed in milliseconds) using the SysTick timer.
  Care must be taken when using HAL_Delay() since this function provides an accurate delay (expressed in milliseconds) based on a variable incremented in SysTick ISR. This means that if HAL_Delay() is called from a peripheral ISR, then the SysTick interrupt must have highest priority (numerically lower) than the peripheral interrupt, otherwise the caller ISR will be blocked.

2.12.2.2 System clock initialization

The clock configuration is done at the beginning of the user code. However the user can change the configuration of the clock in his own code. Please find below the typical Clock configuration sequence:

```
void SystemClock Config(void)
{
RCC_ClkInitTypeDef RCC_ClkInitStruct;
RCC OscInitTypeDef RCC OscInitStruct;
/* Enable HSE Oscillator and activate PLL with HSE as source */
RCC_OscInitStruct.OscillatorType = RCC_OSCILLATORTYPE_HSE;
RCC_OscInitStruct.HSEState = RCC_HSE_ON;
RCC_OscInitStruct.HSEPredivValue = RCC_HSE_PREDIV_DIV1;
RCC_OscInitStruct.PLL.PLLState = RCC_PLL_ON;
RCC OscInitStruct.PLL.PLLSource = RCC PLLSOURCE HSE;
RCC OscInitStruct.PLL.PLLMUL = RCC PLL MUL9;
if (HAL_RCC_OscConfig(&RCC_OscInitStruct)!= HAL_OK)
{
Error Handler();
}
/* Select PLL as system clock source and configure the HCLK, PCLK1 and PCLK2
clocks dividers */
RCC_ClkInitStruct.ClockType = (RCC_CLOCKTYPE_SYSCLK | RCC_CLOCKTYPE_HCLK |
RCC_CLOCKTYPE_PCLK1 | RCC_CLOCKTYPE_PCLK2);
RCC ClkInitStruct.SYSCLKSource = RCC SYSCLKSOURCE PLLCLK;
RCC ClkInitStruct.AHBCLKDivider = RCC SYSCLK DIV1;
RCC ClkInitStruct.APB1CLKDivider = RCC HCLK DIV2;
RCC ClkInitStruct.APB2CLKDivider = RCC HCLK DIV1;
if (HAL_RCC_ClockConfig(&RCC_ClkInitStruct, FLASH_LATENCY_2)!= HAL_OK)
{
Error Handler();
}
}
```

2.12.2.3 HAL MSP initialization process

The peripheral initialization is done through *HAL_PPP_Init()* while the hardware resources initialization used by a peripheral (PPP) is performed during this initialization by calling MSP callback function *HAL_PPP_MspInit().*

The MspInit callback performs the low level initialization related to the different additional hardware resources: RCC, GPIO, NVIC and DMA.

All the HAL drivers with handles include two MSP callbacks for initialization and de-initialization:

```
/**
* @brief Initializes the PPP MSP.
* @param hppp: PPP handle
* @retval None */
void __weak HAL_PPP_MspInit(PPP_HandleTypeDef *hppp) {
/* NOTE : This function Should not be modified, when the callback is needed,
the HAL PPP MspInit could be implemented in the user file */
}
/**
* @brief DeInitializes PPP MSP.
* @param hppp: PPP handle
* @retval None */
void   weak HAL PPP MspDeInit(PPP HandleTypeDef *hppp) {
/* NOTE : This function Should not be modified, when the callback is needed,
the HAL_PPP_MspDeInit could be implemented in the user file */
}
```

The MSP callbacks are declared empty as weak functions in each peripheral driver. The user can use them to set the low level initialization code or omit them and use his own initialization routine.

The HAL MSP callback is implemented inside the *stm32f3xx_hal_msp.c* file in the user folders. An *stm32f3xx_hal_msp_template.c* file is located in the HAL folder and should be copied to the user folder. It can be generated automatically by STM32CubeMX tool and further modified. Note that all the routines are declared as weak functions and could be overwritten or removed to use user low level initialization code.

stm32f3xx_hal_msp.c file contains the following functions:

Table 14: MSP functions

Routine	Description
void HAL_MspInit()	Global MSP initialization routine
void HAL_MspDeInit()	Global MSP de-initialization routine
void HAL_PPP_MspInit()	PPP MSP initialization routine
void HAL_PPP_MspDeInit()	PPP MSP de-initialization routine

By default, if no peripheral needs to be de-initialized during the program execution, the whole MSP initialization is done in *Hal_MspInit()* and MSP De-Initialization in the *Hal_MspDeInit().* In this case the *HAL_PPP_MspInit()* and *HAL_PPP_MspDeInit()* are not implemented.

When one or more peripherals needs to be de-initialized in run time and the low level resources of a given peripheral need to be released and used by another peripheral, HAL_PPP_MspDeInit() and *HAL_PPP_MspInit()* are implemented for the concerned peripheral and other peripherals initialization and de-Initialization are kept in the global *HAL_MspInit()* and the *HAL_MspDeInit().*

If there is nothing to be initialized by the global *HAL_MspInit()* and *HAL_MspDeInit()*, the two routines can simply be omitted.

2.12.3 HAL IO operation process

The HAL functions with internal data processing like transmit, receive, write and read are generally provided with three data processing modes as follows:

- Polling mode
- Interrupt mode
- DMA mode

2.12.3.1 Polling mode

In Polling mode, the HAL functions return the process status when the data processing in blocking mode is complete. The operation is considered complete when the function returns the HAL_OK status, otherwise an error status is returned. The user can get more information through the *HAL_PPP_GetState()* function. The data processing is handled internally in a loop. A timeout (expressed in ms) is used to prevent process hanging.

The example below shows the typical Polling mode processing sequence :

```
HAL StatusTypeDef HAL PPP Transmit ( PPP HandleTypeDef * phandle, uint8 t pData,
int16 tSize,uint32 tTimeout)
{
if((pData == NULL ) || (Size == 0))
{
return HAL ERROR;
}
(…) while (data processing is running)
{
if( timeout reached )
{
return HAL TIMEOUT;
}
}
(…)
return HAL_OK; }
```

2.12.3.2 Interrupt mode

In Interrupt mode, the HAL function returns the process status after starting the data processing and enabling the appropriate interruption. The end of the operation is indicated by a callback declared as a weak function. It can be customized by the user to be informed in real-time about the process completion. The user can also get the process status through the *HAL_PPP_GetState()* function.

In Interrupt mode, four functions are declared in the driver:

- *HAL_PPP_Process_IT()*: launch the process
- *HAL_PPP_IRQHandler()*: the global PPP peripheral interruption
- *__weak HAL_PPP_ProcessCpltCallback ()*: the callback relative to the process completion.
- *__weak HAL_PPP_ProcessErrorCallback()*: the callback relative to the process Error.

To use a process in Interrupt mode, *HAL_PPP_Process_IT()* is called in the user file and HAL_PPP_IRQHandler in *stm32f3xx_it.c.*

The *HAL_PPP_ProcessCpltCallback()* function is declared as weak function in the driver. This means that the user can declare it again in the application. The function in the driver is not modified.

An example of use is illustrated below:

main.c file:

```
UART HandleTypeDef UartHandle;
int main(void)
{
/* Set User Parameters */
UartHandle.Init.BaudRate = 9600;
UartHandle.Init.WordLength = UART DATABITS 8;
UartHandle.Init.StopBits = UART STOPBITS 1;
UartHandle.Init.Parity = UART PARITY NONE;
UartHandle.Init.HwFlowCtl = UART_HWCONTROL_NONE;
UartHandle.Init.Mode = UART_MODE_TX_RX;
UartHandle.Init.Instance = USART1;
HAL UART Init(&UartHandle);
HAL UART SendIT(&UartHandle, TxBuffer, sizeof(TxBuffer));
while (1);
}
void HAL_UART_TxCpltCallback(UART_HandleTypeDef *huart)
{
}
void HAL UART ErrorCallback(UART HandleTypeDef *huart)
{
}
```

*stm32f3xx_it.c*file:

```
extern UART_HandleTypeDef UartHandle;
void USART1_IRQHandler(void)
{
HAL UART IRQHandler(&UartHandle);
}
```

2.12.3.3 DMA mode

In DMA mode, the HAL function returns the process status after starting the data processing through the DMA and after enabling the appropriate DMA interruption. The end of the operation is indicated by a callback declared as a weak function and can be customized by the user to be informed in real-time about the process completion. The user can also get the process status through the *HAL_PPP_GetState()* function. For the DMA mode, three functions are declared in the driver:

- *HAL_PPP_Process_DMA()*: launch the process
- *HAL_PPP_DMA_IRQHandler()*: the DMA interruption used by the PPP peripheral
- *__weak HAL_PPP_ProcessCpltCallback()*: the callback relative to the process completion.
- *__weak HAL_PPP_ErrorCpltCallback()*: the callback relative to the process Error.

To use a process in DMA mode, *HAL_PPP_Process_DMA()* is called in the user file and the *HAL_PPP_DMA_IRQHandler()* is placed in the *stm32f3xx_it.c*. When DMA mode is used, the DMA initialization is done in the *HAL_PPP_MspInit()* callback. The user should also associate the DMA handle to the PPP handle. For this purpose, the handles of all the peripheral drivers that use the DMA must be declared as follows:

```
typedef struct
{
PPP TypeDef *Instance; /* Register base address */
PPP InitTypeDef Init; /* PPP communication parameters */
HAL StateTypeDef State; /* PPP communication state */
(…)
DMA_HandleTypeDef *hdma; /* associated DMA handle */
} PPP_HandleTypeDef;
```

The initialization is done as follows (UART example):

```
int main(void)
{
/* Set User Parameters */
UartHandle.Init.BaudRate = 9600;
UartHandle.Init.WordLength = UART DATABITS 8;
UartHandle.Init.StopBits = UART STOPBITS 1;
UartHandle.Init.Parity = UART PARITY NONE;
UartHandle.Init.HwFlowCtl = UART HWCONTROL NONE;
UartHandle.Init.Mode = UART_MODE_TX_RX;
UartHandle.Init.Instance = UART1;
HAL UART Init(&UartHandle);
(..)
}
void HAL USART MspInit (UART HandleTypeDef * huart)
{
static DMA_HandleTypeDef hdma_tx;
static DMA HandleTypeDef hdma rx;
(…)
__HAL_LINKDMA(UartHandle, DMA_Handle_tx, hdma_tx);
__HAL_LINKDMA(UartHandle, DMA_Handle_rx, hdma_rx);
(…)
}
```

The *HAL_PPP_ProcessCpltCallback()* function is declared as weak function in the driver that means, the user can declare it again in the application code. The function in the driver should not be modified.

An example of use is illustrated below:

main.c file:

```
UART_HandleTypeDef UartHandle;
int main(void)
{
/* Set User Paramaters */
UartHandle.Init.BaudRate = 9600;
UartHandle.Init.WordLength = UART_DATABITS_8;
UartHandle.Init.StopBits = UART_STOPBITS_1;
UartHandle.Init.Parity = UART_PARITY_NONE;
UartHandle.Init.HwFlowCtl = UART_HWCONTROL_NONE;
UartHandle.Init.Mode = UART MODE TX RX; UartHandle.Init.Instance = USART1;
HAL UART Init(&UartHandle);
HAL_UART_Send_DMA(&UartHandle, TxBuffer, sizeof(TxBuffer));
while (1);
}
void HAL UART TxCpltCallback(UART HandleTypeDef *phuart)
{
}
void HAL_UART_TxErrorCallback(UART_HandleTypeDef *phuart)
{
}
```

stm32f3xx_it.c file:

```
extern UART_HandleTypeDef UartHandle;
void DMAx IRQHandler(void)
{
HAL_DMA_IRQHandler(&UartHandle.DMA_Handle_tx);
}
```

HAL_USART_TxCpltCallback() and *HAL_USART_ErrorCallback()* should be linked in the *HAL_PPP_Process_DMA()* function to the DMA transfer complete callback and the DMA transfer Error callback by using the following statement:

```
HAL_PPP_Process_DMA (PPP_HandleTypeDef *hppp, Params….)
{
(…)
hppp->DMA Handle->XferCpltCallback = HAL UART TxCpltCallback ;
hppp->DMA_Handle->XferErrorCallback = HAL_UART_ErrorCallback ;
```

```
(…)
}
```

2.12.4 Timeout and error management

2.12.4.1 Timeout management

The timeout is often used for the APIs that operate in polling mode. It defines the delay during which a blocking process should wait till an error is returned. An example is provided below:

```
HAL_StatusTypeDef HAL_DMA_PollForTransfer(DMA_HandleTypeDef *hdma, uint32_t
CompleteLevel, uint32_t Timeout)
```

The timeout possible value are the following:

Table 15: Timeout values

Timeout value	Description
0	No poll : Immediate process check and exit
1 ... (HAL_MAX_DELAY -1)(1)	Timeout in ms
HAL_MAX_DELAY	Infinite poll till process is successful

Notes:

(1)HAL_MAX_DELAY is defined in the stm32fxxx_hal_def.h as 0xFFFFFFFF

However, in some cases, a fixed timeout is used for system peripherals or internal HAL driver processes. In these cases, the timeout has the same meaning and is used in the same way, except when it is defined locally in the drivers and cannot be modified or introduced as an argument in the user application.

Example of fixed timeout:

```
#define LOCAL PROCESS TIMEOUT 100
HAL StatusTypeDef HAL PPP Process(PPP HandleTypeDef)
{
(…)
timeout = HAL_GetTick() + LOCAL_PROCESS_TIMEOUT;
(…)
while(ProcessOngoing)
{
(…)
if(HAL_GetTick() >= timeout)
{
/* Process unlocked */
  HAL UNLOCK(hppp);
hppp->State= HAL PPP STATE TIMEOUT;
return HAL_PPP_STATE_TIMEOUT;
}
}
(…)
}
```

The following example shows how to use the timeout inside the polling functions:

```
HAL PPP StateTypeDef HAL PPP Poll (PPP HandleTypeDef *hppp, uint32 t Timeout)
{
(…)
timeout = HAL_GetTick() + Timeout;
(…)
while(ProcessOngoing)
{
(…)
if(Timeout != HAL_MAX_DELAY)
{
```

```
if(HAL_GetTick() >= timeout)
{
/* Process unlocked */
__HAL_UNLOCK(hppp);
hppp->State= HAL PPP STATE TIMEOUT;
return hppp->State;
}
}
(…)
}
```

2.12.4.2 Error management

The HAL drivers implement a check on the following items:

- Valid parameters: for some process the used parameters should be valid and already defined, otherwise the system may crash or go into an undefined state. These critical parameters are checked before being used (see example below).

```
HAL_StatusTypeDef HAL_PPP_Process(PPP_HandleTypeDef* hppp, uint32_t *pdata, uint32
Size)
{ if ((pData == NULL ) || (Size == 0))
{ return HAL ERROR;
}
}
```

- Valid handle: the PPP peripheral handle is the most important argument since it keeps the PPP driver vital parameters. It is always checked in the beginning of the *HAL_PPP_Init()* function.

```
HAL_StatusTypeDef HAL_PPP_Init(PPP_HandleTypeDef* hppp)
 { if (hppp == NULL) //the handle should be already allocated
 { return HAL_ERROR;
}
}
```

- Timeout error: the following statement is used when a timeout error occurs:

```
while (Process ongoing)
{ timeout = HAL GetTick() + Timeout;
  while (data processing is running)
{ if(timeout)
{ return HAL_TIMEOUT;
}
}
```

When an error occurs during a peripheral process, *HAL_PPP_Process ()* returns with a *HAL_ERROR* status. The HAL PPP driver implements the *HAL_PPP_GetError ()* to allow retrieving the origin of the error.

```
HAL_PPP_ErrorTypeDef HAL_PPP_GetError (PPP_HandleTypeDef *hppp);
```

In all peripheral handles, a *HAL_PPP_ErrorTypeDef* is defined and used to store the last error code.

```
typedef struct
{
PPP TypeDef * Instance; /* PPP registers base address */
PPP InitTypeDef Init; /* PPP initialization parameters */
HAL_LockTypeDef Lock; /* PPP locking object */
__IO HAL_PPP_StateTypeDef State; /* PPP state */
  IO HAL PPP ErrorTypeDef ErrorCode; /* PPP Error code */
(…)
/* PPP specific parameters */
}
PPP_HandleTypeDef;
```

The error state and the peripheral global state are always updated before returning an error:

```
PPP->State = HAL_PPP_READY;  /* Set the peripheral ready */
PP->ErrorCode = HAL ERRORCODE ; /* Set the error code */
 HAL UNLOCK(PPP) ; /* Unlock the PPP resources */
return HAL_ERROR;  /*return with HAL error */
```

HAL_PPP_GetError () must be used in interrupt mode in the error callback:

```
void HAL PPP ProcessCpltCallback(PPP HandleTypeDef *hspi)
{
ErrorCode = HAL_PPP_GetError (hppp); /* retreive error code */
}
```

2.12.4.3 Run-time checking

The HAL implements run-time failure detection by checking the input values of all HAL driver functions. The run-time checking is achieved by using an *assert_param* macro. This macro is used in all the HAL drivers' functions which have an input parameter. It allows verifying that the input value lies within the parameter allowed values.

To enable the run-time checking, use the *assert_param* macro, and leave the define ***USE_FULL_ASSERT*** uncommented in *stm32f3xx_hal_conf.h* file.

```
void HAL_UART_Init(UART_HandleTypeDef *huart)
{
(..) /* Check the parameters */
assert param(IS UART INSTANCE(huart->Instance));
assert param(IS UART BAUDRATE(huart->Init.BaudRate));
assert_param(IS_UART_WORD_LENGTH(huart->Init.WordLength));
assert_param(IS_UART_STOPBITS(huart->Init.StopBits));
assert_param(IS_UART_PARITY(huart->Init.Parity));
assert param(IS UART MODE(huart->Init.Mode));
assert param(IS UART HARDWARE FLOW CONTROL(huart->Init.HwFlowCtl));
(..)

/** @defgroup UART_Word_Length *
@{
*/
#define UART WORDLENGTH 8B ((uint32 t)0x00000000)
#define UART_WORDLENGTH_9B ((uint32_t)USART_CR1_M)
#define IS_UART_WORD_LENGTH(LENGTH) (((LENGTH) == UART_WORDLENGTH_8B) ||
\ ((LENGTH) == UART_WORDLENGTH_9B))
```

If the expression passed to the assert_param macro is false, the*assert_failed* function is called and returns the name of the source file and the source line number of the call that failed. If the expression is true, no value is returned.

The *assert_param* macro is implemented in stm32f3xx_hal_conf.h:

```
/* Exported macro ------------------------------------------------------------*/
#ifdef USE_FULL_ASSERT
/**
* @brief The assert param macro is used for function's parameters check.
* @param expr: If expr is false, it calls assert failed function
* which reports the name of the source file and the source
* line number of the call that failed.
* If expr is true, it returns no value.
* @retval None */
#define assert param(expr) ((expr)?(void)0:assert failed((uint8 t *)  FILE  ,
__LINE__))
/* Exported functions --------------------------------------*/
void assert failed(uint8 t* file, uint32 t line);
#else
#define assert param(expr)((void)0)
#endif /* USE_FULL_ASSERT */
```

The *assert_failed* function is implemented in the main.c file or in any other user C file:

```
#ifdef USE FULL ASSERT /**
* @brief Reports the name of the source file and the source line number
* where the assert_param error has occurred.
* @param file: pointer to the source file name
* @param line: assert param error line source number
* @retval None */
void assert failed(uint8 t* file, uint32 t line)
{
/* User can add his own implementation to report the file name and line number,
ex: printf("Wrong parameters value: file %s on line %d\r\n", file, line) */
/* Infinite loop */
while (1)
{
}
}
```



Because of the overhead run-time checking introduces, it is recommended to use it during application code development and debugging, and to remove it from the final application to improve code size and speed.

3 Overview of low-layer drivers

The low-layer (LL) drivers are designed to offer a fast light-weight expert-oriented layer which is closer to the hardware than the HAL. Contrary to the HAL, LL APIs are not provided for peripherals where optimized access is not a key feature, or those requiring heavy software configuration and/or complex upper-level stack (such as FSMC or USB).

The LL drivers feature:

- A set of functions to initialize peripheral main features according to the parameters specified in data structures
- A set of functions used to fill initialization data structures with the reset values of each field
- Functions to perform peripheral de-initialization (peripheral registers restored to their default values)
- A set of inline functions for direct and atomic register access
- Full independence from HAL since LL drivers can be used either in standalone mode (without HAL drivers) or in mixed mode (with HAL drivers)
- Full coverage of the supported peripheral features.

The low-layer drivers provide hardware services based on the available features of the STM32 peripherals. These services reflect exactly the hardware capabilities and provide one-shot operations that must be called following the programming model described in the microcontroller line reference manual. As a result, the LL services do not implement any processing and do not require any additional memory resources to save their states, counter or data pointers: all the operations are performed by changing the associated peripheral registers content.

3.1 Low-layer files

The low-layer drivers are built around header/C files (one per each supported peripheral) plus five header files for some System and Cortex related features.

Table 16: LL driver files


File	Description
stm32f3xx_ll_bus.h	This is the h-source file for core bus control and peripheral clock activation and deactivation *Example: LL_AHB1_GRP1_EnableClock*
stm32f3xx_ll_ppp.h/.c	stm32f3xx_ll_ppp.c provides peripheral initialization functions such as LL_PPP_Init(), LL_PPP_StructInit(), LL_PPP_DeInit(). All the other APIs are definined within stm32f3xx_ll_ppp.h file. The low-layer PPP driver is a standalone module. To use it, the application must include it in the xx_ll_ppp.h file.
stm32xx_ll_cortex.h	CortexM related register operation APIs including the Systick, Low power (LL_SYSTICK_xxxxx, LL_LPM_xxxxx "Low Power Mode" ...)
stm32xx_ll_xx_ll_utils.h/.c	This file covers the generic APIs: • Read of device unique ID and electronic signature • Timebase and delay management • System clock configuration.
stm32xx_ll_xx_ll_system.h	System related operations (LL_SYSCFG_xxx, LL_DBGMCU_xxx, LL_FLASH_xxx)

File	Description
stm32_assert_template.h	Template file allowing to define the assert_param macro, that is used when run-time checking is enabled. This file is required only when the LL drivers are used in standalone mode (without calling the HAL APIs). It should be copied to the application folder and renamed to stm32_assert.h.

There is no configuration file for the LL drivers.

The low-layer files are located in the same HAL driver folder.


Figure 8: low-layer driver folders

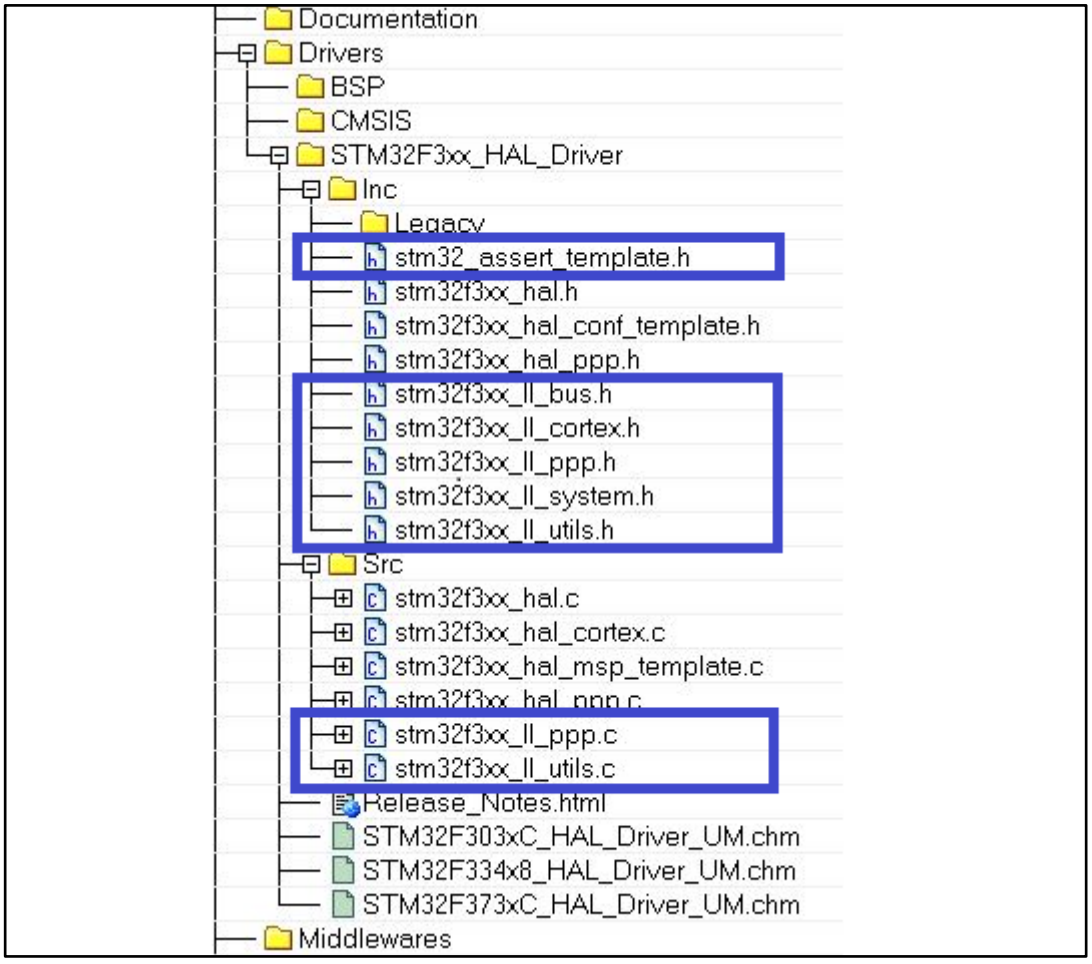

In general, low-layer drivers include only the STM32 CMSIS device file.

```
#include "stm32yyxx.h"
```

Figure 9: Low-layer driver CMSIS files

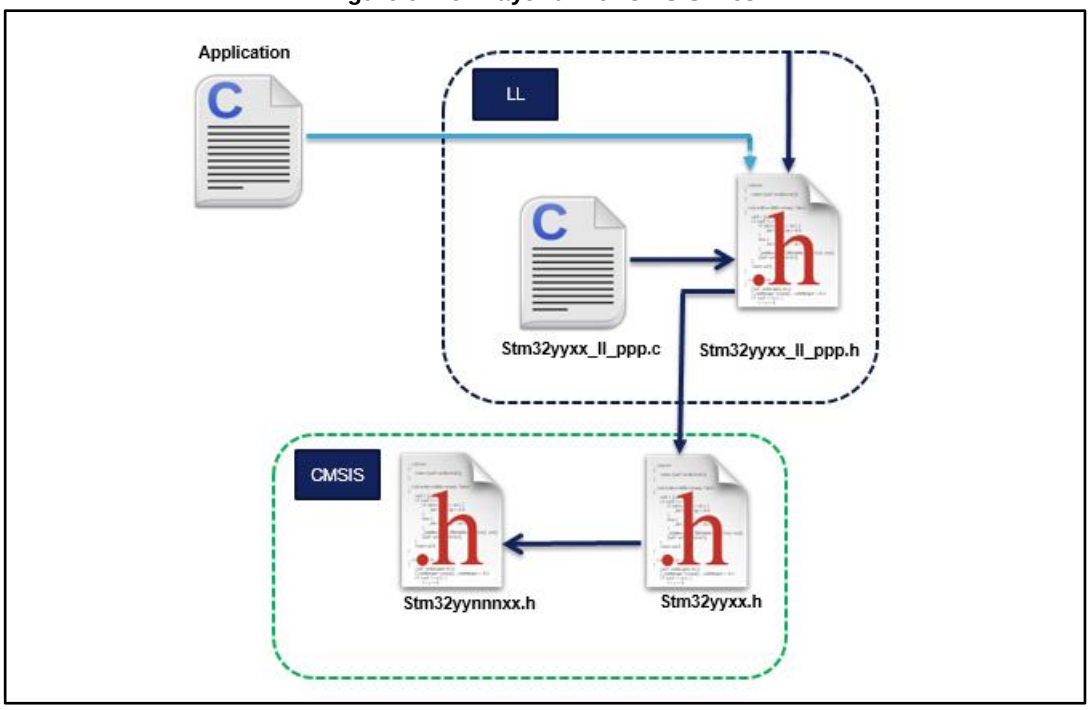

Application files have to include only the used low-layer drivers header files.

3.2 Overview of low-layer APIs and naming rules

3.2.1 Peripheral initialization functions

The LL drivers offer three sets of initialization functions. They are defined in stm32f3xx_ll_ppp.c file:

- Functions to initialize peripheral main features according to the parameters specified in data structures
- A set of functions used to fill initialization data structures with the reset values of each field
- Function for peripheral de-initialization (peripheral registers restored to their default values)

The definition of these LL initialization functions and associated resources (structure, literals and prototypes) is conditioned by a compilation switch: *USE_FULL_LL_DRIVER*. To use these functions, this switch must be added in the toolchain compiler preprocessor or to any generic header file which is processed before the LL drivers.

The below table shows the list of the common functions provided for all the supported peripherals:

Table 17: Common peripheral initialization functions

Functions	Return Type	Parameters	Description
LL_PPP_Init	*ErrorStatus*	• *PPP_TypeDef* PPPx* • *LL_PPP_InitTypeDef* PPP_InitStruct*	Initializes the peripheral main features according to the parameters specified in PPP_InitStruct. Example: LL_USART_Init(USART_TypeDef *USARTx, LL_USART_InitTypeDef *USART_InitStruct)
LL_PPP_StructInit	*void*	• *LL_PPP_InitTypeDef* PPP_InitStruct*	Fills each PPP_InitStruct member with its default value. Example. LL_USART_StructInit(LL_USART_InitTypeDef *USART_InitStruct)
LL_PPP_DeInit	*ErrorStatus*	• *PPP_TypeDef* PPPx*	De-initializes the peripheral registers, that is restore them to their default reset values. Example. LL_USART_DeInit(USART_TypeDef *USARTx)

Additional functions are available for some peripherals (refer to *Table 18: "Optional peripheral initialization functions"*)

Table 18: Optional peripheral initialization functions

Functions	Return Type	Parameters	Examples
LL_PPP{_CATEGORY}_ Init	*Error Status*	• *PPP_TypeDef* PPPx* • *LL_PPP{_CATEGORY}_ InitTypeDef* PPP{_CATEGORY}_ InitStruct*	Initializes peripheral features according to the parameters specified in PPP_InitStruct. Example: LL_ADC_INJ_Init(ADC_TypeDef *ADCx, LL_ADC_INJ_InitTypeDef *ADC_INJ_InitStruct) LL_RTC_TIME_Init(RTC_TypeDef *RTCx, uint32_t RTC_Format, LL_RTC_TimeTypeDef *RTC_TimeStruct) LL_RTC_DATE_Init(RTC_TypeDef *RTCx, uint32_t RTC_Format, LL_RTC_DateTypeDef *RTC_DateStruct) LL_TIM_IC_Init(TIM_TypeDef* TIMx, uint32_t Channel, LL_TIM_IC_InitTypeDef* TIM_IC_InitStruct) LL_TIM_ENCODER_Init(TIM_TypeDef* TIMx, LL_TIM_ENCODER_InitTypeDef* TIM_EncoderInitStruct)

Functions	Return Type	Parameters	Examples
LL_PPP{_CATEGORY}_ StructInit	*void*	*LL_PPP{_CATEGORY}_ InitTypeDef* PPP{_CATEGORY}_ InitStruct*	Fills each *PPP{_CATEGORY}_InitStruct* member with its default value. Example: LL_ADC_INJ_StructInit(LL_ADC_INJ_InitTypeDef *ADC_INJ_InitStruct)
LL_PPP_CommonInit	*Error Status*	• *PPP_TypeDef* PPPx* • *LL_PPP_CommonInit TypeDef* PPP_CommonInitStruct*	Initializes the common features shared between different instances of the same peripheral. Example: LL_ADC_CommonInit(ADC_Common_TypeDef *ADCxy_COMMON, LL_ADC_CommonInitTypeDef *ADC_CommonInitStruct)
LL_PPP_Common StructInit	*void*	*LL_PPP_CommonInitTypeDef* PPP_CommonInitStruct*	Fills each PPP_CommonInitStruct member with its default value Example: LL_ADC_CommonStructInit(LL_ADC_CommonInitTypeDef *ADC_CommonInitStruct)
LL_PPP_ClockInit	*Error Status*	• *PPP_TypeDef* PPPx* • *LL_PPP_ClockInitTypeDef* PPP_ClockInitStruct*	Initializes the peripheral clock configuration in synchronous mode. Example: LL_USART_ClockInit(USART_TypeDef *USARTx, LL_USART_ClockInitTypeDef *USART_ClockInitStruct)
LL_PPP_ClockStructInit	*void*	*LL_PPP_ClockInitTypeDef* PPP_ClockInitStruct*	Fills each *PPP_ClockInitStruct* member with its default value Example: LL_USART_ClockStructInit(LL_USART_ClockInitTypeDef *USART_ClockInitStruct)

3.2.1.1 Run-time checking

Like HAL drivers, LL initialization functions implement run-time failure detection by checking the input values of all LL driver functions. For more details please refer to *Section 2.12.4.3: "Run-time checking"*.

When using the LL drivers in standalone mode (without calling HAL functions), the following actions are required to use run-time checking:

1. Copy stm32_assert_template.h to the application folder and rename it to stm32_assert.h. This file defines the assert_param macro which is used when run-time checking is enabled.
2. Include stm32_assert.h file within the application main header file.
3. Add the USE_FULL_ASSERT compilation switch in the toolchain compiler preprocessor or in any generic header file which is processed before the stm32_assert.h driver.

Run-time checking is not available for LL inline functions.

3.2.2 Peripheral register-level configuration functions

On top of the peripheral initialization functions, the LL drivers offer a set of inline functions for direct atomic register access. Their format is as follows:

```
__STATIC_INLINE return_type LL_PPP_Function (PPPx_TypeDef *PPPx, args)
```

The “Function” naming is defined depending to the action category:

- **Specific Interrupt, DMA request and status flags management**: Set/Get/Clear/Enable/Disable flags on interrupt and status registers

Table 19: Specific Interrupt, DMA request and status flags management

Name	Examples
LL_PPP_{_CATEGORY}_ActionItem_BITNAME *LL_PPP{_CATEGORY}_IsItem_BITNAME_Action*	• LL_RCC_IsActiveFlag_LSIRDY • LL_RCC_IsActiveFlag_FWRST() • LL_ADC_ClearFlag_EOC(ADC1) • LL_DMA_ClearFlag_TCx(DMA_TypeDef* DMAx)

Table 20: Available function formats

Item	Action	Format
Flag	Get	*LL_PPP_IsActiveFlag_BITNAME*
	Clear	*LL_PPP_ClearFlag_BITNAME*
Interrupts	Enable	*LL_PPP_EnableIT_BITNAME*
	Disable	*LL_PPP_DisableIT_BITNAME*
	Get	*LL_PPP_IsEnabledIT_BITNAME*
DMA	Enable	*LL_PPP_EnableDMAReq_BITNAME*
	Disable	*LL_PPP_DisableDMAReq_BITNAME*
	Get	*LL_PPP_IsEnabledDMAReq_BITNAME*

BITNAME refers to the peripheral register bit name as described in the product line reference manual.

- **Peripheral clock activation/deactivation management**: Enable/Disable/Reset a peripheral clock

Table 21: Peripheral clock activation/deactivation management

Name	Examples
LL_bus_GRPx_ActionClock{Mode}	• *LL_AHB1_GRP1_EnableClock (LL_AHB1_GRP1_PERIPH_GPIOA|LL_AHB1_GRP1_PERIPH_GPIOB)* • *LL_APB1_GRP1_EnableClockSleep (LL_APB1_GRP1_PERIPH_DAC1)*

'x' corresponds to the group index and refers to the index of the modified register on a given bus.

'bus' correspond to the bus name (for example APB1).

- ***Peripheral activation/deactivation management***: Enable/disable a peripheral or activate/deactivate specific peripheral features

Table 22: Peripheral activation/deactivation management

Name	Examples
LL_PPP{_CATEGORY}_Action{Item} *LL_PPP{_CATEGORY}_IsItemAction*	• *LL_ADC_Enable ()* • *LL_ADC_StartCalibration();* • *LL_ADC_IsCalibrationOnGoing;* • *LL_RCC_HSI_Enable ()* • *LL_RCC_HSI_IsReady()*

- ***Peripheral configuration management***: Set/get a peripheral configuration settings

Table 23: Peripheral configuration management

Name	Examples
LL_PPP{_CATEGORY}_Set{ or Get}ConfigItem	*LL_USART_SetBaudRate (USART2, 16000000, LL_USART_OVERSAMPLING_16, 9600)*

- ***Peripheral register management***: Write/read the content of a register/retrun DMA relative register address

Table 24: Peripheral register management

Name
LL_PPP_WriteReg(__INSTANCE__, __REG__, __VALUE__)
LL_PPP_ReadReg(__INSTANCE__, __REG__)
*LL_PPP_DMA_GetRegAddr (PPP_TypeDef *PPPx,{Sub Instance if any ex: Channel} , {uint32_t Propriety})*

The Propriety is a variable used to identify the DMA transfer direction or the data register type.

4 Cohabiting of HAL and LL

The low-layer APIs are designed to be used in standalone mode or combined with the HAL. They cannot be automatically used with the HAL for the same peripheral instance. If you use the LL APIs for a specific instance, you can still use the HAL APIs for other instances. Be careful that the low-layer APIs might overwrite some registers which content is mirrored in the HAL handles.

4.1 Low-layer driver used in standalone mode

The low-layer APIs can be used without calling the HAL driver services. This is done by simply including stm32f3xx_ll_ppp.h in the application files. The LL APIs for a given peripheral are called by executing the same sequence as the one recommended by the programming model in the corresponding product line reference manual. In this case the HAL drivers associated to the used peripheral can be removed from the workspace. However the STM32CubeF3 framework should be used in the same way as in the HAL drivers case which means that System file, startup file and CMSIS should always be used.



When the BSP drivers are included, the used HAL drivers associated with the BSP functions drivers should be included in the workspace, even if they are not used by the application layer.

4.2 Mixed use of low-layer APIs and HAL drivers

In this case the low-layer APIs are used in conjunction with the HAL drivers to achieve direct and register level based operations.

Mixed use is allowed, however some consideration should be taken into account:

- It is recommended to avoid using simultaneously the HAL APIs and the combination of low-layer APIs for a given peripheral instance. If this is the case, one or more private fields in the HAL PPP handle structure should be updated accordingly.
- For operations and processes that do not alter the handle fields including the initialization structure, the HAL driver APIs and the low-layer services can be used together for the same peripheral instance.
- The low-layer drivers can be used without any restriction with all the HAL drivers that are not based on handle objects (RCC, common HAL, flash and GPIO).

Several examples showing how to use HAL and LL in the same application are provided within STM32F3 firmware package (refer to Examples_MIX projects).



1. When the HAL Init/DeInit APIs are not used and are replaced by the low-layer macros, the InitMsp() functions are not called and the MSP initialization should be done in the user application.
2. When process APIs are not used and the corresponding function is performed through the low-layer APIs, the callbacks are not called and post processing or error management should be done by the user application.
3. When the LL APIs is used for process operations, the IRQ handler HAL APIs cannot be called and the IRQ should be implemented by the user application. Each LL driver implements the macros needed to read and clear the associated interrupt flags.

5 HAL System Driver

5.1 HAL Firmware driver API description

5.1.1 How to use this driver

The common HAL driver contains a set of generic and common APIs that can be used by the PPP peripheral drivers and the user to start using the HAL.

The HAL contains two APIs categories:

- HAL Initialization and de-initialization functions
- HAL Control functions

5.1.2 Initialization and de-initialization functions

This section provides functions allowing to:

- Initializes the Flash interface, the NVIC allocation and initial clock configuration. It initializes the source of time base also when timeout is needed and the backup domain when enabled.
- de-Initializes common part of the HAL.
- Configure The time base source to have 1ms time base with a dedicated Tick interrupt priority.
  - Systick timer is used by default as source of time base, but user can eventually implement his proper time base source (a general purpose timer for example or other time source), keeping in mind that Time base duration should be kept 1ms since PPP_TIMEOUT_VALUEs are defined and handled in milliseconds basis.
  - Time base configuration function (HAL_InitTick ()) is called automatically at the beginning of the program after reset by HAL_Init() or at any time when clock is configured, by HAL_RCC_ClockConfig().
  - Source of time base is configured to generate interrupts at regular time intervals. Care must be taken if HAL_Delay() is called from a peripheral ISR process, the Tick interrupt line must have higher priority (numerically lower) than the peripheral interrupt. Otherwise the caller ISR process will be blocked.
  - functions affecting time base configurations are declared as __Weak to make override possible in case of other implementations in user file.

This section contains the following APIs:

- ***HAL_Init()***
- ***HAL_DeInit()***
- ***HAL_MspInit()***
- ***HAL_MspDeInit()***
- ***HAL_InitTick()***

5.1.3 HAL Control functions

This section provides functions allowing to:

- Provide a tick value in millisecond
- Provide a blocking delay in millisecond
- Suspend the time base source interrupt
- Resume the time base source interrupt
- Get the HAL API driver version
- Get the device identifier

- Get the device revision identifier
- Enable/Disable Debug module during Sleep mode
- Enable/Disable Debug module during STOP mode
- Enable/Disable Debug module during STANDBY mode

This section contains the following APIs:

- ***HAL_IncTick()***
- ***HAL_GetTick()***
- ***HAL_Delay()***
- ***HAL_SuspendTick()***
- ***HAL_ResumeTick()***
- ***HAL_GetHalVersion()***
- ***HAL_GetREVID()***
- ***HAL_GetDEVID()***
- ***HAL_GetUIDw0()***
- ***HAL_GetUIDw1()***
- ***HAL_GetUIDw2()***
- ***HAL_DBGMCU_EnableDBGSleepMode()***
- ***HAL_DBGMCU_DisableDBGSleepMode()***
- ***HAL_DBGMCU_EnableDBGStopMode()***
- ***HAL_DBGMCU_DisableDBGStopMode()***
- ***HAL_DBGMCU_EnableDBGStandbyMode()***
- ***HAL_DBGMCU_DisableDBGStandbyMode()***

5.1.4 Detailed description of functions

HAL_Init

Function name	**HAL_StatusTypeDef HAL_Init (void)**
Function description	This function configures the Flash prefetch, Configures time base source, NVIC and Low level hardware.
Return values	• **HAL:** status
Notes	• This function is called at the beginning of program after reset and before the clock configuration • The Systick configuration is based on HSI clock, as HSI is the clock used after a system Reset and the NVIC configuration is set to Priority group 4 • The time base configuration is based on MSI clock when exting from Reset. Once done, time base tick start incrementing. In the default implementation,Systick is used as source of time base. The tick variable is incremented each 1ms in its ISR.

HAL_DeInit

Function name	**HAL_StatusTypeDef HAL_DeInit (void)**
Function description	This function de-Initializes common part of the HAL and stops the source of time base.
Return values	• **HAL:** status
Notes	• This function is optional.

HAL_MspInit

Function name **void HAL_MspInit (void)**

Function description Initializes the MSP.

Return values
- **None**

HAL_MspDeInit

Function name **void HAL_MspDeInit (void)**

Function description DeInitializes the MSP.

Return values
- **None**

HAL_InitTick

Function name **HAL_StatusTypeDef HAL_InitTick (uint32_t TickPriority)**

Function description This function configures the source of the time base.

Parameters
- **TickPriority:** Tick interrupt priority.

Return values
- **HAL:** status

Notes
- This function is called automatically at the beginning of program after reset by HAL_Init() or at any time when clock is reconfigured by HAL_RCC_ClockConfig().
- In the default implementation , SysTick timer is the source of time base. It is used to generate interrupts at regular time intervals. Care must be taken if HAL_Delay() is called from a peripheral ISR process, The the SysTick interrupt must have higher priority (numerically lower) than the peripheral interrupt. Otherwise the caller ISR process will be blocked. The function is declared as __Weak to be overwritten in case of other implementation in user file.

HAL_IncTick

Function name **void HAL_IncTick (void)**

Function description This function is called to increment a global variable "uwTick" used as application time base.

Return values
- **None**

Notes
- In the default implementation, this variable is incremented each 1ms in Systick ISR.
- This function is declared as __weak to be overwritten in case of other implementations in user file.

HAL_Delay

Function name **void HAL_Delay (__IO uint32_t Delay)**

Function description This function provides accurate delay (in milliseconds) based on variable incremented.

Parameters
- **Delay:** specifies the delay time length, in milliseconds.

Return values	• **None**
Notes	• In the default implementation , SysTick timer is the source of time base. It is used to generate interrupts at regular time intervals where uwTick is incremented. The function is declared as __Weak to be overwritten in case of other implementations in user file.

HAL_SuspendTick

Function name	**void HAL_SuspendTick (void)**
Function description	Suspend Tick increment.
Return values	• **None**
Notes	• In the default implementation , SysTick timer is the source of time base. It is used to generate interrupts at regular time intervals. Once HAL_SuspendTick() is called, the the SysTick interrupt will be disabled and so Tick increment is suspended. • This function is declared as __weak to be overwritten in case of other implementations in user file.

HAL_ResumeTick

Function name	**void HAL_ResumeTick (void)**
Function description	Resume Tick increment.
Return values	• **None**
Notes	• In the default implementation , SysTick timer is the source of time base. It is used to generate interrupts at regular time intervals. Once HAL_ResumeTick() is called, the the SysTick interrupt will be enabled and so Tick increment is resumed. The function is declared as __Weak to be overwritten in case of other implementations in user file.

HAL_GetTick

Function name	**uint32_t HAL_GetTick (void)**
Function description	Povides a tick value in millisecond.
Return values	• **tick:** value
Notes	• The function is declared as __Weak to be overwritten in case of other implementations in user file.

HAL_GetHalVersion

Function name	**uint32_t HAL_GetHalVersion (void)**
Function description	This function returns the HAL revision.
Return values	• **version:** : 0xXYZR (8bits for each decimal, R for RC)

HAL_GetREVID

Function name	**uint32_t HAL_GetREVID (void)**
Function description	Returns the device revision identifier.
Return values	• **Device:** revision identifier

HAL_GetDEVID

Function name	**uint32_t HAL_GetDEVID (void)**
Function description	Returns the device identifier.
Return values	• **Device:** identifier

HAL_GetUIDw0

Function name	**uint32_t HAL_GetUIDw0 (void)**
Function description	Returns first word of the unique device identifier (UID based on 96 bits)
Return values	• **Device:** identifier

HAL_GetUIDw1

Function name	**uint32_t HAL_GetUIDw1 (void)**
Function description	Returns second word of the unique device identifier (UID based on 96 bits)
Return values	• **Device:** identifier

HAL_GetUIDw2

Function name	**uint32_t HAL_GetUIDw2 (void)**
Function description	Returns third word of the unique device identifier (UID based on 96 bits)
Return values	• **Device:** identifier

HAL_DBGMCU_EnableDBGSleepMode

Function name	**void HAL_DBGMCU_EnableDBGSleepMode (void)**
Function description	Enable the Debug Module during SLEEP mode.
Return values	• **None**

HAL_DBGMCU_DisableDBGSleepMode

Function name	**void HAL_DBGMCU_DisableDBGSleepMode (void)**
Function description	Disable the Debug Module during SLEEP mode.
Return values	• **None**

HAL_DBGMCU_EnableDBGStopMode

Function name	**void HAL_DBGMCU_EnableDBGStopMode (void)**
Function description	Enable the Debug Module during STOP mode.
Return values	• **None**

HAL_DBGMCU_DisableDBGStopMode

Function name	**void HAL_DBGMCU_DisableDBGStopMode (void)**
Function description	Disable the Debug Module during STOP mode.
Return values	• **None**

HAL_DBGMCU_EnableDBGStandbyMode

Function name	**void HAL_DBGMCU_EnableDBGStandbyMode (void)**
Function description	Enable the Debug Module during STANDBY mode.
Return values	• **None**

HAL_DBGMCU_DisableDBGStandbyMode

Function name	**void HAL_DBGMCU_DisableDBGStandbyMode (void)**
Function description	Disable the Debug Module during STANDBY mode.
Return values	• **None**

5.2 HAL Firmware driver defines

5.2.1 HAL

CRC aliases for Exported Functions

HAL_CRC_Input_Data_Reverse

HAL_CRC_Output_Data_Reverse

HAL DMA Remapping

HAL_REMAPDMA_ADC24_DMA2_CH34	ADC24 DMA remap (STM32F303xB/C/E, STM32F358xx and STM32F398xx devices) 1: Remap (ADC24 DMA requests mapped on DMA2 channels 3 and 4)
HAL_REMAPDMA_TIM16_DMA1_CH6	TIM16 DMA request remap 1: Remap (TIM16_CH1 and TIM16_UP DMA requests mapped on DMA1 channel 6)
HAL_REMAPDMA_TIM17_DMA1_CH7	TIM17 DMA request remap 1: Remap (TIM17_CH1 and TIM17_UP DMA requests mapped on DMA1 channel 7)

HAL_REMAPDMA_TIM6_DAC1_CH1_DMA1_CH3	TIM6 and DAC channel1 DMA remap (STM32F303xB/C/E, STM32F358xx and STM32F398xx devices) 1: Remap (TIM6_UP and DAC_CH1 DMA requests mapped on DMA1 channel 3)
HAL_REMAPDMA_TIM7_DAC1_CH2_DMA1_CH4	TIM7 and DAC channel2 DMA remap (STM32F303xB/C/E, STM32F358xx and STM32F398xx devices) 1: Remap (TIM7_UP and DAC_CH2 DMA requests mapped on DMA1 channel 4)
HAL_REMAPDMA_DAC2_CH1_DMA1_CH5	DAC2 channel1 DMA remap (STM32F303x4/6/8 devices only) 1: Remap (DAC2_CH1 DMA requests mapped on DMA1 channel 5)
HAL_REMAPDMA_TIM18_DAC2_CH1_DMA1_CH5	DAC2 channel1 DMA remap (STM32F303x4/6/8 devices only) 1: Remap (DAC2_CH1 DMA requests mapped on DMA1 channel 5)

IS_DMA_REMAP

HAL CCM RAM page write protection

HAL_SYSCFG_WP_PAGE0	ICODE SRAM Write protection page 0
HAL_SYSCFG_WP_PAGE1	ICODE SRAM Write protection page 1
HAL_SYSCFG_WP_PAGE2	ICODE SRAM Write protection page 2
HAL_SYSCFG_WP_PAGE3	ICODE SRAM Write protection page 3
HAL_SYSCFG_WP_PAGE4	ICODE SRAM Write protection page 4
HAL_SYSCFG_WP_PAGE5	ICODE SRAM Write protection page 5
HAL_SYSCFG_WP_PAGE6	ICODE SRAM Write protection page 6
HAL_SYSCFG_WP_PAGE7	ICODE SRAM Write protection page 7

IS_HAL_SYSCFG_WP_PAGE

HAL state definition

HAL_SMBUS_STATE_RESET	SMBUS not yet initialized or disabled
HAL_SMBUS_STATE_READY	SMBUS initialized and ready for use
HAL_SMBUS_STATE_BUSY	SMBUS internal process is ongoing
HAL_SMBUS_STATE_MASTER_BUSY_TX	Master Data Transmission process is ongoing
HAL_SMBUS_STATE_MASTER_BUSY_RX	Master Data Reception process is ongoing
HAL_SMBUS_STATE_SLAVE_BUSY_TX	Slave Data Transmission process is ongoing
HAL_SMBUS_STATE_SLAVE_BUSY_RX	Slave Data Reception process is ongoing
HAL_SMBUS_STATE_TIMEOUT	Timeout state
HAL_SMBUS_STATE_ERROR	Reception process is ongoing

HAL_SMBUS_STATE_LISTEN	Address Listen Mode is ongoing

HAL SYSCFG Interrupts

HAL_SYSCFG_IT_FPU_IOC	Floating Point Unit Invalid operation Interrupt
HAL_SYSCFG_IT_FPU_DZC	Floating Point Unit Divide-by-zero Interrupt
HAL_SYSCFG_IT_FPU_UFC	Floating Point Unit Underflow Interrupt
HAL_SYSCFG_IT_FPU_OFC	Floating Point Unit Overflow Interrupt
HAL_SYSCFG_IT_FPU_IDC	Floating Point Unit Input denormal Interrupt
HAL_SYSCFG_IT_FPU_IXC	Floating Point Unit Inexact Interrupt

IS_HAL_SYSCFG_INTERRUPT

HAL Trigger Remapping

HAL_REMAPTRIGGER_DAC1_TRIG	DAC trigger remap (when TSEL = 001 on STM32F303xB/C and STM32F358xx devices) 0: No remap (DAC trigger is TIM8_TRGO) 1: Remap (DAC trigger is TIM3_TRGO)
HAL_REMAPTRIGGER_TIM1_ITR3	TIM1 ITR3 trigger remap 0: No remap 1: Remap (TIM1_TRG3 = TIM17_OC)

IS_HAL_REMAPTRIGGER

SYSCFG registers bit address in the alias region

SYSCFG_OFFSET

CFGR2_OFFSET

BYPADDRPAR_BitNumber

CFGR2_BYPADDRPAR_BB

Fast-mode Plus on GPIO

SYSCFG_FASTMODEPLUS_PB6	Enable Fast-mode Plus on PB6
SYSCFG_FASTMODEPLUS_PB7	Enable Fast-mode Plus on PB7
SYSCFG_FASTMODEPLUS_PB8	Enable Fast-mode Plus on PB8
SYSCFG_FASTMODEPLUS_PB9	Enable Fast-mode Plus on PB9

6 HAL ADC Generic Driver

6.1 ADC Firmware driver registers structures

6.1.1 __ADC_HandleTypeDef

Data Fields

- ***ADC_TypeDef * Instance***
- ***ADC_InitTypeDef Init***
- ***DMA_HandleTypeDef * DMA_Handle***
- ***HAL_LockTypeDef Lock***
- ***__IO uint32_t State***
- ***__IO uint32_t ErrorCode***
- ***ADC_InjectionConfigTypeDef InjectionConfig***

Field Documentation

- ***ADC_TypeDef* __ADC_HandleTypeDef::Instance***
  Register base address
- ***ADC_InitTypeDef __ADC_HandleTypeDef::Init***
  ADC required parameters
- ***DMA_HandleTypeDef* __ADC_HandleTypeDef::DMA_Handle***
  Pointer DMA Handler
- ***HAL_LockTypeDef __ADC_HandleTypeDef::Lock***
  ADC locking object
- ***__IO uint32_t __ADC_HandleTypeDef::State***
  ADC communication state (bitmap of ADC states)
- ***__IO uint32_t __ADC_HandleTypeDef::ErrorCode***
  ADC Error code
- ***ADC_InjectionConfigTypeDef __ADC_HandleTypeDef::InjectionConfig***
  ADC injected channel configuration build-up structure

6.2 ADC Firmware driver API description

6.2.1 ADC peripheral features

- 12-bit, 10-bit, 8-bit or 6-bit configurable resolution (available only on STM32F30xxC devices).
- Interrupt generation at the end of regular conversion, end of injected conversion, and in case of analog watchdog or overrun events.
- Single and continuous conversion modes.
- Scan mode for conversion of several channels sequentially.
- Data alignment with in-built data coherency.
- Programmable sampling time (channel wise)
- ADC conversion of regular group and injected group.
- External trigger (timer or EXTI) with configurable polarity for both regular and injected groups.
- DMA request generation for transfer of conversions data of regular group.
- Multimode dual mode (available on devices with 2 ADCs or more).
- Configurable DMA data storage in Multimode Dual mode (available on devices with 2 DCs or more).

- Configurable delay between conversions in Dual interleaved mode (available on devices with 2 DCs or more).
- ADC calibration
- ADC channels selectable single/differential input (available only on STM32F30xxC devices)
- ADC Injected sequencer&channels configuration context queue (available only on STM32F30xxC devices)
- ADC offset on injected and regular groups (offset on regular group available only on STM32F30xxC devices)
- ADC supply requirements: 2.4 V to 3.6 V at full speed and down to 1.8 V at slower speed.
- ADC input range: from Vref- (connected to Vssa) to Vref+ (connected to Vdda or to an external voltage reference).

6.2.2 How to use this driver

Configuration of top level parameters related to ADC

1. Enable the ADC interface
   - As prerequisite, ADC clock must be configured at RCC top level.
   - For STM32F30x/STM32F33x devices: Two possible clock sources: synchronous clock derived from AHB clock or asynchronous clock derived from ADC dedicated PLL 72MHz. - Synchronous clock is mandatory since used as ADC core clock. Synchronous clock can be used optionally as ADC conversion clock, depending on ADC init structure clock setting. Synchronous clock is configured using macro __ADCx_CLK_ENABLE(). - Asynchronous can be used optionally as ADC conversion clock, depending on ADC init structure clock setting. Asynchronous clock is configured using function HAL_RCCEx_PeriphCLKConfig().
     - For example, in case of device with a single ADC: Into HAL_ADC_MspInit() (recommended code location) or with other device clock parameters configuration:
       __HAL_RCC_ADC1_CLK_ENABLE() (mandatory)
       PeriphClkInit.PeriphClockSelection = RCC_PERIPHCLK_ADC (optional, if ADC conversion from asynchronous clock)
       PeriphClkInit.Adc1ClockSelection = RCC_ADC1PLLCLK_DIV1 (optional, if ADC conversion from asynchronous clock)
       HAL_RCCEx_PeriphCLKConfig(&RCC_PeriphClkInitStructure) (optional, if ADC conversion from asynchronous clock)
     - For example, in case of device with 4 ADCs:
       if((hadc->Instance == ADC1) || (hadc->Instance == ADC2))
       {
       __HAL_RCC_ADC12_CLK_ENABLE() (mandatory)
       PeriphClkInit.PeriphClockSelection = RCC_PERIPHCLK_ADC (optional, if ADC conversion from asynchronous clock)
       PeriphClkInit.Adc12ClockSelection = RCC_ADC12PLLCLK_DIV1 (optional, if ADC conversion from asynchronous clock)
       HAL_RCCEx_PeriphCLKConfig(&RCC_PeriphClkInitStructure) (optional, if ADC conversion from asynchronous clock)
       }
       else
       {
       __HAL_RCC_ADC34_CLK_ENABLE() (mandatory)
       PeriphClkInit.Adc34ClockSelection = RCC_ADC34PLLCLK_DIV1; (optional, if ADC conversion from asynchronous clock)

HAL_RCCEx_PeriphCLKConfig(&RCC_PeriphClkInitStructure); (optional, if ADC conversion from asynchronous clock)
}

- For STM32F37x devices: One clock setting is mandatory: ADC clock (core and conversion clock) from APB2 clock.
  - Example: Into HAL_ADC_MspInit() (recommended code location) or with other device clock parameters configuration:
    PeriphClkInit.PeriphClockSelection = RCC_PERIPHCLK_ADC
    PeriphClkInit.AdcClockSelection = RCC_ADCPLLCLK_DIV2
    HAL_RCCEx_PeriphCLKConfig(&PeriphClkInit)

2. ADC pins configuration
   - Enable the clock for the ADC GPIOs using macro __HAL_RCC_GPIOx_CLK_ENABLE()
   - Configure these ADC pins in analog mode using function HAL_GPIO_Init()
3. Optionally, in case of usage of ADC with interruptions:
   - Configure the NVIC for ADC using function HAL_NVIC_EnableIRQ(ADCx_IRQn)
   - Insert the ADC interruption handler function HAL_ADC_IRQHandler() into the function of corresponding ADC interruption vector ADCx_IRQHandler().
4. Optionally, in case of usage of DMA:
   - Configure the DMA (DMA channel, mode normal or circular, ...) using function HAL_DMA_Init().
   - Configure the NVIC for DMA using function HAL_NVIC_EnableIRQ(DMAx_Channelx_IRQn)
   - Insert the ADC interruption handler function HAL_ADC_IRQHandler() into the function of corresponding DMA interruption vector DMAx_Channelx_IRQHandler().

Configuration of ADC, groups regular/injected, channels parameters

1. Configure the ADC parameters (resolution, data alignment, ...) and regular group parameters (conversion trigger, sequencer, ...) using function HAL_ADC_Init().
2. Configure the channels for regular group parameters (channel number, channel rank into sequencer, ..., into regular group) using function HAL_ADC_ConfigChannel().
3. Optionally, configure the injected group parameters (conversion trigger, sequencer, ..., of injected group) and the channels for injected group parameters (channel number, channel rank into sequencer, ..., into injected group) using function HAL_ADCEx_InjectedConfigChannel().
4. Optionally, configure the analog watchdog parameters (channels monitored, thresholds, ...) using function HAL_ADC_AnalogWDGConfig().
5. Optionally, for devices with several ADC instances: configure the multimode parameters using function HAL_ADCEx_MultiModeConfigChannel().

Execution of ADC conversions

1. Optionally, perform an automatic ADC calibration to improve the conversion accuracy using function HAL_ADCEx_Calibration_Start().
2. ADC driver can be used among three modes: polling, interruption, transfer by DMA.
   - ADC conversion by polling:
     - Activate the ADC peripheral and start conversions using function HAL_ADC_Start()
     - Wait for ADC conversion completion using function HAL_ADC_PollForConversion() (or for injected group: HAL_ADCEx_InjectedPollForConversion())
     - Retrieve conversion results using function HAL_ADC_GetValue() (or for injected group: HAL_ADCEx_InjectedGetValue())

  - Stop conversion and disable the ADC peripheral using function HAL_ADC_Stop()
- ADC conversion by interruption:
  - Activate the ADC peripheral and start conversions using function HAL_ADC_Start_IT()
  - Wait for ADC conversion completion by call of function HAL_ADC_ConvCpltCallback() (this function must be implemented in user program) (or for injected group: HAL_ADCEx_InjectedConvCpltCallback())
  - Retrieve conversion results using function HAL_ADC_GetValue() (or for injected group: HAL_ADCEx_InjectedGetValue())
  - Stop conversion and disable the ADC peripheral using function HAL_ADC_Stop_IT()
- ADC conversion with transfer by DMA:
  - Activate the ADC peripheral and start conversions using function HAL_ADC_Start_DMA()
  - Wait for ADC conversion completion by call of function HAL_ADC_ConvCpltCallback() or HAL_ADC_ConvHalfCpltCallback() (these functions must be implemented in user program)
  - Conversion results are automatically transferred by DMA into destination variable address.
  - Stop conversion and disable the ADC peripheral using function HAL_ADC_Stop_DMA()
- For devices with several ADCs: ADC multimode conversion with transfer by DMA:
  - Activate the ADC peripheral (slave) using function HAL_ADC_Start() (conversion start pending ADC master)
  - Activate the ADC peripheral (master) and start conversions using function HAL_ADCEx_MultiModeStart_DMA()
  - Wait for ADC conversion completion by call of function HAL_ADC_ConvCpltCallback() or HAL_ADC_ConvHalfCpltCallback() (these functions must be implemented in user program)
  - Conversion results are automatically transferred by DMA into destination variable address.
  - Stop conversion and disable the ADC peripheral (master) using function HAL_ADCEx_MultiModeStop_DMA()
  - Stop conversion and disable the ADC peripheral (slave) using function HAL_ADC_Stop_IT()



Callback functions must be implemented in user program:

- HAL_ADC_ErrorCallback()
- HAL_ADC_LevelOutOfWindowCallback() (callback of analog watchdog)
- HAL_ADC_ConvCpltCallback()
- HAL_ADC_ConvHalfCpltCallback
- HAL_ADCEx_InjectedConvCpltCallback()
- HAL_ADCEx_InjectedQueueOverflowCallback() (for STM32F30x/STM32F33x devices)

Deinitialization of ADC

1. Disable the ADC interface
   - ADC clock can be hard reset and disabled at RCC top level.
   - Hard reset of ADC peripherals using macro __ADCx_FORCE_RESET(), __ADCx_RELEASE_RESET().
   - ADC clock disable using the equivalent macro/functions as configuration step.
   - For STM32F30x/STM32F33x devices: Caution: For devices with several ADCs: These settings impact both ADC of common group: ADC1&ADC2, ADC3&ADC4 if available (ADC2, ADC3, ADC4 availability depends on STM32 product)
     - For example, in case of device with a single ADC: Into HAL_ADC_MspDeInit() (recommended code location) or with other device clock parameters configuration:
       __HAL_RCC_ADC1_FORCE_RESET() (optional)
       __HAL_RCC_ADC1_RELEASE_RESET() (optional)
       __HAL_RCC_ADC1_CLK_DISABLE() (mandatory)
       PeriphClkInit.PeriphClockSelection = RCC_PERIPHCLK_ADC (optional, if configured before)
       PeriphClkInit.Adc1ClockSelection = RCC_ADC1PLLCLK_OFF (optional, if configured before)
       HAL_RCCEx_PeriphCLKConfig(&RCC_PeriphClkInitStructure) (optional, if configured before)
     - For example, in case of device with 4 ADCs:
       if((hadc->Instance == ADC1) || (hadc->Instance == ADC2))
       {
       __HAL_RCC_ADC12_FORCE_RESET() (optional)
       __HAL_RCC_ADC12_RELEASE_RESET() (optional)
       __HAL_RCC_ADC12_CLK_DISABLE() (mandatory)
       PeriphClkInit.PeriphClockSelection = RCC_PERIPHCLK_ADC (optional, if configured before)
       PeriphClkInit.Adc12ClockSelection = RCC_ADC12PLLCLK_OFF (optional, if configured before)
       HAL_RCCEx_PeriphCLKConfig(&RCC_PeriphClkInitStructure) (optional, if configured before)
       }
       else
       {
       __HAL_RCC_ADC32_FORCE_RESET() (optional)
       __HAL_RCC_ADC32_RELEASE_RESET() (optional)
       __HAL_RCC_ADC34_CLK_DISABLE() (mandatory)
       PeriphClkInit.Adc34ClockSelection = RCC_ADC34PLLCLK_OFF (optional, if configured before)
       HAL_RCCEx_PeriphCLKConfig(&RCC_PeriphClkInitStructure) (optional, if configured before)
       }
   - For STM32F37x devices:
     - Example: Into HAL_ADC_MspDeInit() (recommended code location) or with other device clock parameters configuration:
       PeriphClkInit.PeriphClockSelection = RCC_PERIPHCLK_ADC
       PeriphClkInit.AdcClockSelection = RCC_ADCPLLCLK_OFF
       HAL_RCCEx_PeriphCLKConfig(&PeriphClkInit)
2. ADC pins configuration
   - Disable the clock for the ADC GPIOs using macro __HAL_RCC_GPIOx_CLK_DISABLE()

3. Optionally, in case of usage of ADC with interruptions:
   – Disable the NVIC for ADC using function HAL_NVIC_EnableIRQ(ADCx_IRQn)
4. Optionally, in case of usage of DMA:
   – Deinitialize the DMA using function HAL_DMA_Init().
   – Disable the NVIC for DMA using function HAL_NVIC_EnableIRQ(DMAx_Channelx_IRQn)

6.2.3 Initialization and de-initialization functions

This section provides functions allowing to:

- Initialize and configure the ADC.
- De-initialize the ADC.

This section contains the following APIs:

- ***HAL_ADC_Init()***
- ***HAL_ADC_DeInit()***
- ***HAL_ADC_MspInit()***
- ***HAL_ADC_MspDeInit()***

6.2.4 IO operation functions

This section provides functions allowing to:

- Start conversion of regular group.
- Stop conversion of regular group.
- Poll for conversion complete on regular group.
- Poll for conversion event.
- Get result of regular channel conversion.
- Start conversion of regular group and enable interruptions.
- Stop conversion of regular group and disable interruptions.
- Handle ADC interrupt request
- Start conversion of regular group and enable DMA transfer.
- Stop conversion of regular group and disable ADC DMA transfer.

This section contains the following APIs:

- ***HAL_ADC_Start()***
- ***HAL_ADC_Stop()***
- ***HAL_ADC_PollForConversion()***
- ***HAL_ADC_PollForEvent()***
- ***HAL_ADC_Start_IT()***
- ***HAL_ADC_Stop_IT()***
- ***HAL_ADC_Start_DMA()***
- ***HAL_ADC_Stop_DMA()***
- ***HAL_ADC_GetValue()***
- ***HAL_ADC_IRQHandler()***
- ***HAL_ADC_ConvCpltCallback()***
- ***HAL_ADC_ConvHalfCpltCallback()***
- ***HAL_ADC_LevelOutOfWindowCallback()***
- ***HAL_ADC_ErrorCallback()***

6.2.5 Peripheral Control functions

This section provides functions allowing to:

- Configure channels on regular group
- Configure the analog watchdog

This section contains the following APIs:

- ***HAL_ADC_ConfigChannel()***
- ***HAL_ADC_AnalogWDGConfig()***

6.2.6 Peripheral state and errors functions

This subsection provides functions to get in run-time the status of the peripheral.

- Check the ADC state
- Check the ADC error code

This section contains the following APIs:

- ***HAL_ADC_GetState()***
- ***HAL_ADC_GetError()***

6.2.7 Detailed description of functions

HAL_ADC_Init

Function name	**HAL_StatusTypeDef HAL_ADC_Init (ADC_HandleTypeDef * hadc)**
Function description	Initializes the ADC peripheral and regular group according to parameters specified in structure "ADC_InitTypeDef".
Parameters	• **hadc:** ADC handle
Return values	• **HAL:** status
Notes	• As prerequisite, ADC clock must be configured at RCC top level depending on both possible clock sources: PLL clock or AHB clock. See commented example code below that can be copied and uncommented into HAL_ADC_MspInit(). • Possibility to update parameters on the fly: This function initializes the ADC MSP (HAL_ADC_MspInit()) only when coming from ADC state reset. Following calls to this function can be used to reconfigure some parameters of ADC_InitTypeDef structure on the fly, without modifying MSP configuration. If ADC MSP has to be modified again, HAL_ADC_DeInit() must be called before HAL_ADC_Init(). The setting of these parameters is conditioned to ADC state. For parameters constraints, see comments of structure "ADC_InitTypeDef". • This function configures the ADC within 2 scopes: scope of entire ADC and scope of regular group. For parameters details, see comments of structure "ADC_InitTypeDef". • For devices with several ADCs: parameters related to common ADC registers (ADC clock mode) are set only if all ADCs sharing the same common group are disabled. If this is not the case, these common parameters setting are bypassed

without error reporting: it can be the intended behaviour in case of update of a parameter of ADC_InitTypeDef on the fly, without disabling the other ADCs sharing the same common group.

HAL_ADC_DeInit

Function name	**HAL_StatusTypeDef HAL_ADC_DeInit (ADC_HandleTypeDef * hadc)**
Function description	Deinitialize the ADC peripheral registers to their default reset values, with deinitialization of the ADC MSP.
Parameters	• **hadc:** ADC handle
Return values	• **HAL:** status
Notes	• For devices with several ADCs: reset of ADC common registers is done only if all ADCs sharing the same common group are disabled. If this is not the case, reset of these common parameters reset is bypassed without error reporting: it can be the intended behaviour in case of reset of a single ADC while the other ADCs sharing the same common group is still running. • For devices with several ADCs: Global reset of all ADCs sharing a common group is possible. As this function is intended to reset a single ADC, to not impact other ADCs, instructions for global reset of multiple ADCs have been let commented below. If needed, the example code can be copied and uncommented into function HAL_ADC_MspDeInit().

HAL_ADC_MspInit

Function name	**void HAL_ADC_MspInit (ADC_HandleTypeDef * hadc)**
Function description	Initializes the ADC MSP.
Parameters	• **hadc:** ADC handle
Return values	• **None**

HAL_ADC_MspDeInit

Function name	**void HAL_ADC_MspDeInit (ADC_HandleTypeDef * hadc)**
Function description	DeInitializes the ADC MSP.
Parameters	• **hadc:** ADC handle
Return values	• **None**

HAL_ADC_Start

Function name	**HAL_StatusTypeDef HAL_ADC_Start (ADC_HandleTypeDef * hadc)**
Function description	Enables ADC, starts conversion of regular group.

Parameters
- **hadc:** ADC handle

Return values
- **HAL:** status

Notes
- : Case of multimode enabled (for devices with several ADCs): This function must be called for ADC slave first, then ADC master. For ADC slave, ADC is enabled only (conversion is not started). For ADC master, ADC is enabled and multimode conversion is started.

HAL_ADC_Stop

Function name **HAL_StatusTypeDef HAL_ADC_Stop (ADC_HandleTypeDef * hadc)**

Function description Stop ADC conversion of regular group (and injected group in case of auto_injection mode), disable ADC peripheral.

Parameters
- **hadc:** ADC handle

Return values
- **HAL:** status.

Notes
- : ADC peripheral disable is forcing stop of potential conversion on injected group. If injected group is under use, it should be preliminarily stopped using HAL_ADCEx_InjectedStop function.
- : Case of multimode enabled (for devices with several ADCs): This function must be called for ADC master first, then ADC slave. For ADC master, converson is stopped and ADC is disabled. For ADC slave, ADC is disabled only (conversion stop of ADC master has already stopped conversion of ADC slave).

HAL_ADC_PollForConversion

Function name **HAL_StatusTypeDef HAL_ADC_PollForConversion (ADC_HandleTypeDef * hadc, uint32_t Timeout)**

Function description Wait for regular group conversion to be completed.

Parameters
- **hadc:** ADC handle
- **Timeout:** Timeout value in millisecond.

Return values
- **HAL:** status

HAL_ADC_PollForEvent

Function name **HAL_StatusTypeDef HAL_ADC_PollForEvent (ADC_HandleTypeDef * hadc, uint32_t EventType, uint32_t Timeout)**

Function description Poll for conversion event.

Parameters
- **hadc:** ADC handle
- **EventType:** the ADC event type. This parameter can be one of the following values:
  - ADC_AWD_EVENT: ADC Analog watchdog 1 event (main analog watchdog, present on all STM32 devices)
  - ADC_AWD2_EVENT: ADC Analog watchdog 2 event

(additional analog watchdog, present only on STM32F3 devices)
  - ADC_AWD3_EVENT: ADC Analog watchdog 3 event (additional analog watchdog, present only on STM32F3 devices)
  - ADC_OVR_EVENT: ADC Overrun event
  - ADC_JQOVF_EVENT: ADC Injected context queue overflow event
- **Timeout:** Timeout value in millisecond.

Return values
- **HAL:** status

HAL_ADC_Start_IT

Function name **HAL_StatusTypeDef HAL_ADC_Start_IT (ADC_HandleTypeDef * hadc)**

Function description Enables ADC, starts conversion of regular group with interruption.

HAL_ADC_Stop_IT

Function name **HAL_StatusTypeDef HAL_ADC_Stop_IT (ADC_HandleTypeDef * hadc)**

Function description Stop ADC conversion of regular group (and injected group in case of auto_injection mode), disable interruption of end-of-conversion, disable ADC peripheral.

Parameters
- **hadc:** ADC handle

Return values
- **HAL:** status.

Notes
- : ADC peripheral disable is forcing stop of potential conversion on injected group. If injected group is under use, it should be preliminarily stopped using HAL_ADCEx_InjectedStop function.
- : Case of multimode enabled (for devices with several ADCs): This function must be called for ADC master first, then ADC slave. For ADC master, conversion is stopped and ADC is disabled. For ADC slave, ADC is disabled only (conversion stop of ADC master has already stopped conversion of ADC slave).

HAL_ADC_Start_DMA

Function name **HAL_StatusTypeDef HAL_ADC_Start_DMA (ADC_HandleTypeDef * hadc, uint32_t * pData, uint32_t Length)**

Function description Enables ADC, starts conversion of regular group and transfers result through DMA.

HAL_ADC_Stop_DMA

Function name **HAL_StatusTypeDef HAL_ADC_Stop_DMA (ADC_HandleTypeDef * hadc)**

Function description Stop ADC conversion of regular group (and injected group in case

of auto_injection mode), disable ADC DMA transfer, disable ADC peripheral.

Parameters
- **hadc:** ADC handle

Return values
- **HAL:** status.

Notes
- : ADC peripheral disable is forcing stop of potential conversion on injected group. If injected group is under use, it should be preliminarily stopped using HAL_ADCEx_InjectedStop function.
- : Case of multimode enabled (for devices with several ADCs): This function is for single-ADC mode only. For multimode, use the dedicated MultimodeStop function.

HAL_ADC_GetValue

Function name **uint32_t HAL_ADC_GetValue (ADC_HandleTypeDef * hadc)**

Function description Get ADC regular group conversion result.

Parameters
- **hadc:** ADC handle

Return values
- **Converted:** value

Notes
- Reading DR register automatically clears EOC (end of conversion of regular group) flag. Additionally, this functions clears EOS (end of sequence of regular group) flag, in case of the end of the sequence is reached.

HAL_ADC_IRQHandler

Function name **void HAL_ADC_IRQHandler (ADC_HandleTypeDef * hadc)**

Function description Handles ADC interrupt request.

Parameters
- **hadc:** ADC handle

Return values
- **None**

HAL_ADC_ConvCpltCallback

Function name **void HAL_ADC_ConvCpltCallback (ADC_HandleTypeDef * hadc)**

Function description Conversion complete callback in non blocking mode.

Parameters
- **hadc:** ADC handle

Return values
- **None**

HAL_ADC_ConvHalfCpltCallback

Function name **void HAL_ADC_ConvHalfCpltCallback (ADC_HandleTypeDef * hadc)**

Function description Conversion DMA half-transfer callback in non blocking mode.

Parameters
- **hadc:** ADC handle

Return values
- **None**

HAL_ADC_LevelOutOfWindowCallback

Function name	**void HAL_ADC_LevelOutOfWindowCallback (ADC_HandleTypeDef * hadc)**
Function description	Analog watchdog callback in non blocking mode.
Parameters	• **hadc:** ADC handle
Return values	• **None**

HAL_ADC_ErrorCallback

Function name	**void HAL_ADC_ErrorCallback (ADC_HandleTypeDef * hadc)**
Function description	ADC error callback in non blocking mode (ADC conversion with interruption or transfer by DMA)
Parameters	• **hadc:** ADC handle
Return values	• **None**

HAL_ADC_ConfigChannel

Function name	**HAL_StatusTypeDef HAL_ADC_ConfigChannel (ADC_HandleTypeDef * hadc, ADC_ChannelConfTypeDef * sConfig)**
Function description	Configures the the selected channel to be linked to the regular group.
Parameters	• **hadc:** ADC handle • **sConfig:** Structure of ADC channel for regular group.
Return values	• **HAL:** status
Notes	• In case of usage of internal measurement channels: Vbat/VrefInt/TempSensor. The recommended sampling time is at least: For devices STM32F37x: 17.1us for temperature sensorFor the other STM32F3 devices: 2.2us for each of channels Vbat/VrefInt/TempSensor. These internal paths can be be disabled using function HAL_ADC_DeInit(). • Possibility to update parameters on the fly: This function initializes channel into regular group, following calls to this function can be used to reconfigure some parameters of structure "ADC_ChannelConfTypeDef" on the fly, without reseting the ADC. The setting of these parameters is conditioned to ADC state. For parameters constraints, see comments of structure "ADC_ChannelConfTypeDef".

HAL_ADC_AnalogWDGConfig

Function name	**HAL_StatusTypeDef HAL_ADC_AnalogWDGConfig (ADC_HandleTypeDef * hadc, ADC_AnalogWDGConfTypeDef * AnalogWDGConfig)**
Function description	Configures the analog watchdog.
Parameters	• **hadc:** ADC handle • **AnalogWDGConfig:** Structure of ADC analog watchdog

configuration

Return values
- **HAL:** status

Notes
- Possibility to update parameters on the fly: This function initializes the selected analog watchdog, following calls to this function can be used to reconfigure some parameters of structure "ADC_AnalogWDGConfTypeDef" on the fly, without reseting the ADC. The setting of these parameters is conditioned to ADC state. For parameters constraints, see comments of structure "ADC_AnalogWDGConfTypeDef".

HAL_ADC_GetState

Function name **uint32_t HAL_ADC_GetState (ADC_HandleTypeDef * hadc)**

Function description return the ADC state

Parameters
- **hadc:** ADC handle

Return values
- **HAL:** state

Notes
- ADC state machine is managed by bitfield, state must be compared with bit by bit. For example: " if (HAL_IS_BIT_SET(HAL_ADC_GetState(hadc1), HAL_ADC_STATE_REG_BUSY)) " " if (HAL_IS_BIT_SET(HAL_ADC_GetState(hadc1), HAL_ADC_STATE_AWD1)) "

HAL_ADC_GetError

Function name **uint32_t HAL_ADC_GetError (ADC_HandleTypeDef * hadc)**

Function description Return the ADC error code.

Parameters
- **hadc:** ADC handle

Return values
- **ADC:** Error Code

6.3 ADC Firmware driver defines

6.3.1 ADC

ADC Calibration Factor Length Verification

IS_ADC_CALFACT **Description:**
- Calibration factor length verification (7 bits maximum)

Parameters:
- _Calibration_Factor_: Calibration factor value

Return value:
- None

ADC Conversion Group

ADC_REGULAR_GROUP

ADC_INJECTED_GROUP

ADC_REGULAR_INJECTED_GROUP

ADC Exported Macros

__HAL_ADC_RESET_HANDLE_STATE

Description:

- Reset ADC handle state.

Parameters:

- __HANDLE__: ADC handle

Return value:

- None

ADC Exported Types

HAL_ADC_STATE_RESET

Notes:

- ADC state machine is managed by bitfields, state must be compared with bit by bit. For example: " if (HAL_IS_BIT_SET(HAL_ADC_GetState(hadc1), HAL_ADC_STATE_REG_BUSY)) " " if (HAL_IS_BIT_SET(HAL_ADC_GetState(hadc1), HAL_ADC_STATE_AWD1)) " ADC not yet initialized or disabled

HAL_ADC_STATE_READY	ADC peripheral ready for use
HAL_ADC_STATE_BUSY_INTERNAL	ADC is busy to internal process (initialization, calibration)
HAL_ADC_STATE_TIMEOUT	TimeOut occurrence
HAL_ADC_STATE_ERROR_INTERNAL	Internal error occurrence
HAL_ADC_STATE_ERROR_CONFIG	Configuration error occurrence
HAL_ADC_STATE_ERROR_DMA	DMA error occurrence
HAL_ADC_STATE_REG_BUSY	A conversion on group regular is ongoing or can occur (either by continuous mode, external trigger, low power auto power-on, multimode ADC master control)
HAL_ADC_STATE_REG_EOC	Conversion data available on group regular
HAL_ADC_STATE_REG_OVR	Overrun occurrence
HAL_ADC_STATE_REG_EOSMP	End Of Sampling flag raised
HAL_ADC_STATE_INJ_BUSY	A conversion on group injected is ongoing or can occur (either by auto-injection mode, external trigger, low power auto power-on, multimode ADC master control)
HAL_ADC_STATE_INJ_EOC	Conversion data available on group injected
HAL_ADC_STATE_INJ_JQOVF	Injected queue overflow occurrence
HAL_ADC_STATE_AWD1	Out-of-window occurrence of analog watchdog 1

HAL_ADC_STATE_AWD2	Out-of-window occurrence of analog watchdog 2
HAL_ADC_STATE_AWD3	Out-of-window occurrence of analog watchdog 3
HAL_ADC_STATE_MULTIMODE_SLAVE	ADC in multimode slave state, controlled by another ADC master (

ADC Injected Conversion Number Verification

IS_ADC_INJECTED_NB_CONV

ADC Regular Discontinuous Mode NumberVerification

IS_ADC_REGULAR_DISCONT_NUMBER

ADC Regular Conversion Number Verification

IS_ADC_REGULAR_NB_CONV

7 HAL ADC Extension Driver

7.1 ADCEx Firmware driver registers structures

7.1.1 ADC_InitTypeDef

Data Fields

- ***uint32_t ClockPrescaler***
- ***uint32_t Resolution***
- ***uint32_t DataAlign***
- ***uint32_t ScanConvMode***
- ***uint32_t EOCSelection***
- ***uint32_t LowPowerAutoWait***
- ***uint32_t ContinuousConvMode***
- ***uint32_t NbrOfConversion***
- ***uint32_t DiscontinuousConvMode***
- ***uint32_t NbrOfDiscConversion***
- ***uint32_t ExternalTrigConv***
- ***uint32_t ExternalTrigConvEdge***
- ***uint32_t DMAContinuousRequests***
- ***uint32_t Overrun***

Field Documentation

- ***uint32_t ADC_InitTypeDef::ClockPrescaler***
  Select ADC clock source (synchronous clock derived from AHB clock or asynchronous clock derived from ADC dedicated PLL 72MHz) and clock prescaler. The clock is common for all the ADCs. This parameter can be a value of ***ADCEx_ClockPrescaler***
  Note: In case of usage of channels on injected group, ADC frequency should be lower than AHB clock frequency /4 for resolution 12 or 10 bits, AHB clock frequency /3 for resolution 8 bits, AHB clock frequency /2 for resolution 6 bits. Note: In case of usage of the ADC dedicated PLL clock, this clock must be preliminarily enabled and prescaler set at RCC top level. Note: This parameter can be modified only if all ADCs of the common ADC group are disabled (for products with several ADCs)
- ***uint32_t ADC_InitTypeDef::Resolution***
  Configures the ADC resolution. This parameter can be a value of ***ADCEx_Resolution***
- ***uint32_t ADC_InitTypeDef::DataAlign***
  Specifies ADC data alignment to right (for resolution 12 bits: MSB on register bit 11 and LSB on register bit 0U) (default setting) or to left (for resolution 12 bits, if offset disabled: MSB on register bit 15 and LSB on register bit 4U, if offset enabled: MSB on register bit 14 and LSB on register bit 3U). See reference manual for alignments with other resolutions. This parameter can be a value of ***ADCEx_Data_align***
- ***uint32_t ADC_InitTypeDef::ScanConvMode***
  Configures the sequencer of regular and injected groups. This parameter can be associated to parameter 'DiscontinuousConvMode' to have main sequence subdivided in successive parts. If disabled: Conversion is performed in single mode (one channel converted, the one defined in rank 1U). Parameters 'NbrOfConversion' and 'InjectedNbrOfConversion' are discarded (equivalent to set to 1U). If enabled: Conversions are performed in sequence mode (multiple ranks defined by 'NbrOfConversion'/'InjectedNbrOfConversion' and each channel rank). Scan direction is upward: from rank1 to rank 'n'. This parameter can be a value of ***ADCEx_Scan_mode***

- ***uint32_t ADC_InitTypeDef::EOCSelection***
  Specifies what EOC (End Of Conversion) flag is used for conversion by polling and interruption: end of conversion of each rank or complete sequence. This parameter can be a value of ***ADCEx_EOCSelection***.
- ***uint32_t ADC_InitTypeDef::LowPowerAutoWait***
  Selects the dynamic low power Auto Delay: ADC conversions are performed only when necessary. New conversion starts only when the previous conversion (for regular group) or previous sequence (for injected group) has been treated by user software. This feature automatically adapts the speed of ADC to the speed of the system that reads the data. Moreover, this avoids risk of overrun for low frequency applications. This parameter can be set to ENABLE or DISABLE. Note: Do not use with interruption or DMA (**HAL_ADC_Start_IT()**, **HAL_ADC_Start_DMA()**) since they have to clear immediately the EOC flag to free the IRQ vector sequencer. Do use with polling: 1. Start conversion with **HAL_ADC_Start()**, 2. Later on, when conversion data is needed: use **HAL_ADC_PollForConversion()** to ensure that conversion is completed and use **HAL_ADC_GetValue()** to retrieve conversion result and trig another conversion (in case of usage of injected group, use the equivalent functions HAL_ADCExInjected_Start(), **HAL_ADCEx_InjectedGetValue()**, ...).
- ***uint32_t ADC_InitTypeDef::ContinuousConvMode***
  Specifies whether the conversion is performed in single mode (one conversion) or continuous mode for regular group, after the selected trigger occurred (software start or external trigger). This parameter can be set to ENABLE or DISABLE.
- ***uint32_t ADC_InitTypeDef::NbrOfConversion***
  Specifies the number of ranks that will be converted within the regular group sequencer. To use the regular group sequencer and convert several ranks, parameter 'ScanConvMode' must be enabled. This parameter must be a number between Min_Data = 1 and Max_Data = 16. Note: This parameter must be modified when no conversion is on going on regular group (ADC disabled, or ADC enabled without continuous mode or external trigger that could launch a conversion).
- ***uint32_t ADC_InitTypeDef::DiscontinuousConvMode***
  Specifies whether the conversions sequence of regular group is performed in Complete-sequence/Discontinuous-sequence (main sequence subdivided in successive parts). Discontinuous mode is used only if sequencer is enabled (parameter 'ScanConvMode'). If sequencer is disabled, this parameter is discarded. Discontinuous mode can be enabled only if continuous mode is disabled. If continuous mode is enabled, this parameter setting is discarded. This parameter can be set to ENABLE or DISABLE.
- ***uint32_t ADC_InitTypeDef::NbrOfDiscConversion***
  Specifies the number of discontinuous conversions in which the main sequence of regular group (parameter NbrOfConversion) will be subdivided. If parameter 'DiscontinuousConvMode' is disabled, this parameter is discarded. This parameter must be a number between Min_Data = 1 and Max_Data = 8.
- ***uint32_t ADC_InitTypeDef::ExternalTrigConv***
  Selects the external event used to trigger the conversion start of regular group. If set to ADC_SOFTWARE_START, external triggers are disabled. This parameter can be a value of ***ADCEx_External_trigger_source_Regular*** Caution: For devices with several ADCs, external trigger source is common to ADC common group (for example: ADC1&ADC2, ADC3&ADC4, if available)
- ***uint32_t ADC_InitTypeDef::ExternalTrigConvEdge***
  Selects the external trigger edge of regular group. If trigger is set to ADC_SOFTWARE_START, this parameter is discarded. This parameter can be a value of ***ADCEx_External_trigger_edge_Regular***
- ***uint32_t ADC_InitTypeDef::DMAContinuousRequests***
  Specifies whether the DMA requests are performed in one shot mode (DMA transfer stop when number of conversions is reached) or in Continuous mode (DMA transfer

unlimited, whatever number of conversions). Note: In continuous mode, DMA must be configured in circular mode. Otherwise an overrun will be triggered when DMA buffer maximum pointer is reached. This parameter can be set to ENABLE or DISABLE. Note: This parameter must be modified when no conversion is on going on both regular and injected groups (ADC disabled, or ADC enabled without continuous mode or external trigger that could launch a conversion).

- ***uint32_t ADC_InitTypeDef::Overrun***
  Select the behaviour in case of overrun: data overwritten (default) or preserved. This parameter is for regular group only. This parameter can be a value of ***ADCEx_Overrun*** Note: Case of overrun set to data preserved and usage with end on conversion interruption (HAL_Start_IT()): ADC IRQ handler has to clear end of conversion flags, this induces the release of the preserved data. If needed, this data can be saved into function **HAL_ADC_ConvCpltCallback()** (called before end of conversion flags clear). Note: Error reporting in function of conversion mode:Usage with ADC conversion by polling for event or interruption: Error is reported only if overrun is set to data preserved. If overrun is set to data overwritten, user can willingly not read the conversion data each time, this is not considered as an erroneous case.Usage with ADC conversion by DMA: Error is reported whatever overrun setting (DMA is expected to process all data from data register, any data missed would be abnormal).

7.1.2 ADC_ChannelConfTypeDef

Data Fields

- ***uint32_t Channel***
- ***uint32_t Rank***
- ***uint32_t SamplingTime***
- ***uint32_t SingleDiff***
- ***uint32_t OffsetNumber***
- ***uint32_t Offset***

Field Documentation

- ***uint32_t ADC_ChannelConfTypeDef::Channel***
  Specifies the channel to configure into ADC regular group. This parameter can be a value of ***ADCEx_channels*** Note: Depending on devices, some channels may not be available on package pins. Refer to device datasheet for channels availability.
- ***uint32_t ADC_ChannelConfTypeDef::Rank***
  Specifies the rank in the regular group sequencer. This parameter can be a value of ***ADCEx_regular_rank*** Note: In case of need to disable a channel or change order of conversion sequencer, rank containing a previous channel setting can be overwritten by the new channel setting (or parameter number of conversions can be adjusted)
- ***uint32_t ADC_ChannelConfTypeDef::SamplingTime***
  Sampling time value to be set for the selected channel. Unit: ADC clock cycles Conversion time is the addition of sampling time and processing time (12.5 ADC clock cycles at ADC resolution 12 bits, 10.5 cycles at 10 bits, 8.5 cycles at 8 bits, 6.5 cycles at 6 bits). This parameter can be a value of ***ADCEx_sampling_times*** Caution: This parameter updates the parameter property of the channel, that can be used into regular and/or injected groups. If this same channel has been previously configured in the other group (regular/injected), it will be updated to last setting. Note: In case of usage of internal measurement channels (VrefInt/Vbat/TempSensor), sampling time constraints must be respected (sampling time can be adjusted in function of ADC clock frequency and sampling time setting) Refer to device datasheet for timings values, parameters TS_vrefint, TS_vbat, TS_temp (values rough order: 2.2us min).
- ***uint32_t ADC_ChannelConfTypeDef::SingleDiff***
  Selection of single-ended or differential input. In differential mode: Differential

measurement is between the selected channel 'i' (positive input) and channel 'i+1' (negative input). Only channel 'i' has to be configured, channel 'i+1' is configured automatically. This parameter must be a value of ***ADCEx_SingleDifferential*** Caution: This parameter updates the parameter property of the channel, that can be used into regular and/or injected groups. If this same channel has been previously configured in the other group (regular/injected), it will be updated to last setting. Note: Channels 1 to 14 are available in differential mode. Channels 15U, 16U, 17U, 18 can be used only in single-ended mode. Note: When configuring a channel 'i' in differential mode, the channel 'i+1' is not usable separately. Note: This parameter must be modified when ADC is disabled (before ADC start conversion or after ADC stop conversion). If ADC is enabled, this parameter setting is bypassed without error reporting (as it can be the expected behaviour in case of another parameter update on the fly)

- ***uint32_t ADC_ChannelConfTypeDef::OffsetNumber***
  Selects the offset number This parameter can be a value of ***ADCEx_OffsetNumber*** Caution: Only one channel is allowed per channel. If another channel was on this offset number, the offset will be changed to the new channel
- ***uint32_t ADC_ChannelConfTypeDef::Offset***
  Defines the offset to be subtracted from the raw converted data when convert channels. Offset value must be a positive number. Depending of ADC resolution selected (12U, 10U, 8 or 6 bits), this parameter must be a number between Min_Data = 0x000 and Max_Data = 0xFFFU, 0x3FFU, 0xFF or 0x3F respectively. Note: This parameter must be modified when no conversion is on going on both regular and injected groups (ADC disabled, or ADC enabled without continuous mode or external trigger that could launch a conversion).

7.1.3 ADC_InjectionConfTypeDef

Data Fields

- ***uint32_t InjectedChannel***
- ***uint32_t InjectedRank***
- ***uint32_t InjectedSamplingTime***
- ***uint32_t InjectedSingleDiff***
- ***uint32_t InjectedOffsetNumber***
- ***uint32_t InjectedOffset***
- ***uint32_t InjectedNbrOfConversion***
- ***uint32_t InjectedDiscontinuousConvMode***
- ***uint32_t AutoInjectedConv***
- ***uint32_t QueueInjectedContext***
- ***uint32_t ExternalTrigInjecConv***
- ***uint32_t ExternalTrigInjecConvEdge***

Field Documentation

- ***uint32_t ADC_InjectionConfTypeDef::InjectedChannel***
  Configure the ADC injected channel This parameter can be a value of ***ADCEx_channels*** Note: Depending on devices, some channels may not be available on package pins. Refer to device datasheet for channels availability.
- ***uint32_t ADC_InjectionConfTypeDef::InjectedRank***
  The rank in the regular group sequencer This parameter must be a value of ***ADCEx_injected_rank*** Note: In case of need to disable a channel or change order of conversion sequencer, rank containing a previous channel setting can be overwritten by the new channel setting (or parameter number of conversions can be adjusted)
- ***uint32_t ADC_InjectionConfTypeDef::InjectedSamplingTime***
  Sampling time value to be set for the selected channel. Unit: ADC clock cycles Conversion time is the addition of sampling time and processing time (12.5 ADC clock

cycles at ADC resolution 12 bits, 10.5 cycles at 10 bits, 8.5 cycles at 8 bits, 6.5 cycles at 6 bits). This parameter can be a value of ***ADCEx_sampling_times*** Caution: This parameter updates the parameter property of the channel, that can be used into regular and/or injected groups. If this same channel has been previously configured in the other group (regular/injected), it will be updated to last setting. Note: In case of usage of internal measurement channels (VrefInt/Vbat/TempSensor), sampling time constraints must be respected (sampling time can be adjusted in function of ADC clock frequency and sampling time setting) Refer to device datasheet for timings values, parameters TS_vrefint, TS_vbat, TS_temp (values rough order: 2.2us min).

- ***uint32_t ADC_InjectionConfTypeDef::InjectedSingleDiff***
  Selection of single-ended or differential input. In differential mode: Differential measurement is between the selected channel 'i' (positive input) and channel 'i+1' (negative input). Only channel 'i' has to be configured, channel 'i+1' is configured automatically. This parameter must be a value of ***ADCEx_SingleDifferential*** Caution: This parameter updates the parameter property of the channel, that can be used into regular and/or injected groups. If this same channel has been previously configured in the other group (regular/injected), it will be updated to last setting. Note: Channels 1 to 14 are available in differential mode. Channels 15U, 16U, 17U, 18 can be used only in single-ended mode. Note: When configuring a channel 'i' in differential mode, the channel 'i-1' is not usable separately. Note: This parameter must be modified when ADC is disabled (before ADC start conversion or after ADC stop conversion). If ADC is enabled, this parameter setting is bypassed without error reporting (as it can be the expected behaviour in case of another parameter update on the fly)
- ***uint32_t ADC_InjectionConfTypeDef::InjectedOffsetNumber***
  Selects the offset number This parameter can be a value of ***ADCEx_OffsetNumber*** Caution: Only one channel is allowed per offset number. If another channel was on this offset number, the offset will be changed to the new channel.
- ***uint32_t ADC_InjectionConfTypeDef::InjectedOffset***
  Defines the offset to be subtracted from the raw converted data. Offset value must be a positive number. Depending of ADC resolution selected (12U, 10U, 8 or 6 bits), this parameter must be a number between Min_Data = 0x000 and Max_Data = 0xFFFU, 0x3FFU, 0xFF or 0x3F respectively.
- ***uint32_t ADC_InjectionConfTypeDef::InjectedNbrOfConversion***
  Specifies the number of ranks that will be converted within the injected group sequencer. To use the injected group sequencer and convert several ranks, parameter 'ScanConvMode' must be enabled. This parameter must be a number between Min_Data = 1 and Max_Data = 4. Caution: this setting impacts the entire injected group. Therefore, call of **HAL_ADCEx_InjectedConfigChannel()** to configure a channel on injected group can impact the configuration of other channels previously set.
- ***uint32_t ADC_InjectionConfTypeDef::InjectedDiscontinuousConvMode***
  Specifies whether the conversions sequence of injected group is performed in Complete-sequence/Discontinuous-sequence (main sequence subdivided in successive parts). Discontinuous mode is used only if sequencer is enabled (parameter 'ScanConvMode'). If sequencer is disabled, this parameter is discarded. Discontinuous mode can be enabled only if continuous mode is disabled. If continuous mode is enabled, this parameter setting is discarded. This parameter can be set to ENABLE or DISABLE. Note: This parameter must be modified when ADC is disabled (before ADC start conversion or after ADC stop conversion). Note: For injected group, number of discontinuous ranks increment is fixed to one-by-one. Caution: this setting impacts the entire injected group. Therefore, call of **HAL_ADCEx_InjectedConfigChannel()** to configure a channel on injected group can impact the configuration of other channels previously set.
- ***uint32_t ADC_InjectionConfTypeDef::AutoInjectedConv***
  Enables or disables the selected ADC automatic injected group conversion after

regular one This parameter can be set to ENABLE or DISABLE. Note: To use Automatic injected conversion, discontinuous mode must be disabled ('DiscontinuousConvMode' and 'InjectedDiscontinuousConvMode' set to DISABLE) Note: To use Automatic injected conversion, injected group external triggers must be disabled ('ExternalTrigInjecConv' set to ADC_SOFTWARE_START) Note: In case of DMA used with regular group: if DMA configured in normal mode (single shot) JAUTO will be stopped upon DMA transfer complete. To maintain JAUTO always enabled, DMA must be configured in circular mode. Caution: this setting impacts the entire injected group. Therefore, call of **HAL_ADCEx_InjectedConfigChannel()** to configure a channel on injected group can impact the configuration of other channels previously set.

- ***uint32_t ADC_InjectionConfTypeDef::QueueInjectedContext***
  Specifies whether the context queue feature is enabled. This parameter can be set to ENABLE or DISABLE. If context queue is enabled, injected sequencer&channels configurations are queued on up to 2 contexts. If a new injected context is set when queue is full, error is triggered by interruption and through function 'HAL_ADCEx_InjectedQueueOverflowCallback'. Caution: This feature request that the sequence is fully configured before injected conversion start. Therefore, configure channels with **HAL_ADCEx_InjectedConfigChannel()** as many times as value of 'InjectedNbrOfConversion' parameter. Caution: this setting impacts the entire injected group. Therefore, call of **HAL_ADCEx_InjectedConfigChannel()** to configure a channel on injected group can impact the configuration of other channels previously set. Note: This parameter must be modified when ADC is disabled (before ADC start conversion or after ADC stop conversion).
- ***uint32_t ADC_InjectionConfTypeDef::ExternalTrigInjecConv***
  Selects the external event used to trigger the conversion start of injected group. If set to ADC_INJECTED_SOFTWARE_START, external triggers are disabled. This parameter can be a value of ***ADCEx_External_trigger_source_Injected*** Caution: this setting impacts the entire injected group. Therefore, call of **HAL_ADCEx_InjectedConfigChannel()** to configure a channel on injected group can impact the configuration of other channels previously set.
- ***uint32_t ADC_InjectionConfTypeDef::ExternalTrigInjecConvEdge***
  Selects the external trigger edge of injected group. This parameter can be a value of ***ADCEx_External_trigger_edge_Injected***. If trigger is set to ADC_INJECTED_SOFTWARE_START, this parameter is discarded. Caution: this setting impacts the entire injected group. Therefore, call of **HAL_ADCEx_InjectedConfigChannel()** to configure a channel on injected group can impact the configuration of other channels previously set.

7.1.4 ADC_InjectionConfigTypeDef

Data Fields

- ***uint32_t ContextQueue***
- ***uint32_t ChannelCount***

Field Documentation

- ***uint32_t ADC_InjectionConfigTypeDef::ContextQueue***
  Injected channel configuration context: build-up over each **HAL_ADCEx_InjectedConfigChannel()** call to finally initialize JSQR register at **HAL_ADCEx_InjectedConfigChannel()** last call
- ***uint32_t ADC_InjectionConfigTypeDef::ChannelCount***
  Number of channels in the injected sequence

7.1.5 ADC_AnalogWDGConfTypeDef

Data Fields

- ***uint32_t WatchdogNumber***
- ***uint32_t WatchdogMode***
- ***uint32_t Channel***
- ***uint32_t ITMode***
- ***uint32_t HighThreshold***
- ***uint32_t LowThreshold***

Field Documentation

- ***uint32_t ADC_AnalogWDGConfTypeDef::WatchdogNumber***
  Selects which ADC analog watchdog to apply to the selected channel. For Analog Watchdog 1: Only 1 channel can be monitored (or overall group of channels by setting parameter 'WatchdogMode') For Analog Watchdog 2 and 3: Several channels can be monitored (by successive calls of '**HAL_ADC_AnalogWDGConfig()**' for each channel) This parameter can be a value of ***ADCEx_analog_watchdog_number***.
- ***uint32_t ADC_AnalogWDGConfTypeDef::WatchdogMode***
  For Analog Watchdog 1: Configures the ADC analog watchdog mode: single channel/overall group of channels, regular/injected group. For Analog Watchdog 2 and 3: There is no configuration for overall group of channels as AWD1. Set value 'ADC_ANALOGWATCHDOG_NONE' to reset channels group programmed with parameter 'Channel', set any other value to not use this parameter. This parameter can be a value of ***ADCEx_analog_watchdog_mode***.
- ***uint32_t ADC_AnalogWDGConfTypeDef::Channel***
  Selects which ADC channel to monitor by analog watchdog. For Analog Watchdog 1: this parameter has an effect only if parameter 'WatchdogMode' is configured on single channel. Only 1 channel can be monitored. For Analog Watchdog 2 and 3: Several channels can be monitored (successive calls of **HAL_ADC_AnalogWDGConfig()** must be done, one for each channel. Channels group reset can be done by setting WatchdogMode to 'ADC_ANALOGWATCHDOG_NONE'). This parameter can be a value of ***ADCEx_channels***.
- ***uint32_t ADC_AnalogWDGConfTypeDef::ITMode***
  Specifies whether the analog watchdog is configured in interrupt or polling mode. This parameter can be set to ENABLE or DISABLE
- ***uint32_t ADC_AnalogWDGConfTypeDef::HighThreshold***
  Configures the ADC analog watchdog High threshold value. Depending of ADC resolution selected (12U, 10U, 8 or 6 bits), this parameter must be a number between Min_Data = 0x000 and Max_Data = 0xFFFU, 0x3FFU, 0xFF or 0x3F respectively. Note: Analog watchdog 2 and 3 are limited to a resolution of 8 bits: if ADC resolution is 12 bits the 4 LSB are ignored, if ADC resolution is 10 bits the 2 LSB are ignored.
- ***uint32_t ADC_AnalogWDGConfTypeDef::LowThreshold***
  Configures the ADC analog watchdog High threshold value. Depending of ADC resolution selected (12U, 10U, 8 or 6 bits), this parameter must be a number between Min_Data = 0x000 and Max_Data = 0xFFFU, 0x3FFU, 0xFF or 0x3F respectively. Note: Analog watchdog 2 and 3 are limited to a resolution of 8 bits: if ADC resolution is 12 bits the 4 LSB are ignored, if ADC resolution is 10 bits the 2 LSB are ignored.

7.1.6 ADC_MultiModeTypeDef

Data Fields

- ***uint32_t Mode***
- ***uint32_t DMAAccessMode***
- ***uint32_t TwoSamplingDelay***

Field Documentation

- ***uint32_t ADC_MultiModeTypeDef::Mode***
  Configures the ADC to operate in independent or multi mode. This parameter can be a value of ***ADCEx_Common_mode***
- ***uint32_t ADC_MultiModeTypeDef::DMAAccessMode***
  Configures the DMA mode for multi ADC mode: selection whether 2 DMA channels (each ADC use its own DMA channel) or 1 DMA channel (one DMA channel for both ADC, DMA of ADC master) This parameter can be a value of ***ADCEx_Direct_memory_access_mode_for_multimode*** Caution: Limitations with multimode DMA access enabled (1 DMA channel used): In case of dual mode in high speed (more than 5Msps) or high activity of DMA by other peripherals, there is a risk of DMA overrun. Therefore, it is recommended to disable multimode DMA access: each ADC uses its own DMA channel. Refer to device errata sheet for more details.
- ***uint32_t ADC_MultiModeTypeDef::TwoSamplingDelay***
  Configures the Delay between 2 sampling phases. This parameter can be a value of ***ADCEx_delay_between_2_sampling_phases*** Delay range depends on selected resolution: from 1 to 12 clock cycles for 12 bits, from 1 to 10 clock cycles for 10 bits from 1 to 8 clock cycles for 8 bits, from 1 to 6 clock cycles for 6 bits

7.2 ADCEx Firmware driver API description

7.2.1 Initialization and de-initialization functions

This section provides functions allowing to:

- Initialize and configure the ADC.
- De-initialize the ADC.

This section contains the following APIs:

- ***HAL_ADC_Init()***
- ***HAL_ADC_DeInit()***

7.2.2 IO operation functions

This section provides functions allowing to:

- Start conversion of regular group.
- Stop conversion of regular group.
- Poll for conversion complete on regular group.
- Poll for conversion event.
- Get result of regular channel conversion.
- Start conversion of regular group and enable interruptions.
- Stop conversion of regular group and disable interruptions.
- Handle ADC interrupt request
- Start conversion of regular group and enable DMA transfer.
- Stop conversion of regular group and disable ADC DMA transfer.
- Start conversion of injected group.
- Stop conversion of injected group.
- Poll for conversion complete on injected group.
- Get result of injected channel conversion.
- Start conversion of injected group and enable interruptions.
- Stop conversion of injected group and disable interruptions.
- Start multimode and enable DMA transfer.
- Stop multimode and disable ADC DMA transfer.
- Get result of multimode conversion.

- Perform the ADC self-calibration for single or differential ending.
- Get calibration factors for single or differential ending.
- Set calibration factors for single or differential ending.

This section contains the following APIs:

- ***HAL_ADC_Start()***
- ***HAL_ADC_Stop()***
- ***HAL_ADC_PollForConversion()***
- ***HAL_ADC_PollForEvent()***
- ***HAL_ADC_Start_IT()***
- ***HAL_ADC_Stop_IT()***
- ***HAL_ADC_Start_DMA()***
- ***HAL_ADC_Stop_DMA()***
- ***HAL_ADC_GetValue()***
- ***HAL_ADC_IRQHandler()***
- ***HAL_ADCEx_Calibration_Start()***
- ***HAL_ADCEx_Calibration_GetValue()***
- ***HAL_ADCEx_Calibration_SetValue()***
- ***HAL_ADCEx_InjectedStart()***
- ***HAL_ADCEx_InjectedStop()***
- ***HAL_ADCEx_InjectedPollForConversion()***
- ***HAL_ADCEx_InjectedStart_IT()***
- ***HAL_ADCEx_InjectedStop_IT()***
- ***HAL_ADCEx_MultiModeStart_DMA()***
- ***HAL_ADCEx_MultiModeStop_DMA()***
- ***HAL_ADCEx_MultiModeGetValue()***
- ***HAL_ADCEx_InjectedGetValue()***
- ***HAL_ADCEx_RegularStop()***
- ***HAL_ADCEx_RegularStop_IT()***
- ***HAL_ADCEx_RegularStop_DMA()***
- ***HAL_ADCEx_RegularMultiModeStop_DMA()***
- ***HAL_ADCEx_InjectedConvCpltCallback()***
- ***HAL_ADCEx_InjectedQueueOverflowCallback()***
- ***HAL_ADCEx_LevelOutOfWindow2Callback()***
- ***HAL_ADCEx_LevelOutOfWindow3Callback()***

7.2.3 Peripheral Control functions

This section provides functions allowing to:

- Configure channels on regular group
- Configure channels on injected group
- Configure multimode
- Configure the analog watchdog

This section contains the following APIs:

- ***HAL_ADC_ConfigChannel()***
- ***HAL_ADCEx_InjectedConfigChannel()***
- ***HAL_ADC_AnalogWDGConfig()***
- ***HAL_ADCEx_MultiModeConfigChannel()***

7.2.4 Detailed description of functions

HAL_ADCEx_Calibration_Start

Function name **HAL_StatusTypeDef HAL_ADCEx_Calibration_Start (ADC_HandleTypeDef * hadc, uint32_t SingleDiff)**

Function description Perform an ADC automatic self-calibration Calibration prerequisite: ADC must be disabled (execute this function before HAL_ADC_Start() or after HAL_ADC_Stop()).

Parameters
- **hadc:** ADC handle
- **SingleDiff:** Selection of single-ended or differential input This parameter can be one of the following values:
  - ADC_SINGLE_ENDED: Channel in mode input single ended
  - ADC_DIFFERENTIAL_ENDED: Channel in mode input differential ended

Return values
- **HAL:** status

HAL_ADCEx_Calibration_GetValue

Function name **uint32_t HAL_ADCEx_Calibration_GetValue (ADC_HandleTypeDef * hadc, uint32_t SingleDiff)**

Function description Get the calibration factor from automatic conversion result.

Parameters
- **hadc:** ADC handle
- **SingleDiff:** Selection of single-ended or differential input This parameter can be one of the following values:
  - ADC_SINGLE_ENDED: Channel in mode input single ended
  - ADC_DIFFERENTIAL_ENDED: Channel in mode input differential ended

Return values
- **Converted:** value

HAL_ADCEx_Calibration_SetValue

Function name **HAL_StatusTypeDef HAL_ADCEx_Calibration_SetValue (ADC_HandleTypeDef * hadc, uint32_t SingleDiff, uint32_t CalibrationFactor)**

Function description Set the calibration factor to overwrite automatic conversion result.

Parameters
- **hadc:** ADC handle
- **SingleDiff:** Selection of single-ended or differential input This parameter can be one of the following values:
  - ADC_SINGLE_ENDED: Channel in mode input single ended
  - ADC_DIFFERENTIAL_ENDED: Channel in mode input differential ended
- **CalibrationFactor:** Calibration factor (coded on 7 bits maximum)

Return values
- **HAL:** state

HAL_ADCEx_InjectedStart

Function name	**HAL_StatusTypeDef HAL_ADCEx_InjectedStart (ADC_HandleTypeDef * hadc)**
Function description	Enables ADC, starts conversion of injected group.
Parameters	• **hadc:** ADC handle
Return values	• **HAL:** status
Notes	• Case of multimode enabled (for devices with several ADCs): This function must be called for ADC slave first, then ADC master. For ADC slave, ADC is enabled only (conversion is not started). For ADC master, ADC is enabled and multimode conversion is started.

HAL_ADCEx_InjectedStop

Function name	**HAL_StatusTypeDef HAL_ADCEx_InjectedStop (ADC_HandleTypeDef * hadc)**
Function description	Stop ADC group injected conversion (potential conversion on going on ADC group regular is not impacted), disable ADC peripheral if no conversion is on going on group regular.
Parameters	• **hadc:** ADC handle
Return values	• **None**
Notes	• To stop ADC conversion of both groups regular and injected and to to disable ADC peripheral, instead of using 2 functions HAL_ADCEx_RegularStop() and HAL_ADCEx_InjectedStop(), use function HAL_ADC_Stop(). • If injected group mode auto-injection is enabled, function HAL_ADC_Stop must be used. • Case of multimode enabled (for devices with several ADCs): This function must be called for ADC master first, then ADC slave. For ADC master, conversion is stopped and ADC is disabled. For ADC slave, ADC is disabled only (conversion stop of ADC master has already stopped conversion of ADC slave). • In case of auto-injection mode, HAL_ADC_Stop must be used.

HAL_ADCEx_InjectedPollForConversion

Function name	**HAL_StatusTypeDef HAL_ADCEx_InjectedPollForConversion (ADC_HandleTypeDef * hadc, uint32_t Timeout)**
Function description	Wait for injected group conversion to be completed.
Parameters	• **hadc:** ADC handle • **Timeout:** Timeout value in millisecond.
Return values	• **HAL:** status

HAL_ADCEx_InjectedStart_IT

Function name **HAL_StatusTypeDef HAL_ADCEx_InjectedStart_IT (ADC_HandleTypeDef * hadc)**

Function description Enables ADC, starts conversion of injected group with interruption.

HAL_ADCEx_InjectedStop_IT

Function name **HAL_StatusTypeDef HAL_ADCEx_InjectedStop_IT (ADC_HandleTypeDef * hadc)**

Function description Stop ADC group injected conversion (potential conversion on going on ADC group regular is not impacted), disable ADC peripheral if no conversion is on going on group regular.

HAL_ADCEx_MultiModeStart_DMA

Function name **HAL_StatusTypeDef HAL_ADCEx_MultiModeStart_DMA (ADC_HandleTypeDef * hadc, uint32_t * pData, uint32_t Length)**

Function description With ADC configured in multimode, for ADC master: Enables ADC, starts conversion of regular group and transfers result through DMA.

HAL_ADCEx_MultiModeStop_DMA

Function name **HAL_StatusTypeDef HAL_ADCEx_MultiModeStop_DMA (ADC_HandleTypeDef * hadc)**

Function description With ADC configured in multimode, for ADC master: Stop ADC group regular conversion (potential conversion on going on ADC group injected is not impacted), disable ADC DMA transfer, disable ADC peripheral if no conversion is on going on group injected.

HAL_ADCEx_MultiModeGetValue

Function name **uint32_t HAL_ADCEx_MultiModeGetValue (ADC_HandleTypeDef * hadc)**

Function description Returns the last ADC Master&Slave regular conversions results data in the selected multi mode.

Parameters
- **hadc:** ADC handle of ADC master (handle of ADC slave must not be used)

Return values
- **The:** converted data value.

Notes
- Reading register CDR does not clear flag ADC flag EOC (ADC group regular end of unitary conversion), as it is the case for independent mode data register.

HAL_ADCEx_RegularStop

Function name **HAL_StatusTypeDef HAL_ADCEx_RegularStop (ADC_HandleTypeDef * hadc)**

Function description Stop ADC group regular conversion (potential conversion on going

on ADC group injected is not impacted), disable ADC peripheral if no conversion is on going on group injected.

Parameters
- **hadc:** ADC handle

Return values
- **HAL:** status.

Notes
- To stop ADC conversion of both groups regular and injected and to to disable ADC peripheral, instead of using 2 functions HAL_ADCEx_RegularStop() and HAL_ADCEx_InjectedStop(), use function HAL_ADC_Stop().
- In case of auto-injection mode, this function also stop conversion on ADC group injected.

HAL_ADCEx_RegularStop_IT

Function name **HAL_StatusTypeDef HAL_ADCEx_RegularStop_IT (ADC_HandleTypeDef * hadc)**

Function description Stop ADC group regular conversion (potential conversion on going on ADC group injected is not impacted), disable ADC peripheral if no conversion is on going on group injected.

HAL_ADCEx_RegularStop_DMA

Function name **HAL_StatusTypeDef HAL_ADCEx_RegularStop_DMA (ADC_HandleTypeDef * hadc)**

Function description Stop ADC group regular conversion (potential conversion on going on ADC group injected is not impacted), disable ADC DMA transfer, disable ADC peripheral if no conversion is on going on group injected.

HAL_ADCEx_RegularMultiModeStop_DMA

Function name **HAL_StatusTypeDef HAL_ADCEx_RegularMultiModeStop_DMA (ADC_HandleTypeDef * hadc)**

Function description With ADC configured in multimode, for ADC master: Stop ADC group regular conversion (potential conversion on going on ADC group injected is not impacted), disable ADC DMA transfer, disable ADC peripheral if no conversion is on going on group injected.

HAL_ADCEx_InjectedGetValue

Function name **uint32_t HAL_ADCEx_InjectedGetValue (ADC_HandleTypeDef * hadc, uint32_t InjectedRank)**

Function description Get ADC injected group conversion result.

Parameters
- **hadc:** ADC handle
- **InjectedRank:** the converted ADC injected rank. This parameter can be one of the following values:
  - ADC_INJECTED_RANK_1: Injected Channel1 selected
  - ADC_INJECTED_RANK_2: Injected Channel2 selected
  - ADC_INJECTED_RANK_3: Injected Channel3 selected

– ADC_INJECTED_RANK_4: Injected Channel4 selected

Return values
- **ADC:** group injected conversion data

Notes
- Reading register JDRx automatically clears ADC flag JEOC (ADC group injected end of unitary conversion).
- This function does not clear ADC flag JEOS (ADC group injected end of sequence conversion) Occurrence of flag JEOS rising: If sequencer is composed of 1 rank, flag JEOS is equivalent to flag JEOC.If sequencer is composed of several ranks, during the scan sequence flag JEOC only is raised, at the end of the scan sequence both flags JEOC and EOS are raised. Flag JEOS must not be cleared by this function because it would not be compliant with low power features (feature low power auto-wait, not available on all STM32 families). To clear this flag, either use function: in programming model IT: HAL_ADC_IRQHandler(), in programming model polling: HAL_ADCEx_InjectedPollForConversion() or __HAL_ADC_CLEAR_FLAG(&hadc, ADC_FLAG_JEOS).

HAL_ADCEx_InjectedConvCpltCallback

Function name **void HAL_ADCEx_InjectedConvCpltCallback (ADC_HandleTypeDef * hadc)**

Function description Injected conversion complete callback in non blocking mode.

Parameters
- **hadc:** ADC handle

Return values
- **None**

HAL_ADCEx_InjectedQueueOverflowCallback

Function name **void HAL_ADCEx_InjectedQueueOverflowCallback (ADC_HandleTypeDef * hadc)**

Function description Injected context queue overflow flag callback.

Parameters
- **hadc:** ADC handle

Return values
- **None**

Notes
- This callback is called if injected context queue is enabled (parameter "QueueInjectedContext" in injected channel configuration) and if a new injected context is set when queue is full (maximum 2 contexts).

HAL_ADCEx_LevelOutOfWindow2Callback

Function name **void HAL_ADCEx_LevelOutOfWindow2Callback (ADC_HandleTypeDef * hadc)**

Function description Analog watchdog 2 callback in non blocking mode.

Parameters
- **hadc:** ADC handle

Return values
- **None**

HAL_ADCEx_LevelOutOfWindow3Callback

Function name **void HAL_ADCEx_LevelOutOfWindow3Callback (ADC_HandleTypeDef * hadc)**

Function description Analog watchdog 3 callback in non blocking mode.

Parameters
- **hadc:** ADC handle

Return values
- **None**

HAL_ADCEx_InjectedConfigChannel

Function name **HAL_StatusTypeDef HAL_ADCEx_InjectedConfigChannel (ADC_HandleTypeDef * hadc, ADC_InjectionConfTypeDef * sConfigInjected)**

Function description Configures the ADC injected group and the selected channel to be linked to the injected group.

Parameters
- **hadc:** ADC handle
- **sConfigInjected:** Structure of ADC injected group and ADC channel for injected group.

Return values
- **None**

Notes
- Possibility to update parameters on the fly: This function initializes injected group, following calls to this function can be used to reconfigure some parameters of structure "ADC_InjectionConfTypeDef" on the fly, without reseting the ADC. The setting of these parameters is conditioned to ADC state. For parameters constraints, see comments of structure "ADC_InjectionConfTypeDef".
- In case of usage of internal measurement channels: Vbat/VrefInt/TempSensor. The recommended sampling time is at least: For devices STM32F37x: 17.1us for temperature sensorFor the other STM32F3 devices: 2.2us for each of channels Vbat/VrefInt/TempSensor. These internal paths can be be disabled using function HAL_ADC_DeInit().
- To reset injected sequencer, function HAL_ADCEx_InjectedStop() can be used.
- Caution: For Injected Context Queue use: a context must be fully defined before start of injected conversion: all channels configured consecutively for the same ADC instance. Therefore, Number of calls of HAL_ADCEx_InjectedConfigChannel() must correspond to value of parameter InjectedNbrOfConversion for each context. Example 1: If 1 context intended to be used (or not use of this feature: QueueInjectedContext=DISABLE) and usage of the 3 first injected ranks (InjectedNbrOfConversion=3), HAL_ADCEx_InjectedConfigChannel() must be called once for each channel (3 times) before launching a conversion. This function must not be called to configure the 4th injected channel: it would start a new context into context queue.Example 2: If 2 contexts intended to be used and usage of the 3 first injected ranks (InjectedNbrOfConversion=3), HAL_ADCEx_InjectedConfigChannel() must be called once

for each channel and for each context (3 channels x 2 contexts = 6 calls). Conversion can start once the 1st context is set. The 2nd context can be set on the fly.

HAL_ADCEx_MultiModeConfigChannel

Function name	**HAL_StatusTypeDef HAL_ADCEx_MultiModeConfigChannel (ADC_HandleTypeDef * hadc, ADC_MultiModeTypeDef * multimode)**
Function description	Enable ADC multimode and configure multimode parameters.
Parameters	• **hadc:** ADC handle • **multimode:** Structure of ADC multimode configuration
Return values	• **HAL:** status
Notes	• Possibility to update parameters on the fly: This function initializes multimode parameters, following calls to this function can be used to reconfigure some parameters of structure "ADC_MultiModeTypeDef" on the fly, without reseting the ADCs (both ADCs of the common group). The setting of these parameters is conditioned to ADC state. For parameters constraints, see comments of structure "ADC_MultiModeTypeDef". • To change back configuration from multimode to single mode, ADC must be reset (using function HAL_ADC_Init()).

7.3 ADCEx Firmware driver defines

7.3.1 ADCEx

ADC Extended Analog Watchdog Mode

ADC_ANALOGWATCHDOG_NONE

ADC_ANALOGWATCHDOG_SINGLE_REG

ADC_ANALOGWATCHDOG_SINGLE_INJEC

ADC_ANALOGWATCHDOG_SINGLE_REGINJEC

ADC_ANALOGWATCHDOG_ALL_REG

ADC_ANALOGWATCHDOG_ALL_INJEC

ADC_ANALOGWATCHDOG_ALL_REGINJEC

ADC Extended Analog Watchdog Selection

ADC_ANALOGWATCHDOG_1

ADC_ANALOGWATCHDOG_2

ADC_ANALOGWATCHDOG_3

ADC Extended Channels

ADC_CHANNEL_1

ADC_CHANNEL_2

ADC_CHANNEL_3

ADC_CHANNEL_4

ADC_CHANNEL_5

ADC_CHANNEL_6

ADC_CHANNEL_7

ADC_CHANNEL_8

ADC_CHANNEL_9

ADC_CHANNEL_10

ADC_CHANNEL_11

ADC_CHANNEL_12

ADC_CHANNEL_13

ADC_CHANNEL_14

ADC_CHANNEL_15

ADC_CHANNEL_16

ADC_CHANNEL_17

ADC_CHANNEL_18

ADC_CHANNEL_VOPAMP1

ADC_CHANNEL_TEMPSENSOR

ADC_CHANNEL_VBAT

ADC_CHANNEL_VOPAMP2

ADC_CHANNEL_VOPAMP3

ADC_CHANNEL_VOPAMP4

ADC_CHANNEL_VREFINT

ADC Extended Clock Prescaler

ADC_CLOCK_ASYNC_DIV1	ADC asynchronous clock derived from ADC dedicated PLL
ADC_CLOCK_SYNC_PCLK_DIV1	ADC synchronous clock derived from AHB clock without prescaler
ADC_CLOCK_SYNC_PCLK_DIV2	ADC synchronous clock derived from AHB clock divided by a prescaler of 2U
ADC_CLOCK_SYNC_PCLK_DIV4	ADC synchronous clock derived from AHB clock divided by a prescaler of 4U

IS_ADC_CLOCKPRESCALER

ADC Extended Dual ADC Mode

ADC_MODE_INDEPENDENT

ADC_DUALMODE_REGSIMULT_INJECSIMULT

ADC_DUALMODE_REGSIMULT_ALTERTRIG

ADC_DUALMODE_REGINTERL_INJECSIMULT

ADC_DUALMODE_INJECSIMULT

ADC_DUALMODE_REGSIMULT

ADC_DUALMODE_INTERL

ADC_DUALMODE_ALTERTRIG

ADC Extended Data Alignment

ADC_DATAALIGN_RIGHT

ADC_DATAALIGN_LEFT

ADC Extended Delay Between 2 Sampling Phases

ADC_TWOSAMPLINGDELAY_1CYCLE

ADC_TWOSAMPLINGDELAY_2CYCLES

ADC_TWOSAMPLINGDELAY_3CYCLES

ADC_TWOSAMPLINGDELAY_4CYCLES

ADC_TWOSAMPLINGDELAY_5CYCLES

ADC_TWOSAMPLINGDELAY_6CYCLES

ADC_TWOSAMPLINGDELAY_7CYCLES

ADC_TWOSAMPLINGDELAY_8CYCLES

ADC_TWOSAMPLINGDELAY_9CYCLES

ADC_TWOSAMPLINGDELAY_10CYCLES

ADC_TWOSAMPLINGDELAY_11CYCLES

ADC_TWOSAMPLINGDELAY_12CYCLES

ADC Extended DMA Mode for Dual ADC Mode

ADC_DMAACCESSMODE_DISABLED	DMA multimode disabled: each ADC will use its own DMA channel
ADC_DMAACCESSMODE_12_10_BITS	DMA multimode enabled (one DMA channel for both ADC, DMA of ADC master) for 12 and 10 bits resolution
ADC_DMAACCESSMODE_8_6_BITS	DMA multimode enabled (one DMA channel for both ADC, DMA of ADC master) for 8 and 6 bits resolution

ADC Extended End of Regular Sequence/Conversion

ADC_EOC_SINGLE_CONV

ADC_EOC_SEQ_CONV

ADC Extended Error Code

HAL_ADC_ERROR_NONE	No error
HAL_ADC_ERROR_INTERNAL	ADC IP internal error: if problem of clocking, enable/disable, erroneous state
HAL_ADC_ERROR_OVR	Overrun error
HAL_ADC_ERROR_DMA	DMA transfer error
HAL_ADC_ERROR_JQOVF	Injected context queue overflow error

ADC Extended Event Type

ADC_AWD1_EVENT	ADC Analog watchdog 1 event (main analog watchdog, present on all STM32 devices)
ADC_AWD2_EVENT	ADC Analog watchdog 2 event (additional analog watchdog, not present on all STM32 families)
ADC_AWD3_EVENT	ADC Analog watchdog 3 event (additional analog watchdog, not present on all STM32 families)
ADC_OVR_EVENT	ADC overrun event
ADC_JQOVF_EVENT	ADC Injected Context Queue Overflow event
ADC_AWD_EVENT	

ADCEx Exported Macros

__HAL_ADC_ENABLE

Description:

- Enable the ADC peripheral.

Parameters:

- __HANDLE__: ADC handle

Return value:

- None

Notes:

- ADC enable requires a delay for ADC stabilization time (refer to device datasheet, parameter tSTAB) On STM32F3 devices, some hardware constraints must be strictly respected before using this macro: ADC internal voltage regulator must be preliminarily enabled. This is performed by function HAL_ADC_Init().ADC state requirements: ADC must be disabled, no conversion on going, no calibration on going. These checks are performed by functions HAL_ADC_start_xxx().

__HAL_ADC_DISABLE

Description:

- Disable the ADC peripheral.

Parameters:

- __HANDLE__: ADC handle

Return value:

- None

Notes:

- On STM32F3 devices, some hardware constraints must be strictly respected before using this macro: ADC state requirements: ADC must be enabled, no conversion on going. These checks are performed by functions

HAL_ADC_start_xxx().

__HAL_ADC_ENABLE_IT

Description:

- Enable the ADC end of conversion interrupt.

Parameters:

- __HANDLE__: ADC handle
- __INTERRUPT__: ADC Interrupt This parameter can be any combination of the following values:
  - ADC_IT_RDY: ADC Ready (ADRDY) interrupt source
  - ADC_IT_EOSMP: ADC End of Sampling interrupt source
  - ADC_IT_EOC: ADC End of Regular Conversion interrupt source
  - ADC_IT_EOS: ADC End of Regular sequence of Conversions interrupt source
  - ADC_IT_OVR: ADC overrun interrupt source
  - ADC_IT_JEOC: ADC End of Injected Conversion interrupt source
  - ADC_IT_JEOS: ADC End of Injected sequence of Conversions interrupt source
  - ADC_IT_AWD1: ADC Analog watchdog 1 interrupt source (main analog watchdog, present on all STM32 devices)
  - ADC_IT_AWD2: ADC Analog watchdog 2 interrupt source (additional analog watchdog, present only on STM32F3 devices)
  - ADC_IT_AWD3: ADC Analog watchdog 3 interrupt source (additional analog watchdog, present only on STM32F3 devices)
  - ADC_IT_JQOVF: ADC Injected Context Queue Overflow interrupt source

Return value:

- None

__HAL_ADC_DISABLE_IT

Description:

- Disable the ADC end of conversion interrupt.

Parameters:

- __HANDLE__: ADC handle
- __INTERRUPT__: ADC Interrupt This parameter can be any combination of the

following values:
- ADC_IT_RDY: ADC Ready (ADRDY) interrupt source
- ADC_IT_EOSMP: ADC End of Sampling interrupt source
- ADC_IT_EOC: ADC End of Regular Conversion interrupt source
- ADC_IT_EOS: ADC End of Regular sequence of Conversions interrupt source
- ADC_IT_OVR: ADC overrun interrupt source
- ADC_IT_JEOC: ADC End of Injected Conversion interrupt source
- ADC_IT_JEOS: ADC End of Injected sequence of Conversions interrupt source
- ADC_IT_AWD1: ADC Analog watchdog 1 interrupt source (main analog watchdog, present on all STM32 devices)
- ADC_IT_AWD2: ADC Analog watchdog 2 interrupt source (additional analog watchdog, present only on STM32F3 devices)
- ADC_IT_AWD3: ADC Analog watchdog 3 interrupt source (additional analog watchdog, present only on STM32F3 devices)
- ADC_IT_JQOVF: ADC Injected Context Queue Overflow interrupt source

Return value:

- None

__HAL_ADC_GET_IT_SOURCE

Description:

- Checks if the specified ADC interrupt source is enabled or disabled.

Parameters:

- __HANDLE__: ADC handle
- __INTERRUPT__: ADC interrupt source to check This parameter can be any combination of the following values:
  - ADC_IT_RDY: ADC Ready (ADRDY) interrupt source
  - ADC_IT_EOSMP: ADC End of Sampling interrupt source
  - ADC_IT_EOC: ADC End of Regular Conversion interrupt source
  - ADC_IT_EOS: ADC End of Regular sequence of Conversions interrupt source

- ADC_IT_OVR: ADC overrun interrupt source
- ADC_IT_JEOC: ADC End of Injected Conversion interrupt source
- ADC_IT_JEOS: ADC End of Injected sequence of Conversions interrupt source
- ADC_IT_AWD1: ADC Analog watchdog 1 interrupt source (main analog watchdog, present on all STM32 devices)
- ADC_IT_AWD2: ADC Analog watchdog 2 interrupt source (additional analog watchdog, present only on STM32F3 devices)
- ADC_IT_AWD3: ADC Analog watchdog 3 interrupt source (additional analog watchdog, present only on STM32F3 devices)
- ADC_IT_JQOVF: ADC Injected Context Queue Overflow interrupt source

Return value:

- State: of interruption (SET or RESET)

__HAL_ADC_GET_FLAG

Description:

- Get the selected ADC's flag status.

Parameters:

- __HANDLE__: ADC handle
- __FLAG__: ADC flag This parameter can be any combination of the following values:
  - ADC_FLAG_RDY: ADC Ready (ADRDY) flag
  - ADC_FLAG_EOSMP: ADC End of Sampling flag
  - ADC_FLAG_EOC: ADC End of Regular Conversion flag
  - ADC_FLAG_EOS: ADC End of Regular sequence of Conversions flag
  - ADC_FLAG_OVR: ADC overrun flag
  - ADC_FLAG_JEOC: ADC End of Injected Conversion flag
  - ADC_FLAG_JEOS: ADC End of Injected sequence of Conversions flag
  - ADC_FLAG_AWD1: ADC Analog watchdog 1 flag (main analog watchdog, present on all STM32 devices)
  - ADC_FLAG_AWD2: ADC Analog watchdog 2 flag (additional analog watchdog, present only on STM32F3 devices)

  - ADC_FLAG_AWD3: ADC Analog watchdog 3 flag (additional analog watchdog, present only on STM32F3 devices)
  - ADC_FLAG_JQOVF: ADC Injected Context Queue Overflow flag

Return value:

- None

__HAL_ADC_CLEAR_FLAG

Description:

- Clear the ADC's pending flags.

Parameters:

- __HANDLE__: ADC handle
- __FLAG__: ADC flag This parameter can be any combination of the following values:
  - ADC_FLAG_RDY: ADC Ready (ADRDY) flag
  - ADC_FLAG_EOSMP: ADC End of Sampling flag
  - ADC_FLAG_EOC: ADC End of Regular Conversion flag
  - ADC_FLAG_EOS: ADC End of Regular sequence of Conversions flag
  - ADC_FLAG_OVR: ADC overrun flag
  - ADC_FLAG_JEOC: ADC End of Injected Conversion flag
  - ADC_FLAG_JEOS: ADC End of Injected sequence of Conversions flag
  - ADC_FLAG_AWD1: ADC Analog watchdog 1 flag (main analog watchdog, present on all STM32 devices)
  - ADC_FLAG_AWD2: ADC Analog watchdog 2 flag (additional analog watchdog, present only on STM32F3 devices)
  - ADC_FLAG_AWD3: ADC Analog watchdog 3 flag (additional analog watchdog, present only on STM32F3 devices)
  - ADC_FLAG_JQOVF: ADC Injected Context Queue Overflow flag

Return value:

- None

__HAL_ADC_RESET_HANDLE_STATE

Description:

- Reset ADC handle state.

Parameters:

- __HANDLE__: ADC handle

Return value:

- None

External Trigger Edge of Injected Group

ADC_EXTERNALTRIGINJECCONV_EDGE_NONE

ADC_EXTERNALTRIGINJECCONV_EDGE_RISING

ADC_EXTERNALTRIGINJECCONV_EDGE_FALLING

ADC_EXTERNALTRIGINJECCONV_EDGE_RISINGFALLING

ADC Extended External trigger enable and polarity selection for regular group

ADC_EXTERNALTRIGCONVEDGE_NONE

ADC_EXTERNALTRIGCONVEDGE_RISING

ADC_EXTERNALTRIGCONVEDGE_FALLING

ADC_EXTERNALTRIGCONVEDGE_RISINGFALLING

External Trigger Source of Injected Group

ADC_EXTERNALTRIGINJECCONV_T2_CC1

ADC_EXTERNALTRIGINJECCONV_T3_CC1

ADC_EXTERNALTRIGINJECCONV_T3_CC3

ADC_EXTERNALTRIGINJECCONV_T3_CC4

ADC_EXTERNALTRIGINJECCONV_T6_TRGO

ADC_EXTERNALTRIGINJECCONV_EXT_IT15

ADC_EXTERNALTRIGINJECCONV_T1_CC3

ADC_EXTERNALTRIGINJECCONV_T4_CC3

ADC_EXTERNALTRIGINJECCONV_T4_CC4

ADC_EXTERNALTRIGINJECCONV_T7_TRGO

ADC_EXTERNALTRIGINJECCONV_T8_CC2

ADC_EXTERNALTRIGINJECCONV_T1_CC4

ADC_EXTERNALTRIGINJECCONV_T1_TRGO

ADC_EXTERNALTRIGINJECCONV_T1_TRGO2

ADC_EXTERNALTRIGINJECCONV_T2_TRGO

ADC_EXTERNALTRIGINJECCONV_T3_TRGO

ADC_EXTERNALTRIGINJECCONV_T4_TRGO

ADC_EXTERNALTRIGINJECCONV_T8_CC4

ADC_EXTERNALTRIGINJECCONV_T8_TRGO

ADC_EXTERNALTRIGINJECCONV_T8_TRGO2

ADC_EXTERNALTRIGINJECCONV_T15_TRGO

ADC_INJECTED_SOFTWARE_START

IS_ADC_EXTTRIGINJEC

IS_ADC_EXTTRIGINJEC

ADC Extended External trigger selection for regular group

ADC_EXTERNALTRIGCONV_T1_CC1	< List of external triggers with generic trigger name, independently of
ADC_EXTERNALTRIGCONV_T1_CC2	
ADC_EXTERNALTRIGCONV_T2_CC2	
ADC_EXTERNALTRIGCONV_T3_CC4	
ADC_EXTERNALTRIGCONV_T4_CC4	
ADC_EXTERNALTRIGCONV_T6_TRGO	
ADC_EXTERNALTRIGCONV_EXT_IT11	External triggers of regular group for ADC3&ADC4 only
ADC_EXTERNALTRIGCONV_T2_CC1	
ADC_EXTERNALTRIGCONV_T2_CC3	
ADC_EXTERNALTRIGCONV_T3_CC1	
ADC_EXTERNALTRIGCONV_T4_CC1	
ADC_EXTERNALTRIGCONV_T7_TRGO	
ADC_EXTERNALTRIGCONV_T8_CC1	
ADC_EXTERNALTRIGCONV_EXT_IT2	External triggers of regular group for ADC1&ADC2, ADC3&ADC4
ADC_EXTERNALTRIGCONV_T1_CC3	
ADC_EXTERNALTRIGCONV_T1_TRGO	
ADC_EXTERNALTRIGCONV_T1_TRGO2	
ADC_EXTERNALTRIGCONV_T2_TRGO	
ADC_EXTERNALTRIGCONV_T3_TRGO	
ADC_EXTERNALTRIGCONV_T4_TRGO	
ADC_EXTERNALTRIGCONV_T8_TRGO	
ADC_EXTERNALTRIGCONV_T8_TRGO2	
ADC_EXTERNALTRIGCONV_T15_TRGO	
ADC_SOFTWARE_START	

ADC Extended Flags Definition

ADC_FLAG_RDY	ADC Ready (ADRDY) flag
ADC_FLAG_EOSMP	ADC End of Sampling flag
ADC_FLAG_EOC	ADC End of Regular Conversion flag
ADC_FLAG_EOS	ADC End of Regular sequence of Conversions flag
ADC_FLAG_OVR	ADC overrun flag
ADC_FLAG_JEOC	ADC End of Injected Conversion flag
ADC_FLAG_JEOS	ADC End of Injected sequence of Conversions flag

ADC_FLAG_AWD1	ADC Analog watchdog 1 flag (main analog watchdog, present on all STM32 devices)
ADC_FLAG_AWD2	ADC Analog watchdog 2 flag (additional analog watchdog, present only on STM32F3 devices)
ADC_FLAG_AWD3	ADC Analog watchdog 3 flag (additional analog watchdog, present only on STM32F3 devices)
ADC_FLAG_JQOVF	ADC Injected Context Queue Overflow flag
ADC_FLAG_AWD	

ADC Extended Injected Channel Rank

ADC_INJECTED_RANK_1

ADC_INJECTED_RANK_2

ADC_INJECTED_RANK_3

ADC_INJECTED_RANK_4

ADC Extended Internal HAL driver trigger selection for injected group

ADC1_2_EXTERNALTRIGINJEC_T1_TRGO

ADC1_2_EXTERNALTRIGINJEC_T1_CC4

ADC1_2_EXTERNALTRIGINJEC_T2_TRGO

ADC1_2_EXTERNALTRIGINJEC_T2_CC1

ADC1_2_EXTERNALTRIGINJEC_T3_CC4

ADC1_2_EXTERNALTRIGINJEC_T4_TRGO

ADC1_2_EXTERNALTRIGINJEC_EXT_IT15

ADC1_2_EXTERNALTRIGINJEC_T8_CC4

ADC1_2_EXTERNALTRIGINJEC_T1_TRGO2

ADC1_2_EXTERNALTRIGINJEC_T8_TRGO

ADC1_2_EXTERNALTRIGINJEC_T8_TRGO2

ADC1_2_EXTERNALTRIGINJEC_T3_CC3

ADC1_2_EXTERNALTRIGINJEC_T3_TRGO

ADC1_2_EXTERNALTRIGINJEC_T3_CC1

ADC1_2_EXTERNALTRIGINJEC_T6_TRGO

ADC1_2_EXTERNALTRIGINJEC_T15_TRGO

ADC3_4_EXTERNALTRIGINJEC_T1_TRGO

ADC3_4_EXTERNALTRIGINJEC_T1_CC4

ADC3_4_EXTERNALTRIGINJEC_T4_CC3

ADC3_4_EXTERNALTRIGINJEC_T8_CC2

ADC3_4_EXTERNALTRIGINJEC_T8_CC4

ADC3_4_EXTERNALTRIGINJEC_T4_CC4

ADC3_4_EXTERNALTRIGINJEC_T4_TRGO

ADC3_4_EXTERNALTRIGINJEC_T1_TRGO2

ADC3_4_EXTERNALTRIGINJEC_T8_TRGO

ADC3_4_EXTERNALTRIGINJEC_T8_TRGO2

ADC3_4_EXTERNALTRIGINJEC_T1_CC3

ADC3_4_EXTERNALTRIGINJEC_T3_TRGO

ADC3_4_EXTERNALTRIGINJEC_T2_TRGO

ADC3_4_EXTERNALTRIGINJEC_T7_TRGO

ADC3_4_EXTERNALTRIGINJEC_T15_TRGO

ADC Extended Internal HAL driver trigger selection for regular group

ADC1_2_EXTERNALTRIG_T1_CC1

ADC1_2_EXTERNALTRIG_T1_CC2

ADC1_2_EXTERNALTRIG_T1_CC3

ADC1_2_EXTERNALTRIG_T2_CC2

ADC1_2_EXTERNALTRIG_T3_TRGO

ADC1_2_EXTERNALTRIG_T4_CC4

ADC1_2_EXTERNALTRIG_EXT_IT11

ADC1_2_EXTERNALTRIG_T8_TRGO

ADC1_2_EXTERNALTRIG_T8_TRGO2

ADC1_2_EXTERNALTRIG_T1_TRGO

ADC1_2_EXTERNALTRIG_T1_TRGO2

ADC1_2_EXTERNALTRIG_T2_TRGO

ADC1_2_EXTERNALTRIG_T4_TRGO

ADC1_2_EXTERNALTRIG_T6_TRGO

ADC1_2_EXTERNALTRIG_T15_TRGO

ADC1_2_EXTERNALTRIG_T3_CC4

ADC3_4_EXTERNALTRIG_T3_CC1

ADC3_4_EXTERNALTRIG_T2_CC3

ADC3_4_EXTERNALTRIG_T1_CC3

ADC3_4_EXTERNALTRIG_T8_CC1

ADC3_4_EXTERNALTRIG_T8_TRGO

ADC3_4_EXTERNALTRIG_EXT_IT2

ADC3_4_EXTERNALTRIG_T4_CC1

ADC3_4_EXTERNALTRIG_T2_TRGO

ADC3_4_EXTERNALTRIG_T8_TRGO2

ADC3_4_EXTERNALTRIG_T1_TRGO

ADC3_4_EXTERNALTRIG_T1_TRGO2

ADC3_4_EXTERNALTRIG_T3_TRGO

ADC3_4_EXTERNALTRIG_T4_TRGO

ADC3_4_EXTERNALTRIG_T7_TRGO

ADC3_4_EXTERNALTRIG_T15_TRGO

ADC3_4_EXTERNALTRIG_T2_CC1

ADC Extended Interrupts Definition

ADC_IT_RDY	ADC Ready (ADRDY) interrupt source
ADC_IT_EOSMP	ADC End of Sampling interrupt source
ADC_IT_EOC	ADC End of Regular Conversion interrupt source
ADC_IT_EOS	ADC End of Regular sequence of Conversions interrupt source
ADC_IT_OVR	ADC overrun interrupt source
ADC_IT_JEOC	ADC End of Injected Conversion interrupt source
ADC_IT_JEOS	ADC End of Injected sequence of Conversions interrupt source
ADC_IT_AWD1	ADC Analog watchdog 1 interrupt source (main analog watchdog, present on all STM32 devices)
ADC_IT_AWD2	ADC Analog watchdog 2 interrupt source (additional analog watchdog, present only on STM32F3 devices)
ADC_IT_AWD3	ADC Analog watchdog 3 interrupt source (additional analog watchdog, present only on STM32F3 devices)
ADC_IT_JQOVF	ADC Injected Context Queue Overflow interrupt source

ADC_IT_AWD

ADC Extended Offset Number

ADC_OFFSET_NONE

ADC_OFFSET_1

ADC_OFFSET_2

ADC_OFFSET_3

ADC_OFFSET_4

ADC Extended overrun

ADC_OVR_DATA_OVERWRITTEN	Default setting, to be used for compatibility with other STM32 devices

ADC_OVR_DATA_PRESERVED

ADC Extended Range Verification

IS_ADC_RANGE

ADC Extended rank into regular group

ADC_REGULAR_RANK_1

ADC_REGULAR_RANK_2

ADC_REGULAR_RANK_3

ADC_REGULAR_RANK_4

ADC_REGULAR_RANK_5

ADC_REGULAR_RANK_6

ADC_REGULAR_RANK_7

ADC_REGULAR_RANK_8

ADC_REGULAR_RANK_9

ADC_REGULAR_RANK_10

ADC_REGULAR_RANK_11

ADC_REGULAR_RANK_12

ADC_REGULAR_RANK_13

ADC_REGULAR_RANK_14

ADC_REGULAR_RANK_15

ADC_REGULAR_RANK_16

ADC Extended Resolution

ADC_RESOLUTION_12B	ADC 12-bit resolution
ADC_RESOLUTION_10B	ADC 10-bit resolution
ADC_RESOLUTION_8B	ADC 8-bit resolution
ADC_RESOLUTION_6B	ADC 6-bit resolution

ADC Extended Sampling Times

ADC_SAMPLETIME_1CYCLE_5	Sampling time 1.5 ADC clock cycle
ADC_SAMPLETIME_2CYCLES_5	Sampling time 2.5 ADC clock cycles
ADC_SAMPLETIME_4CYCLES_5	Sampling time 4.5 ADC clock cycles
ADC_SAMPLETIME_7CYCLES_5	Sampling time 7.5 ADC clock cycles
ADC_SAMPLETIME_19CYCLES_5	Sampling time 19.5 ADC clock cycles
ADC_SAMPLETIME_61CYCLES_5	Sampling time 61.5 ADC clock cycles
ADC_SAMPLETIME_181CYCLES_5	Sampling time 181.5 ADC clock cycles
ADC_SAMPLETIME_601CYCLES_5	Sampling time 601.5 ADC clock cycles

ADC Extended Scan Mode

ADC_SCAN_DISABLE

ADC_SCAN_ENABLE

ADC Extended Single-ended/Differential input mode

ADC_SINGLE_ENDED

ADC_DIFFERENTIAL_ENDED

8 HAL CAN Generic Driver

8.1 CAN Firmware driver registers structures

8.1.1 CAN_InitTypeDef

Data Fields

- ***uint32_t Prescaler***
- ***uint32_t Mode***
- ***uint32_t SJW***
- ***uint32_t BS1***
- ***uint32_t BS2***
- ***uint32_t TTCM***
- ***uint32_t ABOM***
- ***uint32_t AWUM***
- ***uint32_t NART***
- ***uint32_t RFLM***
- ***uint32_t TXFP***

Field Documentation

- ***uint32_t CAN_InitTypeDef::Prescaler***
  Specifies the length of a time quantum. This parameter must be a number between Min_Data = 1 and Max_Data = 1024.
- ***uint32_t CAN_InitTypeDef::Mode***
  Specifies the CAN operating mode. This parameter can be a value of ***CAN_operating_mode***
- ***uint32_t CAN_InitTypeDef::SJW***
  Specifies the maximum number of time quanta the CAN hardware is allowed to lengthen or shorten a bit to perform resynchronization. This parameter can be a value of ***CAN_synchronisation_jump_width***
- ***uint32_t CAN_InitTypeDef::BS1***
  Specifies the number of time quanta in Bit Segment 1. This parameter can be a value of ***CAN_time_quantum_in_bit_segment_1***
- ***uint32_t CAN_InitTypeDef::BS2***
  Specifies the number of time quanta in Bit Segment 2. This parameter can be a value of ***CAN_time_quantum_in_bit_segment_2***
- ***uint32_t CAN_InitTypeDef::TTCM***
  Enable or disable the time triggered communication mode. This parameter can be set to ENABLE or DISABLE.
- ***uint32_t CAN_InitTypeDef::ABOM***
  Enable or disable the automatic bus-off management. This parameter can be set to ENABLE or DISABLE.
- ***uint32_t CAN_InitTypeDef::AWUM***
  Enable or disable the automatic wake-up mode. This parameter can be set to ENABLE or DISABLE.
- ***uint32_t CAN_InitTypeDef::NART***
  Enable or disable the non-automatic retransmission mode. This parameter can be set to ENABLE or DISABLE.
- ***uint32_t CAN_InitTypeDef::RFLM***
  Enable or disable the Receive FIFO Locked mode. This parameter can be set to ENABLE or DISABLE.

- ***uint32_t CAN_InitTypeDef::TXFP***
  Enable or disable the transmit FIFO priority. This parameter can be set to ENABLE or DISABLE.

8.1.2 CAN_FilterConfTypeDef

Data Fields

- ***uint32_t FilterIdHigh***
- ***uint32_t FilterIdLow***
- ***uint32_t FilterMaskIdHigh***
- ***uint32_t FilterMaskIdLow***
- ***uint32_t FilterFIFOAssignment***
- ***uint32_t FilterNumber***
- ***uint32_t FilterMode***
- ***uint32_t FilterScale***
- ***uint32_t FilterActivation***
- ***uint32_t BankNumber***

Field Documentation

- ***uint32_t CAN_FilterConfTypeDef::FilterIdHigh***
  Specifies the filter identification number (MSBs for a 32-bit configuration, first one for a 16-bit configuration). This parameter must be a number between Min_Data = 0x0000 and Max_Data = 0xFFFF.
- ***uint32_t CAN_FilterConfTypeDef::FilterIdLow***
  Specifies the filter identification number (LSBs for a 32-bit configuration, second one for a 16-bit configuration). This parameter must be a number between Min_Data = 0x0000 and Max_Data = 0xFFFF.
- ***uint32_t CAN_FilterConfTypeDef::FilterMaskIdHigh***
  Specifies the filter mask number or identification number, according to the mode (MSBs for a 32-bit configuration, first one for a 16-bit configuration). This parameter must be a number between Min_Data = 0x0000 and Max_Data = 0xFFFF.
- ***uint32_t CAN_FilterConfTypeDef::FilterMaskIdLow***
  Specifies the filter mask number or identification number, according to the mode (LSBs for a 32-bit configuration, second one for a 16-bit configuration). This parameter must be a number between Min_Data = 0x0000 and Max_Data = 0xFFFF.
- ***uint32_t CAN_FilterConfTypeDef::FilterFIFOAssignment***
  Specifies the FIFO (0 or 1U) which will be assigned to the filter. This parameter can be a value of ***CAN_filter_FIFO***
- ***uint32_t CAN_FilterConfTypeDef::FilterNumber***
  Specifies the filter which will be initialized. This parameter must be a number between Min_Data = 0 and Max_Data = 27.
- ***uint32_t CAN_FilterConfTypeDef::FilterMode***
  Specifies the filter mode to be initialized. This parameter can be a value of ***CAN_filter_mode***
- ***uint32_t CAN_FilterConfTypeDef::FilterScale***
  Specifies the filter scale. This parameter can be a value of ***CAN_filter_scale***
- ***uint32_t CAN_FilterConfTypeDef::FilterActivation***
  Enable or disable the filter. This parameter can be set to ENABLE or DISABLE.
- ***uint32_t CAN_FilterConfTypeDef::BankNumber***
  Select the start slave bank filter F3 devices don't support CAN2 interface (Slave). Therefore this parameter is meaningless but it has been kept for compatibility accross STM32 families

8.1.3 CanTxMsgTypeDef

Data Fields

- ***uint32_t StdId***
- ***uint32_t ExtId***
- ***uint32_t IDE***
- ***uint32_t RTR***
- ***uint32_t DLC***
- ***uint8_t Data***

Field Documentation

- ***uint32_t CanTxMsgTypeDef::StdId***
  Specifies the standard identifier. This parameter must be a number between Min_Data = 0 and Max_Data = 0x7FF.
- ***uint32_t CanTxMsgTypeDef::ExtId***
  Specifies the extended identifier. This parameter must be a number between Min_Data = 0 and Max_Data = 0x1FFFFFFF.
- ***uint32_t CanTxMsgTypeDef::IDE***
  Specifies the type of identifier for the message that will be transmitted. This parameter can be a value of ***CAN_identifier_type***
- ***uint32_t CanTxMsgTypeDef::RTR***
  Specifies the type of frame for the message that will be transmitted. This parameter can be a value of ***CAN_remote_transmission_request***
- ***uint32_t CanTxMsgTypeDef::DLC***
  Specifies the length of the frame that will be transmitted. This parameter must be a number between Min_Data = 0 and Max_Data = 8.
- ***uint8_t CanTxMsgTypeDef::Data[8]***
  Contains the data to be transmitted. This parameter must be a number between Min_Data = 0 and Max_Data = 0xFF.

8.1.4 CanRxMsgTypeDef

Data Fields

- ***uint32_t StdId***
- ***uint32_t ExtId***
- ***uint32_t IDE***
- ***uint32_t RTR***
- ***uint32_t DLC***
- ***uint8_t Data***
- ***uint32_t FMI***
- ***uint32_t FIFONumber***

Field Documentation

- ***uint32_t CanRxMsgTypeDef::StdId***
  Specifies the standard identifier. This parameter must be a number between Min_Data = 0 and Max_Data = 0x7FF.
- ***uint32_t CanRxMsgTypeDef::ExtId***
  Specifies the extended identifier. This parameter must be a number between Min_Data = 0 and Max_Data = 0x1FFFFFFF.
- ***uint32_t CanRxMsgTypeDef::IDE***
  Specifies the type of identifier for the message that will be received. This parameter can be a value of ***CAN_identifier_type***

- ***uint32_t CanRxMsgTypeDef::RTR***
  Specifies the type of frame for the received message. This parameter can be a value of ***CAN_remote_transmission_request***
- ***uint32_t CanRxMsgTypeDef::DLC***
  Specifies the length of the frame that will be received. This parameter must be a number between Min_Data = 0 and Max_Data = 8.
- ***uint8_t CanRxMsgTypeDef::Data[8]***
  Contains the data to be received. This parameter must be a number between Min_Data = 0 and Max_Data = 0xFF.
- ***uint32_t CanRxMsgTypeDef::FMI***
  Specifies the index of the filter the message stored in the mailbox passes through. This parameter must be a number between Min_Data = 0 and Max_Data = 0xFF.
- ***uint32_t CanRxMsgTypeDef::FIFONumber***
  Specifies the receive FIFO number. This parameter can be CAN_FIFO0 or CAN_FIFO1

8.1.5 CAN_HandleTypeDef

Data Fields

- ***CAN_TypeDef * Instance***
- ***CAN_InitTypeDef Init***
- ***CanTxMsgTypeDef * pTxMsg***
- ***CanRxMsgTypeDef * pRxMsg***
- ***CanRxMsgTypeDef * pRx1Msg***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_CAN_StateTypeDef State***
- ***__IO uint32_t ErrorCode***

Field Documentation

- ***CAN_TypeDef* CAN_HandleTypeDef::Instance***
  Register base address
- ***CAN_InitTypeDef CAN_HandleTypeDef::Init***
  CAN required parameters
- ***CanTxMsgTypeDef* CAN_HandleTypeDef::pTxMsg***
  Pointer to transmit structure
- ***CanRxMsgTypeDef* CAN_HandleTypeDef::pRxMsg***
  Pointer to reception structure for RX FIFO0 msg
- ***CanRxMsgTypeDef* CAN_HandleTypeDef::pRx1Msg***
  Pointer to reception structure for RX FIFO1 msg
- ***HAL_LockTypeDef CAN_HandleTypeDef::Lock***
  CAN locking object
- ***__IO HAL_CAN_StateTypeDef CAN_HandleTypeDef::State***
  CAN communication state
- ***__IO uint32_t CAN_HandleTypeDef::ErrorCode***
  CAN Error code This parameter can be a value of ***CAN_Error_Code***

8.2 CAN Firmware driver API description

8.2.1 How to use this driver

1. Enable the CAN controller interface clock using __HAL_RCC_CAN1_CLK_ENABLE();
2. CAN pins configuration
   – Enable the clock for the CAN GPIOs using the following function: __HAL_RCC_GPIOx_CLK_ENABLE();

  - Connect and configure the involved CAN pins to AF9 using the following function HAL_GPIO_Init();
3. Initialise and configure the CAN using HAL_CAN_Init() function.
4. Transmit the desired CAN frame using HAL_CAN_Transmit() function.
5. Or transmit the desired CAN frame using HAL_CAN_Transmit_IT() function.
6. Receive a CAN frame using HAL_CAN_Receive() function.
7. Or receive a CAN frame using HAL_CAN_Receive_IT() function.

Polling mode IO operation

- Start the CAN peripheral transmission and wait the end of this operation using HAL_CAN_Transmit(), at this stage user can specify the value of timeout according to his end application
- Start the CAN peripheral reception and wait the end of this operation using HAL_CAN_Receive(), at this stage user can specify the value of timeout according to his end application

Interrupt mode IO operation

- Start the CAN peripheral transmission using HAL_CAN_Transmit_IT()
- Start the CAN peripheral reception using HAL_CAN_Receive_IT()
- Use HAL_CAN_IRQHandler() called under the used CAN Interrupt subroutine
- At CAN end of transmission HAL_CAN_TxCpltCallback() function is executed and user can add his own code by customization of function pointer HAL_CAN_TxCpltCallback
- In case of CAN Error, HAL_CAN_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_CAN_ErrorCallback

CAN HAL driver macros list

Below the list of most used macros in CAN HAL driver.

- __HAL_CAN_ENABLE_IT: Enable the specified CAN interrupts
- __HAL_CAN_DISABLE_IT: Disable the specified CAN interrupts
- __HAL_CAN_GET_IT_SOURCE: Check if the specified CAN interrupt source is enabled or disabled
- __HAL_CAN_CLEAR_FLAG: Clear the CAN's pending flags
- __HAL_CAN_GET_FLAG: Get the selected CAN's flag status



You can refer to the CAN HAL driver header file for more useful macros

8.2.2 Initialization and de-initialization functions

This section provides functions allowing to:

- Initialize and configure the CAN.
- De-initialize the CAN.

This section contains the following APIs:

- ***HAL_CAN_Init()***
- ***HAL_CAN_ConfigFilter()***
- ***HAL_CAN_DeInit()***
- ***HAL_CAN_MspInit()***

- *HAL_CAN_MspDeInit()*

8.2.3 Peripheral State and Error functions

This subsection provides functions allowing to :

- Check the CAN state.
- Check CAN Errors detected during interrupt process

This section contains the following APIs:

- *HAL_CAN_GetState()*
- *HAL_CAN_GetError()*

8.2.4 Detailed description of functions

HAL_CAN_Init

Function name	**HAL_StatusTypeDef HAL_CAN_Init (CAN_HandleTypeDef * hcan)**
Function description	Initializes the CAN peripheral according to the specified parameters in the CAN_InitStruct.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN.
Return values	• **HAL:** status

HAL_CAN_ConfigFilter

Function name	**HAL_StatusTypeDef HAL_CAN_ConfigFilter (CAN_HandleTypeDef * hcan, CAN_FilterConfTypeDef * sFilterConfig)**
Function description	Configures the CAN reception filter according to the specified parameters in the CAN_FilterInitStruct.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN. • **sFilterConfig:** pointer to a CAN_FilterConfTypeDef structure that contains the filter configuration information.
Return values	• **None**

HAL_CAN_DeInit

Function name	**HAL_StatusTypeDef HAL_CAN_DeInit (CAN_HandleTypeDef * hcan)**
Function description	Deinitializes the CANx peripheral registers to their default reset values.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN.
Return values	• **HAL:** status

HAL_CAN_MspInit

Function name	**void HAL_CAN_MspInit (CAN_HandleTypeDef * hcan)**
Function description	Initializes the CAN MSP.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN.
Return values	• **None**

HAL_CAN_MspDeInit

Function name	**void HAL_CAN_MspDeInit (CAN_HandleTypeDef * hcan)**
Function description	DeInitializes the CAN MSP.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN.
Return values	• **None**

HAL_CAN_Transmit

Function name	**HAL_StatusTypeDef HAL_CAN_Transmit (CAN_HandleTypeDef * hcan, uint32_t Timeout)**
Function description	Initiates and transmits a CAN frame message.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN. • **Timeout:** Timeout duration.
Return values	• **HAL:** status

HAL_CAN_Transmit_IT

Function name	**HAL_StatusTypeDef HAL_CAN_Transmit_IT (CAN_HandleTypeDef * hcan)**
Function description	Initiates and transmits a CAN frame message.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN.
Return values	• **HAL:** status

HAL_CAN_Receive

Function name	**HAL_StatusTypeDef HAL_CAN_Receive (CAN_HandleTypeDef * hcan, uint8_t FIFONumber, uint32_t Timeout)**
Function description	Receives a correct CAN frame.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN. • **FIFONumber:** FIFO number. • **Timeout:** Timeout duration.
Return values	• **HAL:** status

HAL_CAN_Receive_IT

Function name	**HAL_StatusTypeDef HAL_CAN_Receive_IT (CAN_HandleTypeDef * hcan, uint8_t FIFONumber)**
Function description	Receives a correct CAN frame.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN. • **FIFONumber:** FIFO number.
Return values	• **HAL:** status

HAL_CAN_Sleep

Function name	**HAL_StatusTypeDef HAL_CAN_Sleep (CAN_HandleTypeDef * hcan)**
Function description	Enters the Sleep (low power) mode.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN.
Return values	• **HAL:** status.

HAL_CAN_WakeUp

Function name	**HAL_StatusTypeDef HAL_CAN_WakeUp (CAN_HandleTypeDef * hcan)**
Function description	Wakes up the CAN peripheral from sleep mode, after that the CAN peripheral is in the normal mode.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN.
Return values	• **HAL:** status.

HAL_CAN_IRQHandler

Function name	**void HAL_CAN_IRQHandler (CAN_HandleTypeDef * hcan)**
Function description	Handles CAN interrupt request.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN.
Return values	• **None**

HAL_CAN_TxCpltCallback

Function name	**void HAL_CAN_TxCpltCallback (CAN_HandleTypeDef * hcan)**
Function description	Transmission complete callback in non blocking mode.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN.
Return values	• **None**

HAL_CAN_RxCpltCallback

Function name	**void HAL_CAN_RxCpltCallback (CAN_HandleTypeDef * hcan)**
Function description	Transmission complete callback in non blocking mode.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN.
Return values	• **None**

HAL_CAN_ErrorCallback

Function name	**void HAL_CAN_ErrorCallback (CAN_HandleTypeDef * hcan)**
Function description	Error CAN callback.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN.
Return values	• **None**

HAL_CAN_GetError

Function name	**uint32_t HAL_CAN_GetError (CAN_HandleTypeDef * hcan)**
Function description	Return the CAN error code.
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN.
Return values	• **CAN:** Error Code

HAL_CAN_GetState

Function name	**HAL_CAN_StateTypeDef HAL_CAN_GetState (CAN_HandleTypeDef * hcan)**
Function description	return the CAN state
Parameters	• **hcan:** pointer to a CAN_HandleTypeDef structure that contains the configuration information for the specified CAN.
Return values	• **HAL:** state

8.3 CAN Firmware driver defines

8.3.1 CAN

CAN Error Code

HAL_CAN_ERROR_NONE	No error
HAL_CAN_ERROR_EWG	EWG error
HAL_CAN_ERROR_EPV	EPV error
HAL_CAN_ERROR_BOF	BOF error
HAL_CAN_ERROR_STF	Stuff error
HAL_CAN_ERROR_FOR	Form error

HAL_CAN_ERROR_ACK	Acknowledgment error
HAL_CAN_ERROR_BR	Bit recessive
HAL_CAN_ERROR_BD	LEC dominant
HAL_CAN_ERROR_CRC	LEC transfer error
HAL_CAN_ERROR_FOV0	FIFO0 overrun error
HAL_CAN_ERROR_FOV1	FIFO1 overrun error
HAL_CAN_ERROR_TXFAIL	Transmit failure

CAN Exported Macros

__HAL_CAN_RESET_HANDLE_STATE

Description:

- Reset CAN handle state.

Parameters:

- __HANDLE__: CAN handle.

Return value:

- None

__HAL_CAN_ENABLE_IT

Description:

- Enable the specified CAN interrupts.

Parameters:

- __HANDLE__: CAN handle.
- __INTERRUPT__: CAN Interrupt

Return value:

- None

__HAL_CAN_DISABLE_IT

Description:

- Disable the specified CAN interrupts.

Parameters:

- __HANDLE__: CAN handle.
- __INTERRUPT__: CAN Interrupt

Return value:

- None

__HAL_CAN_MSG_PENDING

Description:

- Return the number of pending received messages.

Parameters:

- __HANDLE__: CAN handle.
- __FIFONUMBER__: Receive FIFO number, CAN_FIFO0 or CAN_FIFO1.

Return value:

- The: number of pending message.

__HAL_CAN_GET_FLAG

Description:

- Check whether the specified CAN flag is set or not.

Parameters:

- __HANDLE__: specifies the CAN Handle.
- __FLAG__: specifies the flag to check. This parameter can be one of the following values:
  - CAN_TSR_RQCP0: Request MailBox0 Flag
  - CAN_TSR_RQCP1: Request MailBox1 Flag
  - CAN_TSR_RQCP2: Request MailBox2 Flag
  - CAN_FLAG_TXOK0: Transmission OK MailBox0 Flag
  - CAN_FLAG_TXOK1: Transmission OK MailBox1 Flag
  - CAN_FLAG_TXOK2: Transmission OK MailBox2 Flag
  - CAN_FLAG_TME0: Transmit mailbox 0 empty Flag
  - CAN_FLAG_TME1: Transmit mailbox 1 empty Flag
  - CAN_FLAG_TME2: Transmit mailbox 2 empty Flag
  - CAN_FLAG_FMP0: FIFO 0 Message Pending Flag
  - CAN_FLAG_FF0: FIFO 0 Full Flag
  - CAN_FLAG_FOV0: FIFO 0 Overrun Flag
  - CAN_FLAG_FMP1: FIFO 1 Message Pending Flag
  - CAN_FLAG_FF1: FIFO 1 Full Flag
  - CAN_FLAG_FOV1: FIFO 1 Overrun Flag
  - CAN_FLAG_WKU: Wake up Flag
  - CAN_FLAG_SLAK: Sleep acknowledge Flag
  - CAN_FLAG_SLAKI: Sleep acknowledge Flag
  - CAN_FLAG_EWG: Error Warning Flag
  - CAN_FLAG_EPV: Error Passive Flag
  - CAN_FLAG_BOF: Bus-Off Flag

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

__HAL_CAN_CLEAR_FLAG

Description:

- Clear the specified CAN pending flag.

Parameters:

- __HANDLE__: specifies the CAN Handle.
- __FLAG__: specifies the flag to check. This parameter can be one of the following values:
  - CAN_TSR_RQCP0: Request MailBox0 Flag
  - CAN_TSR_RQCP1: Request MailBox1 Flag
  - CAN_TSR_RQCP2: Request MailBox2 Flag
  - CAN_FLAG_TXOK0: Transmission OK MailBox0 Flag
  - CAN_FLAG_TXOK1: Transmission OK MailBox1 Flag
  - CAN_FLAG_TXOK2: Transmission OK MailBox2 Flag
  - CAN_FLAG_TME0: Transmit mailbox 0 empty Flag
  - CAN_FLAG_TME1: Transmit mailbox 1 empty Flag
  - CAN_FLAG_TME2: Transmit mailbox 2 empty Flag
  - CAN_FLAG_FMP0: FIFO 0 Message Pending Flag
  - CAN_FLAG_FF0: FIFO 0 Full Flag
  - CAN_FLAG_FOV0: FIFO 0 Overrun Flag
  - CAN_FLAG_FMP1: FIFO 1 Message Pending Flag
  - CAN_FLAG_FF1: FIFO 1 Full Flag
  - CAN_FLAG_FOV1: FIFO 1 Overrun Flag
  - CAN_FLAG_WKU: Wake up Flag
  - CAN_FLAG_SLAKI: Sleep acknowledge Flag
  - CAN_FLAG_EWG: Error Warning Flag
  - CAN_FLAG_EPV: Error Passive Flag
  - CAN_FLAG_BOF: Bus-Off Flag

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

__HAL_CAN_GET_IT_SOURCE

Description:

- Check if the specified CAN interrupt source is enabled or disabled.

Parameters:

- __HANDLE__: specifies the CAN Handle.
- __INTERRUPT__: specifies the CAN interrupt source to check. This parameter

can be one of the following values:
  - CAN_IT_TME: Transmit mailbox empty interrupt enable
  - CAN_IT_FMP0: FIFO0 message pending interrupt enablev
  - CAN_IT_FMP1: FIFO1 message pending interrupt enable

Return value:

- The: new state of __IT__ (TRUE or FALSE).

__HAL_CAN_TRANSMIT_STATUS

Description:

- Check the transmission status of a CAN Frame.

Parameters:

- __HANDLE__: CAN handle.
- __TRANSMITMAILBOX__: the number of the mailbox that is used for transmission.

Return value:

- The: new status of transmission (TRUE or FALSE).

__HAL_CAN_FIFO_RELEASE

Description:

- Release the specified receive FIFO.

Parameters:

- __HANDLE__: CAN handle.
- __FIFONUMBER__: Receive FIFO number, CAN_FIFO0 or CAN_FIFO1.

Return value:

- None

__HAL_CAN_CANCEL_TRANSMIT

Description:

- Cancel a transmit request.

Parameters:

- __HANDLE__: specifies the CAN Handle.
- __TRANSMITMAILBOX__: the number of the mailbox that is used for transmission.

Return value:

- None

__HAL_CAN_DBG_FREEZE

Description:

- Enable or disables the DBG Freeze for CAN.

Parameters:

- __HANDLE__: specifies the CAN Handle.
- __NEWSTATE__: new state of the CAN

peripheral. This parameter can be: ENABLE (CAN reception/transmission is frozen during debug. Reception FIFOs can still be accessed/controlled normally) or DISABLE (CAN is working during debug).

Return value:

- None

CAN Filter FIFO

CAN_FILTER_FIFO0	Filter FIFO 0 assignment for filter x
CAN_FILTER_FIFO1	Filter FIFO 1 assignment for filter x

CAN Filter Mode

CAN_FILTERMODE_IDMASK	Identifier mask mode
CAN_FILTERMODE_IDLIST	Identifier list mode

CAN Filter Scale

CAN_FILTERSCALE_16BIT	Two 16-bit filters
CAN_FILTERSCALE_32BIT	One 32-bit filter

CAN Flags

CAN_FLAG_RQCP0	Request MailBox0 flag
CAN_FLAG_RQCP1	Request MailBox1 flag
CAN_FLAG_RQCP2	Request MailBox2 flag
CAN_FLAG_TXOK0	Transmission OK MailBox0 flag
CAN_FLAG_TXOK1	Transmission OK MailBox1 flag
CAN_FLAG_TXOK2	Transmission OK MailBox2 flag
CAN_FLAG_TME0	Transmit mailbox 0 empty flag
CAN_FLAG_TME1	Transmit mailbox 0 empty flag
CAN_FLAG_TME2	Transmit mailbox 0 empty flag
CAN_FLAG_FF0	FIFO 0 Full flag
CAN_FLAG_FOV0	FIFO 0 Overrun flag
CAN_FLAG_FF1	FIFO 1 Full flag
CAN_FLAG_FOV1	FIFO 1 Overrun flag
CAN_FLAG_INAK	Initialization acknowledge flag
CAN_FLAG_SLAK	Sleep acknowledge flag
CAN_FLAG_ERRI	Error flag
CAN_FLAG_WKU	Wake up flag
CAN_FLAG_SLAKI	Sleep acknowledge flag
CAN_FLAG_EWG	Error warning flag
CAN_FLAG_EPV	Error passive flag
CAN_FLAG_BOF	Bus-Off flag

CAN Identifier Type

CAN_ID_STD	Standard Id
CAN_ID_EXT	Extended Id

CAN InitStatus

CAN_INITSTATUS_FAILED	CAN initialization failed
CAN_INITSTATUS_SUCCESS	CAN initialization OK

CAN Interrupts

CAN_IT_TME	Transmit mailbox empty interrupt
CAN_IT_FMP0	FIFO 0 message pending interrupt
CAN_IT_FF0	FIFO 0 full interrupt
CAN_IT_FOV0	FIFO 0 overrun interrupt
CAN_IT_FMP1	FIFO 1 message pending interrupt
CAN_IT_FF1	FIFO 1 full interrupt
CAN_IT_FOV1	FIFO 1 overrun interrupt
CAN_IT_WKU	Wake-up interrupt
CAN_IT_SLK	Sleep acknowledge interrupt
CAN_IT_EWG	Error warning interrupt
CAN_IT_EPV	Error passive interrupt
CAN_IT_BOF	Bus-off interrupt
CAN_IT_LEC	Last error code interrupt
CAN_IT_ERR	Error Interrupt

CAN Mailboxes

CAN_TXMAILBOX_0

CAN_TXMAILBOX_1

CAN_TXMAILBOX_2

CAN Operating Mode

CAN_MODE_NORMAL	Normal mode
CAN_MODE_LOOPBACK	Loopback mode
CAN_MODE_SILENT	Silent mode
CAN_MODE_SILENT_LOOPBACK	Loopback combined with silent mode

CAN Receive FIFO Number

CAN_FIFO0	CAN FIFO 0 used to receive
CAN_FIFO1	CAN FIFO 1 used to receive

CAN Remote Transmission Request

CAN_RTR_DATA	Data frame
CAN_RTR_REMOTE	Remote frame

CAN Synchronization Jump Width

CAN_SJW_1TQ	1 time quantum
CAN_SJW_2TQ	2 time quantum
CAN_SJW_3TQ	3 time quantum
CAN_SJW_4TQ	4 time quantum

CAN Time Quantum in Bit Segment 1

CAN_BS1_1TQ	1 time quantum
CAN_BS1_2TQ	2 time quantum
CAN_BS1_3TQ	3 time quantum
CAN_BS1_4TQ	4 time quantum
CAN_BS1_5TQ	5 time quantum
CAN_BS1_6TQ	6 time quantum
CAN_BS1_7TQ	7 time quantum
CAN_BS1_8TQ	8 time quantum
CAN_BS1_9TQ	9 time quantum
CAN_BS1_10TQ	10 time quantum
CAN_BS1_11TQ	11 time quantum
CAN_BS1_12TQ	12 time quantum
CAN_BS1_13TQ	13 time quantum
CAN_BS1_14TQ	14 time quantum
CAN_BS1_15TQ	15 time quantum
CAN_BS1_16TQ	16 time quantum

CAN Time Quantum in Bit Segment 2

CAN_BS2_1TQ	1 time quantum
CAN_BS2_2TQ	2 time quantum
CAN_BS2_3TQ	3 time quantum
CAN_BS2_4TQ	4 time quantum
CAN_BS2_5TQ	5 time quantum
CAN_BS2_6TQ	6 time quantum
CAN_BS2_7TQ	7 time quantum
CAN_BS2_8TQ	8 time quantum

9 HAL CEC Generic Driver

9.1 CEC Firmware driver registers structures

9.1.1 CEC_InitTypeDef

Data Fields

- ***uint32_t SignalFreeTime***
- ***uint32_t Tolerance***
- ***uint32_t BRERxStop***
- ***uint32_t BREErrorBitGen***
- ***uint32_t LBPEErrorBitGen***
- ***uint32_t BroadcastMsgNoErrorBitGen***
- ***uint32_t SignalFreeTimeOption***
- ***uint32_t ListenMode***
- ***uint16_t OwnAddress***
- ***uint8_t * RxBuffer***

Field Documentation

- ***uint32_t CEC_InitTypeDef::SignalFreeTime***
  Set SFT field, specifies the Signal Free Time. It can be one of ***CEC_Signal_Free_Time*** and belongs to the set {0U,...,7} where 0x0 is the default configuration else means 0.5U + (SignalFreeTime - 1U) nominal data bit periods
- ***uint32_t CEC_InitTypeDef::Tolerance***
  Set RXTOL bit, specifies the tolerance accepted on the received waveforms, it can be a value of ***CEC_Tolerance*** : it is either CEC_STANDARD_TOLERANCE or CEC_EXTENDED_TOLERANCE
- ***uint32_t CEC_InitTypeDef::BRERxStop***
  Set BRESTP bit ***CEC_BRERxStop*** : specifies whether or not a Bit Rising Error stops the reception. CEC_NO_RX_STOP_ON_BRE: reception is not stopped. CEC_RX_STOP_ON_BRE: reception is stopped.
- ***uint32_t CEC_InitTypeDef::BREErrorBitGen***
  Set BREGEN bit ***CEC_BREErrorBitGen*** : specifies whether or not an Error-Bit is generated on the CEC line upon Bit Rising Error detection. CEC_BRE_ERRORBIT_NO_GENERATION: no error-bit generation. CEC_BRE_ERRORBIT_GENERATION: error-bit generation if BRESTP is set.
- ***uint32_t CEC_InitTypeDef::LBPEErrorBitGen***
  Set LBPEGEN bit ***CEC_LBPEErrorBitGen*** : specifies whether or not an Error-Bit is generated on the CEC line upon Long Bit Period Error detection. CEC_LBPE_ERRORBIT_NO_GENERATION: no error-bit generation. CEC_LBPE_ERRORBIT_GENERATION: error-bit generation.
- ***uint32_t CEC_InitTypeDef::BroadcastMsgNoErrorBitGen***
  Set BRDNOGEN bit ***CEC_BroadCastMsgErrorBitGen*** : allows to avoid an Error-Bit generation on the CEC line upon an error detected on a broadcast message.It supersedes BREGEN and LBPEGEN bits for a broadcast message error handling. It can take two values:1U) CEC_BROADCASTERROR_ERRORBIT_GENERATION. a) BRE detection: error-bit generation on the CEC line if BRESTP=CEC_RX_STOP_ON_BRE and BREGEN=CEC_BRE_ERRORBIT_NO_GENERATION. b) LBPE detection: error-bit generation on the CEC line if LBPGEN=CEC_LBPE_ERRORBIT_NO_GENERATION.2U)

CEC_BROADCASTERROR_NO_ERRORBIT_GENERATION. no error-bit generation in case neither a) nor b) are satisfied. Additionally, there is no error-bit generation in case of Short Bit Period Error detection in a broadcast message while LSTN bit is set.

- ***uint32_t CEC_InitTypeDef::SignalFreeTimeOption***
  Set SFTOP bit ***CEC_SFT_Option*** : specifies when SFT timer starts.
  CEC_SFT_START_ON_TXSOM SFT: timer starts when TXSOM is set by software.
  CEC_SFT_START_ON_TX_RX_END: SFT timer starts automatically at the end of message transmission/reception.
- ***uint32_t CEC_InitTypeDef::ListenMode***
  Set LSTN bit ***CEC_Listening_Mode*** : specifies device listening mode. It can take two values:CEC_REDUCED_LISTENING_MODE: CEC peripheral receives only message addressed to its own address (OAR). Messages addressed to different destination are ignored. Broadcast messages are always received.CEC_FULL_LISTENING_MODE: CEC peripheral receives messages addressed to its own address (OAR) with positive acknowledge. Messages addressed to different destination are received, but without interfering with the CEC bus: no acknowledge sent.
- ***uint16_t CEC_InitTypeDef::OwnAddress***
  Own addresses configuration This parameter can be a value of ***CEC_OWN_ADDRESS***
- ***uint8_t* CEC_InitTypeDef::RxBuffer***
  CEC Rx buffer pointeur

9.1.2 CEC_HandleTypeDef

Data Fields

- ***CEC_TypeDef * Instance***
- ***CEC_InitTypeDef Init***
- ***uint8_t * pTxBuffPtr***
- ***uint16_t TxXferCount***
- ***uint16_t RxXferSize***
- ***HAL_LockTypeDef Lock***
- ***HAL_CEC_StateTypeDef gState***
- ***HAL_CEC_StateTypeDef RxState***
- ***uint32_t ErrorCode***

Field Documentation

- ***CEC_TypeDef* CEC_HandleTypeDef::Instance***
  CEC registers base address
- ***CEC_InitTypeDef CEC_HandleTypeDef::Init***
  CEC communication parameters
- ***uint8_t* CEC_HandleTypeDef::pTxBuffPtr***
  Pointer to CEC Tx transfer Buffer
- ***uint16_t CEC_HandleTypeDef::TxXferCount***
  CEC Tx Transfer Counter
- ***uint16_t CEC_HandleTypeDef::RxXferSize***
  CEC Rx Transfer size, 0: header received only
- ***HAL_LockTypeDef CEC_HandleTypeDef::Lock***
  Locking object
- ***HAL_CEC_StateTypeDef CEC_HandleTypeDef::gState***
  CEC state information related to global Handle management and also related to Tx operations. This parameter can be a value of **HAL_CEC_StateTypeDef**
- ***HAL_CEC_StateTypeDef CEC_HandleTypeDef::RxState***
  CEC state information related to Rx operations. This parameter can be a value of **HAL_CEC_StateTypeDef**

- ***uint32_t CEC_HandleTypeDef::ErrorCode***
  For errors handling purposes, copy of ISR register in case error is reported

9.2 CEC Firmware driver API description

9.2.1 How to use this driver



The specific CEC interrupts (Transmission complete interrupt, RXNE interrupt and Error Interrupts) will be managed using the macros __HAL_CEC_ENABLE_IT() and __HAL_CEC_DISABLE_IT() inside the transmit and receive process. (#) Program the Signal Free Time (SFT) and SFT option, Tolerance, reception stop in in case of Bit Rising Error, Error-Bit generation conditions, device logical address and Listen mode in the hcec Init structure. (#) Initialize the CEC registers by calling the HAL_CEC_Init() API.



This API (HAL_CEC_Init()) configures also the low level Hardware GPIO, CLOCK, CORTEX...etc) by calling the customed HAL_CEC_MspInit() API.

9.2.2 Initialization and Configuration functions

This subsection provides a set of functions allowing to initialize the CEC

- The following parameters need to be configured:
  - SignalFreeTime
  - Tolerance
  - BRERxStop (RX stopped or not upon Bit Rising Error)
  - BREErrorBitGen (Error-Bit generation in case of Bit Rising Error)
  - LBPEErrorBitGen (Error-Bit generation in case of Long Bit Period Error)
  - BroadcastMsgNoErrorBitGen (Error-bit generation in case of broadcast message error)
  - SignalFreeTimeOption (SFT Timer start definition)
  - OwnAddress (CEC device address)
  - ListenMode

This section contains the following APIs:

- ***HAL_CEC_Init()***
- ***HAL_CEC_DeInit()***
- ***HAL_CEC_SetDeviceAddress()***
- ***HAL_CEC_MspInit()***
- ***HAL_CEC_MspDeInit()***

9.2.3 IO operation functions

This section contains the following APIs:

- ***HAL_CEC_Transmit_IT()***
- ***HAL_CEC_GetLastReceivedFrameSize()***
- ***HAL_CEC_ChangeRxBuffer()***
- ***HAL_CEC_IRQHandler()***
- ***HAL_CEC_TxCpltCallback()***
- ***HAL_CEC_RxCpltCallback()***

- *HAL_CEC_ErrorCallback()*

9.2.4 Peripheral Control function

This subsection provides a set of functions allowing to control the CEC.

- HAL_CEC_GetState() API can be helpful to check in run-time the state of the CEC peripheral.
- HAL_CEC_GetError() API can be helpful to check in run-time the error of the CEC peripheral.

This section contains the following APIs:

- *HAL_CEC_GetState()*
- *HAL_CEC_GetError()*

9.2.5 Detailed description of functions

HAL_CEC_Init

Function name — **HAL_StatusTypeDef HAL_CEC_Init (CEC_HandleTypeDef * hcec)**

Function description — Initializes the CEC mode according to the specified parameters in the CEC_InitTypeDef and creates the associated handle .

Parameters
- **hcec:** CEC handle

Return values
- **HAL:** status

HAL_CEC_DeInit

Function name — **HAL_StatusTypeDef HAL_CEC_DeInit (CEC_HandleTypeDef * hcec)**

Function description — DeInitializes the CEC peripheral.

Parameters
- **hcec:** CEC handle

Return values
- **HAL:** status

HAL_CEC_SetDeviceAddress

Function name — **HAL_StatusTypeDef HAL_CEC_SetDeviceAddress (CEC_HandleTypeDef * hcec, uint16_t CEC_OwnAddress)**

Function description — Initializes the Own Address of the CEC device.

Parameters
- **hcec:** CEC handle
- **CEC_OwnAddress:** The CEC own address.

Return values
- **HAL:** status

HAL_CEC_MspInit

Function name — **void HAL_CEC_MspInit (CEC_HandleTypeDef * hcec)**

Function description — CEC MSP Init.

Parameters
- **hcec:** CEC handle

Return values
- **None**

HAL_CEC_MspDeInit

Function name **void HAL_CEC_MspDeInit (CEC_HandleTypeDef * hcec)**

Function description CEC MSP DeInit.

Parameters
- **hcec:** CEC handle

Return values
- **None**

HAL_CEC_Transmit_IT

Function name **HAL_StatusTypeDef HAL_CEC_Transmit_IT (CEC_HandleTypeDef * hcec, uint8_t InitiatorAddress, uint8_t DestinationAddress, uint8_t * pData, uint32_t Size)**

Function description Send data in interrupt mode.

Parameters
- **hcec:** CEC handle
- **InitiatorAddress:** Initiator address
- **DestinationAddress:** destination logical address
- **pData:** pointer to input byte data buffer
- **Size:** amount of data to be sent in bytes (without counting the header). 0 means only the header is sent (ping operation). Maximum TX size is 15 bytes (1 opcode and up to 14 operands).

Return values
- **HAL:** status

HAL_CEC_GetLastReceivedFrameSize

Function name **uint32_t HAL_CEC_GetLastReceivedFrameSize (CEC_HandleTypeDef * hcec)**

Function description Get size of the received frame.

Parameters
- **hcec:** CEC handle

Return values
- **Frame:** size

HAL_CEC_ChangeRxBuffer

Function name **void HAL_CEC_ChangeRxBuffer (CEC_HandleTypeDef * hcec, uint8_t * Rxbuffer)**

Function description Change Rx Buffer.

Parameters
- **hcec:** CEC handle
- **Rxbuffer:** Rx Buffer

Return values
- **Frame:** size

Notes
- This function can be called only inside the HAL_CEC_RxCpltCallback()

HAL_CEC_IRQHandler

Function name	**void HAL_CEC_IRQHandler (CEC_HandleTypeDef * hcec)**
Function description	This function handles CEC interrupt requests.
Parameters	• **hcec:** CEC handle
Return values	• **None**

HAL_CEC_TxCpltCallback

Function name	**void HAL_CEC_TxCpltCallback (CEC_HandleTypeDef * hcec)**
Function description	Tx Transfer completed callback.
Parameters	• **hcec:** CEC handle
Return values	• **None**

HAL_CEC_RxCpltCallback

Function name	**void HAL_CEC_RxCpltCallback (CEC_HandleTypeDef * hcec, uint32_t RxFrameSize)**
Function description	Rx Transfer completed callback.
Parameters	• **hcec:** CEC handle • **RxFrameSize:** Size of frame
Return values	• **None**

HAL_CEC_ErrorCallback

Function name	**void HAL_CEC_ErrorCallback (CEC_HandleTypeDef * hcec)**
Function description	CEC error callbacks.
Parameters	• **hcec:** CEC handle
Return values	• **None**

HAL_CEC_GetState

Function name	**HAL_CEC_StateTypeDef HAL_CEC_GetState (CEC_HandleTypeDef * hcec)**
Function description	return the CEC state
Parameters	• **hcec:** pointer to a CEC_HandleTypeDef structure that contains the configuration information for the specified CEC module.
Return values	• **HAL:** state

HAL_CEC_GetError

Function name	**uint32_t HAL_CEC_GetError (CEC_HandleTypeDef * hcec)**
Function description	Return the CEC error code.
Parameters	• **hcec:** pointer to a CEC_HandleTypeDef structure that

contains the configuration information for the specified CEC.

Return values
- **CEC:** Error Code

9.3 CEC Firmware driver defines

9.3.1 CEC

CEC all RX or TX errors flags

CEC_ISR_ALL_ERROR

CEC Error Bit Generation if Bit Rise Error reported

CEC_BRE_ERRORBIT_NO_GENERATION

CEC_BRE_ERRORBIT_GENERATION

CEC Reception Stop on Error

CEC_NO_RX_STOP_ON_BRE

CEC_RX_STOP_ON_BRE

CEC Error Bit Generation on Broadcast message

CEC_BROADCASTERROR_ERRORBIT_GENERATION

CEC_BROADCASTERROR_NO_ERRORBIT_GENERATION

CEC Error Code

HAL_CEC_ERROR_NONE	no error
HAL_CEC_ERROR_RXOVR	CEC Rx-Overrun
HAL_CEC_ERROR_BRE	CEC Rx Bit Rising Error
HAL_CEC_ERROR_SBPE	CEC Rx Short Bit period Error
HAL_CEC_ERROR_LBPE	CEC Rx Long Bit period Error
HAL_CEC_ERROR_RXACKE	CEC Rx Missing Acknowledge
HAL_CEC_ERROR_ARBLST	CEC Arbitration Lost
HAL_CEC_ERROR_TXUDR	CEC Tx-Buffer Underrun
HAL_CEC_ERROR_TXERR	CEC Tx-Error
HAL_CEC_ERROR_TXACKE	CEC Tx Missing Acknowledge

CEC Exported Macros

__HAL_CEC_RESET_HANDLE_STATE

Description:
- Reset CEC handle gstate & RxState.

Parameters:
- __HANDLE__: CEC handle.

Return value:
- None

__HAL_CEC_GET_FLAG

Description:
- Checks whether or not the

specified CEC interrupt flag is set.

Parameters:

- __HANDLE__: specifies the CEC Handle.
- __FLAG__: specifies the flag to check.
  - CEC_FLAG_TXACKE: Tx Missing acknowledge Error
  - CEC_FLAG_TXERR: Tx Error.
  - CEC_FLAG_TXUDR: Tx-Buffer Underrun.
  - CEC_FLAG_TXEND: End of transmission (successful transmission of the last byte).
  - CEC_FLAG_TXBR: Tx-Byte Request.
  - CEC_FLAG_ARBLST: Arbitration Lost
  - CEC_FLAG_RXACKE: Rx-Missing Acknowledge
  - CEC_FLAG_LBPE: Rx Long period Error
  - CEC_FLAG_SBPE: Rx Short period Error
  - CEC_FLAG_BRE: Rx Bit Rising Error
  - CEC_FLAG_RXOVR: Rx Overrun.
  - CEC_FLAG_RXEND: End Of Reception.
  - CEC_FLAG_RXBR: Rx-Byte Received.

Return value:

- ITStatus

__HAL_CEC_CLEAR_FLAG

Description:

- Clears the interrupt or status flag when raised (write at 1U)

Parameters:

- __HANDLE__: specifies the CEC Handle.
- __FLAG__: specifies the interrupt/status flag to clear. This parameter can be one of the following values:
  - CEC_FLAG_TXACKE: Tx Missing acknowledge Error
  - CEC_FLAG_TXERR: Tx

Error.
- CEC_FLAG_TXUDR: Tx-Buffer Underrun.
- CEC_FLAG_TXEND: End of transmission (successful transmission of the last byte).
- CEC_FLAG_TXBR: Tx-Byte Request.
- CEC_FLAG_ARBLST: Arbitration Lost
- CEC_FLAG_RXACKE: Rx-Missing Acknowledge
- CEC_FLAG_LBPE: Rx Long period Error
- CEC_FLAG_SBPE: Rx Short period Error
- CEC_FLAG_BRE: Rx Bit Rising Error
- CEC_FLAG_RXOVR: Rx Overrun.
- CEC_FLAG_RXEND: End Of Reception.
- CEC_FLAG_RXBR: Rx-Byte Received.

Return value:

- none

__HAL_CEC_ENABLE_IT

Description:

- Enables the specified CEC interrupt.

Parameters:

- __HANDLE__: specifies the CEC Handle.
- __INTERRUPT__: specifies the CEC interrupt to enable. This parameter can be one of the following values:
  - CEC_IT_TXACKE: Tx Missing acknowledge Error IT Enable
  - CEC_IT_TXERR: Tx Error IT Enable
  - CEC_IT_TXUDR: Tx-Buffer Underrun IT Enable
  - CEC_IT_TXEND: End of transmission IT Enable
  - CEC_IT_TXBR: Tx-Byte Request IT Enable
  - CEC_IT_ARBLST: Arbitration Lost IT Enable
  - CEC_IT_RXACKE: Rx-

Missing Acknowledge IT Enable
- CEC_IT_LBPE: Rx Long period Error IT Enable
- CEC_IT_SBPE: Rx Short period Error IT Enable
- CEC_IT_BRE: Rx Bit Rising Error IT Enable
- CEC_IT_RXOVR: Rx Overrun IT Enable
- CEC_IT_RXEND: End Of Reception IT Enable
- CEC_IT_RXBR: Rx-Byte Received IT Enable

Return value:

- none

__HAL_CEC_DISABLE_IT

Description:

- Disables the specified CEC interrupt.

Parameters:

- __HANDLE__: specifies the CEC Handle.
- __INTERRUPT__: specifies the CEC interrupt to disable. This parameter can be one of the following values:
  - CEC_IT_TXACKE: Tx Missing acknowledge Error IT Enable
  - CEC_IT_TXERR: Tx Error IT Enable
  - CEC_IT_TXUDR: Tx-Buffer Underrun IT Enable
  - CEC_IT_TXEND: End of transmission IT Enable
  - CEC_IT_TXBR: Tx-Byte Request IT Enable
  - CEC_IT_ARBLST: Arbitration Lost IT Enable
  - CEC_IT_RXACKE: Rx-Missing Acknowledge IT Enable
  - CEC_IT_LBPE: Rx Long period Error IT Enable
  - CEC_IT_SBPE: Rx Short period Error IT Enable
  - CEC_IT_BRE: Rx Bit Rising Error IT Enable
  - CEC_IT_RXOVR: Rx Overrun IT Enable
  - CEC_IT_RXEND: End Of

Reception IT Enable
  - CEC_IT_RXBR: Rx-Byte Received IT Enable

Return value:

- none

__HAL_CEC_GET_IT_SOURCE

Description:

- Checks whether or not the specified CEC interrupt is enabled.

Parameters:

- __HANDLE__: specifies the CEC Handle.
- __INTERRUPT__: specifies the CEC interrupt to check. This parameter can be one of the following values:
  - CEC_IT_TXACKE: Tx Missing acknowledge Error IT Enable
  - CEC_IT_TXERR: Tx Error IT Enable
  - CEC_IT_TXUDR: Tx-Buffer Underrun IT Enable
  - CEC_IT_TXEND: End of transmission IT Enable
  - CEC_IT_TXBR: Tx-Byte Request IT Enable
  - CEC_IT_ARBLST: Arbitration Lost IT Enable
  - CEC_IT_RXACKE: Rx-Missing Acknowledge IT Enable
  - CEC_IT_LBPE: Rx Long period Error IT Enable
  - CEC_IT_SBPE: Rx Short period Error IT Enable
  - CEC_IT_BRE: Rx Bit Rising Error IT Enable
  - CEC_IT_RXOVR: Rx Overrun IT Enable
  - CEC_IT_RXEND: End Of Reception IT Enable
  - CEC_IT_RXBR: Rx-Byte Received IT Enable

Return value:

- FlagStatus

__HAL_CEC_ENABLE

Description:

- Enables the CEC device.

Parameters:

- __HANDLE__: specifies the CEC Handle.

Return value:

- none

__HAL_CEC_DISABLE

Description:

- Disables the CEC device.

Parameters:

- __HANDLE__: specifies the CEC Handle.

Return value:

- none

__HAL_CEC_FIRST_BYTE_TX_SET

Description:

- Set Transmission Start flag.

Parameters:

- __HANDLE__: specifies the CEC Handle.

Return value:

- none

__HAL_CEC_LAST_BYTE_TX_SET

Description:

- Set Transmission End flag.

Parameters:

- __HANDLE__: specifies the CEC Handle.

Return value:

- None If the CEC message consists of only one byte, TXEOM must be set before of TXSOM.

__HAL_CEC_GET_TRANSMISSION_START_FLAG

Description:

- Get Transmission Start flag.

Parameters:

- __HANDLE__: specifies the CEC Handle.

Return value:

- FlagStatus

__HAL_CEC_GET_TRANSMISSION_END_FLAG

Description:

- Get Transmission End flag.

Parameters:

- __HANDLE__: specifies the CEC Handle.

Return value:

- FlagStatus

__HAL_CEC_CLEAR_OAR

Description:

- Clear OAR register.

Parameters:

- __HANDLE__: specifies the CEC Handle.

Return value:

- none

__HAL_CEC_SET_OAR

Description:

- Set OAR register (without resetting previously set address in case of multi-address mode) To reset OAR,

Parameters:

- __HANDLE__: specifies the CEC Handle.
- __ADDRESS__: Own Address value (CEC logical address is identified by bit position)

Return value:

- none

CEC Flags definition

CEC_FLAG_TXACKE

CEC_FLAG_TXERR

CEC_FLAG_TXUDR

CEC_FLAG_TXEND

CEC_FLAG_TXBR

CEC_FLAG_ARBLST

CEC_FLAG_RXACKE

CEC_FLAG_LBPE

CEC_FLAG_SBPE

CEC_FLAG_BRE

CEC_FLAG_RXOVR

CEC_FLAG_RXEND

CEC_FLAG_RXBR

CEC all RX errors interrupts enabling flag

CEC_IER_RX_ALL_ERR

CEC all TX errors interrupts enabling flag

CEC_IER_TX_ALL_ERR

CEC Initiator logical address position in message header

CEC_INITIATOR_LSB_POS

CEC Interrupts definition

CEC_IT_TXACKE

CEC_IT_TXERR

CEC_IT_TXUDR

CEC_IT_TXEND

CEC_IT_TXBR

CEC_IT_ARBLST

CEC_IT_RXACKE

CEC_IT_LBPE

CEC_IT_SBPE

CEC_IT_BRE

CEC_IT_RXOVR

CEC_IT_RXEND

CEC_IT_RXBR

CEC Error Bit Generation if Long Bit Period Error reported

CEC_LBPE_ERRORBIT_NO_GENERATION

CEC_LBPE_ERRORBIT_GENERATION

CEC Listening mode option

CEC_REDUCED_LISTENING_MODE

CEC_FULL_LISTENING_MODE

CEC Device Own Address position in CEC CFGR register

CEC_CFGR_OAR_LSB_POS

CEC Own Address

CEC_OWN_ADDRESS_NONE

CEC_OWN_ADDRESS_0

CEC_OWN_ADDRESS_1

CEC_OWN_ADDRESS_2

CEC_OWN_ADDRESS_3

CEC_OWN_ADDRESS_4

CEC_OWN_ADDRESS_5

CEC_OWN_ADDRESS_6

CEC_OWN_ADDRESS_7

CEC_OWN_ADDRESS_8

CEC_OWN_ADDRESS_9

CEC_OWN_ADDRESS_10

CEC_OWN_ADDRESS_11

CEC_OWN_ADDRESS_12

CEC_OWN_ADDRESS_13

CEC_OWN_ADDRESS_14

CEC Signal Free Time start option

CEC_SFT_START_ON_TXSOM

CEC_SFT_START_ON_TX_RX_END

CEC Signal Free Time setting parameter

CEC_DEFAULT_SFT

CEC_0_5_BITPERIOD_SFT

CEC_1_5_BITPERIOD_SFT

CEC_2_5_BITPERIOD_SFT

CEC_3_5_BITPERIOD_SFT

CEC_4_5_BITPERIOD_SFT

CEC_5_5_BITPERIOD_SFT

CEC_6_5_BITPERIOD_SFT

CEC Receiver Tolerance

CEC_STANDARD_TOLERANCE

CEC_EXTENDED_TOLERANCE

10 HAL COMP Generic Driver

10.1 COMP Firmware driver registers structures

10.1.1 COMP_InitTypeDef

Data Fields

- ***uint32_t InvertingInput***
- ***uint32_t NonInvertingInput***
- ***uint32_t Output***
- ***uint32_t OutputPol***
- ***uint32_t Hysteresis***
- ***uint32_t BlankingSrce***
- ***uint32_t Mode***
- ***uint32_t WindowMode***
- ***uint32_t TriggerMode***

Field Documentation

- ***uint32_t COMP_InitTypeDef::InvertingInput***
  Selects the inverting input of the comparator. This parameter can be a value of ***COMPEx_InvertingInput***
- ***uint32_t COMP_InitTypeDef::NonInvertingInput***
  Selects the non inverting input of the comparator. This parameter can be a value of ***COMPEx_NonInvertingInput*** Note: Only available on STM32F302xB/xC, STM32F303xB/xC and STM32F358xx devices
- ***uint32_t COMP_InitTypeDef::Output***
  Selects the output redirection of the comparator. This parameter can be a value of ***COMPEx_Output***
- ***uint32_t COMP_InitTypeDef::OutputPol***
  Selects the output polarity of the comparator. This parameter can be a value of ***COMP_OutputPolarity***
- ***uint32_t COMP_InitTypeDef::Hysteresis***
  Selects the hysteresis voltage of the comparator. This parameter can be a value of ***COMPEx_Hysteresis*** Note: Only available on STM32F302xB/xC, STM32F303xB/xC, STM32F373xB/xC, STM32F358xx and STM32F378xx devices
- ***uint32_t COMP_InitTypeDef::BlankingSrce***
  Selects the output blanking source of the comparator. This parameter can be a value of ***COMPEx_BlankingSrce*** Note: Not available on STM32F373xB/C and STM32F378xx devices
- ***uint32_t COMP_InitTypeDef::Mode***
  Selects the operating consumption mode of the comparator to adjust the speed/consumption. This parameter can be a value of ***COMPEx_Mode*** Note: Not available on STM32F301x6/x8, STM32F302x6/x8, STM32F334x6/x8, STM32F318xx and STM32F328xx devices
- ***uint32_t COMP_InitTypeDef::WindowMode***
  Selects the window mode of the comparator X (X=2U, 4 or 6 if available). This parameter can be a value of ***COMPEx_WindowMode***
- ***uint32_t COMP_InitTypeDef::TriggerMode***
  Selects the trigger mode of the comparator (interrupt mode). This parameter can be a value of ***COMP_TriggerMode***

10.1.2 COMP_HandleTypeDef

Data Fields

- ***COMP_TypeDef * Instance***
- ***COMP_InitTypeDef Init***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_COMP_StateTypeDef State***

Field Documentation

- ***COMP_TypeDef* COMP_HandleTypeDef::Instance***
  Register base address
- ***COMP_InitTypeDef COMP_HandleTypeDef::Init***
  COMP required parameters
- ***HAL_LockTypeDef COMP_HandleTypeDef::Lock***
  Locking object
- ***__IO HAL_COMP_StateTypeDef COMP_HandleTypeDef::State***
  COMP communication state

10.2 COMP Firmware driver API description

10.2.1 COMP Peripheral features

The STM32F3xx device family integrates up to 7 analog comparators COMP1, COMP2...COMP7:

1. The non inverting input and inverting input can be set to GPIO pins. For STM32F3xx devices please refer to the COMP peripheral section in corresponding Reference Manual.
2. The COMP output is available using HAL_COMP_GetOutputLevel() and can be set on GPIO pins. For STM32F3xx devices please refer to the COMP peripheral section in corresponding Reference Manual.
3. The COMP output can be redirected to embedded timers (TIM1, TIM2, TIM3...). For STM32F3xx devices please refer to the COMP peripheral section in corresponding Reference Manual.
4. Each couple of comparators COMP1 and COMP2, COMP3 and COMP4, COMP5 and COMP6 can be combined in window mode and respectively COMP1, COMP3 and COMP5 non inverting input is used as common non-inverting input.
5. The seven comparators have interrupt capability with wake-up from Sleep and Stop modes (through the EXTI controller):
   – COMP1 is internally connected to EXTI Line 21
   – COMP2 is internally connected to EXTI Line 22
   – COMP3 is internally connected to EXTI Line 29
   – COMP4 is internally connected to EXTI Line 30
   – COMP5 is internally connected to EXTI Line 31
   – COMP6 is internally connected to EXTI Line 32
   – COMP7 is internally connected to EXTI Line 33. From the corresponding IRQ handler, the right interrupt source can be retrieved with the adequate macro __HAL_COMP_COMPx_EXTI_GET_FLAG().

10.2.2 How to use this driver

This driver provides functions to configure and program the Comparators of all STM32F3xx devices. To use the comparator, perform the following steps:

1. Fill in the HAL_COMP_MspInit() to
   – Configure the comparator input in analog mode using HAL_GPIO_Init()

  - Configure the comparator output in alternate function mode using HAL_GPIO_Init() to map the comparator output to the GPIO pin
  - If required enable the COMP interrupt (EXTI line Interrupt): by configuring and enabling EXTI line in Interrupt mode and selecting the desired sensitivity level using HAL_GPIO_Init() function. After that enable the comparator interrupt vector using HAL_NVIC_SetPriority() and HAL_NVIC_EnableIRQ() functions.
2. Configure the comparator using HAL_COMP_Init() function:
  - Select the inverting input (input minus)
  - Select the non-inverting input (input plus)
  - Select the output polarity
  - Select the output redirection
  - Select the hysteresis level
  - Select the power mode
  - Select the event/interrupt mode HAL_COMP_Init() calls internally __HAL_RCC_SYSCFG_CLK_ENABLE() in order to enable the comparator(s).
3. On-the-fly reconfiguration of comparator(s) may be done by calling again HAL_COMP_Init(function with new input parameter values; HAL_COMP_MspInit() function shall be adapted to support multi configurations.
4. Enable the comparator using HAL_COMP_Start() or HAL_COMP_Start_IT() functions.
5. Use HAL_COMP_TriggerCallback() and/or HAL_COMP_GetOutputLevel() functions to manage comparator outputs (events and output level).
6. Disable the comparator using HAL_COMP_Stop() or HAL_COMP_Stop_IT() function.
7. De-initialize the comparator using HAL_COMP_DeInit() function.
8. For safety purposes comparator(s) can be locked using HAL_COMP_Lock() function. Only a MCU reset can reset that protection.

10.2.3 Initialization and de-initialization functions

This section provides functions to initialize and de-initialize comparators.

This section contains the following APIs:

- ***HAL_COMP_Init()***
- ***HAL_COMP_DeInit()***
- ***HAL_COMP_MspInit()***
- ***HAL_COMP_MspDeInit()***

10.2.4 Start Stop operation functions

This section provides functions allowing to:

- Start a comparator without interrupt generation.
- Stop a comparator without interrupt generation.
- Start a comparator with interrupt generation.
- Stop a comparator with interrupt generation.
- Handle interrupts from a comparator with associated callback function.

This section contains the following APIs:

- ***HAL_COMP_Start()***
- ***HAL_COMP_Stop()***
- ***HAL_COMP_Start_IT()***
- ***HAL_COMP_Stop_IT()***
- ***HAL_COMP_IRQHandler()***
- ***HAL_COMP_TriggerCallback()***

10.2.5 Peripheral Control functions

This subsection provides a set of functions allowing to control the comparators.

This section contains the following APIs:

- ***HAL_COMP_Lock()***
- ***HAL_COMP_GetOutputLevel()***

10.2.6 Peripheral State functions

This subsection permits to get in run-time the status of the peripheral.

This section contains the following APIs:

- ***HAL_COMP_GetState()***

10.2.7 Detailed description of functions

HAL_COMP_Init

Function name	**HAL_StatusTypeDef HAL_COMP_Init (COMP_HandleTypeDef * hcomp)**
Function description	Initialize the COMP peripheral according to the specified parameters in the COMP_InitTypeDef and initialize the associated handle.
Parameters	• **hcomp:** COMP handle
Return values	• **HAL:** status
Notes	• If the selected comparator is locked, initialization cannot be performed. To unlock the configuration, perform a system reset.

HAL_COMP_DeInit

Function name	**HAL_StatusTypeDef HAL_COMP_DeInit (COMP_HandleTypeDef * hcomp)**
Function description	DeInitialize the COMP peripheral.
Parameters	• **hcomp:** COMP handle
Return values	• **HAL:** status
Notes	• If the selected comparator is locked, deinitialization cannot be performed. To unlock the configuration, perform a system reset.

HAL_COMP_MspInit

Function name	**void HAL_COMP_MspInit (COMP_HandleTypeDef * hcomp)**
Function description	Initialize the COMP MSP.
Parameters	• **hcomp:** COMP handle
Return values	• **None**

HAL_COMP_MspDeInit

Function name	**void HAL_COMP_MspDeInit (COMP_HandleTypeDef * hcomp)**
Function description	DeInitialize the COMP MSP.
Parameters	• **hcomp:** COMP handle
Return values	• **None**

HAL_COMP_Start

Function name	**HAL_StatusTypeDef HAL_COMP_Start (COMP_HandleTypeDef * hcomp)**
Function description	Start the comparator.
Parameters	• **hcomp:** COMP handle
Return values	• **HAL:** status

HAL_COMP_Stop

Function name	**HAL_StatusTypeDef HAL_COMP_Stop (COMP_HandleTypeDef * hcomp)**
Function description	Stop the comparator.
Parameters	• **hcomp:** COMP handle
Return values	• **HAL:** status

HAL_COMP_Start_IT

Function name	**HAL_StatusTypeDef HAL_COMP_Start_IT (COMP_HandleTypeDef * hcomp)**
Function description	Start the comparator in Interrupt mode.
Parameters	• **hcomp:** COMP handle
Return values	• **HAL:** status.

HAL_COMP_Stop_IT

Function name	**HAL_StatusTypeDef HAL_COMP_Stop_IT (COMP_HandleTypeDef * hcomp)**
Function description	Stop the comparator in Interrupt mode.
Parameters	• **hcomp:** COMP handle
Return values	• **HAL:** status

HAL_COMP_IRQHandler

Function name	**void HAL_COMP_IRQHandler (COMP_HandleTypeDef * hcomp)**
Function description	Comparator IRQ Handler.
Parameters	• **hcomp:** COMP handle
Return values	• **HAL:** status

HAL_COMP_TriggerCallback

Function name	**void HAL_COMP_TriggerCallback (COMP_HandleTypeDef * hcomp)**
Function description	Comparator callback.
Parameters	• **hcomp:** COMP handle
Return values	• **None**

HAL_COMP_Lock

Function name	**HAL_StatusTypeDef HAL_COMP_Lock (COMP_HandleTypeDef * hcomp)**
Function description	Lock the selected comparator configuration.
Parameters	• **hcomp:** COMP handle
Return values	• **HAL:** status
Notes	• A system reset is required to unlock the comparator configuration.

HAL_COMP_GetOutputLevel

Function name	**uint32_t HAL_COMP_GetOutputLevel (COMP_HandleTypeDef * hcomp)**
Function description	Return the output level (high or low) of the selected comparator.

HAL_COMP_GetState

Function name	**HAL_COMP_StateTypeDef HAL_COMP_GetState (COMP_HandleTypeDef * hcomp)**
Function description	Return the COMP handle state.
Parameters	• **hcomp:** COMP handle
Return values	• **HAL:** state

10.3 COMP Firmware driver defines

10.3.1 COMP

COMP Exported Macros

__HAL_COMP_RESET_HANDLE_STATE **Description:**

- Reset COMP handle state.

Parameters:

- __HANDLE__: COMP handle.

Return value:

- None

COMP Flag

COMP_FLAG_LOCK Lock flag

COMP Extended Private macro to get the EXTI line associated with a comparator handle

COMP_GET_EXTI_LINE **Description:**

- Get the specified EXTI line for a comparator instance.

Parameters:

- __INSTANCE__: specifies the COMP instance.

Return value:

- value: of

COMP Private macros to check input parameters

IS_COMP_OUTPUTPOL

IS_COMP_TRIGGERMODE

COMP Output Level

COMP_OUTPUTLEVEL_LOW

COMP_OUTPUTLEVEL_HIGH

COMP Output Polarity

COMP_OUTPUTPOL_NONINVERTED	COMP output on GPIO isn't inverted
COMP_OUTPUTPOL_INVERTED	COMP output on GPIO is inverted

COMP State Lock

COMP_STATE_BIT_LOCK

COMP Trigger Mode

COMP_TRIGGERMODE_NONE	No External Interrupt trigger detection
COMP_TRIGGERMODE_IT_RISING	External Interrupt Mode with Rising edge trigger detection
COMP_TRIGGERMODE_IT_FALLING	External Interrupt Mode with Falling edge trigger detection

COMP_TRIGGERMODE_IT_RISING_FALLING	External Interrupt Mode with Rising/Falling edge trigger detection
COMP_TRIGGERMODE_EVENT_RISING	Event Mode with Rising edge trigger detection
COMP_TRIGGERMODE_EVENT_FALLING	Event Mode with Falling edge trigger detection
COMP_TRIGGERMODE_EVENT_RISING_FALLING	Event Mode with Rising/Falling edge trigger detection

11 HAL COMP Extension Driver

11.1 COMPEx Firmware driver defines

11.1.1 COMPEx

COMP Extended Blanking Source (STM32F303xE/STM32F398xx/STM32F303xC/STM32F358xx Product devices)

COMP_BLANKINGSRCE_NONE	No blanking source
COMP_BLANKINGSRCE_TIM1OC5	TIM1 OC5 selected as blanking source for COMP1, COMP2, COMP3 and COMP7
COMP_BLANKINGSRCE_TIM2OC3	TIM2 OC5 selected as blanking source for COMP1 and COMP2
COMP_BLANKINGSRCE_TIM3OC3	TIM2 OC3 selected as blanking source for COMP1, COMP2 and COMP5
COMP_BLANKINGSRCE_TIM2OC4	TIM2 OC4 selected as blanking source for COMP3 and COMP6
COMP_BLANKINGSRCE_TIM8OC5	TIM8 OC5 selected as blanking source for COMP4, COMP5, COMP6 and COMP7
COMP_BLANKINGSRCE_TIM3OC4	TIM3 OC4 selected as blanking source for COMP4
COMP_BLANKINGSRCE_TIM15OC1	TIM15 OC1 selected as blanking source for COMP4
COMP_BLANKINGSRCE_TIM15OC2	TIM15 OC2 selected as blanking source for COMP6 and COMP7

COMP Extended Exported Macros

__HAL_COMP_ENABLE

Description:

- Enable the specified comparator.

Parameters:

- __HANDLE__: COMP handle.

Return value:

- None

__HAL_COMP_DISABLE

Description:

- Disable the specified comparator.

Parameters:

- __HANDLE__: COMP handle.

Return value:

- None

__HAL_COMP_LOCK

Description:

- Lock a comparator instance.

Parameters:

- __HANDLE__: COMP handle

Return value:

- None.

__HAL_COMP_GET_FLAG

Description:

- Check whether the specified COMP flag is set or not.

Parameters:

- __HANDLE__: COMP Handle.
- __FLAG__: flag to check. This parameter can be one of the following values:
  - COMP_FLAG_LOCK lock flag

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

__HAL_COMP_COMP1_EXTI_ENABLE_RISING_EDGE

Description:

- Enable the COMP1 EXTI line rising edge trigger.

Return value:

- None

__HAL_COMP_COMP1_EXTI_DISABLE_RISING_EDGE

Description:

- Disable the COMP1 EXTI line rising edge trigger.

Return value:

- None

__HAL_COMP_COMP1_EXTI_ENABLE_FALLING_EDGE

Description:

- Enable the COMP1 EXTI line falling edge trigger.

Return value:

- None

__HAL_COMP_COMP1_EXTI_DISABLE_FALLING_EDGE

Description:

- Disable the COMP1 EXTI line falling edge trigger.

Return value:

- None

__HAL_COMP_COMP1_EXTI_ENABLE_RISING_FALLING_EDGE	**Description:** • Enable the COMP1 EXTI line rising & falling edge trigger. **Return value:** • None
__HAL_COMP_COMP1_EXTI_DISABLE_RISING_FALLING_EDGE	**Description:** • Disable the COMP1 EXTI line rising & falling edge trigger. **Return value:** • None
__HAL_COMP_COMP1_EXTI_ENABLE_IT	**Description:** • Enable the COMP1 EXTI line in interrupt mode. **Return value:** • None
__HAL_COMP_COMP1_EXTI_DISABLE_IT	**Description:** • Disable the COMP1 EXTI line in interrupt mode. **Return value:** • None
__HAL_COMP_COMP1_EXTI_GENERATE_SWIT	**Description:** • Generate a software interrupt on the COMP1 EXTI line. **Return value:** • None
__HAL_COMP_COMP1_EXTI_ENABLE_EVENT	**Description:** • Enable the COMP1 EXTI line in event mode. **Return value:** • None
__HAL_COMP_COMP1_EXTI_DISABLE_EVENT	**Description:** • Disable the COMP1 EXTI line in event mode. **Return value:** • None
__HAL_COMP_COMP1_EXTI_GET_FLAG	**Description:** • Check whether the COMP1 EXTI line flag is set or not.

	Return value: • RESET: or SET
__HAL_COMP_COMP1_EXTI_CLEAR_FLAG	**Description:** • Clear the COMP1 EXTI flag. **Return value:** • None
__HAL_COMP_COMP2_EXTI_ENABLE_RISING_EDGE	**Description:** • Enable the COMP2 EXTI line rising edge trigger. **Return value:** • None
__HAL_COMP_COMP2_EXTI_DISABLE_RISING_EDGE	**Description:** • Disable the COMP2 EXTI line rising edge trigger. **Return value:** • None
__HAL_COMP_COMP2_EXTI_ENABLE_FALLING_EDGE	**Description:** • Enable the COMP2 EXTI line falling edge trigger. **Return value:** • None
__HAL_COMP_COMP2_EXTI_DISABLE_FALLING_EDGE	**Description:** • Disable the COMP2 EXTI line falling edge trigger. **Return value:** • None
__HAL_COMP_COMP2_EXTI_ENABLE_RISING_FALLING_EDGE	**Description:** • Enable the COMP2 EXTI line rising & falling edge trigger. **Return value:** • None
__HAL_COMP_COMP2_EXTI_DISABLE_RISING_FALLING_EDGE	**Description:** • Disable the COMP2 EXTI line rising & falling edge trigger. **Return value:** • None
__HAL_COMP_COMP2_EXTI_ENABLE_IT	**Description:** • Enable the COMP2 EXTI line

	in interrupt mode. **Return value:** • None
__HAL_COMP_COMP2_EXTI_DISABLE_IT	**Description:** • Disable the COMP2 EXTI line in interrupt mode. **Return value:** • None
__HAL_COMP_COMP2_EXTI_GENERATE_SWIT	**Description:** • Generate a software interrupt on the COMP2 EXTI line. **Return value:** • None
__HAL_COMP_COMP2_EXTI_ENABLE_EVENT	**Description:** • Enable the COMP2 EXTI line in event mode. **Return value:** • None
__HAL_COMP_COMP2_EXTI_DISABLE_EVENT	**Description:** • Disable the COMP2 EXTI line in event mode. **Return value:** • None
__HAL_COMP_COMP2_EXTI_GET_FLAG	**Description:** • Check whether the COMP2 EXTI line flag is set or not. **Return value:** • RESET: or SET
__HAL_COMP_COMP2_EXTI_CLEAR_FLAG	**Description:** • Clear the COMP2 EXTI flag. **Return value:** • None
__HAL_COMP_COMP3_EXTI_ENABLE_RISING_EDGE	**Description:** • Enable the COMP3 EXTI line rising edge trigger. **Return value:** • None

__HAL_COMP_COMP3_EXTI_DISABLE_RISING_EDGE	**Description:** • Disable the COMP3 EXTI line rising edge trigger. **Return value:** • None
__HAL_COMP_COMP3_EXTI_ENABLE_FALLING_EDGE	**Description:** • Enable the COMP3 EXTI line falling edge trigger. **Return value:** • None
__HAL_COMP_COMP3_EXTI_DISABLE_FALLING_EDGE	**Description:** • Disable the COMP3 EXTI line falling edge trigger. **Return value:** • None
__HAL_COMP_COMP3_EXTI_ENABLE_RISING_FALLING_EDGE	**Description:** • Enable the COMP3 EXTI line rising & falling edge trigger. **Return value:** • None
__HAL_COMP_COMP3_EXTI_DISABLE_RISING_FALLING_EDGE	**Description:** • Disable the COMP3 EXTI line rising & falling edge trigger. **Return value:** • None
__HAL_COMP_COMP3_EXTI_ENABLE_IT	**Description:** • Enable the COMP3 EXTI line in interrupt mode. **Return value:** • None
__HAL_COMP_COMP3_EXTI_DISABLE_IT	**Description:** • Disable the COMP3 EXTI line in interrupt mode. **Return value:** • None
__HAL_COMP_COMP3_EXTI_GENERATE_SWIT	**Description:** • Generate a software interrupt on the COMP3 EXTI line.

Return value:

- None

__HAL_COMP_COMP3_EXTI_ENABLE_EVENT

Description:

- Enable the COMP3 EXTI line in event mode.

Return value:

- None

__HAL_COMP_COMP3_EXTI_DISABLE_EVENT

Description:

- Disable the COMP3 EXTI line in event mode.

Return value:

- None

__HAL_COMP_COMP3_EXTI_GET_FLAG

Description:

- Check whether the COMP3 EXTI line flag is set or not.

Return value:

- RESET: or SET

__HAL_COMP_COMP3_EXTI_CLEAR_FLAG

Description:

- Clear the COMP3 EXTI flag.

Return value:

- None

__HAL_COMP_COMP4_EXTI_ENABLE_RISING_EDGE

Description:

- Enable the COMP4 EXTI line rising edge trigger.

Return value:

- None

__HAL_COMP_COMP4_EXTI_DISABLE_RISING_EDGE

Description:

- Disable the COMP4 EXTI line rising edge trigger.

Return value:

- None

__HAL_COMP_COMP4_EXTI_ENABLE_FALLING_EDGE

Description:

- Enable the COMP4 EXTI line falling edge trigger.

Return value:

- None

__HAL_COMP_COMP4_EXTI_DISABLE_FALLING_EDGE	**Description:** • Disable the COMP4 EXTI line falling edge trigger. **Return value:** • None
__HAL_COMP_COMP4_EXTI_ENABLE_RISING_FALLING_EDGE	**Description:** • Enable the COMP4 EXTI line rising & falling edge trigger. **Return value:** • None
__HAL_COMP_COMP4_EXTI_DISABLE_RISING_FALLING_EDGE	**Description:** • Disable the COMP4 EXTI line rising & falling edge trigger. **Return value:** • None
__HAL_COMP_COMP4_EXTI_ENABLE_IT	**Description:** • Enable the COMP4 EXTI line in interrupt mode. **Return value:** • None
__HAL_COMP_COMP4_EXTI_DISABLE_IT	**Description:** • Disable the COMP4 EXTI line in interrupt mode. **Return value:** • None
__HAL_COMP_COMP4_EXTI_GENERATE_SWIT	**Description:** • Generate a software interrupt on the COMP4 EXTI line. **Return value:** • None
__HAL_COMP_COMP4_EXTI_ENABLE_EVENT	**Description:** • Enable the COMP4 EXTI line in event mode. **Return value:** • None
__HAL_COMP_COMP4_EXTI_DISABLE_EVENT	**Description:** • Disable the COMP4 EXTI line in event mode.

Return value:

- None

__HAL_COMP_COMP4_EXTI_GET_FLAG

Description:

- Check whether the COMP4 EXTI line flag is set or not.

Return value:

- RESET: or SET

__HAL_COMP_COMP4_EXTI_CLEAR_FLAG

Description:

- Clear the COMP4 EXTI flag.

Return value:

- None

__HAL_COMP_COMP5_EXTI_ENABLE_RISING_EDGE

Description:

- Enable the COMP5 EXTI line rising edge trigger.

Return value:

- None

__HAL_COMP_COMP5_EXTI_DISABLE_RISING_EDGE

Description:

- Disable the COMP5 EXTI line rising edge trigger.

Return value:

- None

__HAL_COMP_COMP5_EXTI_ENABLE_FALLING_EDGE

Description:

- Enable the COMP5 EXTI line falling edge trigger.

Return value:

- None

__HAL_COMP_COMP5_EXTI_DISABLE_FALLING_EDGE

Description:

- Disable the COMP5 EXTI line falling edge trigger.

Return value:

- None

__HAL_COMP_COMP5_EXTI_ENABLE_RISING_FALLING_EDGE

Description:

- Enable the COMP5 EXTI line rising & falling edge trigger.

Return value:

- None

__HAL_COMP_COMP5_EXTI_DISABLE_RISING_FALLING_EDGE

Description:

- Disable the COMP5 EXTI line rising & falling edge trigger.

Return value:

- None

__HAL_COMP_COMP5_EXTI_ENABLE_IT

Description:

- Enable the COMP5 EXTI line in interrupt mode.

Return value:

- None

__HAL_COMP_COMP5_EXTI_DISABLE_IT

Description:

- Disable the COMP5 EXTI line in interrupt mode.

Return value:

- None

__HAL_COMP_COMP5_EXTI_GENERATE_SWIT

Description:

- Generate a software interrupt on the COMP5 EXTI line.

Return value:

- None

__HAL_COMP_COMP5_EXTI_ENABLE_EVENT

Description:

- Enable the COMP5 EXTI line in event mode.

Return value:

- None

__HAL_COMP_COMP5_EXTI_DISABLE_EVENT

Description:

- Disable the COMP5 EXTI line in event mode.

Return value:

- None

__HAL_COMP_COMP5_EXTI_GET_FLAG

Description:

- Check whether the COMP5 EXTI line flag is set or not.

Return value:

- RESET: or SET

__HAL_COMP_COMP5_EXTI_CLEAR_FLAG	**Description:** • Clear the COMP5 EXTI flag. **Return value:** • None
__HAL_COMP_COMP6_EXTI_ENABLE_RISING_EDGE	**Description:** • Enable the COMP6 EXTI line rising edge trigger. **Return value:** • None
__HAL_COMP_COMP6_EXTI_DISABLE_RISING_EDGE	**Description:** • Disable the COMP6 EXTI line rising edge trigger. **Return value:** • None
__HAL_COMP_COMP6_EXTI_ENABLE_FALLING_EDGE	**Description:** • Enable the COMP6 EXTI line falling edge trigger. **Return value:** • None
__HAL_COMP_COMP6_EXTI_DISABLE_FALLING_EDGE	**Description:** • Disable the COMP6 EXTI line falling edge trigger. **Return value:** • None
__HAL_COMP_COMP6_EXTI_ENABLE_RISING_FALLING_EDGE	**Description:** • Enable the COMP6 EXTI line rising & falling edge trigger. **Return value:** • None
__HAL_COMP_COMP6_EXTI_DISABLE_RISING_FALLING_EDGE	**Description:** • Disable the COMP6 EXTI line rising & falling edge trigger. **Return value:** • None

__HAL_COMP_COMP6_EXTI_ENABLE_IT

Description:

- Enable the COMP6 EXTI line in interrupt mode.

Return value:

- None

__HAL_COMP_COMP6_EXTI_DISABLE_IT

Description:

- Disable the COMP6 EXTI line in interrupt mode.

Return value:

- None

__HAL_COMP_COMP6_EXTI_GENERATE_SWIT

Description:

- Generate a software interrupt on the COMP6 EXTI line.

Return value:

- None

__HAL_COMP_COMP6_EXTI_ENABLE_EVENT

Description:

- Enable the COMP6 EXTI line in event mode.

Return value:

- None

__HAL_COMP_COMP6_EXTI_DISABLE_EVENT

Description:

- Disable the COMP6 EXTI line in event mode.

Return value:

- None

__HAL_COMP_COMP6_EXTI_GET_FLAG

Description:

- Check whether the COMP6 EXTI line flag is set or not.

Return value:

- RESET: or SET

__HAL_COMP_COMP6_EXTI_CLEAR_FLAG

Description:

- Clear the COMP6 EXTI flag.

Return value:

- None

__HAL_COMP_COMP7_EXTI_ENABLE_RISING_EDGE

Description:

- Enable the COMP7 EXTI line rising edge trigger.

Return value:

- None

__HAL_COMP_COMP7_EXTI_DISABLE_RISING_EDGE

Description:

- Disable the COMP7 EXTI line rising edge trigger.

Return value:

- None

__HAL_COMP_COMP7_EXTI_ENABLE_FALLING_EDGE

Description:

- Enable the COMP7 EXTI line falling edge trigger.

Return value:

- None

__HAL_COMP_COMP7_EXTI_DISABLE_FALLING_EDGE

Description:

- Disable the COMP7 EXTI line falling edge trigger.

Return value:

- None

__HAL_COMP_COMP7_EXTI_ENABLE_RISING_FALLING_EDGE

Description:

- Enable the COMP7 EXTI line rising & falling edge trigger.

Return value:

- None

__HAL_COMP_COMP7_EXTI_DISABLE_RISING_FALLING_EDGE

Description:

- Disable the COMP7 EXTI line rising & falling edge trigger.

Return value:

- None

__HAL_COMP_COMP7_EXTI_ENABLE_IT

Description:

- Enable the COMP7 EXTI line in interrupt mode.

Return value:

- None

__HAL_COMP_COMP7_EXTI_DISABLE_IT	**Description:** • Disable the COMP7 EXTI line in interrupt mode. **Return value:** • None
__HAL_COMP_COMP7_EXTI_GENERATE_SWIT	**Description:** • Generate a software interrupt on the COMP7 EXTI line. **Return value:** • None
__HAL_COMP_COMP7_EXTI_ENABLE_EVENT	**Description:** • Enable the COMP7 EXTI line in event mode. **Return value:** • None
__HAL_COMP_COMP7_EXTI_DISABLE_EVENT	**Description:** • Disable the COMP7 EXTI line in event mode. **Return value:** • None
__HAL_COMP_COMP7_EXTI_GET_FLAG	**Description:** • Check whether the COMP7 EXTI line flag is set or not. **Return value:** • RESET: or SET
__HAL_COMP_COMP7_EXTI_CLEAR_FLAG	**Description:** • Clear the COMP7 EXTI flag. **Return value:** • None

COMP Extended EXTI lines

COMP_EXTI_LINE_COMP1	External interrupt line 21 connected to COMP1
COMP_EXTI_LINE_COMP2	External interrupt line 22 connected to COMP2
COMP_EXTI_LINE_COMP3	External interrupt line 29 connected to COMP3
COMP_EXTI_LINE_COMP4	External interrupt line 30 connected to COMP4
COMP_EXTI_LINE_COMP5	External interrupt line 31 connected to COMP5
COMP_EXTI_LINE_COMP6	External interrupt line 32 connected to COMP6
COMP_EXTI_LINE_COMP7	External interrupt line 33 connected to COMP7
COMP_EXTI_LINE_REG2_MASK	Mask for External interrupt line control in register xxx2

COMP Extended Hysteresis

COMP_HYSTERESIS_NONE	No hysteresis
COMP_HYSTERESIS_LOW	Hysteresis level low
COMP_HYSTERESIS_MEDIUM	Hysteresis level medium
COMP_HYSTERESIS_HIGH	Hysteresis level high

COMP Extended InvertingInput (STM32F302xE/STM32F303xE/STM32F398xx/STM32F302xC/STM32F303xC/STM32F358xx Product devices)

COMP_INVERTINGINPUT_1_4VREFINT	1U/4 VREFINT connected to comparator inverting input
COMP_INVERTINGINPUT_1_2VREFINT	1U/2 VREFINT connected to comparator inverting input
COMP_INVERTINGINPUT_3_4VREFINT	3U/4 VREFINT connected to comparator inverting input
COMP_INVERTINGINPUT_VREFINT	VREFINT connected to comparator inverting input
COMP_INVERTINGINPUT_DAC1_CH1	DAC1_CH1_OUT (PA4) connected to comparator inverting input
COMP_INVERTINGINPUT_DAC1_CH2	DAC1_CH2_OUT (PA5) connected to comparator inverting input
COMP_INVERTINGINPUT_IO1	IO1 (PA0 for COMP1, PA2 for COMP2, PD15 for COMP3, PE8 for COMP4, PD13 for COMP5, PD10 for COMP6, PC0 for COMP7) connected to comparator inverting input
COMP_INVERTINGINPUT_IO2	IO2 (PB12 for COMP3, PB2 for COMP4, PB10 for COMP5, PB15 for COMP6) connected to comparator inverting input
COMP_INVERTINGINPUT_DAC1	
COMP_INVERTINGINPUT_DAC2	

COMP Extended Private macros to check input parameters

IS_COMP_INVERTINGINPUT

IS_COMP_NONINVERTINGINPUT

IS_COMP_NONINVERTINGINPUT_INSTANCE

IS_COMP_WINDOWMODE

IS_COMP_MODE

IS_COMP_HYSTERESIS

IS_COMP_OUTPUT

IS_COMP_OUTPUT_INSTANCE

IS_COMP_BLANKINGSRCE

IS_COMP_BLANKINGSRCE_INSTANCE

COMP Extended miscellaneous defines

COMP_CSR_COMPxINSEL_MASK	COMP_CSR_COMPxINSEL Mask
COMP_CSR_COMPxOUTSEL_MASK	COMP_CSR_COMPxOUTSEL Mask
COMP_CSR_COMPxPOL_MASK	COMP_CSR_COMPxPOL Mask
COMP_CSR_RESET_VALUE	
COMP_CSR_COMPxNONINSEL_MASK	COMP_CSR_COMPxNONINSEL mask
COMP_CSR_COMPxWNDWEN_MASK	COMP_CSR_COMPxWNDWEN mask
COMP_CSR_COMPxMODE_MASK	COMP_CSR_COMPxMODE Mask
COMP_CSR_COMPxHYST_MASK	COMP_CSR_COMPxHYST Mask
COMP_CSR_COMPxBLANKING_MASK	COMP_CSR_COMPxBLANKING mask

COMP Extended Mode

COMP_MODE_HIGHSPEED	High Speed
COMP_MODE_MEDIUMSPEED	Medium Speed
COMP_MODE_LOWPOWER	Low power mode
COMP_MODE_ULTRALOWPOWER	Ultra-low power mode

COMP Extended NonInvertingInput (STM32F302xC/STM32F303xC/STM32F358xx Product devices)

COMP_NONINVERTINGINPUT_IO1	IO1 (PA1 for COMP1, PA7 for COMP2, PB14 for COMP3, PB0 for COMP4, PD12 for COMP5, PD11 for COMP6, PA0 for COMP7) connected to comparator non inverting input
COMP_NONINVERTINGINPUT_IO2	IO2 (PA3 for COMP2, PD14 for COMP3, PE7 for COMP4, PB13 for COMP5, PB11 for COMP6, PC1 for COMP7) connected to comparator non inverting input
COMP_NONINVERTINGINPUT_DAC1SWITCHCLOSED	DAC ouput connected to comparator COMP1 non inverting input

COMP Extended Output (STM32F303xC/STM32F358xx Product devices)

COMP_OUTPUT_NONE	COMP1, COMP2... or COMP7 output isn't connected to other peripherals
COMP_OUTPUT_TIM1BKIN	COMP1, COMP2... or COMP7 output connected to TIM1 Break Input (BKIN)
COMP_OUTPUT_TIM1BKIN2	COMP1, COMP2... or COMP7 output connected to TIM1 Break Input 2 (BKIN2)
COMP_OUTPUT_TIM8BKIN	COMP1, COMP2... or COMP7 output connected to TIM8 Break Input (BKIN)
COMP_OUTPUT_TIM8BKIN2	COMP1, COMP2... or COMP7 output connected to TIM8 Break Input 2 (BKIN2)

COMP_OUTPUT_TIM1BKIN2_TIM8BKIN2	COMP1, COMP2... or COMP7 output connected to TIM1 Break Input 2 and TIM8 Break Input 2U
COMP_OUTPUT_TIM1OCREFCLR	COMP1, COMP2, COMP3 or COMP7 output connected to TIM1 OCREF Clear
COMP_OUTPUT_TIM2OCREFCLR	COMP1, COMP2 or COMP3 output connected to TIM2 OCREF Clear
COMP_OUTPUT_TIM3OCREFCLR	COMP1, COMP2, COMP4 or COMP5 output connected to TIM3 OCREF Clear
COMP_OUTPUT_TIM8OCREFCLR	COMP4, COMP5, COMP6 or COMP7 output connected to TIM8 OCREF Clear
COMP_OUTPUT_TIM1IC1	COMP1 or COMP2 output connected to TIM1 Input Capture 1U
COMP_OUTPUT_TIM2IC4	COMP1 or COMP2 output connected to TIM2 Input Capture 4U
COMP_OUTPUT_TIM3IC1	COMP1 or COMP2 output connected to TIM3 Input Capture 1U
COMP_OUTPUT_TIM4IC1	COMP3 output connected to TIM4 Input Capture 1U
COMP_OUTPUT_TIM3IC2	COMP3 output connected to TIM3 Input Capture 2U
COMP_OUTPUT_TIM15IC1	COMP3 output connected to TIM15 Input Capture 1U
COMP_OUTPUT_TIM15BKIN	COMP3 output connected to TIM15 Break Input (BKIN)
COMP_OUTPUT_TIM3IC3	COMP4 output connected to TIM3 Input Capture 3U
COMP_OUTPUT_TIM15IC2	COMP4 output connected to TIM15 Input Capture 2U
COMP_OUTPUT_TIM4IC2	COMP4 output connected to TIM4 Input Capture 2U
COMP_OUTPUT_TIM15OCREFCLR	COMP4 output connected to TIM15 OCREF Clear
COMP_OUTPUT_TIM2IC1	COMP5 output connected to TIM2 Input Capture 1U
COMP_OUTPUT_TIM17IC1	COMP5 output connected to TIM17 Input Capture 1U
COMP_OUTPUT_TIM4IC3	COMP5 output connected to TIM4 Input Capture 3U
COMP_OUTPUT_TIM16BKIN	COMP5 output connected to TIM16 Break Input (BKIN)
COMP_OUTPUT_TIM2IC2	COMP6 output connected to TIM2 Input Capture 2U

COMP_OUTPUT_COMP6_TIM2OCREFCLR	COMP6 output connected to TIM2 OCREF Clear
COMP_OUTPUT_TIM16OCREFCLR	COMP6 output connected to TIM16 OCREF Clear
COMP_OUTPUT_TIM16IC1	COMP6 output connected to TIM16 Input Capture 1U
COMP_OUTPUT_TIM4IC4	COMP6 output connected to TIM4 Input Capture 4U
COMP_OUTPUT_TIM2IC3	COMP7 output connected to TIM2 Input Capture 3U
COMP_OUTPUT_TIM1IC2	COMP7 output connected to TIM1 Input Capture 2U
COMP_OUTPUT_TIM17OCREFCLR	COMP7 output connected to TIM17 OCREF Clear
COMP_OUTPUT_TIM17BKIN	COMP7 output connected to TIM17 Break Input (BKIN)

COMP Extended WindowMode (STM32F302xC/STM32F303xC/STM32F358xx Product devices)

COMP_WINDOWMODE_DISABLE	Window mode disabled
COMP_WINDOWMODE_ENABLE	Window mode enabled: non inverting input of comparator X (x=2U,4,6U) is connected to the non inverting input of comparator X-1U

12 HAL CORTEX Generic Driver

12.1 CORTEX Firmware driver registers structures

12.1.1 MPU_Region_InitTypeDef

Data Fields

- ***uint8_t Enable***
- ***uint8_t Number***
- ***uint32_t BaseAddress***
- ***uint8_t Size***
- ***uint8_t SubRegionDisable***
- ***uint8_t TypeExtField***
- ***uint8_t AccessPermission***
- ***uint8_t DisableExec***
- ***uint8_t IsShareable***
- ***uint8_t IsCacheable***
- ***uint8_t IsBufferable***

Field Documentation

- ***uint8_t MPU_Region_InitTypeDef::Enable***
  Specifies the status of the region. This parameter can be a value of ***CORTEX_MPU_Region_Enable***
- ***uint8_t MPU_Region_InitTypeDef::Number***
  Specifies the number of the region to protect. This parameter can be a value of ***CORTEX_MPU_Region_Number***
- ***uint32_t MPU_Region_InitTypeDef::BaseAddress***
  Specifies the base address of the region to protect.
- ***uint8_t MPU_Region_InitTypeDef::Size***
  Specifies the size of the region to protect. This parameter can be a value of ***CORTEX_MPU_Region_Size***
- ***uint8_t MPU_Region_InitTypeDef::SubRegionDisable***
  Specifies the number of the subregion protection to disable. This parameter must be a number between Min_Data = 0x00 and Max_Data = 0xFF
- ***uint8_t MPU_Region_InitTypeDef::TypeExtField***
  Specifies the TEX field level. This parameter can be a value of ***CORTEX_MPU_TEX_Levels***
- ***uint8_t MPU_Region_InitTypeDef::AccessPermission***
  Specifies the region access permission type. This parameter can be a value of ***CORTEX_MPU_Region_Permission_Attributes***
- ***uint8_t MPU_Region_InitTypeDef::DisableExec***
  Specifies the instruction access status. This parameter can be a value of ***CORTEX_MPU_Instruction_Access***
- ***uint8_t MPU_Region_InitTypeDef::IsShareable***
  Specifies the shareability status of the protected region. This parameter can be a value of ***CORTEX_MPU_Access_Shareable***
- ***uint8_t MPU_Region_InitTypeDef::IsCacheable***
  Specifies the cacheable status of the region protected. This parameter can be a value of ***CORTEX_MPU_Access_Cacheable***

- ***uint8_t MPU_Region_InitTypeDef::IsBufferable***
  Specifies the bufferable status of the protected region. This parameter can be a value of ***CORTEX_MPU_Access_Bufferable***

12.2 CORTEX Firmware driver API description

12.2.1 How to use this driver

How to configure Interrupts using CORTEX HAL driver

This section provides functions allowing to configure the NVIC interrupts (IRQ). The Cortex-M4 exceptions are managed by CMSIS functions.

1. Configure the NVIC Priority Grouping using HAL_NVIC_SetPriorityGrouping() function
2. Configure the priority of the selected IRQ Channels using HAL_NVIC_SetPriority()
3. Enable the selected IRQ Channels using HAL_NVIC_EnableIRQ() When the NVIC_PRIORITYGROUP_0 is selected, IRQ pre-emption is no more possible. The pending IRQ priority will be managed only by the sub priority. IRQ priority order (sorted by highest to lowest priority): Lowest pre-emption priorityLowest sub priorityLowest hardware priority (IRQ number)

How to configure Systick using CORTEX HAL driver

Setup SysTick Timer for time base

- The HAL_SYSTICK_Config()function calls the SysTick_Config() function which is a CMSIS function that:
  - Configures the SysTick Reload register with value passed as function parameter.
  - Configures the SysTick IRQ priority to the lowest value (0x0FU).
  - Resets the SysTick Counter register.
  - Configures the SysTick Counter clock source to be Core Clock Source (HCLK).
  - Enables the SysTick Interrupt.
  - Starts the SysTick Counter.
- You can change the SysTick Clock source to be HCLK_Div8 by calling the macro __HAL_CORTEX_SYSTICKCLK_CONFIG(SYSTICK_CLKSOURCE_HCLK_DIV8) just after the HAL_SYSTICK_Config() function call. The __HAL_CORTEX_SYSTICKCLK_CONFIG() macro is defined inside the stm32f3xx_hal_cortex.h file.
- You can change the SysTick IRQ priority by calling the HAL_NVIC_SetPriority(SysTick_IRQn,...) function just after the HAL_SYSTICK_Config() function call. The HAL_NVIC_SetPriority() call the NVIC_SetPriority() function which is a CMSIS function.
- To adjust the SysTick time base, use the following formula: Reload Value = SysTick Counter Clock (Hz) x Desired Time base (s)
  - Reload Value is the parameter to be passed for HAL_SYSTICK_Config() function
  - Reload Value should not exceed 0xFFFFFF

12.2.2 Initialization and de-initialization functions

This section provides the CORTEX HAL driver functions allowing to configure Interrupts Systick functionalities

This section contains the following APIs:

- *HAL_NVIC_SetPriorityGrouping()*
- *HAL_NVIC_SetPriority()*
- *HAL_NVIC_EnableIRQ()*
- *HAL_NVIC_DisableIRQ()*
- *HAL_NVIC_SystemReset()*
- *HAL_SYSTICK_Config()*

12.2.3 Peripheral Control functions

This subsection provides a set of functions allowing to control the CORTEX (NVIC, SYSTICK, MPU) functionalities.

This section contains the following APIs:

- *HAL_MPU_Disable()*
- *HAL_MPU_Enable()*
- *HAL_MPU_ConfigRegion()*
- *HAL_NVIC_GetPriorityGrouping()*
- *HAL_NVIC_GetPriority()*
- *HAL_NVIC_SetPendingIRQ()*
- *HAL_NVIC_GetPendingIRQ()*
- *HAL_NVIC_ClearPendingIRQ()*
- *HAL_NVIC_GetActive()*
- *HAL_SYSTICK_CLKSourceConfig()*
- *HAL_SYSTICK_IRQHandler()*
- *HAL_SYSTICK_Callback()*

12.2.4 Detailed description of functions

HAL_NVIC_SetPriorityGrouping

Function name — **void HAL_NVIC_SetPriorityGrouping (uint32_t PriorityGroup)**

Function description — Sets the priority grouping field (pre-emption priority and subpriority) using the required unlock sequence.

Parameters

- **PriorityGroup:** The priority grouping bits length. This parameter can be one of the following values:
  - NVIC_PRIORITYGROUP_0: 0 bits for pre-emption priority 4 bits for subpriority
  - NVIC_PRIORITYGROUP_1: 1 bits for pre-emption priority 3 bits for subpriority
  - NVIC_PRIORITYGROUP_2: 2 bits for pre-emption priority 2 bits for subpriority
  - NVIC_PRIORITYGROUP_3: 3 bits for pre-emption priority 1 bits for subpriority
  - NVIC_PRIORITYGROUP_4: 4 bits for pre-emption priority 0 bits for subpriority

Return values

- **None**

Notes

- When the NVIC_PriorityGroup_0 is selected, IRQ pre-emption is no more possible. The pending IRQ priority will be managed only by the subpriority.

HAL_NVIC_SetPriority

Function name	**void HAL_NVIC_SetPriority (IRQn_Type IRQn, uint32_t PreemptPriority, uint32_t SubPriority)**
Function description	Sets the priority of an interrupt.
Parameters	• **IRQn:** External interrupt number This parameter can be an enumerator of IRQn_Type enumeration (For the complete STM32 Devices IRQ Channels list, please refer to the appropriate CMSIS device file (stm32f3xxxx.h)) • **PreemptPriority:** The pre-emption priority for the IRQn channel. This parameter can be a value between 0 and 15 as described in the table CORTEX_NVIC_Priority_Table A lower priority value indicates a higher priority • **SubPriority:** the subpriority level for the IRQ channel. This parameter can be a value between 0 and 15 as described in the table CORTEX_NVIC_Priority_Table A lower priority value indicates a higher priority.
Return values	• **None**

HAL_NVIC_EnableIRQ

Function name	**void HAL_NVIC_EnableIRQ (IRQn_Type IRQn)**
Function description	Enables a device specific interrupt in the NVIC interrupt controller.
Parameters	• **IRQn:** External interrupt number This parameter can be an enumerator of IRQn_Type enumeration (For the complete STM32 Devices IRQ Channels list, please refer to the appropriate CMSIS device file (stm32f3xxxx.h))
Return values	• **None**
Notes	• To configure interrupts priority correctly, the NVIC_PriorityGroupConfig() function should be called before.

HAL_NVIC_DisableIRQ

Function name	**void HAL_NVIC_DisableIRQ (IRQn_Type IRQn)**
Function description	Disables a device specific interrupt in the NVIC interrupt controller.
Parameters	• **IRQn:** External interrupt number This parameter can be an enumerator of IRQn_Type enumeration (For the complete STM32 Devices IRQ Channels list, please refer to the appropriate CMSIS device file (stm32f3xxxx.h))
Return values	• **None**

HAL_NVIC_SystemReset

Function name	**void HAL_NVIC_SystemReset (void)**
Function description	Initiates a system reset request to reset the MCU.
Return values	• **None**

HAL_SYSTICK_Config

Function name **uint32_t HAL_SYSTICK_Config (uint32_t TicksNumb)**

Function description Initializes the System Timer and its interrupt, and starts the System Tick Timer.

Parameters
- **TicksNumb:** Specifies the ticks Number of ticks between two interrupts.

Return values
- **status:** - 0 Function succeeded.
  - 1 Function failed.

HAL_MPU_ConfigRegion

Function name **void HAL_MPU_ConfigRegion (MPU_Region_InitTypeDef * MPU_Init)**

Function description Initializes and configures the Region and the memory to be protected.

Parameters
- **MPU_Init:** Pointer to a MPU_Region_InitTypeDef structure that contains the initialization and configuration information.

Return values
- **None**

HAL_NVIC_GetPriorityGrouping

Function name **uint32_t HAL_NVIC_GetPriorityGrouping (void)**

Function description Gets the priority grouping field from the NVIC Interrupt Controller.

Return values
- **Priority:** grouping field (SCB->AIRCR [10:8] PRIGROUP field)

HAL_NVIC_GetPriority

Function name **void HAL_NVIC_GetPriority (IRQn_Type IRQn, uint32_t PriorityGroup, uint32_t * pPreemptPriority, uint32_t * pSubPriority)**

Function description Gets the priority of an interrupt.

Parameters
- **IRQn:** External interrupt number This parameter can be an enumerator of IRQn_Type enumeration (For the complete STM32 Devices IRQ Channels list, please refer to the appropriate CMSIS device file (stm32f3xxxx.h))
- **PriorityGroup:** the priority grouping bits length. This parameter can be one of the following values:
  - NVIC_PRIORITYGROUP_0: 0 bits for pre-emption priority 4 bits for subpriority
  - NVIC_PRIORITYGROUP_1: 1 bits for pre-emption priority 3 bits for subpriority
  - NVIC_PRIORITYGROUP_2: 2 bits for pre-emption priority 2 bits for subpriority
  - NVIC_PRIORITYGROUP_3: 3 bits for pre-emption priority 1 bits for subpriority
  - NVIC_PRIORITYGROUP_4: 4 bits for pre-emption priority 0 bits for subpriority

- **pPreemptPriority:** Pointer on the Preemptive priority value (starting from 0).
- **pSubPriority:** Pointer on the Subpriority value (starting from 0).

Return values
- **None**

HAL_NVIC_GetPendingIRQ

Function name **uint32_t HAL_NVIC_GetPendingIRQ (IRQn_Type IRQn)**

Function description Gets Pending Interrupt (reads the pending register in the NVIC and returns the pending bit for the specified interrupt).

Parameters
- **IRQn:** External interrupt number This parameter can be an enumerator of IRQn_Type enumeration (For the complete STM32 Devices IRQ Channels list, please refer to the appropriate CMSIS device file (stm32f3xxxx.h))

Return values
- **status:** - 0 Interrupt status is not pending.
  - 1 Interrupt status is pending.

HAL_NVIC_SetPendingIRQ

Function name **void HAL_NVIC_SetPendingIRQ (IRQn_Type IRQn)**

Function description Sets Pending bit of an external interrupt.

Parameters
- **IRQn:** External interrupt number This parameter can be an enumerator of IRQn_Type enumeration (For the complete STM32 Devices IRQ Channels list, please refer to the appropriate CMSIS device file (stm32f3xxxx.h))

Return values
- **None**

HAL_NVIC_ClearPendingIRQ

Function name **void HAL_NVIC_ClearPendingIRQ (IRQn_Type IRQn)**

Function description Clears the pending bit of an external interrupt.

Parameters
- **IRQn:** External interrupt number This parameter can be an enumerator of IRQn_Type enumeration (For the complete STM32 Devices IRQ Channels list, please refer to the appropriate CMSIS device file (stm32f3xxxx.h))

Return values
- **None**

HAL_NVIC_GetActive

Function name **uint32_t HAL_NVIC_GetActive (IRQn_Type IRQn)**

Function description Gets active interrupt (reads the active register in NVIC and returns the active bit).

Parameters
- **IRQn:** External interrupt number This parameter can be an enumerator of IRQn_Type enumeration (For the complete STM32 Devices IRQ Channels list, please refer to the appropriate CMSIS device file (stm32f3xxxx.h))

Return values
- **status:** - 0 Interrupt status is not pending.
  – 1 Interrupt status is pending.

HAL_SYSTICK_CLKSourceConfig

Function name **void HAL_SYSTICK_CLKSourceConfig (uint32_t CLKSource)**

Function description Configures the SysTick clock source.

Parameters
- **CLKSource:** specifies the SysTick clock source. This parameter can be one of the following values:
  – SYSTICK_CLKSOURCE_HCLK_DIV8: AHB clock divided by 8 selected as SysTick clock source.
  – SYSTICK_CLKSOURCE_HCLK: AHB clock selected as SysTick clock source.

Return values
- **None**

HAL_SYSTICK_IRQHandler

Function name **void HAL_SYSTICK_IRQHandler (void)**

Function description This function handles SYSTICK interrupt request.

Return values
- **None**

HAL_SYSTICK_Callback

Function name **void HAL_SYSTICK_Callback (void)**

Function description SYSTICK callback.

Return values
- **None**

HAL_MPU_Disable

Function name **void HAL_MPU_Disable (void)**

Function description Disables the MPU also clears the HFNMIENA bit (ARM recommendation)

Return values
- **None**

HAL_MPU_Enable

Function name **void HAL_MPU_Enable (uint32_t MPU_Control)**

Function description Enables the MPU.

Parameters
- **MPU_Control:** Specifies the control mode of the MPU during hard fault, NMI, FAULTMASK and privileged access to the default memory This parameter can be one of the following values:
  – MPU_HFNMI_PRIVDEF_NONE
  – MPU_HARDFAULT_NMI
  – MPU_PRIVILEGED_DEFAULT
  – MPU_HFNMI_PRIVDEF

Return values
- **None**

12.3 CORTEX Firmware driver defines

12.3.1 CORTEX

CORTEX MPU Instruction Access Bufferable

MPU_ACCESS_BUFFERABLE

MPU_ACCESS_NOT_BUFFERABLE

CORTEX MPU Instruction Access Cacheable

MPU_ACCESS_CACHEABLE

MPU_ACCESS_NOT_CACHEABLE

CORTEX MPU Instruction Access Shareable

MPU_ACCESS_SHAREABLE

MPU_ACCESS_NOT_SHAREABLE

MPU HFNMI and PRIVILEGED Access control

MPU_HFNMI_PRIVDEF_NONE

MPU_HARDFAULT_NMI

MPU_PRIVILEGED_DEFAULT

MPU_HFNMI_PRIVDEF

CORTEX MPU Instruction Access

MPU_INSTRUCTION_ACCESS_ENABLE

MPU_INSTRUCTION_ACCESS_DISABLE

CORTEX MPU Region Enable

MPU_REGION_ENABLE

MPU_REGION_DISABLE

CORTEX MPU Region Number

MPU_REGION_NUMBER0

MPU_REGION_NUMBER1

MPU_REGION_NUMBER2

MPU_REGION_NUMBER3

MPU_REGION_NUMBER4

MPU_REGION_NUMBER5

MPU_REGION_NUMBER6

MPU_REGION_NUMBER7

CORTEX MPU Region Permission Attributes

MPU_REGION_NO_ACCESS

MPU_REGION_PRIV_RW

MPU_REGION_PRIV_RW_URO

MPU_REGION_FULL_ACCESS

MPU_REGION_PRIV_RO

MPU_REGION_PRIV_RO_URO

CORTEX MPU Region Size

MPU_REGION_SIZE_32B

MPU_REGION_SIZE_64B

MPU_REGION_SIZE_128B

MPU_REGION_SIZE_256B

MPU_REGION_SIZE_512B

MPU_REGION_SIZE_1KB

MPU_REGION_SIZE_2KB

MPU_REGION_SIZE_4KB

MPU_REGION_SIZE_8KB

MPU_REGION_SIZE_16KB

MPU_REGION_SIZE_32KB

MPU_REGION_SIZE_64KB

MPU_REGION_SIZE_128KB

MPU_REGION_SIZE_256KB

MPU_REGION_SIZE_512KB

MPU_REGION_SIZE_1MB

MPU_REGION_SIZE_2MB

MPU_REGION_SIZE_4MB

MPU_REGION_SIZE_8MB

MPU_REGION_SIZE_16MB

MPU_REGION_SIZE_32MB

MPU_REGION_SIZE_64MB

MPU_REGION_SIZE_128MB

MPU_REGION_SIZE_256MB

MPU_REGION_SIZE_512MB

MPU_REGION_SIZE_1GB

MPU_REGION_SIZE_2GB

MPU_REGION_SIZE_4GB

MPU TEX Levels

MPU_TEX_LEVEL0

MPU_TEX_LEVEL1

MPU_TEX_LEVEL2

CORTEX Preemption Priority Group

NVIC_PRIORITYGROUP_0	0 bits for pre-emption priority 4 bits for subpriority
NVIC_PRIORITYGROUP_1	1 bits for pre-emption priority 3 bits for subpriority
NVIC_PRIORITYGROUP_2	2 bits for pre-emption priority 2 bits for subpriority
NVIC_PRIORITYGROUP_3	3 bits for pre-emption priority 1 bits for subpriority
NVIC_PRIORITYGROUP_4	4 bits for pre-emption priority 0 bits for subpriority

CORTEX SysTick clock source

SYSTICK_CLKSOURCE_HCLK_DIV8

SYSTICK_CLKSOURCE_HCLK

13 HAL CRC Generic Driver

13.1 CRC Firmware driver registers structures

13.1.1 CRC_InitTypeDef

Data Fields

- ***uint8_t DefaultPolynomialUse***
- ***uint8_t DefaultInitValueUse***
- ***uint32_t GeneratingPolynomial***
- ***uint32_t CRCLength***
- ***uint32_t InitValue***
- ***uint32_t InputDataInversionMode***
- ***uint32_t OutputDataInversionMode***

Field Documentation

- ***uint8_t CRC_InitTypeDef::DefaultPolynomialUse***
  This parameter is a value of ***CRC_Default_Polynomial*** and indicates if default polynomial is used. If set to DEFAULT_POLYNOMIAL_ENABLE, resort to default X^32U + X^26U + X^23U + X^22U + X^16U + X^12U + X^11U + X^10U +X^8U + X^7U + X^5U + X^4U + X^2U+ X +1. In that case, there is no need to set GeneratingPolynomial field. If otherwise set to DEFAULT_POLYNOMIAL_DISABLE, GeneratingPolynomial and CRCLength fields must be set.
- ***uint8_t CRC_InitTypeDef::DefaultInitValueUse***
  This parameter is a value of ***CRC_Default_InitValue_Use*** and indicates if default init value is used. If set to DEFAULT_INIT_VALUE_ENABLE, resort to default 0xFFFFFFFF value. In that case, there is no need to set InitValue field. If otherwise set to DEFAULT_INIT_VALUE_DISABLE, InitValue field must be set.
- ***uint32_t CRC_InitTypeDef::GeneratingPolynomial***
  Set CRC generating polynomial as a 7U, 8U, 16 or 32-bit long value for a polynomial degree respectively equal to 7U, 8U, 16 or 32. This field is written in normal representation, e.g., for a polynomial of degree 7U, X^7U + X^6U + X^5U + X^2U + 1 is written 0x65. No need to specify it if DefaultPolynomialUse is set to DEFAULT_POLYNOMIAL_ENABLE.
- ***uint32_t CRC_InitTypeDef::CRCLength***
  This parameter is a value of ***CRC_Polynomial_Sizes*** and indicates CRC length. Value can be either one of CRC_POLYLENGTH_32B (32-bit CRC), CRC_POLYLENGTH_16B (16-bit CRC), CRC_POLYLENGTH_8B (8-bit CRC), CRC_POLYLENGTH_7B (7-bit CRC).
- ***uint32_t CRC_InitTypeDef::InitValue***
  Init value to initiate CRC computation. No need to specify it if DefaultInitValueUse is set to DEFAULT_INIT_VALUE_ENABLE.
- ***uint32_t CRC_InitTypeDef::InputDataInversionMode***
  This parameter is a value of ***CRCEx_Input_Data_Inversion*** and specifies input data inversion mode. Can be either one of the following values CRC_INPUTDATA_INVERSION_NONE, no input data inversion CRC_INPUTDATA_INVERSION_BYTE, byte-wise inversion, 0x1A2B3C4D becomes 0x58D43CB2 CRC_INPUTDATA_INVERSION_HALFWORD, halfword-wise inversion, 0x1A2B3C4D becomes 0xD458B23C CRC_INPUTDATA_INVERSION_WORD, word-wise inversion, 0x1A2B3C4D becomes 0xB23CD458U

- ***uint32_t CRC_InitTypeDef::OutputDataInversionMode***
  This parameter is a value of ***CRCEx_Output_Data_Inversion*** and specifies output data (i.e. CRC) inversion mode. Can be either CRC_OUTPUTDATA_INVERSION_DISABLE: no CRC inversion, CRC_OUTPUTDATA_INVERSION_ENABLE: CRC 0x11223344 is converted into 0x22CC4488U

13.1.2 CRC_HandleTypeDef

Data Fields

- ***CRC_TypeDef * Instance***
- ***CRC_InitTypeDef Init***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_CRC_StateTypeDef State***
- ***uint32_t InputDataFormat***

Field Documentation

- ***CRC_TypeDef* CRC_HandleTypeDef::Instance***
  Register base address
- ***CRC_InitTypeDef CRC_HandleTypeDef::Init***
  CRC configuration parameters
- ***HAL_LockTypeDef CRC_HandleTypeDef::Lock***
  CRC Locking object
- ***__IO HAL_CRC_StateTypeDef CRC_HandleTypeDef::State***
  CRC communication state
- ***uint32_t CRC_HandleTypeDef::InputDataFormat***
  This parameter is a value of ***CRC_Input_Buffer_Format*** and specifies input data format. Can be either CRC_INPUTDATA_FORMAT_BYTES, input data is a stream of bytes (8-bit data) CRC_INPUTDATA_FORMAT_HALFWORDS, input data is a stream of half-words (16-bit data) CRC_INPUTDATA_FORMAT_WORDS, input data is a stream of words (32-bit data) Note that constant CRC_INPUT_FORMAT_UNDEFINED is defined but an initialization error must occur if InputBufferFormat is not one of the three values listed above

13.2 CRC Firmware driver API description

13.2.1 How to use this driver

- Enable CRC AHB clock using __HAL_RCC_CRC_CLK_ENABLE();
- Initialize CRC calculator
  - specify generating polynomial (IP default or non-default one)
  - specify initialization value (IP default or non-default one)
  - specify input data format
  - specify input or output data inversion mode if any
- Use HAL_CRC_Accumulate() function to compute the CRC value of the input data buffer starting with the previously computed CRC as initialization value
- Use HAL_CRC_Calculate() function to compute the CRC value of the input data buffer starting with the defined initialization value (default or non-default) to initiate CRC calculation

13.2.2 Initialization and de-initialization functions

This section provides functions allowing to:

- Initialize the CRC according to the specified parameters in the CRC_InitTypeDef and create the associated handle
- DeInitialize the CRC peripheral
- Initialize the CRC MSP (MCU Specific Package)
- DeInitialize the CRC MSP

This section contains the following APIs:

- ***HAL_CRC_Init()***
- ***HAL_CRC_DeInit()***
- ***HAL_CRC_MspInit()***
- ***HAL_CRC_MspDeInit()***

13.2.3 Peripheral Control functions

This section provides functions allowing to:

- compute the 7U, 8U, 16 or 32-bit CRC value of an 8U, 16 or 32-bit data buffer using the combination of the previous CRC value and the new one

or

- compute the 7U, 8U, 16 or 32-bit CRC value of an 8U, 16 or 32-bit data buffer independently of the previous CRC value.

This section contains the following APIs:

- ***HAL_CRC_Accumulate()***
- ***HAL_CRC_Calculate()***

13.2.4 Peripheral State functions

This subsection permits to get in run-time the status of the peripheral.

This section contains the following APIs:

- ***HAL_CRC_GetState()***

13.2.5 Detailed description of functions

HAL_CRC_Init

Function name	**HAL_StatusTypeDef HAL_CRC_Init (CRC_HandleTypeDef * hcrc)**
Function description	Initialize the CRC according to the specified parameters in the CRC_InitTypeDef and initialize the associated handle.
Parameters	• **hcrc:** CRC handle
Return values	• **HAL:** status

HAL_CRC_DeInit

Function name	**HAL_StatusTypeDef HAL_CRC_DeInit (CRC_HandleTypeDef * hcrc)**
Function description	DeInitialize the CRC peripheral.
Parameters	• **hcrc:** CRC handle
Return values	• **HAL:** status

HAL_CRC_MspInit

Function name	**void HAL_CRC_MspInit (CRC_HandleTypeDef * hcrc)**
Function description	Initializes the CRC MSP.
Parameters	• **hcrc:** CRC handle
Return values	• **None**

HAL_CRC_MspDeInit

Function name	**void HAL_CRC_MspDeInit (CRC_HandleTypeDef * hcrc)**
Function description	DeInitialize the CRC MSP.
Parameters	• **hcrc:** CRC handle
Return values	• **None**

HAL_CRC_Accumulate

Function name	**uint32_t HAL_CRC_Accumulate (CRC_HandleTypeDef * hcrc, uint32_t pBuffer, uint32_t BufferLength)**
Function description	Compute the 7, 8, 16 or 32-bit CRC value of an 8, 16 or 32-bit data buffer starting with the previously computed CRC as initialization value.
Parameters	• **hcrc:** CRC handle • **pBuffer:** pointer to the input data buffer, exact input data format is provided by hcrc->InputDataFormat. • **BufferLength:** input data buffer length (number of bytes if pBuffer type is * uint8_t, number of half-words if pBuffer type is * uint16_t, number of words if pBuffer type is * uint32_t).
Return values	• **uint32_t:** CRC (returned value LSBs for CRC shorter than 32 bits)
Notes	• By default, the API expects a uint32_t pointer as input buffer parameter. Input buffer pointers with other types simply need to be cast in uint32_t and the API will internally adjust its input data processing based on the handle field hcrc->InputDataFormat.

HAL_CRC_Calculate

Function name	**uint32_t HAL_CRC_Calculate (CRC_HandleTypeDef * hcrc, uint32_t pBuffer, uint32_t BufferLength)**
Function description	Compute the 7, 8, 16 or 32-bit CRC value of an 8, 16 or 32-bit data buffer starting with hcrc->Instance->INIT as initialization value.
Parameters	• **hcrc:** CRC handle • **pBuffer:** pointer to the input data buffer, exact input data format is provided by hcrc->InputDataFormat. • **BufferLength:** input data buffer length (number of bytes if pBuffer type is * uint8_t, number of half-words if pBuffer type is * uint16_t, number of words if pBuffer type is * uint32_t).
Return values	• **uint32_t:** CRC (returned value LSBs for CRC shorter than 32 bits)
Notes	• By default, the API expects a uint32_t pointer as input buffer parameter. Input buffer pointers with other types simply need to be cast in uint32_t and the API will internally adjust its input data processing based on the handle field hcrc->InputDataFormat.

HAL_CRC_GetState

Function name	**HAL_CRC_StateTypeDef HAL_CRC_GetState (CRC_HandleTypeDef * hcrc)**
Function description	Return the CRC handle state.
Parameters	• **hcrc:** CRC handle
Return values	• **HAL:** state

13.3 CRC Firmware driver defines

13.3.1 CRC

Default CRC computation initialization value

DEFAULT_CRC_INITVALUE Initial CRC default value

Indicates whether or not default init value is used

DEFAULT_INIT_VALUE_ENABLE Enable initial CRC default value

DEFAULT_INIT_VALUE_DISABLE Disable initial CRC default value

Indicates whether or not default polynomial is used

DEFAULT_POLYNOMIAL_ENABLE Enable default generating polynomial 0x04C11DB7

DEFAULT_POLYNOMIAL_DISABLE Disable default generating polynomial 0x04C11DB7U

Default CRC generating polynomial

DEFAULT_CRC32_POLY X^32U + X^26U + X^23U + X^22U + X^16U + X^12U + X^11U + X^10U +X^8U + X^7U + X^5U + X^4U + X^2U+ X +1U

CRC Exported Macros

__HAL_CRC_RESET_HANDLE_STATE

Description:

- Reset CRC handle state.

Parameters:

- __HANDLE__: CRC handle.

Return value:

- None

__HAL_CRC_DR_RESET

Description:

- Reset CRC Data Register.

Parameters:

- __HANDLE__: CRC handle

Return value:

- None

__HAL_CRC_INITIALCRCVALUE_CONFIG

Description:

- Set CRC INIT non-default value.

Parameters:

- __HANDLE__: CRC handle
- __INIT__: 32-bit initial value

Return value:

- None

__HAL_CRC_SET_IDR

Description:

- Store a 8-bit data in the Independent Data(ID) register.

Parameters:

- __HANDLE__: CRC handle
- __VALUE__: 8-bit value to be stored in the ID register

Return value:

- None

__HAL_CRC_GET_IDR

Description:

- Return the 8-bit data stored in the Independent Data(ID) register.

Parameters:

- __HANDLE__: CRC handle

Return value:

- 8-bit: value of the ID register

Input Buffer Format

CRC_INPUTDATA_FORMAT_UNDEFINED	Undefined input data format
CRC_INPUTDATA_FORMAT_BYTES	Input data in byte format
CRC_INPUTDATA_FORMAT_HALFWORDS	Input data in half-word format
CRC_INPUTDATA_FORMAT_WORDS	Input data in word format

Polynomial sizes to configure the IP

CRC_POLYLENGTH_32B	Resort to a 32-bit long generating polynomial
CRC_POLYLENGTH_16B	Resort to a 16-bit long generating polynomial
CRC_POLYLENGTH_8B	Resort to a 8-bit long generating polynomial
CRC_POLYLENGTH_7B	Resort to a 7-bit long generating polynomial

CRC polynomial possible sizes actual definitions

HAL_CRC_LENGTH_32B	32-bit long CRC
HAL_CRC_LENGTH_16B	16-bit long CRC
HAL_CRC_LENGTH_8B	8-bit long CRC
HAL_CRC_LENGTH_7B	7-bit long CRC

14 HAL CRC Extension Driver

14.1 CRCEx Firmware driver API description

14.1.1 How to use this driver

- Set user-defined generating polynomial thru HAL_CRCEx_Polynomial_Set()
- Configure Input or Output data inversion

14.1.2 Detailed description of functions

HAL_CRCEx_Polynomial_Set

Function name **HAL_StatusTypeDef HAL_CRCEx_Polynomial_Set (CRC_HandleTypeDef * hcrc, uint32_t Pol, uint32_t PolyLength)**

Function description Initialize the CRC polynomial if different from default one.

Parameters
- **hcrc:** CRC handle
- **Pol:** CRC generating polynomial (7, 8, 16 or 32-bit long). This parameter is written in normal representation, e.g.
  - for a polynomial of degree 7, X^7 + X^6 + X^5 + X^2 + 1 is written 0x65
  - for a polynomial of degree 16, X^16 + X^12 + X^5 + 1 is written 0x1021
- **PolyLength:** CRC polynomial length. This parameter can be one of the following values:
  - CRC_POLYLENGTH_7B: 7-bit long CRC (generating polynomial of degree 7)
  - CRC_POLYLENGTH_8B: 8-bit long CRC (generating polynomial of degree 8)
  - CRC_POLYLENGTH_16B: 16-bit long CRC (generating polynomial of degree 16)
  - CRC_POLYLENGTH_32B: 32-bit long CRC (generating polynomial of degree 32)

Return values
- **HAL:** status

HAL_CRCEx_Input_Data_Reverse

Function name **HAL_StatusTypeDef HAL_CRCEx_Input_Data_Reverse (CRC_HandleTypeDef * hcrc, uint32_t InputReverseMode)**

Function description Set the Reverse Input data mode.

Parameters
- **hcrc:** CRC handle
- **InputReverseMode:** Input Data inversion mode. This parameter can be one of the following values:
  - CRC_INPUTDATA_NOINVERSION: no change in bit order (default value)
  - CRC_INPUTDATA_INVERSION_BYTE: Byte-wise bit reversal
  - CRC_INPUTDATA_INVERSION_HALFWORD:

HalfWord-wise bit reversal
  - CRC_INPUTDATA_INVERSION_WORD: Word-wise bit reversal

Return values
- **HAL:** status

HAL_CRCEx_Output_Data_Reverse

Function name **HAL_StatusTypeDef HAL_CRCEx_Output_Data_Reverse (CRC_HandleTypeDef * hcrc, uint32_t OutputReverseMode)**

Function description Set the Reverse Output data mode.

Parameters
- **hcrc:** CRC handle
- **OutputReverseMode:** Output Data inversion mode. This parameter can be one of the following values:
  - CRC_OUTPUTDATA_INVERSION_DISABLE: no CRC inversion (default value)
  - CRC_OUTPUTDATA_INVERSION_ENABLE: bit-level inversion (e.g. for a 8-bit CRC: 0xB5 becomes 0xAD)

Return values
- **HAL:** status

14.2 CRCEx Firmware driver defines

14.2.1 CRCEx

CRC Extended Exported Macros

__HAL_CRC_OUTPUTREVERSAL_ENABLE

Description:
- Set CRC output reversal.

Parameters:
- __HANDLE__: CRC handle

Return value:
- None.

__HAL_CRC_OUTPUTREVERSAL_DISABLE

Description:
- Unset CRC output reversal.

Parameters:
- __HANDLE__: CRC handle

Return value:
- None.

__HAL_CRC_POLYNOMIAL_CONFIG	**Description:** • Set CRC non-default polynomial. **Parameters:** • __HANDLE__: CRC handle • __POLYNOMIAL__: 7, 8, 16 or 32-bit polynomial **Return value:** • None.
CRC Extended Input Data Inversion Modes	
CRC_INPUTDATA_INVERSION_NONE	No input data inversion
CRC_INPUTDATA_INVERSION_BYTE	Byte-wise input data inversion
CRC_INPUTDATA_INVERSION_HALFWORD	HalfWord-wise input data inversion
CRC_INPUTDATA_INVERSION_WORD	Word-wise input data inversion
CRC Extended Output Data Inversion Modes	
CRC_OUTPUTDATA_INVERSION_DISABLE	No output data inversion
CRC_OUTPUTDATA_INVERSION_ENABLE	Bit-wise output data inversion

15 HAL DAC Generic Driver

15.1 DAC Firmware driver registers structures

15.1.1 DAC_ChannelConfTypeDef

Data Fields

- ***uint32_t DAC_Trigger***
- ***uint32_t DAC_OutputBuffer***
- ***uint32_t DAC_OutputSwitch***

Field Documentation

- ***uint32_t DAC_ChannelConfTypeDef::DAC_Trigger***
  Specifies the external trigger for the selected DAC channel. This parameter can be a value of ***DACEx_trigger_selection***
- ***uint32_t DAC_ChannelConfTypeDef::DAC_OutputBuffer***
  Specifies whether the DAC channel output buffer is enabled or disabled. This parameter can be a value of ***DAC_output_buffer*** For a given DAC channel, is this paramater applies then DAC_OutputSwitch does not apply
- ***uint32_t DAC_ChannelConfTypeDef::DAC_OutputSwitch***
  Specifies whether the DAC channel output switch is enabled or disabled. This parameter can be a value of **DAC_OutputSwitch** For a given DAC channel, is this paramater applies then DAC_OutputBuffer does not apply

15.1.2 __DAC_HandleTypeDef

Data Fields

- ***DAC_TypeDef * Instance***
- ***__IO HAL_DAC_StateTypeDef State***
- ***HAL_LockTypeDef Lock***
- ***DMA_HandleTypeDef * DMA_Handle1***
- ***DMA_HandleTypeDef * DMA_Handle2***
- ***__IO uint32_t ErrorCode***

Field Documentation

- ***DAC_TypeDef* __DAC_HandleTypeDef::Instance***
  Register base address
- ***__IO HAL_DAC_StateTypeDef __DAC_HandleTypeDef::State***
  DAC communication state
- ***HAL_LockTypeDef __DAC_HandleTypeDef::Lock***
  DAC locking object
- ***DMA_HandleTypeDef* __DAC_HandleTypeDef::DMA_Handle1***
  Pointer DMA handler for channel 1U
- ***DMA_HandleTypeDef* __DAC_HandleTypeDef::DMA_Handle2***
  Pointer DMA handler for channel 2U
- ***__IO uint32_t __DAC_HandleTypeDef::ErrorCode***
  DAC Error code

15.2 DAC Firmware driver API description

15.2.1 DAC Peripheral features

DAC Channels

The device integrates up to 3 12-bit Digital Analog Converters that can be used independently or simultaneously (dual mode):

1. DAC1 channel1 with DAC1_OUT1 (PA4) as output
2. DAC1 channel2 with DAC1_OUT2 (PA5) as output (for STM32F3 devices having 2 channels on DAC1)
3. DAC2 channel1 with DAC2_OUT1 (PA6) as output (for STM32F3 devices having 2 DAC)

DAC Triggers

Digital to Analog conversion can be non-triggered using DAC_TRIGGER_NONE and DAC1_OUT1/DAC1_OUT2/DAC2_OUT1 is available once writing to DHRx register.

Digital to Analog conversion can be triggered by:

1. External event: EXTI Line 9 (any GPIOx_PIN_9) using DAC_TRIGGER_EXT_IT9. The used pin (GPIOx_PIN_9) must be configured in input mode.
2. Timers TRGO: TIM2, TIM4, TIM5, TIM6, TIM7 and TIM8 (DAC_TRIGGER_T2_TRGO, DAC_TRIGGER_T4_TRGO...)
3. Software using DAC_TRIGGER_SOFTWARE

DAC Buffer mode feature

Each DAC channel integrates an output buffer that can be used to reduce the output impedance, and to drive external loads directly without having to add an external operational amplifier. To enable, the output buffer use sConfig.DAC_OutputBuffer = DAC_OUTPUTBUFFER_ENABLE; Or An output switch (in STM32F303x4, STM32F303x6, STM32F303x8 c, STM32F334x6, STM32F334x8 & STM32F334xx). To enable, the output switch sConfig.DAC_OutputSwitch = DAC_OUTPUTSWITCH_ENABLE;



Refer to the device datasheet for more details about output impedance value with and without output buffer.

GPIO configurations guidelines

When a DAC channel is used (ex channel1 on PA4) and the other is not (ex channel2 on PA5 is configured in Analog and disabled). Channel1 may disturb channel2 as coupling effect. Note that there is no coupling on channel2 as soon as channel2 is turned on. Coupling on adjacent channel could be avoided as follows: when unused PA5 is configured as INPUT PULL-UP or DOWN. PA5 is configured in ANALOG just before it is turned on.

DAC wave generation feature

Both DAC channels of DAC1 can be used to generate note that wave generation is not available in DAC2.

1. Noise wave
2. Triangle wave Wave generation is NOT available in DAC2.

DAC data format

The DAC data format can be:

1. 8-bit right alignment using DAC_ALIGN_8B_R
2. 12-bit left alignment using DAC_ALIGN_12B_L
3. 12-bit right alignment using DAC_ALIGN_12B_R

DAC data value to voltage correspondance

The analog output voltage on each DAC channel pin is determined by the following equation:

DAC_OUTx = VREF+ * DOR / 4095

- with DOR is the Data Output Register

VEF+ is the input voltage reference (refer to the device datasheet)

e.g. To set DAC_OUT1 to 0.7V, use

- Assuming that VREF+ = 3.3V, DAC_OUT1 = (3.3U * 868U) / 4095U = 0.7V

DMA requests

A DMA1 or DMA2 request can be generated when an external trigger (but not a software trigger) occurs if DMA1 or DMA2 requests are enabled using HAL_DAC_Start_DMA().



For Dual mode and specific signal (Triangle and noise) generation please refer to Extended Features Driver description

15.2.2 How to use this driver

- DAC APB clock must be enabled to get write access to DAC registers using HAL_DAC_Init()
- Configure DAC_OUTx (DAC_OUT1: PA4, DAC_OUT2: PA5) in analog mode.
- Configure the DAC channel using HAL_DAC_ConfigChannel() function.
- Enable the DAC channel using HAL_DAC_Start() or HAL_DAC_Start_DMA() functions

Polling mode IO operation

- Start the DAC peripheral using HAL_DAC_Start()
- To read the DAC last data output value, use the HAL_DAC_GetValue() function.
- Stop the DAC peripheral using HAL_DAC_Stop()

DMA mode IO operation

- Start the DAC peripheral using HAL_DAC_Start_DMA(), at this stage the user specify the length of data to be transferred at each end of conversion
- At the middle of data transfer HAL_DAC_ConvHalfCpltCallbackCh1() or HAL_DACEx_ConvHalfCpltCallbackCh2() function is executed and user can add his own code by customization of function pointer HAL_DAC_ConvHalfCpltCallbackCh1() or HAL_DACEx_ConvHalfCpltCallbackCh2()
- At The end of data transfer HAL_DAC_ConvCpltCallbackCh1() or HAL_DACEx_ConvHalfCpltCallbackCh2() function is executed and user can add his

own code by customization of function pointer HAL_DAC_ConvCpltCallbackCh1() or HAL_DACEx_ConvHalfCpltCallbackCh2()
- In case of transfer Error, HAL_DAC_ErrorCallbackCh1() function is executed and user can add his own code by customization of function pointer HAL_DAC_ErrorCallbackCh1
- In case of DMA underrun, DAC interruption triggers and execute internal function HAL_DAC_IRQHandler. HAL_DAC_DMAUnderrunCallbackCh1() or HAL_DACEx_DMAUnderrunCallbackCh2() function is executed and user can add his own code by customization of function pointer HAL_DAC_DMAUnderrunCallbackCh1() or HAL_DACEx_DMAUnderrunCallbackCh2() and add his own code by customization of function pointer HAL_DAC_ErrorCallbackCh1()
- Stop the DAC peripheral using HAL_DAC_Stop_DMA()

DAC HAL driver macros list

Below the list of most used macros in DAC HAL driver.

- __HAL_DAC_ENABLE : Enable the DAC peripheral
- __HAL_DAC_DISABLE : Disable the DAC peripheral
- __HAL_DAC_CLEAR_FLAG: Clear the DAC's pending flags
- __HAL_DAC_GET_FLAG: Get the selected DAC's flag status



You can refer to the DAC HAL driver header file for more useful macros

15.2.3 Initialization and de-initialization functions

This section provides functions allowing to:

- Initialize and configure the DAC.
- De-initialize the DAC.

This section contains the following APIs:

- ***HAL_DAC_Init()***
- ***HAL_DAC_DeInit()***
- ***HAL_DAC_MspInit()***
- ***HAL_DAC_MspDeInit()***

15.2.4 IO operation functions

This section provides functions allowing to:

- Start conversion.
- Stop conversion.
- Start conversion and enable DMA transfer.
- Stop conversion and disable DMA transfer.
- Get result of conversion.
- Get result of dual mode conversion.

This section contains the following APIs:

- ***HAL_DAC_Start()***
- ***HAL_DAC_Stop()***
- ***HAL_DAC_Stop_DMA()***

- ***HAL_DAC_GetValue()***
- ***HAL_DACEx_DualGetValue()***
- ***HAL_DAC_ConvCpltCallbackCh1()***
- ***HAL_DAC_ConvHalfCpltCallbackCh1()***
- ***HAL_DAC_ErrorCallbackCh1()***
- ***HAL_DAC_DMAUnderrunCallbackCh1()***
- ***HAL_DAC_Start_DMA()***
- ***HAL_DAC_ConfigChannel()***
- ***HAL_DAC_IRQHandler()***

15.2.5 Peripheral Control functions

This section provides functions allowing to:

- Configure channels.
- Configure Triangle wave generation.
- Configure Noise wave generation.
- Set the specified data holding register value for DAC channel.
- Set the specified data holding register value for Dual DAC channels.

This section contains the following APIs:

- ***HAL_DAC_ConfigChannel()***
- ***HAL_DAC_SetValue()***
- ***HAL_DACEx_DualSetValue()***

15.2.6 DAC Peripheral State and Error functions

This subsection provides functions allowing to

- Check the DAC state.
- Check the DAC Errors.

This section contains the following APIs:

- ***HAL_DAC_GetState()***
- ***HAL_DAC_GetError()***

15.2.7 Detailed description of functions

HAL_DAC_Init

Function name	**HAL_StatusTypeDef HAL_DAC_Init (DAC_HandleTypeDef * hdac)**
Function description	Initialize the DAC peripheral according to the specified parameters in the DAC_InitStruct and initialize the associated handle.
Parameters	• **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.
Return values	• **HAL:** status

HAL_DAC_DeInit

Function name **HAL_StatusTypeDef HAL_DAC_DeInit (DAC_HandleTypeDef * hdac)**

Function description Deinitialize the DAC peripheral registers to their default reset values.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.

Return values
- **HAL:** status

HAL_DAC_MspInit

Function name **void HAL_DAC_MspInit (DAC_HandleTypeDef * hdac)**

Function description Initialize the DAC MSP.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.

Return values
- **None**

HAL_DAC_MspDeInit

Function name **void HAL_DAC_MspDeInit (DAC_HandleTypeDef * hdac)**

Function description DeInitialize the DAC MSP.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.

Return values
- **None**

HAL_DAC_Start

Function name **HAL_StatusTypeDef HAL_DAC_Start (DAC_HandleTypeDef * hdac, uint32_t Channel)**

Function description Enables DAC and starts conversion of channel.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.
- **Channel:** The selected DAC channel. This parameter can be one of the following values:
  - DAC_CHANNEL_1: DAC1 Channel1 selected
  - DAC_CHANNEL_2: DAC1 Channel2 selected
  - DAC_CHANNEL_1: DAC2 Channel1 selected

Return values
- **HAL:** status

HAL_DAC_Stop

Function name **HAL_StatusTypeDef HAL_DAC_Stop (DAC_HandleTypeDef * hdac, uint32_t Channel)**

Function description Disables DAC and stop conversion of channel.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.
- **Channel:** The selected DAC channel. This parameter can be one of the following values:
  - DAC_CHANNEL_1: DAC1 Channel1 selected
  - DAC_CHANNEL_2: DAC1 Channel2 selected
  - DAC_CHANNEL_1: DAC2 Channel1 selected

Return values
- **HAL:** status

HAL_DAC_Start_DMA

Function name **HAL_StatusTypeDef HAL_DAC_Start_DMA (DAC_HandleTypeDef * hdac, uint32_t Channel, uint32_t * pData, uint32_t Length, uint32_t Alignment)**

Function description Enables DAC and starts conversion of channel.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.
- **Channel:** The selected DAC channel. This parameter can be one of the following values:
  - DAC_CHANNEL_1: DAC1 Channel1 selected
  - DAC_CHANNEL_2: DAC1 Channel2 selected
- **pData:** The destination peripheral Buffer address.
- **Length:** The length of data to be transferred from memory to DAC peripheral
- **Alignment:** Specifies the data alignment for DAC channel. This parameter can be one of the following values:
  - DAC_ALIGN_8B_R: 8bit right data alignment selected
  - DAC_ALIGN_12B_L: 12bit left data alignment selected
  - DAC_ALIGN_12B_R: 12bit right data alignment selected

Return values
- **HAL:** status

HAL_DAC_Stop_DMA

Function name **HAL_StatusTypeDef HAL_DAC_Stop_DMA (DAC_HandleTypeDef * hdac, uint32_t Channel)**

Function description Disables DAC and stop conversion of channel.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.
- **Channel:** The selected DAC channel. This parameter can be one of the following values:
  - DAC_CHANNEL_1: DAC1 Channel1 selected
  - DAC_CHANNEL_2: DAC1 Channel2 selected
  - DAC_CHANNEL_1: DAC2 Channel1 selected

Return values
- **HAL:** status

HAL_DAC_GetValue

Function name **uint32_t HAL_DAC_GetValue (DAC_HandleTypeDef * hdac, uint32_t Channel)**

Function description Returns the last data output value of the selected DAC channel.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.
- **Channel:** The selected DAC channel. This parameter can be one of the following values:
  - DAC_CHANNEL_1: DAC1 Channel1 selected
  - DAC_CHANNEL_2: DAC1 Channel2 selected
  - DAC_CHANNEL_1: DAC2 Channel1 selected

Return values
- **The:** selected DAC channel data output value.

HAL_DAC_ConfigChannel

Function name **HAL_StatusTypeDef HAL_DAC_ConfigChannel (DAC_HandleTypeDef * hdac, DAC_ChannelConfTypeDef * sConfig, uint32_t Channel)**

Function description Configures the selected DAC channel.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.
- **sConfig:** DAC configuration structure.
- **Channel:** The selected DAC channel. This parameter can be one of the following values:
  - DAC_CHANNEL_1: DAC1 Channel1 selected
  - DAC_CHANNEL_2: DAC1 Channel2 selected
  - DAC_CHANNEL_1: DAC2 Channel1 selected

Return values
- **HAL:** status

HAL_DAC_IRQHandler

Function name **void HAL_DAC_IRQHandler (DAC_HandleTypeDef * hdac)**

Function description Handles DAC interrupt request This function uses the interruption of DMA underrun.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.

Return values
- **None**

HAL_DAC_ConvCpltCallbackCh1

Function name **void HAL_DAC_ConvCpltCallbackCh1 (DAC_HandleTypeDef * hdac)**

Function description Conversion complete callback in non blocking mode for Channel1.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.

Return values
- **None**

HAL_DAC_ConvHalfCpltCallbackCh1

Function name **void HAL_DAC_ConvHalfCpltCallbackCh1 (DAC_HandleTypeDef * hdac)**

Function description Conversion half DMA transfer callback in non blocking mode for Channel1.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.

Return values
- **None**

HAL_DAC_ErrorCallbackCh1

Function name **void HAL_DAC_ErrorCallbackCh1 (DAC_HandleTypeDef * hdac)**

Function description Error DAC callback for Channel1.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.

Return values
- **None**

HAL_DAC_DMAUnderrunCallbackCh1

Function name **void HAL_DAC_DMAUnderrunCallbackCh1 (DAC_HandleTypeDef * hdac)**

Function description DMA underrun DAC callback for Channel1.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.

Return values
- **None**

HAL_DAC_SetValue

Function name **HAL_StatusTypeDef HAL_DAC_SetValue (DAC_HandleTypeDef * hdac, uint32_t Channel, uint32_t Alignment, uint32_t Data)**

Function description

HAL_DAC_GetState

Function name **HAL_DAC_StateTypeDef HAL_DAC_GetState (DAC_HandleTypeDef * hdac)**

Function description return the DAC handle state

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.

Return values
- **HAL:** state

HAL_DAC_GetError

Function name	**uint32_t HAL_DAC_GetError (DAC_HandleTypeDef * hdac)**
Function description	Return the DAC error code.
Parameters	• **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.
Return values	• **DAC:** Error Code

15.3 DAC Firmware driver defines

15.3.1 DAC

DAC data alignement

DAC_ALIGN_12B_R

DAC_ALIGN_12B_L

DAC_ALIGN_8B_R

DAC Error Code

HAL_DAC_ERROR_NONE	No error
HAL_DAC_ERROR_DMAUNDERRUNCH1	DAC channel1 DMA underrun error
HAL_DAC_ERROR_DMAUNDERRUNCH2	DAC channel2 DMA underrun error
HAL_DAC_ERROR_DMA	DMA error

DAC Exported Macros

__HAL_DAC_RESET_HANDLE_STATE

Description:

- Reset DAC handle state.

Parameters:

- __HANDLE__: specifies the DAC handle.

Return value:

- None

__HAL_DAC_ENABLE

Description:

- Enable the DAC channel.

Parameters:

- __HANDLE__: specifies the DAC handle.
- __DAC_Channel__: specifies the DAC channel

Return value:

- None

__HAL_DAC_DISABLE

Description:

- Disable the DAC channel.

Parameters:

- __HANDLE__: specifies the DAC handle

- __DAC_Channel__: specifies the DAC channel.

Return value:

- None

DAC_DHR12R1_ALIGNMENT

Description:

- Set DHR12R1 alignment.

Parameters:

- __ALIGNMENT__: specifies the DAC alignment

Return value:

- None

DAC_DHR12R2_ALIGNMENT

Description:

- Set DHR12R2 alignment.

Parameters:

- __ALIGNMENT__: specifies the DAC alignment

Return value:

- None

DAC_DHR12RD_ALIGNMENT

Description:

- Set DHR12RD alignment.

Parameters:

- __ALIGNMENT__: specifies the DAC alignment

Return value:

- None

__HAL_DAC_ENABLE_IT

Description:

- Enable the DAC interrupt.

Parameters:

- __HANDLE__: specifies the DAC handle
- __INTERRUPT__: specifies the DAC interrupt. This parameter can be any combination of the following values:
  - DAC_IT_DMAUDR1: DAC channel 1 DMA underrun interrupt
  - DAC_IT_DMAUDR2: DAC channel 2 DMA underrun interrupt

Return value:

- None

__HAL_DAC_DISABLE_IT

Description:

- Disable the DAC interrupt.

Parameters:

- __HANDLE__: specifies the DAC handle
- __INTERRUPT__: specifies the DAC interrupt. This parameter can be any combination of the following values:
  - DAC_IT_DMAUDR1: DAC channel 1 DMA underrun interrupt
  - DAC_IT_DMAUDR2: DAC channel 2 DMA underrun interrupt

Return value:

- None

__HAL_DAC_GET_IT_SOURCE

Description:

- Check whether the specified DAC interrupt source is enabled or not.

Parameters:

- __HANDLE__: DAC handle
- __INTERRUPT__: DAC interrupt source to check This parameter can be any combination of the following values:
  - DAC_IT_DMAUDR1: DAC channel 1 DMA underrun interrupt
  - DAC_IT_DMAUDR2: DAC channel 2 DMA underrun interrupt

Return value:

- State: of interruption (SET or RESET)

__HAL_DAC_GET_FLAG

Description:

- Get the selected DAC's flag status.

Parameters:

- __HANDLE__: specifies the DAC handle.
- __FLAG__: specifies the DAC flag to get. This parameter can be any combination of the following values:
  - DAC_FLAG_DMAUDR1: DAC channel 1 DMA underrun flag
  - DAC_FLAG_DMAUDR2: DAC channel 2 DMA underrun flag

Return value:

- None

__HAL_DAC_CLEAR_FLAG

Description:

- Clear the DAC's flag.

Parameters:

- __HANDLE__: specifies the DAC handle.
- __FLAG__: specifies the DAC flag to clear. This parameter can be any combination of the following values:
  - DAC_FLAG_DMAUDR1: DAC channel 1 DMA underrun flag
  - DAC_FLAG_DMAUDR2: DAC channel 2 DMA underrun flag

Return value:

- None

DAC flags definition

DAC_FLAG_DMAUDR1

DAC_FLAG_DMAUDR2

DAC interrupts definition

DAC_IT_DMAUDR1

DAC_IT_DMAUDR2

DAC lfsrunmask triangleamplitude

DAC_LFSRUNMASK_BIT0	Unmask DAC channel LFSR bit0 for noise wave generation
DAC_LFSRUNMASK_BITS1_0	Unmask DAC channel LFSR bit[1:0] for noise wave generation
DAC_LFSRUNMASK_BITS2_0	Unmask DAC channel LFSR bit[2:0] for noise wave generation
DAC_LFSRUNMASK_BITS3_0	Unmask DAC channel LFSR bit[3:0] for noise wave generation
DAC_LFSRUNMASK_BITS4_0	Unmask DAC channel LFSR bit[4:0] for noise wave generation
DAC_LFSRUNMASK_BITS5_0	Unmask DAC channel LFSR bit[5:0] for noise wave generation
DAC_LFSRUNMASK_BITS6_0	Unmask DAC channel LFSR bit[6:0] for noise wave generation
DAC_LFSRUNMASK_BITS7_0	Unmask DAC channel LFSR bit[7:0] for noise wave generation
DAC_LFSRUNMASK_BITS8_0	Unmask DAC channel LFSR bit[8:0] for noise wave generation
DAC_LFSRUNMASK_BITS9_0	Unmask DAC channel LFSR bit[9:0] for noise wave generation
DAC_LFSRUNMASK_BITS10_0	Unmask DAC channel LFSR bit[10:0] for noise wave generation

DAC_LFSRUNMASK_BITS11_0	Unmask DAC channel LFSR bit[11:0] for noise wave generation
DAC_TRIANGLEAMPLITUDE_1	Select max triangle amplitude of 1U
DAC_TRIANGLEAMPLITUDE_3	Select max triangle amplitude of 3U
DAC_TRIANGLEAMPLITUDE_7	Select max triangle amplitude of 7U
DAC_TRIANGLEAMPLITUDE_15	Select max triangle amplitude of 15U
DAC_TRIANGLEAMPLITUDE_31	Select max triangle amplitude of 31U
DAC_TRIANGLEAMPLITUDE_63	Select max triangle amplitude of 63U
DAC_TRIANGLEAMPLITUDE_127	Select max triangle amplitude of 127U
DAC_TRIANGLEAMPLITUDE_255	Select max triangle amplitude of 255U
DAC_TRIANGLEAMPLITUDE_511	Select max triangle amplitude of 511U
DAC_TRIANGLEAMPLITUDE_1023	Select max triangle amplitude of 1023U
DAC_TRIANGLEAMPLITUDE_2047	Select max triangle amplitude of 2047U
DAC_TRIANGLEAMPLITUDE_4095	Select max triangle amplitude of 4095U
DAC output buffer	
DAC_OUTPUTBUFFER_ENABLE	
DAC_OUTPUTBUFFER_DISABLE	

16 HAL DAC Extension Driver

16.1 DACEx Firmware driver API description

16.1.1 How to use this driver

- When Dual mode is enabled (i.e. DAC Channel1 and Channel2 are used simultaneously) : Use HAL_DACEx_DualGetValue() to get digital data to be converted and use HAL_DACEx_DualSetValue() to set digital value to converted simultaneously in Channel 1 and Channel 2.
- Use HAL_DACEx_TriangleWaveGenerate() to generate Triangle signal.
- Use HAL_DACEx_NoiseWaveGenerate() to generate Noise signal.

16.1.2 Peripheral Control functions

This section provides functions allowing to:

- Set the specified data holding register value for DAC channel.
- Set the specified data holding register value for dual DAC channel (when DAC channel 2 is present in DAC 1U)

This section contains the following APIs:

- ***HAL_DAC_SetValue()***
- ***HAL_DACEx_DualSetValue()***

16.1.3 IO operation functions

This section provides functions allowing to:

- Start conversion.
- Start conversion and enable DMA transfer.
- Get result of conversion.
- Handle DAC IRQ's.
- Generate triangular-wave
- Generate noise-wave
- Callback functions for DAC1 Channel2 (when supported)

This section contains the following APIs:

- ***HAL_DAC_Start()***
- ***HAL_DAC_Start_DMA()***
- ***HAL_DAC_GetValue()***
- ***HAL_DACEx_DualGetValue()***
- ***HAL_DAC_IRQHandler()***
- ***HAL_DAC_ConfigChannel()***
- ***HAL_DACEx_TriangleWaveGenerate()***
- ***HAL_DACEx_NoiseWaveGenerate()***
- ***HAL_DACEx_ConvCpltCallbackCh2()***
- ***HAL_DACEx_ConvHalfCpltCallbackCh2()***
- ***HAL_DACEx_ErrorCallbackCh2()***
- ***HAL_DACEx_DMAUnderrunCallbackCh2()***
- ***HAL_DACEx_DualSetValue()***

16.1.4 Detailed description of functions

HAL_DACEx_DualGetValue

Function name **uint32_t HAL_DACEx_DualGetValue (DAC_HandleTypeDef * hdac)**

Function description Return the last data output value of the selected DAC channel.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.

Return values
- **The:** selected DAC channel data output value.

HAL_DACEx_DualSetValue

Function name **HAL_StatusTypeDef HAL_DACEx_DualSetValue (DAC_HandleTypeDef * hdac, uint32_t Alignment, uint32_t Data1, uint32_t Data2)**

Function description Set the specified data holding register value for dual DAC channel.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.
- **Alignment:** Specifies the data alignment for dual channel DAC. This parameter can be one of the following values:
  - DAC_ALIGN_8B_R: 8bit right data alignment selected
  - DAC_ALIGN_12B_L: 12bit left data alignment selected
  - DAC_ALIGN_12B_R: 12bit right data alignment selected
- **Data2:** Data for DAC Channel2 to be loaded in the selected data holding register.
- **Data1:** Data for DAC Channel1 to be loaded in the selected data holding register.

Return values
- **HAL:** status

Notes
- In dual mode, a unique register access is required to write in both DAC channels at the same time.

HAL_DACEx_TriangleWaveGenerate

Function name **HAL_StatusTypeDef HAL_DACEx_TriangleWaveGenerate (DAC_HandleTypeDef * hdac, uint32_t Channel, uint32_t Amplitude)**

Function description Enables or disables the selected DAC channel wave generation.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.
- **Channel:** The selected DAC channel. This parameter can be one of the following values:
  - DAC_CHANNEL_1: DAC1 Channel1 selected
  - DAC_CHANNEL_2: DAC1 Channel2 selected
- **Amplitude:** Select max triangle amplitude. This parameter can be one of the following values:
  - DAC_TRIANGLEAMPLITUDE_1: Select max triangle amplitude of 1
  - DAC_TRIANGLEAMPLITUDE_3: Select max triangle

amplitude of 3
  - DAC_TRIANGLEAMPLITUDE_7: Select max triangle amplitude of 7
  - DAC_TRIANGLEAMPLITUDE_15: Select max triangle amplitude of 15
  - DAC_TRIANGLEAMPLITUDE_31: Select max triangle amplitude of 31
  - DAC_TRIANGLEAMPLITUDE_63: Select max triangle amplitude of 63
  - DAC_TRIANGLEAMPLITUDE_127: Select max triangle amplitude of 127
  - DAC_TRIANGLEAMPLITUDE_255: Select max triangle amplitude of 255
  - DAC_TRIANGLEAMPLITUDE_511: Select max triangle amplitude of 511
  - DAC_TRIANGLEAMPLITUDE_1023: Select max triangle amplitude of 1023
  - DAC_TRIANGLEAMPLITUDE_2047: Select max triangle amplitude of 2047
  - DAC_TRIANGLEAMPLITUDE_4095: Select max triangle amplitude of 4095

Return values
- **HAL:** status

Notes
- Wave generation is not available in DAC2.

HAL_DACEx_NoiseWaveGenerate

Function name
HAL_StatusTypeDef HAL_DACEx_NoiseWaveGenerate (DAC_HandleTypeDef * hdac, uint32_t Channel, uint32_t Amplitude)

Function description
Enables or disables the selected DAC channel wave generation.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.
- **Channel:** The selected DAC channel. This parameter can be one of the following values:
  - DAC_CHANNEL_1: DAC1 Channel1 selected
  - DAC_CHANNEL_2: DAC1 Channel2 selected
- **Amplitude:** Unmask DAC channel LFSR for noise wave generation. This parameter can be one of the following values:
  - DAC_LFSRUNMASK_BIT0: Unmask DAC channel LFSR bit0 for noise wave generation
  - DAC_LFSRUNMASK_BITS1_0: Unmask DAC channel LFSR bit[1:0] for noise wave generation
  - DAC_LFSRUNMASK_BITS2_0: Unmask DAC channel LFSR bit[2:0] for noise wave generation
  - DAC_LFSRUNMASK_BITS3_0: Unmask DAC channel LFSR bit[3:0] for noise wave generation
  - DAC_LFSRUNMASK_BITS4_0: Unmask DAC channel LFSR bit[4:0] for noise wave generation
  - DAC_LFSRUNMASK_BITS5_0: Unmask DAC channel LFSR bit[5:0] for noise wave generation
  - DAC_LFSRUNMASK_BITS6_0: Unmask DAC channel

LFSR bit[6:0] for noise wave generation
- DAC_LFSRUNMASK_BITS7_0: Unmask DAC channel LFSR bit[7:0] for noise wave generation
- DAC_LFSRUNMASK_BITS8_0: Unmask DAC channel LFSR bit[8:0] for noise wave generation
- DAC_LFSRUNMASK_BITS9_0: Unmask DAC channel LFSR bit[9:0] for noise wave generation
- DAC_LFSRUNMASK_BITS10_0: Unmask DAC channel LFSR bit[10:0] for noise wave generation
- DAC_LFSRUNMASK_BITS11_0: Unmask DAC channel LFSR bit[11:0] for noise wave generation

Return values
- **HAL:** status

HAL_DACEx_ConvCpltCallbackCh2

Function name **void HAL_DACEx_ConvCpltCallbackCh2 (DAC_HandleTypeDef * hdac)**

Function description Conversion complete callback in non blocking mode for Channel2.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.

Return values
- **None**

HAL_DACEx_ConvHalfCpltCallbackCh2

Function name **void HAL_DACEx_ConvHalfCpltCallbackCh2 (DAC_HandleTypeDef * hdac)**

Function description Conversion half DMA transfer callback in non blocking mode for Channel2.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.

Return values
- **None**

HAL_DACEx_ErrorCallbackCh2

Function name **void HAL_DACEx_ErrorCallbackCh2 (DAC_HandleTypeDef * hdac)**

Function description Error DAC callback for Channel2.

Parameters
- **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.

Return values
- **None**

HAL_DACEx_DMAUnderrunCallbackCh2

Function name	**void HAL_DACEx_DMAUnderrunCallbackCh2 (DAC_HandleTypeDef * hdac)**
Function description	DMA underrun DAC callback for channel2.
Parameters	• **hdac:** pointer to a DAC_HandleTypeDef structure that contains the configuration information for the specified DAC.
Return values	• **None**

16.2 DACEx Firmware driver defines

16.2.1 DACEx

DACEx Channel selection

DAC_CHANNEL_1	DAC Channel 1U
DAC_CHANNEL_2	DAC Channel 2U

DACEx trigger selection

DAC_TRIGGER_NONE	Conversion is automatic once the DAC1_DHRxxxx register has been loaded, and not by external trigger
DAC_TRIGGER_T2_TRGO	TIM2 TRGO selected as external conversion trigger for DAC channel
DAC_TRIGGER_T4_TRGO	TIM4 TRGO selected as external conversion trigger for DAC channel
DAC_TRIGGER_T15_TRGO	TIM5 TRGO selected as external conversion trigger for DAC channel
DAC_TRIGGER_T6_TRGO	TIM6 TRGO selected as external conversion trigger for DAC channel
DAC_TRIGGER_T7_TRGO	TIM7 TRGO selected as external conversion trigger for DAC channel
DAC_TRIGGER_T3_TRGO	TIM3 TRGO selected as external conversion trigger for DAC channel Use
DAC_TRIGGER_T8_TRGO	TIM8 TRGO selected as external conversion trigger for DAC channel Use
DAC_TRIGGER_EXT_IT9	EXTI Line9 event selected as external conversion trigger for DAC channel
DAC_TRIGGER_SOFTWARE	Conversion started by software trigger for DAC channel
IS_DAC_TRIGGER	

17 HAL DMA Generic Driver

17.1 DMA Firmware driver registers structures

17.1.1 DMA_InitTypeDef

Data Fields

- ***uint32_t Direction***
- ***uint32_t PeriphInc***
- ***uint32_t MemInc***
- ***uint32_t PeriphDataAlignment***
- ***uint32_t MemDataAlignment***
- ***uint32_t Mode***
- ***uint32_t Priority***

Field Documentation

- ***uint32_t DMA_InitTypeDef::Direction***
  Specifies if the data will be transferred from memory to peripheral, from memory to memory or from peripheral to memory. This parameter can be a value of ***DMA_Data_transfer_direction***
- ***uint32_t DMA_InitTypeDef::PeriphInc***
  Specifies whether the Peripheral address register should be incremented or not. This parameter can be a value of ***DMA_Peripheral_incremented_mode***
- ***uint32_t DMA_InitTypeDef::MemInc***
  Specifies whether the memory address register should be incremented or not. This parameter can be a value of ***DMA_Memory_incremented_mode***
- ***uint32_t DMA_InitTypeDef::PeriphDataAlignment***
  Specifies the Peripheral data width. This parameter can be a value of ***DMA_Peripheral_data_size***
- ***uint32_t DMA_InitTypeDef::MemDataAlignment***
  Specifies the Memory data width. This parameter can be a value of ***DMA_Memory_data_size***
- ***uint32_t DMA_InitTypeDef::Mode***
  Specifies the operation mode of the DMAy Channelx. This parameter can be a value of ***DMA_mode***
  Note: The circular buffer mode cannot be used if the memory-to-memory data transfer is configured on the selected Channel
- ***uint32_t DMA_InitTypeDef::Priority***
  Specifies the software priority for the DMAy Channelx. This parameter can be a value of ***DMA_Priority_level***

17.1.2 __DMA_HandleTypeDef

Data Fields

- ***DMA_Channel_TypeDef * Instance***
- ***DMA_InitTypeDef Init***
- ***HAL_LockTypeDef Lock***
- ***HAL_DMA_StateTypeDef State***
- ***void * Parent***
- ***void(* XferCpltCallback***
- ***void(* XferHalfCpltCallback***

- ***void(* XferErrorCallback***
- ***void(* XferAbortCallback***
- ***__IO uint32_t ErrorCode***
- ***DMA_TypeDef * DmaBaseAddress***
- ***uint32_t ChannelIndex***

Field Documentation

- ***DMA_Channel_TypeDef* __DMA_HandleTypeDef::Instance***
  Register base address
- ***DMA_InitTypeDef __DMA_HandleTypeDef::Init***
  DMA communication parameters
- ***HAL_LockTypeDef __DMA_HandleTypeDef::Lock***
  DMA locking object
- ***HAL_DMA_StateTypeDef __DMA_HandleTypeDef::State***
  DMA transfer state
- ***void* __DMA_HandleTypeDef::Parent***
  Parent object state
- ***void(* __DMA_HandleTypeDef::XferCpltCallback)(struct __DMA_HandleTypeDef *hdma)***
  DMA transfer complete callback
- ***void(* __DMA_HandleTypeDef::XferHalfCpltCallback)(struct __DMA_HandleTypeDef *hdma)***
  DMA Half transfer complete callback
- ***void(* __DMA_HandleTypeDef::XferErrorCallback)(struct __DMA_HandleTypeDef *hdma)***
  DMA transfer error callback
- ***void(* __DMA_HandleTypeDef::XferAbortCallback)(struct __DMA_HandleTypeDef *hdma)***
  DMA transfer abort callback
- ***__IO uint32_t __DMA_HandleTypeDef::ErrorCode***
  DMA Error code
- ***DMA_TypeDef* __DMA_HandleTypeDef::DmaBaseAddress***
  DMA Channel Base Address
- ***uint32_t __DMA_HandleTypeDef::ChannelIndex***
  DMA Channel Index

17.2 DMA Firmware driver API description

17.2.1 How to use this driver

1. Enable and configure the peripheral to be connected to the DMA Channel (except for internal SRAM / FLASH memories: no initialization is necessary). Please refer to Reference manual for connection between peripherals and DMA requests .
2. For a given Channel, program the required configuration through the following parameters: Transfer Direction, Source and Destination data formats, Circular or Normal mode, Channel Priority level, Source and Destination Increment mode, using HAL_DMA_Init() function.
3. Use HAL_DMA_GetState() function to return the DMA state and HAL_DMA_GetError() in case of error detection.
4. Use HAL_DMA_Abort() function to abort the current transfer In Memory-to-Memory transfer mode, Circular mode is not allowed.

Polling mode IO operation

- Use HAL_DMA_Start() to start DMA transfer after the configuration of Source address and destination address and the Length of data to be transferred
- Use HAL_DMA_PollForTransfer() to poll for the end of current transfer, in this case a fixed Timeout can be configured by User depending from his application.

Interrupt mode IO operation

- Configure the DMA interrupt priority using HAL_NVIC_SetPriority()
- Enable the DMA IRQ handler using HAL_NVIC_EnableIRQ()
- Use HAL_DMA_Start_IT() to start DMA transfer after the configuration of Source address and destination address and the Length of data to be transferred. In this case the DMA interrupt is configured
- Use HAL_DMA_Channel_IRQHandler() called under DMA_IRQHandler() Interrupt subroutine
- At the end of data transfer HAL_DMA_IRQHandler() function is executed and user can add his own function by customization of function pointer XferCpltCallback and XferErrorCallback (i.e a member of DMA handle structure).

DMA HAL driver macros list

Below the list of most used macros in DMA HAL driver.



You can refer to the DMA HAL driver header file for more useful macros

17.2.2 Initialization and de-initialization functions

This section provides functions allowing to initialize the DMA Channel source and destination addresses, incrementation and data sizes, transfer direction, circular/normal mode selection, memory-to-memory mode selection and Channel priority value.

The HAL_DMA_Init() function follows the DMA configuration procedures as described in reference manual.

This section contains the following APIs:

- ***HAL_DMA_Init()***
- ***HAL_DMA_DeInit()***

17.2.3 IO operation functions

This section provides functions allowing to:

- Configure the source, destination address and data length and Start DMA transfer
- Configure the source, destination address and data length and Start DMA transfer with interrupt
- Abort DMA transfer
- Poll for transfer complete
- Handle DMA interrupt request

This section contains the following APIs:

- ***HAL_DMA_Start()***
- ***HAL_DMA_Start_IT()***
- ***HAL_DMA_Abort()***

- ***HAL_DMA_Abort_IT()***
- ***HAL_DMA_PollForTransfer()***
- ***HAL_DMA_IRQHandler()***
- ***HAL_DMA_RegisterCallback()***
- ***HAL_DMA_UnRegisterCallback()***

17.2.4 State and Errors functions

This subsection provides functions allowing to

- Check the DMA state
- Get error code

This section contains the following APIs:

- ***HAL_DMA_GetState()***
- ***HAL_DMA_GetError()***

17.2.5 Detailed description of functions

HAL_DMA_Init

Function name **HAL_StatusTypeDef HAL_DMA_Init (DMA_HandleTypeDef * hdma)**

Function description Initialize the DMA according to the specified parameters in the DMA_InitTypeDef and initialize the associated handle.

Parameters
- **hdma:** Pointer to a DMA_HandleTypeDef structure that contains the configuration information for the specified DMA Channel.

Return values
- **HAL:** status

HAL_DMA_DeInit

Function name **HAL_StatusTypeDef HAL_DMA_DeInit (DMA_HandleTypeDef * hdma)**

Function description DeInitialize the DMA peripheral.

Parameters
- **hdma:** pointer to a DMA_HandleTypeDef structure that contains the configuration information for the specified DMA Channel.

Return values
- **HAL:** status

HAL_DMA_Start

Function name **HAL_StatusTypeDef HAL_DMA_Start (DMA_HandleTypeDef * hdma, uint32_t SrcAddress, uint32_t DstAddress, uint32_t DataLength)**

Function description Start the DMA Transfer.

Parameters
- **hdma:** : pointer to a DMA_HandleTypeDef structure that contains the configuration information for the specified DMA Channel.
- **SrcAddress:** The source memory Buffer address
- **DstAddress:** The destination memory Buffer address

- **DataLength:** The length of data to be transferred from source to destination

Return values
- **HAL:** status

HAL_DMA_Start_IT

Function name **HAL_StatusTypeDef HAL_DMA_Start_IT (DMA_HandleTypeDef * hdma, uint32_t SrcAddress, uint32_t DstAddress, uint32_t DataLength)**

Function description Start the DMA Transfer with interrupt enabled.

Parameters
- **hdma:** pointer to a DMA_HandleTypeDef structure that contains the configuration information for the specified DMA Channel.
- **SrcAddress:** The source memory Buffer address
- **DstAddress:** The destination memory Buffer address
- **DataLength:** The length of data to be transferred from source to destination

Return values
- **HAL:** status

HAL_DMA_Abort

Function name **HAL_StatusTypeDef HAL_DMA_Abort (DMA_HandleTypeDef * hdma)**

Function description Abort the DMA Transfer.

Parameters
- **hdma:** : pointer to a DMA_HandleTypeDef structure that contains the configuration information for the specified DMA Channel.

Return values
- **HAL:** status

HAL_DMA_Abort_IT

Function name **HAL_StatusTypeDef HAL_DMA_Abort_IT (DMA_HandleTypeDef * hdma)**

Function description Abort the DMA Transfer in Interrupt mode.

Parameters
- **hdma:** : pointer to a DMA_HandleTypeDef structure that contains the configuration information for the specified DMA Stream.

Return values
- **HAL:** status

HAL_DMA_PollForTransfer

Function name **HAL_StatusTypeDef HAL_DMA_PollForTransfer (DMA_HandleTypeDef * hdma, uint32_t CompleteLevel, uint32_t Timeout)**

Function description Polling for transfer complete.

Parameters
- **hdma:** pointer to a DMA_HandleTypeDef structure that contains the configuration information for the specified DMA Channel.

- **CompleteLevel:** Specifies the DMA level complete.
- **Timeout:** Timeout duration.

Return values
- **HAL:** status

HAL_DMA_IRQHandler

Function name **void HAL_DMA_IRQHandler (DMA_HandleTypeDef * hdma)**

Function description Handle DMA interrupt request.

Parameters
- **hdma:** pointer to a DMA_HandleTypeDef structure that contains the configuration information for the specified DMA Channel.

Return values
- **None**

HAL_DMA_RegisterCallback

Function name **HAL_StatusTypeDef HAL_DMA_RegisterCallback (DMA_HandleTypeDef * hdma, HAL_DMA_CallbackIDTypeDef CallbackID, void(*)(DMA_HandleTypeDef *_hdma) pCallback)**

Function description Register callbacks.

Parameters
- **hdma:** pointer to a DMA_HandleTypeDef structure that contains the configuration information for the specified DMA Stream.
- **CallbackID:** User Callback identifer a HAL_DMA_CallbackIDTypeDef ENUM as parameter.
- **pCallback:** pointer to private callback function which has pointer to a DMA_HandleTypeDef structure as parameter.

Return values
- **HAL:** status

HAL_DMA_UnRegisterCallback

Function name **HAL_StatusTypeDef HAL_DMA_UnRegisterCallback (DMA_HandleTypeDef * hdma, HAL_DMA_CallbackIDTypeDef CallbackID)**

Function description UnRegister callbacks.

Parameters
- **hdma:** pointer to a DMA_HandleTypeDef structure that contains the configuration information for the specified DMA Stream.
- **CallbackID:** User Callback identifer a HAL_DMA_CallbackIDTypeDef ENUM as parameter.

Return values
- **HAL:** status

HAL_DMA_GetState

Function name	**HAL_DMA_StateTypeDef HAL_DMA_GetState (DMA_HandleTypeDef * hdma)**
Function description	Returns the DMA state.
Parameters	• **hdma:** pointer to a DMA_HandleTypeDef structure that contains the configuration information for the specified DMA Channel.
Return values	• **HAL:** state

HAL_DMA_GetError

Function name	**uint32_t HAL_DMA_GetError (DMA_HandleTypeDef * hdma)**
Function description	Return the DMA error code.
Parameters	• **hdma:** pointer to a DMA_HandleTypeDef structure that contains the configuration information for the specified DMA Channel.
Return values	• **DMA:** Error Code

17.3 DMA Firmware driver defines

17.3.1 DMA

DMA Data transfer direction

DMA_PERIPH_TO_MEMORY	Peripheral to memory direction
DMA_MEMORY_TO_PERIPH	Memory to peripheral direction
DMA_MEMORY_TO_MEMORY	Memory to memory direction

DMA Error Code

HAL_DMA_ERROR_NONE	No error
HAL_DMA_ERROR_TE	Transfer error
HAL_DMA_ERROR_NO_XFER	no ongoin transfer
HAL_DMA_ERROR_TIMEOUT	Timeout error
HAL_DMA_ERROR_NOT_SUPPORTED	Not supported mode

DMA Exported Macros

__HAL_DMA_RESET_HANDLE_STATE

Description:

- Reset DMA handle state.

Parameters:

- __HANDLE__: DMA handle.

Return value:

- None

__HAL_DMA_ENABLE

Description:

- Enable the specified DMA Channel.

Parameters:

- __HANDLE__: DMA handle

Return value:

- None

__HAL_DMA_DISABLE

Description:

- Disable the specified DMA Channel.

Parameters:

- __HANDLE__: DMA handle

Return value:

- None

__HAL_DMA_ENABLE_IT

Description:

- Enables the specified DMA Channel interrupts.

Parameters:

- __HANDLE__: DMA handle
- __INTERRUPT__: specifies the DMA interrupt sources to be enabled or disabled. This parameter can be any combination of the following values:
  - DMA_IT_TC: Transfer complete interrupt mask
  - DMA_IT_HT: Half transfer complete interrupt mask
  - DMA_IT_TE: Transfer error interrupt mask

Return value:

- None

__HAL_DMA_DISABLE_IT

Description:

- Disables the specified DMA Channel interrupts.

Parameters:

- __HANDLE__: DMA handle
- __INTERRUPT__: specifies the DMA interrupt sources to be enabled or disabled. This parameter can be any combination of the following values:
  - DMA_IT_TC: Transfer complete interrupt mask
  - DMA_IT_HT: Half transfer complete interrupt mask

– DMA_IT_TE: Transfer error interrupt mask

Return value:

- None

__HAL_DMA_GET_IT_SOURCE

Description:

- Checks whether the specified DMA Channel interrupt is enabled or disabled.

Parameters:

- __HANDLE__: DMA handle
- __INTERRUPT__: specifies the DMA interrupt source to check. This parameter can be one of the following values:
  – DMA_IT_TC: Transfer complete interrupt mask
  – DMA_IT_HT: Half transfer complete interrupt mask
  – DMA_IT_TE: Transfer error interrupt mask

Return value:

- The: state of DMA_IT (SET or RESET).

__HAL_DMA_GET_COUNTER

Description:

- Returns the number of remaining data units in the current DMAy Channelx transfer.

Parameters:

- __HANDLE__: DMA handle

Return value:

- The: number of remaining data units in the current DMA Channel transfer.

DMA flag definitions

DMA_FLAG_GL1

DMA_FLAG_TC1

DMA_FLAG_HT1

DMA_FLAG_TE1

DMA_FLAG_GL2

DMA_FLAG_TC2

DMA_FLAG_HT2

DMA_FLAG_TE2

DMA_FLAG_GL3

DMA_FLAG_TC3

DMA_FLAG_HT3

DMA_FLAG_TE3
DMA_FLAG_GL4
DMA_FLAG_TC4
DMA_FLAG_HT4
DMA_FLAG_TE4
DMA_FLAG_GL5
DMA_FLAG_TC5
DMA_FLAG_HT5
DMA_FLAG_TE5
DMA_FLAG_GL6
DMA_FLAG_TC6
DMA_FLAG_HT6
DMA_FLAG_TE6
DMA_FLAG_GL7
DMA_FLAG_TC7
DMA_FLAG_HT7
DMA_FLAG_TE7

DMA interrupt enable definitions

DMA_IT_TC
DMA_IT_HT
DMA_IT_TE

DMA Memory data size

DMA_MDATAALIGN_BYTE	Memory data alignment : Byte
DMA_MDATAALIGN_HALFWORD	Memory data alignment : HalfWord
DMA_MDATAALIGN_WORD	Memory data alignment : Word

DMA Memory incremented mode

DMA_MINC_ENABLE	Memory increment mode Enable
DMA_MINC_DISABLE	Memory increment mode Disable

DMA mode

DMA_NORMAL	Normal Mode
DMA_CIRCULAR	Circular Mode

DMA Peripheral data size

DMA_PDATAALIGN_BYTE	Peripheral data alignment : Byte
DMA_PDATAALIGN_HALFWORD	Peripheral data alignment : HalfWord
DMA_PDATAALIGN_WORD	Peripheral data alignment : Word

DMA Peripheral incremented mode

DMA_PINC_ENABLE	Peripheral increment mode Enable
DMA_PINC_DISABLE	Peripheral increment mode Disable

DMA Priority level

DMA_PRIORITY_LOW	Priority level : Low
DMA_PRIORITY_MEDIUM	Priority level : Medium
DMA_PRIORITY_HIGH	Priority level : High
DMA_PRIORITY_VERY_HIGH	Priority level : Very_High

DMA Remap Enable

__HAL_DMA_REMAP_CHANNEL_ENABLE

Description:

- DMA remapping enable/disable macros.

Parameters:

- __DMA_REMAP__: This parameter can be a value of

__HAL_DMA_REMAP_CHANNEL_DISABLE

18 HAL DMA Extension Driver

18.1 DMAEx Firmware driver defines

18.1.1 DMAEx

DMA Extended Exported Macros

__HAL_DMA_GET_TC_FLAG_INDEX

Description:

- Returns the current DMA Channel transfer complete flag.

Parameters:

- __HANDLE__: DMA handle

Return value:

- The: specified transfer complete flag index.

__HAL_DMA_GET_HT_FLAG_INDEX

Description:

- Returns the current DMA Channel half transfer complete flag.

Parameters:

- __HANDLE__: DMA handle

Return value:

- The: specified half transfer complete flag index.

__HAL_DMA_GET_TE_FLAG_INDEX

Description:

- Returns the current DMA Channel transfer error flag.

Parameters:

- __HANDLE__: DMA handle

Return value:

- The: specified transfer error flag index.

__HAL_DMA_GET_GI_FLAG_INDEX

Description:

- Return the current DMA Channel Global interrupt flag.

Parameters:

- __HANDLE__: DMA handle

Return value:

- The: specified transfer error flag index.

__HAL_DMA_GET_FLAG

Description:

- Get the DMA Channel pending flags.

Parameters:

- __HANDLE__: DMA handle
- __FLAG__: Get the specified flag. This parameter can be any combination of the following values:
  - DMA_FLAG_TCx: Transfer complete flag
  - DMA_FLAG_HTx: Half transfer complete flag
  - DMA_FLAG_TEx: Transfer error flag Where x can be 1_7 or 1_5 (depending on DMA1 or DMA2) to select the DMA Channel flag.

Return value:

- The: state of FLAG (SET or RESET).

__HAL_DMA_CLEAR_FLAG

Description:

- Clears the DMA Channel pending flags.

Parameters:

- __HANDLE__: DMA handle
- __FLAG__: specifies the flag to clear. This parameter can be any combination of the following values:
  - DMA_FLAG_TCx: Transfer complete flag
  - DMA_FLAG_HTx: Half transfer complete flag
  - DMA_FLAG_TEx: Transfer error flag Where x can be 1_7 or 1_5 (depending on DMA1 or DMA2) to select the DMA Channel flag.

Return value:

- None

19 HAL FLASH Generic Driver

19.1 FLASH Firmware driver registers structures

19.1.1 FLASH_ProcessTypeDef

Data Fields

- ***__IO FLASH_ProcedureTypeDef ProcedureOnGoing***
- ***__IO uint32_t DataRemaining***
- ***__IO uint32_t Address***
- ***__IO uint64_t Data***
- ***HAL_LockTypeDef Lock***
- ***__IO uint32_t ErrorCode***

Field Documentation

- ***__IO FLASH_ProcedureTypeDef FLASH_ProcessTypeDef::ProcedureOnGoing***
  Internal variable to indicate which procedure is ongoing or not in IT context
- ***__IO uint32_t FLASH_ProcessTypeDef::DataRemaining***
  Internal variable to save the remaining pages to erase or half-word to program in IT context
- ***__IO uint32_t FLASH_ProcessTypeDef::Address***
  Internal variable to save address selected for program or erase
- ***__IO uint64_t FLASH_ProcessTypeDef::Data***
  Internal variable to save data to be programmed
- ***HAL_LockTypeDef FLASH_ProcessTypeDef::Lock***
  FLASH locking object
- ***__IO uint32_t FLASH_ProcessTypeDef::ErrorCode***
  FLASH error code This parameter can be a value of ***FLASH_Error_Codes***

19.2 FLASH Firmware driver API description

19.2.1 FLASH peripheral features

The Flash memory interface manages CPU AHB I-Code and D-Code accesses to the Flash memory. It implements the erase and program Flash memory operations and the read and write protection mechanisms.

The Flash memory interface accelerates code execution with a system of instruction prefetch.

The FLASH main features are:

- Flash memory read operations
- Flash memory program/erase operations
- Read / write protections
- Prefetch on I-Code
- Option Bytes programming

19.2.2 How to use this driver

This driver provides functions and macros to configure and program the FLASH memory of all STM32F3xx devices.

1. FLASH Memory I/O Programming functions: this group includes all needed functions to erase and program the main memory:
   - Lock and Unlock the FLASH interface
   - Erase function: Erase page, erase all pages
   - Program functions: half word, word and doubleword
2. FLASH Option Bytes Programming functions: this group includes all needed functions to manage the Option Bytes:
   - Lock and Unlock the Option Bytes
   - Set/Reset the write protection
   - Set the Read protection Level
   - Program the user Option Bytes
   - Launch the Option Bytes loader
   - Erase Option Bytes
   - Program the data Option Bytes
   - Get the Write protection.
   - Get the user option bytes.
3. Interrupts and flags management functions : this group includes all needed functions to:
   - Handle FLASH interrupts
   - Wait for last FLASH operation according to its status
   - Get error flag status

In addition to these function, this driver includes a set of macros allowing to handle the following operations:

- Set/Get the latency
- Enable/Disable the prefetch buffer
- Enable/Disable the half cycle access
- Enable/Disable the FLASH interrupts
- Monitor the FLASH flags status

19.2.3 Peripheral Control functions

This subsection provides a set of functions allowing to control the FLASH memory operations.

This section contains the following APIs:

- ***HAL_FLASH_Unlock()***
- ***HAL_FLASH_Lock()***
- ***HAL_FLASH_OB_Unlock()***
- ***HAL_FLASH_OB_Lock()***
- ***HAL_FLASH_OB_Launch()***

19.2.4 Peripheral Errors functions

This subsection permit to get in run-time errors of the FLASH peripheral.

This section contains the following APIs:

- ***HAL_FLASH_GetError()***

19.2.5 Detailed description of functions

HAL_FLASH_Program

Function name	**HAL_StatusTypeDef HAL_FLASH_Program (uint32_t TypeProgram, uint32_t Address, uint64_t Data)**
Function description	Program halfword, word or double word at a specified address.
Parameters	• **TypeProgram:** Indicate the way to program at a specified address. This parameter can be a value of FLASH Type Program • **Address:** Specifie the address to be programmed. • **Data:** Specifie the data to be programmed
Return values	• **HAL_StatusTypeDef:** HAL Status
Notes	• The function HAL_FLASH_Unlock() should be called before to unlock the FLASH interface The function HAL_FLASH_Lock() should be called after to lock the FLASH interface • If an erase and a program operations are requested simultaneously, the erase operation is performed before the program one. • FLASH should be previously erased before new programmation (only exception to this is when 0x0000 is programmed)

HAL_FLASH_Program_IT

Function name	**HAL_StatusTypeDef HAL_FLASH_Program_IT (uint32_t TypeProgram, uint32_t Address, uint64_t Data)**
Function description	Program halfword, word or double word at a specified address with interrupt enabled.
Parameters	• **TypeProgram:** Indicate the way to program at a specified address. This parameter can be a value of FLASH Type Program • **Address:** Specifie the address to be programmed. • **Data:** Specifie the data to be programmed
Return values	• **HAL_StatusTypeDef:** HAL Status
Notes	• The function HAL_FLASH_Unlock() should be called before to unlock the FLASH interface The function HAL_FLASH_Lock() should be called after to lock the FLASH interface • If an erase and a program operations are requested simultaneously, the erase operation is performed before the program one.

HAL_FLASH_IRQHandler

Function name	**void HAL_FLASH_IRQHandler (void)**
Function description	This function handles FLASH interrupt request.
Return values	• **None**

HAL_FLASH_EndOfOperationCallback

Function name **void HAL_FLASH_EndOfOperationCallback (uint32_t ReturnValue)**

Function description FLASH end of operation interrupt callback.

Parameters
- **ReturnValue:** The value saved in this parameter depends on the ongoing procedure
  - Mass Erase: No return value expected
  - Pages Erase: Address of the page which has been erased (if 0xFFFFFFFF, it means that all the selected pages have been erased)
  - Program: Address which was selected for data program

Return values
- **None**

HAL_FLASH_OperationErrorCallback

Function name **void HAL_FLASH_OperationErrorCallback (uint32_t ReturnValue)**

Function description FLASH operation error interrupt callback.

Parameters
- **ReturnValue:** The value saved in this parameter depends on the ongoing procedure
  - Mass Erase: No return value expected
  - Pages Erase: Address of the page which returned an error
  - Program: Address which was selected for data program

Return values
- **None**

HAL_FLASH_Unlock

Function name **HAL_StatusTypeDef HAL_FLASH_Unlock (void)**

Function description Unlock the FLASH control register access.

Return values
- **HAL:** Status

HAL_FLASH_Lock

Function name **HAL_StatusTypeDef HAL_FLASH_Lock (void)**

Function description Locks the FLASH control register access.

Return values
- **HAL:** Status

HAL_FLASH_OB_Unlock

Function name **HAL_StatusTypeDef HAL_FLASH_OB_Unlock (void)**

Function description Unlock the FLASH Option Control Registers access.

Return values
- **HAL:** Status

HAL_FLASH_OB_Lock

Function name	**HAL_StatusTypeDef HAL_FLASH_OB_Lock (void)**
Function description	Lock the FLASH Option Control Registers access.
Return values	• **HAL:** Status

HAL_FLASH_OB_Launch

Function name	**HAL_StatusTypeDef HAL_FLASH_OB_Launch (void)**
Function description	Launch the option byte loading.
Return values	• **HAL:** Status
Notes	• This function will reset automatically the MCU.

HAL_FLASH_GetError

Function name	**uint32_t HAL_FLASH_GetError (void)**
Function description	Get the specific FLASH error flag.
Return values	• **FLASH_ErrorCode:** The returned value can be: FLASH Error Codes

FLASH_WaitForLastOperation

Function name	**HAL_StatusTypeDef FLASH_WaitForLastOperation (uint32_t Timeout)**
Function description	Wait for a FLASH operation to complete.
Parameters	• **Timeout:** maximum flash operation timeout
Return values	• **HAL:** Status

19.3 FLASH Firmware driver defines

19.3.1 FLASH

FLASH Error Codes

HAL_FLASH_ERROR_NONE	No error
HAL_FLASH_ERROR_PROG	Programming error
HAL_FLASH_ERROR_WRP	Write protection error

FLASH Flag definition

FLASH_FLAG_BSY	FLASH Busy flag
FLASH_FLAG_PGERR	FLASH Programming error flag
FLASH_FLAG_WRPERR	FLASH Write protected error flag
FLASH_FLAG_EOP	FLASH End of Operation flag

FLASH Half Cycle

__HAL_FLASH_HALF_CYCLE_ACCESS_ENABLE

Description:

- Enable the FLASH half cycle access.

Return value:

- None

__HAL_FLASH_HALF_CYCLE_ACCESS_DISABLE

Description:

- Disable the FLASH half cycle access.

Return value:

- None

FLASH Interrupts

__HAL_FLASH_ENABLE_IT

Description:

- Enable the specified FLASH interrupt.

Parameters:

- __INTERRUPT__: FLASH interrupt This parameter can be any combination of the following values:
  - FLASH_IT_EOP End of FLASH Operation Interrupt
  - FLASH_IT_ERR Error Interrupt

Return value:

- none

__HAL_FLASH_DISABLE_IT

Description:

- Disable the specified FLASH interrupt.

Parameters:

- __INTERRUPT__: FLASH interrupt This parameter can be any combination of the following values:
  - FLASH_IT_EOP End of FLASH Operation Interrupt
  - FLASH_IT_ERR Error Interrupt

Return value:

- none

__HAL_FLASH_GET_FLAG

Description:

- Get the specified FLASH flag status.

Parameters:

- __FLAG__: specifies the FLASH flag to check. This parameter can be one of the following values:
  - FLASH_FLAG_BSY FLASH Busy flag
  - FLASH_FLAG_EOP FLASH End of Operation flag
  - FLASH_FLAG_WRPERR FLASH Write

protected error flag
  - FLASH_FLAG_PGERR FLASH Programming error flag

Return value:

- The: new state of __FLAG__ (SET or RESET).

__HAL_FLASH_CLEAR_FLAG

Description:

- Clear the specified FLASH flag.

Parameters:

- __FLAG__: specifies the FLASH flags to clear. This parameter can be any combination of the following values:
  - FLASH_FLAG_EOP FLASH End of Operation flag
  - FLASH_FLAG_WRPERR FLASH Write protected error flag
  - FLASH_FLAG_PGERR FLASH Programming error flag

Return value:

- none

FLASH Interrupt definition

FLASH_IT_EOP	End of FLASH Operation Interrupt source
FLASH_IT_ERR	Error Interrupt source

FLASH Latency

FLASH_LATENCY_0	FLASH Zero Latency cycle
FLASH_LATENCY_1	FLASH One Latency cycle
FLASH_LATENCY_2	FLASH Two Latency cycles

FLASH Prefetch

__HAL_FLASH_PREFETCH_BUFFER_ENABLE

Description:

- Enable the FLASH prefetch buffer.

Return value:

- None

__HAL_FLASH_PREFETCH_BUFFER_DISABLE

Description:

- Disable the FLASH prefetch buffer.

Return value:

- None

FLASH Type Program

FLASH_TYPEPROGRAM_HALFWORD	Program a half-word (16-bit) at a specified address.
FLASH_TYPEPROGRAM_WORD	Program a word (32-bit) at a specified address.
FLASH_TYPEPROGRAM_DOUBLEWORD	Program a double word (64-bit) at a specified address

20 HAL FLASH Extension Driver

20.1 FLASHEx Firmware driver registers structures

20.1.1 FLASH_EraseInitTypeDef

Data Fields

- ***uint32_t TypeErase***
- ***uint32_t PageAddress***
- ***uint32_t NbPages***

Field Documentation

- ***uint32_t FLASH_EraseInitTypeDef::TypeErase***
  TypeErase: Mass erase or page erase. This parameter can be a value of ***FLASHEx_Type_Erase***
- ***uint32_t FLASH_EraseInitTypeDef::PageAddress***
  PageAdress: Initial FLASH page address to erase when mass erase is disabled This parameter must be a number between Min_Data = FLASH_BASE and Max_Data = FLASH_BANK1_END
- ***uint32_t FLASH_EraseInitTypeDef::NbPages***
  NbPages: Number of pagess to be erased. This parameter must be a value between Min_Data = 1 and Max_Data = (max number of pages - value of initial page)

20.1.2 FLASH_OBProgramInitTypeDef

Data Fields

- ***uint32_t OptionType***
- ***uint32_t WRPState***
- ***uint32_t WRPPage***
- ***uint8_t RDPLevel***
- ***uint8_t USERConfig***
- ***uint32_t DATAAddress***
- ***uint8_t DATAData***

Field Documentation

- ***uint32_t FLASH_OBProgramInitTypeDef::OptionType***
  OptionType: Option byte to be configured. This parameter can be a value of ***FLASHEx_OB_Type***
- ***uint32_t FLASH_OBProgramInitTypeDef::WRPState***
  WRPState: Write protection activation or deactivation. This parameter can be a value of ***FLASHEx_OB_WRP_State***
- ***uint32_t FLASH_OBProgramInitTypeDef::WRPPage***
  WRPPage: specifies the page(s) to be write protected This parameter can be a value of ***FLASHEx_OB_Write_Protection***
- ***uint8_t FLASH_OBProgramInitTypeDef::RDPLevel***
  RDPLevel: Set the read protection level.. This parameter can be a value of ***FLASHEx_OB_Read_Protection***
- ***uint8_t FLASH_OBProgramInitTypeDef::USERConfig***
  USERConfig: Program the FLASH User Option Byte: IWDG / STOP / STDBY / BOOT1 / VDDA_ANALOG / SRAM_PARITY / SDADC12_VDD_MONITOR This parameter can be a combination of ***FLASHEx_OB_IWatchdog***,

FLASHEx_OB_nRST_STOP, ***FLASHEx_OB_nRST_STDBY***, ***FLASHEx_OB_BOOT1***, ***FLASHEx_OB_VDDA_Analog_Monitoring***, ***FLASHEx_OB_RAM_Parity_Check_Enable***.

- ***uint32_t FLASH_OBProgramInitTypeDef::DATAAddress***
  DATAAddress: Address of the option byte DATA to be programmed This parameter can be a value of ***FLASHEx_OB_Data_Address***
- ***uint8_t FLASH_OBProgramInitTypeDef::DATAData***
  DATAData: Data to be stored in the option byte DATA This parameter must be a number between Min_Data = 0x00 and Max_Data = 0xFFU

20.2 FLASHEx Firmware driver API description

20.2.1 FLASH Erasing Programming functions

The FLASH Memory Erasing functions, includes the following functions:

- @ref HAL_FLASHEx_Erase: return only when erase has been done
- @ref HAL_FLASHEx_Erase_IT: end of erase is done when @ref HAL_FLASH_EndOfOperationCallback is called with parameter 0xFFFFFFFF

Any operation of erase should follow these steps:

1. Call the @ref HAL_FLASH_Unlock() function to enable the flash control register and program memory access.
2. Call the desired function to erase page.
3. Call the @ref HAL_FLASH_Lock() to disable the flash program memory access (recommended to protect the FLASH memory against possible unwanted operation).

This section contains the following APIs:

- ***HAL_FLASHEx_Erase()***
- ***HAL_FLASHEx_Erase_IT()***

20.2.2 Option Bytes Programming functions

This subsection provides a set of functions allowing to control the FLASH option bytes operations.

This section contains the following APIs:

- ***HAL_FLASHEx_OBErase()***
- ***HAL_FLASHEx_OBProgram()***
- ***HAL_FLASHEx_OBGetConfig()***
- ***HAL_FLASHEx_OBGetUserData()***

20.2.3 Detailed description of functions

HAL_FLASHEx_Erase

Function name	**HAL_StatusTypeDef HAL_FLASHEx_Erase (FLASH_EraseInitTypeDef * pEraseInit, uint32_t * PageError)**
Function description	Perform a mass erase or erase the specified FLASH memory pages.
Parameters	• **pEraseInit:** pointer to an FLASH_EraseInitTypeDef structure that contains the configuration information for the erasing. • **PageError:** pointer to variable that contains the configuration information on faulty page in case of error (0xFFFFFFFF

means that all the pages have been correctly erased)

Return values
- **HAL_StatusTypeDef:** HAL Status

Notes
- To correctly run this function, the HAL_FLASH_Unlock() function must be called before. Call the HAL_FLASH_Lock() to disable the flash memory access (recommended to protect the FLASH memory against possible unwanted operation)

HAL_FLASHEx_Erase_IT

Function name **HAL_StatusTypeDef HAL_FLASHEx_Erase_IT (FLASH_EraseInitTypeDef * pEraseInit)**

Function description Perform a mass erase or erase the specified FLASH memory pages with interrupt enabled.

Parameters
- **pEraseInit:** pointer to an FLASH_EraseInitTypeDef structure that contains the configuration information for the erasing.

Return values
- **HAL_StatusTypeDef:** HAL Status

Notes
- To correctly run this function, the HAL_FLASH_Unlock() function must be called before. Call the HAL_FLASH_Lock() to disable the flash memory access (recommended to protect the FLASH memory against possible unwanted operation)

HAL_FLASHEx_OBErase

Function name **HAL_StatusTypeDef HAL_FLASHEx_OBErase (void)**

Function description Erases the FLASH option bytes.

Return values
- **HAL:** status

Notes
- This functions erases all option bytes except the Read protection (RDP). The function HAL_FLASH_Unlock() should be called before to unlock the FLASH interface The function HAL_FLASH_OB_Unlock() should be called before to unlock the options bytes The function HAL_FLASH_OB_Launch() should be called after to force the reload of the options bytes (system reset will occur)

HAL_FLASHEx_OBProgram

Function name **HAL_StatusTypeDef HAL_FLASHEx_OBProgram (FLASH_OBProgramInitTypeDef * pOBInit)**

Function description Program option bytes.

Parameters
- **pOBInit:** pointer to an FLASH_OBInitStruct structure that contains the configuration information for the programming.

Return values
- **HAL_StatusTypeDef:** HAL Status

Notes
- The function HAL_FLASH_Unlock() should be called before to unlock the FLASH interface The function HAL_FLASH_OB_Unlock() should be called before to unlock the options bytes The function HAL_FLASH_OB_Launch() should be called after to force the reload of the options bytes

(system reset will occur)

HAL_FLASHEx_OBGetConfig

Function name	**void HAL_FLASHEx_OBGetConfig (FLASH_OBProgramInitTypeDef * pOBInit)**
Function description	Get the Option byte configuration.
Parameters	• **pOBInit:** pointer to an FLASH_OBInitStruct structure that contains the configuration information for the programming.
Return values	• **None**

HAL_FLASHEx_OBGetUserData

Function name	**uint32_t HAL_FLASHEx_OBGetUserData (uint32_t DATAAdress)**
Function description	Get the Option byte user data.
Parameters	• **DATAAdress:** Address of the option byte DATA This parameter can be one of the following values: – OB_DATA_ADDRESS_DATA0 – OB_DATA_ADDRESS_DATA1
Return values	• **Value:** programmed in USER data

20.3 FLASHEx Firmware driver defines

20.3.1 FLASHEx

Option Byte BOOT1

OB_BOOT1_RESET BOOT1 Reset

OB_BOOT1_SET BOOT1 Set

Option Byte Data Address

OB_DATA_ADDRESS_DATA0

OB_DATA_ADDRESS_DATA1

Option Byte IWatchdog

OB_IWDG_SW Software IWDG selected

OB_IWDG_HW Hardware IWDG selected

Option Byte nRST STDBY

OB_STDBY_NO_RST No reset generated when entering in STANDBY

OB_STDBY_RST Reset generated when entering in STANDBY

Option Byte nRST STOP

OB_STOP_NO_RST No reset generated when entering in STOP

OB_STOP_RST Reset generated when entering in STOP

Option Byte SRAM Parity Check Enable

OB_SRAM_PARITY_SET	SRAM parity check enable set
OB_SRAM_PARITY_RESET	SRAM parity check enable reset

Option Byte Read Protection

OB_RDP_LEVEL_0	
OB_RDP_LEVEL_1	
OB_RDP_LEVEL_2	Warning: When enabling read protection level 2 it's no more possible to go back to level 1 or 0U

Option Bytes Type

OPTIONBYTE_WRP	WRP option byte configuration
OPTIONBYTE_RDP	RDP option byte configuration
OPTIONBYTE_USER	USER option byte configuration
OPTIONBYTE_DATA	DATA option byte configuration

Option Byte VDDA Analog Monitoring

OB_VDDA_ANALOG_ON	Analog monitoring on VDDA Power source ON
OB_VDDA_ANALOG_OFF	Analog monitoring on VDDA Power source OFF

FLASHEx OB Write Protection

OB_WRP_PAGES0TO1
OB_WRP_PAGES2TO3
OB_WRP_PAGES4TO5
OB_WRP_PAGES6TO7
OB_WRP_PAGES8TO9
OB_WRP_PAGES10TO11
OB_WRP_PAGES12TO13
OB_WRP_PAGES14TO15
OB_WRP_PAGES16TO17
OB_WRP_PAGES18TO19
OB_WRP_PAGES20TO21
OB_WRP_PAGES22TO23
OB_WRP_PAGES24TO25
OB_WRP_PAGES26TO27
OB_WRP_PAGES28TO29
OB_WRP_PAGES30TO31
OB_WRP_PAGES32TO33
OB_WRP_PAGES34TO35
OB_WRP_PAGES36TO37
OB_WRP_PAGES38TO39

OB_WRP_PAGES40TO41
OB_WRP_PAGES42TO43
OB_WRP_PAGES44TO45
OB_WRP_PAGES46TO47
OB_WRP_PAGES48TO49
OB_WRP_PAGES50TO51
OB_WRP_PAGES52TO53
OB_WRP_PAGES54TO55
OB_WRP_PAGES56TO57
OB_WRP_PAGES58TO59
OB_WRP_PAGES60TO61
OB_WRP_PAGES62TO127
OB_WRP_PAGES0TO15MASK
OB_WRP_PAGES16TO31MASK
OB_WRP_PAGES32TO47MASK
OB_WRP_PAGES32TO47MASK
OB_WRP_PAGES48TO127MASK
OB_WRP_PAGES48TO127MASK
OB_WRP_ALLPAGES Write protection of all pages

Option Byte WRP State

OB_WRPSTATE_DISABLE Disable the write protection of the desired pages
OB_WRPSTATE_ENABLE Enable the write protection of the desired pagess

FLASHEx Page Size

FLASH_PAGE_SIZE

FLASH Type Erase

FLASH_TYPEERASE_PAGES Pages erase only
FLASH_TYPEERASE_MASSERASE Flash mass erase activation

21 HAL GPIO Generic Driver

21.1 GPIO Firmware driver registers structures

21.1.1 GPIO_InitTypeDef

Data Fields

- ***uint32_t Pin***
- ***uint32_t Mode***
- ***uint32_t Pull***
- ***uint32_t Speed***
- ***uint32_t Alternate***

Field Documentation

- ***uint32_t GPIO_InitTypeDef::Pin***
  Specifies the GPIO pins to be configured. This parameter can be any value of ***GPIO_pins***
- ***uint32_t GPIO_InitTypeDef::Mode***
  Specifies the operating mode for the selected pins. This parameter can be a value of ***GPIO_mode***
- ***uint32_t GPIO_InitTypeDef::Pull***
  Specifies the Pull-up or Pull-Down activation for the selected pins. This parameter can be a value of ***GPIO_pull***
- ***uint32_t GPIO_InitTypeDef::Speed***
  Specifies the speed for the selected pins. This parameter can be a value of ***GPIO_speed***
- ***uint32_t GPIO_InitTypeDef::Alternate***
  Peripheral to be connected to the selected pins This parameter can be a value of ***GPIOEx_Alternate_function_selection***

21.2 GPIO Firmware driver API description

21.2.1 GPIO Peripheral features

- Each port bit of the general-purpose I/O (GPIO) ports can be individually configured by software in several modes:
  – Input mode
  – Analog mode
  – Output mode
  – Alternate function mode
  – External interrupt/event lines
- During and just after reset, the alternate functions and external interrupt lines are not active and the I/O ports are configured in input floating mode.
- All GPIO pins have weak internal pull-up and pull-down resistors, which can be activated or not.
- In Output or Alternate mode, each IO can be configured on open-drain or push-pull type and the IO speed can be selected depending on the VDD value.
- The microcontroller IO pins are connected to onboard peripherals/modules through a multiplexer that allows only one peripheral alternate function (AF) connected to an IO pin at a time. In this way, there can be no conflict between peripherals sharing the same IO pin.

- All ports have external interrupt/event capability. To use external interrupt lines, the port must be configured in input mode. All available GPIO pins are connected to the 16 external interrupt/event lines from EXTI0 to EXTI15.
- The external interrupt/event controller consists of up to 23 edge detectors (16 lines are connected to GPIO) for generating event/interrupt requests (each input line can be independently configured to select the type (interrupt or event) and the corresponding trigger event (rising or falling or both). Each line can also be masked independently.

21.2.2 How to use this driver

1. Enable the GPIO AHB clock using the following function: __HAL_RCC_GPIOx_CLK_ENABLE().
2. Configure the GPIO pin(s) using HAL_GPIO_Init().
   - Configure the IO mode using "Mode" member from GPIO_InitTypeDef structure
   - Activate Pull-up, Pull-down resistor using "Pull" member from GPIO_InitTypeDef structure.
   - In case of Output or alternate function mode selection: the speed is configured through "Speed" member from GPIO_InitTypeDef structure.
   - In alternate mode is selection, the alternate function connected to the IO is configured through "Alternate" member from GPIO_InitTypeDef structure.
   - Analog mode is required when a pin is to be used as ADC channel or DAC output.
   - In case of external interrupt/event selection the "Mode" member from GPIO_InitTypeDef structure select the type (interrupt or event) and the corresponding trigger event (rising or falling or both).
3. In case of external interrupt/event mode selection, configure NVIC IRQ priority mapped to the EXTI line using HAL_NVIC_SetPriority() and enable it using HAL_NVIC_EnableIRQ().
4. To get the level of a pin configured in input mode use HAL_GPIO_ReadPin().
5. To set/reset the level of a pin configured in output mode use HAL_GPIO_WritePin()/HAL_GPIO_TogglePin().
6. To lock pin configuration until next reset use HAL_GPIO_LockPin().
7. During and just after reset, the alternate functions are not active and the GPIO pins are configured in input floating mode (except JTAG pins).
8. The LSE oscillator pins OSC32_IN and OSC32_OUT can be used as general purpose (PC14 and PC15U, respectively) when the LSE oscillator is off. The LSE has priority over the GPIO function.
9. The HSE oscillator pins OSC_IN/OSC_OUT can be used as general purpose PF0 and PF1, respectively, when the HSE oscillator is off. The HSE has priority over the GPIO function.

21.2.3 Initialization and de-initialization functions

This section contains the following APIs:

- ***HAL_GPIO_Init()***
- ***HAL_GPIO_DeInit()***

21.2.4 IO operation functions

This section contains the following APIs:

- ***HAL_GPIO_ReadPin()***
- ***HAL_GPIO_WritePin()***
- ***HAL_GPIO_TogglePin()***
- ***HAL_GPIO_LockPin()***
- ***HAL_GPIO_EXTI_IRQHandler()***

- *HAL_GPIO_EXTI_Callback()*

21.2.5 Detailed description of functions

HAL_GPIO_Init

Function name — **void HAL_GPIO_Init (GPIO_TypeDef * GPIOx, GPIO_InitTypeDef * GPIO_Init)**

Function description — Initialize the GPIOx peripheral according to the specified parameters in the GPIO_Init.

Parameters
- **GPIOx:** where x can be (A..F) to select the GPIO peripheral for STM32F3 family devices
- **GPIO_Init:** pointer to a GPIO_InitTypeDef structure that contains the configuration information for the specified GPIO peripheral.

Return values
- **None**

HAL_GPIO_DeInit

Function name — **void HAL_GPIO_DeInit (GPIO_TypeDef * GPIOx, uint32_t GPIO_Pin)**

Function description — De-initialize the GPIOx peripheral registers to their default reset values.

Parameters
- **GPIOx:** where x can be (A..F) to select the GPIO peripheral for STM32F30X device or STM32F37X device
- **GPIO_Pin:** specifies the port bit to be written. This parameter can be one of GPIO_PIN_x where x can be (0..15).

Return values
- **None**

HAL_GPIO_ReadPin

Function name — **GPIO_PinState HAL_GPIO_ReadPin (GPIO_TypeDef * GPIOx, uint16_t GPIO_Pin)**

Function description — Read the specified input port pin.

Parameters
- **GPIOx:** where x can be (A..F) to select the GPIO peripheral for STM32F3 family
- **GPIO_Pin:** specifies the port bit to read. This parameter can be GPIO_PIN_x where x can be (0..15).

Return values
- **The:** input port pin value.

HAL_GPIO_WritePin

Function name — **void HAL_GPIO_WritePin (GPIO_TypeDef * GPIOx, uint16_t GPIO_Pin, GPIO_PinState PinState)**

Function description — Set or clear the selected data port bit.

Parameters
- **GPIOx:** where x can be (A..F) to select the GPIO peripheral for STM32F3 family
- **GPIO_Pin:** specifies the port bit to be written. This parameter can be one of GPIO_PIN_x where x can be (0..15).

- **PinState:** specifies the value to be written to the selected bit. This parameter can be one of the GPIO_PinState enum values:
  - GPIO_PIN_RESET: to clear the port pin
  - GPIO_PIN_SET: to set the port pin

Return values
- **None**

Notes
- This function uses GPIOx_BSRR and GPIOx_BRR registers to allow atomic read/modify accesses. In this way, there is no risk of an IRQ occurring between the read and the modify access.

HAL_GPIO_TogglePin

Function name **void HAL_GPIO_TogglePin (GPIO_TypeDef * GPIOx, uint16_t GPIO_Pin)**

Function description Toggle the specified GPIO pin.

Parameters
- **GPIOx:** where x can be (A..F) to select the GPIO peripheral for STM32F3 family
- **GPIO_Pin:** specifies the pin to be toggled.

Return values
- **None**

HAL_GPIO_LockPin

Function name **HAL_StatusTypeDef HAL_GPIO_LockPin (GPIO_TypeDef * GPIOx, uint16_t GPIO_Pin)**

Function description Lock GPIO Pins configuration registers.

Parameters
- **GPIOx:** where x can be (A..F) to select the GPIO peripheral for STM32F3 family
- **GPIO_Pin:** specifies the port bits to be locked. This parameter can be any combination of GPIO_Pin_x where x can be (0..15).

Return values
- **None**

Notes
- The locked registers are GPIOx_MODER, GPIOx_OTYPER, GPIOx_OSPEEDR, GPIOx_PUPDR, GPIOx_AFRL and GPIOx_AFRH.
- The configuration of the locked GPIO pins can no longer be modified until the next reset.

HAL_GPIO_EXTI_IRQHandler

Function name **void HAL_GPIO_EXTI_IRQHandler (uint16_t GPIO_Pin)**

Function description Handle EXTI interrupt request.

Parameters
- **GPIO_Pin:** Specifies the port pin connected to corresponding EXTI line.

Return values
- **None**

HAL_GPIO_EXTI_Callback

Function name	**void HAL_GPIO_EXTI_Callback (uint16_t GPIO_Pin)**
Function description	EXTI line detection callback.
Parameters	• **GPIO_Pin:** Specifies the port pin connected to corresponding EXTI line.
Return values	• **None**

21.3 GPIO Firmware driver defines

21.3.1 GPIO

GPIO Exported Macros

__HAL_GPIO_EXTI_GET_FLAG

Description:

- Check whether the specified EXTI line flag is set or not.

Parameters:

- __EXTI_LINE__: specifies the EXTI line flag to check. This parameter can be GPIO_PIN_x where x can be(0..15)

Return value:

- The: new state of __EXTI_LINE__ (SET or RESET).

__HAL_GPIO_EXTI_CLEAR_FLAG

Description:

- Clear the EXTI's line pending flags.

Parameters:

- __EXTI_LINE__: specifies the EXTI lines flags to clear. This parameter can be any combination of GPIO_PIN_x where x can be (0..15)

Return value:

- None

__HAL_GPIO_EXTI_GET_IT

Description:

- Check whether the specified EXTI line is asserted or not.

Parameters:

- __EXTI_LINE__: specifies the EXTI line to check. This parameter can be GPIO_PIN_x where x can be(0..15)

Return value:

- The: new state of __EXTI_LINE__ (SET or RESET).

__HAL_GPIO_EXTI_CLEAR_IT	**Description:** • Clear the EXTI's line pending bits. **Parameters:** • __EXTI_LINE__: specifies the EXTI lines to clear. This parameter can be any combination of GPIO_PIN_x where x can be (0..15) **Return value:** • None
__HAL_GPIO_EXTI_GENERATE_SWIT	**Description:** • Generate a Software interrupt on selected EXTI line. **Parameters:** • __EXTI_LINE__: specifies the EXTI line to check. This parameter can be GPIO_PIN_x where x can be(0..15) **Return value:** • None

GPIO mode

GPIO_MODE_INPUT	Input Floating Mode
GPIO_MODE_OUTPUT_PP	Output Push Pull Mode
GPIO_MODE_OUTPUT_OD	Output Open Drain Mode
GPIO_MODE_AF_PP	Alternate Function Push Pull Mode
GPIO_MODE_AF_OD	Alternate Function Open Drain Mode
GPIO_MODE_ANALOG	Analog Mode
GPIO_MODE_IT_RISING	External Interrupt Mode with Rising edge trigger detection
GPIO_MODE_IT_FALLING	External Interrupt Mode with Falling edge trigger detection
GPIO_MODE_IT_RISING_FALLING	External Interrupt Mode with Rising/Falling edge trigger detection
GPIO_MODE_EVT_RISING	External Event Mode with Rising edge trigger detection
GPIO_MODE_EVT_FALLING	External Event Mode with Falling edge trigger detection
GPIO_MODE_EVT_RISING_FALLING	External Event Mode with Rising/Falling edge trigger detection

GPIO pins

GPIO_PIN_0

GPIO_PIN_1

GPIO_PIN_2
GPIO_PIN_3
GPIO_PIN_4
GPIO_PIN_5
GPIO_PIN_6
GPIO_PIN_7
GPIO_PIN_8
GPIO_PIN_9
GPIO_PIN_10
GPIO_PIN_11
GPIO_PIN_12
GPIO_PIN_13
GPIO_PIN_14
GPIO_PIN_15
GPIO_PIN_All
GPIO_PIN_MASK

GPIO pull

GPIO_NOPULL	No Pull-up or Pull-down activation
GPIO_PULLUP	Pull-up activation
GPIO_PULLDOWN	Pull-down activation

GPIO speed

GPIO_SPEED_FREQ_LOW	range up to 2 MHz, please refer to the product datasheet
GPIO_SPEED_FREQ_MEDIUM	range 4 MHz to 10 MHz, please refer to the product datasheet
GPIO_SPEED_FREQ_HIGH	range 10 MHz to 50 MHz, please refer to the product datasheet

22 HAL GPIO Extension Driver

22.1 GPIOEx Firmware driver defines

22.1.1 GPIOEx

GPIOEx Alternate function selection

GPIO_AF0_RTC_50Hz

GPIO_AF0_MCO

GPIO_AF0_TAMPER

GPIO_AF0_SWJ

GPIO_AF0_TRACE

GPIO_AF1_TIM2

GPIO_AF1_TIM15

GPIO_AF1_TIM16

GPIO_AF1_TIM17

GPIO_AF1_EVENTOUT

GPIO_AF2_TIM1

GPIO_AF2_TIM2

GPIO_AF2_TIM3

GPIO_AF2_TIM4

GPIO_AF2_TIM8

GPIO_AF2_TIM15

GPIO_AF2_COMP1

GPIO_AF3_TSC

GPIO_AF3_TIM8

GPIO_AF3_COMP7

GPIO_AF3_TIM15

GPIO_AF4_TIM1

GPIO_AF4_TIM8

GPIO_AF4_TIM16

GPIO_AF4_TIM17

GPIO_AF4_I2C1

GPIO_AF4_I2C2

GPIO_AF5_SPI1

GPIO_AF5_SPI2

GPIO_AF5_SPI3

GPIO_AF5_I2S
GPIO_AF5_I2S2ext
GPIO_AF5_TIM8
GPIO_AF5_IR
GPIO_AF5_UART4
GPIO_AF5_UART5
GPIO_AF6_SPI2
GPIO_AF6_SPI3
GPIO_AF6_I2S3ext
GPIO_AF6_TIM1
GPIO_AF6_TIM8
GPIO_AF6_IR
GPIO_AF7_USART1
GPIO_AF7_USART2
GPIO_AF7_USART3
GPIO_AF7_COMP3
GPIO_AF7_COMP5
GPIO_AF7_COMP6
GPIO_AF7_CAN
GPIO_AF8_COMP1
GPIO_AF8_COMP2
GPIO_AF8_COMP3
GPIO_AF8_COMP4
GPIO_AF8_COMP5
GPIO_AF8_COMP6
GPIO_AF9_CAN
GPIO_AF9_TIM1
GPIO_AF9_TIM8
GPIO_AF9_TIM15
GPIO_AF10_TIM2
GPIO_AF10_TIM3
GPIO_AF10_TIM4
GPIO_AF10_TIM8
GPIO_AF10_TIM17
GPIO_AF11_TIM1
GPIO_AF11_TIM8

GPIO_AF12_TIM1

GPIO_AF14_USB

GPIO_AF15_EVENTOUT

IS_GPIO_AF

GPIOEx_Get Port Index

GPIO_GET_INDEX

23 HAL HRTIM Generic Driver

23.1 HRTIM Firmware driver registers structures

23.1.1 HRTIM_InitTypeDef

Data Fields

- ***uint32_t HRTIMInterruptResquests***
- ***uint32_t SyncOptions***
- ***uint32_t SyncInputSource***
- ***uint32_t SyncOutputSource***
- ***uint32_t SyncOutputPolarity***

Field Documentation

- ***uint32_t HRTIM_InitTypeDef::HRTIMInterruptResquests***
  Specifies which interrupts requests must enabled for the HRTIM instance. This parameter can be any combination of ***HRTIM_Common_Interrupt_Enable***
- ***uint32_t HRTIM_InitTypeDef::SyncOptions***
  Specifies how the HRTIM instance handles the external synchronization signals. The HRTIM instance can be configured to act as a slave (waiting for a trigger to be synchronized) or a master (generating a synchronization signal) or both. This parameter can be a combination of ***HRTIM_Synchronization_Options***.
- ***uint32_t HRTIM_InitTypeDef::SyncInputSource***
  Specifies the external synchronization input source (significant only when the HRTIM instance is configured as a slave). This parameter can be a value of ***HRTIM_Synchronization_Input_Source***.
- ***uint32_t HRTIM_InitTypeDef::SyncOutputSource***
  Specifies the source and event to be sent on the external synchronization outputs (significant only when the HRTIM instance is configured as a master). This parameter can be a value of ***HRTIM_Synchronization_Output_Source***
- ***uint32_t HRTIM_InitTypeDef::SyncOutputPolarity***
  Specifies the conditioning of the event to be sent on the external synchronization outputs (significant only when the HRTIM instance is configured as a master). This parameter can be a value of ***HRTIM_Synchronization_Output_Polarity***

23.1.2 HRTIM_TimerParamTypeDef

Data Fields

- ***uint32_t CaptureTrigger1***
- ***uint32_t CaptureTrigger2***
- ***uint32_t InterruptRequests***
- ***uint32_t DMARequests***
- ***uint32_t DMASrcAddress***
- ***uint32_t DMADstAddress***
- ***uint32_t DMASize***

Field Documentation

- ***uint32_t HRTIM_TimerParamTypeDef::CaptureTrigger1***
  Event(s) triggering capture unit 1. When the timer operates in Simple mode, this parameter can be a value of ***HRTIM_External_Event_Channels***. When the timer

operates in Waveform mode, this parameter can be a combination of ***HRTIM_Capture_Unit_Trigger***.

- ***uint32_t HRTIM_TimerParamTypeDef::CaptureTrigger2***
  Event(s) triggering capture unit 2. When the timer operates in Simple mode, this parameter can be a value of ***HRTIM_External_Event_Channels***. When the timer operates in Waveform mode, this parameter can be a combination of ***HRTIM_Capture_Unit_Trigger***.
- ***uint32_t HRTIM_TimerParamTypeDef::InterruptRequests***
  Interrupts requests enabled for the timer.
- ***uint32_t HRTIM_TimerParamTypeDef::DMARequests***
  DMA requests enabled for the timer.
- ***uint32_t HRTIM_TimerParamTypeDef::DMASrcAddress***
  Address of the source address of the DMA transfer.
- ***uint32_t HRTIM_TimerParamTypeDef::DMADstAddress***
  Address of the destination address of the DMA transfer.
- ***uint32_t HRTIM_TimerParamTypeDef::DMASize***
  Size of the DMA transfer

23.1.3 __HRTIM_HandleTypeDef

Data Fields

- ***HRTIM_TypeDef * Instance***
- ***HRTIM_InitTypeDef Init***
- ***HRTIM_TimerParamTypeDef TimerParam***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_HRTIM_StateTypeDef State***
- ***DMA_HandleTypeDef * hdmaMaster***
- ***DMA_HandleTypeDef * hdmaTimerA***
- ***DMA_HandleTypeDef * hdmaTimerB***
- ***DMA_HandleTypeDef * hdmaTimerC***
- ***DMA_HandleTypeDef * hdmaTimerD***
- ***DMA_HandleTypeDef * hdmaTimerE***

Field Documentation

- ***HRTIM_TypeDef* __HRTIM_HandleTypeDef::Instance***
  Register base address
- ***HRTIM_InitTypeDef __HRTIM_HandleTypeDef::Init***
  HRTIM required parameters
- ***HRTIM_TimerParamTypeDef***
  __HRTIM_HandleTypeDef::TimerParam[MAX_HRTIM_TIMER]
  HRTIM timers - including the master - parameters
- ***HAL_LockTypeDef __HRTIM_HandleTypeDef::Lock***
  Locking object
- ***__IO HAL_HRTIM_StateTypeDef __HRTIM_HandleTypeDef::State***
  HRTIM communication state
- ***DMA_HandleTypeDef* __HRTIM_HandleTypeDef::hdmaMaster***
  Master timer DMA handle parameters
- ***DMA_HandleTypeDef* __HRTIM_HandleTypeDef::hdmaTimerA***
  Timer A DMA handle parameters
- ***DMA_HandleTypeDef* __HRTIM_HandleTypeDef::hdmaTimerB***
  Timer B DMA handle parameters
- ***DMA_HandleTypeDef* __HRTIM_HandleTypeDef::hdmaTimerC***
  Timer C DMA handle parameters

- ***DMA_HandleTypeDef* __HRTIM_HandleTypeDef::hdmaTimerD***
  Timer D DMA handle parameters
- ***DMA_HandleTypeDef* __HRTIM_HandleTypeDef::hdmaTimerE***
  Timer E DMA handle parameters

23.1.4 HRTIM_TimeBaseCfgTypeDef

Data Fields

- ***uint32_t Period***
- ***uint32_t RepetitionCounter***
- ***uint32_t PrescalerRatio***
- ***uint32_t Mode***

Field Documentation

- ***uint32_t HRTIM_TimeBaseCfgTypeDef::Period***
  Specifies the timer period. The period value must be above 3 periods of the fHRTIM clock. Maximum value is = 0xFFDFU
- ***uint32_t HRTIM_TimeBaseCfgTypeDef::RepetitionCounter***
  Specifies the timer repetition period. This parameter must be a number between Min_Data = 0x00 and Max_Data = 0xFF.
- ***uint32_t HRTIM_TimeBaseCfgTypeDef::PrescalerRatio***
  Specifies the timer clock prescaler ratio. This parameter can be any value of ***HRTIM_Prescaler_Ratio***
- ***uint32_t HRTIM_TimeBaseCfgTypeDef::Mode***
  Specifies the counter operating mode. This parameter can be any value of ***HRTIM_Counter_Operating_Mode***

23.1.5 HRTIM_SimpleOCChannelCfgTypeDef

Data Fields

- ***uint32_t Mode***
- ***uint32_t Pulse***
- ***uint32_t Polarity***
- ***uint32_t IdleLevel***

Field Documentation

- ***uint32_t HRTIM_SimpleOCChannelCfgTypeDef::Mode***
  Specifies the output compare mode (toggle, active, inactive). This parameter can be any value of of ***HRTIM_Simple_OC_Mode***
- ***uint32_t HRTIM_SimpleOCChannelCfgTypeDef::Pulse***
  Specifies the compare value to be loaded into the Compare Register. The compare value must be above or equal to 3 periods of the fHRTIM clock
- ***uint32_t HRTIM_SimpleOCChannelCfgTypeDef::Polarity***
  Specifies the output polarity. This parameter can be any value of ***HRTIM_Output_Polarity***
- ***uint32_t HRTIM_SimpleOCChannelCfgTypeDef::IdleLevel***
  Specifies whether the output level is active or inactive when in IDLE state. This parameter can be any value of ***HRTIM_Output_IDLE_Level***

23.1.6 HRTIM_SimplePWMChannelCfgTypeDef

Data Fields

- ***uint32_t Pulse***
- ***uint32_t Polarity***

- ***uint32_t IdleLevel***

Field Documentation

- ***uint32_t HRTIM_SimplePWMChannelCfgTypeDef::Pulse***
  Specifies the compare value to be loaded into the Compare Register. The compare value must be above or equal to 3 periods of the fHRTIM clock
- ***uint32_t HRTIM_SimplePWMChannelCfgTypeDef::Polarity***
  Specifies the output polarity. This parameter can be any value of ***HRTIM_Output_Polarity***
- ***uint32_t HRTIM_SimplePWMChannelCfgTypeDef::IdleLevel***
  Specifies whether the output level is active or inactive when in IDLE state. This parameter can be any value of ***HRTIM_Output_IDLE_Level***

23.1.7 HRTIM_SimpleCaptureChannelCfgTypeDef

Data Fields

- ***uint32_t Event***
- ***uint32_t EventPolarity***
- ***uint32_t EventSensitivity***
- ***uint32_t EventFilter***

Field Documentation

- ***uint32_t HRTIM_SimpleCaptureChannelCfgTypeDef::Event***
  Specifies the external event triggering the capture. This parameter can be any 'EEVx' value of ***HRTIM_External_Event_Channels***
- ***uint32_t HRTIM_SimpleCaptureChannelCfgTypeDef::EventPolarity***
  Specifies the polarity of the external event (in case of level sensitivity). This parameter can be a value of ***HRTIM_External_Event_Polarity***
- ***uint32_t HRTIM_SimpleCaptureChannelCfgTypeDef::EventSensitivity***
  Specifies the sensitivity of the external event. This parameter can be a value of ***HRTIM_External_Event_Sensitivity***
- ***uint32_t HRTIM_SimpleCaptureChannelCfgTypeDef::EventFilter***
  Defines the frequency used to sample the External Event and the length of the digital filter. This parameter can be a value of ***HRTIM_External_Event_Filter***

23.1.8 HRTIM_SimpleOnePulseChannelCfgTypeDef

Data Fields

- ***uint32_t Pulse***
- ***uint32_t OutputPolarity***
- ***uint32_t OutputIdleLevel***
- ***uint32_t Event***
- ***uint32_t EventPolarity***
- ***uint32_t EventSensitivity***
- ***uint32_t EventFilter***

Field Documentation

- ***uint32_t HRTIM_SimpleOnePulseChannelCfgTypeDef::Pulse***
  Specifies the compare value to be loaded into the Compare Register. The compare value must be above or equal to 3 periods of the fHRTIM clock
- ***uint32_t HRTIM_SimpleOnePulseChannelCfgTypeDef::OutputPolarity***
  Specifies the output polarity. This parameter can be any value of ***HRTIM_Output_Polarity***

- ***uint32_t HRTIM_SimpleOnePulseChannelCfgTypeDef::OutputIdleLevel***
  Specifies whether the output level is active or inactive when in IDLE state. This parameter can be any value of ***HRTIM_Output_IDLE_Level***
- ***uint32_t HRTIM_SimpleOnePulseChannelCfgTypeDef::Event***
  Specifies the external event triggering the pulse generation. This parameter can be any 'EEVx' value of ***HRTIM_External_Event_Channels***
- ***uint32_t HRTIM_SimpleOnePulseChannelCfgTypeDef::EventPolarity***
  Specifies the polarity of the external event (in case of level sensitivity). This parameter can be a value of ***HRTIM_External_Event_Polarity***
- ***uint32_t HRTIM_SimpleOnePulseChannelCfgTypeDef::EventSensitivity***
  Specifies the sensitivity of the external event. This parameter can be a value of ***HRTIM_External_Event_Sensitivity***.
- ***uint32_t HRTIM_SimpleOnePulseChannelCfgTypeDef::EventFilter***
  Defines the frequency used to sample the External Event and the length of the digital filter. This parameter can be a value of ***HRTIM_External_Event_Filter***

23.1.9 HRTIM_TimerCfgTypeDef

Data Fields

- ***uint32_t InterruptRequests***
- ***uint32_t DMARequests***
- ***uint32_t DMASrcAddress***
- ***uint32_t DMADstAddress***
- ***uint32_t DMASize***
- ***uint32_t HalfModeEnable***
- ***uint32_t StartOnSync***
- ***uint32_t ResetOnSync***
- ***uint32_t DACSynchro***
- ***uint32_t PreloadEnable***
- ***uint32_t UpdateGating***
- ***uint32_t BurstMode***
- ***uint32_t RepetitionUpdate***
- ***uint32_t PushPull***
- ***uint32_t FaultEnable***
- ***uint32_t FaultLock***
- ***uint32_t DeadTimeInsertion***
- ***uint32_t DelayedProtectionMode***
- ***uint32_t UpdateTrigger***
- ***uint32_t ResetTrigger***
- ***uint32_t ResetUpdate***

Field Documentation

- ***uint32_t HRTIM_TimerCfgTypeDef::InterruptRequests***
  Relevant for all HRTIM timers, including the master. Specifies which interrupts requests must enabled for the timer. This parameter can be any combination of ***HRTIM_Master_Interrupt_Enable*** or ***HRTIM_Timing_Unit_Interrupt_Enable***
- ***uint32_t HRTIM_TimerCfgTypeDef::DMARequests***
  Relevant for all HRTIM timers, including the master. Specifies which DMA requests must be enabled for the timer. This parameter can be any combination of ***HRTIM_Master_DMA_Request_Enable*** or ***HRTIM_Timing_Unit_DMA_Request_Enable***
- ***uint32_t HRTIM_TimerCfgTypeDef::DMASrcAddress***
  Relevant for all HRTIM timers, including the master. Specifies the address of the source address of the DMA transfer

- ***uint32_t HRTIM_TimerCfgTypeDef::DMADstAddress***
  Relevant for all HRTIM timers, including the master. Specifies the address of the destination address of the DMA transfer
- ***uint32_t HRTIM_TimerCfgTypeDef::DMASize***
  Relevant for all HRTIM timers, including the master. Specifies the size of the DMA transfer
- ***uint32_t HRTIM_TimerCfgTypeDef::HalfModeEnable***
  Relevant for all HRTIM timers, including the master. Specifies whether or not hald mode is enabled This parameter can be any value of ***HRTIM_Half_Mode_Enable***
- ***uint32_t HRTIM_TimerCfgTypeDef::StartOnSync***
  Relevant for all HRTIM timers, including the master. Specifies whether or not timer is reset by a rising edge on the synchronization input (when enabled). This parameter can be any value of ***HRTIM_Start_On_Sync_Input_Event***
- ***uint32_t HRTIM_TimerCfgTypeDef::ResetOnSync***
  Relevant for all HRTIM timers, including the master. Specifies whether or not timer is reset by a rising edge on the synchronization input (when enabled). This parameter can be any value of ***HRTIM_Reset_On_Sync_Input_Event***
- ***uint32_t HRTIM_TimerCfgTypeDef::DACSynchro***
  Relevant for all HRTIM timers, including the master. Indicates whether or not the a DAC synchronization event is generated. This parameter can be any value of ***HRTIM_DAC_Synchronization***
- ***uint32_t HRTIM_TimerCfgTypeDef::PreloadEnable***
  Relevant for all HRTIM timers, including the master. Specifies whether or not register preload is enabled. This parameter can be any value of ***HRTIM_Register_Preload_Enable***
- ***uint32_t HRTIM_TimerCfgTypeDef::UpdateGating***
  Relevant for all HRTIM timers, including the master. Specifies how the update occurs with respect to a burst DMA transaction or update enable inputs (Slave timers only). This parameter can be any value of ***HRTIM_Update_Gating***
- ***uint32_t HRTIM_TimerCfgTypeDef::BurstMode***
  Relevant for all HRTIM timers, including the master. Specifies how the timer behaves during a burst mode operation. This parameter can be any value of ***HRTIM_Timer_Burst_Mode***
- ***uint32_t HRTIM_TimerCfgTypeDef::RepetitionUpdate***
  Relevant for all HRTIM timers, including the master. Specifies whether or not registers update is triggered by the repetition event. This parameter can be any value of ***HRTIM_Timer_Repetition_Update***
- ***uint32_t HRTIM_TimerCfgTypeDef::PushPull***
  Relevant for Timer A to Timer E. Specifies whether or not the push-pull mode is enabled. This parameter can be any value of ***HRTIM_Timer_Push_Pull_Mode***
- ***uint32_t HRTIM_TimerCfgTypeDef::FaultEnable***
  Relevant for Timer A to Timer E. Specifies which fault channels are enabled for the timer. This parameter can be a combination of ***HRTIM_Timer_Fault_Enabling***
- ***uint32_t HRTIM_TimerCfgTypeDef::FaultLock***
  Relevant for Timer A to Timer E. Specifies whether or not fault enabling status is write protected. This parameter can be a value of ***HRTIM_Timer_Fault_Lock***
- ***uint32_t HRTIM_TimerCfgTypeDef::DeadTimeInsertion***
  Relevant for Timer A to Timer E. Specifies whether or not dead-time insertion is enabled for the timer. This parameter can be a value of ***HRTIM_Timer_Deadtime_Insertion***
- ***uint32_t HRTIM_TimerCfgTypeDef::DelayedProtectionMode***
  Relevant for Timer A to Timer E. Specifies the delayed protection mode. This parameter can be a value of ***HRTIM_Timer_Delayed_Protection_Mode***

- ***uint32_t HRTIM_TimerCfgTypeDef::UpdateTrigger***
  Relevant for Timer A to Timer E. Specifies source(s) triggering the timer registers update. This parameter can be a combination of ***HRTIM_Timer_Update_Trigger***
- ***uint32_t HRTIM_TimerCfgTypeDef::ResetTrigger***
  Relevant for Timer A to Timer E. Specifies source(s) triggering the timer counter reset. This parameter can be a combination of ***HRTIM_Timer_Reset_Trigger***
- ***uint32_t HRTIM_TimerCfgTypeDef::ResetUpdate***
  Relevant for Timer A to Timer E. Specifies whether or not registers update is triggered when the timer counter is reset. This parameter can be a value of ***HRTIM_Timer_Reset_Update***

23.1.10 HRTIM_CompareCfgTypeDef

Data Fields

- ***uint32_t CompareValue***
- ***uint32_t AutoDelayedMode***
- ***uint32_t AutoDelayedTimeout***

Field Documentation

- ***uint32_t HRTIM_CompareCfgTypeDef::CompareValue***
  Specifies the compare value of the timer compare unit. The minimum value must be greater than or equal to 3 periods of the fHRTIM clock. The maximum value must be less than or equal to 0xFFFFU - 1 periods of the fHRTIM clock
- ***uint32_t HRTIM_CompareCfgTypeDef::AutoDelayedMode***
  Specifies the auto delayed mode for compare unit 2 or 4. This parameter can be a value of ***HRTIM_Compare_Unit_Auto_Delayed_Mode***
- ***uint32_t HRTIM_CompareCfgTypeDef::AutoDelayedTimeout***
  Specifies compare value for timing unit 1 or 3 when auto delayed mode with time out is selected. CompareValue + AutoDelayedTimeout must be less than 0xFFFFU

23.1.11 HRTIM_CaptureCfgTypeDef

Data Fields

- ***uint32_t Trigger***

Field Documentation

- ***uint32_t HRTIM_CaptureCfgTypeDef::Trigger***
  Specifies source(s) triggering the capture. This parameter can be a combination of ***HRTIM_Capture_Unit_Trigger***

23.1.12 HRTIM_OutputCfgTypeDef

Data Fields

- ***uint32_t Polarity***
- ***uint32_t SetSource***
- ***uint32_t ResetSource***
- ***uint32_t IdleMode***
- ***uint32_t IdleLevel***
- ***uint32_t FaultLevel***
- ***uint32_t ChopperModeEnable***
- ***uint32_t BurstModeEntryDelayed***

Field Documentation

- ***uint32_t HRTIM_OutputCfgTypeDef::Polarity***
  Specifies the output polarity. This parameter can be any value of ***HRTIM_Output_Polarity***
- ***uint32_t HRTIM_OutputCfgTypeDef::SetSource***
  Specifies the event(s) transitioning the output from its inactive level to its active level. This parameter can be a combination of ***HRTIM_Output_Set_Source***
- ***uint32_t HRTIM_OutputCfgTypeDef::ResetSource***
  Specifies the event(s) transitioning the output from its active level to its inactive level. This parameter can be a combination of ***HRTIM_Output_Reset_Source***
- ***uint32_t HRTIM_OutputCfgTypeDef::IdleMode***
  Specifies whether or not the output is affected by a burst mode operation. This parameter can be any value of ***HRTIM_Output_Idle_Mode***
- ***uint32_t HRTIM_OutputCfgTypeDef::IdleLevel***
  Specifies whether the output level is active or inactive when in IDLE state. This parameter can be any value of ***HRTIM_Output_IDLE_Level***
- ***uint32_t HRTIM_OutputCfgTypeDef::FaultLevel***
  Specifies whether the output level is active or inactive when in FAULT state. This parameter can be any value of ***HRTIM_Output_FAULT_Level***
- ***uint32_t HRTIM_OutputCfgTypeDef::ChopperModeEnable***
  Indicates whether or not the chopper mode is enabled This parameter can be any value of ***HRTIM_Output_Chopper_Mode_Enable***
- ***uint32_t HRTIM_OutputCfgTypeDef::BurstModeEntryDelayed***
  Indicates whether or not dead-time is inserted when entering the IDLE state during a burst mode operation. This parameters can be any value of ***HRTIM_Output_Burst_Mode_Entry_Delayed***

23.1.13 HRTIM_TimerEventFilteringCfgTypeDef

Data Fields

- ***uint32_t Filter***
- ***uint32_t Latch***

Field Documentation

- ***uint32_t HRTIM_TimerEventFilteringCfgTypeDef::Filter***
  Specifies the type of event filtering within the timing unit. This parameter can be a value of ***HRTIM_Timer_External_Event_Filter***
- ***uint32_t HRTIM_TimerEventFilteringCfgTypeDef::Latch***
  Specifies whether or not the signal is latched. This parameter can be a value of ***HRTIM_Timer_External_Event_Latch***

23.1.14 HRTIM_DeadTimeCfgTypeDef

Data Fields

- ***uint32_t Prescaler***
- ***uint32_t RisingValue***
- ***uint32_t RisingSign***
- ***uint32_t RisingLock***
- ***uint32_t RisingSignLock***
- ***uint32_t FallingValue***
- ***uint32_t FallingSign***
- ***uint32_t FallingLock***
- ***uint32_t FallingSignLock***

Field Documentation

- ***uint32_t HRTIM_DeadTimeCfgTypeDef::Prescaler***
  Specifies the Deadtime Prescaler. This parameter can be a value of ***HRTIM_Deadtime_Prescaler_Ratio***
- ***uint32_t HRTIM_DeadTimeCfgTypeDef::RisingValue***
  Specifies the Deadtime following a rising edge. This parameter can be a number between 0x0 and 0x1FFU
- ***uint32_t HRTIM_DeadTimeCfgTypeDef::RisingSign***
  Specifies whether the deadtime is positive or negative on rising edge. This parameter can be a value of ***HRTIM_Deadtime_Rising_Sign***
- ***uint32_t HRTIM_DeadTimeCfgTypeDef::RisingLock***
  Specifies whether or not deadtime rising settings (value and sign) are write protected. This parameter can be a value of ***HRTIM_Deadtime_Rising_Lock***
- ***uint32_t HRTIM_DeadTimeCfgTypeDef::RisingSignLock***
  Specifies whether or not deadtime rising sign is write protected. This parameter can be a value of ***HRTIM_Deadtime_Rising_Sign_Lock***
- ***uint32_t HRTIM_DeadTimeCfgTypeDef::FallingValue***
  Specifies the Deadtime following a falling edge. This parameter can be a number between 0x0 and 0x1FFU
- ***uint32_t HRTIM_DeadTimeCfgTypeDef::FallingSign***
  Specifies whether the deadtime is positive or negative on falling edge. This parameter can be a value of ***HRTIM_Deadtime_Falling_Sign***
- ***uint32_t HRTIM_DeadTimeCfgTypeDef::FallingLock***
  Specifies whether or not deadtime falling settings (value and sign) are write protected. This parameter can be a value of ***HRTIM_Deadtime_Falling_Lock***
- ***uint32_t HRTIM_DeadTimeCfgTypeDef::FallingSignLock***
  Specifies whether or not deadtime falling sign is write protected. This parameter can be a value of ***HRTIM_Deadtime_Falling_Sign_Lock***

23.1.15 HRTIM_ChopperModeCfgTypeDef

Data Fields

- ***uint32_t CarrierFreq***
- ***uint32_t DutyCycle***
- ***uint32_t StartPulse***

Field Documentation

- ***uint32_t HRTIM_ChopperModeCfgTypeDef::CarrierFreq***
  Specifies the Timer carrier frequency value. This parameter can be a value of ***HRTIM_Chopper_Frequency***
- ***uint32_t HRTIM_ChopperModeCfgTypeDef::DutyCycle***
  Specifies the Timer chopper duty cycle value. This parameter can be a value of ***HRTIM_Chopper_Duty_Cycle***
- ***uint32_t HRTIM_ChopperModeCfgTypeDef::StartPulse***
  Specifies the Timer pulse width value. This parameter can be a value of ***HRTIM_Chopper_Start_Pulse_Width***

23.1.16 HRTIM_EventCfgTypeDef

Data Fields

- ***uint32_t Source***
- ***uint32_t Polarity***
- ***uint32_t Sensitivity***
- ***uint32_t Filter***

- ***uint32_t FastMode***

Field Documentation

- ***uint32_t HRTIM_EventCfgTypeDef::Source***
  Identifies the source of the external event. This parameter can be a value of ***HRTIM_External_Event_Sources***
- ***uint32_t HRTIM_EventCfgTypeDef::Polarity***
  Specifies the polarity of the external event (in case of level sensitivity). This parameter can be a value of ***HRTIM_External_Event_Polarity***
- ***uint32_t HRTIM_EventCfgTypeDef::Sensitivity***
  Specifies the sensitivity of the external event. This parameter can be a value of ***HRTIM_External_Event_Sensitivity***
- ***uint32_t HRTIM_EventCfgTypeDef::Filter***
  Defines the frequency used to sample the External Event and the length of the digital filter. This parameter can be a value of ***HRTIM_External_Event_Filter***
- ***uint32_t HRTIM_EventCfgTypeDef::FastMode***
  Indicates whether or not low latency mode is enabled for the external event. This parameter can be a value of ***HRTIM_External_Event_Fast_Mode***

23.1.17 HRTIM_FaultCfgTypeDef

Data Fields

- ***uint32_t Source***
- ***uint32_t Polarity***
- ***uint32_t Filter***
- ***uint32_t Lock***

Field Documentation

- ***uint32_t HRTIM_FaultCfgTypeDef::Source***
  Identifies the source of the fault. This parameter can be a value of ***HRTIM_Fault_Sources***
- ***uint32_t HRTIM_FaultCfgTypeDef::Polarity***
  Specifies the polarity of the fault event. This parameter can be a value of ***HRTIM_Fault_Polarity***
- ***uint32_t HRTIM_FaultCfgTypeDef::Filter***
  Defines the frequency used to sample the Fault input and the length of the digital filter. This parameter can be a value of ***HRTIM_Fault_Filter***
- ***uint32_t HRTIM_FaultCfgTypeDef::Lock***
  Indicates whether or not fault programming bits are write protected. This parameter can be a value of ***HRTIM_Fault_Lock***

23.1.18 HRTIM_BurstModeCfgTypeDef

Data Fields

- ***uint32_t Mode***
- ***uint32_t ClockSource***
- ***uint32_t Prescaler***
- ***uint32_t PreloadEnable***
- ***uint32_t Trigger***
- ***uint32_t IdleDuration***
- ***uint32_t Period***

Field Documentation

- ***uint32_t HRTIM_BurstModeCfgTypeDef::Mode***
  Specifies the burst mode operating mode. This parameter can be a value of ***HRTIM_Burst_Mode_Operating_Mode***
- ***uint32_t HRTIM_BurstModeCfgTypeDef::ClockSource***
  Specifies the burst mode clock source. This parameter can be a value of ***HRTIM_Burst_Mode_Clock_Source***
- ***uint32_t HRTIM_BurstModeCfgTypeDef::Prescaler***
  Specifies the burst mode prescaler. This parameter can be a value of ***HRTIM_Burst_Mode_Prescaler***
- ***uint32_t HRTIM_BurstModeCfgTypeDef::PreloadEnable***
  Specifies whether or not preload is enabled for burst mode related registers (HRTIM_BMCMPR and HRTIM_BMPER). This parameter can be a combination of ***HRTIM_Burst_Mode_Register_Preload_Enable***
- ***uint32_t HRTIM_BurstModeCfgTypeDef::Trigger***
  Specifies the event(s) triggering the burst operation. This parameter can be a combination of ***HRTIM_Burst_Mode_Trigger***
- ***uint32_t HRTIM_BurstModeCfgTypeDef::IdleDuration***
  Specifies number of periods during which the selected timers are in idle state. This parameter can be a number between 0x0 and 0xFFFF
- ***uint32_t HRTIM_BurstModeCfgTypeDef::Period***
  Specifies burst mode repetition period. This parameter can be a number between 0x1 and 0xFFFF

23.1.19 HRTIM_ADCTriggerCfgTypeDef

Data Fields

- ***uint32_t UpdateSource***
- ***uint32_t Trigger***

Field Documentation

- ***uint32_t HRTIM_ADCTriggerCfgTypeDef::UpdateSource***
  Specifies the ADC trigger update source. This parameter can be a combination of ***HRTIM_ADC_Trigger_Update_Source***
- ***uint32_t HRTIM_ADCTriggerCfgTypeDef::Trigger***
  Specifies the event(s) triggering the ADC conversion. This parameter can be a value of ***HRTIM_ADC_Trigger_Event***

23.2 HRTIM Firmware driver API description

23.2.1 Simple mode v.s. waveform mode

The HRTIM HAL API is split into 2 categories:

1. Simple functions: these functions allow for using a HRTIM timer as a general purpose timer with high resolution capabilities. HRTIM simple modes are managed through the set of functions named HAL_HRTIM_Simple<Function>. These functions are similar in name and usage to the one defined for the TIM peripheral. When a HRTIM timer operates in simple mode, only a very limited set of HRTIM features are used. Following simple modes are proposed:
   – Output compare mode,
   – PWM output mode,
   – Input capture mode,
   – One pulse mode.

2. Waveform functions: These functions allow taking advantage of the HRTIM flexibility to produce numerous types of control signal. When a HRTIM timer operates in waveform mode, all the HRTIM features are accessible without any restriction. HRTIM waveform modes are managed through the set of functions named HAL_HRTIM_Waveform<Function>

23.2.2 How to use this driver

1. Initialize the HRTIM low level resources by implementing the HAL_HRTIM_MspInit() function:
   a. Enable the HRTIM clock source using __HRTIMx_CLK_ENABLE()
   b. Connect HRTIM pins to MCU I/Os
      – Enable the clock for the HRTIM GPIOs using the following function: __HAL_RCC_GPIOx_CLK_ENABLE()
      – Configure these GPIO pins in Alternate Function mode using HAL_GPIO_Init()
   c. When using DMA to control data transfer (e.g HAL_HRTIM_SimpleBaseStart_DMA())
      – Enable the DMAx interface clock using __DMAx_CLK_ENABLE()
      – Initialize the DMA handle
      – Associate the initialized DMA handle to the appropriate DMA handle of the HRTIM handle using __HAL_LINKDMA()
      – Initialize the DMA channel using HAL_DMA_Init()
      – Configure the priority and enable the NVIC for the transfer complete interrupt on the DMA channel using HAL_NVIC_SetPriority() and HAL_NVIC_EnableIRQ()
   d. In case of using interrupt mode (e.g HAL_HRTIM_SimpleBaseStart_IT())
      – Configure the priority and enable the NVIC for the concerned HRTIM interrupt using HAL_NVIC_SetPriority() and HAL_NVIC_EnableIRQ()
2. Initialize the HRTIM HAL using HAL_HRTIM_Init(). The HRTIM configuration structure (field of the HRTIM handle) specifies which global interrupt of whole HRTIM must be enabled (Burst mode period, System fault, Faults). It also contains the HRTIM external synchronization configuration. HRTIM can act as a master (generating a synchronization signal) or as a slave (waiting for a trigger to be synchronized).
3. Start the high resolution unit using HAL_HRTIM_DLLCalibrationStart(). DLL calibration is executed periodically and compensate for potential voltage and temperature drifts. DLL calibration period is specified by the CalibrationRate argument.
4. HRTIM timers cannot be used until the high resolution unit is ready. This can be checked using HAL_HRTIM_PollForDLLCalibration(): this function returns HAL_OK if DLL calibration is completed or HAL_TIMEOUT if the DLL calibration is still going on when timeout given as argument expires. DLL calibration can also be started in interrupt mode using HAL_HRTIM_DLLCalibrationStart_IT(). In that case an interrupt is generated when the DLL calibration is completed. Note that as DLL calibration is executed on a periodic basis an interrupt will be generated at the end of every DLL calibration operation (worst case: one interrupt every 14 micro seconds !).
5. Configure HRTIM resources shared by all HRTIM timers
   a. Burst Mode Controller:
      – HAL_HRTIM_BurstModeConfig(): configures the HRTIM burst mode controller: operating mode (continuous or one-shot mode), clock (source, prescaler) , trigger(s), period, idle duration.
   b. External Events Conditionning:
      – HAL_HRTIM_EventConfig(): configures the conditioning of an external event channel: source, polarity, edge-sensitivity. External event can be used as triggers (timer reset, input capture, burst mode, ADC triggers, delayed

protection) They can also be used to set or reset timer outputs. Up to 10 event channels are available.
  - HAL_HRTIM_EventPrescalerConfig(): configures the external event sampling clock (used for digital filtering).

c. Fault Conditionning:
  - HAL_HRTIM_FaultConfig(): configures the conditioning of a fault channel: source, polarity, edge-sensitivity. Fault channels are used to disable the outputs in case of an abnormal operation. Up to 5 fault channels are available.
  - HAL_HRTIM_FaultPrescalerConfig(): configures the fault sampling clock (used for digital filtering).
  - HAL_HRTIM_FaultModeCtl(): Enables or disables fault input(s) circuitry. By default all fault inputs are disabled.

d. ADC trigger:
  - HAL_HRTIM_ADCTriggerConfig(): configures the source triggering the update of the ADC trigger register and the ADC trigger. 4 independent triggers are available to start both the regular and the injected sequencers of the 2 ADCs

6. Configure HRTIM timer time base using HAL_HRTIM_TimeBaseConfig(). This function must be called whatever the HRTIM timer operating mode is (simple v.s. waveform). It configures mainly:
   a. The HRTIM timer counter operating mode (continuous v.s. one shot)
   b. The HRTIM timer clock prescaler
   c. The HRTIM timer period
   d. The HRTIM timer repetition counter

If the HRTIM timer operates in simple mode

1. Start or Stop simple timers
   - Simple time base: HAL_HRTIM_SimpleBaseStart(),HAL_HRTIM_SimpleBaseStop(), HAL_HRTIM_SimpleBaseStart_IT(),HAL_HRTIM_SimpleBaseStop_IT(), HAL_HRTIM_SimpleBaseStart_DMA(),HAL_HRTIM_SimpleBaseStop_DMA().
   - Simple output compare: HAL_HRTIM_SimpleOCChannelConfig(), HAL_HRTIM_SimpleOCStart(),HAL_HRTIM_SimpleOCStop(), HAL_HRTIM_SimpleOCStart_IT(),HAL_HRTIM_SimpleOCStop_IT(), HAL_HRTIM_SimpleOCStart_DMA(),HAL_HRTIM_SimpleOCStop_DMA(),
   - Simple PWM output: HAL_HRTIM_SimplePWMChannelConfig(), HAL_HRTIM_SimplePWMStart(),HAL_HRTIM_SimplePWMStop(), HAL_HRTIM_SimplePWMStart_IT(),HAL_HRTIM_SimplePWMStop_IT(), HAL_HRTIM_SimplePWMStart_DMA(),HAL_HRTIM_SimplePWMStop_DMA(),
   - Simple input capture: HAL_HRTIM_SimpleCaptureChannelConfig(), HAL_HRTIM_SimpleCaptureStart(),HAL_HRTIM_SimpleCaptureStop(), HAL_HRTIM_SimpleCaptureStart_IT(),HAL_HRTIM_SimpleCaptureStop_IT(), HAL_HRTIM_SimpleCaptureStart_DMA(),HAL_HRTIM_SimpleCaptureStop_DMA().
   - Simple one pulse: HAL_HRTIM_SimpleOnePulseChannelConfig(), HAL_HRTIM_SimpleOnePulseStart(),HAL_HRTIM_SimpleOnePulseStop(), HAL_HRTIM_SimpleOnePulseStart_IT(),HAL_HRTIM_SimpleOnePulseStop_It().

If the HRTIM timer operates in waveform mode

1. Completes waveform timer configuration
   - HAL_HRTIM_WaveformTimerConfig(): configuration of a HRTIM timer operating in wave form mode mainly consists in:

  - Enabling the HRTIM timer interrupts and DMA requests.
  - Enabling the half mode for the HRTIM timer.
  - Defining how the HRTIM timer reacts to external synchronization input.
  - Enabling the push-pull mode for the HRTIM timer.
  - Enabling the fault channels for the HRTIM timer.
  - Enabling the dead-time insertion for the HRTIM timer.
  - Setting the delayed protection mode for the HRTIM timer (source and outputs on which the delayed protection are applied).
  - Specifying the HRTIM timer update and reset triggers.
  - Specifying the HRTIM timer registers update policy (e.g. pre-load enabling).
- HAL_HRTIM_TimerEventFilteringConfig(): configures external event blanking and windowing circuitry of a HRTIM timer:
  - Blanking: to mask external events during a defined time period a defined time period
  - Windowing, to enable external events only during a defined time period
- HAL_HRTIM_DeadTimeConfig(): configures the dead-time insertion unit for a HRTIM timer. Allows to generate a couple of complementary signals from a single reference waveform, with programmable delays between active state.
- HAL_HRTIM_ChopperModeConfig(): configures the parameters of the high-frequency carrier signal added on top of the timing unit output. Chopper mode can be enabled or disabled for each timer output separately (see HAL_HRTIM_WaveformOutputConfig()).
- HAL_HRTIM_BurstDMAConfig(): configures the burst DMA burst controller. Allows having multiple HRTIM registers updated with a single DMA request. The burst DMA operation is started by calling HAL_HRTIM_BurstDMATransfer().
- HAL_HRTIM_WaveformCompareConfig():configures the compare unit of a HRTIM timer. This operation consists in setting the compare value and possibly specifying the auto delayed mode for compare units 2 and 4 (allows to have compare events generated relatively to capture events). Note that when auto delayed mode is needed, the capture unit associated to the compare unit must be configured separately.
- HAL_HRTIM_WaveformCaptureConfig(): configures the capture unit of a HRTIM timer. This operation consists in specifying the source(s) triggering the capture (timer register update event, external event, timer output set/reset event, other HRTIM timer related events).
- HAL_HRTIM_WaveformOutputConfig(): configuration of a HRTIM timer output mainly consists in:
  - Setting the output polarity (active high or active low),
  - Defining the set/reset crossbar for the output,
  - Specifying the fault level (active or inactive) in IDLE and FAULT states.,

2. Set waveform timer output(s) level
   - HAL_HRTIM_WaveformSetOutputLevel(): forces the output to its active or inactive level. For example, when deadtime insertion is enabled it is necessary to force the output level by software to have the outputs in a complementary state as soon as the RUN mode is entered.
3. Enable or Disable waveform timer output(s)
   - HAL_HRTIM_WaveformOutputStart(),HAL_HRTIM_WaveformOutputStop().
4. Start or Stop waveform HRTIM timer(s).
   - HAL_HRTIM_WaveformCounterStart(),HAL_HRTIM_WaveformCounterStop(),
   - HAL_HRTIM_WaveformCounterStart_IT(),HAL_HRTIM_WaveformCounterStop_IT(),
   - HAL_HRTIM_WaveformCounterStart()_DMA,HAL_HRTIM_WaveformCounterStop_DMA(),

5. Burst mode controller enabling:
   – HAL_HRTIM_BurstModeCtl(): activates or de-activates the burst mode controller.
6. Some HRTIM operations can be triggered by software:
   – HAL_HRTIM_BurstModeSoftwareTrigger(): calling this function trigs the burst operation.
   – HAL_HRTIM_SoftwareCapture(): calling this function trigs the capture of the HRTIM timer counter.
   – HAL_HRTIM_SoftwareUpdate(): calling this function trigs the update of the pre-loadable registers of the HRTIM timer
   – HAL_HRTIM_SoftwareReset():calling this function resets the HRTIM timer counter.
7. Some functions can be used any time to retrieve HRTIM timer related information
   – HAL_HRTIM_GetCapturedValue(): returns actual value of the capture register of the designated capture unit.
   – HAL_HRTIM_WaveformGetOutputLevel(): returns actual level (ACTIVE/INACTIVE) of the designated timer output.
   – HAL_HRTIM_WaveformGetOutputState():returns actual state (IDLE/RUN/FAULT) of the designated timer output.
   – HAL_HRTIM_GetDelayedProtectionStatus():returns actual level (ACTIVE/INACTIVE) of the designated output when the delayed protection was triggered.
   – HAL_HRTIM_GetBurstStatus(): returns the actual status (ACTIVE/INACTIVE) of the burst mode controller.
   – HAL_HRTIM_GetCurrentPushPullStatus(): when the push-pull mode is enabled for the HRTIM timer (see HAL_HRTIM_WaveformTimerConfig()), the push-pull status indicates on which output the signal is currently active (e.g signal applied on output 1 and output 2 forced inactive or vice versa).
   – HAL_HRTIM_GetIdlePushPullStatus(): when the push-pull mode is enabled for the HRTIM timer (see HAL_HRTIM_WaveformTimerConfig()), the idle push-pull status indicates during which period the delayed protection request occurred (e.g. protection occurred when the output 1 was active and output 2 forced inactive or vice versa).
8. Some functions can be used any time to retrieve actual HRTIM status
   – HAL_HRTIM_GetState(): returns actual HRTIM instance HAL state.

23.2.3 Initialization and Time Base Configuration functions

This section provides functions allowing to:

- Initialize a HRTIM instance
- De-initialize a HRTIM instance
- Initialize the HRTIM MSP
- De-initialize the HRTIM MSP
- Start the high-resolution unit (start DLL calibration)
- Check that the high resolution unit is ready (DLL calibration done)
- Configure the time base unit of a HRTIM timer

This section contains the following APIs:

- ***HAL_HRTIM_Init()***
- ***HAL_HRTIM_DeInit()***
- ***HAL_HRTIM_MspInit()***
- ***HAL_HRTIM_MspDeInit()***
- ***HAL_HRTIM_DLLCalibrationStart()***

- ***HAL_HRTIM_DLLCalibrationStart_IT()***
- ***HAL_HRTIM_PollForDLLCalibration()***
- ***HAL_HRTIM_TimeBaseConfig()***

23.2.4 Simple time base mode functions

This section provides functions allowing to:

- Start simple time base
- Stop simple time base
- Start simple time base and enable interrupt
- Stop simple time base and disable interrupt
- Start simple time base and enable DMA transfer
- Stop simple time base and disable DMA transfer When a HRTIM timer operates in simple time base mode, the timer counter counts from 0 to the period value.

This section contains the following APIs:

- ***HAL_HRTIM_SimpleBaseStart()***
- ***HAL_HRTIM_SimpleBaseStop()***
- ***HAL_HRTIM_SimpleBaseStart_IT()***
- ***HAL_HRTIM_SimpleBaseStop_IT()***
- ***HAL_HRTIM_SimpleBaseStart_DMA()***
- ***HAL_HRTIM_SimpleBaseStop_DMA()***

23.2.5 Simple output compare functions

This section provides functions allowing to:

- Configure simple output channel
- Start simple output compare
- Stop simple output compare
- Start simple output compare and enable interrupt
- Stop simple output compare and disable interrupt
- Start simple output compare and enable DMA transfer
- Stop simple output compare and disable DMA transfer When a HRTIM timer operates in simple output compare mode the output level is set to a programmable value when a match is found between the compare register and the counter. Compare unit 1 is automatically associated to output 1 Compare unit 2 is automatically associated to output 2

This section contains the following APIs:

- ***HAL_HRTIM_SimpleOCChannelConfig()***
- ***HAL_HRTIM_SimpleOCStart()***
- ***HAL_HRTIM_SimpleOCStop()***
- ***HAL_HRTIM_SimpleOCStart_IT()***
- ***HAL_HRTIM_SimpleOCStop_IT()***
- ***HAL_HRTIM_SimpleOCStart_DMA()***
- ***HAL_HRTIM_SimpleOCStop_DMA()***

23.2.6 Simple PWM output functions

This section provides functions allowing to:

- Configure simple PWM output channel
- Start simple PWM output
- Stop simple PWM output

- Start simple PWM output and enable interrupt
- Stop simple PWM output and disable interrupt
- Start simple PWM output and enable DMA transfer
- Stop simple PWM output and disable DMA transfer When a HRTIM timer operates in simple PWM output mode the output level is set to a programmable value when a match is found between the compare register and the counter and reset when the timer period is reached. Duty cycle is determined by the comparison value. Compare unit 1 is automatically associated to output 1 Compare unit 2 is automatically associated to output 2

This section contains the following APIs:

- ***HAL_HRTIM_SimplePWMChannelConfig()***
- ***HAL_HRTIM_SimplePWMStart()***
- ***HAL_HRTIM_SimplePWMStop()***
- ***HAL_HRTIM_SimplePWMStart_IT()***
- ***HAL_HRTIM_SimplePWMStop_IT()***
- ***HAL_HRTIM_SimplePWMStart_DMA()***
- ***HAL_HRTIM_SimplePWMStop_DMA()***

23.2.7 Simple input capture functions

This section provides functions allowing to:

- Configure simple input capture channel
- Start simple input capture
- Stop simple input capture
- Start simple input capture and enable interrupt
- Stop simple input capture and disable interrupt
- Start simple input capture and enable DMA transfer
- Stop simple input capture and disable DMA transfer When a HRTIM timer operates in simple input capture mode the Capture Register (HRTIM_CPT1/2xR) is used to latch the value of the timer counter counter after a transition detected on a given external event input.

This section contains the following APIs:

- ***HAL_HRTIM_SimpleCaptureChannelConfig()***
- ***HAL_HRTIM_SimpleCaptureStart()***
- ***HAL_HRTIM_SimpleCaptureStop()***
- ***HAL_HRTIM_SimpleCaptureStart_IT()***
- ***HAL_HRTIM_SimpleCaptureStop_IT()***
- ***HAL_HRTIM_SimpleCaptureStart_DMA()***
- ***HAL_HRTIM_SimpleCaptureStop_DMA()***

23.2.8 Simple one pulse functions

This section provides functions allowing to:

- Configure one pulse channel
- Start one pulse generation
- Stop one pulse generation
- Start one pulse generation and enable interrupt
- Stop one pulse generation and disable interrupt When a HRTIM timer operates in simple one pulse mode the timer counter is started in response to transition detected on a given external event input to generate a pulse with a programmable length after a programmable delay.

This section contains the following APIs:

- ***HAL_HRTIM_SimpleOnePulseChannelConfig()***
- ***HAL_HRTIM_SimpleOnePulseStart()***
- ***HAL_HRTIM_SimpleOnePulseStop()***
- ***HAL_HRTIM_SimpleOnePulseStart_IT()***
- ***HAL_HRTIM_SimpleOnePulseStop_IT()***

23.2.9 HRTIM configuration functions

This section provides functions allowing to configure the HRTIM resources shared by all the HRTIM timers operating in waveform mode:

- Configure the burst mode controller
- Configure an external event conditionning
- Configure the external events sampling clock
- Configure a fault conditionning
- Enable or disable fault inputs
- Configure the faults sampling clock
- Configure an ADC trigger

This section contains the following APIs:

- ***HAL_HRTIM_BurstModeConfig()***
- ***HAL_HRTIM_EventConfig()***
- ***HAL_HRTIM_EventPrescalerConfig()***
- ***HAL_HRTIM_FaultConfig()***
- ***HAL_HRTIM_FaultPrescalerConfig()***
- ***HAL_HRTIM_FaultModeCtl()***
- ***HAL_HRTIM_ADCTriggerConfig()***

23.2.10 HRTIM timer configuration and control functions

This section provides functions used to configure and control a HRTIM timer operating in waveform mode:

- Configure HRTIM timer general behavior
- Configure HRTIM timer event filtering
- Configure HRTIM timer deadtime insertion
- Configure HRTIM timer chopper mode
- Configure HRTIM timer burst DMA
- Configure HRTIM timer compare unit
- Configure HRTIM timer capture unit
- Configure HRTIM timer output
- Set HRTIM timer output level
- Enable HRTIM timer output
- Disable HRTIM timer output
- Start HRTIM timer
- Stop HRTIM timer
- Start HRTIM timer and enable interrupt
- Stop HRTIM timer and disable interrupt
- Start HRTIM timer and enable DMA transfer
- Stop HRTIM timer and disable DMA transfer
- Enable or disable the burst mode controller
- Start the burst mode controller (by software)
- Trigger a Capture (by software)

- Update the HRTIM timer preloadable registers (by software)
- Reset the HRTIM timer counter (by software)
- Start a burst DMA transfer
- Enable timer register update
- Disable timer register update

This section contains the following APIs:

- ***HAL_HRTIM_WaveformTimerConfig()***
- ***HAL_HRTIM_TimerEventFilteringConfig()***
- ***HAL_HRTIM_DeadTimeConfig()***
- ***HAL_HRTIM_ChopperModeConfig()***
- ***HAL_HRTIM_BurstDMAConfig()***
- ***HAL_HRTIM_WaveformCompareConfig()***
- ***HAL_HRTIM_WaveformCaptureConfig()***
- ***HAL_HRTIM_WaveformOutputConfig()***
- ***HAL_HRTIM_WaveformSetOutputLevel()***
- ***HAL_HRTIM_WaveformOutputStart()***
- ***HAL_HRTIM_WaveformOutputStop()***
- ***HAL_HRTIM_WaveformCounterStart()***
- ***HAL_HRTIM_WaveformCounterStop()***
- ***HAL_HRTIM_WaveformCounterStart_IT()***
- ***HAL_HRTIM_WaveformCounterStop_IT()***
- ***HAL_HRTIM_WaveformCounterStart_DMA()***
- ***HAL_HRTIM_WaveformCounterStop_DMA()***
- ***HAL_HRTIM_BurstModeCtl()***
- ***HAL_HRTIM_BurstModeSoftwareTrigger()***
- ***HAL_HRTIM_SoftwareCapture()***
- ***HAL_HRTIM_SoftwareUpdate()***
- ***HAL_HRTIM_SoftwareReset()***
- ***HAL_HRTIM_BurstDMATransfer()***
- ***HAL_HRTIM_UpdateEnable()***
- ***HAL_HRTIM_UpdateDisable()***

23.2.11 Peripheral State functions

This section provides functions used to get HRTIM or HRTIM timer specific information:

- Get HRTIM HAL state
- Get captured value
- Get HRTIM timer output level
- Get HRTIM timer output state
- Get delayed protection status
- Get burst status
- Get current push-pull status
- Get idle push-pull status

This section contains the following APIs:

- ***HAL_HRTIM_GetState()***
- ***HAL_HRTIM_GetCapturedValue()***
- ***HAL_HRTIM_WaveformGetOutputLevel()***
- ***HAL_HRTIM_WaveformGetOutputState()***
- ***HAL_HRTIM_GetDelayedProtectionStatus()***
- ***HAL_HRTIM_GetBurstStatus()***
- ***HAL_HRTIM_GetCurrentPushPullStatus()***

- ***HAL_HRTIM_GetIdlePushPullStatus()***

23.2.12 Detailed description of functions

HAL_HRTIM_Init

Function name	**HAL_StatusTypeDef HAL_HRTIM_Init (HRTIM_HandleTypeDef * hhrtim)**
Function description	Initializes a HRTIM instance.
Parameters	• **hhrtim:** pointer to HAL HRTIM handle
Return values	• **HAL:** status

HAL_HRTIM_DeInit

Function name	**HAL_StatusTypeDef HAL_HRTIM_DeInit (HRTIM_HandleTypeDef * hhrtim)**
Function description	De-initializes a HRTIM instance.
Parameters	• **hhrtim:** pointer to HAL HRTIM handle
Return values	• **HAL:** status

HAL_HRTIM_MspInit

Function name	**void HAL_HRTIM_MspInit (HRTIM_HandleTypeDef * hhrtim)**
Function description	MSP initialization for a HRTIM instance.
Parameters	• **hhrtim:** pointer to HAL HRTIM handle
Return values	• **None**

HAL_HRTIM_MspDeInit

Function name	**void HAL_HRTIM_MspDeInit (HRTIM_HandleTypeDef * hhrtim)**
Function description	MSP de-initialization for a for a HRTIM instance.
Parameters	• **hhrtim:** pointer to HAL HRTIM handle
Return values	• **None**

HAL_HRTIM_TimeBaseConfig

Function name	**HAL_StatusTypeDef HAL_HRTIM_TimeBaseConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, HRTIM_TimeBaseCfgTypeDef * pTimeBaseCfg)**
Function description	Configures the time base unit of a timer.
Parameters	• **hhrtim:** pointer to HAL HRTIM handle • **TimerIdx:** Timer index This parameter can be one of the following values: – HRTIM_TIMERINDEX_MASTER for master timer – HRTIM_TIMERINDEX_TIMER_A for timer A – HRTIM_TIMERINDEX_TIMER_B for timer B – HRTIM_TIMERINDEX_TIMER_C for timer C

  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **pTimeBaseCfg:** pointer to the time base configuration structure

Return values
- **HAL:** status

Notes
- This function must be called prior starting the timer
- The time-base unit initialization parameters specify: The timer counter operating mode (continuous, one shot), The timer clock prescaler, The timer period , The timer repetition counter.

HAL_HRTIM_DLLCalibrationStart

Function name **HAL_StatusTypeDef HAL_HRTIM_DLLCalibrationStart (HRTIM_HandleTypeDef * hhrtim, uint32_t CalibrationRate)**

Function description Starts the DLL calibration.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **CalibrationRate:** DLL calibration period This parameter can be one of the following values:
  - HRTIM_SINGLE_CALIBRATION: One shot DLL calibration
  - HRTIM_CALIBRATIONRATE_7300: Periodic DLL calibration. T=7.3 ms
  - HRTIM_CALIBRATIONRATE_910: Periodic DLL calibration. T=910 us
  - HRTIM_CALIBRATIONRATE_114: Periodic DLL calibration. T=114 us
  - HRTIM_CALIBRATIONRATE_14: Periodic DLL calibration. T=14 us

Return values
- **HAL:** status

Notes
- This function locks the HRTIM instance. HRTIM instance is unlocked within the HAL_HRTIM_PollForDLLCalibration function, just before exiting the function.

HAL_HRTIM_DLLCalibrationStart_IT

Function name **HAL_StatusTypeDef HAL_HRTIM_DLLCalibrationStart_IT (HRTIM_HandleTypeDef * hhrtim, uint32_t CalibrationRate)**

Function description Starts the DLL calibration.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **CalibrationRate:** DLL calibration period This parameter can be one of the following values:
  - HRTIM_SINGLE_CALIBRATION: One shot DLL calibration
  - HRTIM_CALIBRATIONRATE_7300: Periodic DLL calibration. T=7.3 ms
  - HRTIM_CALIBRATIONRATE_910: Periodic DLL calibration. T=910 us
  - HRTIM_CALIBRATIONRATE_114: Periodic DLL calibration. T=114 us

  - HRTIM_CALIBRATIONRATE_14: Periodic DLL calibration. T=14 us

Return values
- **HAL:** status

Notes
- This function locks the HRTIM instance. HRTIM instance is unlocked within the IRQ processing function when processing the DLL ready interrupt.
- If this function is called for periodic calibration, the DLLRDY interrupt is generated every time the calibration completes which will significantly increases the overall interrupt rate.

HAL_HRTIM_PollForDLLCalibration

Function name
HAL_StatusTypeDef HAL_HRTIM_PollForDLLCalibration (HRTIM_HandleTypeDef * hhrtim, uint32_t Timeout)

Function description
Polls the DLL calibration ready flag and returns when the flag is set (DLL calibration completed) or upon timeout expiration.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Timeout:** Timeout duration in millisecond

Return values
- **HAL:** status

HAL_HRTIM_SimpleBaseStart

Function name
HAL_StatusTypeDef HAL_HRTIM_SimpleBaseStart (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)

Function description
Starts the counter of a timer operating in simple time base mode.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index. This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_MASTER for master timer
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **HAL:** status

HAL_HRTIM_SimpleBaseStop

Function name
HAL_StatusTypeDef HAL_HRTIM_SimpleBaseStop (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)

Function description
Stops the counter of a timer operating in simple time base mode.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index. This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_MASTER for master timer
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C

– HRTIM_TIMERINDEX_TIMER_D for timer D
– HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **HAL:** status

HAL_HRTIM_SimpleBaseStart_IT

Function name **HAL_StatusTypeDef HAL_HRTIM_SimpleBaseStart_IT (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)**

Function description Starts the counter of a timer operating in simple time base mode (Timer repetition interrupt is enabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index. This parameter can be one of the following values:
  – HRTIM_TIMERINDEX_MASTER for master timer
  – HRTIM_TIMERINDEX_TIMER_A for timer A
  – HRTIM_TIMERINDEX_TIMER_B for timer B
  – HRTIM_TIMERINDEX_TIMER_C for timer C
  – HRTIM_TIMERINDEX_TIMER_D for timer D
  – HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **HAL:** status

HAL_HRTIM_SimpleBaseStop_IT

Function name **HAL_StatusTypeDef HAL_HRTIM_SimpleBaseStop_IT (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)**

Function description Stops the counter of a timer operating in simple time base mode (Timer repetition interrupt is disabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index. This parameter can be one of the following values:
  – HRTIM_TIMERINDEX_MASTER for master timer
  – HRTIM_TIMERINDEX_TIMER_A for timer A
  – HRTIM_TIMERINDEX_TIMER_B for timer B
  – HRTIM_TIMERINDEX_TIMER_C for timer C
  – HRTIM_TIMERINDEX_TIMER_D for timer D
  – HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **HAL:** status

HAL_HRTIM_SimpleBaseStart_DMA

Function name **HAL_StatusTypeDef HAL_HRTIM_SimpleBaseStart_DMA (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t SrcAddr, uint32_t DestAddr, uint32_t Length)**

Function description Starts the counter of a timer operating in simple time base mode (Timer repetition DMA request is enabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index. This parameter can be one of the following values:
  – HRTIM_TIMERINDEX_MASTER for master timer

  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **SrcAddr:** DMA transfer source address
- **DestAddr:** DMA transfer destination address
- **Length:** The length of data items (data size) to be transferred from source to destination

HAL_HRTIM_SimpleBaseStop_DMA

Function name
HAL_StatusTypeDef HAL_HRTIM_SimpleBaseStop_DMA (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)

Function description
Stops the counter of a timer operating in simple time base mode (Timer repetition DMA request is disabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index. This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_MASTER for master timer
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **HAL:** status

HAL_HRTIM_SimpleOCChannelConfig

Function name
HAL_StatusTypeDef HAL_HRTIM_SimpleOCChannelConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t OCChannel, HRTIM_SimpleOCChannelCfgTypeDef * pSimpleOCChannelCfg)

Function description
Configures an output in simple output compare mode.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **OCChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1

  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2
- **pSimpleOCChannelCfg:** pointer to the simple output compare output configuration structure

Return values
- **HAL:** status

Notes
- When the timer operates in simple output compare mode: Output 1 is implicitly controlled by the compare unit 1 Output 2 is implicitly controlled by the compare unit 2 Output Set/Reset crossbar is set according to the selected output compare mode: Toggle: SETxyR = RSTxyR = CMPy Active: SETxyR = CMPy, RSTxyR = 0 Inactive: SETxy =0, RSTxy = CMPy

HAL_HRTIM_SimpleOCStart

Function name
HAL_StatusTypeDef HAL_HRTIM_SimpleOCStart (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t OCChannel)

Function description
Starts the output compare signal generation on the designed timer output.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **OCChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_SimpleOCStop

Function name
HAL_StatusTypeDef HAL_HRTIM_SimpleOCStop (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t OCChannel)

Function description
Stops the output compare signal generation on the designed timer output.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **OCChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_SimpleOCStart_IT

Function name **HAL_StatusTypeDef HAL_HRTIM_SimpleOCStart_IT (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t OCChannel)**

Function description Starts the output compare signal generation on the designed timer output (Interrupt is enabled (see note note below)).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **OCChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

Notes
- Interrupt enabling depends on the chosen output compare mode Output toggle: compare match interrupt is enabled Output set active: output set interrupt is enabled Output set inactive: output reset interrupt is enabled

HAL_HRTIM_SimpleOCStop_IT

Function name **HAL_StatusTypeDef HAL_HRTIM_SimpleOCStop_IT (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t OCChannel)**

Function description Stops the output compare signal generation on the designed timer output (Interrupt is disabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **OCChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_SimpleOCStart_DMA

Function name **HAL_StatusTypeDef HAL_HRTIM_SimpleOCStart_DMA (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t OCChannel, uint32_t SrcAddr, uint32_t DestAddr, uint32_t Length)**

Function description Starts the output compare signal generation on the designed timer output (DMA request is enabled (see note below)).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **OCChannel:** Timer output This parameter can be one of the

following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2
- **SrcAddr:** DMA transfer source address
- **DestAddr:** DMA transfer destination address
- **Length:** The length of data items (data size) to be transferred from source to destination

Return values
- **HAL:** status

Notes
- DMA request enabling depends on the chosen output compare mode Output toggle: compare match DMA request is enabled Output set active: output set DMA request is enabled Output set inactive: output reset DMA request is enabled

HAL_HRTIM_SimpleOCStop_DMA

Function name

HAL_StatusTypeDef HAL_HRTIM_SimpleOCStop_DMA (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t OCChannel)

Function description

Stops the output compare signal generation on the designed timer output (DMA request is disabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **OCChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_SimplePWMChannelConfig

Function name

HAL_StatusTypeDef HAL_HRTIM_SimplePWMChannelConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t PWMChannel, HRTIM_SimplePWMChannelCfgTypeDef * pSimplePWMChannelCfg)

Function description

Configures an output in simple PWM mode.

Parameters

- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **PWMChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2
- **pSimplePWMChannelCfg:** pointer to the simple PWM output configuration structure

Return values

- **HAL:** status

Notes

- When the timer operates in simple PWM output mode: Output 1 is implicitly controlled by the compare unit 1 Output 2 is implicitly controlled by the compare unit 2 Output Set/Reset crossbar is set as follows: Output 1: SETx1R = CMP1, RSTx1R = PER Output 2: SETx2R = CMP2, RST2R = PER
- When Simple PWM mode is used the registers preload mechanism is enabled (otherwise the behavior is not guaranteed).

HAL_HRTIM_SimplePWMStart

Function name

HAL_StatusTypeDef HAL_HRTIM_SimplePWMStart (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t PWMChannel)

Function description

Starts the PWM output signal generation on the designed timer output.

Parameters

- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B

  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **PWMChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_SimplePWMStop

Function name
HAL_StatusTypeDef HAL_HRTIM_SimplePWMStop (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t PWMChannel)

Function description
Stops the PWM output signal generation on the designed timer output.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **PWMChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_SimplePWMStart_IT

Function name
HAL_StatusTypeDef HAL_HRTIM_SimplePWMStart_IT (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t PWMChannel)

Function description
Starts the PWM output signal generation on the designed timer output (The compare interrupt is enabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **PWMChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_SimplePWMStop_IT

Function name
HAL_StatusTypeDef HAL_HRTIM_SimplePWMStop_IT (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t PWMChannel)

Function description
Stops the PWM output signal generation on the designed timer output (The compare interrupt is disabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **PWMChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1

  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_SimplePWMStart_DMA

Function name
HAL_StatusTypeDef HAL_HRTIM_SimplePWMStart_DMA (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t PWMChannel, uint32_t SrcAddr, uint32_t DestAddr, uint32_t Length)

Function description
Starts the PWM output signal generation on the designed timer output (The compare DMA request is enabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **PWMChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2
- **SrcAddr:** DMA transfer source address
- **DestAddr:** DMA transfer destination address
- **Length:** The length of data items (data size) to be transferred from source to destination

Return values
- **HAL:** status

HAL_HRTIM_SimplePWMStop_DMA

Function name
HAL_StatusTypeDef HAL_HRTIM_SimplePWMStop_DMA (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t PWMChannel)

Function description
Stops the PWM output signal generation on the designed timer output (The compare DMA request is disabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the

following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **PWMChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_SimpleCaptureChannelConfig

Function name
HAL_StatusTypeDef HAL_HRTIM_SimpleCaptureChannelConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t CaptureChannel, HRTIM_SimpleCaptureChannelCfgTypeDef * pSimpleCaptureChannelCfg)

Function description
Configures a simple capture.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **CaptureChannel:** Capture unit This parameter can be one of the following values:
  - HRTIM_CAPTUREUNIT_1: Capture unit 1
  - HRTIM_CAPTUREUNIT_2: Capture unit 2
- **pSimpleCaptureChannelCfg:** pointer to the simple capture configuration structure

Return values
- **HAL:** status

Notes
- When the timer operates in simple capture mode the capture is trigerred by the designated external event and GPIO input is implicitly used as event source. The cature can be triggered by a rising edge, a falling edge or both edges on event channel.

HAL_HRTIM_SimpleCaptureStart

Function name **HAL_StatusTypeDef HAL_HRTIM_SimpleCaptureStart (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t CaptureChannel)**

Function description Enables a simple capture on the designed capture unit.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **CaptureChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_CAPTUREUNIT_1: Capture unit 1
  - HRTIM_CAPTUREUNIT_2: Capture unit 2

Return values
- **HAL:** status

Notes
- The external event triggering the capture is available for all timing units. It can be used directly and is active as soon as the timing unit counter is enabled.

HAL_HRTIM_SimpleCaptureStop

Function name **HAL_StatusTypeDef HAL_HRTIM_SimpleCaptureStop (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t CaptureChannel)**

Function description Disables a simple capture on the designed capture unit.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **CaptureChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_CAPTUREUNIT_1: Capture unit 1
  - HRTIM_CAPTUREUNIT_2: Capture unit 2

Return values
- **HAL:** status

HAL_HRTIM_SimpleCaptureStart_IT

Function name
HAL_StatusTypeDef HAL_HRTIM_SimpleCaptureStart_IT (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t CaptureChannel)

Function description
Enables a simple capture on the designed capture unit (Capture interrupt is enabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **CaptureChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_CAPTUREUNIT_1: Capture unit 1
  - HRTIM_CAPTUREUNIT_2: Capture unit 2

Return values
- **HAL:** status

HAL_HRTIM_SimpleCaptureStop_IT

Function name
HAL_StatusTypeDef HAL_HRTIM_SimpleCaptureStop_IT (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t CaptureChannel)

Function description
Disables a simple capture on the designed capture unit (Capture interrupt is disabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **CaptureChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_CAPTUREUNIT_1: Capture unit 1
  - HRTIM_CAPTUREUNIT_2: Capture unit 2

Return values
- **HAL:** status

HAL_HRTIM_SimpleCaptureStart_DMA

Function name
HAL_StatusTypeDef HAL_HRTIM_SimpleCaptureStart_DMA (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t CaptureChannel, uint32_t SrcAddr, uint32_t DestAddr, uint32_t Length)

Function description
Enables a simple capture on the designed capture unit (Capture DMA request is enabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **CaptureChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_CAPTUREUNIT_1: Capture unit 1
  - HRTIM_CAPTUREUNIT_2: Capture unit 2
- **SrcAddr:** DMA transfer source address
- **DestAddr:** DMA transfer destination address
- **Length:** The length of data items (data size) to be transferred from source to destination

Return values
- **HAL:** status

HAL_HRTIM_SimpleCaptureStop_DMA

Function name
HAL_StatusTypeDef HAL_HRTIM_SimpleCaptureStop_DMA (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t CaptureChannel)

Function description
Disables a simple capture on the designed capture unit (Capture DMA request is disabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **CaptureChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_CAPTUREUNIT_1: Capture unit 1
  - HRTIM_CAPTUREUNIT_2: Capture unit 2

Return values
- **HAL:** status

HAL_HRTIM_SimpleOnePulseChannelConfig

Function name

HAL_StatusTypeDef HAL_HRTIM_SimpleOnePulseChannelConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t OnePulseChannel, HRTIM_SimpleOnePulseChannelCfgTypeDef * pSimpleOnePulseChannelCfg)

Function description

Configures an output simple one pulse mode.

Parameters

- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **OnePulseChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2
- **pSimpleOnePulseChannelCfg:** pointer to the simple one pulse output configuration structure

Return values

- **HAL:** status

Notes

- When the timer operates in simple one pulse mode: the timer counter is implicitly started by the reset event, the reset of the timer counter is triggered by the designated external event GPIO input is implicitly used as event source, Output 1 is implicitly controlled by the compare unit 1, Output 2 is implicitly controlled by the compare unit 2. Output Set/Reset crossbar is set as follows: Output 1: SETx1R = CMP1, RSTx1R = PER Output 2: SETx2R = CMP2, RST2R = PER
- If HAL_HRTIM_SimpleOnePulseChannelConfig is called for both timer outputs, the reset event related configuration data provided in the second call will override the reset event related configuration data provided in the first call.

HAL_HRTIM_SimpleOnePulseStart

Function name **HAL_StatusTypeDef HAL_HRTIM_SimpleOnePulseStart (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t OnePulseChannel)**

Function description Enables the simple one pulse signal generation on the designed output.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **OnePulseChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_SimpleOnePulseStop

Function name **HAL_StatusTypeDef HAL_HRTIM_SimpleOnePulseStop (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t OnePulseChannel)**

Function description Disables the simple one pulse signal generation on the designed output.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **OnePulseChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1

  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_SimpleOnePulseStart_IT

Function name
HAL_StatusTypeDef HAL_HRTIM_SimpleOnePulseStart_IT (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t OnePulseChannel)

Function description
Enables the simple one pulse signal generation on the designed output (The compare interrupt is enabled (pulse start)).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **OnePulseChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_SimpleOnePulseStop_IT

Function name
HAL_StatusTypeDef HAL_HRTIM_SimpleOnePulseStop_IT (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t OnePulseChannel)

Function description
Disables the simple one pulse signal generation on the designed output (The compare interrupt is disabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D

  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **OnePulseChannel:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_BurstModeConfig

Function name **HAL_StatusTypeDef HAL_HRTIM_BurstModeConfig (HRTIM_HandleTypeDef * hhrtim, HRTIM_BurstModeCfgTypeDef * pBurstModeCfg)**

Function description Configures the burst mode feature of the HRTIM.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **pBurstModeCfg:** pointer to the burst mode configuration structure

Return values
- **HAL:** status

Notes
- This function must be called before starting the burst mode controller

HAL_HRTIM_EventConfig

Function name **HAL_StatusTypeDef HAL_HRTIM_EventConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t Event, HRTIM_EventCfgTypeDef * pEventCfg)**

Function description Configures the conditioning of an external event.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Event:** external event to configure This parameter can be one of the following values:
  - HRTIM_EVENT_1: External event 1
  - HRTIM_EVENT_2: External event 2
  - HRTIM_EVENT_3: External event 3
  - HRTIM_EVENT_4: External event 4
  - HRTIM_EVENT_5: External event 5
  - HRTIM_EVENT_6: External event 6
  - HRTIM_EVENT_7: External event 7
  - HRTIM_EVENT_8: External event 8
  - HRTIM_EVENT_9: External event 9
  - HRTIM_EVENT_10: External event 10
- **pEventCfg:** pointer to the event conditioning configuration structure

Return values
- **HAL:** status

Notes
- This function must be called before starting the timer

HAL_HRTIM_EventPrescalerConfig

Function name **HAL_StatusTypeDef HAL_HRTIM_EventPrescalerConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t Prescaler)**

Function description Configures the external event conditioning block prescaler.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Prescaler:** Prescaler value This parameter can be one of the following values:
  - HRTIM_EVENTPRESCALER_DIV1: fEEVS=fHRTIM
  - HRTIM_EVENTPRESCALER_DIV2: fEEVS=fHRTIM / 2
  - HRTIM_EVENTPRESCALER_DIV4: fEEVS=fHRTIM / 4
  - HRTIM_EVENTPRESCALER_DIV8: fEEVS=fHRTIM / 8

Return values
- **HAL:** status

Notes
- This function must be called before starting the timer

HAL_HRTIM_FaultConfig

Function name **HAL_StatusTypeDef HAL_HRTIM_FaultConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t Fault, HRTIM_FaultCfgTypeDef * pFaultCfg)**

Function description Configures the conditioning of fault input.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Fault:** fault input to configure This parameter can be one of the following values:
  - HRTIM_FAULT_1: Fault input 1
  - HRTIM_FAULT_2: Fault input 2
  - HRTIM_FAULT_3: Fault input 3
  - HRTIM_FAULT_4: Fault input 4
  - HRTIM_FAULT_5: Fault input 5
- **pFaultCfg:** pointer to the fault conditioning configuration structure

Return values
- **HAL:** status

Notes
- This function must be called before starting the timer and before enabling faults inputs

HAL_HRTIM_FaultPrescalerConfig

Function name **HAL_StatusTypeDef HAL_HRTIM_FaultPrescalerConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t Prescaler)**

Function description Configures the fault conditioning block prescaler.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Prescaler:** Prescaler value This parameter can be one of the following values:
  - HRTIM_FAULTPRESCALER_DIV1: fFLTS=fHRTIM
  - HRTIM_FAULTPRESCALER_DIV2: fFLTS=fHRTIM / 2

  - HRTIM_FAULTPRESCALER_DIV4: fFLTS=fHRTIM / 4
  - HRTIM_FAULTPRESCALER_DIV8: fFLTS=fHRTIM / 8

Return values
- **HAL:** status

Notes
- This function must be called before starting the timer and before enabling faults inputs

HAL_HRTIM_FaultModeCtl

Function name
void HAL_HRTIM_FaultModeCtl (HRTIM_HandleTypeDef * hhrtim, uint32_t Faults, uint32_t Enable)

Function description
Enables or disables the HRTIMx Fault mode.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Faults:** fault input(s) to enable or disable This parameter can be any combination of the following values:
  - HRTIM_FAULT_1: Fault input 1
  - HRTIM_FAULT_2: Fault input 2
  - HRTIM_FAULT_3: Fault input 3
  - HRTIM_FAULT_4: Fault input 4
  - HRTIM_FAULT_5: Fault input 5
- **Enable:** Fault(s) enabling This parameter can be one of the following values:
  - HRTIM_FAULTMODECTL_ENABLED: Fault(s) enabled
  - HRTIM_FAULTMODECTL_DISABLED: Fault(s) disabled

Return values
- **None**

HAL_HRTIM_ADCTriggerConfig

Function name
HAL_StatusTypeDef HAL_HRTIM_ADCTriggerConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t ADCTrigger, HRTIM_ADCTriggerCfgTypeDef * pADCTriggerCfg)

Function description
Configures both the ADC trigger register update source and the ADC trigger source.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **ADCTrigger:** ADC trigger to configure This parameter can be one of the following values:
  - HRTIM_ADCTRIGGER_1: ADC trigger 1
  - HRTIM_ADCTRIGGER_2: ADC trigger 2
  - HRTIM_ADCTRIGGER_3: ADC trigger 3
  - HRTIM_ADCTRIGGER_4: ADC trigger 4
- **pADCTriggerCfg:** pointer to the ADC trigger configuration structure

Return values
- **HAL:** status

Notes
- This function must be called before starting the timer

HAL_HRTIM_WaveformTimerConfig

Function name
HAL_StatusTypeDef HAL_HRTIM_WaveformTimerConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, HRTIM_TimerCfgTypeDef * pTimerCfg)

Function description
Configures the general behavior of a timer operating in waveform mode.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_MASTER for master timer
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **pTimerCfg:** pointer to the timer configuration structure

Return values
- **HAL:** status

Notes
- When the timer operates in waveform mode, all the features supported by the HRTIM are available without any limitation.
- This function must be called before starting the timer

HAL_HRTIM_WaveformCompareConfig

Function name
HAL_StatusTypeDef HAL_HRTIM_WaveformCompareConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t CompareUnit, HRTIM_CompareCfgTypeDef * pCompareCfg)

Function description
Configures the compare unit of a timer operating in waveform mode.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_MASTER for master timer
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **CompareUnit:** Compare unit to configure This parameter can be one of the following values:
  - HRTIM_COMPAREUNIT_1: Compare unit 1
  - HRTIM_COMPAREUNIT_2: Compare unit 2
  - HRTIM_COMPAREUNIT_3: Compare unit 3
  - HRTIM_COMPAREUNIT_4: Compare unit 4
- **pCompareCfg:** pointer to the compare unit configuration structure

Return values
- **HAL:** status

Notes
- When auto delayed mode is required for compare unit 2 or compare unit 4, application has to configure separately the capture unit. Capture unit to configure in that case depends

on the compare unit auto delayed mode is applied to (see below): Auto delayed on output compare 2: capture unit 1 must be configured Auto delayed on output compare 4: capture unit 2 must be configured
- This function must be called before starting the timer

HAL_HRTIM_WaveformCaptureConfig

Function name
HAL_StatusTypeDef HAL_HRTIM_WaveformCaptureConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t CaptureUnit, HRTIM_CaptureCfgTypeDef * pCaptureCfg)

Function description
Configures the capture unit of a timer operating in waveform mode.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **CaptureUnit:** Capture unit to configure This parameter can be one of the following values:
  - HRTIM_CAPTUREUNIT_1: Capture unit 1
  - HRTIM_CAPTUREUNIT_2: Capture unit 2
- **pCaptureCfg:** pointer to the compare unit configuration structure

Return values
- **HAL:** status

Notes
- This function must be called before starting the timer

HAL_HRTIM_WaveformOutputConfig

Function name
HAL_StatusTypeDef HAL_HRTIM_WaveformOutputConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t Output, HRTIM_OutputCfgTypeDef * pOutputCfg)

Function description
Configures the output of a timer operating in waveform mode.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **Output:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2

  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2
- **pOutputCfg:** pointer to the timer output configuration structure

Return values
- **HAL:** status

Notes
- This function must be called before configuring the timer and after configuring the deadtime insertion feature (if required).

HAL_HRTIM_WaveformSetOutputLevel

Function name
HAL_StatusTypeDef HAL_HRTIM_WaveformSetOutputLevel (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t Output, uint32_t OutputLevel)

Function description
Forces the timer output to its active or inactive state.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **Output:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2
- **OutputLevel:** indicates whether the output is forced to its active or inactive level This parameter can be one of the following values:
  - HRTIM_OUTPUTLEVEL_ACTIVE: output is forced to its active level
  - HRTIM_OUTPUTLEVEL_INACTIVE: output is forced to its inactive level

Return values
- **HAL:** status

Notes
- The 'software set/reset trigger' bit in the output set/reset registers is automatically reset by hardware

HAL_HRTIM_TimerEventFilteringConfig

Function name
HAL_StatusTypeDef HAL_HRTIM_TimerEventFilteringConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t Event, HRTIM_TimerEventFilteringCfgTypeDef * pTimerEventFilteringCfg)

Function description
Configures the event filtering capabilities of a timer (blanking, windowing)

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **Event:** external event for which timer event filtering must be configured This parameter can be one of the following values:
  - HRTIM_EVENT_NONE Reset timer event filtering configuration
  - HRTIM_EVENT_1: External event 1
  - HRTIM_EVENT_2: External event 2
  - HRTIM_EVENT_3: External event 3
  - HRTIM_EVENT_4: External event 4
  - HRTIM_EVENT_5: External event 5
  - HRTIM_EVENT_6: External event 6
  - HRTIM_EVENT_7: External event 7
  - HRTIM_EVENT_8: External event 8
  - HRTIM_EVENT_9: External event 9
  - HRTIM_EVENT_10: External event 10
- **pTimerEventFilteringCfg:** pointer to the timer event filtering configuration structure

Return values
- **HAL:** status

Notes
- This function must be called before starting the timer

HAL_HRTIM_DeadTimeConfig

Function name
HAL_StatusTypeDef HAL_HRTIM_DeadTimeConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, HRTIM_DeadTimeCfgTypeDef * pDeadTimeCfg)

Function description
Configures the deadtime insertion feature for a timer.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **pDeadTimeCfg:** pointer to the deadtime insertion

configuration structure

Return values
- **HAL:** status

Notes
- This function must be called before starting the timer

HAL_HRTIM_ChopperModeConfig

Function name **HAL_StatusTypeDef HAL_HRTIM_ChopperModeConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, HRTIM_ChopperModeCfgTypeDef * pChopperModeCfg)**

Function description Configures the chopper mode feature for a timer.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **pChopperModeCfg:** pointer to the chopper mode configuration structure

Return values
- **HAL:** status

Notes
- This function must be called before configuring the timer output(s)

HAL_HRTIM_BurstDMAConfig

Function name **HAL_StatusTypeDef HAL_HRTIM_BurstDMAConfig (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t RegistersToUpdate)**

Function description Configures the burst DMA controller for a timer.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_MASTER for master timer
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **RegistersToUpdate:** registers to be written by DMA This parameter can be any combination of the following values:
  - HRTIM_BURSTDMA_CR: HRTIM_MCR or HRTIM_TIMxCR
  - HRTIM_BURSTDMA_ICR: HRTIM_MICR or HRTIM_TIMxICR
  - HRTIM_BURSTDMA_DIER: HRTIM_MDIER or HRTIM_TIMxDIER
  - HRTIM_BURSTDMA_CNT: HRTIM_MCNT or HRTIM_TIMxCNT

  - HRTIM_BURSTDMA_PER: HRTIM_MPER or HRTIM_TIMxPER
  - HRTIM_BURSTDMA_REP: HRTIM_MREP or HRTIM_TIMxREP
  - HRTIM_BURSTDMA_CMP1: HRTIM_MCMP1 or HRTIM_TIMxCMP1
  - HRTIM_BURSTDMA_CMP2: HRTIM_MCMP2 or HRTIM_TIMxCMP2
  - HRTIM_BURSTDMA_CMP3: HRTIM_MCMP3 or HRTIM_TIMxCMP3
  - HRTIM_BURSTDMA_CMP4: HRTIM_MCMP4 or HRTIM_TIMxCMP4
  - HRTIM_BURSTDMA_DTR: HRTIM_TIMxDTR
  - HRTIM_BURSTDMA_SET1R: HRTIM_TIMxSET1R
  - HRTIM_BURSTDMA_RST1R: HRTIM_TIMxRST1R
  - HRTIM_BURSTDMA_SET2R: HRTIM_TIMxSET2R
  - HRTIM_BURSTDMA_RST2R: HRTIM_TIMxRST2R
  - HRTIM_BURSTDMA_EEFR1: HRTIM_TIMxEEFR1
  - HRTIM_BURSTDMA_EEFR2: HRTIM_TIMxEEFR2
  - HRTIM_BURSTDMA_RSTR: HRTIM_TIMxRSTR
  - HRTIM_BURSTDMA_CHPR: HRTIM_TIMxCHPR
  - HRTIM_BURSTDMA_OUTR: HRTIM_TIMxOUTR
  - HRTIM_BURSTDMA_FLTR: HRTIM_TIMxFLTR

Return values
- **HAL:** status

Notes
- This function must be called before starting the timer

HAL_HRTIM_WaveformCounterStart

Function name
HAL_StatusTypeDef HAL_HRTIM_WaveformCounterStart (HRTIM_HandleTypeDef * hhrtim, uint32_t Timers)

Function description
Starts the counter of the designated timer(s) operating in waveform mode Timers can be combined (ORed) to allow for simultaneous counter start.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Timers:** Timer counter(s) to start This parameter can be any combination of the following values:
  - HRTIM_TIMERID_MASTER
  - HRTIM_TIMERID_TIMER_A
  - HRTIM_TIMERID_TIMER_B
  - HRTIM_TIMERID_TIMER_C
  - HRTIM_TIMERID_TIMER_D
  - HRTIM_TIMERID_TIMER_E

Return values
- **HAL:** status

HAL_HRTIM_WaveformCounterStop

Function name
HAL_StatusTypeDef HAL_HRTIM_WaveformCounterStop (HRTIM_HandleTypeDef * hhrtim, uint32_t Timers)

Function description
Stops the counter of the designated timer(s) operating in waveform mode Timers can be combined (ORed) to allow for simultaneous counter stop.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Timers:** Timer counter(s) to stop This parameter can be any combination of the following values:
  - HRTIM_TIMERID_MASTER
  - HRTIM_TIMERID_A
  - HRTIM_TIMERID_B
  - HRTIM_TIMERID_C
  - HRTIM_TIMERID_D
  - HRTIM_TIMERID_E

Return values
- **HAL:** status

Notes
- The counter of a timer is stopped only if all timer outputs are disabled

HAL_HRTIM_WaveformCounterStart_IT

Function name
HAL_StatusTypeDef HAL_HRTIM_WaveformCounterStart_IT (HRTIM_HandleTypeDef * hhrtim, uint32_t Timers)

Function description
Starts the counter of the designated timer(s) operating in waveform mode Timers can be combined (ORed) to allow for simultaneous counter start.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Timers:** Timer counter(s) to start This parameter can be any combination of the following values:
  - HRTIM_TIMERID_MASTER
  - HRTIM_TIMERID_A
  - HRTIM_TIMERID_B
  - HRTIM_TIMERID_C
  - HRTIM_TIMERID_D
  - HRTIM_TIMERID_E

Return values
- **HAL:** status

Notes
- HRTIM interrupts (e.g. faults interrupts) and interrupts related to the timers to start are enabled within this function. Interrupts to enable are selected through HAL_HRTIM_WaveformTimerConfig function.

HAL_HRTIM_WaveformCounterStop_IT

Function name
HAL_StatusTypeDef HAL_HRTIM_WaveformCounterStop_IT (HRTIM_HandleTypeDef * hhrtim, uint32_t Timers)

Function description
Stops the counter of the designated timer(s) operating in waveform mode Timers can be combined (ORed) to allow for simultaneous counter stop.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Timers:** Timer counter(s) to stop This parameter can be any combination of the following values:
  - HRTIM_TIMERID_MASTER
  - HRTIM_TIMERID_A
  - HRTIM_TIMERID_B
  - HRTIM_TIMERID_C
  - HRTIM_TIMERID_D
  - HRTIM_TIMERID_E

Return values
- **HAL:** status

Notes
- The counter of a timer is stopped only if all timer outputs are disabled
- All enabled timer related interrupts are disabled.

HAL_HRTIM_WaveformCounterStart_DMA

Function name
HAL_StatusTypeDef HAL_HRTIM_WaveformCounterStart_DMA (HRTIM_HandleTypeDef * hhrtim, uint32_t Timers)

Function description
Starts the counter of the designated timer(s) operating in waveform mode Timers can be combined (ORed) to allow for simultaneous counter start.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Timers:** Timer counter(s) to start This parameter can be any combination of the following values: HRTIM_TIMERID_MASTER
  - HRTIM_TIMERID_A
  - HRTIM_TIMERID_B
  - HRTIM_TIMERID_C
  - HRTIM_TIMERID_D
  - HRTIM_TIMERID_E

Return values
- **HAL:** status

Notes
- This function enables the dma request(s) mentionned in the timer configuration data structure for every timers to start.
- The source memory address, the destination memory address and the size of each DMA transfer are specified at timer configuration time (see HAL_HRTIM_WaveformTimerConfig)

HAL_HRTIM_WaveformCounterStop_DMA

Function name
HAL_StatusTypeDef HAL_HRTIM_WaveformCounterStop_DMA (HRTIM_HandleTypeDef * hhrtim, uint32_t Timers)

Function description
Stops the counter of the designated timer(s) operating in waveform mode Timers can be combined (ORed) to allow for simultaneous counter stop.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Timers:** Timer counter(s) to stop This parameter can be any combination of the following values:

  - HRTIM_TIMERID_MASTER
  - HRTIM_TIMERID_A
  - HRTIM_TIMERID_B
  - HRTIM_TIMERID_C
  - HRTIM_TIMERID_D
  - HRTIM_TIMERID_E

Return values
- **HAL:** status

Notes
- The counter of a timer is stopped only if all timer outputs are disabled
- All enabled timer related DMA requests are disabled.

HAL_HRTIM_WaveformOutputStart

Function name
HAL_StatusTypeDef HAL_HRTIM_WaveformOutputStart (HRTIM_HandleTypeDef * hhrtim, uint32_t OutputsToStart)

Function description
Enables the generation of the waveform signal on the designated output(s) Outputs can be combined (ORed) to allow for simultaneous output enabling.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **OutputsToStart:** Timer output(s) to enable This parameter can be any combination of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_WaveformOutputStop

Function name
HAL_StatusTypeDef HAL_HRTIM_WaveformOutputStop (HRTIM_HandleTypeDef * hhrtim, uint32_t OutputsToStop)

Function description
Disables the generation of the waveform signal on the designated output(s) Outputs can be combined (ORed) to allow for simultaneous output disabling.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **OutputsToStop:** Timer output(s) to disable This parameter can be any combination of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1

- HRTIM_OUTPUT_TD2: Timer D - Output 2
- HRTIM_OUTPUT_TE1: Timer E - Output 1
- HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **HAL:** status

HAL_HRTIM_BurstModeCtl

Function name **HAL_StatusTypeDef HAL_HRTIM_BurstModeCtl (HRTIM_HandleTypeDef * hhrtim, uint32_t Enable)**

Function description Enables or disables the HRTIM burst mode controller.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Enable:** Burst mode controller enabling This parameter can be one of the following values:
  - HRTIM_BURSTMODECTL_ENABLED: Burst mode enabled
  - HRTIM_BURSTMODECTL_DISABLED: Burst mode disabled

Return values
- **HAL:** status

Notes
- This function must be called after starting the timer(s)

HAL_HRTIM_BurstModeSoftwareTrigger

Function name **HAL_StatusTypeDef HAL_HRTIM_BurstModeSoftwareTrigger (HRTIM_HandleTypeDef * hhrtim)**

Function description Triggers the burst mode operation.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle

Return values
- **HAL:** status

HAL_HRTIM_SoftwareCapture

Function name **HAL_StatusTypeDef HAL_HRTIM_SoftwareCapture (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t CaptureUnit)**

Function description Triggers a software capture on the designed capture unit.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **CaptureUnit:** Capture unit to trig This parameter can be one of the following values:
  - HRTIM_CAPTUREUNIT_1: Capture unit 1
  - HRTIM_CAPTUREUNIT_2: Capture unit 2

Return values
- **HAL:** status

Notes
- The software capture' bit in the capure configuration register is automatically reset by hardware

HAL_HRTIM_SoftwareUpdate

Function name **HAL_StatusTypeDef HAL_HRTIM_SoftwareUpdate (HRTIM_HandleTypeDef * hhrtim, uint32_t Timers)**

Function description Triggers the update of the registers of one or several timers.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Timers:** timers concerned with the software register update This parameter can be any combination of the following values:
  - HRTIM_TIMERUPDATE_MASTER
  - HRTIM_TIMERUPDATE_A
  - HRTIM_TIMERUPDATE_B
  - HRTIM_TIMERUPDATE_C
  - HRTIM_TIMERUPDATE_D
  - HRTIM_TIMERUPDATE_E

Return values
- **HAL:** status

Notes
- The 'software update' bits in the HRTIM conrol register 2 register are automatically reset by hardware

HAL_HRTIM_SoftwareReset

Function name **HAL_StatusTypeDef HAL_HRTIM_SoftwareReset (HRTIM_HandleTypeDef * hhrtim, uint32_t Timers)**

Function description Triggers the reset of one or several timers.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Timers:** timers concerned with the software counter reset This parameter can be any combination of the following values:
  - HRTIM_TIMERRESET_MASTER
  - HRTIM_TIMERRESET_TIMER_A
  - HRTIM_TIMERRESET_TIMER_B
  - HRTIM_TIMERRESET_TIMER_C
  - HRTIM_TIMERRESET_TIMER_D
  - HRTIM_TIMERRESET_TIMER_E

Return values
- **HAL:** status

Notes
- The 'software reset' bits in the HRTIM conrol register 2 are automatically reset by hardware

HAL_HRTIM_BurstDMATransfer

Function name **HAL_StatusTypeDef HAL_HRTIM_BurstDMATransfer (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t BurstBufferAddress, uint32_t BurstBufferLength)**

Function description Starts a burst DMA operation to update HRTIM control registers content.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_MASTER for master timer
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **BurstBufferAddress:** address of the buffer the HRTIM control registers content will be updated from.
- **BurstBufferLength:** size (in WORDS) of the burst buffer.

Return values
- **HAL:** status

Notes
- The TimerIdx parameter determines the dma channel to be used by the DMA burst controller (see below) HRTIM_TIMERINDEX_MASTER: DMA channel 2 is used by the DMA burst controller HRTIM_TIMERINDEX_TIMER_A: DMA channel 3 is used by the DMA burst controller HRTIM_TIMERINDEX_TIMER_B: DMA channel 4 is used by the DMA burst controller HRTIM_TIMERINDEX_TIMER_C: DMA channel 5 is used by the DMA burst controller HRTIM_TIMERINDEX_TIMER_D: DMA channel 6 is used by the DMA burst controller HRTIM_TIMERINDEX_TIMER_E: DMA channel 7 is used by the DMA burst controller

HAL_HRTIM_UpdateEnable

Function name **HAL_StatusTypeDef HAL_HRTIM_UpdateEnable (HRTIM_HandleTypeDef * hhrtim, uint32_t Timers)**

Function description Enables the transfer from preload to active registers for one or several timing units (including master timer).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **Timers:** Timer(s) concerned by the register preload enabling command This parameter can be any combination of the following values:
  - HRTIM_TIMERUPDATE_MASTER
  - HRTIM_TIMERUPDATE_A
  - HRTIM_TIMERUPDATE_B
  - HRTIM_TIMERUPDATE_C
  - HRTIM_TIMERUPDATE_D
  - HRTIM_TIMERUPDATE_E

Return values
- **HAL:** status

HAL_HRTIM_UpdateDisable

Function name **HAL_StatusTypeDef HAL_HRTIM_UpdateDisable (HRTIM_HandleTypeDef * hhrtim, uint32_t Timers)**

Function description Disables the transfer from preload to active registers for one or several timing units (including master timer).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle

- **Timers:** Timer(s) concerned by the register preload disabling command This parameter can be any combination of the following values:
  - HRTIM_TIMERUPDATE_MASTER
  - HRTIM_TIMERUPDATE_A
  - HRTIM_TIMERUPDATE_B
  - HRTIM_TIMERUPDATE_C
  - HRTIM_TIMERUPDATE_D
  - HRTIM_TIMERUPDATE_E

Return values
- **HAL:** status

HAL_HRTIM_GetState

Function name **HAL_HRTIM_StateTypeDef HAL_HRTIM_GetState (HRTIM_HandleTypeDef * hhrtim)**

Function description return the HRTIM HAL state

Parameters
- **hhrtim:** pointer to HAL HRTIM handle

Return values
- **HAL:** state

HAL_HRTIM_GetCapturedValue

Function name **uint32_t HAL_HRTIM_GetCapturedValue (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t CaptureUnit)**

Function description Returns actual value of the capture register of the designated capture unit.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **CaptureUnit:** Capture unit to trig This parameter can be one of the following values:
  - HRTIM_CAPTUREUNIT_1: Capture unit 1
  - HRTIM_CAPTUREUNIT_2: Capture unit 2

Return values
- **Captured:** value

HAL_HRTIM_WaveformGetOutputLevel

Function name **uint32_t HAL_HRTIM_WaveformGetOutputLevel (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t Output)**

Function description Returns actual level (active or inactive) of the designated output.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:

  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **Output:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **Output:** level

Notes
- Returned output level is taken before the output stage (chopper, polarity).

HAL_HRTIM_WaveformGetOutputState

Function name
uint32_t HAL_HRTIM_WaveformGetOutputState (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t Output)

Function description
Returns actual state (RUN, IDLE, FAULT) of the designated output.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **Output:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TE1: Timer E - Output 1
  - HRTIM_OUTPUT_TE2: Timer E - Output 2

Return values
- **Output:** state

HAL_HRTIM_GetDelayedProtectionStatus

Function name **uint32_t HAL_HRTIM_GetDelayedProtectionStatus (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx, uint32_t Output)**

Function description Returns the level (active or inactive) of the designated output when the delayed protection was triggered.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E
- **Output:** Timer output This parameter can be one of the following values:
  - HRTIM_OUTPUT_TA1: Timer A - Output 1
  - HRTIM_OUTPUT_TA2: Timer A - Output 2
  - HRTIM_OUTPUT_TB1: Timer B - Output 1
  - HRTIM_OUTPUT_TB2: Timer B - Output 2
  - HRTIM_OUTPUT_TC1: Timer C - Output 1
  - HRTIM_OUTPUT_TC2: Timer C - Output 2
  - HRTIM_OUTPUT_TD1: Timer D - Output 1
  - HRTIM_OUTPUT_TD2: Timer D - Output 2
  - HRTIM_OUTPUT_TD1: Timer E - Output 1
  - HRTIM_OUTPUT_TD2: Timer E - Output 2

Return values
- **Delayed:** protection status

HAL_HRTIM_GetBurstStatus

Function name **uint32_t HAL_HRTIM_GetBurstStatus (HRTIM_HandleTypeDef * hhrtim)**

Function description Returns the actual status (active or inactive) of the burst mode controller.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle

Return values
- **Burst:** mode controller status

HAL_HRTIM_GetCurrentPushPullStatus

Function name **uint32_t HAL_HRTIM_GetCurrentPushPullStatus (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)**

Function description Indicates on which output the signal is currently active (when the push pull mode is enabled).

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C

  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **Burst:** mode controller status

HAL_HRTIM_GetIdlePushPullStatus

Function name
uint32_t HAL_HRTIM_GetIdlePushPullStatus (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)

Function description
Indicates on which output the signal was applied, in push-pull mode, balanced fault mode or delayed idle mode, when the protection was triggered.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **Idle:** Push Pull Status

HAL_HRTIM_IRQHandler

Function name
void HAL_HRTIM_IRQHandler (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)

Function description
This function handles HRTIM interrupt request.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be any value of HRTIM Timer Index

Return values
- **None**

HAL_HRTIM_Fault1Callback

Function name
void HAL_HRTIM_Fault1Callback (HRTIM_HandleTypeDef * hhrtim)

Function description
Callback function invoked when a fault 1 interrupt occured.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle *

Return values
- **None**
- **None**

HAL_HRTIM_Fault2Callback

Function name
void HAL_HRTIM_Fault2Callback (HRTIM_HandleTypeDef * hhrtim)

Function description
Callback function invoked when a fault 2 interrupt occured.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle

Return values
- **None**

HAL_HRTIM_Fault3Callback

Function name **void HAL_HRTIM_Fault3Callback (HRTIM_HandleTypeDef * hhrtim)**

Function description Callback function invoked when a fault 3 interrupt occured.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle

Return values
- **None**

HAL_HRTIM_Fault4Callback

Function name **void HAL_HRTIM_Fault4Callback (HRTIM_HandleTypeDef * hhrtim)**

Function description Callback function invoked when a fault 4 interrupt occured.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle

Return values
- **None**

HAL_HRTIM_Fault5Callback

Function name **void HAL_HRTIM_Fault5Callback (HRTIM_HandleTypeDef * hhrtim)**

Function description Callback function invoked when a fault 5 interrupt occured.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle

Return values
- **None**

HAL_HRTIM_SystemFaultCallback

Function name **void HAL_HRTIM_SystemFaultCallback (HRTIM_HandleTypeDef * hhrtim)**

Function description Callback function invoked when a system fault interrupt occured.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle

Return values
- **None**

HAL_HRTIM_DLLCalbrationReadyCallback

Function name **void HAL_HRTIM_DLLCalbrationReadyCallback (HRTIM_HandleTypeDef * hhrtim)**

Function description Callback function invoked when the DLL calibration is completed.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle

Return values
- **None**

HAL_HRTIM_BurstModePeriodCallback

Function name **void HAL_HRTIM_BurstModePeriodCallback (HRTIM_HandleTypeDef * hhrtim)**

Function description Callback function invoked when the end of the burst mode period is reached.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle

Return values
- **None**

HAL_HRTIM_SynchronizationEventCallback

Function name **void HAL_HRTIM_SynchronizationEventCallback (HRTIM_HandleTypeDef * hhrtim)**

Function description Callback function invoked when a synchronization input event is received.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle

Return values
- **None**

HAL_HRTIM_RegistersUpdateCallback

Function name **void HAL_HRTIM_RegistersUpdateCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)**

Function description Callback function invoked when timer registers are updated.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_MASTER for master timer
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_RepetitionEventCallback

Function name **void HAL_HRTIM_RepetitionEventCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)**

Function description Callback function invoked when timer repetition period has elapsed.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_MASTER for master timer
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D

– HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_Compare1EventCallback

Function name **void HAL_HRTIM_Compare1EventCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)**

Function description Callback function invoked when the timer counter matches the value programmed in the compare 1 register.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  – HRTIM_TIMERINDEX_MASTER for master timer
  – HRTIM_TIMERINDEX_TIMER_A for timer A
  – HRTIM_TIMERINDEX_TIMER_B for timer B
  – HRTIM_TIMERINDEX_TIMER_C for timer C
  – HRTIM_TIMERINDEX_TIMER_D for timer D
  – HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_Compare2EventCallback

Function name **void HAL_HRTIM_Compare2EventCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)**

Function description Callback function invoked when the timer counter matches the value programmed in the compare 2 register.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  – HRTIM_TIMERINDEX_MASTER for master timer
  – HRTIM_TIMERINDEX_TIMER_A for timer A
  – HRTIM_TIMERINDEX_TIMER_B for timer B
  – HRTIM_TIMERINDEX_TIMER_C for timer C
  – HRTIM_TIMERINDEX_TIMER_D for timer D
  – HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_Compare3EventCallback

Function name **void HAL_HRTIM_Compare3EventCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)**

Function description Callback function invoked when the timer counter matches the value programmed in the compare 3 register.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  – HRTIM_TIMERINDEX_MASTER for master timer
  – HRTIM_TIMERINDEX_TIMER_A for timer A
  – HRTIM_TIMERINDEX_TIMER_B for timer B

  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_Compare4EventCallback

Function name
void HAL_HRTIM_Compare4EventCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)

Function description
Callback function invoked when the timer counter matches the value programmed in the compare 4 register.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_MASTER for master timer
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_Capture1EventCallback

Function name
void HAL_HRTIM_Capture1EventCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)

Function description
Callback function invoked when the timer x capture 1 event occurs.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_Capture2EventCallback

Function name
void HAL_HRTIM_Capture2EventCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)

Function description
Callback function invoked when the timer x capture 2 event occurs.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B

  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_DelayedProtectionCallback

Function name
void HAL_HRTIM_DelayedProtectionCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)

Function description
Callback function invoked when the delayed idle or balanced idle mode is entered.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_CounterResetCallback

Function name
void HAL_HRTIM_CounterResetCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)

Function description
Callback function invoked when the timer x counter reset/roll-over event occurs.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_Output1SetCallback

Function name
void HAL_HRTIM_Output1SetCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)

Function description
Callback function invoked when the timer x output 1 is set.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D

– HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_Output1ResetCallback

Function name **void HAL_HRTIM_Output1ResetCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)**

Function description Callback function invoked when the timer x output 1 is reset.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  – HRTIM_TIMERINDEX_TIMER_A for timer A
  – HRTIM_TIMERINDEX_TIMER_B for timer B
  – HRTIM_TIMERINDEX_TIMER_C for timer C
  – HRTIM_TIMERINDEX_TIMER_D for timer D
  – HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_Output2SetCallback

Function name **void HAL_HRTIM_Output2SetCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)**

Function description Callback function invoked when the timer x output 2 is set.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  – HRTIM_TIMERINDEX_TIMER_A for timer A
  – HRTIM_TIMERINDEX_TIMER_B for timer B
  – HRTIM_TIMERINDEX_TIMER_C for timer C
  – HRTIM_TIMERINDEX_TIMER_D for timer D
  – HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_Output2ResetCallback

Function name **void HAL_HRTIM_Output2ResetCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)**

Function description Callback function invoked when the timer x output 2 is reset.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  – HRTIM_TIMERINDEX_TIMER_A for timer A
  – HRTIM_TIMERINDEX_TIMER_B for timer B
  – HRTIM_TIMERINDEX_TIMER_C for timer C
  – HRTIM_TIMERINDEX_TIMER_D for timer D
  – HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_BurstDMATransferCallback

Function name **void HAL_HRTIM_BurstDMATransferCallback (HRTIM_HandleTypeDef * hhrtim, uint32_t TimerIdx)**

Function description Callback function invoked when a DMA burst transfer is completed.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle
- **TimerIdx:** Timer index This parameter can be one of the following values:
  - HRTIM_TIMERINDEX_MASTER for master timer
  - HRTIM_TIMERINDEX_TIMER_A for timer A
  - HRTIM_TIMERINDEX_TIMER_B for timer B
  - HRTIM_TIMERINDEX_TIMER_C for timer C
  - HRTIM_TIMERINDEX_TIMER_D for timer D
  - HRTIM_TIMERINDEX_TIMER_E for timer E

Return values
- **None**

HAL_HRTIM_ErrorCallback

Function name **void HAL_HRTIM_ErrorCallback (HRTIM_HandleTypeDef * hhrtim)**

Function description Callback function invoked when a DMA error occurs.

Parameters
- **hhrtim:** pointer to HAL HRTIM handle

Return values
- **None**

23.3 HRTIM Firmware driver defines

23.3.1 HRTIM

HRTIM ADC Trigger

HRTIM_ADCTRIGGER_1	ADC trigger 1 identifier
HRTIM_ADCTRIGGER_2	ADC trigger 2 identifier
HRTIM_ADCTRIGGER_3	ADC trigger 3 identifier
HRTIM_ADCTRIGGER_4	ADC trigger 4 identifier
IS_HRTIM_ADCTRIGGER	

HRTIM ADC Trigger Event

HRTIM_ADCTRIGGEREVENT13_NONE	No ADC trigger event
HRTIM_ADCTRIGGEREVENT13_MASTER_CMP1	ADC Trigger on master compare 1U
HRTIM_ADCTRIGGEREVENT13_MASTER_CMP2	ADC Trigger on master compare 2U
HRTIM_ADCTRIGGEREVENT13_MASTER_CMP3	ADC Trigger on master compare 3U
HRTIM_ADCTRIGGEREVENT13_MASTER_CMP4	ADC Trigger on master compare 4U

HRTIM_ADCTRIGGEREVENT13_MASTER_PERIOD	ADC Trigger on master period
HRTIM_ADCTRIGGEREVENT13_EVENT_1	ADC Trigger on external event 1U
HRTIM_ADCTRIGGEREVENT13_EVENT_2	ADC Trigger on external event 2U
HRTIM_ADCTRIGGEREVENT13_EVENT_3	ADC Trigger on external event 3U
HRTIM_ADCTRIGGEREVENT13_EVENT_4	ADC Trigger on external event 4U
HRTIM_ADCTRIGGEREVENT13_EVENT_5	ADC Trigger on external event 5U
HRTIM_ADCTRIGGEREVENT13_TIMERA_CMP2	ADC Trigger on Timer A compare 2U
HRTIM_ADCTRIGGEREVENT13_TIMERA_CMP3	ADC Trigger on Timer A compare 3U
HRTIM_ADCTRIGGEREVENT13_TIMERA_CMP4	ADC Trigger on Timer A compare 4U
HRTIM_ADCTRIGGEREVENT13_TIMERA_PERIOD	ADC Trigger on Timer A period
HRTIM_ADCTRIGGEREVENT13_TIMERA_RESET	ADC Trigger on Timer A reset
HRTIM_ADCTRIGGEREVENT13_TIMERB_CMP2	ADC Trigger on Timer B compare 2U
HRTIM_ADCTRIGGEREVENT13_TIMERB_CMP3	ADC Trigger on Timer B compare 3U
HRTIM_ADCTRIGGEREVENT13_TIMERB_CMP4	ADC Trigger on Timer B compare 4U
HRTIM_ADCTRIGGEREVENT13_TIMERB_PERIOD	ADC Trigger on Timer B period
HRTIM_ADCTRIGGEREVENT13_TIMERB_RESET	ADC Trigger on Timer B reset
HRTIM_ADCTRIGGEREVENT13_TIMERC_CMP2	ADC Trigger on Timer C compare 2U
HRTIM_ADCTRIGGEREVENT13_TIMERC_CMP3	ADC Trigger on Timer C compare 3U
HRTIM_ADCTRIGGEREVENT13_TIMERC_CMP4	ADC Trigger on Timer C compare 4U
HRTIM_ADCTRIGGEREVENT13_TIMERC_PERIOD	ADC Trigger on Timer C period
HRTIM_ADCTRIGGEREVENT13_TIMERD_CMP2	ADC Trigger on Timer D compare 2U
HRTIM_ADCTRIGGEREVENT13_TIMERD_CMP3	ADC Trigger on Timer D compare 3U
HRTIM_ADCTRIGGEREVENT13_TIMERD_CMP4	ADC Trigger on Timer D compare 4U
HRTIM_ADCTRIGGEREVENT13_TIMERD_PERIOD	ADC Trigger on Timer D period
HRTIM_ADCTRIGGEREVENT13_TIMERE_CMP2	ADC Trigger on Timer E compare 2U
HRTIM_ADCTRIGGEREVENT13_TIMERE_CMP3	ADC Trigger on Timer E compare 3U
HRTIM_ADCTRIGGEREVENT13_TIMERE_CMP4	ADC Trigger on Timer E compare

	4U
HRTIM_ADCTRIGGEREVENT13_TIMERE_PERIOD	ADC Trigger on Timer E period
HRTIM_ADCTRIGGEREVENT24_NONE	No ADC trigger event
HRTIM_ADCTRIGGEREVENT24_MASTER_CMP1	ADC Trigger on master compare 1U
HRTIM_ADCTRIGGEREVENT24_MASTER_CMP2	ADC Trigger on master compare 2U
HRTIM_ADCTRIGGEREVENT24_MASTER_CMP3	ADC Trigger on master compare 3U
HRTIM_ADCTRIGGEREVENT24_MASTER_CMP4	ADC Trigger on master compare 4U
HRTIM_ADCTRIGGEREVENT24_MASTER_PERIOD	ADC Trigger on master period
HRTIM_ADCTRIGGEREVENT24_EVENT_6	ADC Trigger on external event 6U
HRTIM_ADCTRIGGEREVENT24_EVENT_7	ADC Trigger on external event 7U
HRTIM_ADCTRIGGEREVENT24_EVENT_8	ADC Trigger on external event 8U
HRTIM_ADCTRIGGEREVENT24_EVENT_9	ADC Trigger on external event 9U
HRTIM_ADCTRIGGEREVENT24_EVENT_10	ADC Trigger on external event 10U
HRTIM_ADCTRIGGEREVENT24_TIMERA_CMP2	ADC Trigger on Timer A compare 2U
HRTIM_ADCTRIGGEREVENT24_TIMERA_CMP3	ADC Trigger on Timer A compare 3U
HRTIM_ADCTRIGGEREVENT24_TIMERA_CMP4	ADC Trigger on Timer A compare 4U
HRTIM_ADCTRIGGEREVENT24_TIMERA_PERIOD	ADC Trigger on Timer A period
HRTIM_ADCTRIGGEREVENT24_TIMERB_CMP2	ADC Trigger on Timer B compare 2U
HRTIM_ADCTRIGGEREVENT24_TIMERB_CMP3	ADC Trigger on Timer B compare 3U
HRTIM_ADCTRIGGEREVENT24_TIMERB_CMP4	ADC Trigger on Timer B compare 4U
HRTIM_ADCTRIGGEREVENT24_TIMERB_PERIOD	ADC Trigger on Timer B period
HRTIM_ADCTRIGGEREVENT24_TIMERC_CMP2	ADC Trigger on Timer C compare 2U
HRTIM_ADCTRIGGEREVENT24_TIMERC_CMP3	ADC Trigger on Timer C compare 3U
HRTIM_ADCTRIGGEREVENT24_TIMERC_CMP4	ADC Trigger on Timer C compare 4U
HRTIM_ADCTRIGGEREVENT24_TIMERC_PERIOD	ADC Trigger on Timer C period
HRTIM_ADCTRIGGEREVENT24_TIMERC_RESET	ADC Trigger on Timer C reset
HRTIM_ADCTRIGGEREVENT24_TIMERD_CMP2	ADC Trigger on Timer D compare

	2U
HRTIM_ADCTRIGGEREVENT24_TIMERD_CMP3	ADC Trigger on Timer D compare 3U
HRTIM_ADCTRIGGEREVENT24_TIMERD_CMP4	ADC Trigger on Timer D compare 4U
HRTIM_ADCTRIGGEREVENT24_TIMERD_PERIOD	ADC Trigger on Timer D period
HRTIM_ADCTRIGGEREVENT24_TIMERD_RESET	ADC Trigger on Timer D reset
HRTIM_ADCTRIGGEREVENT24_TIMERE_CMP2	ADC Trigger on Timer E compare 2U
HRTIM_ADCTRIGGEREVENT24_TIMERE_CMP3	ADC Trigger on Timer E compare 3U
HRTIM_ADCTRIGGEREVENT24_TIMERE_CMP4	ADC Trigger on Timer E compare 4U
HRTIM_ADCTRIGGEREVENT24_TIMERE_RESET	ADC Trigger on Timer E reset

HRTIM ADC Trigger Update Source

HRTIM_ADCTRIGGERUPDATE_MASTER	Master timer
HRTIM_ADCTRIGGERUPDATE_TIMER_A	Timer A
HRTIM_ADCTRIGGERUPDATE_TIMER_B	Timer B
HRTIM_ADCTRIGGERUPDATE_TIMER_C	Timer C
HRTIM_ADCTRIGGERUPDATE_TIMER_D	Timer D
HRTIM_ADCTRIGGERUPDATE_TIMER_E	Timer E

HRTIM Burst DMA Registers Update

HRTIM_BURSTDMA_NONE	No register is updated by Burst DMA accesses
HRTIM_BURSTDMA_CR	MCR or TIMxCR register is updated by Burst DMA accesses
HRTIM_BURSTDMA_ICR	MICR or TIMxICR register is updated by Burst DMA accesses
HRTIM_BURSTDMA_DIER	MDIER or TIMxDIER register is updated by Burst DMA accesses
HRTIM_BURSTDMA_CNT	MCNTR or CNTxCR register is updated by Burst DMA accesses
HRTIM_BURSTDMA_PER	MPER or PERxR register is updated by Burst DMA accesses
HRTIM_BURSTDMA_REP	MREPR or REPxR register is updated by Burst DMA accesses
HRTIM_BURSTDMA_CMP1	MCMP1R or CMP1xR register is updated by Burst DMA accesses
HRTIM_BURSTDMA_CMP2	MCMP2R or CMP2xR register is updated by Burst DMA accesses
HRTIM_BURSTDMA_CMP3	MCMP3R or CMP3xR register is updated by Burst DMA accesses

HRTIM_BURSTDMA_CMP4	MCMP4R or CMP4xR register is updated by Burst DMA accesses
HRTIM_BURSTDMA_DTR	TDxR register is updated by Burst DMA accesses
HRTIM_BURSTDMA_SET1R	SET1R register is updated by Burst DMA accesses
HRTIM_BURSTDMA_RST1R	RST1R register is updated by Burst DMA accesses
HRTIM_BURSTDMA_SET2R	SET2R register is updated by Burst DMA accesses
HRTIM_BURSTDMA_RST2R	RST1R register is updated by Burst DMA accesses
HRTIM_BURSTDMA_EEFR1	EEFxR1 register is updated by Burst DMA accesses
HRTIM_BURSTDMA_EEFR2	EEFxR2 register is updated by Burst DMA accesses
HRTIM_BURSTDMA_RSTR	RSTxR register is updated by Burst DMA accesses
HRTIM_BURSTDMA_CHPR	CHPxR register is updated by Burst DMA accesses
HRTIM_BURSTDMA_OUTR	OUTxR register is updated by Burst DMA accesses
HRTIM_BURSTDMA_FLTR	FLTxR register is updated by Burst DMA accesses

HRTIM Burst Mode Clock Source

HRTIM_BURSTMODECLOCKSOURCE_MASTER	Master timer counter reset/roll-over is used as clock source for the burst mode counter
HRTIM_BURSTMODECLOCKSOURCE_TIMER_A	Timer A counter reset/roll-over is used as clock source for the burst mode counter
HRTIM_BURSTMODECLOCKSOURCE_TIMER_B	Timer B counter reset/roll-over is used as clock source for the burst mode counter
HRTIM_BURSTMODECLOCKSOURCE_TIMER_C	Timer C counter reset/roll-over is used as clock source for the burst mode counter
HRTIM_BURSTMODECLOCKSOURCE_TIMER_D	Timer D counter reset/roll-over is used as clock source for the burst mode counter
HRTIM_BURSTMODECLOCKSOURCE_TIMER_E	Timer E counter reset/roll-over is used as clock source for the burst mode counter
HRTIM_BURSTMODECLOCKSOURCE_TIM16_OC	On-chip Event 1 (BMClk[1]), acting as a burst mode counter clock
HRTIM_BURSTMODECLOCKSOURCE_TIM17_OC	On-chip Event 2 (BMClk[2]), acting as a burst mode counter clock
HRTIM_BURSTMODECLOCKSOURCE_TIM7_TRGO	On-chip Event 3 (BMClk[3]), acting as a burst mode counter clock
HRTIM_BURSTMODECLOCKSOURCE_FHRTIM	Prescaled fHRTIM clock is used as clock source for the burst mode counter

HRTIM Burst Mode Control

HRTIM_BURSTMODECTL_DISABLED	Burst mode disabled
HRTIM_BURSTMODECTL_ENABLED	Burst mode enabled

HRTIM Burst Mode Operating Mode

HRTIM_BURSTMODE_SINGLESHOT	Burst mode operates in single shot mode
HRTIM_BURSTMODE_CONTINOUS	Burst mode operates in continuous mode

HRTIM Burst Mode Prescaler

HRTIM_BURSTMODEPRESCALER_DIV1	fBRST = fHRTIM
HRTIM_BURSTMODEPRESCALER_DIV2	fBRST = fHRTIM/2U
HRTIM_BURSTMODEPRESCALER_DIV4	fBRST = fHRTIM/4U
HRTIM_BURSTMODEPRESCALER_DIV8	fBRST = fHRTIM/8U
HRTIM_BURSTMODEPRESCALER_DIV16	fBRST = fHRTIM/16U
HRTIM_BURSTMODEPRESCALER_DIV32	fBRST = fHRTIM/32U
HRTIM_BURSTMODEPRESCALER_DIV64	fBRST = fHRTIM/64U
HRTIM_BURSTMODEPRESCALER_DIV128	fBRST = fHRTIM/128U
HRTIM_BURSTMODEPRESCALER_DIV256	fBRST = fHRTIM/256U
HRTIM_BURSTMODEPRESCALER_DIV512	fBRST = fHRTIM/512U
HRTIM_BURSTMODEPRESCALER_DIV1024	fBRST = fHRTIM/1024U
HRTIM_BURSTMODEPRESCALER_DIV2048	fBRST = fHRTIM/2048U
HRTIM_BURSTMODEPRESCALER_DIV4096	fBRST = fHRTIM/4096U
HRTIM_BURSTMODEPRESCALER_DIV8192	fBRST = fHRTIM/8192U
HRTIM_BURSTMODEPRESCALER_DIV16384	fBRST = fHRTIM/16384U
HRTIM_BURSTMODEPRESCALER_DIV32768	fBRST = fHRTIM/32768U

HRTIM Burst Mode Register Preload Enable

HRIM_BURSTMODEPRELOAD_DISABLED	Preload disabled: the write access is directly done into active registers
HRIM_BURSTMODEPRELOAD_ENABLED	Preload enabled: the write access is done into preload registers

HRTIM Burst Mode Status

HRTIM_BURSTMODESTATUS_NORMAL	Normal operation
HRTIM_BURSTMODESTATUS_ONGOING	Burst operation on-going

HRTIM Burst Mode Trigger

HRTIM_BURSTMODETRIGGER_NONE	No trigger
HRTIM_BURSTMODETRIGGER_MASTER_RESET	Master reset
HRTIM_BURSTMODETRIGGER_MASTER_REPETITION	Master repetition
HRTIM_BURSTMODETRIGGER_MASTER_CMP1	Master compare 1U
HRTIM_BURSTMODETRIGGER_MASTER_CMP2	Master compare 2U

HRTIM_BURSTMODETRIGGER_MASTER_CMP3	Master compare 3U
HRTIM_BURSTMODETRIGGER_MASTER_CMP4	Master compare 4U
HRTIM_BURSTMODETRIGGER_TIMERA_RESET	Timer A reset
HRTIM_BURSTMODETRIGGER_TIMERA_REPETITION	Timer A repetition
HRTIM_BURSTMODETRIGGER_TIMERA_CMP1	Timer A compare 1
HRTIM_BURSTMODETRIGGER_TIMERA_CMP2	Timer A compare 2
HRTIM_BURSTMODETRIGGER_TIMERB_RESET	Timer B reset
HRTIM_BURSTMODETRIGGER_TIMERB_REPETITION	Timer B repetition
HRTIM_BURSTMODETRIGGER_TIMERB_CMP1	Timer B compare 1
HRTIM_BURSTMODETRIGGER_TIMERB_CMP2	Timer B compare 2
HRTIM_BURSTMODETRIGGER_TIMERC_RESET	Timer C reset
HRTIM_BURSTMODETRIGGER_TIMERC_REPETITION	Timer C repetition
HRTIM_BURSTMODETRIGGER_TIMERC_CMP1	Timer C compare 1
HRTIM_BURSTMODETRIGGER_TIMERC_CMP2	Timer C compare 2
HRTIM_BURSTMODETRIGGER_TIMERD_RESET	Timer D reset
HRTIM_BURSTMODETRIGGER_TIMERD_REPETITION	Timer D repetition
HRTIM_BURSTMODETRIGGER_TIMERD_CMP1	Timer D compare 1
HRTIM_BURSTMODETRIGGER_TIMERD_CMP2	Timer D compare 2
HRTIM_BURSTMODETRIGGER_TIMERE_RESET	Timer E reset
HRTIM_BURSTMODETRIGGER_TIMERE_REPETITION	Timer E repetition
HRTIM_BURSTMODETRIGGER_TIMERE_CMP1	Timer E compare 1
HRTIM_BURSTMODETRIGGER_TIMERE_CMP2	Timer E compare 2
HRTIM_BURSTMODETRIGGER_TIMERA_EVENT7	Timer A period following External Event 7
HRTIM_BURSTMODETRIGGER_TIMERD_EVENT8	Timer D period following External Event 8
HRTIM_BURSTMODETRIGGER_EVENT_7	External Event 7 (timer A filters applied)
HRTIM_BURSTMODETRIGGER_EVENT_8	External Event 8 (timer D filters applied)
HRTIM_BURSTMODETRIGGER_EVENT_ONCHIP	On-chip Event

HRTIM Capture Unit

HRTIM_CAPTUREUNIT_1	Capture unit 1 identifier
HRTIM_CAPTUREUNIT_2	Capture unit 2 identifier

HRTIM Capture Unit Trigger

HRTIM_CAPTURETRIGGER_NONE	Capture trigger is disabled
HRTIM_CAPTURETRIGGER_UPDATE	The update event triggers the Capture
HRTIM_CAPTURETRIGGER_EEV_1	The External event 1 triggers the Capture

HRTIM_CAPTURETRIGGER_EEV_2	The External event 2 triggers the Capture
HRTIM_CAPTURETRIGGER_EEV_3	The External event 3 triggers the Capture
HRTIM_CAPTURETRIGGER_EEV_4	The External event 4 triggers the Capture
HRTIM_CAPTURETRIGGER_EEV_5	The External event 5 triggers the Capture
HRTIM_CAPTURETRIGGER_EEV_6	The External event 6 triggers the Capture
HRTIM_CAPTURETRIGGER_EEV_7	The External event 7 triggers the Capture
HRTIM_CAPTURETRIGGER_EEV_8	The External event 8 triggers the Capture
HRTIM_CAPTURETRIGGER_EEV_9	The External event 9 triggers the Capture
HRTIM_CAPTURETRIGGER_EEV_10	The External event 10 triggers the Capture
HRTIM_CAPTURETRIGGER_TA1_SET	Capture is triggered by TA1 output inactive to active transition
HRTIM_CAPTURETRIGGER_TA1_RESET	Capture is triggered by TA1 output active to inactive transition
HRTIM_CAPTURETRIGGER_TIMERA_CMP1	Timer A Compare 1 triggers Capture
HRTIM_CAPTURETRIGGER_TIMERA_CMP2	Timer A Compare 2 triggers Capture
HRTIM_CAPTURETRIGGER_TB1_SET	Capture is triggered by TB1 output inactive to active transition
HRTIM_CAPTURETRIGGER_TB1_RESET	Capture is triggered by TB1 output active to inactive transition
HRTIM_CAPTURETRIGGER_TIMERB_CMP1	Timer B Compare 1 triggers Capture
HRTIM_CAPTURETRIGGER_TIMERB_CMP2	Timer B Compare 2 triggers Capture
HRTIM_CAPTURETRIGGER_TC1_SET	Capture is triggered by TC1 output inactive to active transition
HRTIM_CAPTURETRIGGER_TC1_RESET	Capture is triggered by TC1 output active to inactive transition
HRTIM_CAPTURETRIGGER_TIMERC_CMP1	Timer C Compare 1 triggers Capture
HRTIM_CAPTURETRIGGER_TIMERC_CMP2	Timer C Compare 2 triggers Capture
HRTIM_CAPTURETRIGGER_TD1_SET	Capture is triggered by TD1 output inactive to active transition
HRTIM_CAPTURETRIGGER_TD1_RESET	Capture is triggered by TD1 output active to inactive transition
HRTIM_CAPTURETRIGGER_TIMERD_CMP1	Timer D Compare 1 triggers Capture
HRTIM_CAPTURETRIGGER_TIMERD_CMP2	Timer D Compare 2 triggers Capture
HRTIM_CAPTURETRIGGER_TE1_SET	Capture is triggered by TE1 output inactive to active transition
HRTIM_CAPTURETRIGGER_TE1_RESET	Capture is triggered by TE1 output active to inactive transition
HRTIM_CAPTURETRIGGER_TIMERE_CMP1	Timer E Compare 1 triggers Capture
HRTIM_CAPTURETRIGGER_TIMERE_CMP2	Timer E Compare 2 triggers Capture

HRTIM Chopper Duty Cycle

HRTIM_CHOPPER_DUTYCYCLE_0	Only 1st pulse is present
HRTIM_CHOPPER_DUTYCYCLE_125	Duty cycle of the carrier signal is 12.5U %
HRTIM_CHOPPER_DUTYCYCLE_250	Duty cycle of the carrier signal is 25U %
HRTIM_CHOPPER_DUTYCYCLE_375	Duty cycle of the carrier signal is 37.5U %
HRTIM_CHOPPER_DUTYCYCLE_500	Duty cycle of the carrier signal is 50U %
HRTIM_CHOPPER_DUTYCYCLE_625	Duty cycle of the carrier signal is 62.5U %
HRTIM_CHOPPER_DUTYCYCLE_750	Duty cycle of the carrier signal is 75U %
HRTIM_CHOPPER_DUTYCYCLE_875	Duty cycle of the carrier signal is 87.5U %

HRTIM Chopper Frequency

HRTIM_CHOPPER_PRESCALERRATIO_DIV16	fCHPFRQ = fHRTIM / 16
HRTIM_CHOPPER_PRESCALERRATIO_DIV32	fCHPFRQ = fHRTIM / 32
HRTIM_CHOPPER_PRESCALERRATIO_DIV48	fCHPFRQ = fHRTIM / 48
HRTIM_CHOPPER_PRESCALERRATIO_DIV64	fCHPFRQ = fHRTIM / 64
HRTIM_CHOPPER_PRESCALERRATIO_DIV80	fCHPFRQ = fHRTIM / 80
HRTIM_CHOPPER_PRESCALERRATIO_DIV96	fCHPFRQ = fHRTIM / 96
HRTIM_CHOPPER_PRESCALERRATIO_DIV112	fCHPFRQ = fHRTIM / 112
HRTIM_CHOPPER_PRESCALERRATIO_DIV128	fCHPFRQ = fHRTIM / 128
HRTIM_CHOPPER_PRESCALERRATIO_DIV144	fCHPFRQ = fHRTIM / 144
HRTIM_CHOPPER_PRESCALERRATIO_DIV160	fCHPFRQ = fHRTIM / 160
HRTIM_CHOPPER_PRESCALERRATIO_DIV176	fCHPFRQ = fHRTIM / 176
HRTIM_CHOPPER_PRESCALERRATIO_DIV192	fCHPFRQ = fHRTIM / 192
HRTIM_CHOPPER_PRESCALERRATIO_DIV208	fCHPFRQ = fHRTIM / 208
HRTIM_CHOPPER_PRESCALERRATIO_DIV224	fCHPFRQ = fHRTIM / 224
HRTIM_CHOPPER_PRESCALERRATIO_DIV240	fCHPFRQ = fHRTIM / 240
HRTIM_CHOPPER_PRESCALERRATIO_DIV256	fCHPFRQ = fHRTIM / 256

HRTIM Chopper Start Pulse Width

HRTIM_CHOPPER_PULSEWIDTH_16	tSTPW = tHRTIM x 16
HRTIM_CHOPPER_PULSEWIDTH_32	tSTPW = tHRTIM x 32
HRTIM_CHOPPER_PULSEWIDTH_48	tSTPW = tHRTIM x 48
HRTIM_CHOPPER_PULSEWIDTH_64	tSTPW = tHRTIM x 64
HRTIM_CHOPPER_PULSEWIDTH_80	tSTPW = tHRTIM x 80
HRTIM_CHOPPER_PULSEWIDTH_96	tSTPW = tHRTIM x 96
HRTIM_CHOPPER_PULSEWIDTH_112	tSTPW = tHRTIM x 112
HRTIM_CHOPPER_PULSEWIDTH_128	tSTPW = tHRTIM x 128
HRTIM_CHOPPER_PULSEWIDTH_144	tSTPW = tHRTIM x 144

HRTIM_CHOPPER_PULSEWIDTH_160	tSTPW = tHRTIM x 160
HRTIM_CHOPPER_PULSEWIDTH_176	tSTPW = tHRTIM x 176
HRTIM_CHOPPER_PULSEWIDTH_192	tSTPW = tHRTIM x 192
HRTIM_CHOPPER_PULSEWIDTH_208	tSTPW = tHRTIM x 208
HRTIM_CHOPPER_PULSEWIDTH_224	tSTPW = tHRTIM x 224
HRTIM_CHOPPER_PULSEWIDTH_240	tSTPW = tHRTIM x 240
HRTIM_CHOPPER_PULSEWIDTH_256	tSTPW = tHRTIM x 256

HRTIM Common Interrupt Enable

HRTIM_IT_NONE	No interrupt enabled
HRTIM_IT_FLT1	Fault 1 interrupt enable
HRTIM_IT_FLT2	Fault 2 interrupt enable
HRTIM_IT_FLT3	Fault 3 interrupt enable
HRTIM_IT_FLT4	Fault 4 interrupt enable
HRTIM_IT_FLT5	Fault 5 interrupt enable
HRTIM_IT_SYSFLT	System Fault interrupt enable
HRTIM_IT_DLLRDY	DLL ready interrupt enable
HRTIM_IT_BMPER	Burst mode period interrupt enable

HRTIM Common Interrupt Flag

HRTIM_FLAG_FLT1	Fault 1 interrupt flag
HRTIM_FLAG_FLT2	Fault 2 interrupt flag
HRTIM_FLAG_FLT3	Fault 3 interrupt flag
HRTIM_FLAG_FLT4	Fault 4 interrupt flag
HRTIM_FLAG_FLT5	Fault 5 interrupt flag
HRTIM_FLAG_SYSFLT	System Fault interrupt flag
HRTIM_FLAG_DLLRDY	DLL ready interrupt flag
HRTIM_FLAG_BMPER	Burst mode period interrupt flag

HRTIM Compare Unit

HRTIM_COMPAREUNIT_1	Compare unit 1 identifier
HRTIM_COMPAREUNIT_2	Compare unit 2 identifier
HRTIM_COMPAREUNIT_3	Compare unit 3 identifier
HRTIM_COMPAREUNIT_4	Compare unit 4 identifier

HRTIM Compare Unit Auto Delayed Mode

HRTIM_AUTODELAYEDMODE_REGULAR	standard compare mode
HRTIM_AUTODELAYEDMODE_AUTODELAYED_NOTIMEOUT	Compare event generated only if a capture has occurred
HRTIM_AUTODELAYEDMODE_AUTODELAYED_TIMEOUTCMP1	Compare event generated if a capture has occurred or after a Compare 1 match (timeout if

	capture event is missing)
HRTIM_AUTODELAYEDMODE_AUTODELAYED_TIMEOUTCMP3	Compare event generated if a capture has occurred or after a Compare 3 match (timeout if capture event is missing)

HRTIM Counter Operating Mode

HRTIM_MODE_CONTINUOUS	The timer operates in continuous (free-running) mode
HRTIM_MODE_SINGLESHOT	The timer operates in non retriggerable single-shot mode
HRTIM_MODE_SINGLESHOT_RETRIGGERABLE	The timer operates in retriggerable single-shot mode

HRTIM Current Push Pull Status

HRTIM_PUSHPULL_CURRENTSTATUS_OUTPUT1	Signal applied on output 1 and output 2 forced inactive
HRTIM_PUSHPULL_CURRENTSTATUS_OUTPUT2	Signal applied on output 2 and output 1 forced inactive

HRTIM DAC Synchronization

HRTIM_DACSYNC_NONE	No DAC synchronization event generated
HRTIM_DACSYNC_DACTRIGOUT_1	DAC synchronization event generated on DACTrigOut1 output upon timer update
HRTIM_DACSYNC_DACTRIGOUT_2	DAC synchronization event generated on DACTrigOut2 output upon timer update
HRTIM_DACSYNC_DACTRIGOUT_3	DAC update generated on DACTrigOut3 output upon timer update

HRTIM Deadtime Falling Lock

HRTIM_TIMDEADTIME_FALLINGLOCK_WRITE	Deadtime falling value and sign is writeable
HRTIM_TIMDEADTIME_FALLINGLOCK_READONLY	Deadtime falling value and sign is read-only

HRTIM Deadtime Falling Sign

HRTIM_TIMDEADTIME_FALLINGSIGN_POSITIVE	Positive deadtime on falling edge
HRTIM_TIMDEADTIME_FALLINGSIGN_NEGATIVE	Negative deadtime on falling edge

HRTIM Deadtime Falling Sign Lock

HRTIM_TIMDEADTIME_FALLINGSIGNLOCK_WRITE	Deadtime falling sign is writeable
HRTIM_TIMDEADTIME_FALLINGSIGNLOCK_READONLY	Deadtime falling sign is read-only

HRTIM Deadtime Prescaler Ratio

HRTIM_TIMDEADTIME_PRESCALERRATIO_MUL8	fDTG = fHRTIM * 8U

HRTIM_TIMDEADTIME_PRESCALERRATIO_MUL4	fDTG = fHRTIM * 4U
HRTIM_TIMDEADTIME_PRESCALERRATIO_MUL2	fDTG = fHRTIM * 2U
HRTIM_TIMDEADTIME_PRESCALERRATIO_DIV1	fDTG = fHRTIM
HRTIM_TIMDEADTIME_PRESCALERRATIO_DIV2	fDTG = fHRTIM / 2U
HRTIM_TIMDEADTIME_PRESCALERRATIO_DIV4	fDTG = fHRTIM / 4U
HRTIM_TIMDEADTIME_PRESCALERRATIO_DIV8	fDTG = fHRTIM / 8U
HRTIM_TIMDEADTIME_PRESCALERRATIO_DIV16	fDTG = fHRTIM / 16U

HRTIM Deadtime Rising Lock

HRTIM_TIMDEADTIME_RISINGLOCK_WRITE	Deadtime rising value and sign is writeable
HRTIM_TIMDEADTIME_RISINGLOCK_READONLY	Deadtime rising value and sign is read-only

HRTIM Deadtime Rising Sign

HRTIM_TIMDEADTIME_RISINGSIGN_POSITIVE	Positive deadtime on rising edge
HRTIM_TIMDEADTIME_RISINGSIGN_NEGATIVE	Negative deadtime on rising edge

HRTIM Deadtime Rising Sign Lock

HRTIM_TIMDEADTIME_RISINGSIGNLOCK_WRITE	Deadtime rising sign is writeable
HRTIM_TIMDEADTIME_RISINGSIGNLOCK_READONLY	Deadtime rising sign is read-only

HRTIM DLL Calibration Rate

HRTIM_SINGLE_CALIBRATION	Non periodic DLL calibration
HRTIM_CALIBRATIONRATE_7300	Periodic DLL calibration: T = 1048576U * tHRTIM (7.3 ms)
HRTIM_CALIBRATIONRATE_910	Periodic DLL calibration: T = 131072U * tHRTIM (910 ms)
HRTIM_CALIBRATIONRATE_114	Periodic DLL calibration: T = 16384U * tHRTIM (114 ms)
HRTIM_CALIBRATIONRATE_14	Periodic DLL calibration: T = 2048U * tHRTIM (14 ms)

HRTIM Exported Macros

__HAL_HRTIM_RESET_HANDLE_STATE

Description:

- Reset HRTIM handle state.

Parameters:

- __HANDLE__: HRTIM handle.

Return value:

- None

__HAL_HRTIM_ENABLE

Description:

- Enables or disables the timer counter(s)

Parameters:

- __HANDLE__: specifies the HRTIM Handle.
- __TIMERS__: timers to enable/disable This parameter can be any combinations of the following values:
  - HRTIM_TIMERID_MASTER: Master timer identifier
  - HRTIM_TIMERID_TIMER_A: Timer A identifier
  - HRTIM_TIMERID_TIMER_B: Timer B identifier
  - HRTIM_TIMERID_TIMER_C: Timer C identifier
  - HRTIM_TIMERID_TIMER_D: Timer D identifier
  - HRTIM_TIMERID_TIMER_E: Timer E identifier

Return value:

- None

HRTIM_TAOEN_MASK

HRTIM_TBOEN_MASK

HRTIM_TCOEN_MASK

HRTIM_TDOEN_MASK

HRTIM_TEOEN_MASK

__HAL_HRTIM_DISABLE

__HAL_HRTIM_ENABLE_IT

Description:

- Enables or disables the specified HRTIM common interrupts.

Parameters:

- __HANDLE__: specifies the HRTIM Handle.
- __INTERRUPT__: specifies the interrupt source to enable or disable. This parameter can be one of the following values:
  - HRTIM_IT_FLT1: Fault 1 interrupt enable
  - HRTIM_IT_FLT2: Fault 2 interrupt enable
  - HRTIM_IT_FLT3: Fault 3 interrupt enable
  - HRTIM_IT_FLT4: Fault 4 interrupt enable
  - HRTIM_IT_FLT5: Fault 5 interrupt enable
  - HRTIM_IT_SYSFLT: System Fault interrupt enable

- HRTIM_IT_DLLRDY: DLL ready interrupt enable
- HRTIM_IT_BMPER: Burst mode period interrupt enable

Return value:

- None

__HAL_HRTIM_ENABLE_IT

Description:

- Enables or disables the specified HRTIM common interrupts.

Parameters:

- __HANDLE__: specifies the HRTIM Handle.
- __INTERRUPT__: specifies the interrupt source to enable or disable. This parameter can be one of the following values:
  - HRTIM_IT_FLT1: Fault 1 interrupt enable
  - HRTIM_IT_FLT2: Fault 2 interrupt enable
  - HRTIM_IT_FLT3: Fault 3 interrupt enable
  - HRTIM_IT_FLT4: Fault 4 interrupt enable
  - HRTIM_IT_FLT5: Fault 5 interrupt enable
  - HRTIM_IT_SYSFLT: System Fault interrupt enable
  - HRTIM_IT_DLLRDY: DLL ready interrupt enable
  - HRTIM_IT_BMPER: Burst mode period interrupt enable

Return value:

- None

__HAL_HRTIM_DISABLE_IT

__HAL_HRTIM_DISABLE_IT

__HAL_HRTIM_MASTER_ENABLE_IT

Description:

- Enables or disables the specified HRTIM Master timer interrupts.

Parameters:

- __HANDLE__: specifies the HRTIM Handle.
- __INTERRUPT__: specifies the interrupt source to enable or disable. This parameter can be one of the following values:
  - HRTIM_MASTER_IT_MCMP1: Master compare 1 interrupt enable
  - HRTIM_MASTER_IT_MCMP2: Master compare 2 interrupt enable
  - HRTIM_MASTER_IT_MCMP3: Master

compare 3 interrupt enable
  - HRTIM_MASTER_IT_MCMP4: Master compare 4 interrupt enable
  - HRTIM_MASTER_IT_MREP: Master Repetition interrupt enable
  - HRTIM_MASTER_IT_SYNC: Synchronization input interrupt enable
  - HRTIM_MASTER_IT_MUPD: Master update interrupt enable

Return value:

- None

__HAL_HRTIM_MASTER_DISABLE_IT

__HAL_HRTIM_TIMER_ENABLE_IT

Description:

- Enables or disables the specified HRTIM Timerx interrupts.

Parameters:

- __HANDLE__: specifies the HRTIM Handle.
- __TIMER__: specified the timing unit (Timer A to E)
- __INTERRUPT__: specifies the interrupt source to enable or disable. This parameter can be one of the following values:
  - HRTIM_TIM_IT_CMP1: Timer compare 1 interrupt enable
  - HRTIM_TIM_IT_CMP2: Timer compare 2 interrupt enable
  - HRTIM_TIM_IT_CMP3: Timer compare 3 interrupt enable
  - HRTIM_TIM_IT_CMP4: Timer compare 4 interrupt enable
  - HRTIM_TIM_IT_REP: Timer repetition interrupt enable
  - HRTIM_TIM_IT_UPD: Timer update interrupt enable
  - HRTIM_TIM_IT_CPT1: Timer capture 1 interrupt enable
  - HRTIM_TIM_IT_CPT2: Timer capture 2 interrupt enable
  - HRTIM_TIM_IT_SET1: Timer output 1 set interrupt enable
  - HRTIM_TIM_IT_RST1: Timer output 1 reset interrupt enable
  - HRTIM_TIM_IT_SET2: Timer output 2 set interrupt enable
  - HRTIM_TIM_IT_RST2: Timer output 2 reset interrupt enable
  - HRTIM_TIM_IT_RST: Timer reset interrupt enable

– HRTIM_TIM_IT_DLYPRT: Timer delay protection interrupt enable

Return value:

- None

__HAL_HRTIM_TIMER_DISABLE_IT

__HAL_HRTIM_GET_ITSTATUS

Description:

- Checks if the specified HRTIM common interrupt source is enabled or disabled.

Parameters:

- __HANDLE__: specifies the HRTIM Handle.
- __INTERRUPT__: specifies the interrupt source to check. This parameter can be one of the following values:
  – HRTIM_IT_FLT1: Fault 1 interrupt enable
  – HRTIM_IT_FLT2: Fault 2 interrupt enable
  – HRTIM_IT_FLT3: Fault 3 enable
  – HRTIM_IT_FLT4: Fault 4 enable
  – HRTIM_IT_FLT5: Fault 5 enable
  – HRTIM_IT_SYSFLT: System Fault interrupt enable
  – HRTIM_IT_DLLRDY: DLL ready interrupt enable
  – HRTIM_IT_BMPER: Burst mode period interrupt enable

Return value:

- The: new state of __INTERRUPT__ (TRUE or FALSE).

__HAL_HRTIM_MASTER_GET_IT STATUS

Description:

- Checks if the specified HRTIM Master interrupt source is enabled or disabled.

Parameters:

- __HANDLE__: specifies the HRTIM Handle.
- __INTERRUPT__: specifies the interrupt source to check. This parameter can be one of the following values:
  – HRTIM_MASTER_IT_MCMP1: Master compare 1 interrupt enable
  – HRTIM_MASTER_IT_MCMP2: Master compare 2 interrupt enable
  – HRTIM_MASTER_IT_MCMP3: Master compare 3 interrupt enable
  – HRTIM_MASTER_IT_MCMP4: Master compare 4 interrupt enable
  – HRTIM_MASTER_IT_MREP: Master Repetition interrupt enable

– HRTIM_MASTER_IT_SYNC: Synchronization input interrupt enable
– HRTIM_MASTER_IT_MUPD: Master update interrupt enable

Return value:

- The: new state of __INTERRUPT__ (TRUE or FALSE).

__HAL_HRTIM_TIMER_GET_IT STATUS

Description:

- Checks if the specified HRTIM Timerx interrupt source is enabled or disabled.

Parameters:

- __HANDLE__: specifies the HRTIM Handle.
- __TIMER__: specified the timing unit (Timer A to E)
- __INTERRUPT__: specifies the interrupt source to check. This parameter can be one of the following values:
  – HRTIM_MASTER_IT_MCMP1: Master compare 1 interrupt enable
  – HRTIM_MASTER_IT_MCMP2: Master compare 2 interrupt enable
  – HRTIM_MASTER_IT_MCMP3: Master compare 3 interrupt enable
  – HRTIM_MASTER_IT_MCMP4: Master compare 4 interrupt enable
  – HRTIM_MASTER_IT_MREP: Master Repetition interrupt enable
  – HRTIM_MASTER_IT_SYNC: Synchronization input interrupt enable
  – HRTIM_MASTER_IT_MUPD: Master update interrupt enable
  – HRTIM_TIM_IT_CMP1: Timer compare 1 interrupt enable
  – HRTIM_TIM_IT_CMP2: Timer compare 2 interrupt enable
  – HRTIM_TIM_IT_CMP3: Timer compare 3 interrupt enable
  – HRTIM_TIM_IT_CMP4: Timer compare 4 interrupt enable
  – HRTIM_TIM_IT_REP: Timer repetition interrupt enable
  – HRTIM_TIM_IT_UPD: Timer update interrupt enable
  – HRTIM_TIM_IT_CPT1: Timer capture 1 interrupt enable
  – HRTIM_TIM_IT_CPT2: Timer capture 2 interrupt enable
  – HRTIM_TIM_IT_SET1: Timer output 1 set interrupt enable
  – HRTIM_TIM_IT_RST1: Timer output 1 reset interrupt enable

- HRTIM_TIM_IT_SET2: Timer output 2 set interrupt enable
- HRTIM_TIM_IT_RST2: Timer output 2 reset interrupt enable
- HRTIM_TIM_IT_RST: Timer reset interrupt enable
- HRTIM_TIM_IT_DLYPRT: Timer delay protection interrupt enable

Return value:

- The: new state of __INTERRUPT__ (TRUE or FALSE).

__HAL_HRTIM_CLEAR_IT

Description:

- Clears the specified HRTIM common pending flag.

Parameters:

- __HANDLE__: specifies the HRTIM Handle.
- __INTERRUPT__: specifies the interrupt pending bit to clear. This parameter can be one of the following values:
  - HRTIM_IT_FLT1: Fault 1 interrupt clear flag
  - HRTIM_IT_FLT2: Fault 2 interrupt clear flag
  - HRTIM_IT_FLT3: Fault 3 clear flag
  - HRTIM_IT_FLT4: Fault 4 clear flag
  - HRTIM_IT_FLT5: Fault 5 clear flag
  - HRTIM_IT_SYSFLT: System Fault interrupt clear flag
  - HRTIM_IT_DLLRDY: DLL ready interrupt clear flag
  - HRTIM_IT_BMPER: Burst mode period interrupt clear flag

Return value:

- None

__HAL_HRTIM_MASTER_CLEAR_IT

Description:

- Clears the specified HRTIM Master pending flag.

Parameters:

- __HANDLE__: specifies the HRTIM Handle.
- __INTERRUPT__: specifies the interrupt pending bit to clear. This parameter can be one of the following values:
  - HRTIM_MASTER_IT_MCMP1: Master compare 1 interrupt clear flag
  - HRTIM_MASTER_IT_MCMP2: Master compare 2 interrupt clear flag
  - HRTIM_MASTER_IT_MCMP3: Master compare 3 interrupt clear flag

- HRTIM_MASTER_IT_MCMP4: Master compare 4 interrupt clear flag
- HRTIM_MASTER_IT_MREP: Master Repetition interrupt clear flag
- HRTIM_MASTER_IT_SYNC: Synchronization input interrupt clear flag
- HRTIM_MASTER_IT_MUPD: Master update interrupt clear flag

Return value:

- None

__HAL_HRTIM_TIMER_CLEAR_IT

Description:

- Clears the specified HRTIM Timerx pending flag.

Parameters:

- __HANDLE__: specifies the HRTIM Handle.
- __TIMER__: specified the timing unit (Timer A to E)
- __INTERRUPT__: specifies the interrupt pending bit to clear. This parameter can be one of the following values:
  - HRTIM_TIM_IT_CMP1: Timer compare 1 interrupt clear flag
  - HRTIM_TIM_IT_CMP2: Timer compare 2 interrupt clear flag
  - HRTIM_TIM_IT_CMP3: Timer compare 3 interrupt clear flag
  - HRTIM_TIM_IT_CMP4: Timer compare 4 interrupt clear flag
  - HRTIM_TIM_IT_REP: Timer repetition interrupt clear flag
  - HRTIM_TIM_IT_UPD: Timer update interrupt clear flag
  - HRTIM_TIM_IT_CPT1: Timer capture 1 interrupt clear flag
  - HRTIM_TIM_IT_CPT2: Timer capture 2 interrupt clear flag
  - HRTIM_TIM_IT_SET1: Timer output 1 set interrupt clear flag
  - HRTIM_TIM_IT_RST1: Timer output 1 reset interrupt clear flag
  - HRTIM_TIM_IT_SET2: Timer output 2 set interrupt clear flag
  - HRTIM_TIM_IT_RST2: Timer output 2 reset interrupt clear flag
  - HRTIM_TIM_IT_RST: Timer reset interrupt clear flag
  - HRTIM_TIM_IT_DLYPRT: Timer output 1 delay protection interrupt clear flag

Return value:

- None

__HAL_HRTIM_MASTER_ENABLE_DMA

Description:

- Enables or disables the specified HRTIM Master timer DMA requets.

Parameters:

- __HANDLE__: specifies the HRTIM Handle.
- __DMA__: specifies the DMA request to enable or disable. This parameter can be one of the following values:
  - HRTIM_MASTER_DMA_MCMP1: Master compare 1 DMA resquest enable
  - HRTIM_MASTER_DMA_MCMP2: Master compare 2 DMA resquest enable
  - HRTIM_MASTER_DMA_MCMP3: Master compare 3 DMA resquest enable
  - HRTIM_MASTER_DMA_MCMP4: Master compare 4 DMA resquest enable
  - HRTIM_MASTER_DMA_MREP: Master Repetition DMA resquest enable
  - HRTIM_MASTER_DMA_SYNC: Synchronization input DMA resquest enable
  - HRTIM_MASTER_DMA_MUPD: Master update DMA resquest enable

Return value:

- None

__HAL_HRTIM_MASTER_DISABLE_DMA

__HAL_HRTIM_TIMER_ENABLE_DMA

Description:

- Enables or disables the specified HRTIM Timerx DMA requests.

Parameters:

- __HANDLE__: specifies the HRTIM Handle.
- __TIMER__: specified the timing unit (Timer A to E)
- __DMA__: specifies the DMA request to enable or disable. This parameter can be one of the following values:
  - HRTIM_TIM_DMA_CMP1: Timer compare 1 DMA resquest enable
  - HRTIM_TIM_DMA_CMP2: Timer compare 2 DMA resquest enable
  - HRTIM_TIM_DMA_CMP3: Timer compare 3 DMA resquest enable
  - HRTIM_TIM_DMA_CMP4: Timer compare 4 DMA resquest enable
  - HRTIM_TIM_DMA_REP: Timer

repetition DMA resquest enable
  - HRTIM_TIM_DMA_UPD: Timer update DMA resquest enable
  - HRTIM_TIM_DMA_CPT1: Timer capture 1 DMA resquest enable
  - HRTIM_TIM_DMA_CPT2: Timer capture 2 DMA resquest enable
  - HRTIM_TIM_DMA_SET1: Timer output 1 set DMA resquest enable
  - HRTIM_TIM_DMA_RST1: Timer output 1 reset DMA resquest enable
  - HRTIM_TIM_DMA_SET2: Timer output 2 set DMA resquest enable
  - HRTIM_TIM_DMA_RST2: Timer output 2 reset DMA resquest enable
  - HRTIM_TIM_DMA_RST: Timer reset DMA resquest enable
  - HRTIM_TIM_DMA_DLYPRT: Timer delay protection DMA resquest enable

Return value:

- None

__HAL_HRTIM_TIMER_DISABLE_DMA

__HAL_HRTIM_GET_FLAG

__HAL_HRTIM_CLEAR_FLAG

__HAL_HRTIM_MASTER_GET_FLAG

__HAL_HRTIM_MASTER_CLEAR_FLAG

__HAL_HRTIM_TIMER_GET_FLAG

__HAL_HRTIM_TIMER_CLEAR_FLAG

__HAL_HRTIM_SETCOUNTER

Description:

- Sets the HRTIM timer Counter Register value on runtime.

Parameters:

- __HANDLE__: HRTIM Handle.
- __TIMER__: HRTIM timer This parameter can be one of the following values:
  - 0x5 for master timer
  - 0x0 to 0x4 for timers A to E
- __COUNTER__: specifies the Counter Register new value.

Return value:

- None

__HAL_HRTIM_GETCOUNTER

Description:

- Gets the HRTIM timer Counter Register value on runtime.

Parameters:

- __HANDLE__: HRTIM Handle.
- __TIMER__: HRTIM timer This parameter can be one of the following values:
  - 0x5 for master timer
  - 0x0 to 0x4 for timers A to E

Return value:

- HRTIM: timer Counter Register value

__HAL_HRTIM_SETPERIOD

Description:

- Sets the HRTIM timer Period value on runtime.

Parameters:

- __HANDLE__: HRTIM Handle.
- __TIMER__: HRTIM timer This parameter can be one of the following values:
  - 0x5 for master timer
  - 0x0 to 0x4 for timers A to E
- __PERIOD__: specifies the Period Register new value.

Return value:

- None

__HAL_HRTIM_GETPERIOD

Description:

- Gets the HRTIM timer Period Register value on runtime.

Parameters:

- __HANDLE__: HRTIM Handle.
- __TIMER__: HRTIM timer This parameter can be one of the following values:
  - 0x5 for master timer
  - 0x0 to 0x4 for timers A to E

Return value:

- timer: Period Register

__HAL_HRTIM_SETCLOCK PRESCALER

Description:

- Sets the HRTIM timer clock prescaler value on runtime.

Parameters:

- __HANDLE__: HRTIM Handle.
- __TIMER__: HRTIM timer This parameter can be one of the following values:
  - 0x5 for master timer

  - 0x0 to 0x4 for timers A to E
- __PRESCALER__: specifies the clock prescaler new value. This parameter can be one of the following values:
  - HRTIM_PRESCALERRATIO_MUL32: fHRCK: 4.608 GHz - Resolution: 217 ps - Min PWM frequency: 70.3 kHz (fHRTIM=144MHz)
  - HRTIM_PRESCALERRATIO_MUL16: fHRCK: 2.304 GHz - Resolution: 434 ps - Min PWM frequency: 35.1 KHz (fHRTIM=144MHz)
  - HRTIM_PRESCALERRATIO_MUL8: fHRCK: 1.152 GHz - Resolution: 868 ps - Min PWM frequency: 17.6 kHz (fHRTIM=144MHz)
  - HRTIM_PRESCALERRATIO_MUL4: fHRCK: 576 MHz - Resolution: 1.73 ns - Min PWM frequency: 8.8 kHz (fHRTIM=144MHz)
  - HRTIM_PRESCALERRATIO_MUL2: fHRCK: 288 MHz - Resolution: 3.47 ns - Min PWM frequency: 4.4 kHz (fHRTIM=144MHz)
  - HRTIM_PRESCALERRATIO_DIV1: fHRCK: 144 MHz - Resolution: 6.95 ns - Min PWM frequency: 2.2 kHz (fHRTIM=144MHz)
  - HRTIM_PRESCALERRATIO_DIV2: fHRCK: 72 MHz - Resolution: 13.88 ns- Min PWM frequency: 1.1 kHz (fHRTIM=144MHz)
  - HRTIM_PRESCALERRATIO_DIV4: fHRCK: 36 MHz - Resolution: 27.7 ns- Min PWM frequency: 550Hz (fHRTIM=144MHz)

Return value:

- None

__HAL_HRTIM_GETCLOCKPRESCALER

Description:

- Gets the HRTIM timer clock prescaler value on runtime.

Parameters:

- __HANDLE__: HRTIM Handle.
- __TIMER__: HRTIM timer This parameter can be one of the following values:
  - 0x5 for master timer
  - 0x0 to 0x4 for timers A to E

Return value:

- timer: clock prescaler value

__HAL_HRTIM_SETCOMPARE

Description:

- Sets the HRTIM timer Compare Register value on runtime.

Parameters:

- __HANDLE__: HRTIM Handle.
- __TIMER__: HRTIM timer This parameter can be one of the following values:
  - 0x0 to 0x4 for timers A to E
- __COMPAREUNIT__: timer compare unit This parameter can be one of the following values:
  - HRTIM_COMPAREUNIT_1: Compare unit 1
  - HRTIM_COMPAREUNIT_2: Compare unit 2
  - HRTIM_COMPAREUNIT_3: Compare unit 3
  - HRTIM_COMPAREUNIT_4: Compare unit 4
- __COMPARE__: specifies the Compare new value.

Return value:

- None

__HAL_HRTIM_GETCOMPARE

Description:

- Gets the HRTIM timer Compare Register value on runtime.

Parameters:

- __HANDLE__: HRTIM Handle.
- __TIMER__: HRTIM timer This parameter can be one of the following values:
  - 0x0 to 0x4 for timers A to E
- __COMPAREUNIT__: timer compare unit This parameter can be one of the following values:
  - HRTIM_COMPAREUNIT_1: Compare unit 1
  - HRTIM_COMPAREUNIT_2: Compare unit 2
  - HRTIM_COMPAREUNIT_3: Compare unit 3
  - HRTIM_COMPAREUNIT_4: Compare unit 4

Return value:

- Compare: value

HRTIM External Event Channels

HRTIM_EVENT_NONE	Undefined event channel
HRTIM_EVENT_1	External event channel 1 identifier
HRTIM_EVENT_2	External event channel 2 identifier
HRTIM_EVENT_3	External event channel 3 identifier
HRTIM_EVENT_4	External event channel 4 identifier
HRTIM_EVENT_5	External event channel 5 identifier
HRTIM_EVENT_6	External event channel 6 identifier
HRTIM_EVENT_7	External event channel 7 identifier
HRTIM_EVENT_8	External event channel 8 identifier
HRTIM_EVENT_9	External event channel 9 identifier
HRTIM_EVENT_10	External event channel 10 identifier

HRTIM External Event Fast Mode

HRTIM_EVENTFASTMODE_ENABLE	External Event is re-synchronized by the HRTIM logic before acting on outputs
HRTIM_EVENTFASTMODE_DISABLE	External Event is acting asynchronously on outputs (low latency mode)

HRTIM External Event Filter

HRTIM_EVENTFILTER_NONE	Filter disabled
HRTIM_EVENTFILTER_1	fSAMPLING= fHRTIM, N=2U
HRTIM_EVENTFILTER_2	fSAMPLING= fHRTIM, N=4U
HRTIM_EVENTFILTER_3	fSAMPLING= fHRTIM, N=8U
HRTIM_EVENTFILTER_4	fSAMPLING= fEEVS/2U, N=6U
HRTIM_EVENTFILTER_5	fSAMPLING= fEEVS/2U, N=8U
HRTIM_EVENTFILTER_6	fSAMPLING= fEEVS/4U, N=6U
HRTIM_EVENTFILTER_7	fSAMPLING= fEEVS/4U, N=8U
HRTIM_EVENTFILTER_8	fSAMPLING= fEEVS/8U, N=6U
HRTIM_EVENTFILTER_9	fSAMPLING= fEEVS/8U, N=8U
HRTIM_EVENTFILTER_10	fSAMPLING= fEEVS/16U, N=5U
HRTIM_EVENTFILTER_11	fSAMPLING= fEEVS/16U, N=6U
HRTIM_EVENTFILTER_12	fSAMPLING= fEEVS/16U, N=8U
HRTIM_EVENTFILTER_13	fSAMPLING= fEEVS/32U, N=5U
HRTIM_EVENTFILTER_14	fSAMPLING= fEEVS/32U, N=6U
HRTIM_EVENTFILTER_15	fSAMPLING= fEEVS/32U, N=8U

HRTIM External Event Polarity

HRTIM_EVENTPOLARITY_HIGH	External event is active high
HRTIM_EVENTPOLARITY_LOW	External event is active low

HRTIM External Event Prescaler

HRTIM_EVENTPRESCALER_DIV1	fEEVS=fHRTIM
HRTIM_EVENTPRESCALER_DIV2	fEEVS=fHRTIM / 2U
HRTIM_EVENTPRESCALER_DIV4	fEEVS=fHRTIM / 4U
HRTIM_EVENTPRESCALER_DIV8	fEEVS=fHRTIM / 8U

HRTIM External Event Sensitivity

HRTIM_EVENTSENSITIVITY_LEVEL	External event is active on level
HRTIM_EVENTSENSITIVITY_RISINGEDGE	External event is active on Rising edge
HRTIM_EVENTSENSITIVITY_FALLINGEDGE	External event is active on Falling edge
HRTIM_EVENTSENSITIVITY_BOTHEDGES	External event is active on Rising and Falling edges

HRTIM External Event Sources

HRTIM_EVENTSRC_1	External event source 1U
HRTIM_EVENTSRC_2	External event source 2U
HRTIM_EVENTSRC_3	External event source 3U
HRTIM_EVENTSRC_4	External event source 4U

HRTIM External Fault Prescaler

HRTIM_FAULTPRESCALER_DIV1	fFLTS=fHRTIM
HRTIM_FAULTPRESCALER_DIV2	fFLTS=fHRTIM / 2U
HRTIM_FAULTPRESCALER_DIV4	fFLTS=fHRTIM / 4U
HRTIM_FAULTPRESCALER_DIV8	fFLTS=fHRTIM / 8U

HRTIM Fault Channel

HRTIM_FAULT_1	Fault channel 1 identifier
HRTIM_FAULT_2	Fault channel 2 identifier
HRTIM_FAULT_3	Fault channel 3 identifier
HRTIM_FAULT_4	Fault channel 4 identifier
HRTIM_FAULT_5	Fault channel 5 identifier

HRTIM Fault Filter

HRTIM_FAULTFILTER_NONE	Filter disabled
HRTIM_FAULTFILTER_1	fSAMPLING= fHRTIM, N=2U
HRTIM_FAULTFILTER_2	fSAMPLING= fHRTIM, N=4U
HRTIM_FAULTFILTER_3	fSAMPLING= fHRTIM, N=8U
HRTIM_FAULTFILTER_4	fSAMPLING= fFLTS/2U, N=6U
HRTIM_FAULTFILTER_5	fSAMPLING= fFLTS/2U, N=8U
HRTIM_FAULTFILTER_6	fSAMPLING= fFLTS/4U, N=6U
HRTIM_FAULTFILTER_7	fSAMPLING= fFLTS/4U, N=8U
HRTIM_FAULTFILTER_8	fSAMPLING= fFLTS/8U, N=6U

HRTIM_FAULTFILTER_9	fSAMPLING= fFLTS/8U, N=8U
HRTIM_FAULTFILTER_10	fSAMPLING= fFLTS/16U, N=5U
HRTIM_FAULTFILTER_11	fSAMPLING= fFLTS/16U, N=6U
HRTIM_FAULTFILTER_12	fSAMPLING= fFLTS/16U, N=8U
HRTIM_FAULTFILTER_13	fSAMPLING= fFLTS/32U, N=5U
HRTIM_FAULTFILTER_14	fSAMPLING= fFLTS/32U, N=6U
HRTIM_FAULTFILTER_15	fSAMPLING= fFLTS/32U, N=8U

HRTIM Fault Lock

HRTIM_FAULTLOCK_READWRITE	Fault settings bits are read/write
HRTIM_FAULTLOCK_READONLY	Fault settings bits are read only

HRTIM Fault Mode Control

HRTIM_FAULTMODECTL_DISABLED	Fault channel is disabled
HRTIM_FAULTMODECTL_ENABLED	Fault channel is enabled

IS_HRTIM_FAULTMODECTL

HRTIM Fault Polarity

HRTIM_FAULTPOLARITY_LOW	Fault input is active low
HRTIM_FAULTPOLARITY_HIGH	Fault input is active high

HRTIM Fault Sources

HRTIM_FAULTSOURCE_DIGITALINPUT	Fault input is FLT input pin
HRTIM_FAULTSOURCE_INTERNAL	Fault input is FLT_Int signal (e.g. internal comparator)

HRTIM Half Mode Enable

HRTIM_HALFMODE_DISABLED	Half mode is disabled
HRTIM_HALFMODE_ENABLED	Half mode is enabled

HRTIM Idle Push Pull Status

HRTIM_PUSHPULL_IDLESTATUS_OUTPUT1	Protection occurred when the output 1 was active and output 2 forced inactive
HRTIM_PUSHPULL_IDLESTATUS_OUTPUT2	Protection occurred when the output 2 was active and output 1 forced inactive

HRTIM Master DMA Request Enable

HRTIM_MASTER_DMA_NONE	No DMA request enable
HRTIM_MASTER_DMA_MCMP1	Master compare 1 DMA request enable
HRTIM_MASTER_DMA_MCMP2	Master compare 2 DMA request enable
HRTIM_MASTER_DMA_MCMP3	Master compare 3 DMA request enable
HRTIM_MASTER_DMA_MCMP4	Master compare 4 DMA request enable
HRTIM_MASTER_DMA_MREP	Master Repetition DMA request enable
HRTIM_MASTER_DMA_SYNC	Synchronization input DMA request enable

HRTIM_MASTER_DMA_MUPD	Master update DMA request enable

HRTIM Master Interrupt Enable

HRTIM_MASTER_IT_NONE	No interrupt enabled
HRTIM_MASTER_IT_MCMP1	Master compare 1 interrupt enable
HRTIM_MASTER_IT_MCMP2	Master compare 2 interrupt enable
HRTIM_MASTER_IT_MCMP3	Master compare 3 interrupt enable
HRTIM_MASTER_IT_MCMP4	Master compare 4 interrupt enable
HRTIM_MASTER_IT_MREP	Master Repetition interrupt enable
HRTIM_MASTER_IT_SYNC	Synchronization input interrupt enable
HRTIM_MASTER_IT_MUPD	Master update interrupt enable

HRTIM Master Interrupt Flag

HRTIM_MASTER_FLAG_MCMP1	Master compare 1 interrupt flag
HRTIM_MASTER_FLAG_MCMP2	Master compare 2 interrupt flag
HRTIM_MASTER_FLAG_MCMP3	Master compare 3 interrupt flag
HRTIM_MASTER_FLAG_MCMP4	Master compare 4 interrupt flag
HRTIM_MASTER_FLAG_MREP	Master Repetition interrupt flag
HRTIM_MASTER_FLAG_SYNC	Synchronization input interrupt flag
HRTIM_MASTER_FLAG_MUPD	Master update interrupt flag

HRTIM Max Timer

MAX_HRTIM_TIMER

HRTIM Output Burst Mode Entry Delayed

HRTIM_OUTPUTBURSTMODEENTRY_REGULAR	The programmed Idle state is applied immediately to the Output
HRTIM_OUTPUTBURSTMODEENTRY_DELAYED	Deadtime is inserted on output before entering the idle mode

HRTIM Output Chopper Mode Enable

HRTIM_OUTPUTCHOPPERMODE_DISABLED	Output signal is not altered
HRTIM_OUTPUTCHOPPERMODE_ENABLED	Output signal is chopped by a carrier signal

HRTIM Output FAULT Level

HRTIM_OUTPUTFAULTLEVEL_NONE	The output is not affected by the fault input
HRTIM_OUTPUTFAULTLEVEL_ACTIVE	Output at active level when in FAULT state
HRTIM_OUTPUTFAULTLEVEL_INACTIVE	Output at inactive level when in FAULT state
HRTIM_OUTPUTFAULTLEVEL_HIGHZ	Output is tri-stated when in FAULT state

HRTIM Output IDLE Level

HRTIM_OUTPUTIDLELEVEL_INACTIVE	Output at inactive level when in IDLE state
HRTIM_OUTPUTIDLELEVEL_ACTIVE	Output at active level when in IDLE state

HRTIM Output Idle Mode

HRTIM_OUTPUTIDLEMODE_NONE	The output is not affected by the burst mode operation
HRTIM_OUTPUTIDLEMODE_IDLE	The output is in idle state when requested by the burst mode controller

HRTIM Output Level

HRTIM_OUTPUTLEVEL_ACTIVE	Forces the output to its active state
HRTIM_OUTPUTLEVEL_INACTIVE	Forces the output to its inactive state

IS_HRTIM_OUTPUTLEVEL

HRTIM Output Polarity

HRTIM_OUTPUTPOLARITY_HIGH	Output is acitve HIGH
HRTIM_OUTPUTPOLARITY_LOW	Output is active LOW

HRTIM Output Reset Source

HRTIM_OUTPUTRESET_NONE	Reset the output reset crossbar
HRTIM_OUTPUTRESET_RESYNC	Timer reset event coming solely from software or SYNC input forces the output to its inactive state
HRTIM_OUTPUTRESET_TIMPER	Timer period event forces the output to its inactive state
HRTIM_OUTPUTRESET_TIMCMP1	Timer compare 1 event forces the output to its inactive state
HRTIM_OUTPUTRESET_TIMCMP2	Timer compare 2 event forces the output to its inactive state
HRTIM_OUTPUTRESET_TIMCMP3	Timer compare 3 event forces the output to its inactive state
HRTIM_OUTPUTRESET_TIMCMP4	Timer compare 4 event forces the output to its inactive state
HRTIM_OUTPUTRESET_MASTERPER	The master timer period event forces the output to its inactive state
HRTIM_OUTPUTRESET_MASTERCMP1	Master Timer compare 1 event forces the output to its inactive state
HRTIM_OUTPUTRESET_MASTERCMP2	Master Timer compare 2 event forces the output to its inactive state
HRTIM_OUTPUTRESET_MASTERCMP3	Master Timer compare 3 event forces the output to its inactive state
HRTIM_OUTPUTRESET_MASTERCMP4	Master Timer compare 4 event forces the output to its inactive state
HRTIM_OUTPUTRESET_TIMEV_1	Timer event 1 forces the output to its inactive state
HRTIM_OUTPUTRESET_TIMEV_2	Timer event 2 forces the output to its inactive state

HRTIM_OUTPUTRESET_TIMEV_3	Timer event 3 forces the output to its inactive state
HRTIM_OUTPUTRESET_TIMEV_4	Timer event 4 forces the output to its inactive state
HRTIM_OUTPUTRESET_TIMEV_5	Timer event 5 forces the output to its inactive state
HRTIM_OUTPUTRESET_TIMEV_6	Timer event 6 forces the output to its inactive state
HRTIM_OUTPUTRESET_TIMEV_7	Timer event 7 forces the output to its inactive state
HRTIM_OUTPUTRESET_TIMEV_8	Timer event 8 forces the output to its inactive state
HRTIM_OUTPUTRESET_TIMEV_9	Timer event 9 forces the output to its inactive state
HRTIM_OUTPUTRESET_EEV_1	External event 1 forces the output to its inactive state
HRTIM_OUTPUTRESET_EEV_2	External event 2 forces the output to its inactive state
HRTIM_OUTPUTRESET_EEV_3	External event 3 forces the output to its inactive state
HRTIM_OUTPUTRESET_EEV_4	External event 4 forces the output to its inactive state
HRTIM_OUTPUTRESET_EEV_5	External event 5 forces the output to its inactive state
HRTIM_OUTPUTRESET_EEV_6	External event 6 forces the output to its inactive state
HRTIM_OUTPUTRESET_EEV_7	External event 7 forces the output to its inactive state
HRTIM_OUTPUTRESET_EEV_8	External event 8 forces the output to its inactive state
HRTIM_OUTPUTRESET_EEV_9	External event 9 forces the output to its inactive state
HRTIM_OUTPUTRESET_EEV_10	External event 10 forces the output to its inactive state
HRTIM_OUTPUTRESET_UPDATE	Timer register update event forces the output to its inactive state

HRTIM Output Set Source

HRTIM_OUTPUTSET_NONE	Reset the output set crossbar
HRTIM_OUTPUTSET_RESYNC	Timer reset event coming solely from software or SYNC input forces the output to its active state
HRTIM_OUTPUTSET_TIMPER	Timer period event forces the output to its active state
HRTIM_OUTPUTSET_TIMCMP1	Timer compare 1 event forces the output to its active state

HRTIM_OUTPUTSET_TIMCMP2	Timer compare 2 event forces the output to its active state
HRTIM_OUTPUTSET_TIMCMP3	Timer compare 3 event forces the output to its active state
HRTIM_OUTPUTSET_TIMCMP4	Timer compare 4 event forces the output to its active state
HRTIM_OUTPUTSET_MASTERPER	The master timer period event forces the output to its active state
HRTIM_OUTPUTSET_MASTERCMP1	Master Timer compare 1 event forces the output to its active state
HRTIM_OUTPUTSET_MASTERCMP2	Master Timer compare 2 event forces the output to its active state
HRTIM_OUTPUTSET_MASTERCMP3	Master Timer compare 3 event forces the output to its active state
HRTIM_OUTPUTSET_MASTERCMP4	Master Timer compare 4 event forces the output to its active state
HRTIM_OUTPUTSET_TIMEV_1	Timer event 1 forces the output to its active state
HRTIM_OUTPUTSET_TIMEV_2	Timer event 2 forces the output to its active state
HRTIM_OUTPUTSET_TIMEV_3	Timer event 3 forces the output to its active state
HRTIM_OUTPUTSET_TIMEV_4	Timer event 4 forces the output to its active state
HRTIM_OUTPUTSET_TIMEV_5	Timer event 5 forces the output to its active state
HRTIM_OUTPUTSET_TIMEV_6	Timer event 6 forces the output to its active state
HRTIM_OUTPUTSET_TIMEV_7	Timer event 7 forces the output to its active state
HRTIM_OUTPUTSET_TIMEV_8	Timer event 8 forces the output to its active state
HRTIM_OUTPUTSET_TIMEV_9	Timer event 9 forces the output to its active state
HRTIM_OUTPUTSET_EEV_1	External event 1 forces the output to its active state
HRTIM_OUTPUTSET_EEV_2	External event 2 forces the output to its active state
HRTIM_OUTPUTSET_EEV_3	External event 3 forces the output to its active state
HRTIM_OUTPUTSET_EEV_4	External event 4 forces the output to its active state
HRTIM_OUTPUTSET_EEV_5	External event 5 forces the output to its active state
HRTIM_OUTPUTSET_EEV_6	External event 6 forces the output to its active state
HRTIM_OUTPUTSET_EEV_7	External event 7 forces the output to its active state
HRTIM_OUTPUTSET_EEV_8	External event 8 forces the output to its active state
HRTIM_OUTPUTSET_EEV_9	External event 9 forces the output to its active

	state
HRTIM_OUTPUTSET_EEV_10	External event 10 forces the output to its active state
HRTIM_OUTPUTSET_UPDATE	Timer register update event forces the output to its active state

HRTIM Output State

HRTIM_OUTPUTSTATE_IDLE	Main operating mode, where the output can take the active or inactive level as programmed in the crossbar unit
HRTIM_OUTPUTSTATE_RUN	Default operating state (e.g. after an HRTIM reset, when the outputs are disabled by software or during a burst mode operation
HRTIM_OUTPUTSTATE_FAULT	Safety state, entered in case of a shut-down request on FAULTx inputs

HRTIM Prescaler Ratio

HRTIM_PRESCALERRATIO_MUL32	fHRCK: fHRTIM x 32U = 4.608 GHz - Resolution: 217 ps - Min PWM frequency: 70.3 kHz (fHRTIM=144MHz)
HRTIM_PRESCALERRATIO_MUL16	fHRCK: fHRTIM x 16U = 2.304 GHz - Resolution: 434 ps - Min PWM frequency: 35.1 KHz (fHRTIM=144MHz)
HRTIM_PRESCALERRATIO_MUL8	fHRCK: fHRTIM x 8U = 1.152 GHz - Resolution: 868 ps - Min PWM frequency: 17.6 kHz (fHRTIM=144MHz)
HRTIM_PRESCALERRATIO_MUL4	fHRCK: fHRTIM x 4U = 576 MHz - Resolution: 1.73 ns - Min PWM frequency: 8.8 kHz (fHRTIM=144MHz)
HRTIM_PRESCALERRATIO_MUL2	fHRCK: fHRTIM x 2U = 288 MHz - Resolution: 3.47 ns - Min PWM frequency: 4.4 kHz (fHRTIM=144MHz)
HRTIM_PRESCALERRATIO_DIV1	fHRCK: fHRTIM = 144 MHz - Resolution: 6.95 ns - Min PWM frequency: 2.2 kHz (fHRTIM=144MHz)
HRTIM_PRESCALERRATIO_DIV2	fHRCK: fHRTIM / 2U = 72 MHz - Resolution: 13.88 ns- Min PWM frequency: 1.1 kHz (fHRTIM=144MHz)
HRTIM_PRESCALERRATIO_DIV4	fHRCK: fHRTIM / 4U = 36 MHz - Resolution: 27.7 ns- Min PWM frequency: 550Hz (fHRTIM=144MHz)

HRTIM Register Preload Enable

HRTIM_PRELOAD_DISABLED	Preload disabled: the write access is directly done into the active register
HRTIM_PRELOAD_ENABLED	Preload enabled: the write access is done into the preload register

HRTIM Reset On Sync Input Event

HRTIM_SYNCRESET_DISABLED	Synchronization input event has effect on the timer

HRTIM_SYNCRESET_ENABLED	Synchronization input event resets the timer

HRTIM Simple OC Mode

HRTIM_BASICOCMODE_TOGGLE	Output toggles when the timer counter reaches the compare value
HRTIM_BASICOCMODE_INACTIVE	Output forced to active level when the timer counter reaches the compare value
HRTIM_BASICOCMODE_ACTIVE	Output forced to inactive level when the timer counter reaches the compare value

IS_HRTIM_BASICOCMODE

HRTIM Software Timer Reset

HRTIM_TIMERRESET_MASTER	Resets the master timer counter
HRTIM_TIMERRESET_TIMER_A	Resets the timer A counter
HRTIM_TIMERRESET_TIMER_B	Resets the timer B counter
HRTIM_TIMERRESET_TIMER_C	Resets the timer C counter
HRTIM_TIMERRESET_TIMER_D	Resets the timer D counter
HRTIM_TIMERRESET_TIMER_E	Resets the timer E counter

HRTIM Software Timer Update

HRTIM_TIMERUPDATE_MASTER	Forces an immediate transfer from the preload to the active register in the master timer
HRTIM_TIMERUPDATE_A	Forces an immediate transfer from the preload to the active register in the timer A
HRTIM_TIMERUPDATE_B	Forces an immediate transfer from the preload to the active register in the timer B
HRTIM_TIMERUPDATE_C	Forces an immediate transfer from the preload to the active register in the timer C
HRTIM_TIMERUPDATE_D	Forces an immediate transfer from the preload to the active register in the timer D
HRTIM_TIMERUPDATE_E	Forces an immediate transfer from the preload to the active register in the timer E

HRTIM Start On Sync Input Event

HRTIM_SYNCSTART_DISABLED	Synchronization input event has effect on the timer
HRTIM_SYNCSTART_ENABLED	Synchronization input event starts the timer

HRTIM Synchronization Input Source

HRTIM_SYNCINPUTSOURCE_NONE	disabled. HRTIM is not synchronized and runs in standalone mode
HRTIM_SYNCINPUTSOURCE_INTERNALEVENT	The HRTIM is synchronized with the on-chip timer
HRTIM_SYNCINPUTSOURCE_EXTERNALEVENT	A positive pulse on SYNCIN input triggers the HRTIM

HRTIM Synchronization Options

HRTIM_SYNCOPTION_NONE	HRTIM instance doesn't handle external synchronization signals (SYNCIN, SYNCOUT)
HRTIM_SYNCOPTION_MASTER	HRTIM instance acts as a MASTER, i.e. generates external synchronization output (SYNCOUT)
HRTIM_SYNCOPTION_SLAVE	HRTIM instance acts as a SLAVE, i.e. it is synchronized by external sources (SYNCIN)

HRTIM Synchronization Output Polarity

HRTIM_SYNCOUTPUTPOLARITY_NONE	Synchronization output event is disabled
HRTIM_SYNCOUTPUTPOLARITY_POSITIVE	SCOUT pin has a low idle level and issues a positive pulse of 16 fHRTIM clock cycles length for the synchronization
HRTIM_SYNCOUTPUTPOLARITY_NEGATIVE	SCOUT pin has a high idle level and issues a negative pulse of 16 fHRTIM clock cycles length for the synchronization

HRTIM Synchronization Output Source

HRTIM_SYNCOUTPUTSOURCE_MASTER_START	A pulse is sent on the SYNCOUT output upon master timer start event
HRTIM_SYNCOUTPUTSOURCE_MASTER_CMP1	A pulse is sent on the SYNCOUT output upon master timer compare 1 event
HRTIM_SYNCOUTPUTSOURCE_TIMA_START	A pulse is sent on the SYNCOUT output upon timer A start or reset events
HRTIM_SYNCOUTPUTSOURCE_TIMA_CMP1	A pulse is sent on the SYNCOUT output upon timer A compare 1 event

HRTIM Timer Burst Mode

HRTIM_TIMERBURSTMODE_MAINTAINCLOCK	Timer counter clock is maintained and the timer operates normally
HRTIM_TIMERBURSTMODE_RESETCOUNTER	Timer counter clock is stopped and the counter is reset

HRTIM Timer Deadtime Insertion

HRTIM_TIMDEADTIMEINSERTION_DISABLED	Output 1 and output 2 signals are independent
HRTIM_TIMDEADTIMEINSERTION_ENABLED	Deadtime is inserted between output 1 and output 2U

HRTIM Timer Delayed Protection Mode

HRTIM_TIMER_A_B_C_DELAYEDPROTECTION_DISABLED	No action

HRTIM_TIMER_A_B_C_DELAYEDPROTECTION_DELAYEDOUT1_EEV6	Timers A, B, C: Output 1 delayed Idle on external Event 6U
HRTIM_TIMER_A_B_C_DELAYEDPROTECTION_DELAYEDOUT2_EEV6	Timers A, B, C: Output 2 delayed Idle on external Event 6U
HRTIM_TIMER_A_B_C_DELAYEDPROTECTION_DELAYEDBOTH_EEV6	Timers A, B, C: Output 1 and output 2 delayed Idle on external Event 6U
HRTIM_TIMER_A_B_C_DELAYEDPROTECTION_BALANCED_EEV6	Timers A, B, C: Balanced Idle on external Event 6U
HRTIM_TIMER_A_B_C_DELAYEDPROTECTION_DELAYEDOUT1_DEEV7	Timers A, B, C: Output 1 delayed Idle on external Event 7U
HRTIM_TIMER_A_B_C_DELAYEDPROTECTION_DELAYEDOUT2_DEEV7	Timers A, B, C: Output 2 delayed Idle on external Event 7U
HRTIM_TIMER_A_B_C_DELAYEDPROTECTION_DELAYEDBOTH_EEV7	Timers A, B, C: Output 1 and output2 delayed Idle on external Event 7U
HRTIM_TIMER_A_B_C_DELAYEDPROTECTION_BALANCED_EEV7	Timers A, B, C: Balanced Idle on external Event 7U
HRTIM_TIMER_D_E_DELAYEDPROTECTION_DISABLED	No action
HRTIM_TIMER_D_E_DELAYEDPROTECTION_DELAYEDOUT1_EEV8	Timers D, E: Output 1 delayed Idle on external Event 6U
HRTIM_TIMER_D_E_DELAYEDPROTECTION_DELAYEDOUT2_EEV8	Timers D, E: Output 2 delayed Idle on external Event 6U
HRTIM_TIMER_D_E_DELAYEDPROTECTION_DELAYEDBOTH_EEV8	Timers D, E: Output 1 and output 2 delayed Idle on external Event 6U
HRTIM_TIMER_D_E_DELAYEDPROTECTION_BALANCED_EEV8	Timers D, E: Balanced Idle on external Event 6U
HRTIM_TIMER_D_E_DELAYEDPROTECTION_DELAYEDOUT1_DEEV9	Timers D, E: Output 1 delayed Idle on external Event 7U
HRTIM_TIMER_D_E_DELAYEDPROTECTION_DELAYEDOUT2_DEEV9	Timers D, E: Output 2 delayed Idle on external Event 7U
HRTIM_TIMER_D_E_DELAYEDPROTECTION_DELAYEDBOTH_EEV9	Timers D, E: Output 1 and output2 delayed Idle on external Event 7U
HRTIM_TIMER_D_E_DELAYEDPROTECTION_BALANCED_EEV9	Timers D, E: Balanced Idle on external Event 7U

HRTIM Timer External Event Filter

HRTIM_TIMEVENTFILTER_NONE	
HRTIM_TIMEVENTFILTER_BLANKINGCMP1	Blanking from counter reset/roll-over to Compare 1U
HRTIM_TIMEVENTFILTER_BLANKINGCMP2	Blanking from counter reset/roll-over to Compare 2U
HRTIM_TIMEVENTFILTER_BLANKINGCMP3	Blanking from counter reset/roll-over to Compare 3U

HRTIM_TIMEVENTFILTER_BLANKINGCMP4	Blanking from counter reset/roll-over to Compare 4U
HRTIM_TIMEVENTFILTER_BLANKINGFLTR1	Blanking from another timing unit: TIMFLTR1 source
HRTIM_TIMEVENTFILTER_BLANKINGFLTR2	Blanking from another timing unit: TIMFLTR2 source
HRTIM_TIMEVENTFILTER_BLANKINGFLTR3	Blanking from another timing unit: TIMFLTR3 source
HRTIM_TIMEVENTFILTER_BLANKINGFLTR4	Blanking from another timing unit: TIMFLTR4 source
HRTIM_TIMEVENTFILTER_BLANKINGFLTR5	Blanking from another timing unit: TIMFLTR5 source
HRTIM_TIMEVENTFILTER_BLANKINGFLTR6	Blanking from another timing unit: TIMFLTR6 source
HRTIM_TIMEVENTFILTER_BLANKINGFLTR7	Blanking from another timing unit: TIMFLTR7 source
HRTIM_TIMEVENTFILTER_BLANKINGFLTR8	Blanking from another timing unit: TIMFLTR8 source
HRTIM_TIMEVENTFILTER_WINDOWINGCMP2	Windowing from counter reset/roll-over to Compare 2U
HRTIM_TIMEVENTFILTER_WINDOWINGCMP3	Windowing from counter reset/roll-over to Compare 3U
HRTIM_TIMEVENTFILTER_WINDOWINGTIM	Windowing from another timing unit: TIMWIN source

HRTIM Timer External Event Latch

HRTIM_TIMEVENTLATCH_DISABLED	Event is ignored if it happens during a blank, or passed through during a window
HRTIM_TIMEVENTLATCH_ENABLED	Event is latched and delayed till the end of the blanking or windowing period

HRTIM Timer Fault Enabling

HRTIM_TIMFAULTENABLE_NONE	No fault enabled
HRTIM_TIMFAULTENABLE_FAULT1	Fault 1 enabled
HRTIM_TIMFAULTENABLE_FAULT2	Fault 2 enabled
HRTIM_TIMFAULTENABLE_FAULT3	Fault 3 enabled
HRTIM_TIMFAULTENABLE_FAULT4	Fault 4 enabled
HRTIM_TIMFAULTENABLE_FAULT5	Fault 5 enabled

HRTIM Timer Fault Lock

HRTIM_TIMFAULTLOCK_READWRITE	Timer fault enabling bits are read/write
HRTIM_TIMFAULTLOCK_READONLY	Timer fault enabling bits are read only

HRTIM Timer identifier

HRTIM_TIMERID_MASTER	Master identifier

HRTIM_TIMERID_TIMER_A	Timer A identifier
HRTIM_TIMERID_TIMER_B	Timer B identifier
HRTIM_TIMERID_TIMER_C	Timer C identifier
HRTIM_TIMERID_TIMER_D	Timer D identifier
HRTIM_TIMERID_TIMER_E	Timer E identifier

HRTIM Timer Index

HRTIM_TIMERINDEX_TIMER_A	Index used to access timer A registers
HRTIM_TIMERINDEX_TIMER_B	Index used to access timer B registers
HRTIM_TIMERINDEX_TIMER_C	Index used to access timer C registers
HRTIM_TIMERINDEX_TIMER_D	Index used to access timer D registers
HRTIM_TIMERINDEX_TIMER_E	Index used to access timer E registers
HRTIM_TIMERINDEX_MASTER	Index used to access master registers
HRTIM_TIMERINDEX_COMMON	Index used to access HRTIM common registers

HRTIM Timer Output

HRTIM_OUTPUT_TA1	Timer A - Output 1 identifier
HRTIM_OUTPUT_TA2	Timer A - Output 2 identifier
HRTIM_OUTPUT_TB1	Timer B - Output 1 identifier
HRTIM_OUTPUT_TB2	Timer B - Output 2 identifier
HRTIM_OUTPUT_TC1	Timer C - Output 1 identifier
HRTIM_OUTPUT_TC2	Timer C - Output 2 identifier
HRTIM_OUTPUT_TD1	Timer D - Output 1 identifier
HRTIM_OUTPUT_TD2	Timer D - Output 2 identifier
HRTIM_OUTPUT_TE1	Timer E - Output 1 identifier
HRTIM_OUTPUT_TE2	Timer E - Output 2 identifier

HRTIM Timer Push Pull Mode

HRTIM_TIMPUSHPULLMODE_DISABLED	Push-Pull mode disabled
HRTIM_TIMPUSHPULLMODE_ENABLED	Push-Pull mode enabled

HRTIM Timer Repetition Update

HRTIM_UPDATEONREPETITION_DISABLED	Update on repetition disabled
HRTIM_UPDATEONREPETITION_ENABLED	Update on repetition enabled

HRTIM Timer Reset Trigger

HRTIM_TIMRESETTRIGGER_NONE	No counter reset trigger
HRTIM_TIMRESETTRIGGER_UPDATE	The timer counter is reset upon update event
HRTIM_TIMRESETTRIGGER_CMP2	The timer counter is reset upon Timer Compare 2 event
HRTIM_TIMRESETTRIGGER_CMP4	The timer counter is reset upon Timer

	Compare 4 event
HRTIM_TIMRESETTRIGGER_MASTER_PER	The timer counter is reset upon master timer period event
HRTIM_TIMRESETTRIGGER_MASTER_CMP1	The timer counter is reset upon master timer Compare 1 event
HRTIM_TIMRESETTRIGGER_MASTER_CMP2	The timer counter is reset upon master timer Compare 2 event
HRTIM_TIMRESETTRIGGER_MASTER_CMP3	The timer counter is reset upon master timer Compare 3 event
HRTIM_TIMRESETTRIGGER_MASTER_CMP4	The timer counter is reset upon master timer Compare 4 event
HRTIM_TIMRESETTRIGGER_EEV_1	The timer counter is reset upon external event 1U
HRTIM_TIMRESETTRIGGER_EEV_2	The timer counter is reset upon external event 2U
HRTIM_TIMRESETTRIGGER_EEV_3	The timer counter is reset upon external event 3U
HRTIM_TIMRESETTRIGGER_EEV_4	The timer counter is reset upon external event 4U
HRTIM_TIMRESETTRIGGER_EEV_5	The timer counter is reset upon external event 5U
HRTIM_TIMRESETTRIGGER_EEV_6	The timer counter is reset upon external event 6U
HRTIM_TIMRESETTRIGGER_EEV_7	The timer counter is reset upon external event 7U
HRTIM_TIMRESETTRIGGER_EEV_8	The timer counter is reset upon external event 8U
HRTIM_TIMRESETTRIGGER_EEV_9	The timer counter is reset upon external event 9U
HRTIM_TIMRESETTRIGGER_EEV_10	The timer counter is reset upon external event 10U
HRTIM_TIMRESETTRIGGER_OTHER1_CMP1	The timer counter is reset upon other timer Compare 1 event
HRTIM_TIMRESETTRIGGER_OTHER1_CMP2	The timer counter is reset upon other timer Compare 2 event
HRTIM_TIMRESETTRIGGER_OTHER1_CMP4	The timer counter is reset upon other timer Compare 4 event
HRTIM_TIMRESETTRIGGER_OTHER2_CMP1	The timer counter is reset upon other timer Compare 1 event
HRTIM_TIMRESETTRIGGER_OTHER2_CMP2	The timer counter is reset upon other timer Compare 2 event
HRTIM_TIMRESETTRIGGER_OTHER2_CMP4	The timer counter is reset upon other timer Compare 4 event
HRTIM_TIMRESETTRIGGER_OTHER3_CMP1	The timer counter is reset upon other

	timer Compare 1 event
HRTIM_TIMRESETTRIGGER_OTHER3_CMP2	The timer counter is reset upon other timer Compare 2 event
HRTIM_TIMRESETTRIGGER_OTHER3_CMP4	The timer counter is reset upon other timer Compare 4 event
HRTIM_TIMRESETTRIGGER_OTHER4_CMP1	The timer counter is reset upon other timer Compare 1 event
HRTIM_TIMRESETTRIGGER_OTHER4_CMP2	The timer counter is reset upon other timer Compare 2 event
HRTIM_TIMRESETTRIGGER_OTHER4_CMP4	The timer counter is reset upon other timer Compare 4 event

HRTIM Timer Reset Update

HRTIM_TIMUPDATEONRESET_DISABLED	Update by timer x reset / roll-over disabled
HRTIM_TIMUPDATEONRESET_ENABLED	Update by timer x reset / roll-over enabled

HRTIM Timer Update Trigger

HRTIM_TIMUPDATETRIGGER_NONE	Register update is disabled
HRTIM_TIMUPDATETRIGGER_MASTER	Register update is triggered by the master timer update
HRTIM_TIMUPDATETRIGGER_TIMER_A	Register update is triggered by the timer A update
HRTIM_TIMUPDATETRIGGER_TIMER_B	Register update is triggered by the timer B update
HRTIM_TIMUPDATETRIGGER_TIMER_C	Register update is triggered by the timer C update
HRTIM_TIMUPDATETRIGGER_TIMER_D	Register update is triggered by the timer D update
HRTIM_TIMUPDATETRIGGER_TIMER_E	Register update is triggered by the timer E update

HRTIM Timing Unit DMA Request Enable

HRTIM_TIM_DMA_NONE	No DMA request enable
HRTIM_TIM_DMA_CMP1	Timer compare 1 DMA request enable
HRTIM_TIM_DMA_CMP2	Timer compare 2 DMA request enable
HRTIM_TIM_DMA_CMP3	Timer compare 3 DMA request enable
HRTIM_TIM_DMA_CMP4	Timer compare 4 DMA request enable
HRTIM_TIM_DMA_REP	Timer repetition DMA request enable
HRTIM_TIM_DMA_UPD	Timer update DMA request enable
HRTIM_TIM_DMA_CPT1	Timer capture 1 DMA request enable
HRTIM_TIM_DMA_CPT2	Timer capture 2 DMA request enable
HRTIM_TIM_DMA_SET1	Timer output 1 set DMA request enable
HRTIM_TIM_DMA_RST1	Timer output 1 reset DMA request enable

HRTIM_TIM_DMA_SET2	Timer output 2 set DMA request enable
HRTIM_TIM_DMA_RST2	Timer output 2 reset DMA request enable
HRTIM_TIM_DMA_RST	Timer reset DMA request enable
HRTIM_TIM_DMA_DLYPRT	Timer delay protection DMA request enable

HRTIM Timing Unit Interrupt Enable

HRTIM_TIM_IT_NONE	No interrupt enabled
HRTIM_TIM_IT_CMP1	Timer compare 1 interrupt enable
HRTIM_TIM_IT_CMP2	Timer compare 2 interrupt enable
HRTIM_TIM_IT_CMP3	Timer compare 3 interrupt enable
HRTIM_TIM_IT_CMP4	Timer compare 4 interrupt enable
HRTIM_TIM_IT_REP	Timer repetition interrupt enable
HRTIM_TIM_IT_UPD	Timer update interrupt enable
HRTIM_TIM_IT_CPT1	Timer capture 1 interrupt enable
HRTIM_TIM_IT_CPT2	Timer capture 2 interrupt enable
HRTIM_TIM_IT_SET1	Timer output 1 set interrupt enable
HRTIM_TIM_IT_RST1	Timer output 1 reset interrupt enable
HRTIM_TIM_IT_SET2	Timer output 2 set interrupt enable
HRTIM_TIM_IT_RST2	Timer output 2 reset interrupt enable
HRTIM_TIM_IT_RST	Timer reset interrupt enable
HRTIM_TIM_IT_DLYPRT	Timer delay protection interrupt enable

HRTIM Timing Unit Interrupt Flag

HRTIM_TIM_FLAG_CMP1	Timer compare 1 interrupt flag
HRTIM_TIM_FLAG_CMP2	Timer compare 2 interrupt flag
HRTIM_TIM_FLAG_CMP3	Timer compare 3 interrupt flag
HRTIM_TIM_FLAG_CMP4	Timer compare 4 interrupt flag
HRTIM_TIM_FLAG_REP	Timer repetition interrupt flag
HRTIM_TIM_FLAG_UPD	Timer update interrupt flag
HRTIM_TIM_FLAG_CPT1	Timer capture 1 interrupt flag
HRTIM_TIM_FLAG_CPT2	Timer capture 2 interrupt flag
HRTIM_TIM_FLAG_SET1	Timer output 1 set interrupt flag
HRTIM_TIM_FLAG_RST1	Timer output 1 reset interrupt flag
HRTIM_TIM_FLAG_SET2	Timer output 2 set interrupt flag
HRTIM_TIM_FLAG_RST2	Timer output 2 reset interrupt flag
HRTIM_TIM_FLAG_RST	Timer reset interrupt flag
HRTIM_TIM_FLAG_DLYPRT	Timer delay protection interrupt flag

HRTIM Update Gating

HRTIM_UPDATEGATING_INDEPENDENT	Update done independently from the DMA burst transfer completion
HRTIM_UPDATEGATING_DMABURST	Update done when the DMA burst transfer is completed
HRTIM_UPDATEGATING_DMABURST_UPDATE	Update done on timer roll-over following a DMA burst transfer completion
HRTIM_UPDATEGATING_UPDEN1	Slave timer only - Update done on a rising edge of HRTIM update enable input 1U
HRTIM_UPDATEGATING_UPDEN2	Slave timer only - Update done on a rising edge of HRTIM update enable input 2U
HRTIM_UPDATEGATING_UPDEN3	Slave timer only - Update done on a rising edge of HRTIM update enable input 3U
HRTIM_UPDATEGATING_UPDEN1_UPDATE	Slave timer only - Update done on the update event following a rising edge of HRTIM update enable input 1U
HRTIM_UPDATEGATING_UPDEN2_UPDATE	Slave timer only - Update done on the update event following a rising edge of HRTIM update enable input 2U
HRTIM_UPDATEGATING_UPDEN3_UPDATE	Slave timer only - Update done on the update event following a rising edge of HRTIM update enable input 3U

24 HAL I2C Generic Driver

24.1 I2C Firmware driver registers structures

24.1.1 I2C_InitTypeDef

Data Fields

- ***uint32_t Timing***
- ***uint32_t OwnAddress1***
- ***uint32_t AddressingMode***
- ***uint32_t DualAddressMode***
- ***uint32_t OwnAddress2***
- ***uint32_t OwnAddress2Masks***
- ***uint32_t GeneralCallMode***
- ***uint32_t NoStretchMode***

Field Documentation

- ***uint32_t I2C_InitTypeDef::Timing***
  Specifies the I2C_TIMINGR_register value. This parameter calculated by referring to I2C initialization section in Reference manual
- ***uint32_t I2C_InitTypeDef::OwnAddress1***
  Specifies the first device own address. This parameter can be a 7-bit or 10-bit address.
- ***uint32_t I2C_InitTypeDef::AddressingMode***
  Specifies if 7-bit or 10-bit addressing mode is selected. This parameter can be a value of ***I2C_ADDRESSING_MODE***
- ***uint32_t I2C_InitTypeDef::DualAddressMode***
  Specifies if dual addressing mode is selected. This parameter can be a value of ***I2C_DUAL_ADDRESSING_MODE***
- ***uint32_t I2C_InitTypeDef::OwnAddress2***
  Specifies the second device own address if dual addressing mode is selected This parameter can be a 7-bit address.
- ***uint32_t I2C_InitTypeDef::OwnAddress2Masks***
  Specifies the acknowledge mask address second device own address if dual addressing mode is selected This parameter can be a value of ***I2C_OWN_ADDRESS2_MASKS***
- ***uint32_t I2C_InitTypeDef::GeneralCallMode***
  Specifies if general call mode is selected. This parameter can be a value of ***I2C_GENERAL_CALL_ADDRESSING_MODE***
- ***uint32_t I2C_InitTypeDef::NoStretchMode***
  Specifies if nostretch mode is selected. This parameter can be a value of ***I2C_NOSTRETCH_MODE***

24.1.2 __I2C_HandleTypeDef

Data Fields

- ***I2C_TypeDef * Instance***
- ***I2C_InitTypeDef Init***
- ***uint8_t * pBuffPtr***
- ***uint16_t XferSize***
- ***__IO uint16_t XferCount***

- ***__IO uint32_t XferOptions***
- ***__IO uint32_t PreviousState***
- ***HAL_StatusTypeDef(* XferISR***
- ***DMA_HandleTypeDef * hdmatx***
- ***DMA_HandleTypeDef * hdmarx***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_I2C_StateTypeDef State***
- ***__IO HAL_I2C_ModeTypeDef Mode***
- ***__IO uint32_t ErrorCode***
- ***__IO uint32_t AddrEventCount***

Field Documentation

- ***I2C_TypeDef* __I2C_HandleTypeDef::Instance***
  I2C registers base address
- ***I2C_InitTypeDef __I2C_HandleTypeDef::Init***
  I2C communication parameters
- ***uint8_t* __I2C_HandleTypeDef::pBuffPtr***
  Pointer to I2C transfer buffer
- ***uint16_t __I2C_HandleTypeDef::XferSize***
  I2C transfer size
- ***__IO uint16_t __I2C_HandleTypeDef::XferCount***
  I2C transfer counter
- ***__IO uint32_t __I2C_HandleTypeDef::XferOptions***
  I2C sequantial transfer options, this parameter can be a value of ***I2C_XFEROPTIONS***
- ***__IO uint32_t __I2C_HandleTypeDef::PreviousState***
  I2C communication Previous state
- ***HAL_StatusTypeDef(* __I2C_HandleTypeDef::XferISR)(struct __I2C_HandleTypeDef *hi2c, uint32_t ITFlags, uint32_t ITSources)***
  I2C transfer IRQ handler function pointer
- ***DMA_HandleTypeDef* __I2C_HandleTypeDef::hdmatx***
  I2C Tx DMA handle parameters
- ***DMA_HandleTypeDef* __I2C_HandleTypeDef::hdmarx***
  I2C Rx DMA handle parameters
- ***HAL_LockTypeDef __I2C_HandleTypeDef::Lock***
  I2C locking object
- ***__IO HAL_I2C_StateTypeDef __I2C_HandleTypeDef::State***
  I2C communication state
- ***__IO HAL_I2C_ModeTypeDef __I2C_HandleTypeDef::Mode***
  I2C communication mode
- ***__IO uint32_t __I2C_HandleTypeDef::ErrorCode***
  I2C Error code
- ***__IO uint32_t __I2C_HandleTypeDef::AddrEventCount***
  I2C Address Event counter

24.2 I2C Firmware driver API description

24.2.1 How to use this driver

The I2C HAL driver can be used as follows:

1. Declare a I2C_HandleTypeDef handle structure, for example: I2C_HandleTypeDef hi2c;
2. Initialize the I2C low level resources by implementing the HAL_I2C_MspInit() API:
   a. Enable the I2Cx interface clock

b. I2C pins configuration
   - Enable the clock for the I2C GPIOs
   - Configure I2C pins as alternate function open-drain

c. NVIC configuration if you need to use interrupt process
   - Configure the I2Cx interrupt priority
   - Enable the NVIC I2C IRQ Channel

d. DMA Configuration if you need to use DMA process
   - Declare a DMA_HandleTypeDef handle structure for the transmit or receive channel
   - Enable the DMAx interface clock using
   - Configure the DMA handle parameters
   - Configure the DMA Tx or Rx channel
   - Associate the initialized DMA handle to the hi2c DMA Tx or Rx handle
   - Configure the priority and enable the NVIC for the transfer complete interrupt on the DMA Tx or Rx channel

3. Configure the Communication Clock Timing, Own Address1, Master Addressing mode, Dual Addressing mode, Own Address2, Own Address2 Mask, General call and Nostretch mode in the hi2c Init structure.
4. Initialize the I2C registers by calling the HAL_I2C_Init(), configures also the low level Hardware (GPIO, CLOCK, NVIC...etc) by calling the customized HAL_I2C_MspInit(&hi2c) API.
5. To check if target device is ready for communication, use the function HAL_I2C_IsDeviceReady()
6. For I2C IO and IO MEM operations, three operation modes are available within this driver :

Polling mode IO operation

- Transmit in master mode an amount of data in blocking mode using HAL_I2C_Master_Transmit()
- Receive in master mode an amount of data in blocking mode using HAL_I2C_Master_Receive()
- Transmit in slave mode an amount of data in blocking mode using HAL_I2C_Slave_Transmit()
- Receive in slave mode an amount of data in blocking mode using HAL_I2C_Slave_Receive()

Polling mode IO MEM operation

- Write an amount of data in blocking mode to a specific memory address using HAL_I2C_Mem_Write()
- Read an amount of data in blocking mode from a specific memory address using HAL_I2C_Mem_Read()

Interrupt mode IO operation

- Transmit in master mode an amount of data in non-blocking mode using HAL_I2C_Master_Transmit_IT()
- At transmission end of transfer, HAL_I2C_MasterTxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_MasterTxCpltCallback()
- Receive in master mode an amount of data in non-blocking mode using HAL_I2C_Master_Receive_IT()

- At reception end of transfer, HAL_I2C_MasterRxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_MasterRxCpltCallback()
- Transmit in slave mode an amount of data in non-blocking mode using HAL_I2C_Slave_Transmit_IT()
- At transmission end of transfer, HAL_I2C_SlaveTxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_SlaveTxCpltCallback()
- Receive in slave mode an amount of data in non-blocking mode using HAL_I2C_Slave_Receive_IT()
- At reception end of transfer, HAL_I2C_SlaveRxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_SlaveRxCpltCallback()
- In case of transfer Error, HAL_I2C_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_I2C_ErrorCallback()
- Abort a master I2C process communication with Interrupt using HAL_I2C_Master_Abort_IT()
- End of abort process, HAL_I2C_AbortCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_AbortCpltCallback()
- Discard a slave I2C process communication using __HAL_I2C_GENERATE_NACK() macro. This action will inform Master to generate a Stop condition to discard the communication.

Interrupt mode IO sequential operation



These interfaces allow to manage a sequential transfer with a repeated start condition when a direction change during transfer

- A specific option field manage the different steps of a sequential transfer
- Option field values are defined through @ref I2C_XFEROPTIONS and are listed below:
  - I2C_FIRST_AND_LAST_FRAME: No sequential usage, functionnal is same as associated interfaces in no sequential mode
  - I2C_FIRST_FRAME: Sequential usage, this option allow to manage a sequence with start condition, address and data to transfer without a final stop condition
  - I2C_FIRST_AND_NEXT_FRAME: Sequential usage (Master only), this option allow to manage a sequence with start condition, address and data to transfer without a final stop condition, an then permit a call the same master sequential interface several times (like HAL_I2C_Master_Sequential_Transmit_IT() then HAL_I2C_Master_Sequential_Transmit_IT())
  - I2C_NEXT_FRAME: Sequential usage, this option allow to manage a sequence with a restart condition, address and with new data to transfer if the direction change or manage only the new data to transfer if no direction change and without a final stop condition in both cases
  - I2C_LAST_FRAME: Sequential usage, this option allow to manage a sequance with a restart condition, address and with new data to transfer if the direction change or manage only the new data to transfer if no direction change and with a final stop condition in both cases
- Differents sequential I2C interfaces are listed below:
  - Sequential transmit in master I2C mode an amount of data in non-blocking mode using HAL_I2C_Master_Sequential_Transmit_IT()

  - At transmission end of current frame transfer, HAL_I2C_MasterTxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_MasterTxCpltCallback()
- Sequential receive in master I2C mode an amount of data in non-blocking mode using HAL_I2C_Master_Sequential_Receive_IT()
  - At reception end of current frame transfer, HAL_I2C_MasterRxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_MasterRxCpltCallback()
- Abort a master I2C process communication with Interrupt using HAL_I2C_Master_Abort_IT()
  - End of abort process, HAL_I2C_AbortCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_AbortCpltCallback()
- Enable/disable the Address listen mode in slave I2C mode using HAL_I2C_EnableListen_IT() HAL_I2C_DisableListen_IT()
  - When address slave I2C match, HAL_I2C_AddrCallback() is executed and user can add his own code to check the Address Match Code and the transmission direction request by master (Write/Read).
  - At Listen mode end HAL_I2C_ListenCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_ListenCpltCallback()
- Sequential transmit in slave I2C mode an amount of data in non-blocking mode using HAL_I2C_Slave_Sequential_Transmit_IT()
  - At transmission end of current frame transfer, HAL_I2C_SlaveTxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_SlaveTxCpltCallback()
- Sequential receive in slave I2C mode an amount of data in non-blocking mode using HAL_I2C_Slave_Sequential_Receive_IT()
  - At reception end of current frame transfer, HAL_I2C_SlaveRxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_SlaveRxCpltCallback()
- In case of transfer Error, HAL_I2C_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_I2C_ErrorCallback()
- Abort a master I2C process communication with Interrupt using HAL_I2C_Master_Abort_IT()
- End of abort process, HAL_I2C_AbortCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_AbortCpltCallback()
- Discard a slave I2C process communication using __HAL_I2C_GENERATE_NACK() macro. This action will inform Master to generate a Stop condition to discard the communication.

Interrupt mode IO MEM operation

- Write an amount of data in non-blocking mode with Interrupt to a specific memory address using HAL_I2C_Mem_Write_IT()
- At Memory end of write transfer, HAL_I2C_MemTxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_MemTxCpltCallback()
- Read an amount of data in non-blocking mode with Interrupt from a specific memory address using HAL_I2C_Mem_Read_IT()
- At Memory end of read transfer, HAL_I2C_MemRxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_MemRxCpltCallback()

- In case of transfer Error, HAL_I2C_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_I2C_ErrorCallback()

DMA mode IO operation

- Transmit in master mode an amount of data in non-blocking mode (DMA) using HAL_I2C_Master_Transmit_DMA()
- At transmission end of transfer, HAL_I2C_MasterTxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_MasterTxCpltCallback()
- Receive in master mode an amount of data in non-blocking mode (DMA) using HAL_I2C_Master_Receive_DMA()
- At reception end of transfer, HAL_I2C_MasterRxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_MasterRxCpltCallback()
- Transmit in slave mode an amount of data in non-blocking mode (DMA) using HAL_I2C_Slave_Transmit_DMA()
- At transmission end of transfer, HAL_I2C_SlaveTxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_SlaveTxCpltCallback()
- Receive in slave mode an amount of data in non-blocking mode (DMA) using HAL_I2C_Slave_Receive_DMA()
- At reception end of transfer, HAL_I2C_SlaveRxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_SlaveRxCpltCallback()
- In case of transfer Error, HAL_I2C_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_I2C_ErrorCallback()
- Abort a master I2C process communication with Interrupt using HAL_I2C_Master_Abort_IT()
- End of abort process, HAL_I2C_AbortCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_AbortCpltCallback()
- Discard a slave I2C process communication using __HAL_I2C_GENERATE_NACK() macro. This action will inform Master to generate a Stop condition to discard the communication.

DMA mode IO MEM operation

- Write an amount of data in non-blocking mode with DMA to a specific memory address using HAL_I2C_Mem_Write_DMA()
- At Memory end of write transfer, HAL_I2C_MemTxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_MemTxCpltCallback()
- Read an amount of data in non-blocking mode with DMA from a specific memory address using HAL_I2C_Mem_Read_DMA()
- At Memory end of read transfer, HAL_I2C_MemRxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_I2C_MemRxCpltCallback()
- In case of transfer Error, HAL_I2C_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_I2C_ErrorCallback()

I2C HAL driver macros list

Below the list of most used macros in I2C HAL driver.

- __HAL_I2C_ENABLE: Enable the I2C peripheral
- __HAL_I2C_DISABLE: Disable the I2C peripheral

- __HAL_I2C_GENERATE_NACK: Generate a Non-Acknowledge I2C peripheral in Slave mode
- __HAL_I2C_GET_FLAG: Check whether the specified I2C flag is set or not
- __HAL_I2C_CLEAR_FLAG: Clear the specified I2C pending flag
- __HAL_I2C_ENABLE_IT: Enable the specified I2C interrupt
- __HAL_I2C_DISABLE_IT: Disable the specified I2C interrupt



You can refer to the I2C HAL driver header file for more useful macros

24.2.2 Initialization and de-initialization functions

This subsection provides a set of functions allowing to initialize and deinitialize the I2Cx peripheral:

- User must Implement HAL_I2C_MspInit() function in which he configures all related peripherals resources (CLOCK, GPIO, DMA, IT and NVIC).
- Call the function HAL_I2C_Init() to configure the selected device with the selected configuration:
  - Clock Timing
  - Own Address 1
  - Addressing mode (Master, Slave)
  - Dual Addressing mode
  - Own Address 2
  - Own Address 2 Mask
  - General call mode
  - Nostretch mode
- Call the function HAL_I2C_DeInit() to restore the default configuration of the selected I2Cx peripheral.

This section contains the following APIs:

- ***HAL_I2C_Init()***
- ***HAL_I2C_DeInit()***
- ***HAL_I2C_MspInit()***
- ***HAL_I2C_MspDeInit()***

24.2.3 IO operation functions

This subsection provides a set of functions allowing to manage the I2C data transfers.

1. There are two modes of transfer:
   - Blocking mode : The communication is performed in the polling mode. The status of all data processing is returned by the same function after finishing transfer.
   - No-Blocking mode : The communication is performed using Interrupts or DMA. These functions return the status of the transfer startup. The end of the data processing will be indicated through the dedicated I2C IRQ when using Interrupt mode or the DMA IRQ when using DMA mode.
2. Blocking mode functions are :
   - HAL_I2C_Master_Transmit()
   - HAL_I2C_Master_Receive()
   - HAL_I2C_Slave_Transmit()
   - HAL_I2C_Slave_Receive()
   - HAL_I2C_Mem_Write()

  - HAL_I2C_Mem_Read()
  - HAL_I2C_IsDeviceReady()
3. No-Blocking mode functions with Interrupt are :
  - HAL_I2C_Master_Transmit_IT()
  - HAL_I2C_Master_Receive_IT()
  - HAL_I2C_Slave_Transmit_IT()
  - HAL_I2C_Slave_Receive_IT()
  - HAL_I2C_Mem_Write_IT()
  - HAL_I2C_Mem_Read_IT()
4. No-Blocking mode functions with DMA are :
  - HAL_I2C_Master_Transmit_DMA()
  - HAL_I2C_Master_Receive_DMA()
  - HAL_I2C_Slave_Transmit_DMA()
  - HAL_I2C_Slave_Receive_DMA()
  - HAL_I2C_Mem_Write_DMA()
  - HAL_I2C_Mem_Read_DMA()
5. A set of Transfer Complete Callbacks are provided in non Blocking mode:
  - HAL_I2C_MemTxCpltCallback()
  - HAL_I2C_MemRxCpltCallback()
  - HAL_I2C_MasterTxCpltCallback()
  - HAL_I2C_MasterRxCpltCallback()
  - HAL_I2C_SlaveTxCpltCallback()
  - HAL_I2C_SlaveRxCpltCallback()
  - HAL_I2C_ErrorCallback()

This section contains the following APIs:

- ***HAL_I2C_Master_Transmit()***
- ***HAL_I2C_Master_Receive()***
- ***HAL_I2C_Slave_Transmit()***
- ***HAL_I2C_Slave_Receive()***
- ***HAL_I2C_Master_Transmit_IT()***
- ***HAL_I2C_Master_Receive_IT()***
- ***HAL_I2C_Slave_Transmit_IT()***
- ***HAL_I2C_Slave_Receive_IT()***
- ***HAL_I2C_Master_Transmit_DMA()***
- ***HAL_I2C_Master_Receive_DMA()***
- ***HAL_I2C_Slave_Transmit_DMA()***
- ***HAL_I2C_Slave_Receive_DMA()***
- ***HAL_I2C_Mem_Write()***
- ***HAL_I2C_Mem_Read()***
- ***HAL_I2C_Mem_Write_IT()***
- ***HAL_I2C_Mem_Read_IT()***
- ***HAL_I2C_Mem_Write_DMA()***
- ***HAL_I2C_Mem_Read_DMA()***
- ***HAL_I2C_IsDeviceReady()***
- ***HAL_I2C_Master_Sequential_Transmit_IT()***
- ***HAL_I2C_Master_Sequential_Receive_IT()***
- ***HAL_I2C_Slave_Sequential_Transmit_IT()***
- ***HAL_I2C_Slave_Sequential_Receive_IT()***
- ***HAL_I2C_EnableListen_IT()***
- ***HAL_I2C_DisableListen_IT()***
- ***HAL_I2C_Master_Abort_IT()***

24.2.4 Peripheral State, Mode and Error functions

This subsection permit to get in run-time the status of the peripheral and the data flow.

This section contains the following APIs:

- ***HAL_I2C_GetState()***
- ***HAL_I2C_GetMode()***
- ***HAL_I2C_GetError()***

24.2.5 Detailed description of functions

HAL_I2C_Init

Function name	**HAL_StatusTypeDef HAL_I2C_Init (I2C_HandleTypeDef * hi2c)**
Function description	Initializes the I2C according to the specified parameters in the I2C_InitTypeDef and initialize the associated handle.
Parameters	• **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
Return values	• **HAL:** status

HAL_I2C_DeInit

Function name	**HAL_StatusTypeDef HAL_I2C_DeInit (I2C_HandleTypeDef * hi2c)**
Function description	DeInitialize the I2C peripheral.
Parameters	• **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
Return values	• **HAL:** status

HAL_I2C_MspInit

Function name	**void HAL_I2C_MspInit (I2C_HandleTypeDef * hi2c)**
Function description	Initialize the I2C MSP.
Parameters	• **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
Return values	• **None**

HAL_I2C_MspDeInit

Function name	**void HAL_I2C_MspDeInit (I2C_HandleTypeDef * hi2c)**
Function description	DeInitialize the I2C MSP.
Parameters	• **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
Return values	• **None**

HAL_I2C_Master_Transmit

Function name	**HAL_StatusTypeDef HAL_I2C_Master_Transmit (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint8_t * pData, uint16_t Size, uint32_t Timeout)**
Function description	Transmits in master mode an amount of data in blocking mode.
Parameters	• **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C. • **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface • **pData:** Pointer to data buffer • **Size:** Amount of data to be sent • **Timeout:** Timeout duration
Return values	• **HAL:** status

HAL_I2C_Master_Receive

Function name	**HAL_StatusTypeDef HAL_I2C_Master_Receive (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint8_t * pData, uint16_t Size, uint32_t Timeout)**
Function description	Receives in master mode an amount of data in blocking mode.
Parameters	• **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C. • **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface • **pData:** Pointer to data buffer • **Size:** Amount of data to be sent • **Timeout:** Timeout duration
Return values	• **HAL:** status

HAL_I2C_Slave_Transmit

Function name	**HAL_StatusTypeDef HAL_I2C_Slave_Transmit (I2C_HandleTypeDef * hi2c, uint8_t * pData, uint16_t Size, uint32_t Timeout)**
Function description	Transmits in slave mode an amount of data in blocking mode.
Parameters	• **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C. • **pData:** Pointer to data buffer • **Size:** Amount of data to be sent • **Timeout:** Timeout duration
Return values	• **HAL:** status

HAL_I2C_Slave_Receive

Function name **HAL_StatusTypeDef HAL_I2C_Slave_Receive (I2C_HandleTypeDef * hi2c, uint8_t * pData, uint16_t Size, uint32_t Timeout)**

Function description Receive in slave mode an amount of data in blocking mode.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent
- **Timeout:** Timeout duration

Return values
- **HAL:** status

HAL_I2C_Mem_Write

Function name **HAL_StatusTypeDef HAL_I2C_Mem_Write (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint16_t MemAddress, uint16_t MemAddSize, uint8_t * pData, uint16_t Size, uint32_t Timeout)**

Function description Write an amount of data in blocking mode to a specific memory address.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **MemAddress:** Internal memory address
- **MemAddSize:** Size of internal memory address
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent
- **Timeout:** Timeout duration

Return values
- **HAL:** status

HAL_I2C_Mem_Read

Function name **HAL_StatusTypeDef HAL_I2C_Mem_Read (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint16_t MemAddress, uint16_t MemAddSize, uint8_t * pData, uint16_t Size, uint32_t Timeout)**

Function description Read an amount of data in blocking mode from a specific memory address.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **MemAddress:** Internal memory address
- **MemAddSize:** Size of internal memory address
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent

- **Timeout:** Timeout duration

Return values
- **HAL:** status

HAL_I2C_IsDeviceReady

Function name
HAL_StatusTypeDef HAL_I2C_IsDeviceReady (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint32_t Trials, uint32_t Timeout)

Function description
Checks if target device is ready for communication.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **Trials:** Number of trials
- **Timeout:** Timeout duration

Return values
- **HAL:** status

Notes
- This function is used with Memory devices

HAL_I2C_Master_Transmit_IT

Function name
HAL_StatusTypeDef HAL_I2C_Master_Transmit_IT (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint8_t * pData, uint16_t Size)

Function description
Transmit in master mode an amount of data in non-blocking mode with Interrupt.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent

Return values
- **HAL:** status

HAL_I2C_Master_Receive_IT

Function name
HAL_StatusTypeDef HAL_I2C_Master_Receive_IT (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint8_t * pData, uint16_t Size)

Function description
Receive in master mode an amount of data in non-blocking mode with Interrupt.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **pData:** Pointer to data buffer

- **Size:** Amount of data to be sent

Return values
- **HAL:** status

HAL_I2C_Slave_Transmit_IT

Function name **HAL_StatusTypeDef HAL_I2C_Slave_Transmit_IT (I2C_HandleTypeDef * hi2c, uint8_t * pData, uint16_t Size)**

Function description Transmit in slave mode an amount of data in non-blocking mode with Interrupt.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent

Return values
- **HAL:** status

HAL_I2C_Slave_Receive_IT

Function name **HAL_StatusTypeDef HAL_I2C_Slave_Receive_IT (I2C_HandleTypeDef * hi2c, uint8_t * pData, uint16_t Size)**

Function description Receive in slave mode an amount of data in non-blocking mode with Interrupt.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent

Return values
- **HAL:** status

HAL_I2C_Mem_Write_IT

Function name **HAL_StatusTypeDef HAL_I2C_Mem_Write_IT (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint16_t MemAddress, uint16_t MemAddSize, uint8_t * pData, uint16_t Size)**

Function description Write an amount of data in non-blocking mode with Interrupt to a specific memory address.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **MemAddress:** Internal memory address
- **MemAddSize:** Size of internal memory address
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent

Return values
- **HAL:** status

HAL_I2C_Mem_Read_IT

Function name
HAL_StatusTypeDef HAL_I2C_Mem_Read_IT (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint16_t MemAddress, uint16_t MemAddSize, uint8_t * pData, uint16_t Size)

Function description
Read an amount of data in non-blocking mode with Interrupt from a specific memory address.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **MemAddress:** Internal memory address
- **MemAddSize:** Size of internal memory address
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent

Return values
- **HAL:** status

HAL_I2C_Master_Sequential_Transmit_IT

Function name
HAL_StatusTypeDef HAL_I2C_Master_Sequential_Transmit_IT (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint8_t * pData, uint16_t Size, uint32_t XferOptions)

Function description
Sequential transmit in master I2C mode an amount of data in non-blocking mode with Interrupt.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent
- **XferOptions:** Options of Transfer, value of I2C Sequential Transfer Options

Return values
- **HAL:** status

Notes
- This interface allow to manage repeated start condition when a direction change during transfer

HAL_I2C_Master_Sequential_Receive_IT

Function name
HAL_StatusTypeDef HAL_I2C_Master_Sequential_Receive_IT (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint8_t * pData, uint16_t Size, uint32_t XferOptions)

Function description
Sequential receive in master I2C mode an amount of data in non-blocking mode with Interrupt.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress:** Target device address: The device 7 bits

address value in datasheet must be shift at right before call interface
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent
- **XferOptions:** Options of Transfer, value of I2C Sequential Transfer Options

Return values
- **HAL:** status

Notes
- This interface allow to manage repeated start condition when a direction change during transfer

HAL_I2C_Slave_Sequential_Transmit_IT

Function name **HAL_StatusTypeDef HAL_I2C_Slave_Sequential_Transmit_IT (I2C_HandleTypeDef * hi2c, uint8_t * pData, uint16_t Size, uint32_t XferOptions)**

Function description Sequential transmit in slave/device I2C mode an amount of data in non-blocking mode with Interrupt.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent
- **XferOptions:** Options of Transfer, value of I2C Sequential Transfer Options

Return values
- **HAL:** status

Notes
- This interface allow to manage repeated start condition when a direction change during transfer

HAL_I2C_Slave_Sequential_Receive_IT

Function name **HAL_StatusTypeDef HAL_I2C_Slave_Sequential_Receive_IT (I2C_HandleTypeDef * hi2c, uint8_t * pData, uint16_t Size, uint32_t XferOptions)**

Function description Sequential receive in slave/device I2C mode an amount of data in non-blocking mode with Interrupt.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent
- **XferOptions:** Options of Transfer, value of I2C Sequential Transfer Options

Return values
- **HAL:** status

Notes
- This interface allow to manage repeated start condition when a direction change during transfer

HAL_I2C_EnableListen_IT

Function name **HAL_StatusTypeDef HAL_I2C_EnableListen_IT (I2C_HandleTypeDef * hi2c)**

Function description Enable the Address listen mode with Interrupt.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.

Return values
- **HAL:** status

HAL_I2C_DisableListen_IT

Function name **HAL_StatusTypeDef HAL_I2C_DisableListen_IT (I2C_HandleTypeDef * hi2c)**

Function description Disable the Address listen mode with Interrupt.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C

Return values
- **HAL:** status

HAL_I2C_Master_Abort_IT

Function name **HAL_StatusTypeDef HAL_I2C_Master_Abort_IT (I2C_HandleTypeDef * hi2c, uint16_t DevAddress)**

Function description Abort a master I2C IT or DMA process communication with Interrupt.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface

Return values
- **HAL:** status

HAL_I2C_Master_Transmit_DMA

Function name **HAL_StatusTypeDef HAL_I2C_Master_Transmit_DMA (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint8_t * pData, uint16_t Size)**

Function description Transmit in master mode an amount of data in non-blocking mode with DMA.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent

Return values
- **HAL:** status

HAL_I2C_Master_Receive_DMA

Function name **HAL_StatusTypeDef HAL_I2C_Master_Receive_DMA (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint8_t * pData, uint16_t Size)**

Function description Receive in master mode an amount of data in non-blocking mode with DMA.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent

Return values
- **HAL:** status

HAL_I2C_Slave_Transmit_DMA

Function name **HAL_StatusTypeDef HAL_I2C_Slave_Transmit_DMA (I2C_HandleTypeDef * hi2c, uint8_t * pData, uint16_t Size)**

Function description Transmit in slave mode an amount of data in non-blocking mode with DMA.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent

Return values
- **HAL:** status

HAL_I2C_Slave_Receive_DMA

Function name **HAL_StatusTypeDef HAL_I2C_Slave_Receive_DMA (I2C_HandleTypeDef * hi2c, uint8_t * pData, uint16_t Size)**

Function description Receive in slave mode an amount of data in non-blocking mode with DMA.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent

Return values
- **HAL:** status

HAL_I2C_Mem_Write_DMA

Function name **HAL_StatusTypeDef HAL_I2C_Mem_Write_DMA (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint16_t MemAddress, uint16_t MemAddSize, uint8_t * pData, uint16_t Size)**

Function description Write an amount of data in non-blocking mode with DMA to a specific memory address.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **MemAddress:** Internal memory address
- **MemAddSize:** Size of internal memory address
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent

Return values
- **HAL:** status

HAL_I2C_Mem_Read_DMA

Function name **HAL_StatusTypeDef HAL_I2C_Mem_Read_DMA (I2C_HandleTypeDef * hi2c, uint16_t DevAddress, uint16_t MemAddress, uint16_t MemAddSize, uint8_t * pData, uint16_t Size)**

Function description Reads an amount of data in non-blocking mode with DMA from a specific memory address.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **MemAddress:** Internal memory address
- **MemAddSize:** Size of internal memory address
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be read

Return values
- **HAL:** status

HAL_I2C_EV_IRQHandler

Function name **void HAL_I2C_EV_IRQHandler (I2C_HandleTypeDef * hi2c)**

Function description This function handles I2C event interrupt request.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.

Return values
- **None**

HAL_I2C_ER_IRQHandler

Function name **void HAL_I2C_ER_IRQHandler (I2C_HandleTypeDef * hi2c)**

Function description This function handles I2C error interrupt request.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.

Return values
- **None**

HAL_I2C_MasterTxCpltCallback

Function name **void HAL_I2C_MasterTxCpltCallback (I2C_HandleTypeDef * hi2c)**

Function description Master Tx Transfer completed callback.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.

Return values
- **None**

HAL_I2C_MasterRxCpltCallback

Function name **void HAL_I2C_MasterRxCpltCallback (I2C_HandleTypeDef * hi2c)**

Function description Master Rx Transfer completed callback.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.

Return values
- **None**

HAL_I2C_SlaveTxCpltCallback

Function name **void HAL_I2C_SlaveTxCpltCallback (I2C_HandleTypeDef * hi2c)**

Function description Slave Tx Transfer completed callback.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.

Return values
- **None**

HAL_I2C_SlaveRxCpltCallback

Function name **void HAL_I2C_SlaveRxCpltCallback (I2C_HandleTypeDef * hi2c)**

Function description Slave Rx Transfer completed callback.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.

Return values
- **None**

HAL_I2C_AddrCallback

Function name **void HAL_I2C_AddrCallback (I2C_HandleTypeDef * hi2c, uint8_t TransferDirection, uint16_t AddrMatchCode)**

Function description Slave Address Match callback.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **TransferDirection:** Master request Transfer Direction (Write/Read), value of I2C Transfer Direction Master Point of View
- **AddrMatchCode:** Address Match Code

Return values
- **None**

HAL_I2C_ListenCpltCallback

Function name **void HAL_I2C_ListenCpltCallback (I2C_HandleTypeDef * hi2c)**

Function description Listen Complete callback.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.

Return values
- **None**

HAL_I2C_MemTxCpltCallback

Function name **void HAL_I2C_MemTxCpltCallback (I2C_HandleTypeDef * hi2c)**

Function description Memory Tx Transfer completed callback.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.

Return values
- **None**

HAL_I2C_MemRxCpltCallback

Function name **void HAL_I2C_MemRxCpltCallback (I2C_HandleTypeDef * hi2c)**

Function description Memory Rx Transfer completed callback.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.

Return values
- **None**

HAL_I2C_ErrorCallback

Function name **void HAL_I2C_ErrorCallback (I2C_HandleTypeDef * hi2c)**

Function description I2C error callback.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.

Return values
- **None**

HAL_I2C_AbortCpltCallback

Function name **void HAL_I2C_AbortCpltCallback (I2C_HandleTypeDef * hi2c)**

Function description I2C abort callback.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.

Return values
- **None**

HAL_I2C_GetState

Function name	**HAL_I2C_StateTypeDef HAL_I2C_GetState (I2C_HandleTypeDef * hi2c)**
Function description	Return the I2C handle state.
Parameters	• **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
Return values	• **HAL:** state

HAL_I2C_GetMode

Function name	**HAL_I2C_ModeTypeDef HAL_I2C_GetMode (I2C_HandleTypeDef * hi2c)**
Function description	Returns the I2C Master, Slave, Memory or no mode.
Parameters	• **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for I2C module
Return values	• **HAL:** mode

HAL_I2C_GetError

Function name	**uint32_t HAL_I2C_GetError (I2C_HandleTypeDef * hi2c)**
Function description	Return the I2C error code.
Parameters	• **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2C.
Return values	• **I2C:** Error Code

24.3 I2C Firmware driver defines

24.3.1 I2C

I2C Addressing Mode

I2C_ADDRESSINGMODE_7BIT

I2C_ADDRESSINGMODE_10BIT

I2C Dual Addressing Mode

I2C_DUALADDRESS_DISABLE

I2C_DUALADDRESS_ENABLE

I2C Error Code definition

HAL_I2C_ERROR_NONE	No error
HAL_I2C_ERROR_BERR	BERR error
HAL_I2C_ERROR_ARLO	ARLO error
HAL_I2C_ERROR_AF	ACKF error
HAL_I2C_ERROR_OVR	OVR error
HAL_I2C_ERROR_DMA	DMA transfer error

HAL_I2C_ERROR_TIMEOUT Timeout error

HAL_I2C_ERROR_SIZE Size Management error

I2C Exported Macros

__HAL_I2C_RESET_HANDLE_STATE

Description:

- Reset I2C handle state.

Parameters:

- __HANDLE__: specifies the I2C Handle.

Return value:

- None

__HAL_I2C_ENABLE_IT

Description:

- Enable the specified I2C interrupt.

Parameters:

- __HANDLE__: specifies the I2C Handle.
- __INTERRUPT__: specifies the interrupt source to enable. This parameter can be one of the following values:
  - I2C_IT_ERRI Errors interrupt enable
  - I2C_IT_TCI Transfer complete interrupt enable
  - I2C_IT_STOPI STOP detection interrupt enable
  - I2C_IT_NACKI NACK received interrupt enable
  - I2C_IT_ADDRI Address match interrupt enable
  - I2C_IT_RXI RX interrupt enable
  - I2C_IT_TXI TX interrupt enable

Return value:

- None

__HAL_I2C_DISABLE_IT

Description:

- Disable the specified I2C interrupt.

Parameters:

- __HANDLE__: specifies the I2C Handle.
- __INTERRUPT__: specifies the interrupt source to disable. This parameter can be one of the following values:
  - I2C_IT_ERRI Errors interrupt enable
  - I2C_IT_TCI Transfer complete interrupt enable
  - I2C_IT_STOPI STOP detection interrupt enable
  - I2C_IT_NACKI NACK received interrupt enable
  - I2C_IT_ADDRI Address match interrupt enable

- I2C_IT_RXI RX interrupt enable
- I2C_IT_TXI TX interrupt enable

Return value:

- None

__HAL_I2C_GET_IT_SOURCE

Description:

- Check whether the specified I2C interrupt source is enabled or not.

Parameters:

- __HANDLE__: specifies the I2C Handle.
- __INTERRUPT__: specifies the I2C interrupt source to check. This parameter can be one of the following values:
  - I2C_IT_ERRI Errors interrupt enable
  - I2C_IT_TCI Transfer complete interrupt enable
  - I2C_IT_STOPI STOP detection interrupt enable
  - I2C_IT_NACKI NACK received interrupt enable
  - I2C_IT_ADDRI Address match interrupt enable
  - I2C_IT_RXI RX interrupt enable
  - I2C_IT_TXI TX interrupt enable

Return value:

- The: new state of __INTERRUPT__ (SET or RESET).

__HAL_I2C_GET_FLAG

Description:

- Check whether the specified I2C flag is set or not.

Parameters:

- __HANDLE__: specifies the I2C Handle.
- __FLAG__: specifies the flag to check. This parameter can be one of the following values:
  - I2C_FLAG_TXE Transmit data register empty
  - I2C_FLAG_TXIS Transmit interrupt status
  - I2C_FLAG_RXNE Receive data register not empty
  - I2C_FLAG_ADDR Address matched (slave mode)
  - I2C_FLAG_AF Acknowledge failure received flag
  - I2C_FLAG_STOPF STOP detection flag
  - I2C_FLAG_TC Transfer complete (master mode)

  - I2C_FLAG_TCR Transfer complete reload
  - I2C_FLAG_BERR Bus error
  - I2C_FLAG_ARLO Arbitration lost
  - I2C_FLAG_OVR Overrun/Underrun
  - I2C_FLAG_PECERR PEC error in reception
  - I2C_FLAG_TIMEOUT Timeout or Tlow detection flag
  - I2C_FLAG_ALERT SMBus alert
  - I2C_FLAG_BUSY Bus busy
  - I2C_FLAG_DIR Transfer direction (slave mode)

Return value:

- The: new state of __FLAG__ (SET or RESET).

__HAL_I2C_CLEAR_FLAG

Description:

- Clear the I2C pending flags which are cleared by writing 1 in a specific bit.

Parameters:

- __HANDLE__: specifies the I2C Handle.
- __FLAG__: specifies the flag to clear. This parameter can be any combination of the following values:
  - I2C_FLAG_TXE Transmit data register empty
  - I2C_FLAG_ADDR Address matched (slave mode)
  - I2C_FLAG_AF Acknowledge failure received flag
  - I2C_FLAG_STOPF STOP detection flag
  - I2C_FLAG_BERR Bus error
  - I2C_FLAG_ARLO Arbitration lost
  - I2C_FLAG_OVR Overrun/Underrun
  - I2C_FLAG_PECERR PEC error in reception
  - I2C_FLAG_TIMEOUT Timeout or Tlow detection flag
  - I2C_FLAG_ALERT SMBus alert

Return value:

- None

__HAL_I2C_ENABLE

Description:

- Enable the specified I2C peripheral.

Parameters:

- __HANDLE__: specifies the I2C Handle.

Return value:

- None

__HAL_I2C_DISABLE

Description:

- Disable the specified I2C peripheral.

Parameters:

- __HANDLE__: specifies the I2C Handle.

Return value:

- None

__HAL_I2C_GENERATE_NACK

Description:

- Generate a Non-Acknowledge I2C peripheral in Slave mode.

Parameters:

- __HANDLE__: specifies the I2C Handle.

Return value:

- None

I2C Flag definition

I2C_FLAG_TXE

I2C_FLAG_TXIS

I2C_FLAG_RXNE

I2C_FLAG_ADDR

I2C_FLAG_AF

I2C_FLAG_STOPF

I2C_FLAG_TC

I2C_FLAG_TCR

I2C_FLAG_BERR

I2C_FLAG_ARLO

I2C_FLAG_OVR

I2C_FLAG_PECERR

I2C_FLAG_TIMEOUT

I2C_FLAG_ALERT

I2C_FLAG_BUSY

I2C_FLAG_DIR

I2C General Call Addressing Mode

I2C_GENERALCALL_DISABLE

I2C_GENERALCALL_ENABLE

I2C Interrupt configuration definition

I2C_IT_ERRI

I2C_IT_TCI

I2C_IT_STOPI

I2C_IT_NACKI

I2C_IT_ADDRI

I2C_IT_RXI

I2C_IT_TXI

I2C Memory Address Size

I2C_MEMADD_SIZE_8BIT

I2C_MEMADD_SIZE_16BIT

I2C No-Stretch Mode

I2C_NOSTRETCH_DISABLE

I2C_NOSTRETCH_ENABLE

I2C Own Address2 Masks

I2C_OA2_NOMASK

I2C_OA2_MASK01

I2C_OA2_MASK02

I2C_OA2_MASK03

I2C_OA2_MASK04

I2C_OA2_MASK05

I2C_OA2_MASK06

I2C_OA2_MASK07

I2C Reload End Mode

I2C_RELOAD_MODE

I2C_AUTOEND_MODE

I2C_SOFTEND_MODE

I2C Start or Stop Mode

I2C_NO_STARTSTOP

I2C_GENERATE_STOP

I2C_GENERATE_START_READ

I2C_GENERATE_START_WRITE

I2C Transfer Direction Master Point of View

I2C_DIRECTION_TRANSMIT

I2C_DIRECTION_RECEIVE

I2C Sequential Transfer Options

I2C_FIRST_FRAME

I2C_FIRST_AND_NEXT_FRAME

I2C_NEXT_FRAME

I2C_FIRST_AND_LAST_FRAME

I2C_LAST_FRAME

25 HAL I2C Extension Driver

25.1 I2CEx Firmware driver API description

25.1.1 I2C peripheral Extended features

Comparing to other previous devices, the I2C interface for STM32F3xx devices contains the following additional features

- Possibility to disable or enable Analog Noise Filter
- Use of a configured Digital Noise Filter
- Disable or enable wakeup from Stop mode

25.1.2 How to use this driver

This driver provides functions to configure Noise Filter and Wake Up Feature

1. Configure I2C Analog noise filter using the function HAL_I2CEx_ConfigAnalogFilter()
2. Configure I2C Digital noise filter using the function HAL_I2CEx_ConfigDigitalFilter()
3. Configure the enable or disable of I2C Wake Up Mode using the functions :
   – HAL_I2CEx_EnableWakeUp()
   – HAL_I2CEx_DisableWakeUp()
4. Configure the enable or disable of fast mode plus driving capability using the functions :
   – HAL_I2CEx_EnableFastModePlus()
   – HAL_I2CEx_DisableFastModePlus()

25.1.3 Extended features functions

This section provides functions allowing to:

- Configure Noise Filters
- Configure Wake Up Feature

This section contains the following APIs:

- ***HAL_I2CEx_ConfigAnalogFilter()***
- ***HAL_I2CEx_ConfigDigitalFilter()***
- ***HAL_I2CEx_EnableWakeUp()***
- ***HAL_I2CEx_DisableWakeUp()***
- ***HAL_I2CEx_EnableFastModePlus()***
- ***HAL_I2CEx_DisableFastModePlus()***

25.1.4 Detailed description of functions

HAL_I2CEx_ConfigAnalogFilter

Function name	**HAL_StatusTypeDef HAL_I2CEx_ConfigAnalogFilter (I2C_HandleTypeDef * hi2c, uint32_t AnalogFilter)**
Function description	Configure I2C Analog noise filter.
Parameters	• **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2Cx peripheral. • **AnalogFilter:** New state of the Analog filter.

Return values
- **HAL:** status

HAL_I2CEx_ConfigDigitalFilter

Function name **HAL_StatusTypeDef HAL_I2CEx_ConfigDigitalFilter (I2C_HandleTypeDef * hi2c, uint32_t DigitalFilter)**

Function description Configure I2C Digital noise filter.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2Cx peripheral.
- **DigitalFilter:** Coefficient of digital noise filter between Min_Data=0x00 and Max_Data=0x0F.

Return values
- **HAL:** status

HAL_I2CEx_EnableWakeUp

Function name **HAL_StatusTypeDef HAL_I2CEx_EnableWakeUp (I2C_HandleTypeDef * hi2c)**

Function description Enable I2C wakeup from stop mode.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2Cx peripheral.

Return values
- **HAL:** status

HAL_I2CEx_DisableWakeUp

Function name **HAL_StatusTypeDef HAL_I2CEx_DisableWakeUp (I2C_HandleTypeDef * hi2c)**

Function description Disable I2C wakeup from stop mode.

Parameters
- **hi2c:** Pointer to a I2C_HandleTypeDef structure that contains the configuration information for the specified I2Cx peripheral.

Return values
- **HAL:** status

HAL_I2CEx_EnableFastModePlus

Function name **void HAL_I2CEx_EnableFastModePlus (uint32_t ConfigFastModePlus)**

Function description Enable the I2C fast mode plus driving capability.

Parameters
- **ConfigFastModePlus:** Selects the pin. This parameter can be one of the I2C Extended Fast Mode Plus values

Return values
- **None**

Notes
- For I2C1, fast mode plus driving capability can be enabled on all selected I2C1 pins using I2C_FASTMODEPLUS_I2C1 parameter or independently on each one of the following pins PB6, PB7, PB8 and PB9.
- For remaining I2C1 pins (PA14, PA15...) fast mode plus driving capability can be enabled only by using I2C_FASTMODEPLUS_I2C1 parameter.
- For all I2C2 pins fast mode plus driving capability can be

enabled only by using I2C_FASTMODEPLUS_I2C2 parameter.
- For all I2C3 pins fast mode plus driving capability can be enabled only by using I2C_FASTMODEPLUS_I2C3 parameter.

HAL_I2CEx_DisableFastModePlus

Function name	**void HAL_I2CEx_DisableFastModePlus (uint32_t ConfigFastModePlus)**
Function description	Disable the I2C fast mode plus driving capability.
Parameters	• **ConfigFastModePlus:** Selects the pin. This parameter can be one of the I2C Extended Fast Mode Plus values
Return values	• **None**
Notes	• For I2C1, fast mode plus driving capability can be disabled on all selected I2C1 pins using I2C_FASTMODEPLUS_I2C1 parameter or independently on each one of the following pins PB6, PB7, PB8 and PB9. • For remaining I2C1 pins (PA14, PA15...) fast mode plus driving capability can be disabled only by using I2C_FASTMODEPLUS_I2C1 parameter. • For all I2C2 pins fast mode plus driving capability can be disabled only by using I2C_FASTMODEPLUS_I2C2 parameter. • For all I2C3 pins fast mode plus driving capability can be disabled only by using I2C_FASTMODEPLUS_I2C3 parameter.

25.2 I2CEx Firmware driver defines

25.2.1 I2CEx

I2C Extended Analog Filter

I2C_ANALOGFILTER_ENABLE

I2C_ANALOGFILTER_DISABLE

I2C Extended Fast Mode Plus

I2C_FMP_NOT_SUPPORTED	Fast Mode Plus not supported
I2C_FASTMODEPLUS_PB6	Enable Fast Mode Plus on PB6
I2C_FASTMODEPLUS_PB7	Enable Fast Mode Plus on PB7
I2C_FASTMODEPLUS_PB8	Enable Fast Mode Plus on PB8
I2C_FASTMODEPLUS_PB9	Enable Fast Mode Plus on PB9
I2C_FASTMODEPLUS_I2C1	Enable Fast Mode Plus on I2C1 pins
I2C_FASTMODEPLUS_I2C2	Enable Fast Mode Plus on I2C2 pins
I2C_FASTMODEPLUS_I2C3	Fast Mode Plus I2C3 not supported

26 HAL I2S Generic Driver

26.1 I2S Firmware driver registers structures

26.1.1 I2S_InitTypeDef

Data Fields

- ***uint32_t Mode***
- ***uint32_t Standard***
- ***uint32_t DataFormat***
- ***uint32_t MCLKOutput***
- ***uint32_t AudioFreq***
- ***uint32_t CPOL***
- ***uint32_t ClockSource***
- ***uint32_t FullDuplexMode***

Field Documentation

- ***uint32_t I2S_InitTypeDef::Mode***
  Specifies the I2S operating mode. This parameter can be a value of ***I2S_Mode***
- ***uint32_t I2S_InitTypeDef::Standard***
  Specifies the standard used for the I2S communication. This parameter can be a value of ***I2S_Standard***
- ***uint32_t I2S_InitTypeDef::DataFormat***
  Specifies the data format for the I2S communication. This parameter can be a value of ***I2S_Data_Format***
- ***uint32_t I2S_InitTypeDef::MCLKOutput***
  Specifies whether the I2S MCLK output is enabled or not. This parameter can be a value of ***I2S_MCLK_Output***
- ***uint32_t I2S_InitTypeDef::AudioFreq***
  Specifies the frequency selected for the I2S communication. This parameter can be a value of ***I2S_Audio_Frequency***
- ***uint32_t I2S_InitTypeDef::CPOL***
  Specifies the idle state of the I2S clock. This parameter can be a value of ***I2S_Clock_Polarity***
- ***uint32_t I2S_InitTypeDef::ClockSource***
  Specifies the I2S Clock Source. This parameter can be a value of ***I2S_Clock_Source***
- ***uint32_t I2S_InitTypeDef::FullDuplexMode***
  Specifies the I2S FullDuplex mode. This parameter can be a value of ***I2S_FullDuplex_Mode***

26.1.2 I2S_HandleTypeDef

Data Fields

- ***SPI_TypeDef * Instance***
- ***I2S_InitTypeDef Init***
- ***uint16_t * pTxBuffPtr***
- ***__IO uint16_t TxXferSize***
- ***__IO uint16_t TxXferCount***
- ***uint16_t * pRxBuffPtr***
- ***__IO uint16_t RxXferSize***
- ***__IO uint16_t RxXferCount***

- ***DMA_HandleTypeDef * hdmatx***
- ***DMA_HandleTypeDef * hdmarx***
- ***__IO HAL_LockTypeDef Lock***
- ***__IO HAL_I2S_StateTypeDef State***
- ***__IO uint32_t ErrorCode***

Field Documentation

- ***SPI_TypeDef* I2S_HandleTypeDef::Instance***
  I2S registers base address
- ***I2S_InitTypeDef I2S_HandleTypeDef::Init***
  I2S communication parameters
- ***uint16_t* I2S_HandleTypeDef::pTxBuffPtr***
  Pointer to I2S Tx transfer buffer
- ***__IO uint16_t I2S_HandleTypeDef::TxXferSize***
  I2S Tx transfer size
- ***__IO uint16_t I2S_HandleTypeDef::TxXferCount***
  I2S Tx transfer Counter
- ***uint16_t* I2S_HandleTypeDef::pRxBuffPtr***
  Pointer to I2S Rx transfer buffer
- ***__IO uint16_t I2S_HandleTypeDef::RxXferSize***
  I2S Rx transfer size
- ***__IO uint16_t I2S_HandleTypeDef::RxXferCount***
  I2S Rx transfer counter (This field is initialized at the same value as transfer size at the beginning of the transfer and decremented when a sample is received. NbSamplesReceived = RxBufferSize-RxBufferCount)
- ***DMA_HandleTypeDef* I2S_HandleTypeDef::hdmatx***
  I2S Tx DMA handle parameters
- ***DMA_HandleTypeDef* I2S_HandleTypeDef::hdmarx***
  I2S Rx DMA handle parameters
- ***__IO HAL_LockTypeDef I2S_HandleTypeDef::Lock***
  I2S locking object
- ***__IO HAL_I2S_StateTypeDef I2S_HandleTypeDef::State***
  I2S communication state
- ***__IO uint32_t I2S_HandleTypeDef::ErrorCode***
  I2S Error code This parameter can be a value of ***I2S_Error***

26.2 I2S Firmware driver API description

26.2.1 How to use this driver

The I2S HAL driver can be used as follows:

1. Declare a I2S_HandleTypeDef handle structure.
2. Initialize the I2S low level resources by implement the HAL_I2S_MspInit() API:
   a. Enable the SPIx interface clock.
   b. I2S pins configuration:
      – Enable the clock for the I2S GPIOs.
      – Configure these I2S pins as alternate function pull-up.
   c. NVIC configuration if you need to use interrupt process (HAL_I2S_Transmit_IT() and HAL_I2S_Receive_IT() APIs).
      – Configure the I2Sx interrupt priority.
      – Enable the NVIC I2S IRQ handle.
   d. DMA Configuration if you need to use DMA process (HAL_I2S_Transmit_DMA() and HAL_I2S_Receive_DMA() APIs:
      – Declare a DMA handle structure for the Tx/Rx channel.

  - Enable the DMAx interface clock.
  - Configure the declared DMA handle structure with the required Tx/Rx parameters.
  - Configure the DMA Tx/Rx Channel.
  - Associate the initilalized DMA handle to the I2S DMA Tx/Rx handle.
  - Configure the priority and enable the NVIC for the transfer complete interrupt on the DMA Tx/Rx Channel.

3. Program the Mode, Standard, Data Format, MCLK Output, Audio frequency and Polarity using HAL_I2S_Init() function. The specific I2S interrupts (Transmission complete interrupt, RXNE interrupt and Error Interrupts) will be managed using the macros __HAL_I2S_ENABLE_IT() and __HAL_I2S_DISABLE_IT() inside the transmit and receive process. Make sure that either: I2S clock is configured based on SYSCLK or External clock source is configured after setting correctly the define constant EXTERNAL_CLOCK_VALUE in the stm32f3xx_hal_conf.h file.
4. Three mode of operations are available within this driver :

Polling mode IO operation

- Send an amount of data in blocking mode using HAL_I2S_Transmit()
- Receive an amount of data in blocking mode using HAL_I2S_Receive()

Interrupt mode IO operation

- Send an amount of data in non blocking mode using HAL_I2S_Transmit_IT()
- At transmission end of half transfer HAL_I2S_TxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_TxHalfCpltCallback
- At transmission end of transfer HAL_I2S_TxCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_TxCpltCallback
- Receive an amount of data in non blocking mode using HAL_I2S_Receive_IT()
- At reception end of half transfer HAL_I2S_RxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_RxHalfCpltCallback
- At reception end of transfer HAL_I2S_RxCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_RxCpltCallback
- In case of transfer Error, HAL_I2S_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_I2S_ErrorCallback

DMA mode IO operation

- Send an amount of data in non blocking mode (DMA) using HAL_I2S_Transmit_DMA()
- At transmission end of half transfer HAL_I2S_TxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_TxHalfCpltCallback
- At transmission end of transfer HAL_I2S_TxCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_TxCpltCallback
- Receive an amount of data in non blocking mode (DMA) using HAL_I2S_Receive_DMA()
- At reception end of half transfer HAL_I2S_RxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_RxHalfCpltCallback
- At reception end of transfer HAL_I2S_RxCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_RxCpltCallback

- In case of transfer Error, HAL_I2S_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_I2S_ErrorCallback
- Pause the DMA Transfer using HAL_I2S_DMAPause()
- Resume the DMA Transfer using HAL_I2S_DMAResume()
- Stop the DMA Transfer using HAL_I2S_DMAStop()

I2S HAL driver macros list

Below the list of most used macros in I2S HAL driver.

- __HAL_I2S_ENABLE: Enable the specified SPI peripheral (in I2S mode)
- __HAL_I2S_DISABLE: Disable the specified SPI peripheral (in I2S mode)
- __HAL_I2S_ENABLE_IT : Enable the specified I2S interrupts
- __HAL_I2S_DISABLE_IT : Disable the specified I2S interrupts
- __HAL_I2S_GET_FLAG: Check whether the specified I2S flag is set or not



You can refer to the I2S HAL driver header file for more useful macros

26.2.2 Initialization and de-initialization functions

This subsection provides a set of functions allowing to initialize and de-initialiaze the I2Sx peripheral in simplex mode:

- User must Implement HAL_I2S_MspInit() function in which he configures all related peripherals resources (CLOCK, GPIO, DMA, IT and NVIC).
- Call the function HAL_I2S_Init() to configure the selected device with the selected configuration:
  - Mode
  - Standard
  - Data Format
  - MCLK Output
  - Audio frequency
  - Polarity
  - Full duplex mode
- Call the function HAL_I2S_DeInit() to restore the default configuration of the selected I2Sx periperal.

This section contains the following APIs:

- ***HAL_I2S_Init()***
- ***HAL_I2S_DeInit()***
- ***HAL_I2S_MspInit()***
- ***HAL_I2S_MspDeInit()***

26.2.3 IO operation functions

This subsection provides a set of functions allowing to manage the I2S data transfers.

1. There are two modes of transfer:
   - Blocking mode : The communication is performed in the polling mode. The status of all data processing is returned by the same function after finishing transfer.
   - No-Blocking mode : The communication is performed using Interrupts or DMA. These functions return the status of the transfer startup. The end of the data

processing will be indicated through the dedicated I2S IRQ when using Interrupt mode or the DMA IRQ when using DMA mode.

2. Blocking mode functions are :
   – HAL_I2S_Transmit()
   – HAL_I2S_Receive()
3. No-Blocking mode functions with Interrupt are :
   – HAL_I2S_Transmit_IT()
   – HAL_I2S_Receive_IT()
4. No-Blocking mode functions with DMA are :
   – HAL_I2S_Transmit_DMA()
   – HAL_I2S_Receive_DMA()
5. A set of Transfer Complete Callbacks are provided in non Blocking mode:
   – HAL_I2S_TxCpltCallback()
   – HAL_I2S_RxCpltCallback()
   – HAL_I2S_ErrorCallback()

This section contains the following APIs:

- ***HAL_I2S_Transmit()***
- ***HAL_I2S_Receive()***
- ***HAL_I2S_Transmit_IT()***
- ***HAL_I2S_Receive_IT()***
- ***HAL_I2S_Transmit_DMA()***
- ***HAL_I2S_Receive_DMA()***
- ***HAL_I2S_DMAPause()***
- ***HAL_I2S_DMAResume()***
- ***HAL_I2S_DMAStop()***
- ***HAL_I2S_IRQHandler()***
- ***HAL_I2S_TxHalfCpltCallback()***
- ***HAL_I2S_TxCpltCallback()***
- ***HAL_I2S_RxHalfCpltCallback()***
- ***HAL_I2S_RxCpltCallback()***
- ***HAL_I2S_ErrorCallback()***
- ***HAL_I2S_FullDuplex_IRQHandler()***
- ***HAL_I2S_TxRxCpltCallback()***
- ***HAL_I2S_TxRxHalfCpltCallback()***

26.2.4 Peripheral State and Errors functions

This subsection permits to get in run-time the status of the peripheral and the data flow.

This section contains the following APIs:

- ***HAL_I2S_GetState()***
- ***HAL_I2S_GetError()***
- ***HAL_I2S_DMAPause()***
- ***HAL_I2S_DMAResume()***
- ***HAL_I2S_DMAStop()***

26.2.5 Detailed description of functions

HAL_I2S_Init

Function name **HAL_StatusTypeDef HAL_I2S_Init (I2S_HandleTypeDef * hi2s)**

Function description Initializes the I2S according to the specified parameters in the I2S_InitTypeDef and create the associated handle.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module
- **hi2s:** I2S handle

Return values
- **HAL:** status
- **HAL:** status

HAL_I2S_DeInit

Function name **HAL_StatusTypeDef HAL_I2S_DeInit (I2S_HandleTypeDef * hi2s)**

Function description DeInitializes the I2S peripheral.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module

Return values
- **HAL:** status

HAL_I2S_MspInit

Function name **void HAL_I2S_MspInit (I2S_HandleTypeDef * hi2s)**

Function description I2S MSP Init.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module

Return values
- **None**

HAL_I2S_MspDeInit

Function name **void HAL_I2S_MspDeInit (I2S_HandleTypeDef * hi2s)**

Function description I2S MSP DeInit.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module

Return values
- **None**

HAL_I2S_Transmit

Function name **HAL_StatusTypeDef HAL_I2S_Transmit (I2S_HandleTypeDef * hi2s, uint16_t * pData, uint16_t Size, uint32_t Timeout)**

Function description Transmit an amount of data in blocking mode.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module

- **pData:** a 16-bit pointer to data buffer.
- **Size:** number of data sample to be sent:
- **Timeout:** Timeout duration

Return values
- **HAL:** status

Notes
- When a 16-bit data frame or a 16-bit data frame extended is selected during the I2S configuration phase, the Size parameter means the number of 16-bit data length in the transaction and when a 24-bit data frame or a 32-bit data frame is selected the Size parameter means the number of 16-bit data length.
- The I2S is kept enabled at the end of transaction to avoid the clock de-synchronization between Master and Slave(example: audio streaming).

HAL_I2S_Receive

Function name **HAL_StatusTypeDef HAL_I2S_Receive (I2S_HandleTypeDef * hi2s, uint16_t * pData, uint16_t Size, uint32_t Timeout)**

Function description Receive an amount of data in blocking mode.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module
- **pData:** a 16-bit pointer to data buffer.
- **Size:** number of data sample to be sent:
- **Timeout:** Timeout duration

Return values
- **HAL:** status

Notes
- When a 16-bit data frame or a 16-bit data frame extended is selected during the I2S configuration phase, the Size parameter means the number of 16-bit data length in the transaction and when a 24-bit data frame or a 32-bit data frame is selected the Size parameter means the number of 16-bit data length.
- The I2S is kept enabled at the end of transaction to avoid the clock de-synchronization between Master and Slave(example: audio streaming).
- In I2S Master Receiver mode, just after enabling the peripheral the clock will be generate in continouse way and as the I2S is not disabled at the end of the I2S transaction.

HAL_I2S_Transmit_IT

Function name **HAL_StatusTypeDef HAL_I2S_Transmit_IT (I2S_HandleTypeDef * hi2s, uint16_t * pData, uint16_t Size)**

Function description Transmit an amount of data in non-blocking mode with Interrupt.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module
- **pData:** a 16-bit pointer to data buffer.
- **Size:** number of data sample to be sent:

Return values
- **HAL:** status

Notes
- When a 16-bit data frame or a 16-bit data frame extended is selected during the I2S configuration phase, the Size parameter means the number of 16-bit data length in the transaction and when a 24-bit data frame or a 32-bit data frame is selected the Size parameter means the number of 16-bit data length.
- The I2S is kept enabled at the end of transaction to avoid the clock de-synchronization between Master and Slave(example: audio streaming).

HAL_I2S_Receive_IT

Function name **HAL_StatusTypeDef HAL_I2S_Receive_IT (I2S_HandleTypeDef * hi2s, uint16_t * pData, uint16_t Size)**

Function description Receive an amount of data in non-blocking mode with Interrupt.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module
- **pData:** a 16-bit pointer to the Receive data buffer.
- **Size:** number of data sample to be sent:

Return values
- **HAL:** status

Notes
- When a 16-bit data frame or a 16-bit data frame extended is selected during the I2S configuration phase, the Size parameter means the number of 16-bit data length in the transaction and when a 24-bit data frame or a 32-bit data frame is selected the Size parameter means the number of 16-bit data length.
- The I2S is kept enabled at the end of transaction to avoid the clock de-synchronization between Master and Slave(example: audio streaming).
- It is recommended to use DMA for the I2S receiver to avoid de-synchronisation between Master and Slave otherwise the I2S interrupt should be optimized.

HAL_I2S_IRQHandler

Function name **void HAL_I2S_IRQHandler (I2S_HandleTypeDef * hi2s)**

Function description This function handles I2S interrupt request.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module

Return values
- **None**

HAL_I2S_Transmit_DMA

Function name **HAL_StatusTypeDef HAL_I2S_Transmit_DMA (I2S_HandleTypeDef * hi2s, uint16_t * pData, uint16_t Size)**

Function description Transmit an amount of data in non-blocking mode with DMA.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module
- **pData:** a 16-bit pointer to the Transmit data buffer.

- **Size:** number of data sample to be sent:

Return values
- **HAL:** status

Notes
- When a 16-bit data frame or a 16-bit data frame extended is selected during the I2S configuration phase, the Size parameter means the number of 16-bit data length in the transaction and when a 24-bit data frame or a 32-bit data frame is selected the Size parameter means the number of 16-bit data length.
- The I2S is kept enabled at the end of transaction to avoid the clock de-synchronization between Master and Slave(example: audio streaming).

HAL_I2S_Receive_DMA

Function name
HAL_StatusTypeDef HAL_I2S_Receive_DMA (I2S_HandleTypeDef * hi2s, uint16_t * pData, uint16_t Size)

Function description
Receive an amount of data in non-blocking mode with DMA.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module
- **pData:** a 16-bit pointer to the Receive data buffer.
- **Size:** number of data sample to be sent:

Return values
- **HAL:** status

Notes
- When a 16-bit data frame or a 16-bit data frame extended is selected during the I2S configuration phase, the Size parameter means the number of 16-bit data length in the transaction and when a 24-bit data frame or a 32-bit data frame is selected the Size parameter means the number of 16-bit data length.
- The I2S is kept enabled at the end of transaction to avoid the clock de-synchronization between Master and Slave(example: audio streaming).

HAL_I2S_DMAPause

Function name
HAL_StatusTypeDef HAL_I2S_DMAPause (I2S_HandleTypeDef * hi2s)

Function description
Pauses the audio stream playing from the Media.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module

Return values
- **HAL:** status

HAL_I2S_DMAResume

Function name
HAL_StatusTypeDef HAL_I2S_DMAResume (I2S_HandleTypeDef * hi2s)

Function description
Resumes the audio stream playing from the Media.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module

Return values
- **HAL:** status

HAL_I2S_DMAStop

Function name **HAL_StatusTypeDef HAL_I2S_DMAStop (I2S_HandleTypeDef * hi2s)**

Function description Resumes the audio stream playing from the Media.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module

Return values
- **HAL:** status

HAL_I2S_TxHalfCpltCallback

Function name **void HAL_I2S_TxHalfCpltCallback (I2S_HandleTypeDef * hi2s)**

Function description Tx Transfer Half completed callbacks.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module

Return values
- **None**

HAL_I2S_TxCpltCallback

Function name **void HAL_I2S_TxCpltCallback (I2S_HandleTypeDef * hi2s)**

Function description Tx Transfer completed callbacks.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module

Return values
- **None**

HAL_I2S_RxHalfCpltCallback

Function name **void HAL_I2S_RxHalfCpltCallback (I2S_HandleTypeDef * hi2s)**

Function description Rx Transfer half completed callbacks.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module

Return values
- **None**

HAL_I2S_RxCpltCallback

Function name **void HAL_I2S_RxCpltCallback (I2S_HandleTypeDef * hi2s)**

Function description Rx Transfer completed callbacks.

Parameters
- **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module

Return values
- **None**

HAL_I2S_ErrorCallback

Function name	**void HAL_I2S_ErrorCallback (I2S_HandleTypeDef * hi2s)**
Function description	I2S error callbacks.
Parameters	• **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module
Return values	• **None**

HAL_I2S_GetState

Function name	**HAL_I2S_StateTypeDef HAL_I2S_GetState (I2S_HandleTypeDef * hi2s)**
Function description	Return the I2S state.
Parameters	• **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module
Return values	• **HAL:** state

HAL_I2S_GetError

Function name	**uint32_t HAL_I2S_GetError (I2S_HandleTypeDef * hi2s)**
Function description	Return the I2S error code.
Parameters	• **hi2s:** pointer to a I2S_HandleTypeDef structure that contains the configuration information for I2S module
Return values	• **I2S:** Error Code

26.3 I2S Firmware driver defines

26.3.1 I2S

I2S Audio Frequency

I2S_AUDIOFREQ_192K

I2S_AUDIOFREQ_96K

I2S_AUDIOFREQ_48K

I2S_AUDIOFREQ_44K

I2S_AUDIOFREQ_32K

I2S_AUDIOFREQ_22K

I2S_AUDIOFREQ_16K

I2S_AUDIOFREQ_11K

I2S_AUDIOFREQ_8K

I2S_AUDIOFREQ_DEFAULT

IS_I2S_AUDIO_FREQ

I2S Clock Polarity

I2S_CPOL_LOW

I2S_CPOL_HIGH

IS_I2S_CPOL

I2S Clock Source

I2S_CLOCK_EXTERNAL

I2S_CLOCK_SYSCLK

IS_I2S_CLOCKSOURCE

I2S Data Format

I2S_DATAFORMAT_16B

I2S_DATAFORMAT_16B_EXTENDED

I2S_DATAFORMAT_24B

I2S_DATAFORMAT_32B

IS_I2S_DATA_FORMAT

I2S Error

HAL_I2S_ERROR_NONE	No error
HAL_I2S_ERROR_TIMEOUT	Timeout error
HAL_I2S_ERROR_OVR	OVR error
HAL_I2S_ERROR_UDR	UDR error
HAL_I2S_ERROR_DMA	DMA transfer error
HAL_I2S_ERROR_UNKNOW	Unknow Error error

I2S Exported Macros

__HAL_I2S_RESET_HANDLE_STATE

Description:

- Reset I2S handle state.

Parameters:

- __HANDLE__: I2S handle.

Return value:

- None

__HAL_I2S_ENABLE

Description:

- Enable or disable the specified SPI peripheral (in I2S mode).

Parameters:

- __HANDLE__: specifies the I2S Handle.

Return value:

- None

__HAL_I2S_DISABLE

__HAL_I2S_ENABLE_IT

Description:

- Enable or disable the specified I2S interrupts.

Parameters:

- __HANDLE__: specifies the I2S Handle.
- __INTERRUPT__: specifies the interrupt source to enable or disable. This parameter can be one of the following values:
  - I2S_IT_TXE: Tx buffer empty interrupt enable
  - I2S_IT_RXNE: RX buffer not empty interrupt enable
  - I2S_IT_ERR: Error interrupt enable

Return value:

- None

__HAL_I2S_DISABLE_IT

__HAL_I2S_GET_IT_SOURCE

Description:

- Checks if the specified I2S interrupt source is enabled or disabled.

Parameters:

- __HANDLE__: specifies the I2S Handle. This parameter can be I2S where x: 1, 2, or 3 to select the I2S peripheral.
- __INTERRUPT__: specifies the I2S interrupt source to check. This parameter can be one of the following values:
  - I2S_IT_TXE: Tx buffer empty interrupt enable
  - I2S_IT_RXNE: RX buffer not empty interrupt enable
  - I2S_IT_ERR: Error interrupt enable

Return value:

- The: new state of __IT__ (TRUE or FALSE).

__HAL_I2S_GET_FLAG

Description:

- Checks whether the specified I2S flag is set or not.

Parameters:

- __HANDLE__: specifies the I2S Handle.
- __FLAG__: specifies the flag to check. This parameter can be one of the following values:
  - I2S_FLAG_RXNE: Receive buffer not empty flag
  - I2S_FLAG_TXE: Transmit buffer empty flag
  - I2S_FLAG_UDR: Underrun flag
  - I2S_FLAG_OVR: Overrun flag
  - I2S_FLAG_FRE: Frame error flag
  - I2S_FLAG_CHSIDE: Channel Side flag

– I2S_FLAG_BSY: Busy flag

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

__HAL_I2S_CLEAR_OVRFLAG

Description:

- Clears the I2S OVR pending flag.

Parameters:

- __HANDLE__: specifies the I2S Handle.

Return value:

- None

__HAL_I2S_CLEAR_UDRFLAG

Description:

- Clears the I2S UDR pending flag.

Parameters:

- __HANDLE__: specifies the I2S Handle.

Return value:

- None

I2S Flag definition

I2S_FLAG_TXE

I2S_FLAG_RXNE

I2S_FLAG_UDR

I2S_FLAG_OVR

I2S_FLAG_FRE

I2S_FLAG_CHSIDE

I2S_FLAG_BSY

I2S Full Duplex Mode

I2S_FULLDUPLEXMODE_DISABLE

I2S_FULLDUPLEXMODE_ENABLE

IS_I2S_FULLDUPLEX_MODE

I2S Interrupt configuration definition

I2S_IT_TXE

I2S_IT_RXNE

I2S_IT_ERR

I2S MCLK Output

I2S_MCLKOUTPUT_ENABLE

I2S_MCLKOUTPUT_DISABLE

IS_I2S_MCLK_OUTPUT

I2S Mode

I2S_MODE_SLAVE_TX

I2S_MODE_SLAVE_RX

I2S_MODE_MASTER_TX

I2S_MODE_MASTER_RX

IS_I2S_MODE

I2S Standard

I2S_STANDARD_PHILIPS

I2S_STANDARD_MSB

I2S_STANDARD_LSB

I2S_STANDARD_PCM_SHORT

I2S_STANDARD_PCM_LONG

IS_I2S_STANDARD

27 HAL I2S Extension Driver

27.1 I2SEx Firmware driver API description

27.1.1 I2S Extended features

1. In I2S full duplex mode, each SPI peripheral is able to manage sending and receiving data simultaneously using two data lines. Each SPI peripheral has an extended block called I2Sxext ie. I2S2ext for SPI2 and I2S3ext for SPI3).
2. The Extended block is not a full SPI IP, it is used only as I2S slave to implement full duplex mode. The Extended block uses the same clock sources as its master.
3. Both I2Sx and I2Sx_ext can be configured as transmitters or receivers. Only I2Sx can deliver SCK and WS to I2Sx_ext in full duplex mode, where I2Sx can be I2S2 or I2S3.

27.1.2 How to use this driver

Three mode of operations are available within this driver :

Polling mode IO operation

- Send and receive in the same time an amount of data in blocking mode using HAL_I2S_TransmitReceive()

Interrupt mode IO operation

- Send and receive in the same time an amount of data in non blocking mode using HAL_I2S_TransmitReceive_IT()
- At transmission end of half transfer HAL_I2S_TxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_TxHalfCpltCallback
- At transmission end of transfer HAL_I2S_TxCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_TxCpltCallback
- At reception end of half transfer HAL_I2S_RxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_RxHalfCpltCallback
- At reception end of transfer HAL_I2S_RxCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_RxCpltCallback
- In case of transfer Error, HAL_I2S_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_I2S_ErrorCallback

DMA mode IO operation

- Send and receive an amount of data in non blocking mode (DMA) using HAL_I2S_TransmitReceive_DMA()
- At transmission end of half transfer HAL_I2S_TxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_TxHalfCpltCallback
- At transmission end of transfer HAL_I2S_TxCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_TxCpltCallback
- At reception end of half transfer HAL_I2S_RxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_RxHalfCpltCallback

- At reception end of transfer HAL_I2S_RxCpltCallback is executed and user can add his own code by customization of function pointer HAL_I2S_RxCpltCallback
- In case of transfer Error, HAL_I2S_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_I2S_ErrorCallback
- Pause the DMA Transfer using HAL_I2S_DMAPause()
- Resume the DMA Transfer using HAL_I2S_DMAResume()
- Stop the DMA Transfer using HAL_I2S_DMAStop()

27.1.3 Extended features Functions

This subsection provides a set of functions allowing to manage the I2S data transfers.

1. There is two mode of transfer:
   – Blocking mode: The communication is performed in the polling mode. The status of all data processing is returned by the same function after finishing transfer.
   – No-Blocking mode: The communication is performed using Interrupts or DMA. These functions return the status of the transfer startup. The end of the data processing will be indicated through the dedicated I2S IRQ when using Interrupt mode or the DMA IRQ when using DMA mode.
2. Blocking mode functions are :
   – HAL_I2S_TransmitReceive()
3. No-Blocking mode functions with Interrupt are:
   – HAL_I2S_TransmitReceive_IT()
   – HAL_I2SFullDuplex_IRQHandler()
4. No-Blocking mode functions with DMA are:
   – HAL_I2S_TransmitReceive_DMA()
5. A set of Transfer Complete Callbacks are provided in No_Blocking mode:
   – HAL_I2S_TxRxCpltCallback()
   – HAL_I2S_TxRxHalfCpltCallback()
   – HAL_I2S_TxRxErrorCallback()

This section contains the following APIs:

- ***HAL_I2SEx_TransmitReceive()***
- ***HAL_I2SEx_TransmitReceive_IT()***
- ***HAL_I2SEx_TransmitReceive_DMA()***

27.1.4 Detailed description of functions

HAL_I2SEx_TransmitReceive

Function name	**HAL_StatusTypeDef HAL_I2SEx_TransmitReceive (I2S_HandleTypeDef * hi2s, uint16_t * pTxData, uint16_t * pRxData, uint16_t Size, uint32_t Timeout)**
Function description	Full-Duplex Transmit/Receive data in blocking mode.
Parameters	• **hi2s:** I2S handle • **pTxData:** a 16-bit pointer to the Transmit data buffer. • **pRxData:** a 16-bit pointer to the Receive data buffer. • **Size:** number of data sample to be sent: • **Timeout:** Timeout duration
Return values	• **HAL:** status
Notes	• When a 16-bit data frame or a 16-bit data frame extended is selected during the I2S configuration phase, the Size parameter means the number of 16-bit data length in the

transaction and when a 24-bit data frame or a 32-bit data frame is selected the Size parameter means the number of 16-bit data length.
- The I2S is kept enabled at the end of transaction to avoid the clock de-synchronization between Master and Slave(example: audio streaming).

HAL_I2SEx_TransmitReceive_IT

Function name	**HAL_StatusTypeDef HAL_I2SEx_TransmitReceive_IT (I2S_HandleTypeDef * hi2s, uint16_t * pTxData, uint16_t * pRxData, uint16_t Size)**
Function description	Full-Duplex Transmit/Receive data in non-blocking mode using Interrupt.
Parameters	• **hi2s:** I2S handle • **pTxData:** a 16-bit pointer to the Transmit data buffer. • **pRxData:** a 16-bit pointer to the Receive data buffer. • **Size:** number of data sample to be sent:
Return values	• **HAL:** status
Notes	• When a 16-bit data frame or a 16-bit data frame extended is selected during the I2S configuration phase, the Size parameter means the number of 16-bit data length in the transaction and when a 24-bit data frame or a 32-bit data frame is selected the Size parameter means the number of 16-bit data length. • The I2S is kept enabled at the end of transaction to avoid the clock de-synchronization between Master and Slave(example: audio streaming).

HAL_I2SEx_TransmitReceive_DMA

Function name	**HAL_StatusTypeDef HAL_I2SEx_TransmitReceive_DMA (I2S_HandleTypeDef * hi2s, uint16_t * pTxData, uint16_t * pRxData, uint16_t Size)**
Function description	Full-Duplex Transmit/Receive data in non-blocking mode using DMA.
Parameters	• **hi2s:** I2S handle • **pTxData:** a 16-bit pointer to the Transmit data buffer. • **pRxData:** a 16-bit pointer to the Receive data buffer. • **Size:** number of data sample to be sent:
Return values	• **HAL:** status
Notes	• When a 16-bit data frame or a 16-bit data frame extended is selected during the I2S configuration phase, the Size parameter means the number of 16-bit data length in the transaction and when a 24-bit data frame or a 32-bit data frame is selected the Size parameter means the number of 16-bit data length. • The I2S is kept enabled at the end of transaction to avoid the clock de-synchronization between Master and Slave(example: audio streaming).

HAL_I2S_FullDuplex_IRQHandler

Function name **void HAL_I2S_FullDuplex_IRQHandler (I2S_HandleTypeDef * hi2s)**

Function description This function handles I2S/I2Sext interrupt requests in full-duplex mode.

Parameters
- **hi2s:** I2S handle

Return values
- **HAL:** status

HAL_I2S_TxRxCpltCallback

Function name **void HAL_I2S_TxRxCpltCallback (I2S_HandleTypeDef * hi2s)**

Function description Tx and Rx Transfer completed callbacks.

Parameters
- **hi2s:** I2S handle

Return values
- **None**

HAL_I2S_TxRxHalfCpltCallback

Function name **void HAL_I2S_TxRxHalfCpltCallback (I2S_HandleTypeDef * hi2s)**

Function description Tx and Rx Transfer half completed callbacks.

Parameters
- **hi2s:** I2S handle

Return values
- **None**

HAL_I2S_DMAPause

Function name **HAL_StatusTypeDef HAL_I2S_DMAPause (I2S_HandleTypeDef * hi2s)**

Function description Pauses the audio stream playing from the Media.

Parameters
- **hi2s:** : I2S handle

Return values
- **None**

HAL_I2S_DMAResume

Function name **HAL_StatusTypeDef HAL_I2S_DMAResume (I2S_HandleTypeDef * hi2s)**

Function description Resumes the audio stream playing from the Media.

Parameters
- **hi2s:** : I2S handle

Return values
- **None**

HAL_I2S_DMAStop

Function name **HAL_StatusTypeDef HAL_I2S_DMAStop (I2S_HandleTypeDef * hi2s)**

Function description Resumes the audio stream playing from the Media.

Parameters
- **hi2s:** I2S handle

Return values
- **None**

27.2 I2SEx Firmware driver defines

27.2.1 I2SEx

I2S Extended Exported Macros

I2SxEXT

__HAL_I2SEXT_ENABLE

Description:

- Enable or disable the specified I2SExt peripheral.

Parameters:

- __HANDLE__: specifies the I2S Handle.

Return value:

- None

__HAL_I2SEXT_DISABLE

__HAL_I2SEXT_ENABLE_IT

Description:

- Enable or disable the specified I2SExt interrupts.

Parameters:

- __HANDLE__: specifies the I2S Handle.
- __INTERRUPT__: specifies the interrupt source to enable or disable. This parameter can be one of the following values:
  - I2S_IT_TXE: Tx buffer empty interrupt enable
  - I2S_IT_RXNE: RX buffer not empty interrupt enable
  - I2S_IT_ERR: Error interrupt enable

Return value:

- None

__HAL_I2SEXT_DISABLE_IT

__HAL_I2SEXT_GET_IT_SOURCE

Description:

- Checks if the specified I2SExt interrupt source is enabled or disabled.

Parameters:

- __HANDLE__: specifies the I2S Handle. This parameter can be I2S where x: 1, 2, or 3 to select the I2S peripheral.
- __INTERRUPT__: specifies the I2S interrupt source to check. This parameter can be one of the following values:
  - I2S_IT_TXE: Tx buffer empty interrupt

enable
  - I2S_IT_RXNE: RX buffer not empty interrupt enable
  - I2S_IT_ERR: Error interrupt enable

Return value:

- The: new state of __IT__ (TRUE or FALSE).

__HAL_I2SEXT_GET_FLAG

Description:

- Checks whether the specified I2SExt flag is set or not.

Parameters:

- __HANDLE__: specifies the I2S Handle.
- __FLAG__: specifies the flag to check. This parameter can be one of the following values:
  - I2S_FLAG_RXNE: Receive buffer not empty flag
  - I2S_FLAG_TXE: Transmit buffer empty flag
  - I2S_FLAG_UDR: Underrun flag
  - I2S_FLAG_OVR: Overrun flag
  - I2S_FLAG_FRE: Frame error flag
  - I2S_FLAG_CHSIDE: Channel Side flag
  - I2S_FLAG_BSY: Busy flag

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

__HAL_I2SEXT_CLEAR_OVRFLAG

Description:

- Clears the I2SExt OVR pending flag.

Parameters:

- __HANDLE__: specifies the I2S Handle.

Return value:

- None

__HAL_I2SEXT_CLEAR_UDRFLAG

Description:

- Clears the I2SExt UDR pending flag.

Parameters:

- __HANDLE__: specifies the I2S Handle.

Return value:

- None

28 HAL IRDA Generic Driver

28.1 IRDA Firmware driver registers structures

28.1.1 IRDA_InitTypeDef

Data Fields

- ***uint32_t BaudRate***
- ***uint32_t WordLength***
- ***uint32_t Parity***
- ***uint32_t Mode***
- ***uint8_t Prescaler***
- ***uint16_t PowerMode***

Field Documentation

- ***uint32_t IRDA_InitTypeDef::BaudRate***
  This member configures the IRDA communication baud rate. The baud rate register is computed using the following formula: Baud Rate Register = ((PCLKx) / ((hirda->Init.BaudRate)))
- ***uint32_t IRDA_InitTypeDef::WordLength***
  Specifies the number of data bits transmitted or received in a frame. This parameter can be a value of ***IRDAEx_Word_Length***
- ***uint32_t IRDA_InitTypeDef::Parity***
  Specifies the parity mode. This parameter can be a value of ***IRDA_Parity***
  Note: When parity is enabled, the computed parity is inserted at the MSB position of the transmitted data (9th bit when the word length is set to 9 data bits; 8th bit when the word length is set to 8 data bits).
- ***uint32_t IRDA_InitTypeDef::Mode***
  Specifies whether the Receive or Transmit mode is enabled or disabled. This parameter can be a value of ***IRDA_Transfer_Mode***
- ***uint8_t IRDA_InitTypeDef::Prescaler***
  Specifies the Prescaler value for dividing the UART/USART source clock to achieve low-power frequency.
  Note: Prescaler value 0 is forbidden
- ***uint16_t IRDA_InitTypeDef::PowerMode***
  Specifies the IRDA power mode. This parameter can be a value of ***IRDA_Low_Power***

28.1.2 IRDA_HandleTypeDef

Data Fields

- ***USART_TypeDef * Instance***
- ***IRDA_InitTypeDef Init***
- ***uint8_t * pTxBuffPtr***
- ***uint16_t TxXferSize***
- ***__IO uint16_t TxXferCount***
- ***uint8_t * pRxBuffPtr***
- ***uint16_t RxXferSize***
- ***__IO uint16_t RxXferCount***
- ***uint16_t Mask***
- ***DMA_HandleTypeDef * hdmatx***
- ***DMA_HandleTypeDef * hdmarx***

- ***HAL_LockTypeDef Lock***
- ***__IO HAL_IRDA_StateTypeDef gState***
- ***__IO HAL_IRDA_StateTypeDef RxState***
- ***__IO uint32_t ErrorCode***

Field Documentation

- ***USART_TypeDef* IRDA_HandleTypeDef::Instance***
  IRDA registers base address
- ***IRDA_InitTypeDef IRDA_HandleTypeDef::Init***
  IRDA communication parameters
- ***uint8_t* IRDA_HandleTypeDef::pTxBuffPtr***
  Pointer to IRDA Tx transfer Buffer
- ***uint16_t IRDA_HandleTypeDef::TxXferSize***
  IRDA Tx Transfer size
- ***__IO uint16_t IRDA_HandleTypeDef::TxXferCount***
  IRDA Tx Transfer Counter
- ***uint8_t* IRDA_HandleTypeDef::pRxBuffPtr***
  Pointer to IRDA Rx transfer Buffer
- ***uint16_t IRDA_HandleTypeDef::RxXferSize***
  IRDA Rx Transfer size
- ***__IO uint16_t IRDA_HandleTypeDef::RxXferCount***
  IRDA Rx Transfer Counter
- ***uint16_t IRDA_HandleTypeDef::Mask***
  IRDA RX RDR register mask
- ***DMA_HandleTypeDef* IRDA_HandleTypeDef::hdmatx***
  IRDA Tx DMA Handle parameters
- ***DMA_HandleTypeDef* IRDA_HandleTypeDef::hdmarx***
  IRDA Rx DMA Handle parameters
- ***HAL_LockTypeDef IRDA_HandleTypeDef::Lock***
  Locking object
- ***__IO HAL_IRDA_StateTypeDef IRDA_HandleTypeDef::gState***
  IRDA state information related to global Handle management and also related to Tx operations. This parameter can be a value of **HAL_IRDA_StateTypeDef**
- ***__IO HAL_IRDA_StateTypeDef IRDA_HandleTypeDef::RxState***
  IRDA state information related to Rx operations. This parameter can be a value of **HAL_IRDA_StateTypeDef**
- ***__IO uint32_t IRDA_HandleTypeDef::ErrorCode***
  IRDA Error code This parameter can be a value of ***IRDA_Error***

28.2 IRDA Firmware driver API description

28.2.1 How to use this driver

The IRDA HAL driver can be used as follows:

1. Declare a IRDA_HandleTypeDef handle structure (eg. IRDA_HandleTypeDef hirda).
2. Initialize the IRDA low level resources by implementing the HAL_IRDA_MspInit() API in setting the associated USART or UART in IRDA mode:
   - Enable the USARTx/UARTx interface clock.
   - USARTx/UARTx pins configuration:
     - Enable the clock for the USARTx/UARTx GPIOs.
     - Configure these USARTx/UARTx pins (TX as alternate function pull-up, RX as alternate function Input).

  - NVIC configuration if you need to use interrupt process (HAL_IRDA_Transmit_IT() and HAL_IRDA_Receive_IT() APIs):
    - Configure the USARTx/UARTx interrupt priority.
    - Enable the NVIC USARTx/UARTx IRQ handle.
    - The specific IRDA interrupts (Transmission complete interrupt, RXNE interrupt and Error Interrupts) will be managed using the macros __HAL_IRDA_ENABLE_IT() and __HAL_IRDA_DISABLE_IT() inside the transmit and receive process.
  - DMA Configuration if you need to use DMA process (HAL_IRDA_Transmit_DMA() and HAL_IRDA_Receive_DMA() APIs):
    - Declare a DMA handle structure for the Tx/Rx channel.
    - Enable the DMAx interface clock.
    - Configure the declared DMA handle structure with the required Tx/Rx parameters.
    - Configure the DMA Tx/Rx channel.
    - Associate the initialized DMA handle to the IRDA DMA Tx/Rx handle.
    - Configure the priority and enable the NVIC for the transfer complete interrupt on the DMA Tx/Rx channel.
3. Program the Baud Rate, Word Length and Parity and Mode(Receiver/Transmitter), the normal or low power mode and the clock prescaler in the hirda handle Init structure.
4. Initialize the IRDA registers by calling the HAL_IRDA_Init() API:
  - This API configures also the low level Hardware (GPIO, CLOCK, CORTEX...etc) by calling the customized HAL_IRDA_MspInit() API. The specific IRDA interrupts (Transmission complete interrupt, RXNE interrupt and Error Interrupts) will be managed using the macros __HAL_IRDA_ENABLE_IT() and __HAL_IRDA_DISABLE_IT() inside the transmit and receive process.
5. Three operation modes are available within this driver :

Polling mode IO operation

- Send an amount of data in blocking mode using HAL_IRDA_Transmit()
- Receive an amount of data in blocking mode using HAL_IRDA_Receive()

Interrupt mode IO operation

- Send an amount of data in non-blocking mode using HAL_IRDA_Transmit_IT()
- At transmission end of transfer HAL_IRDA_TxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_IRDA_TxCpltCallback()
- Receive an amount of data in non-blocking mode using HAL_IRDA_Receive_IT()
- At reception end of transfer HAL_IRDA_RxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_IRDA_RxCpltCallback()
- In case of transfer Error, HAL_IRDA_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_IRDA_ErrorCallback()

DMA mode IO operation

- Send an amount of data in non-blocking mode (DMA) using HAL_IRDA_Transmit_DMA()
- At transmission half of transfer HAL_IRDA_TxHalfCpltCallback() is executed and user can add his own code by customization of function pointer HAL_IRDA_TxHalfCpltCallback()
- At transmission end of transfer HAL_IRDA_TxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_IRDA_TxCpltCallback()
- Receive an amount of data in non-blocking mode (DMA) using HAL_IRDA_Receive_DMA()

- At reception half of transfer HAL_IRDA_RxHalfCpltCallback() is executed and user can add his own code by customization of function pointer HAL_IRDA_RxHalfCpltCallback()
- At reception end of transfer HAL_IRDA_RxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_IRDA_RxCpltCallback()
- In case of transfer Error, HAL_IRDA_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_IRDA_ErrorCallback()

IRDA HAL driver macros list

Below the list of most used macros in IRDA HAL driver.

- __HAL_IRDA_ENABLE: Enable the IRDA peripheral
- __HAL_IRDA_DISABLE: Disable the IRDA peripheral
- __HAL_IRDA_GET_FLAG : Check whether the specified IRDA flag is set or not
- __HAL_IRDA_CLEAR_FLAG : Clear the specified IRDA pending flag
- __HAL_IRDA_ENABLE_IT: Enable the specified IRDA interrupt
- __HAL_IRDA_DISABLE_IT: Disable the specified IRDA interrupt
- __HAL_IRDA_GET_IT_SOURCE: Check whether or not the specified IRDA interrupt is enabled



You can refer to the IRDA HAL driver header file for more useful macros

28.2.2 Initialization and Configuration functions

This subsection provides a set of functions allowing to initialize the USARTx in asynchronous IRDA mode.

- For the asynchronous mode only these parameters can be configured:
  - Baud Rate
  - Word Length
  - Parity
  - Power mode
  - Prescaler setting
  - Receiver/transmitter modes

The HAL_IRDA_Init() API follows the USART asynchronous configuration procedures (details for the procedures are available in reference manual).

This section contains the following APIs:

- ***HAL_IRDA_Init()***
- ***HAL_IRDA_DeInit()***
- ***HAL_IRDA_MspInit()***
- ***HAL_IRDA_MspDeInit()***

28.2.3 IO operation functions

This subsection provides a set of functions allowing to manage the IRDA data transfers.

IrDA is a half duplex communication protocol. If the Transmitter is busy, any data on the IrDA receive line will be ignored by the IrDA decoder and if the Receiver is busy, data on the TX from the USART to IrDA will not be encoded by IrDA. While receiving data, transmission should be avoided as the data to be transmitted could be corrupted.

1. There are two mode of transfer:
   - Blocking mode: the communication is performed in polling mode. The HAL status of all data processing is returned by the same function after finishing transfer.
   - Non-Blocking mode: the communication is performed using Interrupts or DMA, these API's return the HAL status. The end of the data processing will be indicated through the dedicated IRDA IRQ when using Interrupt mode or the DMA IRQ when using DMA mode. The HAL_IRDA_TxCpltCallback(), HAL_IRDA_RxCpltCallback() user callbacks will be executed respectively at the end of the Transmit or Receive process The HAL_IRDA_ErrorCallback() user callback will be executed when a communication error is detected
2. Blocking mode APIs are :
   - HAL_IRDA_Transmit()
   - HAL_IRDA_Receive()
3. Non Blocking mode APIs with Interrupt are :
   - HAL_IRDA_Transmit_IT()
   - HAL_IRDA_Receive_IT()
   - HAL_IRDA_IRQHandler()
4. Non Blocking mode functions with DMA are :
   - HAL_IRDA_Transmit_DMA()
   - HAL_IRDA_Receive_DMA()
   - HAL_IRDA_DMAPause()
   - HAL_IRDA_DMAResume()
   - HAL_IRDA_DMAStop()
5. A set of Transfer Complete Callbacks are provided in Non Blocking mode:
   - HAL_IRDA_TxHalfCpltCallback()
   - HAL_IRDA_TxCpltCallback()
   - HAL_IRDA_RxHalfCpltCallback()
   - HAL_IRDA_RxCpltCallback()
   - HAL_IRDA_ErrorCallback()
6. Non-Blocking mode transfers could be aborted using Abort API's :
   - HAL_IRDA_Abort()
   - HAL_IRDA_AbortTransmit()
   - HAL_IRDA_AbortReceive()
   - HAL_IRDA_Abort_IT()
   - HAL_IRDA_AbortTransmit_IT()
   - HAL_IRDA_AbortReceive_IT()
7. For Abort services based on interrupts (HAL_IRDA_Abortxxx_IT), a set of Abort Complete Callbacks are provided:
   - HAL_IRDA_AbortCpltCallback()
   - HAL_IRDA_AbortTransmitCpltCallback()
   - HAL_IRDA_AbortReceiveCpltCallback()
8. In Non-Blocking mode transfers, possible errors are split into 2 categories. Errors are handled as follows :
   - Error is considered as Recoverable and non blocking : Transfer could go till end, but error severity is to be evaluated by user : this concerns Frame Error, Parity Error or Noise Error in Interrupt mode reception . Received character is then retrieved and stored in Rx buffer, Error code is set to allow user to identify error type, and HAL_IRDA_ErrorCallback() user callback is executed. Transfer is kept ongoing on IRDA side. If user wants to abort it, Abort services should be called by user.
   - Error is considered as Blocking : Transfer could not be completed properly and is aborted. This concerns Overrun Error In Interrupt mode reception and all errors in DMA mode. Error code is set to allow user to identify error type, and HAL_IRDA_ErrorCallback() user callback is executed.

This section contains the following APIs:

- ***HAL_IRDA_Transmit()***
- ***HAL_IRDA_Receive()***
- ***HAL_IRDA_Transmit_IT()***
- ***HAL_IRDA_Receive_IT()***
- ***HAL_IRDA_Transmit_DMA()***
- ***HAL_IRDA_Receive_DMA()***
- ***HAL_IRDA_DMAPause()***
- ***HAL_IRDA_DMAResume()***
- ***HAL_IRDA_DMAStop()***
- ***HAL_IRDA_Abort()***
- ***HAL_IRDA_AbortTransmit()***
- ***HAL_IRDA_AbortReceive()***
- ***HAL_IRDA_Abort_IT()***
- ***HAL_IRDA_AbortTransmit_IT()***
- ***HAL_IRDA_AbortReceive_IT()***
- ***HAL_IRDA_IRQHandler()***
- ***HAL_IRDA_TxCpltCallback()***
- ***HAL_IRDA_TxHalfCpltCallback()***
- ***HAL_IRDA_RxCpltCallback()***
- ***HAL_IRDA_RxHalfCpltCallback()***
- ***HAL_IRDA_ErrorCallback()***
- ***HAL_IRDA_AbortCpltCallback()***
- ***HAL_IRDA_AbortTransmitCpltCallback()***
- ***HAL_IRDA_AbortReceiveCpltCallback()***

28.2.4 Peripheral State and Error functions

This subsection provides a set of functions allowing to return the State of IrDA communication process and also return Peripheral Errors occurred during communication process

- HAL_IRDA_GetState() API can be helpful to check in run-time the state of the IRDA peripheral handle.
- HAL_IRDA_GetError() checks in run-time errors that could occur during communication.

This section contains the following APIs:

- ***HAL_IRDA_GetState()***
- ***HAL_IRDA_GetError()***

28.2.5 Detailed description of functions

HAL_IRDA_Init

Function name	**HAL_StatusTypeDef HAL_IRDA_Init (IRDA_HandleTypeDef * hirda)**
Function description	Initialize the IRDA mode according to the specified parameters in the IRDA_InitTypeDef and initialize the associated handle.
Parameters	• **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **HAL:** status

HAL_IRDA_DeInit

Function name **HAL_StatusTypeDef HAL_IRDA_DeInit (IRDA_HandleTypeDef * hirda)**

Function description DeInitialize the IRDA peripheral.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **HAL:** status

HAL_IRDA_MspInit

Function name **void HAL_IRDA_MspInit (IRDA_HandleTypeDef * hirda)**

Function description Initialize the IRDA MSP.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **None**

HAL_IRDA_MspDeInit

Function name **void HAL_IRDA_MspDeInit (IRDA_HandleTypeDef * hirda)**

Function description DeInitialize the IRDA MSP.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **None**

HAL_IRDA_Transmit

Function name **HAL_StatusTypeDef HAL_IRDA_Transmit (IRDA_HandleTypeDef * hirda, uint8_t * pData, uint16_t Size, uint32_t Timeout)**

Function description Send an amount of data in blocking mode.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.
- **pData:** Pointer to data buffer.
- **Size:** Amount of data to be sent.
- **Timeout:** Specify timeout value.

Return values
- **HAL:** status

HAL_IRDA_Receive

Function name **HAL_StatusTypeDef HAL_IRDA_Receive (IRDA_HandleTypeDef * hirda, uint8_t * pData, uint16_t Size, uint32_t Timeout)**

Function description Receive an amount of data in blocking mode.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.
- **pData:** Pointer to data buffer.
- **Size:** Amount of data to be received.
- **Timeout:** Specify timeout value.

Return values
- **HAL:** status

HAL_IRDA_Transmit_IT

Function name **HAL_StatusTypeDef HAL_IRDA_Transmit_IT (IRDA_HandleTypeDef * hirda, uint8_t * pData, uint16_t Size)**

Function description Send an amount of data in interrupt mode.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.
- **pData:** Pointer to data buffer.
- **Size:** Amount of data to be sent.

Return values
- **HAL:** status

HAL_IRDA_Receive_IT

Function name **HAL_StatusTypeDef HAL_IRDA_Receive_IT (IRDA_HandleTypeDef * hirda, uint8_t * pData, uint16_t Size)**

Function description Receive an amount of data in interrupt mode.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.
- **pData:** Pointer to data buffer.
- **Size:** Amount of data to be received.

Return values
- **HAL:** status

HAL_IRDA_Transmit_DMA

Function name **HAL_StatusTypeDef HAL_IRDA_Transmit_DMA (IRDA_HandleTypeDef * hirda, uint8_t * pData, uint16_t Size)**

Function description Send an amount of data in DMA mode.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.
- **pData:** pointer to data buffer.
- **Size:** amount of data to be sent.

Return values
- **HAL:** status

HAL_IRDA_Receive_DMA

Function name **HAL_StatusTypeDef HAL_IRDA_Receive_DMA (IRDA_HandleTypeDef * hirda, uint8_t * pData, uint16_t Size)**

Function description Receive an amount of data in DMA mode.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.
- **pData:** Pointer to data buffer.
- **Size:** Amount of data to be received.

Return values
- **HAL:** status

Notes
- When the IRDA parity is enabled (PCE = 1), the received data contains the parity bit (MSB position).

HAL_IRDA_DMAPause

Function name **HAL_StatusTypeDef HAL_IRDA_DMAPause (IRDA_HandleTypeDef * hirda)**

Function description Pause the DMA Transfer.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **HAL:** status

HAL_IRDA_DMAResume

Function name **HAL_StatusTypeDef HAL_IRDA_DMAResume (IRDA_HandleTypeDef * hirda)**

Function description Resume the DMA Transfer.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified UART module.

Return values
- **HAL:** status

HAL_IRDA_DMAStop

Function name **HAL_StatusTypeDef HAL_IRDA_DMAStop (IRDA_HandleTypeDef * hirda)**

Function description Stop the DMA Transfer.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified UART module.

Return values
- **HAL:** status

HAL_IRDA_Abort

Function name **HAL_StatusTypeDef HAL_IRDA_Abort (IRDA_HandleTypeDef * hirda)**

Function description Abort ongoing transfers (blocking mode).

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified UART module.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable IRDA Interrupts (Tx and Rx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort (in case of transfer in DMA mode)Set handle State to READY
- This procedure is executed in blocking mode : when exiting function, Abort is considered as completed.

HAL_IRDA_AbortTransmit

Function name **HAL_StatusTypeDef HAL_IRDA_AbortTransmit (IRDA_HandleTypeDef * hirda)**

Function description Abort ongoing Transmit transfer (blocking mode).

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified UART module.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing Tx transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable IRDA Interrupts (Tx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort (in case of transfer in DMA mode)Set handle State to READY
- This procedure is executed in blocking mode : when exiting function, Abort is considered as completed.

HAL_IRDA_AbortReceive

Function name **HAL_StatusTypeDef HAL_IRDA_AbortReceive (IRDA_HandleTypeDef * hirda)**

Function description Abort ongoing Receive transfer (blocking mode).

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified UART module.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing Rx transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable IRDA Interrupts (Rx)Disable the DMA transfer in the peripheral register (if

enabled)Abort DMA transfer by calling HAL_DMA_Abort (in case of transfer in DMA mode)Set handle State to READY
- This procedure is executed in blocking mode : when exiting function, Abort is considered as completed.

HAL_IRDA_Abort_IT

Function name	**HAL_StatusTypeDef HAL_IRDA_Abort_IT (IRDA_HandleTypeDef * hirda)**
Function description	Abort ongoing transfers (Interrupt mode).
Parameters	• **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified UART module.
Return values	• **HAL:** status
Notes	• This procedure could be used for aborting any ongoing transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable IRDA Interrupts (Tx and Rx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort_IT (in case of transfer in DMA mode)Set handle State to READYAt abort completion, call user abort complete callback • This procedure is executed in Interrupt mode, meaning that abort procedure could be considered as completed only when user abort complete callback is executed (not when exiting function).

HAL_IRDA_AbortTransmit_IT

Function name	**HAL_StatusTypeDef HAL_IRDA_AbortTransmit_IT (IRDA_HandleTypeDef * hirda)**
Function description	Abort ongoing Transmit transfer (Interrupt mode).
Parameters	• **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified UART module.
Return values	• **HAL:** status
Notes	• This procedure could be used for aborting any ongoing Tx transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable IRDA Interrupts (Tx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort_IT (in case of transfer in DMA mode)Set handle State to READYAt abort completion, call user abort complete callback • This procedure is executed in Interrupt mode, meaning that abort procedure could be considered as completed only when user abort complete callback is executed (not when exiting function).

HAL_IRDA_AbortReceive_IT

Function name **HAL_StatusTypeDef HAL_IRDA_AbortReceive_IT (IRDA_HandleTypeDef * hirda)**

Function description Abort ongoing Receive transfer (Interrupt mode).

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified UART module.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing Rx transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable IRDA Interrupts (Rx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort_IT (in case of transfer in DMA mode)Set handle State to READYAt abort completion, call user abort complete callback
- This procedure is executed in Interrupt mode, meaning that abort procedure could be considered as completed only when user abort complete callback is executed (not when exiting function).

HAL_IRDA_IRQHandler

Function name **void HAL_IRDA_IRQHandler (IRDA_HandleTypeDef * hirda)**

Function description Handle IRDA interrupt request.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **None**

HAL_IRDA_TxCpltCallback

Function name **void HAL_IRDA_TxCpltCallback (IRDA_HandleTypeDef * hirda)**

Function description Tx Transfer completed callback.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **None**

HAL_IRDA_RxCpltCallback

Function name **void HAL_IRDA_RxCpltCallback (IRDA_HandleTypeDef * hirda)**

Function description Rx Transfer completed callback.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **None**

HAL_IRDA_TxHalfCpltCallback

Function name **void HAL_IRDA_TxHalfCpltCallback (IRDA_HandleTypeDef * hirda)**

Function description Tx Half Transfer completed callback.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified USART module.

Return values
- **None**

HAL_IRDA_RxHalfCpltCallback

Function name **void HAL_IRDA_RxHalfCpltCallback (IRDA_HandleTypeDef * hirda)**

Function description Rx Half Transfer complete callback.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **None**

HAL_IRDA_ErrorCallback

Function name **void HAL_IRDA_ErrorCallback (IRDA_HandleTypeDef * hirda)**

Function description IRDA error callback.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **None**

HAL_IRDA_AbortCpltCallback

Function name **void HAL_IRDA_AbortCpltCallback (IRDA_HandleTypeDef * hirda)**

Function description IRDA Abort Complete callback.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **None**

HAL_IRDA_AbortTransmitCpltCallback

Function name **void HAL_IRDA_AbortTransmitCpltCallback (IRDA_HandleTypeDef * hirda)**

Function description IRDA Abort Complete callback.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **None**

HAL_IRDA_AbortReceiveCpltCallback

Function name **void HAL_IRDA_AbortReceiveCpltCallback (IRDA_HandleTypeDef * hirda)**

Function description IRDA Abort Receive Complete callback.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **None**

HAL_IRDA_GetState

Function name **HAL_IRDA_StateTypeDef HAL_IRDA_GetState (IRDA_HandleTypeDef * hirda)**

Function description Return the IRDA handle state.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **HAL:** state

HAL_IRDA_GetError

Function name **uint32_t HAL_IRDA_GetError (IRDA_HandleTypeDef * hirda)**

Function description Return the IRDA handle error code.

Parameters
- **hirda:** Pointer to a IRDA_HandleTypeDef structure that contains the configuration information for the specified IRDA module.

Return values
- **IRDA:** Error Code

28.3 IRDA Firmware driver defines

28.3.1 IRDA

IRDA DMA Rx

IRDA_DMA_RX_DISABLE IRDA DMA RX disabled

IRDA_DMA_RX_ENABLE IRDA DMA RX enabled

IRDA DMA Tx

IRDA_DMA_TX_DISABLE IRDA DMA TX disabled

IRDA_DMA_TX_ENABLE IRDA DMA TX enabled

IRDA Error

HAL_IRDA_ERROR_NONE	No error
HAL_IRDA_ERROR_PE	Parity error
HAL_IRDA_ERROR_NE	Noise error
HAL_IRDA_ERROR_FE	frame error
HAL_IRDA_ERROR_ORE	Overrun error
HAL_IRDA_ERROR_DMA	DMA transfer error
HAL_IRDA_ERROR_BUSY	Busy Error

IRDA Exported Macros

__HAL_IRDA_RESET_HANDLE_STATE

Description:

- Reset IRDA handle state.

Parameters:

- __HANDLE__: IRDA handle.

Return value:

- None

__HAL_IRDA_FLUSH_DRREGISTER

Description:

- Flush the IRDA DR register.

Parameters:

- __HANDLE__: specifies the IRDA Handle.

Return value:

- None

__HAL_IRDA_CLEAR_FLAG

Description:

- Clear the specified IRDA pending flag.

Parameters:

- __HANDLE__: specifies the IRDA Handle.
- __FLAG__: specifies the flag to check. This parameter can be any combination of the following values:
  - IRDA_CLEAR_PEF
  - IRDA_CLEAR_FEF
  - IRDA_CLEAR_NEF
  - IRDA_CLEAR_OREF
  - IRDA_CLEAR_TCF
  - IRDA_CLEAR_IDLEF

Return value:

- None

__HAL_IRDA_CLEAR_PEFLAG

Description:

- Clear the IRDA PE pending flag.

Parameters:

- __HANDLE__: specifies the IRDA Handle.

Return value:

- None

__HAL_IRDA_CLEAR_FEFLAG

Description:

- Clear the IRDA FE pending flag.

Parameters:

- __HANDLE__: specifies the IRDA Handle.

Return value:

- None

__HAL_IRDA_CLEAR_NEFLAG

Description:

- Clear the IRDA NE pending flag.

Parameters:

- __HANDLE__: specifies the IRDA Handle.

Return value:

- None

__HAL_IRDA_CLEAR_OREFLAG

Description:

- Clear the IRDA ORE pending flag.

Parameters:

- __HANDLE__: specifies the IRDA Handle.

Return value:

- None

__HAL_IRDA_CLEAR_IDLEFLAG

Description:

- Clear the IRDA IDLE pending flag.

Parameters:

- __HANDLE__: specifies the IRDA Handle.

Return value:

- None

__HAL_IRDA_GET_FLAG

Description:

- Check whether the specified IRDA flag is set or not.

Parameters:

- __HANDLE__: specifies the IRDA Handle.
- __FLAG__: specifies the flag to check. This parameter can be one of the following values:
  - IRDA_FLAG_REACK Receive enable acknowledge flag
  - IRDA_FLAG_TEACK Transmit enable acknowledge flag

- IRDA_FLAG_BUSY Busy flag
- IRDA_FLAG_ABRF Auto Baud rate detection flag
- IRDA_FLAG_ABRE Auto Baud rate detection error flag
- IRDA_FLAG_TXE Transmit data register empty flag
- IRDA_FLAG_TC Transmission Complete flag
- IRDA_FLAG_RXNE Receive data register not empty flag
- IRDA_FLAG_ORE OverRun Error flag
- IRDA_FLAG_NE Noise Error flag
- IRDA_FLAG_FE Framing Error flag
- IRDA_FLAG_PE Parity Error flag

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

__HAL_IRDA_ENABLE_IT

Description:

- Enable the specified IRDA interrupt.

Parameters:

- __HANDLE__: specifies the IRDA Handle.
- __INTERRUPT__: specifies the IRDA interrupt source to enable. This parameter can be one of the following values:
  - IRDA_IT_TXE Transmit Data Register empty interrupt
  - IRDA_IT_TC Transmission complete interrupt
  - IRDA_IT_RXNE Receive Data register not empty interrupt
  - IRDA_IT_IDLE Idle line detection interrupt
  - IRDA_IT_PE Parity Error interrupt
  - IRDA_IT_ERR Error interrupt(Frame error, noise error, overrun error)

Return value:

- None

__HAL_IRDA_DISABLE_IT

Description:

- Disable the specified IRDA interrupt.

Parameters:

- __HANDLE__: specifies the IRDA Handle.
- __INTERRUPT__: specifies the IRDA interrupt source to disable. This parameter can be one of the following values:
  - IRDA_IT_TXE Transmit Data Register empty interrupt
  - IRDA_IT_TC Transmission complete

interrupt
  - IRDA_IT_RXNE Receive Data register not empty interrupt
  - IRDA_IT_IDLE Idle line detection interrupt
  - IRDA_IT_PE Parity Error interrupt
  - IRDA_IT_ERR Error interrupt(Frame error, noise error, overrun error)

Return value:

- None

__HAL_IRDA_GET_IT

Description:

- Check whether the specified IRDA interrupt has occurred or not.

Parameters:

- __HANDLE__: specifies the IRDA Handle.
- __IT__: specifies the IRDA interrupt source to check. This parameter can be one of the following values:
  - IRDA_IT_TXE Transmit Data Register empty interrupt
  - IRDA_IT_TC Transmission complete interrupt
  - IRDA_IT_RXNE Receive Data register not empty interrupt
  - IRDA_IT_IDLE Idle line detection interrupt
  - IRDA_IT_ORE OverRun Error interrupt
  - IRDA_IT_NE Noise Error interrupt
  - IRDA_IT_FE Framing Error interrupt
  - IRDA_IT_PE Parity Error interrupt

Return value:

- The: new state of __IT__ (TRUE or FALSE).

__HAL_IRDA_GET_IT_SOURCE

Description:

- Check whether the specified IRDA interrupt source is enabled or not.

Parameters:

- __HANDLE__: specifies the IRDA Handle.
- __IT__: specifies the IRDA interrupt source to check. This parameter can be one of the following values:
  - IRDA_IT_TXE Transmit Data Register empty interrupt
  - IRDA_IT_TC Transmission complete interrupt
  - IRDA_IT_RXNE Receive Data register not empty interrupt
  - IRDA_IT_IDLE Idle line detection interrupt

- IRDA_IT_ERR Framing, overrun or noise error interrupt
- IRDA_IT_PE Parity Error interrupt

Return value:

- The: new state of __IT__ (TRUE or FALSE).

__HAL_IRDA_CLEAR_IT

Description:

- Clear the specified IRDA ISR flag, in setting the proper ICR register flag.

Parameters:

- __HANDLE__: specifies the IRDA Handle.
- __IT_CLEAR__: specifies the interrupt clear register flag that needs to be set to clear the corresponding interrupt This parameter can be one of the following values:
  - IRDA_CLEAR_PEF Parity Error Clear Flag
  - IRDA_CLEAR_FEF Framing Error Clear Flag
  - IRDA_CLEAR_NEF Noise detected Clear Flag
  - IRDA_CLEAR_OREF OverRun Error Clear Flag
  - IRDA_CLEAR_TCF Transmission Complete Clear Flag

Return value:

- None

__HAL_IRDA_SEND_REQ

Description:

- Set a specific IRDA request flag.

Parameters:

- __HANDLE__: specifies the IRDA Handle.
- __REQ__: specifies the request flag to set This parameter can be one of the following values:
  - IRDA_AUTOBAUD_REQUEST Auto-Baud Rate Request
  - IRDA_RXDATA_FLUSH_REQUEST Receive Data flush Request
  - IRDA_TXDATA_FLUSH_REQUEST Transmit data flush Request

Return value:

- None

__HAL_IRDA_ONE_BIT_SAMPLE_ENABLE

Description:

- Enable the IRDA one bit sample method.

Parameters:

- __HANDLE__: specifies the IRDA Handle.

Return value:

- None

__HAL_IRDA_ONE_BIT_SAMPLE_DISABLE

Description:

- Disable the IRDA one bit sample method.

Parameters:

- __HANDLE__: specifies the IRDA Handle.

Return value:

- None

__HAL_IRDA_ENABLE

Description:

- Enable UART/USART associated to IRDA Handle.

Parameters:

- __HANDLE__: specifies the IRDA Handle.

Return value:

- None

__HAL_IRDA_DISABLE

Description:

- Disable UART/USART associated to IRDA Handle.

Parameters:

- __HANDLE__: specifies the IRDA Handle.

Return value:

- None

IRDA Flags

IRDA_FLAG_REACK	IRDA Receive enable acknowledge flag
IRDA_FLAG_TEACK	IRDA Transmit enable acknowledge flag
IRDA_FLAG_BUSY	IRDA Busy flag
IRDA_FLAG_ABRF	IRDA Auto baud rate flag
IRDA_FLAG_ABRE	IRDA Auto baud rate error
IRDA_FLAG_TXE	IRDA Transmit data register empty
IRDA_FLAG_TC	IRDA Transmission complete
IRDA_FLAG_RXNE	IRDA Read data register not empty
IRDA_FLAG_ORE	IRDA Overrun error
IRDA_FLAG_NE	IRDA Noise error
IRDA_FLAG_FE	IRDA Framing error
IRDA_FLAG_PE	IRDA Parity error

IRDA interruptions flags mask

IRDA_IT_MASK IRDA Interruptions flags mask

IRDA Interrupts Definition

IRDA_IT_PE IRDA Parity error interruption

IRDA_IT_TXE IRDA Transmit data register empty interruption

IRDA_IT_TC IRDA Transmission complete interruption

IRDA_IT_RXNE IRDA Read data register not empty interruption

IRDA_IT_IDLE IRDA Idle interruption

IRDA_IT_ERR IRDA Error interruption

IRDA_IT_ORE IRDA Overrun error interruption

IRDA_IT_NE IRDA Noise error interruption

IRDA_IT_FE IRDA Frame error interruption

IRDA Interruption Clear Flags

IRDA_CLEAR_PEF Parity Error Clear Flag

IRDA_CLEAR_FEF Framing Error Clear Flag

IRDA_CLEAR_NEF Noise detected Clear Flag

IRDA_CLEAR_OREF OverRun Error Clear Flag

IRDA_CLEAR_IDLEF IDLE line detected Clear Flag

IRDA_CLEAR_TCF Transmission Complete Clear Flag

IRDA Low Power

IRDA_POWERMODE_NORMAL IRDA normal power mode

IRDA_POWERMODE_LOWPOWER IRDA low power mode

IRDA Mode

IRDA_MODE_DISABLE Associated UART disabled in IRDA mode

IRDA_MODE_ENABLE Associated UART enabled in IRDA mode

IRDA One Bit Sampling

IRDA_ONE_BIT_SAMPLE_DISABLE One-bit sampling disabled

IRDA_ONE_BIT_SAMPLE_ENABLE One-bit sampling enabled

IRDA Parity

IRDA_PARITY_NONE No parity

IRDA_PARITY_EVEN Even parity

IRDA_PARITY_ODD Odd parity

IRDA Request Parameters

IRDA_AUTOBAUD_REQUEST Auto-Baud Rate Request

IRDA_RXDATA_FLUSH_REQUEST Receive Data flush Request

IRDA_TXDATA_FLUSH_REQUEST Transmit data flush Request

IRDA State

IRDA_STATE_DISABLE	IRDA disabled
IRDA_STATE_ENABLE	IRDA enabled

IRDA Transfer Mode

IRDA_MODE_RX	RX mode
IRDA_MODE_TX	TX mode
IRDA_MODE_TX_RX	RX and TX mode

29 HAL IRDA Extension Driver

29.1 IRDAEx Firmware driver defines

29.1.1 IRDAEx

IRDA Word Length

IRDA_WORDLENGTH_8B 8-bit long frame

IRDA_WORDLENGTH_9B 9-bit long frame

30 HAL IWDG Generic Driver

30.1 IWDG Firmware driver registers structures

30.1.1 IWDG_InitTypeDef

Data Fields

- ***uint32_t Prescaler***
- ***uint32_t Reload***
- ***uint32_t Window***

Field Documentation

- ***uint32_t IWDG_InitTypeDef::Prescaler***
  Select the prescaler of the IWDG. This parameter can be a value of ***IWDG_Prescaler***
- ***uint32_t IWDG_InitTypeDef::Reload***
  Specifies the IWDG down-counter reload value. This parameter must be a number between Min_Data = 0 and Max_Data = 0x0FFFU
- ***uint32_t IWDG_InitTypeDef::Window***
  Specifies the window value to be compared to the down-counter. This parameter must be a number between Min_Data = 0 and Max_Data = 0x0FFFU

30.1.2 IWDG_HandleTypeDef

Data Fields

- ***IWDG_TypeDef * Instance***
- ***IWDG_InitTypeDef Init***

Field Documentation

- ***IWDG_TypeDef* IWDG_HandleTypeDef::Instance***
  Register base address
- ***IWDG_InitTypeDef IWDG_HandleTypeDef::Init***
  IWDG required parameters

30.2 IWDG Firmware driver API description

30.2.1 IWDG Generic features

- The IWDG can be started by either software or hardware (configurable through option byte).
- The IWDG is clocked by Low-Speed clock (LSI) and thus stays active even if the main clock fails.
- Once the IWDG is started, the LSI is forced ON and both can not be disabled. The counter starts counting down from the reset value (0xFFFU). When it reaches the end of count value (0x000U) a reset signal is generated (IWDG reset).
- Whenever the key value 0x0000 AAAA is written in the IWDG_KR register, the IWDG_RLR value is reloaded in the counter and the watchdog reset is prevented.
- The IWDG is implemented in the VDD voltage domain that is still functional in STOP and STANDBY mode (IWDG reset can wake-up from STANDBY). IWDGRST flag in RCC_CSR register can be used to inform when an IWDG reset occurs.
- Debug mode : When the microcontroller enters debug mode (core halted), the IWDG counter either continues to work normally or stops, depending on DBG_IWDG_STOP

configuration bit in DBG module, accessible through __HAL_DBGMCU_FREEZE_IWDG() and __HAL_DBGMCU_UNFREEZE_IWDG() macros

Min-max timeout value @41KHz (LSI): ~0.1ms / ~25.5s The IWDG timeout may vary due to LSI frequency dispersion. STM32F3xx devices provide the capability to measure the LSI frequency (LSI clock connected internally to TIM16 CH1 input capture). The measured value can be used to have an IWDG timeout with an acceptable accuracy.

30.2.2 How to use this driver

1. Use IWDG using HAL_IWDG_Init() function to :
   - Enable instance by writing Start keyword in IWDG_KEY register. LSI clock is forced ON and IWDG counter starts downcounting.
   - Enable write access to configuration register: IWDG_PR, IWDG_RLR & IWDG_WINR.
   - Configure the IWDG prescaler and counter reload value. This reload value will be loaded in the IWDG counter each time the watchdog is reloaded, then the IWDG will start counting down from this value.
   - wait for status flags to be reset"
   - Depending on window parameter:
     - If Window Init parameter is same as Window register value, nothing more is done but reload counter value in order to exit function withy exact time base.
     - Else modify Window register. This will automatically reload watchdog counter.
2. Then the application program must refresh the IWDG counter at regular intervals during normal operation to prevent an MCU reset, using HAL_IWDG_Refresh() function.

IWDG HAL driver macros list

Below the list of most used macros in IWDG HAL driver:

- __HAL_IWDG_START: Enable the IWDG peripheral
- __HAL_IWDG_RELOAD_COUNTER: Reloads IWDG counter with value defined in the reload register

30.2.3 Initialization and Start functions

This section provides functions allowing to:

- Initialize the IWDG according to the specified parameters in the IWDG_InitTypeDef of associated handle.
- Manage Window option.
- Once initialization is performed in HAL_IWDG_Init function, Watchdog is reloaded in order to exit function with correct time base.

This section contains the following APIs:

- ***HAL_IWDG_Init()***

30.2.4 IO operation functions

This section provides functions allowing to:

- Refresh the IWDG.

This section contains the following APIs:

- ***HAL_IWDG_Refresh()***

30.2.5 Detailed description of functions

HAL_IWDG_Init

Function name **HAL_StatusTypeDef HAL_IWDG_Init (IWDG_HandleTypeDef * hiwdg)**

Function description Initialize the IWDG according to the specified parameters in the IWDG_InitTypeDef and start watchdog.

Parameters
- **hiwdg:** pointer to a IWDG_HandleTypeDef structure that contains the configuration information for the specified IWDG module.

Return values
- **HAL:** status

HAL_IWDG_Refresh

Function name **HAL_StatusTypeDef HAL_IWDG_Refresh (IWDG_HandleTypeDef * hiwdg)**

Function description Refresh the IWDG.

Parameters
- **hiwdg:** pointer to a IWDG_HandleTypeDef structure that contains the configuration information for the specified IWDG module.

Return values
- **HAL:** status

30.3 IWDG Firmware driver defines

30.3.1 IWDG

IWDG Exported Macros

__HAL_IWDG_START

Description:
- Enable the IWDG peripheral.

Parameters:
- __HANDLE__: IWDG handle

Return value:
- None

__HAL_IWDG_RELOAD_COUNTER

Description:
- Reload IWDG counter with value defined in the reload register (write access to IWDG_PR, IWDG_RLR & IWDG_WINR registers disabled).

Parameters:
- __HANDLE__: IWDG handle

Return value:
- None

IWDG Prescaler

IWDG_PRESCALER_4	IWDG prescaler set to 4
IWDG_PRESCALER_8	IWDG prescaler set to 8
IWDG_PRESCALER_16	IWDG prescaler set to 16
IWDG_PRESCALER_32	IWDG prescaler set to 32
IWDG_PRESCALER_64	IWDG prescaler set to 64
IWDG_PRESCALER_128	IWDG prescaler set to 128U
IWDG_PRESCALER_256	IWDG prescaler set to 256U

IWDG Window option

IWDG_WINDOW_DISABLE

31 HAL NAND Generic Driver

31.1 NAND Firmware driver registers structures

31.1.1 NAND_IDTypeDef

Data Fields

- ***uint8_t Maker_Id***
- ***uint8_t Device_Id***
- ***uint8_t Third_Id***
- ***uint8_t Fourth_Id***

Field Documentation

- ***uint8_t NAND_IDTypeDef::Maker_Id***
- ***uint8_t NAND_IDTypeDef::Device_Id***
- ***uint8_t NAND_IDTypeDef::Third_Id***
- ***uint8_t NAND_IDTypeDef::Fourth_Id***

31.1.2 NAND_AddressTypeDef

Data Fields

- ***uint16_t Page***
- ***uint16_t Plane***
- ***uint16_t Block***

Field Documentation

- ***uint16_t NAND_AddressTypeDef::Page***
  NAND memory Page address
- ***uint16_t NAND_AddressTypeDef::Plane***
  NAND memory Plane address
- ***uint16_t NAND_AddressTypeDef::Block***
  NAND memory Block address

31.1.3 NAND_DeviceConfigTypeDef

Data Fields

- ***uint32_t PageSize***
- ***uint32_t SpareAreaSize***
- ***uint32_t BlockSize***
- ***uint32_t BlockNbr***
- ***uint32_t PlaneNbr***
- ***uint32_t PlaneSize***
- ***FunctionalState ExtraCommandEnable***

Field Documentation

- ***uint32_t NAND_DeviceConfigTypeDef::PageSize***
  NAND memory page (without spare area) size measured in bytes for 8 bits adressing or words for 16 bits addressing
- ***uint32_t NAND_DeviceConfigTypeDef::SpareAreaSize***
  NAND memory spare area size measured in bytes for 8 bits adressing or words for 16 bits addressing

- ***uint32_t NAND_DeviceConfigTypeDef::BlockSize***
  NAND memory block size measured in number of pages
- ***uint32_t NAND_DeviceConfigTypeDef::BlockNbr***
  NAND memory number of total blocks
- ***uint32_t NAND_DeviceConfigTypeDef::PlaneNbr***
  NAND memory number of planes
- ***uint32_t NAND_DeviceConfigTypeDef::PlaneSize***
  NAND memory plane size measured in number of blocks
- ***FunctionalState NAND_DeviceConfigTypeDef::ExtraCommandEnable***
  NAND extra command needed for Page reading mode. This parameter is mandatory for some NAND parts after the read command (NAND_CMD_AREA_TRUE1) and before DATA reading sequence. Example: Toshiba THTH58BYG3S0HBAI6. This parameter could be ENABLE or DISABLE Please check the Read Mode sequnece in the NAND device datasheet

31.1.4 NAND_HandleTypeDef

Data Fields

- ***FMC_NAND_TypeDef * Instance***
- ***FMC_NAND_InitTypeDef Init***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_NAND_StateTypeDef State***
- ***NAND_DeviceConfigTypeDef Config***

Field Documentation

- ***FMC_NAND_TypeDef* NAND_HandleTypeDef::Instance***
  Register base address
- ***FMC_NAND_InitTypeDef NAND_HandleTypeDef::Init***
  NAND device control configuration parameters
- ***HAL_LockTypeDef NAND_HandleTypeDef::Lock***
  NAND locking object
- ***__IO HAL_NAND_StateTypeDef NAND_HandleTypeDef::State***
  NAND device access state
- ***NAND_DeviceConfigTypeDef NAND_HandleTypeDef::Config***
  NAND phusical characteristic information structure

31.2 NAND Firmware driver API description

31.2.1 How to use this driver

This driver is a generic layered driver which contains a set of APIs used to control NAND flash memories. It uses the FMC layer functions to interface with NAND devices. This driver is used as follows:

- NAND flash memory configuration sequence using the function HAL_NAND_Init() with control and timing parameters for both common and attribute spaces.
- Read NAND flash memory maker and device IDs using the function HAL_NAND_Read_ID(). The read information is stored in the NAND_ID_TypeDef structure declared by the function caller.
- Access NAND flash memory by read/write operations using the functions HAL_NAND_Read_Page_8b()/HAL_NAND_Read_SpareArea_8b(), HAL_NAND_Write_Page_8b()/HAL_NAND_Write_SpareArea_8b(), HAL_NAND_Read_Page_16b()/HAL_NAND_Read_SpareArea_16b(), HAL_NAND_Write_Page_16b()/HAL_NAND_Write_SpareArea_16b() to read/write page(s)/spare area(s). These functions use specific device information (Block, page

size..) predefined by the user in the HAL_NAND_Info_TypeDef structure. The read/write address information is contained by the Nand_Address_Typedef structure passed as parameter.

- Perform NAND flash Reset chip operation using the function HAL_NAND_Reset().
- Perform NAND flash erase block operation using the function HAL_NAND_Erase_Block(). The erase block address information is contained in the Nand_Address_Typedef structure passed as parameter.
- Read the NAND flash status operation using the function HAL_NAND_Read_Status().
- You can also control the NAND device by calling the control APIs HAL_NAND_ECC_Enable()/ HAL_NAND_ECC_Disable() to respectively enable/disable the ECC code correction feature or the function HAL_NAND_GetECC() to get the ECC correction code.
- You can monitor the NAND device HAL state by calling the function HAL_NAND_GetState()



This driver is a set of generic APIs which handle standard NAND flash operations. If a NAND flash device contains different operations and/or implementations, it should be implemented separately.

31.2.2 NAND Initialization and de-initialization functions

This section provides functions allowing to initialize/de-initialize the NAND memory

This section contains the following APIs:

- ***HAL_NAND_Init()***
- ***HAL_NAND_DeInit()***
- ***HAL_NAND_MspInit()***
- ***HAL_NAND_MspDeInit()***
- ***HAL_NAND_IRQHandler()***
- ***HAL_NAND_ITCallback()***
- ***HAL_NAND_ConfigDevice()***
- ***HAL_NAND_Read_ID()***

31.2.3 NAND Input and Output functions

This section provides functions allowing to use and control the NAND memory

This section contains the following APIs:

- ***HAL_NAND_Read_ID()***
- ***HAL_NAND_Reset()***
- ***HAL_NAND_ConfigDevice()***
- ***HAL_NAND_Read_Page_8b()***
- ***HAL_NAND_Read_Page_16b()***
- ***HAL_NAND_Write_Page_8b()***
- ***HAL_NAND_Write_Page_16b()***
- ***HAL_NAND_Read_SpareArea_8b()***
- ***HAL_NAND_Read_SpareArea_16b()***
- ***HAL_NAND_Write_SpareArea_8b()***
- ***HAL_NAND_Write_SpareArea_16b()***
- ***HAL_NAND_Erase_Block()***
- ***HAL_NAND_Read_Status()***
- ***HAL_NAND_Address_Inc()***

31.2.4 NAND Control functions

This subsection provides a set of functions allowing to control dynamically the NAND interface.

This section contains the following APIs:

- ***HAL_NAND_ECC_Enable()***
- ***HAL_NAND_ECC_Disable()***
- ***HAL_NAND_GetECC()***

31.2.5 NAND State functions

This subsection permits to get in run-time the status of the NAND controller and the data flow.

This section contains the following APIs:

- ***HAL_NAND_GetState()***

31.2.6 Detailed description of functions

HAL_NAND_Init

Function name	**HAL_StatusTypeDef HAL_NAND_Init (NAND_HandleTypeDef * hnand, FMC_NAND_PCC_TimingTypeDef * ComSpace_Timing, FMC_NAND_PCC_TimingTypeDef * AttSpace_Timing)**
Function description	Perform NAND memory Initialization sequence.
Parameters	• **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module. • **ComSpace_Timing:** pointer to Common space timing structure • **AttSpace_Timing:** pointer to Attribute space timing structure
Return values	• **HAL:** status

HAL_NAND_DeInit

Function name	**HAL_StatusTypeDef HAL_NAND_DeInit (NAND_HandleTypeDef * hnand)**
Function description	Perform NAND memory De-Initialization sequence.
Parameters	• **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.
Return values	• **HAL:** status

HAL_NAND_ConfigDevice

Function name	**HAL_StatusTypeDef HAL_NAND_ConfigDevice (NAND_HandleTypeDef * hnand, NAND_DeviceConfigTypeDef * pDeviceConfig)**
Function description	Configure the device: Enter the physical parameters of the device.
Parameters	• **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.

- **pDeviceConfig:** pointer to NAND_DeviceConfigTypeDef structure

Return values
- **HAL:** status

HAL_NAND_Read_ID

Function name **HAL_StatusTypeDef HAL_NAND_Read_ID (NAND_HandleTypeDef * hnand, NAND_IDTypeDef * pNAND_ID)**

Function description Read the NAND memory electronic signature.

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.
- **pNAND_ID:** NAND ID structure

Return values
- **HAL:** status

HAL_NAND_MspInit

Function name **void HAL_NAND_MspInit (NAND_HandleTypeDef * hnand)**

Function description NAND MSP Init.

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.

Return values
- **None**

HAL_NAND_MspDeInit

Function name **void HAL_NAND_MspDeInit (NAND_HandleTypeDef * hnand)**

Function description NAND MSP DeInit.

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.

Return values
- **None**

HAL_NAND_IRQHandler

Function name **void HAL_NAND_IRQHandler (NAND_HandleTypeDef * hnand)**

Function description This function handles NAND device interrupt request.

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.

Return values
- **HAL:** status

HAL_NAND_ITCallback

Function name **void HAL_NAND_ITCallback (NAND_HandleTypeDef * hnand)**

Function description NAND interrupt feature callback.

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.

Return values
- **None**

HAL_NAND_Reset

Function name **HAL_StatusTypeDef HAL_NAND_Reset (NAND_HandleTypeDef * hnand)**

Function description NAND memory reset.

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.

Return values
- **HAL:** status

HAL_NAND_Read_Page_8b

Function name **HAL_StatusTypeDef HAL_NAND_Read_Page_8b (NAND_HandleTypeDef * hnand, NAND_AddressTypeDef * pAddress, uint8_t * pBuffer, uint32_t NumPageToRead)**

Function description Read Page(s) from NAND memory block (8-bits addressing)

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.
- **pAddress:** pointer to NAND address structure
- **pBuffer:** pointer to destination read buffer
- **NumPageToRead:** number of pages to read from block

Return values
- **HAL:** status

HAL_NAND_Write_Page_8b

Function name **HAL_StatusTypeDef HAL_NAND_Write_Page_8b (NAND_HandleTypeDef * hnand, NAND_AddressTypeDef * pAddress, uint8_t * pBuffer, uint32_t NumPageToWrite)**

Function description Write Page(s) to NAND memory block (8-bits addressing)

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.
- **pAddress:** pointer to NAND address structure
- **pBuffer:** pointer to source buffer to write
- **NumPageToWrite:** : number of pages to write to block

Return values
- **HAL:** status

HAL_NAND_Read_SpareArea_8b

Function name **HAL_StatusTypeDef HAL_NAND_Read_SpareArea_8b (NAND_HandleTypeDef * hnand, NAND_AddressTypeDef * pAddress, uint8_t * pBuffer, uint32_t NumSpareAreaToRead)**

Function description Read Spare area(s) from NAND memory.

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.
- **pAddress:** pointer to NAND address structure
- **pBuffer:** pointer to source buffer to write

- **NumSpareAreaToRead:** Number of spare area to read

Return values
- **HAL:** status

HAL_NAND_Write_SpareArea_8b

Function name
HAL_StatusTypeDef HAL_NAND_Write_SpareArea_8b (NAND_HandleTypeDef * hnand, NAND_AddressTypeDef * pAddress, uint8_t * pBuffer, uint32_t NumSpareAreaTowrite)

Function description
Write Spare area(s) to NAND memory.

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.
- **pAddress:** pointer to NAND address structure
- **pBuffer:** pointer to source buffer to write
- **NumSpareAreaTowrite:** : number of spare areas to write to block

Return values
- **HAL:** status

HAL_NAND_Read_Page_16b

Function name
HAL_StatusTypeDef HAL_NAND_Read_Page_16b (NAND_HandleTypeDef * hnand, NAND_AddressTypeDef * pAddress, uint16_t * pBuffer, uint32_t NumPageToRead)

Function description
Read Page(s) from NAND memory block (16-bits addressing)

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.
- **pAddress:** pointer to NAND address structure
- **pBuffer:** pointer to destination read buffer. pBuffer should be 16bits aligned
- **NumPageToRead:** number of pages to read from block

Return values
- **HAL:** status

HAL_NAND_Write_Page_16b

Function name
HAL_StatusTypeDef HAL_NAND_Write_Page_16b (NAND_HandleTypeDef * hnand, NAND_AddressTypeDef * pAddress, uint16_t * pBuffer, uint32_t NumPageToWrite)

Function description
Write Page(s) to NAND memory block (16-bits addressing)

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.
- **pAddress:** pointer to NAND address structure
- **pBuffer:** pointer to source buffer to write. pBuffer should be 16bits aligned
- **NumPageToWrite:** : number of pages to write to block

Return values
- **HAL:** status

HAL_NAND_Read_SpareArea_16b

Function name	**HAL_StatusTypeDef HAL_NAND_Read_SpareArea_16b (NAND_HandleTypeDef * hnand, NAND_AddressTypeDef * pAddress, uint16_t * pBuffer, uint32_t NumSpareAreaToRead)**
Function description	Read Spare area(s) from NAND memory (16-bits addressing)
Parameters	• **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module. • **pAddress:** pointer to NAND address structure • **pBuffer:** pointer to source buffer to write. pBuffer should be 16bits aligned. • **NumSpareAreaToRead:** Number of spare area to read
Return values	• **HAL:** status

HAL_NAND_Write_SpareArea_16b

Function name	**HAL_StatusTypeDef HAL_NAND_Write_SpareArea_16b (NAND_HandleTypeDef * hnand, NAND_AddressTypeDef * pAddress, uint16_t * pBuffer, uint32_t NumSpareAreaTowrite)**
Function description	Write Spare area(s) to NAND memory (16-bits addressing)
Parameters	• **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module. • **pAddress:** pointer to NAND address structure • **pBuffer:** pointer to source buffer to write. pBuffer should be 16bits aligned. • **NumSpareAreaTowrite:** : number of spare areas to write to block
Return values	• **HAL:** status

HAL_NAND_Erase_Block

Function name	**HAL_StatusTypeDef HAL_NAND_Erase_Block (NAND_HandleTypeDef * hnand, NAND_AddressTypeDef * pAddress)**
Function description	NAND memory Block erase.
Parameters	• **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module. • **pAddress:** pointer to NAND address structure
Return values	• **HAL:** status

HAL_NAND_Read_Status

Function name	**uint32_t HAL_NAND_Read_Status (NAND_HandleTypeDef * hnand)**
Function description	NAND memory read status.
Parameters	• **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.
Return values	• **NAND:** status

HAL_NAND_Address_Inc

Function name **uint32_t HAL_NAND_Address_Inc (NAND_HandleTypeDef * hnand, NAND_AddressTypeDef * pAddress)**

Function description Increment the NAND memory address.

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.
- **pAddress:** pointer to NAND address structure

Return values
- **The:** new status of the increment address operation. It can be:
  - NAND_VALID_ADDRESS: When the new address is valid address
  - NAND_INVALID_ADDRESS: When the new address is invalid address

HAL_NAND_ECC_Enable

Function name **HAL_StatusTypeDef HAL_NAND_ECC_Enable (NAND_HandleTypeDef * hnand)**

Function description Enables dynamically NAND ECC feature.

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.

Return values
- **HAL:** status

HAL_NAND_ECC_Disable

Function name **HAL_StatusTypeDef HAL_NAND_ECC_Disable (NAND_HandleTypeDef * hnand)**

Function description Disables dynamically FMC_NAND ECC feature.

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.

Return values
- **HAL:** status

HAL_NAND_GetECC

Function name **HAL_StatusTypeDef HAL_NAND_GetECC (NAND_HandleTypeDef * hnand, uint32_t * ECCval, uint32_t Timeout)**

Function description Disables dynamically NAND ECC feature.

Parameters
- **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.
- **ECCval:** pointer to ECC value
- **Timeout:** maximum timeout to wait

Return values
- **HAL:** status

HAL_NAND_GetState

Function name	**HAL_NAND_StateTypeDef HAL_NAND_GetState (NAND_HandleTypeDef * hnand)**
Function description	return the NAND state
Parameters	• **hnand:** pointer to a NAND_HandleTypeDef structure that contains the configuration information for NAND module.
Return values	• **HAL:** state

31.3 NAND Firmware driver defines

31.3.1 NAND

NAND Exported Macros

__HAL_NAND_RESET_HANDLE_STATE

Description:

- Reset NAND handle state.

Parameters:

- __HANDLE__: specifies the NAND handle.

Return value:

- None

32 HAL NOR Generic Driver

32.1 NOR Firmware driver registers structures

32.1.1 NOR_IDTypeDef

Data Fields

- ***uint16_t Manufacturer_Code***
- ***uint16_t Device_Code1***
- ***uint16_t Device_Code2***
- ***uint16_t Device_Code3***

Field Documentation

- ***uint16_t NOR_IDTypeDef::Manufacturer_Code***
  Defines the device's manufacturer code used to identify the memory
- ***uint16_t NOR_IDTypeDef::Device_Code1***
- ***uint16_t NOR_IDTypeDef::Device_Code2***
- ***uint16_t NOR_IDTypeDef::Device_Code3***
  Defines the device's codes used to identify the memory. These codes can be accessed by performing read operations with specific control signals and addresses set.They can also be accessed by issuing an Auto Select command.

32.1.2 NOR_CFITypeDef

Data Fields

- ***uint16_t CFI_1***
- ***uint16_t CFI_2***
- ***uint16_t CFI_3***
- ***uint16_t CFI_4***

Field Documentation

- ***uint16_t NOR_CFITypeDef::CFI_1***
- ***uint16_t NOR_CFITypeDef::CFI_2***
- ***uint16_t NOR_CFITypeDef::CFI_3***
- ***uint16_t NOR_CFITypeDef::CFI_4***
  Defines the information stored in the memory's Common flash interface which contains a description of various electrical and timing parameters, density information and functions supported by the memory.

32.1.3 NOR_HandleTypeDef

Data Fields

- ***FMC_NORSRAM_TypeDef * Instance***
- ***FMC_NORSRAM_EXTENDED_TypeDef * Extended***
- ***FMC_NORSRAM_InitTypeDef Init***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_NOR_StateTypeDef State***

Field Documentation

- ***FMC_NORSRAM_TypeDef* NOR_HandleTypeDef::Instance***
  Register base address

- ***FMC_NORSRAM_EXTENDED_TypeDef* NOR_HandleTypeDef::Extended***
  Extended mode register base address
- ***FMC_NORSRAM_InitTypeDef NOR_HandleTypeDef::Init***
  NOR device control configuration parameters
- ***HAL_LockTypeDef NOR_HandleTypeDef::Lock***
  NOR locking object
- ***__IO HAL_NOR_StateTypeDef NOR_HandleTypeDef::State***
  NOR device access state

32.2 NOR Firmware driver API description

32.2.1 How to use this driver

This driver is a generic layered driver which contains a set of APIs used to control NOR flash memories. It uses the FMC layer functions to interface with NOR devices. This driver is used as follows:

- NOR flash memory configuration sequence using the function HAL_NOR_Init() with control and timing parameters for both normal and extended mode.
- Read NOR flash memory manufacturer code and device IDs using the function HAL_NOR_Read_ID(). The read information is stored in the NOR_ID_TypeDef structure declared by the function caller.
- Access NOR flash memory by read/write data unit operations using the functions HAL_NOR_Read(), HAL_NOR_Program().
- Perform NOR flash erase block/chip operations using the functions HAL_NOR_Erase_Block() and HAL_NOR_Erase_Chip().
- Read the NOR flash CFI (common flash interface) IDs using the function HAL_NOR_Read_CFI(). The read information is stored in the NOR_CFI_TypeDef structure declared by the function caller.
- You can also control the NOR device by calling the control APIs HAL_NOR_WriteOperation_Enable()/ HAL_NOR_WriteOperation_Disable() to respectively enable/disable the NOR write operation
- You can monitor the NOR device HAL state by calling the function HAL_NOR_GetState()



This driver is a set of generic APIs which handle standard NOR flash operations. If a NOR flash device contains different operations and/or implementations, it should be implemented separately.

NOR HAL driver macros list

Below the list of most used macros in NOR HAL driver.

- NOR_WRITE: NOR memory write data to specified address

32.2.2 NOR Initialization and de_initialization functions

This section provides functions allowing to initialize/de-initialize the NOR memory

This section contains the following APIs:

- ***HAL_NOR_Init()***
- ***HAL_NOR_DeInit()***
- ***HAL_NOR_MspInit()***
- ***HAL_NOR_MspDeInit()***
- ***HAL_NOR_MspWait()***

32.2.3 NOR Input and Output functions

This section provides functions allowing to use and control the NOR memory

This section contains the following APIs:

- ***HAL_NOR_Read_ID()***
- ***HAL_NOR_ReturnToReadMode()***
- ***HAL_NOR_Read()***
- ***HAL_NOR_Program()***
- ***HAL_NOR_ReadBuffer()***
- ***HAL_NOR_ProgramBuffer()***
- ***HAL_NOR_Erase_Block()***
- ***HAL_NOR_Erase_Chip()***
- ***HAL_NOR_Read_CFI()***

32.2.4 NOR Control functions

This subsection provides a set of functions allowing to control dynamically the NOR interface.

This section contains the following APIs:

- ***HAL_NOR_WriteOperation_Enable()***
- ***HAL_NOR_WriteOperation_Disable()***

32.2.5 NOR State functions

This subsection permits to get in run-time the status of the NOR controller and the data flow.

This section contains the following APIs:

- ***HAL_NOR_GetState()***
- ***HAL_NOR_GetStatus()***

32.2.6 Detailed description of functions

HAL_NOR_Init

Function name	**HAL_StatusTypeDef HAL_NOR_Init (NOR_HandleTypeDef * hnor, FMC_NORSRAM_TimingTypeDef * Timing, FMC_NORSRAM_TimingTypeDef * ExtTiming)**
Function description	Perform the NOR memory Initialization sequence.
Parameters	• **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module. • **Timing:** pointer to NOR control timing structure • **ExtTiming:** pointer to NOR extended mode timing structure
Return values	• **HAL:** status

HAL_NOR_DeInit

Function name	**HAL_StatusTypeDef HAL_NOR_DeInit (NOR_HandleTypeDef * hnor)**
Function description	Perform NOR memory De-Initialization sequence.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.

Return values
- **HAL:** status

HAL_NOR_MspInit

Function name **void HAL_NOR_MspInit (NOR_HandleTypeDef * hnor)**

Function description NOR MSP Init.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.

Return values
- **None**

HAL_NOR_MspDeInit

Function name **void HAL_NOR_MspDeInit (NOR_HandleTypeDef * hnor)**

Function description NOR MSP DeInit.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.

Return values
- **None**

HAL_NOR_MspWait

Function name **void HAL_NOR_MspWait (NOR_HandleTypeDef * hnor, uint32_t Timeout)**

Function description NOR MSP Wait fro Ready/Busy signal.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.
- **Timeout:** Maximum timeout value

Return values
- **None**

HAL_NOR_Read_ID

Function name **HAL_StatusTypeDef HAL_NOR_Read_ID (NOR_HandleTypeDef * hnor, NOR_IDTypeDef * pNOR_ID)**

Function description Read NOR flash IDs.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.
- **pNOR_ID:** pointer to NOR ID structure

Return values
- **HAL:** status

HAL_NOR_ReturnToReadMode

Function name **HAL_StatusTypeDef HAL_NOR_ReturnToReadMode (NOR_HandleTypeDef * hnor)**

Function description Returns the NOR memory to Read mode.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that

contains the configuration information for NOR module.

Return values
- **HAL:** status

HAL_NOR_Read

Function name **HAL_StatusTypeDef HAL_NOR_Read (NOR_HandleTypeDef * hnor, uint32_t * pAddress, uint16_t * pData)**

Function description Read data from NOR memory.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.
- **pAddress:** pointer to Device address
- **pData:** pointer to read data

Return values
- **HAL:** status

HAL_NOR_Program

Function name **HAL_StatusTypeDef HAL_NOR_Program (NOR_HandleTypeDef * hnor, uint32_t * pAddress, uint16_t * pData)**

Function description Program data to NOR memory.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.
- **pAddress:** Device address
- **pData:** pointer to the data to write

Return values
- **HAL:** status

HAL_NOR_ReadBuffer

Function name **HAL_StatusTypeDef HAL_NOR_ReadBuffer (NOR_HandleTypeDef * hnor, uint32_t uwAddress, uint16_t * pData, uint32_t uwBufferSize)**

Function description Reads a block of data from the FMC NOR memory.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.
- **uwAddress:** NOR memory internal address to read from.
- **pData:** pointer to the buffer that receives the data read from the NOR memory.
- **uwBufferSize:** number of Half word to read.

Return values
- **HAL:** status

HAL_NOR_ProgramBuffer

Function name **HAL_StatusTypeDef HAL_NOR_ProgramBuffer (NOR_HandleTypeDef * hnor, uint32_t uwAddress, uint16_t * pData, uint32_t uwBufferSize)**

Function description Writes a half-word buffer to the FMC NOR memory.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.

- **uwAddress:** NOR memory internal address from which the data
- **pData:** pointer to source data buffer.
- **uwBufferSize:** number of Half words to write.

Return values
- **HAL:** status

Notes
- Some NOR memory need Address aligned to xx bytes (can be aligned to 64 bytes boundary for example).
- The maximum buffer size allowed is NOR memory dependent (can be 64 Bytes max for example).

HAL_NOR_Erase_Block

Function name **HAL_StatusTypeDef HAL_NOR_Erase_Block (NOR_HandleTypeDef * hnor, uint32_t BlockAddress, uint32_t Address)**

Function description Erase the specified block of the NOR memory.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.
- **BlockAddress:** Block to erase address
- **Address:** Device address

Return values
- **HAL:** status

HAL_NOR_Erase_Chip

Function name **HAL_StatusTypeDef HAL_NOR_Erase_Chip (NOR_HandleTypeDef * hnor, uint32_t Address)**

Function description Erase the entire NOR chip.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.
- **Address:** Device address

Return values
- **HAL:** status

HAL_NOR_Read_CFI

Function name **HAL_StatusTypeDef HAL_NOR_Read_CFI (NOR_HandleTypeDef * hnor, NOR_CFITypeDef * pNOR_CFI)**

Function description Read NOR flash CFI IDs.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.
- **pNOR_CFI:** pointer to NOR CFI IDs structure

Return values
- **HAL:** status

HAL_NOR_WriteOperation_Enable

Function name **HAL_StatusTypeDef HAL_NOR_WriteOperation_Enable (NOR_HandleTypeDef * hnor)**

Function description Enables dynamically NOR write operation.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.

Return values
- **HAL:** status

HAL_NOR_WriteOperation_Disable

Function name **HAL_StatusTypeDef HAL_NOR_WriteOperation_Disable (NOR_HandleTypeDef * hnor)**

Function description Disables dynamically NOR write operation.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.

Return values
- **HAL:** status

HAL_NOR_GetState

Function name **HAL_NOR_StateTypeDef HAL_NOR_GetState (NOR_HandleTypeDef * hnor)**

Function description return the NOR controller state

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.

Return values
- **NOR:** controller state

HAL_NOR_GetStatus

Function name **HAL_NOR_StatusTypeDef HAL_NOR_GetStatus (NOR_HandleTypeDef * hnor, uint32_t Address, uint32_t Timeout)**

Function description Returns the NOR operation status.

Parameters
- **hnor:** pointer to a NOR_HandleTypeDef structure that contains the configuration information for NOR module.
- **Address:** Device address
- **Timeout:** NOR progamming Timeout

Return values
- **NOR_Status:** The returned value can be: HAL_NOR_STATUS_SUCCESS, HAL_NOR_STATUS_ERROR or HAL_NOR_STATUS_TIMEOUT

32.3 NOR Firmware driver defines

32.3.1 NOR

NOR Exported Macros

__HAL_NOR_RESET_HANDLE_STATE **Description:**

- Reset NOR handle state.

Parameters:

- __HANDLE__: NOR handle

Return value:

- None

33 HAL OPAMP Generic Driver

33.1 OPAMP Firmware driver registers structures

33.1.1 OPAMP_InitTypeDef

Data Fields

- ***uint32_t Mode***
- ***uint32_t InvertingInput***
- ***uint32_t NonInvertingInput***
- ***uint32_t TimerControlledMuxmode***
- ***uint32_t InvertingInputSecondary***
- ***uint32_t NonInvertingInputSecondary***
- ***uint32_t PgaConnect***
- ***uint32_t PgaGain***
- ***uint32_t UserTrimming***
- ***uint32_t TrimmingValueP***
- ***uint32_t TrimmingValueN***

Field Documentation

- ***uint32_t OPAMP_InitTypeDef::Mode***
  Specifies the OPAMP mode This parameter must be a value of ***OPAMP_Mode*** mode is either Standalone, - Follower or PGA
- ***uint32_t OPAMP_InitTypeDef::InvertingInput***
  Specifies the inverting input in Standalone & Pga modesIn Standalone mode: i.e when mode is OPAMP_STANDALONE_MODE This parameter must be a value of ***OPAMP_InvertingInput*** InvertingInput is either VM0 or VM1In PGA mode: i.e when mode is OPAMP_PGA_MODE & in Follower mode i.e when mode is OPAMP_FOLLOWER_MODE This parameter is Not Applicable
- ***uint32_t OPAMP_InitTypeDef::NonInvertingInput***
  Specifies the non inverting input of the opamp: This parameter must be a value of ***OPAMP_NonInvertingInput*** NonInvertingInput is either VP0, VP1, VP2 or VP3
- ***uint32_t OPAMP_InitTypeDef::TimerControlledMuxmode***
  Specifies if the Timer controlled Mux mode is enabled or disabled This parameter must be a value of ***OPAMP_TimerControlledMuxmode***
- ***uint32_t OPAMP_InitTypeDef::InvertingInputSecondary***
  Specifies the inverting input (secondary) of the opamp when TimerControlledMuxmode is enabled i.e. when TimerControlledMuxmode is OPAMP_TIMERCONTROLLEDMUXMODE_ENABLEIn Standalone mode: i.e when mode is OPAMP_STANDALONE_MODE This parameter must be a value of ***OPAMP_InvertingInputSecondary*** InvertingInputSecondary is either VM0 or VM1In PGA mode: i.e when mode is OPAMP_PGA_MODE & in Follower mode i.e when mode is OPAMP_FOLLOWER_MODE This parameter is Not Applicable
- ***uint32_t OPAMP_InitTypeDef::NonInvertingInputSecondary***
  Specifies the non inverting input (secondary) of the opamp when TimerControlledMuxmode is enabled i.e. when TimerControlledMuxmode is OPAMP_TIMERCONTROLLEDMUXMODE_ENABLE This parameter must be a value of ***OPAMP_NonInvertingInputSecondary*** NonInvertingInput is either VP0, VP1, VP2 or VP3
- ***uint32_t OPAMP_InitTypeDef::PgaConnect***
  Specifies the inverting pin in PGA mode i.e. when mode is OPAMP_PGA_MODE This

parameter must be a value of ***OPAMP_PgaConnect*** Either: not connected, connected to VM0, connected to VM1 (VM0 or VM1 are typically used for external filtering)

- ***uint32_t OPAMP_InitTypeDef::PgaGain***
  Specifies the gain in PGA mode i.e. when mode is OPAMP_PGA_MODE. This parameter must be a value of ***OPAMP_PgaGain*** (2U, 4U, 8 or 16U)
- ***uint32_t OPAMP_InitTypeDef::UserTrimming***
  Specifies the trimming mode This parameter must be a value of ***OPAMP_UserTrimming*** UserTrimming is either factory or user trimming
- ***uint32_t OPAMP_InitTypeDef::TrimmingValueP***
  Specifies the offset trimming value (PMOS) i.e. when UserTrimming is OPAMP_TRIMMING_USER. This parameter must be a number between Min_Data = 1 and Max_Data = 31U
- ***uint32_t OPAMP_InitTypeDef::TrimmingValueN***
  Specifies the offset trimming value (NMOS) i.e. when UserTrimming is OPAMP_TRIMMING_USER. This parameter must be a number between Min_Data = 1 and Max_Data = 31U

33.1.2 OPAMP_HandleTypeDef

Data Fields

- ***OPAMP_TypeDef * Instance***
- ***OPAMP_InitTypeDef Init***
- ***HAL_StatusTypeDef Status***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_OPAMP_StateTypeDef State***

Field Documentation

- ***OPAMP_TypeDef* OPAMP_HandleTypeDef::Instance***
  OPAMP instance's registers base address
- ***OPAMP_InitTypeDef OPAMP_HandleTypeDef::Init***
  OPAMP required parameters
- ***HAL_StatusTypeDef OPAMP_HandleTypeDef::Status***
  OPAMP peripheral status
- ***HAL_LockTypeDef OPAMP_HandleTypeDef::Lock***
  Locking object
- ***__IO HAL_OPAMP_StateTypeDef OPAMP_HandleTypeDef::State***
  OPAMP communication state

33.2 OPAMP Firmware driver API description

33.2.1 OPAMP Peripheral Features

The device integrates up to 4 operational amplifiers OPAMP1, OPAMP2, OPAMP3 and OPAMP4:

1. The OPAMP(s) provides several exclusive running modes.
   – Standalone mode
   – Programmable Gain Amplifier (PGA) mode (Resistor feedback output)
   – Follower mode
2. The OPAMP(s) provide(s) calibration capabilities.
   – Calibration aims at correcting some offset for running mode.
   – The OPAMP uses either factory calibration settings OR user defined calibration (trimming) settings (i.e. trimming mode).
   – The user defined settings can be figured out using self calibration handled by HAL_OPAMP_SelfCalibrate, HAL_OPAMPEx_SelfCalibrateAll

  - HAL_OPAMP_SelfCalibrate:
  - Runs automatically the calibration in 2 steps. (90U% of VDDA for NMOS transistors, 10U% of VDDA for PMOS transistors). (As OPAMP is Rail-to-rail input/output, these 2 steps calibration is appropriate and enough in most cases).
  - Enables the user trimming mode
  - Updates the init structure with trimming values with fresh calibration results. The user may store the calibration results for larger (ex monitoring the trimming as a function of temperature for instance)
  - for STM32F3 devices having 2 or 4 OPAMPs HAL_OPAMPEx_SelfCalibrateAll runs calibration of 2 or 4 OPAMPs in parallel.
3. For any running mode, an additional Timer-controlled Mux (multiplexer) mode can be set on top.
  - Timer-controlled Mux mode allows Automatic switching between inverting and non-inverting input.
  - Hence on top of defaults (primary) inverting and non-inverting inputs, the user shall select secondary inverting and non inverting inputs.
  - TIM1 CC6 provides the alternate switching tempo between defaults (primary) and secondary inputs.
4. Running mode: Standalone mode
  - Gain is set externally (gain depends on external loads).
  - Follower mode also possible externally by connecting the inverting input to the output.
5. Running mode: Follower mode
  - No Inverting Input is connected.
6. Running mode: Programmable Gain Amplifier (PGA) mode (Resistor feedback output)
  - The OPAMP(s) output(s) can be internally connected to resistor feedback output.
  - OPAMP gain is either 2U, 4U, 8 or 16.

33.2.2 How to use this driver

Calibration

To run the opamp calibration self calibration:

1. Start calibration using HAL_OPAMP_SelfCalibrate. Store the calibration results.

Running mode

To use the opamp, perform the following steps:

1. Fill in the HAL_OPAMP_MspInit() to
  - Configure the opamp input AND output in analog mode using HAL_GPIO_Init() to map the opamp output to the GPIO pin.
2. Configure the opamp using HAL_OPAMP_Init() function:
  - Select the mode
  - Select the inverting input
  - Select the non-inverting input
  - Select if the Timer controlled Mux mode is enabled/disabled
  - If the Timer controlled Mux mode is enabled, select the secondary inverting input
  - If the Timer controlled Mux mode is enabled, Select the secondary non-inverting input
  - If PGA mode is enabled, Select if inverting input is connected.
  - Select either factory or user defined trimming mode.

  - If the user defined trimming mode is enabled, select PMOS & NMOS trimming values (typ. settings returned by HAL_OPAMP_SelfCalibrate function).
3. Enable the opamp using HAL_OPAMP_Start() function.
4. Disable the opamp using HAL_OPAMP_Stop() function.
5. Lock the opamp in running mode using HAL_OPAMP_Lock() function. From then The configuration can be modified
   - After HW reset
   - OR thanks to HAL_OPAMP_MspDeInit called (user defined) from HAL_OPAMP_DeInit.

Running mode: change of configuration while OPAMP ON

To Re-configure OPAMP when OPAMP is ON (change on the fly)

1. If needed, Fill in the HAL_OPAMP_MspInit()
   - This is the case for instance if you wish to use new OPAMP I/O
2. Configure the opamp using HAL_OPAMP_Init() function:
   - As in configure case, selects first the parameters you wish to modify.

33.2.3 Initialization and de-initialization functions

This section provides functions allowing to:

This section contains the following APIs:

- ***HAL_OPAMP_Init()***
- ***HAL_OPAMP_DeInit()***
- ***HAL_OPAMP_MspInit()***
- ***HAL_OPAMP_MspDeInit()***

33.2.4 IO operation functions

This subsection provides a set of functions allowing to manage the OPAMP data transfers.

This section contains the following APIs:

- ***HAL_OPAMP_Start()***
- ***HAL_OPAMP_Stop()***
- ***HAL_OPAMP_SelfCalibrate()***

33.2.5 Peripheral Control functions

This subsection provides a set of functions allowing to control the OPAMP data transfers.

This section contains the following APIs:

- ***HAL_OPAMP_Lock()***

33.2.6 Peripheral State functions

This subsection permit to get in run-time the status of the peripheral and the data flow.

This section contains the following APIs:

- ***HAL_OPAMP_GetState()***
- ***HAL_OPAMP_GetTrimOffset()***

33.2.7 Detailed description of functions

HAL_OPAMP_Init

Function name **HAL_StatusTypeDef HAL_OPAMP_Init (OPAMP_HandleTypeDef * hopamp)**

Function description Initializes the OPAMP according to the specified parameters in the OPAMP_InitTypeDef and create the associated handle.

Parameters
- **hopamp:** OPAMP handle

Return values
- **HAL:** status

Notes
- If the selected opamp is locked, initialization can't be performed. To unlock the configuration, perform a system reset.

HAL_OPAMP_DeInit

Function name **HAL_StatusTypeDef HAL_OPAMP_DeInit (OPAMP_HandleTypeDef * hopamp)**

Function description DeInitializes the OPAMP peripheral.

Parameters
- **hopamp:** OPAMP handle

Return values
- **HAL:** status

Notes
- Deinitialization can't be performed if the OPAMP configuration is locked. To unlock the configuration, perform a system reset.

HAL_OPAMP_MspInit

Function name **void HAL_OPAMP_MspInit (OPAMP_HandleTypeDef * hopamp)**

Function description Initializes the OPAMP MSP.

Parameters
- **hopamp:** OPAMP handle

Return values
- **None**

HAL_OPAMP_MspDeInit

Function name **void HAL_OPAMP_MspDeInit (OPAMP_HandleTypeDef * hopamp)**

Function description DeInitializes OPAMP MSP.

Parameters
- **hopamp:** OPAMP handle

Return values
- **None**

HAL_OPAMP_Start

Function name **HAL_StatusTypeDef HAL_OPAMP_Start (OPAMP_HandleTypeDef * hopamp)**

Function description Start the opamp.

Parameters
- **hopamp:** OPAMP handle

Return values
- **HAL:** status

HAL_OPAMP_Stop

Function name **HAL_StatusTypeDef HAL_OPAMP_Stop (OPAMP_HandleTypeDef * hopamp)**

Function description Stop the opamp.

Parameters
- **hopamp:** OPAMP handle

Return values
- **HAL:** status

HAL_OPAMP_SelfCalibrate

Function name **HAL_StatusTypeDef HAL_OPAMP_SelfCalibrate (OPAMP_HandleTypeDef * hopamp)**

Function description Run the self calibration of one OPAMP.

Parameters
- **hopamp:** handle

Return values
- **Updated:** offset trimming values (PMOS & NMOS), user trimming is enabled
- **HAL:** status

Notes
- Calibration runs about 25 ms.

HAL_OPAMP_Lock

Function name **HAL_StatusTypeDef HAL_OPAMP_Lock (OPAMP_HandleTypeDef * hopamp)**

Function description Lock the selected opamp configuration.

Parameters
- **hopamp:** OPAMP handle

Return values
- **HAL:** status

HAL_OPAMP_GetState

Function name **HAL_OPAMP_StateTypeDef HAL_OPAMP_GetState (OPAMP_HandleTypeDef * hopamp)**

Function description Return the OPAMP state.

Parameters
- **hopamp:** OPAMP handle

Return values
- **HAL:** state

HAL_OPAMP_GetTrimOffset

Function name **OPAMP_TrimmingValueTypeDef HAL_OPAMP_GetTrimOffset (OPAMP_HandleTypeDef * hopamp, uint32_t trimmingoffset)**

Function description Return the OPAMP factory trimming value.

Parameters
- **hopamp:** OPAMP handle
- **trimmingoffset:** Trimming offset (P or N)

Return values

- **Trimming:** value (P or N): range: 0->31 or OPAMP_FACTORYTRIMMING_DUMMY if trimming value is not available

33.3 OPAMP Firmware driver defines

33.3.1 OPAMP

OPAMP CSR init register Mask

OPAMP_CSR_UPDATE_PARAMETERS_INIT_MASK

OPAMP Exported Macros

__HAL_OPAMP_RESET_HANDLE_STATE **Description:**

- Reset OPAMP handle state.

Parameters:

- __HANDLE__: OPAMP handle.

Return value:

- None

OPAMP Factory Trimming

OPAMP_FACTORYTRIMMING_DUMMY	Dummy trimming value
OPAMP_FACTORYTRIMMING_N	Offset trimming N
OPAMP_FACTORYTRIMMING_P	Offset trimming P

IS_OPAMP_FACTORYTRIMMING

OPAMP Input

OPAMP_INPUT_INVERTING	Inverting input
OPAMP_INPUT_NONINVERTING	Non inverting input

IS_OPAMP_INPUT

OPAMP Inverting Input

OPAMP_INVERTINGINPUT_IO0	inverting input connected to VM0
OPAMP_INVERTINGINPUT_IO1	inverting input connected to VM1

IS_OPAMP_INVERTING_INPUT

OPAMP Inverting Input Secondary

OPAMP_SEC_INVERTINGINPUT_IO0	VM0 (PC5 for OPAMP1 and OPAMP2, PB10 for OPAMP3 and OPAMP4) connected to OPAMPx inverting input
OPAMP_SEC_INVERTINGINPUT_IO1	VM1 (PA3 for OPAMP1, PA5 for OPAMP2, PB2 for OPAMP3, PD8 for OPAMP4) connected to OPAMPx inverting input

IS_OPAMP_SEC_INVERTINGINPUT

OPAMP Mode

OPAMP_STANDALONE_MODE	standalone mode

OPAMP_PGA_MODE	PGA mode
OPAMP_FOLLOWER_MODE	follower mode

IS_OPAMP_FUNCTIONAL_NORMALMODE

OPAMP Non Inverting Input

OPAMP_NONINVERTINGINPUT_IO0	VP0 (PA1 for OPAMP1, VP0 PA7 for OPAMP2, VP0 PB0 for OPAMP3, VP0 PB13 for OPAMP4) connected to OPAMPx non inverting input
OPAMP_NONINVERTINGINPUT_IO1	VP1 (PA7 for OPAMP1, VP3 PD14 for OPAMP2, VP1 PB13 for OPAMP3, VP1 PD11 for OPAMP4) connected to OPAMPx non inverting input
OPAMP_NONINVERTINGINPUT_IO2	VP2 (PA3 for OPAMP1, VP2 PB0 for OPAMP2, VP2 PA1 for OPAMP3, VP3 PA4 for OPAMP4) connected to OPAMPx non inverting input
OPAMP_NONINVERTINGINPUT_IO3	VP3 (PA5 for OPAMP1, VP1 PB14 for OPAMP2, VP3 PA5 for OPAMP3, VP2 PB11 for OPAMP4) connected to OPAMPx non inverting input

IS_OPAMP_NONINVERTING_INPUT

OPAMP Non Inverting Input Secondary

OPAMP_SEC_NONINVERTINGINPUT_IO0	VP0 (PA1 for OPAMP1, PA7 for OPAMP2, PB0 for OPAMP3, PB13 for OPAMP4) connected to OPAMPx non inverting input
OPAMP_SEC_NONINVERTINGINPUT_IO1	VP1 (PA7 for OPAMP1, PD14 for OPAMP2, PB13 for OPAMP3, PD11 for OPAMP4) connected to OPAMPx non inverting input
OPAMP_SEC_NONINVERTINGINPUT_IO2	VP2 (PA3 for OPAMP1, PB0 for OPAMP2, PA1 for OPAMP3, PA4 for OPAMP4) connected to OPAMPx non inverting input
OPAMP_SEC_NONINVERTINGINPUT_IO3	VP3 (PA5 for OPAMP1, PB14 for OPAMP2, PA5 for OPAMP3, PB11 for OPAMP4) connected to OPAMPx non inverting input

IS_OPAMP_SEC_NONINVERTINGINPUT

OPAMP Pga Connect

OPAMP_PGA_CONNECT_INVERTINGINPUT_NO	In PGA mode, the non inverting input is not connected
OPAMP_PGA_CONNECT_INVERTINGINPUT_IO0	In PGA mode, the non inverting input is connected to VM0
OPAMP_PGA_CONNECT_INVERTINGINPUT_IO1	In PGA mode, the non inverting input is connected to VM1

IS_OPAMP_PGACONNECT

OPAMP Pga Gain

OPAMP_PGA_GAIN_2	PGA gain = 2
OPAMP_PGA_GAIN_4	PGA gain = 4
OPAMP_PGA_GAIN_8	PGA gain = 8

OPAMP_PGA_GAIN_16 PGA gain = 16

IS_OPAMP_PGA_GAIN

OPAMP Timer Controlled Mux mode

OPAMP_TIMERCONTROLLEDMUXMODE_DISABLE Timer controlled Mux mode disabled

OPAMP_TIMERCONTROLLEDMUXMODE_ENABLE Timer controlled Mux mode enabled

IS_OPAMP_TIMERCONTROLLED_MUXMODE

OPAMP Trimming Value

IS_OPAMP_TRIMMINGVALUE

OPAMP User Trimming

OPAMP_TRIMMING_FACTORY Factory trimming

OPAMP_TRIMMING_USER User trimming

IS_OPAMP_TRIMMING

OPAMP_VREF_NOTCONNECTEDTO_ADC VREF not connected to ADC

OPAMP_VREF_CONNECTEDTO_ADC VREF not connected to ADC

IS_OPAMP_ALLOPAMPVREF_CONNECT

OPAMP VREF

OPAMP_VREF_3VDDA OPMAP Vref = 3.3U% VDDA

OPAMP_VREF_10VDDA OPMAP Vref = 10U% VDDA

OPAMP_VREF_50VDDA OPMAP Vref = 50U% VDDA

OPAMP_VREF_90VDDA OPMAP Vref = 90U% VDDA

IS_OPAMP_VREF

34 HAL OPAMP Extension Driver

34.1 OPAMPEx Firmware driver API description

34.1.1 Detailed description of functions

HAL_OPAMPEx_SelfCalibrateAll

Function name	**HAL_StatusTypeDef HAL_OPAMPEx_SelfCalibrateAll (OPAMP_HandleTypeDef * hopamp1, OPAMP_HandleTypeDef * hopamp2, OPAMP_HandleTypeDef * hopamp3, OPAMP_HandleTypeDef * hopamp4)**
Function description	Run the self calibration of 4 OPAMPs in parallel.
Parameters	• **hopamp1:** handle • **hopamp2:** handle • **hopamp3:** handle • **hopamp4:** handle
Return values	• **HAL:** status
Notes	• Updated offset trimming values (PMOS & NMOS), user trimming is enabled • Calibration runs about 25 ms.

35 HAL PCCARD Generic Driver

35.1 PCCARD Firmware driver registers structures

35.1.1 PCCARD_HandleTypeDef

Data Fields

- ***FMC_PCCARD_TypeDef * Instance***
- ***FMC_PCCARD_InitTypeDef Init***
- ***__IO HAL_PCCARD_StateTypeDef State***
- ***HAL_LockTypeDef Lock***

Field Documentation

- ***FMC_PCCARD_TypeDef* PCCARD_HandleTypeDef::Instance***
  Register base address for PCCARD device
- ***FMC_PCCARD_InitTypeDef PCCARD_HandleTypeDef::Init***
  PCCARD device control configuration parameters
- ***__IO HAL_PCCARD_StateTypeDef PCCARD_HandleTypeDef::State***
  PCCARD device access state
- ***HAL_LockTypeDef PCCARD_HandleTypeDef::Lock***
  PCCARD Lock

35.2 PCCARD Firmware driver API description

35.2.1 How to use this driver

This driver is a generic layered driver which contains a set of APIs used to control PCCARD/compact flash memories. It uses the FMC layer functions to interface with PCCARD devices. This driver is used for:

- PCCARD/compact flash memory configuration sequence using the function HAL_PCCARD_Init() with control and timing parameters for both common and attribute spaces.
- Read PCCARD/compact flash memory maker and device IDs using the function HAL_PCCARD_Read_ID(). The read information is stored in the CompactFlash_ID structure declared by the function caller.
- Access PCCARD/compact flash memory by read/write operations using the functions HAL_PCCARD_Read_Sector()/HAL_PCCARD_Write_Sector(), to read/write sector.
- Perform PCCARD/compact flash Reset chip operation using the function HAL_PCCARD_Reset().
- Perform PCCARD/compact flash erase sector operation using the function HAL_PCCARD_Erase_Sector().
- Read the PCCARD/compact flash status operation using the function HAL_PCCARD_ReadStatus().
- You can monitor the PCCARD/compact flash device HAL state by calling the function HAL_PCCARD_GetState()



This driver is a set of generic APIs which handle standard PCCARD/compact flash operations. If a PCCARD/compact flash device contains different operations and/or implementations, it should be implemented separately.

35.2.2 PCCARD Initialization and de-initialization functions

This section provides functions allowing to initialize/de-initialize the PCCARD memory

This section contains the following APIs:

- *HAL_PCCARD_Init()*
- *HAL_PCCARD_DeInit()*
- *HAL_PCCARD_MspInit()*
- *HAL_PCCARD_MspDeInit()*

35.2.3 PCCARD Input Output and memory functions

This section provides functions allowing to use and control the PCCARD memory

This section contains the following APIs:

- *HAL_PCCARD_Read_ID()*
- *HAL_PCCARD_Read_Sector()*
- *HAL_PCCARD_Write_Sector()*
- *HAL_PCCARD_Erase_Sector()*
- *HAL_PCCARD_Reset()*
- *HAL_PCCARD_IRQHandler()*
- *HAL_PCCARD_ITCallback()*

35.2.4 PCCARD Peripheral State functions

This subsection permits to get in run-time the status of the PCCARD controller and the data flow.

This section contains the following APIs:

- *HAL_PCCARD_GetState()*
- *HAL_PCCARD_GetStatus()*
- *HAL_PCCARD_ReadStatus()*

35.2.5 Detailed description of functions

HAL_PCCARD_Init

Function name	**HAL_StatusTypeDef HAL_PCCARD_Init (PCCARD_HandleTypeDef * hpccard, FMC_NAND_PCC_TimingTypeDef * ComSpaceTiming, FMC_NAND_PCC_TimingTypeDef * AttSpaceTiming, FMC_NAND_PCC_TimingTypeDef * IOSpaceTiming)**
Function description	Perform the PCCARD memory Initialization sequence.
Parameters	• **hpccard:** pointer to a PCCARD_HandleTypeDef structure that contains the configuration information for PCCARD module. • **ComSpaceTiming:** Common space timing structure • **AttSpaceTiming:** Attribute space timing structure • **IOSpaceTiming:** IO space timing structure
Return values	• **HAL:** status

HAL_PCCARD_DeInit

Function name **HAL_StatusTypeDef HAL_PCCARD_DeInit (PCCARD_HandleTypeDef * hpccard)**

Function description Perform the PCCARD memory De-initialization sequence.

Parameters
- **hpccard:** pointer to a PCCARD_HandleTypeDef structure that contains the configuration information for PCCARD module.

Return values
- **HAL:** status

HAL_PCCARD_MspInit

Function name **void HAL_PCCARD_MspInit (PCCARD_HandleTypeDef * hpccard)**

Function description PCCARD MSP Init.

Parameters
- **hpccard:** pointer to a PCCARD_HandleTypeDef structure that contains the configuration information for PCCARD module.

Return values
- **None**

HAL_PCCARD_MspDeInit

Function name **void HAL_PCCARD_MspDeInit (PCCARD_HandleTypeDef * hpccard)**

Function description PCCARD MSP DeInit.

Parameters
- **hpccard:** pointer to a PCCARD_HandleTypeDef structure that contains the configuration information for PCCARD module.

Return values
- **None**

HAL_PCCARD_Read_ID

Function name **HAL_StatusTypeDef HAL_PCCARD_Read_ID (PCCARD_HandleTypeDef * hpccard, uint8_t CompactFlash_ID, uint8_t * pStatus)**

Function description Read Compact Flash's ID.

Parameters
- **hpccard:** pointer to a PCCARD_HandleTypeDef structure that contains the configuration information for PCCARD module.
- **CompactFlash_ID:** Compact flash ID structure.
- **pStatus:** pointer to compact flash status

Return values
- **HAL:** status

HAL_PCCARD_Write_Sector

Function name **HAL_StatusTypeDef HAL_PCCARD_Write_Sector (PCCARD_HandleTypeDef * hpccard, uint16_t * pBuffer, uint16_t SectorAddress, uint8_t * pStatus)**

Function description Write sector to PCCARD memory.

Parameters
- **hpccard:** pointer to a PCCARD_HandleTypeDef structure that contains the configuration information for PCCARD module.
- **pBuffer:** pointer to source write buffer
- **SectorAddress:** Sector address to write
- **pStatus:** pointer to CF status

Return values
- **HAL:** status

HAL_PCCARD_Read_Sector

Function name **HAL_StatusTypeDef HAL_PCCARD_Read_Sector (PCCARD_HandleTypeDef * hpccard, uint16_t * pBuffer, uint16_t SectorAddress, uint8_t * pStatus)**

Function description Read sector from PCCARD memory.

Parameters
- **hpccard:** pointer to a PCCARD_HandleTypeDef structure that contains the configuration information for PCCARD module.
- **pBuffer:** pointer to destination read buffer
- **SectorAddress:** Sector address to read
- **pStatus:** pointer to CF status

Return values
- **HAL:** status

HAL_PCCARD_Erase_Sector

Function name **HAL_StatusTypeDef HAL_PCCARD_Erase_Sector (PCCARD_HandleTypeDef * hpccard, uint16_t SectorAddress, uint8_t * pStatus)**

Function description Erase sector from PCCARD memory.

Parameters
- **hpccard:** pointer to a PCCARD_HandleTypeDef structure that contains the configuration information for PCCARD module.
- **SectorAddress:** Sector address to erase
- **pStatus:** pointer to CF status

Return values
- **HAL:** status

HAL_PCCARD_Reset

Function name **HAL_StatusTypeDef HAL_PCCARD_Reset (PCCARD_HandleTypeDef * hpccard)**

Function description Reset the PCCARD memory.

Parameters
- **hpccard:** pointer to a PCCARD_HandleTypeDef structure that contains the configuration information for PCCARD module.

Return values
- **HAL:** status

HAL_PCCARD_IRQHandler

Function name **void HAL_PCCARD_IRQHandler (PCCARD_HandleTypeDef * hpccard)**

Function description This function handles PCCARD device interrupt request.

Parameters
- **hpccard:** pointer to a PCCARD_HandleTypeDef structure that contains the configuration information for PCCARD module.

Return values
- **HAL:** status

HAL_PCCARD_ITCallback

Function name **void HAL_PCCARD_ITCallback (PCCARD_HandleTypeDef * hpccard)**

Function description PCCARD interrupt feature callback.

Parameters
- **hpccard:** pointer to a PCCARD_HandleTypeDef structure that contains the configuration information for PCCARD module.

Return values
- **None**

HAL_PCCARD_GetState

Function name **HAL_PCCARD_StateTypeDef HAL_PCCARD_GetState (PCCARD_HandleTypeDef * hpccard)**

Function description return the PCCARD controller state

Parameters
- **hpccard:** pointer to a PCCARD_HandleTypeDef structure that contains the configuration information for PCCARD module.

Return values
- **HAL:** state

HAL_PCCARD_GetStatus

Function name **HAL_PCCARD_StatusTypeDef HAL_PCCARD_GetStatus (PCCARD_HandleTypeDef * hpccard)**

Function description Get the compact flash memory status.

Parameters
- **hpccard:** pointer to a PCCARD_HandleTypeDef structure that contains the configuration information for PCCARD module.

Return values
- **New:** status of the CF operation. This parameter can be:
  - CompactFlash_TIMEOUT_ERROR: when the previous operation generate a Timeout error
  - CompactFlash_READY: when memory is ready for the next operation

HAL_PCCARD_ReadStatus

Function name **HAL_PCCARD_StatusTypeDef HAL_PCCARD_ReadStatus (PCCARD_HandleTypeDef * hpccard)**

Function description Reads the Compact Flash memory status using the Read status command.

Parameters
- **hpccard:** pointer to a PCCARD_HandleTypeDef structure that contains the configuration information for PCCARD module.

Return values
- **The:** status of the Compact Flash memory. This parameter can be:
  - CompactFlash_BUSY: when memory is busy
  - CompactFlash_READY: when memory is ready for the next operation
  - CompactFlash_ERROR: when the previous operation gererates error

35.3 PCCARD Firmware driver defines

35.3.1 PCCARD

PCCARD Exported Macros

__HAL_PCCARD_RESET_HANDLE_STATE

Description:
- Reset PCCARD handle state.

Parameters:
- __HANDLE__: specifies the PCCARD handle.

Return value:
- None

36 HAL PCD Generic Driver

36.1 PCD Firmware driver registers structures

36.1.1 PCD_InitTypeDef

Data Fields

- ***uint32_t dev_endpoints***
- ***uint32_t speed***
- ***uint32_t ep0_mps***
- ***uint32_t phy_itface***
- ***uint32_t Sof_enable***
- ***uint32_t low_power_enable***
- ***uint32_t lpm_enable***
- ***uint32_t battery_charging_enable***

Field Documentation

- ***uint32_t PCD_InitTypeDef::dev_endpoints***
  Device Endpoints number. This parameter depends on the used USB core. This parameter must be a number between Min_Data = 1 and Max_Data = 15
- ***uint32_t PCD_InitTypeDef::speed***
  USB Core speed. This parameter can be any value of ***PCD_Core_Speed***
- ***uint32_t PCD_InitTypeDef::ep0_mps***
  Set the Endpoint 0 Max Packet size. This parameter can be any value of ***PCD_EP0_MPS***
- ***uint32_t PCD_InitTypeDef::phy_itface***
  Select the used PHY interface. This parameter can be any value of ***PCD_Core_PHY***
- ***uint32_t PCD_InitTypeDef::Sof_enable***
  Enable or disable the output of the SOF signal. This parameter can be set to ENABLE or DISABLE
- ***uint32_t PCD_InitTypeDef::low_power_enable***
  Enable or disable Low Power mode This parameter can be set to ENABLE or DISABLE
- ***uint32_t PCD_InitTypeDef::lpm_enable***
  Enable or disable the Link Power Management . This parameter can be set to ENABLE or DISABLE
- ***uint32_t PCD_InitTypeDef::battery_charging_enable***
  Enable or disable Battery charging. This parameter can be set to ENABLE or DISABLE

36.1.2 PCD_EPTypeDef

Data Fields

- ***uint8_t num***
- ***uint8_t is_in***
- ***uint8_t is_stall***
- ***uint8_t type***
- ***uint16_t pmaadress***
- ***uint16_t pmaaddr0***
- ***uint16_t pmaaddr1***
- ***uint8_t doublebuffer***

- ***uint32_t maxpacket***
- ***uint8_t * xfer_buff***
- ***uint32_t xfer_len***
- ***uint32_t xfer_count***

Field Documentation

- ***uint8_t PCD_EPTypeDef::num***
  Endpoint number This parameter must be a number between Min_Data = 1 and Max_Data = 15
- ***uint8_t PCD_EPTypeDef::is_in***
  Endpoint direction This parameter must be a number between Min_Data = 0 and Max_Data = 1
- ***uint8_t PCD_EPTypeDef::is_stall***
  Endpoint stall condition This parameter must be a number between Min_Data = 0 and Max_Data = 1
- ***uint8_t PCD_EPTypeDef::type***
  Endpoint type This parameter can be any value of ***PCD_EP_Type***
- ***uint16_t PCD_EPTypeDef::pmaadress***
  PMA Address This parameter can be any value between Min_addr = 0 and Max_addr = 1K
- ***uint16_t PCD_EPTypeDef::pmaaddr0***
  PMA Address0 This parameter can be any value between Min_addr = 0 and Max_addr = 1K
- ***uint16_t PCD_EPTypeDef::pmaaddr1***
  PMA Address1 This parameter can be any value between Min_addr = 0 and Max_addr = 1K
- ***uint8_t PCD_EPTypeDef::doublebuffer***
  Double buffer enable This parameter can be 0 or 1
- ***uint32_t PCD_EPTypeDef::maxpacket***
  Endpoint Max packet size This parameter must be a number between Min_Data = 0 and Max_Data = 64KB
- ***uint8_t* PCD_EPTypeDef::xfer_buff***
  Pointer to transfer buffer
- ***uint32_t PCD_EPTypeDef::xfer_len***
  Current transfer length
- ***uint32_t PCD_EPTypeDef::xfer_count***
  Partial transfer length in case of multi packet transfer

36.1.3 PCD_HandleTypeDef

Data Fields

- ***PCD_TypeDef * Instance***
- ***PCD_InitTypeDef Init***
- ***__IO uint8_t USB_Address***
- ***PCD_EPTypeDef IN_ep***
- ***PCD_EPTypeDef OUT_ep***
- ***HAL_LockTypeDef Lock***
- ***__IO PCD_StateTypeDef State***
- ***uint32_t Setup***
- ***void * pData***

Field Documentation

- ***PCD_TypeDef* PCD_HandleTypeDef::Instance***
  Register base address

- ***PCD_InitTypeDef PCD_HandleTypeDef::Init***
  PCD required parameters
- ***__IO uint8_t PCD_HandleTypeDef::USB_Address***
  USB Address
- ***PCD_EPTypeDef PCD_HandleTypeDef::IN_ep[15]***
  IN endpoint parameters
- ***PCD_EPTypeDef PCD_HandleTypeDef::OUT_ep[15]***
  OUT endpoint parameters
- ***HAL_LockTypeDef PCD_HandleTypeDef::Lock***
  PCD peripheral status
- ***__IO PCD_StateTypeDef PCD_HandleTypeDef::State***
  PCD communication state
- ***uint32_t PCD_HandleTypeDef::Setup[12]***
  Setup packet buffer
- ***void* PCD_HandleTypeDef::pData***
  Pointer to upper stack Handler

36.2 PCD Firmware driver API description

36.2.1 How to use this driver

The PCD HAL driver can be used as follows:

1. Declare a PCD_HandleTypeDef handle structure, for example: PCD_HandleTypeDef hpcd;
2. Fill parameters of Init structure in HCD handle
3. Call HAL_PCD_Init() API to initialize the HCD peripheral (Core, Device core, ...)
4. Initialize the PCD low level resources through the HAL_PCD_MspInit() API:
   a. Enable the PCD/USB Low Level interface clock using
      – __HAL_RCC_USB_CLK_ENABLE();
   b. Initialize the related GPIO clocks
   c. Configure PCD pin-out
   d. Configure PCD NVIC interrupt
5. Associate the Upper USB device stack to the HAL PCD Driver:
   a. hpcd.pData = pdev;
6. Enable HCD transmission and reception:
   a. HAL_PCD_Start();

36.2.2 Initialization and de-initialization functions

This section provides functions allowing to:

This section contains the following APIs:

- ***HAL_PCD_Init()***
- ***HAL_PCD_DeInit()***
- ***HAL_PCD_MspInit()***
- ***HAL_PCD_MspDeInit()***

36.2.3 IO operation functions

This subsection provides a set of functions allowing to manage the PCD data transfers.

This section contains the following APIs:

- ***HAL_PCD_Start()***
- ***HAL_PCD_Stop()***
- ***HAL_PCD_IRQHandler()***

- *HAL_PCD_DataOutStageCallback()*
- *HAL_PCD_DataInStageCallback()*
- *HAL_PCD_SetupStageCallback()*
- *HAL_PCD_SOFCallback()*
- *HAL_PCD_ResetCallback()*
- *HAL_PCD_SuspendCallback()*
- *HAL_PCD_ResumeCallback()*
- *HAL_PCD_ISOOUTIncompleteCallback()*
- *HAL_PCD_ISOINIncompleteCallback()*
- *HAL_PCD_ConnectCallback()*
- *HAL_PCD_DisconnectCallback()*

36.2.4 Peripheral Control functions

This subsection provides a set of functions allowing to control the PCD data transfers.

This section contains the following APIs:

- *HAL_PCD_DevConnect()*
- *HAL_PCD_DevDisconnect()*
- *HAL_PCD_SetAddress()*
- *HAL_PCD_EP_Open()*
- *HAL_PCD_EP_Close()*
- *HAL_PCD_EP_Receive()*
- *HAL_PCD_EP_GetRxCount()*
- *HAL_PCD_EP_Transmit()*
- *HAL_PCD_EP_SetStall()*
- *HAL_PCD_EP_ClrStall()*
- *HAL_PCD_EP_Flush()*
- *HAL_PCD_ActivateRemoteWakeup()*
- *HAL_PCD_DeActivateRemoteWakeup()*
- *HAL_PCD_ActiveRemoteWakeup()*
- *HAL_PCD_DeActiveRemoteWakeup()*

36.2.5 Peripheral State functions

This subsection permits to get in run-time the status of the peripheral and the data flow.

This section contains the following APIs:

- *HAL_PCD_GetState()*

36.2.6 Detailed description of functions

HAL_PCD_Init

Function name	**HAL_StatusTypeDef HAL_PCD_Init (PCD_HandleTypeDef * hpcd)**
Function description	Initializes the PCD according to the specified parameters in the PCD_InitTypeDef and create the associated handle.
Parameters	• **hpcd:** PCD handle
Return values	• **HAL:** status

HAL_PCD_DeInit

Function name **HAL_StatusTypeDef HAL_PCD_DeInit (PCD_HandleTypeDef * hpcd)**

Function description DeInitializes the PCD peripheral.

Parameters
- **hpcd:** PCD handle

Return values
- **HAL:** status

HAL_PCD_MspInit

Function name **void HAL_PCD_MspInit (PCD_HandleTypeDef * hpcd)**

Function description Initializes the PCD MSP.

Parameters
- **hpcd:** PCD handle

Return values
- **None**

HAL_PCD_MspDeInit

Function name **void HAL_PCD_MspDeInit (PCD_HandleTypeDef * hpcd)**

Function description DeInitializes PCD MSP.

Parameters
- **hpcd:** PCD handle

Return values
- **None**

HAL_PCD_Start

Function name **HAL_StatusTypeDef HAL_PCD_Start (PCD_HandleTypeDef * hpcd)**

Function description Start the USB device.

Parameters
- **hpcd:** PCD handle

Return values
- **HAL:** status

HAL_PCD_Stop

Function name **HAL_StatusTypeDef HAL_PCD_Stop (PCD_HandleTypeDef * hpcd)**

Function description Stop the USB device.

Parameters
- **hpcd:** PCD handle

Return values
- **HAL:** status

HAL_PCD_IRQHandler

Function name **void HAL_PCD_IRQHandler (PCD_HandleTypeDef * hpcd)**

Function description This function handles PCD interrupt request.

Parameters
- **hpcd:** PCD handle

Return values
- **HAL:** status

HAL_PCD_DataOutStageCallback

Function name	**void HAL_PCD_DataOutStageCallback (PCD_HandleTypeDef * hpcd, uint8_t epnum)**
Function description	Data out stage callbacks.
Parameters	• **hpcd:** PCD handle • **epnum:** endpoint number
Return values	• **None**

HAL_PCD_DataInStageCallback

Function name	**void HAL_PCD_DataInStageCallback (PCD_HandleTypeDef * hpcd, uint8_t epnum)**
Function description	Data IN stage callbacks.
Parameters	• **hpcd:** PCD handle • **epnum:** endpoint number
Return values	• **None**

HAL_PCD_SetupStageCallback

Function name	**void HAL_PCD_SetupStageCallback (PCD_HandleTypeDef * hpcd)**
Function description	Setup stage callback.
Parameters	• **hpcd:** PCD handle
Return values	• **None**

HAL_PCD_SOFCallback

Function name	**void HAL_PCD_SOFCallback (PCD_HandleTypeDef * hpcd)**
Function description	USB Start Of Frame callbacks.
Parameters	• **hpcd:** PCD handle
Return values	• **None**

HAL_PCD_ResetCallback

Function name	**void HAL_PCD_ResetCallback (PCD_HandleTypeDef * hpcd)**
Function description	USB Reset callbacks.
Parameters	• **hpcd:** PCD handle
Return values	• **None**

HAL_PCD_SuspendCallback

Function name	**void HAL_PCD_SuspendCallback (PCD_HandleTypeDef * hpcd)**
Function description	Suspend event callbacks.

Parameters
- **hpcd:** PCD handle

Return values
- **None**

HAL_PCD_ResumeCallback

Function name **void HAL_PCD_ResumeCallback (PCD_HandleTypeDef * hpcd)**

Function description Resume event callbacks.

Parameters
- **hpcd:** PCD handle

Return values
- **None**

HAL_PCD_ISOOUTIncompleteCallback

Function name **void HAL_PCD_ISOOUTIncompleteCallback (PCD_HandleTypeDef * hpcd, uint8_t epnum)**

Function description Incomplete ISO OUT callbacks.

Parameters
- **hpcd:** PCD handle
- **epnum:** endpoint number

Return values
- **None**

HAL_PCD_ISOINIncompleteCallback

Function name **void HAL_PCD_ISOINIncompleteCallback (PCD_HandleTypeDef * hpcd, uint8_t epnum)**

Function description Incomplete ISO IN callbacks.

Parameters
- **hpcd:** PCD handle
- **epnum:** endpoint number

Return values
- **None**

HAL_PCD_ConnectCallback

Function name **void HAL_PCD_ConnectCallback (PCD_HandleTypeDef * hpcd)**

Function description Connection event callbacks.

Parameters
- **hpcd:** PCD handle

Return values
- **None**

HAL_PCD_DisconnectCallback

Function name **void HAL_PCD_DisconnectCallback (PCD_HandleTypeDef * hpcd)**

Function description Disconnection event callbacks.

Parameters
- **hpcd:** PCD handle

Return values
- **None**

HAL_PCD_DevConnect

Function name **HAL_StatusTypeDef HAL_PCD_DevConnect (PCD_HandleTypeDef * hpcd)**

Function description Connect the USB device.

Parameters
- **hpcd:** PCD handle

Return values
- **HAL:** status

HAL_PCD_DevDisconnect

Function name **HAL_StatusTypeDef HAL_PCD_DevDisconnect (PCD_HandleTypeDef * hpcd)**

Function description Disconnect the USB device.

Parameters
- **hpcd:** PCD handle

Return values
- **HAL:** status

HAL_PCD_SetAddress

Function name **HAL_StatusTypeDef HAL_PCD_SetAddress (PCD_HandleTypeDef * hpcd, uint8_t address)**

Function description Set the USB Device address.

Parameters
- **hpcd:** PCD handle
- **address:** new device address

Return values
- **HAL:** status

HAL_PCD_EP_Open

Function name **HAL_StatusTypeDef HAL_PCD_EP_Open (PCD_HandleTypeDef * hpcd, uint8_t ep_addr, uint16_t ep_mps, uint8_t ep_type)**

Function description Open and configure an endpoint.

Parameters
- **hpcd:** PCD handle
- **ep_addr:** endpoint address
- **ep_mps:** endpoint max packet size
- **ep_type:** endpoint type

Return values
- **HAL:** status

HAL_PCD_EP_Close

Function name **HAL_StatusTypeDef HAL_PCD_EP_Close (PCD_HandleTypeDef * hpcd, uint8_t ep_addr)**

Function description Deactivate an endpoint.

Parameters
- **hpcd:** PCD handle
- **ep_addr:** endpoint address

Return values
- **HAL:** status

HAL_PCD_EP_Receive

Function name	**HAL_StatusTypeDef HAL_PCD_EP_Receive (PCD_HandleTypeDef * hpcd, uint8_t ep_addr, uint8_t * pBuf, uint32_t len)**
Function description	Receive an amount of data.
Parameters	• **hpcd:** PCD handle • **ep_addr:** endpoint address • **pBuf:** pointer to the reception buffer • **len:** amount of data to be received
Return values	• **HAL:** status

HAL_PCD_EP_Transmit

Function name	**HAL_StatusTypeDef HAL_PCD_EP_Transmit (PCD_HandleTypeDef * hpcd, uint8_t ep_addr, uint8_t * pBuf, uint32_t len)**
Function description	Send an amount of data.
Parameters	• **hpcd:** PCD handle • **ep_addr:** endpoint address • **pBuf:** pointer to the transmission buffer • **len:** amount of data to be sent
Return values	• **HAL:** status

HAL_PCD_EP_GetRxCount

Function name	**uint16_t HAL_PCD_EP_GetRxCount (PCD_HandleTypeDef * hpcd, uint8_t ep_addr)**
Function description	Get Received Data Size.
Parameters	• **hpcd:** PCD handle • **ep_addr:** endpoint address
Return values	• **Data:** Size

HAL_PCD_EP_SetStall

Function name	**HAL_StatusTypeDef HAL_PCD_EP_SetStall (PCD_HandleTypeDef * hpcd, uint8_t ep_addr)**
Function description	Set a STALL condition over an endpoint.
Parameters	• **hpcd:** PCD handle • **ep_addr:** endpoint address
Return values	• **HAL:** status

HAL_PCD_EP_ClrStall

Function name	**HAL_StatusTypeDef HAL_PCD_EP_ClrStall (PCD_HandleTypeDef * hpcd, uint8_t ep_addr)**
Function description	Clear a STALL condition over in an endpoint.

Parameters
- **hpcd:** PCD handle
- **ep_addr:** endpoint address

Return values
- **HAL:** status

HAL_PCD_EP_Flush

Function name **HAL_StatusTypeDef HAL_PCD_EP_Flush (PCD_HandleTypeDef * hpcd, uint8_t ep_addr)**

Function description Flush an endpoint.

Parameters
- **hpcd:** PCD handle
- **ep_addr:** endpoint address

Return values
- **HAL:** status

HAL_PCD_ActivateRemoteWakeup

Function name **HAL_StatusTypeDef HAL_PCD_ActivateRemoteWakeup (PCD_HandleTypeDef * hpcd)**

Function description HAL_PCD_ActivateRemoteWakeup : active remote wakeup signalling.

Parameters
- **hpcd:** PCD handle

Return values
- **HAL:** status

HAL_PCD_DeActivateRemoteWakeup

Function name **HAL_StatusTypeDef HAL_PCD_DeActivateRemoteWakeup (PCD_HandleTypeDef * hpcd)**

Function description HAL_PCD_DeActivateRemoteWakeup : de-active remote wakeup signalling.

Parameters
- **hpcd:** PCD handle

Return values
- **HAL:** status

HAL_PCD_GetState

Function name **PCD_StateTypeDef HAL_PCD_GetState (PCD_HandleTypeDef * hpcd)**

Function description Return the PCD state.

Parameters
- **hpcd:** PCD handle

Return values
- **HAL:** state

HAL_PCD_ActiveRemoteWakeup

Function name **HAL_StatusTypeDef HAL_PCD_ActiveRemoteWakeup (PCD_HandleTypeDef * hpcd)**

Function description

HAL_PCD_DeActiveRemoteWakeup

Function name **HAL_StatusTypeDef HAL_PCD_DeActiveRemoteWakeup (PCD_HandleTypeDef * hpcd)**

Function description

PCD_WritePMA

Function name **void PCD_WritePMA (USB_TypeDef * USBx, uint8_t * pbUsrBuf, uint16_t wPMABufAddr, uint16_t wNBytes)**

Function description Copy a buffer from user memory area to packet memory area (PMA)

Parameters
- **USBx:** USB peripheral instance register address.
- **pbUsrBuf:** pointer to user memory area.
- **wPMABufAddr:** address into PMA.
- **wNBytes:** no. of bytes to be copied.

Return values
- **None**

PCD_ReadPMA

Function name **void PCD_ReadPMA (USB_TypeDef * USBx, uint8_t * pbUsrBuf, uint16_t wPMABufAddr, uint16_t wNBytes)**

Function description Copy a buffer from user memory area to packet memory area (PMA)

Parameters
- **USBx:** USB peripheral instance register address.
- **pbUsrBuf:** pointer to user memory area.
- **wPMABufAddr:** address into PMA.
- **wNBytes:** no. of bytes to be copied.

Return values
- **None**

36.3 PCD Firmware driver defines

36.3.1 PCD

PCD Core PHY

PCD_PHY_EMBEDDED

PCD Core Speed

PCD_SPEED_HIGH

PCD_SPEED_FULL

PCD ENDP

PCD_ENDP0

PCD_ENDP1

PCD_ENDP2

PCD_ENDP3

PCD_ENDP4

PCD_ENDP5

PCD_ENDP6

PCD_ENDP7

PCD Endpoint Kind

PCD_SNG_BUF

PCD_DBL_BUF

PCD EP0 MPS

DEP0CTL_MPS_64

DEP0CTL_MPS_32

DEP0CTL_MPS_16

DEP0CTL_MPS_8

PCD_EP0MPS_64

PCD_EP0MPS_32

PCD_EP0MPS_16

PCD_EP0MPS_08

PCD EP Type

PCD_EP_TYPE_CTRL

PCD_EP_TYPE_ISOC

PCD_EP_TYPE_BULK

PCD_EP_TYPE_INTR

PCD Exported Macros

__HAL_PCD_GET_FLAG

__HAL_PCD_CLEAR_FLAG

__HAL_USB_WAKEUP_EXTI_ENABLE_IT

__HAL_USB_WAKEUP_EXTI_DISABLE_IT

__HAL_USB_EXTI_GENERATE_SWIT

__HAL_USB_WAKEUP_EXTI_GET_FLAG

__HAL_USB_WAKEUP_EXTI_CLEAR_FLAG

__HAL_USB_WAKEUP_EXTI_ENABLE_RISING_EDGE

__HAL_USB_WAKEUP_EXTI_ENABLE_FALLING_EDGE

__HAL_USB_WAKEUP_EXTI_ENABLE_RISING_FALLING_EDGE

PCD Instance definition

IS_PCD_ALL_INSTANCE

37 HAL PCD Extension Driver

37.1 PCDEx Firmware driver API description

37.1.1 Extended Peripheral Control functions

This section provides functions allowing to:

- Update PMA configuration

This section contains the following APIs:

- ***HAL_PCDEx_PMAConfig()***
- ***HAL_PCDEx_SetConnectionState()***

37.1.2 Detailed description of functions

HAL_PCDEx_PMAConfig

Function name	**HAL_StatusTypeDef HAL_PCDEx_PMAConfig (PCD_HandleTypeDef * hpcd, uint16_t ep_addr, uint16_t ep_kind, uint32_t pmaadress)**
Function description	Configure PMA for EP.
Parameters	• **hpcd:** PCD handle • **ep_addr:** endpoint address • **ep_kind:** endpoint Kind – USB_SNG_BUF: Single Buffer used – USB_DBL_BUF: Double Buffer used • **pmaadress:** EP address in The PMA: In case of single buffer endpoint this parameter is 16-bit value providing the address in PMA allocated to endpoint. In case of double buffer endpoint this parameter is a 32-bit value providing the endpoint buffer 0 address in the LSB part of 32-bit value and endpoint buffer 1 address in the MSB part of 32-bit value.
Return values	• **::** status

HAL_PCDEx_SetConnectionState

Function name	**void HAL_PCDEx_SetConnectionState (PCD_HandleTypeDef * hpcd, uint8_t state)**
Function description	Software Device Connection.
Parameters	• **hpcd:** PCD handle • **state:** Device state
Return values	• **None**

37.2 PCDEx Firmware driver defines

37.2.1 PCDEx

PCD Extended Exported Macros

PCD_EP_TX_ADDRESS

Description:

- Gets address in an endpoint register.

Parameters:

- USBx: USB peripheral instance register address.
- bEpNum: Endpoint Number.

Return value:

- None

PCD_EP_TX_CNT

PCD_EP_RX_ADDRESS

PCD_EP_RX_CNT

PCD_SET_EP_RX_CNT

38 HAL PWR Generic Driver

38.1 PWR Firmware driver API description

38.1.1 Initialization and de-initialization functions

After reset, the backup domain (RTC registers, RTC backup data registers and backup SRAM) is protected against possible unwanted write accesses. To enable access to the RTC Domain and RTC registers, proceed as follows:

- Enable the Power Controller (PWR) APB1 interface clock using the __HAL_RCC_PWR_CLK_ENABLE() macro.
- Enable access to RTC domain using the HAL_PWR_EnableBkUpAccess() function.

38.1.2 Peripheral Control functions

WakeUp pin configuration

- WakeUp pin is used to wakeup the system from Standby mode. This pin is forced in input pull down configuration and is active on rising edges.
- There are up to three WakeUp pins:
  - WakeUp Pin 1 on PA.00.
  - WakeUp Pin 2 on PC.13 (STM32F303xC, STM32F303xE only).
  - WakeUp Pin 3 on PE.06.

Main and Backup Regulators configuration

- When the backup domain is supplied by VDD (analog switch connected to VDD) the backup SRAM is powered from VDD which replaces the VBAT power supply to save battery life.
- The backup SRAM is not mass erased by a tamper event. It is read protected to prevent confidential data, such as cryptographic private key, from being accessed. The backup SRAM can be erased only through the Flash interface when a protection level change from level 1 to level 0 is requested. Refer to the description of Read protection (RDP) in the Flash programming manual. Refer to the datasheets for more details.

Low Power modes configuration

The devices feature 3 low-power modes:

- Sleep mode: Cortex-M4 core stopped, peripherals kept running.
- Stop mode: all clocks are stopped, regulator running, regulator in low power mode
- Standby mode: 1.2V domain powered off (mode not available on STM32F3x8 devices).

Sleep mode

- Entry: The Sleep mode is entered by using the HAL_PWR_EnterSLEEPMode(PWR_MAINREGULATOR_ON, PWR_SLEEPENTRY_WFx) functions with
  - PWR_SLEEPENTRY_WFI: enter SLEEP mode with WFI instruction
  - PWR_SLEEPENTRY_WFE: enter SLEEP mode with WFE instruction
- Exit:

– Any peripheral interrupt acknowledged by the nested vectored interrupt controller (NVIC) can wake up the device from Sleep mode.

Stop mode

In Stop mode, all clocks in the 1.8V domain are stopped, the PLL, the HSI, and the HSE RC oscillators are disabled. Internal SRAM and register contents are preserved. The voltage regulator can be configured either in normal or low-power mode to minimize the consumption.

- Entry: The Stop mode is entered using the HAL_PWR_EnterSTOPMode(PWR_MAINREGULATOR_ON, PWR_STOPENTRY_WFI) function with:
  – Main regulator ON or
  – Low Power regulator ON.
  – PWR_STOPENTRY_WFI: enter STOP mode with WFI instruction or
  – PWR_STOPENTRY_WFE: enter STOP mode with WFE instruction
- Exit:
  – Any EXTI Line (Internal or External) configured in Interrupt/Event mode.
  – Some specific communication peripherals (CEC, USART, I2C) interrupts, when programmed in wakeup mode (the peripheral must be programmed in wakeup mode and the corresponding interrupt vector must be enabled in the NVIC).

Standby mode

The Standby mode allows to achieve the lowest power consumption. It is based on the Cortex-M4 deep sleep mode, with the voltage regulator disabled. The 1.8V domain is consequently powered off. The PLL, the HSI oscillator and the HSE oscillator are also switched off. SRAM and register contents are lost except for the RTC registers, RTC backup registers, backup SRAM and Standby circuitry. The voltage regulator is OFF.

- Entry:
  – The Standby mode is entered using the HAL_PWR_EnterSTANDBYMode() function.
- Exit:
  – WKUP pin rising edge, RTC alarm (Alarm A and Alarm B), RTC wakeup, tamper event, time-stamp event, external reset in NRST pin, IWDG reset.

Auto-wakeup (AWU) from low-power mode

The MCU can be woken up from low-power mode by an RTC Alarm event, an RTC Wakeup event, a tamper event, a time-stamp event, or a comparator event, without depending on an external interrupt (Auto-wakeup mode).

- RTC auto-wakeup (AWU) from the Stop and Standby modes
  – To wake up from the Stop mode with an RTC alarm event, it is necessary to configure the RTC to generate the RTC alarm using the HAL_RTC_SetAlarm_IT() function.
  – To wake up from the Stop mode with an RTC Tamper or time stamp event, it is necessary to configure the RTC to detect the tamper or time stamp event using the HAL_RTC_SetTimeStamp_IT() or HAL_RTC_SetTamper_IT() functions.
  – To wake up from the Stop mode with an RTC WakeUp event, it is necessary to configure the RTC to generate the RTC WakeUp event using the HAL_RTC_SetWakeUpTimer_IT() function.

- Comparator auto-wakeup (AWU) from the Stop mode
  - To wake up from the Stop mode with a comparator wakeup event, it is necessary to:
    - Configure the EXTI Line associated with the comparator (example EXTI Line 22 for comparator 2U) to be sensitive to to the selected edges (falling, rising or falling and rising) (Interrupt or Event modes) using the EXTI_Init() function.
    - Configure the comparator to generate the event.

This section contains the following APIs:

- ***HAL_PWR_EnableWakeUpPin()***
- ***HAL_PWR_DisableWakeUpPin()***
- ***HAL_PWR_EnterSLEEPMode()***
- ***HAL_PWR_EnterSTOPMode()***
- ***HAL_PWR_EnterSTANDBYMode()***
- ***HAL_PWR_EnableSleepOnExit()***
- ***HAL_PWR_DisableSleepOnExit()***
- ***HAL_PWR_EnableSEVOnPend()***
- ***HAL_PWR_DisableSEVOnPend()***
- ***HAL_PWR_EnableBkUpAccess()***
- ***HAL_PWR_DisableBkUpAccess()***

38.1.3 Detailed description of functions

HAL_PWR_DeInit

Function name	**void HAL_PWR_DeInit (void)**
Function description	Deinitializes the PWR peripheral registers to their default reset values.
Return values	• **None**

HAL_PWR_EnableBkUpAccess

Function name	**void HAL_PWR_EnableBkUpAccess (void)**
Function description	Enables access to the backup domain (RTC registers, RTC backup data registers and backup SRAM).
Return values	• **None**
Notes	• If the HSE divided by 32 is used as the RTC clock, the Backup Domain Access should be kept enabled.

HAL_PWR_DisableBkUpAccess

Function name	**void HAL_PWR_DisableBkUpAccess (void)**
Function description	Disables access to the backup domain (RTC registers, RTC backup data registers and backup SRAM).
Return values	• **None**
Notes	• If the HSE divided by 32 is used as the RTC clock, the Backup Domain Access should be kept enabled.

HAL_PWR_EnableWakeUpPin

Function name **void HAL_PWR_EnableWakeUpPin (uint32_t WakeUpPinx)**

Function description Enables the WakeUp PINx functionality.

Parameters
- **WakeUpPinx:** Specifies the Power Wake-Up pin to enable. This parameter can be value of : PWR WakeUp Pins

Return values
- **None**

HAL_PWR_DisableWakeUpPin

Function name **void HAL_PWR_DisableWakeUpPin (uint32_t WakeUpPinx)**

Function description Disables the WakeUp PINx functionality.

Parameters
- **WakeUpPinx:** Specifies the Power Wake-Up pin to disable. This parameter can be values of : PWR WakeUp Pins

Return values
- **None**

HAL_PWR_EnterSTOPMode

Function name **void HAL_PWR_EnterSTOPMode (uint32_t Regulator, uint8_t STOPEntry)**

Function description Enters STOP mode.

Parameters
- **Regulator:** Specifies the regulator state in STOP mode. This parameter can be one of the following values:
  - PWR_MAINREGULATOR_ON: STOP mode with regulator ON
  - PWR_LOWPOWERREGULATOR_ON: STOP mode with low power regulator ON
- **STOPEntry:** specifies if STOP mode in entered with WFI or WFE instruction. This parameter can be one of the following values:
  - PWR_STOPENTRY_WFI:Enter STOP mode with WFI instruction
  - PWR_STOPENTRY_WFE: Enter STOP mode with WFE instruction

Return values
- **None**

Notes
- In Stop mode, all I/O pins keep the same state as in Run mode.
- When exiting Stop mode by issuing an interrupt or a wakeup event, the HSI RC oscillator is selected as system clock.
- When the voltage regulator operates in low power mode, an additional startup delay is incurred when waking up from Stop mode. By keeping the internal regulator ON during Stop mode, the consumption is higher although the startup time is reduced.

HAL_PWR_EnterSLEEPMode

Function name **void HAL_PWR_EnterSLEEPMode (uint32_t Regulator, uint8_t SLEEPEntry)**

Function description Enters Sleep mode.

Parameters
- **Regulator:** Specifies the regulator state in SLEEP mode. This parameter can be one of the following values:
  - PWR_MAINREGULATOR_ON: SLEEP mode with regulator ON
  - PWR_LOWPOWERREGULATOR_ON: SLEEP mode with low power regulator ON
- **SLEEPEntry:** Specifies if SLEEP mode is entered with WFI or WFE instruction. When WFI entry is used, tick interrupt have to be disabled if not desired as the interrupt wake up source. This parameter can be one of the following values:
  - PWR_SLEEPENTRY_WFI: enter SLEEP mode with WFI instruction
  - PWR_SLEEPENTRY_WFE: enter SLEEP mode with WFE instruction

Return values
- **None**

Notes
- In Sleep mode, all I/O pins keep the same state as in Run mode.
- This parameter has no effect in F3 family and is just maintained to offer full portability of other STM32 families softwares.

HAL_PWR_EnterSTANDBYMode

Function name **void HAL_PWR_EnterSTANDBYMode (void)**

Function description Enters STANDBY mode.

Return values
- **None**

Notes
- In Standby mode, all I/O pins are high impedance except for: Reset pad (still available),RTC alternate function pins if configured for tamper, time-stamp, RTC Alarm out, or RTC clock calibration out,WKUP pins if enabled.

HAL_PWR_EnableSleepOnExit

Function name **void HAL_PWR_EnableSleepOnExit (void)**

Function description Indicates Sleep-On-Exit when returning from Handler mode to Thread mode.

Return values
- **None**

Notes
- Set SLEEPONEXIT bit of SCR register. When this bit is set, the processor re-enters SLEEP mode when an interruption handling is over. Setting this bit is useful when the processor is expected to run only on interruptions handling.

HAL_PWR_DisableSleepOnExit

Function name	**void HAL_PWR_DisableSleepOnExit (void)**
Function description	Disables Sleep-On-Exit feature when returning from Handler mode to Thread mode.
Return values	• **None**
Notes	• Clears SLEEPONEXIT bit of SCR register. When this bit is set, the processor re-enters SLEEP mode when an interruption handling is over.

HAL_PWR_EnableSEVOnPend

Function name	**void HAL_PWR_EnableSEVOnPend (void)**
Function description	Enables CORTEX M4 SEVONPEND bit.
Return values	• **None**
Notes	• Sets SEVONPEND bit of SCR register. When this bit is set, this causes WFE to wake up when an interrupt moves from inactive to pended.

HAL_PWR_DisableSEVOnPend

Function name	**void HAL_PWR_DisableSEVOnPend (void)**
Function description	Disables CORTEX M4 SEVONPEND bit.
Return values	• **None**
Notes	• Clears SEVONPEND bit of SCR register. When this bit is set, this causes WFE to wake up when an interrupt moves from inactive to pended.

38.2 PWR Firmware driver defines

38.2.1 PWR

PWR Exported Macro

__HAL_PWR_GET_FLAG

Description:

- Check PWR flag is set or not.

Parameters:

- __FLAG__: specifies the flag to check. This parameter can be one of the following values:
  - PWR_FLAG_WU: Wake Up flag. This flag indicates that a wakeup event was received from the WKUP pin or from the RTC alarm (Alarm A or Alarm B), RTC Tamper event, RTC TimeStamp event or RTC Wakeup. An additional wakeup event is detected if the WKUP pin is enabled (by setting the EWUP bit) when the WKUP pin level is already high.
  - PWR_FLAG_SB: StandBy flag. This flag indicates that the system was resumed from

StandBy mode.
  - PWR_FLAG_PVDO: PVD Output. This flag is valid only if PVD is enabled by the HAL_PWR_EnablePVD() function. The PVD is stopped by Standby mode For this reason, this bit is equal to 0 after Standby or reset until the PVDE bit is set.
  - PWR_FLAG_VREFINTRDY: This flag indicates that the internal reference voltage VREFINT is ready.

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

__HAL_PWR_CLEAR_FLAG **Description:**

- Clear the PWR's pending flags.

Parameters:

- __FLAG__: specifies the flag to clear. This parameter can be one of the following values:
  - PWR_FLAG_WU: Wake Up flag
  - PWR_FLAG_SB: StandBy flag

PWR Flag

PWR_FLAG_WU	Wakeup event from wakeup pin or RTC alarm
PWR_FLAG_SB	Standby flag
PWR_FLAG_PVDO	Power Voltage Detector output flag
PWR_FLAG_VREFINTRDY	VREFINT reference voltage ready

PWR Regulator state in STOP mode

PWR_MAINREGULATOR_ON	Voltage regulator on during STOP mode
PWR_LOWPOWERREGULATOR_ON	Voltage regulator in low-power mode during STOP mode

PWR SLEEP mode entry

PWR_SLEEPENTRY_WFI	Wait For Interruption instruction to enter SLEEP mode
PWR_SLEEPENTRY_WFE	Wait For Event instruction to enter SLEEP mode

PWR STOP mode entry

PWR_STOPENTRY_WFI	Wait For Interruption instruction to enter STOP mode
PWR_STOPENTRY_WFE	Wait For Event instruction to enter STOP mode

PWR WakeUp Pins

PWR_WAKEUP_PIN1	Wakeup pin 1U
PWR_WAKEUP_PIN2	Wakeup pin 2U
PWR_WAKEUP_PIN3	Wakeup pin 3U

39 HAL PWR Extension Driver

39.1 PWREx Firmware driver registers structures

39.1.1 PWR_PVDTypeDef

Data Fields

- ***uint32_t PVDLevel***
- ***uint32_t Mode***

Field Documentation

- ***uint32_t PWR_PVDTypeDef::PVDLevel***
  PVDLevel: Specifies the PVD detection level This parameter can be a value of ***PWREx_PVD_detection_level***
- ***uint32_t PWR_PVDTypeDef::Mode***
  Mode: Specifies the operating mode for the selected pins. This parameter can be a value of ***PWREx_PVD_Mode***

39.2 PWREx Firmware driver API description

39.2.1 Peripheral Extended control functions

PVD configuration (present on all other devices than STM32F3x8 devices)

- The PVD is used to monitor the VDD power supply by comparing it to a threshold selected by the PVD Level (PLS[2:0] bits in the PWR_CR).
- A PVDO flag is available to indicate if VDD/VDDA is higher or lower than the PVD threshold. This event is internally connected to the EXTI line16 and can generate an interrupt if enabled. This is done through __HAL_PWR_PVD_EXTI_ENABLE_IT() macro
- The PVD is stopped in Standby mode. PVD is not available on STM32F3x8 Product Line

Voltage regulator

- The voltage regulator is always enabled after Reset. It works in three different modes. In Run mode, the regulator supplies full power to the 1.8V domain (core, memories and digital peripherals). In Stop mode, the regulator supplies low power to the 1.8V domain, preserving contents of registers and SRAM. In Stop mode, the regulator is powered off. The contents of the registers and SRAM are lost except for the Standby circuitry and the Backup Domain. Note: in the STM32F3x8xx devices, the voltage regulator is bypassed and the microcontroller must be powered from a nominal VDD = 1.8V +/-8U% voltage.
- A PVDO flag is available to indicate if VDD/VDDA is higher or lower than the PVD threshold. This event is internally connected to the EXTI line16 and can generate an interrupt if enabled. This is done through __HAL_PWR_PVD_EXTI_ENABLE_IT() macro
- The PVD is stopped in Standby mode.

SDADC power configuration

- On STM32F373xC/STM32F378xx devices, there are up to 3 SDADC instances that can be enabled/disabled.

This section contains the following APIs:

- ***HAL_PWR_ConfigPVD()***
- ***HAL_PWR_EnablePVD()***
- ***HAL_PWR_DisablePVD()***
- ***HAL_PWR_PVD_IRQHandler()***
- ***HAL_PWR_PVDCallback()***

39.2.2 Detailed description of functions

HAL_PWR_ConfigPVD

Function name	**void HAL_PWR_ConfigPVD (PWR_PVDTypeDef * sConfigPVD)**
Function description	Configures the voltage threshold detected by the Power Voltage Detector(PVD).
Parameters	• **sConfigPVD:** pointer to an PWR_PVDTypeDef structure that contains the configuration information for the PVD.
Return values	• **None**
Notes	• Refer to the electrical characteristics of your device datasheet for more details about the voltage threshold corresponding to each detection level.

HAL_PWR_EnablePVD

Function name	**void HAL_PWR_EnablePVD (void)**
Function description	Enables the Power Voltage Detector(PVD).
Return values	• **None**

HAL_PWR_DisablePVD

Function name	**void HAL_PWR_DisablePVD (void)**
Function description	Disables the Power Voltage Detector(PVD).
Return values	• **None**

HAL_PWR_PVD_IRQHandler

Function name	**void HAL_PWR_PVD_IRQHandler (void)**
Function description	This function handles the PWR PVD interrupt request.
Return values	• **None**
Notes	• This API should be called under the PVD_IRQHandler().

HAL_PWR_PVDCallback

Function name **void HAL_PWR_PVDCallback (void)**

Function description PWR PVD interrupt callback.

Return values
- **None**

39.3 PWREx Firmware driver defines

39.3.1 PWREx

PWR Extended Exported Constants

PWR_EXTI_LINE_PVD External interrupt line 16 Connected to the PVD EXTI Line

PWR Extended Exported Macros

__HAL_PWR_PVD_EXTI_ENABLE_IT

Description:
- Enable interrupt on PVD Exti Line 16.

Return value:
- None.

__HAL_PWR_PVD_EXTI_DISABLE_IT

Description:
- Disable interrupt on PVD Exti Line 16.

Return value:
- None.

__HAL_PWR_PVD_EXTI_GENERATE_SWIT

Description:
- Generate a Software interrupt on selected EXTI line.

Return value:
- None.

__HAL_PWR_PVD_EXTI_ENABLE_EVENT

Description:
- Enable event on PVD Exti Line 16.

Return value:
- None.

__HAL_PWR_PVD_EXTI_DISABLE_EVENT

Description:
- Disable event on PVD Exti Line 16.

Return value:
- None.

__HAL_PWR_PVD_EXTI_DISABLE_RISING_EDGE

Description:

	• Disable the PVD Extended Interrupt Rising Trigger. **Return value:** • None.
__HAL_PWR_PVD_EXTI_DISABLE_FALLING_EDGE	**Description:** • Disable the PVD Extended Interrupt Falling Trigger. **Return value:** • None.
__HAL_PWR_PVD_EXTI_DISABLE_RISING_FALLING_EDGE	**Description:** • Disable the PVD Extended Interrupt Rising & Falling Trigger. **Return value:** • None
__HAL_PWR_PVD_EXTI_ENABLE_FALLING_EDGE	**Description:** • PVD EXTI line configuration: set falling edge trigger. **Return value:** • None.
__HAL_PWR_PVD_EXTI_ENABLE_RISING_EDGE	**Description:** • PVD EXTI line configuration: set rising edge trigger. **Return value:** • None.
__HAL_PWR_PVD_EXTI_ENABLE_RISING_FALLING_EDGE	**Description:** • Enable the PVD Extended Interrupt Rising & Falling Trigger. **Return value:** • None
__HAL_PWR_PVD_EXTI_GET_FLAG	**Description:** • Check whether the specified PVD EXTI interrupt flag is set or not. **Return value:** • EXTI: PVD Line Status.
__HAL_PWR_PVD_EXTI_CLEAR_FLAG	**Description:** • Clear the PVD EXTI flag.

Return value:

- None.

PWR Extended PVD detection level

PWR_PVDLEVEL_0	PVD threshold around 2.2 V
PWR_PVDLEVEL_1	PVD threshold around 2.3 V
PWR_PVDLEVEL_2	PVD threshold around 2.4 V
PWR_PVDLEVEL_3	PVD threshold around 2.5 V
PWR_PVDLEVEL_4	PVD threshold around 2.6 V
PWR_PVDLEVEL_5	PVD threshold around 2.7 V
PWR_PVDLEVEL_6	PVD threshold around 2.8 V
PWR_PVDLEVEL_7	PVD threshold around 2.9 V

PWR Extended PVD Mode

PWR_PVD_MODE_NORMAL	Basic mode is used
PWR_PVD_MODE_IT_RISING	External Interrupt Mode with Rising edge trigger detection
PWR_PVD_MODE_IT_FALLING	External Interrupt Mode with Falling edge trigger detection
PWR_PVD_MODE_IT_RISING_FALLING	External Interrupt Mode with Rising/Falling edge trigger detection
PWR_PVD_MODE_EVENT_RISING	Event Mode with Rising edge trigger detection
PWR_PVD_MODE_EVENT_FALLING	Event Mode with Falling edge trigger detection
PWR_PVD_MODE_EVENT_RISING_FALLING	Event Mode with Rising/Falling edge trigger detection

40 HAL RCC Generic Driver

40.1 RCC Firmware driver registers structures

40.1.1 RCC_PLLInitTypeDef

Data Fields

- ***uint32_t PLLState***
- ***uint32_t PLLSource***
- ***uint32_t PLLMUL***

Field Documentation

- ***uint32_t RCC_PLLInitTypeDef::PLLState***
  PLLState: The new state of the PLL. This parameter can be a value of ***RCC_PLL_Config***
- ***uint32_t RCC_PLLInitTypeDef::PLLSource***
  PLLSource: PLL entry clock source. This parameter must be a value of ***RCC_PLL_Clock_Source***
- ***uint32_t RCC_PLLInitTypeDef::PLLMUL***
  PLLMUL: Multiplication factor for PLL VCO input clock This parameter must be a value of ***RCC_PLL_Multiplication_Factor***

40.1.2 RCC_OscInitTypeDef

Data Fields

- ***uint32_t OscillatorType***
- ***uint32_t HSEState***
- ***uint32_t HSEPredivValue***
- ***uint32_t LSEState***
- ***uint32_t HSIState***
- ***uint32_t HSICalibrationValue***
- ***uint32_t LSIState***
- ***RCC_PLLInitTypeDef PLL***

Field Documentation

- ***uint32_t RCC_OscInitTypeDef::OscillatorType***
  The oscillators to be configured. This parameter can be a value of ***RCC_Oscillator_Type***
- ***uint32_t RCC_OscInitTypeDef::HSEState***
  The new state of the HSE. This parameter can be a value of ***RCC_HSE_Config***
- ***uint32_t RCC_OscInitTypeDef::HSEPredivValue***
  The HSE predivision factor value. This parameter can be a value of ***RCC_PLL_HSE_Prediv_Factor***
- ***uint32_t RCC_OscInitTypeDef::LSEState***
  The new state of the LSE. This parameter can be a value of ***RCC_LSE_Config***
- ***uint32_t RCC_OscInitTypeDef::HSIState***
  The new state of the HSI. This parameter can be a value of ***RCC_HSI_Config***
- ***uint32_t RCC_OscInitTypeDef::HSICalibrationValue***
  The HSI calibration trimming value (default is RCC_HSICALIBRATION_DEFAULT). This parameter must be a number between Min_Data = 0x00 and Max_Data = 0x1FU

- ***uint32_t RCC_OscInitTypeDef::LSIState***
  The new state of the LSI. This parameter can be a value of ***RCC_LSI_Config***
- ***RCC_PLLInitTypeDef RCC_OscInitTypeDef::PLL***
  PLL structure parameters

40.1.3 RCC_ClkInitTypeDef

Data Fields

- ***uint32_t ClockType***
- ***uint32_t SYSCLKSource***
- ***uint32_t AHBCLKDivider***
- ***uint32_t APB1CLKDivider***
- ***uint32_t APB2CLKDivider***

Field Documentation

- ***uint32_t RCC_ClkInitTypeDef::ClockType***
  The clock to be configured. This parameter can be a value of ***RCC_System_Clock_Type***
- ***uint32_t RCC_ClkInitTypeDef::SYSCLKSource***
  The clock source (SYSCLKS) used as system clock. This parameter can be a value of ***RCC_System_Clock_Source***
- ***uint32_t RCC_ClkInitTypeDef::AHBCLKDivider***
  The AHB clock (HCLK) divider. This clock is derived from the system clock (SYSCLK). This parameter can be a value of ***RCC_AHB_Clock_Source***
- ***uint32_t RCC_ClkInitTypeDef::APB1CLKDivider***
  The APB1 clock (PCLK1) divider. This clock is derived from the AHB clock (HCLK). This parameter can be a value of ***RCC_APB1_APB2_Clock_Source***
- ***uint32_t RCC_ClkInitTypeDef::APB2CLKDivider***
  The APB2 clock (PCLK2) divider. This clock is derived from the AHB clock (HCLK). This parameter can be a value of ***RCC_APB1_APB2_Clock_Source***

40.2 RCC Firmware driver API description

40.2.1 RCC specific features

After reset the device is running from Internal High Speed oscillator (HSI 8MHz) with Flash 0 wait state, Flash prefetch buffer is enabled, and all peripherals are off except internal SRAM, Flash and JTAG.

- There is no prescaler on High speed (AHB) and Low speed (APB) buses; all peripherals mapped on these buses are running at HSI speed.
- The clock for all peripherals is switched off, except the SRAM and FLASH.
- All GPIOs are in input floating state, except the JTAG pins which are assigned to be used for debug purpose.

Once the device started from reset, the user application has to:

- Configure the clock source to be used to drive the System clock (if the application needs higher frequency/performance)
- Configure the System clock frequency and Flash settings
- Configure the AHB and APB buses prescalers
- Enable the clock for the peripheral(s) to be used
- Configure the clock source(s) for peripherals whose clocks are not derived from the System clock (RTC, ADC, I2C, I2S, TIM, USB FS)

40.2.2 RCC Limitations

A delay between an RCC peripheral clock enable and the effective peripheral enabling should be taken into account in order to manage the peripheral read/write from/to registers.

- This delay depends on the peripheral mapping.
  - AHB & APB peripherals, 1 dummy read is necessary

Workarounds:

1. For AHB & APB peripherals, a dummy read to the peripheral register has been inserted in each __HAL_RCC_PPP_CLK_ENABLE() macro.

40.2.3 Initialization and de-initialization functions

This section provides functions allowing to configure the internal/external oscillators (HSE, HSI, LSE, LSI, PLL, CSS and MCO) and the System buses clocks (SYSCLK, AHB, APB1 and APB2).

Internal/external clock and PLL configuration

1. HSI (high-speed internal), 8 MHz factory-trimmed RC used directly or through the PLL as System clock source. The HSI clock can be used also to clock the USART and I2C peripherals.
2. LSI (low-speed internal), ~40 KHz low consumption RC used as IWDG and/or RTC clock source.
3. HSE (high-speed external), 4 to 32 MHz crystal oscillator used directly or through the PLL as System clock source. Can be used also as RTC clock source.
4. LSE (low-speed external), 32 KHz oscillator used as RTC clock source.
5. PLL (clocked by HSI or HSE), featuring different output clocks:
   - The first output is used to generate the high speed system clock (up to 72 MHz)
   - The second output is used to generate the clock for the USB FS (48 MHz)
   - The third output may be used to generate the clock for the ADC peripherals (up to 72 MHz)
   - The fourth output may be used to generate the clock for the TIM peripherals (144 MHz)
6. CSS (Clock security system), once enable using the macro __HAL_RCC_CSS_ENABLE() and if a HSE clock failure occurs(HSE used directly or through PLL as System clock source), the System clocks automatically switched to HSI and an interrupt is generated if enabled. The interrupt is linked to the Cortex-M4 NMI (Non-Maskable Interrupt) exception vector.
7. MCO (microcontroller clock output), used to output SYSCLK, HSI, HSE, LSI, LSE or PLL clock (divided by 2) output on pin (such as PA8 pin).

System, AHB and APB buses clocks configuration

1. Several clock sources can be used to drive the System clock (SYSCLK): HSI, HSE and PLL. The AHB clock (HCLK) is derived from System clock through configurable prescaler and used to clock the CPU, memory and peripherals mapped on AHB bus (DMA, GPIO...). APB1 (PCLK1) and APB2 (PCLK2) clocks are derived from AHB clock through configurable prescalers and used to clock the peripherals mapped on these buses. You can use "@ref HAL_RCC_GetSysClockFreq()" function to retrieve the frequencies of these clocks.
2. All the peripheral clocks are derived from the System clock (SYSCLK) except:
   - The FLASH program/erase clock which is always HSI 8MHz clock.
   - The USB 48 MHz clock which is derived from the PLL VCO clock.
   - The USART clock which can be derived as well from HSI 8MHz, LSI or LSE.
   - The I2C clock which can be derived as well from HSI 8MHz clock.
   - The ADC clock which is derived from PLL output.

- The RTC clock which is derived from the LSE, LSI or 1 MHz HSE_RTC (HSE divided by a programmable prescaler). The System clock (SYSCLK) frequency must be higher or equal to the RTC clock frequency.
- IWDG clock which is always the LSI clock.

3. For the STM32F3xx devices, the maximum frequency of the SYSCLK, HCLK, PCLK1 and PCLK2 is 72 MHz, Depending on the SYSCLK frequency, the flash latency should be adapted accordingly.
4. After reset, the System clock source is the HSI (8 MHz) with 0 WS and prefetch is disabled.

This section contains the following APIs:

- ***HAL_RCC_DeInit()***
- ***HAL_RCC_OscConfig()***
- ***HAL_RCC_ClockConfig()***

40.2.4 Peripheral Control functions

This subsection provides a set of functions allowing to control the RCC Clocks frequencies.

This section contains the following APIs:

- ***HAL_RCC_MCOConfig()***
- ***HAL_RCC_EnableCSS()***
- ***HAL_RCC_DisableCSS()***
- ***HAL_RCC_GetSysClockFreq()***
- ***HAL_RCC_GetHCLKFreq()***
- ***HAL_RCC_GetPCLK1Freq()***
- ***HAL_RCC_GetPCLK2Freq()***
- ***HAL_RCC_GetOscConfig()***
- ***HAL_RCC_GetClockConfig()***
- ***HAL_RCC_NMI_IRQHandler()***
- ***HAL_RCC_CSSCallback()***

40.2.5 Detailed description of functions

HAL_RCC_DeInit

Function name	**void HAL_RCC_DeInit (void)**
Function description	Resets the RCC clock configuration to the default reset state.
Return values	• **None**
Notes	• The default reset state of the clock configuration is given below: HSI ON and used as system clock sourceHSE and PLL OFFAHB, APB1 and APB2 prescaler set to 1.CSS and MCO1 OFFAll interrupts disabled • This function does not modify the configuration of the Peripheral clocksLSI, LSE and RTC clocks

HAL_RCC_OscConfig

Function name	**HAL_StatusTypeDef HAL_RCC_OscConfig (RCC_OscInitTypeDef * RCC_OscInitStruct)**
Function description	Initializes the RCC Oscillators according to the specified

parameters in the RCC_OscInitTypeDef.

Parameters
- **RCC_OscInitStruct:** pointer to an RCC_OscInitTypeDef structure that contains the configuration information for the RCC Oscillators.

Return values
- **HAL:** status

Notes
- The PLL is not disabled when used as system clock.
- Transitions LSE Bypass to LSE On and LSE On to LSE Bypass are not supported by this macro. User should request a transition to LSE Off first and then LSE On or LSE Bypass.
- Transition HSE Bypass to HSE On and HSE On to HSE Bypass are not supported by this macro. User should request a transition to HSE Off first and then HSE On or HSE Bypass.

HAL_RCC_ClockConfig

Function name **HAL_StatusTypeDef HAL_RCC_ClockConfig (RCC_ClkInitTypeDef * RCC_ClkInitStruct, uint32_t FLatency)**

Function description Initializes the CPU, AHB and APB buses clocks according to the specified parameters in the RCC_ClkInitStruct.

Parameters
- **RCC_ClkInitStruct:** pointer to an RCC_OscInitTypeDef structure that contains the configuration information for the RCC peripheral.
- **FLatency:** FLASH Latency The value of this parameter depend on device used within the same series

Return values
- **HAL:** status

Notes
- The SystemCoreClock CMSIS variable is used to store System Clock Frequency and updated by HAL_RCC_GetHCLKFreq() function called within this function
- The HSI is used (enabled by hardware) as system clock source after start-up from Reset, wake-up from STOP and STANDBY mode, or in case of failure of the HSE used directly or indirectly as system clock (if the Clock Security System CSS is enabled).
- A switch from one clock source to another occurs only if the target clock source is ready (clock stable after start-up delay or PLL locked). If a clock source which is not yet ready is selected, the switch will occur when the clock source will be ready. You can use HAL_RCC_GetClockConfig() function to know which clock is currently used as system clock source.

HAL_RCC_MCOConfig

Function name **void HAL_RCC_MCOConfig (uint32_t RCC_MCOx, uint32_t RCC_MCOSource, uint32_t RCC_MCODiv)**

Function description Selects the clock source to output on MCO pin.

Parameters
- **RCC_MCOx:** specifies the output direction for the clock source. This parameter can be one of the following values:
  – RCC_MCO1 Clock source to output on MCO1 pin(PA8).
- **RCC_MCOSource:** specifies the clock source to output. This parameter can be one of the following values:

  - RCC_MCO1SOURCE_NOCLOCK No clock selected as MCO clock
  - RCC_MCO1SOURCE_SYSCLK System clock selected as MCO clock
  - RCC_MCO1SOURCE_HSI HSI selected as MCO clock
  - RCC_MCO1SOURCE_HSE HSE selected as MCO clock
  - RCC_MCO1SOURCE_LSI LSI selected as MCO clock
  - RCC_MCO1SOURCE_LSE LSE selected as MCO clock
  - RCC_MCO1SOURCE_PLLCLK_DIV2 PLLCLK Divided by 2 selected as MCO clock
- **RCC_MCODiv:** specifies the MCO DIV. This parameter can be one of the following values:
  - RCC_MCODIV_1 no division applied to MCO clock

Return values
- **None**

Notes
- MCO pin should be configured in alternate function mode.

HAL_RCC_EnableCSS

Function name **void HAL_RCC_EnableCSS (void)**

Function description Enables the Clock Security System.

Return values
- **None**

Notes
- If a failure is detected on the HSE oscillator clock, this oscillator is automatically disabled and an interrupt is generated to inform the software about the failure (Clock Security System Interrupt, CSSI), allowing the MCU to perform rescue operations. The CSSI is linked to the Cortex-M4 NMI (Non-Maskable Interrupt) exception vector.

HAL_RCC_NMI_IRQHandler

Function name **void HAL_RCC_NMI_IRQHandler (void)**

Function description This function handles the RCC CSS interrupt request.

Return values
- **None**

Notes
- This API should be called under the NMI_Handler().

HAL_RCC_CSSCallback

Function name **void HAL_RCC_CSSCallback (void)**

Function description RCC Clock Security System interrupt callback.

Return values
- **None**

HAL_RCC_DisableCSS

Function name **void HAL_RCC_DisableCSS (void)**

Function description Disables the Clock Security System.

Return values
- **None**

HAL_RCC_GetSysClockFreq

Function name **uint32_t HAL_RCC_GetSysClockFreq (void)**

Function description Returns the SYSCLK frequency.

Return values
- **SYSCLK:** frequency

Notes
- The system frequency computed by this function is not the real frequency in the chip. It is calculated based on the predefined constant and the selected clock source:
- If SYSCLK source is HSI, function returns values based on HSI_VALUE(*)
- If SYSCLK source is HSE, function returns a value based on HSE_VALUE divided by PREDIV factor(**)
- If SYSCLK source is PLL, function returns a value based on HSE_VALUE divided by PREDIV factor(**) or HSI_VALUE(*) multiplied by the PLL factor.
- (*) HSI_VALUE is a constant defined in stm32f3xx_hal_conf.h file (default value 8 MHz) but the real value may vary depending on the variations in voltage and temperature.
- (**) HSE_VALUE is a constant defined in stm32f3xx_hal_conf.h file (default value 8 MHz), user has to ensure that HSE_VALUE is same as the real frequency of the crystal used. Otherwise, this function may have wrong result.
- The result of this function could be not correct when using fractional value for HSE crystal.
- This function can be used by the user application to compute the baud-rate for the communication peripherals or configure other parameters.
- Each time SYSCLK changes, this function must be called to update the right SYSCLK value. Otherwise, any configuration based on this function will be incorrect.

HAL_RCC_GetHCLKFreq

Function name **uint32_t HAL_RCC_GetHCLKFreq (void)**

Function description Returns the HCLK frequency.

Return values
- **HCLK:** frequency

Notes
- Each time HCLK changes, this function must be called to update the right HCLK value. Otherwise, any configuration based on this function will be incorrect.
- The SystemCoreClock CMSIS variable is used to store System Clock Frequency and updated within this function

HAL_RCC_GetPCLK1Freq

Function name	**uint32_t HAL_RCC_GetPCLK1Freq (void)**
Function description	Returns the PCLK1 frequency.
Return values	• **PCLK1:** frequency
Notes	• Each time PCLK1 changes, this function must be called to update the right PCLK1 value. Otherwise, any configuration based on this function will be incorrect.

HAL_RCC_GetPCLK2Freq

Function name	**uint32_t HAL_RCC_GetPCLK2Freq (void)**
Function description	Returns the PCLK2 frequency.
Return values	• **PCLK2:** frequency
Notes	• Each time PCLK2 changes, this function must be called to update the right PCLK2 value. Otherwise, any configuration based on this function will be incorrect.

HAL_RCC_GetOscConfig

Function name	**void HAL_RCC_GetOscConfig (RCC_OscInitTypeDef * RCC_OscInitStruct)**
Function description	Configures the RCC_OscInitStruct according to the internal RCC configuration registers.
Parameters	• **RCC_OscInitStruct:** pointer to an RCC_OscInitTypeDef structure that will be configured.
Return values	• **None**

HAL_RCC_GetClockConfig

Function name	**void HAL_RCC_GetClockConfig (RCC_ClkInitTypeDef * RCC_ClkInitStruct, uint32_t * pFLatency)**
Function description	Get the RCC_ClkInitStruct according to the internal RCC configuration registers.
Parameters	• **RCC_ClkInitStruct:** pointer to an RCC_ClkInitTypeDef structure that contains the current clock configuration. • **pFLatency:** Pointer on the Flash Latency.
Return values	• **None**

40.3 RCC Firmware driver defines

40.3.1 RCC

RCC AHB Clock Enable Disable

__HAL_RCC_GPIOA_CLK_ENABLE

__HAL_RCC_GPIOB_CLK_ENABLE

__HAL_RCC_GPIOC_CLK_ENABLE
__HAL_RCC_GPIOD_CLK_ENABLE
__HAL_RCC_GPIOF_CLK_ENABLE
__HAL_RCC_CRC_CLK_ENABLE
__HAL_RCC_DMA1_CLK_ENABLE
__HAL_RCC_SRAM_CLK_ENABLE
__HAL_RCC_FLITF_CLK_ENABLE
__HAL_RCC_TSC_CLK_ENABLE
__HAL_RCC_GPIOA_CLK_DISABLE
__HAL_RCC_GPIOB_CLK_DISABLE
__HAL_RCC_GPIOC_CLK_DISABLE
__HAL_RCC_GPIOD_CLK_DISABLE
__HAL_RCC_GPIOF_CLK_DISABLE
__HAL_RCC_CRC_CLK_DISABLE
__HAL_RCC_DMA1_CLK_DISABLE
__HAL_RCC_SRAM_CLK_DISABLE
__HAL_RCC_FLITF_CLK_DISABLE
__HAL_RCC_TSC_CLK_DISABLE

AHB Clock Source

RCC_SYSCLK_DIV1	SYSCLK not divided
RCC_SYSCLK_DIV2	SYSCLK divided by 2
RCC_SYSCLK_DIV4	SYSCLK divided by 4
RCC_SYSCLK_DIV8	SYSCLK divided by 8
RCC_SYSCLK_DIV16	SYSCLK divided by 16
RCC_SYSCLK_DIV64	SYSCLK divided by 64
RCC_SYSCLK_DIV128	SYSCLK divided by 128
RCC_SYSCLK_DIV256	SYSCLK divided by 256
RCC_SYSCLK_DIV512	SYSCLK divided by 512

RCC AHB Force Release Reset

__HAL_RCC_AHB_FORCE_RESET
__HAL_RCC_GPIOA_FORCE_RESET
__HAL_RCC_GPIOB_FORCE_RESET
__HAL_RCC_GPIOC_FORCE_RESET
__HAL_RCC_GPIOD_FORCE_RESET
__HAL_RCC_GPIOF_FORCE_RESET
__HAL_RCC_TSC_FORCE_RESET

__HAL_RCC_AHB_RELEASE_RESET

__HAL_RCC_GPIOA_RELEASE_RESET

__HAL_RCC_GPIOB_RELEASE_RESET

__HAL_RCC_GPIOC_RELEASE_RESET

__HAL_RCC_GPIOD_RELEASE_RESET

__HAL_RCC_GPIOF_RELEASE_RESET

__HAL_RCC_TSC_RELEASE_RESET

AHB Peripheral Clock Enable Disable Status

__HAL_RCC_GPIOA_IS_CLK_ENABLED

__HAL_RCC_GPIOB_IS_CLK_ENABLED

__HAL_RCC_GPIOC_IS_CLK_ENABLED

__HAL_RCC_GPIOD_IS_CLK_ENABLED

__HAL_RCC_GPIOF_IS_CLK_ENABLED

__HAL_RCC_CRC_IS_CLK_ENABLED

__HAL_RCC_DMA1_IS_CLK_ENABLED

__HAL_RCC_SRAM_IS_CLK_ENABLED

__HAL_RCC_FLITF_IS_CLK_ENABLED

__HAL_RCC_TSC_IS_CLK_ENABLED

__HAL_RCC_GPIOA_IS_CLK_DISABLED

__HAL_RCC_GPIOB_IS_CLK_DISABLED

__HAL_RCC_GPIOC_IS_CLK_DISABLED

__HAL_RCC_GPIOD_IS_CLK_DISABLED

__HAL_RCC_GPIOF_IS_CLK_DISABLED

__HAL_RCC_CRC_IS_CLK_DISABLED

__HAL_RCC_DMA1_IS_CLK_DISABLED

__HAL_RCC_SRAM_IS_CLK_DISABLED

__HAL_RCC_FLITF_IS_CLK_DISABLED

__HAL_RCC_TSC_IS_CLK_DISABLED

APB1 APB2 Clock Source

RCC_HCLK_DIV1	HCLK not divided
RCC_HCLK_DIV2	HCLK divided by 2
RCC_HCLK_DIV4	HCLK divided by 4
RCC_HCLK_DIV8	HCLK divided by 8
RCC_HCLK_DIV16	HCLK divided by 16

RCC APB1 Clock Enable Disable

__HAL_RCC_TIM2_CLK_ENABLE

__HAL_RCC_TIM6_CLK_ENABLE

__HAL_RCC_WWDG_CLK_ENABLE

__HAL_RCC_USART2_CLK_ENABLE

__HAL_RCC_USART3_CLK_ENABLE

__HAL_RCC_I2C1_CLK_ENABLE

__HAL_RCC_PWR_CLK_ENABLE

__HAL_RCC_DAC1_CLK_ENABLE

__HAL_RCC_TIM2_CLK_DISABLE

__HAL_RCC_TIM6_CLK_DISABLE

__HAL_RCC_WWDG_CLK_DISABLE

__HAL_RCC_USART2_CLK_DISABLE

__HAL_RCC_USART3_CLK_DISABLE

__HAL_RCC_I2C1_CLK_DISABLE

__HAL_RCC_PWR_CLK_DISABLE

__HAL_RCC_DAC1_CLK_DISABLE

APB1 Peripheral Clock Enable Disable Status

__HAL_RCC_TIM2_IS_CLK_ENABLED

__HAL_RCC_TIM6_IS_CLK_ENABLED

__HAL_RCC_WWDG_IS_CLK_ENABLED

__HAL_RCC_USART2_IS_CLK_ENABLED

__HAL_RCC_USART3_IS_CLK_ENABLED

__HAL_RCC_I2C1_IS_CLK_ENABLED

__HAL_RCC_PWR_IS_CLK_ENABLED

__HAL_RCC_DAC1_IS_CLK_ENABLED

__HAL_RCC_TIM2_IS_CLK_DISABLED

__HAL_RCC_TIM6_IS_CLK_DISABLED

__HAL_RCC_WWDG_IS_CLK_DISABLED

__HAL_RCC_USART2_IS_CLK_DISABLED

__HAL_RCC_USART3_IS_CLK_DISABLED

__HAL_RCC_I2C1_IS_CLK_DISABLED

__HAL_RCC_PWR_IS_CLK_DISABLED

__HAL_RCC_DAC1_IS_CLK_DISABLED

RCC APB1 Force Release Reset

__HAL_RCC_APB1_FORCE_RESET

__HAL_RCC_TIM2_FORCE_RESET

__HAL_RCC_TIM6_FORCE_RESET

__HAL_RCC_WWDG_FORCE_RESET
__HAL_RCC_USART2_FORCE_RESET
__HAL_RCC_USART3_FORCE_RESET
__HAL_RCC_I2C1_FORCE_RESET
__HAL_RCC_PWR_FORCE_RESET
__HAL_RCC_DAC1_FORCE_RESET
__HAL_RCC_APB1_RELEASE_RESET
__HAL_RCC_TIM2_RELEASE_RESET
__HAL_RCC_TIM6_RELEASE_RESET
__HAL_RCC_WWDG_RELEASE_RESET
__HAL_RCC_USART2_RELEASE_RESET
__HAL_RCC_USART3_RELEASE_RESET
__HAL_RCC_I2C1_RELEASE_RESET
__HAL_RCC_PWR_RELEASE_RESET
__HAL_RCC_DAC1_RELEASE_RESET

RCC APB2 Clock Enable Disable

__HAL_RCC_SYSCFG_CLK_ENABLE
__HAL_RCC_TIM15_CLK_ENABLE
__HAL_RCC_TIM16_CLK_ENABLE
__HAL_RCC_TIM17_CLK_ENABLE
__HAL_RCC_USART1_CLK_ENABLE
__HAL_RCC_SYSCFG_CLK_DISABLE
__HAL_RCC_TIM15_CLK_DISABLE
__HAL_RCC_TIM16_CLK_DISABLE
__HAL_RCC_TIM17_CLK_DISABLE
__HAL_RCC_USART1_CLK_DISABLE

APB2 Peripheral Clock Enable Disable Status

__HAL_RCC_SYSCFG_IS_CLK_ENABLED
__HAL_RCC_TIM15_IS_CLK_ENABLED
__HAL_RCC_TIM16_IS_CLK_ENABLED
__HAL_RCC_TIM17_IS_CLK_ENABLED
__HAL_RCC_USART1_IS_CLK_ENABLED
__HAL_RCC_SYSCFG_IS_CLK_DISABLED
__HAL_RCC_TIM15_IS_CLK_DISABLED
__HAL_RCC_TIM16_IS_CLK_DISABLED
__HAL_RCC_TIM17_IS_CLK_DISABLED

__HAL_RCC_USART1_IS_CLK_DISABLED

RCC APB2 Force Release Reset

__HAL_RCC_APB2_FORCE_RESET

__HAL_RCC_SYSCFG_FORCE_RESET

__HAL_RCC_TIM15_FORCE_RESET

__HAL_RCC_TIM16_FORCE_RESET

__HAL_RCC_TIM17_FORCE_RESET

__HAL_RCC_USART1_FORCE_RESET

__HAL_RCC_APB2_RELEASE_RESET

__HAL_RCC_SYSCFG_RELEASE_RESET

__HAL_RCC_TIM15_RELEASE_RESET

__HAL_RCC_TIM16_RELEASE_RESET

__HAL_RCC_TIM17_RELEASE_RESET

__HAL_RCC_USART1_RELEASE_RESET

BitAddress AliasRegion

RCC_CR_OFFSET_BB

RCC_CFGR_OFFSET_BB

RCC_CIR_OFFSET_BB

RCC_BDCR_OFFSET_BB

RCC_CSR_OFFSET_BB

RCC_HSION_BIT_NUMBER

RCC_CR_HSION_BB

RCC_HSEON_BIT_NUMBER

RCC_CR_HSEON_BB

RCC_CSSON_BIT_NUMBER

RCC_CR_CSSON_BB

RCC_PLLON_BIT_NUMBER

RCC_CR_PLLON_BB

RCC_LSION_BIT_NUMBER

RCC_CSR_LSION_BB

RCC_RMVF_BIT_NUMBER

RCC_CSR_RMVF_BB

RCC_LSEON_BIT_NUMBER

RCC_BDCR_LSEON_BB

RCC_LSEBYP_BIT_NUMBER

RCC_BDCR_LSEBYP_BB

RCC_RTCEN_BIT_NUMBER

RCC_BDCR_RTCEN_BB

RCC_BDRST_BIT_NUMBER

RCC_BDCR_BDRST_BB

Flags

RCC_FLAG_HSIRDY	Internal High Speed clock ready flag
RCC_FLAG_HSERDY	External High Speed clock ready flag
RCC_FLAG_PLLRDY	PLL clock ready flag
RCC_FLAG_LSIRDY	Internal Low Speed oscillator Ready
RCC_FLAG_V18PWRRST	
RCC_FLAG_OBLRST	Options bytes loading reset flag
RCC_FLAG_PINRST	PIN reset flag
RCC_FLAG_PORRST	POR/PDR reset flag
RCC_FLAG_SFTRST	Software Reset flag
RCC_FLAG_IWDGRST	Independent Watchdog reset flag
RCC_FLAG_WWDGRST	Window watchdog reset flag
RCC_FLAG_LPWRRST	Low-Power reset flag
RCC_FLAG_LSERDY	External Low Speed oscillator Ready
RCC_FLAG_MCO	Microcontroller Clock Output Flag

Flags Interrupts Management

__HAL_RCC_ENABLE_IT

Description:

- Enable RCC interrupt.

Parameters:

- __INTERRUPT__: specifies the RCC interrupt sources to be enabled. This parameter can be any combination of the following values:
  - RCC_IT_LSIRDY LSI ready interrupt
  - RCC_IT_LSERDY LSE ready interrupt
  - RCC_IT_HSIRDY HSI ready interrupt
  - RCC_IT_HSERDY HSE ready interrupt
  - RCC_IT_PLLRDY main PLL ready interrupt

__HAL_RCC_DISABLE_IT

Description:

- Disable RCC interrupt.

Parameters:

- __INTERRUPT__: specifies the RCC interrupt sources to be disabled. This parameter can be any combination of the following values:
  - RCC_IT_LSIRDY LSI ready interrupt

- RCC_IT_LSERDY LSE ready interrupt
- RCC_IT_HSIRDY HSI ready interrupt
- RCC_IT_HSERDY HSE ready interrupt
- RCC_IT_PLLRDY main PLL ready interrupt

__HAL_RCC_CLEAR_IT

Description:

- Clear the RCC's interrupt pending bits.

Parameters:

- __INTERRUPT__: specifies the interrupt pending bit to clear. This parameter can be any combination of the following values:
  - RCC_IT_LSIRDY LSI ready interrupt.
  - RCC_IT_LSERDY LSE ready interrupt.
  - RCC_IT_HSIRDY HSI ready interrupt.
  - RCC_IT_HSERDY HSE ready interrupt.
  - RCC_IT_PLLRDY Main PLL ready interrupt.
  - RCC_IT_CSS Clock Security System interrupt

__HAL_RCC_GET_IT

Description:

- Check the RCC's interrupt has occurred or not.

Parameters:

- __INTERRUPT__: specifies the RCC interrupt source to check. This parameter can be one of the following values:
  - RCC_IT_LSIRDY LSI ready interrupt.
  - RCC_IT_LSERDY LSE ready interrupt.
  - RCC_IT_HSIRDY HSI ready interrupt.
  - RCC_IT_HSERDY HSE ready interrupt.
  - RCC_IT_PLLRDY Main PLL ready interrupt.
  - RCC_IT_CSS Clock Security System interrupt

Return value:

- The: new state of __INTERRUPT__ (TRUE or FALSE).

__HAL_RCC_CLEAR_RESET_FLAGS

The reset flags are RCC_FLAG_PINRST, RCC_FLAG_PORRST, RCC_FLAG_SFTRST, RCC_FLAG_OBLRST, RCC_FLAG_IWDGRST, RCC_FLAG_WWDGRST, RCC_FLAG_LPWRRST

__HAL_RCC_GET_FLAG

Description:

- Check RCC flag is set or not.

Parameters:

- __FLAG__: specifies the flag to check. This parameter can be one of the following values:
  - RCC_FLAG_HSIRDY HSI oscillator clock ready.
  - RCC_FLAG_HSERDY HSE oscillator clock ready.
  - RCC_FLAG_PLLRDY Main PLL clock ready.
  - RCC_FLAG_LSERDY LSE oscillator clock ready.
  - RCC_FLAG_LSIRDY LSI oscillator clock ready.
  - RCC_FLAG_OBLRST Option Byte Load reset
  - RCC_FLAG_PINRST Pin reset.
  - RCC_FLAG_PORRST POR/PDR reset.
  - RCC_FLAG_SFTRST Software reset.
  - RCC_FLAG_IWDGRST Independent Watchdog reset.
  - RCC_FLAG_WWDGRST Window Watchdog reset.
  - RCC_FLAG_LPWRRST Low Power reset.

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

Get Clock source

__HAL_RCC_SYSCLK_CONFIG

Description:

- Macro to configure the system clock source.

Parameters:

- __SYSCLKSOURCE__: specifies the system clock source. This parameter can be one of the following values:
  - RCC_SYSCLKSOURCE_HSI HSI oscillator is used as system clock source.
  - RCC_SYSCLKSOURCE_HSE HSE oscillator is used as system clock source.
  - RCC_SYSCLKSOURCE_PLLCLK PLL output is used as system clock source.

__HAL_RCC_GET_SYSCLK_SOURCE

Description:

- Macro to get the clock source used as system clock.

Return value:

- The: clock source used as system clock. The returned value can be one of the following:
  - RCC_SYSCLKSOURCE_STATUS_HSI HSI

used as system clock
- RCC_SYSCLKSOURCE_STATUS_HSE HSE used as system clock
- RCC_SYSCLKSOURCE_STATUS_PLLCLK PLL used as system clock

HSE Config

RCC_HSE_OFF HSE clock deactivation

RCC_HSE_ON HSE clock activation

RCC_HSE_BYPASS External clock source for HSE clock

HSE Configuration

__HAL_RCC_HSE_CONFIG **Description:**

- Macro to configure the External High Speed oscillator (HSE).

Parameters:

- __STATE__: specifies the new state of the HSE. This parameter can be one of the following values:
  - RCC_HSE_OFF turn OFF the HSE oscillator, HSERDY flag goes low after 6 HSE oscillator clock cycles.
  - RCC_HSE_ON turn ON the HSE oscillator
  - RCC_HSE_BYPASS HSE oscillator bypassed with external clock

Notes:

- Transition HSE Bypass to HSE On and HSE On to HSE Bypass are not supported by this macro. User should request a transition to HSE Off first and then HSE On or HSE Bypass. After enabling the HSE (RCC_HSE_ON or RCC_HSE_Bypass), the application software should wait on HSERDY flag to be set indicating that HSE clock is stable and can be used to clock the PLL and/or system clock. HSE state can not be changed if it is used directly or through the PLL as system clock. In this case, you have to select another source of the system clock then change the HSE state (ex. disable it). The HSE is stopped by hardware when entering STOP and STANDBY modes. This function reset the CSSON bit, so if the clock security system(CSS) was previously enabled you have to enable it again after calling this function.

HSI Config

RCC_HSI_OFF HSI clock deactivation

RCC_HSI_ON HSI clock activation

RCC_HSICALIBRATION_DEFAULT

HSI Configuration

__HAL_RCC_HSI_ENABLE **Notes:**

- The HSI is stopped by hardware when

entering STOP and STANDBY modes. It is used (enabled by hardware) as system clock source after startup from Reset, wakeup from STOP and STANDBY mode, or in case of failure of the HSE used directly or indirectly as system clock (if the Clock Security System CSS is enabled). HSI can not be stopped if it is used as system clock source. In this case, you have to select another source of the system clock then stop the HSI. After enabling the HSI, the application software should wait on HSIRDY flag to be set indicating that HSI clock is stable and can be used as system clock source. When the HSI is stopped, HSIRDY flag goes low after 6 HSI oscillator clock cycles.

__HAL_RCC_HSI_DISABLE

__HAL_RCC_HSI_CALIBRATION VALUE_ADJUST

Description:

- Macro to adjust the Internal High Speed oscillator (HSI) calibration value.

Parameters:

- _HSICALIBRATIONVALUE_: specifies the calibration trimming value. (default is RCC_HSICALIBRATION_DEFAULT). This parameter must be a number between 0 and 0x1F.

Notes:

- The calibration is used to compensate for the variations in voltage and temperature that influence the frequency of the internal HSI RC.

RCC I2C1 Clock Source

RCC_I2C1CLKSOURCE_HSI

RCC_I2C1CLKSOURCE_SYSCLK

RCC I2Cx Clock Config

__HAL_RCC_I2C1_CONFIG

Description:

- Macro to configure the I2C1 clock (I2C1CLK).

Parameters:

- __I2C1CLKSOURCE__: specifies the I2C1 clock source. This parameter can be one of the following values:
  - RCC_I2C1CLKSOURCE_HSI HSI selected as I2C1 clock
  - RCC_I2C1CLKSOURCE_SYSCLK

System Clock selected as I2C1 clock

__HAL_RCC_GET_I2C1_SOURCE **Description:**

- Macro to get the I2C1 clock source.

Return value:

- The: clock source can be one of the following values:
  - RCC_I2C1CLKSOURCE_HSI HSI selected as I2C1 clock
  - RCC_I2C1CLKSOURCE_SYSCLK System Clock selected as I2C1 clock

Interrupts

RCC_IT_LSIRDY	LSI Ready Interrupt flag
RCC_IT_LSERDY	LSE Ready Interrupt flag
RCC_IT_HSIRDY	HSI Ready Interrupt flag
RCC_IT_HSERDY	HSE Ready Interrupt flag
RCC_IT_PLLRDY	PLL Ready Interrupt flag
RCC_IT_CSS	Clock Security System Interrupt flag

LSE Config

RCC_LSE_OFF	LSE clock deactivation
RCC_LSE_ON	LSE clock activation
RCC_LSE_BYPASS	External clock source for LSE clock

LSE Configuration

__HAL_RCC_LSE_CONFIG **Description:**

- Macro to configure the External Low Speed oscillator (LSE).

Parameters:

- __STATE__: specifies the new state of the LSE. This parameter can be one of the following values:
  - RCC_LSE_OFF turn OFF the LSE oscillator, LSERDY flag goes low after 6 LSE oscillator clock cycles.
  - RCC_LSE_ON turn ON the LSE oscillator.
  - RCC_LSE_BYPASS LSE oscillator bypassed with external clock.

Notes:

- Transitions LSE Bypass to LSE On and LSE On to LSE Bypass are not supported by this macro. As the LSE is in the Backup domain and write access is denied to this domain after reset, you have to enable write access using HAL_PWR_EnableBkUpAccess() function before to configure the LSE (to be done once after reset). After enabling the LSE (RCC_LSE_ON or RCC_LSE_BYPASS), the application software should

wait on LSERDY flag to be set indicating that LSE clock is stable and can be used to clock the RTC.

LSI Config

RCC_LSI_OFF LSI clock deactivation

RCC_LSI_ON LSI clock activation

LSI Configuration

__HAL_RCC_LSI_ENABLE **Notes:**

- After enabling the LSI, the application software should wait on LSIRDY flag to be set indicating that LSI clock is stable and can be used to clock the IWDG and/or the RTC.

__HAL_RCC_LSI_DISABLE **Notes:**

- LSI can not be disabled if the IWDG is running. When the LSI is stopped, LSIRDY flag goes low after 6 LSI oscillator clock cycles.

MCO Index

RCC_MCO1

RCC_MCO MCO1 to be compliant with other families with 2 MCOs

Oscillator Type

RCC_OSCILLATORTYPE_NONE

RCC_OSCILLATORTYPE_HSE

RCC_OSCILLATORTYPE_HSI

RCC_OSCILLATORTYPE_LSE

RCC_OSCILLATORTYPE_LSI

PLL Clock Source

RCC_PLLSOURCE_HSI HSI clock divided by 2 selected as PLL entry clock source

RCC_PLLSOURCE_HSE HSE clock selected as PLL entry clock source

PLL Config

RCC_PLL_NONE PLL is not configured

RCC_PLL_OFF PLL deactivation

RCC_PLL_ON PLL activation

PLL Configuration

__HAL_RCC_PLL_ENABLE

Notes:

- After enabling the main PLL, the application software should wait on PLLRDY flag to be set indicating that PLL clock is stable and can be used as system clock source. The main PLL is disabled by hardware when entering STOP and STANDBY modes.

__HAL_RCC_PLL_DISABLE

Notes:

- The main PLL can not be disabled if it is used as system clock source

__HAL_RCC_GET_PLL_OSCSOURCE

Description:

- Get oscillator clock selected as PLL input clock.

Return value:

- The: clock source used for PLL entry. The returned value can be one of the following:
  - RCC_PLLSOURCE_HSI HSI oscillator clock selected as PLL input clock
  - RCC_PLLSOURCE_HSE HSE oscillator clock selected as PLL input clock

RCC PLL HSE Prediv Factor

RCC_HSE_PREDIV_DIV1

RCC_HSE_PREDIV_DIV2

RCC_HSE_PREDIV_DIV3

RCC_HSE_PREDIV_DIV4

RCC_HSE_PREDIV_DIV5

RCC_HSE_PREDIV_DIV6

RCC_HSE_PREDIV_DIV7

RCC_HSE_PREDIV_DIV8

RCC_HSE_PREDIV_DIV9

RCC_HSE_PREDIV_DIV10

RCC_HSE_PREDIV_DIV11

RCC_HSE_PREDIV_DIV12

RCC_HSE_PREDIV_DIV13

RCC_HSE_PREDIV_DIV14

RCC_HSE_PREDIV_DIV15

RCC_HSE_PREDIV_DIV16

RCC PLL Multiplication Factor

RCC_PLL_MUL2

RCC_PLL_MUL3

RCC_PLL_MUL4

RCC_PLL_MUL5

RCC_PLL_MUL6

RCC_PLL_MUL7

RCC_PLL_MUL8

RCC_PLL_MUL9

RCC_PLL_MUL10

RCC_PLL_MUL11

RCC_PLL_MUL12

RCC_PLL_MUL13

RCC_PLL_MUL14

RCC_PLL_MUL15

RCC_PLL_MUL16

Register offsets

RCC_OFFSET

RCC_CR_OFFSET

RCC_CFGR_OFFSET

RCC_CIR_OFFSET

RCC_BDCR_OFFSET

RCC_CSR_OFFSET

RCC RTC Clock Configuration

__HAL_RCC_RTC_CONFIG

Description:

- Macro to configure the RTC clock (RTCCLK).

Parameters:

- __RTC_CLKSOURCE__: specifies the RTC clock source. This parameter can be one of the following values:
  - RCC_RTCCLKSOURCE_NO_CLK No clock selected as RTC clock
  - RCC_RTCCLKSOURCE_LSE LSE selected as RTC clock
  - RCC_RTCCLKSOURCE_LSI LSI selected as RTC clock
  - RCC_RTCCLKSOURCE_HSE_DIV32 HSE clock divided by 32

Notes:

- As the RTC clock configuration bits are in the Backup domain and write access is denied to this domain after reset, you have to enable write access using the Power Backup Access macro before to configure the RTC clock source (to be done once after reset). Once the RTC clock is configured it cannot be changed unless the Backup domain is reset using __HAL_RCC_BACKUPRESET_FORCE() macro, or by a Power On Reset (POR).
- If the LSE or LSI is used as RTC clock source, the RTC continues to work in STOP and STANDBY modes, and can be used as wakeup source. However, when the LSI clock and HSE clock divided by 32 is used as RTC clock source, the RTC cannot be used in STOP and STANDBY modes. The system must always be configured so as to get a PCLK frequency greater than or equal to the RTCCLK frequency for a proper operation of the RTC.

__HAL_RCC_GET_RTC_SOURCE

Description:

- Macro to get the RTC clock source.

Return value:

- The: clock source can be one of the following values:
  - RCC_RTCCLKSOURCE_NO_CLK No clock selected as RTC clock
  - RCC_RTCCLKSOURCE_LSE LSE selected as RTC clock
  - RCC_RTCCLKSOURCE_LSI LSI selected as RTC clock
  - RCC_RTCCLKSOURCE_HSE_DIV32 HSE clock divided by 32

__HAL_RCC_RTC_ENABLE

Notes:

- These macros must be used only after the RTC clock source was selected.

__HAL_RCC_RTC_DISABLE

Notes:

- These macros must be used only after the RTC clock source was selected.

__HAL_RCC_BACKUPRESET_FORCE

Notes:

- This function resets the RTC peripheral (including the backup registers) and the RTC clock source selection in RCC_BDCR register.

__HAL_RCC_BACKUPRESET_RELEASE

RTC Clock Source

RCC_RTCCLKSOURCE_NO_CLK	No clock
RCC_RTCCLKSOURCE_LSE	LSE oscillator clock used as RTC clock
RCC_RTCCLKSOURCE_LSI	LSI oscillator clock used as RTC clock
RCC_RTCCLKSOURCE_HSE_DIV32	HSE oscillator clock divided by 32 used as RTC clock

System Clock Source

RCC_SYSCLKSOURCE_HSI	HSI selected as system clock
RCC_SYSCLKSOURCE_HSE	HSE selected as system clock
RCC_SYSCLKSOURCE_PLLCLK	PLL selected as system clock

System Clock Source Status

RCC_SYSCLKSOURCE_STATUS_HSI	HSI used as system clock
RCC_SYSCLKSOURCE_STATUS_HSE	HSE used as system clock
RCC_SYSCLKSOURCE_STATUS_PLLCLK	PLL used as system clock

System Clock Type

RCC_CLOCKTYPE_SYSCLK	SYSCLK to configure
RCC_CLOCKTYPE_HCLK	HCLK to configure
RCC_CLOCKTYPE_PCLK1	PCLK1 to configure
RCC_CLOCKTYPE_PCLK2	PCLK2 to configure

RCC Timeout

RCC_DBP_TIMEOUT_VALUE

RCC_LSE_TIMEOUT_VALUE

CLOCKSWITCH_TIMEOUT_VALUE

HSE_TIMEOUT_VALUE

HSI_TIMEOUT_VALUE

LSI_TIMEOUT_VALUE

PLL_TIMEOUT_VALUE

RCC USART2 Clock Source

RCC_USART2CLKSOURCE_PCLK1

RCC_USART2CLKSOURCE_SYSCLK

RCC_USART2CLKSOURCE_LSE

RCC_USART2CLKSOURCE_HSI

RCC USART3 Clock Source

RCC_USART3CLKSOURCE_PCLK1

RCC_USART3CLKSOURCE_SYSCLK

RCC_USART3CLKSOURCE_LSE

RCC_USART3CLKSOURCE_HSI

RCC USARTx Clock Config

__HAL_RCC_USART1_CONFIG

Description:

- Macro to configure the USART1 clock (USART1CLK).

Parameters:

- __USART1CLKSOURCE__: specifies the USART1 clock source. This parameter can be one of the following values:
  - RCC_USART1CLKSOURCE_PCLK2 PCLK2 selected as USART1 clock
  - RCC_USART1CLKSOURCE_HSI HSI selected as USART1 clock
  - RCC_USART1CLKSOURCE_SYSCLK System Clock selected as USART1 clock
  - RCC_USART1CLKSOURCE_LSE LSE selected as USART1 clock

__HAL_RCC_GET_USART1_SOURCE

Description:

- Macro to get the USART1 clock source.

Return value:

- The: clock source can be one of the following values:
  - RCC_USART1CLKSOURCE_PCLK2 PCLK2 selected as USART1 clock
  - RCC_USART1CLKSOURCE_HSI HSI selected as USART1 clock
  - RCC_USART1CLKSOURCE_SYSCLK System Clock selected as USART1 clock
  - RCC_USART1CLKSOURCE_LSE LSE selected as USART1 clock

__HAL_RCC_USART2_CONFIG

Description:

- Macro to configure the USART2 clock (USART2CLK).

Parameters:

- __USART2CLKSOURCE__: specifies the USART2 clock source. This parameter can be one of the following values:
  - RCC_USART2CLKSOURCE_PCLK1 PCLK1 selected as USART2 clock
  - RCC_USART2CLKSOURCE_HSI HSI selected as USART2 clock
  - RCC_USART2CLKSOURCE_SYSCLK System Clock selected as USART2 clock
  - RCC_USART2CLKSOURCE_LSE LSE selected as USART2 clock

__HAL_RCC_GET_USART2_SOURCE

Description:

- Macro to get the USART2 clock source.

Return value:

- The: clock source can be one of the following values:
  - RCC_USART2CLKSOURCE_PCLK1 PCLK1 selected as USART2 clock
  - RCC_USART2CLKSOURCE_HSI HSI selected as USART2 clock
  - RCC_USART2CLKSOURCE_SYSCLK System Clock selected as USART2 clock
  - RCC_USART2CLKSOURCE_LSE LSE selected as USART2 clock

__HAL_RCC_USART3_CONFIG

Description:

- Macro to configure the USART3 clock (USART3CLK).

Parameters:

- __USART3CLKSOURCE__: specifies the USART3 clock source. This parameter can be one of the following values:
  - RCC_USART3CLKSOURCE_PCLK1 PCLK1 selected as USART3 clock
  - RCC_USART3CLKSOURCE_HSI HSI selected as USART3 clock
  - RCC_USART3CLKSOURCE_SYSCLK System Clock selected as USART3 clock
  - RCC_USART3CLKSOURCE_LSE LSE selected as USART3 clock

__HAL_RCC_GET_USART3_SOURCE

Description:

- Macro to get the USART3 clock source.

Return value:

- The: clock source can be one of the following values:
  - RCC_USART3CLKSOURCE_PCLK1 PCLK1 selected as USART3 clock
  - RCC_USART3CLKSOURCE_HSI HSI selected as USART3 clock
  - RCC_USART3CLKSOURCE_SYSCLK System Clock selected as USART3 clock
  - RCC_USART3CLKSOURCE_LSE LSE selected as USART3 clock

41 HAL RCC Extension Driver

41.1 RCCEx Firmware driver registers structures

41.1.1 RCC_PeriphCLKInitTypeDef

Data Fields

- ***uint32_t PeriphClockSelection***
- ***uint32_t RTCClockSelection***
- ***uint32_t Usart1ClockSelection***
- ***uint32_t Usart2ClockSelection***
- ***uint32_t Usart3ClockSelection***
- ***uint32_t Uart4ClockSelection***
- ***uint32_t Uart5ClockSelection***
- ***uint32_t I2c1ClockSelection***
- ***uint32_t I2c2ClockSelection***
- ***uint32_t Adc12ClockSelection***
- ***uint32_t Adc34ClockSelection***
- ***uint32_t I2sClockSelection***
- ***uint32_t Tim1ClockSelection***
- ***uint32_t Tim8ClockSelection***
- ***uint32_t USBClockSelection***

Field Documentation

- ***uint32_t RCC_PeriphCLKInitTypeDef::PeriphClockSelection***
  The Extended Clock to be configured. This parameter can be a value of ***RCCEx_Periph_Clock_Selection***
- ***uint32_t RCC_PeriphCLKInitTypeDef::RTCClockSelection***
  Specifies RTC Clock Prescalers Selection This parameter can be a value of ***RCC_RTC_Clock_Source***
- ***uint32_t RCC_PeriphCLKInitTypeDef::Usart1ClockSelection***
  USART1 clock source This parameter can be a value of ***RCCEx_USART1_Clock_Source***
- ***uint32_t RCC_PeriphCLKInitTypeDef::Usart2ClockSelection***
  USART2 clock source This parameter can be a value of ***RCC_USART2_Clock_Source***
- ***uint32_t RCC_PeriphCLKInitTypeDef::Usart3ClockSelection***
  USART3 clock source This parameter can be a value of ***RCC_USART3_Clock_Source***
- ***uint32_t RCC_PeriphCLKInitTypeDef::Uart4ClockSelection***
  UART4 clock source This parameter can be a value of ***RCCEx_UART4_Clock_Source***
- ***uint32_t RCC_PeriphCLKInitTypeDef::Uart5ClockSelection***
  UART5 clock source This parameter can be a value of ***RCCEx_UART5_Clock_Source***
- ***uint32_t RCC_PeriphCLKInitTypeDef::I2c1ClockSelection***
  I2C1 clock source This parameter can be a value of ***RCC_I2C1_Clock_Source***
- ***uint32_t RCC_PeriphCLKInitTypeDef::I2c2ClockSelection***
  I2C2 clock source This parameter can be a value of ***RCCEx_I2C2_Clock_Source***

- ***uint32_t RCC_PeriphCLKInitTypeDef::Adc12ClockSelection***
  ADC1 & ADC2 clock source This parameter can be a value of ***RCCEx_ADC12_Clock_Source***
- ***uint32_t RCC_PeriphCLKInitTypeDef::Adc34ClockSelection***
  ADC3 & ADC4 clock source This parameter can be a value of ***RCCEx_ADC34_Clock_Source***
- ***uint32_t RCC_PeriphCLKInitTypeDef::I2sClockSelection***
  I2S clock source This parameter can be a value of ***RCCEx_I2S_Clock_Source***
- ***uint32_t RCC_PeriphCLKInitTypeDef::Tim1ClockSelection***
  TIM1 clock source This parameter can be a value of ***RCCEx_TIM1_Clock_Source***
- ***uint32_t RCC_PeriphCLKInitTypeDef::Tim8ClockSelection***
  TIM8 clock source This parameter can be a value of ***RCCEx_TIM8_Clock_Source***
- ***uint32_t RCC_PeriphCLKInitTypeDef::USBClockSelection***
  USB clock source This parameter can be a value of ***RCCEx_USB_Clock_Source***

41.2 RCCEx Firmware driver API description

41.2.1 Extended Peripheral Control functions

This subsection provides a set of functions allowing to control the RCC Clocks frequencies.



Important note: Care must be taken when HAL_RCCEx_PeriphCLKConfig() is used to select the RTC clock source; in this case the Backup domain will be reset in order to modify the RTC Clock source, as consequence RTC registers (including the backup registers) are set to their reset values.

This section contains the following APIs:

- ***HAL_RCCEx_PeriphCLKConfig()***
- ***HAL_RCCEx_GetPeriphCLKConfig()***
- ***HAL_RCCEx_GetPeriphCLKFreq()***

41.2.2 Detailed description of functions

HAL_RCCEx_PeriphCLKConfig

Function name	**HAL_StatusTypeDef HAL_RCCEx_PeriphCLKConfig (RCC_PeriphCLKInitTypeDef * PeriphClkInit)**
Function description	Initializes the RCC extended peripherals clocks according to the specified parameters in the RCC_PeriphCLKInitTypeDef.
Parameters	• **PeriphClkInit:** pointer to an RCC_PeriphCLKInitTypeDef structure that contains the configuration information for the Extended Peripherals clocks (ADC, CEC, I2C, I2S, SDADC, HRTIM, TIM, USART, RTC and USB).
Return values	• **HAL:** status
Notes	• Care must be taken when HAL_RCCEx_PeriphCLKConfig() is used to select the RTC clock source; in this case the Backup domain will be reset in order to modify the RTC Clock source, as consequence RTC registers (including the backup registers) and RCC_BDCR register are set to their reset values.

HAL_RCCEx_GetPeriphCLKConfig

Function name **void HAL_RCCEx_GetPeriphCLKConfig (RCC_PeriphCLKInitTypeDef * PeriphClkInit)**

Function description Get the RCC_ClkInitStruct according to the internal RCC configuration registers.

Parameters
- **PeriphClkInit:** pointer to an RCC_PeriphCLKInitTypeDef structure that returns the configuration information for the Extended Peripherals clocks (ADC, CEC, I2C, I2S, SDADC, HRTIM, TIM, USART, RTC and USB clocks).

Return values
- **None**

HAL_RCCEx_GetPeriphCLKFreq

Function name **uint32_t HAL_RCCEx_GetPeriphCLKFreq (uint32_t PeriphClk)**

Function description Returns the peripheral clock frequency.

Parameters
- **PeriphClk:** Peripheral clock identifier This parameter can be one of the following values:
  - RCC_PERIPHCLK_RTC RTC peripheral clock
  - RCC_PERIPHCLK_USART1 USART1 peripheral clock
  - RCC_PERIPHCLK_I2C1 I2C1 peripheral clock
  - RCC_PERIPHCLK_USART2 USART2 peripheral clock
  - RCC_PERIPHCLK_USART3 USART3 peripheral clock
  - RCC_PERIPHCLK_UART4 UART4 peripheral clock
  - RCC_PERIPHCLK_UART5 UART5 peripheral clock
  - RCC_PERIPHCLK_I2C2 I2C2 peripheral clock
  - RCC_PERIPHCLK_I2S I2S peripheral clock
  - RCC_PERIPHCLK_USB USB peripheral clock
  - RCC_PERIPHCLK_ADC12 ADC12 peripheral clock
  - RCC_PERIPHCLK_ADC34 ADC34 peripheral clock
  - RCC_PERIPHCLK_TIM1 TIM1 peripheral clock
  - RCC_PERIPHCLK_TIM8 TIM8 peripheral clock

Return values
- **Frequency:** in Hz (0: means that no available frequency for the peripheral)

Notes
- Returns 0 if peripheral clock is unknown or 0xDEADDEAD if not applicable.

41.3 RCCEx Firmware driver defines

41.3.1 RCCEx

RCC Extended ADC12 Clock Source

RCC_ADC12PLLCLK_OFF

RCC_ADC12PLLCLK_DIV1

RCC_ADC12PLLCLK_DIV2

RCC_ADC12PLLCLK_DIV4

RCC_ADC12PLLCLK_DIV6

RCC_ADC12PLLCLK_DIV8

RCC_ADC12PLLCLK_DIV10

RCC_ADC12PLLCLK_DIV12

RCC_ADC12PLLCLK_DIV16

RCC_ADC12PLLCLK_DIV32

RCC_ADC12PLLCLK_DIV64

RCC_ADC12PLLCLK_DIV128

RCC_ADC12PLLCLK_DIV256

RCC Extended ADC34 Clock Source

RCC_ADC34PLLCLK_OFF

RCC_ADC34PLLCLK_DIV1

RCC_ADC34PLLCLK_DIV2

RCC_ADC34PLLCLK_DIV4

RCC_ADC34PLLCLK_DIV6

RCC_ADC34PLLCLK_DIV8

RCC_ADC34PLLCLK_DIV10

RCC_ADC34PLLCLK_DIV12

RCC_ADC34PLLCLK_DIV16

RCC_ADC34PLLCLK_DIV32

RCC_ADC34PLLCLK_DIV64

RCC_ADC34PLLCLK_DIV128

RCC_ADC34PLLCLK_DIV256

RCC Extended ADCx Clock Config

__HAL_RCC_ADC12_CONFIG

Description:

- Macro to configure the ADC1 & ADC2 clock (ADC12CLK).

Parameters:

- __ADC12CLKSource__: specifies the ADC1 & ADC2 clock source. This parameter can be one of the following values:
  - RCC_ADC12PLLCLK_OFF ADC1 & ADC2 PLL clock disabled, ADC1 & ADC2 can use AHB clock
  - RCC_ADC12PLLCLK_DIV1 PLL clock divided by 1 selected as ADC1 & ADC2 clock
  - RCC_ADC12PLLCLK_DIV2 PLL clock divided by 2 selected as ADC1 & ADC2 clock
  - RCC_ADC12PLLCLK_DIV4 PLL clock divided by 4 selected as ADC1 & ADC2 clock

- RCC_ADC12PLLCLK_DIV6 PLL clock divided by 6 selected as ADC1 & ADC2 clock
- RCC_ADC12PLLCLK_DIV8 PLL clock divided by 8 selected as ADC1 & ADC2 clock
- RCC_ADC12PLLCLK_DIV10 PLL clock divided by 10 selected as ADC1 & ADC2 clock
- RCC_ADC12PLLCLK_DIV12 PLL clock divided by 12 selected as ADC1 & ADC2 clock
- RCC_ADC12PLLCLK_DIV16 PLL clock divided by 16 selected as ADC1 & ADC2 clock
- RCC_ADC12PLLCLK_DIV32 PLL clock divided by 32 selected as ADC1 & ADC2 clock
- RCC_ADC12PLLCLK_DIV64 PLL clock divided by 64 selected as ADC1 & ADC2 clock
- RCC_ADC12PLLCLK_DIV128 PLL clock divided by 128 selected as ADC1 & ADC2 clock
- RCC_ADC12PLLCLK_DIV256 PLL clock divided by 256 selected as ADC1 & ADC2 clock

__HAL_RCC_GET_ADC12_SOURCE

Description:

- Macro to get the ADC1 & ADC2 clock.

Return value:

- The: clock source can be one of the following values:
  - RCC_ADC12PLLCLK_OFF ADC1 & ADC2 PLL clock disabled, ADC1 & ADC2 can use AHB clock
  - RCC_ADC12PLLCLK_DIV1 PLL clock divided by 1 selected as ADC1 & ADC2 clock
  - RCC_ADC12PLLCLK_DIV2 PLL clock divided by 2 selected as ADC1 & ADC2 clock
  - RCC_ADC12PLLCLK_DIV4 PLL clock divided by 4 selected as ADC1 & ADC2 clock
  - RCC_ADC12PLLCLK_DIV6 PLL clock divided by 6 selected as ADC1 & ADC2 clock
  - RCC_ADC12PLLCLK_DIV8 PLL clock divided by 8 selected as ADC1 & ADC2 clock
  - RCC_ADC12PLLCLK_DIV10 PLL clock divided by 10 selected as ADC1 &

ADC2 clock
- RCC_ADC12PLLCLK_DIV12 PLL clock divided by 12 selected as ADC1 & ADC2 clock
- RCC_ADC12PLLCLK_DIV16 PLL clock divided by 16 selected as ADC1 & ADC2 clock
- RCC_ADC12PLLCLK_DIV32 PLL clock divided by 32 selected as ADC1 & ADC2 clock
- RCC_ADC12PLLCLK_DIV64 PLL clock divided by 64 selected as ADC1 & ADC2 clock
- RCC_ADC12PLLCLK_DIV128 PLL clock divided by 128 selected as ADC1 & ADC2 clock
- RCC_ADC12PLLCLK_DIV256 PLL clock divided by 256 selected as ADC1 & ADC2 clock

__HAL_RCC_ADC34_CONFIG

Description:

- Macro to configure the ADC3 & ADC4 clock (ADC34CLK).

Parameters:

- __ADC34CLKSource__: specifies the ADC3 & ADC4 clock source. This parameter can be one of the following values:
  - RCC_ADC34PLLCLK_OFF ADC3 & ADC4 PLL clock disabled, ADC3 & ADC4 can use AHB clock
  - RCC_ADC34PLLCLK_DIV1 PLL clock divided by 1 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV2 PLL clock divided by 2 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV4 PLL clock divided by 4 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV6 PLL clock divided by 6 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV8 PLL clock divided by 8 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV10 PLL clock divided by 10 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV12 PLL clock divided by 12 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV16 PLL clock divided by 16 selected as ADC3 &

ADC4 clock
- RCC_ADC34PLLCLK_DIV32 PLL clock divided by 32 selected as ADC3 & ADC4 clock
- RCC_ADC34PLLCLK_DIV64 PLL clock divided by 64 selected as ADC3 & ADC4 clock
- RCC_ADC34PLLCLK_DIV128 PLL clock divided by 128 selected as ADC3 & ADC4 clock
- RCC_ADC34PLLCLK_DIV256 PLL clock divided by 256 selected as ADC3 & ADC4 clock

__HAL_RCC_GET_ADC34_SOURCE

Description:

- Macro to get the ADC3 & ADC4 clock.

Return value:

- The: clock source can be one of the following values:
  - RCC_ADC34PLLCLK_OFF ADC3 & ADC4 PLL clock disabled, ADC3 & ADC4 can use AHB clock
  - RCC_ADC34PLLCLK_DIV1 PLL clock divided by 1 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV2 PLL clock divided by 2 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV4 PLL clock divided by 4 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV6 PLL clock divided by 6 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV8 PLL clock divided by 8 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV10 PLL clock divided by 10 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV12 PLL clock divided by 12 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV16 PLL clock divided by 16 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV32 PLL clock divided by 32 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV64 PLL clock divided by 64 selected as ADC3 & ADC4 clock
  - RCC_ADC34PLLCLK_DIV128 PLL

clock divided by 128 selected as ADC3 & ADC4 clock
- RCC_ADC34PLLCLK_DIV256 PLL clock divided by 256 selected as ADC3 & ADC4 clock

RCC Extended AHB Clock Enable Disable

__HAL_RCC_DMA2_CLK_ENABLE

__HAL_RCC_GPIOE_CLK_ENABLE

__HAL_RCC_ADC12_CLK_ENABLE

__HAL_RCC_ADC1_CLK_ENABLE

__HAL_RCC_ADC2_CLK_ENABLE

__HAL_RCC_DMA2_CLK_DISABLE

__HAL_RCC_GPIOE_CLK_DISABLE

__HAL_RCC_ADC12_CLK_DISABLE

__HAL_RCC_ADC1_CLK_DISABLE

__HAL_RCC_ADC2_CLK_DISABLE

__HAL_RCC_ADC34_CLK_ENABLE

__HAL_RCC_ADC34_CLK_DISABLE

RCC Extended AHB Force Release Reset

__HAL_RCC_GPIOE_FORCE_RESET

__HAL_RCC_ADC12_FORCE_RESET

__HAL_RCC_ADC1_FORCE_RESET

__HAL_RCC_ADC2_FORCE_RESET

__HAL_RCC_GPIOE_RELEASE_RESET

__HAL_RCC_ADC12_RELEASE_RESET

__HAL_RCC_ADC1_RELEASE_RESET

__HAL_RCC_ADC2_RELEASE_RESET

__HAL_RCC_ADC34_FORCE_RESET

__HAL_RCC_ADC34_RELEASE_RESET

RCC Extended AHB Peripheral Clock Enable Disable Status

__HAL_RCC_DMA2_IS_CLK_ENABLED

__HAL_RCC_GPIOE_IS_CLK_ENABLED

__HAL_RCC_ADC12_IS_CLK_ENABLED

__HAL_RCC_DMA2_IS_CLK_DISABLED

__HAL_RCC_GPIOE_IS_CLK_DISABLED

__HAL_RCC_ADC12_IS_CLK_DISABLED

__HAL_RCC_ADC34_IS_CLK_ENABLED

__HAL_RCC_ADC34_IS_CLK_DISABLED

RCC Extended APB1 Clock Enable Disable

__HAL_RCC_TIM3_CLK_ENABLE

__HAL_RCC_TIM4_CLK_ENABLE

__HAL_RCC_SPI2_CLK_ENABLE

__HAL_RCC_SPI3_CLK_ENABLE

__HAL_RCC_UART4_CLK_ENABLE

__HAL_RCC_UART5_CLK_ENABLE

__HAL_RCC_I2C2_CLK_ENABLE

__HAL_RCC_TIM3_CLK_DISABLE

__HAL_RCC_TIM4_CLK_DISABLE

__HAL_RCC_SPI2_CLK_DISABLE

__HAL_RCC_SPI3_CLK_DISABLE

__HAL_RCC_UART4_CLK_DISABLE

__HAL_RCC_UART5_CLK_DISABLE

__HAL_RCC_I2C2_CLK_DISABLE

__HAL_RCC_TIM7_CLK_ENABLE

__HAL_RCC_TIM7_CLK_DISABLE

__HAL_RCC_USB_CLK_ENABLE

__HAL_RCC_USB_CLK_DISABLE

__HAL_RCC_CAN1_CLK_ENABLE

__HAL_RCC_CAN1_CLK_DISABLE

RCC Extended APB1 Peripheral Clock Enable Disable Status

__HAL_RCC_TIM3_IS_CLK_ENABLED

__HAL_RCC_TIM4_IS_CLK_ENABLED

__HAL_RCC_SPI2_IS_CLK_ENABLED

__HAL_RCC_SPI3_IS_CLK_ENABLED

__HAL_RCC_UART4_IS_CLK_ENABLED

__HAL_RCC_UART5_IS_CLK_ENABLED

__HAL_RCC_I2C2_IS_CLK_ENABLED

__HAL_RCC_TIM3_IS_CLK_DISABLED

__HAL_RCC_TIM4_IS_CLK_DISABLED

__HAL_RCC_SPI2_IS_CLK_DISABLED

__HAL_RCC_SPI3_IS_CLK_DISABLED

__HAL_RCC_UART4_IS_CLK_DISABLED

__HAL_RCC_UART5_IS_CLK_DISABLED

__HAL_RCC_I2C2_IS_CLK_DISABLED

__HAL_RCC_TIM7_IS_CLK_ENABLED

__HAL_RCC_TIM7_IS_CLK_DISABLED

__HAL_RCC_USB_IS_CLK_ENABLED

__HAL_RCC_USB_IS_CLK_DISABLED

__HAL_RCC_CAN1_IS_CLK_ENABLED

__HAL_RCC_CAN1_IS_CLK_DISABLED

RCC Extended APB1 Force Release Reset

__HAL_RCC_TIM3_FORCE_RESET

__HAL_RCC_TIM4_FORCE_RESET

__HAL_RCC_SPI2_FORCE_RESET

__HAL_RCC_SPI3_FORCE_RESET

__HAL_RCC_UART4_FORCE_RESET

__HAL_RCC_UART5_FORCE_RESET

__HAL_RCC_I2C2_FORCE_RESET

__HAL_RCC_TIM3_RELEASE_RESET

__HAL_RCC_TIM4_RELEASE_RESET

__HAL_RCC_SPI2_RELEASE_RESET

__HAL_RCC_SPI3_RELEASE_RESET

__HAL_RCC_UART4_RELEASE_RESET

__HAL_RCC_UART5_RELEASE_RESET

__HAL_RCC_I2C2_RELEASE_RESET

__HAL_RCC_TIM7_FORCE_RESET

__HAL_RCC_TIM7_RELEASE_RESET

__HAL_RCC_USB_FORCE_RESET

__HAL_RCC_USB_RELEASE_RESET

__HAL_RCC_CAN1_FORCE_RESET

__HAL_RCC_CAN1_RELEASE_RESET

RCC Extended APB2 Clock Enable Disable

__HAL_RCC_SPI1_CLK_ENABLE

__HAL_RCC_SPI1_CLK_DISABLE

__HAL_RCC_TIM8_CLK_ENABLE

__HAL_RCC_TIM8_CLK_DISABLE

__HAL_RCC_TIM1_CLK_ENABLE

__HAL_RCC_TIM1_CLK_DISABLE

RCC Extended APB2 Peripheral Clock Enable Disable Status

__HAL_RCC_SPI1_IS_CLK_ENABLED

__HAL_RCC_SPI1_IS_CLK_DISABLED

__HAL_RCC_TIM8_IS_CLK_ENABLED

__HAL_RCC_TIM8_IS_CLK_DISABLED

__HAL_RCC_TIM1_IS_CLK_ENABLED

__HAL_RCC_TIM1_IS_CLK_DISABLED

RCC Extended APB2 Force Release Reset

__HAL_RCC_SPI1_FORCE_RESET

__HAL_RCC_SPI1_RELEASE_RESET

__HAL_RCC_TIM8_FORCE_RESET

__HAL_RCC_TIM8_RELEASE_RESET

__HAL_RCC_TIM1_FORCE_RESET

__HAL_RCC_TIM1_RELEASE_RESET

RCC Extended HSE Configuration

__HAL_RCC_HSE_PREDIV_CONFIG

Description:

- Macro to configure the External High Speed oscillator (HSE) Predivision factor for PLL.

Parameters:

- __HSE_PREDIV_VALUE__: specifies the division value applied to HSE. This parameter must be a number between RCC_HSE_PREDIV_DIV1 and RCC_HSE_PREDIV_DIV16.

Notes:

- Predivision factor can not be changed if PLL is used as system clock In this case, you have to select another source of the system clock, disable the PLL and then change the HSE predivision factor.

__HAL_RCC_HSE_GET_PREDIV

RCC Extended I2C2 Clock Source

RCC_I2C2CLKSOURCE_HSI

RCC_I2C2CLKSOURCE_SYSCLK

RCC Extended I2Cx Clock Config

__HAL_RCC_I2C2_CONFIG

Description:

- Macro to configure the I2C2 clock (I2C2CLK).

Parameters:

- __I2C2CLKSource__: specifies the I2C2 clock source. This parameter can be one of the following values:
  - RCC_I2C2CLKSOURCE_HSI HSI selected as I2C2 clock

- RCC_I2C2CLKSOURCE_SYSCLK System Clock selected as I2C2 clock

__HAL_RCC_GET_I2C2_SOURCE

Description:

- Macro to get the I2C2 clock source.

Return value:

- The: clock source can be one of the following values:
  - RCC_I2C2CLKSOURCE_HSI HSI selected as I2C2 clock
  - RCC_I2C2CLKSOURCE_SYSCLK System Clock selected as I2C2 clock

RCC Extended I2Sx Clock Config

__HAL_RCC_I2S_CONFIG

Description:

- Macro to configure the I2S clock source (I2SCLK).

Parameters:

- __I2SCLKSource__: specifies the I2S clock source. This parameter can be one of the following values:
  - RCC_I2SCLKSOURCE_SYSCLK SYSCLK clock used as I2S clock source
  - RCC_I2SCLKSOURCE_EXT External clock mapped on the I2S_CKIN pin used as I2S clock source

Notes:

- This function must be called before enabling the I2S APB clock.

__HAL_RCC_GET_I2S_SOURCE

Description:

- Macro to get the I2S clock source (I2SCLK).

Return value:

- The: clock source can be one of the following values:
  - RCC_I2SCLKSOURCE_SYSCLK SYSCLK clock used as I2S clock source
  - RCC_I2SCLKSOURCE_EXT External clock mapped on the I2S_CKIN pin used as I2S clock source

RCC Extended I2S Clock Source

RCC_I2SCLKSOURCE_SYSCLK

RCC_I2SCLKSOURCE_EXT

RCC LSE Drive Configuration

RCC_LSEDRIVE_LOW	Xtal mode lower driving capability
RCC_LSEDRIVE_MEDIUMLOW	Xtal mode medium low driving capability

RCC_LSEDRIVE_MEDIUMHIGH Xtal mode medium high driving capability

RCC_LSEDRIVE_HIGH Xtal mode higher driving capability

LSE Drive Configuration

__HAL_RCC_LSEDRIVE_CONFIG **Description:**

- Macro to configure the External Low Speed oscillator (LSE) drive capability.

Parameters:

- __RCC_LSEDRIVE__: specifies the new state of the LSE drive capability. This parameter can be one of the following values:
  - RCC_LSEDRIVE_LOW LSE oscillator low drive capability.
  - RCC_LSEDRIVE_MEDIUMLOW LSE oscillator medium low drive capability.
  - RCC_LSEDRIVE_MEDIUMHIGH LSE oscillator medium high drive capability.
  - RCC_LSEDRIVE_HIGH LSE oscillator high drive capability.

Return value:

- None

RCC Extended MCOx Clock Config

__HAL_RCC_MCO1_CONFIG **Description:**

- Macro to configure the MCO clock.

Parameters:

- __MCOCLKSOURCE__: specifies the MCO clock source. This parameter can be one of the following values:
  - RCC_MCO1SOURCE_NOCLOCK No clock selected as MCO clock
  - RCC_MCO1SOURCE_SYSCLK System Clock selected as MCO clock
  - RCC_MCO1SOURCE_HSI HSI selected as MCO clock
  - RCC_MCO1SOURCE_HSE HSE selected as MCO clock
  - RCC_MCO1SOURCE_LSI LSI selected as MCO clock
  - RCC_MCO1SOURCE_LSE LSE selected as MCO clock
  - RCC_MCO1SOURCE_PLLCLK_DIV2 PLLCLK Divided by 2 selected as MCO clock
- __MCODIV__: specifies the MCO clock prescaler. This parameter can be one of the following values:
  - RCC_MCODIV_1 No division applied on MCO clock source

RCC Extended MCOx Clock Prescaler

RCC_MCODIV_1

RCC Extended MCO Clock Source

RCC_MCO1SOURCE_NOCLOCK

RCC_MCO1SOURCE_LSI

RCC_MCO1SOURCE_LSE

RCC_MCO1SOURCE_SYSCLK

RCC_MCO1SOURCE_HSI

RCC_MCO1SOURCE_HSE

RCC_MCO1SOURCE_PLLCLK_DIV2

RCC Extended Periph Clock Selection

RCC_PERIPHCLK_USART1

RCC_PERIPHCLK_USART2

RCC_PERIPHCLK_USART3

RCC_PERIPHCLK_UART4

RCC_PERIPHCLK_UART5

RCC_PERIPHCLK_I2C1

RCC_PERIPHCLK_I2C2

RCC_PERIPHCLK_ADC12

RCC_PERIPHCLK_ADC34

RCC_PERIPHCLK_I2S

RCC_PERIPHCLK_TIM1

RCC_PERIPHCLK_TIM8

RCC_PERIPHCLK_RTC

RCC_PERIPHCLK_USB

RCC Extended PLL Configuration

__HAL_RCC_PLL_CONFIG **Description:**

- Macro to configure the PLL clock source and multiplication factor.

Parameters:

- __RCC_PLLSource__: specifies the PLL entry clock source. This parameter can be one of the following values:
  - RCC_PLLSOURCE_HSI HSI oscillator clock selected as PLL clock entry
  - RCC_PLLSOURCE_HSE HSE oscillator clock selected as PLL clock entry
- __PLLMUL__: specifies the multiplication factor for PLL VCO input clock This parameter must be a number between RCC_PLL_MUL2 and RCC_PLL_MUL16.

Notes:

- This macro must be used only when the PLL is disabled.

RCC Extended TIM1 Clock Source

RCC_TIM1CLK_HCLK

RCC_TIM1CLK_PLLCLK

RCC Extended TIM8 Clock Source

RCC_TIM8CLK_HCLK

RCC_TIM8CLK_PLLCLK

RCC Extended TIMx Clock Config

__HAL_RCC_TIM1_CONFIG

Description:

- Macro to configure the TIM1 clock (TIM1CLK).

Parameters:

- __TIM1CLKSource__: specifies the TIM1 clock source. This parameter can be one of the following values:
  - RCC_TIM1CLK_HCLK HCLK selected as TIM1 clock
  - RCC_TIM1CLK_PLLCLK PLL Clock selected as TIM1 clock

__HAL_RCC_GET_TIM1_SOURCE

Description:

- Macro to get the TIM1 clock (TIM1CLK).

Return value:

- The: clock source can be one of the following values:
  - RCC_TIM1CLK_HCLK HCLK selected as TIM1 clock
  - RCC_TIM1CLK_PLLCLK PLL Clock selected as TIM1 clock

__HAL_RCC_TIM8_CONFIG

Description:

- Macro to configure the TIM8 clock (TIM8CLK).

Parameters:

- __TIM8CLKSource__: specifies the TIM8 clock source. This parameter can be one of the following values:
  - RCC_TIM8CLK_HCLK HCLK selected as TIM8 clock
  - RCC_TIM8CLK_PLLCLK PLL Clock selected as TIM8 clock

__HAL_RCC_GET_TIM8_SOURCE

Description:

- Macro to get the TIM8 clock (TIM8CLK).

Return value:

- The: clock source can be one of the following values:
  - RCC_TIM8CLK_HCLK HCLK selected as TIM8 clock
  - RCC_TIM8CLK_PLLCLK PLL Clock selected as TIM8 clock

RCC Extended UART4 Clock Source

RCC_UART4CLKSOURCE_PCLK1

RCC_UART4CLKSOURCE_SYSCLK

RCC_UART4CLKSOURCE_LSE

RCC_UART4CLKSOURCE_HSI

RCC Extended UART5 Clock Source

RCC_UART5CLKSOURCE_PCLK1

RCC_UART5CLKSOURCE_SYSCLK

RCC_UART5CLKSOURCE_LSE

RCC_UART5CLKSOURCE_HSI

RCC Extended UARTx Clock Config

__HAL_RCC_UART4_CONFIG

Description:

- Macro to configure the UART4 clock (UART4CLK).

Parameters:

- __UART4CLKSource__: specifies the UART4 clock source. This parameter can be one of the following values:
  - RCC_UART4CLKSOURCE_PCLK1 PCLK1 selected as UART4 clock
  - RCC_UART4CLKSOURCE_HSI HSI selected as UART4 clock
  - RCC_UART4CLKSOURCE_SYSCLK System Clock selected as UART4 clock
  - RCC_UART4CLKSOURCE_LSE LSE selected as UART4 clock

__HAL_RCC_GET_UART4_SOURCE

Description:

- Macro to get the UART4 clock source.

Return value:

- The: clock source can be one of the following values:
  - RCC_UART4CLKSOURCE_PCLK1 PCLK1 selected as UART4 clock
  - RCC_UART4CLKSOURCE_HSI HSI selected as UART4 clock
  - RCC_UART4CLKSOURCE_SYSCLK System Clock selected as UART4 clock
  - RCC_UART4CLKSOURCE_LSE LSE

selected as UART4 clock

__HAL_RCC_UART5_CONFIG

Description:

- Macro to configure the UART5 clock (UART5CLK).

Parameters:

- __UART5CLKSource__: specifies the UART5 clock source. This parameter can be one of the following values:
  - RCC_UART5CLKSOURCE_PCLK1 PCLK1 selected as UART5 clock
  - RCC_UART5CLKSOURCE_HSI HSI selected as UART5 clock
  - RCC_UART5CLKSOURCE_SYSCLK System Clock selected as UART5 clock
  - RCC_UART5CLKSOURCE_LSE LSE selected as UART5 clock

__HAL_RCC_GET_UART5_SOURCE

Description:

- Macro to get the UART5 clock source.

Return value:

- The: clock source can be one of the following values:
  - RCC_UART5CLKSOURCE_PCLK1 PCLK1 selected as UART5 clock
  - RCC_UART5CLKSOURCE_HSI HSI selected as UART5 clock
  - RCC_UART5CLKSOURCE_SYSCLK System Clock selected as UART5 clock
  - RCC_UART5CLKSOURCE_LSE LSE selected as UART5 clock

RCC Extended USART1 Clock Source

RCC_USART1CLKSOURCE_PCLK2

RCC_USART1CLKSOURCE_SYSCLK

RCC_USART1CLKSOURCE_LSE

RCC_USART1CLKSOURCE_HSI

RCC Extended USBx Clock Config

__HAL_RCC_USB_CONFIG

Description:

- Macro to configure the USB clock (USBCLK).

Parameters:

- __USBCLKSource__: specifies the USB clock source. This parameter can be one of the following values:
  - RCC_USBCLKSOURCE_PLL PLL Clock divided by 1 selected as USB clock
  - RCC_USBCLKSOURCE_PLL_DIV1_5 PLL Clock divided by 1.5 selected as USB clock

__HAL_RCC_GET_USB_SOURCE

Description:

- Macro to get the USB clock source.

Return value:

- The: clock source can be one of the following values:
  - RCC_USBCLKSOURCE_PLL PLL Clock divided by 1 selected as USB clock
  - RCC_USBCLKSOURCE_PLL_DIV1_5 PLL Clock divided by 1.5 selected as USB clock

RCC Extended USB Clock Source

RCC_USBCLKSOURCE_PLL

RCC_USBCLKSOURCE_PLL_DIV1_5

42 HAL RTC Generic Driver

42.1 RTC Firmware driver registers structures

42.1.1 RTC_InitTypeDef

Data Fields

- ***uint32_t HourFormat***
- ***uint32_t AsynchPrediv***
- ***uint32_t SynchPrediv***
- ***uint32_t OutPut***
- ***uint32_t OutPutPolarity***
- ***uint32_t OutPutType***

Field Documentation

- ***uint32_t RTC_InitTypeDef::HourFormat***
  Specifies the RTC Hour Format. This parameter can be a value of ***RTC_Hour_Formats***
- ***uint32_t RTC_InitTypeDef::AsynchPrediv***
  Specifies the RTC Asynchronous Predivider value. This parameter must be a number between Min_Data = 0x00 and Max_Data = 0x7F
- ***uint32_t RTC_InitTypeDef::SynchPrediv***
  Specifies the RTC Synchronous Predivider value. This parameter must be a number between Min_Data = 0x00 and Max_Data = 0x7FFF
- ***uint32_t RTC_InitTypeDef::OutPut***
  Specifies which signal will be routed to the RTC output. This parameter can be a value of ***RTCEx_Output_selection_Definitions***
- ***uint32_t RTC_InitTypeDef::OutPutPolarity***
  Specifies the polarity of the output signal. This parameter can be a value of ***RTC_Output_Polarity_Definitions***
- ***uint32_t RTC_InitTypeDef::OutPutType***
  Specifies the RTC Output Pin mode. This parameter can be a value of ***RTC_Output_Type_ALARM_OUT***

42.1.2 RTC_TimeTypeDef

Data Fields

- ***uint8_t Hours***
- ***uint8_t Minutes***
- ***uint8_t Seconds***
- ***uint8_t TimeFormat***
- ***uint32_t SubSeconds***
- ***uint32_t SecondFraction***
- ***uint32_t DayLightSaving***
- ***uint32_t StoreOperation***

Field Documentation

- ***uint8_t RTC_TimeTypeDef::Hours***
  Specifies the RTC Time Hour. This parameter must be a number between Min_Data = 0 and Max_Data = 12 if the RTC_HourFormat_12 is selected. This parameter must be

a number between Min_Data = 0 and Max_Data = 23 if the RTC_HourFormat_24 is selected

- ***uint8_t RTC_TimeTypeDef::Minutes***
  Specifies the RTC Time Minutes. This parameter must be a number between Min_Data = 0 and Max_Data = 59
- ***uint8_t RTC_TimeTypeDef::Seconds***
  Specifies the RTC Time Seconds. This parameter must be a number between Min_Data = 0 and Max_Data = 59
- ***uint8_t RTC_TimeTypeDef::TimeFormat***
  Specifies the RTC AM/PM Time. This parameter can be a value of ***RTC_AM_PM_Definitions***
- ***uint32_t RTC_TimeTypeDef::SubSeconds***
  Specifies the RTC_SSR RTC Sub Second register content. This parameter corresponds to a time unit range between [0-1] Second with [1 Sec / SecondFraction +1] granularity
- ***uint32_t RTC_TimeTypeDef::SecondFraction***
  Specifies the range or granularity of Sub Second register content corresponding to Synchronous pre-scaler factor value (PREDIV_S) This parameter corresponds to a time unit range between [0-1] Second with [1 Sec / SecondFraction +1] granularity. This field will be used only by HAL_RTC_GetTime function
- ***uint32_t RTC_TimeTypeDef::DayLightSaving***
  Specifies RTC_DayLightSaveOperation: the value of hour adjustment. This parameter can be a value of ***RTC_DayLightSaving_Definitions***
- ***uint32_t RTC_TimeTypeDef::StoreOperation***
  Specifies RTC_StoreOperation value to be written in the BCK bit in CR register to store the operation. This parameter can be a value of ***RTC_StoreOperation_Definitions***

42.1.3 RTC_DateTypeDef

Data Fields

- ***uint8_t WeekDay***
- ***uint8_t Month***
- ***uint8_t Date***
- ***uint8_t Year***

Field Documentation

- ***uint8_t RTC_DateTypeDef::WeekDay***
  Specifies the RTC Date WeekDay. This parameter can be a value of ***RTC_WeekDay_Definitions***
- ***uint8_t RTC_DateTypeDef::Month***
  Specifies the RTC Date Month (in BCD format). This parameter can be a value of ***RTC_Month_Date_Definitions***
- ***uint8_t RTC_DateTypeDef::Date***
  Specifies the RTC Date. This parameter must be a number between Min_Data = 1 and Max_Data = 31
- ***uint8_t RTC_DateTypeDef::Year***
  Specifies the RTC Date Year. This parameter must be a number between Min_Data = 0 and Max_Data = 99

42.1.4 RTC_AlarmTypeDef

Data Fields

- ***RTC_TimeTypeDef AlarmTime***

- ***uint32_t AlarmMask***
- ***uint32_t AlarmSubSecondMask***
- ***uint32_t AlarmDateWeekDaySel***
- ***uint8_t AlarmDateWeekDay***
- ***uint32_t Alarm***

Field Documentation

- ***RTC_TimeTypeDef RTC_AlarmTypeDef::AlarmTime***
  Specifies the RTC Alarm Time members
- ***uint32_t RTC_AlarmTypeDef::AlarmMask***
  Specifies the RTC Alarm Masks. This parameter can be a value of ***RTC_AlarmMask_Definitions***
- ***uint32_t RTC_AlarmTypeDef::AlarmSubSecondMask***
  Specifies the RTC Alarm SubSeconds Masks. This parameter can be a value of ***RTC_Alarm_Sub_Seconds_Masks_Definitions***
- ***uint32_t RTC_AlarmTypeDef::AlarmDateWeekDaySel***
  Specifies the RTC Alarm is on Date or WeekDay. This parameter can be a value of ***RTC_AlarmDateWeekDay_Definitions***
- ***uint8_t RTC_AlarmTypeDef::AlarmDateWeekDay***
  Specifies the RTC Alarm Date/WeekDay. If the Alarm Date is selected, this parameter must be set to a value in the 1-31 range. If the Alarm WeekDay is selected, this parameter can be a value of ***RTC_WeekDay_Definitions***
- ***uint32_t RTC_AlarmTypeDef::Alarm***
  Specifies the alarm . This parameter can be a value of ***RTC_Alarms_Definitions***

42.1.5 RTC_HandleTypeDef

Data Fields

- ***RTC_TypeDef * Instance***
- ***RTC_InitTypeDef Init***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_RTCStateTypeDef State***

Field Documentation

- ***RTC_TypeDef* RTC_HandleTypeDef::Instance***
  Register base address
- ***RTC_InitTypeDef RTC_HandleTypeDef::Init***
  RTC required parameters
- ***HAL_LockTypeDef RTC_HandleTypeDef::Lock***
  RTC locking object
- ***__IO HAL_RTCStateTypeDef RTC_HandleTypeDef::State***
  Time communication state

42.2 RTC Firmware driver API description

42.2.1 RTC Operating Condition

The real-time clock (RTC) and the RTC backup registers can be powered from the VBAT voltage when the main VDD supply is powered off. To retain the content of the RTC backup registers and supply the RTC when VDD is turned off, VBAT pin can be connected to an optional standby voltage supplied by a battery or by another source.

To allow the RTC to operate even when the main digital supply (VDD) is turned off, the VBAT pin powers the following blocks:

1. The RTC
2. The LSE oscillator
3. PC13 to PC15 I/Os (when available)

When the backup domain is supplied by VDD (analog switch connected to VDD), the following functions are available:

1. PC14 and PC15 can be used as either GPIO or LSE pins
2. PC13 can be used as a GPIO or as the RTC_OUT pin

When the backup domain is supplied by VBAT (analog switch connected to VBAT because VDD is not present), the following functions are available:

1. PC14 and PC15 can be used as LSE pins only
2. PC13 can be used as the RTC_OUT pin

42.2.2 Backup Domain Reset

The backup domain reset sets all RTC registers and the RCC_BDCR register to their reset values. A backup domain reset is generated when one of the following events occurs:

1. Software reset, triggered by setting the BDRST bit in the RCC Backup domain control register (RCC_BDCR).
2. VDD or VBAT power on, if both supplies have previously been powered off.

42.2.3 Backup Domain Access

After reset, the backup domain (RTC registers, RTC backup data registers and backup SRAM) is protected against possible unwanted write accesses.

To enable access to the RTC Domain and RTC registers, proceed as follows:

1. Enable the Power Controller (PWR) APB1 interface clock using the __HAL_RCC_PWR_CLK_ENABLE() function.
2. Enable access to RTC domain using the HAL_PWR_EnableBkUpAccess() function.
3. Select the RTC clock source using the __HAL_RCC_RTC_CONFIG() function.
4. Enable RTC Clock using the __HAL_RCC_RTC_ENABLE() function.

42.2.4 How to use RTC Driver

- Enable the RTC domain access (see description in the section above).
- Configure the RTC Prescaler (Asynchronous and Synchronous) and RTC hour format using the HAL_RTC_Init() function.

Time and Date configuration

- To configure the RTC Calendar (Time and Date) use the HAL_RTC_SetTime() and HAL_RTC_SetDate() functions.
- To read the RTC Calendar, use the HAL_RTC_GetTime() and HAL_RTC_GetDate() functions.

Alarm configuration

- To configure the RTC Alarm use the HAL_RTC_SetAlarm() function. You can also configure the RTC Alarm with interrupt mode using the HAL_RTC_SetAlarm_IT() function.
- To read the RTC Alarm, use the HAL_RTC_GetAlarm() function.

RTC Wakeup configuration

- To configure the RTC Wakeup Clock source and Counter use the HAL_RTC_SetWakeUpTimer() function. You can also configure the RTC Wakeup timer with interrupt mode using the HAL_RTC_SetWakeUpTimer_IT() function.
- To read the RTC WakeUp Counter register, use the HAL_RTC_GetWakeUpTimer() function.

TimeStamp configuration

- Configure the RTC_AF trigger and enables the RTC TimeStamp using the HAL_RTC_SetTimeStamp() function. You can also configure the RTC TimeStamp with interrupt mode using the HAL_RTC_SetTimeStamp_IT() function.
- To read the RTC TimeStamp Time and Date register, use the HAL_RTC_GetTimeStamp() function.

Tamper configuration

- Enable the RTC Tamper and Configure the Tamper filter count, trigger Edge or Level according to the Tamper filter (if equal to 0 Edge else Level) value, sampling frequency, precharge or discharge and Pull-UP using the HAL_RTC_SetTamper() function. You can configure RTC Tamper with interrupt mode using HAL_RTC_SetTamper_IT() function.

Backup Data Registers configuration

- To write to the RTC Backup Data registers, use the HAL_RTC_BKUPWrite() function.
- To read the RTC Backup Data registers, use the HAL_RTC_BKUPRead() function.

42.2.5 RTC and low power modes

The MCU can be woken up from a low power mode by an RTC alternate function.

The RTC alternate functions are the RTC alarms (Alarm A and Alarm B), RTC wakeup, RTC tamper event detection and RTC time stamp event detection. These RTC alternate functions can wake up the system from the Stop and Standby low power modes.

The system can also wake up from low power modes without depending on an external interrupt (Auto-wakeup mode), by using the RTC alarm or the RTC wakeup events.

The RTC provides a programmable time base for waking up from the Stop or Standby mode at regular intervals. Wakeup from STOP and Standby modes is possible only when the RTC clock source is LSE or LSI.

42.2.6 Initialization and de-initialization functions

This section provides functions allowing to initialize and configure the RTC Prescaler (Synchronous and Asynchronous), RTC Hour format, disable RTC registers Write protection, enter and exit the RTC initialization mode, RTC registers synchronization check and reference clock detection enable.

1. The RTC Prescaler is programmed to generate the RTC 1Hz time base. It is split into 2 programmable prescalers to minimize power consumption.
   - A 7-bit asynchronous prescaler and a 15-bit synchronous prescaler.
   - When both prescalers are used, it is recommended to configure the asynchronous prescaler to a high value to minimize power consumption.
2. All RTC registers are Write protected. Writing to the RTC registers is enabled by writing a key into the Write Protection register, RTC_WPR.

3. To configure the RTC Calendar, user application should enter initialization mode. In this mode, the calendar counter is stopped and its value can be updated. When the initialization sequence is complete, the calendar restarts counting after 4 RTCCLK cycles.
4. To read the calendar through the shadow registers after Calendar initialization, calendar update or after wakeup from low power modes the software must first clear the RSF flag. The software must then wait until it is set again before reading the calendar, which means that the calendar registers have been correctly copied into the RTC_TR and RTC_DR shadow registers.The HAL_RTC_WaitForSynchro() function implements the above software sequence (RSF clear and RSF check).

This section contains the following APIs:

- ***HAL_RTC_Init()***
- ***HAL_RTC_DeInit()***
- ***HAL_RTC_MspInit()***
- ***HAL_RTC_MspDeInit()***

42.2.7 RTC Time and Date functions

This section provides functions allowing to configure Time and Date features

This section contains the following APIs:

- ***HAL_RTC_SetTime()***
- ***HAL_RTC_GetTime()***
- ***HAL_RTC_SetDate()***
- ***HAL_RTC_GetDate()***

42.2.8 RTC Alarm functions

This section provides functions allowing to configure Alarm feature

This section contains the following APIs:

- ***HAL_RTC_SetAlarm()***
- ***HAL_RTC_SetAlarm_IT()***
- ***HAL_RTC_DeactivateAlarm()***
- ***HAL_RTC_GetAlarm()***
- ***HAL_RTC_AlarmIRQHandler()***
- ***HAL_RTC_AlarmAEventCallback()***
- ***HAL_RTC_PollForAlarmAEvent()***

42.2.9 Detailed description of functions

HAL_RTC_Init

Function name	**HAL_StatusTypeDef HAL_RTC_Init (RTC_HandleTypeDef * hrtc)**
Function description	Initialize the RTC according to the specified parameters in the RTC_InitTypeDef structure and initialize the associated handle.
Parameters	• **hrtc:** RTC handle
Return values	• **HAL:** status

HAL_RTC_DeInit

Function name **HAL_StatusTypeDef HAL_RTC_DeInit (RTC_HandleTypeDef * hrtc)**

Function description DeInitialize the RTC peripheral.

Parameters
- **hrtc:** RTC handle

Return values
- **HAL:** status

Notes
- This function doesn't reset the RTC Backup Data registers.

HAL_RTC_MspInit

Function name **void HAL_RTC_MspInit (RTC_HandleTypeDef * hrtc)**

Function description Initialize the RTC MSP.

Parameters
- **hrtc:** RTC handle

Return values
- **None**

HAL_RTC_MspDeInit

Function name **void HAL_RTC_MspDeInit (RTC_HandleTypeDef * hrtc)**

Function description DeInitialize the RTC MSP.

Parameters
- **hrtc:** RTC handle

Return values
- **None**

HAL_RTC_SetTime

Function name **HAL_StatusTypeDef HAL_RTC_SetTime (RTC_HandleTypeDef * hrtc, RTC_TimeTypeDef * sTime, uint32_t Format)**

Function description Set RTC current time.

Parameters
- **hrtc:** RTC handle
- **sTime:** Pointer to Time structure
- **Format:** Specifies the format of the entered parameters. This parameter can be one of the following values:
  - RTC_FORMAT_BIN: Binary data format
  - RTC_FORMAT_BCD: BCD data format

Return values
- **HAL:** status

HAL_RTC_GetTime

Function name **HAL_StatusTypeDef HAL_RTC_GetTime (RTC_HandleTypeDef * hrtc, RTC_TimeTypeDef * sTime, uint32_t Format)**

Function description Get RTC current time.

Parameters
- **hrtc:** RTC handle
- **sTime:** Pointer to Time structure
- **Format:** Specifies the format of the entered parameters. This parameter can be one of the following values:
  - RTC_FORMAT_BIN: Binary data format

– RTC_FORMAT_BCD: BCD data format

Return values
- **HAL:** status

Notes
- You can use SubSeconds and SecondFraction (sTime structure fields returned) to convert SubSeconds value in second fraction ratio with time unit following generic formula: Second fraction ratio * time_unit= [(SecondFraction-SubSeconds)/(SecondFraction+1)] * time_unit This conversion can be performed only if no shift operation is pending (ie. SHFP=0) when PREDIV_S >= SS
- Call HAL_RTC_GetDate() after HAL_RTC_GetTime() to unlock the values in the higher-order calendar shadow registers.

HAL_RTC_SetDate

Function name **HAL_StatusTypeDef HAL_RTC_SetDate (RTC_HandleTypeDef * hrtc, RTC_DateTypeDef * sDate, uint32_t Format)**

Function description Set RTC current date.

Parameters
- **hrtc:** RTC handle
- **sDate:** Pointer to date structure
- **Format:** specifies the format of the entered parameters. This parameter can be one of the following values:
  – RTC_FORMAT_BIN: Binary data format
  – RTC_FORMAT_BCD: BCD data format

Return values
- **HAL:** status

HAL_RTC_GetDate

Function name **HAL_StatusTypeDef HAL_RTC_GetDate (RTC_HandleTypeDef * hrtc, RTC_DateTypeDef * sDate, uint32_t Format)**

Function description Get RTC current date.

Parameters
- **hrtc:** RTC handle
- **sDate:** Pointer to Date structure
- **Format:** Specifies the format of the entered parameters. This parameter can be one of the following values:
  – RTC_FORMAT_BIN : Binary data format
  – RTC_FORMAT_BCD : BCD data format

Return values
- **HAL:** status

HAL_RTC_SetAlarm

Function name **HAL_StatusTypeDef HAL_RTC_SetAlarm (RTC_HandleTypeDef * hrtc, RTC_AlarmTypeDef * sAlarm, uint32_t Format)**

Function description Set the specified RTC Alarm.

Parameters
- **hrtc:** RTC handle
- **sAlarm:** Pointer to Alarm structure
- **Format:** Specifies the format of the entered parameters. This parameter can be one of the following values:

  - RTC_FORMAT_BIN: Binary data format
  - RTC_FORMAT_BCD: BCD data format

Return values
- **HAL:** status

HAL_RTC_SetAlarm_IT

Function name
HAL_StatusTypeDef HAL_RTC_SetAlarm_IT (RTC_HandleTypeDef * hrtc, RTC_AlarmTypeDef * sAlarm, uint32_t Format)

Function description
Set the specified RTC Alarm with Interrupt.

Parameters
- **hrtc:** RTC handle
- **sAlarm:** Pointer to Alarm structure
- **Format:** Specifies the format of the entered parameters. This parameter can be one of the following values:
  - RTC_FORMAT_BIN: Binary data format
  - RTC_FORMAT_BCD: BCD data format

Return values
- **HAL:** status

Notes
- The Alarm register can only be written when the corresponding Alarm is disabled (Use the HAL_RTC_DeactivateAlarm()).
- The HAL_RTC_SetTime() must be called before enabling the Alarm feature.

HAL_RTC_DeactivateAlarm

Function name
HAL_StatusTypeDef HAL_RTC_DeactivateAlarm (RTC_HandleTypeDef * hrtc, uint32_t Alarm)

Function description
Deactivate the specified RTC Alarm.

Parameters
- **hrtc:** RTC handle
- **Alarm:** Specifies the Alarm. This parameter can be one of the following values:
  - RTC_ALARM_A : AlarmA
  - RTC_ALARM_B : AlarmB

Return values
- **HAL:** status

HAL_RTC_GetAlarm

Function name
HAL_StatusTypeDef HAL_RTC_GetAlarm (RTC_HandleTypeDef * hrtc, RTC_AlarmTypeDef * sAlarm, uint32_t Alarm, uint32_t Format)

Function description
Get the RTC Alarm value and masks.

Parameters
- **hrtc:** RTC handle
- **sAlarm:** Pointer to Date structure
- **Alarm:** Specifies the Alarm. This parameter can be one of the following values:
  - RTC_ALARM_A: AlarmA
  - RTC_ALARM_B: AlarmB
- **Format:** Specifies the format of the entered parameters. This

parameter can be one of the following values:
– RTC_FORMAT_BIN: Binary data format
– RTC_FORMAT_BCD: BCD data format

Return values
- **HAL:** status

HAL_RTC_AlarmIRQHandler

Function name **void HAL_RTC_AlarmIRQHandler (RTC_HandleTypeDef * hrtc)**

Function description Handle Alarm interrupt request.

Parameters
- **hrtc:** RTC handle

Return values
- **None**

HAL_RTC_PollForAlarmAEvent

Function name **HAL_StatusTypeDef HAL_RTC_PollForAlarmAEvent (RTC_HandleTypeDef * hrtc, uint32_t Timeout)**

Function description Handle AlarmA Polling request.

Parameters
- **hrtc:** RTC handle
- **Timeout:** Timeout duration

Return values
- **HAL:** status

HAL_RTC_AlarmAEventCallback

Function name **void HAL_RTC_AlarmAEventCallback (RTC_HandleTypeDef * hrtc)**

Function description Alarm A callback.

Parameters
- **hrtc:** RTC handle

Return values
- **None**

HAL_RTC_WaitForSynchro

Function name **HAL_StatusTypeDef HAL_RTC_WaitForSynchro (RTC_HandleTypeDef * hrtc)**

Function description @addtogroup RTC_Exported_Functions_Group4 Peripheral Control functions

Parameters
- **hrtc:** RTC handle

Return values
- **HAL:** status

Notes
- The RTC Resynchronization mode is write protected, use the __HAL_RTC_WRITEPROTECTION_DISABLE() before calling this function.
- To read the calendar through the shadow registers after Calendar initialization, calendar update or after wakeup from low power modes the software must first clear the RSF flag. The software must then wait until it is set again before reading the calendar, which means that the calendar registers have been correctly copied into the RTC_TR and RTC_DR shadow

registers.

HAL_RTC_GetState

Function name	**HAL_RTCStateTypeDef HAL_RTC_GetState (RTC_HandleTypeDef * hrtc)**
Function description	@addtogroup RTC_Exported_Functions_Group5 Peripheral State functions
Parameters	• **hrtc:** RTC handle
Return values	• **HAL:** state

RTC_EnterInitMode

Function name	**HAL_StatusTypeDef RTC_EnterInitMode (RTC_HandleTypeDef * hrtc)**
Function description	@addtogroup RTC_Private_Functions RTC Private Functions
Parameters	• **hrtc:** RTC handle
Return values	• **An:** ErrorStatus enumeration value: – HAL_OK : RTC is in Init mode – HAL_TIMEOUT : RTC is not in Init mode and in Timeout
Notes	• The RTC Initialization mode is write protected, use the __HAL_RTC_WRITEPROTECTION_DISABLE() before calling this function.

RTC_ByteToBcd2

Function name	**uint8_t RTC_ByteToBcd2 (uint8_t Value)**
Function description	Convert a 2 digit decimal to BCD format.
Parameters	• **Value:** Byte to be converted
Return values	• **Converted:** byte

RTC_Bcd2ToByte

Function name	**uint8_t RTC_Bcd2ToByte (uint8_t Value)**
Function description	Convert from 2 digit BCD to Binary.
Parameters	• **Value:** BCD value to be converted
Return values	• **Converted:** word

42.3 RTC Firmware driver defines

42.3.1 RTC

RTC AlarmDateWeekDay Definitions

RTC_ALARMDATEWEEKDAYSEL_DATE

RTC_ALARMDATEWEEKDAYSEL_WEEKDAY

RTC AlarmMask Definitions

RTC_ALARMMASK_NONE

RTC_ALARMMASK_DATEWEEKDAY

RTC_ALARMMASK_HOURS

RTC_ALARMMASK_MINUTES

RTC_ALARMMASK_SECONDS

RTC_ALARMMASK_ALL

RTC Alarms Definitions

RTC_ALARM_A

RTC_ALARM_B

RTC Alarm Sub Seconds Masks Definitions

RTC_ALARMSUBSECONDMASK_ALL	All Alarm SS fields are masked. There is no comparison on sub seconds for Alarm
RTC_ALARMSUBSECONDMASK_SS14_1	SS[14:1] are ignored in Alarm comparison. Only SS[0] is compared.
RTC_ALARMSUBSECONDMASK_SS14_2	SS[14:2] are ignored in Alarm comparison. Only SS[1:0] are compared
RTC_ALARMSUBSECONDMASK_SS14_3	SS[14:3] are ignored in Alarm comparison. Only SS[2:0] are compared
RTC_ALARMSUBSECONDMASK_SS14_4	SS[14:4] are ignored in Alarm comparison. Only SS[3:0] are compared
RTC_ALARMSUBSECONDMASK_SS14_5	SS[14:5] are ignored in Alarm comparison. Only SS[4:0] are compared
RTC_ALARMSUBSECONDMASK_SS14_6	SS[14:6] are ignored in Alarm comparison. Only SS[5:0] are compared
RTC_ALARMSUBSECONDMASK_SS14_7	SS[14:7] are ignored in Alarm comparison. Only SS[6:0] are compared
RTC_ALARMSUBSECONDMASK_SS14_8	SS[14:8] are ignored in Alarm comparison. Only SS[7:0] are compared
RTC_ALARMSUBSECONDMASK_SS14_9	SS[14:9] are ignored in Alarm comparison. Only SS[8:0] are compared
RTC_ALARMSUBSECONDMASK_SS14_10	SS[14:10] are ignored in Alarm comparison. Only SS[9:0] are compared
RTC_ALARMSUBSECONDMASK_SS14_11	SS[14:11] are ignored in Alarm comparison. Only SS[10:0] are compared
RTC_ALARMSUBSECONDMASK_SS14_12	SS[14:12] are ignored in Alarm comparison.Only SS[11:0] are compared
RTC_ALARMSUBSECONDMASK_SS14_13	SS[14:13] are ignored in Alarm comparison. Only SS[12:0] are compared
RTC_ALARMSUBSECONDMASK_SS14	SS[14] is don't care in Alarm comparison.Only SS[13:0] are compared

RTC_ALARMSUBSECONDMASK_NONE	SS[14:0] are compared and must match to activate alarm.

RTC AM PM Definitions

RTC_HOURFORMAT12_AM

RTC_HOURFORMAT12_PM

RTC DayLightSaving Definitions

RTC_DAYLIGHTSAVING_NONE

RTC_DAYLIGHTSAVING_SUB1H

RTC_DAYLIGHTSAVING_ADD1H

RTC Exported Macros

__HAL_RTC_RESET_HANDLE_STATE

Description:

- Reset RTC handle state.

Parameters:

- __HANDLE__: RTC handle.

Return value:

- None

__HAL_RTC_WRITEPROTECTION_DISABLE

Description:

- Disable the write protection for RTC registers.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_WRITEPROTECTION_ENABLE

Description:

- Enable the write protection for RTC registers.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_ALARMA_ENABLE

Description:

- Enable the RTC ALARMA peripheral.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_ALARMA_DISABLE

Description:

- Disable the RTC ALARMA peripheral.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_ALARMB_ENABLE

Description:

- Enable the RTC ALARMB peripheral.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_ALARMB_DISABLE

Description:

- Disable the RTC ALARMB peripheral.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_ALARM_ENABLE_IT

Description:

- Enable the RTC Alarm interrupt.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC Alarm interrupt sources to be enabled or disabled. This parameter can be any combination of the following values:
  - RTC_IT_ALRA: Alarm A interrupt
  - RTC_IT_ALRB: Alarm B interrupt

Return value:

- None

__HAL_RTC_ALARM_DISABLE_IT

Description:

- Disable the RTC Alarm interrupt.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC Alarm interrupt sources to be enabled or disabled. This parameter can be any combination of the following values:
  - RTC_IT_ALRA: Alarm A interrupt
  - RTC_IT_ALRB: Alarm B interrupt

Return value:

- None

__HAL_RTC_ALARM_GET_IT

Description:

- Check whether the specified RTC Alarm interrupt has occurred or not.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC Alarm interrupt to check. This parameter can be:
  - RTC_IT_ALRA: Alarm A interrupt
  - RTC_IT_ALRB: Alarm B interrupt

Return value:

- None

__HAL_RTC_ALARM_GET_IT_SOURCE

Description:

- Check whether the specified RTC Alarm interrupt has been enabled or not.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC Alarm interrupt sources to check. This parameter can be:
  - RTC_IT_ALRA: Alarm A interrupt
  - RTC_IT_ALRB: Alarm B

interrupt

Return value:

- None

__HAL_RTC_ALARM_GET_FLAG

Description:

- Get the selected RTC Alarm's flag status.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __FLAG__: specifies the RTC Alarm Flag sources to check. This parameter can be:
  - RTC_FLAG_ALRAF
  - RTC_FLAG_ALRBF
  - RTC_FLAG_ALRAWF
  - RTC_FLAG_ALRBWF

Return value:

- None

__HAL_RTC_ALARM_CLEAR_FLAG

Description:

- Clear the RTC Alarm's pending flags.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __FLAG__: specifies the RTC Alarm Flag sources to clear. This parameter can be:
  - RTC_FLAG_ALRAF
  - RTC_FLAG_ALRBF

Return value:

- None

__HAL_RTC_ALARM_EXTI_ENABLE_IT

Description:

- Enable interrupt on the RTC Alarm associated Exti line.

Return value:

- None

__HAL_RTC_ALARM_EXTI_DISABLE_IT

Description:

- Disable interrupt on the RTC Alarm associated Exti line.

Return value:

- None

__HAL_RTC_ALARM_EXTI_ENABLE_EVENT	**Description:** • Enable event on the RTC Alarm associated Exti line. **Return value:** • None.
__HAL_RTC_ALARM_EXTI_DISABLE_EVENT	**Description:** • Disable event on the RTC Alarm associated Exti line. **Return value:** • None.
__HAL_RTC_ALARM_EXTI_ENABLE_FALLING_EDGE	**Description:** • Enable falling edge trigger on the RTC Alarm associated Exti line. **Return value:** • None.
__HAL_RTC_ALARM_EXTI_DISABLE_FALLING_EDGE	**Description:** • Disable falling edge trigger on the RTC Alarm associated Exti line. **Return value:** • None.
__HAL_RTC_ALARM_EXTI_ENABLE_RISING_EDGE	**Description:** • Enable rising edge trigger on the RTC Alarm associated Exti line. **Return value:** • None.
__HAL_RTC_ALARM_EXTI_DISABLE_RISING_EDGE	**Description:** • Disable rising edge trigger on the RTC Alarm associated Exti line. **Return value:** • None.
__HAL_RTC_ALARM_EXTI_ENABLE_RISING_FALLING_EDGE	**Description:** • Enable rising & falling edge trigger on the RTC Alarm associated Exti line. **Return value:** • None.

__HAL_RTC_ALARM_EXTI_DISABLE_RISING_FALLING_EDGE	**Description:** • Disable rising & falling edge trigger on the RTC Alarm associated Exti line. **Return value:** • None.
__HAL_RTC_ALARM_EXTI_GET_FLAG	**Description:** • Check whether the RTC Alarm associated Exti line interrupt flag is set or not. **Return value:** • Line: Status.
__HAL_RTC_ALARM_EXTI_CLEAR_FLAG	**Description:** • Clear the RTC Alarm associated Exti line flag. **Return value:** • None.
__HAL_RTC_ALARM_EXTI_GENERATE_SWIT	**Description:** • Generate a Software interrupt on RTC Alarm associated Exti line. **Return value:** • None.

RTC Flags Definitions

RTC_FLAG_RECALPF

RTC_FLAG_TAMP3F

RTC_FLAG_TAMP2F

RTC_FLAG_TAMP1F

RTC_FLAG_TSOVF

RTC_FLAG_TSF

RTC_FLAG_WUTF

RTC_FLAG_ALRBF

RTC_FLAG_ALRAF

RTC_FLAG_INITF

RTC_FLAG_RSF

RTC_FLAG_INITS

RTC_FLAG_SHPF

RTC_FLAG_WUTWF

RTC_FLAG_ALRBWF

RTC_FLAG_ALRAWF

RTC Hour Formats

RTC_HOURFORMAT_24

RTC_HOURFORMAT_12

RTC Input parameter format definitions

RTC_FORMAT_BIN

RTC_FORMAT_BCD

RTC Interrupts Definitions

RTC_IT_TS

RTC_IT_WUT

RTC_IT_ALRB

RTC_IT_ALRA

RTC_IT_TAMP

RTC_IT_TAMP1

RTC_IT_TAMP2

RTC_IT_TAMP3

RTC Private macros to check input parameters

IS_RTC_HOUR_FORMAT

IS_RTC_OUTPUT_POL

IS_RTC_OUTPUT_TYPE

IS_RTC_HOUR12

IS_RTC_HOUR24

IS_RTC_ASYNCH_PREDIV

IS_RTC_SYNCH_PREDIV

IS_RTC_MINUTES

IS_RTC_SECONDS

IS_RTC_HOURFORMAT12

IS_RTC_DAYLIGHT_SAVING

IS_RTC_STORE_OPERATION

IS_RTC_FORMAT

IS_RTC_YEAR

IS_RTC_MONTH

IS_RTC_DATE

IS_RTC_WEEKDAY

IS_RTC_ALARM_DATE_WEEKDAY_DATE

IS_RTC_ALARM_DATE_WEEKDAY_WEEKDAY

IS_RTC_ALARM_DATE_WEEKDAY_SEL

IS_RTC_ALARM_MASK

IS_RTC_ALARM

IS_RTC_ALARM_SUB_SECOND_VALUE

IS_RTC_ALARM_SUB_SECOND_MASK

RTC Month Date Definitions

RTC_MONTH_JANUARY

RTC_MONTH_FEBRUARY

RTC_MONTH_MARCH

RTC_MONTH_APRIL

RTC_MONTH_MAY

RTC_MONTH_JUNE

RTC_MONTH_JULY

RTC_MONTH_AUGUST

RTC_MONTH_SEPTEMBER

RTC_MONTH_OCTOBER

RTC_MONTH_NOVEMBER

RTC_MONTH_DECEMBER

RTC Output Polarity Definitions

RTC_OUTPUT_POLARITY_HIGH

RTC_OUTPUT_POLARITY_LOW

RTC Output Type ALARM OUT

RTC_OUTPUT_TYPE_OPENDRAIN

RTC_OUTPUT_TYPE_PUSHPULL

RTC StoreOperation Definitions

RTC_STOREOPERATION_RESET

RTC_STOREOPERATION_SET

RTC WeekDay Definitions

RTC_WEEKDAY_MONDAY

RTC_WEEKDAY_TUESDAY

RTC_WEEKDAY_WEDNESDAY

RTC_WEEKDAY_THURSDAY

RTC_WEEKDAY_FRIDAY

RTC_WEEKDAY_SATURDAY

RTC_WEEKDAY_SUNDAY

43 HAL RTC Extension Driver

43.1 RTCEx Firmware driver registers structures

43.1.1 RTC_TamperTypeDef

Data Fields

- ***uint32_t Tamper***
- ***uint32_t Trigger***
- ***uint32_t Filter***
- ***uint32_t SamplingFrequency***
- ***uint32_t PrechargeDuration***
- ***uint32_t TamperPullUp***
- ***uint32_t TimeStampOnTamperDetection***

Field Documentation

- ***uint32_t RTC_TamperTypeDef::Tamper***
  Specifies the Tamper Pin. This parameter can be a value of ***RTCEx_Tamper_Pins_Definitions***
- ***uint32_t RTC_TamperTypeDef::Trigger***
  Specifies the Tamper Trigger. This parameter can be a value of ***RTCEx_Tamper_Trigger_Definitions***
- ***uint32_t RTC_TamperTypeDef::Filter***
  Specifies the RTC Filter Tamper. This parameter can be a value of ***RTCEx_Tamper_Filter_Definitions***
- ***uint32_t RTC_TamperTypeDef::SamplingFrequency***
  Specifies the sampling frequency. This parameter can be a value of ***RTCEx_Tamper_Sampling_Frequencies_Definitions***
- ***uint32_t RTC_TamperTypeDef::PrechargeDuration***
  Specifies the Precharge Duration . This parameter can be a value of ***RTCEx_Tamper_Pin_Precharge_Duration_Definitions***
- ***uint32_t RTC_TamperTypeDef::TamperPullUp***
  Specifies the Tamper PullUp . This parameter can be a value of ***RTCEx_Tamper_Pull_UP_Definitions***
- ***uint32_t RTC_TamperTypeDef::TimeStampOnTamperDetection***
  Specifies the TimeStampOnTamperDetection. This parameter can be a value of ***RTCEx_Tamper_TimeStampOnTamperDetection_Definitions***

43.2 RTCEx Firmware driver API description

43.2.1 How to use this driver

- Enable the RTC domain access.
- Configure the RTC Prescaler (Asynchronous and Synchronous) and RTC hour format using the HAL_RTC_Init() function.

RTC Wakeup configuration

- To configure the RTC Wakeup Clock source and Counter use the HAL_RTCEx_SetWakeUpTimer() function. You can also configure the RTC Wakeup timer with interrupt mode using the HAL_RTCEx_SetWakeUpTimer_IT() function.

- To read the RTC WakeUp Counter register, use the HAL_RTCEx_GetWakeUpTimer() function.

TimeStamp configuration

- Configure the RTC_AF trigger and enable the RTC TimeStamp using the HAL_RTCEx_SetTimeStamp() function. You can also configure the RTC TimeStamp with interrupt mode using the HAL_RTCEx_SetTimeStamp_IT() function.
- To read the RTC TimeStamp Time and Date register, use the HAL_RTCEx_GetTimeStamp() function.
- The TIMESTAMP alternate function is mapped to RTC_AF1 (PC13U).

Tamper configuration

- Enable the RTC Tamper and configure the Tamper filter count, trigger Edge or Level according to the Tamper filter (if equal to 0 Edge else Level) value, sampling frequency, precharge or discharge and Pull-UP using the HAL_RTCEx_SetTamper() function. You can configure RTC Tamper with interrupt mode using HAL_RTCEx_SetTamper_IT() function.
- The TAMPER1 alternate function is mapped to RTC_AF1 (PC13U).

Backup Data Registers configuration

- To write to the RTC Backup Data registers, use the HAL_RTCEx_BKUPWrite() function.
- To read the RTC Backup Data registers, use the HAL_RTCEx_BKUPRead() function.

43.2.2 RTC TimeStamp and Tamper functions

This section provides functions allowing to configure TimeStamp feature

This section contains the following APIs:

- ***HAL_RTCEx_SetTimeStamp()***
- ***HAL_RTCEx_SetTimeStamp_IT()***
- ***HAL_RTCEx_DeactivateTimeStamp()***
- ***HAL_RTCEx_GetTimeStamp()***
- ***HAL_RTCEx_SetTamper()***
- ***HAL_RTCEx_SetTamper_IT()***
- ***HAL_RTCEx_DeactivateTamper()***
- ***HAL_RTCEx_TamperTimeStampIRQHandler()***
- ***HAL_RTCEx_TimeStampEventCallback()***
- ***HAL_RTCEx_Tamper1EventCallback()***
- ***HAL_RTCEx_Tamper2EventCallback()***
- ***HAL_RTCEx_Tamper3EventCallback()***
- ***HAL_RTCEx_PollForTimeStampEvent()***
- ***HAL_RTCEx_PollForTamper1Event()***
- ***HAL_RTCEx_PollForTamper2Event()***
- ***HAL_RTCEx_PollForTamper3Event()***

43.2.3 RTC Wake-up functions

This section provides functions allowing to configure Wake-up feature

This section contains the following APIs:

- ***HAL_RTCEx_SetWakeUpTimer()***
- ***HAL_RTCEx_SetWakeUpTimer_IT()***

- ***HAL_RTCEx_DeactivateWakeUpTimer()***
- ***HAL_RTCEx_GetWakeUpTimer()***
- ***HAL_RTCEx_WakeUpTimerIRQHandler()***
- ***HAL_RTCEx_WakeUpTimerEventCallback()***
- ***HAL_RTCEx_PollForWakeUpTimerEvent()***

43.2.4 Extended Peripheral Control functions

This subsection provides functions allowing to

- Write a data in a specified RTC Backup data register
- Read a data in a specified RTC Backup data register
- Set the Coarse calibration parameters.
- Deactivate the Coarse calibration parameters
- Set the Smooth calibration parameters.
- Configure the Synchronization Shift Control Settings.
- Configure the Calibration Pinout (RTC_CALIB) Selection (1Hz or 512Hz).
- Deactivate the Calibration Pinout (RTC_CALIB) Selection (1Hz or 512Hz).
- Enable the RTC reference clock detection.
- Disable the RTC reference clock detection.
- Enable the Bypass Shadow feature.
- Disable the Bypass Shadow feature.

This section contains the following APIs:

- ***HAL_RTCEx_BKUPWrite()***
- ***HAL_RTCEx_BKUPRead()***
- ***HAL_RTCEx_SetSmoothCalib()***
- ***HAL_RTCEx_SetSynchroShift()***
- ***HAL_RTCEx_SetCalibrationOutPut()***
- ***HAL_RTCEx_DeactivateCalibrationOutPut()***
- ***HAL_RTCEx_SetRefClock()***
- ***HAL_RTCEx_DeactivateRefClock()***
- ***HAL_RTCEx_EnableBypassShadow()***
- ***HAL_RTCEx_DisableBypassShadow()***

43.2.5 Extended features functions

This section provides functions allowing to:

- RTC Alram B callback
- RTC Poll for Alarm B request

This section contains the following APIs:

- ***HAL_RTCEx_AlarmBEventCallback()***
- ***HAL_RTCEx_PollForAlarmBEvent()***

43.2.6 Detailed description of functions

HAL_RTCEx_SetTimeStamp

Function name	**HAL_StatusTypeDef HAL_RTCEx_SetTimeStamp (RTC_HandleTypeDef * hrtc, uint32_t TimeStampEdge, uint32_t RTC_TimeStampPin)**
Function description	Set TimeStamp.

Parameters
- **hrtc:** RTC handle
- **TimeStampEdge:** Specifies the pin edge on which the TimeStamp is activated. This parameter can be one of the following values:
  - RTC_TIMESTAMPEDGE_RISING: the Time stamp event occurs on the rising edge of the related pin.
  - RTC_TIMESTAMPEDGE_FALLING: the Time stamp event occurs on the falling edge of the related pin.
- **RTC_TimeStampPin:** specifies the RTC TimeStamp Pin. This parameter can be one of the following values:
  - RTC_TIMESTAMPPIN_DEFAULT: PC13 is selected as RTC TimeStamp Pin.

Return values
- **HAL:** status

Notes
- This API must be called before enabling the TimeStamp feature.

HAL_RTCEx_SetTimeStamp_IT

Function name **HAL_StatusTypeDef HAL_RTCEx_SetTimeStamp_IT (RTC_HandleTypeDef * hrtc, uint32_t TimeStampEdge, uint32_t RTC_TimeStampPin)**

Function description Set TimeStamp with Interrupt.

Parameters
- **hrtc:** RTC handle
- **TimeStampEdge:** Specifies the pin edge on which the TimeStamp is activated. This parameter can be one of the following values:
  - RTC_TIMESTAMPEDGE_RISING: the Time stamp event occurs on the rising edge of the related pin.
  - RTC_TIMESTAMPEDGE_FALLING: the Time stamp event occurs on the falling edge of the related pin.
- **RTC_TimeStampPin:** Specifies the RTC TimeStamp Pin. This parameter can be one of the following values:
  - RTC_TIMESTAMPPIN_DEFAULT: PC13 is selected as RTC TimeStamp Pin.

Return values
- **HAL:** status

Notes
- This API must be called before enabling the TimeStamp feature.

HAL_RTCEx_DeactivateTimeStamp

Function name **HAL_StatusTypeDef HAL_RTCEx_DeactivateTimeStamp (RTC_HandleTypeDef * hrtc)**

Function description Deactivate TimeStamp.

Parameters
- **hrtc:** RTC handle

Return values
- **HAL:** status

HAL_RTCEx_GetTimeStamp

Function name
HAL_StatusTypeDef HAL_RTCEx_GetTimeStamp (RTC_HandleTypeDef * hrtc, RTC_TimeTypeDef * sTimeStamp, RTC_DateTypeDef * sTimeStampDate, uint32_t Format)

Function description
Get the RTC TimeStamp value.

Parameters
- **hrtc:** RTC handle
- **sTimeStamp:** Pointer to Time structure
- **sTimeStampDate:** Pointer to Date structure
- **Format:** specifies the format of the entered parameters. This parameter can be one of the following values:
  - RTC_FORMAT_BIN: Binary data format
  - RTC_FORMAT_BCD: BCD data format

Return values
- **HAL:** status

HAL_RTCEx_SetTamper

Function name
HAL_StatusTypeDef HAL_RTCEx_SetTamper (RTC_HandleTypeDef * hrtc, RTC_TamperTypeDef * sTamper)

Function description
Set Tamper.

Parameters
- **hrtc:** RTC handle
- **sTamper:** Pointer to Tamper Structure.

Return values
- **HAL:** status

Notes
- By calling this API we disable the tamper interrupt for all tampers.

HAL_RTCEx_SetTamper_IT

Function name
HAL_StatusTypeDef HAL_RTCEx_SetTamper_IT (RTC_HandleTypeDef * hrtc, RTC_TamperTypeDef * sTamper)

Function description
Set Tamper with interrupt.

Parameters
- **hrtc:** RTC handle
- **sTamper:** Pointer to RTC Tamper.

Return values
- **HAL:** status

Notes
- By calling this API we force the tamper interrupt for all tampers.

HAL_RTCEx_DeactivateTamper

Function name
HAL_StatusTypeDef HAL_RTCEx_DeactivateTamper (RTC_HandleTypeDef * hrtc, uint32_t Tamper)

Function description
Deactivate Tamper.

Parameters
- **hrtc:** RTC handle
- **Tamper:** Selected tamper pin. This parameter can be any combination of RTC_TAMPER_1, RTC_TAMPER_2 and RTC_TAMPER_3 (*)

Return values	• **HAL:** status
Notes	• (*) RTC_TAMPER_3 not present on all the devices

HAL_RTCEx_TamperTimeStampIRQHandler

Function name	**void HAL_RTCEx_TamperTimeStampIRQHandler (RTC_HandleTypeDef * hrtc)**
Function description	Handle TimeStamp interrupt request.
Parameters	• **hrtc:** RTC handle
Return values	• **None**

HAL_RTCEx_Tamper1EventCallback

Function name	**void HAL_RTCEx_Tamper1EventCallback (RTC_HandleTypeDef * hrtc)**
Function description	Tamper 1 callback.
Parameters	• **hrtc:** RTC handle
Return values	• **None**

HAL_RTCEx_Tamper2EventCallback

Function name	**void HAL_RTCEx_Tamper2EventCallback (RTC_HandleTypeDef * hrtc)**
Function description	Tamper 2 callback.
Parameters	• **hrtc:** RTC handle
Return values	• **None**

HAL_RTCEx_Tamper3EventCallback

Function name	**void HAL_RTCEx_Tamper3EventCallback (RTC_HandleTypeDef * hrtc)**
Function description	Tamper 3 callback.
Parameters	• **hrtc:** RTC handle
Return values	• **None**

HAL_RTCEx_TimeStampEventCallback

Function name	**void HAL_RTCEx_TimeStampEventCallback (RTC_HandleTypeDef * hrtc)**
Function description	TimeStamp callback.
Parameters	• **hrtc:** RTC handle
Return values	• **None**

HAL_RTCEx_PollForTimeStampEvent

Function name **HAL_StatusTypeDef HAL_RTCEx_PollForTimeStampEvent (RTC_HandleTypeDef * hrtc, uint32_t Timeout)**

Function description Handle TimeStamp polling request.

Parameters
- **hrtc:** RTC handle
- **Timeout:** Timeout duration

Return values
- **HAL:** status

HAL_RTCEx_PollForTamper1Event

Function name **HAL_StatusTypeDef HAL_RTCEx_PollForTamper1Event (RTC_HandleTypeDef * hrtc, uint32_t Timeout)**

Function description Handle Tamper 1 Polling.

Parameters
- **hrtc:** RTC handle
- **Timeout:** Timeout duration

Return values
- **HAL:** status

HAL_RTCEx_PollForTamper2Event

Function name **HAL_StatusTypeDef HAL_RTCEx_PollForTamper2Event (RTC_HandleTypeDef * hrtc, uint32_t Timeout)**

Function description Handle Tamper 2 Polling.

Parameters
- **hrtc:** RTC handle
- **Timeout:** Timeout duration

Return values
- **HAL:** status

HAL_RTCEx_PollForTamper3Event

Function name **HAL_StatusTypeDef HAL_RTCEx_PollForTamper3Event (RTC_HandleTypeDef * hrtc, uint32_t Timeout)**

Function description Handle Tamper 3 Polling.

Parameters
- **hrtc:** RTC handle
- **Timeout:** Timeout duration

Return values
- **HAL:** status

HAL_RTCEx_SetWakeUpTimer

Function name **HAL_StatusTypeDef HAL_RTCEx_SetWakeUpTimer (RTC_HandleTypeDef * hrtc, uint32_t WakeUpCounter, uint32_t WakeUpClock)**

Function description Set wake up timer.

Parameters
- **hrtc:** RTC handle
- **WakeUpCounter:** Wake up counter
- **WakeUpClock:** Wake up clock

Return values
- **HAL:** status

HAL_RTCEx_SetWakeUpTimer_IT

Function name	**HAL_StatusTypeDef HAL_RTCEx_SetWakeUpTimer_IT (RTC_HandleTypeDef * hrtc, uint32_t WakeUpCounter, uint32_t WakeUpClock)**
Function description	Set wake up timer with interrupt.
Parameters	• **hrtc:** RTC handle • **WakeUpCounter:** Wake up counter • **WakeUpClock:** Wake up clock
Return values	• **HAL:** status

HAL_RTCEx_DeactivateWakeUpTimer

Function name	**uint32_t HAL_RTCEx_DeactivateWakeUpTimer (RTC_HandleTypeDef * hrtc)**
Function description	Deactivate wake up timer counter.
Parameters	• **hrtc:** RTC handle
Return values	• **HAL:** status

HAL_RTCEx_GetWakeUpTimer

Function name	**uint32_t HAL_RTCEx_GetWakeUpTimer (RTC_HandleTypeDef * hrtc)**
Function description	Get wake up timer counter.
Parameters	• **hrtc:** RTC handle
Return values	• **Counter:** value

HAL_RTCEx_WakeUpTimerIRQHandler

Function name	**void HAL_RTCEx_WakeUpTimerIRQHandler (RTC_HandleTypeDef * hrtc)**
Function description	Handle Wake Up Timer interrupt request.
Parameters	• **hrtc:** RTC handle
Return values	• **None**

HAL_RTCEx_WakeUpTimerEventCallback

Function name	**void HAL_RTCEx_WakeUpTimerEventCallback (RTC_HandleTypeDef * hrtc)**
Function description	Wake Up Timer callback.
Parameters	• **hrtc:** RTC handle
Return values	• **None**

HAL_RTCEx_PollForWakeUpTimerEvent

Function name **HAL_StatusTypeDef HAL_RTCEx_PollForWakeUpTimerEvent (RTC_HandleTypeDef * hrtc, uint32_t Timeout)**

Function description Handle Wake Up Timer Polling.

Parameters
- **hrtc:** RTC handle
- **Timeout:** Timeout duration

Return values
- **HAL:** status

HAL_RTCEx_BKUPWrite

Function name **void HAL_RTCEx_BKUPWrite (RTC_HandleTypeDef * hrtc, uint32_t BackupRegister, uint32_t Data)**

Function description Write a data in a specified RTC Backup data register.

Parameters
- **hrtc:** RTC handle
- **BackupRegister:** RTC Backup data Register number. This parameter can be: RTC_BKP_DRx where x can be from 0 to 19 to specify the register.
- **Data:** Data to be written in the specified RTC Backup data register.

Return values
- **None**

HAL_RTCEx_BKUPRead

Function name **uint32_t HAL_RTCEx_BKUPRead (RTC_HandleTypeDef * hrtc, uint32_t BackupRegister)**

Function description Reads data from the specified RTC Backup data Register.

Parameters
- **hrtc:** RTC handle
- **BackupRegister:** RTC Backup data Register number. This parameter can be: RTC_BKP_DRx where x can be from 0 to 19 to specify the register.

Return values
- **Read:** value

HAL_RTCEx_SetSmoothCalib

Function name **HAL_StatusTypeDef HAL_RTCEx_SetSmoothCalib (RTC_HandleTypeDef * hrtc, uint32_t SmoothCalibPeriod, uint32_t SmoothCalibPlusPulses, uint32_t SmoothCalibMinusPulsesValue)**

Function description Set the Smooth calibration parameters.

Parameters
- **hrtc:** RTC handle
- **SmoothCalibPeriod:** Select the Smooth Calibration Period. This parameter can be can be one of the following values :
  - RTC_SMOOTHCALIB_PERIOD_32SEC: The smooth calibration period is 32s.
  - RTC_SMOOTHCALIB_PERIOD_16SEC: The smooth calibration period is 16s.
  - RTC_SMOOTHCALIB_PERIOD_8SEC: The smooth calibration period is 8s.

- **SmoothCalibPlusPulses:** Select to Set or reset the CALP bit. This parameter can be one of the following values:
  - RTC_SMOOTHCALIB_PLUSPULSES_SET: Add one RTCCLK pulse every 2*11 pulses.
  - RTC_SMOOTHCALIB_PLUSPULSES_RESET: No RTCCLK pulses are added.
- **SmoothCalibMinusPulsesValue:** Select the value of CALM[8:0] bits. This parameter can be one any value from 0 to 0x000001FF.

Return values
- **HAL:** status

Notes
- To deactivate the smooth calibration, the field SmoothCalibPlusPulses must be equal to SMOOTHCALIB_PLUSPULSES_RESET and the field SmoothCalibMinusPulsesValue mut be equal to 0.

HAL_RTCEx_SetSynchroShift

Function name
HAL_StatusTypeDef HAL_RTCEx_SetSynchroShift (RTC_HandleTypeDef * hrtc, uint32_t ShiftAdd1S, uint32_t ShiftSubFS)

Function description
Configure the Synchronization Shift Control Settings.

Parameters
- **hrtc:** RTC handle
- **ShiftAdd1S:** Select to add or not 1 second to the time calendar. This parameter can be one of the following values :
  - RTC_SHIFTADD1S_SET: Add one second to the clock calendar.
  - RTC_SHIFTADD1S_RESET: No effect.
- **ShiftSubFS:** Select the number of Second Fractions to substitute. This parameter can be one any value from 0 to 0x7FFF.

Return values
- **HAL:** status

Notes
- When REFCKON is set, firmware must not write to Shift control register.

HAL_RTCEx_SetCalibrationOutPut

Function name
HAL_StatusTypeDef HAL_RTCEx_SetCalibrationOutPut (RTC_HandleTypeDef * hrtc, uint32_t CalibOutput)

Function description
Configure the Calibration Pinout (RTC_CALIB) Selection (1Hz or 512Hz).

Parameters
- **hrtc:** RTC handle
- **CalibOutput:** Select the Calibration output Selection . This parameter can be one of the following values:
  - RTC_CALIBOUTPUT_512HZ: A signal has a regular waveform at 512Hz.
  - RTC_CALIBOUTPUT_1HZ: A signal has a regular waveform at 1Hz.

Return values
- **HAL:** status

HAL_RTCEx_DeactivateCalibrationOutPut

Function name **HAL_StatusTypeDef HAL_RTCEx_DeactivateCalibrationOutPut (RTC_HandleTypeDef * hrtc)**

Function description Deactivate the Calibration Pinout (RTC_CALIB) Selection (1Hz or 512Hz).

Parameters
- **hrtc:** RTC handle

Return values
- **HAL:** status

HAL_RTCEx_SetRefClock

Function name **HAL_StatusTypeDef HAL_RTCEx_SetRefClock (RTC_HandleTypeDef * hrtc)**

Function description Enable the RTC reference clock detection.

Parameters
- **hrtc:** RTC handle

Return values
- **HAL:** status

HAL_RTCEx_DeactivateRefClock

Function name **HAL_StatusTypeDef HAL_RTCEx_DeactivateRefClock (RTC_HandleTypeDef * hrtc)**

Function description Disable the RTC reference clock detection.

Parameters
- **hrtc:** RTC handle

Return values
- **HAL:** status

HAL_RTCEx_EnableBypassShadow

Function name **HAL_StatusTypeDef HAL_RTCEx_EnableBypassShadow (RTC_HandleTypeDef * hrtc)**

Function description Enable the Bypass Shadow feature.

Parameters
- **hrtc:** RTC handle

Return values
- **HAL:** status

Notes
- When the Bypass Shadow is enabled the calendar value are taken directly from the Calendar counter.

HAL_RTCEx_DisableBypassShadow

Function name **HAL_StatusTypeDef HAL_RTCEx_DisableBypassShadow (RTC_HandleTypeDef * hrtc)**

Function description Disable the Bypass Shadow feature.

Parameters
- **hrtc:** RTC handle

Return values
- **HAL:** status

Notes
- When the Bypass Shadow is enabled the calendar value are taken directly from the Calendar counter.

HAL_RTCEx_AlarmBEventCallback

Function name	**void HAL_RTCEx_AlarmBEventCallback (RTC_HandleTypeDef * hrtc)**
Function description	Alarm B callback.
Parameters	• **hrtc:** RTC handle
Return values	• **None**

HAL_RTCEx_PollForAlarmBEvent

Function name	**HAL_StatusTypeDef HAL_RTCEx_PollForAlarmBEvent (RTC_HandleTypeDef * hrtc, uint32_t Timeout)**
Function description	This function handles AlarmB Polling request.
Parameters	• **hrtc:** RTC handle • **Timeout:** Timeout duration
Return values	• **HAL:** status

43.3 RTCEx Firmware driver defines

43.3.1 RTCEx

RTC Extended Add 1 Second Parameter Definition

RTC_SHIFTADD1S_RESET

RTC_SHIFTADD1S_SET

RTC Extended Backup Registers Definition

RTC_BKP_DR0

RTC_BKP_DR1

RTC_BKP_DR2

RTC_BKP_DR3

RTC_BKP_DR4

RTC_BKP_DR5

RTC_BKP_DR6

RTC_BKP_DR7

RTC_BKP_DR8

RTC_BKP_DR9

RTC_BKP_DR10

RTC_BKP_DR11

RTC_BKP_DR12

RTC_BKP_DR13

RTC_BKP_DR14

RTC_BKP_DR15

RTC Extended Calibration

__HAL_RTC_CALIBRATION_OUTPUT_ENABLE

Description:

- Enable the RTC calibration output.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_CALIBRATION_OUTPUT_DISABLE

Description:

- Disable the calibration output.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_CLOCKREF_DETECTION_ENABLE

Description:

- Enable the clock reference detection.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_CLOCKREF_DETECTION_DISABLE

Description:

- Disable the clock reference detection.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_SHIFT_GET_FLAG

Description:

- Get the selected RTC shift operation's flag status.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __FLAG__: specifies the RTC shift operation Flag is pending

or not. This parameter can be:
– RTC_FLAG_SHPF

Return value:

- None

RTC Extended Calib Output selection Definition

RTC_CALIBOUTPUT_512HZ

RTC_CALIBOUTPUT_1HZ

Private macros to check input parameters

IS_RTC_OUTPUT

IS_RTC_BKP

IS_TIMESTAMP_EDGE

IS_RTC_TAMPER

IS_RTC_TIMESTAMP_PIN

IS_RTC_TAMPER_TRIGGER

IS_RTC_TAMPER_FILTER

IS_RTC_TAMPER_SAMPLING_FREQ

IS_RTC_TAMPER_PRECHARGE_DURATION

IS_RTC_TAMPER_TIMESTAMPONTAMPER_DETECTION

IS_RTC_TAMPER_PULLUP_STATE

IS_RTC_WAKEUP_CLOCK

IS_RTC_WAKEUP_COUNTER

IS_RTC_SMOOTH_CALIB_PERIOD

IS_RTC_SMOOTH_CALIB_PLUS

IS_RTC_SMOOTH_CALIB_MINUS

IS_RTC_SHIFT_ADD1S

IS_RTC_SHIFT_SUBFS

IS_RTC_CALIB_OUTPUT

RTC Extended Output Selection Definition

RTC_OUTPUT_DISABLE

RTC_OUTPUT_ALARMA

RTC_OUTPUT_ALARMB

RTC_OUTPUT_WAKEUP

RTC Extended Smooth calib period Definition

RTC_SMOOTHCALIB_PERIOD_32SEC	If RTCCLK = 32768 Hz, Smooth calibation period is 32s, else 2exp20 RTCCLK seconds
RTC_SMOOTHCALIB_PERIOD_16SEC	If RTCCLK = 32768 Hz, Smooth calibation period is 16s, else 2exp19 RTCCLK seconds

RTC_SMOOTHCALIB_PERIOD_8SEC — If RTCCLK = 32768 Hz, Smooth calibation period is 8s, else 2exp18 RTCCLK seconds

RTC Extended Smooth calib Plus pulses Definition

RTC_SMOOTHCALIB_PLUSPULSES_RESET — The number of RTCCLK pulses subbstited during a 32-second window = CALM[8:0]

RTC_SMOOTHCALIB_PLUSPULSES_SET — The number of RTCCLK pulses added during a X -second window = Y - CALM[8:0] with Y = 512U, 256U, 128 when X = 32U, 16U, 8U

RTC Extended Tamper

__HAL_RTC_TAMPER1_ENABLE

Description:

- Enable the RTC Tamper1 input detection.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_TAMPER1_DISABLE

Description:

- Disable the RTC Tamper1 input detection.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_TAMPER2_ENABLE

Description:

- Enable the RTC Tamper2 input detection.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_TAMPER2_DISABLE

Description:

- Disable the RTC Tamper2 input detection.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_TAMPER3_ENABLE

Description:

- Enable the RTC Tamper3 input detection.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_TAMPER3_DISABLE

Description:

- Disable the RTC Tamper3 input detection.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_TAMPER_ENABLE_IT

Description:

- Enable the RTC Tamper interrupt.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC Tamper interrupt sources to be enabled. This parameter can be any combination of the following values:
  - RTC_IT_TAMP: Tamper interrupt

Return value:

- None

__HAL_RTC_TAMPER_DISABLE_IT

Description:

- Disable the RTC Tamper interrupt.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC Tamper interrupt sources to be disabled. This parameter can be any combination of the following values:
  - RTC_IT_TAMP: Tamper interrupt

Return value:

- None

__HAL_RTC_TAMPER_GET_IT

Description:

- Check whether the specified RTC Tamper interrupt has occurred or not.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC Tamper interrupt to check. This parameter can be:
  - RTC_IT_TAMP1: Tamper1 interrupt
  - RTC_IT_TAMP2: Tamper2 interrupt
  - RTC_IT_TAMP3: Tamper3 interrupt (*)

Return value:

- None

Notes:

- (*) RTC_IT_TAMP3 not present on all the devices

__HAL_RTC_TAMPER_GET_IT_SOURCE

Description:

- Check whether the specified RTC Tamper interrupt has been enabled or not.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC Tamper interrupt source to check. This parameter can be:
  - RTC_IT_TAMP: Tamper interrupt

Return value:

- None

__HAL_RTC_TAMPER_GET_FLAG

Description:

- Get the selected RTC Tamper's flag status.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __FLAG__: specifies the RTC Tamper Flag is pending or not. This parameter can be:
  - RTC_FLAG_TAMP1F
  - RTC_FLAG_TAMP2F

– RTC_FLAG_TAMP3F (*)

Return value:

- None

Notes:

- (*) RTC_FLAG_TAMP3F not present on all the devices

__HAL_RTC_TAMPER_CLEAR_FLAG

Description:

- Clear the RTC Tamper's pending flags.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __FLAG__: specifies the RTC Tamper Flag to clear. This parameter can be:
  – RTC_FLAG_TAMP1F
  – RTC_FLAG_TAMP2F
  – RTC_FLAG_TAMP3F (*)

Return value:

- None

Notes:

- (*) RTC_FLAG_TAMP3F not present on all the devices

RTC Extended Tamper Filter Definition

RTC_TAMPERFILTER_DISABLE	Tamper filter is disabled
RTC_TAMPERFILTER_2SAMPLE	Tamper is activated after 2 consecutive samples at the active level
RTC_TAMPERFILTER_4SAMPLE	Tamper is activated after 4 consecutive samples at the active level
RTC_TAMPERFILTER_8SAMPLE	Tamper is activated after 8 consecutive samples at the active level.

RTC Extended Tamper Pins Definition

RTC_TAMPER_1

RTC_TAMPER_2

RTC_TAMPER_3

RTC Extended Tamper Pin Precharge Duration Definition

RTC_TAMPERPRECHARGEDURATION_1RTCCLK	Tamper pins are pre-charged before sampling during 1 RTCCLK cycle
RTC_TAMPERPRECHARGEDURATION_2RTCCLK	Tamper pins are pre-charged before sampling during 2 RTCCLK cycles
RTC_TAMPERPRECHARGEDURATION_4RTCCLK	Tamper pins are pre-charged before sampling during 4 RTCCLK

	cycles
RTC_TAMPERPRECHARGEDURATION_8RTCCLK	Tamper pins are pre-charged before sampling during 8 RTCCLK cycles

RTC Extended Tamper Pull UP Definition

RTC_TAMPER_PULLUP_ENABLE	Tamper pins are pre-charged before sampling
RTC_TAMPER_PULLUP_DISABLE	Tamper pins are not pre-charged before sampling

RTC Extended Tamper Sampling Frequencies Definition

RTC_TAMPERSAMPLINGFREQ_RTCCLK_DIV32768	Each of the tamper inputs are sampled with a frequency = RTCCLK / 32768U
RTC_TAMPERSAMPLINGFREQ_RTCCLK_DIV16384	Each of the tamper inputs are sampled with a frequency = RTCCLK / 16384U
RTC_TAMPERSAMPLINGFREQ_RTCCLK_DIV8192	Each of the tamper inputs are sampled with a frequency = RTCCLK / 8192
RTC_TAMPERSAMPLINGFREQ_RTCCLK_DIV4096	Each of the tamper inputs are sampled with a frequency = RTCCLK / 4096
RTC_TAMPERSAMPLINGFREQ_RTCCLK_DIV2048	Each of the tamper inputs are sampled with a frequency = RTCCLK / 2048
RTC_TAMPERSAMPLINGFREQ_RTCCLK_DIV1024	Each of the tamper inputs are sampled with a frequency = RTCCLK / 1024
RTC_TAMPERSAMPLINGFREQ_RTCCLK_DIV512	Each of the tamper inputs are sampled with a frequency = RTCCLK / 512
RTC_TAMPERSAMPLINGFREQ_RTCCLK_DIV256	Each of the tamper inputs are sampled with a frequency = RTCCLK / 256

EXTI RTC Extended Tamper Timestamp EXTI

__HAL_RTC_TAMPER_TIMESTAMP_EXTI_ENABLE_IT

Description:

- Enable interrupt on the RTC Tamper and Timestamp associated Exti line.

Return value:

- None

__HAL_RTC_TAMPER_TIMESTAMP_EXTI_DISABLE_IT

Description:

- Disable interrupt on the RTC Tamper and Timestamp associated

	Exti line. **Return value:** • None
__HAL_RTC_TAMPER_TIMESTAMP_EXTI_ENABLE_EVENT	**Description:** • Enable event on the RTC Tamper and Timestamp associated Exti line. **Return value:** • None.
__HAL_RTC_TAMPER_TIMESTAMP_EXTI_DISABLE_EVENT	**Description:** • Disable event on the RTC Tamper and Timestamp associated Exti line. **Return value:** • None.
__HAL_RTC_TAMPER_TIMESTAMP_EXTI_ENABLE_FALLING_EDGE	**Description:** • Enable falling edge trigger on the RTC Tamper and Timestamp associated Exti line. **Return value:** • None.
__HAL_RTC_TAMPER_TIMESTAMP_EXTI_DISABLE_FALLING_EDGE	**Description:** • Disable falling edge trigger on the RTC Tamper and Timestamp associated Exti line. **Return value:** • None.
__HAL_RTC_TAMPER_TIMESTAMP_EXTI_ENABLE_RISING_EDGE	**Description:** • Enable rising edge trigger on the RTC Tamper and Timestamp associated Exti line. **Return value:** • None.
__HAL_RTC_TAMPER_TIMESTAMP_EXTI_DISABLE_RISING_EDGE	**Description:** • Disable rising edge trigger on the RTC Tamper and Timestamp

	associated Exti line. **Return value:** • None.
__HAL_RTC_TAMPER_TIMESTAMP_EXTI_ENABLE_RISING_FALLING_EDGE	**Description:** • Enable rising & falling edge trigger on the RTC Tamper and Timestamp associated Exti line. **Return value:** • None.
__HAL_RTC_TAMPER_TIMESTAMP_EXTI_DISABLE_RISING_FALLING_EDGE	**Description:** • Disable rising & falling edge trigger on the RTC Tamper and Timestamp associated Exti line. **Return value:** • None.
__HAL_RTC_TAMPER_TIMESTAMP_EXTI_GET_FLAG	**Description:** • Check whether the RTC Tamper and Timestamp associated Exti line interrupt flag is set or not. **Return value:** • Line: Status.
__HAL_RTC_TAMPER_TIMESTAMP_EXTI_CLEAR_FLAG	**Description:** • Clear the RTC Tamper and Timestamp associated Exti line flag. **Return value:** • None.
__HAL_RTC_TAMPER_TIMESTAMP_EXTI_GENERATE_SWIT	**Description:** • Generate a Software interrupt on the RTC Tamper and Timestamp associated Exti line. **Return value:** • None.

RTC Extended Tamper TimeStampOnTamperDetection Definition

RTC_TIMESTAMPONTAMPERDETECTION_ENABLE	TimeStamp on Tamper Detection event saved

RTC_TIMESTAMPONTAMPERDETECTION_DISABLE	TimeStamp on Tamper Detection event is not saved

RTC Extended Tamper Trigger Definition

RTC_TAMPERTRIGGER_RISINGEDGE

RTC_TAMPERTRIGGER_FALLINGEDGE

RTC_TAMPERTRIGGER_LOWLEVEL

RTC_TAMPERTRIGGER_HIGHLEVEL

RTC Extended Timestamp

__HAL_RTC_TIMESTAMP_ENABLE

Description:

- Enable the RTC TimeStamp peripheral.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_TIMESTAMP_DISABLE

Description:

- Disable the RTC TimeStamp peripheral.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_TIMESTAMP_ENABLE_IT

Description:

- Enable the RTC TimeStamp interrupt.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC TimeStamp interrupt source to be enabled. This parameter can be:
  - RTC_IT_TS: TimeStamp interrupt

Return value:

- None

__HAL_RTC_TIMESTAMP_DISABLE_IT

Description:

- Disable the RTC TimeStamp interrupt.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC TimeStamp interrupt source to be disabled. This parameter can be:
  – RTC_IT_TS: TimeStamp interrupt

Return value:

- None

__HAL_RTC_TIMESTAMP_GET_IT

Description:

- Check whether the specified RTC TimeStamp interrupt has occurred or not.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC TimeStamp interrupt to check. This parameter can be:
  – RTC_IT_TS: TimeStamp interrupt

Return value:

- None

__HAL_RTC_TIMESTAMP_GET_IT_SOURCE

Description:

- Check whether the specified RTC Time Stamp interrupt has been enabled or not.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC Time Stamp interrupt source to check. This parameter can be:
  – RTC_IT_TS: TimeStamp interrupt

Return value:

- None

__HAL_RTC_TIMESTAMP_GET_FLAG

Description:

- Get the selected RTC TimeStamp's flag status.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __FLAG__: specifies the RTC

TimeStamp Flag is pending or not. This parameter can be:
- RTC_FLAG_TSF
- RTC_FLAG_TSOVF

Return value:

- None

__HAL_RTC_TIMESTAMP_CLEAR_FLAG

Description:

- Clear the RTC Time Stamp's pending flags.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __FLAG__: specifies the RTC Alarm Flag to clear. This parameter can be:
  - RTC_FLAG_TSF

Return value:

- None

RTC Extended TimeStamp Pin Selection

RTC_TIMESTAMPPIN_DEFAULT

RTC Extended Time Stamp Edges definition

RTC_TIMESTAMPEDGE_RISING

RTC_TIMESTAMPEDGE_FALLING

RTC Extended WakeUp Timer

__HAL_RTC_WAKEUPTIMER_ENABLE

Description:

- Enable the RTC WakeUp Timer peripheral.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_WAKEUPTIMER_DISABLE

Description:

- Disable the RTC WakeUp Timer peripheral.

Parameters:

- __HANDLE__: specifies the RTC handle.

Return value:

- None

__HAL_RTC_WAKEUPTIMER_ENABLE_IT

Description:

- Enable the RTC WakeUpTimer interrupt.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC WakeUpTimer interrupt sources to be enabled. This parameter can be:
  - RTC_IT_WUT: WakeUpTimer interrupt

Return value:

- None

__HAL_RTC_WAKEUPTIMER_DISABLE_IT

Description:

- Disable the RTC WakeUpTimer interrupt.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC WakeUpTimer interrupt sources to be disabled. This parameter can be:
  - RTC_IT_WUT: WakeUpTimer interrupt

Return value:

- None

__HAL_RTC_WAKEUPTIMER_GET_IT

Description:

- Check whether the specified RTC WakeUpTimer interrupt has occurred or not.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC WakeUpTimer interrupt to check. This parameter can be:
  - RTC_IT_WUT: WakeUpTimer interrupt

Return value:

- None

__HAL_RTC_WAKEUPTIMER_GET_IT_SOURCE

Description:

- Check whether the specified RTC Wake Up timer interrupt has been enabled or not.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __INTERRUPT__: specifies the RTC Wake Up timer interrupt sources to check. This parameter can be:
  - RTC_IT_WUT: WakeUpTimer interrupt

Return value:

- None

__HAL_RTC_WAKEUPTIMER_GET_FLAG

Description:

- Get the selected RTC WakeUpTimer's flag status.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __FLAG__: specifies the RTC WakeUpTimer Flag is pending or not. This parameter can be:
  - RTC_FLAG_WUTF
  - RTC_FLAG_WUTWF

Return value:

- None

__HAL_RTC_WAKEUPTIMER_CLEAR_FLAG

Description:

- Clear the RTC Wake Up timer's pending flags.

Parameters:

- __HANDLE__: specifies the RTC handle.
- __FLAG__: specifies the RTC WakeUpTimer Flag to clear. This parameter can be:
  - RTC_FLAG_WUTF

Return value:

- None

__HAL_RTC_WAKEUPTIMER_EXTI_ENABLE_IT

Description:

- Enable interrupt on the RTC WakeUp Timer associated Exti line.

Return value:

- None

__HAL_RTC_WAKEUPTIMER_EXTI_DISABLE_IT

Description:

- Disable interrupt on the RTC WakeUp Timer associated Exti line.

Return value:

- None

__HAL_RTC_WAKEUPTIMER_EXTI_ENABLE_EVENT

Description:

- Enable event on the RTC WakeUp Timer associated Exti line.

Return value:

- None.

__HAL_RTC_WAKEUPTIMER_EXTI_DISABLE_EVENT

Description:

- Disable event on the RTC WakeUp Timer associated Exti line.

Return value:

- None.

__HAL_RTC_WAKEUPTIMER_EXTI_ENABLE_FALLING_EDGE

Description:

- Enable falling edge trigger on the RTC WakeUp Timer associated Exti line.

Return value:

- None.

__HAL_RTC_WAKEUPTIMER_EXTI_DISABLE_FALLING_EDGE

Description:

- Disable falling edge trigger on the RTC WakeUp Timer associated Exti line.

Return value:

- None.

__HAL_RTC_WAKEUPTIMER_EXTI_ENABLE_RISING_EDGE

Description:

- Enable rising edge trigger on the RTC WakeUp Timer associated Exti line.

Return value:

- None.

__HAL_RTC_WAKEUPTIMER_EXTI_DISABLE_RISING_EDGE

Description:

- Disable rising edge trigger on the RTC WakeUp Timer associated Exti line.

Return value:

- None.

__HAL_RTC_WAKEUPTIMER_EXTI_ENABLE_RISING_FALLING_EDGE

Description:

- Enable rising & falling edge trigger on the RTC WakeUp Timer associated Exti line.

Return value:

- None.

__HAL_RTC_WAKEUPTIMER_EXTI_DISABLE_RISING_FALLING_EDGE

Description:

- Disable rising & falling edge trigger on the RTC WakeUp Timer associated Exti line.

Return value:

- None.

__HAL_RTC_WAKEUPTIMER_EXTI_GET_FLAG

Description:

- Check whether the RTC WakeUp Timer associated Exti line interrupt flag is set or not.

Return value:

- Line: Status.

__HAL_RTC_WAKEUPTIMER_EXTI_CLEAR_FLAG

Description:

- Clear the RTC WakeUp Timer associated Exti line flag.

Return value:

- None.

__HAL_RTC_WAKEUPTIMER_EXTI_GENERATE_SWIT

Description:

- Generate a Software interrupt on the RTC WakeUp Timer associated Exti line.

Return value:

- None.

RTC Extended Wakeup Timer Definition

RTC_WAKEUPCLOCK_RTCCLK_DIV16

RTC_WAKEUPCLOCK_RTCCLK_DIV8

RTC_WAKEUPCLOCK_RTCCLK_DIV4

RTC_WAKEUPCLOCK_RTCCLK_DIV2

RTC_WAKEUPCLOCK_CK_SPRE_16BITS

RTC_WAKEUPCLOCK_CK_SPRE_17BITS

44 HAL SDADC Generic Driver

44.1 SDADC Firmware driver registers structures

44.1.1 SDADC_InitTypeDef

Data Fields

- ***uint32_t IdleLowPowerMode***
- ***uint32_t FastConversionMode***
- ***uint32_t SlowClockMode***
- ***uint32_t ReferenceVoltage***

Field Documentation

- ***uint32_t SDADC_InitTypeDef::IdleLowPowerMode***
  Specifies if SDADC can enter in power down or standby when idle. This parameter can be a value of ***SDADC_Idle_Low_Power_Mode***
- ***uint32_t SDADC_InitTypeDef::FastConversionMode***
  Specifies if Fast conversion mode is enabled or not. This parameter can be a value of ***SDADC_Fast_Conv_Mode***
- ***uint32_t SDADC_InitTypeDef::SlowClockMode***
  Specifies if slow clock mode is enabled or not. This parameter can be a value of ***SDADC_Slow_Clock_Mode***
- ***uint32_t SDADC_InitTypeDef::ReferenceVoltage***
  Specifies the reference voltage. Note: This parameter is common to all SDADC instances. This parameter can be a value of ***SDADC_Reference_Voltage***

44.1.2 SDADC_HandleTypeDef

Data Fields

- ***SDADC_TypeDef * Instance***
- ***SDADC_InitTypeDef Init***
- ***DMA_HandleTypeDef * hdma***
- ***uint32_t RegularContMode***
- ***uint32_t InjectedContMode***
- ***uint32_t InjectedChannelsNbr***
- ***uint32_t InjConvRemaining***
- ***uint32_t RegularTrigger***
- ***uint32_t InjectedTrigger***
- ***uint32_t ExtTriggerEdge***
- ***uint32_t RegularMultimode***
- ***uint32_t InjectedMultimode***
- ***HAL_SDADC_StateTypeDef State***
- ***uint32_t ErrorCode***

Field Documentation

- ***SDADC_TypeDef* SDADC_HandleTypeDef::Instance***
  SDADC registers base address
- ***SDADC_InitTypeDef SDADC_HandleTypeDef::Init***
  SDADC init parameters
- ***DMA_HandleTypeDef* SDADC_HandleTypeDef::hdma***
  SDADC DMA Handle parameters

- ***uint32_t SDADC_HandleTypeDef::RegularContMode***
  Regular conversion continuous mode
- ***uint32_t SDADC_HandleTypeDef::InjectedContMode***
  Injected conversion continuous mode
- ***uint32_t SDADC_HandleTypeDef::InjectedChannelsNbr***
  Number of channels in injected sequence
- ***uint32_t SDADC_HandleTypeDef::InjConvRemaining***
  Injected conversion remaining
- ***uint32_t SDADC_HandleTypeDef::RegularTrigger***
  Current trigger used for regular conversion
- ***uint32_t SDADC_HandleTypeDef::InjectedTrigger***
  Current trigger used for injected conversion
- ***uint32_t SDADC_HandleTypeDef::ExtTriggerEdge***
  Rising, falling or both edges selected
- ***uint32_t SDADC_HandleTypeDef::RegularMultimode***
  current type of regular multimode
- ***uint32_t SDADC_HandleTypeDef::InjectedMultimode***
  Current type of injected multimode
- ***HAL_SDADC_StateTypeDef SDADC_HandleTypeDef::State***
  SDADC state
- ***uint32_t SDADC_HandleTypeDef::ErrorCode***
  SDADC Error code

44.1.3 SDADC_ConfParamTypeDef

Data Fields

- ***uint32_t InputMode***
- ***uint32_t Gain***
- ***uint32_t CommonMode***
- ***uint32_t Offset***

Field Documentation

- ***uint32_t SDADC_ConfParamTypeDef::InputMode***
  Specifies the input mode (single ended, differential...) This parameter can be any value of ***SDADC_InputMode***
- ***uint32_t SDADC_ConfParamTypeDef::Gain***
  Specifies the gain setting. This parameter can be any value of ***SDADC_Gain***
- ***uint32_t SDADC_ConfParamTypeDef::CommonMode***
  Specifies the common mode setting (VSSA, VDDA, VDDA/2U). This parameter can be any value of ***SDADC_CommonMode***
- ***uint32_t SDADC_ConfParamTypeDef::Offset***
  Specifies the 12-bit offset value. This parameter can be any value lower or equal to 0x00000FFFU

44.2 SDADC Firmware driver API description

44.2.1 SDADC specific features

1. 16-bit sigma delta architecture.
2. Self calibration.
3. Interrupt generation at the end of calibration, regular/injected conversion and in case of overrun events.
4. Single and continuous conversion modes.
5. External trigger option with configurable polarity for injected conversion.

6. Multi mode (synchronized another SDADC with SDADC1).
7. DMA request generation during regular or injected channel conversion.

44.2.2 How to use this driver

Initialization

1. As prerequisite, fill in the HAL_SDADC_MspInit() :
   - Enable SDADCx clock interface with __SDADCx_CLK_ENABLE().
   - Configure SDADCx clock divider with HAL_RCCEx_PeriphCLKConfig.
   - Enable power on SDADC with HAL_PWREx_EnableSDADC().
   - Enable the clocks for the SDADC GPIOS with __HAL_RCC_GPIOx_CLK_ENABLE().
   - Configure these SDADC pins in analog mode using HAL_GPIO_Init().
   - If interrupt mode is used, enable and configure SDADC global interrupt with HAL_NVIC_SetPriority() and HAL_NVIC_EnableIRQ().
   - If DMA mode is used, configure DMA with HAL_DMA_Init and link it with SDADC handle using __HAL_LINKDMA.
2. Configure the SDADC low power mode, fast conversion mode, slow clock mode and SDADC1 reference voltage using the HAL_ADC_Init() function. Note: Common reference voltage. is common to all SDADC instances.
3. Prepare channel configurations (input mode, common mode, gain and offset) using HAL_SDADC_PrepareChannelConfig and associate channel with one configuration using HAL_SDADC_AssociateChannelConfig.

Calibration

1. Start calibration using HAL_SDADC_StartCalibration or HAL_SDADC_CalibrationStart_IT.
2. In polling mode, use HAL_SDADC_PollForCalibEvent to detect the end of calibration.
3. In interrupt mode, HAL_SDADC_CalibrationCpltCallback will be called at the end of calibration.

Regular channel conversion

1. Select trigger for regular conversion using HAL_SDADC_SelectRegularTrigger.
2. Select regular channel and enable/disable continuous mode using HAL_SDADC_ConfigChannel.
3. Start regular conversion using HAL_SDADC_Start, HAL_SDADC_Start_IT or HAL_SDADC_Start_DMA.
4. In polling mode, use HAL_SDADC_PollForConversion to detect the end of regular conversion.
5. In interrupt mode, HAL_SDADC_ConvCpltCallback will be called at the end of regular conversion.
6. Get value of regular conversion using HAL_SDADC_GetValue.
7. In DMA mode, HAL_SDADC_ConvHalfCpltCallback and HAL_SDADC_ConvCpltCallback will be called respectively at the half transfer and at the transfer complete.
8. Stop regular conversion using HAL_SDADC_Stop, HAL_SDADC_Stop_IT or HAL_SDADC_Stop_DMA.

Injected channels conversion

1. Enable/disable delay on injected conversion using HAL_SDADC_SelectInjectedDelay.

2. If external trigger is used for injected conversion, configure this trigger using HAL_SDADC_SelectInjectedExtTrigger.
3. Select trigger for injected conversion using HAL_SDADC_SelectInjectedTrigger.
4. Select injected channels and enable/disable continuous mode using HAL_SDADC_InjectedConfigChannel.
5. Start injected conversion using HAL_SDADC_InjectedStart, HAL_SDADC_InjectedStart_IT or HAL_SDADC_InjectedStart_DMA.
6. In polling mode, use HAL_SDADC_PollForInjectedConversion to detect the end of injected conversion.
7. In interrupt mode, HAL_SDADC_InjectedConvCpltCallback will be called at the end of injected conversion.
8. Get value of injected conversion and corresponding channel using HAL_SDADC_InjectedGetValue.
9. In DMA mode, HAL_SDADC_InjectedConvHalfCpltCallback and HAL_SDADC_InjectedConvCpltCallback will be called respectively at the half transfer and at the transfer complete.
10. Stop injected conversion using HAL_SDADC_InjectedStop, HAL_SDADC_InjectedStop_IT or HAL_SDADC_InjectedStop_DMA.

Multi mode regular channels conversions

1. Select type of multimode (SDADC1/SDADC2 or SDADC1/SDADC3) using HAL_SDADC_MultiModeConfigChannel.
2. Select software trigger for SDADC1 and synchronized trigger for SDADC2 (or SDADC3) using HAL_SDADC_SelectRegularTrigger.
3. Select regular channel for SDADC1 and SDADC2 (or SDADC3) using HAL_SDADC_ConfigChannel.
4. Start regular conversion for SDADC2 (or SDADC3) with HAL_SDADC_Start.
5. Start regular conversion for SDADC1 using HAL_SDADC_Start, HAL_SDADC_Start_IT or HAL_SDADC_MultiModeStart_DMA.
6. In polling mode, use HAL_SDADC_PollForConversion to detect the end of regular conversion for SDADC1.
7. In interrupt mode, HAL_SDADC_ConvCpltCallback will be called at the end of regular conversion for SDADC1.
8. Get value of regular conversions using HAL_SDADC_MultiModeGetValue.
9. In DMA mode, HAL_SDADC_ConvHalfCpltCallback and HAL_SDADC_ConvCpltCallback will be called respectively at the half transfer and at the transfer complete for SDADC1.
10. Stop regular conversion using HAL_SDADC_Stop, HAL_SDADC_Stop_IT or HAL_SDADC_MultiModeStop_DMA for SDADC1.
11. Stop regular conversion using HAL_SDADC_Stop for SDADC2 (or SDADC3).

Multi mode injected channels conversions

1. Select type of multimode (SDADC1/SDADC2 or SDADC1/SDADC3) using HAL_SDADC_InjectedMultiModeConfigChannel.
2. Select software or external trigger for SDADC1 and synchronized trigger for SDADC2 (or SDADC3) using HAL_SDADC_SelectInjectedTrigger.
3. Select injected channels for SDADC1 and SDADC2 (or SDADC3) using HAL_SDADC_InjectedConfigChannel.
4. Start injected conversion for SDADC2 (or SDADC3) with HAL_SDADC_InjectedStart.
5. Start injected conversion for SDADC1 using HAL_SDADC_InjectedStart, HAL_SDADC_InjectedStart_IT or HAL_SDADC_InjectedMultiModeStart_DMA.
6. In polling mode, use HAL_SDADC_InjectedPollForConversion to detect the end of injected conversion for SDADC1.

7. In interrupt mode, HAL_SDADC_InjectedConvCpltCallback will be called at the end of injected conversion for SDADC1.
8. Get value of injected conversions using HAL_SDADC_InjectedMultiModeGetValue.
9. In DMA mode, HAL_SDADC_InjectedConvHalfCpltCallback and HAL_SDADC_InjectedConvCpltCallback will be called respectively at the half transfer and at the transfer complete for SDADC1.
10. Stop injected conversion using HAL_SDADC_InjectedStop, HAL_SDADC_InjectedStop_IT or HAL_SDADC_InjecteddMultiModeStop_DMA for SDADC1.
11. Stop injected conversion using HAL_SDADC_InjectedStop for SDADC2 (or SDADC3).

44.2.3 Initialization and de-initialization functions

This section provides functions allowing to:

- Initialize the SDADC.
- De-initialize the SDADC.

This section contains the following APIs:

- ***HAL_SDADC_Init()***
- ***HAL_SDADC_DeInit()***
- ***HAL_SDADC_MspInit()***
- ***HAL_SDADC_MspDeInit()***

44.2.4 Peripheral control functions

This section provides functions allowing to:

- Program one of the three different configurations for channels.
- Associate channel to one of configurations.
- Select regular and injected channels.
- Enable/disable continuous mode for regular and injected conversions.
- Select regular and injected triggers.
- Select and configure injected external trigger.
- Enable/disable delay addition for injected conversions.
- Configure multimode.

This section contains the following APIs:

- ***HAL_SDADC_PrepareChannelConfig()***
- ***HAL_SDADC_AssociateChannelConfig()***
- ***HAL_SDADC_ConfigChannel()***
- ***HAL_SDADC_InjectedConfigChannel()***
- ***HAL_SDADC_SelectRegularTrigger()***
- ***HAL_SDADC_SelectInjectedTrigger()***
- ***HAL_SDADC_SelectInjectedExtTrigger()***
- ***HAL_SDADC_SelectInjectedDelay()***
- ***HAL_SDADC_MultiModeConfigChannel()***
- ***HAL_SDADC_InjectedMultiModeConfigChannel()***

44.2.5 IO operation functions

This section provides functions allowing to:

- Start calibration.
- Poll for the end of calibration.
- Start calibration and enable interrupt.

- Start conversion of regular/injected channel.
- Poll for the end of regular/injected conversion.
- Stop conversion of regular/injected channel.
- Start conversion of regular/injected channel and enable interrupt.
- Stop conversion of regular/injected channel and disable interrupt.
- Start conversion of regular/injected channel and enable DMA transfer.
- Stop conversion of regular/injected channel and disable DMA transfer.
- Start multimode and enable DMA transfer for regular/injected conversion.
- Stop multimode and disable DMA transfer for regular/injected conversion..
- Get result of regular channel conversion.
- Get result of injected channel conversion.
- Get result of multimode conversion.
- Handle SDADC interrupt request.
- Callbacks for calibration and regular/injected conversions.

This section contains the following APIs:

- ***HAL_SDADC_CalibrationStart()***
- ***HAL_SDADC_PollForCalibEvent()***
- ***HAL_SDADC_CalibrationStart_IT()***
- ***HAL_SDADC_Start()***
- ***HAL_SDADC_PollForConversion()***
- ***HAL_SDADC_Stop()***
- ***HAL_SDADC_Start_IT()***
- ***HAL_SDADC_Stop_IT()***
- ***HAL_SDADC_Start_DMA()***
- ***HAL_SDADC_Stop_DMA()***
- ***HAL_SDADC_GetValue()***
- ***HAL_SDADC_InjectedStart()***
- ***HAL_SDADC_PollForInjectedConversion()***
- ***HAL_SDADC_InjectedStop()***
- ***HAL_SDADC_InjectedStart_IT()***
- ***HAL_SDADC_InjectedStop_IT()***
- ***HAL_SDADC_InjectedStart_DMA()***
- ***HAL_SDADC_InjectedStop_DMA()***
- ***HAL_SDADC_InjectedGetValue()***
- ***HAL_SDADC_MultiModeStart_DMA()***
- ***HAL_SDADC_MultiModeStop_DMA()***
- ***HAL_SDADC_MultiModeGetValue()***
- ***HAL_SDADC_InjectedMultiModeStart_DMA()***
- ***HAL_SDADC_InjectedMultiModeStop_DMA()***
- ***HAL_SDADC_InjectedMultiModeGetValue()***
- ***HAL_SDADC_IRQHandler()***
- ***HAL_SDADC_CalibrationCpltCallback()***
- ***HAL_SDADC_ConvHalfCpltCallback()***
- ***HAL_SDADC_ConvCpltCallback()***
- ***HAL_SDADC_InjectedConvHalfCpltCallback()***
- ***HAL_SDADC_InjectedConvCpltCallback()***
- ***HAL_SDADC_ErrorCallback()***

44.2.6 ADC Peripheral State functions

This subsection provides functions allowing to

- Get the SDADC state
- Get the SDADC Error

This section contains the following APIs:

- ***HAL_SDADC_GetState()***
- ***HAL_SDADC_GetError()***

44.2.7 Detailed description of functions

HAL_SDADC_Init

Function name	**HAL_StatusTypeDef HAL_SDADC_Init (SDADC_HandleTypeDef * hsdadc)**
Function description	Initializes the SDADC according to the specified parameters in the SDADC_InitTypeDef structure.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **HAL:** status.
Notes	• If multiple SDADC are used, please configure first SDADC1 to set the common reference voltage.

HAL_SDADC_DeInit

Function name	**HAL_StatusTypeDef HAL_SDADC_DeInit (SDADC_HandleTypeDef * hsdadc)**
Function description	De-initializes the SDADC.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **HAL:** status.

HAL_SDADC_MspInit

Function name	**void HAL_SDADC_MspInit (SDADC_HandleTypeDef * hsdadc)**
Function description	Initializes the SDADC MSP.
Parameters	• **hsdadc:** SDADC handle
Return values	• **None**

HAL_SDADC_MspDeInit

Function name	**void HAL_SDADC_MspDeInit (SDADC_HandleTypeDef * hsdadc)**
Function description	De-initializes the SDADC MSP.
Parameters	• **hsdadc:** SDADC handle
Return values	• **None**

HAL_SDADC_PrepareChannelConfig

Function name
HAL_StatusTypeDef HAL_SDADC_PrepareChannelConfig (SDADC_HandleTypeDef * hsdadc, uint32_t ConfIndex, SDADC_ConfParamTypeDef * ConfParamStruct)

Function description
This function allows the user to set parameters for a configuration.

Parameters
- **hsdadc:** SDADC handle.
- **ConfIndex:** Index of configuration to modify. This parameter can be a value of SDADC Configuration Index.
- **ConfParamStruct:** Parameters to apply for this configuration.

Return values
- **HAL:** status

Notes
- This function should be called only when SDADC instance is in idle state (neither calibration nor regular or injected conversion ongoing)

HAL_SDADC_AssociateChannelConfig

Function name
HAL_StatusTypeDef HAL_SDADC_AssociateChannelConfig (SDADC_HandleTypeDef * hsdadc, uint32_t Channel, uint32_t ConfIndex)

Function description
This function allows the user to associate a channel with one of the available configurations.

Parameters
- **hsdadc:** SDADC handle.
- **Channel:** Channel to associate with configuration. This parameter can be a value of SDADC Channel Selection.
- **ConfIndex:** Index of configuration to associate with channel. This parameter can be a value of SDADC Configuration Index.

Return values
- **HAL:** status

Notes
- This function should be called only when SDADC instance is in idle state (neither calibration nor regular or injected conversion ongoing)

HAL_SDADC_ConfigChannel

Function name
HAL_StatusTypeDef HAL_SDADC_ConfigChannel (SDADC_HandleTypeDef * hsdadc, uint32_t Channel, uint32_t ContinuousMode)

Function description
This function allows to select channel for regular conversion and to enable/disable continuous mode for regular conversion.

Parameters
- **hsdadc:** SDADC handle.
- **Channel:** Channel for regular conversion. This parameter can be a value of SDADC Channel Selection.
- **ContinuousMode:** Enable/disable continuous mode for regular conversion. This parameter can be a value of SDADC Continuous Mode.

Return values
- **HAL:** status

HAL_SDADC_InjectedConfigChannel

Function name
HAL_StatusTypeDef HAL_SDADC_InjectedConfigChannel (SDADC_HandleTypeDef * hsdadc, uint32_t Channel, uint32_t ContinuousMode)

Function description
This function allows to select channels for injected conversion and to enable/disable continuous mode for injected conversion.

Parameters
- **hsdadc:** SDADC handle.
- **Channel:** Channels for injected conversion. This parameter can be a values combination of SDADC Channel Selection.
- **ContinuousMode:** Enable/disable continuous mode for injected conversion. This parameter can be a value of SDADC Continuous Mode.

Return values
- **HAL:** status

HAL_SDADC_SelectInjectedExtTrigger

Function name
HAL_StatusTypeDef HAL_SDADC_SelectInjectedExtTrigger (SDADC_HandleTypeDef * hsdadc, uint32_t InjectedExtTrigger, uint32_t ExtTriggerEdge)

Function description
This function allows to select and configure injected external trigger.

Parameters
- **hsdadc:** SDADC handle.
- **InjectedExtTrigger:** External trigger for injected conversions. This parameter can be a value of SDADC Injected External Trigger.
- **ExtTriggerEdge:** Edge of external injected trigger. This parameter can be a value of SDADC External Trigger Edge.

Return values
- **HAL:** status

Notes
- This function should be called only when SDADC instance is in idle state (neither calibration nor regular or injected conversion ongoing)

HAL_SDADC_SelectInjectedDelay

Function name
HAL_StatusTypeDef HAL_SDADC_SelectInjectedDelay (SDADC_HandleTypeDef * hsdadc, uint32_t InjectedDelay)

Function description
This function allows to enable/disable delay addition for injected conversions.

Parameters
- **hsdadc:** SDADC handle.
- **InjectedDelay:** Enable/disable delay for injected conversions. This parameter can be a value of SDADC Injected Conversion Delay.

Return values
- **HAL:** status

Notes
- This function should be called only when SDADC instance is in idle state (neither calibration nor regular or injected conversion ongoing)

HAL_SDADC_SelectRegularTrigger

Function name	**HAL_StatusTypeDef HAL_SDADC_SelectRegularTrigger (SDADC_HandleTypeDef * hsdadc, uint32_t Trigger)**
Function description	This function allows to select trigger for regular conversions.
Parameters	• **hsdadc:** SDADC handle. • **Trigger:** Trigger for regular conversions. This parameter can be one of the following value : – SDADC_SOFTWARE_TRIGGER : Software trigger. – SDADC_SYNCHRONOUS_TRIGGER : Synchronous with SDADC1 (only for SDADC2 and SDADC3).
Return values	• **HAL:** status
Notes	• This function should not be called if regular conversion is ongoing.

HAL_SDADC_SelectInjectedTrigger

Function name	**HAL_StatusTypeDef HAL_SDADC_SelectInjectedTrigger (SDADC_HandleTypeDef * hsdadc, uint32_t Trigger)**
Function description	This function allows to select trigger for injected conversions.
Parameters	• **hsdadc:** SDADC handle. • **Trigger:** Trigger for injected conversions. This parameter can be one of the following value : – SDADC_SOFTWARE_TRIGGER : Software trigger. – SDADC_SYNCHRONOUS_TRIGGER : Synchronous with SDADC1 (only for SDADC2 and SDADC3). – SDADC_EXTERNAL_TRIGGER : External trigger.
Return values	• **HAL:** status
Notes	• This function should not be called if injected conversion is ongoing.

HAL_SDADC_MultiModeConfigChannel

Function name	**HAL_StatusTypeDef HAL_SDADC_MultiModeConfigChannel (SDADC_HandleTypeDef * hsdadc, uint32_t MultimodeType)**
Function description	This function allows to configure multimode for regular conversions.
Parameters	• **hsdadc:** SDADC handle. • **MultimodeType:** Type of multimode for regular conversions. This parameter can be a value of SDADC Multimode Type.
Return values	• **HAL:** status
Notes	• This function should not be called if regular conversion is ongoing and should be could only for SDADC1.

HAL_SDADC_InjectedMultiModeConfigChannel

Function name	**HAL_StatusTypeDef HAL_SDADC_InjectedMultiModeConfigChannel (SDADC_HandleTypeDef * hsdadc, uint32_t MultimodeType)**
Function description	This function allows to configure multimode for injected conversions.
Parameters	• **hsdadc:** SDADC handle. • **MultimodeType:** Type of multimode for injected conversions. This parameter can be a value of SDADC Multimode Type.
Return values	• **HAL:** status
Notes	• This function should not be called if injected conversion is ongoing and should be could only for SDADC1.

HAL_SDADC_CalibrationStart

Function name	**HAL_StatusTypeDef HAL_SDADC_CalibrationStart (SDADC_HandleTypeDef * hsdadc, uint32_t CalibrationSequence)**
Function description	This function allows to start calibration in polling mode.
Parameters	• **hsdadc:** SDADC handle. • **CalibrationSequence:** Calibration sequence. This parameter can be a value of SDADC Calibration Sequence.
Return values	• **HAL:** status
Notes	• This function should be called only when SDADC instance is in idle state (neither calibration nor regular or injected conversion ongoing).

HAL_SDADC_CalibrationStart_IT

Function name	**HAL_StatusTypeDef HAL_SDADC_CalibrationStart_IT (SDADC_HandleTypeDef * hsdadc, uint32_t CalibrationSequence)**
Function description	This function allows to start calibration in interrupt mode.
Parameters	• **hsdadc:** SDADC handle. • **CalibrationSequence:** Calibration sequence. This parameter can be a value of SDADC Calibration Sequence.
Return values	• **HAL:** status
Notes	• This function should be called only when SDADC instance is in idle state (neither calibration nor regular or injected conversion ongoing).

HAL_SDADC_Start

Function name	**HAL_StatusTypeDef HAL_SDADC_Start (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to start regular conversion in polling mode.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **HAL:** status
Notes	• This function should be called only when SDADC instance is in idle state or if injected conversion is ongoing.

HAL_SDADC_Start_IT

Function name	**HAL_StatusTypeDef HAL_SDADC_Start_IT (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to start regular conversion in interrupt mode.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **HAL:** status
Notes	• This function should be called only when SDADC instance is in idle state or if injected conversion is ongoing.

HAL_SDADC_Start_DMA

Function name	**HAL_StatusTypeDef HAL_SDADC_Start_DMA (SDADC_HandleTypeDef * hsdadc, uint32_t * pData, uint32_t Length)**
Function description	This function allows to start regular conversion in DMA mode.
Parameters	• **hsdadc:** SDADC handle. • **pData:** The destination buffer address. • **Length:** The length of data to be transferred from SDADC peripheral to memory.
Return values	• **HAL:** status
Notes	• This function should be called only when SDADC instance is in idle state or if injected conversion is ongoing.

HAL_SDADC_Stop

Function name	**HAL_StatusTypeDef HAL_SDADC_Stop (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to stop regular conversion in polling mode.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **HAL:** status
Notes	• This function should be called only if regular conversion is ongoing.

HAL_SDADC_Stop_IT

Function name	**HAL_StatusTypeDef HAL_SDADC_Stop_IT (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to stop regular conversion in interrupt mode.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **HAL:** status
Notes	• This function should be called only if regular conversion is ongoing.

HAL_SDADC_Stop_DMA

Function name	**HAL_StatusTypeDef HAL_SDADC_Stop_DMA (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to stop regular conversion in DMA mode.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **HAL:** status
Notes	• This function should be called only if regular conversion is ongoing.

HAL_SDADC_InjectedStart

Function name	**HAL_StatusTypeDef HAL_SDADC_InjectedStart (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to start injected conversion in polling mode.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **HAL:** status
Notes	• This function should be called only when SDADC instance is in idle state or if regular conversion is ongoing.

HAL_SDADC_InjectedStart_IT

Function name	**HAL_StatusTypeDef HAL_SDADC_InjectedStart_IT (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to start injected conversion in interrupt mode.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **HAL:** status
Notes	• This function should be called only when SDADC instance is in idle state or if regular conversion is ongoing.

HAL_SDADC_InjectedStart_DMA

Function name	**HAL_StatusTypeDef HAL_SDADC_InjectedStart_DMA (SDADC_HandleTypeDef * hsdadc, uint32_t * pData, uint32_t Length)**
Function description	This function allows to start injected conversion in DMA mode.
Parameters	• **hsdadc:** SDADC handle. • **pData:** The destination buffer address. • **Length:** The length of data to be transferred from SDADC peripheral to memory.
Return values	• **HAL:** status
Notes	• This function should be called only when SDADC instance is in idle state or if regular conversion is ongoing.

HAL_SDADC_InjectedStop

Function name	**HAL_StatusTypeDef HAL_SDADC_InjectedStop (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to stop injected conversion in polling mode.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **HAL:** status
Notes	• This function should be called only if injected conversion is ongoing.

HAL_SDADC_InjectedStop_IT

Function name	**HAL_StatusTypeDef HAL_SDADC_InjectedStop_IT (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to stop injected conversion in interrupt mode.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **HAL:** status
Notes	• This function should be called only if injected conversion is ongoing.

HAL_SDADC_InjectedStop_DMA

Function name	**HAL_StatusTypeDef HAL_SDADC_InjectedStop_DMA (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to stop injected conversion in DMA mode.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **HAL:** status
Notes	• This function should be called only if injected conversion is ongoing.

HAL_SDADC_MultiModeStart_DMA

Function name	**HAL_StatusTypeDef HAL_SDADC_MultiModeStart_DMA (SDADC_HandleTypeDef * hsdadc, uint32_t * pData, uint32_t Length)**
Function description	This function allows to start multimode regular conversions in DMA mode.
Parameters	• **hsdadc:** SDADC handle. • **pData:** The destination buffer address. • **Length:** The length of data to be transferred from SDADC peripheral to memory.
Return values	• **HAL:** status
Notes	• This function should be called only when SDADC instance is in idle state or if injected conversion is ongoing.

HAL_SDADC_MultiModeStop_DMA

Function name	**HAL_StatusTypeDef HAL_SDADC_MultiModeStop_DMA (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to stop multimode regular conversions in DMA mode.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **HAL:** status
Notes	• This function should be called only if regular conversion is ongoing.

HAL_SDADC_InjectedMultiModeStart_DMA

Function name	**HAL_StatusTypeDef HAL_SDADC_InjectedMultiModeStart_DMA (SDADC_HandleTypeDef * hsdadc, uint32_t * pData, uint32_t Length)**
Function description	This function allows to start multimode injected conversions in DMA mode.
Parameters	• **hsdadc:** SDADC handle. • **pData:** The destination buffer address. • **Length:** The length of data to be transferred from SDADC peripheral to memory.
Return values	• **HAL:** status
Notes	• This function should be called only when SDADC instance is in idle state or if regular conversion is ongoing.

HAL_SDADC_InjectedMultiModeStop_DMA

Function name	**HAL_StatusTypeDef HAL_SDADC_InjectedMultiModeStop_DMA (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to stop multimode injected conversions in DMA mode.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **HAL:** status
Notes	• This function should be called only if injected conversion is ongoing.

HAL_SDADC_GetValue

Function name	**uint32_t HAL_SDADC_GetValue (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to get regular conversion value.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **Regular:** conversion value

HAL_SDADC_InjectedGetValue

Function name	**uint32_t HAL_SDADC_InjectedGetValue (SDADC_HandleTypeDef * hsdadc, uint32_t * Channel)**
Function description	This function allows to get injected conversion value.
Parameters	• **hsdadc:** SDADC handle. • **Channel:** Corresponding channel of injected conversion.
Return values	• **Injected:** conversion value

HAL_SDADC_MultiModeGetValue

Function name	**uint32_t HAL_SDADC_MultiModeGetValue (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to get multimode regular conversion value.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **Multimode:** regular conversion value

HAL_SDADC_InjectedMultiModeGetValue

Function name	**uint32_t HAL_SDADC_InjectedMultiModeGetValue (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to get multimode injected conversion value.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **Multimode:** injected conversion value

HAL_SDADC_IRQHandler

Function name **void HAL_SDADC_IRQHandler (SDADC_HandleTypeDef * hsdadc)**

Function description This function handles the SDADC interrupts.

Parameters
- **hsdadc:** SDADC handle.

Return values
- **None**

HAL_SDADC_PollForCalibEvent

Function name **HAL_StatusTypeDef HAL_SDADC_PollForCalibEvent (SDADC_HandleTypeDef * hsdadc, uint32_t Timeout)**

Function description This function allows to poll for the end of calibration.

Parameters
- **hsdadc:** SDADC handle.
- **Timeout:** Timeout value in milliseconds.

Return values
- **HAL:** status

Notes
- This function should be called only if calibration is ongoing.

HAL_SDADC_PollForConversion

Function name **HAL_StatusTypeDef HAL_SDADC_PollForConversion (SDADC_HandleTypeDef * hsdadc, uint32_t Timeout)**

Function description This function allows to poll for the end of regular conversion.

Parameters
- **hsdadc:** SDADC handle.
- **Timeout:** Timeout value in milliseconds.

Return values
- **HAL:** status

Notes
- This function should be called only if regular conversion is ongoing.

HAL_SDADC_PollForInjectedConversion

Function name **HAL_StatusTypeDef HAL_SDADC_PollForInjectedConversion (SDADC_HandleTypeDef * hsdadc, uint32_t Timeout)**

Function description This function allows to poll for the end of injected conversion.

Parameters
- **hsdadc:** SDADC handle.
- **Timeout:** Timeout value in milliseconds.

Return values
- **HAL:** status

Notes
- This function should be called only if injected conversion is ongoing.

HAL_SDADC_CalibrationCpltCallback

Function name **void HAL_SDADC_CalibrationCpltCallback (SDADC_HandleTypeDef * hsdadc)**

Function description Calibration complete callback.

Parameters	• **hsdadc:** SDADC handle.
Return values	• **None**

HAL_SDADC_ConvHalfCpltCallback

Function name	**void HAL_SDADC_ConvHalfCpltCallback (SDADC_HandleTypeDef * hsdadc)**
Function description	Half regular conversion complete callback.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **None**

HAL_SDADC_ConvCpltCallback

Function name	**void HAL_SDADC_ConvCpltCallback (SDADC_HandleTypeDef * hsdadc)**
Function description	Regular conversion complete callback.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **None**
Notes	• In interrupt mode, user has to read conversion value in this function using HAL_SDADC_GetValue or HAL_SDADC_MultiModeGetValue.

HAL_SDADC_InjectedConvHalfCpltCallback

Function name	**void HAL_SDADC_InjectedConvHalfCpltCallback (SDADC_HandleTypeDef * hsdadc)**
Function description	Half injected conversion complete callback.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **None**

HAL_SDADC_InjectedConvCpltCallback

Function name	**void HAL_SDADC_InjectedConvCpltCallback (SDADC_HandleTypeDef * hsdadc)**
Function description	Injected conversion complete callback.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **None**
Notes	• In interrupt mode, user has to read conversion value in this function using HAL_SDADC_InjectedGetValue or HAL_SDADC_InjectedMultiModeGetValue.

HAL_SDADC_ErrorCallback

Function name	**void HAL_SDADC_ErrorCallback (SDADC_HandleTypeDef * hsdadc)**
Function description	Error callback.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **None**

HAL_SDADC_GetState

Function name	**HAL_SDADC_StateTypeDef HAL_SDADC_GetState (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to get the current SDADC state.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **SDADC:** state.

HAL_SDADC_GetError

Function name	**uint32_t HAL_SDADC_GetError (SDADC_HandleTypeDef * hsdadc)**
Function description	This function allows to get the current SDADC error code.
Parameters	• **hsdadc:** SDADC handle.
Return values	• **SDADC:** error code.

44.3 SDADC Firmware driver defines

44.3.1 SDADC

SDADC Calibration Sequence

SDADC_CALIBRATION_SEQ_1	One calibration sequence to calculate offset of conf0 (OFFSET0[11:0])
SDADC_CALIBRATION_SEQ_2	Two calibration sequences to calculate offset of conf0 and conf1 (OFFSET0[11:0] and OFFSET1[11:0])
SDADC_CALIBRATION_SEQ_3	Three calibration sequences to calculate offset of conf0, conf1 and conf2 (OFFSET0[11:0], OFFSET1[11:0], and OFFSET2[11:0])

SDADC Channel Selection

SDADC_CHANNEL_0

SDADC_CHANNEL_1

SDADC_CHANNEL_2

SDADC_CHANNEL_3

SDADC_CHANNEL_4

SDADC_CHANNEL_5

SDADC_CHANNEL_6

SDADC_CHANNEL_7

SDADC_CHANNEL_8

SDADC Common Mode

SDADC_COMMON_MODE_VSSA	Select SDADC VSSA as common mode
SDADC_COMMON_MODE_VDDA_2	Select SDADC VDDA/2 as common mode
SDADC_COMMON_MODE_VDDA	Select SDADC VDDA as common mode

SDADC Configuration Index

SDADC_CONF_INDEX_0	Configuration 0 Register selected
SDADC_CONF_INDEX_1	Configuration 1 Register selected
SDADC_CONF_INDEX_2	Configuration 2 Register selected

SDADC Continuous Mode

SDADC_CONTINUOUS_CONV_OFF	Conversion are not continuous
SDADC_CONTINUOUS_CONV_ON	Conversion are continuous

SDADC Error Code

SDADC_ERROR_NONE	No error
SDADC_ERROR_REGULAR_OVERRUN	Overrun occurs during regular conversion
SDADC_ERROR_INJECTED_OVERRUN	Overrun occurs during injected conversion
SDADC_ERROR_DMA	DMA error occurs

SDADC Exported Macros

__HAL_SDADC_ENABLE_IT

Description:

- Enable the ADC end of conversion interrupt.

Parameters:

- __HANDLE__: ADC handle
- __INTERRUPT__: ADC Interrupt This parameter can be any combination of the following values:
  - SDADC_IT_EOCAL: End of calibration interrupt enable
  - SDADC_IT_JEOC: Injected end of conversion interrupt enable
  - SDADC_IT_JOVR: Injected data overrun interrupt enable
  - SDADC_IT_REOC: Regular end of conversion interrupt enable
  - SDADC_IT_ROVR: Regular data overrun interrupt enable

Return value:

- None

__HAL_SDADC_DISABLE_IT

Description:

- Disable the ADC end of conversion

interrupt.

Parameters:

- __HANDLE__: ADC handle
- __INTERRUPT__: ADC Interrupt This parameter can be any combination of the following values:
  - SDADC_IT_EOCAL: End of calibration interrupt enable
  - SDADC_IT_JEOC: Injected end of conversion interrupt enable
  - SDADC_IT_JOVR: Injected data overrun interrupt enable
  - SDADC_IT_REOC: Regular end of conversion interrupt enable
  - SDADC_IT_ROVR: Regular data overrun interrupt enable

Return value:

- None

__HAL_SDADC_GET_IT_SOURCE

Description:

- Checks if the specified ADC interrupt source is enabled or disabled.

Parameters:

- __HANDLE__: ADC handle
- __INTERRUPT__: ADC interrupt source to check This parameter can be any combination of the following values:
  - SDADC_IT_EOCAL: End of calibration interrupt enable
  - SDADC_IT_JEOC: Injected end of conversion interrupt enable
  - SDADC_IT_JOVR: Injected data overrun interrupt enable
  - SDADC_IT_REOC: Regular end of conversion interrupt enable
  - SDADC_IT_ROVR: Regular data overrun interrupt enable

Return value:

- State: of interruption (SET or RESET)

__HAL_SDADC_GET_FLAG

Description:

- Get the selected ADC's flag status.

Parameters:

- __HANDLE__: ADC handle
- __FLAG__: ADC flag This parameter can be any combination of the following values:
  - SDADC_FLAG_EOCAL: End of calibration flag

- SDADC_FLAG_JEOC: End of injected conversion flag
- SDADC_FLAG_JOVR: Injected conversion overrun flag
- SDADC_FLAG_REOC: End of regular conversion flag
- SDADC_FLAG_ROVR: Regular conversion overrun flag

Return value:

- None

__HAL_SDADC_CLEAR_FLAG

Description:

- Clear the ADC's pending flags.

Parameters:

- __HANDLE__: ADC handle
- __FLAG__: ADC flag This parameter can be any combination of the following values:
  - SDADC_FLAG_EOCAL: End of calibration flag
  - SDADC_FLAG_JEOC: End of injected conversion flag
  - SDADC_FLAG_JOVR: Injected conversion overrun flag
  - SDADC_FLAG_REOC: End of regular conversion flag
  - SDADC_FLAG_ROVR: Regular conversion overrun flag

Return value:

- None

__HAL_SDADC_RESET_HANDLE_STATE

Description:

- Reset SDADC handle state.

Parameters:

- __HANDLE__: SDADC handle.

Return value:

- None

SDADC External Trigger Edge

SDADC_EXT_TRIG_RISING_EDGE	External rising edge
SDADC_EXT_TRIG_FALLING_EDGE	External falling edge
SDADC_EXT_TRIG_BOTH_EDGES	External rising and falling edges

SDADC Fast Conversion Mode

SDADC_FAST_CONV_DISABLE

SDADC_FAST_CONV_ENABLE

SDADC flags definition

SDADC_FLAG_EOCAL	End of calibration flag
SDADC_FLAG_JEOC	End of injected conversion flag
SDADC_FLAG_JOVR	Injected conversion overrun flag
SDADC_FLAG_REOC	End of regular conversion flag
SDADC_FLAG_ROVR	Regular conversion overrun flag

SDADC Gain

SDADC_GAIN_1	Gain equal to 1U
SDADC_GAIN_2	Gain equal to 2U
SDADC_GAIN_4	Gain equal to 4U
SDADC_GAIN_8	Gain equal to 8U
SDADC_GAIN_16	Gain equal to 16U
SDADC_GAIN_32	Gain equal to 32U
SDADC_GAIN_1_2	Gain equal to 1U/2U

SDADC Idle Low Power Mode

SDADC_LOWPOWER_NONE

SDADC_LOWPOWER_POWERDOWN

SDADC_LOWPOWER_STANDBY

SDADC Injected Conversion Delay

SDADC_INJECTED_DELAY_NONE	No delay on injected conversion
SDADC_INJECTED_DELAY	Delay on injected conversion

SDADC Injected External Trigger

SDADC_EXT_TRIG_TIM13_CC1	Trigger source for SDADC1
SDADC_EXT_TRIG_TIM14_CC1	Trigger source for SDADC1
SDADC_EXT_TRIG_TIM16_CC1	Trigger source for SDADC3
SDADC_EXT_TRIG_TIM17_CC1	Trigger source for SDADC2
SDADC_EXT_TRIG_TIM12_CC1	Trigger source for SDADC2
SDADC_EXT_TRIG_TIM12_CC2	Trigger source for SDADC3
SDADC_EXT_TRIG_TIM15_CC2	Trigger source for SDADC1
SDADC_EXT_TRIG_TIM2_CC3	Trigger source for SDADC2
SDADC_EXT_TRIG_TIM2_CC4	Trigger source for SDADC3
SDADC_EXT_TRIG_TIM3_CC1	Trigger source for SDADC1
SDADC_EXT_TRIG_TIM3_CC2	Trigger source for SDADC2
SDADC_EXT_TRIG_TIM3_CC3	Trigger source for SDADC3
SDADC_EXT_TRIG_TIM4_CC1	Trigger source for SDADC1
SDADC_EXT_TRIG_TIM4_CC2	Trigger source for SDADC2

SDADC_EXT_TRIG_TIM4_CC3	Trigger source for SDADC3
SDADC_EXT_TRIG_TIM19_CC2	Trigger source for SDADC1
SDADC_EXT_TRIG_TIM19_CC3	Trigger source for SDADC2
SDADC_EXT_TRIG_TIM19_CC4	Trigger source for SDADC3
SDADC_EXT_TRIG_EXTI11	Trigger source for SDADC1, SDADC2 and SDADC3
SDADC_EXT_TRIG_EXTI15	Trigger source for SDADC1, SDADC2 and SDADC3

SDADC Input Mode

SDADC_INPUT_MODE_DIFF	Conversions are executed in differential mode
SDADC_INPUT_MODE_SE_OFFSET	Conversions are executed in single ended offset mode
SDADC_INPUT_MODE_SE_ZERO_REFERENCE	Conversions are executed in single ended zero-volt reference mode

SDADC interrupts definition

SDADC_IT_EOCAL	End of calibration interrupt enable
SDADC_IT_JEOC	Injected end of conversion interrupt enable
SDADC_IT_JOVR	Injected data overrun interrupt enable
SDADC_IT_REOC	Regular end of conversion interrupt enable
SDADC_IT_ROVR	Regular data overrun interrupt enable

SDADC Multimode Type

SDADC_MULTIMODE_SDADC1_SDADC2	Get conversion values for SDADC1 and SDADC2
SDADC_MULTIMODE_SDADC1_SDADC3	Get conversion values for SDADC1 and SDADC3

SDADC Reference Voltage

SDADC_VREF_EXT	The reference voltage is forced externally using VREF pin
SDADC_VREF_VREFINT1	The reference voltage is forced internally to 1.22V VREFINT
SDADC_VREF_VREFINT2	The reference voltage is forced internally to 1.8V VREFINT
SDADC_VREF_VDDA	The reference voltage is forced internally to VDDA

SDADC Slow Clock Mode

SDADC_SLOW_CLOCK_DISABLE

SDADC_SLOW_CLOCK_ENABLE

SDADC Trigger

SDADC_SOFTWARE_TRIGGER	Software trigger
SDADC_SYNCHRONOUS_TRIGGER	Synchronous with SDADC1 (only for SDADC2 and SDADC3)
SDADC_EXTERNAL_TRIGGER	External trigger

45 HAL SMARTCARD Generic Driver

45.1 SMARTCARD Firmware driver registers structures

45.1.1 SMARTCARD_InitTypeDef

Data Fields

- ***uint32_t BaudRate***
- ***uint32_t WordLength***
- ***uint32_t StopBits***
- ***uint16_t Parity***
- ***uint16_t Mode***
- ***uint16_t CLKPolarity***
- ***uint16_t CLKPhase***
- ***uint16_t CLKLastBit***
- ***uint16_t OneBitSampling***
- ***uint8_t Prescaler***
- ***uint8_t GuardTime***
- ***uint16_t NACKEnable***
- ***uint32_t TimeOutEnable***
- ***uint32_t TimeOutValue***
- ***uint8_t BlockLength***
- ***uint8_t AutoRetryCount***

Field Documentation

- ***uint32_t SMARTCARD_InitTypeDef::BaudRate***
  Configures the SmartCard communication baud rate. The baud rate register is computed using the following formula: Baud Rate Register = ((PCLKx) / ((hsmartcard->Init.BaudRate)))
- ***uint32_t SMARTCARD_InitTypeDef::WordLength***
  Specifies the number of data bits transmitted or received in a frame. This parameter ***SMARTCARD_Word_Length*** can only be set to 9 (8 data + 1 parity bits).
- ***uint32_t SMARTCARD_InitTypeDef::StopBits***
  Specifies the number of stop bits. This parameter can be a value of ***SMARTCARD_Stop_Bits***.
- ***uint16_t SMARTCARD_InitTypeDef::Parity***
  Specifies the parity mode. This parameter can be a value of ***SMARTCARD_Parity***
  Note: The parity is enabled by default (PCE is forced to 1U). Since the WordLength is forced to 8 bits + parity, M is forced to 1 and the parity bit is the 9th bit.
- ***uint16_t SMARTCARD_InitTypeDef::Mode***
  Specifies whether the Receive or Transmit mode is enabled or disabled. This parameter can be a value of ***SMARTCARD_Mode***
- ***uint16_t SMARTCARD_InitTypeDef::CLKPolarity***
  Specifies the steady state of the serial clock. This parameter can be a value of ***SMARTCARD_Clock_Polarity***
- ***uint16_t SMARTCARD_InitTypeDef::CLKPhase***
  Specifies the clock transition on which the bit capture is made. This parameter can be a value of ***SMARTCARD_Clock_Phase***
- ***uint16_t SMARTCARD_InitTypeDef::CLKLastBit***
  Specifies whether the clock pulse corresponding to the last transmitted data bit (MSB)

has to be output on the SCLK pin in synchronous mode. This parameter can be a value of ***SMARTCARD_Last_Bit***

- ***uint16_t SMARTCARD_InitTypeDef::OneBitSampling***
  Specifies whether a single sample or three samples' majority vote is selected. Selecting the single sample method increases the receiver tolerance to clock deviations. This parameter can be a value of ***SMARTCARD_OneBit_Sampling***.
- ***uint8_t SMARTCARD_InitTypeDef::Prescaler***
  Specifies the SmartCard Prescaler.
- ***uint8_t SMARTCARD_InitTypeDef::GuardTime***
  Specifies the SmartCard Guard Time applied after stop bits.
- ***uint16_t SMARTCARD_InitTypeDef::NACKEnable***
  Specifies whether the SmartCard NACK transmission is enabled in case of parity error. This parameter can be a value of ***SMARTCARD_NACK_Enable***
- ***uint32_t SMARTCARD_InitTypeDef::TimeOutEnable***
  Specifies whether the receiver timeout is enabled. This parameter can be a value of ***SMARTCARD_Timeout_Enable***
- ***uint32_t SMARTCARD_InitTypeDef::TimeOutValue***
  Specifies the receiver time out value in number of baud blocks: it is used to implement the Character Wait Time (CWT) and Block Wait Time (BWT). It is coded over 24 bits.
- ***uint8_t SMARTCARD_InitTypeDef::BlockLength***
  Specifies the SmartCard Block Length in T=1 Reception mode. This parameter can be any value from 0x0 to 0xFFU
- ***uint8_t SMARTCARD_InitTypeDef::AutoRetryCount***
  Specifies the SmartCard auto-retry count (number of retries in receive and transmit mode). When set to 0U, retransmission is disabled. Otherwise, its maximum value is 7 (before signalling an error)

45.1.2 SMARTCARD_AdvFeatureInitTypeDef

Data Fields

- ***uint32_t AdvFeatureInit***
- ***uint32_t TxPinLevelInvert***
- ***uint32_t RxPinLevelInvert***
- ***uint32_t DataInvert***
- ***uint32_t Swap***
- ***uint32_t OverrunDisable***
- ***uint32_t DMADisableonRxError***
- ***uint32_t MSBFirst***

Field Documentation

- ***uint32_t SMARTCARD_AdvFeatureInitTypeDef::AdvFeatureInit***
  Specifies which advanced SMARTCARD features is initialized. Several advanced features may be initialized at the same time. This parameter can be a value of ***SMARTCARD_Advanced_Features_Initialization_Type***
- ***uint32_t SMARTCARD_AdvFeatureInitTypeDef::TxPinLevelInvert***
  Specifies whether the TX pin active level is inverted. This parameter can be a value of ***SMARTCARD_Tx_Inv***
- ***uint32_t SMARTCARD_AdvFeatureInitTypeDef::RxPinLevelInvert***
  Specifies whether the RX pin active level is inverted. This parameter can be a value of ***SMARTCARD_Rx_Inv***
- ***uint32_t SMARTCARD_AdvFeatureInitTypeDef::DataInvert***
  Specifies whether data are inverted (positive/direct logic vs negative/inverted logic). This parameter can be a value of ***SMARTCARD_Data_Inv***

- ***uint32_t SMARTCARD_AdvFeatureInitTypeDef::Swap***
  Specifies whether TX and RX pins are swapped. This parameter can be a value of ***SMARTCARD_Rx_Tx_Swap***
- ***uint32_t SMARTCARD_AdvFeatureInitTypeDef::OverrunDisable***
  Specifies whether the reception overrun detection is disabled. This parameter can be a value of ***SMARTCARD_Overrun_Disable***
- ***uint32_t SMARTCARD_AdvFeatureInitTypeDef::DMADisableonRxError***
  Specifies whether the DMA is disabled in case of reception error. This parameter can be a value of ***SMARTCARD_DMA_Disable_on_Rx_Error***
- ***uint32_t SMARTCARD_AdvFeatureInitTypeDef::MSBFirst***
  Specifies whether MSB is sent first on UART line. This parameter can be a value of ***SMARTCARD_MSB_First***

45.1.3 SMARTCARD_HandleTypeDef

Data Fields

- ***USART_TypeDef * Instance***
- ***SMARTCARD_InitTypeDef Init***
- ***SMARTCARD_AdvFeatureInitTypeDef AdvancedInit***
- ***uint8_t * pTxBuffPtr***
- ***uint16_t TxXferSize***
- ***__IO uint16_t TxXferCount***
- ***uint8_t * pRxBuffPtr***
- ***uint16_t RxXferSize***
- ***__IO uint16_t RxXferCount***
- ***DMA_HandleTypeDef * hdmatx***
- ***DMA_HandleTypeDef * hdmarx***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_SMARTCARD_StateTypeDef gState***
- ***__IO HAL_SMARTCARD_StateTypeDef RxState***
- ***__IO uint32_t ErrorCode***

Field Documentation

- ***USART_TypeDef* SMARTCARD_HandleTypeDef::Instance***
  USART registers base address
- ***SMARTCARD_InitTypeDef SMARTCARD_HandleTypeDef::Init***
  SmartCard communication parameters
- ***SMARTCARD_AdvFeatureInitTypeDef SMARTCARD_HandleTypeDef::AdvancedInit***
  SmartCard advanced features initialization parameters
- ***uint8_t* SMARTCARD_HandleTypeDef::pTxBuffPtr***
  Pointer to SmartCard Tx transfer Buffer
- ***uint16_t SMARTCARD_HandleTypeDef::TxXferSize***
  SmartCard Tx Transfer size
- ***__IO uint16_t SMARTCARD_HandleTypeDef::TxXferCount***
  SmartCard Tx Transfer Counter
- ***uint8_t* SMARTCARD_HandleTypeDef::pRxBuffPtr***
  Pointer to SmartCard Rx transfer Buffer
- ***uint16_t SMARTCARD_HandleTypeDef::RxXferSize***
  SmartCard Rx Transfer size
- ***__IO uint16_t SMARTCARD_HandleTypeDef::RxXferCount***
  SmartCard Rx Transfer Counter
- ***DMA_HandleTypeDef* SMARTCARD_HandleTypeDef::hdmatx***
  SmartCard Tx DMA Handle parameters

- ***DMA_HandleTypeDef* SMARTCARD_HandleTypeDef::hdmarx***
  SmartCard Rx DMA Handle parameters
- ***HAL_LockTypeDef SMARTCARD_HandleTypeDef::Lock***
  Locking object
- ***__IO HAL_SMARTCARD_StateTypeDef SMARTCARD_HandleTypeDef::gState***
  SmartCard state information related to global Handle management and also related to Tx operations. This parameter can be a value of **HAL_SMARTCARD_StateTypeDef**
- ***__IO HAL_SMARTCARD_StateTypeDef SMARTCARD_HandleTypeDef::RxState***
  SmartCard state information related to Rx operations. This parameter can be a value of **HAL_SMARTCARD_StateTypeDef**
- ***__IO uint32_t SMARTCARD_HandleTypeDef::ErrorCode***
  SmartCard Error code This parameter can be a value of ***SMARTCARD_Error***

45.2 SMARTCARD Firmware driver API description

45.2.1 How to use this driver

The SMARTCARD HAL driver can be used as follows:

1. Declare a SMARTCARD_HandleTypeDef handle structure (eg. SMARTCARD_HandleTypeDef hsmartcard).
2. Associate a USART to the SMARTCARD handle hsmartcard.
3. Initialize the SMARTCARD low level resources by implementing the HAL_SMARTCARD_MspInit() API:
   - Enable the USARTx interface clock.
   - USART pins configuration:
     - Enable the clock for the USART GPIOs.
     - Configure the USART pins (TX as alternate function pull-up, RX as alternate function Input).
   - NVIC configuration if you need to use interrupt process (HAL_SMARTCARD_Transmit_IT() and HAL_SMARTCARD_Receive_IT() APIs):
     - Configure the USARTx interrupt priority.
     - Enable the NVIC USART IRQ handle.
   - DMA Configuration if you need to use DMA process (HAL_SMARTCARD_Transmit_DMA() and HAL_SMARTCARD_Receive_DMA() APIs):
     - Declare a DMA handle structure for the Tx/Rx channel.
     - Enable the DMAx interface clock.
     - Configure the declared DMA handle structure with the required Tx/Rx parameters.
     - Configure the DMA Tx/Rx channel.
     - Associate the initialized DMA handle to the SMARTCARD DMA Tx/Rx handle.
     - Configure the priority and enable the NVIC for the transfer complete interrupt on the DMA Tx/Rx channel.
4. Program the Baud Rate, Parity, Mode(Receiver/Transmitter), clock enabling/disabling and accordingly, the clock parameters (parity, phase, last bit), prescaler value, guard time and NACK on transmission error enabling or disabling in the hsmartcard handle Init structure.
5. If required, program SMARTCARD advanced features (TX/RX pins swap, TimeOut, auto-retry counter,...) in the hsmartcard handle AdvancedInit structure.
6. Initialize the SMARTCARD registers by calling the HAL_SMARTCARD_Init() API:
   - This API configures also the low level Hardware (GPIO, CLOCK, CORTEX...etc) by calling the customized HAL_SMARTCARD_MspInit() API.



The specific SMARTCARD interrupts (Transmission complete interrupt, RXNE interrupt and Error Interrupts) will be managed using the macros __HAL_SMARTCARD_ENABLE_IT() and __HAL_SMARTCARD_DISABLE_IT() inside the transmit and receive process.

Three operation modes are available within this driver :

Polling mode IO operation

- Send an amount of data in blocking mode using HAL_SMARTCARD_Transmit()
- Receive an amount of data in blocking mode using HAL_SMARTCARD_Receive()

Interrupt mode IO operation

- Send an amount of data in non-blocking mode using HAL_SMARTCARD_Transmit_IT()
- At transmission end of transfer HAL_SMARTCARD_TxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_SMARTCARD_TxCpltCallback()
- Receive an amount of data in non-blocking mode using HAL_SMARTCARD_Receive_IT()
- At reception end of transfer HAL_SMARTCARD_RxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_SMARTCARD_RxCpltCallback()
- In case of transfer Error, HAL_SMARTCARD_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_SMARTCARD_ErrorCallback()

DMA mode IO operation

- Send an amount of data in non-blocking mode (DMA) using HAL_SMARTCARD_Transmit_DMA()
- At transmission end of transfer HAL_SMARTCARD_TxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_SMARTCARD_TxCpltCallback()
- Receive an amount of data in non-blocking mode (DMA) using HAL_SMARTCARD_Receive_DMA()
- At reception end of transfer HAL_SMARTCARD_RxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_SMARTCARD_RxCpltCallback()
- In case of transfer Error, HAL_SMARTCARD_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_SMARTCARD_ErrorCallback()

SMARTCARD HAL driver macros list

Below the list of most used macros in SMARTCARD HAL driver.

- __HAL_SMARTCARD_GET_FLAG : Check whether or not the specified SMARTCARD flag is set
- __HAL_SMARTCARD_CLEAR_FLAG : Clear the specified SMARTCARD pending flag
- __HAL_SMARTCARD_ENABLE_IT: Enable the specified SMARTCARD interrupt
- __HAL_SMARTCARD_DISABLE_IT: Disable the specified SMARTCARD interrupt

- __HAL_SMARTCARD_GET_IT_SOURCE: Check whether or not the specified SMARTCARD interrupt is enabled



You can refer to the SMARTCARD HAL driver header file for more useful macros

45.2.2 Initialization and Configuration functions

This subsection provides a set of functions allowing to initialize the USARTx associated to the SmartCard.

The Smartcard interface is designed to support asynchronous protocol Smartcards as defined in the ISO 7816-3 standard.

The USART can provide a clock to the smartcard through the SCLK output. In smartcard mode, SCLK is not associated to the communication but is simply derived from the internal peripheral input clock through a 5-bit prescaler.

- These parameters can be configured:
  - Baud Rate
  - Parity: should be enabled
  - Receiver/transmitter modes
  - Synchronous mode (and if enabled, phase, polarity and last bit parameters)
  - Prescaler value
  - Guard bit time
  - NACK enabling or disabling on transmission error
- The following advanced features can be configured as well:
  - TX and/or RX pin level inversion
  - data logical level inversion
  - RX and TX pins swap
  - RX overrun detection disabling
  - DMA disabling on RX error
  - MSB first on communication line
  - Time out enabling (and if activated, timeout value)
  - Block length
  - Auto-retry counter

The HAL_SMARTCARD_Init() API follows the USART synchronous configuration procedures (details for the procedures are available in reference manual).

This section contains the following APIs:

- ***HAL_SMARTCARD_Init()***
- ***HAL_SMARTCARD_DeInit()***
- ***HAL_SMARTCARD_MspInit()***
- ***HAL_SMARTCARD_MspDeInit()***

45.2.3 IO operation functions

This subsection provides a set of functions allowing to manage the SMARTCARD data transfers.

Smartcard is a single wire half duplex communication protocol. The Smartcard interface is designed to support asynchronous protocol Smartcards as defined in the ISO 7816-3 standard. The USART should be configured as:

- 8 bits plus parity: where M=1 and PCE=1 in the USART_CR1 register
- 1.5 stop bits when transmitting and receiving: where STOP=11 in the USART_CR2 register.

1. There are two modes of transfer:
   - Blocking mode: The communication is performed in polling mode. The HAL status of all data processing is returned by the same function after finishing transfer.
   - Non-Blocking mode: The communication is performed using Interrupts or DMA, the relevant API's return the HAL status. The end of the data processing will be indicated through the dedicated SMARTCARD IRQ when using Interrupt mode or the DMA IRQ when using DMA mode.
   - The HAL_SMARTCARD_TxCpltCallback(), HAL_SMARTCARD_RxCpltCallback() user callbacks will be executed respectively at the end of the Transmit or Receive process The HAL_SMARTCARD_ErrorCallback() user callback will be executed when a communication error is detected.
2. Blocking mode APIs are :
   - HAL_SMARTCARD_Transmit()
   - HAL_SMARTCARD_Receive()
3. Non Blocking mode APIs with Interrupt are :
   - HAL_SMARTCARD_Transmit_IT()
   - HAL_SMARTCARD_Receive_IT()
   - HAL_SMARTCARD_IRQHandler()
4. Non Blocking mode functions with DMA are :
   - HAL_SMARTCARD_Transmit_DMA()
   - HAL_SMARTCARD_Receive_DMA()
5. A set of Transfer Complete Callbacks are provided in non Blocking mode:
   - HAL_SMARTCARD_TxCpltCallback()
   - HAL_SMARTCARD_RxCpltCallback()
   - HAL_SMARTCARD_ErrorCallback()
6. Non-Blocking mode transfers could be aborted using Abort API's :
   - HAL_SMARTCARD_Abort()
   - HAL_SMARTCARD_AbortTransmit()
   - HAL_SMARTCARD_AbortReceive()
   - HAL_SMARTCARD_Abort_IT()
   - HAL_SMARTCARD_AbortTransmit_IT()
   - HAL_SMARTCARD_AbortReceive_IT()
7. For Abort services based on interrupts (HAL_SMARTCARD_Abortxxx_IT), a set of Abort Complete Callbacks are provided:
   - HAL_SMARTCARD_AbortCpltCallback()
   - HAL_SMARTCARD_AbortTransmitCpltCallback()
   - HAL_SMARTCARD_AbortReceiveCpltCallback()
8. In Non-Blocking mode transfers, possible errors are split into 2 categories. Errors are handled as follows :
   - Error is considered as Recoverable and non blocking : Transfer could go till end, but error severity is to be evaluated by user : this concerns Frame Error, Parity Error or Noise Error in Interrupt mode reception . Received character is then retrieved and stored in Rx buffer, Error code is set to allow user to identify error type, and HAL_SMARTCARD_ErrorCallback() user callback is executed. Transfer is kept ongoing on SMARTCARD side. If user wants to abort it, Abort services should be called by user.
   - Error is considered as Blocking : Transfer could not be completed properly and is aborted. This concerns Frame Error in Interrupt mode tranmission, Overrun Error in Interrupt mode reception and all errors in DMA mode. Error code is set to allow

user to identify error type, and HAL_SMARTCARD_ErrorCallback() user callback is executed.

This section contains the following APIs:

- ***HAL_SMARTCARD_Transmit()***
- ***HAL_SMARTCARD_Receive()***
- ***HAL_SMARTCARD_Transmit_IT()***
- ***HAL_SMARTCARD_Receive_IT()***
- ***HAL_SMARTCARD_Transmit_DMA()***
- ***HAL_SMARTCARD_Receive_DMA()***
- ***HAL_SMARTCARD_Abort()***
- ***HAL_SMARTCARD_AbortTransmit()***
- ***HAL_SMARTCARD_AbortReceive()***
- ***HAL_SMARTCARD_Abort_IT()***
- ***HAL_SMARTCARD_AbortTransmit_IT()***
- ***HAL_SMARTCARD_AbortReceive_IT()***
- ***HAL_SMARTCARD_IRQHandler()***
- ***HAL_SMARTCARD_TxCpltCallback()***
- ***HAL_SMARTCARD_RxCpltCallback()***
- ***HAL_SMARTCARD_ErrorCallback()***
- ***HAL_SMARTCARD_AbortCpltCallback()***
- ***HAL_SMARTCARD_AbortTransmitCpltCallback()***
- ***HAL_SMARTCARD_AbortReceiveCpltCallback()***

45.2.4 Peripheral State and Errors functions

This subsection provides a set of functions allowing to return the State of SmartCard handle and also return Peripheral Errors occurred during communication process

- HAL_SMARTCARD_GetState() API can be helpful to check in run-time the state of the SMARTCARD peripheral.
- HAL_SMARTCARD_GetError() checks in run-time errors that could occur during communication.

This section contains the following APIs:

- ***HAL_SMARTCARD_GetState()***
- ***HAL_SMARTCARD_GetError()***

45.2.5 Detailed description of functions

HAL_SMARTCARD_Init

Function name	**HAL_StatusTypeDef HAL_SMARTCARD_Init (SMARTCARD_HandleTypeDef * hsmartcard)**
Function description	Initialize the SMARTCARD mode according to the specified parameters in the SMARTCARD_HandleTypeDef and initialize the associated handle.
Parameters	• **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.
Return values	• **HAL:** status

HAL_SMARTCARD_DeInit

Function name **HAL_StatusTypeDef HAL_SMARTCARD_DeInit (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description DeInitialize the SMARTCARD peripheral.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **HAL:** status

HAL_SMARTCARD_MspInit

Function name **void HAL_SMARTCARD_MspInit (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description Initialize the SMARTCARD MSP.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **None**

HAL_SMARTCARD_MspDeInit

Function name **void HAL_SMARTCARD_MspDeInit (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description DeInitialize the SMARTCARD MSP.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **None**

HAL_SMARTCARD_Transmit

Function name **HAL_StatusTypeDef HAL_SMARTCARD_Transmit (SMARTCARD_HandleTypeDef * hsmartcard, uint8_t * pData, uint16_t Size, uint32_t Timeout)**

Function description Send an amount of data in blocking mode.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.
- **pData:** pointer to data buffer.
- **Size:** amount of data to be sent.
- **Timeout:** Timeout duration.

Return values
- **HAL:** status

HAL_SMARTCARD_Receive

Function name
HAL_StatusTypeDef HAL_SMARTCARD_Receive (SMARTCARD_HandleTypeDef * hsmartcard, uint8_t * pData, uint16_t Size, uint32_t Timeout)

Function description
Receive an amount of data in blocking mode.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.
- **pData:** pointer to data buffer.
- **Size:** amount of data to be received.
- **Timeout:** Timeout duration.

Return values
- **HAL:** status

HAL_SMARTCARD_Transmit_IT

Function name
HAL_StatusTypeDef HAL_SMARTCARD_Transmit_IT (SMARTCARD_HandleTypeDef * hsmartcard, uint8_t * pData, uint16_t Size)

Function description
Send an amount of data in interrupt mode.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.
- **pData:** pointer to data buffer.
- **Size:** amount of data to be sent.

Return values
- **HAL:** status

HAL_SMARTCARD_Receive_IT

Function name
HAL_StatusTypeDef HAL_SMARTCARD_Receive_IT (SMARTCARD_HandleTypeDef * hsmartcard, uint8_t * pData, uint16_t Size)

Function description
Receive an amount of data in interrupt mode.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.
- **pData:** pointer to data buffer.
- **Size:** amount of data to be received.

Return values
- **HAL:** status

HAL_SMARTCARD_Transmit_DMA

Function name
HAL_StatusTypeDef HAL_SMARTCARD_Transmit_DMA (SMARTCARD_HandleTypeDef * hsmartcard, uint8_t * pData, uint16_t Size)

Function description
Send an amount of data in DMA mode.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

- **pData:** pointer to data buffer.
- **Size:** amount of data to be sent.

Return values
- **HAL:** status

HAL_SMARTCARD_Receive_DMA

Function name **HAL_StatusTypeDef HAL_SMARTCARD_Receive_DMA (SMARTCARD_HandleTypeDef * hsmartcard, uint8_t * pData, uint16_t Size)**

Function description Receive an amount of data in DMA mode.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.
- **pData:** pointer to data buffer.
- **Size:** amount of data to be received.

Return values
- **HAL:** status

Notes
- The SMARTCARD-associated USART parity is enabled (PCE = 1), the received data contain the parity bit (MSB position).

HAL_SMARTCARD_Abort

Function name **HAL_StatusTypeDef HAL_SMARTCARD_Abort (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description Abort ongoing transfers (blocking mode).

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable SMARTCARD Interrupts (Tx and Rx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort (in case of transfer in DMA mode)Set handle State to READY
- This procedure is executed in blocking mode : when exiting function, Abort is considered as completed.

HAL_SMARTCARD_AbortTransmit

Function name **HAL_StatusTypeDef HAL_SMARTCARD_AbortTransmit (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description Abort ongoing Transmit transfer (blocking mode).

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing Tx transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable SMARTCARD Interrupts (Tx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort (in case of transfer in DMA mode)Set handle State to READY
- This procedure is executed in blocking mode : when exiting function, Abort is considered as completed.

HAL_SMARTCARD_AbortReceive

Function name **HAL_StatusTypeDef HAL_SMARTCARD_AbortReceive (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description Abort ongoing Receive transfer (blocking mode).

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing Rx transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable SMARTCARD Interrupts (Rx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort (in case of transfer in DMA mode)Set handle State to READY
- This procedure is executed in blocking mode : when exiting function, Abort is considered as completed.

HAL_SMARTCARD_Abort_IT

Function name **HAL_StatusTypeDef HAL_SMARTCARD_Abort_IT (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description Abort ongoing transfers (Interrupt mode).

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable SMARTCARD Interrupts (Tx and Rx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort_IT (in case of transfer in DMA mode)Set handle State to READYAt abort completion, call user abort complete callback
- This procedure is executed in Interrupt mode, meaning that abort procedure could be considered as completed only when user abort complete callback is executed (not when exiting function).

HAL_SMARTCARD_AbortTransmit_IT

Function name **HAL_StatusTypeDef HAL_SMARTCARD_AbortTransmit_IT (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description Abort ongoing Transmit transfer (Interrupt mode).

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing Tx transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable SMARTCARD Interrupts (Tx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort_IT (in case of transfer in DMA mode)Set handle State to READYAt abort completion, call user abort complete callback
- This procedure is executed in Interrupt mode, meaning that abort procedure could be considered as completed only when user abort complete callback is executed (not when exiting function).

HAL_SMARTCARD_AbortReceive_IT

Function name **HAL_StatusTypeDef HAL_SMARTCARD_AbortReceive_IT (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description Abort ongoing Receive transfer (Interrupt mode).

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing Rx transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable SMARTCARD Interrupts (Rx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort_IT (in case of transfer in DMA mode)Set handle State to READYAt abort completion, call user abort complete callback
- This procedure is executed in Interrupt mode, meaning that abort procedure could be considered as completed only when user abort complete callback is executed (not when exiting function).

HAL_SMARTCARD_IRQHandler

Function name **void HAL_SMARTCARD_IRQHandler (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description Handle SMARTCARD interrupt requests.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **None**

HAL_SMARTCARD_TxCpltCallback

Function name **void HAL_SMARTCARD_TxCpltCallback (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description Tx Transfer completed callback.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **None**

HAL_SMARTCARD_RxCpltCallback

Function name **void HAL_SMARTCARD_RxCpltCallback (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description Rx Transfer completed callback.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **None**

HAL_SMARTCARD_ErrorCallback

Function name **void HAL_SMARTCARD_ErrorCallback (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description SMARTCARD error callback.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **None**

HAL_SMARTCARD_AbortCpltCallback

Function name **void HAL_SMARTCARD_AbortCpltCallback (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description SMARTCARD Abort Complete callback.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **None**

HAL_SMARTCARD_AbortTransmitCpltCallback

Function name **void HAL_SMARTCARD_AbortTransmitCpltCallback (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description SMARTCARD Abort Complete callback.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **None**

HAL_SMARTCARD_AbortReceiveCpltCallback

Function name **void HAL_SMARTCARD_AbortReceiveCpltCallback (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description SMARTCARD Abort Receive Complete callback.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **None**

HAL_SMARTCARD_GetState

Function name **HAL_SMARTCARD_StateTypeDef HAL_SMARTCARD_GetState (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description Return the SMARTCARD handle state.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **SMARTCARD:** handle state

HAL_SMARTCARD_GetError

Function name **uint32_t HAL_SMARTCARD_GetError (SMARTCARD_HandleTypeDef * hsmartcard)**

Function description Return the SMARTCARD handle error code.

Parameters
- **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.

Return values
- **SMARTCARD:** handle Error Code

45.3 SMARTCARD Firmware driver defines

45.3.1 SMARTCARD

SMARTCARD advanced feature initialization type

SMARTCARD_ADVFEATURE_NO_INIT	No advanced feature initialization
SMARTCARD_ADVFEATURE_TXINVERT_INIT	TX pin active level inversion
SMARTCARD_ADVFEATURE_RXINVERT_INIT	RX pin active level inversion
SMARTCARD_ADVFEATURE_DATAINVERT_INIT	Binary data inversion
SMARTCARD_ADVFEATURE_SWAP_INIT	TX/RX pins swap
SMARTCARD_ADVFEATURE_RXOVERRUNDISABLE_INIT	RX overrun disable
SMARTCARD_ADVFEATURE_DMADISABLEONERROR_INIT	DMA disable on Reception Error
SMARTCARD_ADVFEATURE_MSBFIRST_INIT	Most significant bit sent/received first

SMARTCARD Clock Phase

SMARTCARD_PHASE_1EDGE	SMARTCARD frame phase on first clock transition
SMARTCARD_PHASE_2EDGE	SMARTCARD frame phase on second clock transition

SMARTCARD Clock Polarity

SMARTCARD_POLARITY_LOW	SMARTCARD frame low polarity
SMARTCARD_POLARITY_HIGH	SMARTCARD frame high polarity

SMARTCARD auto retry counter LSB position in CR3 register

SMARTCARD_CR3_SCARCNT_LSB_POS	SMARTCARD auto retry counter LSB position in CR3 register

SMARTCARD advanced feature Binary Data inversion

SMARTCARD_ADVFEATURE_DATAINV_DISABLE	Binary data inversion disable
SMARTCARD_ADVFEATURE_DATAINV_ENABLE	Binary data inversion enable

SMARTCARD advanced feature DMA Disable on Rx Error

SMARTCARD_ADVFEATURE_DMA_ENABLEONRXERROR	DMA enable on Reception Error
SMARTCARD_ADVFEATURE_DMA_DISABLEONRXERROR	DMA disable on Reception Error

SMARTCARD Error

HAL_SMARTCARD_ERROR_NONE	No error
HAL_SMARTCARD_ERROR_PE	Parity error
HAL_SMARTCARD_ERROR_NE	Noise error
HAL_SMARTCARD_ERROR_FE	frame error

HAL_SMARTCARD_ERROR_ORE	Overrun error
HAL_SMARTCARD_ERROR_DMA	DMA transfer error
HAL_SMARTCARD_ERROR_RTO	Receiver TimeOut error

SMARTCARD Exported Macros

__HAL_SMARTCARD_RESET_HANDLE_STATE	**Description:** • Reset SMARTCARD handle states. **Parameters:** • __HANDLE__: SMARTCARD handle. **Return value:** • None
__HAL_SMARTCARD_FLUSH_DRREGISTER	**Description:** • Flush the Smartcard Data registers. **Parameters:** • __HANDLE__: specifies the SMARTCARD Handle. **Return value:** • None
__HAL_SMARTCARD_CLEAR_FLAG	**Description:** • Clear the specified SMARTCARD pending flag. **Parameters:** • __HANDLE__: specifies the SMARTCARD Handle. • __FLAG__: specifies the flag to check. This parameter can be any combination of the following values: – SMARTCARD_CLEAR_PEF Parity error clear flag – SMARTCARD_CLEAR_FEF Framing error clear flag – SMARTCARD_CLEAR_NEF Noise detected clear flag – SMARTCARD_CLEAR_OREF OverRun error clear flag – SMARTCARD_CLEAR_IDLEF Idle line detected clear flag – SMARTCARD_CLEAR_TCF Transmission complete clear flag – SMARTCARD_CLEAR_RTOF Receiver timeout clear flag – SMARTCARD_CLEAR_EOBF End of block clear flag **Return value:** • None

__HAL_SMARTCARD_CLEAR_PEFLAG

Description:

- Clear the SMARTCARD PE pending flag.

Parameters:

- __HANDLE__: specifies the SMARTCARD Handle.

Return value:

- None

__HAL_SMARTCARD_CLEAR_FEFLAG

Description:

- Clear the SMARTCARD FE pending flag.

Parameters:

- __HANDLE__: specifies the SMARTCARD Handle.

Return value:

- None

__HAL_SMARTCARD_CLEAR_NEFLAG

Description:

- Clear the SMARTCARD NE pending flag.

Parameters:

- __HANDLE__: specifies the SMARTCARD Handle.

Return value:

- None

__HAL_SMARTCARD_CLEAR_OREFLAG

Description:

- Clear the SMARTCARD ORE pending flag.

Parameters:

- __HANDLE__: specifies the SMARTCARD Handle.

Return value:

- None

__HAL_SMARTCARD_CLEAR_IDLEFLAG

Description:

- Clear the SMARTCARD IDLE pending flag.

Parameters:

- __HANDLE__: specifies the SMARTCARD Handle.

Return value:

- None

__HAL_SMARTCARD_GET_FLAG

Description:

- Check whether the specified Smartcard flag is set or not.

Parameters:

- __HANDLE__: specifies the SMARTCARD Handle.
- __FLAG__: specifies the flag to check. This parameter can be one of the following values:
  - SMARTCARD_FLAG_REACK Receive enable acknowledge flag
  - SMARTCARD_FLAG_TEACK Transmit enable acknowledge flag
  - SMARTCARD_FLAG_BUSY Busy flag
  - SMARTCARD_FLAG_EOBF End of block flag
  - SMARTCARD_FLAG_RTOF Receiver timeout flag
  - SMARTCARD_FLAG_TXE Transmit data register empty flag
  - SMARTCARD_FLAG_TC Transmission complete flag
  - SMARTCARD_FLAG_RXNE Receive data register not empty flag
  - SMARTCARD_FLAG_IDLE Idle line detection flag
  - SMARTCARD_FLAG_ORE Overrun error flag
  - SMARTCARD_FLAG_NE Noise error flag
  - SMARTCARD_FLAG_FE Framing error flag
  - SMARTCARD_FLAG_PE Parity error flag

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

__HAL_SMARTCARD_ENABLE_IT

Description:

- Enable the specified SmartCard interrupt.

Parameters:

- __HANDLE__: specifies the SMARTCARD Handle.
- __INTERRUPT__: specifies the SMARTCARD interrupt to enable. This parameter can be one of the following values:
  - SMARTCARD_IT_EOB End of block interrupt
  - SMARTCARD_IT_RTO Receive timeout interrupt
  - SMARTCARD_IT_TXE Transmit data register empty interrupt
  - SMARTCARD_IT_TC Transmission

complete interrupt
  - SMARTCARD_IT_RXNE Receive data register not empty interrupt
  - SMARTCARD_IT_IDLE Idle line detection interrupt
  - SMARTCARD_IT_PE Parity error interrupt
  - SMARTCARD_IT_ERR Error interrupt(frame error, noise error, overrun error)

Return value:

- None

__HAL_SMARTCARD_DISABLE_IT

Description:

- Disable the specified SmartCard interrupt.

Parameters:

- __HANDLE__: specifies the SMARTCARD Handle.
- __INTERRUPT__: specifies the SMARTCARD interrupt to disable. This parameter can be one of the following values:
  - SMARTCARD_IT_EOB End of block interrupt
  - SMARTCARD_IT_RTO Receive timeout interrupt
  - SMARTCARD_IT_TXE Transmit data register empty interrupt
  - SMARTCARD_IT_TC Transmission complete interrupt
  - SMARTCARD_IT_RXNE Receive data register not empty interrupt
  - SMARTCARD_IT_IDLE Idle line detection interrupt
  - SMARTCARD_IT_PE Parity error interrupt
  - SMARTCARD_IT_ERR Error interrupt(frame error, noise error, overrun error)

Return value:

- None

__HAL_SMARTCARD_GET_IT

Description:

- Check whether the specified SmartCard interrupt has occurred or not.

Parameters:

- __HANDLE__: specifies the SMARTCARD Handle.
- __IT__: specifies the SMARTCARD interrupt to check. This parameter can be one of the following values:
  - SMARTCARD_IT_EOB End of block interrupt

- SMARTCARD_IT_RTO Receive timeout interrupt
- SMARTCARD_IT_TXE Transmit data register empty interrupt
- SMARTCARD_IT_TC Transmission complete interrupt
- SMARTCARD_IT_RXNE Receive data register not empty interrupt
- SMARTCARD_IT_IDLE Idle line detection interrupt
- SMARTCARD_IT_ORE Overrun error interrupt
- SMARTCARD_IT_NE Noise error interrupt
- SMARTCARD_IT_FE Framing error interrupt
- SMARTCARD_IT_PE Parity error interrupt

Return value:

- The: new state of __IT__ (TRUE or FALSE).

__HAL_SMARTCARD_GET_IT_SOURCE

Description:

- Check whether the specified SmartCard interrupt source is enabled or not.

Parameters:

- __HANDLE__: specifies the SMARTCARD Handle.
- __IT__: specifies the SMARTCARD interrupt source to check. This parameter can be one of the following values:
  - SMARTCARD_IT_EOB End of block interrupt
  - SMARTCARD_IT_RTO Receive timeout interrupt
  - SMARTCARD_IT_TXE Transmit data register empty interrupt
  - SMARTCARD_IT_TC Transmission complete interrupt
  - SMARTCARD_IT_RXNE Receive data register not empty interrupt
  - SMARTCARD_IT_IDLE Idle line detection interrupt
  - SMARTCARD_IT_ERR Framing, overrun or noise error interrupt
  - SMARTCARD_IT_PE Parity error interrupt

Return value:

- The: new state of __IT__ (TRUE or FALSE).

__HAL_SMARTCARD_CLEAR_IT

Description:

- Clear the specified SMARTCARD ISR flag, in setting the proper ICR register flag.

Parameters:

- __HANDLE__: specifies the SMARTCARD Handle.
- __IT_CLEAR__: specifies the interrupt clear register flag that needs to be set to clear the corresponding interrupt. This parameter can be one of the following values:
  - SMARTCARD_CLEAR_PEF Parity error clear flag
  - SMARTCARD_CLEAR_FEF Framing error clear flag
  - SMARTCARD_CLEAR_NEF Noise detected clear flag
  - SMARTCARD_CLEAR_OREF OverRun error clear flag
  - SMARTCARD_CLEAR_IDLEF Idle line detection clear flag
  - SMARTCARD_CLEAR_TCF Transmission complete clear flag
  - SMARTCARD_CLEAR_RTOF Receiver timeout clear flag
  - SMARTCARD_CLEAR_EOBF End of block clear flag

Return value:

- None

__HAL_SMARTCARD_SEND_REQ

Description:

- Set a specific SMARTCARD request flag.

Parameters:

- __HANDLE__: specifies the SMARTCARD Handle.
- __REQ__: specifies the request flag to set This parameter can be one of the following values:
  - SMARTCARD_RXDATA_FLUSH_REQUEST Receive data flush Request
  - SMARTCARD_TXDATA_FLUSH_REQUEST Transmit data flush Request

Return value:

- None

__HAL_SMARTCARD_ONE_BIT_SAMPLE_ENABLE

Description:

- Enable the SMARTCARD one bit sample method.

Parameters:

- __HANDLE__: specifies the SMARTCARD Handle.

Return value:

- None

__HAL_SMARTCARD_ONE_BIT_SAMPLE_DISABLE	**Description:** • Disable the SMARTCARD one bit sample method. **Parameters:** • __HANDLE__: specifies the SMARTCARD Handle. **Return value:** • None
__HAL_SMARTCARD_ENABLE	**Description:** • Enable the USART associated to the SMARTCARD Handle. **Parameters:** • __HANDLE__: specifies the SMARTCARD Handle. **Return value:** • None
__HAL_SMARTCARD_DISABLE	**Description:** • Disable the USART associated to the SMARTCARD Handle. **Parameters:** • __HANDLE__: specifies the SMARTCARD Handle. **Return value:** • None

SMARTCARD Flags

SMARTCARD_FLAG_REACK	SMARTCARD receive enable acknowledge flag
SMARTCARD_FLAG_TEACK	SMARTCARD transmit enable acknowledge flag
SMARTCARD_FLAG_BUSY	SMARTCARD busy flag
SMARTCARD_FLAG_EOBF	SMARTCARD end of block flag
SMARTCARD_FLAG_RTOF	SMARTCARD receiver timeout flag
SMARTCARD_FLAG_TXE	SMARTCARD transmit data register empty
SMARTCARD_FLAG_TC	SMARTCARD transmission complete
SMARTCARD_FLAG_RXNE	SMARTCARD read data register not empty
SMARTCARD_FLAG_IDLE	SMARTCARD idle line detection
SMARTCARD_FLAG_ORE	SMARTCARD overrun error
SMARTCARD_FLAG_NE	SMARTCARD noise error
SMARTCARD_FLAG_FE	SMARTCARD frame error
SMARTCARD_FLAG_PE	SMARTCARD parity error

SMARTCARD guard time value LSB position in GTPR register

SMARTCARD_GTPR_GT_LSB_POS	SMARTCARD guard time value LSB position in GTPR register

SMARTCARD interruptions flags mask

SMARTCARD_IT_MASK	SMARTCARD interruptions flags mask

SMARTCARD Interrupts Definition

SMARTCARD_IT_PE	SMARTCARD parity error interruption
SMARTCARD_IT_TXE	SMARTCARD transmit data register empty interruption
SMARTCARD_IT_TC	SMARTCARD transmission complete interruption
SMARTCARD_IT_RXNE	SMARTCARD read data register not empty interruption
SMARTCARD_IT_IDLE	SMARTCARD idle line detection interruption
SMARTCARD_IT_ERR	SMARTCARD error interruption
SMARTCARD_IT_ORE	SMARTCARD overrun error interruption
SMARTCARD_IT_NE	SMARTCARD noise error interruption
SMARTCARD_IT_FE	SMARTCARD frame error interruption
SMARTCARD_IT_EOB	SMARTCARD end of block interruption
SMARTCARD_IT_RTO	SMARTCARD receiver timeout interruption

SMARTCARD Interruption Clear Flags

SMARTCARD_CLEAR_PEF	SMARTCARD parity error clear flag
SMARTCARD_CLEAR_FEF	SMARTCARD framing error clear flag
SMARTCARD_CLEAR_NEF	SMARTCARD noise detected clear flag
SMARTCARD_CLEAR_OREF	SMARTCARD overrun error clear flag
SMARTCARD_CLEAR_IDLEF	SMARTCARD idle line detected clear flag
SMARTCARD_CLEAR_TCF	SMARTCARD transmission complete clear flag
SMARTCARD_CLEAR_RTOF	SMARTCARD receiver time out clear flag
SMARTCARD_CLEAR_EOBF	SMARTCARD end of block clear flag

SMARTCARD Last Bit

SMARTCARD_LASTBIT_DISABLE	SMARTCARD frame last data bit clock pulse not output to SCLK pin
SMARTCARD_LASTBIT_ENABLE	SMARTCARD frame last data bit clock pulse output to SCLK pin

SMARTCARD Transfer Mode

SMARTCARD_MODE_RX	SMARTCARD RX mode
SMARTCARD_MODE_TX	SMARTCARD TX mode
SMARTCARD_MODE_TX_RX	SMARTCARD RX and TX mode

SMARTCARD advanced feature MSB first

SMARTCARD_ADVFEATURE_MSBFIRST_DISABLE	Most significant bit sent/received first disable

SMARTCARD_ADVFEATURE_MSBFIRST_ENABLE Most significant bit sent/received first enable

SMARTCARD NACK Enable

SMARTCARD_NACK_ENABLE SMARTCARD NACK transmission disabled

SMARTCARD_NACK_DISABLE SMARTCARD NACK transmission enabled

SMARTCARD One Bit Sampling Method

SMARTCARD_ONE_BIT_SAMPLE_DISABLE SMARTCARD frame one-bit sample disabled

SMARTCARD_ONE_BIT_SAMPLE_ENABLE SMARTCARD frame one-bit sample enabled

SMARTCARD advanced feature Overrun Disable

SMARTCARD_ADVFEATURE_OVERRUN_ENABLE RX overrun enable

SMARTCARD_ADVFEATURE_OVERRUN_DISABLE RX overrun disable

SMARTCARD Parity

SMARTCARD_PARITY_EVEN SMARTCARD frame even parity

SMARTCARD_PARITY_ODD SMARTCARD frame odd parity

SMARTCARD Request Parameters

SMARTCARD_RXDATA_FLUSH_REQUEST Receive data flush request

SMARTCARD_TXDATA_FLUSH_REQUEST Transmit data flush request

SMARTCARD block length LSB position in RTOR register

SMARTCARD_RTOR_BLEN_LSB_POS SMARTCARD block length LSB position in RTOR register

SMARTCARD advanced feature RX pin active level inversion

SMARTCARD_ADVFEATURE_RXINV_DISABLE RX pin active level inversion disable

SMARTCARD_ADVFEATURE_RXINV_ENABLE RX pin active level inversion enable

SMARTCARD advanced feature RX TX pins swap

SMARTCARD_ADVFEATURE_SWAP_DISABLE TX/RX pins swap disable

SMARTCARD_ADVFEATURE_SWAP_ENABLE TX/RX pins swap enable

SMARTCARD Number of Stop Bits

SMARTCARD_STOPBITS_0_5 SMARTCARD frame with 0.5 stop bit

SMARTCARD_STOPBITS_1_5 SMARTCARD frame with 1.5 stop bits

SMARTCARD Timeout Enable

SMARTCARD_TIMEOUT_DISABLE SMARTCARD receiver timeout disabled

SMARTCARD_TIMEOUT_ENABLE SMARTCARD receiver timeout enabled

SMARTCARD advanced feature TX pin active level inversion

SMARTCARD_ADVFEATURE_TXINV_DISABLE TX pin active level inversion disable

SMARTCARD_ADVFEATURE_TXINV_ENABLE TX pin active level inversion enable

SMARTCARD Word Length

SMARTCARD_WORDLENGTH_9B	SMARTCARD frame length

46 HAL SMARTCARD Extension Driver

46.1 SMARTCARDEx Firmware driver API description

46.1.1 SMARTCARD peripheral extended features

The Extended SMARTCARD HAL driver can be used as follows:

1. After having configured the SMARTCARD basic features with HAL_SMARTCARD_Init(), then program SMARTCARD advanced features if required (TX/RX pins swap, TimeOut, auto-retry counter,...) in the hsmartcard AdvancedInit structure.

46.1.2 Peripheral Control functions

This subsection provides a set of functions allowing to initialize the SMARTCARD.

- HAL_SMARTCARDEx_BlockLength_Config() API allows to configure the Block Length on the fly
- HAL_SMARTCARDEx_TimeOut_Config() API allows to configure the receiver timeout value on the fly
- HAL_SMARTCARDEx_EnableReceiverTimeOut() API enables the receiver timeout feature
- HAL_SMARTCARDEx_DisableReceiverTimeOut() API disables the receiver timeout feature

This section contains the following APIs:

- ***HAL_SMARTCARDEx_BlockLength_Config()***
- ***HAL_SMARTCARDEx_TimeOut_Config()***
- ***HAL_SMARTCARDEx_EnableReceiverTimeOut()***
- ***HAL_SMARTCARDEx_DisableReceiverTimeOut()***

46.1.3 Detailed description of functions

HAL_SMARTCARDEx_BlockLength_Config

Function name	**void HAL_SMARTCARDEx_BlockLength_Config (SMARTCARD_HandleTypeDef * hsmartcard, uint8_t BlockLength)**
Function description	Update on the fly the SMARTCARD block length in RTOR register.
Parameters	• **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module. • **BlockLength:** SMARTCARD block length (8-bit long at most)
Return values	• **None**

HAL_SMARTCARDEx_TimeOut_Config

Function name	**void HAL_SMARTCARDEx_TimeOut_Config (SMARTCARD_HandleTypeDef * hsmartcard, uint32_t TimeOutValue)**
Function description	Update on the fly the receiver timeout value in RTOR register.
Parameters	• **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module. • **TimeOutValue:** receiver timeout value in number of baud blocks. The timeout value must be less or equal to 0x0FFFFFFFF.
Return values	• **None**

HAL_SMARTCARDEx_EnableReceiverTimeOut

Function name	**HAL_StatusTypeDef HAL_SMARTCARDEx_EnableReceiverTimeOut (SMARTCARD_HandleTypeDef * hsmartcard)**
Function description	Enable the SMARTCARD receiver timeout feature.
Parameters	• **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.
Return values	• **HAL:** status

HAL_SMARTCARDEx_DisableReceiverTimeOut

Function name	**HAL_StatusTypeDef HAL_SMARTCARDEx_DisableReceiverTimeOut (SMARTCARD_HandleTypeDef * hsmartcard)**
Function description	Disable the SMARTCARD receiver timeout feature.
Parameters	• **hsmartcard:** Pointer to a SMARTCARD_HandleTypeDef structure that contains the configuration information for the specified SMARTCARD module.
Return values	• **HAL:** status

47 HAL SMBUS Generic Driver

47.1 SMBUS Firmware driver registers structures

47.1.1 SMBUS_InitTypeDef

Data Fields

- ***uint32_t Timing***
- ***uint32_t AnalogFilter***
- ***uint32_t OwnAddress1***
- ***uint32_t AddressingMode***
- ***uint32_t DualAddressMode***
- ***uint32_t OwnAddress2***
- ***uint32_t OwnAddress2Masks***
- ***uint32_t GeneralCallMode***
- ***uint32_t NoStretchMode***
- ***uint32_t PacketErrorCheckMode***
- ***uint32_t PeripheralMode***
- ***uint32_t SMBusTimeout***

Field Documentation

- ***uint32_t SMBUS_InitTypeDef::Timing***
  Specifies the SMBUS_TIMINGR_register value. This parameter calculated by referring to SMBUS initialization section in Reference manual
- ***uint32_t SMBUS_InitTypeDef::AnalogFilter***
  Specifies if Analog Filter is enable or not. This parameter can be a value of ***SMBUS_Analog_Filter***
- ***uint32_t SMBUS_InitTypeDef::OwnAddress1***
  Specifies the first device own address. This parameter can be a 7-bit or 10-bit address.
- ***uint32_t SMBUS_InitTypeDef::AddressingMode***
  Specifies if 7-bit or 10-bit addressing mode for master is selected. This parameter can be a value of ***SMBUS_addressing_mode***
- ***uint32_t SMBUS_InitTypeDef::DualAddressMode***
  Specifies if dual addressing mode is selected. This parameter can be a value of ***SMBUS_dual_addressing_mode***
- ***uint32_t SMBUS_InitTypeDef::OwnAddress2***
  Specifies the second device own address if dual addressing mode is selected This parameter can be a 7-bit address.
- ***uint32_t SMBUS_InitTypeDef::OwnAddress2Masks***
  Specifies the acknoledge mask address second device own address if dual addressing mode is selected This parameter can be a value of ***SMBUS_own_address2_masks***.
- ***uint32_t SMBUS_InitTypeDef::GeneralCallMode***
  Specifies if general call mode is selected. This parameter can be a value of ***SMBUS_general_call_addressing_mode***.
- ***uint32_t SMBUS_InitTypeDef::NoStretchMode***
  Specifies if nostretch mode is selected. This parameter can be a value of ***SMBUS_nostretch_mode***

- ***uint32_t SMBUS_InitTypeDef::PacketErrorCheckMode***
  Specifies if Packet Error Check mode is selected. This parameter can be a value of ***SMBUS_packet_error_check_mode***
- ***uint32_t SMBUS_InitTypeDef::PeripheralMode***
  Specifies which mode of Periphal is selected. This parameter can be a value of ***SMBUS_peripheral_mode***
- ***uint32_t SMBUS_InitTypeDef::SMBusTimeout***
  Specifies the content of the 32 Bits SMBUS_TIMEOUT_register value. (Enable bits and different timeout values) This parameter calculated by referring to SMBUS initialization section in Reference manual

47.1.2 SMBUS_HandleTypeDef

Data Fields

- ***I2C_TypeDef * Instance***
- ***SMBUS_InitTypeDef Init***
- ***uint8_t * pBuffPtr***
- ***uint16_t XferSize***
- ***__IO uint16_t XferCount***
- ***__IO uint32_t XferOptions***
- ***__IO uint32_t PreviousState***
- ***HAL_LockTypeDef Lock***
- ***__IO uint32_t State***
- ***__IO uint32_t ErrorCode***

Field Documentation

- ***I2C_TypeDef* SMBUS_HandleTypeDef::Instance***
  SMBUS registers base address
- ***SMBUS_InitTypeDef SMBUS_HandleTypeDef::Init***
  SMBUS communication parameters
- ***uint8_t* SMBUS_HandleTypeDef::pBuffPtr***
  Pointer to SMBUS transfer buffer
- ***uint16_t SMBUS_HandleTypeDef::XferSize***
  SMBUS transfer size
- ***__IO uint16_t SMBUS_HandleTypeDef::XferCount***
  SMBUS transfer counter
- ***__IO uint32_t SMBUS_HandleTypeDef::XferOptions***
  SMBUS transfer options
- ***__IO uint32_t SMBUS_HandleTypeDef::PreviousState***
  SMBUS communication Previous state
- ***HAL_LockTypeDef SMBUS_HandleTypeDef::Lock***
  SMBUS locking object
- ***__IO uint32_t SMBUS_HandleTypeDef::State***
  SMBUS communication state
- ***__IO uint32_t SMBUS_HandleTypeDef::ErrorCode***
  SMBUS Error code

47.2 SMBUS Firmware driver API description

47.2.1 How to use this driver

The SMBUS HAL driver can be used as follows:

1. Declare a SMBUS_HandleTypeDef handle structure, for example: SMBUS_HandleTypeDef hsmbus;
2. Initialize the SMBUS low level resources by implementing the HAL_SMBUS_MspInit() API:
   a. Enable the SMBUSx interface clock
   b. SMBUS pins configuration
      – Enable the clock for the SMBUS GPIOs
      – Configure SMBUS pins as alternate function open-drain
   c. NVIC configuration if you need to use interrupt process
      – Configure the SMBUSx interrupt priority
      – Enable the NVIC SMBUS IRQ Channel
3. Configure the Communication Clock Timing, Bus Timeout, Own Address1, Master Addressing mode, Dual Addressing mode, Own Address2, Own Address2 Mask, General call, Nostretch mode, Peripheral mode and Packet Error Check mode in the hsmbus Init structure.
4. Initialize the SMBUS registers by calling the HAL_SMBUS_Init() API:
   – These API's configures also the low level Hardware GPIO, CLOCK, CORTEX...etc) by calling the customized HAL_SMBUS_MspInit(&hsmbus) API.
5. To check if target device is ready for communication, use the function HAL_SMBUS_IsDeviceReady()
6. For SMBUS IO operations, only one mode of operations is available within this driver

Interrupt mode IO operation

- Transmit in master/host SMBUS mode an amount of data in non-blocking mode using HAL_SMBUS_Master_Transmit_IT()
  – At transmission end of transfer HAL_SMBUS_MasterTxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_SMBUS_MasterTxCpltCallback()
- Receive in master/host SMBUS mode an amount of data in non-blocking mode using HAL_SMBUS_Master_Receive_IT()
  – At reception end of transfer HAL_SMBUS_MasterRxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_SMBUS_MasterRxCpltCallback()
- Abort a master/host SMBUS process communication with Interrupt using HAL_SMBUS_Master_Abort_IT()
  – The associated previous transfer callback is called at the end of abort process
  – mean HAL_SMBUS_MasterTxCpltCallback() in case of previous state was master transmit
  – mean HAL_SMBUS_MasterRxCpltCallback() in case of previous state was master receive
- Enable/disable the Address listen mode in slave/device or host/slave SMBUS mode using HAL_SMBUS_EnableListen_IT() HAL_SMBUS_DisableListen_IT()
  – When address slave/device SMBUS match, HAL_SMBUS_AddrCallback() is executed and user can add his own code to check the Address Match Code and the transmission direction request by master/host (Write/Read).

  - At Listen mode end HAL_SMBUS_ListenCpltCallback() is executed and user can add his own code by customization of function pointer HAL_SMBUS_ListenCpltCallback()
- Transmit in slave/device SMBUS mode an amount of data in non-blocking mode using HAL_SMBUS_Slave_Transmit_IT()
  - At transmission end of transfer HAL_SMBUS_SlaveTxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_SMBUS_SlaveTxCpltCallback()
- Receive in slave/device SMBUS mode an amount of data in non-blocking mode using HAL_SMBUS_Slave_Receive_IT()
  - At reception end of transfer HAL_SMBUS_SlaveRxCpltCallback() is executed and user can add his own code by customization of function pointer HAL_SMBUS_SlaveRxCpltCallback()
- Enable/Disable the SMBUS alert mode using HAL_SMBUS_EnableAlert_IT() HAL_SMBUS_DisableAlert_IT()
  - When SMBUS Alert is generated HAL_SMBUS_ErrorCallback() is executed and user can add his own code by customization of function pointer HAL_SMBUS_ErrorCallback() to check the Alert Error Code using function HAL_SMBUS_GetError()
- Get HAL state machine or error values using HAL_SMBUS_GetState() or HAL_SMBUS_GetError()
- In case of transfer Error, HAL_SMBUS_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_SMBUS_ErrorCallback() to check the Error Code using function HAL_SMBUS_GetError()

SMBUS HAL driver macros list

Below the list of most used macros in SMBUS HAL driver.

- __HAL_SMBUS_ENABLE: Enable the SMBUS peripheral
- __HAL_SMBUS_DISABLE: Disable the SMBUS peripheral
- __HAL_SMBUS_GET_FLAG: Check whether the specified SMBUS flag is set or not
- __HAL_SMBUS_CLEAR_FLAG: Clear the specified SMBUS pending flag
- __HAL_SMBUS_ENABLE_IT: Enable the specified SMBUS interrupt
- __HAL_SMBUS_DISABLE_IT: Disable the specified SMBUS interrupt



You can refer to the SMBUS HAL driver header file for more useful macros

47.2.2 Initialization and de-initialization functions

This subsection provides a set of functions allowing to initialize and deinitialize the SMBUSx peripheral:

- User must Implement HAL_SMBUS_MspInit() function in which he configures all related peripherals resources (CLOCK, GPIO, IT and NVIC).
- Call the function HAL_SMBUS_Init() to configure the selected device with the selected configuration:
  - Clock Timing
  - Bus Timeout
  - Analog Filer mode
  - Own Address 1

  - Addressing mode (Master, Slave)
  - Dual Addressing mode
  - Own Address 2
  - Own Address 2 Mask
  - General call mode
  - Nostretch mode
  - Packet Error Check mode
  - Peripheral mode
- Call the function HAL_SMBUS_DeInit() to restore the default configuration of the selected SMBUSx peripheral.
- Enable/Disable Analog/Digital filters with HAL_SMBUS_ConfigAnalogFilter() and HAL_SMBUS_ConfigDigitalFilter().

This section contains the following APIs:

- ***HAL_SMBUS_Init()***
- ***HAL_SMBUS_DeInit()***
- ***HAL_SMBUS_MspInit()***
- ***HAL_SMBUS_MspDeInit()***
- ***HAL_SMBUS_ConfigAnalogFilter()***
- ***HAL_SMBUS_ConfigDigitalFilter()***

47.2.3 IO operation functions

This subsection provides a set of functions allowing to manage the SMBUS data transfers.

1. Blocking mode function to check if device is ready for usage is :
   - HAL_SMBUS_IsDeviceReady()
2. There is only one mode of transfer:
   - Non-Blocking mode : The communication is performed using Interrupts. These functions return the status of the transfer startup. The end of the data processing will be indicated through the dedicated SMBUS IRQ when using Interrupt mode.
3. Non-Blocking mode functions with Interrupt are :
   - HAL_SMBUS_Master_Transmit_IT()
   - HAL_SMBUS_Master_Receive_IT()
   - HAL_SMBUS_Slave_Transmit_IT()
   - HAL_SMBUS_Slave_Receive_IT()
   - HAL_SMBUS_EnableListen_IT() or alias HAL_SMBUS_EnableListen_IT()
   - HAL_SMBUS_DisableListen_IT()
   - HAL_SMBUS_EnableAlert_IT()
   - HAL_SMBUS_DisableAlert_IT()
4. A set of Transfer Complete Callbacks are provided in non-Blocking mode:
   - HAL_SMBUS_MasterTxCpltCallback()
   - HAL_SMBUS_MasterRxCpltCallback()
   - HAL_SMBUS_SlaveTxCpltCallback()
   - HAL_SMBUS_SlaveRxCpltCallback()
   - HAL_SMBUS_AddrCallback()
   - HAL_SMBUS_ListenCpltCallback()
   - HAL_SMBUS_ErrorCallback()

This section contains the following APIs:

- ***HAL_SMBUS_Master_Transmit_IT()***
- ***HAL_SMBUS_Master_Receive_IT()***
- ***HAL_SMBUS_Master_Abort_IT()***
- ***HAL_SMBUS_Slave_Transmit_IT()***

- ***HAL_SMBUS_Slave_Receive_IT()***
- ***HAL_SMBUS_EnableListen_IT()***
- ***HAL_SMBUS_DisableListen_IT()***
- ***HAL_SMBUS_EnableAlert_IT()***
- ***HAL_SMBUS_DisableAlert_IT()***
- ***HAL_SMBUS_IsDeviceReady()***

47.2.4 Peripheral State and Errors functions

This subsection permits to get in run-time the status of the peripheral and the data flow.

This section contains the following APIs:

- ***HAL_SMBUS_GetState()***
- ***HAL_SMBUS_GetError()***

47.2.5 Detailed description of functions

HAL_SMBUS_Init

Function name	**HAL_StatusTypeDef HAL_SMBUS_Init (SMBUS_HandleTypeDef * hsmbus)**
Function description	Initialize the SMBUS according to the specified parameters in the SMBUS_InitTypeDef and initialize the associated handle.
Parameters	• **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
Return values	• **HAL:** status

HAL_SMBUS_DeInit

Function name	**HAL_StatusTypeDef HAL_SMBUS_DeInit (SMBUS_HandleTypeDef * hsmbus)**
Function description	DeInitialize the SMBUS peripheral.
Parameters	• **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
Return values	• **HAL:** status

HAL_SMBUS_MspInit

Function name	**void HAL_SMBUS_MspInit (SMBUS_HandleTypeDef * hsmbus)**
Function description	Initialize the SMBUS MSP.
Parameters	• **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
Return values	• **None**

HAL_SMBUS_MspDeInit

Function name **void HAL_SMBUS_MspDeInit (SMBUS_HandleTypeDef * hsmbus)**

Function description DeInitialize the SMBUS MSP.

Parameters
- **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.

Return values
- **None**

HAL_SMBUS_ConfigAnalogFilter

Function name **HAL_StatusTypeDef HAL_SMBUS_ConfigAnalogFilter (SMBUS_HandleTypeDef * hsmbus, uint32_t AnalogFilter)**

Function description Configure Analog noise filter.

Parameters
- **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
- **AnalogFilter:** This parameter can be one of the following values:
  - SMBUS_ANALOGFILTER_ENABLE
  - SMBUS_ANALOGFILTER_DISABLE

Return values
- **HAL:** status

HAL_SMBUS_ConfigDigitalFilter

Function name **HAL_StatusTypeDef HAL_SMBUS_ConfigDigitalFilter (SMBUS_HandleTypeDef * hsmbus, uint32_t DigitalFilter)**

Function description Configure Digital noise filter.

Parameters
- **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
- **DigitalFilter:** Coefficient of digital noise filter between Min_Data=0x00 and Max_Data=0x0F.

Return values
- **HAL:** status

HAL_SMBUS_IsDeviceReady

Function name **HAL_StatusTypeDef HAL_SMBUS_IsDeviceReady (SMBUS_HandleTypeDef * hsmbus, uint16_t DevAddress, uint32_t Trials, uint32_t Timeout)**

Function description Check if target device is ready for communication.

Parameters
- **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **Trials:** Number of trials

- **Timeout:** Timeout duration

Return values
- **HAL:** status

HAL_SMBUS_Master_Transmit_IT

Function name **HAL_StatusTypeDef HAL_SMBUS_Master_Transmit_IT (SMBUS_HandleTypeDef * hsmbus, uint16_t DevAddress, uint8_t * pData, uint16_t Size, uint32_t XferOptions)**

Function description Transmit in master/host SMBUS mode an amount of data in non-blocking mode with Interrupt.

Parameters
- **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent
- **XferOptions:** Options of Transfer, value of SMBUS XferOptions definition

Return values
- **HAL:** status

HAL_SMBUS_Master_Receive_IT

Function name **HAL_StatusTypeDef HAL_SMBUS_Master_Receive_IT (SMBUS_HandleTypeDef * hsmbus, uint16_t DevAddress, uint8_t * pData, uint16_t Size, uint32_t XferOptions)**

Function description Receive in master/host SMBUS mode an amount of data in non-blocking mode with Interrupt.

Parameters
- **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
- **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
- **pData:** Pointer to data buffer
- **Size:** Amount of data to be sent
- **XferOptions:** Options of Transfer, value of SMBUS XferOptions definition

Return values
- **HAL:** status

HAL_SMBUS_Master_Abort_IT

Function name	**HAL_StatusTypeDef HAL_SMBUS_Master_Abort_IT (SMBUS_HandleTypeDef * hsmbus, uint16_t DevAddress)**
Function description	Abort a master/host SMBUS process communication with Interrupt.
Parameters	• **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS. • **DevAddress:** Target device address: The device 7 bits address value in datasheet must be shift at right before call interface
Return values	• **HAL:** status
Notes	• This abort can be called only if state is ready

HAL_SMBUS_Slave_Transmit_IT

Function name	**HAL_StatusTypeDef HAL_SMBUS_Slave_Transmit_IT (SMBUS_HandleTypeDef * hsmbus, uint8_t * pData, uint16_t Size, uint32_t XferOptions)**
Function description	Transmit in slave/device SMBUS mode an amount of data in non-blocking mode with Interrupt.
Parameters	• **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS. • **pData:** Pointer to data buffer • **Size:** Amount of data to be sent • **XferOptions:** Options of Transfer, value of SMBUS XferOptions definition
Return values	• **HAL:** status

HAL_SMBUS_Slave_Receive_IT

Function name	**HAL_StatusTypeDef HAL_SMBUS_Slave_Receive_IT (SMBUS_HandleTypeDef * hsmbus, uint8_t * pData, uint16_t Size, uint32_t XferOptions)**
Function description	Receive in slave/device SMBUS mode an amount of data in non-blocking mode with Interrupt.
Parameters	• **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS. • **pData:** Pointer to data buffer • **Size:** Amount of data to be sent • **XferOptions:** Options of Transfer, value of SMBUS XferOptions definition
Return values	• **HAL:** status

HAL_SMBUS_EnableAlert_IT

Function name **HAL_StatusTypeDef HAL_SMBUS_EnableAlert_IT (SMBUS_HandleTypeDef * hsmbus)**

Function description Enable the SMBUS alert mode with Interrupt.

Parameters
- **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUSx peripheral.

Return values
- **HAL:** status

HAL_SMBUS_DisableAlert_IT

Function name **HAL_StatusTypeDef HAL_SMBUS_DisableAlert_IT (SMBUS_HandleTypeDef * hsmbus)**

Function description Disable the SMBUS alert mode with Interrupt.

Parameters
- **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUSx peripheral.

Return values
- **HAL:** status

HAL_SMBUS_EnableListen_IT

Function name **HAL_StatusTypeDef HAL_SMBUS_EnableListen_IT (SMBUS_HandleTypeDef * hsmbus)**

Function description Enable the Address listen mode with Interrupt.

Parameters
- **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.

Return values
- **HAL:** status

HAL_SMBUS_DisableListen_IT

Function name **HAL_StatusTypeDef HAL_SMBUS_DisableListen_IT (SMBUS_HandleTypeDef * hsmbus)**

Function description Disable the Address listen mode with Interrupt.

Parameters
- **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.

Return values
- **HAL:** status

HAL_SMBUS_EV_IRQHandler

Function name	**void HAL_SMBUS_EV_IRQHandler (SMBUS_HandleTypeDef * hsmbus)**
Function description	Handle SMBUS event interrupt request.
Parameters	• **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
Return values	• **None**

HAL_SMBUS_ER_IRQHandler

Function name	**void HAL_SMBUS_ER_IRQHandler (SMBUS_HandleTypeDef * hsmbus)**
Function description	Handle SMBUS error interrupt request.
Parameters	• **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
Return values	• **None**

HAL_SMBUS_MasterTxCpltCallback

Function name	**void HAL_SMBUS_MasterTxCpltCallback (SMBUS_HandleTypeDef * hsmbus)**
Function description	Master Tx Transfer completed callback.
Parameters	• **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
Return values	• **None**

HAL_SMBUS_MasterRxCpltCallback

Function name	**void HAL_SMBUS_MasterRxCpltCallback (SMBUS_HandleTypeDef * hsmbus)**
Function description	Master Rx Transfer completed callback.
Parameters	• **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
Return values	• **None**

HAL_SMBUS_SlaveTxCpltCallback

Function name **void HAL_SMBUS_SlaveTxCpltCallback (SMBUS_HandleTypeDef * hsmbus)**

Function description Slave Tx Transfer completed callback.

Parameters
- **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.

Return values
- **None**

HAL_SMBUS_SlaveRxCpltCallback

Function name **void HAL_SMBUS_SlaveRxCpltCallback (SMBUS_HandleTypeDef * hsmbus)**

Function description Slave Rx Transfer completed callback.

Parameters
- **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.

Return values
- **None**

HAL_SMBUS_AddrCallback

Function name **void HAL_SMBUS_AddrCallback (SMBUS_HandleTypeDef * hsmbus, uint8_t TransferDirection, uint16_t AddrMatchCode)**

Function description Slave Address Match callback.

Parameters
- **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
- **TransferDirection:** Master request Transfer Direction (Write/Read)
- **AddrMatchCode:** Address Match Code

Return values
- **None**

HAL_SMBUS_ListenCpltCallback

Function name **void HAL_SMBUS_ListenCpltCallback (SMBUS_HandleTypeDef * hsmbus)**

Function description Listen Complete callback.

Parameters
- **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.

Return values
- **None**

HAL_SMBUS_ErrorCallback

Function name	**void HAL_SMBUS_ErrorCallback (SMBUS_HandleTypeDef * hsmbus)**
Function description	SMBUS error callback.
Parameters	• **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
Return values	• **None**

HAL_SMBUS_GetState

Function name	**uint32_t HAL_SMBUS_GetState (SMBUS_HandleTypeDef * hsmbus)**
Function description	Return the SMBUS handle state.
Parameters	• **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
Return values	• **HAL:** state

HAL_SMBUS_GetError

Function name	**uint32_t HAL_SMBUS_GetError (SMBUS_HandleTypeDef * hsmbus)**
Function description	Return the SMBUS error code.
Parameters	• **hsmbus:** Pointer to a SMBUS_HandleTypeDef structure that contains the configuration information for the specified SMBUS.
Return values	• **SMBUS:** Error Code

47.3 SMBUS Firmware driver defines

47.3.1 SMBUS

SMBUS addressing mode

SMBUS_ADDRESSINGMODE_7BIT

SMBUS_ADDRESSINGMODE_10BIT

SMBUS Analog Filter

SMBUS_ANALOGFILTER_ENABLE

SMBUS_ANALOGFILTER_DISABLE

SMBUS dual addressing mode

SMBUS_DUALADDRESS_DISABLE

SMBUS_DUALADDRESS_ENABLE

SMBUS Error Code definition

HAL_SMBUS_ERROR_NONE	No error
HAL_SMBUS_ERROR_BERR	BERR error
HAL_SMBUS_ERROR_ARLO	ARLO error
HAL_SMBUS_ERROR_ACKF	ACKF error
HAL_SMBUS_ERROR_OVR	OVR error
HAL_SMBUS_ERROR_HALTIMEOUT	Timeout error
HAL_SMBUS_ERROR_BUSTIMEOUT	Bus Timeout error
HAL_SMBUS_ERROR_ALERT	Alert error
HAL_SMBUS_ERROR_PECERR	PEC error

SMBUS Exported Macros

__HAL_SMBUS_RESET_HANDLE_STATE

Description:

- Reset SMBUS handle state.

Parameters:

- __HANDLE__: specifies the SMBUS Handle.

Return value:

- None

__HAL_SMBUS_ENABLE_IT

Description:

- Enable the specified SMBUS interrupts.

Parameters:

- __HANDLE__: specifies the SMBUS Handle.
- __INTERRUPT__: specifies the interrupt source to enable. This parameter can be one of the following values:
  - SMBUS_IT_ERRI Errors interrupt enable
  - SMBUS_IT_TCI Transfer complete interrupt enable
  - SMBUS_IT_STOPI STOP detection interrupt enable
  - SMBUS_IT_NACKI NACK received interrupt enable
  - SMBUS_IT_ADDRI Address match interrupt enable
  - SMBUS_IT_RXI RX interrupt enable
  - SMBUS_IT_TXI TX interrupt enable

Return value:

- None

__HAL_SMBUS_DISABLE_IT

Description:

- Disable the specified SMBUS interrupts.

Parameters:

- __HANDLE__: specifies the SMBUS Handle.
- __INTERRUPT__: specifies the interrupt source to disable. This parameter can be one of the following values:
  - SMBUS_IT_ERRI Errors interrupt enable
  - SMBUS_IT_TCI Transfer complete interrupt enable
  - SMBUS_IT_STOPI STOP detection interrupt enable
  - SMBUS_IT_NACKI NACK received interrupt enable
  - SMBUS_IT_ADDRI Address match interrupt enable
  - SMBUS_IT_RXI RX interrupt enable
  - SMBUS_IT_TXI TX interrupt enable

Return value:

- None

__HAL_SMBUS_GET_IT_SOURCE

Description:

- Check whether the specified SMBUS interrupt source is enabled or not.

Parameters:

- __HANDLE__: specifies the SMBUS Handle.
- __INTERRUPT__: specifies the SMBUS interrupt source to check. This parameter can be one of the following values:
  - SMBUS_IT_ERRI Errors interrupt enable
  - SMBUS_IT_TCI Transfer complete interrupt enable
  - SMBUS_IT_STOPI STOP detection interrupt enable
  - SMBUS_IT_NACKI NACK received interrupt enable
  - SMBUS_IT_ADDRI Address match interrupt enable
  - SMBUS_IT_RXI RX interrupt enable
  - SMBUS_IT_TXI TX interrupt

enable

Return value:

- The: new state of __IT__ (TRUE or FALSE).

SMBUS_FLAG_MASK

Description:

- Check whether the specified SMBUS flag is set or not.

Parameters:

- __HANDLE__: specifies the SMBUS Handle.
- __FLAG__: specifies the flag to check. This parameter can be one of the following values:
  - SMBUS_FLAG_TXE Transmit data register empty
  - SMBUS_FLAG_TXIS Transmit interrupt status
  - SMBUS_FLAG_RXNE Receive data register not empty
  - SMBUS_FLAG_ADDR Address matched (slave mode)
  - SMBUS_FLAG_AF NACK received flag
  - SMBUS_FLAG_STOPF STOP detection flag
  - SMBUS_FLAG_TC Transfer complete (master mode)
  - SMBUS_FLAG_TCR Transfer complete reload
  - SMBUS_FLAG_BERR Bus error
  - SMBUS_FLAG_ARLO Arbitration lost
  - SMBUS_FLAG_OVR Overrun/Underrun
  - SMBUS_FLAG_PECERR PEC error in reception
  - SMBUS_FLAG_TIMEOUT Timeout or Tlow detection flag
  - SMBUS_FLAG_ALERT SMBus alert
  - SMBUS_FLAG_BUSY Bus busy
  - SMBUS_FLAG_DIR Transfer direction (slave mode)

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

__HAL_SMBUS_GET_FLAG

__HAL_SMBUS_CLEAR_FLAG

Description:

- Clear the SMBUS pending flags which are cleared by writing 1 in a specific bit.

Parameters:

- __HANDLE__: specifies the SMBUS Handle.
- __FLAG__: specifies the flag to clear. This parameter can be any combination of the following values:
  - SMBUS_FLAG_ADDR Address matched (slave mode)
  - SMBUS_FLAG_AF NACK received flag
  - SMBUS_FLAG_STOPF STOP detection flag
  - SMBUS_FLAG_BERR Bus error
  - SMBUS_FLAG_ARLO Arbitration lost
  - SMBUS_FLAG_OVR Overrun/Underrun
  - SMBUS_FLAG_PECERR PEC error in reception
  - SMBUS_FLAG_TIMEOUT Timeout or Tlow detection flag
  - SMBUS_FLAG_ALERT SMBus alert

Return value:

- None

__HAL_SMBUS_ENABLE

Description:

- Enable the specified SMBUS peripheral.

Parameters:

- __HANDLE__: specifies the SMBUS Handle.

Return value:

- None

__HAL_SMBUS_DISABLE

Description:

- Disable the specified SMBUS peripheral.

Parameters:

- __HANDLE__: specifies the SMBUS Handle.

Return value:

- None

__HAL_SMBUS_GENERATE_NACK

Description:

- Generate a Non-Acknowledge SMBUS peripheral in Slave mode.

Parameters:

- __HANDLE__: specifies the SMBUS Handle.

Return value:

- None

SMBUS Flag definition

SMBUS_FLAG_TXE

SMBUS_FLAG_TXIS

SMBUS_FLAG_RXNE

SMBUS_FLAG_ADDR

SMBUS_FLAG_AF

SMBUS_FLAG_STOPF

SMBUS_FLAG_TC

SMBUS_FLAG_TCR

SMBUS_FLAG_BERR

SMBUS_FLAG_ARLO

SMBUS_FLAG_OVR

SMBUS_FLAG_PECERR

SMBUS_FLAG_TIMEOUT

SMBUS_FLAG_ALERT

SMBUS_FLAG_BUSY

SMBUS_FLAG_DIR

SMBUS general call addressing mode

SMBUS_GENERALCALL_DISABLE

SMBUS_GENERALCALL_ENABLE

SMBUS Interrupt configuration definition

SMBUS_IT_ERRI

SMBUS_IT_TCI

SMBUS_IT_STOPI

SMBUS_IT_NACKI

SMBUS_IT_ADDRI

SMBUS_IT_RXI

SMBUS_IT_TXI

SMBUS_IT_TX

SMBUS_IT_RX

SMBUS_IT_ALERT

SMBUS_IT_ADDR

SMBUS nostretch mode

SMBUS_NOSTRETCH_DISABLE

SMBUS_NOSTRETCH_ENABLE

SMBUS ownaddress2 masks

SMBUS_OA2_NOMASK

SMBUS_OA2_MASK01

SMBUS_OA2_MASK02

SMBUS_OA2_MASK03

SMBUS_OA2_MASK04

SMBUS_OA2_MASK05

SMBUS_OA2_MASK06

SMBUS_OA2_MASK07

SMBUS packet error check mode

SMBUS_PEC_DISABLE

SMBUS_PEC_ENABLE

SMBUS peripheral mode

SMBUS_PERIPHERAL_MODE_SMBUS_HOST

SMBUS_PERIPHERAL_MODE_SMBUS_SLAVE

SMBUS_PERIPHERAL_MODE_SMBUS_SLAVE_ARP

SMBUS ReloadEndMode definition

SMBUS_SOFTEND_MODE

SMBUS_RELOAD_MODE

SMBUS_AUTOEND_MODE

SMBUS_SENDPEC_MODE

SMBUS StartStopMode definition

SMBUS_NO_STARTSTOP

SMBUS_GENERATE_STOP

SMBUS_GENERATE_START_READ

SMBUS_GENERATE_START_WRITE

SMBUS XferOptions definition

SMBUS_FIRST_FRAME

SMBUS_NEXT_FRAME

SMBUS_FIRST_AND_LAST_FRAME_NO_PEC

SMBUS_LAST_FRAME_NO_PEC

SMBUS_FIRST_AND_LAST_FRAME_WITH_PEC

SMBUS_LAST_FRAME_WITH_PEC

SMBUS_OTHER_FRAME_NO_PEC

SMBUS_OTHER_FRAME_WITH_PEC

SMBUS_OTHER_AND_LAST_FRAME_NO_PEC

SMBUS_OTHER_AND_LAST_FRAME_WITH_PEC

48 HAL SPI Generic Driver

48.1 SPI Firmware driver registers structures

48.1.1 SPI_InitTypeDef

Data Fields

- ***uint32_t Mode***
- ***uint32_t Direction***
- ***uint32_t DataSize***
- ***uint32_t CLKPolarity***
- ***uint32_t CLKPhase***
- ***uint32_t NSS***
- ***uint32_t BaudRatePrescaler***
- ***uint32_t FirstBit***
- ***uint32_t TIMode***
- ***uint32_t CRCCalculation***
- ***uint32_t CRCPolynomial***
- ***uint32_t CRCLength***
- ***uint32_t NSSPMode***

Field Documentation

- ***uint32_t SPI_InitTypeDef::Mode***
  Specifies the SPI operating mode. This parameter can be a value of ***SPI_Mode***
- ***uint32_t SPI_InitTypeDef::Direction***
  Specifies the SPI bidirectional mode state. This parameter can be a value of ***SPI_Direction***
- ***uint32_t SPI_InitTypeDef::DataSize***
  Specifies the SPI data size. This parameter can be a value of ***SPI_Data_Size***
- ***uint32_t SPI_InitTypeDef::CLKPolarity***
  Specifies the serial clock steady state. This parameter can be a value of ***SPI_Clock_Polarity***
- ***uint32_t SPI_InitTypeDef::CLKPhase***
  Specifies the clock active edge for the bit capture. This parameter can be a value of ***SPI_Clock_Phase***
- ***uint32_t SPI_InitTypeDef::NSS***
  Specifies whether the NSS signal is managed by hardware (NSS pin) or by software using the SSI bit. This parameter can be a value of ***SPI_Slave_Select_management***
- ***uint32_t SPI_InitTypeDef::BaudRatePrescaler***
  Specifies the Baud Rate prescaler value which will be used to configure the transmit and receive SCK clock. This parameter can be a value of ***SPI_BaudRate_Prescaler***
  Note: The communication clock is derived from the master clock. The slave clock does not need to be set.
- ***uint32_t SPI_InitTypeDef::FirstBit***
  Specifies whether data transfers start from MSB or LSB bit. This parameter can be a value of ***SPI_MSB_LSB_transmission***
- ***uint32_t SPI_InitTypeDef::TIMode***
  Specifies if the TI mode is enabled or not. This parameter can be a value of ***SPI_TI_mode***

- ***uint32_t SPI_InitTypeDef::CRCCalculation***
  Specifies if the CRC calculation is enabled or not. This parameter can be a value of ***SPI_CRC_Calculation***
- ***uint32_t SPI_InitTypeDef::CRCPolynomial***
  Specifies the polynomial used for the CRC calculation. This parameter must be an odd number between Min_Data = 1 and Max_Data = 65535
- ***uint32_t SPI_InitTypeDef::CRCLength***
  Specifies the CRC Length used for the CRC calculation. CRC Length is only used with Data8 and Data16, not other data size This parameter can be a value of ***SPI_CRC_length***
- ***uint32_t SPI_InitTypeDef::NSSPMode***
  Specifies whether the NSSP signal is enabled or not . This parameter can be a value of ***SPI_NSSP_Mode*** This mode is activated by the NSSP bit in the SPIx_CR2 register and it takes effect only if the SPI interface is configured as Motorola SPI master (FRF=0) with capture on the first edge (SPIx_CR1 CPHA = 0, CPOL setting is ignored)..

48.1.2 __SPI_HandleTypeDef

Data Fields

- ***SPI_TypeDef * Instance***
- ***SPI_InitTypeDef Init***
- ***uint8_t * pTxBuffPtr***
- ***uint16_t TxXferSize***
- ***__IO uint16_t TxXferCount***
- ***uint8_t * pRxBuffPtr***
- ***uint16_t RxXferSize***
- ***__IO uint16_t RxXferCount***
- ***uint32_t CRCSize***
- ***void(* RxISR***
- ***void(* TxISR***
- ***DMA_HandleTypeDef * hdmatx***
- ***DMA_HandleTypeDef * hdmarx***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_SPI_StateTypeDef State***
- ***__IO uint32_t ErrorCode***

Field Documentation

- ***SPI_TypeDef* __SPI_HandleTypeDef::Instance***
  SPI registers base address
- ***SPI_InitTypeDef __SPI_HandleTypeDef::Init***
  SPI communication parameters
- ***uint8_t* __SPI_HandleTypeDef::pTxBuffPtr***
  Pointer to SPI Tx transfer Buffer
- ***uint16_t __SPI_HandleTypeDef::TxXferSize***
  SPI Tx Transfer size
- ***__IO uint16_t __SPI_HandleTypeDef::TxXferCount***
  SPI Tx Transfer Counter
- ***uint8_t* __SPI_HandleTypeDef::pRxBuffPtr***
  Pointer to SPI Rx transfer Buffer
- ***uint16_t __SPI_HandleTypeDef::RxXferSize***
  SPI Rx Transfer size
- ***__IO uint16_t __SPI_HandleTypeDef::RxXferCount***
  SPI Rx Transfer Counter

- ***uint32_t __SPI_HandleTypeDef::CRCSize***
  SPI CRC size used for the transfer
- ***void(* __SPI_HandleTypeDef::RxISR)(struct __SPI_HandleTypeDef *hspi)***
  function pointer on Rx ISR
- ***void(* __SPI_HandleTypeDef::TxISR)(struct __SPI_HandleTypeDef *hspi)***
  function pointer on Tx ISR
- ***DMA_HandleTypeDef* __SPI_HandleTypeDef::hdmatx***
  SPI Tx DMA Handle parameters
- ***DMA_HandleTypeDef* __SPI_HandleTypeDef::hdmarx***
  SPI Rx DMA Handle parameters
- ***HAL_LockTypeDef __SPI_HandleTypeDef::Lock***
  Locking object
- ***__IO HAL_SPI_StateTypeDef __SPI_HandleTypeDef::State***
  SPI communication state
- ***__IO uint32_t __SPI_HandleTypeDef::ErrorCode***
  SPI Error code

48.2 SPI Firmware driver API description

48.2.1 How to use this driver

The SPI HAL driver can be used as follows:

1. Declare a SPI_HandleTypeDef handle structure, for example: SPI_HandleTypeDef hspi;
2. Initialize the SPI low level resources by implementing the HAL_SPI_MspInit() API:
   a. Enable the SPIx interface clock
   b. SPI pins configuration
      – Enable the clock for the SPI GPIOs
      – Configure these SPI pins as alternate function push-pull
   c. NVIC configuration if you need to use interrupt process
      – Configure the SPIx interrupt priority
      – Enable the NVIC SPI IRQ handle
   d. DMA Configuration if you need to use DMA process
      – Declare a DMA_HandleTypeDef handle structure for the transmit or receive Stream/Channel
      – Enable the DMAx clock
      – Configure the DMA handle parameters
      – Configure the DMA Tx or Rx Stream/Channel
      – Associate the initialized hdma_tx handle to the hspi DMA Tx or Rx handle
      – Configure the priority and enable the NVIC for the transfer complete interrupt on the DMA Tx or Rx Stream/Channel
3. Program the Mode, BidirectionalMode , Data size, Baudrate Prescaler, NSS management, Clock polarity and phase, FirstBit and CRC configuration in the hspi Init structure.
4. Initialize the SPI registers by calling the HAL_SPI_Init() API:
   – This API configures also the low level Hardware GPIO, CLOCK, CORTEX...etc) by calling the customized HAL_SPI_MspInit() API.

Circular mode restriction:

1. The DMA circular mode cannot be used when the SPI is configured in these modes:
   a. Master 2Lines RxOnly
   b. Master 1Line Rx
2. The CRC feature is not managed when the DMA circular mode is enabled

3. When the SPI DMA Pause/Stop features are used, we must use the following APIs the HAL_SPI_DMAPause()/ HAL_SPI_DMAStop() only under the SPI callbacks

Master Receive mode restriction:

1. In Master unidirectional receive-only mode (MSTR =1, BIDIMODE=0, RXONLY=0) or bidirectional receive mode (MSTR=1, BIDIMODE=1, BIDIOE=0), to ensure that the SPI does not initiate a new transfer the following procedure has to be respected:
   a. HAL_SPI_DeInit()
   b. HAL_SPI_Init()

The HAL drivers do not allow reaching all supported SPI frequencies in the different SPI modes. Refer to the source code (stm32xxxx_hal_spi.c header) to get a summary of the maximum SPI frequency that can be reached with a data size of 8 or 16 bits, depending on the APBx peripheral clock frequency (fPCLK) used by the SPI instance.

48.2.2 Initialization and de-initialization functions

This subsection provides a set of functions allowing to initialize and de-initialize the SPIx peripheral:

- User must implement HAL_SPI_MspInit() function in which he configures all related peripherals resources (CLOCK, GPIO, DMA, IT and NVIC).
- Call the function HAL_SPI_Init() to configure the selected device with the selected configuration:
  - Mode
  - Direction
  - Data Size
  - Clock Polarity and Phase
  - NSS Management
  - BaudRate Prescaler
  - FirstBit
  - TIMode
  - CRC Calculation
  - CRC Polynomial if CRC enabled
  - CRC Length, used only with Data8 and Data16
  - FIFO reception threshold
- Call the function HAL_SPI_DeInit() to restore the default configuration of the selected SPIx peripheral.

This section contains the following APIs:

- ***HAL_SPI_Init()***
- ***HAL_SPI_DeInit()***
- ***HAL_SPI_MspInit()***
- ***HAL_SPI_MspDeInit()***

48.2.3 IO operation functions

This subsection provides a set of functions allowing to manage the SPI data transfers.

The SPI supports master and slave mode :

1. There are two modes of transfer:
   - Blocking mode: The communication is performed in polling mode. The HAL status of all data processing is returned by the same function after finishing transfer.
   - No-Blocking mode: The communication is performed using Interrupts or DMA, These APIs return the HAL status. The end of the data processing will be

indicated through the dedicated SPI IRQ when using Interrupt mode or the DMA IRQ when using DMA mode. The HAL_SPI_TxCpltCallback(), HAL_SPI_RxCpltCallback() and HAL_SPI_TxRxCpltCallback() user callbacks will be executed respectively at the end of the transmit or Receive process The HAL_SPI_ErrorCallback()user callback will be executed when a communication error is detected

2. APIs provided for these 2 transfer modes (Blocking mode or Non blocking mode using either Interrupt or DMA) exist for 1Line (simplex) and 2Lines (full duplex) modes.

This section contains the following APIs:

- ***HAL_SPI_Transmit()***
- ***HAL_SPI_Receive()***
- ***HAL_SPI_TransmitReceive()***
- ***HAL_SPI_Transmit_IT()***
- ***HAL_SPI_Receive_IT()***
- ***HAL_SPI_TransmitReceive_IT()***
- ***HAL_SPI_Transmit_DMA()***
- ***HAL_SPI_Receive_DMA()***
- ***HAL_SPI_TransmitReceive_DMA()***
- ***HAL_SPI_Abort()***
- ***HAL_SPI_Abort_IT()***
- ***HAL_SPI_DMAPause()***
- ***HAL_SPI_DMAResume()***
- ***HAL_SPI_DMAStop()***
- ***HAL_SPI_IRQHandler()***
- ***HAL_SPI_TxCpltCallback()***
- ***HAL_SPI_RxCpltCallback()***
- ***HAL_SPI_TxRxCpltCallback()***
- ***HAL_SPI_TxHalfCpltCallback()***
- ***HAL_SPI_RxHalfCpltCallback()***
- ***HAL_SPI_TxRxHalfCpltCallback()***
- ***HAL_SPI_ErrorCallback()***
- ***HAL_SPI_AbortCpltCallback()***

48.2.4 Peripheral State and Errors functions

This subsection provides a set of functions allowing to control the SPI.

- HAL_SPI_GetState() API can be helpful to check in run-time the state of the SPI peripheral
- HAL_SPI_GetError() check in run-time Errors occurring during communication

This section contains the following APIs:

- ***HAL_SPI_GetState()***
- ***HAL_SPI_GetError()***

48.2.5 Detailed description of functions

HAL_SPI_Init

Function name	**HAL_StatusTypeDef HAL_SPI_Init (SPI_HandleTypeDef * hspi)**
Function description	Initialize the SPI according to the specified parameters in the SPI_InitTypeDef and initialize the associated handle.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.

Return values
- **HAL:** status

HAL_SPI_DeInit

Function name **HAL_StatusTypeDef HAL_SPI_DeInit (SPI_HandleTypeDef * hspi)**

Function description De-Initialize the SPI peripheral.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.

Return values
- **HAL:** status

HAL_SPI_MspInit

Function name **void HAL_SPI_MspInit (SPI_HandleTypeDef * hspi)**

Function description Initialize the SPI MSP.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.

Return values
- **None**

HAL_SPI_MspDeInit

Function name **void HAL_SPI_MspDeInit (SPI_HandleTypeDef * hspi)**

Function description De-Initialize the SPI MSP.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.

Return values
- **None**

HAL_SPI_Transmit

Function name **HAL_StatusTypeDef HAL_SPI_Transmit (SPI_HandleTypeDef * hspi, uint8_t * pData, uint16_t Size, uint32_t Timeout)**

Function description Transmit an amount of data in blocking mode.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.
- **pData:** pointer to data buffer
- **Size:** amount of data to be sent
- **Timeout:** Timeout duration

Return values
- **HAL:** status

HAL_SPI_Receive

Function name **HAL_StatusTypeDef HAL_SPI_Receive (SPI_HandleTypeDef * hspi, uint8_t * pData, uint16_t Size, uint32_t Timeout)**

Function description Receive an amount of data in blocking mode.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.
- **pData:** pointer to data buffer
- **Size:** amount of data to be received
- **Timeout:** Timeout duration

Return values
- **HAL:** status

HAL_SPI_TransmitReceive

Function name **HAL_StatusTypeDef HAL_SPI_TransmitReceive (SPI_HandleTypeDef * hspi, uint8_t * pTxData, uint8_t * pRxData, uint16_t Size, uint32_t Timeout)**

Function description Transmit and Receive an amount of data in blocking mode.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.
- **pTxData:** pointer to transmission data buffer
- **pRxData:** pointer to reception data buffer
- **Size:** amount of data to be sent and received
- **Timeout:** Timeout duration

Return values
- **HAL:** status

HAL_SPI_Transmit_IT

Function name **HAL_StatusTypeDef HAL_SPI_Transmit_IT (SPI_HandleTypeDef * hspi, uint8_t * pData, uint16_t Size)**

Function description Transmit an amount of data in non-blocking mode with Interrupt.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.
- **pData:** pointer to data buffer
- **Size:** amount of data to be sent

Return values
- **HAL:** status

HAL_SPI_Receive_IT

Function name **HAL_StatusTypeDef HAL_SPI_Receive_IT (SPI_HandleTypeDef * hspi, uint8_t * pData, uint16_t Size)**

Function description Receive an amount of data in non-blocking mode with Interrupt.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.
- **pData:** pointer to data buffer
- **Size:** amount of data to be sent

Return values
- **HAL:** status

HAL_SPI_TransmitReceive_IT

Function name **HAL_StatusTypeDef HAL_SPI_TransmitReceive_IT (SPI_HandleTypeDef * hspi, uint8_t * pTxData, uint8_t * pRxData, uint16_t Size)**

Function description Transmit and Receive an amount of data in non-blocking mode with Interrupt.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.
- **pTxData:** pointer to transmission data buffer
- **pRxData:** pointer to reception data buffer
- **Size:** amount of data to be sent and received

Return values
- **HAL:** status

HAL_SPI_Transmit_DMA

Function name **HAL_StatusTypeDef HAL_SPI_Transmit_DMA (SPI_HandleTypeDef * hspi, uint8_t * pData, uint16_t Size)**

Function description Transmit an amount of data in non-blocking mode with DMA.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.
- **pData:** pointer to data buffer
- **Size:** amount of data to be sent

Return values
- **HAL:** status

HAL_SPI_Receive_DMA

Function name **HAL_StatusTypeDef HAL_SPI_Receive_DMA (SPI_HandleTypeDef * hspi, uint8_t * pData, uint16_t Size)**

Function description Receive an amount of data in non-blocking mode with DMA.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.
- **pData:** pointer to data buffer
- **Size:** amount of data to be sent

Return values
- **HAL:** status

Notes
- In case of MASTER mode and SPI_DIRECTION_2LINES direction, hdmatx shall be defined.
- When the CRC feature is enabled the pData Length must be Size + 1.

HAL_SPI_TransmitReceive_DMA

Function name **HAL_StatusTypeDef HAL_SPI_TransmitReceive_DMA (SPI_HandleTypeDef * hspi, uint8_t * pTxData, uint8_t * pRxData, uint16_t Size)**

Function description Transmit and Receive an amount of data in non-blocking mode with DMA.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains

the configuration information for SPI module.
- **pTxData:** pointer to transmission data buffer
- **pRxData:** pointer to reception data buffer
- **Size:** amount of data to be sent

Return values
- **HAL:** status

Notes
- When the CRC feature is enabled the pRxData Length must be Size + 1

HAL_SPI_DMAPause

Function name **HAL_StatusTypeDef HAL_SPI_DMAPause (SPI_HandleTypeDef * hspi)**

Function description Pause the DMA Transfer.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for the specified SPI module.

Return values
- **HAL:** status

HAL_SPI_DMAResume

Function name **HAL_StatusTypeDef HAL_SPI_DMAResume (SPI_HandleTypeDef * hspi)**

Function description Resume the DMA Transfer.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for the specified SPI module.

Return values
- **HAL:** status

HAL_SPI_DMAStop

Function name **HAL_StatusTypeDef HAL_SPI_DMAStop (SPI_HandleTypeDef * hspi)**

Function description Stop the DMA Transfer.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for the specified SPI module.

Return values
- **HAL:** status

HAL_SPI_Abort

Function name **HAL_StatusTypeDef HAL_SPI_Abort (SPI_HandleTypeDef * hspi)**

Function description Abort ongoing transfer (blocking mode).

Parameters
- **hspi:** SPI handle.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing transfer (Tx and Rx), started in Interrupt or DMA mode. This procedure performs following operations : Disable SPI Interrupts (depending of transfer direction)Disable the DMA

transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort (in case of transfer in DMA mode)Set handle State to READY
- This procedure is executed in blocking mode : when exiting function, Abort is considered as completed.

HAL_SPI_Abort_IT

Function name	**HAL_StatusTypeDef HAL_SPI_Abort_IT (SPI_HandleTypeDef * hspi)**
Function description	Abort ongoing transfer (Interrupt mode).
Parameters	• **hspi:** SPI handle.
Return values	• **HAL:** status
Notes	• This procedure could be used for aborting any ongoing transfer (Tx and Rx), started in Interrupt or DMA mode. This procedure performs following operations : Disable SPI Interrupts (depending of transfer direction)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort_IT (in case of transfer in DMA mode)Set handle State to READYAt abort completion, call user abort complete callback • This procedure is executed in Interrupt mode, meaning that abort procedure could be considered as completed only when user abort complete callback is executed (not when exiting function).

HAL_SPI_IRQHandler

Function name	**void HAL_SPI_IRQHandler (SPI_HandleTypeDef * hspi)**
Function description	Handle SPI interrupt request.
Parameters	• **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for the specified SPI module.
Return values	• **None**

HAL_SPI_TxCpltCallback

Function name	**void HAL_SPI_TxCpltCallback (SPI_HandleTypeDef * hspi)**
Function description	Tx Transfer completed callback.
Parameters	• **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.
Return values	• **None**

HAL_SPI_RxCpltCallback

Function name	**void HAL_SPI_RxCpltCallback (SPI_HandleTypeDef * hspi)**
Function description	Rx Transfer completed callback.
Parameters	• **hspi:** pointer to a SPI_HandleTypeDef structure that contains

the configuration information for SPI module.

Return values
- **None**

HAL_SPI_TxRxCpltCallback

Function name **void HAL_SPI_TxRxCpltCallback (SPI_HandleTypeDef * hspi)**

Function description Tx and Rx Transfer completed callback.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.

Return values
- **None**

HAL_SPI_TxHalfCpltCallback

Function name **void HAL_SPI_TxHalfCpltCallback (SPI_HandleTypeDef * hspi)**

Function description Tx Half Transfer completed callback.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.

Return values
- **None**

HAL_SPI_RxHalfCpltCallback

Function name **void HAL_SPI_RxHalfCpltCallback (SPI_HandleTypeDef * hspi)**

Function description Rx Half Transfer completed callback.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.

Return values
- **None**

HAL_SPI_TxRxHalfCpltCallback

Function name **void HAL_SPI_TxRxHalfCpltCallback (SPI_HandleTypeDef * hspi)**

Function description Tx and Rx Half Transfer callback.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.

Return values
- **None**

HAL_SPI_ErrorCallback

Function name **void HAL_SPI_ErrorCallback (SPI_HandleTypeDef * hspi)**

Function description SPI error callback.

Parameters
- **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.

Return values
- **None**

HAL_SPI_AbortCpltCallback

Function name	**void HAL_SPI_AbortCpltCallback (SPI_HandleTypeDef * hspi)**
Function description	SPI Abort Complete callback.
Parameters	• **hspi:** SPI handle.
Return values	• **None**

HAL_SPI_GetState

Function name	**HAL_SPI_StateTypeDef HAL_SPI_GetState (SPI_HandleTypeDef * hspi)**
Function description	Return the SPI handle state.
Parameters	• **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.
Return values	• **SPI:** state

HAL_SPI_GetError

Function name	**uint32_t HAL_SPI_GetError (SPI_HandleTypeDef * hspi)**
Function description	Return the SPI error code.
Parameters	• **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for SPI module.
Return values	• **SPI:** error code in bitmap format

48.3 SPI Firmware driver defines

48.3.1 SPI

SPI BaudRate Prescaler

SPI_BAUDRATEPRESCALER_2

SPI_BAUDRATEPRESCALER_4

SPI_BAUDRATEPRESCALER_8

SPI_BAUDRATEPRESCALER_16

SPI_BAUDRATEPRESCALER_32

SPI_BAUDRATEPRESCALER_64

SPI_BAUDRATEPRESCALER_128

SPI_BAUDRATEPRESCALER_256

SPI Clock Phase

SPI_PHASE_1EDGE

SPI_PHASE_2EDGE

SPI Clock Polarity

SPI_POLARITY_LOW

SPI_POLARITY_HIGH

SPI CRC Calculation

SPI_CRCCALCULATION_DISABLE

SPI_CRCCALCULATION_ENABLE

SPI CRC Length

SPI_CRC_LENGTH_DATASIZE

SPI_CRC_LENGTH_8BIT

SPI_CRC_LENGTH_16BIT

SPI Data Size

SPI_DATASIZE_4BIT

SPI_DATASIZE_5BIT

SPI_DATASIZE_6BIT

SPI_DATASIZE_7BIT

SPI_DATASIZE_8BIT

SPI_DATASIZE_9BIT

SPI_DATASIZE_10BIT

SPI_DATASIZE_11BIT

SPI_DATASIZE_12BIT

SPI_DATASIZE_13BIT

SPI_DATASIZE_14BIT

SPI_DATASIZE_15BIT

SPI_DATASIZE_16BIT

SPI Direction Mode

SPI_DIRECTION_2LINES

SPI_DIRECTION_2LINES_RXONLY

SPI_DIRECTION_1LINE

SPI Error Code

HAL_SPI_ERROR_NONE	No error
HAL_SPI_ERROR_MODF	MODF error
HAL_SPI_ERROR_CRC	CRC error
HAL_SPI_ERROR_OVR	OVR error
HAL_SPI_ERROR_FRE	FRE error
HAL_SPI_ERROR_DMA	DMA transfer error
HAL_SPI_ERROR_FLAG	Error on RXNE/TXE/BSY/FTLVL/FRLVL Flag
HAL_SPI_ERROR_ABORT	Error during SPI Abort procedure

SPI Exported Macros

__HAL_SPI_RESET_HANDLE_STATE

Description:

- Reset SPI handle state.

Parameters:

- __HANDLE__: specifies the SPI Handle. This parameter can be SPI where x: 1, 2, or 3 to select the SPI peripheral.

Return value:

- None

__HAL_SPI_ENABLE_IT

Description:

- Enable the specified SPI interrupts.

Parameters:

- __HANDLE__: specifies the SPI Handle. This parameter can be SPI where x: 1, 2, or 3 to select the SPI peripheral.
- __INTERRUPT__: specifies the interrupt source to enable. This parameter can be one of the following values:
  - SPI_IT_TXE: Tx buffer empty interrupt enable
  - SPI_IT_RXNE: RX buffer not empty interrupt enable
  - SPI_IT_ERR: Error interrupt enable

Return value:

- None

__HAL_SPI_DISABLE_IT

Description:

- Disable the specified SPI interrupts.

Parameters:

- __HANDLE__: specifies the SPI handle. This parameter can be SPIx where x: 1, 2, or 3 to select the SPI peripheral.
- __INTERRUPT__: specifies the interrupt source to disable. This parameter can be one of the following values:
  - SPI_IT_TXE: Tx buffer empty interrupt enable
  - SPI_IT_RXNE: RX buffer not empty interrupt enable
  - SPI_IT_ERR: Error interrupt enable

Return value:

- None

__HAL_SPI_GET_IT_SOURCE

Description:

- Check whether the specified SPI interrupt

source is enabled or not.

Parameters:

- __HANDLE__: specifies the SPI Handle. This parameter can be SPI where x: 1, 2, or 3 to select the SPI peripheral.
- __INTERRUPT__: specifies the SPI interrupt source to check. This parameter can be one of the following values:
  - SPI_IT_TXE: Tx buffer empty interrupt enable
  - SPI_IT_RXNE: RX buffer not empty interrupt enable
  - SPI_IT_ERR: Error interrupt enable

Return value:

- The: new state of __IT__ (TRUE or FALSE).

__HAL_SPI_GET_FLAG

Description:

- Check whether the specified SPI flag is set or not.

Parameters:

- __HANDLE__: specifies the SPI Handle. This parameter can be SPI where x: 1, 2, or 3 to select the SPI peripheral.
- __FLAG__: specifies the flag to check. This parameter can be one of the following values:
  - SPI_FLAG_RXNE: Receive buffer not empty flag
  - SPI_FLAG_TXE: Transmit buffer empty flag
  - SPI_FLAG_CRCERR: CRC error flag
  - SPI_FLAG_MODF: Mode fault flag
  - SPI_FLAG_OVR: Overrun flag
  - SPI_FLAG_BSY: Busy flag
  - SPI_FLAG_FRE: Frame format error flag
  - SPI_FLAG_FTLVL: SPI fifo transmission level
  - SPI_FLAG_FRLVL: SPI fifo reception level

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

__HAL_SPI_CLEAR_CRCERRFLAG

Description:

- Clear the SPI CRCERR pending flag.

Parameters:

- __HANDLE__: specifies the SPI Handle. This parameter can be SPI where x: 1, 2, or

3 to select the SPI peripheral.

Return value:

- None

__HAL_SPI_CLEAR_MODFFLAG

Description:

- Clear the SPI MODF pending flag.

Parameters:

- __HANDLE__: specifies the SPI Handle. This parameter can be SPI where x: 1, 2, or 3 to select the SPI peripheral.

Return value:

- None

__HAL_SPI_CLEAR_OVRFLAG

Description:

- Clear the SPI OVR pending flag.

Parameters:

- __HANDLE__: specifies the SPI Handle. This parameter can be SPI where x: 1, 2, or 3 to select the SPI peripheral.

Return value:

- None

__HAL_SPI_CLEAR_FREFLAG

Description:

- Clear the SPI FRE pending flag.

Parameters:

- __HANDLE__: specifies the SPI Handle. This parameter can be SPI where x: 1, 2, or 3 to select the SPI peripheral.

Return value:

- None

__HAL_SPI_ENABLE

Description:

- Enable the SPI peripheral.

Parameters:

- __HANDLE__: specifies the SPI Handle. This parameter can be SPI where x: 1, 2, or 3 to select the SPI peripheral.

Return value:

- None

__HAL_SPI_DISABLE

Description:

- Disable the SPI peripheral.

Parameters:

- __HANDLE__: specifies the SPI Handle.

This parameter can be SPI where x: 1, 2, or 3 to select the SPI peripheral.

Return value:

- None

SPI FIFO Reception Threshold

SPI_RXFIFO_THRESHOLD

SPI_RXFIFO_THRESHOLD_QF

SPI_RXFIFO_THRESHOLD_HF

SPI Flags Definition

SPI_FLAG_RXNE

SPI_FLAG_TXE

SPI_FLAG_BSY

SPI_FLAG_CRCERR

SPI_FLAG_MODF

SPI_FLAG_OVR

SPI_FLAG_FRE

SPI_FLAG_FTLVL

SPI_FLAG_FRLVL

SPI Interrupt Definition

SPI_IT_TXE

SPI_IT_RXNE

SPI_IT_ERR

SPI Mode

SPI_MODE_SLAVE

SPI_MODE_MASTER

SPI MSB LSB Transmission

SPI_FIRSTBIT_MSB

SPI_FIRSTBIT_LSB

SPI NSS Pulse Mode

SPI_NSS_PULSE_ENABLE

SPI_NSS_PULSE_DISABLE

SPI Reception FIFO Status Level

SPI_FRLVL_EMPTY

SPI_FRLVL_QUARTER_FULL

SPI_FRLVL_HALF_FULL

SPI_FRLVL_FULL

SPI Slave Select Management

SPI_NSS_SOFT

SPI_NSS_HARD_INPUT

SPI_NSS_HARD_OUTPUT

SPI TI Mode

SPI_TIMODE_DISABLE

SPI_TIMODE_ENABLE

SPI Transmission FIFO Status Level

SPI_FTLVL_EMPTY

SPI_FTLVL_QUARTER_FULL

SPI_FTLVL_HALF_FULL

SPI_FTLVL_FULL

49 HAL SPI Extension Driver

49.1 SPIEx Firmware driver API description

49.1.1 IO operation functions

This subsection provides a set of extended functions to manage the SPI data transfers.

1. Rx data flush function:
   – HAL_SPIEx_FlushRxFifo()

This section contains the following APIs:

- ***HAL_SPIEx_FlushRxFifo()***

49.1.2 Detailed description of functions

HAL_SPIEx_FlushRxFifo

Function name	**HAL_StatusTypeDef HAL_SPIEx_FlushRxFifo (SPI_HandleTypeDef * hspi)**
Function description	Flush the RX fifo.
Parameters	• **hspi:** pointer to a SPI_HandleTypeDef structure that contains the configuration information for the specified SPI module.
Return values	• **HAL:** status

50 HAL SRAM Generic Driver

50.1 SRAM Firmware driver registers structures

50.1.1 SRAM_HandleTypeDef

Data Fields

- ***FMC_NORSRAM_TypeDef * Instance***
- ***FMC_NORSRAM_EXTENDED_TypeDef * Extended***
- ***FMC_NORSRAM_InitTypeDef Init***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_SRAM_StateTypeDef State***
- ***DMA_HandleTypeDef * hdma***

Field Documentation

- ***FMC_NORSRAM_TypeDef* SRAM_HandleTypeDef::Instance***
  Register base address
- ***FMC_NORSRAM_EXTENDED_TypeDef* SRAM_HandleTypeDef::Extended***
  Extended mode register base address
- ***FMC_NORSRAM_InitTypeDef SRAM_HandleTypeDef::Init***
  SRAM device control configuration parameters
- ***HAL_LockTypeDef SRAM_HandleTypeDef::Lock***
  SRAM locking object
- ***__IO HAL_SRAM_StateTypeDef SRAM_HandleTypeDef::State***
  SRAM device access state
- ***DMA_HandleTypeDef* SRAM_HandleTypeDef::hdma***
  Pointer DMA handler

50.2 SRAM Firmware driver API description

50.2.1 How to use this driver

This driver is a generic layered driver which contains a set of APIs used to control SRAM memories. It uses the FMC layer functions to interface with SRAM devices. The following sequence should be followed to configure the FMC to interface with SRAM/PSRAM memories:

1. Declare a SRAM_HandleTypeDef handle structure, for example:
   SRAM_HandleTypeDef hsram; and:
   – Fill the SRAM_HandleTypeDef handle "Init" field with the allowed values of the structure member.
   – Fill the SRAM_HandleTypeDef handle "Instance" field with a predefined base register instance for NOR or SRAM device
   – Fill the SRAM_HandleTypeDef handle "Extended" field with a predefined base register instance for NOR or SRAM extended mode
2. Declare two FMC_NORSRAM_TimingTypeDef structures, for both normal and extended mode timings; for example: FMC_NORSRAM_TimingTypeDef Timing and FMC_NORSRAM_TimingTypeDef ExTiming; and fill its fields with the allowed values of the structure member.
3. Initialize the SRAM Controller by calling the function HAL_SRAM_Init(). This function performs the following sequence:
   a. MSP hardware layer configuration using the function HAL_SRAM_MspInit()

b. Control register configuration using the FMC NORSRAM interface function FMC_NORSRAM_Init()
c. Timing register configuration using the FMC NORSRAM interface function FMC_NORSRAM_Timing_Init()
d. Extended mode Timing register configuration using the FMC NORSRAM interface function FMC_NORSRAM_Extended_Timing_Init()
e. Enable the SRAM device using the macro __FMC_NORSRAM_ENABLE()

4. At this stage you can perform read/write accesses from/to the memory connected to the NOR/SRAM Bank. You can perform either polling or DMA transfer using the following APIs:
   – HAL_SRAM_Read()/HAL_SRAM_Write() for polling read/write access
   – HAL_SRAM_Read_DMA()/HAL_SRAM_Write_DMA() for DMA read/write transfer
5. You can also control the SRAM device by calling the control APIs HAL_SRAM_WriteOperation_Enable()/ HAL_SRAM_WriteOperation_Disable() to respectively enable/disable the SRAM write operation
6. You can continuously monitor the SRAM device HAL state by calling the function HAL_SRAM_GetState()

50.2.2 SRAM Initialization and de_initialization functions

This section provides functions allowing to initialize/de-initialize the SRAM memory

This section contains the following APIs:

- ***HAL_SRAM_Init()***
- ***HAL_SRAM_DeInit()***
- ***HAL_SRAM_MspInit()***
- ***HAL_SRAM_MspDeInit()***
- ***HAL_SRAM_DMA_XferCpltCallback()***
- ***HAL_SRAM_DMA_XferErrorCallback()***

50.2.3 SRAM Input and Output functions

This section provides functions allowing to use and control the SRAM memory

This section contains the following APIs:

- ***HAL_SRAM_Read_8b()***
- ***HAL_SRAM_Write_8b()***
- ***HAL_SRAM_Read_16b()***
- ***HAL_SRAM_Write_16b()***
- ***HAL_SRAM_Read_32b()***
- ***HAL_SRAM_Write_32b()***
- ***HAL_SRAM_Read_DMA()***
- ***HAL_SRAM_Write_DMA()***

50.2.4 SRAM Control functions

This subsection provides a set of functions allowing to control dynamically the SRAM interface.

This section contains the following APIs:

- ***HAL_SRAM_WriteOperation_Enable()***
- ***HAL_SRAM_WriteOperation_Disable()***

50.2.5 SRAM State functions

This subsection permits to get in run-time the status of the SRAM controller and the data flow.

This section contains the following APIs:

- ***HAL_SRAM_GetState()***

50.2.6 Detailed description of functions

HAL_SRAM_Init

Function name	**HAL_StatusTypeDef HAL_SRAM_Init (SRAM_HandleTypeDef * hsram, FMC_NORSRAM_TimingTypeDef * Timing, FMC_NORSRAM_TimingTypeDef * ExtTiming)**
Function description	Performs the SRAM device initialization sequence.
Parameters	• **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module. • **Timing:** Pointer to SRAM control timing structure • **ExtTiming:** Pointer to SRAM extended mode timing structure
Return values	• **HAL:** status

HAL_SRAM_DeInit

Function name	**HAL_StatusTypeDef HAL_SRAM_DeInit (SRAM_HandleTypeDef * hsram)**
Function description	Performs the SRAM device De-initialization sequence.
Parameters	• **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.
Return values	• **HAL:** status

HAL_SRAM_MspInit

Function name	**void HAL_SRAM_MspInit (SRAM_HandleTypeDef * hsram)**
Function description	SRAM MSP Init.
Parameters	• **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.
Return values	• **None**

HAL_SRAM_MspDeInit

Function name	**void HAL_SRAM_MspDeInit (SRAM_HandleTypeDef * hsram)**
Function description	SRAM MSP DeInit.
Parameters	• **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.
Return values	• **None**

HAL_SRAM_DMA_XferCpltCallback

Function name **void HAL_SRAM_DMA_XferCpltCallback (DMA_HandleTypeDef * hdma)**

Function description DMA transfer complete callback.

Parameters
- **hdma:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.

Return values
- **None**

HAL_SRAM_DMA_XferErrorCallback

Function name **void HAL_SRAM_DMA_XferErrorCallback (DMA_HandleTypeDef * hdma)**

Function description DMA transfer complete error callback.

Parameters
- **hdma:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.

Return values
- **None**

HAL_SRAM_Read_8b

Function name **HAL_StatusTypeDef HAL_SRAM_Read_8b (SRAM_HandleTypeDef * hsram, uint32_t * pAddress, uint8_t * pDstBuffer, uint32_t BufferSize)**

Function description Reads 8-bit buffer from SRAM memory.

Parameters
- **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.
- **pAddress:** Pointer to read start address
- **pDstBuffer:** Pointer to destination buffer
- **BufferSize:** Size of the buffer to read from memory

Return values
- **HAL:** status

HAL_SRAM_Write_8b

Function name **HAL_StatusTypeDef HAL_SRAM_Write_8b (SRAM_HandleTypeDef * hsram, uint32_t * pAddress, uint8_t * pSrcBuffer, uint32_t BufferSize)**

Function description Writes 8-bit buffer to SRAM memory.

Parameters
- **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.
- **pAddress:** Pointer to write start address
- **pSrcBuffer:** Pointer to source buffer to write
- **BufferSize:** Size of the buffer to write to memory

Return values
- **HAL:** status

HAL_SRAM_Read_16b

Function name **HAL_StatusTypeDef HAL_SRAM_Read_16b (SRAM_HandleTypeDef * hsram, uint32_t * pAddress, uint16_t * pDstBuffer, uint32_t BufferSize)**

Function description Reads 16-bit buffer from SRAM memory.

Parameters
- **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.
- **pAddress:** Pointer to read start address
- **pDstBuffer:** Pointer to destination buffer
- **BufferSize:** Size of the buffer to read from memory

Return values
- **HAL:** status

HAL_SRAM_Write_16b

Function name **HAL_StatusTypeDef HAL_SRAM_Write_16b (SRAM_HandleTypeDef * hsram, uint32_t * pAddress, uint16_t * pSrcBuffer, uint32_t BufferSize)**

Function description Writes 16-bit buffer to SRAM memory.

Parameters
- **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.
- **pAddress:** Pointer to write start address
- **pSrcBuffer:** Pointer to source buffer to write
- **BufferSize:** Size of the buffer to write to memory

Return values
- **HAL:** status

HAL_SRAM_Read_32b

Function name **HAL_StatusTypeDef HAL_SRAM_Read_32b (SRAM_HandleTypeDef * hsram, uint32_t * pAddress, uint32_t * pDstBuffer, uint32_t BufferSize)**

Function description Reads 32-bit buffer from SRAM memory.

Parameters
- **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.
- **pAddress:** Pointer to read start address
- **pDstBuffer:** Pointer to destination buffer
- **BufferSize:** Size of the buffer to read from memory

Return values
- **HAL:** status

HAL_SRAM_Write_32b

Function name **HAL_StatusTypeDef HAL_SRAM_Write_32b (SRAM_HandleTypeDef * hsram, uint32_t * pAddress, uint32_t * pSrcBuffer, uint32_t BufferSize)**

Function description Writes 32-bit buffer to SRAM memory.

Parameters
- **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.
- **pAddress:** Pointer to write start address
- **pSrcBuffer:** Pointer to source buffer to write

- **BufferSize:** Size of the buffer to write to memory

Return values
- **HAL:** status

HAL_SRAM_Read_DMA

Function name **HAL_StatusTypeDef HAL_SRAM_Read_DMA (SRAM_HandleTypeDef * hsram, uint32_t * pAddress, uint32_t * pDstBuffer, uint32_t BufferSize)**

Function description Reads a Words data from the SRAM memory using DMA transfer.

Parameters
- **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.
- **pAddress:** Pointer to read start address
- **pDstBuffer:** Pointer to destination buffer
- **BufferSize:** Size of the buffer to read from memory

Return values
- **HAL:** status

HAL_SRAM_Write_DMA

Function name **HAL_StatusTypeDef HAL_SRAM_Write_DMA (SRAM_HandleTypeDef * hsram, uint32_t * pAddress, uint32_t * pSrcBuffer, uint32_t BufferSize)**

Function description Writes a Words data buffer to SRAM memory using DMA transfer.

Parameters
- **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.
- **pAddress:** Pointer to write start address
- **pSrcBuffer:** Pointer to source buffer to write
- **BufferSize:** Size of the buffer to write to memory

Return values
- **HAL:** status

HAL_SRAM_WriteOperation_Enable

Function name **HAL_StatusTypeDef HAL_SRAM_WriteOperation_Enable (SRAM_HandleTypeDef * hsram)**

Function description Enables dynamically SRAM write operation.

Parameters
- **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.

Return values
- **HAL:** status

HAL_SRAM_WriteOperation_Disable

Function name **HAL_StatusTypeDef HAL_SRAM_WriteOperation_Disable (SRAM_HandleTypeDef * hsram)**

Function description Disables dynamically SRAM write operation.

Parameters
- **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.

Return values
- **HAL:** status

HAL_SRAM_GetState

Function name	**HAL_SRAM_StateTypeDef HAL_SRAM_GetState (SRAM_HandleTypeDef * hsram)**
Function description	Returns the SRAM controller state.
Parameters	• **hsram:** pointer to a SRAM_HandleTypeDef structure that contains the configuration information for SRAM module.
Return values	• **HAL:** state

50.3 SRAM Firmware driver defines

50.3.1 SRAM

SRAM Exported Macros

__HAL_SRAM_RESET_HANDLE_STATE

Description:

- Reset SRAM handle state.

Parameters:

- __HANDLE__: SRAM handle

Return value:

- None

51 HAL TIM Generic Driver

51.1 TIM Firmware driver registers structures

51.1.1 TIM_Base_InitTypeDef

Data Fields

- ***uint32_t Prescaler***
- ***uint32_t CounterMode***
- ***uint32_t Period***
- ***uint32_t ClockDivision***
- ***uint32_t RepetitionCounter***
- ***uint32_t AutoReloadPreload***

Field Documentation

- ***uint32_t TIM_Base_InitTypeDef::Prescaler***
  Specifies the prescaler value used to divide the TIM clock. This parameter can be a number between Min_Data = 0x0000 and Max_Data = 0xFFFFU
- ***uint32_t TIM_Base_InitTypeDef::CounterMode***
  Specifies the counter mode. This parameter can be a value of ***TIM_Counter_Mode***
- ***uint32_t TIM_Base_InitTypeDef::Period***
  Specifies the period value to be loaded into the active Auto-Reload Register at the next update event. This parameter can be a number between Min_Data = 0x0000 and Max_Data = 0xFFFF.
- ***uint32_t TIM_Base_InitTypeDef::ClockDivision***
  Specifies the clock division. This parameter can be a value of ***TIM_ClockDivision***
- ***uint32_t TIM_Base_InitTypeDef::RepetitionCounter***
  Specifies the repetition counter value. Each time the RCR downcounter reaches zero, an update event is generated and counting restarts from the RCR value (N). This means in PWM mode that (N+1U) corresponds to:the number of PWM periods in edge-aligned modethe number of half PWM period in center-aligned mode GP timers: this parameter must be a number between Min_Data = 0x00 and Max_Data = 0xFF. Advanced timers: this parameter must be a number between Min_Data = 0x0000 and Max_Data = 0xFFFF.
- ***uint32_t TIM_Base_InitTypeDef::AutoReloadPreload***
  Specifies the auto-reload preload. This parameter can be a value of ***TIM_AutoReloadPreload***

51.1.2 TIM_OC_InitTypeDef

Data Fields

- ***uint32_t OCMode***
- ***uint32_t Pulse***
- ***uint32_t OCPolarity***
- ***uint32_t OCNPolarity***
- ***uint32_t OCFastMode***
- ***uint32_t OCIdleState***
- ***uint32_t OCNIdleState***

Field Documentation

- ***uint32_t TIM_OC_InitTypeDef::OCMode***
  Specifies the TIM mode. This parameter can be a value of ***TIMEx_Output_Compare_and_PWM_modes***
- ***uint32_t TIM_OC_InitTypeDef::Pulse***
  Specifies the pulse value to be loaded into the Capture Compare Register. This parameter can be a number between Min_Data = 0x0000 and Max_Data = 0xFFFFU
- ***uint32_t TIM_OC_InitTypeDef::OCPolarity***
  Specifies the output polarity. This parameter can be a value of ***TIM_Output_Compare_Polarity***
- ***uint32_t TIM_OC_InitTypeDef::OCNPolarity***
  Specifies the complementary output polarity. This parameter can be a value of ***TIM_Output_Compare_N_Polarity***
  Note: This parameter is valid only for TIM1 and TIM8.
- ***uint32_t TIM_OC_InitTypeDef::OCFastMode***
  Specifies the Fast mode state. This parameter can be a value of ***TIM_Output_Fast_State***
  Note: This parameter is valid only in PWM1 and PWM2 mode.
- ***uint32_t TIM_OC_InitTypeDef::OCIdleState***
  Specifies the TIM Output Compare pin state during Idle state. This parameter can be a value of ***TIM_Output_Compare_Idle_State***
  Note: This parameter is valid only for TIM1 and TIM8.
- ***uint32_t TIM_OC_InitTypeDef::OCNIdleState***
  Specifies the TIM Output Compare pin state during Idle state. This parameter can be a value of ***TIM_Output_Compare_N_Idle_State***
  Note: This parameter is valid only for TIM1 and TIM8.

51.1.3 TIM_OnePulse_InitTypeDef

Data Fields

- ***uint32_t OCMode***
- ***uint32_t Pulse***
- ***uint32_t OCPolarity***
- ***uint32_t OCNPolarity***
- ***uint32_t OCIdleState***
- ***uint32_t OCNIdleState***
- ***uint32_t ICPolarity***
- ***uint32_t ICSelection***
- ***uint32_t ICFilter***

Field Documentation

- ***uint32_t TIM_OnePulse_InitTypeDef::OCMode***
  Specifies the TIM mode. This parameter can be a value of ***TIMEx_Output_Compare_and_PWM_modes***
- ***uint32_t TIM_OnePulse_InitTypeDef::Pulse***
  Specifies the pulse value to be loaded into the Capture Compare Register. This parameter can be a number between Min_Data = 0x0000 and Max_Data = 0xFFFFU
- ***uint32_t TIM_OnePulse_InitTypeDef::OCPolarity***
  Specifies the output polarity. This parameter can be a value of ***TIM_Output_Compare_Polarity***
- ***uint32_t TIM_OnePulse_InitTypeDef::OCNPolarity***
  Specifies the complementary output polarity. This parameter can be a value of ***TIM_Output_Compare_N_Polarity***
  Note: This parameter is valid only for TIM1 and TIM8.

- ***uint32_t TIM_OnePulse_InitTypeDef::OCIdleState***
  Specifies the TIM Output Compare pin state during Idle state. This parameter can be a value of ***TIM_Output_Compare_Idle_State***
  Note: This parameter is valid only for TIM1 and TIM8.
- ***uint32_t TIM_OnePulse_InitTypeDef::OCNIdleState***
  Specifies the TIM Output Compare pin state during Idle state. This parameter can be a value of ***TIM_Output_Compare_N_Idle_State***
  Note: This parameter is valid only for TIM1 and TIM8.
- ***uint32_t TIM_OnePulse_InitTypeDef::ICPolarity***
  Specifies the active edge of the input signal. This parameter can be a value of ***TIM_Input_Capture_Polarity***
- ***uint32_t TIM_OnePulse_InitTypeDef::ICSelection***
  Specifies the input. This parameter can be a value of ***TIM_Input_Capture_Selection***
- ***uint32_t TIM_OnePulse_InitTypeDef::ICFilter***
  Specifies the input capture filter. This parameter can be a number between Min_Data = 0x0 and Max_Data = 0xFU

51.1.4 TIM_IC_InitTypeDef

Data Fields

- ***uint32_t ICPolarity***
- ***uint32_t ICSelection***
- ***uint32_t ICPrescaler***
- ***uint32_t ICFilter***

Field Documentation

- ***uint32_t TIM_IC_InitTypeDef::ICPolarity***
  Specifies the active edge of the input signal. This parameter can be a value of ***TIM_Input_Capture_Polarity***
- ***uint32_t TIM_IC_InitTypeDef::ICSelection***
  Specifies the input. This parameter can be a value of ***TIM_Input_Capture_Selection***
- ***uint32_t TIM_IC_InitTypeDef::ICPrescaler***
  Specifies the Input Capture Prescaler. This parameter can be a value of ***TIM_Input_Capture_Prescaler***
- ***uint32_t TIM_IC_InitTypeDef::ICFilter***
  Specifies the input capture filter. This parameter can be a number between Min_Data = 0x0 and Max_Data = 0xFU

51.1.5 TIM_Encoder_InitTypeDef

Data Fields

- ***uint32_t EncoderMode***
- ***uint32_t IC1Polarity***
- ***uint32_t IC1Selection***
- ***uint32_t IC1Prescaler***
- ***uint32_t IC1Filter***
- ***uint32_t IC2Polarity***
- ***uint32_t IC2Selection***
- ***uint32_t IC2Prescaler***
- ***uint32_t IC2Filter***

Field Documentation

- ***uint32_t TIM_Encoder_InitTypeDef::EncoderMode***
  Specifies the active edge of the input signal. This parameter can be a value of ***TIM_Encoder_Mode***
- ***uint32_t TIM_Encoder_InitTypeDef::IC1Polarity***
  Specifies the active edge of the input signal. This parameter can be a value of ***TIM_Input_Capture_Polarity***
- ***uint32_t TIM_Encoder_InitTypeDef::IC1Selection***
  Specifies the input. This parameter can be a value of ***TIM_Input_Capture_Selection***
- ***uint32_t TIM_Encoder_InitTypeDef::IC1Prescaler***
  Specifies the Input Capture Prescaler. This parameter can be a value of ***TIM_Input_Capture_Prescaler***
- ***uint32_t TIM_Encoder_InitTypeDef::IC1Filter***
  Specifies the input capture filter. This parameter can be a number between Min_Data = 0x0 and Max_Data = 0xFU
- ***uint32_t TIM_Encoder_InitTypeDef::IC2Polarity***
  Specifies the active edge of the input signal. This parameter can be a value of ***TIM_Input_Capture_Polarity***
- ***uint32_t TIM_Encoder_InitTypeDef::IC2Selection***
  Specifies the input. This parameter can be a value of ***TIM_Input_Capture_Selection***
- ***uint32_t TIM_Encoder_InitTypeDef::IC2Prescaler***
  Specifies the Input Capture Prescaler. This parameter can be a value of ***TIM_Input_Capture_Prescaler***
- ***uint32_t TIM_Encoder_InitTypeDef::IC2Filter***
  Specifies the input capture filter. This parameter can be a number between Min_Data = 0x0 and Max_Data = 0xFU

51.1.6 TIM_ClockConfigTypeDef

Data Fields

- ***uint32_t ClockSource***
- ***uint32_t ClockPolarity***
- ***uint32_t ClockPrescaler***
- ***uint32_t ClockFilter***

Field Documentation

- ***uint32_t TIM_ClockConfigTypeDef::ClockSource***
  TIM clock sources This parameter can be a value of ***TIM_Clock_Source***
- ***uint32_t TIM_ClockConfigTypeDef::ClockPolarity***
  TIM clock polarity This parameter can be a value of ***TIM_Clock_Polarity***
- ***uint32_t TIM_ClockConfigTypeDef::ClockPrescaler***
  TIM clock prescaler This parameter can be a value of ***TIM_Clock_Prescaler***
- ***uint32_t TIM_ClockConfigTypeDef::ClockFilter***
  TIM clock filter This parameter can be a number between Min_Data = 0x0 and Max_Data = 0xFU

51.1.7 TIM_ClearInputConfigTypeDef

Data Fields

- ***uint32_t ClearInputState***
- ***uint32_t ClearInputSource***
- ***uint32_t ClearInputPolarity***
- ***uint32_t ClearInputPrescaler***

- ***uint32_t ClearInputFilter***

Field Documentation

- ***uint32_t TIM_ClearInputConfigTypeDef::ClearInputState***
  TIM clear Input state This parameter can be ENABLE or DISABLE
- ***uint32_t TIM_ClearInputConfigTypeDef::ClearInputSource***
  TIM clear Input sources This parameter can be a value of ***TIMEx_ClearInput_Source***
- ***uint32_t TIM_ClearInputConfigTypeDef::ClearInputPolarity***
  TIM Clear Input polarity This parameter can be a value of ***TIM_ClearInput_Polarity***
- ***uint32_t TIM_ClearInputConfigTypeDef::ClearInputPrescaler***
  TIM Clear Input prescaler This parameter can be a value of ***TIM_ClearInput_Prescaler***
- ***uint32_t TIM_ClearInputConfigTypeDef::ClearInputFilter***
  TIM Clear Input filter This parameter can be a number between Min_Data = 0x0 and Max_Data = 0xFU

51.1.8 TIM_SlaveConfigTypeDef

Data Fields

- ***uint32_t SlaveMode***
- ***uint32_t InputTrigger***
- ***uint32_t TriggerPolarity***
- ***uint32_t TriggerPrescaler***
- ***uint32_t TriggerFilter***

Field Documentation

- ***uint32_t TIM_SlaveConfigTypeDef::SlaveMode***
  Slave mode selection This parameter can be a value of ***TIMEx_Slave_Mode***
- ***uint32_t TIM_SlaveConfigTypeDef::InputTrigger***
  Input Trigger source This parameter can be a value of ***TIM_Trigger_Selection***
- ***uint32_t TIM_SlaveConfigTypeDef::TriggerPolarity***
  Input Trigger polarity This parameter can be a value of ***TIM_Trigger_Polarity***
- ***uint32_t TIM_SlaveConfigTypeDef::TriggerPrescaler***
  Input trigger prescaler This parameter can be a value of ***TIM_Trigger_Prescaler***
- ***uint32_t TIM_SlaveConfigTypeDef::TriggerFilter***
  Input trigger filter This parameter can be a number between Min_Data = 0x0 and Max_Data = 0xFU

51.1.9 TIM_HandleTypeDef

Data Fields

- ***TIM_TypeDef * Instance***
- ***TIM_Base_InitTypeDef Init***
- ***HAL_TIM_ActiveChannel Channel***
- ***DMA_HandleTypeDef * hdma***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_TIM_StateTypeDef State***

Field Documentation

- ***TIM_TypeDef* TIM_HandleTypeDef::Instance***
  Register base address
- ***TIM_Base_InitTypeDef TIM_HandleTypeDef::Init***
  TIM Time Base required parameters

- ***HAL_TIM_ActiveChannel TIM_HandleTypeDef::Channel***
  Active channel
- ***DMA_HandleTypeDef* TIM_HandleTypeDef::hdma[7]***
  DMA Handlers array This array is accessed by a ***TIM_DMA_Handle_index***
- ***HAL_LockTypeDef TIM_HandleTypeDef::Lock***
  Locking object
- ***__IO HAL_TIM_StateTypeDef TIM_HandleTypeDef::State***
  TIM operation state

51.2 TIM Firmware driver API description

51.2.1 TIMER Generic features

The Timer features include:

1. 16-bit up, down, up/down auto-reload counter.
2. 16-bit programmable prescaler allowing dividing (also on the fly) the counter clock frequency either by any factor between 1 and 65536.
3. Up to 4 independent channels for:
   – Input Capture
   – Output Compare
   – PWM generation (Edge and Center-aligned Mode)
   – One-pulse mode output

51.2.2 How to use this driver

1. Initialize the TIM low level resources by implementing the following functions depending from feature used :
   – Time Base : HAL_TIM_Base_MspInit()
   – Input Capture : HAL_TIM_IC_MspInit()
   – Output Compare : HAL_TIM_OC_MspInit()
   – PWM generation : HAL_TIM_PWM_MspInit()
   – One-pulse mode output : HAL_TIM_OnePulse_MspInit()
   – Encoder mode output : HAL_TIM_Encoder_MspInit()
2. Initialize the TIM low level resources :
   a. Enable the TIM interface clock using __HAL_RCC_TIMx_CLK_ENABLE ();
   b. TIM pins configuration
      – Enable the clock for the TIM GPIOs using the following function: __HAL_RCC_GPIOx_CLK_ENABLE();
      – Configure these TIM pins in Alternate function mode using HAL_GPIO_Init();
3. The external Clock can be configured, if needed (the default clock is the internal clock from the APBx), using the following function: HAL_TIM_ConfigClockSource, the clock configuration should be done before any start function.
4. Configure the TIM in the desired functioning mode using one of the Initialization function of this driver:
   – HAL_TIM_Base_Init: to use the Timer to generate a simple time base
   – HAL_TIM_OC_Init and HAL_TIM_OC_ConfigChannel: to use the Timer to generate an Output Compare signal.
   – HAL_TIM_PWM_Init and HAL_TIM_PWM_ConfigChannel: to use the Timer to generate a PWM signal.
   – HAL_TIM_IC_Init and HAL_TIM_IC_ConfigChannel: to use the Timer to measure an external signal.
   – HAL_TIM_OnePulse_Init and HAL_TIM_OnePulse_ConfigChannel: to use the Timer in One Pulse Mode.
   – HAL_TIM_Encoder_Init: to use the Timer Encoder Interface.

5. Activate the TIM peripheral using one of the start functions depending from the feature used:
   - Time Base : HAL_TIM_Base_Start(), HAL_TIM_Base_Start_DMA(), HAL_TIM_Base_Start_IT()
   - Input Capture : HAL_TIM_IC_Start(), HAL_TIM_IC_Start_DMA(), HAL_TIM_IC_Start_IT()
   - Output Compare : HAL_TIM_OC_Start(), HAL_TIM_OC_Start_DMA(), HAL_TIM_OC_Start_IT()
   - PWM generation : HAL_TIM_PWM_Start(), HAL_TIM_PWM_Start_DMA(), HAL_TIM_PWM_Start_IT()
   - One-pulse mode output : HAL_TIM_OnePulse_Start(), HAL_TIM_OnePulse_Start_IT()
   - Encoder mode output : HAL_TIM_Encoder_Start(), HAL_TIM_Encoder_Start_DMA(), HAL_TIM_Encoder_Start_IT().
6. The DMA Burst is managed with the two following functions: HAL_TIM_DMABurst_WriteStart() HAL_TIM_DMABurst_ReadStart()

51.2.3 Time Base functions

This section provides functions allowing to:

- Initialize and configure the TIM base.
- De-initialize the TIM base.
- Start the Time Base.
- Stop the Time Base.
- Start the Time Base and enable interrupt.
- Stop the Time Base and disable interrupt.
- Start the Time Base and enable DMA transfer.
- Stop the Time Base and disable DMA transfer.

This section contains the following APIs:

- ***HAL_TIM_Base_Init()***
- ***HAL_TIM_Base_DeInit()***
- ***HAL_TIM_Base_MspInit()***
- ***HAL_TIM_Base_MspDeInit()***
- ***HAL_TIM_Base_Start()***
- ***HAL_TIM_Base_Stop()***
- ***HAL_TIM_Base_Start_IT()***
- ***HAL_TIM_Base_Stop_IT()***
- ***HAL_TIM_Base_Start_DMA()***
- ***HAL_TIM_Base_Stop_DMA()***

51.2.4 Time Output Compare functions

This section provides functions allowing to:

- Initialize and configure the TIM Output Compare.
- De-initialize the TIM Output Compare.
- Start the Time Output Compare.
- Stop the Time Output Compare.
- Start the Time Output Compare and enable interrupt.
- Stop the Time Output Compare and disable interrupt.
- Start the Time Output Compare and enable DMA transfer.
- Stop the Time Output Compare and disable DMA transfer.

This section contains the following APIs:

- ***HAL_TIM_OC_Init()***
- ***HAL_TIM_OC_DeInit()***
- ***HAL_TIM_OC_MspInit()***
- ***HAL_TIM_OC_MspDeInit()***
- ***HAL_TIM_OC_Start()***
- ***HAL_TIM_OC_Stop()***
- ***HAL_TIM_OC_Start_IT()***
- ***HAL_TIM_OC_Stop_IT()***
- ***HAL_TIM_OC_Start_DMA()***
- ***HAL_TIM_OC_Stop_DMA()***

51.2.5 Time PWM functions

This section provides functions allowing to:

- Initialize and configure the TIM OPWM.
- De-initialize the TIM PWM.
- Start the Time PWM.
- Stop the Time PWM.
- Start the Time PWM and enable interrupt.
- Stop the Time PWM and disable interrupt.
- Start the Time PWM and enable DMA transfer.
- Stop the Time PWM and disable DMA transfer.

This section contains the following APIs:

- ***HAL_TIM_PWM_Init()***
- ***HAL_TIM_PWM_DeInit()***
- ***HAL_TIM_PWM_MspInit()***
- ***HAL_TIM_PWM_MspDeInit()***
- ***HAL_TIM_PWM_Start()***
- ***HAL_TIM_PWM_Stop()***
- ***HAL_TIM_PWM_Start_IT()***
- ***HAL_TIM_PWM_Stop_IT()***
- ***HAL_TIM_PWM_Start_DMA()***
- ***HAL_TIM_PWM_Stop_DMA()***

51.2.6 Time Input Capture functions

This section provides functions allowing to:

- Initialize and configure the TIM Input Capture.
- De-initialize the TIM Input Capture.
- Start the Time Input Capture.
- Stop the Time Input Capture.
- Start the Time Input Capture and enable interrupt.
- Stop the Time Input Capture and disable interrupt.
- Start the Time Input Capture and enable DMA transfer.
- Stop the Time Input Capture and disable DMA transfer.

This section contains the following APIs:

- ***HAL_TIM_IC_Init()***
- ***HAL_TIM_IC_DeInit()***
- ***HAL_TIM_IC_MspInit()***

- ***HAL_TIM_IC_MspDeInit()***
- ***HAL_TIM_IC_Start()***
- ***HAL_TIM_IC_Stop()***
- ***HAL_TIM_IC_Start_IT()***
- ***HAL_TIM_IC_Stop_IT()***
- ***HAL_TIM_IC_Start_DMA()***
- ***HAL_TIM_IC_Stop_DMA()***

51.2.7 Time One Pulse functions

This section provides functions allowing to:

- Initialize and configure the TIM One Pulse.
- De-initialize the TIM One Pulse.
- Start the Time One Pulse.
- Stop the Time One Pulse.
- Start the Time One Pulse and enable interrupt.
- Stop the Time One Pulse and disable interrupt.
- Start the Time One Pulse and enable DMA transfer.
- Stop the Time One Pulse and disable DMA transfer.

This section contains the following APIs:

- ***HAL_TIM_OnePulse_Init()***
- ***HAL_TIM_OnePulse_DeInit()***
- ***HAL_TIM_OnePulse_MspInit()***
- ***HAL_TIM_OnePulse_MspDeInit()***
- ***HAL_TIM_OnePulse_Start()***
- ***HAL_TIM_OnePulse_Stop()***
- ***HAL_TIM_OnePulse_Start_IT()***
- ***HAL_TIM_OnePulse_Stop_IT()***

51.2.8 Time Encoder functions

This section provides functions allowing to:

- Initialize and configure the TIM Encoder.
- De-initialize the TIM Encoder.
- Start the Time Encoder.
- Stop the Time Encoder.
- Start the Time Encoder and enable interrupt.
- Stop the Time Encoder and disable interrupt.
- Start the Time Encoder and enable DMA transfer.
- Stop the Time Encoder and disable DMA transfer.

This section contains the following APIs:

- ***HAL_TIM_Encoder_Init()***
- ***HAL_TIM_Encoder_DeInit()***
- ***HAL_TIM_Encoder_MspInit()***
- ***HAL_TIM_Encoder_MspDeInit()***
- ***HAL_TIM_Encoder_Start()***
- ***HAL_TIM_Encoder_Stop()***
- ***HAL_TIM_Encoder_Start_IT()***
- ***HAL_TIM_Encoder_Stop_IT()***
- ***HAL_TIM_Encoder_Start_DMA()***
- ***HAL_TIM_Encoder_Stop_DMA()***

51.2.9 IRQ handler management

This section provides Timer IRQ handler function.

This section contains the following APIs:

- ***HAL_TIM_IRQHandler()***

51.2.10 Peripheral Control functions

This section provides functions allowing to:

- Configure The Input Output channels for OC, PWM, IC or One Pulse mode.
- Configure External Clock source.
- Configure Complementary channels, break features and dead time.
- Configure Master and the Slave synchronization.
- Configure the DMA Burst Mode.

This section contains the following APIs:

- ***HAL_TIM_OC_ConfigChannel()***
- ***HAL_TIM_IC_ConfigChannel()***
- ***HAL_TIM_PWM_ConfigChannel()***
- ***HAL_TIM_OnePulse_ConfigChannel()***
- ***HAL_TIM_DMABurst_WriteStart()***
- ***HAL_TIM_DMABurst_MultiWriteStart()***
- ***HAL_TIM_DMABurst_WriteStop()***
- ***HAL_TIM_DMABurst_ReadStart()***
- ***HAL_TIM_DMABurst_MultiReadStart()***
- ***HAL_TIM_DMABurst_ReadStop()***
- ***HAL_TIM_GenerateEvent()***
- ***HAL_TIM_ConfigOCrefClear()***
- ***HAL_TIM_ConfigClockSource()***
- ***HAL_TIM_ConfigTI1Input()***
- ***HAL_TIM_SlaveConfigSynchronization()***
- ***HAL_TIM_SlaveConfigSynchronization_IT()***
- ***HAL_TIM_ReadCapturedValue()***

51.2.11 TIM Callbacks functions

This section provides TIM callback functions:

- Timer Period elapsed callback
- Timer Output Compare callback
- Timer Input capture callback
- Timer Trigger callback
- Timer Error callback

This section contains the following APIs:

- ***HAL_TIM_PeriodElapsedCallback()***
- ***HAL_TIM_OC_DelayElapsedCallback()***
- ***HAL_TIM_IC_CaptureCallback()***
- ***HAL_TIM_PWM_PulseFinishedCallback()***
- ***HAL_TIM_TriggerCallback()***
- ***HAL_TIM_ErrorCallback()***

51.2.12 Peripheral State functions

This subsection permit to get in run-time the status of the peripheral and the data flow.

This section contains the following APIs:

- ***HAL_TIM_Base_GetState()***
- ***HAL_TIM_OC_GetState()***
- ***HAL_TIM_PWM_GetState()***
- ***HAL_TIM_IC_GetState()***
- ***HAL_TIM_OnePulse_GetState()***
- ***HAL_TIM_Encoder_GetState()***

51.2.13 Detailed description of functions

HAL_TIM_Base_Init

Function name	**HAL_StatusTypeDef HAL_TIM_Base_Init (TIM_HandleTypeDef * htim)**
Function description	Initializes the TIM Time base Unit according to the specified parameters in the TIM_HandleTypeDef and create the associated handle.
Parameters	• **htim:** TIM Base handle
Return values	• **HAL:** status

HAL_TIM_Base_DeInit

Function name	**HAL_StatusTypeDef HAL_TIM_Base_DeInit (TIM_HandleTypeDef * htim)**
Function description	DeInitializes the TIM Base peripheral.
Parameters	• **htim:** TIM Base handle
Return values	• **HAL:** status

HAL_TIM_Base_MspInit

Function name	**void HAL_TIM_Base_MspInit (TIM_HandleTypeDef * htim)**
Function description	Initializes the TIM Base MSP.
Parameters	• **htim:** TIM handle
Return values	• **None**

HAL_TIM_Base_MspDeInit

Function name	**void HAL_TIM_Base_MspDeInit (TIM_HandleTypeDef * htim)**
Function description	DeInitializes TIM Base MSP.
Parameters	• **htim:** TIM handle
Return values	• **None**

HAL_TIM_Base_Start

Function name	**HAL_StatusTypeDef HAL_TIM_Base_Start (TIM_HandleTypeDef * htim)**
Function description	Starts the TIM Base generation.
Parameters	• **htim:** TIM handle
Return values	• **HAL:** status

HAL_TIM_Base_Stop

Function name	**HAL_StatusTypeDef HAL_TIM_Base_Stop (TIM_HandleTypeDef * htim)**
Function description	Stops the TIM Base generation.
Parameters	• **htim:** TIM handle
Return values	• **HAL:** status

HAL_TIM_Base_Start_IT

Function name	**HAL_StatusTypeDef HAL_TIM_Base_Start_IT (TIM_HandleTypeDef * htim)**
Function description	Starts the TIM Base generation in interrupt mode.
Parameters	• **htim:** TIM handle
Return values	• **HAL:** status

HAL_TIM_Base_Stop_IT

Function name	**HAL_StatusTypeDef HAL_TIM_Base_Stop_IT (TIM_HandleTypeDef * htim)**
Function description	Stops the TIM Base generation in interrupt mode.
Parameters	• **htim:** TIM handle
Return values	• **HAL:** status

HAL_TIM_Base_Start_DMA

Function name	**HAL_StatusTypeDef HAL_TIM_Base_Start_DMA (TIM_HandleTypeDef * htim, uint32_t * pData, uint16_t Length)**
Function description	Starts the TIM Base generation in DMA mode.
Parameters	• **htim:** TIM handle • **pData:** The source Buffer address. • **Length:** The length of data to be transferred from memory to peripheral.
Return values	• **HAL:** status

HAL_TIM_Base_Stop_DMA

Function name	**HAL_StatusTypeDef HAL_TIM_Base_Stop_DMA (TIM_HandleTypeDef * htim)**
Function description	Stops the TIM Base generation in DMA mode.
Parameters	• **htim:** TIM handle
Return values	• **HAL:** status

HAL_TIM_OC_Init

Function name	**HAL_StatusTypeDef HAL_TIM_OC_Init (TIM_HandleTypeDef * htim)**
Function description	Initializes the TIM Output Compare according to the specified parameters in the TIM_HandleTypeDef and create the associated handle.
Parameters	• **htim:** TIM Output Compare handle
Return values	• **HAL:** status

HAL_TIM_OC_DeInit

Function name	**HAL_StatusTypeDef HAL_TIM_OC_DeInit (TIM_HandleTypeDef * htim)**
Function description	DeInitializes the TIM peripheral.
Parameters	• **htim:** TIM Output Compare handle
Return values	• **HAL:** status

HAL_TIM_OC_MspInit

Function name	**void HAL_TIM_OC_MspInit (TIM_HandleTypeDef * htim)**
Function description	Initializes the TIM Output Compare MSP.
Parameters	• **htim:** TIM handle
Return values	• **None**

HAL_TIM_OC_MspDeInit

Function name	**void HAL_TIM_OC_MspDeInit (TIM_HandleTypeDef * htim)**
Function description	DeInitializes TIM Output Compare MSP.
Parameters	• **htim:** TIM handle
Return values	• **None**

HAL_TIM_OC_Start

Function name	**HAL_StatusTypeDef HAL_TIM_OC_Start (TIM_HandleTypeDef * htim, uint32_t Channel)**
Function description	Starts the TIM Output Compare signal generation.

Parameters
- **htim:** TIM Output Compare handle
- **Channel:** TIM Channel to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_OC_Stop

Function name **HAL_StatusTypeDef HAL_TIM_OC_Stop (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the TIM Output Compare signal generation.

Parameters
- **htim:** TIM handle
- **Channel:** TIM Channel to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_OC_Start_IT

Function name **HAL_StatusTypeDef HAL_TIM_OC_Start_IT (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Starts the TIM Output Compare signal generation in interrupt mode.

Parameters
- **htim:** TIM OC handle
- **Channel:** TIM Channel to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_OC_Stop_IT

Function name **HAL_StatusTypeDef HAL_TIM_OC_Stop_IT (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the TIM Output Compare signal generation in interrupt mode.

Parameters
- **htim:** TIM Output Compare handle
- **Channel:** TIM Channel to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected

– TIM_CHANNEL_3: TIM Channel 3 selected
– TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_OC_Start_DMA

Function name **HAL_StatusTypeDef HAL_TIM_OC_Start_DMA (TIM_HandleTypeDef * htim, uint32_t Channel, uint32_t * pData, uint16_t Length)**

Function description Starts the TIM Output Compare signal generation in DMA mode.

Parameters
- **htim:** TIM Output Compare handle
- **Channel:** TIM Channel to be enabled This parameter can be one of the following values:
  – TIM_CHANNEL_1: TIM Channel 1 selected
  – TIM_CHANNEL_2: TIM Channel 2 selected
  – TIM_CHANNEL_3: TIM Channel 3 selected
  – TIM_CHANNEL_4: TIM Channel 4 selected
- **pData:** The source Buffer address.
- **Length:** The length of data to be transferred from memory to TIM peripheral

Return values
- **HAL:** status

HAL_TIM_OC_Stop_DMA

Function name **HAL_StatusTypeDef HAL_TIM_OC_Stop_DMA (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the TIM Output Compare signal generation in DMA mode.

Parameters
- **htim:** TIM Output Compare handle
- **Channel:** TIM Channel to be disabled This parameter can be one of the following values:
  – TIM_CHANNEL_1: TIM Channel 1 selected
  – TIM_CHANNEL_2: TIM Channel 2 selected
  – TIM_CHANNEL_3: TIM Channel 3 selected
  – TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_PWM_Init

Function name **HAL_StatusTypeDef HAL_TIM_PWM_Init (TIM_HandleTypeDef * htim)**

Function description Initializes the TIM PWM Time Base according to the specified parameters in the TIM_HandleTypeDef and create the associated handle.

Parameters
- **htim:** TIM handle

Return values
- **HAL:** status

HAL_TIM_PWM_DeInit

Function name **HAL_StatusTypeDef HAL_TIM_PWM_DeInit (TIM_HandleTypeDef * htim)**

Function description DeInitializes the TIM peripheral.

Parameters
- **htim:** TIM handle

Return values
- **HAL:** status

HAL_TIM_PWM_MspInit

Function name **void HAL_TIM_PWM_MspInit (TIM_HandleTypeDef * htim)**

Function description Initializes the TIM PWM MSP.

Parameters
- **htim:** TIM handle

Return values
- **None**

HAL_TIM_PWM_MspDeInit

Function name **void HAL_TIM_PWM_MspDeInit (TIM_HandleTypeDef * htim)**

Function description DeInitializes TIM PWM MSP.

Parameters
- **htim:** TIM handle

Return values
- **None**

HAL_TIM_PWM_Start

Function name **HAL_StatusTypeDef HAL_TIM_PWM_Start (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Starts the PWM signal generation.

Parameters
- **htim:** TIM handle
- **Channel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_PWM_Stop

Function name **HAL_StatusTypeDef HAL_TIM_PWM_Stop (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the PWM signal generation.

Parameters
- **htim:** TIM handle
- **Channel:** TIM Channels to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected

– TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_PWM_Start_IT

Function name **HAL_StatusTypeDef HAL_TIM_PWM_Start_IT (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Starts the PWM signal generation in interrupt mode.

Parameters
- **htim:** TIM handle
- **Channel:** TIM Channels to be enabled This parameter can be one of the following values:
  – TIM_CHANNEL_1: TIM Channel 1 selected
  – TIM_CHANNEL_2: TIM Channel 2 selected
  – TIM_CHANNEL_3: TIM Channel 3 selected
  – TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_PWM_Stop_IT

Function name **HAL_StatusTypeDef HAL_TIM_PWM_Stop_IT (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the PWM signal generation in interrupt mode.

Parameters
- **htim:** TIM handle
- **Channel:** TIM Channels to be disabled This parameter can be one of the following values:
  – TIM_CHANNEL_1: TIM Channel 1 selected
  – TIM_CHANNEL_2: TIM Channel 2 selected
  – TIM_CHANNEL_3: TIM Channel 3 selected
  – TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_PWM_Start_DMA

Function name **HAL_StatusTypeDef HAL_TIM_PWM_Start_DMA (TIM_HandleTypeDef * htim, uint32_t Channel, uint32_t * pData, uint16_t Length)**

Function description Starts the TIM PWM signal generation in DMA mode.

Parameters
- **htim:** TIM handle
- **Channel:** TIM Channels to be enabled This parameter can be one of the following values:
  – TIM_CHANNEL_1: TIM Channel 1 selected
  – TIM_CHANNEL_2: TIM Channel 2 selected
  – TIM_CHANNEL_3: TIM Channel 3 selected
  – TIM_CHANNEL_4: TIM Channel 4 selected
- **pData:** The source Buffer address.
- **Length:** The length of data to be transferred from memory to TIM peripheral

Return values
- **HAL:** status

HAL_TIM_PWM_Stop_DMA

Function name	**HAL_StatusTypeDef HAL_TIM_PWM_Stop_DMA (TIM_HandleTypeDef * htim, uint32_t Channel)**
Function description	Stops the TIM PWM signal generation in DMA mode.
Parameters	• **htim:** TIM handle • **Channel:** TIM Channels to be disabled This parameter can be one of the following values: – TIM_CHANNEL_1: TIM Channel 1 selected – TIM_CHANNEL_2: TIM Channel 2 selected – TIM_CHANNEL_3: TIM Channel 3 selected – TIM_CHANNEL_4: TIM Channel 4 selected
Return values	• **HAL:** status

HAL_TIM_IC_Init

Function name	**HAL_StatusTypeDef HAL_TIM_IC_Init (TIM_HandleTypeDef * htim)**
Function description	Initializes the TIM Input Capture Time base according to the specified parameters in the TIM_HandleTypeDef and create the associated handle.
Parameters	• **htim:** TIM Input Capture handle
Return values	• **HAL:** status

HAL_TIM_IC_DeInit

Function name	**HAL_StatusTypeDef HAL_TIM_IC_DeInit (TIM_HandleTypeDef * htim)**
Function description	DeInitializes the TIM peripheral.
Parameters	• **htim:** TIM Input Capture handle
Return values	• **HAL:** status

HAL_TIM_IC_MspInit

Function name	**void HAL_TIM_IC_MspInit (TIM_HandleTypeDef * htim)**
Function description	Initializes the TIM Input Capture MSP.
Parameters	• **htim:** TIM handle
Return values	• **None**

HAL_TIM_IC_MspDeInit

Function name	**void HAL_TIM_IC_MspDeInit (TIM_HandleTypeDef * htim)**
Function description	DeInitializes TIM Input Capture MSP.
Parameters	• **htim:** TIM handle
Return values	• **None**

HAL_TIM_IC_Start

Function name **HAL_StatusTypeDef HAL_TIM_IC_Start (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Starts the TIM Input Capture measurement.

Parameters
- **htim:** TIM Input Capture handle
- **Channel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_IC_Stop

Function name **HAL_StatusTypeDef HAL_TIM_IC_Stop (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the TIM Input Capture measurement.

Parameters
- **htim:** TIM handle
- **Channel:** TIM Channels to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_IC_Start_IT

Function name **HAL_StatusTypeDef HAL_TIM_IC_Start_IT (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Starts the TIM Input Capture measurement in interrupt mode.

Parameters
- **htim:** TIM Input Capture handle
- **Channel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_IC_Stop_IT

Function name **HAL_StatusTypeDef HAL_TIM_IC_Stop_IT (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the TIM Input Capture measurement in interrupt mode.

Parameters
- **htim:** TIM handle

- **Channel:** TIM Channels to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_IC_Start_DMA

Function name **HAL_StatusTypeDef HAL_TIM_IC_Start_DMA (TIM_HandleTypeDef * htim, uint32_t Channel, uint32_t * pData, uint16_t Length)**

Function description Starts the TIM Input Capture measurement in DMA mode.

Parameters
- **htim:** TIM Input Capture handle
- **Channel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected
- **pData:** The destination Buffer address.
- **Length:** The length of data to be transferred from TIM peripheral to memory.

Return values
- **HAL:** status

HAL_TIM_IC_Stop_DMA

Function name **HAL_StatusTypeDef HAL_TIM_IC_Stop_DMA (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the TIM Input Capture measurement in DMA mode.

Parameters
- **htim:** TIM Input Capture handle
- **Channel:** TIM Channels to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_OnePulse_Init

Function name **HAL_StatusTypeDef HAL_TIM_OnePulse_Init (TIM_HandleTypeDef * htim, uint32_t OnePulseMode)**

Function description Initializes the TIM One Pulse Time Base according to the specified parameters in the TIM_HandleTypeDef and create the associated handle.

Parameters
- **htim:** TIM OnePulse handle
- **OnePulseMode:** Select the One pulse mode. This parameter

can be one of the following values:
- TIM_OPMODE_SINGLE: Only one pulse will be generated.
- TIM_OPMODE_REPETITIVE: Repetitive pulses wil be generated.

Return values
- **HAL:** status

HAL_TIM_OnePulse_DeInit

Function name **HAL_StatusTypeDef HAL_TIM_OnePulse_DeInit (TIM_HandleTypeDef * htim)**

Function description DeInitializes the TIM One Pulse.

Parameters
- **htim:** TIM One Pulse handle

Return values
- **HAL:** status

HAL_TIM_OnePulse_MspInit

Function name **void HAL_TIM_OnePulse_MspInit (TIM_HandleTypeDef * htim)**

Function description Initializes the TIM One Pulse MSP.

Parameters
- **htim:** TIM handle

Return values
- **None**

HAL_TIM_OnePulse_MspDeInit

Function name **void HAL_TIM_OnePulse_MspDeInit (TIM_HandleTypeDef * htim)**

Function description DeInitializes TIM One Pulse MSP.

Parameters
- **htim:** TIM handle

Return values
- **None**

HAL_TIM_OnePulse_Start

Function name **HAL_StatusTypeDef HAL_TIM_OnePulse_Start (TIM_HandleTypeDef * htim, uint32_t OutputChannel)**

Function description Starts the TIM One Pulse signal generation.

Parameters
- **htim:** TIM One Pulse handle
- **OutputChannel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected

Return values
- **HAL:** status

HAL_TIM_OnePulse_Stop

Function name **HAL_StatusTypeDef HAL_TIM_OnePulse_Stop (TIM_HandleTypeDef * htim, uint32_t OutputChannel)**

Function description: Stops the TIM One Pulse signal generation.

Parameters:
- **htim:** TIM One Pulse handle
- **OutputChannel:** TIM Channels to be disable This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected

Return values:
- **HAL:** status

HAL_TIM_OnePulse_Start_IT

Function name: **HAL_StatusTypeDef HAL_TIM_OnePulse_Start_IT (TIM_HandleTypeDef * htim, uint32_t OutputChannel)**

Function description: Starts the TIM One Pulse signal generation in interrupt mode.

Parameters:
- **htim:** TIM One Pulse handle
- **OutputChannel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected

Return values:
- **HAL:** status

HAL_TIM_OnePulse_Stop_IT

Function name: **HAL_StatusTypeDef HAL_TIM_OnePulse_Stop_IT (TIM_HandleTypeDef * htim, uint32_t OutputChannel)**

Function description: Stops the TIM One Pulse signal generation in interrupt mode.

Parameters:
- **htim:** TIM One Pulse handle
- **OutputChannel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected

Return values:
- **HAL:** status

HAL_TIM_Encoder_Init

Function name: **HAL_StatusTypeDef HAL_TIM_Encoder_Init (TIM_HandleTypeDef * htim, TIM_Encoder_InitTypeDef * sConfig)**

Function description: Initializes the TIM Encoder Interface and create the associated handle.

Parameters:
- **htim:** TIM Encoder Interface handle
- **sConfig:** TIM Encoder Interface configuration structure

Return values:
- **HAL:** status

HAL_TIM_Encoder_DeInit

Function name **HAL_StatusTypeDef HAL_TIM_Encoder_DeInit (TIM_HandleTypeDef * htim)**

Function description DeInitializes the TIM Encoder interface.

Parameters
- **htim:** TIM Encoder handle

Return values
- **HAL:** status

HAL_TIM_Encoder_MspInit

Function name **void HAL_TIM_Encoder_MspInit (TIM_HandleTypeDef * htim)**

Function description Initializes the TIM Encoder Interface MSP.

Parameters
- **htim:** TIM handle

Return values
- **None**

HAL_TIM_Encoder_MspDeInit

Function name **void HAL_TIM_Encoder_MspDeInit (TIM_HandleTypeDef * htim)**

Function description DeInitializes TIM Encoder Interface MSP.

Parameters
- **htim:** TIM handle

Return values
- **None**

HAL_TIM_Encoder_Start

Function name **HAL_StatusTypeDef HAL_TIM_Encoder_Start (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Starts the TIM Encoder Interface.

Parameters
- **htim:** TIM Encoder Interface handle
- **Channel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_ALL: TIM Channel 1 and TIM Channel 2 are selected

Return values
- **HAL:** status

HAL_TIM_Encoder_Stop

Function name **HAL_StatusTypeDef HAL_TIM_Encoder_Stop (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the TIM Encoder Interface.

Parameters
- **htim:** TIM Encoder Interface handle
- **Channel:** TIM Channels to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected

– TIM_CHANNEL_ALL: TIM Channel 1 and TIM Channel 2 are selected

Return values
- **HAL:** status

HAL_TIM_Encoder_Start_IT

Function name **HAL_StatusTypeDef HAL_TIM_Encoder_Start_IT (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Starts the TIM Encoder Interface in interrupt mode.

Parameters
- **htim:** TIM Encoder Interface handle
- **Channel:** TIM Channels to be enabled This parameter can be one of the following values:
  – TIM_CHANNEL_1: TIM Channel 1 selected
  – TIM_CHANNEL_2: TIM Channel 2 selected
  – TIM_CHANNEL_ALL: TIM Channel 1 and TIM Channel 2 are selected

Return values
- **HAL:** status

HAL_TIM_Encoder_Stop_IT

Function name **HAL_StatusTypeDef HAL_TIM_Encoder_Stop_IT (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the TIM Encoder Interface in interrupt mode.

Parameters
- **htim:** TIM Encoder Interface handle
- **Channel:** TIM Channels to be disabled This parameter can be one of the following values:
  – TIM_CHANNEL_1: TIM Channel 1 selected
  – TIM_CHANNEL_2: TIM Channel 2 selected
  – TIM_CHANNEL_ALL: TIM Channel 1 and TIM Channel 2 are selected

Return values
- **HAL:** status

HAL_TIM_Encoder_Start_DMA

Function name **HAL_StatusTypeDef HAL_TIM_Encoder_Start_DMA (TIM_HandleTypeDef * htim, uint32_t Channel, uint32_t * pData1, uint32_t * pData2, uint16_t Length)**

Function description Starts the TIM Encoder Interface in DMA mode.

Parameters
- **htim:** TIM Encoder Interface handle
- **Channel:** TIM Channels to be enabled This parameter can be one of the following values:
  – TIM_CHANNEL_1: TIM Channel 1 selected
  – TIM_CHANNEL_2: TIM Channel 2 selected
  – TIM_CHANNEL_ALL: TIM Channel 1 and TIM Channel 2 are selected
- **pData1:** The destination Buffer address for IC1.
- **pData2:** The destination Buffer address for IC2.
- **Length:** The length of data to be transferred from TIM

peripheral to memory.

Return values
- **HAL:** status

HAL_TIM_Encoder_Stop_DMA

Function name **HAL_StatusTypeDef HAL_TIM_Encoder_Stop_DMA (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the TIM Encoder Interface in DMA mode.

Parameters
- **htim:** TIM Encoder Interface handle
- **Channel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_ALL: TIM Channel 1 and TIM Channel 2 are selected

Return values
- **HAL:** status

HAL_TIM_IRQHandler

Function name **void HAL_TIM_IRQHandler (TIM_HandleTypeDef * htim)**

Function description This function handles TIM interrupts requests.

Parameters
- **htim:** TIM handle

Return values
- **None**

HAL_TIM_OC_ConfigChannel

Function name **HAL_StatusTypeDef HAL_TIM_OC_ConfigChannel (TIM_HandleTypeDef * htim, TIM_OC_InitTypeDef * sConfig, uint32_t Channel)**

Function description Initializes the TIM Output Compare Channels according to the specified parameters in the TIM_OC_InitTypeDef.

Parameters
- **htim:** TIM Output Compare handle
- **sConfig:** TIM Output Compare configuration structure
- **Channel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_PWM_ConfigChannel

Function name
HAL_StatusTypeDef HAL_TIM_PWM_ConfigChannel (TIM_HandleTypeDef * htim, TIM_OC_InitTypeDef * sConfig, uint32_t Channel)

Function description
Initializes the TIM PWM channels according to the specified parameters in the TIM_OC_InitTypeDef.

Parameters
- **htim:** TIM handle
- **sConfig:** TIM PWM configuration structure
- **Channel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_IC_ConfigChannel

Function name
HAL_StatusTypeDef HAL_TIM_IC_ConfigChannel (TIM_HandleTypeDef * htim, TIM_IC_InitTypeDef * sConfig, uint32_t Channel)

Function description
Initializes the TIM Input Capture Channels according to the specified parameters in the TIM_IC_InitTypeDef.

Parameters
- **htim:** TIM IC handle
- **sConfig:** TIM Input Capture configuration structure
- **Channel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIM_OnePulse_ConfigChannel

Function name
HAL_StatusTypeDef HAL_TIM_OnePulse_ConfigChannel (TIM_HandleTypeDef * htim, TIM_OnePulse_InitTypeDef * sConfig, uint32_t OutputChannel, uint32_t InputChannel)

Function description
Initializes the TIM One Pulse Channels according to the specified parameters in the TIM_OnePulse_InitTypeDef.

Parameters
- **htim:** TIM One Pulse handle
- **sConfig:** TIM One Pulse configuration structure
- **OutputChannel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
- **InputChannel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected

– TIM_CHANNEL_2: TIM Channel 2 selected

Return values
- **HAL:** status

HAL_TIM_ConfigOCrefClear

Function name **HAL_StatusTypeDef HAL_TIM_ConfigOCrefClear (TIM_HandleTypeDef * htim, TIM_ClearInputConfigTypeDef * sClearInputConfig, uint32_t Channel)**

Function description Configures the OCRef clear feature.

Parameters
- **htim:** TIM handle
- **sClearInputConfig:** pointer to a TIM_ClearInputConfigTypeDef structure that contains the OCREF clear feature and parameters for the TIM peripheral.
- **Channel:** specifies the TIM Channel This parameter can be one of the following values:
  – TIM_CHANNEL_1: TIM Channel 1
  – TIM_CHANNEL_2: TIM Channel 2
  – TIM_CHANNEL_3: TIM Channel 3
  – TIM_CHANNEL_4: TIM Channel 4
- **htim:** TIM handle
- **sClearInputConfig:** pointer to a TIM_ClearInputConfigTypeDef structure that contains the OCREF clear feature and parameters for the TIM peripheral.
- **Channel:** specifies the TIM Channel This parameter can be one of the following values:
  – TIM_CHANNEL_1: TIM Channel 1
  – TIM_CHANNEL_2: TIM Channel 2
  – TIM_CHANNEL_3: TIM Channel 3
  – TIM_CHANNEL_4: TIM Channel 4
  – TIM_Channel_5: TIM Channel 5
  – TIM_Channel_6: TIM Channel 6

Return values
- **HAL:** status
- **None**

Notes
- For STM32F302xC, STM32F302xE, STM32F303xC, STM32F303xE, STM32F358xx, STM32F398xx and STM32F303x8 up to 6 OC channels can be configured

HAL_TIM_ConfigClockSource

Function name **HAL_StatusTypeDef HAL_TIM_ConfigClockSource (TIM_HandleTypeDef * htim, TIM_ClockConfigTypeDef * sClockSourceConfig)**

Function description Configures the clock source to be used.

Parameters
- **htim:** TIM handle
- **sClockSourceConfig:** pointer to a TIM_ClockConfigTypeDef structure that contains the clock source information for the TIM peripheral.

Return values
- **HAL:** status

HAL_TIM_ConfigTI1Input

Function name
HAL_StatusTypeDef HAL_TIM_ConfigTI1Input (TIM_HandleTypeDef * htim, uint32_t TI1_Selection)

Function description
Selects the signal connected to the TI1 input: direct from CH1_input or a XOR combination between CH1_input, CH2_input & CH3_input.

Parameters
- **htim:** TIM handle.
- **TI1_Selection:** Indicate whether or not channel 1 is connected to the output of a XOR gate. This parameter can be one of the following values:
  - TIM_TI1SELECTION_CH1: The TIMx_CH1 pin is connected to TI1 input
  - TIM_TI1SELECTION_XORCOMBINATION: The TIMx_CH1, CH2 and CH3 pins are connected to the TI1 input (XOR combination)

Return values
- **HAL:** status

HAL_TIM_SlaveConfigSynchronization

Function name
HAL_StatusTypeDef HAL_TIM_SlaveConfigSynchronization (TIM_HandleTypeDef * htim, TIM_SlaveConfigTypeDef * sSlaveConfig)

Function description
Configures the TIM in Slave mode.

Parameters
- **htim:** TIM handle.
- **sSlaveConfig:** pointer to a TIM_SlaveConfigTypeDef structure that contains the selected trigger (internal trigger input, filtered timer input or external trigger input) and the) and the Slave mode (Disable, Reset, Gated, Trigger, External clock mode 1).

Return values
- **HAL:** status

HAL_TIM_SlaveConfigSynchronization_IT

Function name
HAL_StatusTypeDef HAL_TIM_SlaveConfigSynchronization_IT (TIM_HandleTypeDef * htim, TIM_SlaveConfigTypeDef * sSlaveConfig)

Function description
Configures the TIM in Slave mode in interrupt mode.

Parameters
- **htim:** TIM handle.
- **sSlaveConfig:** pointer to a TIM_SlaveConfigTypeDef structure that contains the selected trigger (internal trigger input, filtered timer input or external trigger input) and the) and the Slave mode (Disable, Reset, Gated, Trigger, External clock mode 1).

Return values
- **HAL:** status

HAL_TIM_DMABurst_WriteStart

Function name

HAL_StatusTypeDef HAL_TIM_DMABurst_WriteStart (TIM_HandleTypeDef * htim, uint32_t BurstBaseAddress, uint32_t BurstRequestSrc, uint32_t * BurstBuffer, uint32_t BurstLength)

Function description

Configure the DMA Burst to transfer Data from the memory to the TIM peripheral.

Parameters

- **htim:** TIM handle
- **BurstBaseAddress:** TIM Base address from where the DMA will start the Data write This parameter can be one of the following values:
  - TIM_DMABASE_CR1
  - TIM_DMABASE_CR2
  - TIM_DMABASE_SMCR
  - TIM_DMABASE_DIER
  - TIM_DMABASE_SR
  - TIM_DMABASE_EGR
  - TIM_DMABASE_CCMR1
  - TIM_DMABASE_CCMR2
  - TIM_DMABASE_CCER
  - TIM_DMABASE_CNT
  - TIM_DMABASE_PSC
  - TIM_DMABASE_ARR
  - TIM_DMABASE_RCR
  - TIM_DMABASE_CCR1
  - TIM_DMABASE_CCR2
  - TIM_DMABASE_CCR3
  - TIM_DMABASE_CCR4
  - TIM_DMABASE_BDTR
  - TIM_DMABASE_DCR
- **BurstRequestSrc:** TIM DMA Request sources This parameter can be one of the following values:
  - TIM_DMA_UPDATE: TIM update Interrupt source
  - TIM_DMA_CC1: TIM Capture Compare 1 DMA source
  - TIM_DMA_CC2: TIM Capture Compare 2 DMA source
  - TIM_DMA_CC3: TIM Capture Compare 3 DMA source
  - TIM_DMA_CC4: TIM Capture Compare 4 DMA source
  - TIM_DMA_COM: TIM Commutation DMA source
  - TIM_DMA_TRIGGER: TIM Trigger DMA source
- **BurstBuffer:** The Buffer address.
- **BurstLength:** DMA Burst length. This parameter can be one value between: TIM_DMABURSTLENGTH_1TRANSFER and TIM_DMABURSTLENGTH_18TRANSFERS.

Return values

- **HAL:** status

HAL_TIM_DMABurst_MultiWriteStart

Function name

HAL_StatusTypeDef HAL_TIM_DMABurst_MultiWriteStart (TIM_HandleTypeDef * htim, uint32_t BurstBaseAddress, uint32_t BurstRequestSrc, uint32_t * BurstBuffer, uint32_t BurstLength, uint32_t DataLength)

Function description

Configure the DMA Burst to transfer multiple Data from the memory to the TIM peripheral.

Parameters

- **htim:** TIM handle
- **BurstBaseAddress:** TIM Base address from where the DMA will start the Data write This parameter can be one of the following values:
  - TIM_DMABASE_CR1
  - TIM_DMABASE_CR2
  - TIM_DMABASE_SMCR
  - TIM_DMABASE_DIER
  - TIM_DMABASE_SR
  - TIM_DMABASE_EGR
  - TIM_DMABASE_CCMR1
  - TIM_DMABASE_CCMR2
  - TIM_DMABASE_CCER
  - TIM_DMABASE_CNT
  - TIM_DMABASE_PSC
  - TIM_DMABASE_ARR
  - TIM_DMABASE_RCR
  - TIM_DMABASE_CCR1
  - TIM_DMABASE_CCR2
  - TIM_DMABASE_CCR3
  - TIM_DMABASE_CCR4
  - TIM_DMABASE_BDTR
  - TIM_DMABASE_DCR
- **BurstRequestSrc:** TIM DMA Request sources This parameter can be one of the following values:
  - TIM_DMA_UPDATE: TIM update Interrupt source
  - TIM_DMA_CC1: TIM Capture Compare 1 DMA source
  - TIM_DMA_CC2: TIM Capture Compare 2 DMA source
  - TIM_DMA_CC3: TIM Capture Compare 3 DMA source
  - TIM_DMA_CC4: TIM Capture Compare 4 DMA source
  - TIM_DMA_COM: TIM Commutation DMA source
  - TIM_DMA_TRIGGER: TIM Trigger DMA source
- **BurstBuffer:** The Buffer address.
- **BurstLength:** DMA Burst length. This parameter can be one value between: TIM_DMABURSTLENGTH_1TRANSFER and TIM_DMABURSTLENGTH_18TRANSFERS.
- **DataLength:** Data length. This parameter can be one value between 1 and 0xFFFF.

Return values

- **HAL:** status

HAL_TIM_DMABurst_WriteStop

Function name **HAL_StatusTypeDef HAL_TIM_DMABurst_WriteStop (TIM_HandleTypeDef * htim, uint32_t BurstRequestSrc)**

Function description Stops the TIM DMA Burst mode.

Parameters
- **htim:** TIM handle
- **BurstRequestSrc:** TIM DMA Request sources to disable

Return values
- **HAL:** status

HAL_TIM_DMABurst_ReadStart

Function name **HAL_StatusTypeDef HAL_TIM_DMABurst_ReadStart (TIM_HandleTypeDef * htim, uint32_t BurstBaseAddress, uint32_t BurstRequestSrc, uint32_t * BurstBuffer, uint32_t BurstLength)**

Function description Configure the DMA Burst to transfer Data from the TIM peripheral to the memory.

Parameters
- **htim:** TIM handle
- **BurstBaseAddress:** TIM Base address from where the DMA will starts the Data read This parameter can be one of the following values:
  - TIM_DMABASE_CR1
  - TIM_DMABASE_CR2
  - TIM_DMABASE_SMCR
  - TIM_DMABASE_DIER
  - TIM_DMABASE_SR
  - TIM_DMABASE_EGR
  - TIM_DMABASE_CCMR1
  - TIM_DMABASE_CCMR2
  - TIM_DMABASE_CCER
  - TIM_DMABASE_CNT
  - TIM_DMABASE_PSC
  - TIM_DMABASE_ARR
  - TIM_DMABASE_RCR
  - TIM_DMABASE_CCR1
  - TIM_DMABASE_CCR2
  - TIM_DMABASE_CCR3
  - TIM_DMABASE_CCR4
  - TIM_DMABASE_BDTR
  - TIM_DMABASE_DCR
- **BurstRequestSrc:** TIM DMA Request sources This parameter can be one of the following values:
  - TIM_DMA_UPDATE: TIM update Interrupt source
  - TIM_DMA_CC1: TIM Capture Compare 1 DMA source
  - TIM_DMA_CC2: TIM Capture Compare 2 DMA source
  - TIM_DMA_CC3: TIM Capture Compare 3 DMA source
  - TIM_DMA_CC4: TIM Capture Compare 4 DMA source
  - TIM_DMA_COM: TIM Commutation DMA source
  - TIM_DMA_TRIGGER: TIM Trigger DMA source
- **BurstBuffer:** The Buffer address.
- **BurstLength:** DMA Burst length. This parameter can be one

value between: TIM_DMABURSTLENGTH_1TRANSFER and TIM_DMABURSTLENGTH_18TRANSFERS.

Return values
- **HAL:** status

HAL_TIM_DMABurst_MultiReadStart

Function name
HAL_StatusTypeDef HAL_TIM_DMABurst_MultiReadStart (TIM_HandleTypeDef * htim, uint32_t BurstBaseAddress, uint32_t BurstRequestSrc, uint32_t * BurstBuffer, uint32_t BurstLength, uint32_t DataLength)

Function description
Configure the DMA Burst to transfer multiple Data from the TIM peripheral to the memory.

Parameters
- **htim:** TIM handle
- **BurstBaseAddress:** TIM Base address from where the DMA will starts the Data read This parameter can be one of the following values:
  - TIM_DMABASE_CR1
  - TIM_DMABASE_CR2
  - TIM_DMABASE_SMCR
  - TIM_DMABASE_DIER
  - TIM_DMABASE_SR
  - TIM_DMABASE_EGR
  - TIM_DMABASE_CCMR1
  - TIM_DMABASE_CCMR2
  - TIM_DMABASE_CCER
  - TIM_DMABASE_CNT
  - TIM_DMABASE_PSC
  - TIM_DMABASE_ARR
  - TIM_DMABASE_RCR
  - TIM_DMABASE_CCR1
  - TIM_DMABASE_CCR2
  - TIM_DMABASE_CCR3
  - TIM_DMABASE_CCR4
  - TIM_DMABASE_BDTR
  - TIM_DMABASE_DCR
- **BurstRequestSrc:** TIM DMA Request sources This parameter can be one of the following values:
  - TIM_DMA_UPDATE: TIM update Interrupt source
  - TIM_DMA_CC1: TIM Capture Compare 1 DMA source
  - TIM_DMA_CC2: TIM Capture Compare 2 DMA source
  - TIM_DMA_CC3: TIM Capture Compare 3 DMA source
  - TIM_DMA_CC4: TIM Capture Compare 4 DMA source
  - TIM_DMA_COM: TIM Commutation DMA source
  - TIM_DMA_TRIGGER: TIM Trigger DMA source
- **BurstBuffer:** The Buffer address.
- **BurstLength:** DMA Burst length. This parameter can be one value between: TIM_DMABURSTLENGTH_1TRANSFER and TIM_DMABURSTLENGTH_18TRANSFERS.
- **DataLength:** Data length. This parameter can be one value between 1 and 0xFFFF.

Return values
- **HAL:** status

HAL_TIM_DMABurst_ReadStop

Function name **HAL_StatusTypeDef HAL_TIM_DMABurst_ReadStop (TIM_HandleTypeDef * htim, uint32_t BurstRequestSrc)**

Function description Stop the DMA burst reading.

Parameters
- **htim:** TIM handle
- **BurstRequestSrc:** TIM DMA Request sources to disable.

Return values
- **HAL:** status

HAL_TIM_GenerateEvent

Function name **HAL_StatusTypeDef HAL_TIM_GenerateEvent (TIM_HandleTypeDef * htim, uint32_t EventSource)**

Function description Generate a software event.

Parameters
- **htim:** TIM handle
- **EventSource:** specifies the event source. This parameter can be one of the following values:
  - TIM_EVENTSOURCE_UPDATE: Timer update Event source
  - TIM_EVENTSOURCE_CC1: Timer Capture Compare 1 Event source
  - TIM_EVENTSOURCE_CC2: Timer Capture Compare 2 Event source
  - TIM_EVENTSOURCE_CC3: Timer Capture Compare 3 Event source
  - TIM_EVENTSOURCE_CC4: Timer Capture Compare 4 Event source
  - TIM_EVENTSOURCE_COM: Timer COM event source
  - TIM_EVENTSOURCE_TRIGGER: Timer Trigger Event source
  - TIM_EVENTSOURCE_BREAK: Timer Break event source
  - TIM_EVENTSOURCE_BREAK2: Timer Break2 event source

Return values
- **HAL:** status

Notes
- TIM_EVENTSOURCE_BREAK2 isn't relevant for STM32F37xx and STM32F38xx devices

HAL_TIM_ReadCapturedValue

Function name **uint32_t HAL_TIM_ReadCapturedValue (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Read the captured value from Capture Compare unit.

Parameters
- **htim:** TIM handle.
- **Channel:** TIM Channels to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected

– TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **Captured:** value

HAL_TIM_PeriodElapsedCallback

Function name **void HAL_TIM_PeriodElapsedCallback (TIM_HandleTypeDef * htim)**

Function description Period elapsed callback in non blocking mode.

Parameters
- **htim:** TIM handle

Return values
- **None**

HAL_TIM_OC_DelayElapsedCallback

Function name **void HAL_TIM_OC_DelayElapsedCallback (TIM_HandleTypeDef * htim)**

Function description Output Compare callback in non blocking mode.

Parameters
- **htim:** TIM OC handle

Return values
- **None**

HAL_TIM_IC_CaptureCallback

Function name **void HAL_TIM_IC_CaptureCallback (TIM_HandleTypeDef * htim)**

Function description Input Capture callback in non blocking mode.

Parameters
- **htim:** TIM IC handle

Return values
- **None**

HAL_TIM_PWM_PulseFinishedCallback

Function name **void HAL_TIM_PWM_PulseFinishedCallback (TIM_HandleTypeDef * htim)**

Function description PWM Pulse finished callback in non blocking mode.

Parameters
- **htim:** TIM handle

Return values
- **None**

HAL_TIM_TriggerCallback

Function name **void HAL_TIM_TriggerCallback (TIM_HandleTypeDef * htim)**

Function description Hall Trigger detection callback in non blocking mode.

Parameters
- **htim:** TIM handle

Return values
- **None**

HAL_TIM_ErrorCallback

Function name	**void HAL_TIM_ErrorCallback (TIM_HandleTypeDef * htim)**
Function description	Timer error callback in non blocking mode.
Parameters	• **htim:** TIM handle
Return values	• **None**

HAL_TIM_Base_GetState

Function name	**HAL_TIM_StateTypeDef HAL_TIM_Base_GetState (TIM_HandleTypeDef * htim)**
Function description	Return the TIM Base state.
Parameters	• **htim:** TIM Base handle
Return values	• **HAL:** state

HAL_TIM_OC_GetState

Function name	**HAL_TIM_StateTypeDef HAL_TIM_OC_GetState (TIM_HandleTypeDef * htim)**
Function description	Return the TIM OC state.
Parameters	• **htim:** TIM Ouput Compare handle
Return values	• **HAL:** state

HAL_TIM_PWM_GetState

Function name	**HAL_TIM_StateTypeDef HAL_TIM_PWM_GetState (TIM_HandleTypeDef * htim)**
Function description	Return the TIM PWM state.
Parameters	• **htim:** TIM handle
Return values	• **HAL:** state

HAL_TIM_IC_GetState

Function name	**HAL_TIM_StateTypeDef HAL_TIM_IC_GetState (TIM_HandleTypeDef * htim)**
Function description	Return the TIM Input Capture state.
Parameters	• **htim:** TIM IC handle
Return values	• **HAL:** state

HAL_TIM_OnePulse_GetState

Function name **HAL_TIM_StateTypeDef HAL_TIM_OnePulse_GetState (TIM_HandleTypeDef * htim)**

Function description Return the TIM One Pulse Mode state.

Parameters
- **htim:** TIM OPM handle

Return values
- **HAL:** state

HAL_TIM_Encoder_GetState

Function name **HAL_TIM_StateTypeDef HAL_TIM_Encoder_GetState (TIM_HandleTypeDef * htim)**

Function description Return the TIM Encoder Mode state.

Parameters
- **htim:** TIM Encoder handle

Return values
- **HAL:** state

TIM_Base_SetConfig

Function name **void TIM_Base_SetConfig (TIM_TypeDef * TIMx, TIM_Base_InitTypeDef * Structure)**

Function description Time Base configuration.

Parameters
- **TIMx:** TIM periheral
- **Structure:** TIM Base configuration structure

Return values
- **None**

TIM_TI1_SetConfig

Function name **void TIM_TI1_SetConfig (TIM_TypeDef * TIMx, uint32_t TIM_ICPolarity, uint32_t TIM_ICSelection, uint32_t TIM_ICFilter)**

Function description Configure the TI1 as Input.

Parameters
- **TIMx:** to select the TIM peripheral.
- **TIM_ICPolarity:** The Input Polarity. This parameter can be one of the following values:
  - TIM_ICPOLARITY_RISING
  - TIM_ICPOLARITY_FALLING
  - TIM_ICPOLARITY_BOTHEDGE
- **TIM_ICSelection:** specifies the input to be used. This parameter can be one of the following values:
  - TIM_ICSELECTION_DIRECTTI: TIM Input 1 is selected to be connected to IC1.
  - TIM_ICSELECTION_INDIRECTTI: TIM Input 1 is selected to be connected to IC2.
  - TIM_ICSELECTION_TRC: TIM Input 1 is selected to be connected to TRC.
- **TIM_ICFilter:** Specifies the Input Capture Filter. This parameter must be a value between 0x00 and 0x0F.

Return values
- **None**

Notes
- TIM_ICFilter and TIM_ICPolarity are not used in INDIRECT mode as TI2FP1 (on channel2 path) is used as the input signal. Therefore CCMR1 must be protected against un-initialized filter and polarity values.

TIM_OC1_SetConfig

Function name **void TIM_OC1_SetConfig (TIM_TypeDef * TIMx, TIM_OC_InitTypeDef * OC_Config)**

Function description Time Ouput Compare 1 configuration.

Parameters
- **TIMx:** to select the TIM peripheral
- **OC_Config:** The ouput configuration structure

Return values
- **None**

TIM_OC2_SetConfig

Function name **void TIM_OC2_SetConfig (TIM_TypeDef * TIMx, TIM_OC_InitTypeDef * OC_Config)**

Function description Time Ouput Compare 2 configuration.

Parameters
- **TIMx:** to select the TIM peripheral
- **OC_Config:** The ouput configuration structure

Return values
- **None**

TIM_OC3_SetConfig

Function name **void TIM_OC3_SetConfig (TIM_TypeDef * TIMx, TIM_OC_InitTypeDef * OC_Config)**

Function description Time Ouput Compare 3 configuration.

Parameters
- **TIMx:** to select the TIM peripheral
- **OC_Config:** The ouput configuration structure

Return values
- **None**

TIM_OC4_SetConfig

Function name **void TIM_OC4_SetConfig (TIM_TypeDef * TIMx, TIM_OC_InitTypeDef * OC_Config)**

Function description Time Ouput Compare 4 configuration.

Parameters
- **TIMx:** to select the TIM peripheral
- **OC_Config:** The ouput configuration structure

Return values
- **None**

TIM_ETR_SetConfig

Function name **void TIM_ETR_SetConfig (TIM_TypeDef * TIMx, uint32_t TIM_ExtTRGPrescaler, uint32_t TIM_ExtTRGPolarity, uint32_t ExtTRGFilter)**

Function description Configures the TIMx External Trigger (ETR).

Parameters
- **TIMx:** to select the TIM peripheral
- **TIM_ExtTRGPrescaler:** The external Trigger Prescaler. This parameter can be one of the following values:
  - TIM_ETRPRESCALER_DIV1 : ETRP Prescaler OFF.
  - TIM_ETRPRESCALER_DIV2 : ETRP frequency divided by 2.
  - TIM_ETRPRESCALER_DIV4 : ETRP frequency divided by 4.
  - TIM_ETRPRESCALER_DIV8 : ETRP frequency divided by 8.
- **TIM_ExtTRGPolarity:** The external Trigger Polarity. This parameter can be one of the following values:
  - TIM_ETRPOLARITY_INVERTED : active low or falling edge active.
  - TIM_ETRPOLARITY_NONINVERTED : active high or rising edge active.
- **ExtTRGFilter:** External Trigger Filter. This parameter must be a value between 0x00 and 0x0F

Return values
- **None**

TIM_DMADelayPulseCplt

Function name **void TIM_DMADelayPulseCplt (DMA_HandleTypeDef * hdma)**

Function description TIM DMA Delay Pulse complete callback.

Parameters
- **hdma:** pointer to DMA handle.

Return values
- **None**

TIM_DMAError

Function name **void TIM_DMAError (DMA_HandleTypeDef * hdma)**

Function description TIM DMA error callback.

Parameters
- **hdma:** pointer to DMA handle.

Return values
- **None**

TIM_DMACaptureCplt

Function name **void TIM_DMACaptureCplt (DMA_HandleTypeDef * hdma)**

Function description TIM DMA Capture complete callback.

Parameters
- **hdma:** pointer to DMA handle.

Return values
- **None**

TIM_CCxChannelCmd

Function name	**void TIM_CCxChannelCmd (TIM_TypeDef * TIMx, uint32_t Channel, uint32_t ChannelState)**
Function description	Enables or disables the TIM Capture Compare Channel x.
Parameters	• **TIMx:** to select the TIM peripheral • **Channel:** specifies the TIM Channel This parameter can be one of the following values: – TIM_CHANNEL_1: TIM Channel 1 – TIM_CHANNEL_2: TIM Channel 2 – TIM_CHANNEL_3: TIM Channel 3 – TIM_CHANNEL_4: TIM Channel 4 • **ChannelState:** specifies the TIM Channel CCxE bit new state. This parameter can be: TIM_CCx_ENABLE or TIM_CCx_Disable.
Return values	• **None**

51.3 TIM Firmware driver defines

51.3.1 TIM

TIM Automatic Output Enable

TIM_AUTOMATICOUTPUT_ENABLE

TIM_AUTOMATICOUTPUT_DISABLE

TIM Auto-Reload Preload

TIM_AUTORELOAD_PRELOAD_DISABLE	TIMx_ARR register is not buffered
TIM_AUTORELOAD_PRELOAD_ENABLE	TIMx_ARR register is buffered

TIM Break Input Enable Disable

TIM_BREAK_ENABLE

TIM_BREAK_DISABLE

TIM Break Input Polarity

TIM_BREAKPOLARITY_LOW

TIM_BREAKPOLARITY_HIGH

TIM Capture/Compare Channel State

TIM_CCx_ENABLE

TIM_CCx_DISABLE

TIM_CCxN_ENABLE

TIM_CCxN_DISABLE

TIM Clear Input Polarity

TIM_CLEARINPUTPOLARITY_INVERTED	Polarity for ETRx pin
TIM_CLEARINPUTPOLARITY_NONINVERTED	Polarity for ETRx pin

TIM Clear Input Prescaler

TIM_CLEARINPUTPRESCALER_DIV1	No prescaler is used
TIM_CLEARINPUTPRESCALER_DIV2	Prescaler for External ETR pin: Capture performed once every 2 events.
TIM_CLEARINPUTPRESCALER_DIV4	Prescaler for External ETR pin: Capture performed once every 4 events.
TIM_CLEARINPUTPRESCALER_DIV8	Prescaler for External ETR pin: Capture performed once every 8 events.

TIM Clock Division

TIM_CLOCKDIVISION_DIV1

TIM_CLOCKDIVISION_DIV2

TIM_CLOCKDIVISION_DIV4

TIM Clock Polarity

TIM_CLOCKPOLARITY_INVERTED	Polarity for ETRx clock sources
TIM_CLOCKPOLARITY_NONINVERTED	Polarity for ETRx clock sources
TIM_CLOCKPOLARITY_RISING	Polarity for TIx clock sources
TIM_CLOCKPOLARITY_FALLING	Polarity for TIx clock sources
TIM_CLOCKPOLARITY_BOTHEDGE	Polarity for TIx clock sources

TIM Clock Prescaler

TIM_CLOCKPRESCALER_DIV1	No prescaler is used
TIM_CLOCKPRESCALER_DIV2	Prescaler for External ETR Clock: Capture performed once every 2 events.
TIM_CLOCKPRESCALER_DIV4	Prescaler for External ETR Clock: Capture performed once every 4 events.
TIM_CLOCKPRESCALER_DIV8	Prescaler for External ETR Clock: Capture performed once every 8 events.

TIM Clock Source

TIM_CLOCKSOURCE_ETRMODE2

TIM_CLOCKSOURCE_INTERNAL

TIM_CLOCKSOURCE_ITR0

TIM_CLOCKSOURCE_ITR1

TIM_CLOCKSOURCE_ITR2

TIM_CLOCKSOURCE_ITR3

TIM_CLOCKSOURCE_TI1ED

TIM_CLOCKSOURCE_TI1

TIM_CLOCKSOURCE_TI2

TIM_CLOCKSOURCE_ETRMODE1

TIM Commutation Source

TIM_COMMUTATION_TRGI

TIM_COMMUTATION_SOFTWARE

TIM Counter Mode

TIM_COUNTERMODE_UP

TIM_COUNTERMODE_DOWN

TIM_COUNTERMODE_CENTERALIGNED1

TIM_COUNTERMODE_CENTERALIGNED2

TIM_COUNTERMODE_CENTERALIGNED3

TIMEx DMA Base Address

TIM_DMABASE_CR1

TIM_DMABASE_CR2

TIM_DMABASE_SMCR

TIM_DMABASE_DIER

TIM_DMABASE_SR

TIM_DMABASE_EGR

TIM_DMABASE_CCMR1

TIM_DMABASE_CCMR2

TIM_DMABASE_CCER

TIM_DMABASE_CNT

TIM_DMABASE_PSC

TIM_DMABASE_ARR

TIM_DMABASE_RCR

TIM_DMABASE_CCR1

TIM_DMABASE_CCR2

TIM_DMABASE_CCR3

TIM_DMABASE_CCR4

TIM_DMABASE_BDTR

TIM_DMABASE_DCR

TIM_DMABASE_CCMR3

TIM_DMABASE_CCR5

TIM_DMABASE_CCR6

TIM_DMABASE_OR

TIM DMA Burst Length

TIM_DMABURSTLENGTH_1TRANSFER

TIM_DMABURSTLENGTH_2TRANSFERS

TIM_DMABURSTLENGTH_3TRANSFERS
TIM_DMABURSTLENGTH_4TRANSFERS
TIM_DMABURSTLENGTH_5TRANSFERS
TIM_DMABURSTLENGTH_6TRANSFERS
TIM_DMABURSTLENGTH_7TRANSFERS
TIM_DMABURSTLENGTH_8TRANSFERS
TIM_DMABURSTLENGTH_9TRANSFERS
TIM_DMABURSTLENGTH_10TRANSFERS
TIM_DMABURSTLENGTH_11TRANSFERS
TIM_DMABURSTLENGTH_12TRANSFERS
TIM_DMABURSTLENGTH_13TRANSFERS
TIM_DMABURSTLENGTH_14TRANSFERS
TIM_DMABURSTLENGTH_15TRANSFERS
TIM_DMABURSTLENGTH_16TRANSFERS
TIM_DMABURSTLENGTH_17TRANSFERS
TIM_DMABURSTLENGTH_18TRANSFERS

TIM DMA Handle Index

TIM_DMA_ID_UPDATE	Index of the DMA handle used for Update DMA requests
TIM_DMA_ID_CC1	Index of the DMA handle used for Capture/Compare 1 DMA requests
TIM_DMA_ID_CC2	Index of the DMA handle used for Capture/Compare 2 DMA requests
TIM_DMA_ID_CC3	Index of the DMA handle used for Capture/Compare 3 DMA requests
TIM_DMA_ID_CC4	Index of the DMA handle used for Capture/Compare 4 DMA requests
TIM_DMA_ID_COMMUTATION	Index of the DMA handle used for Commutation DMA requests
TIM_DMA_ID_TRIGGER	Index of the DMA handle used for Trigger DMA requests

TIM DMA Sources

TIM_DMA_UPDATE
TIM_DMA_CC1
TIM_DMA_CC2
TIM_DMA_CC3
TIM_DMA_CC4
TIM_DMA_COM
TIM_DMA_TRIGGER

TIM Encoder Mode

TIM_ENCODERMODE_TI1

TIM_ENCODERMODE_TI2

TIM_ENCODERMODE_TI12

TIM ETR Polarity

TIM_ETRPOLARITY_INVERTED	Polarity for ETR source
TIM_ETRPOLARITY_NONINVERTED	Polarity for ETR source

TIM ETR Prescaler

TIM_ETRPRESCALER_DIV1	No prescaler is used
TIM_ETRPRESCALER_DIV2	ETR input source is divided by 2U
TIM_ETRPRESCALER_DIV4	ETR input source is divided by 4U
TIM_ETRPRESCALER_DIV8	ETR input source is divided by 8U

TIMEx Event Source

TIM_EVENTSOURCE_UPDATE	Reinitialize the counter and generates an update of the registers
TIM_EVENTSOURCE_CC1	A capture/compare event is generated on channel 1U
TIM_EVENTSOURCE_CC2	A capture/compare event is generated on channel 2U
TIM_EVENTSOURCE_CC3	A capture/compare event is generated on channel 3U
TIM_EVENTSOURCE_CC4	A capture/compare event is generated on channel 4U
TIM_EVENTSOURCE_COM	A commutation event is generated
TIM_EVENTSOURCE_TRIGGER	A trigger event is generated
TIM_EVENTSOURCE_BREAK	A break event is generated
TIM_EVENTSOURCE_BREAK2	A break 2 event is generated

TIM Exported Macros

__HAL_TIM_RESET_HANDLE_STATE

Description:

- Reset TIM handle state.

Parameters:

- __HANDLE__: TIM handle.

Return value:

- None

__HAL_TIM_ENABLE

Description:

- Enable the TIM peripheral.

Parameters:

- __HANDLE__: TIM handle

Return value:

- None

__HAL_TIM_MOE_ENABLE

Description:

- Enable the TIM main Output.

Parameters:

- __HANDLE__: TIM handle

Return value:

- None

__HAL_TIM_DISABLE

Description:

- Disable the TIM peripheral.

Parameters:

- __HANDLE__: TIM handle

Return value:

- None

__HAL_TIM_MOE_DISABLE

Description:

- Disable the TIM main Output.

Parameters:

- __HANDLE__: TIM handle

Return value:

- None

Notes:

- The Main Output Enable of a timer instance is disabled only if all the CCx and CCxN channels have been disabled

__HAL_TIM_MOE_DISABLE_UNCONDITIONALLY

Description:

- Disable the TIM main Output.

Parameters:

- __HANDLE__: TIM handle

Return value:

- None

Notes:

- The Main Output Enable of a timer instance is disabled uncondiotionally

__HAL_TIM_ENABLE_IT

Description:

- Enables the specified TIM interrupt.

Parameters:

- __HANDLE__: specifies the TIM Handle.
- __INTERRUPT__: specifies the TIM interrupt source to enable. This parameter can be one of the following values:

- TIM_IT_UPDATE: Update interrupt
- TIM_IT_CC1: Capture/Compare 1 interrupt
- TIM_IT_CC2: Capture/Compare 2 interrupt
- TIM_IT_CC3: Capture/Compare 3 interrupt
- TIM_IT_CC4: Capture/Compare 4 interrupt
- TIM_IT_COM: Commutation interrupt
- TIM_IT_TRIGGER: Trigger interrupt
- TIM_IT_BREAK: Break interrupt

Return value:

- None

__HAL_TIM_DISABLE_IT

Description:

- Disables the specified TIM interrupt.

Parameters:

- __HANDLE__: specifies the TIM Handle.
- __INTERRUPT__: specifies the TIM interrupt source to disable. This parameter can be one of the following values:
  - TIM_IT_UPDATE: Update interrupt
  - TIM_IT_CC1: Capture/Compare 1 interrupt
  - TIM_IT_CC2: Capture/Compare 2 interrupt
  - TIM_IT_CC3: Capture/Compare 3 interrupt
  - TIM_IT_CC4: Capture/Compare 4 interrupt
  - TIM_IT_COM: Commutation interrupt
  - TIM_IT_TRIGGER: Trigger interrupt
  - TIM_IT_BREAK: Break interrupt

Return value:

- None

__HAL_TIM_ENABLE_DMA

Description:

- Enables the specified DMA request.

Parameters:

- __HANDLE__: specifies the TIM Handle.
- __DMA__: specifies the TIM DMA request to enable. This parameter can be one of the following values:
  - TIM_DMA_UPDATE: Update DMA request
  - TIM_DMA_CC1: Capture/Compare 1 DMA request
  - TIM_DMA_CC2: Capture/Compare 2 DMA request

  - TIM_DMA_CC3: Capture/Compare 3 DMA request
  - TIM_DMA_CC4: Capture/Compare 4 DMA request
  - TIM_DMA_COM: Commutation DMA request
  - TIM_DMA_TRIGGER: Trigger DMA request

Return value:

- None

__HAL_TIM_DISABLE_DMA

Description:

- Disables the specified DMA request.

Parameters:

- __HANDLE__: specifies the TIM Handle.
- __DMA__: specifies the TIM DMA request to disable. This parameter can be one of the following values:
  - TIM_DMA_UPDATE: Update DMA request
  - TIM_DMA_CC1: Capture/Compare 1 DMA request
  - TIM_DMA_CC2: Capture/Compare 2 DMA request
  - TIM_DMA_CC3: Capture/Compare 3 DMA request
  - TIM_DMA_CC4: Capture/Compare 4 DMA request
  - TIM_DMA_COM: Commutation DMA request
  - TIM_DMA_TRIGGER: Trigger DMA request

Return value:

- None

__HAL_TIM_GET_FLAG

Description:

- Checks whether the specified TIM interrupt flag is set or not.

Parameters:

- __HANDLE__: specifies the TIM Handle.
- __FLAG__: specifies the TIM interrupt flag to check. This parameter can be one of the following values:
  - TIM_FLAG_UPDATE: Update interrupt flag
  - TIM_FLAG_CC1: Capture/Compare 1 interrupt flag
  - TIM_FLAG_CC2: Capture/Compare 2 interrupt flag
  - TIM_FLAG_CC3: Capture/Compare 3

interrupt flag
- TIM_FLAG_CC4: Capture/Compare 4 interrupt flag
- TIM_FLAG_COM: Commutation interrupt flag
- TIM_FLAG_TRIGGER: Trigger interrupt flag
- TIM_FLAG_BREAK: Break interrupt flag
- TIM_FLAG_CC1OF: Capture/Compare 1 overcapture flag
- TIM_FLAG_CC2OF: Capture/Compare 2 overcapture flag
- TIM_FLAG_CC3OF: Capture/Compare 3 overcapture flag
- TIM_FLAG_CC4OF: Capture/Compare 4 overcapture flag

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

__HAL_TIM_CLEAR_FLAG

Description:

- Clears the specified TIM interrupt flag.

Parameters:

- __HANDLE__: specifies the TIM Handle.
- __FLAG__: specifies the TIM interrupt flag to clear. This parameter can be one of the following values:
  - TIM_FLAG_UPDATE: Update interrupt flag
  - TIM_FLAG_CC1: Capture/Compare 1 interrupt flag
  - TIM_FLAG_CC2: Capture/Compare 2 interrupt flag
  - TIM_FLAG_CC3: Capture/Compare 3 interrupt flag
  - TIM_FLAG_CC4: Capture/Compare 4 interrupt flag
  - TIM_FLAG_COM: Commutation interrupt flag
  - TIM_FLAG_TRIGGER: Trigger interrupt flag
  - TIM_FLAG_BREAK: Break interrupt flag
  - TIM_FLAG_CC1OF: Capture/Compare 1 overcapture flag
  - TIM_FLAG_CC2OF: Capture/Compare 2 overcapture flag
  - TIM_FLAG_CC3OF: Capture/Compare 3 overcapture flag
  - TIM_FLAG_CC4OF:

Capture/Compare 4 overcapture flag

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

__HAL_TIM_GET_IT_SOURCE

Description:

- Checks whether the specified TIM interrupt has occurred or not.

Parameters:

- __HANDLE__: TIM handle
- __INTERRUPT__: specifies the TIM interrupt source to check.

Return value:

- The: state of TIM_IT (SET or RESET).

__HAL_TIM_CLEAR_IT

Description:

- Clear the TIM interrupt pending bits.

Parameters:

- __HANDLE__: TIM handle
- __INTERRUPT__: specifies the interrupt pending bit to clear.

Return value:

- None

__HAL_TIM_IS_TIM_COUNTING_DOWN

Description:

- Indicates whether or not the TIM Counter is used as downcounter.

Parameters:

- __HANDLE__: TIM handle.

Return value:

- False: (Counter used as upcounter) or True (Counter used as downcounter)

Notes:

- This macro is particularly usefull to get the counting mode when the timer operates in Center-aligned mode or Encoder mode.

__HAL_TIM_SET_PRESCALER

Description:

- Sets the TIM active prescaler register value on update event.

Parameters:

- __HANDLE__: TIM handle.
- __PRESC__: specifies the active prescaler register new value.

Return value:

- None

__HAL_TIM_SET_COUNTER

Description:

- Sets the TIM Counter Register value on runtime.

Parameters:

- __HANDLE__: TIM handle.
- __COUNTER__: specifies the Counter register new value.

Return value:

- None

__HAL_TIM_GET_COUNTER

Description:

- Gets the TIM Counter Register value on runtime.

Parameters:

- __HANDLE__: TIM handle.

Return value:

- 16-bit: or 32-bit value of the timer counter register (TIMx_CNT)

__HAL_TIM_SET_AUTORELOAD

Description:

- Sets the TIM Autoreload Register value on runtime without calling another time any Init function.

Parameters:

- __HANDLE__: TIM handle.
- __AUTORELOAD__: specifies the Counter register new value.

Return value:

- None

__HAL_TIM_GET_AUTORELOAD

Description:

- Gets the TIM Autoreload Register value on runtime.

Parameters:

- __HANDLE__: TIM handle.

Return value:

- 16-bit: or 32-bit value of the timer auto-reload register(TIMx_ARR)

__HAL_TIM_SET_CLOCKDIVISION

Description:

- Sets the TIM Clock Division value on runtime without calling another time any Init function.

Parameters:

- __HANDLE__: TIM handle.
- __CKD__: specifies the clock division value. This parameter can be one of the following value:
  - TIM_CLOCKDIVISION_DIV1: tDTS=tCK_INT
  - TIM_CLOCKDIVISION_DIV2: tDTS=2*tCK_INT
  - TIM_CLOCKDIVISION_DIV4: tDTS=4*tCK_INT

Return value:

- None

__HAL_TIM_GET_CLOCKDIVISION

Description:

- Gets the TIM Clock Division value on runtime.

Parameters:

- __HANDLE__: TIM handle.

Return value:

- The: clock division can be one of the following values:
  - TIM_CLOCKDIVISION_DIV1: tDTS=tCK_INT
  - TIM_CLOCKDIVISION_DIV2: tDTS=2*tCK_INT
  - TIM_CLOCKDIVISION_DIV4: tDTS=4*tCK_INT

__HAL_TIM_SET_ICPRESCALER

Description:

- Sets the TIM Input Capture prescaler on runtime without calling another time

Parameters:

- __HANDLE__: TIM handle.
- __CHANNEL__: TIM Channels to be configured. This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4

selected
- __ICPSC__: specifies the Input Capture4 prescaler new value. This parameter can be one of the following values:
  - TIM_ICPSC_DIV1: no prescaler
  - TIM_ICPSC_DIV2: capture is done once every 2 events
  - TIM_ICPSC_DIV4: capture is done once every 4 events
  - TIM_ICPSC_DIV8: capture is done once every 8 events

Return value:

- None

__HAL_TIM_GET_ICPRESCALER

Description:

- Gets the TIM Input Capture prescaler on runtime.

Parameters:

- __HANDLE__: TIM handle.
- __CHANNEL__: TIM Channels to be configured. This parameter can be one of the following values:
  - TIM_CHANNEL_1: get input capture 1 prescaler value
  - TIM_CHANNEL_2: get input capture 2 prescaler value
  - TIM_CHANNEL_3: get input capture 3 prescaler value
  - TIM_CHANNEL_4: get input capture 4 prescaler value

Return value:

- The: input capture prescaler can be one of the following values:
  - TIM_ICPSC_DIV1: no prescaler
  - TIM_ICPSC_DIV2: capture is done once every 2 events
  - TIM_ICPSC_DIV4: capture is done once every 4 events
  - TIM_ICPSC_DIV8: capture is done once every 8 events

__HAL_TIM_URS_ENABLE

Description:

- Set the Update Request Source (URS) bit of the TIMx_CR1 register.

Parameters:

- __HANDLE__: TIM handle.

Return value:

- None

Notes:

- When the USR bit of the TIMx_CR1 register is set, only counter overflow/underflow generates an update interrupt or DMA request (if enabled)

__HAL_TIM_URS_DISABLE

Description:

- Reset the Update Request Source (URS) bit of the TIMx_CR1 register.

Parameters:

- __HANDLE__: TIM handle.

Return value:

- None

Notes:

- When the USR bit of the TIMx_CR1 register is reset, any of the following events generate an update interrupt or DMA request (if enabled): (+) Counter overflow/underflow (+) Setting the UG bit (+) Update generation through the slave mode controller

__HAL_TIM_SET_CAPTURE POLARITY

Description:

- Sets the TIM Capture x input polarity on runtime.

Parameters:

- __HANDLE__: TIM handle.
- __CHANNEL__: TIM Channels to be configured. This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected
- __POLARITY__: Polarity for TIx source
  - TIM_INPUTCHANNELPOLARITY_RISING: Rising Edge
  - TIM_INPUTCHANNELPOLARITY_FALLING: Falling Edge
  - TIM_INPUTCHANNELPOLARITY_BOTHEDGE: Rising and Falling Edge

Return value:

- None

TIM Flag Definition

TIM_FLAG_UPDATE

TIM_FLAG_CC1

TIM_FLAG_CC2

TIM_FLAG_CC3

TIM_FLAG_CC4

TIM_FLAG_COM

TIM_FLAG_TRIGGER

TIM_FLAG_BREAK

TIM_FLAG_BREAK2

TIM_FLAG_CC1OF

TIM_FLAG_CC2OF

TIM_FLAG_CC3OF

TIM_FLAG_CC4OF

TIM Input Capture Polarity

TIM_ICPOLARITY_RISING

TIM_ICPOLARITY_FALLING

TIM_ICPOLARITY_BOTHEDGE

TIM Input Capture Prescaler

TIM_ICPSC_DIV1	Capture performed each time an edge is detected on the capture input
TIM_ICPSC_DIV2	Capture performed once every 2 events
TIM_ICPSC_DIV4	Capture performed once every 4 events
TIM_ICPSC_DIV8	Capture performed once every 8 events

TIM Input Capture Selection

TIM_ICSELECTION_DIRECTTI	TIM Input 1U, 2U, 3 or 4 is selected to be connected to IC1, IC2, IC3 or IC4, respectively
TIM_ICSELECTION_INDIRECTTI	TIM Input 1U, 2U, 3 or 4 is selected to be connected to IC2, IC1, IC4 or IC3, respectively
TIM_ICSELECTION_TRC	TIM Input 1U, 2U, 3 or 4 is selected to be connected to TRC

TIM Input Channel Polarity

TIM_INPUTCHANNELPOLARITY_RISING	Polarity for TIx source
TIM_INPUTCHANNELPOLARITY_FALLING	Polarity for TIx source
TIM_INPUTCHANNELPOLARITY_BOTHEDGE	Polarity for TIx source

TIM Interrupt Definition

TIM_IT_UPDATE

TIM_IT_CC1

TIM_IT_CC2

TIM_IT_CC3

TIM_IT_CC4

TIM_IT_COM

TIM_IT_TRIGGER

TIM_IT_BREAK

TIM Lock level

TIM_LOCKLEVEL_OFF

TIM_LOCKLEVEL_1

TIM_LOCKLEVEL_2

TIM_LOCKLEVEL_3

TIM Master Mode Selection

TIM_TRGO_RESET

TIM_TRGO_ENABLE

TIM_TRGO_UPDATE

TIM_TRGO_OC1

TIM_TRGO_OC1REF

TIM_TRGO_OC2REF

TIM_TRGO_OC3REF

TIM_TRGO_OC4REF

TIM Master Slave Mode

TIM_MASTERSLAVEMODE_ENABLE

TIM_MASTERSLAVEMODE_DISABLE

TIM One Pulse Mode

TIM_OPMODE_SINGLE

TIM_OPMODE_REPETITIVE

TIM OSSI Off State Selection for Idle mode state

TIM_OSSI_ENABLE

TIM_OSSI_DISABLE

TIM OSSR Off State Selection for Run mode state

TIM_OSSR_ENABLE

TIM_OSSR_DISABLE

TIM Output Compare Idle State

TIM_OCIDLESTATE_SET

TIM_OCIDLESTATE_RESET

TIM Complementary Output Compare Idle State

TIM_OCNIDLESTATE_SET

TIM_OCNIDLESTATE_RESET

TIM Complementary Output Compare Polarity

TIM_OCNPOLARITY_HIGH

TIM_OCNPOLARITY_LOW

TIM Output Compare Polarity

TIM_OCPOLARITY_HIGH

TIM_OCPOLARITY_LOW

TIM Output Fast State

TIM_OCFAST_DISABLE

TIM_OCFAST_ENABLE

TIM TI1 Input Selection

TIM_TI1SELECTION_CH1

TIM_TI1SELECTION_XORCOMBINATION

TIM Trigger Polarity

TIM_TRIGGERPOLARITY_INVERTED	Polarity for ETRx trigger sources
TIM_TRIGGERPOLARITY_NONINVERTED	Polarity for ETRx trigger sources
TIM_TRIGGERPOLARITY_RISING	Polarity for TIxFPx or TI1_ED trigger sources
TIM_TRIGGERPOLARITY_FALLING	Polarity for TIxFPx or TI1_ED trigger sources
TIM_TRIGGERPOLARITY_BOTHEDGE	Polarity for TIxFPx or TI1_ED trigger sources

TIM Trigger Prescaler

TIM_TRIGGERPRESCALER_DIV1	No prescaler is used
TIM_TRIGGERPRESCALER_DIV2	Prescaler for External ETR Trigger: Capture performed once every 2 events.
TIM_TRIGGERPRESCALER_DIV4	Prescaler for External ETR Trigger: Capture performed once every 4 events.
TIM_TRIGGERPRESCALER_DIV8	Prescaler for External ETR Trigger: Capture performed once every 8 events.

TIM Trigger Selection

TIM_TS_ITR0

TIM_TS_ITR1

TIM_TS_ITR2

TIM_TS_ITR3

TIM_TS_TI1F_ED

TIM_TS_TI1FP1

TIM_TS_TI2FP2

TIM_TS_ETRF

TIM_TS_NONE

52 HAL TIM Extension Driver

52.1 TIMEx Firmware driver registers structures

52.1.1 TIM_HallSensor_InitTypeDef

Data Fields

- ***uint32_t IC1Polarity***
- ***uint32_t IC1Prescaler***
- ***uint32_t IC1Filter***
- ***uint32_t Commutation_Delay***

Field Documentation

- ***uint32_t TIM_HallSensor_InitTypeDef::IC1Polarity***
  Specifies the active edge of the input signal. This parameter can be a value of ***TIM_Input_Capture_Polarity***
- ***uint32_t TIM_HallSensor_InitTypeDef::IC1Prescaler***
  Specifies the Input Capture Prescaler. This parameter can be a value of ***TIM_Input_Capture_Prescaler***
- ***uint32_t TIM_HallSensor_InitTypeDef::IC1Filter***
  Specifies the input capture filter. This parameter can be a number between Min_Data = 0x0 and Max_Data = 0xFU
- ***uint32_t TIM_HallSensor_InitTypeDef::Commutation_Delay***
  Specifies the pulse value to be loaded into the Capture Compare Register. This parameter can be a number between Min_Data = 0x0000 and Max_Data = 0xFFFFU

52.1.2 TIM_BreakDeadTimeConfigTypeDef

Data Fields

- ***uint32_t OffStateRunMode***
- ***uint32_t OffStateIDLEMode***
- ***uint32_t LockLevel***
- ***uint32_t DeadTime***
- ***uint32_t BreakState***
- ***uint32_t BreakPolarity***
- ***uint32_t BreakFilter***
- ***uint32_t Break2State***
- ***uint32_t Break2Polarity***
- ***uint32_t Break2Filter***
- ***uint32_t AutomaticOutput***

Field Documentation

- ***uint32_t TIM_BreakDeadTimeConfigTypeDef::OffStateRunMode***
  TIM off state in run mode This parameter can be a value of ***TIM_OSSR_Off_State_Selection_for_Run_mode_state***
- ***uint32_t TIM_BreakDeadTimeConfigTypeDef::OffStateIDLEMode***
  TIM off state in IDLE mode This parameter can be a value of ***TIM_OSSI_Off_State_Selection_for_Idle_mode_state***
- ***uint32_t TIM_BreakDeadTimeConfigTypeDef::LockLevel***
  TIM Lock level This parameter can be a value of ***TIM_Lock_level***

- ***uint32_t TIM_BreakDeadTimeConfigTypeDef::DeadTime***
  TIM dead Time This parameter can be a number between Min_Data = 0x00 and Max_Data = 0xFFU
- ***uint32_t TIM_BreakDeadTimeConfigTypeDef::BreakState***
  TIM Break State This parameter can be a value of ***TIM_Break_Input_enable_disable***
- ***uint32_t TIM_BreakDeadTimeConfigTypeDef::BreakPolarity***
  TIM Break input polarity This parameter can be a value of ***TIM_Break_Polarity***
- ***uint32_t TIM_BreakDeadTimeConfigTypeDef::BreakFilter***
  Specifies the brek input filter. This parameter can be a number between Min_Data = 0x0 and Max_Data = 0xFU
- ***uint32_t TIM_BreakDeadTimeConfigTypeDef::Break2State***
  TIM Break2 State This parameter can be a value of ***TIMEx_Break2_Input_enable_disable***
- ***uint32_t TIM_BreakDeadTimeConfigTypeDef::Break2Polarity***
  TIM Break2 input polarity This parameter can be a value of ***TIMEx_Break2_Polarity***
- ***uint32_t TIM_BreakDeadTimeConfigTypeDef::Break2Filter***
  TIM break2 input filter. This parameter can be a number between Min_Data = 0x0 and Max_Data = 0xFU
- ***uint32_t TIM_BreakDeadTimeConfigTypeDef::AutomaticOutput***
  TIM Automatic Output Enable state This parameter can be a value of ***TIM_AOE_Bit_Set_Reset***

52.1.3 TIM_MasterConfigTypeDef

Data Fields

- ***uint32_t MasterOutputTrigger***
- ***uint32_t MasterOutputTrigger2***
- ***uint32_t MasterSlaveMode***

Field Documentation

- ***uint32_t TIM_MasterConfigTypeDef::MasterOutputTrigger***
  Trigger output (TRGO) selection This parameter can be a value of ***TIM_Master_Mode_Selection***
- ***uint32_t TIM_MasterConfigTypeDef::MasterOutputTrigger2***
  Trigger output2 (TRGO2) selection This parameter can be a value of ***TIMEx_Master_Mode_Selection_2***
- ***uint32_t TIM_MasterConfigTypeDef::MasterSlaveMode***
  Master/slave mode selection This parameter can be a value of ***TIM_Master_Slave_Mode***

52.2 TIMEx Firmware driver API description

52.2.1 TIMER Extended features

The Timer Extended features include:

1. Complementary outputs with programmable dead-time for :
   – Output Compare
   – PWM generation (Edge and Center-aligned Mode)
   – One-pulse mode output
2. Synchronization circuit to control the timer with external signals and to interconnect several timers together.
3. Break input to put the timer output signals in reset state or in a known state.
4. Supports incremental (quadrature) encoder and hall-sensor circuitry for positioning purposes

52.2.2 How to use this driver

1. Initialize the TIM low level resources by implementing the following functions depending from feature used :
   - Complementary Output Compare : HAL_TIM_OC_MspInit()
   - Complementary PWM generation : HAL_TIM_PWM_MspInit()
   - Complementary One-pulse mode output : HAL_TIM_OnePulse_MspInit()
   - Hall Sensor output : HAL_TIM_HallSensor_MspInit()
2. Initialize the TIM low level resources :
   a. Enable the TIM interface clock using __HAL_RCC_TIMx_CLK_ENABLE ();
   b. TIM pins configuration
      - Enable the clock for the TIM GPIOs using the following function: __HAL_RCC_GPIOx_CLK_ENABLE();
      - Configure these TIM pins in Alternate function mode using HAL_GPIO_Init();
3. The external Clock can be configured, if needed (the default clock is the internal clock from the APBx), using the following function: HAL_TIM_ConfigClockSource, the clock configuration should be done before any start function.
4. Configure the TIM in the desired functioning mode using one of the initialization function of this driver:
   - HAL_TIMEx_HallSensor_Init and HAL_TIMEx_ConfigCommutationEvent: to use the Timer Hall Sensor Interface and the commutation event with the corresponding Interrupt and DMA request if needed (Note that One Timer is used to interface with the Hall sensor Interface and another Timer should be used to use the commutation event).
5. Activate the TIM peripheral using one of the start functions:
   - Complementary Output Compare : HAL_TIMEx_OCN_Start(), HAL_TIMEx_OCN_Start_DMA(), HAL_TIMEx_OCN_Start_IT()
   - Complementary PWM generation : HAL_TIMEx_PWMN_Start(), HAL_TIMEx_PWMN_Start_DMA(), HAL_TIMEx_PWMN_Start_IT()
   - Complementary One-pulse mode output : HAL_TIMEx_OnePulseN_Start(), HAL_TIMEx_OnePulseN_Start_IT()
   - Hall Sensor output : HAL_TIMEx_HallSensor_Start(), HAL_TIMEx_HallSensor_Start_DMA(), HAL_TIMEx_HallSensor_Start_IT().

52.2.3 Timer Hall Sensor functions

This section provides functions allowing to:

- Initialize and configure TIM HAL Sensor.
- De-initialize TIM HAL Sensor.
- Start the Hall Sensor Interface.
- Stop the Hall Sensor Interface.
- Start the Hall Sensor Interface and enable interrupts.
- Stop the Hall Sensor Interface and disable interrupts.
- Start the Hall Sensor Interface and enable DMA transfers.
- Stop the Hall Sensor Interface and disable DMA transfers.

This section contains the following APIs:

- ***HAL_TIMEx_HallSensor_Init()***
- ***HAL_TIMEx_HallSensor_DeInit()***
- ***HAL_TIMEx_HallSensor_MspInit()***
- ***HAL_TIMEx_HallSensor_MspDeInit()***
- ***HAL_TIMEx_HallSensor_Start()***
- ***HAL_TIMEx_HallSensor_Stop()***
- ***HAL_TIMEx_HallSensor_Start_IT()***

- ***HAL_TIMEx_HallSensor_Stop_IT()***
- ***HAL_TIMEx_HallSensor_Start_DMA()***
- ***HAL_TIMEx_HallSensor_Stop_DMA()***

52.2.4 Timer Complementary Output Compare functions

This section provides functions allowing to:

- Start the Complementary Output Compare.
- Stop the Complementary Output Compare.
- Start the Complementary Output Compare and enable interrupts.
- Stop the Complementary Output Compare and disable interrupts.
- Start the Complementary Output Compare and enable DMA transfers.
- Stop the Complementary Output Compare and disable DMA transfers.

This section contains the following APIs:

- ***HAL_TIMEx_OCN_Start()***
- ***HAL_TIMEx_OCN_Stop()***
- ***HAL_TIMEx_OCN_Start_IT()***
- ***HAL_TIMEx_OCN_Stop_IT()***
- ***HAL_TIMEx_OCN_Start_DMA()***
- ***HAL_TIMEx_OCN_Stop_DMA()***

52.2.5 Timer Complementary PWM functions

This section provides functions allowing to:

- Start the Complementary PWM.
- Stop the Complementary PWM.
- Start the Complementary PWM and enable interrupts.
- Stop the Complementary PWM and disable interrupts.
- Start the Complementary PWM and enable DMA transfers.
- Stop the Complementary PWM and disable DMA transfers.
- Start the Complementary Input Capture measurement.
- Stop the Complementary Input Capture.
- Start the Complementary Input Capture and enable interrupts.
- Stop the Complementary Input Capture and disable interrupts.
- Start the Complementary Input Capture and enable DMA transfers.
- Stop the Complementary Input Capture and disable DMA transfers.
- Start the Complementary One Pulse generation.
- Stop the Complementary One Pulse.
- Start the Complementary One Pulse and enable interrupts.
- Stop the Complementary One Pulse and disable interrupts.

This section contains the following APIs:

- ***HAL_TIMEx_PWMN_Start()***
- ***HAL_TIMEx_PWMN_Stop()***
- ***HAL_TIMEx_PWMN_Start_IT()***
- ***HAL_TIMEx_PWMN_Stop_IT()***
- ***HAL_TIMEx_PWMN_Start_DMA()***
- ***HAL_TIMEx_PWMN_Stop_DMA()***

52.2.6 Timer Complementary One Pulse functions

This section provides functions allowing to:

- Start the Complementary One Pulse generation.
- Stop the Complementary One Pulse.
- Start the Complementary One Pulse and enable interrupts.
- Stop the Complementary One Pulse and disable interrupts.

This section contains the following APIs:

- ***HAL_TIMEx_OnePulseN_Start()***
- ***HAL_TIMEx_OnePulseN_Stop()***
- ***HAL_TIMEx_OnePulseN_Start_IT()***
- ***HAL_TIMEx_OnePulseN_Stop_IT()***

52.2.7 Peripheral Control functions

This section provides functions allowing to:

- Configure the commutation event in case of use of the Hall sensor interface.
- Configure Output channels for OC and PWM mode.
- Configure Complementary channels, break features and dead time.
- Configure Master synchronization.
- Configure timer remapping capabilities.
- Enable or disable channel grouping

This section contains the following APIs:

- ***HAL_TIMEx_ConfigCommutationEvent()***
- ***HAL_TIMEx_ConfigCommutationEvent_IT()***
- ***HAL_TIMEx_ConfigCommutationEvent_DMA()***
- ***HAL_TIM_OC_ConfigChannel()***
- ***HAL_TIM_PWM_ConfigChannel()***
- ***HAL_TIMEx_MasterConfigSynchronization()***
- ***HAL_TIMEx_ConfigBreakDeadTime()***
- ***HAL_TIMEx_RemapConfig()***
- ***HAL_TIMEx_GroupChannel5()***

52.2.8 Extended Callbacks functions

This section provides Extended TIM callback functions:

- Timer Commutation callback
- Timer Break callback

This section contains the following APIs:

- ***HAL_TIMEx_CommutationCallback()***
- ***HAL_TIMEx_BreakCallback()***
- ***HAL_TIMEx_Break2Callback()***

52.2.9 Extended Peripheral State functions

This subsection permit to get in run-time the status of the peripheral and the data flow.

This section contains the following APIs:

- ***HAL_TIMEx_HallSensor_GetState()***

52.2.10 Detailed description of functions

HAL_TIMEx_HallSensor_Init

Function name	**HAL_StatusTypeDef HAL_TIMEx_HallSensor_Init (TIM_HandleTypeDef * htim, TIM_HallSensor_InitTypeDef * sConfig)**
Function description	Initializes the TIM Hall Sensor Interface and create the associated handle.
Parameters	• **htim:** TIM Encoder Interface handle • **sConfig:** TIM Hall Sensor configuration structure
Return values	• **HAL:** status

HAL_TIMEx_HallSensor_DeInit

Function name	**HAL_StatusTypeDef HAL_TIMEx_HallSensor_DeInit (TIM_HandleTypeDef * htim)**
Function description	DeInitializes the TIM Hall Sensor interface.
Parameters	• **htim:** TIM Hall Sensor handle
Return values	• **HAL:** status

HAL_TIMEx_HallSensor_MspInit

Function name	**void HAL_TIMEx_HallSensor_MspInit (TIM_HandleTypeDef * htim)**
Function description	Initializes the TIM Hall Sensor MSP.
Parameters	• **htim:** TIM handle
Return values	• **None**

HAL_TIMEx_HallSensor_MspDeInit

Function name	**void HAL_TIMEx_HallSensor_MspDeInit (TIM_HandleTypeDef * htim)**
Function description	DeInitializes TIM Hall Sensor MSP.
Parameters	• **htim:** TIM handle
Return values	• **None**

HAL_TIMEx_HallSensor_Start

Function name	**HAL_StatusTypeDef HAL_TIMEx_HallSensor_Start (TIM_HandleTypeDef * htim)**
Function description	Starts the TIM Hall Sensor Interface.
Parameters	• **htim:** TIM Hall Sensor handle
Return values	• **HAL:** status

HAL_TIMEx_HallSensor_Stop

Function name **HAL_StatusTypeDef HAL_TIMEx_HallSensor_Stop (TIM_HandleTypeDef * htim)**

Function description Stops the TIM Hall sensor Interface.

Parameters
- **htim:** TIM Hall Sensor handle

Return values
- **HAL:** status

HAL_TIMEx_HallSensor_Start_IT

Function name **HAL_StatusTypeDef HAL_TIMEx_HallSensor_Start_IT (TIM_HandleTypeDef * htim)**

Function description Starts the TIM Hall Sensor Interface in interrupt mode.

Parameters
- **htim:** TIM Hall Sensor handle

Return values
- **HAL:** status

HAL_TIMEx_HallSensor_Stop_IT

Function name **HAL_StatusTypeDef HAL_TIMEx_HallSensor_Stop_IT (TIM_HandleTypeDef * htim)**

Function description Stops the TIM Hall Sensor Interface in interrupt mode.

Parameters
- **htim:** TIM handle

Return values
- **HAL:** status

HAL_TIMEx_HallSensor_Start_DMA

Function name **HAL_StatusTypeDef HAL_TIMEx_HallSensor_Start_DMA (TIM_HandleTypeDef * htim, uint32_t * pData, uint16_t Length)**

Function description Starts the TIM Hall Sensor Interface in DMA mode.

Parameters
- **htim:** TIM Hall Sensor handle
- **pData:** The destination Buffer address.
- **Length:** The length of data to be transferred from TIM peripheral to memory.

Return values
- **HAL:** status

HAL_TIMEx_HallSensor_Stop_DMA

Function name **HAL_StatusTypeDef HAL_TIMEx_HallSensor_Stop_DMA (TIM_HandleTypeDef * htim)**

Function description Stops the TIM Hall Sensor Interface in DMA mode.

Parameters
- **htim:** TIM handle

Return values
- **HAL:** status

HAL_TIMEx_OCN_Start

Function name
HAL_StatusTypeDef HAL_TIMEx_OCN_Start (TIM_HandleTypeDef * htim, uint32_t Channel)

Function description
Starts the TIM Output Compare signal generation on the complementary output.

Parameters
- **htim:** TIM Output Compare handle
- **Channel:** TIM Channel to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIMEx_OCN_Stop

Function name
HAL_StatusTypeDef HAL_TIMEx_OCN_Stop (TIM_HandleTypeDef * htim, uint32_t Channel)

Function description
Stops the TIM Output Compare signal generation on the complementary output.

Parameters
- **htim:** TIM handle
- **Channel:** TIM Channel to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIMEx_OCN_Start_IT

Function name
HAL_StatusTypeDef HAL_TIMEx_OCN_Start_IT (TIM_HandleTypeDef * htim, uint32_t Channel)

Function description
Starts the TIM Output Compare signal generation in interrupt mode on the complementary output.

Parameters
- **htim:** TIM OC handle
- **Channel:** TIM Channel to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIMEx_OCN_Stop_IT

Function name **HAL_StatusTypeDef HAL_TIMEx_OCN_Stop_IT (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the TIM Output Compare signal generation in interrupt mode on the complementary output.

Parameters
- **htim:** TIM Output Compare handle
- **Channel:** TIM Channel to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIMEx_OCN_Start_DMA

Function name **HAL_StatusTypeDef HAL_TIMEx_OCN_Start_DMA (TIM_HandleTypeDef * htim, uint32_t Channel, uint32_t * pData, uint16_t Length)**

Function description Starts the TIM Output Compare signal generation in DMA mode on the complementary output.

Parameters
- **htim:** TIM Output Compare handle
- **Channel:** TIM Channel to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected
- **pData:** The source Buffer address.
- **Length:** The length of data to be transferred from memory to TIM peripheral

Return values
- **HAL:** status

HAL_TIMEx_OCN_Stop_DMA

Function name **HAL_StatusTypeDef HAL_TIMEx_OCN_Stop_DMA (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the TIM Output Compare signal generation in DMA mode on the complementary output.

Parameters
- **htim:** TIM Output Compare handle
- **Channel:** TIM Channel to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIMEx_PWMN_Start

Function name
HAL_StatusTypeDef HAL_TIMEx_PWMN_Start (TIM_HandleTypeDef * htim, uint32_t Channel)

Function description
Starts the PWM signal generation on the complementary output.

Parameters
- **htim:** TIM handle
- **Channel:** TIM Channel to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIMEx_PWMN_Stop

Function name
HAL_StatusTypeDef HAL_TIMEx_PWMN_Stop (TIM_HandleTypeDef * htim, uint32_t Channel)

Function description
Stops the PWM signal generation on the complementary output.

Parameters
- **htim:** TIM handle
- **Channel:** TIM Channel to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIMEx_PWMN_Start_IT

Function name
HAL_StatusTypeDef HAL_TIMEx_PWMN_Start_IT (TIM_HandleTypeDef * htim, uint32_t Channel)

Function description
Starts the PWM signal generation in interrupt mode on the complementary output.

Parameters
- **htim:** TIM handle
- **Channel:** TIM Channel to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIMEx_PWMN_Stop_IT

Function name **HAL_StatusTypeDef HAL_TIMEx_PWMN_Stop_IT (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the PWM signal generation in interrupt mode on the complementary output.

Parameters
- **htim:** TIM handle
- **Channel:** TIM Channel to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIMEx_PWMN_Start_DMA

Function name **HAL_StatusTypeDef HAL_TIMEx_PWMN_Start_DMA (TIM_HandleTypeDef * htim, uint32_t Channel, uint32_t * pData, uint16_t Length)**

Function description Starts the TIM PWM signal generation in DMA mode on the complementary output.

Parameters
- **htim:** TIM handle
- **Channel:** TIM Channel to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected
- **pData:** The source Buffer address.
- **Length:** The length of data to be transferred from memory to TIM peripheral

Return values
- **HAL:** status

HAL_TIMEx_PWMN_Stop_DMA

Function name **HAL_StatusTypeDef HAL_TIMEx_PWMN_Stop_DMA (TIM_HandleTypeDef * htim, uint32_t Channel)**

Function description Stops the TIM PWM signal generation in DMA mode on the complementary output.

Parameters
- **htim:** TIM handle
- **Channel:** TIM Channel to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected

Return values
- **HAL:** status

HAL_TIMEx_OnePulseN_Start

Function name **HAL_StatusTypeDef HAL_TIMEx_OnePulseN_Start (TIM_HandleTypeDef * htim, uint32_t OutputChannel)**

Function description Starts the TIM One Pulse signal generation on the complemetary output.

Parameters
- **htim:** TIM One Pulse handle
- **OutputChannel:** TIM Channel to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected

Return values
- **HAL:** status

HAL_TIMEx_OnePulseN_Stop

Function name **HAL_StatusTypeDef HAL_TIMEx_OnePulseN_Stop (TIM_HandleTypeDef * htim, uint32_t OutputChannel)**

Function description Stops the TIM One Pulse signal generation on the complementary output.

Parameters
- **htim:** TIM One Pulse handle
- **OutputChannel:** TIM Channel to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected

Return values
- **HAL:** status

HAL_TIMEx_OnePulseN_Start_IT

Function name **HAL_StatusTypeDef HAL_TIMEx_OnePulseN_Start_IT (TIM_HandleTypeDef * htim, uint32_t OutputChannel)**

Function description Starts the TIM One Pulse signal generation in interrupt mode on the complementary channel.

Parameters
- **htim:** TIM One Pulse handle
- **OutputChannel:** TIM Channel to be enabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected

Return values
- **HAL:** status

HAL_TIMEx_OnePulseN_Stop_IT

Function name **HAL_StatusTypeDef HAL_TIMEx_OnePulseN_Stop_IT (TIM_HandleTypeDef * htim, uint32_t OutputChannel)**

Function description Stops the TIM One Pulse signal generation in interrupt mode on the complementary channel.

Parameters
- **htim:** TIM One Pulse handle
- **OutputChannel:** TIM Channel to be disabled This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected

– TIM_CHANNEL_2: TIM Channel 2 selected

Return values
- **HAL:** status

HAL_TIMEx_ConfigCommutationEvent

Function name
HAL_StatusTypeDef HAL_TIMEx_ConfigCommutationEvent (TIM_HandleTypeDef * htim, uint32_t InputTrigger, uint32_t CommutationSource)

Function description
Configure the TIM commutation event sequence.

Parameters
- **htim:** TIM handle
- **InputTrigger:** the Internal trigger corresponding to the Timer Interfacing with the Hall sensor This parameter can be one of the following values:
  – TIM_TS_ITR0: Internal trigger 0 selected
  – TIM_TS_ITR1: Internal trigger 1 selected
  – TIM_TS_ITR2: Internal trigger 2 selected
  – TIM_TS_ITR3: Internal trigger 3 selected
  – TIM_TS_NONE No trigger is needed
- **CommutationSource:** the Commutation Event source This parameter can be one of the following values:
  – TIM_COMMUTATION_TRGI: Commutation source is the TRGI of the Interface Timer
  – TIM_COMMUTATION_SOFTWARE: Commutation source is set by software using the COMG bit

Return values
- **HAL:** status

Notes
- this function is mandatory to use the commutation event in order to update the configuration at each commutation detection on the TRGI input of the Timer, the typical use of this feature is with the use of another Timer(interface Timer) configured in Hall sensor interface, this interface Timer will generate the commutation at its TRGO output (connected to Timer used in this function) each time the TI1 of the Interface Timer detect a commutation at its input TI1.

HAL_TIMEx_ConfigCommutationEvent_IT

Function name
HAL_StatusTypeDef HAL_TIMEx_ConfigCommutationEvent_IT (TIM_HandleTypeDef * htim, uint32_t InputTrigger, uint32_t CommutationSource)

Function description
Configure the TIM commutation event sequence with interrupt.

Parameters
- **htim:** TIM handle
- **InputTrigger:** the Internal trigger corresponding to the Timer Interfacing with the Hall sensor This parameter can be one of the following values:
  – TIM_TS_ITR0: Internal trigger 0 selected
  – TIM_TS_ITR1: Internal trigger 1 selected
  – TIM_TS_ITR2: Internal trigger 2 selected
  – TIM_TS_ITR3: Internal trigger 3 selected
  – TIM_TS_NONE No trigger is needed

- **CommutationSource:** the Commutation Event source This parameter can be one of the following values:
  - TIM_COMMUTATION_TRGI: Commutation source is the TRGI of the Interface Timer
  - TIM_COMMUTATION_SOFTWARE: Commutation source is set by software using the COMG bit

Return values
- **HAL:** status

Notes
- this function is mandatory to use the commutation event in order to update the configuration at each commutation detection on the TRGI input of the Timer, the typical use of this feature is with the use of another Timer(interface Timer) configured in Hall sensor interface, this interface Timer will generate the commutation at its TRGO output (connected to Timer used in this function) each time the TI1 of the Interface Timer detect a commutation at its input TI1.

HAL_TIMEx_ConfigCommutationEvent_DMA

Function name
HAL_StatusTypeDef HAL_TIMEx_ConfigCommutationEvent_DMA (TIM_HandleTypeDef * htim, uint32_t InputTrigger, uint32_t CommutationSource)

Function description
Configure the TIM commutation event sequence with DMA.

Parameters
- **htim:** TIM handle
- **InputTrigger:** the Internal trigger corresponding to the Timer Interfacing with the Hall sensor This parameter can be one of the following values:
  - TIM_TS_ITR0: Internal trigger 0 selected
  - TIM_TS_ITR1: Internal trigger 1 selected
  - TIM_TS_ITR2: Internal trigger 2 selected
  - TIM_TS_ITR3: Internal trigger 3 selected
  - TIM_TS_NONE No trigger is needed
- **CommutationSource:** the Commutation Event source This parameter can be one of the following values:
  - TIM_COMMUTATION_TRGI: Commutation source is the TRGI of the Interface Timer
  - TIM_COMMUTATION_SOFTWARE: Commutation source is set by software using the COMG bit

Return values
- **HAL:** status

Notes
- this function is mandatory to use the commutation event in order to update the configuration at each commutation detection on the TRGI input of the Timer, the typical use of this feature is with the use of another Timer(interface Timer) configured in Hall sensor interface, this interface Timer will generate the commutation at its TRGO output (connected to Timer used in this function) each time the TI1 of the Interface Timer detect a commutation at its input TI1.
- The user should configure the DMA in his own software, in This function only the COMDE bit is set

HAL_TIMEx_MasterConfigSynchronization

Function name
HAL_StatusTypeDef HAL_TIMEx_MasterConfigSynchronization (TIM_HandleTypeDef * htim, TIM_MasterConfigTypeDef * sMasterConfig)

Function description
Configures the TIM in master mode.

Parameters
- **htim:** TIM handle.
- **sMasterConfig:** pointer to a TIM_MasterConfigTypeDef structure that contains the selected trigger output (TRGO) and the Master/Slave mode.

Return values
- **HAL:** status

HAL_TIMEx_ConfigBreakDeadTime

Function name
HAL_StatusTypeDef HAL_TIMEx_ConfigBreakDeadTime (TIM_HandleTypeDef * htim, TIM_BreakDeadTimeConfigTypeDef * sBreakDeadTimeConfig)

Function description
Configures the Break feature, dead time, Lock level, OSSI/OSSR State and the AOE(automatic output enable).

Parameters
- **htim:** TIM handle
- **sBreakDeadTimeConfig:** pointer to a TIM_ConfigBreakDeadConfigTypeDef structure that contains the BDTR Register configuration information for the TIM peripheral.

Return values
- **HAL:** status

Notes
- For STM32F302xC, STM32F302xE, STM32F303xC, STM32F358xx, STM32F303xE, STM32F398xx and STM32F303x8 two break inputs can be configured.

HAL_TIMEx_RemapConfig

Function name
HAL_StatusTypeDef HAL_TIMEx_RemapConfig (TIM_HandleTypeDef * htim, uint32_t Remap1, uint32_t Remap2)

Function description
Configures the TIM1, TIM8 and TIM16 Remapping input capabilities.

Parameters
- **htim:** TIM handle.
- **Remap1:** specifies the first TIM remapping source. This parameter can be one of the following values:
  - TIM_TIM1_ADC1_NONE TIM1_ETR is not connected to any AWD (analog watchdog)
  - TIM_TIM1_ADC1_AWD1: TIM1_ETR is connected to ADC1 AWD1
  - TIM_TIM1_ADC1_AWD2: TIM1_ETR is connected to ADC1 AWD2
  - TIM_TIM1_ADC1_AWD3: TIM1_ETR is connected to ADC1 AWD3
  - TIM_TIM8_ADC2_NONE TIM8_ETR is not connected to any AWD

  - TIM_TIM8_ADC2_AWD1: TIM8_ETR is connected to ADC2 AWD1
  - TIM_TIM8_ADC2_AWD2: TIM8_ETR is connected to ADC2 AWD2
  - TIM_TIM8_ADC2_AWD3: TIM8_ETR is connected to ADC2 AWD3
  - TIM_TIM16_GPIO: TIM16 TI1 is connected to GPIO
  - TIM_TIM16_RTC: TIM16 TI1 is connected to RTC clock
  - TIM_TIM16_HSE: TIM16 TI1 is connected to HSE/32
  - TIM_TIM16_MCO: TIM16 TI1 is connected to MCO
- **Remap2:** specifies the second TIMremapping source (if any). This parameter can be one of the following values:
  - TIM_TIM1_ADC4_NONE TIM1_ETR is not connected to any AWD (analog watchdog)
  - TIM_TIM1_ADC4_AWD1: TIM1_ETR is connected to ADC4 AWD1
  - TIM_TIM1_ADC4_AWD2: TIM1_ETR is connected to ADC4 AWD2
  - TIM_TIM1_ADC4_AWD3: TIM1_ETR is connected to ADC4 AWD3
  - TIM_TIM8_ADC3_NONE TIM8_ETR is not connected to any AWD
  - TIM_TIM8_ADC3_AWD1: TIM8_ETR is connected to ADC3 AWD1
  - TIM_TIM8_ADC3_AWD2: TIM8_ETR is connected to ADC3 AWD2
  - TIM_TIM8_ADC3_AWD3: TIM8_ETR is connected to ADC3 AWD3

Return values
- **HAL:** status

HAL_TIMEx_GroupChannel5

Function name
HAL_StatusTypeDef HAL_TIMEx_GroupChannel5 (TIM_HandleTypeDef * htim, uint32_t Channels)

Function description
Group channel 5 and channel 1, 2 or 3.

Parameters
- **htim:** TIM handle.
- **Channels:** specifies the reference signal(s) the OC5REF is combined with. This parameter can be any combination of the following values: TIM_GROUPCH5_NONE No effect of OC5REF on OC1REFC, OC2REFC and OC3REFC TIM_GROUPCH5_OC1REFC: OC1REFC is the logical AND of OC1REFC and OC5REF TIM_GROUPCH5_OC2REFC: OC2REFC is the logical AND of OC2REFC and OC5REF TIM_GROUPCH5_OC3REFC: OC3REFC is the logical AND of OC3REFC and OC5REF

Return values
- **HAL:** status

HAL_TIMEx_CommutationCallback

Function name	**void HAL_TIMEx_CommutationCallback (TIM_HandleTypeDef * htim)**
Function description	Hall commutation changed callback in non blocking mode.
Parameters	• **htim:** TIM handle
Return values	• **None**

HAL_TIMEx_BreakCallback

Function name	**void HAL_TIMEx_BreakCallback (TIM_HandleTypeDef * htim)**
Function description	Hall Break detection callback in non blocking mode.
Parameters	• **htim:** TIM handle
Return values	• **None**

HAL_TIMEx_Break2Callback

Function name	**void HAL_TIMEx_Break2Callback (TIM_HandleTypeDef * htim)**
Function description	Hall Break2 detection callback in non blocking mode.
Parameters	• **htim:** TIM handle
Return values	• **None**

HAL_TIMEx_HallSensor_GetState

Function name	**HAL_TIM_StateTypeDef HAL_TIMEx_HallSensor_GetState (TIM_HandleTypeDef * htim)**
Function description	Return the TIM Hall Sensor interface state.
Parameters	• **htim:** TIM Hall Sensor handle
Return values	• **HAL:** state

TIMEx_DMACommutationCplt

Function name	**void TIMEx_DMACommutationCplt (DMA_HandleTypeDef * hdma)**
Function description	TIM DMA Commutation callback.
Parameters	• **hdma:** pointer to DMA handle.
Return values	• **None**

52.3 TIMEx Firmware driver defines

52.3.1 TIMEx

TIMEX Break input 2 Enable

TIM_BREAK2_DISABLE

TIM_BREAK2_ENABLE

TIMEx Break Input 2 Polarity

TIM_BREAK2POLARITY_LOW

TIM_BREAK2POLARITY_HIGH

TIMEx Channel

TIM_CHANNEL_1

TIM_CHANNEL_2

TIM_CHANNEL_3

TIM_CHANNEL_4

TIM_CHANNEL_5

TIM_CHANNEL_6

TIM_CHANNEL_ALL

TIMEx Clear Input Source

TIM_CLEARINPUTSOURCE_ETR

TIM_CLEARINPUTSOURCE_OCREFCLR

TIM_CLEARINPUTSOURCE_NONE

TIMEx Exported Macros

__HAL_TIM_SET_COMPARE

Description:

- Sets the TIM Capture Compare Register value on runtime without calling another time ConfigChannel function.

Parameters:

- __HANDLE__: TIM handle.
- __CHANNEL__: TIM Channels to be configured. This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected
  - TIM_CHANNEL_5: TIM Channel 5 selected
  - TIM_CHANNEL_6: TIM Channel 6 selected
- __COMPARE__: specifies the Capture Compare register new value.

Return value:

- None

__HAL_TIM_GET_COMPARE

Description:

- Gets the TIM Capture Compare Register

value on runtime.

Parameters:

- __HANDLE__: TIM handle.
- __CHANNEL__: TIM Channel associated with the capture compare register This parameter can be one of the following values:
  - TIM_CHANNEL_1: get capture/compare 1 register value
  - TIM_CHANNEL_2: get capture/compare 2 register value
  - TIM_CHANNEL_3: get capture/compare 3 register value
  - TIM_CHANNEL_4: get capture/compare 4 register value
  - TIM_CHANNEL_5: get capture/compare 5 register value
  - TIM_CHANNEL_6: get capture/compare 6 register value

Return value:

- None

__HAL_TIM_ENABLE_OCxPRELOAD

Description:

- Sets the TIM Output compare preload.

Parameters:

- __HANDLE__: TIM handle.
- __CHANNEL__: TIM Channels to be configured. This parameter can be one of the following values:
  - TIM_CHANNEL_1: TIM Channel 1 selected
  - TIM_CHANNEL_2: TIM Channel 2 selected
  - TIM_CHANNEL_3: TIM Channel 3 selected
  - TIM_CHANNEL_4: TIM Channel 4 selected
  - TIM_CHANNEL_5: TIM Channel 5 selected
  - TIM_CHANNEL_6: TIM Channel 6 selected

Return value:

- None

__HAL_TIM_DISABLE_OCxPRELOAD

Description:

- Resets the TIM Output compare preload.

Parameters:

- __HANDLE__: TIM handle.
- __CHANNEL__: TIM Channels to be

configured. This parameter can be one of the following values:
- TIM_CHANNEL_1: TIM Channel 1 selected
- TIM_CHANNEL_2: TIM Channel 2 selected
- TIM_CHANNEL_3: TIM Channel 3 selected
- TIM_CHANNEL_4: TIM Channel 4 selected
- TIM_CHANNEL_5: TIM Channel 5 selected
- TIM_CHANNEL_6: TIM Channel 6 selected

Return value:

- None

Group Channel 5 and Channel 1U, 2 or 3

TIM_GROUPCH5_NONE	No effect of OC5REF on OC1REFC, OC2REFC and OC3REFC
TIM_GROUPCH5_OC1REFC	OC1REFC is the logical AND of OC1REFC and OC5REF
TIM_GROUPCH5_OC2REFC	OC2REFC is the logical AND of OC2REFC and OC5REF
TIM_GROUPCH5_OC3REFC	OC3REFC is the logical AND of OC3REFC and OC5REF

TIMEx Master Mode Selection 2 (TRGO2)

TIM_TRGO2_RESET

TIM_TRGO2_ENABLE

TIM_TRGO2_UPDATE

TIM_TRGO2_OC1

TIM_TRGO2_OC1REF

TIM_TRGO2_OC2REF

TIM_TRGO2_OC3REF

TIM_TRGO2_OC4REF

TIM_TRGO2_OC5REF

TIM_TRGO2_OC6REF

TIM_TRGO2_OC4REF_RISINGFALLING

TIM_TRGO2_OC6REF_RISINGFALLING

TIM_TRGO2_OC4REF_RISING_OC6REF_RISING

TIM_TRGO2_OC4REF_RISING_OC6REF_FALLING

TIM_TRGO2_OC5REF_RISING_OC6REF_RISING

TIM_TRGO2_OC5REF_RISING_OC6REF_FALLING

TIMEx Output Compare and PWM Modes

TIM_OCMODE_TIMING

TIM_OCMODE_ACTIVE

TIM_OCMODE_INACTIVE

TIM_OCMODE_TOGGLE

TIM_OCMODE_PWM1

TIM_OCMODE_PWM2

TIM_OCMODE_FORCED_ACTIVE

TIM_OCMODE_FORCED_INACTIVE

TIM_OCMODE_RETRIGERRABLE_OPM1

TIM_OCMODE_RETRIGERRABLE_OPM2

TIM_OCMODE_COMBINED_PWM1

TIM_OCMODE_COMBINED_PWM2

TIM_OCMODE_ASSYMETRIC_PWM1

TIM_OCMODE_ASSYMETRIC_PWM2

TIMEx Remapping 1

TIM_TIM1_ADC1_NONE	TIM1_ETR is not connected to any AWD (analog watchdog)
TIM_TIM1_ADC1_AWD1	TIM1_ETR is connected to ADC1 AWD1
TIM_TIM1_ADC1_AWD2	TIM1_ETR is connected to ADC1 AWD2
TIM_TIM1_ADC1_AWD3	TIM1_ETR is connected to ADC1 AWD3
TIM_TIM8_ADC2_NONE	TIM8_ETR is not connected to any AWD (analog watchdog)
TIM_TIM8_ADC2_AWD1	TIM8_ETR is connected to ADC2 AWD1
TIM_TIM8_ADC2_AWD2	TIM8_ETR is connected to ADC2 AWD2
TIM_TIM8_ADC2_AWD3	TIM8_ETR is connected to ADC2 AWD3
TIM_TIM16_GPIO	TIM16 TI1 is connected to GPIO
TIM_TIM16_RTC	TIM16 TI1 is connected to RTC_clock
TIM_TIM16_HSE	TIM16 TI1 is connected to HSE/32U
TIM_TIM16_MCO	TIM16 TI1 is connected to MCO

TIMEx Remapping 2

TIM_TIM1_ADC4_NONE	TIM1_ETR is not connected to any AWD (analog watchdog)
TIM_TIM1_ADC4_AWD1	TIM1_ETR is connected to ADC4 AWD1
TIM_TIM1_ADC4_AWD2	TIM1_ETR is connected to ADC4 AWD2
TIM_TIM1_ADC4_AWD3	TIM1_ETR is connected to ADC4 AWD3
TIM_TIM8_ADC3_NONE	TIM8_ETR is not connected to any AWD (analog watchdog)
TIM_TIM8_ADC3_AWD1	TIM8_ETR is connected to ADC3 AWD1
TIM_TIM8_ADC3_AWD2	TIM8_ETR is connected to ADC3 AWD2
TIM_TIM8_ADC3_AWD3	TIM8_ETR is connected to ADC3 AWD3
TIM_TIM16_NONE	Non significant value for TIM16U

TIMEx Slave mode

TIM_SLAVEMODE_DISABLE

TIM_SLAVEMODE_RESET

TIM_SLAVEMODE_GATED

TIM_SLAVEMODE_TRIGGER

TIM_SLAVEMODE_EXTERNAL1

TIM_SLAVEMODE_COMBINED_RESETTRIGGER

53 HAL TSC Generic Driver

53.1 TSC Firmware driver registers structures

53.1.1 TSC_InitTypeDef

Data Fields

- ***uint32_t CTPulseHighLength***
- ***uint32_t CTPulseLowLength***
- ***uint32_t SpreadSpectrum***
- ***uint32_t SpreadSpectrumDeviation***
- ***uint32_t SpreadSpectrumPrescaler***
- ***uint32_t PulseGeneratorPrescaler***
- ***uint32_t MaxCountValue***
- ***uint32_t IODefaultMode***
- ***uint32_t SynchroPinPolarity***
- ***uint32_t AcquisitionMode***
- ***uint32_t MaxCountInterrupt***
- ***uint32_t ChannelIOs***
- ***uint32_t ShieldIOs***
- ***uint32_t SamplingIOs***

Field Documentation

- ***uint32_t TSC_InitTypeDef::CTPulseHighLength***
  Charge-transfer high pulse length This parameter can be a value of ***TSC_CTPulseHL_Config***
- ***uint32_t TSC_InitTypeDef::CTPulseLowLength***
  Charge-transfer low pulse length This parameter can be a value of ***TSC_CTPulseLL_Config***
- ***uint32_t TSC_InitTypeDef::SpreadSpectrum***
  Spread spectrum activation This parameter can be a value of ***TSC_CTPulseLL_Config***
- ***uint32_t TSC_InitTypeDef::SpreadSpectrumDeviation***
  Spread spectrum deviation This parameter must be a number between Min_Data = 0 and Max_Data = 127U
- ***uint32_t TSC_InitTypeDef::SpreadSpectrumPrescaler***
  Spread spectrum prescaler This parameter can be a value of ***TSC_SpreadSpec_Prescaler***
- ***uint32_t TSC_InitTypeDef::PulseGeneratorPrescaler***
  Pulse generator prescaler This parameter can be a value of ***TSC_PulseGenerator_Prescaler***
- ***uint32_t TSC_InitTypeDef::MaxCountValue***
  Max count value This parameter can be a value of ***TSC_MaxCount_Value***
- ***uint32_t TSC_InitTypeDef::IODefaultMode***
  IO default mode This parameter can be a value of ***TSC_IO_Default_Mode***
- ***uint32_t TSC_InitTypeDef::SynchroPinPolarity***
  Synchro pin polarity This parameter can be a value of ***TSC_Synchro_Pin_Polarity***
- ***uint32_t TSC_InitTypeDef::AcquisitionMode***
  Acquisition mode This parameter can be a value of ***TSC_Acquisition_Mode***
- ***uint32_t TSC_InitTypeDef::MaxCountInterrupt***
  Max count interrupt activation This parameter can be set to ENABLE or DISABLE.

- ***uint32_t TSC_InitTypeDef::ChannelIOs***
  Channel IOs mask
- ***uint32_t TSC_InitTypeDef::ShieldIOs***
  Shield IOs mask
- ***uint32_t TSC_InitTypeDef::SamplingIOs***
  Sampling IOs mask

53.1.2 TSC_IOConfigTypeDef

Data Fields

- ***uint32_t ChannelIOs***
- ***uint32_t ShieldIOs***
- ***uint32_t SamplingIOs***

Field Documentation

- ***uint32_t TSC_IOConfigTypeDef::ChannelIOs***
  Channel IOs mask
- ***uint32_t TSC_IOConfigTypeDef::ShieldIOs***
  Shield IOs mask
- ***uint32_t TSC_IOConfigTypeDef::SamplingIOs***
  Sampling IOs mask

53.1.3 TSC_HandleTypeDef

Data Fields

- ***TSC_TypeDef * Instance***
- ***TSC_InitTypeDef Init***
- ***__IO HAL_TSC_StateTypeDef State***
- ***HAL_LockTypeDef Lock***

Field Documentation

- ***TSC_TypeDef* TSC_HandleTypeDef::Instance***
  Register base address
- ***TSC_InitTypeDef TSC_HandleTypeDef::Init***
  Initialization parameters
- ***__IO HAL_TSC_StateTypeDef TSC_HandleTypeDef::State***
  Peripheral state
- ***HAL_LockTypeDef TSC_HandleTypeDef::Lock***
  Lock feature

53.2 TSC Firmware driver API description

53.2.1 TSC specific features

1. Proven and robust surface charge transfer acquisition principle
2. Supports up to 3 capacitive sensing channels per group
3. Capacitive sensing channels can be acquired in parallel offering a very good response time
4. Spread spectrum feature to improve system robustness in noisy environments
5. Full hardware management of the charge transfer acquisition sequence
6. Programmable charge transfer frequency
7. Programmable sampling capacitor I/O pin
8. Programmable channel I/O pin
9. Programmable max count value to avoid long acquisition when a channel is faulty

10. Dedicated end of acquisition and max count error flags with interrupt capability
11. One sampling capacitor for up to 3 capacitive sensing channels to reduce the system components
12. Compatible with proximity, touchkey, linear and rotary touch sensor implementation

53.2.2 How to use this driver

1. Enable the TSC interface clock using __HAL_RCC_TSC_CLK_ENABLE() macro.
2. GPIO pins configuration
   - Enable the clock for the TSC GPIOs using __HAL_RCC_GPIOx_CLK_ENABLE() macro.
   - Configure the TSC pins used as sampling IOs in alternate function output Open-Drain mode, and TSC pins used as channel/shield IOs in alternate function output Push-Pull mode using HAL_GPIO_Init() function.
3. Interrupts configuration
   - Configure the NVIC (if the interrupt model is used) using HAL_NVIC_SetPriority() and HAL_NVIC_EnableIRQ() and function.
4. TSC configuration
   - Configure all TSC parameters and used TSC IOs using HAL_TSC_Init() function.

Acquisition sequence

- Discharge all IOs using HAL_TSC_IODischarge() function.
- Wait a certain time allowing a good discharge of all capacitors. This delay depends of the sampling capacitor and electrodes design.
- Select the channel IOs to be acquired using HAL_TSC_IOConfig() function.
- Launch the acquisition using either HAL_TSC_Start() or HAL_TSC_Start_IT() function. If the synchronized mode is selected, the acquisition will start as soon as the signal is received on the synchro pin.
- Wait the end of acquisition using either HAL_TSC_PollForAcquisition() or HAL_TSC_GetState() function or using WFI instruction for example.
- Check the group acquisition status using HAL_TSC_GroupGetStatus() function.
- Read the acquisition value using HAL_TSC_GroupGetValue() function.

53.2.3 Initialization and de-initialization functions

This section provides functions allowing to:

- Initialize and configure the TSC.
- De-initialize the TSC.

This section contains the following APIs:

- ***HAL_TSC_Init()***
- ***HAL_TSC_DeInit()***
- ***HAL_TSC_MspInit()***
- ***HAL_TSC_MspDeInit()***

53.2.4 IO Operation functions

This section provides functions allowing to:

- Start acquisition in polling mode.
- Start acquisition in interrupt mode.
- Stop conversion in polling mode.
- Stop conversion in interrupt mode.
- Poll for acquisition completed.
- Get group acquisition status.

- Get group acquisition value.

This section contains the following APIs:

- ***HAL_TSC_Start()***
- ***HAL_TSC_Start_IT()***
- ***HAL_TSC_Stop()***
- ***HAL_TSC_Stop_IT()***
- ***HAL_TSC_PollForAcquisition()***
- ***HAL_TSC_GroupGetStatus()***
- ***HAL_TSC_GroupGetValue()***

53.2.5 Peripheral Control functions

This section provides functions allowing to:

- Configure TSC IOs
- Discharge TSC IOs

This section contains the following APIs:

- ***HAL_TSC_IOConfig()***
- ***HAL_TSC_IODischarge()***

53.2.6 State and Errors functions

This subsection provides functions allowing to

- Get TSC state.

This section contains the following APIs:

- ***HAL_TSC_GetState()***

53.2.7 Detailed description of functions

HAL_TSC_Init

Function name	**HAL_StatusTypeDef HAL_TSC_Init (TSC_HandleTypeDef * htsc)**
Function description	Initialize the TSC peripheral according to the specified parameters in the TSC_InitTypeDef structure and initialize the associated handle.
Parameters	• **htsc:** TSC handle
Return values	• **HAL:** status

HAL_TSC_DeInit

Function name	**HAL_StatusTypeDef HAL_TSC_DeInit (TSC_HandleTypeDef * htsc)**
Function description	Deinitialize the TSC peripheral registers to their default reset values.
Parameters	• **htsc:** TSC handle
Return values	• **HAL:** status

HAL_TSC_MspInit

Function name **void HAL_TSC_MspInit (TSC_HandleTypeDef * htsc)**

Function description Initialize the TSC MSP.

Parameters
- **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.

Return values
- **None**

HAL_TSC_MspDeInit

Function name **void HAL_TSC_MspDeInit (TSC_HandleTypeDef * htsc)**

Function description DeInitialize the TSC MSP.

Parameters
- **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.

Return values
- **None**

HAL_TSC_Start

Function name **HAL_StatusTypeDef HAL_TSC_Start (TSC_HandleTypeDef * htsc)**

Function description Start the acquisition.

Parameters
- **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.

Return values
- **HAL:** status

HAL_TSC_Start_IT

Function name **HAL_StatusTypeDef HAL_TSC_Start_IT (TSC_HandleTypeDef * htsc)**

Function description Start the acquisition in interrupt mode.

Parameters
- **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.

Return values
- **HAL:** status.

HAL_TSC_Stop

Function name **HAL_StatusTypeDef HAL_TSC_Stop (TSC_HandleTypeDef * htsc)**

Function description Stop the acquisition previously launched in polling mode.

Parameters
- **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.

Return values
- **HAL:** status

HAL_TSC_Stop_IT

Function name **HAL_StatusTypeDef HAL_TSC_Stop_IT (TSC_HandleTypeDef * htsc)**

Function description Stop the acquisition previously launched in interrupt mode.

Parameters
- **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.

Return values
- **HAL:** status

HAL_TSC_PollForAcquisition

Function name **HAL_StatusTypeDef HAL_TSC_PollForAcquisition (TSC_HandleTypeDef * htsc)**

Function description Start acquisition and wait until completion.

Parameters
- **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.

Return values
- **HAL:** state

Notes
- There is no need of a timeout parameter as the max count error is already managed by the TSC peripheral.

HAL_TSC_GroupGetStatus

Function name **TSC_GroupStatusTypeDef HAL_TSC_GroupGetStatus (TSC_HandleTypeDef * htsc, uint32_t gx_index)**

Function description Get the acquisition status for a group.

Parameters
- **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.
- **gx_index:** Index of the group

Return values
- **Group:** status

HAL_TSC_GroupGetValue

Function name **uint32_t HAL_TSC_GroupGetValue (TSC_HandleTypeDef * htsc, uint32_t gx_index)**

Function description Get the acquisition measure for a group.

Parameters
- **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.
- **gx_index:** Index of the group

Return values
- **Acquisition:** measure

HAL_TSC_IOConfig

Function name **HAL_StatusTypeDef HAL_TSC_IOConfig (TSC_HandleTypeDef * htsc, TSC_IOConfigTypeDef * config)**

Function description Configure TSC IOs.

Parameters
- **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.

- **config:** pointer to the configuration structure.

Return values
- **HAL:** status

HAL_TSC_IODischarge

Function name **HAL_StatusTypeDef HAL_TSC_IODischarge (TSC_HandleTypeDef * htsc, uint32_t choice)**

Function description Discharge TSC IOs.

Parameters
- **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.
- **choice:** enable or disable

Return values
- **HAL:** status

HAL_TSC_GetState

Function name **HAL_TSC_StateTypeDef HAL_TSC_GetState (TSC_HandleTypeDef * htsc)**

Function description Return the TSC handle state.

Parameters
- **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.

Return values
- **HAL:** state

HAL_TSC_IRQHandler

Function name **void HAL_TSC_IRQHandler (TSC_HandleTypeDef * htsc)**

Function description Handle TSC interrupt request.

Parameters
- **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.

Return values
- **None**

HAL_TSC_ConvCpltCallback

Function name **void HAL_TSC_ConvCpltCallback (TSC_HandleTypeDef * htsc)**

Function description Acquisition completed callback in non-blocking mode.

Parameters
- **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.

Return values
- **None**

HAL_TSC_ErrorCallback

Function name	**void HAL_TSC_ErrorCallback (TSC_HandleTypeDef * htsc)**
Function description	Error callback in non-blocking mode.
Parameters	• **htsc:** pointer to a TSC_HandleTypeDef structure that contains the configuration information for the specified TSC.
Return values	• **None**

53.3 TSC Firmware driver defines

53.3.1 TSC

Acquisition Mode

TSC_ACQ_MODE_NORMAL

TSC_ACQ_MODE_SYNCHRO

CTPulse High Length

TSC_CTPH_1CYCLE

TSC_CTPH_2CYCLES

TSC_CTPH_3CYCLES

TSC_CTPH_4CYCLES

TSC_CTPH_5CYCLES

TSC_CTPH_6CYCLES

TSC_CTPH_7CYCLES

TSC_CTPH_8CYCLES

TSC_CTPH_9CYCLES

TSC_CTPH_10CYCLES

TSC_CTPH_11CYCLES

TSC_CTPH_12CYCLES

TSC_CTPH_13CYCLES

TSC_CTPH_14CYCLES

TSC_CTPH_15CYCLES

TSC_CTPH_16CYCLES

CTPulse Low Length

TSC_CTPL_1CYCLE

TSC_CTPL_2CYCLES

TSC_CTPL_3CYCLES

TSC_CTPL_4CYCLES

TSC_CTPL_5CYCLES

TSC_CTPL_6CYCLES

TSC_CTPL_7CYCLES

TSC_CTPL_8CYCLES

TSC_CTPL_9CYCLES

TSC_CTPL_10CYCLES

TSC_CTPL_11CYCLES

TSC_CTPL_12CYCLES

TSC_CTPL_13CYCLES

TSC_CTPL_14CYCLES

TSC_CTPL_15CYCLES

TSC_CTPL_16CYCLES

TSC Exported Macros

__HAL_TSC_RESET_HANDLE_STATE

Description:

- Reset TSC handle state.

Parameters:

- __HANDLE__: TSC handle

Return value:

- None

__HAL_TSC_ENABLE

Description:

- Enable the TSC peripheral.

Parameters:

- __HANDLE__: TSC handle

Return value:

- None

__HAL_TSC_DISABLE

Description:

- Disable the TSC peripheral.

Parameters:

- __HANDLE__: TSC handle

Return value:

- None

__HAL_TSC_START_ACQ

Description:

- Start acquisition.

Parameters:

- __HANDLE__: TSC handle

Return value:

- None

__HAL_TSC_STOP_ACQ

Description:

- Stop acquisition.

Parameters:

- __HANDLE__: TSC handle

Return value:

- None

__HAL_TSC_SET_IODEF_OUTPPLOW

Description:

- Set IO default mode to output push-pull low.

Parameters:

- __HANDLE__: TSC handle

Return value:

- None

__HAL_TSC_SET_IODEF_INFLOAT

Description:

- Set IO default mode to input floating.

Parameters:

- __HANDLE__: TSC handle

Return value:

- None

__HAL_TSC_SET_SYNC_POL_FALL

Description:

- Set synchronization polarity to falling edge.

Parameters:

- __HANDLE__: TSC handle

Return value:

- None

__HAL_TSC_SET_SYNC_POL_RISE_HIGH

Description:

- Set synchronization polarity to rising edge and high level.

Parameters:

- __HANDLE__: TSC handle

Return value:

- None

__HAL_TSC_ENABLE_IT

Description:

- Enable TSC interrupt.

Parameters:

- __HANDLE__: TSC handle

- __INTERRUPT__: TSC interrupt

Return value:

- None

__HAL_TSC_DISABLE_IT

Description:

- Disable TSC interrupt.

Parameters:

- __HANDLE__: TSC handle
- __INTERRUPT__: TSC interrupt

Return value:

- None

__HAL_TSC_GET_IT_SOURCE

Description:

- Check whether the specified TSC interrupt source is enabled or not.

Parameters:

- __HANDLE__: TSC Handle
- __INTERRUPT__: TSC interrupt

Return value:

- SET: or RESET

__HAL_TSC_GET_FLAG

Description:

- Check whether the specified TSC flag is set or not.

Parameters:

- __HANDLE__: TSC handle
- __FLAG__: TSC flag

Return value:

- SET: or RESET

__HAL_TSC_CLEAR_FLAG

Description:

- Clear the TSC's pending flag.

Parameters:

- __HANDLE__: TSC handle
- __FLAG__: TSC flag

Return value:

- None

__HAL_TSC_ENABLE_HYSTERESIS

Description:

- Enable schmitt trigger hysteresis on a group of IOs.

Parameters:

- __HANDLE__: TSC handle

- __GX_IOY_MASK__: IOs mask

Return value:

- None

__HAL_TSC_DISABLE_HYSTERESIS

Description:

- Disable schmitt trigger hysteresis on a group of IOs.

Parameters:

- __HANDLE__: TSC handle
- __GX_IOY_MASK__: IOs mask

Return value:

- None

__HAL_TSC_OPEN_ANALOG_SWITCH

Description:

- Open analog switch on a group of IOs.

Parameters:

- __HANDLE__: TSC handle
- __GX_IOY_MASK__: IOs mask

Return value:

- None

__HAL_TSC_CLOSE_ANALOG_SWITCH

Description:

- Close analog switch on a group of IOs.

Parameters:

- __HANDLE__: TSC handle
- __GX_IOY_MASK__: IOs mask

Return value:

- None

__HAL_TSC_ENABLE_CHANNEL

Description:

- Enable a group of IOs in channel mode.

Parameters:

- __HANDLE__: TSC handle
- __GX_IOY_MASK__: IOs mask

Return value:

- None

__HAL_TSC_DISABLE_CHANNEL

Description:

- Disable a group of channel IOs.

Parameters:

- __HANDLE__: TSC handle
- __GX_IOY_MASK__: IOs mask

Return value:

- None

__HAL_TSC_ENABLE_SAMPLING

Description:

- Enable a group of IOs in sampling mode.

Parameters:

- __HANDLE__: TSC handle
- __GX_IOY_MASK__: IOs mask

Return value:

- None

__HAL_TSC_DISABLE_SAMPLING

Description:

- Disable a group of sampling IOs.

Parameters:

- __HANDLE__: TSC handle
- __GX_IOY_MASK__: IOs mask

Return value:

- None

__HAL_TSC_ENABLE_GROUP

Description:

- Enable acquisition groups.

Parameters:

- __HANDLE__: TSC handle
- __GX_MASK__: Groups mask

Return value:

- None

__HAL_TSC_DISABLE_GROUP

Description:

- Disable acquisition groups.

Parameters:

- __HANDLE__: TSC handle
- __GX_MASK__: Groups mask

Return value:

- None

__HAL_TSC_GET_GROUP_STATUS

Description:

- Gets acquisition group status.

Parameters:

- __HANDLE__: TSC Handle
- __GX_INDEX__: Group index

Return value:

- SET: or RESET

Flags definition

TSC_FLAG_EOA

TSC_FLAG_MCE

Group definition

TSC_NB_OF_GROUPS

TSC_GROUP1

TSC_GROUP2

TSC_GROUP3

TSC_GROUP4

TSC_GROUP5

TSC_GROUP6

TSC_GROUP7

TSC_GROUP8

TSC_ALL_GROUPS

TSC_GROUP1_IDX

TSC_GROUP2_IDX

TSC_GROUP3_IDX

TSC_GROUP4_IDX

TSC_GROUP5_IDX

TSC_GROUP6_IDX

TSC_GROUP7_IDX

TSC_GROUP8_IDX

TSC_GROUP1_IO1

TSC_GROUP1_IO2

TSC_GROUP1_IO3

TSC_GROUP1_IO4

TSC_GROUP1_ALL_IOS

TSC_GROUP2_IO1

TSC_GROUP2_IO2

TSC_GROUP2_IO3

TSC_GROUP2_IO4

TSC_GROUP2_ALL_IOS

TSC_GROUP3_IO1

TSC_GROUP3_IO2

TSC_GROUP3_IO3

TSC_GROUP3_IO4

TSC_GROUP3_ALL_IOS
TSC_GROUP4_IO1
TSC_GROUP4_IO2
TSC_GROUP4_IO3
TSC_GROUP4_IO4
TSC_GROUP4_ALL_IOS
TSC_GROUP5_IO1
TSC_GROUP5_IO2
TSC_GROUP5_IO3
TSC_GROUP5_IO4
TSC_GROUP5_ALL_IOS
TSC_GROUP6_IO1
TSC_GROUP6_IO2
TSC_GROUP6_IO3
TSC_GROUP6_IO4
TSC_GROUP6_ALL_IOS
TSC_GROUP7_IO1
TSC_GROUP7_IO2
TSC_GROUP7_IO3
TSC_GROUP7_IO4
TSC_GROUP7_ALL_IOS
TSC_GROUP8_IO1
TSC_GROUP8_IO2
TSC_GROUP8_IO3
TSC_GROUP8_IO4
TSC_GROUP8_ALL_IOS
TSC_ALL_GROUPS_ALL_IOS

Interrupts definition

TSC_IT_EOA
TSC_IT_MCE

IO Default Mode

TSC_IODEF_OUT_PP_LOW
TSC_IODEF_IN_FLOAT

IO Mode

TSC_IOMODE_UNUSED
TSC_IOMODE_CHANNEL

TSC_IOMODE_SHIELD

TSC_IOMODE_SAMPLING

Max Count Value

TSC_MCV_255

TSC_MCV_511

TSC_MCV_1023

TSC_MCV_2047

TSC_MCV_4095

TSC_MCV_8191

TSC_MCV_16383

Pulse Generator Prescaler

TSC_PG_PRESC_DIV1

TSC_PG_PRESC_DIV2

TSC_PG_PRESC_DIV4

TSC_PG_PRESC_DIV8

TSC_PG_PRESC_DIV16

TSC_PG_PRESC_DIV32

TSC_PG_PRESC_DIV64

TSC_PG_PRESC_DIV128

Spread Spectrum Prescaler

TSC_SS_PRESC_DIV1

TSC_SS_PRESC_DIV2

Synchro Pin Polarity

TSC_SYNC_POLARITY_FALLING

TSC_SYNC_POLARITY_RISING

54 HAL UART Generic Driver

54.1 UART Firmware driver registers structures

54.1.1 UART_InitTypeDef

Data Fields

- ***uint32_t BaudRate***
- ***uint32_t WordLength***
- ***uint32_t StopBits***
- ***uint32_t Parity***
- ***uint32_t Mode***
- ***uint32_t HwFlowCtl***
- ***uint32_t OverSampling***
- ***uint32_t OneBitSampling***

Field Documentation

- ***uint32_t UART_InitTypeDef::BaudRate***
  This member configures the UART communication baud rate. The baud rate register is computed using the following formula:If oversampling is 16 or in LIN mode, Baud Rate Register = ((PCLKx) / ((huart->Init.BaudRate)))If oversampling is 8U, Baud Rate Register[15:4] = ((2U * PCLKx) / ((huart->Init.BaudRate)))[15:4] Baud Rate Register[3] = 0 Baud Rate Register[2:0] = (((2U * PCLKx) / ((huart->Init.BaudRate)))[3:0]) >> 1
- ***uint32_t UART_InitTypeDef::WordLength***
  Specifies the number of data bits transmitted or received in a frame. This parameter can be a value of ***UARTEx_Word_Length***.
- ***uint32_t UART_InitTypeDef::StopBits***
  Specifies the number of stop bits transmitted. This parameter can be a value of ***UART_Stop_Bits***.
- ***uint32_t UART_InitTypeDef::Parity***
  Specifies the parity mode. This parameter can be a value of ***UART_Parity***
  Note: When parity is enabled, the computed parity is inserted at the MSB position of the transmitted data (9th bit when the word length is set to 9 data bits; 8th bit when the word length is set to 8 data bits).
- ***uint32_t UART_InitTypeDef::Mode***
  Specifies whether the Receive or Transmit mode is enabled or disabled. This parameter can be a value of ***UART_Mode***.
- ***uint32_t UART_InitTypeDef::HwFlowCtl***
  Specifies whether the hardware flow control mode is enabled or disabled. This parameter can be a value of ***UART_Hardware_Flow_Control***.
- ***uint32_t UART_InitTypeDef::OverSampling***
  Specifies whether the Over sampling 8 is enabled or disabled, to achieve higher speed (up to f_PCLK/8U). This parameter can be a value of ***UART_Over_Sampling***.
- ***uint32_t UART_InitTypeDef::OneBitSampling***
  Specifies whether a single sample or three samples' majority vote is selected. Selecting the single sample method increases the receiver tolerance to clock deviations. This parameter can be a value of ***UART_OneBit_Sampling***.

54.1.2 UART_AdvFeatureInitTypeDef

Data Fields

- ***uint32_t AdvFeatureInit***
- ***uint32_t TxPinLevelInvert***
- ***uint32_t RxPinLevelInvert***
- ***uint32_t DataInvert***
- ***uint32_t Swap***
- ***uint32_t OverrunDisable***
- ***uint32_t DMADisableonRxError***
- ***uint32_t AutoBaudRateEnable***
- ***uint32_t AutoBaudRateMode***
- ***uint32_t MSBFirst***

Field Documentation

- ***uint32_t UART_AdvFeatureInitTypeDef::AdvFeatureInit***
  Specifies which advanced UART features is initialized. Several Advanced Features may be initialized at the same time . This parameter can be a value of ***UART_Advanced_Features_Initialization_Type***.
- ***uint32_t UART_AdvFeatureInitTypeDef::TxPinLevelInvert***
  Specifies whether the TX pin active level is inverted. This parameter can be a value of ***UART_Tx_Inv***.
- ***uint32_t UART_AdvFeatureInitTypeDef::RxPinLevelInvert***
  Specifies whether the RX pin active level is inverted. This parameter can be a value of ***UART_Rx_Inv***.
- ***uint32_t UART_AdvFeatureInitTypeDef::DataInvert***
  Specifies whether data are inverted (positive/direct logic vs negative/inverted logic). This parameter can be a value of ***UART_Data_Inv***.
- ***uint32_t UART_AdvFeatureInitTypeDef::Swap***
  Specifies whether TX and RX pins are swapped. This parameter can be a value of ***UART_Rx_Tx_Swap***.
- ***uint32_t UART_AdvFeatureInitTypeDef::OverrunDisable***
  Specifies whether the reception overrun detection is disabled. This parameter can be a value of ***UART_Overrun_Disable***.
- ***uint32_t UART_AdvFeatureInitTypeDef::DMADisableonRxError***
  Specifies whether the DMA is disabled in case of reception error. This parameter can be a value of ***UART_DMA_Disable_on_Rx_Error***.
- ***uint32_t UART_AdvFeatureInitTypeDef::AutoBaudRateEnable***
  Specifies whether auto Baud rate detection is enabled. This parameter can be a value of ***UART_AutoBaudRate_Enable***
- ***uint32_t UART_AdvFeatureInitTypeDef::AutoBaudRateMode***
  If auto Baud rate detection is enabled, specifies how the rate detection is carried out. This parameter can be a value of ***UART_AutoBaud_Rate_Mode***.
- ***uint32_t UART_AdvFeatureInitTypeDef::MSBFirst***
  Specifies whether MSB is sent first on UART line. This parameter can be a value of ***UART_MSB_First***.

54.1.3 UART_WakeUpTypeDef

Data Fields

- ***uint32_t WakeUpEvent***
- ***uint16_t AddressLength***
- ***uint8_t Address***

Field Documentation

- ***uint32_t UART_WakeUpTypeDef::WakeUpEvent***
  Specifies which event will activat the Wakeup from Stop mode flag (WUF). This

parameter can be a value of ***UART_WakeUp_from_Stop_Selection***. If set to UART_WAKEUP_ON_ADDRESS, the two other fields below must be filled up.

- ***uint16_t UART_WakeUpTypeDef::AddressLength***
  Specifies whether the address is 4 or 7-bit long. This parameter can be a value of ***UART_WakeUp_Address_Length***.
- ***uint8_t UART_WakeUpTypeDef::Address***
  UART/USART node address (7-bit long max).

54.1.4 UART_HandleTypeDef

Data Fields

- ***USART_TypeDef * Instance***
- ***UART_InitTypeDef Init***
- ***UART_AdvFeatureInitTypeDef AdvancedInit***
- ***uint8_t * pTxBuffPtr***
- ***uint16_t TxXferSize***
- ***__IO uint16_t TxXferCount***
- ***uint8_t * pRxBuffPtr***
- ***uint16_t RxXferSize***
- ***__IO uint16_t RxXferCount***
- ***uint16_t Mask***
- ***DMA_HandleTypeDef * hdmatx***
- ***DMA_HandleTypeDef * hdmarx***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_UART_StateTypeDef gState***
- ***__IO HAL_UART_StateTypeDef RxState***
- ***__IO uint32_t ErrorCode***

Field Documentation

- ***USART_TypeDef* UART_HandleTypeDef::Instance***
  UART registers base address
- ***UART_InitTypeDef UART_HandleTypeDef::Init***
  UART communication parameters
- ***UART_AdvFeatureInitTypeDef UART_HandleTypeDef::AdvancedInit***
  UART Advanced Features initialization parameters
- ***uint8_t* UART_HandleTypeDef::pTxBuffPtr***
  Pointer to UART Tx transfer Buffer
- ***uint16_t UART_HandleTypeDef::TxXferSize***
  UART Tx Transfer size
- ***__IO uint16_t UART_HandleTypeDef::TxXferCount***
  UART Tx Transfer Counter
- ***uint8_t* UART_HandleTypeDef::pRxBuffPtr***
  Pointer to UART Rx transfer Buffer
- ***uint16_t UART_HandleTypeDef::RxXferSize***
  UART Rx Transfer size
- ***__IO uint16_t UART_HandleTypeDef::RxXferCount***
  UART Rx Transfer Counter
- ***uint16_t UART_HandleTypeDef::Mask***
  UART Rx RDR register mask
- ***DMA_HandleTypeDef* UART_HandleTypeDef::hdmatx***
  UART Tx DMA Handle parameters
- ***DMA_HandleTypeDef* UART_HandleTypeDef::hdmarx***
  UART Rx DMA Handle parameters

- ***HAL_LockTypeDef UART_HandleTypeDef::Lock***
  Locking object
- ***__IO HAL_UART_StateTypeDef UART_HandleTypeDef::gState***
  UART state information related to global Handle management and also related to Tx operations. This parameter can be a value of **HAL_UART_StateTypeDef**
- ***__IO HAL_UART_StateTypeDef UART_HandleTypeDef::RxState***
  UART state information related to Rx operations. This parameter can be a value of **HAL_UART_StateTypeDef**
- ***__IO uint32_t UART_HandleTypeDef::ErrorCode***
  UART Error code

54.2 UART Firmware driver API description

54.2.1 How to use this driver

The UART HAL driver can be used as follows:

1. Declare a UART_HandleTypeDef handle structure (eg. UART_HandleTypeDef huart).
2. Initialize the UART low level resources by implementing the HAL_UART_MspInit() API:
   - Enable the USARTx interface clock.
   - UART pins configuration:
     - Enable the clock for the UART GPIOs.
     - Configure these UART pins as alternate function pull-up.
   - NVIC configuration if you need to use interrupt process (HAL_UART_Transmit_IT() and HAL_UART_Receive_IT() APIs):
     - Configure the USARTx interrupt priority.
     - Enable the NVIC USART IRQ handle.
   - UART interrupts handling: The specific UART interrupts (Transmission complete interrupt, RXNE interrupt and Error Interrupts) are managed using the macros __HAL_UART_ENABLE_IT() and __HAL_UART_DISABLE_IT() inside the transmit and receive processes.
   - DMA Configuration if you need to use DMA process (HAL_UART_Transmit_DMA() and HAL_UART_Receive_DMA() APIs):
     - Declare a DMA handle structure for the Tx/Rx channel.
     - Enable the DMAx interface clock.
     - Configure the declared DMA handle structure with the required Tx/Rx parameters.
     - Configure the DMA Tx/Rx channel.
     - Associate the initialized DMA handle to the UART DMA Tx/Rx handle.
     - Configure the priority and enable the NVIC for the transfer complete interrupt on the DMA Tx/Rx channel.
3. Program the Baud Rate, Word Length, Stop Bit, Parity, Hardware flow control and Mode (Receiver/Transmitter) in the huart handle Init structure.
4. If required, program UART advanced features (TX/RX pins swap, auto Baud rate detection,...) in the huart handle AdvancedInit structure.
5. For the UART asynchronous mode, initialize the UART registers by calling the HAL_UART_Init() API.
6. For the UART Half duplex mode, initialize the UART registers by calling the HAL_HalfDuplex_Init() API.
7. For the UART LIN (Local Interconnection Network) mode, initialize the UART registers by calling the HAL_LIN_Init() API.
8. For the UART Multiprocessor mode, initialize the UART registers by calling the HAL_MultiProcessor_Init() API.

9. For the UART RS485 Driver Enabled mode, initialize the UART registers by calling the HAL_RS485Ex_Init() API.



These APIs (HAL_UART_Init(), HAL_HalfDuplex_Init(), HAL_MultiProcessor_Init(), also configure the low level Hardware (GPIO, CLOCK, CORTEX...etc) by calling the customized HAL_UART_MspInit() API.

Three operation modes are available within this driver :

Polling mode IO operation

- Send an amount of data in blocking mode using HAL_UART_Transmit()
- Receive an amount of data in blocking mode using HAL_UART_Receive()

Interrupt mode IO operation

- Send an amount of data in non blocking mode using HAL_UART_Transmit_IT()
- At transmission end of half transfer HAL_UART_TxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_UART_TxHalfCpltCallback
- At transmission end of transfer HAL_UART_TxCpltCallback is executed and user can add his own code by customization of function pointer HAL_UART_TxCpltCallback
- Receive an amount of data in non blocking mode using HAL_UART_Receive_IT()
- At reception end of half transfer HAL_UART_RxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_UART_RxHalfCpltCallback
- At reception end of transfer HAL_UART_RxCpltCallback is executed and user can add his own code by customization of function pointer HAL_UART_RxCpltCallback
- In case of transfer Error, HAL_UART_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_UART_ErrorCallback

DMA mode IO operation

- Send an amount of data in non blocking mode (DMA) using HAL_UART_Transmit_DMA()
- At transmission end of half transfer HAL_UART_TxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_UART_TxHalfCpltCallback
- At transmission end of transfer HAL_UART_TxCpltCallback is executed and user can add his own code by customization of function pointer HAL_UART_TxCpltCallback
- Receive an amount of data in non blocking mode (DMA) using HAL_UART_Receive_DMA()
- At reception end of half transfer HAL_UART_RxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_UART_RxHalfCpltCallback
- At reception end of transfer HAL_UART_RxCpltCallback is executed and user can add his own code by customization of function pointer HAL_UART_RxCpltCallback
- In case of transfer Error, HAL_UART_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_UART_ErrorCallback
- Pause the DMA Transfer using HAL_UART_DMAPause()
- Resume the DMA Transfer using HAL_UART_DMAResume()
- Stop the DMA Transfer using HAL_UART_DMAStop()

UART HAL driver macros list

Below the list of most used macros in UART HAL driver.

- __HAL_UART_ENABLE: Enable the UART peripheral
- __HAL_UART_DISABLE: Disable the UART peripheral
- __HAL_UART_GET_FLAG : Check whether the specified UART flag is set or not
- __HAL_UART_CLEAR_FLAG : Clear the specified UART pending flag
- __HAL_UART_ENABLE_IT: Enable the specified UART interrupt
- __HAL_UART_DISABLE_IT: Disable the specified UART interrupt



You can refer to the UART HAL driver header file for more useful macros

54.2.2 Initialization and Configuration functions

This subsection provides a set of functions allowing to initialize the USARTx or the UARTy in asynchronous mode.

- For the asynchronous mode the parameters below can be configured:
  - Baud Rate
  - Word Length
  - Stop Bit
  - Parity
  - Hardware flow control
  - Receiver/transmitter modes
  - Over Sampling Method
  - One-Bit Sampling Method
- For the asynchronous mode, the following advanced features can be configured as well:
  - TX and/or RX pin level inversion
  - data logical level inversion
  - RX and TX pins swap
  - RX overrun detection disabling
  - DMA disabling on RX error
  - MSB first on communication line
  - auto Baud rate detection

The HAL_UART_Init(), HAL_HalfDuplex_Init(), HAL_LIN_Init() and HAL_MultiProcessor_Init() API follow respectively the UART asynchronous, UART Half duplex, UART LIN mode and multiprocessor configuration procedures (details for the procedures are available in reference manual).

This section contains the following APIs:

- ***HAL_UART_Init()***
- ***HAL_HalfDuplex_Init()***
- ***HAL_LIN_Init()***
- ***HAL_MultiProcessor_Init()***
- ***HAL_UART_DeInit()***
- ***HAL_UART_MspInit()***
- ***HAL_UART_MspDeInit()***

54.2.3 IO operation functions

This section contains the following APIs:

- ***HAL_UART_Transmit()***
- ***HAL_UART_Receive()***
- ***HAL_UART_Transmit_IT()***
- ***HAL_UART_Receive_IT()***
- ***HAL_UART_Transmit_DMA()***
- ***HAL_UART_Receive_DMA()***
- ***HAL_UART_DMAPause()***
- ***HAL_UART_DMAResume()***
- ***HAL_UART_DMAStop()***
- ***HAL_UART_Abort()***
- ***HAL_UART_AbortTransmit()***
- ***HAL_UART_AbortReceive()***
- ***HAL_UART_Abort_IT()***
- ***HAL_UART_AbortTransmit_IT()***
- ***HAL_UART_AbortReceive_IT()***
- ***HAL_UART_IRQHandler()***
- ***HAL_UART_TxCpltCallback()***
- ***HAL_UART_TxHalfCpltCallback()***
- ***HAL_UART_RxCpltCallback()***
- ***HAL_UART_RxHalfCpltCallback()***
- ***HAL_UART_ErrorCallback()***
- ***HAL_UART_AbortCpltCallback()***
- ***HAL_UART_AbortTransmitCpltCallback()***
- ***HAL_UART_AbortReceiveCpltCallback()***

54.2.4 Peripheral Control functions

This subsection provides a set of functions allowing to control the UART.

- HAL_MultiProcessor_EnableMuteMode() API enables mute mode
- HAL_MultiProcessor_DisableMuteMode() API disables mute mode
- HAL_MultiProcessor_EnterMuteMode() API enters mute mode
- HAL_HalfDuplex_EnableTransmitter() API disables receiver and enables transmitter
- HAL_HalfDuplex_EnableReceiver() API disables transmitter and enables receiver
- HAL_LIN_SendBreak() API transmits the break characters

This section contains the following APIs:

- ***HAL_MultiProcessor_EnableMuteMode()***
- ***HAL_MultiProcessor_DisableMuteMode()***
- ***HAL_MultiProcessor_EnterMuteMode()***
- ***HAL_HalfDuplex_EnableTransmitter()***
- ***HAL_HalfDuplex_EnableReceiver()***
- ***HAL_LIN_SendBreak()***

54.2.5 Peripheral State and Error functions

This subsection provides functions allowing to :

- Return the UART handle state.
- Return the UART handle error code

This section contains the following APIs:

- *HAL_UART_GetState()*
- *HAL_UART_GetError()*

54.2.6 Detailed description of functions

HAL_UART_Init

Function name **HAL_StatusTypeDef HAL_UART_Init (UART_HandleTypeDef * huart)**

Function description Initialize the UART mode according to the specified parameters in the UART_InitTypeDef and initialize the associated handle.

Parameters
- **huart:** UART handle.

Return values
- **HAL:** status

HAL_HalfDuplex_Init

Function name **HAL_StatusTypeDef HAL_HalfDuplex_Init (UART_HandleTypeDef * huart)**

Function description Initialize the half-duplex mode according to the specified parameters in the UART_InitTypeDef and creates the associated handle.

Parameters
- **huart:** UART handle.

Return values
- **HAL:** status

HAL_LIN_Init

Function name **HAL_StatusTypeDef HAL_LIN_Init (UART_HandleTypeDef * huart, uint32_t BreakDetectLength)**

Function description Initialize the LIN mode according to the specified parameters in the UART_InitTypeDef and creates the associated handle .

Parameters
- **huart:** UART handle.
- **BreakDetectLength:** specifies the LIN break detection length. This parameter can be one of the following values:
  - UART_LINBREAKDETECTLENGTH_10B 10-bit break detection
  - UART_LINBREAKDETECTLENGTH_11B 11-bit break detection

Return values
- **HAL:** status

HAL_MultiProcessor_Init

Function name **HAL_StatusTypeDef HAL_MultiProcessor_Init (UART_HandleTypeDef * huart, uint8_t Address, uint32_t WakeUpMethod)**

Function description Initialize the multiprocessor mode according to the specified parameters in the UART_InitTypeDef and initialize the associated handle.

Parameters
- **huart:** UART handle.
- **Address:** UART node address (4-, 6-, 7- or 8-bit long).
- **WakeUpMethod:** specifies the UART wakeup method. This parameter can be one of the following values:
  - UART_WAKEUPMETHOD_IDLELINE WakeUp by an idle line detection
  - UART_WAKEUPMETHOD_ADDRESSMARK WakeUp by an address mark

Return values
- **HAL:** status

Notes
- If the user resorts to idle line detection wake up, the Address parameter is useless and ignored by the initialization function.
- If the user resorts to address mark wake up, the address length detection is configured by default to 4 bits only. For the UART to be able to manage 6-, 7- or 8-bit long addresses detection, the API HAL_MultiProcessorEx_AddressLength_Set() must be called after HAL_MultiProcessor_Init().

HAL_UART_DeInit

Function name **HAL_StatusTypeDef HAL_UART_DeInit (UART_HandleTypeDef * huart)**

Function description DeInitialize the UART peripheral.

Parameters
- **huart:** UART handle.

Return values
- **HAL:** status

HAL_UART_MspInit

Function name **void HAL_UART_MspInit (UART_HandleTypeDef * huart)**

Function description Initialize the UART MSP.

Parameters
- **huart:** UART handle.

Return values
- **None**

HAL_UART_MspDeInit

Function name **void HAL_UART_MspDeInit (UART_HandleTypeDef * huart)**

Function description DeInitialize the UART MSP.

Parameters
- **huart:** UART handle.

Return values
- **None**

HAL_UART_Transmit

Function name **HAL_StatusTypeDef HAL_UART_Transmit (UART_HandleTypeDef * huart, uint8_t * pData, uint16_t Size, uint32_t Timeout)**

Function description Send an amount of data in blocking mode.

Parameters
- **huart:** UART handle.

- **pData:** Pointer to data buffer.
- **Size:** Amount of data to be sent.
- **Timeout:** Timeout duration.

Return values
- **HAL:** status

HAL_UART_Receive

Function name **HAL_StatusTypeDef HAL_UART_Receive (UART_HandleTypeDef * huart, uint8_t * pData, uint16_t Size, uint32_t Timeout)**

Function description Receive an amount of data in blocking mode.

Parameters
- **huart:** UART handle.
- **pData:** pointer to data buffer.
- **Size:** amount of data to be received.
- **Timeout:** Timeout duration.

Return values
- **HAL:** status

HAL_UART_Transmit_IT

Function name **HAL_StatusTypeDef HAL_UART_Transmit_IT (UART_HandleTypeDef * huart, uint8_t * pData, uint16_t Size)**

Function description Send an amount of data in interrupt mode.

Parameters
- **huart:** UART handle.
- **pData:** pointer to data buffer.
- **Size:** amount of data to be sent.

Return values
- **HAL:** status

HAL_UART_Receive_IT

Function name **HAL_StatusTypeDef HAL_UART_Receive_IT (UART_HandleTypeDef * huart, uint8_t * pData, uint16_t Size)**

Function description Receive an amount of data in interrupt mode.

Parameters
- **huart:** UART handle.
- **pData:** pointer to data buffer.
- **Size:** amount of data to be received.

Return values
- **HAL:** status

HAL_UART_Transmit_DMA

Function name **HAL_StatusTypeDef HAL_UART_Transmit_DMA (UART_HandleTypeDef * huart, uint8_t * pData, uint16_t Size)**

Function description Send an amount of data in DMA mode.

Parameters
- **huart:** UART handle.
- **pData:** pointer to data buffer.
- **Size:** amount of data to be sent.

Return values
- **HAL:** status

Notes
- This function starts a DMA transfer in interrupt mode meaning that DMA half transfer complete, DMA transfer complete and DMA transfer error interrupts are enabled

HAL_UART_Receive_DMA

Function name **HAL_StatusTypeDef HAL_UART_Receive_DMA (UART_HandleTypeDef * huart, uint8_t * pData, uint16_t Size)**

Function description Receive an amount of data in DMA mode.

Parameters
- **huart:** UART handle.
- **pData:** pointer to data buffer.
- **Size:** amount of data to be received.

Return values
- **HAL:** status

Notes
- When the UART parity is enabled (PCE = 1), the received data contain the parity bit (MSB position).
- This function starts a DMA transfer in interrupt mode meaning that DMA half transfer complete, DMA transfer complete and DMA transfer error interrupts are enabled

HAL_UART_DMAPause

Function name **HAL_StatusTypeDef HAL_UART_DMAPause (UART_HandleTypeDef * huart)**

Function description Pause the DMA Transfer.

Parameters
- **huart:** UART handle.

Return values
- **HAL:** status

HAL_UART_DMAResume

Function name **HAL_StatusTypeDef HAL_UART_DMAResume (UART_HandleTypeDef * huart)**

Function description Resume the DMA Transfer.

Parameters
- **huart:** UART handle.

Return values
- **HAL:** status

HAL_UART_DMAStop

Function name **HAL_StatusTypeDef HAL_UART_DMAStop (UART_HandleTypeDef * huart)**

Function description Stop the DMA Transfer.

Parameters
- **huart:** UART handle.

Return values
- **HAL:** status

HAL_UART_Abort

Function name	**HAL_StatusTypeDef HAL_UART_Abort (UART_HandleTypeDef * huart)**
Function description	Abort ongoing transfers (blocking mode).
Parameters	• **huart:** UART handle.
Return values	• **HAL:** status
Notes	• This procedure could be used for aborting any ongoing transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable UART Interrupts (Tx and Rx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort (in case of transfer in DMA mode)Set handle State to READY • This procedure is executed in blocking mode : when exiting function, Abort is considered as completed.

HAL_UART_AbortTransmit

Function name	**HAL_StatusTypeDef HAL_UART_AbortTransmit (UART_HandleTypeDef * huart)**
Function description	Abort ongoing Transmit transfer (blocking mode).
Parameters	• **huart:** UART handle.
Return values	• **HAL:** status
Notes	• This procedure could be used for aborting any ongoing Tx transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable UART Interrupts (Tx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort (in case of transfer in DMA mode)Set handle State to READY • This procedure is executed in blocking mode : when exiting function, Abort is considered as completed.

HAL_UART_AbortReceive

Function name	**HAL_StatusTypeDef HAL_UART_AbortReceive (UART_HandleTypeDef * huart)**
Function description	Abort ongoing Receive transfer (blocking mode).
Parameters	• **huart:** UART handle.
Return values	• **HAL:** status
Notes	• This procedure could be used for aborting any ongoing Rx transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable UART Interrupts (Rx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort (in case of transfer in DMA mode)Set handle State to READY • This procedure is executed in blocking mode : when exiting function, Abort is considered as completed.

HAL_UART_Abort_IT

Function name **HAL_StatusTypeDef HAL_UART_Abort_IT (UART_HandleTypeDef * huart)**

Function description Abort ongoing transfers (Interrupt mode).

Parameters
- **huart:** UART handle.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable UART Interrupts (Tx and Rx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort_IT (in case of transfer in DMA mode)Set handle State to READYAt abort completion, call user abort complete callback
- This procedure is executed in Interrupt mode, meaning that abort procedure could be considered as completed only when user abort complete callback is executed (not when exiting function).

HAL_UART_AbortTransmit_IT

Function name **HAL_StatusTypeDef HAL_UART_AbortTransmit_IT (UART_HandleTypeDef * huart)**

Function description Abort ongoing Transmit transfer (Interrupt mode).

Parameters
- **huart:** UART handle.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing Tx transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable UART Interrupts (Tx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort_IT (in case of transfer in DMA mode)Set handle State to READYAt abort completion, call user abort complete callback
- This procedure is executed in Interrupt mode, meaning that abort procedure could be considered as completed only when user abort complete callback is executed (not when exiting function).

HAL_UART_AbortReceive_IT

Function name **HAL_StatusTypeDef HAL_UART_AbortReceive_IT (UART_HandleTypeDef * huart)**

Function description Abort ongoing Receive transfer (Interrupt mode).

Parameters
- **huart:** UART handle.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing Rx transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable UART Interrupts (Rx)Disable the DMA transfer in the peripheral register (if

enabled)Abort DMA transfer by calling HAL_DMA_Abort_IT (in case of transfer in DMA mode)Set handle State to READYAt abort completion, call user abort complete callback

- This procedure is executed in Interrupt mode, meaning that abort procedure could be considered as completed only when user abort complete callback is executed (not when exiting function).

HAL_UART_IRQHandler

Function name	**void HAL_UART_IRQHandler (UART_HandleTypeDef * huart)**
Function description	Handle UART interrupt request.
Parameters	• **huart:** UART handle.
Return values	• **None**

HAL_UART_TxCpltCallback

Function name	**void HAL_UART_TxCpltCallback (UART_HandleTypeDef * huart)**
Function description	Tx Transfer completed callback.
Parameters	• **huart:** UART handle.
Return values	• **None**

HAL_UART_TxHalfCpltCallback

Function name	**void HAL_UART_TxHalfCpltCallback (UART_HandleTypeDef * huart)**
Function description	Tx Half Transfer completed callback.
Parameters	• **huart:** UART handle.
Return values	• **None**

HAL_UART_RxCpltCallback

Function name	**void HAL_UART_RxCpltCallback (UART_HandleTypeDef * huart)**
Function description	Rx Transfer completed callback.
Parameters	• **huart:** UART handle.
Return values	• **None**

HAL_UART_RxHalfCpltCallback

Function name	**void HAL_UART_RxHalfCpltCallback (UART_HandleTypeDef * huart)**
Function description	Rx Half Transfer completed callback.
Parameters	• **huart:** UART handle.
Return values	• **None**

HAL_UART_ErrorCallback

Function name	**void HAL_UART_ErrorCallback (UART_HandleTypeDef * huart)**
Function description	UART error callback.
Parameters	• **huart:** UART handle.
Return values	• **None**

HAL_UART_AbortCpltCallback

Function name	**void HAL_UART_AbortCpltCallback (UART_HandleTypeDef * huart)**
Function description	UART Abort Complete callback.
Parameters	• **huart:** UART handle.
Return values	• **None**

HAL_UART_AbortTransmitCpltCallback

Function name	**void HAL_UART_AbortTransmitCpltCallback (UART_HandleTypeDef * huart)**
Function description	UART Abort Complete callback.
Parameters	• **huart:** UART handle.
Return values	• **None**

HAL_UART_AbortReceiveCpltCallback

Function name	**void HAL_UART_AbortReceiveCpltCallback (UART_HandleTypeDef * huart)**
Function description	UART Abort Receive Complete callback.
Parameters	• **huart:** UART handle.
Return values	• **None**

HAL_MultiProcessor_EnableMuteMode

Function name	**HAL_StatusTypeDef HAL_MultiProcessor_EnableMuteMode (UART_HandleTypeDef * huart)**
Function description	Enable UART in mute mode (does not mean UART enters mute mode; to enter mute mode, HAL_MultiProcessor_EnterMuteMode() API must be called).
Parameters	• **huart:** UART handle.
Return values	• **HAL:** status

HAL_MultiProcessor_DisableMuteMode

Function name	**HAL_StatusTypeDef HAL_MultiProcessor_DisableMuteMode (UART_HandleTypeDef * huart)**
Function description	Disable UART mute mode (does not mean the UART actually exits mute mode as it may not have been in mute mode at this very moment).
Parameters	• **huart:** UART handle.
Return values	• **HAL:** status

HAL_MultiProcessor_EnterMuteMode

Function name	**void HAL_MultiProcessor_EnterMuteMode (UART_HandleTypeDef * huart)**
Function description	Enter UART mute mode (means UART actually enters mute mode).
Parameters	• **huart:** UART handle.
Return values	• **None**
Notes	• To exit from mute mode, HAL_MultiProcessor_DisableMuteMode() API must be called.

HAL_HalfDuplex_EnableTransmitter

Function name	**HAL_StatusTypeDef HAL_HalfDuplex_EnableTransmitter (UART_HandleTypeDef * huart)**
Function description	Enable the UART transmitter and disable the UART receiver.
Parameters	• **huart:** UART handle.
Return values	• **HAL:** status

HAL_HalfDuplex_EnableReceiver

Function name	**HAL_StatusTypeDef HAL_HalfDuplex_EnableReceiver (UART_HandleTypeDef * huart)**
Function description	Enable the UART receiver and disable the UART transmitter.
Parameters	• **huart:** UART handle.
Return values	• **HAL:** status.

HAL_LIN_SendBreak

Function name	**HAL_StatusTypeDef HAL_LIN_SendBreak (UART_HandleTypeDef * huart)**
Function description	Transmit break characters.
Parameters	• **huart:** UART handle.
Return values	• **HAL:** status

HAL_UART_GetState

Function name	**HAL_UART_StateTypeDef HAL_UART_GetState (UART_HandleTypeDef * huart)**
Function description	Return the UART handle state.
Parameters	• **huart:** Pointer to a UART_HandleTypeDef structure that contains the configuration information for the specified UART.
Return values	• **HAL:** state

HAL_UART_GetError

Function name	**uint32_t HAL_UART_GetError (UART_HandleTypeDef * huart)**
Function description	Return the UART handle error code.
Parameters	• **huart:** Pointer to a UART_HandleTypeDef structure that contains the configuration information for the specified UART.
Return values	• **UART:** Error Code

UART_SetConfig

Function name	**HAL_StatusTypeDef UART_SetConfig (UART_HandleTypeDef * huart)**
Function description	Configure the UART peripheral.
Parameters	• **huart:** UART handle.
Return values	• **HAL:** status

UART_AdvFeatureConfig

Function name	**void UART_AdvFeatureConfig (UART_HandleTypeDef * huart)**
Function description	Configure the UART peripheral advanced features.
Parameters	• **huart:** UART handle.
Return values	• **None**

UART_CheckIdleState

Function name	**HAL_StatusTypeDef UART_CheckIdleState (UART_HandleTypeDef * huart)**
Function description	Check the UART Idle State.
Parameters	• **huart:** UART handle.
Return values	• **HAL:** status

UART_WaitOnFlagUntilTimeout

Function name	**HAL_StatusTypeDef UART_WaitOnFlagUntilTimeout (UART_HandleTypeDef * huart, uint32_t Flag, FlagStatus Status, uint32_t Tickstart, uint32_t Timeout)**
Function description	Handle UART Communication Timeout.
Parameters	• **huart:** UART handle. • **Flag:** Specifies the UART flag to check • **Status:** Flag status (SET or RESET) • **Tickstart:** Tick start value • **Timeout:** Timeout duration
Return values	• **HAL:** status

UART_Transmit_IT

Function name	**HAL_StatusTypeDef UART_Transmit_IT (UART_HandleTypeDef * huart)**
Function description	Send an amount of data in interrupt mode.
Parameters	• **huart:** UART handle.
Return values	• **HAL:** status
Notes	• Function is called under interruption only, once interruptions have been enabled by HAL_UART_Transmit_IT().

UART_EndTransmit_IT

Function name	**HAL_StatusTypeDef UART_EndTransmit_IT (UART_HandleTypeDef * huart)**
Function description	Wrap up transmission in non-blocking mode.
Parameters	• **huart:** pointer to a UART_HandleTypeDef structure that contains the configuration information for the specified UART module.
Return values	• **HAL:** status

UART_Receive_IT

Function name	**HAL_StatusTypeDef UART_Receive_IT (UART_HandleTypeDef * huart)**
Function description	Receive an amount of data in interrupt mode.
Parameters	• **huart:** UART handle.
Return values	• **HAL:** status
Notes	• Function is called under interruption only, once interruptions have been enabled by HAL_UART_Receive_IT()

UART_Wakeup_AddressConfig

Function name	**void UART_Wakeup_AddressConfig (UART_HandleTypeDef * huart, UART_WakeUpTypeDef WakeUpSelection)**
Function description	Initialize the UART wake-up from stop mode parameters when triggered by address detection.
Parameters	• **huart:** UART handle. • **WakeUpSelection:** UART wake up from stop mode parameters.
Return values	• **None**

54.3 UART Firmware driver defines

54.3.1 UART

UART Advanced Feature Initialization Type

UART_ADVFEATURE_NO_INIT	No advanced feature initialization
UART_ADVFEATURE_TXINVERT_INIT	TX pin active level inversion
UART_ADVFEATURE_RXINVERT_INIT	RX pin active level inversion
UART_ADVFEATURE_DATAINVERT_INIT	Binary data inversion
UART_ADVFEATURE_SWAP_INIT	TX/RX pins swap
UART_ADVFEATURE_RXOVERRUNDISABLE_INIT	RX overrun disable
UART_ADVFEATURE_DMADISABLEONERROR_INIT	DMA disable on Reception Error
UART_ADVFEATURE_AUTOBAUDRATE_INIT	Auto Baud rate detection initialization
UART_ADVFEATURE_MSBFIRST_INIT	Most significant bit sent/received first

UART Advanced Feature Auto BaudRate Enable

UART_ADVFEATURE_AUTOBAUDRATE_DISABLE	RX Auto Baud rate detection enable
UART_ADVFEATURE_AUTOBAUDRATE_ENABLE	RX Auto Baud rate detection disable

UART Advanced Feature AutoBaud Rate Mode

UART_ADVFEATURE_AUTOBAUDRATE_ONSTARTBIT	Auto Baud rate detection on start bit
UART_ADVFEATURE_AUTOBAUDRATE_ONFALLINGEDGE	Auto Baud rate detection on falling edge
UART_ADVFEATURE_AUTOBAUDRATE_ON0X7FFRAME	Auto Baud rate detection on 0x7F frame detection
UART_ADVFEATURE_AUTOBAUDRATE_ON0X55FRAME	Auto Baud rate detection on 0x55 frame detection

UART Driver Enable Assertion Time LSB Position In CR1 Register

UART_CR1_DEAT_ADDRESS_LSB_POS	UART Driver Enable assertion time LSB

position in CR1 register

UART Driver Enable DeAssertion Time LSB Position In CR1 Register

UART_CR1_DEDT_ADDRESS_LSB_POS UART Driver Enable de-assertion time LSB position in CR1 register

UART Address-matching LSB Position In CR2 Register

UART_CR2_ADDRESS_LSB_POS UART address-matching LSB position in CR2 register

UART Advanced Feature Binary Data Inversion

UART_ADVFEATURE_DATAINV_DISABLE Binary data inversion disable

UART_ADVFEATURE_DATAINV_ENABLE Binary data inversion enable

UART Advanced Feature DMA Disable On Rx Error

UART_ADVFEATURE_DMA_ENABLEONRXERROR DMA enable on Reception Error

UART_ADVFEATURE_DMA_DISABLEONRXERROR DMA disable on Reception Error

UART DMA Rx

UART_DMA_RX_DISABLE UART DMA RX disabled

UART_DMA_RX_ENABLE UART DMA RX enabled

UART DMA Tx

UART_DMA_TX_DISABLE UART DMA TX disabled

UART_DMA_TX_ENABLE UART DMA TX enabled

UART DriverEnable Polarity

UART_DE_POLARITY_HIGH Driver enable signal is active high

UART_DE_POLARITY_LOW Driver enable signal is active low

UART Error

HAL_UART_ERROR_NONE No error

HAL_UART_ERROR_PE Parity error

HAL_UART_ERROR_NE Noise error

HAL_UART_ERROR_FE frame error

HAL_UART_ERROR_ORE Overrun error

HAL_UART_ERROR_DMA DMA transfer error

HAL_UART_ERROR_BUSY Busy Error

UART Exported Macros

__HAL_UART_RESET_HANDLE_STATE

Description:

- Reset UART handle states.

Parameters:

- __HANDLE__: UART handle.

Return value:

- None

__HAL_UART_FLUSH_DRREGISTER

Description:

- Flush the UART Data registers.

Parameters:

- __HANDLE__: specifies the UART Handle.

Return value:

- None

__HAL_UART_CLEAR_FLAG

Description:

- Clear the specified UART pending flag.

Parameters:

- __HANDLE__: specifies the UART Handle.
- __FLAG__: specifies the flag to check. This parameter can be any combination of the following values:
  - UART_CLEAR_PEF Parity Error Clear Flag
  - UART_CLEAR_FEF Framing Error Clear Flag
  - UART_CLEAR_NEF Noise detected Clear Flag
  - UART_CLEAR_OREF Overrun Error Clear Flag
  - UART_CLEAR_IDLEF IDLE line detected Clear Flag
  - UART_CLEAR_TCF Transmission Complete Clear Flag
  - UART_CLEAR_LBDF LIN Break Detection Clear Flag (not available on all devices)
  - UART_CLEAR_CTSF CTS Interrupt Clear Flag
  - UART_CLEAR_RTOF Receiver Time Out Clear Flag
  - UART_CLEAR_EOBF End Of Block Clear Flag (not available on all devices)
  - UART_CLEAR_CMF Character Match Clear Flag
  - UART_CLEAR_WUF Wake Up from stop mode Clear Flag (not available on all devices)

Return value:

- None

__HAL_UART_CLEAR_PEFLAG

Description:

- Clear the UART PE pending flag.

Parameters:

- __HANDLE__: specifies the UART Handle.

Return value:

- None

__HAL_UART_CLEAR_FEFLAG

Description:

- Clear the UART FE pending flag.

Parameters:

- __HANDLE__: specifies the UART Handle.

Return value:

- None

__HAL_UART_CLEAR_NEFLAG

Description:

- Clear the UART NE pending flag.

Parameters:

- __HANDLE__: specifies the UART Handle.

Return value:

- None

__HAL_UART_CLEAR_OREFLAG

Description:

- Clear the UART ORE pending flag.

Parameters:

- __HANDLE__: specifies the UART Handle.

Return value:

- None

__HAL_UART_CLEAR_IDLEFLAG

Description:

- Clear the UART IDLE pending flag.

Parameters:

- __HANDLE__: specifies the UART Handle.

Return value:

- None

__HAL_UART_GET_FLAG

Description:

- Check whether the specified UART flag is set or not.

Parameters:

- __HANDLE__: specifies the UART Handle.
- __FLAG__: specifies the flag to check. This parameter can be one of the following values:
  - UART_FLAG_REACK Receive enable acknowledge flag
  - UART_FLAG_TEACK Transmit enable acknowledge flag
  - UART_FLAG_WUF Wake up from stop

mode flag
- UART_FLAG_RWU Receiver wake up flag
- UART_FLAG_SBKF Send Break flag
- UART_FLAG_CMF Character match flag
- UART_FLAG_BUSY Busy flag
- UART_FLAG_ABRF Auto Baud rate detection flag
- UART_FLAG_ABRE Auto Baud rate detection error flag
- UART_FLAG_EOBF End of block flag
- UART_FLAG_RTOF Receiver timeout flag
- UART_FLAG_CTS CTS Change flag (not available for UART4 and UART5)
- UART_FLAG_LBDF LIN Break detection flag
- UART_FLAG_TXE Transmit data register empty flag
- UART_FLAG_TC Transmission Complete flag
- UART_FLAG_RXNE Receive data register not empty flag
- UART_FLAG_IDLE Idle Line detection flag
- UART_FLAG_ORE Overrun Error flag
- UART_FLAG_NE Noise Error flag
- UART_FLAG_FE Framing Error flag
- UART_FLAG_PE Parity Error flag

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

__HAL_UART_ENABLE_IT

Description:

- Enable the specified UART interrupt.

Parameters:

- __HANDLE__: specifies the UART Handle.
- __INTERRUPT__: specifies the UART interrupt source to enable. This parameter can be one of the following values:
  - UART_IT_WUF Wakeup from stop mode interrupt
  - UART_IT_CM Character match interrupt
  - UART_IT_CTS CTS change interrupt
  - UART_IT_LBD LIN Break detection interrupt
  - UART_IT_TXE Transmit Data Register empty interrupt
  - UART_IT_TC Transmission complete interrupt

- UART_IT_RXNE Receive Data register not empty interrupt
- UART_IT_IDLE Idle line detection interrupt
- UART_IT_PE Parity Error interrupt
- UART_IT_ERR Error interrupt (Frame error, noise error, overrun error)

Return value:

- None

__HAL_UART_DISABLE_IT

Description:

- Disable the specified UART interrupt.

Parameters:

- __HANDLE__: specifies the UART Handle.
- __INTERRUPT__: specifies the UART interrupt source to disable. This parameter can be one of the following values:
  - UART_IT_WUF Wakeup from stop mode interrupt
  - UART_IT_CM Character match interrupt
  - UART_IT_CTS CTS change interrupt
  - UART_IT_LBD LIN Break detection interrupt
  - UART_IT_TXE Transmit Data Register empty interrupt
  - UART_IT_TC Transmission complete interrupt
  - UART_IT_RXNE Receive Data register not empty interrupt
  - UART_IT_IDLE Idle line detection interrupt
  - UART_IT_PE Parity Error interrupt
  - UART_IT_ERR Error interrupt (Frame error, noise error, overrun error)

Return value:

- None

__HAL_UART_GET_IT

Description:

- Check whether the specified UART interrupt has occurred or not.

Parameters:

- __HANDLE__: specifies the UART Handle.
- __IT__: specifies the UART interrupt to check. This parameter can be one of the following values:
  - UART_IT_WUF Wakeup from stop mode interrupt
  - UART_IT_CM Character match interrupt

- UART_IT_CTS CTS change interrupt (not available for UART4 and UART5)
- UART_IT_LBD LIN Break detection interrupt
- UART_IT_TXE Transmit Data Register empty interrupt
- UART_IT_TC Transmission complete interrupt
- UART_IT_RXNE Receive Data register not empty interrupt
- UART_IT_IDLE Idle line detection interrupt
- UART_IT_ORE Overrun Error interrupt
- UART_IT_NE Noise Error interrupt
- UART_IT_FE Framing Error interrupt
- UART_IT_PE Parity Error interrupt

Return value:

- The: new state of __IT__ (TRUE or FALSE).

__HAL_UART_GET_IT_SOURCE

Description:

- Check whether the specified UART interrupt source is enabled or not.

Parameters:

- __HANDLE__: specifies the UART Handle.
- __IT__: specifies the UART interrupt source to check. This parameter can be one of the following values:
  - UART_IT_WUF Wakeup from stop mode interrupt
  - UART_IT_CM Character match interrupt
  - UART_IT_CTS CTS change interrupt (not available for UART4 and UART5)
  - UART_IT_LBD LIN Break detection interrupt
  - UART_IT_TXE Transmit Data Register empty interrupt
  - UART_IT_TC Transmission complete interrupt
  - UART_IT_RXNE Receive Data register not empty interrupt
  - UART_IT_IDLE Idle line detection interrupt
  - UART_IT_ERR Error interrupt (Frame error, noise error, overrun error)
  - UART_IT_PE Parity Error interrupt

Return value:

- The: new state of __IT__ (TRUE or FALSE).

__HAL_UART_CLEAR_IT

Description:

- Clear the specified UART ISR flag, in setting the proper ICR register flag.

Parameters:

- __HANDLE__: specifies the UART Handle.
- __IT_CLEAR__: specifies the interrupt clear register flag that needs to be set to clear the corresponding interrupt This parameter can be one of the following values:
  - UART_CLEAR_PEF Parity Error Clear Flag
  - UART_CLEAR_FEF Framing Error Clear Flag
  - UART_CLEAR_NEF Noise detected Clear Flag
  - UART_CLEAR_OREF Overrun Error Clear Flag
  - UART_CLEAR_IDLEF IDLE line detected Clear Flag
  - UART_CLEAR_TCF Transmission Complete Clear Flag
  - UART_CLEAR_LBDF LIN Break Detection Clear Flag
  - UART_CLEAR_CTSF CTS Interrupt Clear Flag
  - UART_CLEAR_RTOF Receiver Time Out Clear Flag
  - UART_CLEAR_EOBF End Of Block Clear Flag
  - UART_CLEAR_CMF Character Match Clear Flag
  - UART_CLEAR_WUF Wake Up from stop mode Clear Flag

Return value:

- None

__HAL_UART_SEND_REQ

Description:

- Set a specific UART request flag.

Parameters:

- __HANDLE__: specifies the UART Handle.
- __REQ__: specifies the request flag to set This parameter can be one of the following values:
  - UART_AUTOBAUD_REQUEST Auto-Baud Rate Request
  - UART_SENDBREAK_REQUEST Send Break Request
  - UART_MUTE_MODE_REQUEST Mute Mode Request
  - UART_RXDATA_FLUSH_REQUEST

Receive Data flush Request
– UART_TXDATA_FLUSH_REQUEST
Transmit data flush Request

Return value:

- None

__HAL_UART_ONE_BIT_SAMPLE_ENABLE

Description:

- Enable the UART one bit sample method.

Parameters:

- __HANDLE__: specifies the UART Handle.

Return value:

- None

__HAL_UART_ONE_BIT_SAMPLE_DISABLE

Description:

- Disable the UART one bit sample method.

Parameters:

- __HANDLE__: specifies the UART Handle.

Return value:

- None

__HAL_UART_ENABLE

Description:

- Enable UART.

Parameters:

- __HANDLE__: specifies the UART Handle.

Return value:

- None

__HAL_UART_DISABLE

Description:

- Disable UART.

Parameters:

- __HANDLE__: specifies the UART Handle.

Return value:

- None

__HAL_UART_HWCONTROL_CTS_ENABLE

Description:

- Enable CTS flow control.

Parameters:

- __HANDLE__: specifies the UART Handle.

Return value:

- None

Notes:

- This macro allows to enable CTS hardware

flow control for a given UART instance, without need to call HAL_UART_Init() function. As involving direct access to UART registers, usage of this macro should be fully endorsed by user. As macro is expected to be used for modifying CTS Hw flow control feature activation, without need for USART instance Deinit/Init, following conditions for macro call should be fulfilled : UART instance should have already been initialised (through call of HAL_UART_Init())macro could only be called when corresponding UART instance is disabled (i.e. __HAL_UART_DISABLE(__HANDLE__)) and should be followed by an Enable macro (i.e. __HAL_UART_ENABLE(__HANDLE__)).

__HAL_UART_HWCONTROL_CTS_DISABLE

Description:

- Disable CTS flow control.

Parameters:

- __HANDLE__: specifies the UART Handle.

Return value:

- None

Notes:

- This macro allows to disable CTS hardware flow control for a given UART instance, without need to call HAL_UART_Init() function. As involving direct access to UART registers, usage of this macro should be fully endorsed by user. As macro is expected to be used for modifying CTS Hw flow control feature activation, without need for USART instance Deinit/Init, following conditions for macro call should be fulfilled : UART instance should have already been initialised (through call of HAL_UART_Init())macro could only be called when corresponding UART instance is disabled (i.e. __HAL_UART_DISABLE(__HANDLE__)) and should be followed by an Enable macro (i.e. __HAL_UART_ENABLE(__HANDLE__)).

__HAL_UART_HWCONTROL_RTS_ENABLE

Description:

- Enable RTS flow control.

Parameters:

- __HANDLE__: specifies the UART Handle.

Return value:

- None

Notes:

- This macro allows to enable RTS hardware flow control for a given UART instance, without need to call HAL_UART_Init() function. As involving direct access to UART registers, usage of this macro should be fully endorsed by user. As macro is expected to be used for modifying RTS Hw flow control feature activation, without need for USART instance Deinit/Init, following conditions for macro call should be fulfilled : UART instance should have already been initialised (through call of HAL_UART_Init())macro could only be called when corresponding UART instance is disabled (i.e. __HAL_UART_DISABLE(__HANDLE__)) and should be followed by an Enable macro (i.e. __HAL_UART_ENABLE(__HANDLE__)).

__HAL_UART_HWCONTROL_RTS_DISABLE

Description:

- Disable RTS flow control.

Parameters:

- __HANDLE__: specifies the UART Handle.

Return value:

- None

Notes:

- This macro allows to disable RTS hardware flow control for a given UART instance, without need to call HAL_UART_Init() function. As involving direct access to UART registers, usage of this macro should be fully endorsed by user. As macro is expected to be used for modifying RTS Hw flow control feature activation, without need for USART instance Deinit/Init, following conditions for macro call should be fulfilled : UART instance should have already been initialised (through call of HAL_UART_Init())macro could only be called when corresponding UART instance is disabled (i.e. __HAL_UART_DISABLE(__HANDLE__)) and should be followed by an Enable macro (i.e. __HAL_UART_ENABLE(__HANDLE__)).

UART Status Flags

UART_FLAG_REACK	UART receive enable acknowledge flag
UART_FLAG_TEACK	UART transmit enable acknowledge flag
UART_FLAG_WUF	UART wake-up from stop mode flag
UART_FLAG_RWU	UART receiver wake-up from mute mode flag
UART_FLAG_SBKF	UART send break flag
UART_FLAG_CMF	UART character match flag
UART_FLAG_BUSY	UART busy flag
UART_FLAG_ABRF	UART auto Baud rate flag
UART_FLAG_ABRE	UART auto Baud rate error
UART_FLAG_EOBF	UART end of block flag
UART_FLAG_RTOF	UART receiver timeout flag
UART_FLAG_CTS	UART clear to send flag
UART_FLAG_CTSIF	UART clear to send interrupt flag
UART_FLAG_LBDF	UART LIN break detection flag
UART_FLAG_TXE	UART transmit data register empty
UART_FLAG_TC	UART transmission complete
UART_FLAG_RXNE	UART read data register not empty
UART_FLAG_IDLE	UART idle flag
UART_FLAG_ORE	UART overrun error
UART_FLAG_NE	UART noise error
UART_FLAG_FE	UART frame error
UART_FLAG_PE	UART parity error

UART Half Duplex Selection

UART_HALF_DUPLEX_DISABLE	UART half-duplex disabled
UART_HALF_DUPLEX_ENABLE	UART half-duplex enabled

UART Hardware Flow Control

UART_HWCONTROL_NONE	No hardware control
UART_HWCONTROL_RTS	Request To Send
UART_HWCONTROL_CTS	Clear To Send
UART_HWCONTROL_RTS_CTS	Request and Clear To Send

UART Interruptions Flag Mask

UART_IT_MASK	UART interruptions flags mask

UART Interrupts Definition

UART_IT_PE	UART parity error interruption
UART_IT_TXE	UART transmit data register empty interruption

UART_IT_TC	UART transmission complete interruption
UART_IT_RXNE	UART read data register not empty interruption
UART_IT_IDLE	UART idle interruption
UART_IT_LBD	UART LIN break detection interruption
UART_IT_CTS	UART CTS interruption
UART_IT_CM	UART character match interruption
UART_IT_WUF	UART wake-up from stop mode interruption
UART_IT_ERR	UART error interruption
UART_IT_ORE	UART overrun error interruption
UART_IT_NE	UART noise error interruption
UART_IT_FE	UART frame error interruption

UART Interruption Clear Flags

UART_CLEAR_PEF	Parity Error Clear Flag
UART_CLEAR_FEF	Framing Error Clear Flag
UART_CLEAR_NEF	Noise detected Clear Flag
UART_CLEAR_OREF	Overrun Error Clear Flag
UART_CLEAR_IDLEF	IDLE line detected Clear Flag
UART_CLEAR_TCF	Transmission Complete Clear Flag
UART_CLEAR_LBDF	LIN Break Detection Clear Flag
UART_CLEAR_CTSF	CTS Interrupt Clear Flag
UART_CLEAR_RTOF	Receiver Time Out Clear Flag
UART_CLEAR_EOBF	End Of Block Clear Flag
UART_CLEAR_CMF	Character Match Clear Flag
UART_CLEAR_WUF	Wake Up from stop mode Clear Flag

UART Local Interconnection Network mode

UART_LIN_DISABLE	Local Interconnect Network disable
UART_LIN_ENABLE	Local Interconnect Network enable

UART LIN Break Detection

UART_LINBREAKDETECTLENGTH_10B	LIN 10-bit break detection length
UART_LINBREAKDETECTLENGTH_11B	LIN 11-bit break detection length

UART Transfer Mode

UART_MODE_RX	RX mode
UART_MODE_TX	TX mode
UART_MODE_TX_RX	RX and TX mode

UART Advanced Feature MSB First

UART_ADVFEATURE_MSBFIRST_DISABLE	Most significant bit sent/received first disable

UART_ADVFEATURE_MSBFIRST_ENABLE	Most significant bit sent/received first enable

UART Advanced Feature Mute Mode Enable

UART_ADVFEATURE_MUTEMODE_DISABLE	UART mute mode disable
UART_ADVFEATURE_MUTEMODE_ENABLE	UART mute mode enable

UART One Bit Sampling Method

UART_ONE_BIT_SAMPLE_DISABLE	One-bit sampling disable
UART_ONE_BIT_SAMPLE_ENABLE	One-bit sampling enable

UART Advanced Feature Overrun Disable

UART_ADVFEATURE_OVERRUN_ENABLE	RX overrun enable
UART_ADVFEATURE_OVERRUN_DISABLE	RX overrun disable

UART Over Sampling

UART_OVERSAMPLING_16	Oversampling by 16U
UART_OVERSAMPLING_8	Oversampling by 8

UART Parity

UART_PARITY_NONE	No parity
UART_PARITY_EVEN	Even parity
UART_PARITY_ODD	Odd parity

UART Receiver TimeOut

UART_RECEIVER_TIMEOUT_DISABLE	UART receiver timeout disable
UART_RECEIVER_TIMEOUT_ENABLE	UART receiver timeout enable

UART Request Parameters

UART_AUTOBAUD_REQUEST	Auto-Baud Rate Request
UART_SENDBREAK_REQUEST	Send Break Request
UART_MUTE_MODE_REQUEST	Mute Mode Request
UART_RXDATA_FLUSH_REQUEST	Receive Data flush Request
UART_TXDATA_FLUSH_REQUEST	Transmit data flush Request

UART Advanced Feature RX Pin Active Level Inversion

UART_ADVFEATURE_RXINV_DISABLE	RX pin active level inversion disable
UART_ADVFEATURE_RXINV_ENABLE	RX pin active level inversion enable

UART Advanced Feature RX TX Pins Swap

UART_ADVFEATURE_SWAP_DISABLE	TX/RX pins swap disable
UART_ADVFEATURE_SWAP_ENABLE	TX/RX pins swap enable

UART State

UART_STATE_DISABLE	UART disabled
UART_STATE_ENABLE	UART enabled

UART Number of Stop Bits

UART_STOPBITS_0_5	UART frame with 0.5 stop bit
UART_STOPBITS_1	UART frame with 1 stop bit
UART_STOPBITS_1_5	UART frame with 1.5 stop bits
UART_STOPBITS_2	UART frame with 2 stop bits

UART Advanced Feature Stop Mode Enable

UART_ADVFEATURE_STOPMODE_DISABLE	UART stop mode disable
UART_ADVFEATURE_STOPMODE_ENABLE	UART stop mode enable

UART polling-based communications time-out value

HAL_UART_TIMEOUT_VALUE	UART polling-based communications time-out value

UART Advanced Feature TX Pin Active Level Inversion

UART_ADVFEATURE_TXINV_DISABLE	TX pin active level inversion disable
UART_ADVFEATURE_TXINV_ENABLE	TX pin active level inversion enable

UART WakeUp Address Length

UART_ADDRESS_DETECT_4B	4-bit long wake-up address
UART_ADDRESS_DETECT_7B	7-bit long wake-up address

UART WakeUp From Stop Selection

UART_WAKEUP_ON_ADDRESS	UART wake-up on address
UART_WAKEUP_ON_STARTBIT	UART wake-up on start bit
UART_WAKEUP_ON_READDATA_NONEMPTY	UART wake-up on receive data register not empty

UART WakeUp Methods

UART_WAKEUPMETHOD_IDLELINE	UART wake-up on idle line
UART_WAKEUPMETHOD_ADDRESSMARK	UART wake-up on address mark

55 HAL UART Extension Driver

55.1 UARTEx Firmware driver API description

55.1.1 UART peripheral extended features

55.1.2 Initialization and Configuration functions

This subsection provides a set of functions allowing to initialize the USARTx or the UARTy in asynchronous mode.

- For the asynchronous mode the parameters below can be configured:
  - Baud Rate
  - Word Length (Fixed to 8-bits only for LIN mode)
  - Stop Bit
  - Parity
  - Hardware flow control
  - Receiver/transmitter modes
  - Over Sampling Method
  - One-Bit Sampling Method
- For the asynchronous mode, the following advanced features can be configured as well:
  - TX and/or RX pin level inversion
  - data logical level inversion
  - RX and TX pins swap
  - RX overrun detection disabling
  - DMA disabling on RX error
  - MSB first on communication line
  - auto Baud rate detection

The HAL_RS485Ex_Init() API follows respectively the UART RS485 mode configuration procedures (details for the procedures are available in reference manual).

This section contains the following APIs:

- ***HAL_RS485Ex_Init()***

55.1.3 IO operation function

This subsection provides functions allowing to manage the UART interrupts and to handle Wake up interrupt call-back.

1. Callback provided in No_Blocking mode:
   - HAL_UARTEx_WakeupCallback()

This section contains the following APIs:

- ***HAL_UARTEx_WakeupCallback()***

55.1.4 Peripheral Control functions

This subsection provides extended functions allowing to control the UART.

- HAL_UARTEx_StopModeWakeUpSourceConfig() API sets Wakeup from Stop mode interrupt flag selection

- HAL_UARTEx_EnableStopMode() API allows the UART to wake up the MCU from Stop mode as long as UART clock is HSI or LSE
- HAL_UARTEx_DisableStopMode() API disables the above feature
- HAL_MultiProcessorEx_AddressLength_Set() API optionally sets the UART node address detection length to more than 4 bits for multiprocessor address mark wake up.

This section contains the following APIs:

- ***HAL_UARTEx_StopModeWakeUpSourceConfig()***
- ***HAL_UARTEx_EnableStopMode()***
- ***HAL_UARTEx_DisableStopMode()***
- ***HAL_MultiProcessorEx_AddressLength_Set()***
- ***HAL_UARTEx_WakeupCallback()***

55.1.5 Detailed description of functions

HAL_RS485Ex_Init

Function name
HAL_StatusTypeDef HAL_RS485Ex_Init (UART_HandleTypeDef * huart, uint32_t Polarity, uint32_t AssertionTime, uint32_t DeassertionTime)

Function description
Initialize the RS485 Driver enable feature according to the specified parameters in the UART_InitTypeDef and creates the associated handle.

Parameters
- **huart:** UART handle.
- **Polarity:** select the driver enable polarity. This parameter can be one of the following values:
  - UART_DE_POLARITY_HIGH DE signal is active high
  - UART_DE_POLARITY_LOW DE signal is active low
- **AssertionTime:** Driver Enable assertion time: 5-bit value defining the time between the activation of the DE (Driver Enable) signal and the beginning of the start bit. It is expressed in sample time units (1/8 or 1/16 bit time, depending on the oversampling rate)
- **DeassertionTime:** Driver Enable deassertion time: 5-bit value defining the time between the end of the last stop bit, in a transmitted message, and the de-activation of the DE (Driver Enable) signal. It is expressed in sample time units (1/8 or 1/16 bit time, depending on the oversampling rate).

Return values
- **HAL:** status

HAL_UARTEx_StopModeWakeUpSourceConfig

Function name
HAL_StatusTypeDef HAL_UARTEx_StopModeWakeUpSourceConfig (UART_HandleTypeDef * huart, UART_WakeUpTypeDef WakeUpSelection)

Function description
Set Wakeup from Stop mode interrupt flag selection.

Parameters
- **huart:** UART handle.
- **WakeUpSelection:** address match, Start Bit detection or RXNE bit status. This parameter can be one of the following values:

  - UART_WAKEUP_ON_ADDRESS
  - UART_WAKEUP_ON_STARTBIT
  - UART_WAKEUP_ON_READDATA_NONEMPTY

Return values
- **HAL:** status

HAL_UARTEx_EnableStopMode

Function name
HAL_StatusTypeDef HAL_UARTEx_EnableStopMode (UART_HandleTypeDef * huart)

Function description
Enable UART Stop Mode.

Parameters
- **huart:** UART handle.

Return values
- **HAL:** status

Notes
- The UART is able to wake up the MCU from Stop mode as long as UART clock is HSI or LSE.

HAL_UARTEx_DisableStopMode

Function name
HAL_StatusTypeDef HAL_UARTEx_DisableStopMode (UART_HandleTypeDef * huart)

Function description
Disable UART Stop Mode.

Parameters
- **huart:** UART handle.

Return values
- **HAL:** status

HAL_MultiProcessorEx_AddressLength_Set

Function name
HAL_StatusTypeDef HAL_MultiProcessorEx_AddressLength_Set (UART_HandleTypeDef * huart, uint32_t AddressLength)

Function description
By default in multiprocessor mode, when the wake up method is set to address mark, the UART handles only 4-bit long addresses detection; this API allows to enable longer addresses detection (6-, 7- or 8-bit long).

Parameters
- **huart:** UART handle.
- **AddressLength:** this parameter can be one of the following values:
  - UART_ADDRESS_DETECT_4B 4-bit long address
  - UART_ADDRESS_DETECT_7B 6-, 7- or 8-bit long address

Return values
- **HAL:** status

Notes
- Addresses detection lengths are: 6-bit address detection in 7-bit data mode, 7-bit address detection in 8-bit data mode, 8-bit address detection in 9-bit data mode.

HAL_UARTEx_WakeupCallback

Function name	**void HAL_UARTEx_WakeupCallback (UART_HandleTypeDef * huart)**
Function description	UART wakeup from Stop mode callback.
Parameters	• **huart:** UART handle.
Return values	• **None**

55.2 UARTEx Firmware driver defines

55.2.1 UARTEx

UARTEx Word Length

UART_WORDLENGTH_8B	8-bit long UART frame
UART_WORDLENGTH_9B	9-bit long UART frame

56 HAL USART Generic Driver

56.1 USART Firmware driver registers structures

56.1.1 USART_InitTypeDef

Data Fields

- ***uint32_t BaudRate***
- ***uint32_t WordLength***
- ***uint32_t StopBits***
- ***uint32_t Parity***
- ***uint32_t Mode***
- ***uint32_t CLKPolarity***
- ***uint32_t CLKPhase***
- ***uint32_t CLKLastBit***

Field Documentation

- ***uint32_t USART_InitTypeDef::BaudRate***
  This member configures the Usart communication baud rate. The baud rate is computed using the following formula: Baud Rate Register = ((PCLKx) / ((huart->Init.BaudRate))).
- ***uint32_t USART_InitTypeDef::WordLength***
  Specifies the number of data bits transmitted or received in a frame. This parameter can be a value of ***USARTEx_Word_Length***.
- ***uint32_t USART_InitTypeDef::StopBits***
  Specifies the number of stop bits transmitted. This parameter can be a value of ***USART_Stop_Bits***.
- ***uint32_t USART_InitTypeDef::Parity***
  Specifies the parity mode. This parameter can be a value of ***USART_Parity***
  Note: When parity is enabled, the computed parity is inserted at the MSB position of the transmitted data (9th bit when the word length is set to 9 data bits; 8th bit when the word length is set to 8 data bits).
- ***uint32_t USART_InitTypeDef::Mode***
  Specifies whether the Receive or Transmit mode is enabled or disabled. This parameter can be a value of ***USART_Mode***.
- ***uint32_t USART_InitTypeDef::CLKPolarity***
  Specifies the steady state of the serial clock. This parameter can be a value of ***USART_Clock_Polarity***.
- ***uint32_t USART_InitTypeDef::CLKPhase***
  Specifies the clock transition on which the bit capture is made. This parameter can be a value of ***USART_Clock_Phase***.
- ***uint32_t USART_InitTypeDef::CLKLastBit***
  Specifies whether the clock pulse corresponding to the last transmitted data bit (MSB) has to be output on the SCLK pin in synchronous mode. This parameter can be a value of ***USART_Last_Bit***.

56.1.2 USART_HandleTypeDef

Data Fields

- ***USART_TypeDef * Instance***
- ***USART_InitTypeDef Init***

- ***uint8_t * pTxBuffPtr***
- ***uint16_t TxXferSize***
- ***__IO uint16_t TxXferCount***
- ***uint8_t * pRxBuffPtr***
- ***uint16_t RxXferSize***
- ***__IO uint16_t RxXferCount***
- ***uint16_t Mask***
- ***DMA_HandleTypeDef * hdmatx***
- ***DMA_HandleTypeDef * hdmarx***
- ***HAL_LockTypeDef Lock***
- ***__IO HAL_USART_StateTypeDef State***
- ***__IO uint32_t ErrorCode***

Field Documentation

- ***USART_TypeDef* USART_HandleTypeDef::Instance***
  USART registers base address
- ***USART_InitTypeDef USART_HandleTypeDef::Init***
  USART communication parameters
- ***uint8_t* USART_HandleTypeDef::pTxBuffPtr***
  Pointer to USART Tx transfer Buffer
- ***uint16_t USART_HandleTypeDef::TxXferSize***
  USART Tx Transfer size
- ***__IO uint16_t USART_HandleTypeDef::TxXferCount***
  USART Tx Transfer Counter
- ***uint8_t* USART_HandleTypeDef::pRxBuffPtr***
  Pointer to USART Rx transfer Buffer
- ***uint16_t USART_HandleTypeDef::RxXferSize***
  USART Rx Transfer size
- ***__IO uint16_t USART_HandleTypeDef::RxXferCount***
  USART Rx Transfer Counter
- ***uint16_t USART_HandleTypeDef::Mask***
  USART Rx RDR register mask
- ***DMA_HandleTypeDef* USART_HandleTypeDef::hdmatx***
  USART Tx DMA Handle parameters
- ***DMA_HandleTypeDef* USART_HandleTypeDef::hdmarx***
  USART Rx DMA Handle parameters
- ***HAL_LockTypeDef USART_HandleTypeDef::Lock***
  Locking object
- ***__IO HAL_USART_StateTypeDef USART_HandleTypeDef::State***
  USART communication state
- ***__IO uint32_t USART_HandleTypeDef::ErrorCode***
  USART Error code

56.2 USART Firmware driver API description

56.2.1 How to use this driver

The USART HAL driver can be used as follows:

1. Declare a USART_HandleTypeDef handle structure (eg. USART_HandleTypeDef husart).
2. Initialize the USART low level resources by implementing the HAL_USART_MspInit() API:
   – Enable the USARTx interface clock.

  - USART pins configuration:
    - Enable the clock for the USART GPIOs.
    - Configure these USART pins as alternate function pull-up.
  - NVIC configuration if you need to use interrupt process (HAL_USART_Transmit_IT(), HAL_USART_Receive_IT() and HAL_USART_TransmitReceive_IT() APIs):
    - Configure the USARTx interrupt priority.
    - Enable the NVIC USART IRQ handle.
  - USART interrupts handling: The specific USART interrupts (Transmission complete interrupt, RXNE interrupt and Error Interrupts) will be managed using the macros __HAL_USART_ENABLE_IT() and __HAL_USART_DISABLE_IT() inside the transmit and receive process.
  - DMA Configuration if you need to use DMA process (HAL_USART_Transmit_DMA() HAL_USART_Receive_DMA() and HAL_USART_TransmitReceive_DMA() APIs):
    - Declare a DMA handle structure for the Tx/Rx channel.
    - Enable the DMAx interface clock.
    - Configure the declared DMA handle structure with the required Tx/Rx parameters.
    - Configure the DMA Tx/Rx channel.
    - Associate the initialized DMA handle to the USART DMA Tx/Rx handle.
    - Configure the priority and enable the NVIC for the transfer complete interrupt on the DMA Tx/Rx channel.
3. Program the Baud Rate, Word Length, Stop Bit, Parity, Hardware flow control and Mode (Receiver/Transmitter) in the husart handle Init structure.
4. Initialize the USART registers by calling the HAL_USART_Init() API:
   - This API configures also the low level Hardware (GPIO, CLOCK, CORTEX...etc) by calling the customized HAL_USART_MspInit(&husart) API.
5. Three operation modes are available within this driver :

Polling mode IO operation

- Send an amount of data in blocking mode using HAL_USART_Transmit()
- Receive an amount of data in blocking mode using HAL_USART_Receive()

Interrupt mode IO operation

- Send an amount of data in non blocking mode using HAL_USART_Transmit_IT()
- At transmission end of half transfer HAL_USART_TxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_USART_TxHalfCpltCallback
- At transmission end of transfer HAL_USART_TxCpltCallback is executed and user can add his own code by customization of function pointer HAL_USART_TxCpltCallback
- Receive an amount of data in non blocking mode using HAL_USART_Receive_IT()
- At reception end of half transfer HAL_USART_RxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_USART_RxHalfCpltCallback
- At reception end of transfer HAL_USART_RxCpltCallback is executed and user can add his own code by customization of function pointer HAL_USART_RxCpltCallback
- In case of transfer Error, HAL_USART_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_USART_ErrorCallback

DMA mode IO operation

- Send an amount of data in non blocking mode (DMA) using HAL_USART_Transmit_DMA()
- At transmission end of half transfer HAL_USART_TxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_USART_TxHalfCpltCallback
- At transmission end of transfer HAL_USART_TxCpltCallback is executed and user can add his own code by customization of function pointer HAL_USART_TxCpltCallback
- Receive an amount of data in non blocking mode (DMA) using HAL_USART_Receive_DMA()
- At reception end of half transfer HAL_USART_RxHalfCpltCallback is executed and user can add his own code by customization of function pointer HAL_USART_RxHalfCpltCallback
- At reception end of transfer HAL_USART_RxCpltCallback is executed and user can add his own code by customization of function pointer HAL_USART_RxCpltCallback
- In case of transfer Error, HAL_USART_ErrorCallback() function is executed and user can add his own code by customization of function pointer HAL_USART_ErrorCallback
- Pause the DMA Transfer using HAL_USART_DMAPause()
- Resume the DMA Transfer using HAL_USART_DMAResume()
- Stop the DMA Transfer using HAL_USART_DMAStop()

USART HAL driver macros list

Below the list of most used macros in USART HAL driver.

- __HAL_USART_ENABLE: Enable the USART peripheral
- __HAL_USART_DISABLE: Disable the USART peripheral
- __HAL_USART_GET_FLAG : Check whether the specified USART flag is set or not
- __HAL_USART_CLEAR_FLAG : Clear the specified USART pending flag
- __HAL_USART_ENABLE_IT: Enable the specified USART interrupt
- __HAL_USART_DISABLE_IT: Disable the specified USART interrupt



You can refer to the USART HAL driver header file for more useful macros



To configure and enable/disable the USART to wake up the MCU from stop mode, resort to UART API's HAL_UARTEx_StopModeWakeUpSourceConfig(), HAL_UARTEx_EnableStopMode() and HAL_UARTEx_DisableStopMode() in casting the USART handle to UART type UART_HandleTypeDef.

56.2.2 Initialization and Configuration functions

This subsection provides a set of functions allowing to initialize the USART in asynchronous and in synchronous modes.

- For the asynchronous mode only these parameters can be configured:
  - Baud Rate
  - Word Length
  - Stop Bit

- Parity
- USART polarity
- USART phase
- USART LastBit
- Receiver/transmitter modes

The HAL_USART_Init() function follows the USART synchronous configuration procedure (details for the procedure are available in reference manual).

This section contains the following APIs:

- ***HAL_USART_Init()***
- ***HAL_USART_DeInit()***
- ***HAL_USART_MspInit()***
- ***HAL_USART_MspDeInit()***

56.2.3 IO operation functions

This subsection provides a set of functions allowing to manage the USART synchronous data transfers.

The USART supports master mode only: it cannot receive or send data related to an input clock (SCLK is always an output).

1. There are two modes of transfer:
   - Blocking mode: The communication is performed in polling mode. The HAL status of all data processing is returned by the same function after finishing transfer.
   - No-Blocking mode: The communication is performed using Interrupts or DMA, These APIs return the HAL status. The end of the data processing will be indicated through the dedicated USART IRQ when using Interrupt mode or the DMA IRQ when using DMA mode. The HAL_USART_TxCpltCallback(), HAL_USART_RxCpltCallback() and HAL_USART_TxRxCpltCallback() user callbacks will be executed respectively at the end of the transmit or Receive process The HAL_USART_ErrorCallback()user callback will be executed when a communication error is detected
2. Blocking mode APIs are :
   - HAL_USART_Transmit() in simplex mode
   - HAL_USART_Receive() in full duplex receive only
   - HAL_USART_TransmitReceive() in full duplex mode
3. No-Blocking mode APIs with Interrupt are :
   - HAL_USART_Transmit_IT() in simplex mode
   - HAL_USART_Receive_IT() in full duplex receive only
   - HAL_USART_TransmitReceive_IT()in full duplex mode
   - HAL_USART_IRQHandler()
4. No-Blocking mode APIs with DMA are :
   - HAL_USART_Transmit_DMA() in simplex mode
   - HAL_USART_Receive_DMA() in full duplex receive only
   - HAL_USART_TransmitReceive_DMA() in full duplex mode
   - HAL_USART_DMAPause()
   - HAL_USART_DMAResume()
   - HAL_USART_DMAStop()
5. A set of Transfer Complete Callbacks are provided in No-Blocking mode:
   - HAL_USART_TxCpltCallback()
   - HAL_USART_RxCpltCallback()
   - HAL_USART_TxHalfCpltCallback()
   - HAL_USART_RxHalfCpltCallback()

  - HAL_USART_ErrorCallback()
  - HAL_USART_TxRxCpltCallback()
6. Non-Blocking mode transfers could be aborted using Abort API's :
  - HAL_USART_Abort()
  - HAL_USART_Abort_IT()
7. For Abort services based on interrupts (HAL_USART_Abort_IT), a Abort Complete Callbacks is provided:
  - HAL_USART_AbortCpltCallback()
8. In Non-Blocking mode transfers, possible errors are split into 2 categories. Errors are handled as follows :
  - Error is considered as Recoverable and non blocking : Transfer could go till end, but error severity is to be evaluated by user : this concerns Frame Error, Parity Error or Noise Error in Interrupt mode reception . Received character is then retrieved and stored in Rx buffer, Error code is set to allow user to identify error type, and HAL_USART_ErrorCallback() user callback is executed. Transfer is kept ongoing on USART side. If user wants to abort it, Abort services should be called by user.
  - Error is considered as Blocking : Transfer could not be completed properly and is aborted. This concerns Overrun Error In Interrupt mode reception and all errors in DMA mode. Error code is set to allow user to identify error type, and HAL_USART_ErrorCallback() user callback is executed.

This section contains the following APIs:

- ***HAL_USART_Transmit()***
- ***HAL_USART_Receive()***
- ***HAL_USART_TransmitReceive()***
- ***HAL_USART_Transmit_IT()***
- ***HAL_USART_Receive_IT()***
- ***HAL_USART_TransmitReceive_IT()***
- ***HAL_USART_Transmit_DMA()***
- ***HAL_USART_Receive_DMA()***
- ***HAL_USART_TransmitReceive_DMA()***
- ***HAL_USART_DMAPause()***
- ***HAL_USART_DMAResume()***
- ***HAL_USART_DMAStop()***
- ***HAL_USART_Abort()***
- ***HAL_USART_Abort_IT()***
- ***HAL_USART_IRQHandler()***
- ***HAL_USART_TxCpltCallback()***
- ***HAL_USART_TxHalfCpltCallback()***
- ***HAL_USART_RxCpltCallback()***
- ***HAL_USART_RxHalfCpltCallback()***
- ***HAL_USART_TxRxCpltCallback()***
- ***HAL_USART_ErrorCallback()***
- ***HAL_USART_AbortCpltCallback()***

56.2.4 Peripheral State and Error functions

This subsection provides functions allowing to :

- Return the USART handle state
- Return the USART handle error code

This section contains the following APIs:

- *HAL_USART_GetState()*
- *HAL_USART_GetError()*

56.2.5 Detailed description of functions

HAL_USART_Init

Function name	**HAL_StatusTypeDef HAL_USART_Init (USART_HandleTypeDef * husart)**
Function description	Initialize the USART mode according to the specified parameters in the USART_InitTypeDef and initialize the associated handle.
Parameters	• **husart:** USART handle.
Return values	• **HAL:** status

HAL_USART_DeInit

Function name	**HAL_StatusTypeDef HAL_USART_DeInit (USART_HandleTypeDef * husart)**
Function description	DeInitialize the USART peripheral.
Parameters	• **husart:** USART handle.
Return values	• **HAL:** status

HAL_USART_MspInit

Function name	**void HAL_USART_MspInit (USART_HandleTypeDef * husart)**
Function description	Initialize the USART MSP.
Parameters	• **husart:** USART handle.
Return values	• **None**

HAL_USART_MspDeInit

Function name	**void HAL_USART_MspDeInit (USART_HandleTypeDef * husart)**
Function description	DeInitialize the USART MSP.
Parameters	• **husart:** USART handle.
Return values	• **None**

HAL_USART_Transmit

Function name	**HAL_StatusTypeDef HAL_USART_Transmit (USART_HandleTypeDef * husart, uint8_t * pTxData, uint16_t Size, uint32_t Timeout)**
Function description	Simplex send an amount of data in blocking mode.
Parameters	• **husart:** USART handle. • **pTxData:** Pointer to data buffer.

- **Size:** Amount of data to be sent.
- **Timeout:** Timeout duration.

Return values
- **HAL:** status

HAL_USART_Receive

Function name **HAL_StatusTypeDef HAL_USART_Receive (USART_HandleTypeDef * husart, uint8_t * pRxData, uint16_t Size, uint32_t Timeout)**

Function description Receive an amount of data in blocking mode.

Parameters
- **husart:** USART handle.
- **pRxData:** Pointer to data buffer.
- **Size:** Amount of data to be received.
- **Timeout:** Timeout duration.

Return values
- **HAL:** status

Notes
- To receive synchronous data, dummy data are simultaneously transmitted.

HAL_USART_TransmitReceive

Function name **HAL_StatusTypeDef HAL_USART_TransmitReceive (USART_HandleTypeDef * husart, uint8_t * pTxData, uint8_t * pRxData, uint16_t Size, uint32_t Timeout)**

Function description Full-Duplex Send and Receive an amount of data in blocking mode.

Parameters
- **husart:** USART handle.
- **pTxData:** pointer to TX data buffer.
- **pRxData:** pointer to RX data buffer.
- **Size:** amount of data to be sent (same amount to be received).
- **Timeout:** Timeout duration.

Return values
- **HAL:** status

HAL_USART_Transmit_IT

Function name **HAL_StatusTypeDef HAL_USART_Transmit_IT (USART_HandleTypeDef * husart, uint8_t * pTxData, uint16_t Size)**

Function description Send an amount of data in interrupt mode.

Parameters
- **husart:** USART handle.
- **pTxData:** pointer to data buffer.
- **Size:** amount of data to be sent.

Return values
- **HAL:** status

HAL_USART_Receive_IT

Function name	**HAL_StatusTypeDef HAL_USART_Receive_IT (USART_HandleTypeDef * husart, uint8_t * pRxData, uint16_t Size)**
Function description	Receive an amount of data in interrupt mode.
Parameters	• **husart:** USART handle. • **pRxData:** pointer to data buffer. • **Size:** amount of data to be received.
Return values	• **HAL:** status
Notes	• To receive synchronous data, dummy data are simultaneously transmitted.

HAL_USART_TransmitReceive_IT

Function name	**HAL_StatusTypeDef HAL_USART_TransmitReceive_IT (USART_HandleTypeDef * husart, uint8_t * pTxData, uint8_t * pRxData, uint16_t Size)**
Function description	Full-Duplex Send and Receive an amount of data in interrupt mode.
Parameters	• **husart:** USART handle. • **pTxData:** pointer to TX data buffer. • **pRxData:** pointer to RX data buffer. • **Size:** amount of data to be sent (same amount to be received).
Return values	• **HAL:** status

HAL_USART_Transmit_DMA

Function name	**HAL_StatusTypeDef HAL_USART_Transmit_DMA (USART_HandleTypeDef * husart, uint8_t * pTxData, uint16_t Size)**
Function description	Send an amount of data in DMA mode.
Parameters	• **husart:** USART handle. • **pTxData:** pointer to data buffer. • **Size:** amount of data to be sent.
Return values	• **HAL:** status
Notes	• This function starts a DMA transfer in interrupt mode meaning that DMA half transfer complete, DMA transfer complete and DMA transfer error interrupts are enabled

HAL_USART_Receive_DMA

Function name	**HAL_StatusTypeDef HAL_USART_Receive_DMA (USART_HandleTypeDef * husart, uint8_t * pRxData, uint16_t Size)**
Function description	Receive an amount of data in DMA mode.

Parameters
- **husart:** USART handle.
- **pRxData:** pointer to data buffer.
- **Size:** amount of data to be received.

Return values
- **HAL:** status

Notes
- When the USART parity is enabled (PCE = 1), the received data contain the parity bit (MSB position).
- The USART DMA transmit channel must be configured in order to generate the clock for the slave.
- This function starts a DMA transfer in interrupt mode meaning that DMA half transfer complete, DMA transfer complete and DMA transfer error interrupts are enabled

HAL_USART_TransmitReceive_DMA

Function name **HAL_StatusTypeDef HAL_USART_TransmitReceive_DMA (USART_HandleTypeDef * husart, uint8_t * pTxData, uint8_t * pRxData, uint16_t Size)**

Function description Full-Duplex Transmit Receive an amount of data in non-blocking mode.

Parameters
- **husart:** USART handle.
- **pTxData:** pointer to TX data buffer.
- **pRxData:** pointer to RX data buffer.
- **Size:** amount of data to be received/sent.

Return values
- **HAL:** status

Notes
- When the USART parity is enabled (PCE = 1) the data received contain the parity bit.
- This function starts a 2 DMA transfers in interrupt mode meaning that DMA half transfer complete, DMA transfer complete and DMA transfer error interrupts are enabled

HAL_USART_DMAPause

Function name **HAL_StatusTypeDef HAL_USART_DMAPause (USART_HandleTypeDef * husart)**

Function description Pause the DMA Transfer.

Parameters
- **husart:** USART handle.

Return values
- **HAL:** status

HAL_USART_DMAResume

Function name **HAL_StatusTypeDef HAL_USART_DMAResume (USART_HandleTypeDef * husart)**

Function description Resume the DMA Transfer.

Parameters
- **husart:** USART handle.

Return values
- **HAL:** status

HAL_USART_DMAStop

Function name **HAL_StatusTypeDef HAL_USART_DMAStop (USART_HandleTypeDef * husart)**

Function description Stop the DMA Transfer.

Parameters
- **husart:** USART handle.

Return values
- **HAL:** status

HAL_USART_Abort

Function name **HAL_StatusTypeDef HAL_USART_Abort (USART_HandleTypeDef * husart)**

Function description Abort ongoing transfers (blocking mode).

Parameters
- **husart:** USART handle.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable USART Interrupts (Tx and Rx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort (in case of transfer in DMA mode)Set handle State to READY
- This procedure is executed in blocking mode : when exiting function, Abort is considered as completed.

HAL_USART_Abort_IT

Function name **HAL_StatusTypeDef HAL_USART_Abort_IT (USART_HandleTypeDef * husart)**

Function description Abort ongoing transfers (Interrupt mode).

Parameters
- **husart:** USART handle.

Return values
- **HAL:** status

Notes
- This procedure could be used for aborting any ongoing transfer started in Interrupt or DMA mode. This procedure performs following operations : Disable USART Interrupts (Tx and Rx)Disable the DMA transfer in the peripheral register (if enabled)Abort DMA transfer by calling HAL_DMA_Abort_IT (in case of transfer in DMA mode)Set handle State to READYAt abort completion, call user abort complete callback
- This procedure is executed in Interrupt mode, meaning that abort procedure could be considered as completed only when user abort complete callback is executed (not when exiting function).

HAL_USART_IRQHandler

Function name **void HAL_USART_IRQHandler (USART_HandleTypeDef * husart)**

Function description Handle USART interrupt request.

Parameters
- **husart:** USART handle.

Return values
- **None**

HAL_USART_TxCpltCallback

Function name **void HAL_USART_TxCpltCallback (USART_HandleTypeDef * husart)**

Function description Tx Transfer completed callback.

Parameters
- **husart:** USART handle.

Return values
- **None**

HAL_USART_TxHalfCpltCallback

Function name **void HAL_USART_TxHalfCpltCallback (USART_HandleTypeDef * husart)**

Function description Tx Half Transfer completed callback.

Parameters
- **husart:** USART handle.

Return values
- **None**

HAL_USART_RxCpltCallback

Function name **void HAL_USART_RxCpltCallback (USART_HandleTypeDef * husart)**

Function description Rx Transfer completed callback.

Parameters
- **husart:** USART handle.

Return values
- **None**

HAL_USART_RxHalfCpltCallback

Function name **void HAL_USART_RxHalfCpltCallback (USART_HandleTypeDef * husart)**

Function description Rx Half Transfer completed callback.

Parameters
- **husart:** USART handle.

Return values
- **None**

HAL_USART_TxRxCpltCallback

Function name **void HAL_USART_TxRxCpltCallback (USART_HandleTypeDef * husart)**

Function description Tx/Rx Transfers completed callback for the non-blocking process.

Parameters
- **husart:** USART handle.

Return values
- **None**

HAL_USART_ErrorCallback

Function name **void HAL_USART_ErrorCallback (USART_HandleTypeDef * husart)**

Function description USART error callback.

Parameters
- **husart:** USART handle.

Return values
- **None**

HAL_USART_AbortCpltCallback

Function name **void HAL_USART_AbortCpltCallback (USART_HandleTypeDef * husart)**

Function description USART Abort Complete callback.

Parameters
- **husart:** USART handle.

Return values
- **None**

HAL_USART_GetState

Function name **HAL_USART_StateTypeDef HAL_USART_GetState (USART_HandleTypeDef * husart)**

Function description Return the USART handle state.

Parameters
- **husart:** pointer to a USART_HandleTypeDef structure that contains the configuration information for the specified USART.

Return values
- **USART:** handle state

HAL_USART_GetError

Function name **uint32_t HAL_USART_GetError (USART_HandleTypeDef * husart)**

Function description Return the USART error code.

Parameters
- **husart:** pointer to a USART_HandleTypeDef structure that contains the configuration information for the specified USART.

Return values
- **USART:** handle Error Code

56.3 USART Firmware driver defines

56.3.1 USART

USART Clock

USART_CLOCK_DISABLE USART clock disable

USART_CLOCK_ENABLE USART clock enable

USART Clock Phase

USART_PHASE_1EDGE USART frame phase on first clock transition

USART_PHASE_2EDGE USART frame phase on second clock transition

USART Clock Polarity

USART_POLARITY_LOW USART Clock signal is steady Low

USART_POLARITY_HIGH USART Clock signal is steady High

USART Error

HAL_USART_ERROR_NONE No error

HAL_USART_ERROR_PE Parity error

HAL_USART_ERROR_NE Noise error

HAL_USART_ERROR_FE frame error

HAL_USART_ERROR_ORE Overrun error

HAL_USART_ERROR_DMA DMA transfer error

USART Exported Macros

__HAL_USART_RESET_HANDLE_STATE

Description:

- Reset USART handle state.

Parameters:

- __HANDLE__: USART handle.

Return value:

- None

__HAL_USART_FLUSH_DRREGISTER

Description:

- Flush the USART Data registers.

Parameters:

- __HANDLE__: specifies the USART Handle.

Return value:

- None

__HAL_USART_GET_FLAG

Description:

- Check whether the specified USART flag is set or not.

Parameters:

- __HANDLE__: specifies the USART Handle
- __FLAG__: specifies the flag to check. This parameter can be one of the following values:
  - USART_FLAG_REACK Receive enable acknowledge flag
  - USART_FLAG_TEACK Transmit enable acknowledge flag
  - USART_FLAG_BUSY Busy flag
  - USART_FLAG_CTS CTS Change flag
  - USART_FLAG_TXE Transmit data register empty flag
  - USART_FLAG_TC Transmission Complete flag

  - USART_FLAG_RXNE Receive data register not empty flag
  - USART_FLAG_IDLE Idle Line detection flag
  - USART_FLAG_ORE OverRun Error flag
  - USART_FLAG_NE Noise Error flag
  - USART_FLAG_FE Framing Error flag
  - USART_FLAG_PE Parity Error flag

Return value:

- The: new state of __FLAG__ (TRUE or FALSE).

__HAL_USART_CLEAR_FLAG

Description:

- Clear the specified USART pending flag.

Parameters:

- __HANDLE__: specifies the USART Handle.
- __FLAG__: specifies the flag to check. This parameter can be any combination of the following values:
  - USART_CLEAR_PEF
  - USART_CLEAR_FEF
  - USART_CLEAR_NEF
  - USART_CLEAR_OREF
  - USART_CLEAR_IDLEF
  - USART_CLEAR_TCF
  - USART_CLEAR_CTSF

Return value:

- None

__HAL_USART_CLEAR_PEFLAG

Description:

- Clear the USART PE pending flag.

Parameters:

- __HANDLE__: specifies the USART Handle.

Return value:

- None

__HAL_USART_CLEAR_FEFLAG

Description:

- Clear the USART FE pending flag.

Parameters:

- __HANDLE__: specifies the USART Handle.

Return value:

- None

__HAL_USART_CLEAR_NEFLAG

Description:

- Clear the USART NE pending flag.

Parameters:

- __HANDLE__: specifies the USART Handle.

Return value:

- None

__HAL_USART_CLEAR_OREFLAG

Description:

- Clear the USART ORE pending flag.

Parameters:

- __HANDLE__: specifies the USART Handle.

Return value:

- None

__HAL_USART_CLEAR_IDLEFLAG

Description:

- Clear the USART IDLE pending flag.

Parameters:

- __HANDLE__: specifies the USART Handle.

Return value:

- None

__HAL_USART_ENABLE_IT

Description:

- Enable the specified USART interrupt.

Parameters:

- __HANDLE__: specifies the USART Handle.
- __INTERRUPT__: specifies the USART interrupt source to enable. This parameter can be one of the following values:
  - USART_IT_TXE Transmit Data Register empty interrupt
  - USART_IT_TC Transmission complete interrupt
  - USART_IT_RXNE Receive Data register not empty interrupt
  - USART_IT_IDLE Idle line detection interrupt
  - USART_IT_PE Parity Error interrupt
  - USART_IT_ERR Error interrupt(Frame error, noise error, overrun error)

Return value:

- None

__HAL_USART_DISABLE_IT

Description:

- Disable the specified USART interrupt.

Parameters:

- __HANDLE__: specifies the USART Handle.
- __INTERRUPT__: specifies the USART

interrupt source to disable. This parameter can be one of the following values:
- USART_IT_TXE Transmit Data Register empty interrupt
- USART_IT_TC Transmission complete interrupt
- USART_IT_RXNE Receive Data register not empty interrupt
- USART_IT_IDLE Idle line detection interrupt
- USART_IT_PE Parity Error interrupt
- USART_IT_ERR Error interrupt(Frame error, noise error, overrun error)

Return value:

- None

__HAL_USART_GET_IT

Description:

- Check whether the specified USART interrupt has occurred or not.

Parameters:

- __HANDLE__: specifies the USART Handle.
- __IT__: specifies the USART interrupt source to check. This parameter can be one of the following values:
  - USART_IT_TXE Transmit Data Register empty interrupt
  - USART_IT_TC Transmission complete interrupt
  - USART_IT_RXNE Receive Data register not empty interrupt
  - USART_IT_IDLE Idle line detection interrupt
  - USART_IT_ORE OverRun Error interrupt
  - USART_IT_NE Noise Error interrupt
  - USART_IT_FE Framing Error interrupt
  - USART_IT_PE Parity Error interrupt

Return value:

- The: new state of __IT__ (TRUE or FALSE).

__HAL_USART_GET_IT_SOURCE

Description:

- Check whether the specified USART interrupt source is enabled or not.

Parameters:

- __HANDLE__: specifies the USART Handle.
- __IT__: specifies the USART interrupt source to check. This parameter can be one of the following values:
  - USART_IT_TXE Transmit Data Register empty interrupt

- USART_IT_TC Transmission complete interrupt
- USART_IT_RXNE Receive Data register not empty interrupt
- USART_IT_IDLE Idle line detection interrupt
- USART_IT_ORE OverRun Error interrupt
- USART_IT_NE Noise Error interrupt
- USART_IT_FE Framing Error interrupt
- USART_IT_PE Parity Error interrupt

Return value:

- The: new state of __IT__ (TRUE or FALSE).

__HAL_USART_CLEAR_IT

Description:

- Clear the specified USART ISR flag, in setting the proper ICR register flag.

Parameters:

- __HANDLE__: specifies the USART Handle.
- __IT_CLEAR__: specifies the interrupt clear register flag that needs to be set to clear the corresponding interrupt. This parameter can be one of the following values:
  - USART_CLEAR_PEF Parity Error Clear Flag
  - USART_CLEAR_FEF Framing Error Clear Flag
  - USART_CLEAR_NEF Noise detected Clear Flag
  - USART_CLEAR_OREF OverRun Error Clear Flag
  - USART_CLEAR_IDLEF IDLE line detected Clear Flag
  - USART_CLEAR_TCF Transmission Complete Clear Flag
  - USART_CLEAR_CTSF CTS Interrupt Clear Flag

Return value:

- None

__HAL_USART_SEND_REQ

Description:

- Set a specific USART request flag.

Parameters:

- __HANDLE__: specifies the USART Handle.
- __REQ__: specifies the request flag to set. This parameter can be one of the following values:
  - USART_RXDATA_FLUSH_REQUEST Receive Data flush Request
  - USART_TXDATA_FLUSH_REQUEST

	Transmit data flush Request **Return value:** • None
__HAL_USART_ONE_BIT_SAMPLE_ ENABLE	**Description:** • Enable the USART one bit sample method. **Parameters:** • __HANDLE__: specifies the USART Handle. **Return value:** • None
__HAL_USART_ONE_BIT_SAMPLE_ DISABLE	**Description:** • Disable the USART one bit sample method. **Parameters:** • __HANDLE__: specifies the USART Handle. **Return value:** • None
__HAL_USART_ENABLE	**Description:** • Enable USART. **Parameters:** • __HANDLE__: specifies the USART Handle. **Return value:** • None
__HAL_USART_DISABLE	**Description:** • Disable USART. **Parameters:** • __HANDLE__: specifies the USART Handle. **Return value:** • None

USART Flags

USART_FLAG_REACK	USART receive enable acknowledge flag
USART_FLAG_TEACK	USART transmit enable acknowledge flag
USART_FLAG_BUSY	USART busy flag
USART_FLAG_CTS	USART clear to send flag
USART_FLAG_CTSIF	USART clear to send interrupt flag
USART_FLAG_LBDF	USART LIN break detection flag
USART_FLAG_TXE	USART transmit data register empty
USART_FLAG_TC	USART transmission complete

USART_FLAG_RXNE	USART read data register not empty
USART_FLAG_IDLE	USART idle flag
USART_FLAG_ORE	USART overrun error
USART_FLAG_NE	USART noise error
USART_FLAG_FE	USART frame error
USART_FLAG_PE	USART parity error

USART Interruption Flags Mask

USART_IT_MASK	USART interruptions flags mask

USART Interrupts Definition

USART_IT_PE	USART parity error interruption
USART_IT_TXE	USART transmit data register empty interruption
USART_IT_TC	USART transmission complete interruption
USART_IT_RXNE	USART read data register not empty interruption
USART_IT_IDLE	USART idle interruption
USART_IT_ERR	USART error interruption
USART_IT_ORE	USART overrun error interruption
USART_IT_NE	USART noise error interruption
USART_IT_FE	USART frame error interruption

USART Interruption Clear Flags

USART_CLEAR_PEF	Parity Error Clear Flag
USART_CLEAR_FEF	Framing Error Clear Flag
USART_CLEAR_NEF	Noise detected Clear Flag
USART_CLEAR_OREF	OverRun Error Clear Flag
USART_CLEAR_IDLEF	IDLE line detected Clear Flag
USART_CLEAR_TCF	Transmission Complete Clear Flag
USART_CLEAR_CTSF	CTS Interrupt Clear Flag

USART Last Bit

USART_LASTBIT_DISABLE	USART frame last data bit clock pulse not output to SCLK pin
USART_LASTBIT_ENABLE	USART frame last data bit clock pulse output to SCLK pin

USART Mode

USART_MODE_RX	RX mode
USART_MODE_TX	TX mode
USART_MODE_TX_RX	RX and TX mode

USART Parity

USART_PARITY_NONE	No parity
USART_PARITY_EVEN	Even parity

USART_PARITY_ODD	Odd parity

USART Request Parameters

USART_RXDATA_FLUSH_REQUEST	Receive Data flush Request
USART_TXDATA_FLUSH_REQUEST	Transmit data flush Request

USART Number of Stop Bits

USART_STOPBITS_0_5	USART frame with 0.5 stop bit
USART_STOPBITS_1	USART frame with 1 stop bit
USART_STOPBITS_1_5	USART frame with 1.5 stop bits
USART_STOPBITS_2	USART frame with 2 stop bits

57 HAL USART Extension Driver

57.1 USARTEx Firmware driver defines

57.1.1 USARTEx

USARTEx Word Length

USART_WORDLENGTH_8B	8-bit long USART frame
USART_WORDLENGTH_9B	9-bit long USART frame

58 HAL WWDG Generic Driver

58.1 WWDG Firmware driver registers structures

58.1.1 WWDG_InitTypeDef

Data Fields

- ***uint32_t Prescaler***
- ***uint32_t Window***
- ***uint32_t Counter***
- ***uint32_t EWIMode***

Field Documentation

- ***uint32_t WWDG_InitTypeDef::Prescaler***
  Specifies the prescaler value of the WWDG. This parameter can be a value of ***WWDG_Prescaler***
- ***uint32_t WWDG_InitTypeDef::Window***
  Specifies the WWDG window value to be compared to the downcounter. This parameter must be a number Min_Data = 0x40 and Max_Data = 0x7FU
- ***uint32_t WWDG_InitTypeDef::Counter***
  Specifies the WWDG free-running downcounter value. This parameter must be a number between Min_Data = 0x40 and Max_Data = 0x7FU
- ***uint32_t WWDG_InitTypeDef::EWIMode***
  Specifies if WWDG Early Wakeup Interupt is enable or not. This parameter can be a value of ***WWDG_EWI_Mode***

58.1.2 WWDG_HandleTypeDef

Data Fields

- ***WWDG_TypeDef * Instance***
- ***WWDG_InitTypeDef Init***

Field Documentation

- ***WWDG_TypeDef* WWDG_HandleTypeDef::Instance***
  Register base address
- ***WWDG_InitTypeDef WWDG_HandleTypeDef::Init***
  WWDG required parameters

58.2 WWDG Firmware driver API description

58.2.1 WWDG specific features

Once enabled the WWDG generates a system reset on expiry of a programmed time period, unless the program refreshes the counter (T[6U;0] downcounter) before reaching 0x3F value (i.e. a reset is generated when the counter value rolls over from 0x40 to 0x3FU).

- An MCU reset is also generated if the counter value is refreshed before the counter has reached the refresh window value. This implies that the counter must be refreshed in a limited window.
- Once enabled the WWDG cannot be disabled except by a system reset.

- WWDGRST flag in RCC_CSR register informs when a WWDG reset has occurred (check available with __HAL_RCC_GET_FLAG(RCC_FLAG_WWDGRST)).
- The WWDG downcounter input clock is derived from the APB clock divided by a programmable prescaler.
- WWDG downcounter clock (Hz) = PCLK1 / (4096U * Prescaler)
- WWDG timeout (ms) = (1000U * (T[5U;0] + 1U)) / (WWDG downcounter clock) where T[5U;0] are the lowest 6 bits of downcounter.
- WWDG Counter refresh is allowed between the following limits :
  - min time (ms) = (1000U * (T[5U;0] - Window)) / (WWDG downcounter clock)
  - max time (ms) = (1000U * (T[5U;0] - 0x40U)) / (WWDG downcounter clock)
- Min-max timeout value @42 MHz(PCLK1): ~97.5 us / ~49.9 ms
- The Early Wakeup Interrupt (EWI) can be used if specific safety operations or data logging must be performed before the actual reset is generated. When the downcounter reaches the value 0x40U, an EWI interrupt is generated and the corresponding interrupt service routine (ISR) can be used to trigger specific actions (such as communications or data logging), before resetting the device. In some applications, the EWI interrupt can be used to manage a software system check and/or system recovery/graceful degradation, without generating a WWDG reset. In this case, the corresponding interrupt service routine (ISR) should reload the WWDG counter to avoid the WWDG reset, then trigger the required actions. Note:When the EWI interrupt cannot be served, e.g. due to a system lock in a higher priority task, the WWDG reset will eventually be generated.
- Debug mode : When the microcontroller enters debug mode (core halted), the WWDG counter either continues to work normally or stops, depending on DBG_WWDG_STOP configuration bit in DBG module, accessible through __HAL_DBGMCU_FREEZE_WWDG() and __HAL_DBGMCU_UNFREEZE_WWDG() macros

58.2.2 How to use this driver

- Enable WWDG APB1 clock using __HAL_RCC_WWDG_CLK_ENABLE().
- Set the WWDG prescaler, refresh window, counter value and Early Wakeup Interrupt mode using using HAL_WWDG_Init() function. This enables WWDG peripheral and the downcounter starts downcounting from given counter value. Init function can be called again to modify all watchdog parameters, however if EWI mode has been set once, it can't be clear until next reset.
- The application program must refresh the WWDG counter at regular intervals during normal operation to prevent an MCU reset using HAL_WWDG_Refresh() function. This operation must occur only when the counter is lower than the window value already programmed.
- if Early Wakeup Interrupt mode is enable an interrupt is generated when the counter reaches 0x40. User can add his own code in weak function HAL_WWDG_EarlyWakeupCallback().

WWDG HAL driver macros list

Below the list of most used macros in WWDG HAL driver.

- __HAL_WWDG_GET_IT_SOURCE: Check the selected WWDG's interrupt source.
- __HAL_WWDG_GET_FLAG: Get the selected WWDG's flag status.
- __HAL_WWDG_CLEAR_FLAG: Clear the WWDG's pending flags.

58.2.3 Initialization and Configuration functions

This section provides functions allowing to:

- Initialize and start the WWDG according to the specified parameters in the WWDG_InitTypeDef of associated handle.
- Initialize the WWDG MSP.

This section contains the following APIs:

- ***HAL_WWDG_Init()***
- ***HAL_WWDG_MspInit()***

58.2.4 IO operation functions

This section provides functions allowing to:

- Refresh the WWDG.
- Handle WWDG interrupt request and associated function callback.

This section contains the following APIs:

- ***HAL_WWDG_Refresh()***
- ***HAL_WWDG_IRQHandler()***
- ***HAL_WWDG_EarlyWakeupCallback()***

58.2.5 Detailed description of functions

HAL_WWDG_Init

Function name	**HAL_StatusTypeDef HAL_WWDG_Init (WWDG_HandleTypeDef * hwwdg)**
Function description	Initialize the WWDG according to the specified.
Parameters	• **hwwdg:** pointer to a WWDG_HandleTypeDef structure that contains the configuration information for the specified WWDG module.
Return values	• **HAL:** status

HAL_WWDG_MspInit

Function name	**void HAL_WWDG_MspInit (WWDG_HandleTypeDef * hwwdg)**
Function description	Initialize the WWDG MSP.
Parameters	• **hwwdg:** pointer to a WWDG_HandleTypeDef structure that contains the configuration information for the specified WWDG module.
Return values	• **None**
Notes	• When rewriting this function in user file, mechanism may be added to avoid multiple initialize when HAL_WWDG_Init function is called again to change parameters.

HAL_WWDG_Refresh

Function name	**HAL_StatusTypeDef HAL_WWDG_Refresh (WWDG_HandleTypeDef * hwwdg)**
Function description	Refresh the WWDG.
Parameters	• **hwwdg:** pointer to a WWDG_HandleTypeDef structure that contains the configuration information for the specified WWDG module.
Return values	• **HAL:** status

HAL_WWDG_IRQHandler

Function name	**void HAL_WWDG_IRQHandler (WWDG_HandleTypeDef * hwwdg)**
Function description	Handle WWDG interrupt request.
Parameters	• **hwwdg:** pointer to a WWDG_HandleTypeDef structure that contains the configuration information for the specified WWDG module.
Return values	• **None**
Notes	• The Early Wakeup Interrupt (EWI) can be used if specific safety operations or data logging must be performed before the actual reset is generated. The EWI interrupt is enabled by calling HAL_WWDG_Init function with EWIMode set to WWDG_EWI_ENABLE. When the downcounter reaches the value 0x40, and EWI interrupt is generated and the corresponding Interrupt Service Routine (ISR) can be used to trigger specific actions (such as communications or data logging), before resetting the device.

HAL_WWDG_EarlyWakeupCallback

Function name	**void HAL_WWDG_EarlyWakeupCallback (WWDG_HandleTypeDef * hwwdg)**
Function description	WWDG Early Wakeup callback.
Parameters	• **hwwdg:** pointer to a WWDG_HandleTypeDef structure that contains the configuration information for the specified WWDG module.
Return values	• **None**

58.3 WWDG Firmware driver defines

58.3.1 WWDG

WWDG Early Wakeup Interrupt Mode

WWDG_EWI_DISABLE	EWI Disable
WWDG_EWI_ENABLE	EWI Enable

WWDG Exported Macros

__HAL_WWDG_ENABLE

Description:

- Enable the WWDG peripheral.

Parameters:

- __HANDLE__: WWDG handle

Return value:

- None

__HAL_WWDG_ENABLE_IT

Description:

- Enable the WWDG early wakeup interrupt.

Parameters:

- __HANDLE__: WWDG handle
- __INTERRUPT__: specifies the interrupt to enable. This parameter can be one of the following values:
  - WWDG_IT_EWI: Early wakeup interrupt

Return value:

- None

Notes:

- Once enabled this interrupt cannot be disabled except by a system reset.

__HAL_WWDG_GET_IT

Description:

- Check whether the selected WWDG interrupt has occurred or not.

Parameters:

- __HANDLE__: WWDG handle
- __INTERRUPT__: specifies the it to check. This parameter can be one of the following values:
  - WWDG_FLAG_EWIF: Early wakeup interrupt IT

Return value:

- The: new state of WWDG_FLAG (SET or RESET).

__HAL_WWDG_CLEAR_IT

Description:

- Clear the WWDG interrupt pending bits.

Parameters:

- __HANDLE__: WWDG handle
- __INTERRUPT__: specifies the interrupt pending bit to clear. This parameter can be one of the following values:
  - WWDG_FLAG_EWIF: Early wakeup interrupt flag

__HAL_WWDG_GET_FLAG

Description:

- Check whether the specified WWDG flag is set or not.

Parameters:

- __HANDLE__: WWDG handle
- __FLAG__: specifies the flag to check. This parameter can be one of the following values:
  - WWDG_FLAG_EWIF: Early wakeup interrupt flag

Return value:

- The: new state of WWDG_FLAG (SET or RESET).

__HAL_WWDG_CLEAR_FLAG

Description:

- Clear the WWDG's pending flags.

Parameters:

- __HANDLE__: WWDG handle
- __FLAG__: specifies the flag to clear. This parameter can be one of the following values:
  - WWDG_FLAG_EWIF: Early wakeup interrupt flag

Return value:

- None

__HAL_WWDG_GET_IT_SOURCE

Description:

- Check whether the specified WWDG interrupt source is enabled or not.

Parameters:

- __HANDLE__: WWDG Handle.
- __INTERRUPT__: specifies the WWDG interrupt source to check. This parameter can be one of the following values:
  - WWDG_IT_EWI: Early Wakeup Interrupt

Return value:

- state: of __INTERRUPT__ (TRUE or FALSE).

WWDG Flag definition

WWDG_FLAG_EWIF Early wakeup interrupt flag

WWDG Interrupt definition

WWDG_IT_EWI Early wakeup interrupt

WWDG Prescaler

WWDG_PRESCALER_1	WWDG counter clock = (PCLK1/4096U)/1U
WWDG_PRESCALER_2	WWDG counter clock = (PCLK1/4096U)/2U
WWDG_PRESCALER_4	WWDG counter clock = (PCLK1/4096U)/4U
WWDG_PRESCALER_8	WWDG counter clock = (PCLK1/4096U)/8U

59 LL ADC Generic Driver

59.1 ADC Firmware driver registers structures

59.1.1 LL_ADC_CommonInitTypeDef

Data Fields

- ***uint32_t CommonClock***
- ***uint32_t Multimode***
- ***uint32_t MultiDMATransfer***
- ***uint32_t MultiTwoSamplingDelay***

Field Documentation

- ***uint32_t LL_ADC_CommonInitTypeDef::CommonClock***
  Set parameter common to several ADC: Clock source and prescaler. This parameter can be a value of ***ADC_LL_EC_COMMON_CLOCK_SOURCE***
  Note: On this STM32 serie, if ADC group injected is used, some clock ratio constraints between ADC clock and AHB clock must be respected. Refer to reference manual.
  This feature can be modified afterwards using unitary function **LL_ADC_SetCommonClock()**.
- ***uint32_t LL_ADC_CommonInitTypeDef::Multimode***
  Set ADC multimode configuration to operate in independent mode or multimode (for devices with several ADC instances). This parameter can be a value of ***ADC_LL_EC_MULTI_MODE***This feature can be modified afterwards using unitary function **LL_ADC_SetMultimode()**.
- ***uint32_t LL_ADC_CommonInitTypeDef::MultiDMATransfer***
  Set ADC multimode conversion data transfer: no transfer or transfer by DMA. This parameter can be a value of ***ADC_LL_EC_MULTI_DMA_TRANSFER***This feature can be modified afterwards using unitary function **LL_ADC_SetMultiDMATransfer()**.
- ***uint32_t LL_ADC_CommonInitTypeDef::MultiTwoSamplingDelay***
  Set ADC multimode delay between 2 sampling phases. This parameter can be a value of ***ADC_LL_EC_MULTI_TWOSMP_DELAY***This feature can be modified afterwards using unitary function **LL_ADC_SetMultiTwoSamplingDelay()**.

59.1.2 LL_ADC_InitTypeDef

Data Fields

- ***uint32_t Resolution***
- ***uint32_t DataAlignment***
- ***uint32_t LowPowerMode***

Field Documentation

- ***uint32_t LL_ADC_InitTypeDef::Resolution***
  Set ADC resolution. This parameter can be a value of ***ADC_LL_EC_RESOLUTION***This feature can be modified afterwards using unitary function **LL_ADC_SetResolution()**.
- ***uint32_t LL_ADC_InitTypeDef::DataAlignment***
  Set ADC conversion data alignment. This parameter can be a value of ***ADC_LL_EC_DATA_ALIGN***This feature can be modified afterwards using unitary function **LL_ADC_SetDataAlignment()**.

- ***uint32_t LL_ADC_InitTypeDef::LowPowerMode***
  Set ADC low power mode. This parameter can be a value of ***ADC_LL_EC_LP_MODE***This feature can be modified afterwards using unitary function **LL_ADC_SetLowPowerMode()**.

59.1.3 LL_ADC_REG_InitTypeDef

Data Fields

- ***uint32_t TriggerSource***
- ***uint32_t SequencerLength***
- ***uint32_t SequencerDiscont***
- ***uint32_t ContinuousMode***
- ***uint32_t DMATransfer***
- ***uint32_t Overrun***

Field Documentation

- ***uint32_t LL_ADC_REG_InitTypeDef::TriggerSource***
  Set ADC group regular conversion trigger source: internal (SW start) or from external IP (timer event, external interrupt line). This parameter can be a value of ***ADC_LL_EC_REG_TRIGGER_SOURCE***
  Note: On this STM32 serie, setting trigger source to external trigger also set trigger polarity to rising edge (default setting for compatibility with some ADC on other STM32 families having this setting set by HW default value). In case of need to modify trigger edge, use function **LL_ADC_REG_SetTriggerEdge()**. This feature can be modified afterwards using unitary function **LL_ADC_REG_SetTriggerSource()**.
- ***uint32_t LL_ADC_REG_InitTypeDef::SequencerLength***
  Set ADC group regular sequencer length. This parameter can be a value of ***ADC_LL_EC_REG_SEQ_SCAN_LENGTH***This feature can be modified afterwards using unitary function **LL_ADC_REG_SetSequencerLength()**.
- ***uint32_t LL_ADC_REG_InitTypeDef::SequencerDiscont***
  Set ADC group regular sequencer discontinuous mode: sequence subdivided and scan conversions interrupted every selected number of ranks. This parameter can be a value of ***ADC_LL_EC_REG_SEQ_DISCONT_MODE***
  Note: This parameter has an effect only if group regular sequencer is enabled (scan length of 2 ranks or more). This feature can be modified afterwards using unitary function **LL_ADC_REG_SetSequencerDiscont()**.
- ***uint32_t LL_ADC_REG_InitTypeDef::ContinuousMode***
  Set ADC continuous conversion mode on ADC group regular, whether ADC conversions are performed in single mode (one conversion per trigger) or in continuous mode (after the first trigger, following conversions launched successively automatically). This parameter can be a value of ***ADC_LL_EC_REG_CONTINUOUS_MODE*** Note: It is not possible to enable both ADC group regular continuous mode and discontinuous mode.This feature can be modified afterwards using unitary function **LL_ADC_REG_SetContinuousMode()**.
- ***uint32_t LL_ADC_REG_InitTypeDef::DMATransfer***
  Set ADC group regular conversion data transfer: no transfer or transfer by DMA, and DMA requests mode. This parameter can be a value of ***ADC_LL_EC_REG_DMA_TRANSFER***This feature can be modified afterwards using unitary function **LL_ADC_REG_SetDMATransfer()**.
- ***uint32_t LL_ADC_REG_InitTypeDef::Overrun***
  Set ADC group regular behavior in case of overrun: data preserved or overwritten. This parameter can be a value of ***ADC_LL_EC_REG_OVR_DATA_BEHAVIOR***This feature can be modified afterwards using unitary function **LL_ADC_REG_SetOverrun()**.

59.1.4 LL_ADC_INJ_InitTypeDef

Data Fields

- ***uint32_t TriggerSource***
- ***uint32_t SequencerLength***
- ***uint32_t SequencerDiscont***
- ***uint32_t TrigAuto***

Field Documentation

- ***uint32_t LL_ADC_INJ_InitTypeDef::TriggerSource***
  Set ADC group injected conversion trigger source: internal (SW start) or from external IP (timer event, external interrupt line). This parameter can be a value of ***ADC_LL_EC_INJ_TRIGGER_SOURCE***
  Note: On this STM32 serie, setting trigger source to external trigger also set trigger polarity to rising edge (default setting for compatibility with some ADC on other STM32 families having this setting set by HW default value). In case of need to modify trigger edge, use function **LL_ADC_INJ_SetTriggerEdge()**. This feature can be modified afterwards using unitary function **LL_ADC_INJ_SetTriggerSource()**.
- ***uint32_t LL_ADC_INJ_InitTypeDef::SequencerLength***
  Set ADC group injected sequencer length. This parameter can be a value of ***ADC_LL_EC_INJ_SEQ_SCAN_LENGTH***This feature can be modified afterwards using unitary function **LL_ADC_INJ_SetSequencerLength()**.
- ***uint32_t LL_ADC_INJ_InitTypeDef::SequencerDiscont***
  Set ADC group injected sequencer discontinuous mode: sequence subdivided and scan conversions interrupted every selected number of ranks. This parameter can be a value of ***ADC_LL_EC_INJ_SEQ_DISCONT_MODE***
  Note: This parameter has an effect only if group injected sequencer is enabled (scan length of 2 ranks or more). This feature can be modified afterwards using unitary function **LL_ADC_INJ_SetSequencerDiscont()**.
- ***uint32_t LL_ADC_INJ_InitTypeDef::TrigAuto***
  Set ADC group injected conversion trigger: independent or from ADC group regular. This parameter can be a value of ***ADC_LL_EC_INJ_TRIG_AUTO*** Note: This parameter must be set to set to independent trigger if injected trigger source is set to an external trigger.This feature can be modified afterwards using unitary function **LL_ADC_INJ_SetTrigAuto()**.

59.2 ADC Firmware driver API description

59.2.1 Detailed description of functions

LL_ADC_DMA_GetRegAddr

Function name	**__STATIC_INLINE uint32_t LL_ADC_DMA_GetRegAddr (ADC_TypeDef * ADCx, uint32_t Register)**
Function description	Function to help to configure DMA transfer from ADC: retrieve the ADC register address from ADC instance and a list of ADC registers intended to be used (most commonly) with DMA transfer.
Parameters	• **ADCx:** ADC instance • **Register:** This parameter can be one of the following values: (1) Available on devices with several ADC instances. – LL_ADC_DMA_REG_REGULAR_DATA – LL_ADC_DMA_REG_REGULAR_DATA_MULTI (1)

Return values
- **ADC:** register address

Notes
- These ADC registers are data registers: when ADC conversion data is available in ADC data registers, ADC generates a DMA transfer request.
- This macro is intended to be used with LL DMA driver, refer to function "LL_DMA_ConfigAddresses()". Example: LL_DMA_ConfigAddresses(DMA1, LL_DMA_CHANNEL_1, LL_ADC_DMA_GetRegAddr(ADC1, LL_ADC_DMA_REG_REGULAR_DATA), (uint32_t)&< array or variable >, LL_DMA_DIRECTION_PERIPH_TO_MEMORY);
- For devices with several ADC: in multimode, some devices use a different data register outside of ADC instance scope (common data register). This macro manages this register difference, only ADC instance has to be set as parameter.

Reference Manual to LL API cross reference:
- DR RDATA LL_ADC_DMA_GetRegAddr
- CDR RDATA_MST LL_ADC_DMA_GetRegAddr
- CDR RDATA_SLV LL_ADC_DMA_GetRegAddr

LL_ADC_SetCommonClock

Function name
__STATIC_INLINE void LL_ADC_SetCommonClock (ADC_Common_TypeDef * ADCxy_COMMON, uint32_t CommonClock)

Function description
Set parameter common to several ADC: Clock source and prescaler.

Parameters
- **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
- **CommonClock:** This parameter can be one of the following values:
  - LL_ADC_CLOCK_SYNC_PCLK_DIV1
  - LL_ADC_CLOCK_SYNC_PCLK_DIV2
  - LL_ADC_CLOCK_SYNC_PCLK_DIV4
  - LL_ADC_CLOCK_ASYNC_DIV1

Return values
- **None**

Notes
- On this STM32 serie, if ADC group injected is used, some clock ratio constraints between ADC clock and AHB clock must be respected. Refer to reference manual.
- On this STM32 serie, setting of this feature is conditioned to ADC state: All ADC instances of the ADC common group must be disabled. This check can be done with function LL_ADC_IsEnabled() for each ADC instance or by using helper macro helper macro __LL_ADC_IS_ENABLED_ALL_COMMON_INSTANCE().

Reference Manual to LL API cross reference:
- CCR CKMODE LL_ADC_SetCommonClock
- CCR PRESC LL_ADC_SetCommonClock

LL_ADC_GetCommonClock

Function name
__STATIC_INLINE uint32_t LL_ADC_GetCommonClock (ADC_Common_TypeDef * ADCxy_COMMON)

Function description
Get parameter common to several ADC: Clock source and prescaler.

Parameters
- **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())

Return values
- **Returned:** value can be one of the following values:
  - LL_ADC_CLOCK_SYNC_PCLK_DIV1
  - LL_ADC_CLOCK_SYNC_PCLK_DIV2
  - LL_ADC_CLOCK_SYNC_PCLK_DIV4
  - LL_ADC_CLOCK_ASYNC_DIV1

Reference Manual to LL API cross reference:
- CCR CKMODE LL_ADC_GetCommonClock
- CCR PRESC LL_ADC_GetCommonClock

LL_ADC_SetCommonPathInternalCh

Function name
__STATIC_INLINE void LL_ADC_SetCommonPathInternalCh (ADC_Common_TypeDef * ADCxy_COMMON, uint32_t PathInternal)

Function description
Set parameter common to several ADC: measurement path to internal channels (VrefInt, temperature sensor, ...).

Parameters
- **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
- **PathInternal:** This parameter can be a combination of the following values:
  - LL_ADC_PATH_INTERNAL_NONE
  - LL_ADC_PATH_INTERNAL_VREFINT
  - LL_ADC_PATH_INTERNAL_TEMPSENSOR
  - LL_ADC_PATH_INTERNAL_VBAT

Return values
- **None**

Notes
- One or several values can be selected. Example: (LL_ADC_PATH_INTERNAL_VREFINT | LL_ADC_PATH_INTERNAL_TEMPSENSOR)
- Stabilization time of measurement path to internal channel: After enabling internal paths, before starting ADC conversion, a delay is required for internal voltage reference and temperature sensor stabilization time. Refer to device datasheet. Refer to literal LL_ADC_DELAY_VREFINT_STAB_US. Refer to literal LL_ADC_DELAY_TEMPSENSOR_STAB_US.
- ADC internal channel sampling time constraint: For ADC conversion of internal channels, a sampling time minimum value is required. Refer to device datasheet.
- On this STM32 serie, setting of this feature is conditioned to ADC state: All ADC instances of the ADC common group must be disabled. This check can be done with function

LL_ADC_IsEnabled() for each ADC instance or by using helper macro helper macro __LL_ADC_IS_ENABLED_ALL_COMMON_INSTANCE().

Reference Manual to LL API cross reference:
- CCR VREFEN LL_ADC_SetCommonPathInternalCh
- CCR TSEN LL_ADC_SetCommonPathInternalCh
- CCR VBATEN LL_ADC_SetCommonPathInternalCh

LL_ADC_GetCommonPathInternalCh

Function name
__STATIC_INLINE uint32_t LL_ADC_GetCommonPathInternalCh (ADC_Common_TypeDef * ADCxy_COMMON)

Function description
Get parameter common to several ADC: measurement path to internal channels (VrefInt, temperature sensor, ...).

Parameters
- **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())

Return values
- **Returned:** value can be a combination of the following values:
  - LL_ADC_PATH_INTERNAL_NONE
  - LL_ADC_PATH_INTERNAL_VREFINT
  - LL_ADC_PATH_INTERNAL_TEMPSENSOR
  - LL_ADC_PATH_INTERNAL_VBAT

Notes
- One or several values can be selected. Example: (LL_ADC_PATH_INTERNAL_VREFINT | LL_ADC_PATH_INTERNAL_TEMPSENSOR)

Reference Manual to LL API cross reference:
- CCR VREFEN LL_ADC_GetCommonPathInternalCh
- CCR TSEN LL_ADC_GetCommonPathInternalCh
- CCR VBATEN LL_ADC_GetCommonPathInternalCh

LL_ADC_SetCalibrationFactor

Function name
__STATIC_INLINE void LL_ADC_SetCalibrationFactor (ADC_TypeDef * ADCx, uint32_t SingleDiff, uint32_t CalibrationFactor)

Function description
Set ADC calibration factor in the mode single-ended or differential (for devices with differential mode available).

Parameters
- **ADCx:** ADC instance
- **SingleDiff:** This parameter can be one of the following values:
  - LL_ADC_SINGLE_ENDED
  - LL_ADC_DIFFERENTIAL_ENDED
  - LL_ADC_BOTH_SINGLE_DIFF_ENDED
- **CalibrationFactor:** Value between Min_Data=0x00 and Max_Data=0x7F

Return values
- **None**

Notes
- This function is intended to set calibration parameters without having to perform a new calibration using LL_ADC_StartCalibration().

- For devices with differential mode available: Calibration of offset is specific to each of single-ended and differential modes (calibration factor must be specified for each of these differential modes, if used afterwards and if the application requires their calibration).
- In case of setting calibration factors of both modes single ended and differential (parameter LL_ADC_BOTH_SINGLE_DIFF_ENDED): both calibration factors must be concatenated. To perform this processing, use helper macro __LL_ADC_CALIB_FACTOR_SINGLE_DIFF().
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be enabled, without calibration on going, without conversion on going on group regular.

Reference Manual to LL API cross reference:

- CALFACT CALFACT_S LL_ADC_SetCalibrationFactor
- CALFACT CALFACT_D LL_ADC_SetCalibrationFactor

LL_ADC_GetCalibrationFactor

Function name **__STATIC_INLINE uint32_t LL_ADC_GetCalibrationFactor (ADC_TypeDef * ADCx, uint32_t SingleDiff)**

Function description Get ADC calibration factor in the mode single-ended or differential (for devices with differential mode available).

Parameters

- **ADCx:** ADC instance
- **SingleDiff:** This parameter can be one of the following values:
  - LL_ADC_SINGLE_ENDED
  - LL_ADC_DIFFERENTIAL_ENDED

Return values

- **Value:** between Min_Data=0x00 and Max_Data=0x7F

Notes

- Calibration factors are set by hardware after performing a calibration run using function LL_ADC_StartCalibration().
- For devices with differential mode available: Calibration of offset is specific to each of single-ended and differential modes

Reference Manual to LL API cross reference:

- CALFACT CALFACT_S LL_ADC_GetCalibrationFactor
- CALFACT CALFACT_D LL_ADC_GetCalibrationFactor

LL_ADC_SetResolution

Function name **__STATIC_INLINE void LL_ADC_SetResolution (ADC_TypeDef * ADCx, uint32_t Resolution)**

Function description Set ADC resolution.

Parameters

- **ADCx:** ADC instance
- **Resolution:** This parameter can be one of the following values:
  - LL_ADC_RESOLUTION_12B
  - LL_ADC_RESOLUTION_10B
  - LL_ADC_RESOLUTION_8B

– LL_ADC_RESOLUTION_6B

Return values
- **None**

Notes
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:
- CFGR RES LL_ADC_SetResolution

LL_ADC_GetResolution

Function name
__STATIC_INLINE uint32_t LL_ADC_GetResolution (ADC_TypeDef * ADCx)

Function description
Get ADC resolution.

Parameters
- **ADCx:** ADC instance

Return values
- **Returned:** value can be one of the following values:
  – LL_ADC_RESOLUTION_12B
  – LL_ADC_RESOLUTION_10B
  – LL_ADC_RESOLUTION_8B
  – LL_ADC_RESOLUTION_6B

Reference Manual to LL API cross reference:
- CFGR RES LL_ADC_GetResolution

LL_ADC_SetDataAlignment

Function name
__STATIC_INLINE void LL_ADC_SetDataAlignment (ADC_TypeDef * ADCx, uint32_t DataAlignment)

Function description
Set ADC conversion data alignment.

Parameters
- **ADCx:** ADC instance
- **DataAlignment:** This parameter can be one of the following values:
  – LL_ADC_DATA_ALIGN_RIGHT
  – LL_ADC_DATA_ALIGN_LEFT

Return values
- **None**

Notes
- Refer to reference manual for alignments formats dependencies to ADC resolutions.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:
- CFGR ALIGN LL_ADC_SetDataAlignment

LL_ADC_GetDataAlignment

Function name	**__STATIC_INLINE uint32_t LL_ADC_GetDataAlignment (ADC_TypeDef * ADCx)**
Function description	Get ADC conversion data alignment.
Parameters	• **ADCx:** ADC instance
Return values	• **Returned:** value can be one of the following values: – LL_ADC_DATA_ALIGN_RIGHT – LL_ADC_DATA_ALIGN_LEFT
Notes	• Refer to reference manual for alignments formats dependencies to ADC resolutions.
Reference Manual to LL API cross reference:	• CFGR ALIGN LL_ADC_GetDataAlignment

LL_ADC_SetLowPowerMode

Function name	**__STATIC_INLINE void LL_ADC_SetLowPowerMode (ADC_TypeDef * ADCx, uint32_t LowPowerMode)**
Function description	Set ADC low power mode.
Parameters	• **ADCx:** ADC instance • **LowPowerMode:** This parameter can be one of the following values: – LL_ADC_LP_MODE_NONE – LL_ADC_LP_AUTOWAIT
Return values	• **None**
Notes	• Description of ADC low power modes: ADC low power mode "auto wait": Dynamic low power mode, ADC conversions occurrences are limited to the minimum necessary in order to reduce power consumption. New ADC conversion starts only when the previous unitary conversion data (for ADC group regular) or previous sequence conversions data (for ADC group injected) has been retrieved by user software. In the meantime, ADC remains idle: does not performs any other conversion. This mode allows to automatically adapt the ADC conversions triggers to the speed of the software that reads the data. Moreover, this avoids risk of overrun for low frequency applications. How to use this low power mode: Do not use with interruption or DMA since these modes have to clear immediately the EOC flag to free the IRQ vector sequencer.Do use with polling: 1. Start conversion, 2. Later on, when conversion data is needed: poll for end of conversion to ensure that conversion is completed and retrieve ADC conversion data. This will trig another ADC conversion start. ADC low power mode "auto power-off" (feature available on this device if parameter LL_ADC_LP_MODE_AUTOOFF is available): the ADC automatically powers-off after a conversion and automatically wakes up when a new conversion is triggered (with startup time between trigger and start of sampling). This feature can

be combined with low power mode "auto wait".
- With ADC low power mode "auto wait", the ADC conversion data read is corresponding to previous ADC conversion start, independently of delay during which ADC was idle. Therefore, the ADC conversion data may be outdated: does not correspond to the current voltage level on the selected ADC channel.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:
- CFGR AUTDLY LL_ADC_SetLowPowerMode

LL_ADC_GetLowPowerMode

Function name **__STATIC_INLINE uint32_t LL_ADC_GetLowPowerMode (ADC_TypeDef * ADCx)**

Function description Get ADC low power mode:

Parameters
- **ADCx:** ADC instance

Return values
- **Returned:** value can be one of the following values:
  - LL_ADC_LP_MODE_NONE
  - LL_ADC_LP_AUTOWAIT

Notes
- Description of ADC low power modes: ADC low power mode "auto wait": Dynamic low power mode, ADC conversions occurrences are limited to the minimum necessary in order to reduce power consumption. New ADC conversion starts only when the previous unitary conversion data (for ADC group regular) or previous sequence conversions data (for ADC group injected) has been retrieved by user software. In the meantime, ADC remains idle: does not performs any other conversion. This mode allows to automatically adapt the ADC conversions triggers to the speed of the software that reads the data. Moreover, this avoids risk of overrun for low frequency applications. How to use this low power mode: Do not use with interruption or DMA since these modes have to clear immediately the EOC flag to free the IRQ vector sequencer.Do use with polling: 1. Start conversion, 2. Later on, when conversion data is needed: poll for end of conversion to ensure that conversion is completed and retrieve ADC conversion data. This will trig another ADC conversion start. ADC low power mode "auto power-off" (feature available on this device if parameter LL_ADC_LP_MODE_AUTOOFF is available): the ADC automatically powers-off after a conversion and automatically wakes up when a new conversion is triggered (with startup time between trigger and start of sampling). This feature can be combined with low power mode "auto wait".
- With ADC low power mode "auto wait", the ADC conversion data read is corresponding to previous ADC conversion start, independently of delay during which ADC was idle. Therefore, the ADC conversion data may be outdated: does not

correspond to the current voltage level on the selected ADC channel.

Reference Manual to LL API cross reference:

- CFGR AUTDLY LL_ADC_GetLowPowerMode

LL_ADC_SetOffset

Function name

__STATIC_INLINE void LL_ADC_SetOffset (ADC_TypeDef * ADCx, uint32_t Offsety, uint32_t Channel, uint32_t OffsetLevel)

Function description

Set ADC selected offset number 1, 2, 3 or 4.

Parameters

- **ADCx:** ADC instance
- **Offsety:** This parameter can be one of the following values:
  - LL_ADC_OFFSET_1
  - LL_ADC_OFFSET_2
  - LL_ADC_OFFSET_3
  - LL_ADC_OFFSET_4
- **Channel:** This parameter can be one of the following values: (1) On STM32F3, parameter available only on ADC instance: ADC1.
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18
  - LL_ADC_CHANNEL_VREFINT (5)
  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)
  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)
  - LL_ADC_CHANNEL_VOPAMP4 (4)
- (2) On STM32F3, parameter available only on ADC instance: ADC2.
- (3) On STM32F3, parameter available only on ADC instance: ADC3.
- (4) On STM32F3, parameter available only on ADC

instances: ADC4.
- (5) On STM32F3, ADC channel available only on all ADC instances, but only one ADC instance is allowed to be connected to VrefInt at the same time.
- **OffsetLevel:** Value between Min_Data=0x000 and Max_Data=0xFFF

Return values
- **None**

Notes
- This function set the 2 items of offset configuration: ADC channel to which the offset programmed will be applied (independently of channel mapped on ADC group regular or group injected)Offset level (offset to be subtracted from the raw converted data).
- Caution: Offset format is dependent to ADC resolution: offset has to be left-aligned on bit 11, the LSB (right bits) are set to 0.
- This function enables the offset, by default. It can be forced to disable state using function LL_ADC_SetOffsetState().
- If a channel is mapped on several offsets numbers, only the offset with the lowest value is considered for the subtraction.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:
- OFR1 OFFSET1_CH LL_ADC_SetOffset
- OFR1 OFFSET1 LL_ADC_SetOffset
- OFR1 OFFSET1_EN LL_ADC_SetOffset
- OFR2 OFFSET2_CH LL_ADC_SetOffset
- OFR2 OFFSET2 LL_ADC_SetOffset
- OFR2 OFFSET2_EN LL_ADC_SetOffset
- OFR3 OFFSET3_CH LL_ADC_SetOffset
- OFR3 OFFSET3 LL_ADC_SetOffset
- OFR3 OFFSET3_EN LL_ADC_SetOffset
- OFR4 OFFSET4_CH LL_ADC_SetOffset
- OFR4 OFFSET4 LL_ADC_SetOffset
- OFR4 OFFSET4_EN LL_ADC_SetOffset

LL_ADC_GetOffsetChannel

Function name
__STATIC_INLINE uint32_t LL_ADC_GetOffsetChannel (ADC_TypeDef * ADCx, uint32_t Offsety)

Function description
Get for the ADC selected offset number 1, 2, 3 or 4: Channel to which the offset programmed will be applied (independently of channel mapped on ADC group regular or group injected)

Parameters
- **ADCx:** ADC instance
- **Offsety:** This parameter can be one of the following values:
  - LL_ADC_OFFSET_1
  - LL_ADC_OFFSET_2
  - LL_ADC_OFFSET_3
  - LL_ADC_OFFSET_4

Return values
- **Returned:** value can be one of the following values: (1) On STM32F3, parameter available only on ADC instance: ADC1.

- LL_ADC_CHANNEL_0
- LL_ADC_CHANNEL_1
- LL_ADC_CHANNEL_2
- LL_ADC_CHANNEL_3
- LL_ADC_CHANNEL_4
- LL_ADC_CHANNEL_5
- LL_ADC_CHANNEL_6
- LL_ADC_CHANNEL_7
- LL_ADC_CHANNEL_8
- LL_ADC_CHANNEL_9
- LL_ADC_CHANNEL_10
- LL_ADC_CHANNEL_11
- LL_ADC_CHANNEL_12
- LL_ADC_CHANNEL_13
- LL_ADC_CHANNEL_14
- LL_ADC_CHANNEL_15
- LL_ADC_CHANNEL_16
- LL_ADC_CHANNEL_17
- LL_ADC_CHANNEL_18
- LL_ADC_CHANNEL_VREFINT (5)
- LL_ADC_CHANNEL_TEMPSENSOR (1)
- LL_ADC_CHANNEL_VBAT (1)
- LL_ADC_CHANNEL_VOPAMP1 (1)
- LL_ADC_CHANNEL_VOPAMP2 (2)
- LL_ADC_CHANNEL_VOPAMP3 (3)
- LL_ADC_CHANNEL_VOPAMP4 (4)

- (2) On STM32F3, parameter available only on ADC instance: ADC2.
- (3) On STM32F3, parameter available only on ADC instance: ADC3.
- (4) On STM32F3, parameter available only on ADC instances: ADC4.
- (5) On STM32F3, ADC channel available only on all ADC instances, but only one ADC instance is allowed to be connected to VrefInt at the same time.
- (1, 2, 3, 4, 5) For ADC channel read back from ADC register, comparison with internal channel parameter to be done using helper macro __LL_ADC_CHANNEL_INTERNAL_TO_EXTERNAL().

Notes

- Usage of the returned channel number: To reinject this channel into another function LL_ADC_xxx: the returned channel number is only partly formatted on definition of literals LL_ADC_CHANNEL_x. Therefore, it has to be compared with parts of literals LL_ADC_CHANNEL_x or using helper macro __LL_ADC_CHANNEL_TO_DECIMAL_NB(). Then the selected literal LL_ADC_CHANNEL_x can be used as parameter for another function.To get the channel number in decimal format: process the returned value with the helper macro __LL_ADC_CHANNEL_TO_DECIMAL_NB().

Reference Manual to LL API cross reference:

- OFR1 OFFSET1_CH LL_ADC_GetOffsetChannel
- OFR2 OFFSET2_CH LL_ADC_GetOffsetChannel
- OFR3 OFFSET3_CH LL_ADC_GetOffsetChannel

- OFR4 OFFSET4_CH LL_ADC_GetOffsetChannel

LL_ADC_GetOffsetLevel

Function name	**__STATIC_INLINE uint32_t LL_ADC_GetOffsetLevel (ADC_TypeDef * ADCx, uint32_t Offsety)**
Function description	Get for the ADC selected offset number 1, 2, 3 or 4: Offset level (offset to be subtracted from the raw converted data).
Parameters	• **ADCx:** ADC instance • **Offsety:** This parameter can be one of the following values: – LL_ADC_OFFSET_1 – LL_ADC_OFFSET_2 – LL_ADC_OFFSET_3 – LL_ADC_OFFSET_4
Return values	• **Value:** between Min_Data=0x000 and Max_Data=0xFFF
Notes	• Caution: Offset format is dependent to ADC resolution: offset has to be left-aligned on bit 11, the LSB (right bits) are set to 0.
Reference Manual to LL API cross reference:	• OFR1 OFFSET1 LL_ADC_GetOffsetLevel • OFR2 OFFSET2 LL_ADC_GetOffsetLevel • OFR3 OFFSET3 LL_ADC_GetOffsetLevel • OFR4 OFFSET4 LL_ADC_GetOffsetLevel

LL_ADC_SetOffsetState

Function name	**__STATIC_INLINE void LL_ADC_SetOffsetState (ADC_TypeDef * ADCx, uint32_t Offsety, uint32_t OffsetState)**
Function description	Set for the ADC selected offset number 1, 2, 3 or 4: force offset state disable or enable without modifying offset channel or offset value.
Parameters	• **ADCx:** ADC instance • **Offsety:** This parameter can be one of the following values: – LL_ADC_OFFSET_1 – LL_ADC_OFFSET_2 – LL_ADC_OFFSET_3 – LL_ADC_OFFSET_4 • **OffsetState:** This parameter can be one of the following values: – LL_ADC_OFFSET_DISABLE – LL_ADC_OFFSET_ENABLE
Return values	• **None**
Notes	• This function should be needed only in case of offset to be enabled-disabled dynamically, and should not be needed in other cases: function LL_ADC_SetOffset() automatically enables the offset. • On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:
- OFR1 OFFSET1_EN LL_ADC_SetOffsetState
- OFR2 OFFSET2_EN LL_ADC_SetOffsetState
- OFR3 OFFSET3_EN LL_ADC_SetOffsetState
- OFR4 OFFSET4_EN LL_ADC_SetOffsetState

LL_ADC_GetOffsetState

Function name: **__STATIC_INLINE uint32_t LL_ADC_GetOffsetState (ADC_TypeDef * ADCx, uint32_t Offsety)**

Function description: Get for the ADC selected offset number 1, 2, 3 or 4: offset state disabled or enabled.

Parameters:
- **ADCx:** ADC instance
- **Offsety:** This parameter can be one of the following values:
  - LL_ADC_OFFSET_1
  - LL_ADC_OFFSET_2
  - LL_ADC_OFFSET_3
  - LL_ADC_OFFSET_4

Return values:
- **Returned:** value can be one of the following values:
  - LL_ADC_OFFSET_DISABLE
  - LL_ADC_OFFSET_ENABLE

Reference Manual to LL API cross reference:
- OFR1 OFFSET1_EN LL_ADC_GetOffsetState
- OFR2 OFFSET2_EN LL_ADC_GetOffsetState
- OFR3 OFFSET3_EN LL_ADC_GetOffsetState
- OFR4 OFFSET4_EN LL_ADC_GetOffsetState

LL_ADC_REG_SetTriggerSource

Function name: **__STATIC_INLINE void LL_ADC_REG_SetTriggerSource (ADC_TypeDef * ADCx, uint32_t TriggerSource)**

Function description: Set ADC group regular conversion trigger source: internal (SW start) or from external IP (timer event, external interrupt line).

Parameters:
- **ADCx:** ADC instance
- **TriggerSource:** This parameter can be one of the following values: (1) On STM32F3, parameter not available on all devices: among others, on STM32F303xE, STM32F398xx.
  - LL_ADC_REG_TRIG_SOFTWARE
  - LL_ADC_REG_TRIG_EXT_TIM1_TRGO
  - LL_ADC_REG_TRIG_EXT_TIM1_TRGO2
  - LL_ADC_REG_TRIG_EXT_TIM1_CH1 (3)(4)(5)(6)
  - LL_ADC_REG_TRIG_EXT_TIM1_CH1_ADC12 (1)(2)(7)
  - LL_ADC_REG_TRIG_EXT_TIM1_CH2 (3)(4)(5)(6)
  - LL_ADC_REG_TRIG_EXT_TIM1_CH2_ADC12 (1)(2)(7)
  - LL_ADC_REG_TRIG_EXT_TIM1_CH3
  - LL_ADC_REG_TRIG_EXT_TIM2_TRGO (3)(4)(5)(6)
  - LL_ADC_REG_TRIG_EXT_TIM2_TRGO_ADC12 (1)(2)(7)
  - LL_ADC_REG_TRIG_EXT_TIM2_TRGO__ADC34 (1)(2)(8)

- LL_ADC_REG_TRIG_EXT_TIM2_CH1_ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM2_CH2_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM2_CH3_ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM3_TRGO (3)(4)(5)
- LL_ADC_REG_TRIG_EXT_TIM3_TRGO_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM3_TRGO__ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM3_CH1_ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM3_CH4 (3)(4)(5)
- LL_ADC_REG_TRIG_EXT_TIM3_CH4_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM4_TRGO (1)(2)(3)(5)
- LL_ADC_REG_TRIG_EXT_TIM4_CH1_ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM4_CH4 (3) (5)
- LL_ADC_REG_TRIG_EXT_TIM4_CH4_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM6_TRGO (3)(4)(5)(6)
- LL_ADC_REG_TRIG_EXT_TIM6_TRGO_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM8_TRGO (3)
- LL_ADC_REG_TRIG_EXT_TIM8_TRGO_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM8_TRGO2 (1)(2)
- LL_ADC_REG_TRIG_EXT_TIM6_TRGO_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM7_TRGO_ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM8_TRGO__ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM8_TRGO2 (1)(2)
- LL_ADC_REG_TRIG_EXT_TIM8_CH1_ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM15_TRGO (5)
- LL_ADC_REG_TRIG_EXT_TIM20_TRG0_ADC12 (1)(7)
- LL_ADC_REG_TRIG_EXT_TIM20_TRG02_ADC12 (1)(7)
- LL_ADC_REG_TRIG_EXT_TIM20_CH1_ADC12 (1) (7)
- LL_ADC_REG_TRIG_EXT_TIM20_CH2_ADC12 (1) (7)
- LL_ADC_REG_TRIG_EXT_TIM20_CH3_ADC12 (1) (7)
- LL_ADC_REG_TRIG_EXT_TIM20_TRG0_ADC3 (1) (8)
- LL_ADC_REG_TRIG_EXT_TIM20_TRG02_ADC34 (1)(8)
- LL_ADC_REG_TRIG_EXT_TIM20_CH1_ADC34 (1) (8)
- LL_ADC_REG_TRIG_EXT_HRTIM_TRG1 (4)
- LL_ADC_REG_TRIG_EXT_HRTIM_TRG3 (4)
- LL_ADC_REG_TRIG_EXT_EXTI_LINE2_ADC34 (1)(2)

(8)
  - LL_ADC_REG_TRIG_EXT_EXTI_LINE11 (3)(4)(5)(6)
  - LL_ADC_REG_TRIG_EXT_EXTI_LINE11_ADC12 (1)(2)(7)
- (2) On STM32F3, parameter not available on all devices: among others, on STM32F303xC, STM32F358xx.
- (3) On STM32F3, parameter not available on all devices: among others, on STM32F303x8, STM32F328xx.
- (4) On STM32F3, parameter not available on all devices: among others, on STM32F334x8.
- (5) On STM32F3, parameter not available on all devices: among others, on STM32F302xC, STM32F302xE.
- (6) On STM32F3, parameter not available on all devices: among others, on STM32F301x8, STM32F302x8, STM32F318xx.
- (7) On STM32F3, parameter not available on all ADC instances: ADC1, ADC2 (for ADC instances ADCx available on the selected device).
- (8) On STM32F3, parameter not available on all ADC instances: ADC3, ADC4 (for ADC instances ADCx available on the selected device).

Return values
- **None**

Notes
- On this STM32 serie, setting trigger source to external trigger also set trigger polarity to rising edge (default setting for compatibility with some ADC on other STM32 families having this setting set by HW default value). In case of need to modify trigger edge, use function LL_ADC_REG_SetTriggerEdge().
- Availability of parameters of trigger sources from timer depends on timers availability on the selected device.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on group regular.

Reference Manual to LL API cross reference:
- CFGR EXTSEL LL_ADC_REG_SetTriggerSource
- CFGR EXTEN LL_ADC_REG_SetTriggerSource

LL_ADC_REG_GetTriggerSource

Function name
__STATIC_INLINE uint32_t LL_ADC_REG_GetTriggerSource (ADC_TypeDef * ADCx)

Function description
Get ADC group regular conversion trigger source: internal (SW start) or from external IP (timer event, external interrupt line).

Parameters
- **ADCx:** ADC instance

Return values
- **Returned:** value can be one of the following values: (1) On STM32F3, parameter not available on all devices: among others, on STM32F303xE, STM32F398xx.
  - LL_ADC_REG_TRIG_SOFTWARE
  - LL_ADC_REG_TRIG_EXT_TIM1_TRGO
  - LL_ADC_REG_TRIG_EXT_TIM1_TRGO2
  - LL_ADC_REG_TRIG_EXT_TIM1_CH1 (3)(4)(5)(6)

- LL_ADC_REG_TRIG_EXT_TIM1_CH1_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM1_CH2 (3)(4)(5)(6)
- LL_ADC_REG_TRIG_EXT_TIM1_CH2_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM1_CH3
- LL_ADC_REG_TRIG_EXT_TIM2_TRGO (3)(4)(5)(6)
- LL_ADC_REG_TRIG_EXT_TIM2_TRGO_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM2_TRGO__ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM2_CH1_ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM2_CH2_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM2_CH3_ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM3_TRGO (3)(4)(5)
- LL_ADC_REG_TRIG_EXT_TIM3_TRGO_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM3_TRGO__ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM3_CH1_ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM3_CH4 (3)(4)(5)
- LL_ADC_REG_TRIG_EXT_TIM3_CH4_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM4_TRGO (1)(2)(3)(5)
- LL_ADC_REG_TRIG_EXT_TIM4_CH1_ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM4_CH4 (3) (5)
- LL_ADC_REG_TRIG_EXT_TIM4_CH4_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM6_TRGO (3)(4)(5)(6)
- LL_ADC_REG_TRIG_EXT_TIM6_TRGO_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM8_TRGO (3)
- LL_ADC_REG_TRIG_EXT_TIM8_TRGO_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM8_TRGO2 (1)(2)
- LL_ADC_REG_TRIG_EXT_TIM6_TRGO_ADC12 (1)(2)(7)
- LL_ADC_REG_TRIG_EXT_TIM7_TRGO_ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM8_TRGO__ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM8_TRGO2 (1)(2)
- LL_ADC_REG_TRIG_EXT_TIM8_CH1_ADC34 (1)(2)(8)
- LL_ADC_REG_TRIG_EXT_TIM15_TRGO (5)
- LL_ADC_REG_TRIG_EXT_TIM20_TRG0_ADC12 (1)(7)
- LL_ADC_REG_TRIG_EXT_TIM20_TRG02_ADC12 (1)

(7)
  - LL_ADC_REG_TRIG_EXT_TIM20_CH1_ADC12 (1) (7)
  - LL_ADC_REG_TRIG_EXT_TIM20_CH2_ADC12 (1) (7)
  - LL_ADC_REG_TRIG_EXT_TIM20_CH3_ADC12 (1) (7)
  - LL_ADC_REG_TRIG_EXT_TIM20_TRG0_ADC3 (1) (8)
  - LL_ADC_REG_TRIG_EXT_TIM20_TRG02_ADC34 (1) (8)
  - LL_ADC_REG_TRIG_EXT_TIM20_CH1_ADC34 (1) (8)
  - LL_ADC_REG_TRIG_EXT_HRTIM_TRG1 (4)
  - LL_ADC_REG_TRIG_EXT_HRTIM_TRG3 (4)
  - LL_ADC_REG_TRIG_EXT_EXTI_LINE2_ADC34 (1)(2) (8)
  - LL_ADC_REG_TRIG_EXT_EXTI_LINE11 (3)(4)(5)(6)
  - LL_ADC_REG_TRIG_EXT_EXTI_LINE11_ADC12 (1)(2) (7)
- (2) On STM32F3, parameter not available on all devices: among others, on STM32F303xC, STM32F358xx.
- (3) On STM32F3, parameter not available on all devices: among others, on STM32F303x8, STM32F328xx.
- (4) On STM32F3, parameter not available on all devices: among others, on STM32F334x8.
- (5) On STM32F3, parameter not available on all devices: among others, on STM32F302xC, STM32F302xE.
- (6) On STM32F3, parameter not available on all devices: among others, on STM32F301x8, STM32F302x8, STM32F318xx.
- (7) On STM32F3, parameter not available on all ADC instances: ADC1, ADC2 (for ADC instances ADCx available on the selected device).
- (8) On STM32F3, parameter not available on all ADC instances: ADC3, ADC4 (for ADC instances ADCx available on the selected device).

Notes

- To determine whether group regular trigger source is internal (SW start) or external, without detail of which peripheral is selected as external trigger, (equivalent to "if(LL_ADC_REG_GetTriggerSource(ADC1) == LL_ADC_REG_TRIG_SOFTWARE)") use function LL_ADC_REG_IsTriggerSourceSWStart.
- Availability of parameters of trigger sources from timer depends on timers availability on the selected device.

Reference Manual to LL API cross reference:

- CFGR EXTSEL LL_ADC_REG_GetTriggerSource
- CFGR EXTEN LL_ADC_REG_GetTriggerSource

LL_ADC_REG_IsTriggerSourceSWStart

Function name	**__STATIC_INLINE uint32_t LL_ADC_REG_IsTriggerSourceSWStart (ADC_TypeDef * ADCx)**
Function description	Get ADC group regular conversion trigger source internal (SW start) or external.
Parameters	• **ADCx:** ADC instance
Return values	• **Value:** "0" if trigger source external trigger Value "1" if trigger source SW start.
Notes	• In case of group regular trigger source set to external trigger, to determine which peripheral is selected as external trigger, use function LL_ADC_REG_GetTriggerSource().
Reference Manual to LL API cross reference:	• CFGR EXTEN LL_ADC_REG_IsTriggerSourceSWStart

LL_ADC_REG_SetTriggerEdge

Function name	**__STATIC_INLINE void LL_ADC_REG_SetTriggerEdge (ADC_TypeDef * ADCx, uint32_t ExternalTriggerEdge)**
Function description	Set ADC group regular conversion trigger polarity.
Parameters	• **ADCx:** ADC instance • **ExternalTriggerEdge:** This parameter can be one of the following values: – LL_ADC_REG_TRIG_EXT_RISING – LL_ADC_REG_TRIG_EXT_FALLING – LL_ADC_REG_TRIG_EXT_RISINGFALLING
Return values	• **None**
Notes	• Applicable only for trigger source set to external trigger. • On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on group regular.
Reference Manual to LL API cross reference:	• CFGR EXTEN LL_ADC_REG_SetTriggerEdge

LL_ADC_REG_GetTriggerEdge

Function name	**__STATIC_INLINE uint32_t LL_ADC_REG_GetTriggerEdge (ADC_TypeDef * ADCx)**
Function description	Get ADC group regular conversion trigger polarity.
Parameters	• **ADCx:** ADC instance
Return values	• **Returned:** value can be one of the following values: – LL_ADC_REG_TRIG_EXT_RISING – LL_ADC_REG_TRIG_EXT_FALLING – LL_ADC_REG_TRIG_EXT_RISINGFALLING

Notes
- Applicable only for trigger source set to external trigger.

Reference Manual to LL API cross reference:
- CFGR EXTEN LL_ADC_REG_GetTriggerEdge

LL_ADC_REG_SetSequencerLength

Function name **__STATIC_INLINE void LL_ADC_REG_SetSequencerLength (ADC_TypeDef * ADCx, uint32_t SequencerNbRanks)**

Function description Set ADC group regular sequencer length and scan direction.

Parameters
- **ADCx:** ADC instance
- **SequencerNbRanks:** This parameter can be one of the following values:
  - LL_ADC_REG_SEQ_SCAN_DISABLE
  - LL_ADC_REG_SEQ_SCAN_ENABLE_2RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_3RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_4RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_5RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_6RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_7RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_8RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_9RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_10RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_11RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_12RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_13RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_14RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_15RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_16RANKS

Return values
- **None**

Notes
- Description of ADC group regular sequencer features: For devices with sequencer fully configurable (function "LL_ADC_REG_SetSequencerRanks()" available): sequencer length and each rank affectation to a channel are configurable. This function performs configuration of: Sequence length: Number of ranks in the scan sequence.Sequence direction: Unless specified in parameters, sequencer scan direction is forward (from rank 1 to rank n). Sequencer ranks are selected using function "LL_ADC_REG_SetSequencerRanks()". For devices with sequencer not fully configurable (function "LL_ADC_REG_SetSequencerChannels()" available): sequencer length and each rank affectation to a channel are defined by channel number. This function performs configuration of: Sequence length: Number of ranks in the scan sequence is defined by number of channels set in the sequence, rank of each channel is fixed by channel HW number. (channel 0 fixed on rank 0, channel 1 fixed on rank1, ...).Sequence direction: Unless specified in parameters, sequencer scan direction is forward (from lowest channel number to highest channel number). Sequencer ranks are

selected using function "LL_ADC_REG_SetSequencerChannels()".
- Sequencer disabled is equivalent to sequencer of 1 rank: ADC conversion on only 1 channel.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on group regular.

Reference Manual to LL API cross reference:
- SQR1 L LL_ADC_REG_SetSequencerLength

LL_ADC_REG_GetSequencerLength

Function name **__STATIC_INLINE uint32_t LL_ADC_REG_GetSequencerLength (ADC_TypeDef * ADCx)**

Function description Get ADC group regular sequencer length and scan direction.

Parameters
- **ADCx:** ADC instance

Return values
- **Returned:** value can be one of the following values:
  - LL_ADC_REG_SEQ_SCAN_DISABLE
  - LL_ADC_REG_SEQ_SCAN_ENABLE_2RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_3RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_4RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_5RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_6RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_7RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_8RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_9RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_10RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_11RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_12RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_13RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_14RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_15RANKS
  - LL_ADC_REG_SEQ_SCAN_ENABLE_16RANKS

Notes
- Description of ADC group regular sequencer features: For devices with sequencer fully configurable (function "LL_ADC_REG_SetSequencerRanks()" available): sequencer length and each rank affectation to a channel are configurable. This function retrieves: Sequence length: Number of ranks in the scan sequence.Sequence direction: Unless specified in parameters, sequencer scan direction is forward (from rank 1 to rank n). Sequencer ranks are selected using function "LL_ADC_REG_SetSequencerRanks()". For devices with sequencer not fully configurable (function "LL_ADC_REG_SetSequencerChannels()" available): sequencer length and each rank affectation to a channel are defined by channel number. This function retrieves: Sequence length: Number of ranks in the scan sequence is defined by number of channels set in the sequence, rank of each channel is fixed by channel HW number. (channel 0 fixed on rank 0, channel 1 fixed on rank1, ...).Sequence direction:

Unless specified in parameters, sequencer scan direction is forward (from lowest channel number to highest channel number). Sequencer ranks are selected using function "LL_ADC_REG_SetSequencerChannels()".
- Sequencer disabled is equivalent to sequencer of 1 rank: ADC conversion on only 1 channel.

Reference Manual to LL API cross reference:
- SQR1 L LL_ADC_REG_GetSequencerLength

LL_ADC_REG_SetSequencerDiscont

Function name
__STATIC_INLINE void LL_ADC_REG_SetSequencerDiscont (ADC_TypeDef * ADCx, uint32_t SeqDiscont)

Function description
Set ADC group regular sequencer discontinuous mode: sequence subdivided and scan conversions interrupted every selected number of ranks.

Parameters
- **ADCx:** ADC instance
- **SeqDiscont:** This parameter can be one of the following values:
  - LL_ADC_REG_SEQ_DISCONT_DISABLE
  - LL_ADC_REG_SEQ_DISCONT_1RANK
  - LL_ADC_REG_SEQ_DISCONT_2RANKS
  - LL_ADC_REG_SEQ_DISCONT_3RANKS
  - LL_ADC_REG_SEQ_DISCONT_4RANKS
  - LL_ADC_REG_SEQ_DISCONT_5RANKS
  - LL_ADC_REG_SEQ_DISCONT_6RANKS
  - LL_ADC_REG_SEQ_DISCONT_7RANKS
  - LL_ADC_REG_SEQ_DISCONT_8RANKS

Return values
- **None**

Notes
- It is not possible to enable both ADC group regular continuous mode and sequencer discontinuous mode.
- It is not possible to enable both ADC auto-injected mode and ADC group regular sequencer discontinuous mode.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on group regular.

Reference Manual to LL API cross reference:
- CFGR DISCEN LL_ADC_REG_SetSequencerDiscont
- CFGR DISCNUM LL_ADC_REG_SetSequencerDiscont

LL_ADC_REG_GetSequencerDiscont

Function name
__STATIC_INLINE uint32_t LL_ADC_REG_GetSequencerDiscont (ADC_TypeDef * ADCx)

Function description
Get ADC group regular sequencer discontinuous mode: sequence subdivided and scan conversions interrupted every selected number of ranks.

Parameters
- **ADCx:** ADC instance

Return values
- **Returned:** value can be one of the following values:
  - LL_ADC_REG_SEQ_DISCONT_DISABLE
  - LL_ADC_REG_SEQ_DISCONT_1RANK
  - LL_ADC_REG_SEQ_DISCONT_2RANKS
  - LL_ADC_REG_SEQ_DISCONT_3RANKS
  - LL_ADC_REG_SEQ_DISCONT_4RANKS
  - LL_ADC_REG_SEQ_DISCONT_5RANKS
  - LL_ADC_REG_SEQ_DISCONT_6RANKS
  - LL_ADC_REG_SEQ_DISCONT_7RANKS
  - LL_ADC_REG_SEQ_DISCONT_8RANKS

Reference Manual to LL API cross reference:
- CFGR DISCEN LL_ADC_REG_GetSequencerDiscont
- CFGR DISCNUM LL_ADC_REG_GetSequencerDiscont

LL_ADC_REG_SetSequencerRanks

Function name
__STATIC_INLINE void LL_ADC_REG_SetSequencerRanks (ADC_TypeDef * ADCx, uint32_t Rank, uint32_t Channel)

Function description
Set ADC group regular sequence: channel on the selected scan sequence rank.

Parameters
- **ADCx:** ADC instance
- **Rank:** This parameter can be one of the following values:
  - LL_ADC_REG_RANK_1
  - LL_ADC_REG_RANK_2
  - LL_ADC_REG_RANK_3
  - LL_ADC_REG_RANK_4
  - LL_ADC_REG_RANK_5
  - LL_ADC_REG_RANK_6
  - LL_ADC_REG_RANK_7
  - LL_ADC_REG_RANK_8
  - LL_ADC_REG_RANK_9
  - LL_ADC_REG_RANK_10
  - LL_ADC_REG_RANK_11
  - LL_ADC_REG_RANK_12
  - LL_ADC_REG_RANK_13
  - LL_ADC_REG_RANK_14
  - LL_ADC_REG_RANK_15
  - LL_ADC_REG_RANK_16
- **Channel:** This parameter can be one of the following values: (1) On STM32F3, parameter available only on ADC instance: ADC1.
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9

  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18
  - LL_ADC_CHANNEL_VREFINT (5)
  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)
  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)
  - LL_ADC_CHANNEL_VOPAMP4 (4)
- (2) On STM32F3, parameter available only on ADC instance: ADC2.
- (3) On STM32F3, parameter available only on ADC instance: ADC3.
- (4) On STM32F3, parameter available only on ADC instances: ADC4.
- (5) On STM32F3, ADC channel available only on all ADC instances, but only one ADC instance is allowed to be connected to VrefInt at the same time.

Return values
- **None**

Notes
- This function performs configuration of: Channels ordering into each rank of scan sequence: whatever channel can be placed into whatever rank.
- On this STM32 serie, ADC group regular sequencer is fully configurable: sequencer length and each rank affectation to a channel are configurable. Refer to description of function LL_ADC_REG_SetSequencerLength().
- Depending on devices and packages, some channels may not be available. Refer to device datasheet for channels availability.
- On this STM32 serie, to measure internal channels (VrefInt, TempSensor, ...), measurement paths to internal channels must be enabled separately. This can be done using function LL_ADC_SetCommonPathInternalCh().
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on group regular.

Reference Manual to LL API cross reference:
- SQR1 SQ1 LL_ADC_REG_SetSequencerRanks
- SQR1 SQ2 LL_ADC_REG_SetSequencerRanks
- SQR1 SQ3 LL_ADC_REG_SetSequencerRanks
- SQR1 SQ4 LL_ADC_REG_SetSequencerRanks
- SQR2 SQ5 LL_ADC_REG_SetSequencerRanks
- SQR2 SQ6 LL_ADC_REG_SetSequencerRanks
- SQR2 SQ7 LL_ADC_REG_SetSequencerRanks
- SQR2 SQ8 LL_ADC_REG_SetSequencerRanks
- SQR2 SQ9 LL_ADC_REG_SetSequencerRanks

- SQR3 SQ10 LL_ADC_REG_SetSequencerRanks
- SQR3 SQ11 LL_ADC_REG_SetSequencerRanks
- SQR3 SQ12 LL_ADC_REG_SetSequencerRanks
- SQR3 SQ13 LL_ADC_REG_SetSequencerRanks
- SQR3 SQ14 LL_ADC_REG_SetSequencerRanks
- SQR4 SQ15 LL_ADC_REG_SetSequencerRanks
- SQR4 SQ16 LL_ADC_REG_SetSequencerRanks

LL_ADC_REG_GetSequencerRanks

Function name **__STATIC_INLINE uint32_t LL_ADC_REG_GetSequencerRanks (ADC_TypeDef * ADCx, uint32_t Rank)**

Function description Get ADC group regular sequence: channel on the selected scan sequence rank.

Parameters
- **ADCx:** ADC instance
- **Rank:** This parameter can be one of the following values:
  - LL_ADC_REG_RANK_1
  - LL_ADC_REG_RANK_2
  - LL_ADC_REG_RANK_3
  - LL_ADC_REG_RANK_4
  - LL_ADC_REG_RANK_5
  - LL_ADC_REG_RANK_6
  - LL_ADC_REG_RANK_7
  - LL_ADC_REG_RANK_8
  - LL_ADC_REG_RANK_9
  - LL_ADC_REG_RANK_10
  - LL_ADC_REG_RANK_11
  - LL_ADC_REG_RANK_12
  - LL_ADC_REG_RANK_13
  - LL_ADC_REG_RANK_14
  - LL_ADC_REG_RANK_15
  - LL_ADC_REG_RANK_16

Return values
- **Returned:** value can be one of the following values: (1) On STM32F3, parameter available only on ADC instance: ADC1.
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15

  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18
  - LL_ADC_CHANNEL_VREFINT (5)
  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)
  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)
  - LL_ADC_CHANNEL_VOPAMP4 (4)

- (2) On STM32F3, parameter available only on ADC instance: ADC2.
- (3) On STM32F3, parameter available only on ADC instance: ADC3.
- (4) On STM32F3, parameter available only on ADC instances: ADC4.
- (5) On STM32F3, ADC channel available only on all ADC instances, but only one ADC instance is allowed to be connected to VrefInt at the same time.
- (1, 2, 3, 4, 5) For ADC channel read back from ADC register, comparison with internal channel parameter to be done using helper macro __LL_ADC_CHANNEL_INTERNAL_TO_EXTERNAL().

Notes

- On this STM32 serie, ADC group regular sequencer is fully configurable: sequencer length and each rank affectation to a channel are configurable. Refer to description of function LL_ADC_REG_SetSequencerLength().
- Depending on devices and packages, some channels may not be available. Refer to device datasheet for channels availability.
- Usage of the returned channel number: To reinject this channel into another function LL_ADC_xxx: the returned channel number is only partly formatted on definition of literals LL_ADC_CHANNEL_x. Therefore, it has to be compared with parts of literals LL_ADC_CHANNEL_x or using helper macro __LL_ADC_CHANNEL_TO_DECIMAL_NB(). Then the selected literal LL_ADC_CHANNEL_x can be used as parameter for another function.To get the channel number in decimal format: process the returned value with the helper macro __LL_ADC_CHANNEL_TO_DECIMAL_NB().

Reference Manual to LL API cross reference:

- SQR1 SQ1 LL_ADC_REG_GetSequencerRanks
- SQR1 SQ2 LL_ADC_REG_GetSequencerRanks
- SQR1 SQ3 LL_ADC_REG_GetSequencerRanks
- SQR1 SQ4 LL_ADC_REG_GetSequencerRanks
- SQR2 SQ5 LL_ADC_REG_GetSequencerRanks
- SQR2 SQ6 LL_ADC_REG_GetSequencerRanks
- SQR2 SQ7 LL_ADC_REG_GetSequencerRanks
- SQR2 SQ8 LL_ADC_REG_GetSequencerRanks
- SQR2 SQ9 LL_ADC_REG_GetSequencerRanks
- SQR3 SQ10 LL_ADC_REG_GetSequencerRanks
- SQR3 SQ11 LL_ADC_REG_GetSequencerRanks
- SQR3 SQ12 LL_ADC_REG_GetSequencerRanks
- SQR3 SQ13 LL_ADC_REG_GetSequencerRanks

- SQR3 SQ14 LL_ADC_REG_GetSequencerRanks
- SQR4 SQ15 LL_ADC_REG_GetSequencerRanks
- SQR4 SQ16 LL_ADC_REG_GetSequencerRanks

LL_ADC_REG_SetContinuousMode

Function name	**__STATIC_INLINE void LL_ADC_REG_SetContinuousMode (ADC_TypeDef * ADCx, uint32_t Continuous)**
Function description	Set ADC continuous conversion mode on ADC group regular.
Parameters	• **ADCx:** ADC instance • **Continuous:** This parameter can be one of the following values: – LL_ADC_REG_CONV_SINGLE – LL_ADC_REG_CONV_CONTINUOUS
Return values	• **None**
Notes	• Description of ADC continuous conversion mode: single mode: one conversion per triggercontinuous mode: after the first trigger, following conversions launched successively automatically. • It is not possible to enable both ADC group regular continuous mode and sequencer discontinuous mode. • On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on group regular.
Reference Manual to LL API cross reference:	• CFGR CONT LL_ADC_REG_SetContinuousMode

LL_ADC_REG_GetContinuousMode

Function name	**__STATIC_INLINE uint32_t LL_ADC_REG_GetContinuousMode (ADC_TypeDef * ADCx)**
Function description	Get ADC continuous conversion mode on ADC group regular.
Parameters	• **ADCx:** ADC instance
Return values	• **Returned:** value can be one of the following values: – LL_ADC_REG_CONV_SINGLE – LL_ADC_REG_CONV_CONTINUOUS
Notes	• Description of ADC continuous conversion mode: single mode: one conversion per triggercontinuous mode: after the first trigger, following conversions launched successively automatically.
Reference Manual to LL API cross reference:	• CFGR CONT LL_ADC_REG_GetContinuousMode

LL_ADC_REG_SetDMATransfer

Function name
__STATIC_INLINE void LL_ADC_REG_SetDMATransfer (ADC_TypeDef * ADCx, uint32_t DMATransfer)

Function description
Set ADC group regular conversion data transfer: no transfer or transfer by DMA, and DMA requests mode.

Parameters
- **ADCx:** ADC instance
- **DMATransfer:** This parameter can be one of the following values:
  - LL_ADC_REG_DMA_TRANSFER_NONE
  - LL_ADC_REG_DMA_TRANSFER_LIMITED
  - LL_ADC_REG_DMA_TRANSFER_UNLIMITED

Return values
- **None**

Notes
- If transfer by DMA selected, specifies the DMA requests mode: Limited mode (One shot mode): DMA transfer requests are stopped when number of DMA data transfers (number of ADC conversions) is reached. This ADC mode is intended to be used with DMA mode non-circular.Unlimited mode: DMA transfer requests are unlimited, whatever number of DMA data transfers (number of ADC conversions). This ADC mode is intended to be used with DMA mode circular.
- If ADC DMA requests mode is set to unlimited and DMA is set to mode non-circular: when DMA transfers size will be reached, DMA will stop transfers of ADC conversions data ADC will raise an overrun error (overrun flag and interruption if enabled).
- For devices with several ADC instances: ADC multimode DMA settings are available using function LL_ADC_SetMultiDMATransfer().
- To configure DMA source address (peripheral address), use function LL_ADC_DMA_GetRegAddr().
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:
- CFGR DMAEN LL_ADC_REG_SetDMATransfer
- CFGR DMACFG LL_ADC_REG_SetDMATransfer

LL_ADC_REG_GetDMATransfer

Function name
__STATIC_INLINE uint32_t LL_ADC_REG_GetDMATransfer (ADC_TypeDef * ADCx)

Function description
Get ADC group regular conversion data transfer: no transfer or transfer by DMA, and DMA requests mode.

Parameters
- **ADCx:** ADC instance

Return values
- **Returned:** value can be one of the following values:
  - LL_ADC_REG_DMA_TRANSFER_NONE
  - LL_ADC_REG_DMA_TRANSFER_LIMITED
  - LL_ADC_REG_DMA_TRANSFER_UNLIMITED

Notes
- If transfer by DMA selected, specifies the DMA requests

mode: Limited mode (One shot mode): DMA transfer requests are stopped when number of DMA data transfers (number of ADC conversions) is reached. This ADC mode is intended to be used with DMA mode non-circular.Unlimited mode: DMA transfer requests are unlimited, whatever number of DMA data transfers (number of ADC conversions). This ADC mode is intended to be used with DMA mode circular.
- If ADC DMA requests mode is set to unlimited and DMA is set to mode non-circular: when DMA transfers size will be reached, DMA will stop transfers of ADC conversions data ADC will raise an overrun error (overrun flag and interruption if enabled).
- For devices with several ADC instances: ADC multimode DMA settings are available using function LL_ADC_GetMultiDMATransfer().
- To configure DMA source address (peripheral address), use function LL_ADC_DMA_GetRegAddr().

Reference Manual to LL API cross reference:
- CFGR DMAEN LL_ADC_REG_GetDMATransfer
- CFGR DMACFG LL_ADC_REG_GetDMATransfer

LL_ADC_REG_SetOverrun

Function name **__STATIC_INLINE void LL_ADC_REG_SetOverrun (ADC_TypeDef * ADCx, uint32_t Overrun)**

Function description Set ADC group regular behavior in case of overrun: data preserved or overwritten.

Parameters
- **ADCx:** ADC instance
- **Overrun:** This parameter can be one of the following values:
  - LL_ADC_REG_OVR_DATA_PRESERVED
  - LL_ADC_REG_OVR_DATA_OVERWRITTEN

Return values
- **None**

Notes
- Compatibility with devices without feature overrun: other devices without this feature have a behavior equivalent to data overwritten. The default setting of overrun is data preserved. Therefore, for compatibility with all devices, parameter overrun should be set to data overwritten.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on group regular.

Reference Manual to LL API cross reference:
- CFGR OVRMOD LL_ADC_REG_SetOverrun

LL_ADC_REG_GetOverrun

Function name **__STATIC_INLINE uint32_t LL_ADC_REG_GetOverrun (ADC_TypeDef * ADCx)**

Function description Get ADC group regular behavior in case of overrun: data preserved or overwritten.

Parameters
- **ADCx:** ADC instance

Return values
- **Returned:** value can be one of the following values:
  - LL_ADC_REG_OVR_DATA_PRESERVED
  - LL_ADC_REG_OVR_DATA_OVERWRITTEN

Reference Manual to LL API cross reference:
- CFGR OVRMOD LL_ADC_REG_GetOverrun

LL_ADC_INJ_SetTriggerSource

Function name
__STATIC_INLINE void LL_ADC_INJ_SetTriggerSource (ADC_TypeDef * ADCx, uint32_t TriggerSource)

Function description
Set ADC group injected conversion trigger source: internal (SW start) or from external IP (timer event, external interrupt line).

Parameters
- **ADCx:** ADC instance
- **TriggerSource:** This parameter can be one of the following values: (1) On STM32F3, parameter not available on all devices: among others, on STM32F303xE, STM32F398xx.
  - LL_ADC_INJ_TRIG_SOFTWARE
  - LL_ADC_INJ_TRIG_EXT_TIM1_TRGO
  - LL_ADC_INJ_TRIG_EXT_TIM1_TRGO2
  - LL_ADC_INJ_TRIG_EXT_TIM1_CH3_ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM1_CH4
  - LL_ADC_INJ_TRIG_EXT_TIM2_TRGO (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM2_TRGO_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM2_TRGO__ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM2_CH1 (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM2_CH1_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM3_TRGO (1)(2)(3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH1 (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH1_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH3 (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH3_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH4 (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH4_ADC12 (1)(2)(3)(4)(5) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM4_TRGO (3) (5)
  - LL_ADC_INJ_TRIG_EXT_TIM4_TRGO_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM4_TRGO__ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM4_CH3_ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM4_CH4_ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM6_TRGO (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM6_TRGO_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM7_TRGO_ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM8_TRGO (1)(2)

  - LL_ADC_INJ_TRIG_EXT_TIM8_TRGO2 (1)(2)
  - LL_ADC_INJ_TRIG_EXT_TIM8_CH2_ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM8_CH4_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM8_CH4__ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM15_TRGO
  - LL_ADC_INJ_TRIG_EXT_TIM20_TRGO_ADC12 (1) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM20_TRGO2_ADC12 (1) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM20_CH4_ADC12 (1) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM20_TRG_ADC34 (1) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM20_TRG2_ADC34 (1) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM20_CH2_ADC34 (1) (8)
  - LL_ADC_INJ_TRIG_EXT_HRTIM_TRG2 (4)
  - LL_ADC_INJ_TRIG_EXT_HRTIM_TRG4 (4)
  - LL_ADC_INJ_TRIG_EXT_EXTI_LINE15 (3)(4)(5)(6)
  - LL_ADC_INJ_TRIG_EXT_EXTI_LINE15_ADC12 (1)(2) (7)
- (2) On STM32F3, parameter not available on all devices: among others, on STM32F303xC, STM32F358xx.
- (3) On STM32F3, parameter not available on all devices: among others, on STM32F303x8, STM32F328xx.
- (4) On STM32F3, parameter not available on all devices: among others, on STM32F334x8.
- (5) On STM32F3, parameter not available on all devices: among others, on STM32F302xC, STM32F302xE.
- (6) On STM32F3, parameter not available on all devices: among others, on STM32F301x8, STM32F302x8, STM32F318xx.
- (7) On STM32F3, parameter not available on all ADC instances: ADC1, ADC2 (for ADC instances ADCx available on the selected device).
- (8) On STM32F3, parameter not available on all ADC instances: ADC3, ADC4 (for ADC instances ADCx available on the selected device).

Return values

- **None**

Notes

- On this STM32 serie, setting trigger source to external trigger also set trigger polarity to rising edge (default setting for compatibility with some ADC on other STM32 families having this setting set by HW default value). In case of need to modify trigger edge, use function LL_ADC_INJ_SetTriggerEdge().
- Caution to ADC group injected contexts queue: On this STM32 serie, using successively several times this function will appear has having no effect. This is due to ADC group injected contexts queue (this feature cannot be disabled on this STM32 serie). To set several features of ADC group injected, use function LL_ADC_INJ_ConfigQueueContext().
- Availability of parameters of trigger sources from timer depends on timers availability on the selected device.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must not be disabled. Can be enabled with or without conversion on going on either groups regular or

injected.

Reference Manual to LL API cross reference:
- JSQR JEXTSEL LL_ADC_INJ_SetTriggerSource
- JSQR JEXTEN LL_ADC_INJ_SetTriggerSource

LL_ADC_INJ_GetTriggerSource

Function name **__STATIC_INLINE uint32_t LL_ADC_INJ_GetTriggerSource (ADC_TypeDef * ADCx)**

Function description Get ADC group injected conversion trigger source: internal (SW start) or from external IP (timer event, external interrupt line).

Parameters
- **ADCx:** ADC instance

Return values
- **Returned:** value can be one of the following values: (1) On STM32F3, parameter not available on all devices: among others, on STM32F303xE, STM32F398xx.
  - LL_ADC_INJ_TRIG_SOFTWARE
  - LL_ADC_INJ_TRIG_EXT_TIM1_TRGO
  - LL_ADC_INJ_TRIG_EXT_TIM1_TRGO2
  - LL_ADC_INJ_TRIG_EXT_TIM1_CH3_ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM1_CH4
  - LL_ADC_INJ_TRIG_EXT_TIM2_TRGO (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM2_TRGO_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM2_TRGO__ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM2_CH1 (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM2_CH1_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM3_TRGO (1)(2)(3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH1 (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH1_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH3 (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH3_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH4 (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH4_ADC12 (1)(2)(3)(4)(5) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM4_TRGO (3) (5)
  - LL_ADC_INJ_TRIG_EXT_TIM4_TRGO_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM4_TRGO__ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM4_CH3_ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM4_CH4_ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM6_TRGO (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM6_TRGO_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM7_TRGO_ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM8_TRGO (1)(2)
  - LL_ADC_INJ_TRIG_EXT_TIM8_TRGO2 (1)(2)
  - LL_ADC_INJ_TRIG_EXT_TIM8_CH2_ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM8_CH4_ADC12 (1)(2) (7)

  - LL_ADC_INJ_TRIG_EXT_TIM8_CH4__ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM15_TRGO
  - LL_ADC_INJ_TRIG_EXT_TIM20_TRGO_ADC12 (1) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM20_TRGO2_ADC12 (1) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM20_CH4_ADC12 (1) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM20_TRG_ADC34 (1) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM20_TRG2_ADC34 (1) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM20_CH2_ADC34 (1) (8)
  - LL_ADC_INJ_TRIG_EXT_HRTIM_TRG2 (4)
  - LL_ADC_INJ_TRIG_EXT_HRTIM_TRG4 (4)
  - LL_ADC_INJ_TRIG_EXT_EXTI_LINE15 (3)(4)(5)(6)
  - LL_ADC_INJ_TRIG_EXT_EXTI_LINE15_ADC12 (1)(2) (7)

- (2) On STM32F3, parameter not available on all devices: among others, on STM32F303xC, STM32F358xx.
- (3) On STM32F3, parameter not available on all devices: among others, on STM32F303x8, STM32F328xx.
- (4) On STM32F3, parameter not available on all devices: among others, on STM32F334x8.
- (5) On STM32F3, parameter not available on all devices: among others, on STM32F302xC, STM32F302xE.
- (6) On STM32F3, parameter not available on all devices: among others, on STM32F301x8, STM32F302x8, STM32F318xx.
- (7) On STM32F3, parameter not available on all ADC instances: ADC1, ADC2 (for ADC instances ADCx available on the selected device).
- (8) On STM32F3, parameter not available on all ADC instances: ADC3, ADC4 (for ADC instances ADCx available on the selected device).

Notes

- To determine whether group injected trigger source is internal (SW start) or external, without detail of which peripheral is selected as external trigger, (equivalent to "if(LL_ADC_INJ_GetTriggerSource(ADC1) == LL_ADC_INJ_TRIG_SOFTWARE)") use function LL_ADC_INJ_IsTriggerSourceSWStart.
- Availability of parameters of trigger sources from timer depends on timers availability on the selected device.

Reference Manual to LL API cross reference:

- JSQR JEXTSEL LL_ADC_INJ_GetTriggerSource
- JSQR JEXTEN LL_ADC_INJ_GetTriggerSource

LL_ADC_INJ_IsTriggerSourceSWStart

Function name

__STATIC_INLINE uint32_t LL_ADC_INJ_IsTriggerSourceSWStart (ADC_TypeDef * ADCx)

Function description

Get ADC group injected conversion trigger source internal (SW start) or external.

Parameters

- **ADCx:** ADC instance

Return values

- **Value:** "0" if trigger source external trigger Value "1" if trigger

source SW start.

Notes
- In case of group injected trigger source set to external trigger, to determine which peripheral is selected as external trigger, use function LL_ADC_INJ_GetTriggerSource.

Reference Manual to LL API cross reference:
- JSQR JEXTEN LL_ADC_INJ_IsTriggerSourceSWStart

LL_ADC_INJ_SetTriggerEdge

Function name
__STATIC_INLINE void LL_ADC_INJ_SetTriggerEdge (ADC_TypeDef * ADCx, uint32_t ExternalTriggerEdge)

Function description
Set ADC group injected conversion trigger polarity.

Parameters
- **ADCx:** ADC instance
- **ExternalTriggerEdge:** This parameter can be one of the following values:
  - LL_ADC_INJ_TRIG_EXT_RISING
  - LL_ADC_INJ_TRIG_EXT_FALLING
  - LL_ADC_INJ_TRIG_EXT_RISINGFALLING

Return values
- **None**

Notes
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must not be disabled. Can be enabled with or without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:
- JSQR JEXTEN LL_ADC_INJ_SetTriggerEdge

LL_ADC_INJ_GetTriggerEdge

Function name
__STATIC_INLINE uint32_t LL_ADC_INJ_GetTriggerEdge (ADC_TypeDef * ADCx)

Function description
Get ADC group injected conversion trigger polarity.

Parameters
- **ADCx:** ADC instance

Return values
- **Returned:** value can be one of the following values:
  - LL_ADC_INJ_TRIG_EXT_RISING
  - LL_ADC_INJ_TRIG_EXT_FALLING
  - LL_ADC_INJ_TRIG_EXT_RISINGFALLING

Reference Manual to LL API cross reference:
- JSQR JEXTEN LL_ADC_INJ_GetTriggerEdge

LL_ADC_INJ_SetSequencerLength

Function name	**__STATIC_INLINE void LL_ADC_INJ_SetSequencerLength (ADC_TypeDef * ADCx, uint32_t SequencerNbRanks)**
Function description	Set ADC group injected sequencer length and scan direction.
Parameters	• **ADCx:** ADC instance • **SequencerNbRanks:** This parameter can be one of the following values: – LL_ADC_INJ_SEQ_SCAN_DISABLE – LL_ADC_INJ_SEQ_SCAN_ENABLE_2RANKS – LL_ADC_INJ_SEQ_SCAN_ENABLE_3RANKS – LL_ADC_INJ_SEQ_SCAN_ENABLE_4RANKS
Return values	• **None**
Notes	• This function performs configuration of: Sequence length: Number of ranks in the scan sequence.Sequence direction: Unless specified in parameters, sequencer scan direction is forward (from rank 1 to rank n). • Sequencer disabled is equivalent to sequencer of 1 rank: ADC conversion on only 1 channel. • Caution to ADC group injected contexts queue: On this STM32 serie, using successively several times this function will appear has having no effect. This is due to ADC group injected contexts queue (this feature cannot be disabled on this STM32 serie). To set several features of ADC group injected, use function LL_ADC_INJ_ConfigQueueContext(). • On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must not be disabled. Can be enabled with or without conversion on going on either groups regular or injected.
Reference Manual to LL API cross reference:	• JSQR JL LL_ADC_INJ_SetSequencerLength

LL_ADC_INJ_GetSequencerLength

Function name	**__STATIC_INLINE uint32_t LL_ADC_INJ_GetSequencerLength (ADC_TypeDef * ADCx)**
Function description	Get ADC group injected sequencer length and scan direction.
Parameters	• **ADCx:** ADC instance
Return values	• **Returned:** value can be one of the following values: – LL_ADC_INJ_SEQ_SCAN_DISABLE – LL_ADC_INJ_SEQ_SCAN_ENABLE_2RANKS – LL_ADC_INJ_SEQ_SCAN_ENABLE_3RANKS – LL_ADC_INJ_SEQ_SCAN_ENABLE_4RANKS
Notes	• This function retrieves: Sequence length: Number of ranks in the scan sequence.Sequence direction: Unless specified in parameters, sequencer scan direction is forward (from rank 1 to rank n). • Sequencer disabled is equivalent to sequencer of 1 rank:

ADC conversion on only 1 channel.

Reference Manual to LL API cross reference:
- JSQR JL LL_ADC_INJ_GetSequencerLength

LL_ADC_INJ_SetSequencerDiscont

Function name
__STATIC_INLINE void LL_ADC_INJ_SetSequencerDiscont (ADC_TypeDef * ADCx, uint32_t SeqDiscont)

Function description
Set ADC group injected sequencer discontinuous mode: sequence subdivided and scan conversions interrupted every selected number of ranks.

Parameters
- **ADCx:** ADC instance
- **SeqDiscont:** This parameter can be one of the following values:
  - LL_ADC_INJ_SEQ_DISCONT_DISABLE
  - LL_ADC_INJ_SEQ_DISCONT_1RANK

Return values
- **None**

Notes
- It is not possible to enable both ADC group injected auto-injected mode and sequencer discontinuous mode.

Reference Manual to LL API cross reference:
- CFGR JDISCEN LL_ADC_INJ_SetSequencerDiscont

LL_ADC_INJ_GetSequencerDiscont

Function name
__STATIC_INLINE uint32_t LL_ADC_INJ_GetSequencerDiscont (ADC_TypeDef * ADCx)

Function description
Get ADC group injected sequencer discontinuous mode: sequence subdivided and scan conversions interrupted every selected number of ranks.

Parameters
- **ADCx:** ADC instance

Return values
- **Returned:** value can be one of the following values:
  - LL_ADC_INJ_SEQ_DISCONT_DISABLE
  - LL_ADC_INJ_SEQ_DISCONT_1RANK

Reference Manual to LL API cross reference:
- CFGR JDISCEN LL_ADC_INJ_GetSequencerDiscont

LL_ADC_INJ_SetSequencerRanks

Function name
__STATIC_INLINE void LL_ADC_INJ_SetSequencerRanks (ADC_TypeDef * ADCx, uint32_t Rank, uint32_t Channel)

Function description
Set ADC group injected sequence: channel on the selected sequence rank.

Parameters
- **ADCx:** ADC instance
- **Rank:** This parameter can be one of the following values:
  - LL_ADC_INJ_RANK_1

- LL_ADC_INJ_RANK_2
- LL_ADC_INJ_RANK_3
- LL_ADC_INJ_RANK_4

- **Channel:** This parameter can be one of the following values: (1) On STM32F3, parameter available only on ADC instance: ADC1.
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18
  - LL_ADC_CHANNEL_VREFINT (5)
  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)
  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)
  - LL_ADC_CHANNEL_VOPAMP4 (4)
- (2) On STM32F3, parameter available only on ADC instance: ADC2.
- (3) On STM32F3, parameter available only on ADC instance: ADC3.
- (4) On STM32F3, parameter available only on ADC instances: ADC4.
- (5) On STM32F3, ADC channel available only on all ADC instances, but only one ADC instance is allowed to be connected to VrefInt at the same time.

Return values

- **None**

Notes

- Depending on devices and packages, some channels may not be available. Refer to device datasheet for channels availability.
- On this STM32 serie, to measure internal channels (VrefInt, TempSensor, ...), measurement paths to internal channels must be enabled separately. This can be done using function LL_ADC_SetCommonPathInternalCh().
- Caution to ADC group injected contexts queue: On this STM32 serie, using successively several times this function will appear has having no effect. This is due to ADC group

injected contexts queue (this feature cannot be disabled on this STM32 serie). To set several features of ADC group injected, use function LL_ADC_INJ_ConfigQueueContext().
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must not be disabled. Can be enabled with or without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:
- JSQR JSQ1 LL_ADC_INJ_SetSequencerRanks
- JSQR JSQ2 LL_ADC_INJ_SetSequencerRanks
- JSQR JSQ3 LL_ADC_INJ_SetSequencerRanks
- JSQR JSQ4 LL_ADC_INJ_SetSequencerRanks

LL_ADC_INJ_GetSequencerRanks

Function name **__STATIC_INLINE uint32_t LL_ADC_INJ_GetSequencerRanks (ADC_TypeDef * ADCx, uint32_t Rank)**

Function description Get ADC group injected sequence: channel on the selected sequence rank.

Parameters
- **ADCx:** ADC instance
- **Rank:** This parameter can be one of the following values:
  - LL_ADC_INJ_RANK_1
  - LL_ADC_INJ_RANK_2
  - LL_ADC_INJ_RANK_3
  - LL_ADC_INJ_RANK_4

Return values
- **Returned:** value can be one of the following values: (1) On STM32F3, parameter available only on ADC instance: ADC1.
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18
  - LL_ADC_CHANNEL_VREFINT (5)
  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)
  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)

  - LL_ADC_CHANNEL_VOPAMP4 (4)
- (2) On STM32F3, parameter available only on ADC instance: ADC2.
- (3) On STM32F3, parameter available only on ADC instance: ADC3.
- (4) On STM32F3, parameter available only on ADC instances: ADC4.
- (5) On STM32F3, ADC channel available only on all ADC instances, but only one ADC instance is allowed to be connected to VrefInt at the same time.
- (1, 2, 3, 4, 5) For ADC channel read back from ADC register, comparison with internal channel parameter to be done using helper macro __LL_ADC_CHANNEL_INTERNAL_TO_EXTERNAL().

Notes
- Depending on devices and packages, some channels may not be available. Refer to device datasheet for channels availability.
- Usage of the returned channel number: To reinject this channel into another function LL_ADC_xxx: the returned channel number is only partly formatted on definition of literals LL_ADC_CHANNEL_x. Therefore, it has to be compared with parts of literals LL_ADC_CHANNEL_x or using helper macro __LL_ADC_CHANNEL_TO_DECIMAL_NB(). Then the selected literal LL_ADC_CHANNEL_x can be used as parameter for another function.To get the channel number in decimal format: process the returned value with the helper macro __LL_ADC_CHANNEL_TO_DECIMAL_NB().

Reference Manual to LL API cross reference:
- JSQR JSQ1 LL_ADC_INJ_GetSequencerRanks
- JSQR JSQ2 LL_ADC_INJ_GetSequencerRanks
- JSQR JSQ3 LL_ADC_INJ_GetSequencerRanks
- JSQR JSQ4 LL_ADC_INJ_GetSequencerRanks

LL_ADC_INJ_SetTrigAuto

Function name
__STATIC_INLINE void LL_ADC_INJ_SetTrigAuto (ADC_TypeDef * ADCx, uint32_t TrigAuto)

Function description
Set ADC group injected conversion trigger: independent or from ADC group regular.

Parameters
- **ADCx:** ADC instance
- **TrigAuto:** This parameter can be one of the following values:
  - LL_ADC_INJ_TRIG_INDEPENDENT
  - LL_ADC_INJ_TRIG_FROM_GRP_REGULAR

Return values
- **None**

Notes
- This mode can be used to extend number of data registers updated after one ADC conversion trigger and with data permanently kept (not erased by successive conversions of scan of ADC sequencer ranks), up to 5 data registers: 1 data register on ADC group regular, 4 data registers on ADC group injected.
- If ADC group injected injected trigger source is set to an external trigger, this feature must be must be set to

independent trigger. ADC group injected automatic trigger is compliant only with group injected trigger source set to SW start, without any further action on ADC group injected conversion start or stop: in this case, ADC group injected is controlled only from ADC group regular.
- It is not possible to enable both ADC group injected auto-injected mode and sequencer discontinuous mode.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:
- CFGR JAUTO LL_ADC_INJ_SetTrigAuto

LL_ADC_INJ_GetTrigAuto

Function name **__STATIC_INLINE uint32_t LL_ADC_INJ_GetTrigAuto (ADC_TypeDef * ADCx)**

Function description Get ADC group injected conversion trigger: independent or from ADC group regular.

Parameters
- **ADCx:** ADC instance

Return values
- **Returned:** value can be one of the following values:
  - LL_ADC_INJ_TRIG_INDEPENDENT
  - LL_ADC_INJ_TRIG_FROM_GRP_REGULAR

Reference Manual to LL API cross reference:
- CFGR JAUTO LL_ADC_INJ_GetTrigAuto

LL_ADC_INJ_SetQueueMode

Function name **__STATIC_INLINE void LL_ADC_INJ_SetQueueMode (ADC_TypeDef * ADCx, uint32_t QueueMode)**

Function description Set ADC group injected contexts queue mode.

Parameters
- **ADCx:** ADC instance
- **QueueMode:** This parameter can be one of the following values:
  - LL_ADC_INJ_QUEUE_2CONTEXTS_LAST_ACTIVE
  - LL_ADC_INJ_QUEUE_2CONTEXTS_END_EMPTY

Return values
- **None**

Notes
- A context is a setting of group injected sequencer: group injected triggersequencer lengthsequencer ranks If contexts queue is disabled:only 1 sequence can be configured and is active perpetually. If contexts queue is enabled:up to 2 contexts can be queued and are checked in and out as a FIFO stack (first-in, first-out).If a new context is set when queues is full, error is triggered by interruption "Injected Queue Overflow".Two behaviors are possible when all contexts have been processed: the contexts queue can maintain the last context active perpetually or can be empty and injected group triggers are disabled.Triggers can be only external (not internal

SW start)Caution: The sequence must be fully configured in one time (one write of register JSQR makes a check-in of a new context into the queue). Therefore functions to set separately injected trigger and sequencer channels cannot be used, register JSQR must be set using function LL_ADC_INJ_ConfigQueueContext().
- This parameter can be modified only when no conversion is on going on either groups regular or injected.
- A modification of the context mode (bit JQDIS) causes the contexts queue to be flushed and the register JSQR is cleared.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:
- CFGR JQM LL_ADC_INJ_SetQueueMode

LL_ADC_INJ_GetQueueMode

Function name: **__STATIC_INLINE uint32_t LL_ADC_INJ_GetQueueMode (ADC_TypeDef * ADCx)**

Function description: Get ADC group injected context queue mode.

Parameters:
- **ADCx:** ADC instance

Return values:
- **Returned:** value can be one of the following values:
  - LL_ADC_INJ_QUEUE_2CONTEXTS_LAST_ACTIVE
  - LL_ADC_INJ_QUEUE_2CONTEXTS_END_EMPTY

Reference Manual to LL API cross reference:
- CFGR JQM LL_ADC_INJ_GetQueueMode

LL_ADC_INJ_ConfigQueueContext

Function name: **__STATIC_INLINE void LL_ADC_INJ_ConfigQueueContext (ADC_TypeDef * ADCx, uint32_t TriggerSource, uint32_t ExternalTriggerEdge, uint32_t SequencerNbRanks, uint32_t Rank1_Channel, uint32_t Rank2_Channel, uint32_t Rank3_Channel, uint32_t Rank4_Channel)**

Function description: Set one context on ADC group injected that will be checked in contexts queue.

Parameters:
- **ADCx:** ADC instance
- **TriggerSource:** This parameter can be one of the following values: (1) On STM32F3, parameter not available on all devices: among others, on STM32F303xE, STM32F398xx.
  - LL_ADC_INJ_TRIG_SOFTWARE
  - LL_ADC_INJ_TRIG_EXT_TIM1_TRGO
  - LL_ADC_INJ_TRIG_EXT_TIM1_TRGO2
  - LL_ADC_INJ_TRIG_EXT_TIM1_CH3_ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM1_CH4
  - LL_ADC_INJ_TRIG_EXT_TIM2_TRGO (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM2_TRGO_ADC12 (1)(2) (7)

  - LL_ADC_INJ_TRIG_EXT_TIM2_TRGO__ADC34 (1)(2)(8)
  - LL_ADC_INJ_TRIG_EXT_TIM2_CH1 (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM2_CH1_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM3_TRGO (1)(2)(3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH1 (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH1_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH3 (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH3_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH4 (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM3_CH4_ADC12 (1)(2)(3)(4)(5) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM4_TRGO (3) (5)
  - LL_ADC_INJ_TRIG_EXT_TIM4_TRGO_ADC12 (1)(2)(7)
  - LL_ADC_INJ_TRIG_EXT_TIM4_TRGO__ADC34 (1)(2)(8)
  - LL_ADC_INJ_TRIG_EXT_TIM4_CH3_ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM4_CH4_ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM6_TRGO (3)(4)(5)
  - LL_ADC_INJ_TRIG_EXT_TIM6_TRGO_ADC12 (1)(2)(7)
  - LL_ADC_INJ_TRIG_EXT_TIM7_TRGO_ADC34 (1)(2)(8)
  - LL_ADC_INJ_TRIG_EXT_TIM8_TRGO (1)(2)
  - LL_ADC_INJ_TRIG_EXT_TIM8_TRGO2 (1)(2)
  - LL_ADC_INJ_TRIG_EXT_TIM8_CH2_ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM8_CH4_ADC12 (1)(2) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM8_CH4__ADC34 (1)(2) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM15_TRGO
  - LL_ADC_INJ_TRIG_EXT_TIM20_TRGO_ADC12 (1) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM20_TRGO2_ADC12 (1) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM20_CH4_ADC12 (1) (7)
  - LL_ADC_INJ_TRIG_EXT_TIM20_TRG_ADC34 (1) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM20_TRG2_ADC34 (1) (8)
  - LL_ADC_INJ_TRIG_EXT_TIM20_CH2_ADC34 (1) (8)
  - LL_ADC_INJ_TRIG_EXT_HRTIM_TRG2 (4)
  - LL_ADC_INJ_TRIG_EXT_HRTIM_TRG4 (4)
  - LL_ADC_INJ_TRIG_EXT_EXTI_LINE15 (3)(4)(5)(6)
  - LL_ADC_INJ_TRIG_EXT_EXTI_LINE15_ADC12 (1)(2)(7)

- (2) On STM32F3, parameter not available on all devices: among others, on STM32F303xC, STM32F358xx.
- (3) On STM32F3, parameter not available on all devices: among others, on STM32F303x8, STM32F328xx.
- (4) On STM32F3, parameter not available on all devices: among others, on STM32F334x8.
- (5) On STM32F3, parameter not available on all devices: among others, on STM32F302xC, STM32F302xE.
- (6) On STM32F3, parameter not available on all devices: among others, on STM32F301x8, STM32F302x8, STM32F318xx.

- (7) On STM32F3, parameter not available on all ADC instances: ADC1, ADC2 (for ADC instances ADCx available on the selected device).
- (8) On STM32F3, parameter not available on all ADC instances: ADC3, ADC4 (for ADC instances ADCx available on the selected device).
- **ExternalTriggerEdge:** This parameter can be one of the following values: Note: This parameter is discarded in case of SW start: parameter "TriggerSource" set to "LL_ADC_INJ_TRIG_SOFTWARE".
  - LL_ADC_INJ_TRIG_EXT_RISING
  - LL_ADC_INJ_TRIG_EXT_FALLING
  - LL_ADC_INJ_TRIG_EXT_RISINGFALLING
- **SequencerNbRanks:** This parameter can be one of the following values:
  - LL_ADC_INJ_SEQ_SCAN_DISABLE
  - LL_ADC_INJ_SEQ_SCAN_ENABLE_2RANKS
  - LL_ADC_INJ_SEQ_SCAN_ENABLE_3RANKS
  - LL_ADC_INJ_SEQ_SCAN_ENABLE_4RANKS
- **Rank1_Channel:** This parameter can be one of the following values: (1) On STM32F3, parameter available only on ADC instance: ADC1.
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18
  - LL_ADC_CHANNEL_VREFINT (5)
  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)
  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)
  - LL_ADC_CHANNEL_VOPAMP4 (4)
- (2) On STM32F3, parameter available only on ADC instance: ADC2.
- (3) On STM32F3, parameter available only on ADC instance: ADC3.
- (4) On STM32F3, parameter available only on ADC

instances: ADC4.

- (5) On STM32F3, ADC channel available only on all ADC instances, but only one ADC instance is allowed to be connected to VrefInt at the same time.
- **Rank2_Channel:** This parameter can be one of the following values: (1) On STM32F3, parameter available only on ADC instance: ADC1.
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18
  - LL_ADC_CHANNEL_VREFINT (5)
  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)
  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)
  - LL_ADC_CHANNEL_VOPAMP4 (4)
- (2) On STM32F3, parameter available only on ADC instance: ADC2.
- (3) On STM32F3, parameter available only on ADC instance: ADC3.
- (4) On STM32F3, parameter available only on ADC instances: ADC4.
- (5) On STM32F3, ADC channel available only on all ADC instances, but only one ADC instance is allowed to be connected to VrefInt at the same time.
- **Rank3_Channel:** This parameter can be one of the following values: (1) On STM32F3, parameter available only on ADC instance: ADC1.
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7

  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18
  - LL_ADC_CHANNEL_VREFINT (5)
  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)
  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)
  - LL_ADC_CHANNEL_VOPAMP4 (4)
- (2) On STM32F3, parameter available only on ADC instance: ADC2.
- (3) On STM32F3, parameter available only on ADC instance: ADC3.
- (4) On STM32F3, parameter available only on ADC instances: ADC4.
- (5) On STM32F3, ADC channel available only on all ADC instances, but only one ADC instance is allowed to be connected to VrefInt at the same time.
- **Rank4_Channel:** This parameter can be one of the following values: (1) On STM32F3, parameter available only on ADC instance: ADC1.
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18
  - LL_ADC_CHANNEL_VREFINT (5)
  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)

  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)
  - LL_ADC_CHANNEL_VOPAMP4 (4)
- (2) On STM32F3, parameter available only on ADC instance: ADC2.
- (3) On STM32F3, parameter available only on ADC instance: ADC3.
- (4) On STM32F3, parameter available only on ADC instances: ADC4.
- (5) On STM32F3, ADC channel available only on all ADC instances, but only one ADC instance is allowed to be connected to VrefInt at the same time.

Return values
- **None**

Notes
- A context is a setting of group injected sequencer: group injected triggersequencer lengthsequencer ranks This function is intended to be used when contexts queue is enabled, because the sequence must be fully configured in one time (functions to set separately injected trigger and sequencer channels cannot be used): Refer to function LL_ADC_INJ_SetQueueMode().
- In the contexts queue, only the active context can be read. The parameters of this function can be read using functions: LL_ADC_INJ_GetTriggerSource() LL_ADC_INJ_GetTriggerEdge() LL_ADC_INJ_GetSequencerRanks()
- On this STM32 serie, to measure internal channels (VrefInt, TempSensor, ...), measurement paths to internal channels must be enabled separately. This can be done using function LL_ADC_SetCommonPathInternalCh().
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must not be disabled. Can be enabled with or without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:
- JSQR JEXTSEL LL_ADC_INJ_ConfigQueueContext
- JSQR JEXTEN LL_ADC_INJ_ConfigQueueContext
- JSQR JL LL_ADC_INJ_ConfigQueueContext
- JSQR JSQ1 LL_ADC_INJ_ConfigQueueContext
- JSQR JSQ2 LL_ADC_INJ_ConfigQueueContext
- JSQR JSQ3 LL_ADC_INJ_ConfigQueueContext
- JSQR JSQ4 LL_ADC_INJ_ConfigQueueContext

LL_ADC_SetChannelSamplingTime

Function name
__STATIC_INLINE void LL_ADC_SetChannelSamplingTime (ADC_TypeDef * ADCx, uint32_t Channel, uint32_t SamplingTime)

Function description
Set sampling time of the selected ADC channel Unit: ADC clock cycles.

Parameters
- **ADCx:** ADC instance
- **Channel:** This parameter can be one of the following values: (1) On STM32F3, parameter available only on ADC instance:

ADC1.
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18
  - LL_ADC_CHANNEL_VREFINT (5)
  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)
  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)
  - LL_ADC_CHANNEL_VOPAMP4 (4)
- (2) On STM32F3, parameter available only on ADC instance: ADC2.
- (3) On STM32F3, parameter available only on ADC instance: ADC3.
- (4) On STM32F3, parameter available only on ADC instances: ADC4.
- (5) On STM32F3, ADC channel available only on all ADC instances, but only one ADC instance is allowed to be connected to VrefInt at the same time.
- **SamplingTime:** This parameter can be one of the following values:
  - LL_ADC_SAMPLINGTIME_1CYCLE_5
  - LL_ADC_SAMPLINGTIME_2CYCLES_5
  - LL_ADC_SAMPLINGTIME_4CYCLES_5
  - LL_ADC_SAMPLINGTIME_7CYCLES_5
  - LL_ADC_SAMPLINGTIME_19CYCLES_5
  - LL_ADC_SAMPLINGTIME_61CYCLES_5
  - LL_ADC_SAMPLINGTIME_181CYCLES_5
  - LL_ADC_SAMPLINGTIME_601CYCLES_5

Return values
- **None**

Notes
- On this device, sampling time is on channel scope: independently of channel mapped on ADC group regular or injected.
- In case of internal channel (VrefInt, TempSensor, ...) to be converted: sampling time constraints must be respected

(sampling time can be adjusted in function of ADC clock frequency and sampling time setting). Refer to device datasheet for timings values (parameters TS_vrefint, TS_temp, ...).

- Conversion time is the addition of sampling time and processing time. On this STM32 serie, ADC processing time is: 12.5 ADC clock cycles at ADC resolution 12 bits10.5 ADC clock cycles at ADC resolution 10 bits8.5 ADC clock cycles at ADC resolution 8 bits6.5 ADC clock cycles at ADC resolution 6 bits
- In case of ADC conversion of internal channel (VrefInt, temperature sensor, ...), a sampling time minimum value is required. Refer to device datasheet.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:

- SMPR1 SMP0 LL_ADC_SetChannelSamplingTime
- SMPR1 SMP1 LL_ADC_SetChannelSamplingTime
- SMPR1 SMP2 LL_ADC_SetChannelSamplingTime
- SMPR1 SMP3 LL_ADC_SetChannelSamplingTime
- SMPR1 SMP4 LL_ADC_SetChannelSamplingTime
- SMPR1 SMP5 LL_ADC_SetChannelSamplingTime
- SMPR1 SMP6 LL_ADC_SetChannelSamplingTime
- SMPR1 SMP7 LL_ADC_SetChannelSamplingTime
- SMPR1 SMP8 LL_ADC_SetChannelSamplingTime
- SMPR1 SMP9 LL_ADC_SetChannelSamplingTime
- SMPR2 SMP10 LL_ADC_SetChannelSamplingTime
- SMPR2 SMP11 LL_ADC_SetChannelSamplingTime
- SMPR2 SMP12 LL_ADC_SetChannelSamplingTime
- SMPR2 SMP13 LL_ADC_SetChannelSamplingTime
- SMPR2 SMP14 LL_ADC_SetChannelSamplingTime
- SMPR2 SMP15 LL_ADC_SetChannelSamplingTime
- SMPR2 SMP16 LL_ADC_SetChannelSamplingTime
- SMPR2 SMP17 LL_ADC_SetChannelSamplingTime
- SMPR2 SMP18 LL_ADC_SetChannelSamplingTime

LL_ADC_GetChannelSamplingTime

Function name

__STATIC_INLINE uint32_t LL_ADC_GetChannelSamplingTime (ADC_TypeDef * ADCx, uint32_t Channel)

Function description

Get sampling time of the selected ADC channel Unit: ADC clock cycles.

Parameters

- **ADCx:** ADC instance
- **Channel:** This parameter can be one of the following values: (1) On STM32F3, parameter available only on ADC instance: ADC1.
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4

- LL_ADC_CHANNEL_5
- LL_ADC_CHANNEL_6
- LL_ADC_CHANNEL_7
- LL_ADC_CHANNEL_8
- LL_ADC_CHANNEL_9
- LL_ADC_CHANNEL_10
- LL_ADC_CHANNEL_11
- LL_ADC_CHANNEL_12
- LL_ADC_CHANNEL_13
- LL_ADC_CHANNEL_14
- LL_ADC_CHANNEL_15
- LL_ADC_CHANNEL_16
- LL_ADC_CHANNEL_17
- LL_ADC_CHANNEL_18
- LL_ADC_CHANNEL_VREFINT (5)
- LL_ADC_CHANNEL_TEMPSENSOR (1)
- LL_ADC_CHANNEL_VBAT (1)
- LL_ADC_CHANNEL_VOPAMP1 (1)
- LL_ADC_CHANNEL_VOPAMP2 (2)
- LL_ADC_CHANNEL_VOPAMP3 (3)
- LL_ADC_CHANNEL_VOPAMP4 (4)

- (2) On STM32F3, parameter available only on ADC instance: ADC2.
- (3) On STM32F3, parameter available only on ADC instance: ADC3.
- (4) On STM32F3, parameter available only on ADC instances: ADC4.
- (5) On STM32F3, ADC channel available only on all ADC instances, but only one ADC instance is allowed to be connected to VrefInt at the same time.

Return values

- **Returned:** value can be one of the following values:
  - LL_ADC_SAMPLINGTIME_1CYCLE_5
  - LL_ADC_SAMPLINGTIME_2CYCLES_5
  - LL_ADC_SAMPLINGTIME_4CYCLES_5
  - LL_ADC_SAMPLINGTIME_7CYCLES_5
  - LL_ADC_SAMPLINGTIME_19CYCLES_5
  - LL_ADC_SAMPLINGTIME_61CYCLES_5
  - LL_ADC_SAMPLINGTIME_181CYCLES_5
  - LL_ADC_SAMPLINGTIME_601CYCLES_5

Notes

- On this device, sampling time is on channel scope: independently of channel mapped on ADC group regular or injected.
- Conversion time is the addition of sampling time and processing time. On this STM32 serie, ADC processing time is: 12.5 ADC clock cycles at ADC resolution 12 bits10.5 ADC clock cycles at ADC resolution 10 bits8.5 ADC clock cycles at ADC resolution 8 bits6.5 ADC clock cycles at ADC resolution 6 bits

Reference Manual to LL API cross reference:

- SMPR1 SMP0 LL_ADC_GetChannelSamplingTime
- SMPR1 SMP1 LL_ADC_GetChannelSamplingTime
- SMPR1 SMP2 LL_ADC_GetChannelSamplingTime

- SMPR1 SMP3 LL_ADC_GetChannelSamplingTime
- SMPR1 SMP4 LL_ADC_GetChannelSamplingTime
- SMPR1 SMP5 LL_ADC_GetChannelSamplingTime
- SMPR1 SMP6 LL_ADC_GetChannelSamplingTime
- SMPR1 SMP7 LL_ADC_GetChannelSamplingTime
- SMPR1 SMP8 LL_ADC_GetChannelSamplingTime
- SMPR1 SMP9 LL_ADC_GetChannelSamplingTime
- SMPR2 SMP10 LL_ADC_GetChannelSamplingTime
- SMPR2 SMP11 LL_ADC_GetChannelSamplingTime
- SMPR2 SMP12 LL_ADC_GetChannelSamplingTime
- SMPR2 SMP13 LL_ADC_GetChannelSamplingTime
- SMPR2 SMP14 LL_ADC_GetChannelSamplingTime
- SMPR2 SMP15 LL_ADC_GetChannelSamplingTime
- SMPR2 SMP16 LL_ADC_GetChannelSamplingTime
- SMPR2 SMP17 LL_ADC_GetChannelSamplingTime
- SMPR2 SMP18 LL_ADC_GetChannelSamplingTime

LL_ADC_SetChannelSingleDiff

Function name

__STATIC_INLINE void LL_ADC_SetChannelSingleDiff (ADC_TypeDef * ADCx, uint32_t Channel, uint32_t SingleDiff)

Function description

Set mode single-ended or differential input of the selected ADC channel.

Parameters

- **ADCx:** ADC instance
- **Channel:** This parameter can be one of the following values: (1) On STM32F3, parameter available only on ADC instance: ADC1.
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16 (1)
- **SingleDiff:** This parameter can be a combination of the following values:
  - LL_ADC_SINGLE_ENDED
  - LL_ADC_DIFFERENTIAL_ENDED

Return values

- **None**

Notes

- Channel ending is on channel scope: independently of channel mapped on ADC group regular or injected. In differential mode: Differential measurement is carried out

between the selected channel 'i' (positive input) and channel 'i+1' (negative input). Only channel 'i' has to be configured, channel 'i+1' is configured automatically.
- Refer to Reference Manual to ensure the selected channel is available in differential mode. For example, internal channels (VrefInt, TempSensor, ...) are not available in differential mode.
- When configuring a channel 'i' in differential mode, the channel 'i+1' is not usable separately.
- On STM32F3, channels 16, 17, 18 of ADC1, channels 17, 18 of ADC2, ADC3, ADC4 (if available) are internally fixed to single-ended inputs configuration.
- For ADC channels configured in differential mode, both inputs should be biased at (Vref+)/2 +/-200mV. (Vref+ is the analog voltage reference)
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be ADC disabled.
- One or several values can be selected. Example: (LL_ADC_CHANNEL_4 | LL_ADC_CHANNEL_12 | ...)

Reference Manual to LL API cross reference:
- DIFSEL DIFSEL LL_ADC_GetChannelSamplingTime

LL_ADC_GetChannelSingleDiff

Function name **__STATIC_INLINE uint32_t LL_ADC_GetChannelSingleDiff (ADC_TypeDef * ADCx, uint32_t Channel)**

Function description Get mode single-ended or differential input of the selected ADC channel.

Parameters
- **ADCx:** ADC instance
- **Channel:** This parameter can be a combination of the following values: (1) On STM32F3, parameter available only on ADC instance: ADC1.
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16 (1)

Return values
- **0:** channel in single-ended mode, else: channel in differential

mode

Notes

- When configuring a channel 'i' in differential mode, the channel 'i+1' is not usable separately. Therefore, to ensure a channel is configured in single-ended mode, the configuration of channel itself and the channel 'i-1' must be read back (to ensure that the selected channel channel has not been configured in differential mode by the previous channel).
- Refer to Reference Manual to ensure the selected channel is available in differential mode. For example, internal channels (VrefInt, TempSensor, ...) are not available in differential mode.
- When configuring a channel 'i' in differential mode, the channel 'i+1' is not usable separately.
- On STM32F3, channels 16, 17, 18 of ADC1, channels 17, 18 of ADC2, ADC3, ADC4 (if available) are internally fixed to single-ended inputs configuration.
- One or several values can be selected. In this case, the value returned is null if all channels are in single ended-mode. Example: (LL_ADC_CHANNEL_4 | LL_ADC_CHANNEL_12 | ...)

Reference Manual to LL API cross reference:

- DIFSEL DIFSEL LL_ADC_GetChannelSamplingTime

LL_ADC_SetAnalogWDMonitChannels

Function name

__STATIC_INLINE void LL_ADC_SetAnalogWDMonitChannels (ADC_TypeDef * ADCx, uint32_t AWDy, uint32_t AWDChannelGroup)

Function description

Set ADC analog watchdog monitored channels: a single channel, multiple channels or all channels, on ADC groups regular and-or injected.

Parameters

- **ADCx:** ADC instance
- **AWDy:** This parameter can be one of the following values:
  - LL_ADC_AWD1
  - LL_ADC_AWD2
  - LL_ADC_AWD3
- **AWDChannelGroup:** This parameter can be one of the following values: (0) On STM32F3, parameter available only on analog watchdog number: AWD1.
  - LL_ADC_AWD_DISABLE
  - LL_ADC_AWD_ALL_CHANNELS_REG (0)
  - LL_ADC_AWD_ALL_CHANNELS_INJ (0)
  - LL_ADC_AWD_ALL_CHANNELS_REG_INJ
  - LL_ADC_AWD_CHANNEL_0_REG (0)
  - LL_ADC_AWD_CHANNEL_0_INJ (0)
  - LL_ADC_AWD_CHANNEL_0_REG_INJ
  - LL_ADC_AWD_CHANNEL_1_REG (0)
  - LL_ADC_AWD_CHANNEL_1_INJ (0)
  - LL_ADC_AWD_CHANNEL_1_REG_INJ
  - LL_ADC_AWD_CHANNEL_2_REG (0)
  - LL_ADC_AWD_CHANNEL_2_INJ (0)

- LL_ADC_AWD_CHANNEL_2_REG_INJ
- LL_ADC_AWD_CHANNEL_3_REG (0)
- LL_ADC_AWD_CHANNEL_3_INJ (0)
- LL_ADC_AWD_CHANNEL_3_REG_INJ
- LL_ADC_AWD_CHANNEL_4_REG (0)
- LL_ADC_AWD_CHANNEL_4_INJ (0)
- LL_ADC_AWD_CHANNEL_4_REG_INJ
- LL_ADC_AWD_CHANNEL_5_REG (0)
- LL_ADC_AWD_CHANNEL_5_INJ (0)
- LL_ADC_AWD_CHANNEL_5_REG_INJ
- LL_ADC_AWD_CHANNEL_6_REG (0)
- LL_ADC_AWD_CHANNEL_6_INJ (0)
- LL_ADC_AWD_CHANNEL_6_REG_INJ
- LL_ADC_AWD_CHANNEL_7_REG (0)
- LL_ADC_AWD_CHANNEL_7_INJ (0)
- LL_ADC_AWD_CHANNEL_7_REG_INJ
- LL_ADC_AWD_CHANNEL_8_REG (0)
- LL_ADC_AWD_CHANNEL_8_INJ (0)
- LL_ADC_AWD_CHANNEL_8_REG_INJ
- LL_ADC_AWD_CHANNEL_9_REG (0)
- LL_ADC_AWD_CHANNEL_9_INJ (0)
- LL_ADC_AWD_CHANNEL_9_REG_INJ
- LL_ADC_AWD_CHANNEL_10_REG (0)
- LL_ADC_AWD_CHANNEL_10_INJ (0)
- LL_ADC_AWD_CHANNEL_10_REG_INJ
- LL_ADC_AWD_CHANNEL_11_REG (0)
- LL_ADC_AWD_CHANNEL_11_INJ (0)
- LL_ADC_AWD_CHANNEL_11_REG_INJ
- LL_ADC_AWD_CHANNEL_12_REG (0)
- LL_ADC_AWD_CHANNEL_12_INJ (0)
- LL_ADC_AWD_CHANNEL_12_REG_INJ
- LL_ADC_AWD_CHANNEL_13_REG (0)
- LL_ADC_AWD_CHANNEL_13_INJ (0)
- LL_ADC_AWD_CHANNEL_13_REG_INJ
- LL_ADC_AWD_CHANNEL_14_REG (0)
- LL_ADC_AWD_CHANNEL_14_INJ (0)
- LL_ADC_AWD_CHANNEL_14_REG_INJ
- LL_ADC_AWD_CHANNEL_15_REG (0)
- LL_ADC_AWD_CHANNEL_15_INJ (0)
- LL_ADC_AWD_CHANNEL_15_REG_INJ
- LL_ADC_AWD_CHANNEL_16_REG (0)
- LL_ADC_AWD_CHANNEL_16_INJ (0)
- LL_ADC_AWD_CHANNEL_16_REG_INJ
- LL_ADC_AWD_CHANNEL_17_REG (0)
- LL_ADC_AWD_CHANNEL_17_INJ (0)
- LL_ADC_AWD_CHANNEL_17_REG_INJ
- LL_ADC_AWD_CHANNEL_18_REG (0)
- LL_ADC_AWD_CHANNEL_18_INJ (0)
- LL_ADC_AWD_CHANNEL_18_REG_INJ
- LL_ADC_AWD_CH_VREFINT_REG (0)(5)
- LL_ADC_AWD_CH_VREFINT_INJ (0)(5)
- LL_ADC_AWD_CH_VREFINT_REG_INJ (5)

  - LL_ADC_AWD_CH_TEMPSENSOR_REG (0)(1)
  - LL_ADC_AWD_CH_TEMPSENSOR_INJ (0)(1)
  - LL_ADC_AWD_CH_TEMPSENSOR_REG_INJ (1)
  - LL_ADC_AWD_CH_VBAT_REG (0)(1)
  - LL_ADC_AWD_CH_VBAT_INJ (0)(1)
  - LL_ADC_AWD_CH_VBAT_REG_INJ (1)
  - LL_ADC_AWD_CH_VOPAMP1_REG (0)(1)
  - LL_ADC_AWD_CH_VOPAMP1_INJ (0)(1)
  - LL_ADC_AWD_CH_VOPAMP1_REG_INJ (1)
  - LL_ADC_AWD_CH_VOPAMP2_REG (0)(2)
  - LL_ADC_AWD_CH_VOPAMP2_INJ (0)(2)
  - LL_ADC_AWD_CH_VOPAMP2_REG_INJ (2)
  - LL_ADC_AWD_CH_VOPAMP3_REG (0)(3)
  - LL_ADC_AWD_CH_VOPAMP3_INJ (0)(3)
  - LL_ADC_AWD_CH_VOPAMP3_REG_INJ (3)
  - LL_ADC_AWD_CH_VOPAMP4_REG (0)(4)
  - LL_ADC_AWD_CH_VOPAMP4_INJ (0)(4)
  - LL_ADC_AWD_CH_VOPAMP4_REG_INJ (4)

- (1) On STM32F3, parameter available only on ADC instance: ADC1.
- (2) On STM32F3, parameter available only on ADC instance: ADC2.
- (3) On STM32F3, parameter available only on ADC instance: ADC3.
- (4) On STM32F3, parameter available only on ADC instances: ADC4.
- (5) On STM32F3, ADC channel available only on all ADC instances, but only one ADC instance is allowed to be connected to VrefInt at the same time.

Return values

- **None**

Notes

- Once monitored channels are selected, analog watchdog is enabled.
- In case of need to define a single channel to monitor with analog watchdog from sequencer channel definition, use helper macro __LL_ADC_ANALOGWD_CHANNEL_GROUP().
- On this STM32 serie, there are 2 kinds of analog watchdog instance: AWD standard (instance AWD1): channels monitored: can monitor 1 channel or all channels.groups monitored: ADC groups regular and-or injected.resolution: resolution is not limited (corresponds to ADC resolution configured). AWD flexible (instances AWD2, AWD3): channels monitored: flexible on channels monitored, selection is channel wise, from from 1 to all channels. Specificity of this analog watchdog: Multiple channels can be selected. For example: (LL_ADC_AWD_CHANNEL4_REG_INJ | LL_ADC_AWD_CHANNEL5_REG_INJ | ...)groups monitored: not selection possible (monitoring on both groups regular and injected). Channels selected are monitored on groups regular and injected: LL_ADC_AWD_CHANNELxx_REG_INJ (do not use parameters LL_ADC_AWD_CHANNELxx_REG and LL_ADC_AWD_CHANNELxx_INJ)resolution: resolution is limited to 8 bits: if ADC resolution is 12 bits the 4 LSB are

ignored, if ADC resolution is 10 bits the 2 LSB are ignored.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:
- CFGR AWD1CH LL_ADC_SetAnalogWDMonitChannels
- CFGR AWD1SGL LL_ADC_SetAnalogWDMonitChannels
- CFGR AWD1EN LL_ADC_SetAnalogWDMonitChannels
- CFGR JAWD1EN LL_ADC_SetAnalogWDMonitChannels
- AWD2CR AWD2CH LL_ADC_SetAnalogWDMonitChannels
- AWD3CR AWD3CH LL_ADC_SetAnalogWDMonitChannels

LL_ADC_GetAnalogWDMonitChannels

Function name
__STATIC_INLINE uint32_t LL_ADC_GetAnalogWDMonitChannels (ADC_TypeDef * ADCx, uint32_t AWDy)

Function description
Get ADC analog watchdog monitored channel.

Parameters
- **ADCx:** ADC instance
- **AWDy:** This parameter can be one of the following values: (1) On this AWD number, monitored channel can be retrieved if only 1 channel is programmed (or none or all channels). This function cannot retrieve monitored channel if multiple channels are programmed simultaneously by bitfield.
  - LL_ADC_AWD1
  - LL_ADC_AWD2 (1)
  - LL_ADC_AWD3 (1)

Return values
- **Returned:** value can be one of the following values: (0) On STM32F3, parameter available only on analog watchdog number: AWD1.
  - LL_ADC_AWD_DISABLE
  - LL_ADC_AWD_ALL_CHANNELS_REG (0)
  - LL_ADC_AWD_ALL_CHANNELS_INJ (0)
  - LL_ADC_AWD_ALL_CHANNELS_REG_INJ
  - LL_ADC_AWD_CHANNEL_0_REG (0)
  - LL_ADC_AWD_CHANNEL_0_INJ (0)
  - LL_ADC_AWD_CHANNEL_0_REG_INJ
  - LL_ADC_AWD_CHANNEL_1_REG (0)
  - LL_ADC_AWD_CHANNEL_1_INJ (0)
  - LL_ADC_AWD_CHANNEL_1_REG_INJ
  - LL_ADC_AWD_CHANNEL_2_REG (0)
  - LL_ADC_AWD_CHANNEL_2_INJ (0)
  - LL_ADC_AWD_CHANNEL_2_REG_INJ
  - LL_ADC_AWD_CHANNEL_3_REG (0)
  - LL_ADC_AWD_CHANNEL_3_INJ (0)
  - LL_ADC_AWD_CHANNEL_3_REG_INJ
  - LL_ADC_AWD_CHANNEL_4_REG (0)
  - LL_ADC_AWD_CHANNEL_4_INJ (0)
  - LL_ADC_AWD_CHANNEL_4_REG_INJ
  - LL_ADC_AWD_CHANNEL_5_REG (0)
  - LL_ADC_AWD_CHANNEL_5_INJ (0)
  - LL_ADC_AWD_CHANNEL_5_REG_INJ

- LL_ADC_AWD_CHANNEL_6_REG (0)
- LL_ADC_AWD_CHANNEL_6_INJ (0)
- LL_ADC_AWD_CHANNEL_6_REG_INJ
- LL_ADC_AWD_CHANNEL_7_REG (0)
- LL_ADC_AWD_CHANNEL_7_INJ (0)
- LL_ADC_AWD_CHANNEL_7_REG_INJ
- LL_ADC_AWD_CHANNEL_8_REG (0)
- LL_ADC_AWD_CHANNEL_8_INJ (0)
- LL_ADC_AWD_CHANNEL_8_REG_INJ
- LL_ADC_AWD_CHANNEL_9_REG (0)
- LL_ADC_AWD_CHANNEL_9_INJ (0)
- LL_ADC_AWD_CHANNEL_9_REG_INJ
- LL_ADC_AWD_CHANNEL_10_REG (0)
- LL_ADC_AWD_CHANNEL_10_INJ (0)
- LL_ADC_AWD_CHANNEL_10_REG_INJ
- LL_ADC_AWD_CHANNEL_11_REG (0)
- LL_ADC_AWD_CHANNEL_11_INJ (0)
- LL_ADC_AWD_CHANNEL_11_REG_INJ
- LL_ADC_AWD_CHANNEL_12_REG (0)
- LL_ADC_AWD_CHANNEL_12_INJ (0)
- LL_ADC_AWD_CHANNEL_12_REG_INJ
- LL_ADC_AWD_CHANNEL_13_REG (0)
- LL_ADC_AWD_CHANNEL_13_INJ (0)
- LL_ADC_AWD_CHANNEL_13_REG_INJ
- LL_ADC_AWD_CHANNEL_14_REG (0)
- LL_ADC_AWD_CHANNEL_14_INJ (0)
- LL_ADC_AWD_CHANNEL_14_REG_INJ
- LL_ADC_AWD_CHANNEL_15_REG (0)
- LL_ADC_AWD_CHANNEL_15_INJ (0)
- LL_ADC_AWD_CHANNEL_15_REG_INJ
- LL_ADC_AWD_CHANNEL_16_REG (0)
- LL_ADC_AWD_CHANNEL_16_INJ (0)
- LL_ADC_AWD_CHANNEL_16_REG_INJ
- LL_ADC_AWD_CHANNEL_17_REG (0)
- LL_ADC_AWD_CHANNEL_17_INJ (0)
- LL_ADC_AWD_CHANNEL_17_REG_INJ
- LL_ADC_AWD_CHANNEL_18_REG (0)
- LL_ADC_AWD_CHANNEL_18_INJ (0)
- LL_ADC_AWD_CHANNEL_18_REG_INJ

Notes

- Usage of the returned channel number: To reinject this channel into another function LL_ADC_xxx: the returned channel number is only partly formatted on definition of literals LL_ADC_CHANNEL_x. Therefore, it has to be compared with parts of literals LL_ADC_CHANNEL_x or using helper macro __LL_ADC_CHANNEL_TO_DECIMAL_NB(). Then the selected literal LL_ADC_CHANNEL_x can be used as parameter for another function.To get the channel number in decimal format: process the returned value with the helper macro __LL_ADC_CHANNEL_TO_DECIMAL_NB(). Applicable only when the analog watchdog is set to monitor one channel.
- On this STM32 serie, there are 2 kinds of analog watchdog

instance: AWD standard (instance AWD1): channels monitored: can monitor 1 channel or all channels.groups monitored: ADC groups regular and-or injected.resolution: resolution is not limited (corresponds to ADC resolution configured). AWD flexible (instances AWD2, AWD3): channels monitored: flexible on channels monitored, selection is channel wise, from from 1 to all channels. Specificity of this analog watchdog: Multiple channels can be selected. For example: (LL_ADC_AWD_CHANNEL4_REG_INJ | LL_ADC_AWD_CHANNEL5_REG_INJ | ...)groups monitored: not selection possible (monitoring on both groups regular and injected). Channels selected are monitored on groups regular and injected: LL_ADC_AWD_CHANNELxx_REG_INJ (do not use parameters LL_ADC_AWD_CHANNELxx_REG and LL_ADC_AWD_CHANNELxx_INJ)resolution: resolution is limited to 8 bits: if ADC resolution is 12 bits the 4 LSB are ignored, if ADC resolution is 10 bits the 2 LSB are ignored.

- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:

- CFGR AWD1CH LL_ADC_GetAnalogWDMonitChannels
- CFGR AWD1SGL LL_ADC_GetAnalogWDMonitChannels
- CFGR AWD1EN LL_ADC_GetAnalogWDMonitChannels
- CFGR JAWD1EN LL_ADC_GetAnalogWDMonitChannels
- AWD2CR AWD2CH LL_ADC_GetAnalogWDMonitChannels
- AWD3CR AWD3CH LL_ADC_GetAnalogWDMonitChannels

LL_ADC_ConfigAnalogWDThresholds

Function name

__STATIC_INLINE void LL_ADC_ConfigAnalogWDThresholds (ADC_TypeDef * ADCx, uint32_t AWDy, uint32_t AWDThresholdHighValue, uint32_t AWDThresholdLowValue)

Function description

Set ADC analog watchdog thresholds value of both thresholds high and low.

Parameters

- **ADCx:** ADC instance
- **AWDy:** This parameter can be one of the following values:
  - LL_ADC_AWD1
  - LL_ADC_AWD2
  - LL_ADC_AWD3
- **AWDThresholdHighValue:** Value between Min_Data=0x000 and Max_Data=0xFFF
- **AWDThresholdLowValue:** Value between Min_Data=0x000 and Max_Data=0xFFF

Return values

- **None**

Notes

- If value of only one threshold high or low must be set, use function LL_ADC_SetAnalogWDThresholds().
- In case of ADC resolution different of 12 bits, analog watchdog thresholds data require a specific shift. Use helper macro __LL_ADC_ANALOGWD_SET_THRESHOLD_RESOLUTION().
- On this STM32 serie, there are 2 kinds of analog watchdog

instance: AWD standard (instance AWD1): channels monitored: can monitor 1 channel or all channels.groups monitored: ADC groups regular and-or injected.resolution: resolution is not limited (corresponds to ADC resolution configured). AWD flexible (instances AWD2, AWD3): channels monitored: flexible on channels monitored, selection is channel wise, from from 1 to all channels. Specificity of this analog watchdog: Multiple channels can be selected. For example: (LL_ADC_AWD_CHANNEL4_REG_INJ | LL_ADC_AWD_CHANNEL5_REG_INJ | ...)groups monitored: not selection possible (monitoring on both groups regular and injected). Channels selected are monitored on groups regular and injected: LL_ADC_AWD_CHANNELxx_REG_INJ (do not use parameters LL_ADC_AWD_CHANNELxx_REG and LL_ADC_AWD_CHANNELxx_INJ)resolution: resolution is limited to 8 bits: if ADC resolution is 12 bits the 4 LSB are ignored, if ADC resolution is 10 bits the 2 LSB are ignored.

- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:

- TR1 HT1 LL_ADC_ConfigAnalogWDThresholds
- TR2 HT2 LL_ADC_ConfigAnalogWDThresholds
- TR3 HT3 LL_ADC_ConfigAnalogWDThresholds
- TR1 LT1 LL_ADC_ConfigAnalogWDThresholds
- TR2 LT2 LL_ADC_ConfigAnalogWDThresholds
- TR3 LT3 LL_ADC_ConfigAnalogWDThresholds

LL_ADC_SetAnalogWDThresholds

Function name

__STATIC_INLINE void LL_ADC_SetAnalogWDThresholds (ADC_TypeDef * ADCx, uint32_t AWDy, uint32_t AWDThresholdsHighLow, uint32_t AWDThresholdValue)

Function description

Set ADC analog watchdog threshold value of threshold high or low.

Parameters

- **ADCx:** ADC instance
- **AWDy:** This parameter can be one of the following values:
  - LL_ADC_AWD1
  - LL_ADC_AWD2
  - LL_ADC_AWD3
- **AWDThresholdsHighLow:** This parameter can be one of the following values:
  - LL_ADC_AWD_THRESHOLD_HIGH
  - LL_ADC_AWD_THRESHOLD_LOW
- **AWDThresholdValue:** Value between Min_Data=0x000 and Max_Data=0xFFF

Return values

- **None**

Notes

- If values of both thresholds high or low must be set, use function LL_ADC_ConfigAnalogWDThresholds().
- In case of ADC resolution different of 12 bits, analog watchdog thresholds data require a specific shift. Use helper macro __LL_ADC_ANALOGWD_SET_THRESHOLD_RESOLUTIO

N().
- On this STM32 serie, there are 2 kinds of analog watchdog instance: AWD standard (instance AWD1): channels monitored: can monitor 1 channel or all channels.groups monitored: ADC groups regular and-or injected.resolution: resolution is not limited (corresponds to ADC resolution configured). AWD flexible (instances AWD2, AWD3): channels monitored: flexible on channels monitored, selection is channel wise, from from 1 to all channels. Specificity of this analog watchdog: Multiple channels can be selected. For example: (LL_ADC_AWD_CHANNEL4_REG_INJ | LL_ADC_AWD_CHANNEL5_REG_INJ | ...)groups monitored: not selection possible (monitoring on both groups regular and injected). Channels selected are monitored on groups regular and injected: LL_ADC_AWD_CHANNELxx_REG_INJ (do not use parameters LL_ADC_AWD_CHANNELxx_REG and LL_ADC_AWD_CHANNELxx_INJ)resolution: resolution is limited to 8 bits: if ADC resolution is 12 bits the 4 LSB are ignored, if ADC resolution is 10 bits the 2 LSB are ignored.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be disabled or enabled without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:
- TR1 HT1 LL_ADC_SetAnalogWDThresholds
- TR2 HT2 LL_ADC_SetAnalogWDThresholds
- TR3 HT3 LL_ADC_SetAnalogWDThresholds
- TR1 LT1 LL_ADC_SetAnalogWDThresholds
- TR2 LT2 LL_ADC_SetAnalogWDThresholds
- TR3 LT3 LL_ADC_SetAnalogWDThresholds

LL_ADC_GetAnalogWDThresholds

Function name
__STATIC_INLINE uint32_t LL_ADC_GetAnalogWDThresholds (ADC_TypeDef * ADCx, uint32_t AWDy, uint32_t AWDThresholdsHighLow)

Function description
Get ADC analog watchdog threshold value of threshold high, threshold low or raw data with ADC thresholds high and low concatenated.

Parameters
- **ADCx:** ADC instance
- **AWDy:** This parameter can be one of the following values:
  - LL_ADC_AWD1
  - LL_ADC_AWD2
  - LL_ADC_AWD3
- **AWDThresholdsHighLow:** This parameter can be one of the following values:
  - LL_ADC_AWD_THRESHOLD_HIGH
  - LL_ADC_AWD_THRESHOLD_LOW
  - LL_ADC_AWD_THRESHOLDS_HIGH_LOW

Return values
- **Value:** between Min_Data=0x000 and Max_Data=0xFFF

Notes
- If raw data with ADC thresholds high and low is retrieved, the data of each threshold high or low can be isolated using helper macro: __LL_ADC_ANALOGWD_THRESHOLDS_HIGH_LOW().

- In case of ADC resolution different of 12 bits, analog watchdog thresholds data require a specific shift. Use helper macro __LL_ADC_ANALOGWD_GET_THRESHOLD_RESOLUTION().

Reference Manual to LL API cross reference:

- TR1 HT1 LL_ADC_GetAnalogWDThresholds
- TR2 HT2 LL_ADC_GetAnalogWDThresholds
- TR3 HT3 LL_ADC_GetAnalogWDThresholds
- TR1 LT1 LL_ADC_GetAnalogWDThresholds
- TR2 LT2 LL_ADC_GetAnalogWDThresholds
- TR3 LT3 LL_ADC_GetAnalogWDThresholds

LL_ADC_SetMultimode

Function name

__STATIC_INLINE void LL_ADC_SetMultimode (ADC_Common_TypeDef * ADCxy_COMMON, uint32_t Multimode)

Function description

Set ADC multimode configuration to operate in independent mode or multimode (for devices with several ADC instances).

Parameters

- **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
- **Multimode:** This parameter can be one of the following values:
  - LL_ADC_MULTI_INDEPENDENT
  - LL_ADC_MULTI_DUAL_REG_SIMULT
  - LL_ADC_MULTI_DUAL_REG_INTERL
  - LL_ADC_MULTI_DUAL_INJ_SIMULT
  - LL_ADC_MULTI_DUAL_INJ_ALTERN
  - LL_ADC_MULTI_DUAL_REG_SIM_INJ_SIM
  - LL_ADC_MULTI_DUAL_REG_SIM_INJ_ALT
  - LL_ADC_MULTI_DUAL_REG_INT_INJ_SIM

Return values

- **None**

Notes

- If multimode configuration: the selected ADC instance is either master or slave depending on hardware. Refer to reference manual.
- On this STM32 serie, setting of this feature is conditioned to ADC state: All ADC instances of the ADC common group must be disabled. This check can be done with function LL_ADC_IsEnabled() for each ADC instance or by using helper macro __LL_ADC_IS_ENABLED_ALL_COMMON_INSTANCE().

Reference Manual to LL API cross reference:

- CCR DUAL LL_ADC_SetMultimode

LL_ADC_GetMultimode

Function name	**__STATIC_INLINE uint32_t LL_ADC_GetMultimode (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get ADC multimode configuration to operate in independent mode or multimode (for devices with several ADC instances).
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **Returned:** value can be one of the following values: – LL_ADC_MULTI_INDEPENDENT – LL_ADC_MULTI_DUAL_REG_SIMULT – LL_ADC_MULTI_DUAL_REG_INTERL – LL_ADC_MULTI_DUAL_INJ_SIMULT – LL_ADC_MULTI_DUAL_INJ_ALTERN – LL_ADC_MULTI_DUAL_REG_SIM_INJ_SIM – LL_ADC_MULTI_DUAL_REG_SIM_INJ_ALT – LL_ADC_MULTI_DUAL_REG_INT_INJ_SIM
Notes	• If multimode configuration: the selected ADC instance is either master or slave depending on hardware. Refer to reference manual.
Reference Manual to LL API cross reference:	• CCR DUAL LL_ADC_GetMultimode

LL_ADC_SetMultiDMATransfer

Function name	**__STATIC_INLINE void LL_ADC_SetMultiDMATransfer (ADC_Common_TypeDef * ADCxy_COMMON, uint32_t MultiDMATransfer)**
Function description	Set ADC multimode conversion data transfer: no transfer or transfer by DMA.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE()) • **MultiDMATransfer:** This parameter can be one of the following values: – LL_ADC_MULTI_REG_DMA_EACH_ADC – LL_ADC_MULTI_REG_DMA_LIMIT_RES12_10B – LL_ADC_MULTI_REG_DMA_LIMIT_RES8_6B – LL_ADC_MULTI_REG_DMA_UNLMT_RES12_10B – LL_ADC_MULTI_REG_DMA_UNLMT_RES8_6B
Return values	• **None**
Notes	• If ADC multimode transfer by DMA is not selected: each ADC uses its own DMA channel, with its individual DMA transfer settings. If ADC multimode transfer by DMA is selected: One DMA channel is used for both ADC (DMA of ADC master) Specifies the DMA requests mode: Limited mode (One shot mode): DMA transfer requests are stopped when number of DMA data transfers (number of ADC conversions) is reached.

This ADC mode is intended to be used with DMA mode non-circular.Unlimited mode: DMA transfer requests are unlimited, whatever number of DMA data transfers (number of ADC conversions). This ADC mode is intended to be used with DMA mode circular.

- If ADC DMA requests mode is set to unlimited and DMA is set to mode non-circular: when DMA transfers size will be reached, DMA will stop transfers of ADC conversions data ADC will raise an overrun error (overrun flag and interruption if enabled).
- How to retrieve multimode conversion data: Whatever multimode transfer by DMA setting: using function LL_ADC_REG_ReadMultiConversionData32(). If ADC multimode transfer by DMA is selected: conversion data is a raw data with ADC master and slave concatenated. A macro is available to get the conversion data of ADC master or ADC slave: see helper macro __LL_ADC_MULTI_CONV_DATA_MASTER_SLAVE().
- On this STM32 serie, setting of this feature is conditioned to ADC state: All ADC instances of the ADC common group must be disabled or enabled without conversion on going on group regular.

Reference Manual to LL API cross reference:

- CCR MDMA LL_ADC_SetMultiDMATransfer
- CCR DMACFG LL_ADC_SetMultiDMATransfer

LL_ADC_GetMultiDMATransfer

Function name **__STATIC_INLINE uint32_t LL_ADC_GetMultiDMATransfer (ADC_Common_TypeDef * ADCxy_COMMON)**

Function description Get ADC multimode conversion data transfer: no transfer or transfer by DMA.

Parameters

- **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())

Return values

- **Returned:** value can be one of the following values:
  - LL_ADC_MULTI_REG_DMA_EACH_ADC
  - LL_ADC_MULTI_REG_DMA_LIMIT_RES12_10B
  - LL_ADC_MULTI_REG_DMA_LIMIT_RES8_6B
  - LL_ADC_MULTI_REG_DMA_UNLMT_RES12_10B
  - LL_ADC_MULTI_REG_DMA_UNLMT_RES8_6B

Notes

- If ADC multimode transfer by DMA is not selected: each ADC uses its own DMA channel, with its individual DMA transfer settings. If ADC multimode transfer by DMA is selected: One DMA channel is used for both ADC (DMA of ADC master) Specifies the DMA requests mode: Limited mode (One shot mode): DMA transfer requests are stopped when number of DMA data transfers (number of ADC conversions) is reached. This ADC mode is intended to be used with DMA mode non-circular.Unlimited mode: DMA transfer requests are unlimited, whatever number of DMA data transfers (number of ADC conversions). This ADC mode is intended to be used with

DMA mode circular.

- If ADC DMA requests mode is set to unlimited and DMA is set to mode non-circular: when DMA transfers size will be reached, DMA will stop transfers of ADC conversions data ADC will raise an overrun error (overrun flag and interruption if enabled).
- How to retrieve multimode conversion data: Whatever multimode transfer by DMA setting: using function LL_ADC_REG_ReadMultiConversionData32(). If ADC multimode transfer by DMA is selected: conversion data is a raw data with ADC master and slave concatenated. A macro is available to get the conversion data of ADC master or ADC slave: see helper macro __LL_ADC_MULTI_CONV_DATA_MASTER_SLAVE().

Reference Manual to LL API cross reference:

- CCR MDMA LL_ADC_GetMultiDMATransfer
- CCR DMACFG LL_ADC_GetMultiDMATransfer

LL_ADC_SetMultiTwoSamplingDelay

Function name

__STATIC_INLINE void LL_ADC_SetMultiTwoSamplingDelay (ADC_Common_TypeDef * ADCxy_COMMON, uint32_t MultiTwoSamplingDelay)

Function description

Set ADC multimode delay between 2 sampling phases.

Parameters

- **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
- **MultiTwoSamplingDelay:** This parameter can be one of the following values: (1) Parameter available only if ADC resolution is 12, 10 or 8 bits.
  - LL_ADC_MULTI_TWOSMP_DELAY_1CYCLE
  - LL_ADC_MULTI_TWOSMP_DELAY_2CYCLES
  - LL_ADC_MULTI_TWOSMP_DELAY_3CYCLES
  - LL_ADC_MULTI_TWOSMP_DELAY_4CYCLES
  - LL_ADC_MULTI_TWOSMP_DELAY_5CYCLES
  - LL_ADC_MULTI_TWOSMP_DELAY_6CYCLES (1)
  - LL_ADC_MULTI_TWOSMP_DELAY_7CYCLES (1)
  - LL_ADC_MULTI_TWOSMP_DELAY_8CYCLES (2)
  - LL_ADC_MULTI_TWOSMP_DELAY_9CYCLES (2)
  - LL_ADC_MULTI_TWOSMP_DELAY_10CYCLES (2)
  - LL_ADC_MULTI_TWOSMP_DELAY_11CYCLES (3)
  - LL_ADC_MULTI_TWOSMP_DELAY_12CYCLES (3)
- (2) Parameter available only if ADC resolution is 12 or 10 bits.
- (3) Parameter available only if ADC resolution is 12 bits.

Return values

- **None**

Notes

- The sampling delay range depends on ADC resolution: ADC resolution 12 bits can have maximum delay of 12 cycles.ADC resolution 10 bits can have maximum delay of 10 cycles.ADC resolution 8 bits can have maximum delay of 8 cycles.ADC resolution 6 bits can have maximum delay of 6 cycles.

- On this STM32 serie, setting of this feature is conditioned to ADC state: All ADC instances of the ADC common group must be disabled. This check can be done with function LL_ADC_IsEnabled() for each ADC instance or by using helper macro helper macro __LL_ADC_IS_ENABLED_ALL_COMMON_INSTANCE().

Reference Manual to LL API cross reference:

- CCR DELAY LL_ADC_SetMultiTwoSamplingDelay

LL_ADC_GetMultiTwoSamplingDelay

Function name

__STATIC_INLINE uint32_t LL_ADC_GetMultiTwoSamplingDelay (ADC_Common_TypeDef * ADCxy_COMMON)

Function description

Get ADC multimode delay between 2 sampling phases.

Parameters

- **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())

Return values

- **Returned:** value can be one of the following values: (1) Parameter available only if ADC resolution is 12, 10 or 8 bits.
  - LL_ADC_MULTI_TWOSMP_DELAY_1CYCLE
  - LL_ADC_MULTI_TWOSMP_DELAY_2CYCLES
  - LL_ADC_MULTI_TWOSMP_DELAY_3CYCLES
  - LL_ADC_MULTI_TWOSMP_DELAY_4CYCLES
  - LL_ADC_MULTI_TWOSMP_DELAY_5CYCLES
  - LL_ADC_MULTI_TWOSMP_DELAY_6CYCLES (1)
  - LL_ADC_MULTI_TWOSMP_DELAY_7CYCLES (1)
  - LL_ADC_MULTI_TWOSMP_DELAY_8CYCLES (2)
  - LL_ADC_MULTI_TWOSMP_DELAY_9CYCLES (2)
  - LL_ADC_MULTI_TWOSMP_DELAY_10CYCLES (2)
  - LL_ADC_MULTI_TWOSMP_DELAY_11CYCLES (3)
  - LL_ADC_MULTI_TWOSMP_DELAY_12CYCLES (3)
- (2) Parameter available only if ADC resolution is 12 or 10 bits.
- (3) Parameter available only if ADC resolution is 12 bits.

Reference Manual to LL API cross reference:

- CCR DELAY LL_ADC_GetMultiTwoSamplingDelay

LL_ADC_EnableInternalRegulator

Function name

__STATIC_INLINE void LL_ADC_EnableInternalRegulator (ADC_TypeDef * ADCx)

Function description

Enable ADC instance internal voltage regulator.

Parameters

- **ADCx:** ADC instance

Return values

- **None**

Notes

- On this STM32 serie, after ADC internal voltage regulator enable, a delay for ADC internal voltage regulator stabilization

is required before performing a ADC calibration or ADC enable. Refer to device datasheet, parameter tADCVREG_STUP. Refer to literal LL_ADC_DELAY_INTERNAL_REGUL_STAB_US.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be ADC disabled.

Reference Manual to LL API cross reference:
- CR ADVREGEN LL_ADC_EnableInternalRegulator

LL_ADC_DisableInternalRegulator

Function name **__STATIC_INLINE void LL_ADC_DisableInternalRegulator (ADC_TypeDef * ADCx)**

Function description Disable ADC internal voltage regulator.

Parameters
- **ADCx:** ADC instance

Return values
- **None**

Notes
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be ADC disabled.

Reference Manual to LL API cross reference:
- CR ADVREGEN LL_ADC_DisableInternalRegulator

LL_ADC_IsInternalRegulatorEnabled

Function name **__STATIC_INLINE uint32_t LL_ADC_IsInternalRegulatorEnabled (ADC_TypeDef * ADCx)**

Function description Get the selected ADC instance internal voltage regulator state.

Parameters
- **ADCx:** ADC instance

Return values
- **0:** internal regulator is disabled, 1: internal regulator is enabled.

Reference Manual to LL API cross reference:
- CR ADVREGEN LL_ADC_IsInternalRegulatorEnabled

LL_ADC_Enable

Function name **__STATIC_INLINE void LL_ADC_Enable (ADC_TypeDef * ADCx)**

Function description Enable the selected ADC instance.

Parameters
- **ADCx:** ADC instance

Return values
- **None**

Notes
- On this STM32 serie, after ADC enable, a delay for ADC internal analog stabilization is required before performing a ADC conversion start. Refer to device datasheet, parameter tSTAB.
- On this STM32 serie, flag LL_ADC_FLAG_ADRDY is raised

when the ADC is enabled and when conversion clock is active. (not only core clock: this ADC has a dual clock domain)
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be ADC disabled and ADC internal voltage regulator enabled.

Reference Manual to LL API cross reference:
- CR ADEN LL_ADC_Enable

LL_ADC_Disable

Function name **__STATIC_INLINE void LL_ADC_Disable (ADC_TypeDef * ADCx)**

Function description Disable the selected ADC instance.

Parameters
- **ADCx:** ADC instance

Return values
- **None**

Notes
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be not disabled. Must be enabled without conversion on going on either groups regular or injected.

Reference Manual to LL API cross reference:
- CR ADDIS LL_ADC_Disable

LL_ADC_IsEnabled

Function name **__STATIC_INLINE uint32_t LL_ADC_IsEnabled (ADC_TypeDef * ADCx)**

Function description Get the selected ADC instance enable state.

Parameters
- **ADCx:** ADC instance

Return values
- **0:** ADC is disabled, 1: ADC is enabled.

Notes
- On this STM32 serie, flag LL_ADC_FLAG_ADRDY is raised when the ADC is enabled and when conversion clock is active. (not only core clock: this ADC has a dual clock domain)

Reference Manual to LL API cross reference:
- CR ADEN LL_ADC_IsEnabled

LL_ADC_IsDisableOngoing

Function name **__STATIC_INLINE uint32_t LL_ADC_IsDisableOngoing (ADC_TypeDef * ADCx)**

Function description Get the selected ADC instance disable state.

Parameters
- **ADCx:** ADC instance

Return values
- **0:** no ADC disable command on going.

Reference Manual to LL API cross reference:	• CR ADDIS LL_ADC_IsDisableOngoing

LL_ADC_StartCalibration

Function name	**__STATIC_INLINE void LL_ADC_StartCalibration (ADC_TypeDef * ADCx, uint32_t SingleDiff)**
Function description	Start ADC calibration in the mode single-ended or differential (for devices with differential mode available).
Parameters	• **ADCx:** ADC instance • **SingleDiff:** This parameter can be one of the following values: – LL_ADC_SINGLE_ENDED – LL_ADC_DIFFERENTIAL_ENDED
Return values	• **None**
Notes	• On this STM32 serie, a minimum number of ADC clock cycles are required between ADC end of calibration and ADC enable. Refer to literal LL_ADC_DELAY_CALIB_ENABLE_ADC_CYCLES. • For devices with differential mode available: Calibration of offset is specific to each of single-ended and differential modes (calibration run must be performed for each of these differential modes, if used afterwards and if the application requires their calibration). • On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be ADC disabled.
Reference Manual to LL API cross reference:	• CR ADCAL LL_ADC_StartCalibration • CR ADCALDIF LL_ADC_StartCalibration

LL_ADC_IsCalibrationOnGoing

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsCalibrationOnGoing (ADC_TypeDef * ADCx)**
Function description	Get ADC calibration state.
Parameters	• **ADCx:** ADC instance
Return values	• **0:** calibration complete, 1: calibration in progress.
Reference Manual to LL API cross reference:	• CR ADCAL LL_ADC_IsCalibrationOnGoing

LL_ADC_REG_StartConversion

Function name	**__STATIC_INLINE void LL_ADC_REG_StartConversion (ADC_TypeDef * ADCx)**
Function description	Start ADC group regular conversion.
Parameters	• **ADCx:** ADC instance

Return values	• **None**
Notes	• On this STM32 serie, this function is relevant for both internal trigger (SW start) and external trigger: If ADC trigger has been set to software start, ADC conversion starts immediately.If ADC trigger has been set to external trigger, ADC conversion will start at next trigger event (on the selected trigger edge) following the ADC start conversion command. • On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be enabled without conversion on going on group regular, without conversion stop command on going on group regular, without ADC disable command on going.
Reference Manual to LL API cross reference:	• CR ADSTART LL_ADC_REG_StartConversion

LL_ADC_REG_StopConversion

Function name	**__STATIC_INLINE void LL_ADC_REG_StopConversion (ADC_TypeDef * ADCx)**
Function description	Stop ADC group regular conversion.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Notes	• On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be enabled with conversion on going on group regular, without ADC disable command on going.
Reference Manual to LL API cross reference:	• CR ADSTP LL_ADC_REG_StopConversion

LL_ADC_REG_IsConversionOngoing

Function name	**__STATIC_INLINE uint32_t LL_ADC_REG_IsConversionOngoing (ADC_TypeDef * ADCx)**
Function description	Get ADC group regular conversion state.
Parameters	• **ADCx:** ADC instance
Return values	• **0:** no conversion is on going on ADC group regular.
Reference Manual to LL API cross reference:	• CR ADSTART LL_ADC_REG_IsConversionOngoing

LL_ADC_REG_IsStopConversionOngoing

Function name	**__STATIC_INLINE uint32_t LL_ADC_REG_IsStopConversionOngoing (ADC_TypeDef * ADCx)**
Function description	Get ADC group regular command of conversion stop state.

Parameters	• **ADCx:** ADC instance
Return values	• **0:** no command of conversion stop is on going on ADC group regular.
Reference Manual to LL API cross reference:	• CR ADSTP LL_ADC_REG_IsStopConversionOngoing

LL_ADC_REG_ReadConversionData32

Function name	**__STATIC_INLINE uint32_t LL_ADC_REG_ReadConversionData32 (ADC_TypeDef * ADCx)**
Function description	Get ADC group regular conversion data, range fit for all ADC configurations: all ADC resolutions and all oversampling increased data width (for devices with feature oversampling).
Parameters	• **ADCx:** ADC instance
Return values	• **Value:** between Min_Data=0x00000000 and Max_Data=0xFFFFFFFF
Reference Manual to LL API cross reference:	• DR RDATA LL_ADC_REG_ReadConversionData32

LL_ADC_REG_ReadConversionData12

Function name	**__STATIC_INLINE uint16_t LL_ADC_REG_ReadConversionData12 (ADC_TypeDef * ADCx)**
Function description	Get ADC group regular conversion data, range fit for ADC resolution 12 bits.
Parameters	• **ADCx:** ADC instance
Return values	• **Value:** between Min_Data=0x000 and Max_Data=0xFFF
Notes	• For devices with feature oversampling: Oversampling can increase data width, function for extended range may be needed: LL_ADC_REG_ReadConversionData32.
Reference Manual to LL API cross reference:	• DR RDATA LL_ADC_REG_ReadConversionData12

LL_ADC_REG_ReadConversionData10

Function name	**__STATIC_INLINE uint16_t LL_ADC_REG_ReadConversionData10 (ADC_TypeDef * ADCx)**
Function description	Get ADC group regular conversion data, range fit for ADC resolution 10 bits.
Parameters	• **ADCx:** ADC instance
Return values	• **Value:** between Min_Data=0x000 and Max_Data=0x3FF

Notes	• For devices with feature oversampling: Oversampling can increase data width, function for extended range may be needed: LL_ADC_REG_ReadConversionData32.
Reference Manual to LL API cross reference:	• DR RDATA LL_ADC_REG_ReadConversionData10

LL_ADC_REG_ReadConversionData8

Function name	**__STATIC_INLINE uint8_t LL_ADC_REG_ReadConversionData8 (ADC_TypeDef * ADCx)**
Function description	Get ADC group regular conversion data, range fit for ADC resolution 8 bits.
Parameters	• **ADCx:** ADC instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0xFF
Notes	• For devices with feature oversampling: Oversampling can increase data width, function for extended range may be needed: LL_ADC_REG_ReadConversionData32.
Reference Manual to LL API cross reference:	• DR RDATA LL_ADC_REG_ReadConversionData8

LL_ADC_REG_ReadConversionData6

Function name	**__STATIC_INLINE uint8_t LL_ADC_REG_ReadConversionData6 (ADC_TypeDef * ADCx)**
Function description	Get ADC group regular conversion data, range fit for ADC resolution 6 bits.
Parameters	• **ADCx:** ADC instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0x3F
Notes	• For devices with feature oversampling: Oversampling can increase data width, function for extended range may be needed: LL_ADC_REG_ReadConversionData32.
Reference Manual to LL API cross reference:	• DR RDATA LL_ADC_REG_ReadConversionData6

LL_ADC_REG_ReadMultiConversionData32

Function name	**__STATIC_INLINE uint32_t LL_ADC_REG_ReadMultiConversionData32 (ADC_Common_TypeDef * ADCxy_COMMON, uint32_t ConversionData)**
Function description	Get ADC multimode conversion data of ADC master, ADC slave or raw data with ADC master and slave concatenated.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())

- **ConversionData:** This parameter can be one of the following values:
  - LL_ADC_MULTI_MASTER
  - LL_ADC_MULTI_SLAVE
  - LL_ADC_MULTI_MASTER_SLAVE

Return values
- **Value:** between Min_Data=0x00000000 and Max_Data=0xFFFFFFFF

Notes
- If raw data with ADC master and slave concatenated is retrieved, a macro is available to get the conversion data of ADC master or ADC slave: see helper macro __LL_ADC_MULTI_CONV_DATA_MASTER_SLAVE(). (however this macro is mainly intended for multimode transfer by DMA, because this function can do the same by getting multimode conversion data of ADC master or ADC slave separately).

Reference Manual to LL API cross reference:
- CDR RDATA_MST LL_ADC_REG_ReadMultiConversionData32
- CDR RDATA_SLV LL_ADC_REG_ReadMultiConversionData32

LL_ADC_INJ_StartConversion

Function name
__STATIC_INLINE void LL_ADC_INJ_StartConversion (ADC_TypeDef * ADCx)

Function description
Start ADC group injected conversion.

Parameters
- **ADCx:** ADC instance

Return values
- **None**

Notes
- On this STM32 serie, this function is relevant for both internal trigger (SW start) and external trigger: If ADC trigger has been set to software start, ADC conversion starts immediately.If ADC trigger has been set to external trigger, ADC conversion will start at next trigger event (on the selected trigger edge) following the ADC start conversion command.
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be enabled without conversion on going on group injected, without conversion stop command on going on group injected, without ADC disable command on going.

Reference Manual to LL API cross reference:
- CR JADSTART LL_ADC_INJ_StartConversion

LL_ADC_INJ_StopConversion

Function name
__STATIC_INLINE void LL_ADC_INJ_StopConversion (ADC_TypeDef * ADCx)

Function description
Stop ADC group injected conversion.

Parameters
- **ADCx:** ADC instance

Return values
- **None**

Notes
- On this STM32 serie, setting of this feature is conditioned to ADC state: ADC must be enabled with conversion on going on group injected, without ADC disable command on going.

Reference Manual to LL API cross reference:
- CR JADSTP LL_ADC_INJ_StopConversion

LL_ADC_INJ_IsConversionOngoing

Function name
__STATIC_INLINE uint32_t LL_ADC_INJ_IsConversionOngoing (ADC_TypeDef * ADCx)

Function description
Get ADC group injected conversion state.

Parameters
- **ADCx:** ADC instance

Return values
- **0:** no conversion is on going on ADC group injected.

Reference Manual to LL API cross reference:
- CR JADSTART LL_ADC_INJ_IsConversionOngoing

LL_ADC_INJ_IsStopConversionOngoing

Function name
__STATIC_INLINE uint32_t LL_ADC_INJ_IsStopConversionOngoing (ADC_TypeDef * ADCx)

Function description
Get ADC group injected command of conversion stop state.

Parameters
- **ADCx:** ADC instance

Return values
- **0:** no command of conversion stop is on going on ADC group injected.

Reference Manual to LL API cross reference:
- CR JADSTP LL_ADC_INJ_IsStopConversionOngoing

LL_ADC_INJ_ReadConversionData32

Function name
__STATIC_INLINE uint32_t LL_ADC_INJ_ReadConversionData32 (ADC_TypeDef * ADCx, uint32_t Rank)

Function description
Get ADC group regular conversion data, range fit for all ADC configurations: all ADC resolutions and all oversampling increased data width (for devices with feature oversampling).

Parameters
- **ADCx:** ADC instance
- **Rank:** This parameter can be one of the following values:
  - LL_ADC_INJ_RANK_1
  - LL_ADC_INJ_RANK_2
  - LL_ADC_INJ_RANK_3
  - LL_ADC_INJ_RANK_4

Return values
- **Value:** between Min_Data=0x00000000 and

Max_Data=0xFFFFFFFF

Reference Manual to LL API cross reference:
- JDR1 JDATA LL_ADC_INJ_ReadConversionData32
- JDR2 JDATA LL_ADC_INJ_ReadConversionData32
- JDR3 JDATA LL_ADC_INJ_ReadConversionData32
- JDR4 JDATA LL_ADC_INJ_ReadConversionData32

LL_ADC_INJ_ReadConversionData12

Function name: **__STATIC_INLINE uint16_t LL_ADC_INJ_ReadConversionData12 (ADC_TypeDef * ADCx, uint32_t Rank)**

Function description: Get ADC group injected conversion data, range fit for ADC resolution 12 bits.

Parameters:
- **ADCx:** ADC instance
- **Rank:** This parameter can be one of the following values:
  - LL_ADC_INJ_RANK_1
  - LL_ADC_INJ_RANK_2
  - LL_ADC_INJ_RANK_3
  - LL_ADC_INJ_RANK_4

Return values:
- **Value:** between Min_Data=0x000 and Max_Data=0xFFF

Notes:
- For devices with feature oversampling: Oversampling can increase data width, function for extended range may be needed: LL_ADC_INJ_ReadConversionData32.

Reference Manual to LL API cross reference:
- JDR1 JDATA LL_ADC_INJ_ReadConversionData12
- JDR2 JDATA LL_ADC_INJ_ReadConversionData12
- JDR3 JDATA LL_ADC_INJ_ReadConversionData12
- JDR4 JDATA LL_ADC_INJ_ReadConversionData12

LL_ADC_INJ_ReadConversionData10

Function name: **__STATIC_INLINE uint16_t LL_ADC_INJ_ReadConversionData10 (ADC_TypeDef * ADCx, uint32_t Rank)**

Function description: Get ADC group injected conversion data, range fit for ADC resolution 10 bits.

Parameters:
- **ADCx:** ADC instance
- **Rank:** This parameter can be one of the following values:
  - LL_ADC_INJ_RANK_1
  - LL_ADC_INJ_RANK_2
  - LL_ADC_INJ_RANK_3
  - LL_ADC_INJ_RANK_4

Return values:
- **Value:** between Min_Data=0x000 and Max_Data=0x3FF

Notes:
- For devices with feature oversampling: Oversampling can increase data width, function for extended range may be needed: LL_ADC_INJ_ReadConversionData32.

Reference Manual to LL API cross
- JDR1 JDATA LL_ADC_INJ_ReadConversionData10
- JDR2 JDATA LL_ADC_INJ_ReadConversionData10
- JDR3 JDATA LL_ADC_INJ_ReadConversionData10

reference:
- JDR4 JDATA LL_ADC_INJ_ReadConversionData10

LL_ADC_INJ_ReadConversionData8

Function name
__STATIC_INLINE uint8_t LL_ADC_INJ_ReadConversionData8 (ADC_TypeDef * ADCx, uint32_t Rank)

Function description
Get ADC group injected conversion data, range fit for ADC resolution 8 bits.

Parameters
- **ADCx:** ADC instance
- **Rank:** This parameter can be one of the following values:
  - LL_ADC_INJ_RANK_1
  - LL_ADC_INJ_RANK_2
  - LL_ADC_INJ_RANK_3
  - LL_ADC_INJ_RANK_4

Return values
- **Value:** between Min_Data=0x00 and Max_Data=0xFF

Notes
- For devices with feature oversampling: Oversampling can increase data width, function for extended range may be needed: LL_ADC_INJ_ReadConversionData32.

Reference Manual to LL API cross reference:
- JDR1 JDATA LL_ADC_INJ_ReadConversionData8
- JDR2 JDATA LL_ADC_INJ_ReadConversionData8
- JDR3 JDATA LL_ADC_INJ_ReadConversionData8
- JDR4 JDATA LL_ADC_INJ_ReadConversionData8

LL_ADC_INJ_ReadConversionData6

Function name
__STATIC_INLINE uint8_t LL_ADC_INJ_ReadConversionData6 (ADC_TypeDef * ADCx, uint32_t Rank)

Function description
Get ADC group injected conversion data, range fit for ADC resolution 6 bits.

Parameters
- **ADCx:** ADC instance
- **Rank:** This parameter can be one of the following values:
  - LL_ADC_INJ_RANK_1
  - LL_ADC_INJ_RANK_2
  - LL_ADC_INJ_RANK_3
  - LL_ADC_INJ_RANK_4

Return values
- **Value:** between Min_Data=0x00 and Max_Data=0x3F

Notes
- For devices with feature oversampling: Oversampling can increase data width, function for extended range may be needed: LL_ADC_INJ_ReadConversionData32.

Reference Manual to LL API cross reference:
- JDR1 JDATA LL_ADC_INJ_ReadConversionData6
- JDR2 JDATA LL_ADC_INJ_ReadConversionData6
- JDR3 JDATA LL_ADC_INJ_ReadConversionData6
- JDR4 JDATA LL_ADC_INJ_ReadConversionData6

LL_ADC_IsActiveFlag_ADRDY

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_ADRDY (ADC_TypeDef * ADCx)**
Function description	Get flag ADC ready.
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Notes	• On this STM32 serie, flag LL_ADC_FLAG_ADRDY is raised when the ADC is enabled and when conversion clock is active. (not only core clock: this ADC has a dual clock domain)
Reference Manual to LL API cross reference:	• ISR ADRDY LL_ADC_IsActiveFlag_ADRDY

LL_ADC_IsActiveFlag_EOC

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_EOC (ADC_TypeDef * ADCx)**
Function description	Get flag ADC group regular end of unitary conversion.
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR EOC LL_ADC_IsActiveFlag_EOC

LL_ADC_IsActiveFlag_EOS

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_EOS (ADC_TypeDef * ADCx)**
Function description	Get flag ADC group regular end of sequence conversions.
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR EOS LL_ADC_IsActiveFlag_EOS

LL_ADC_IsActiveFlag_OVR

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_OVR (ADC_TypeDef * ADCx)**
Function description	Get flag ADC group regular overrun.
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• ISR OVR LL_ADC_IsActiveFlag_OVR

LL_ADC_IsActiveFlag_EOSMP

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_EOSMP (ADC_TypeDef * ADCx)**
Function description	Get flag ADC group regular end of sampling phase.
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR EOSMP LL_ADC_IsActiveFlag_EOSMP

LL_ADC_IsActiveFlag_JEOC

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_JEOC (ADC_TypeDef * ADCx)**
Function description	Get flag ADC group injected end of unitary conversion.
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR JEOC LL_ADC_IsActiveFlag_JEOC

LL_ADC_IsActiveFlag_JEOS

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_JEOS (ADC_TypeDef * ADCx)**
Function description	Get flag ADC group injected end of sequence conversions.
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR JEOS LL_ADC_IsActiveFlag_JEOS

LL_ADC_IsActiveFlag_JQOVF

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_JQOVF (ADC_TypeDef * ADCx)**
Function description	Get flag ADC group injected contexts queue overflow.
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• ISR JQOVF LL_ADC_IsActiveFlag_JQOVF

LL_ADC_IsActiveFlag_AWD1

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_AWD1 (ADC_TypeDef * ADCx)**
Function description	Get flag ADC analog watchdog 1 flag.
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR AWD1 LL_ADC_IsActiveFlag_AWD1

LL_ADC_IsActiveFlag_AWD2

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_AWD2 (ADC_TypeDef * ADCx)**
Function description	Get flag ADC analog watchdog 2.
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR AWD2 LL_ADC_IsActiveFlag_AWD2

LL_ADC_IsActiveFlag_AWD3

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_AWD3 (ADC_TypeDef * ADCx)**
Function description	Get flag ADC analog watchdog 3.
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR AWD3 LL_ADC_IsActiveFlag_AWD3

LL_ADC_ClearFlag_ADRDY

Function name	**__STATIC_INLINE void LL_ADC_ClearFlag_ADRDY (ADC_TypeDef * ADCx)**
Function description	Clear flag ADC ready.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Notes	• On this STM32 serie, flag LL_ADC_FLAG_ADRDY is raised when the ADC is enabled and when conversion clock is

active. (not only core clock: this ADC has a dual clock domain)

Reference Manual to LL API cross reference:
- ISR ADRDY LL_ADC_ClearFlag_ADRDY

LL_ADC_ClearFlag_EOC

Function name **__STATIC_INLINE void LL_ADC_ClearFlag_EOC (ADC_TypeDef * ADCx)**

Function description Clear flag ADC group regular end of unitary conversion.

Parameters
- **ADCx:** ADC instance

Return values
- **None**

Reference Manual to LL API cross reference:
- ISR EOC LL_ADC_ClearFlag_EOC

LL_ADC_ClearFlag_EOS

Function name **__STATIC_INLINE void LL_ADC_ClearFlag_EOS (ADC_TypeDef * ADCx)**

Function description Clear flag ADC group regular end of sequence conversions.

Parameters
- **ADCx:** ADC instance

Return values
- **None**

Reference Manual to LL API cross reference:
- ISR EOS LL_ADC_ClearFlag_EOS

LL_ADC_ClearFlag_OVR

Function name **__STATIC_INLINE void LL_ADC_ClearFlag_OVR (ADC_TypeDef * ADCx)**

Function description Clear flag ADC group regular overrun.

Parameters
- **ADCx:** ADC instance

Return values
- **None**

Reference Manual to LL API cross reference:
- ISR OVR LL_ADC_ClearFlag_OVR

LL_ADC_ClearFlag_EOSMP

Function name **__STATIC_INLINE void LL_ADC_ClearFlag_EOSMP (ADC_TypeDef * ADCx)**

Function description Clear flag ADC group regular end of sampling phase.

Parameters
- **ADCx:** ADC instance

Return values	• **None**
Reference Manual to LL API cross reference:	• ISR EOSMP LL_ADC_ClearFlag_EOSMP

LL_ADC_ClearFlag_JEOC

Function name	**__STATIC_INLINE void LL_ADC_ClearFlag_JEOC (ADC_TypeDef * ADCx)**
Function description	Clear flag ADC group injected end of unitary conversion.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ISR JEOC LL_ADC_ClearFlag_JEOC

LL_ADC_ClearFlag_JEOS

Function name	**__STATIC_INLINE void LL_ADC_ClearFlag_JEOS (ADC_TypeDef * ADCx)**
Function description	Clear flag ADC group injected end of sequence conversions.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ISR JEOS LL_ADC_ClearFlag_JEOS

LL_ADC_ClearFlag_JQOVF

Function name	**__STATIC_INLINE void LL_ADC_ClearFlag_JQOVF (ADC_TypeDef * ADCx)**
Function description	Clear flag ADC group injected contexts queue overflow.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ISR JQOVF LL_ADC_ClearFlag_JQOVF

LL_ADC_ClearFlag_AWD1

Function name	**__STATIC_INLINE void LL_ADC_ClearFlag_AWD1 (ADC_TypeDef * ADCx)**
Function description	Clear flag ADC analog watchdog 1.
Parameters	• **ADCx:** ADC instance
Return values	• **None**

Reference Manual to LL API cross reference:	• ISR AWD1 LL_ADC_ClearFlag_AWD1

LL_ADC_ClearFlag_AWD2

Function name	**__STATIC_INLINE void LL_ADC_ClearFlag_AWD2 (ADC_TypeDef * ADCx)**
Function description	Clear flag ADC analog watchdog 2.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ISR AWD2 LL_ADC_ClearFlag_AWD2

LL_ADC_ClearFlag_AWD3

Function name	**__STATIC_INLINE void LL_ADC_ClearFlag_AWD3 (ADC_TypeDef * ADCx)**
Function description	Clear flag ADC analog watchdog 3.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ISR AWD3 LL_ADC_ClearFlag_AWD3

LL_ADC_IsActiveFlag_MST_ADRDY

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_MST_ADRDY (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC ready of the ADC master.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR ADRDY_MST LL_ADC_IsActiveFlag_MST_ADRDY

LL_ADC_IsActiveFlag_SLV_ADRDY

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_SLV_ADRDY (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC ready of the ADC slave.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR ADRDY_SLV LL_ADC_IsActiveFlag_SLV_ADRDY

LL_ADC_IsActiveFlag_MST_EOC

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_MST_EOC (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC group regular end of unitary conversion of the ADC master.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR EOC_MST LL_ADC_IsActiveFlag_MST_EOC

LL_ADC_IsActiveFlag_SLV_EOC

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_SLV_EOC (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC group regular end of unitary conversion of the ADC slave.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR EOC_SLV LL_ADC_IsActiveFlag_SLV_EOC

LL_ADC_IsActiveFlag_MST_EOS

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_MST_EOS (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC group regular end of sequence conversions of the ADC master.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR EOS_MST LL_ADC_IsActiveFlag_MST_EOS

LL_ADC_IsActiveFlag_SLV_EOS

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_SLV_EOS (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC group regular end of sequence conversions of the ADC slave.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR EOS_SLV LL_ADC_IsActiveFlag_SLV_EOS

LL_ADC_IsActiveFlag_MST_OVR

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_MST_OVR (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC group regular overrun of the ADC master.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR OVR_MST LL_ADC_IsActiveFlag_MST_OVR

LL_ADC_IsActiveFlag_SLV_OVR

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_SLV_OVR (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC group regular overrun of the ADC slave.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR OVR_SLV LL_ADC_IsActiveFlag_SLV_OVR

LL_ADC_IsActiveFlag_MST_EOSMP

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_MST_EOSMP (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC group regular end of sampling of the ADC master.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR EOSMP_MST LL_ADC_IsActiveFlag_MST_EOSMP

LL_ADC_IsActiveFlag_SLV_EOSMP

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_SLV_EOSMP (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC group regular end of sampling of the ADC slave.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR EOSMP_SLV LL_ADC_IsActiveFlag_SLV_EOSMP

LL_ADC_IsActiveFlag_MST_JEOC

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_MST_JEOC (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC group injected end of unitary conversion of the ADC master.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR JEOC_MST LL_ADC_IsActiveFlag_MST_JEOC

LL_ADC_IsActiveFlag_SLV_JEOC

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_SLV_JEOC (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC group injected end of unitary conversion of the ADC slave.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR JEOC_SLV LL_ADC_IsActiveFlag_SLV_JEOC

LL_ADC_IsActiveFlag_MST_JEOS

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_MST_JEOS (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC group injected end of sequence conversions of the ADC master.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR JEOS_MST LL_ADC_IsActiveFlag_MST_JEOS

LL_ADC_IsActiveFlag_SLV_JEOS

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_SLV_JEOS (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC group injected end of sequence conversions of the ADC slave.

Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR JEOS_SLV LL_ADC_IsActiveFlag_SLV_JEOS

LL_ADC_IsActiveFlag_MST_JQOVF

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_MST_JQOVF (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC group injected context queue overflow of the ADC master.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR JQOVF_MST LL_ADC_IsActiveFlag_MST_JQOVF

LL_ADC_IsActiveFlag_SLV_JQOVF

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_SLV_JQOVF (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC group injected context queue overflow of the ADC slave.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR JQOVF_SLV LL_ADC_IsActiveFlag_SLV_JQOVF

LL_ADC_IsActiveFlag_MST_AWD1

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_MST_AWD1 (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC analog watchdog 1 of the ADC master.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CSR AWD1_MST LL_ADC_IsActiveFlag_MST_AWD1

LL_ADC_IsActiveFlag_SLV_AWD1

Function name **__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_SLV_AWD1 (ADC_Common_TypeDef * ADCxy_COMMON)**

Function description Get flag multimode analog watchdog 1 of the ADC slave.

Parameters
- **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CSR AWD1_SLV LL_ADC_IsActiveFlag_SLV_AWD1

LL_ADC_IsActiveFlag_MST_AWD2

Function name **__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_MST_AWD2 (ADC_Common_TypeDef * ADCxy_COMMON)**

Function description Get flag multimode ADC analog watchdog 2 of the ADC master.

Parameters
- **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CSR AWD2_MST LL_ADC_IsActiveFlag_MST_AWD2

LL_ADC_IsActiveFlag_SLV_AWD2

Function name **__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_SLV_AWD2 (ADC_Common_TypeDef * ADCxy_COMMON)**

Function description Get flag multimode ADC analog watchdog 2 of the ADC slave.

Parameters
- **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CSR AWD2_SLV LL_ADC_IsActiveFlag_SLV_AWD2

LL_ADC_IsActiveFlag_MST_AWD3

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_MST_AWD3 (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC analog watchdog 3 of the ADC master.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR AWD3_MST LL_ADC_IsActiveFlag_MST_AWD3

LL_ADC_IsActiveFlag_SLV_AWD3

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsActiveFlag_SLV_AWD3 (ADC_Common_TypeDef * ADCxy_COMMON)**
Function description	Get flag multimode ADC analog watchdog 3 of the ADC slave.
Parameters	• **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR AWD3_SLV LL_ADC_IsActiveFlag_SLV_AWD3

LL_ADC_EnableIT_ADRDY

Function name	**__STATIC_INLINE void LL_ADC_EnableIT_ADRDY (ADC_TypeDef * ADCx)**
Function description	Enable ADC ready.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER ADRDYIE LL_ADC_EnableIT_ADRDY

LL_ADC_EnableIT_EOC

Function name	**__STATIC_INLINE void LL_ADC_EnableIT_EOC (ADC_TypeDef * ADCx)**
Function description	Enable interruption ADC group regular end of unitary conversion.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER EOCIE LL_ADC_EnableIT_EOC

LL_ADC_EnableIT_EOS

Function name	**__STATIC_INLINE void LL_ADC_EnableIT_EOS (ADC_TypeDef * ADCx)**
Function description	Enable interruption ADC group regular end of sequence conversions.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER EOSIE LL_ADC_EnableIT_EOS

LL_ADC_EnableIT_OVR

Function name	**__STATIC_INLINE void LL_ADC_EnableIT_OVR (ADC_TypeDef * ADCx)**
Function description	Enable ADC group regular interruption overrun.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER OVRIE LL_ADC_EnableIT_OVR

LL_ADC_EnableIT_EOSMP

Function name	**__STATIC_INLINE void LL_ADC_EnableIT_EOSMP (ADC_TypeDef * ADCx)**
Function description	Enable interruption ADC group regular end of sampling.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER EOSMPIE LL_ADC_EnableIT_EOSMP

LL_ADC_EnableIT_JEOC

Function name	**__STATIC_INLINE void LL_ADC_EnableIT_JEOC (ADC_TypeDef * ADCx)**
Function description	Enable interruption ADC group injected end of unitary conversion.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER JEOCIE LL_ADC_EnableIT_JEOC

LL_ADC_EnableIT_JEOS

Function name	**__STATIC_INLINE void LL_ADC_EnableIT_JEOS (ADC_TypeDef * ADCx)**
Function description	Enable interruption ADC group injected end of sequence conversions.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER JEOSIE LL_ADC_EnableIT_JEOS

LL_ADC_EnableIT_JQOVF

Function name	**__STATIC_INLINE void LL_ADC_EnableIT_JQOVF (ADC_TypeDef * ADCx)**
Function description	Enable interruption ADC group injected context queue overflow.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER JQOVFIE LL_ADC_EnableIT_JQOVF

LL_ADC_EnableIT_AWD1

Function name	**__STATIC_INLINE void LL_ADC_EnableIT_AWD1 (ADC_TypeDef * ADCx)**
Function description	Enable interruption ADC analog watchdog 1.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER AWD1IE LL_ADC_EnableIT_AWD1

LL_ADC_EnableIT_AWD2

Function name	**__STATIC_INLINE void LL_ADC_EnableIT_AWD2 (ADC_TypeDef * ADCx)**
Function description	Enable interruption ADC analog watchdog 2.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER AWD2IE LL_ADC_EnableIT_AWD2

LL_ADC_EnableIT_AWD3

Function name	**__STATIC_INLINE void LL_ADC_EnableIT_AWD3 (ADC_TypeDef * ADCx)**
Function description	Enable interruption ADC analog watchdog 3.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER AWD3IE LL_ADC_EnableIT_AWD3

LL_ADC_DisableIT_ADRDY

Function name	**__STATIC_INLINE void LL_ADC_DisableIT_ADRDY (ADC_TypeDef * ADCx)**
Function description	Disable interruption ADC ready.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER ADRDYIE LL_ADC_DisableIT_ADRDY

LL_ADC_DisableIT_EOC

Function name	**__STATIC_INLINE void LL_ADC_DisableIT_EOC (ADC_TypeDef * ADCx)**
Function description	Disable interruption ADC group regular end of unitary conversion.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER EOCIE LL_ADC_DisableIT_EOC

LL_ADC_DisableIT_EOS

Function name	**__STATIC_INLINE void LL_ADC_DisableIT_EOS (ADC_TypeDef * ADCx)**
Function description	Disable interruption ADC group regular end of sequence conversions.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER EOSIE LL_ADC_DisableIT_EOS

LL_ADC_DisableIT_OVR

Function name	**__STATIC_INLINE void LL_ADC_DisableIT_OVR (ADC_TypeDef * ADCx)**
Function description	Disable interruption ADC group regular overrun.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER OVRIE LL_ADC_DisableIT_OVR

LL_ADC_DisableIT_EOSMP

Function name	**__STATIC_INLINE void LL_ADC_DisableIT_EOSMP (ADC_TypeDef * ADCx)**
Function description	Disable interruption ADC group regular end of sampling.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER EOSMPIE LL_ADC_DisableIT_EOSMP

LL_ADC_DisableIT_JEOC

Function name	**__STATIC_INLINE void LL_ADC_DisableIT_JEOC (ADC_TypeDef * ADCx)**
Function description	Disable interruption ADC group regular end of unitary conversion.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER JEOCIE LL_ADC_DisableIT_JEOC

LL_ADC_DisableIT_JEOS

Function name	**__STATIC_INLINE void LL_ADC_DisableIT_JEOS (ADC_TypeDef * ADCx)**
Function description	Disable interruption ADC group injected end of sequence conversions.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER JEOSIE LL_ADC_DisableIT_JEOS

LL_ADC_DisableIT_JQOVF

Function name	**__STATIC_INLINE void LL_ADC_DisableIT_JQOVF (ADC_TypeDef * ADCx)**
Function description	Disable interruption ADC group injected context queue overflow.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER JQOVFIE LL_ADC_DisableIT_JQOVF

LL_ADC_DisableIT_AWD1

Function name	**__STATIC_INLINE void LL_ADC_DisableIT_AWD1 (ADC_TypeDef * ADCx)**
Function description	Disable interruption ADC analog watchdog 1.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER AWD1IE LL_ADC_DisableIT_AWD1

LL_ADC_DisableIT_AWD2

Function name	**__STATIC_INLINE void LL_ADC_DisableIT_AWD2 (ADC_TypeDef * ADCx)**
Function description	Disable interruption ADC analog watchdog 2.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER AWD2IE LL_ADC_DisableIT_AWD2

LL_ADC_DisableIT_AWD3

Function name	**__STATIC_INLINE void LL_ADC_DisableIT_AWD3 (ADC_TypeDef * ADCx)**
Function description	Disable interruption ADC analog watchdog 3.
Parameters	• **ADCx:** ADC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER AWD3IE LL_ADC_DisableIT_AWD3

LL_ADC_IsEnabledIT_ADRDY

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsEnabledIT_ADRDY (ADC_TypeDef * ADCx)**
Function description	Get state of interruption ADC ready (0: interrupt disabled, 1: interrupt enabled).
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• IER ADRDYIE LL_ADC_IsEnabledIT_ADRDY

LL_ADC_IsEnabledIT_EOC

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsEnabledIT_EOC (ADC_TypeDef * ADCx)**
Function description	Get state of interruption ADC group regular end of unitary conversion (0: interrupt disabled, 1: interrupt enabled).
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• IER EOCIE LL_ADC_IsEnabledIT_EOC

LL_ADC_IsEnabledIT_EOS

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsEnabledIT_EOS (ADC_TypeDef * ADCx)**
Function description	Get state of interruption ADC group regular end of sequence conversions (0: interrupt disabled, 1: interrupt enabled).
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• IER EOSIE LL_ADC_IsEnabledIT_EOS

LL_ADC_IsEnabledIT_OVR

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsEnabledIT_OVR (ADC_TypeDef * ADCx)**
Function description	Get state of interruption ADC group regular overrun (0: interrupt disabled, 1: interrupt enabled).
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• IER OVRIE LL_ADC_IsEnabledIT_OVR

LL_ADC_IsEnabledIT_EOSMP

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsEnabledIT_EOSMP (ADC_TypeDef * ADCx)**
Function description	Get state of interruption ADC group regular end of sampling (0: interrupt disabled, 1: interrupt enabled).
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• IER EOSMPIE LL_ADC_IsEnabledIT_EOSMP

LL_ADC_IsEnabledIT_JEOC

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsEnabledIT_JEOC (ADC_TypeDef * ADCx)**
Function description	Get state of interruption ADC group injected end of unitary conversion (0: interrupt disabled, 1: interrupt enabled).
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• IER JEOCIE LL_ADC_IsEnabledIT_JEOC

LL_ADC_IsEnabledIT_JEOS

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsEnabledIT_JEOS (ADC_TypeDef * ADCx)**
Function description	Get state of interruption ADC group injected end of sequence conversions (0: interrupt disabled, 1: interrupt enabled).
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross	• IER JEOSIE LL_ADC_IsEnabledIT_JEOS

reference:

LL_ADC_IsEnabledIT_JQOVF

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsEnabledIT_JQOVF (ADC_TypeDef * ADCx)**
Function description	Get state of interruption ADC group injected context queue overflow interrupt state (0: interrupt disabled, 1: interrupt enabled).
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• IER JQOVFIE LL_ADC_IsEnabledIT_JQOVF

LL_ADC_IsEnabledIT_AWD1

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsEnabledIT_AWD1 (ADC_TypeDef * ADCx)**
Function description	Get state of interruption ADC analog watchdog 1 (0: interrupt disabled, 1: interrupt enabled).
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• IER AWD1IE LL_ADC_IsEnabledIT_AWD1

LL_ADC_IsEnabledIT_AWD2

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsEnabledIT_AWD2 (ADC_TypeDef * ADCx)**
Function description	Get state of interruption Get ADC analog watchdog 2 (0: interrupt disabled, 1: interrupt enabled).
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• IER AWD2IE LL_ADC_IsEnabledIT_AWD2

LL_ADC_IsEnabledIT_AWD3

Function name	**__STATIC_INLINE uint32_t LL_ADC_IsEnabledIT_AWD3 (ADC_TypeDef * ADCx)**
Function description	Get state of interruption Get ADC analog watchdog 3 (0: interrupt disabled, 1: interrupt enabled).
Parameters	• **ADCx:** ADC instance
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- IER AWD3IE LL_ADC_IsEnabledIT_AWD3

LL_ADC_CommonDeInit

Function name: **ErrorStatus LL_ADC_CommonDeInit (ADC_Common_TypeDef * ADCxy_COMMON)**

Function description: De-initialize registers of all ADC instances belonging to the same ADC common instance to their default reset values.

Parameters:
- **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())

Return values:
- **An:** ErrorStatus enumeration value:
  - SUCCESS: ADC common registers are de-initialized
  - ERROR: not applicable

Notes:
- This function is performing a hard reset, using high level clock source RCC ADC reset. Caution: On this STM32 serie, if several ADC instances are available on the selected device, RCC ADC reset will reset all ADC instances belonging to the common ADC instance. To de-initialize only 1 ADC instance, use function LL_ADC_DeInit().

LL_ADC_CommonInit

Function name: **ErrorStatus LL_ADC_CommonInit (ADC_Common_TypeDef * ADCxy_COMMON, LL_ADC_CommonInitTypeDef * ADC_CommonInitStruct)**

Function description: Initialize some features of ADC common parameters (all ADC instances belonging to the same ADC common instance) and multimode (for devices with several ADC instances available).

Parameters:
- **ADCxy_COMMON:** ADC common instance (can be set directly from CMSIS definition or by using helper macro __LL_ADC_COMMON_INSTANCE())
- **ADC_CommonInitStruct:** Pointer to a LL_ADC_CommonInitTypeDef structure

Return values:
- **An:** ErrorStatus enumeration value:
  - SUCCESS: ADC common registers are initialized
  - ERROR: ADC common registers are not initialized

Notes:
- The setting of ADC common parameters is conditioned to ADC instances state: All ADC instances belonging to the same ADC common instance must be disabled.

LL_ADC_CommonStructInit

Function name: **void LL_ADC_CommonStructInit (LL_ADC_CommonInitTypeDef * ADC_CommonInitStruct)**

Function description: Set each LL_ADC_CommonInitTypeDef field to default value.

Parameters:
- **ADC_CommonInitStruct:** Pointer to a

LL_ADC_CommonInitTypeDef structure whose fields will be set to default values.

Return values
- **None**

LL_ADC_DeInit

Function name **ErrorStatus LL_ADC_DeInit (ADC_TypeDef * ADCx)**

Function description De-initialize registers of the selected ADC instance to their default reset values.

Parameters
- **ADCx:** ADC instance

Return values
- **An:** ErrorStatus enumeration value:
  - SUCCESS: ADC registers are de-initialized
  - ERROR: ADC registers are not de-initialized

Notes
- To reset all ADC instances quickly (perform a hard reset), use function LL_ADC_CommonDeInit().
- If this functions returns error status, it means that ADC instance is in an unknown state. In this case, perform a hard reset using high level clock source RCC ADC reset. Caution: On this STM32 serie, if several ADC instances are available on the selected device, RCC ADC reset will reset all ADC instances belonging to the common ADC instance. Refer to function LL_ADC_CommonDeInit().

LL_ADC_Init

Function name **ErrorStatus LL_ADC_Init (ADC_TypeDef * ADCx, LL_ADC_InitTypeDef * ADC_InitStruct)**

Function description Initialize some features of ADC instance.

Parameters
- **ADCx:** ADC instance
- **ADC_InitStruct:** Pointer to a LL_ADC_REG_InitTypeDef structure

Return values
- **An:** ErrorStatus enumeration value:
  - SUCCESS: ADC registers are initialized
  - ERROR: ADC registers are not initialized

Notes
- These parameters have an impact on ADC scope: ADC instance. Affects both group regular and group injected (availability of ADC group injected depends on STM32 families). Refer to corresponding unitary functions into Configuration of ADC hierarchical scope: ADC instance .
- The setting of these parameters by function LL_ADC_Init() is conditioned to ADC state: ADC instance must be disabled. This condition is applied to all ADC features, for efficiency and compatibility over all STM32 families. However, the different features can be set under different ADC state conditions (setting possible with ADC enabled without conversion on going, ADC enabled with conversion on going, ...) Each feature can be updated afterwards with a unitary function and potentially with ADC in a different state than disabled, refer to description of each function for setting conditioned to ADC state.

- After using this function, some other features must be configured using LL unitary functions. The minimum configuration remaining to be done is: Set ADC group regular or group injected sequencer: map channel on the selected sequencer rank. Refer to function LL_ADC_REG_SetSequencerRanks().Set ADC channel sampling time Refer to function LL_ADC_SetChannelSamplingTime();

LL_ADC_StructInit

Function name **void LL_ADC_StructInit (LL_ADC_InitTypeDef * ADC_InitStruct)**

Function description Set each LL_ADC_InitTypeDef field to default value.

Parameters
- **ADC_InitStruct:** Pointer to a LL_ADC_InitTypeDef structure whose fields will be set to default values.

Return values
- **None**

LL_ADC_REG_Init

Function name **ErrorStatus LL_ADC_REG_Init (ADC_TypeDef * ADCx, LL_ADC_REG_InitTypeDef * ADC_REG_InitStruct)**

Function description Initialize some features of ADC group regular.

Parameters
- **ADCx:** ADC instance
- **ADC_REG_InitStruct:** Pointer to a LL_ADC_REG_InitTypeDef structure

Return values
- **An:** ErrorStatus enumeration value:
  - SUCCESS: ADC registers are initialized
  - ERROR: ADC registers are not initialized

Notes
- These parameters have an impact on ADC scope: ADC group regular. Refer to corresponding unitary functions into Configuration of ADC hierarchical scope: group regular (functions with prefix "REG").
- The setting of these parameters by function LL_ADC_Init() is conditioned to ADC state: ADC instance must be disabled. This condition is applied to all ADC features, for efficiency and compatibility over all STM32 families. However, the different features can be set under different ADC state conditions (setting possible with ADC enabled without conversion on going, ADC enabled with conversion on going, ...) Each feature can be updated afterwards with a unitary function and potentially with ADC in a different state than disabled, refer to description of each function for setting conditioned to ADC state.
- After using this function, other features must be configured using LL unitary functions. The minimum configuration remaining to be done is: Set ADC group regular or group injected sequencer: map channel on the selected sequencer rank. Refer to function LL_ADC_REG_SetSequencerRanks().Set ADC channel sampling time Refer to function

LL_ADC_SetChannelSamplingTime();

LL_ADC_REG_StructInit

Function name **void LL_ADC_REG_StructInit (LL_ADC_REG_InitTypeDef * ADC_REG_InitStruct)**

Function description Set each LL_ADC_REG_InitTypeDef field to default value.

Parameters
- **ADC_REG_InitStruct:** Pointer to a LL_ADC_REG_InitTypeDef structure whose fields will be set to default values.

Return values
- **None**

LL_ADC_INJ_Init

Function name **ErrorStatus LL_ADC_INJ_Init (ADC_TypeDef * ADCx, LL_ADC_INJ_InitTypeDef * ADC_INJ_InitStruct)**

Function description Initialize some features of ADC group injected.

Parameters
- **ADCx:** ADC instance
- **ADC_INJ_InitStruct:** Pointer to a LL_ADC_INJ_InitTypeDef structure

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: ADC registers are initialized
  – ERROR: ADC registers are not initialized

Notes
- These parameters have an impact on ADC scope: ADC group injected. Refer to corresponding unitary functions into Configuration of ADC hierarchical scope: group regular (functions with prefix "INJ").
- The setting of these parameters by function LL_ADC_Init() is conditioned to ADC state: ADC instance must be disabled. This condition is applied to all ADC features, for efficiency and compatibility over all STM32 families. However, the different features can be set under different ADC state conditions (setting possible with ADC enabled without conversion on going, ADC enabled with conversion on going, ...) Each feature can be updated afterwards with a unitary function and potentially with ADC in a different state than disabled, refer to description of each function for setting conditioned to ADC state.
- After using this function, other features must be configured using LL unitary functions. The minimum configuration remaining to be done is: Set ADC group injected sequencer: map channel on the selected sequencer rank. Refer to function LL_ADC_INJ_SetSequencerRanks().Set ADC channel sampling time Refer to function LL_ADC_SetChannelSamplingTime();
- Caution to ADC group injected contexts queue: On this STM32 serie, using successively several times this function will appear has having no effect. This is due to ADC group injected contexts queue (this feature cannot be disabled on this STM32 serie). To set several features of ADC group

injected, use function LL_ADC_INJ_ConfigQueueContext().

LL_ADC_INJ_StructInit

Function name	**void LL_ADC_INJ_StructInit (LL_ADC_INJ_InitTypeDef * ADC_INJ_InitStruct)**
Function description	Set each LL_ADC_INJ_InitTypeDef field to default value.
Parameters	• **ADC_INJ_InitStruct:** Pointer to a LL_ADC_INJ_InitTypeDef structure whose fields will be set to default values.
Return values	• **None**

59.3 ADC Firmware driver defines

59.3.1 ADC

Analog watchdog - Monitored channels

LL_ADC_AWD_DISABLE	ADC analog watchdog monitoring disabled
LL_ADC_AWD_ALL_CHANNELS_REG	ADC analog watchdog monitoring of all channels, converted by group regular only
LL_ADC_AWD_ALL_CHANNELS_INJ	ADC analog watchdog monitoring of all channels, converted by group injected only
LL_ADC_AWD_ALL_CHANNELS_REG_INJ	ADC analog watchdog monitoring of all channels, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_0_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN0, converted by group regular only
LL_ADC_AWD_CHANNEL_0_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN0, converted by group injected only
LL_ADC_AWD_CHANNEL_0_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN0, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_1_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN1, converted by group regular only
LL_ADC_AWD_CHANNEL_1_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN1, converted by group injected only

LL_ADC_AWD_CHANNEL_1_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN1, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_2_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN2, converted by group regular only
LL_ADC_AWD_CHANNEL_2_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN2, converted by group injected only
LL_ADC_AWD_CHANNEL_2_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN2, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_3_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN3, converted by group regular only
LL_ADC_AWD_CHANNEL_3_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN3, converted by group injected only
LL_ADC_AWD_CHANNEL_3_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN3, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_4_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN4, converted by group regular only
LL_ADC_AWD_CHANNEL_4_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN4, converted by group injected only
LL_ADC_AWD_CHANNEL_4_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN4, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_5_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN5, converted by group regular only
LL_ADC_AWD_CHANNEL_5_INJ	ADC analog watchdog monitoring of ADC external channel (channel

	connected to GPIO pin) ADCx_IN5, converted by group injected only
LL_ADC_AWD_CHANNEL_5_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN5, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_6_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN6, converted by group regular only
LL_ADC_AWD_CHANNEL_6_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN6, converted by group injected only
LL_ADC_AWD_CHANNEL_6_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN6, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_7_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN7, converted by group regular only
LL_ADC_AWD_CHANNEL_7_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN7, converted by group injected only
LL_ADC_AWD_CHANNEL_7_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN7, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_8_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN8, converted by group regular only
LL_ADC_AWD_CHANNEL_8_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN8, converted by group injected only
LL_ADC_AWD_CHANNEL_8_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN8, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_9_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN9,

	converted by group regular only
LL_ADC_AWD_CHANNEL_9_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN9, converted by group injected only
LL_ADC_AWD_CHANNEL_9_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN9, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_10_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN10, converted by group regular only
LL_ADC_AWD_CHANNEL_10_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN10, converted by group injected only
LL_ADC_AWD_CHANNEL_10_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN10, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_11_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN11, converted by group regular only
LL_ADC_AWD_CHANNEL_11_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN11, converted by group injected only
LL_ADC_AWD_CHANNEL_11_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN11, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_12_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN12, converted by group regular only
LL_ADC_AWD_CHANNEL_12_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN12, converted by group injected only
LL_ADC_AWD_CHANNEL_12_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN12, converted by either group regular or injected

LL_ADC_AWD_CHANNEL_13_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN13, converted by group regular only
LL_ADC_AWD_CHANNEL_13_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN13, converted by group injected only
LL_ADC_AWD_CHANNEL_13_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN13, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_14_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN14, converted by group regular only
LL_ADC_AWD_CHANNEL_14_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN14, converted by group injected only
LL_ADC_AWD_CHANNEL_14_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN14, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_15_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN15, converted by group regular only
LL_ADC_AWD_CHANNEL_15_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN15, converted by group injected only
LL_ADC_AWD_CHANNEL_15_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN15, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_16_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN16, converted by group regular only
LL_ADC_AWD_CHANNEL_16_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN16, converted by group injected only
LL_ADC_AWD_CHANNEL_16_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN16,

	converted by either group regular or injected
LL_ADC_AWD_CHANNEL_17_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN17, converted by group regular only
LL_ADC_AWD_CHANNEL_17_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN17, converted by group injected only
LL_ADC_AWD_CHANNEL_17_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN17, converted by either group regular or injected
LL_ADC_AWD_CHANNEL_18_REG	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN18, converted by group regular only
LL_ADC_AWD_CHANNEL_18_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN18, converted by group injected only
LL_ADC_AWD_CHANNEL_18_REG_INJ	ADC analog watchdog monitoring of ADC external channel (channel connected to GPIO pin) ADCx_IN18, converted by either group regular or injected
LL_ADC_AWD_CH_VREFINT_REG	ADC analog watchdog monitoring of ADC internal channel connected to VrefInt: Internal voltage reference, converted by group regular only
LL_ADC_AWD_CH_VREFINT_INJ	ADC analog watchdog monitoring of ADC internal channel connected to VrefInt: Internal voltage reference, converted by group injected only
LL_ADC_AWD_CH_VREFINT_REG_INJ	ADC analog watchdog monitoring of ADC internal channel connected to VrefInt: Internal voltage reference, converted by either group regular or injected
LL_ADC_AWD_CH_TEMPSENSOR_REG	ADC analog watchdog monitoring of ADC internal channel connected to Temperature sensor, converted by group regular only
LL_ADC_AWD_CH_TEMPSENSOR_INJ	ADC analog watchdog monitoring of ADC internal channel connected to Temperature sensor, converted by group injected only

LL_ADC_AWD_CH_TEMPSENSOR_REG_INJ	ADC analog watchdog monitoring of ADC internal channel connected to Temperature sensor, converted by either group regular or injected
LL_ADC_AWD_CH_VBAT_REG	ADC analog watchdog monitoring of ADC internal channel connected to Vbat/3: Vbat voltage through a divider ladder of factor 1/3 to have Vbat always below Vdda, converted by group regular only
LL_ADC_AWD_CH_VBAT_INJ	ADC analog watchdog monitoring of ADC internal channel connected to Vbat/3: Vbat voltage through a divider ladder of factor 1/3 to have Vbat always below Vdda, converted by group injected only
LL_ADC_AWD_CH_VBAT_REG_INJ	ADC analog watchdog monitoring of ADC internal channel connected to Vbat/3: Vbat voltage through a divider ladder of factor 1/3 to have Vbat always below Vdda
LL_ADC_AWD_CH_VOPAMP1_REG	ADC analog watchdog monitoring of ADC internal channel connected to DAC1 channel 1, channel specific to ADC2, converted by group regular only
LL_ADC_AWD_CH_VOPAMP1_INJ	ADC analog watchdog monitoring of ADC internal channel connected to DAC1 channel 1, channel specific to ADC2, converted by group injected only
LL_ADC_AWD_CH_VOPAMP1_REG_INJ	ADC analog watchdog monitoring of ADC internal channel connected to DAC1 channel 1, channel specific to ADC2, converted by either group regular or injected
LL_ADC_AWD_CH_VOPAMP2_REG	ADC analog watchdog monitoring of ADC internal channel connected to DAC1 channel 1, channel specific to ADC2, converted by group regular only
LL_ADC_AWD_CH_VOPAMP2_INJ	ADC analog watchdog monitoring of ADC internal channel connected to DAC1 channel 1, channel specific to ADC2, converted by group injected only
LL_ADC_AWD_CH_VOPAMP2_REG_INJ	ADC analog watchdog monitoring of ADC internal channel connected to DAC1 channel 1, channel specific to ADC2, converted by either group regular or injected
LL_ADC_AWD_CH_VOPAMP3_REG	ADC analog watchdog monitoring of ADC internal channel connected to DAC1 channel 1, channel specific to

	ADC3, converted by group regular only
LL_ADC_AWD_CH_VOPAMP3_INJ	ADC analog watchdog monitoring of ADC internal channel connected to DAC1 channel 1, channel specific to ADC3, converted by group injected only
LL_ADC_AWD_CH_VOPAMP3_REG_INJ	ADC analog watchdog monitoring of ADC internal channel connected to DAC1 channel 1, channel specific to ADC3, converted by either group regular or injected
LL_ADC_AWD_CH_VOPAMP4_REG	ADC analog watchdog monitoring of ADC internal channel connected to DAC1 channel 1, channel specific to ADC3, converted by group regular only
LL_ADC_AWD_CH_VOPAMP4_INJ	ADC analog watchdog monitoring of ADC internal channel connected to DAC1 channel 1, channel specific to ADC3, converted by group injected only
LL_ADC_AWD_CH_VOPAMP4_REG_INJ	ADC analog watchdog monitoring of ADC internal channel connected to DAC1 channel 1, channel specific to ADC3, converted by either group regular or injected

Analog watchdog - Analog watchdog number

LL_ADC_AWD1	ADC analog watchdog number 1
LL_ADC_AWD2	ADC analog watchdog number 2
LL_ADC_AWD3	ADC analog watchdog number 3

Analog watchdog - Thresholds

LL_ADC_AWD_THRESHOLD_HIGH	ADC analog watchdog threshold high
LL_ADC_AWD_THRESHOLD_LOW	ADC analog watchdog threshold low
LL_ADC_AWD_THRESHOLDS_HIGH_LOW	ADC analog watchdog both thresholds high and low concatenated into the same data

ADC instance - Channel number

LL_ADC_CHANNEL_0	ADC external channel (channel connected to GPIO pin) ADCx_IN0
LL_ADC_CHANNEL_1	ADC external channel (channel connected to GPIO pin) ADCx_IN1
LL_ADC_CHANNEL_2	ADC external channel (channel connected to GPIO pin) ADCx_IN2
LL_ADC_CHANNEL_3	ADC external channel (channel connected to GPIO pin) ADCx_IN3
LL_ADC_CHANNEL_4	ADC external channel (channel connected to GPIO pin) ADCx_IN4
LL_ADC_CHANNEL_5	ADC external channel (channel connected to GPIO pin) ADCx_IN5

LL_ADC_CHANNEL_6	ADC external channel (channel connected to GPIO pin) ADCx_IN6
LL_ADC_CHANNEL_7	ADC external channel (channel connected to GPIO pin) ADCx_IN7
LL_ADC_CHANNEL_8	ADC external channel (channel connected to GPIO pin) ADCx_IN8
LL_ADC_CHANNEL_9	ADC external channel (channel connected to GPIO pin) ADCx_IN9
LL_ADC_CHANNEL_10	ADC external channel (channel connected to GPIO pin) ADCx_IN10
LL_ADC_CHANNEL_11	ADC external channel (channel connected to GPIO pin) ADCx_IN11
LL_ADC_CHANNEL_12	ADC external channel (channel connected to GPIO pin) ADCx_IN12
LL_ADC_CHANNEL_13	ADC external channel (channel connected to GPIO pin) ADCx_IN13
LL_ADC_CHANNEL_14	ADC external channel (channel connected to GPIO pin) ADCx_IN14
LL_ADC_CHANNEL_15	ADC external channel (channel connected to GPIO pin) ADCx_IN15
LL_ADC_CHANNEL_16	ADC external channel (channel connected to GPIO pin) ADCx_IN16
LL_ADC_CHANNEL_17	ADC external channel (channel connected to GPIO pin) ADCx_IN17
LL_ADC_CHANNEL_18	ADC external channel (channel connected to GPIO pin) ADCx_IN18
LL_ADC_CHANNEL_VREFINT	ADC internal channel connected to VrefInt: Internal voltage reference. On STM32F3, ADC channel available only on all ADC instances, but only one ADC instance is allowed to be connected to VrefInt at the same time.
LL_ADC_CHANNEL_TEMPSENSOR	ADC internal channel connected to Temperature sensor. On STM32F3, ADC channel available only on ADC instance: ADC1.
LL_ADC_CHANNEL_VBAT	ADC internal channel connected to Vbat/3: Vbat voltage through a divider ladder of factor 1/3 to have Vbat always below Vdda. On STM32F3, ADC channel available only on ADC instance: ADC1.
LL_ADC_CHANNEL_VOPAMP1	ADC internal channel connected to OPAMP1 output. On STM32F3, ADC channel available only on ADC instance: ADC1.
LL_ADC_CHANNEL_VOPAMP2	ADC internal channel connected to OPAMP2 output. On STM32F3, ADC channel available only on ADC instance: ADC2.
LL_ADC_CHANNEL_VOPAMP3	ADC internal channel connected to OPAMP3 output. On STM32F3, ADC channel available only

	on ADC instance: ADC3.
LL_ADC_CHANNEL_VOPAMP4	ADC internal channel connected to OPAMP4 output. On STM32F3, ADC channel available only on ADC instance: ADC4.

Channel - Sampling time

LL_ADC_SAMPLINGTIME_1CYCLE_5	Sampling time 1.5 ADC clock cycle
LL_ADC_SAMPLINGTIME_2CYCLES_5	Sampling time 2.5 ADC clock cycles
LL_ADC_SAMPLINGTIME_4CYCLES_5	Sampling time 4.5 ADC clock cycles
LL_ADC_SAMPLINGTIME_7CYCLES_5	Sampling time 7.5 ADC clock cycles
LL_ADC_SAMPLINGTIME_19CYCLES_5	Sampling time 19.5 ADC clock cycles
LL_ADC_SAMPLINGTIME_61CYCLES_5	Sampling time 61.5 ADC clock cycles
LL_ADC_SAMPLINGTIME_181CYCLES_5	Sampling time 181.5 ADC clock cycles
LL_ADC_SAMPLINGTIME_601CYCLES_5	Sampling time 601.5 ADC clock cycles

Channel - Single or differential ending

LL_ADC_SINGLE_ENDED	ADC channel ending set to single ended (literal also used to set calibration mode)
LL_ADC_DIFFERENTIAL_ENDED	ADC channel ending set to differential (literal also used to set calibration mode)
LL_ADC_BOTH_SINGLE_DIFF_ENDED	ADC channel ending set to both single ended and differential (literal used only to set calibration factors)

ADC common - Clock source

LL_ADC_CLOCK_SYNC_PCLK_DIV1	ADC synchronous clock derived from AHB clock without prescaler
LL_ADC_CLOCK_SYNC_PCLK_DIV2	ADC synchronous clock derived from AHB clock with prescaler division by 2
LL_ADC_CLOCK_SYNC_PCLK_DIV4	ADC synchronous clock derived from AHB clock with prescaler division by 4
LL_ADC_CLOCK_ASYNC_DIV1	ADC asynchronous clock without prescaler

ADC common - Measurement path to internal channels

LL_ADC_PATH_INTERNAL_NONE	ADC measurement pathes all disabled
LL_ADC_PATH_INTERNAL_VREFINT	ADC measurement path to internal channel VrefInt
LL_ADC_PATH_INTERNAL_TEMPSENSOR	ADC measurement path to internal channel temperature sensor
LL_ADC_PATH_INTERNAL_VBAT	ADC measurement path to internal channel Vbat

ADC instance - Data alignment

LL_ADC_DATA_ALIGN_RIGHT	ADC conversion data alignment: right aligned (alignment on data register LSB bit 0)
LL_ADC_DATA_ALIGN_LEFT	ADC conversion data alignment: left aligned (aligment

on data register MSB bit 15)

ADC flags

LL_ADC_FLAG_ADRDY	ADC flag ADC instance ready
LL_ADC_FLAG_EOC	ADC flag ADC group regular end of unitary conversion
LL_ADC_FLAG_EOS	ADC flag ADC group regular end of sequence conversions
LL_ADC_FLAG_OVR	ADC flag ADC group regular overrun
LL_ADC_FLAG_EOSMP	ADC flag ADC group regular end of sampling phase
LL_ADC_FLAG_JEOC	ADC flag ADC group injected end of unitary conversion
LL_ADC_FLAG_JEOS	ADC flag ADC group injected end of sequence conversions
LL_ADC_FLAG_JQOVF	ADC flag ADC group injected contexts queue overflow
LL_ADC_FLAG_AWD1	ADC flag ADC analog watchdog 1
LL_ADC_FLAG_AWD2	ADC flag ADC analog watchdog 2
LL_ADC_FLAG_AWD3	ADC flag ADC analog watchdog 3
LL_ADC_FLAG_ADRDY_MST	ADC flag ADC multimode master instance ready
LL_ADC_FLAG_ADRDY_SLV	ADC flag ADC multimode slave instance ready
LL_ADC_FLAG_EOC_MST	ADC flag ADC multimode master group regular end of unitary conversion
LL_ADC_FLAG_EOC_SLV	ADC flag ADC multimode slave group regular end of unitary conversion
LL_ADC_FLAG_EOS_MST	ADC flag ADC multimode master group regular end of sequence conversions
LL_ADC_FLAG_EOS_SLV	ADC flag ADC multimode slave group regular end of sequence conversions
LL_ADC_FLAG_OVR_MST	ADC flag ADC multimode master group regular overrun
LL_ADC_FLAG_OVR_SLV	ADC flag ADC multimode slave group regular overrun
LL_ADC_FLAG_EOSMP_MST	ADC flag ADC multimode master group regular end of sampling phase
LL_ADC_FLAG_EOSMP_SLV	ADC flag ADC multimode slave group regular end of sampling phase
LL_ADC_FLAG_JEOC_MST	ADC flag ADC multimode master group injected end of unitary conversion
LL_ADC_FLAG_JEOC_SLV	ADC flag ADC multimode slave group injected end of unitary conversion
LL_ADC_FLAG_JEOS_MST	ADC flag ADC multimode master group injected end of sequence conversions
LL_ADC_FLAG_JEOS_SLV	ADC flag ADC multimode slave group injected end of sequence conversions
LL_ADC_FLAG_JQOVF_MST	ADC flag ADC multimode master group injected contexts queue overflow

LL_ADC_FLAG_JQOVF_SLV	ADC flag ADC multimode slave group injected contexts queue overflow
LL_ADC_FLAG_AWD1_MST	ADC flag ADC multimode master analog watchdog 1 of the ADC master
LL_ADC_FLAG_AWD1_SLV	ADC flag ADC multimode slave analog watchdog 1 of the ADC slave
LL_ADC_FLAG_AWD2_MST	ADC flag ADC multimode master analog watchdog 2 of the ADC master
LL_ADC_FLAG_AWD2_SLV	ADC flag ADC multimode slave analog watchdog 2 of the ADC slave
LL_ADC_FLAG_AWD3_MST	ADC flag ADC multimode master analog watchdog 3 of the ADC master
LL_ADC_FLAG_AWD3_SLV	ADC flag ADC multimode slave analog watchdog 3 of the ADC slave

ADC instance - Groups

LL_ADC_GROUP_REGULAR	ADC group regular (available on all STM32 devices)
LL_ADC_GROUP_INJECTED	ADC group injected (not available on all STM32 devices)
LL_ADC_GROUP_REGULAR_INJECTED	ADC both groups regular and injected

Definitions of ADC hardware constraints delays

LL_ADC_DELAY_INTERNAL_REGUL_STAB_US	Delay for ADC stabilization time (ADC voltage regulator start-up time)
LL_ADC_DELAY_VREFINT_STAB_US	Delay for internal voltage reference stabilization time
LL_ADC_DELAY_TEMPSENSOR_STAB_US	Delay for temperature sensor stabilization time
LL_ADC_DELAY_CALIB_ENABLE_ADC_CYCLES	Delay required between ADC end of calibration and ADC enable

ADC group injected - Context queue mode

LL_ADC_INJ_QUEUE_2CONTEXTS_LAST_ACTIVE

LL_ADC_INJ_QUEUE_2CONTEXTS_END_EMPTY

ADC group injected - Sequencer discontinuous mode

LL_ADC_INJ_SEQ_DISCONT_DISABLE	ADC group injected sequencer discontinuous mode disable
LL_ADC_INJ_SEQ_DISCONT_1RANK	ADC group injected sequencer discontinuous mode enable with sequence interruption every rank

ADC group injected - Sequencer ranks

LL_ADC_INJ_RANK_1	ADC group injected sequencer rank 1
LL_ADC_INJ_RANK_2	ADC group injected sequencer rank 2
LL_ADC_INJ_RANK_3	ADC group injected sequencer rank 3

LL_ADC_INJ_RANK_4 ADC group injected sequencer rank 4

ADC group injected - Sequencer scan length

LL_ADC_INJ_SEQ_SCAN_DISABLE	ADC group injected sequencer disable (equivalent to sequencer of 1 rank: ADC conversion on only 1 channel)
LL_ADC_INJ_SEQ_SCAN_ENABLE_2RANKS	ADC group injected sequencer enable with 2 ranks in the sequence
LL_ADC_INJ_SEQ_SCAN_ENABLE_3RANKS	ADC group injected sequencer enable with 3 ranks in the sequence
LL_ADC_INJ_SEQ_SCAN_ENABLE_4RANKS	ADC group injected sequencer enable with 4 ranks in the sequence

ADC group injected - Trigger edge

LL_ADC_INJ_TRIG_EXT_RISING	ADC group injected conversion trigger polarity set to rising edge
LL_ADC_INJ_TRIG_EXT_FALLING	ADC group injected conversion trigger polarity set to falling edge
LL_ADC_INJ_TRIG_EXT_RISINGFALLING	ADC group injected conversion trigger polarity set to both rising and falling edges

ADC group injected - Trigger source

LL_ADC_INJ_TRIG_SOFTWARE	ADC group injected conversion trigger internal: SW start.. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM1_TRGO	ADC group injected conversion trigger from external IP: TIM1 TRG0. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM1_TRGO	ADC group injected conversion trigger from external IP: TIM1 TRG0. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM1_CH4	ADC group injected conversion trigger from external IP: TIM1 channel 4 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM1_CH4	ADC group injected conversion trigger from external IP: TIM1 channel 4 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM2_TRGO_ADC12	ADC group injected conversion trigger from external IP: TIM2 TRG0. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM2_CH1_ADC12	ADC group injected conversion trigger from external IP: TIM2 channel 1 event (capture compare: input capture or

	output capture). Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM3_CH4_ADC12	ADC group injected conversion trigger from external IP: TIM3 channel 4 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM4_TRGO_ADC12	ADC group injected conversion trigger from external IP: TIM4 TRG0. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_EXTI_LINE15_ADC12	ADC group injected conversion trigger from external IP: external interrupt line 15. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM8_CH4_ADC12	ADC group injected conversion trigger from external IP: TIM8 channel 4 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM1_TRGO2	ADC group injected conversion trigger from external IP: TIM1 TRG02. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM1_TRGO2	ADC group injected conversion trigger from external IP: TIM1 TRG02. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM8_TRGO	ADC group injected conversion trigger from external IP: TIM8 TRG0. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM8_TRGO	ADC group injected conversion trigger from external IP: TIM8 TRG0. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM8_TRGO2	ADC group injected conversion trigger from external IP: TIM8 TRG02. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM8_TRGO2	ADC group injected conversion trigger from external IP: TIM8 TRG02. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM3_CH3_ADC12	ADC group injected conversion trigger from external IP: TIM3 channel 3 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).

LL_ADC_INJ_TRIG_EXT_TIM3_TRGO	ADC group injected conversion trigger from external IP: TIM3 TRG0. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM3_TRGO	ADC group injected conversion trigger from external IP: TIM3 TRG0. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM3_CH1_ADC12	ADC group injected conversion trigger from external IP: TIM3 channel 1 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM6_TRGO_ADC12	ADC group injected conversion trigger from external IP: TIM6 TRG0. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM15_TRGO	ADC group injected conversion trigger from external IP: TIM15 TRG0. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM15_TRGO	ADC group injected conversion trigger from external IP: TIM15 TRG0. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM4_CH3_ADC34	ADC group injected conversion trigger from external IP: TIM4 channel 3 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM8_CH2_ADC34	ADC group injected conversion trigger from external IP: TIM8 channel 2 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM8_CH4__ADC34	ADC group injected conversion trigger from external IP: TIM8 channel 4 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM4_CH4_ADC34	ADC group injected conversion trigger from external IP: TIM4 channel 4 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM4_TRGO__ADC34	ADC group injected conversion trigger from external IP: TIM4 TRG0. Trigger edge set to rising edge (default setting).

LL_ADC_INJ_TRIG_EXT_TIM1_CH3_ADC34	ADC group injected conversion trigger from external IP: TIM1 channel 3 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM2_TRGO__ADC34	ADC group injected conversion trigger from external IP: TIM2 TRG0. Trigger edge set to rising edge (default setting).
LL_ADC_INJ_TRIG_EXT_TIM7_TRGO_ADC34	ADC group injected conversion trigger from external IP: TIM7 TRG0. Trigger edge set to rising edge (default setting).

ADC group injected - Automatic trigger mode

LL_ADC_INJ_TRIG_INDEPENDENT	ADC group injected conversion trigger independent. Setting mandatory if ADC group injected injected trigger source is set to an external trigger.
LL_ADC_INJ_TRIG_FROM_GRP_REGULAR	ADC group injected conversion trigger from ADC group regular. Setting compliant only with group injected trigger source set to SW start, without any further action on ADC group injected conversion start or stop: in this case, ADC group injected is controlled only from ADC group regular.

ADC interruptions for configuration (interruption enable or disable)

LL_ADC_IT_ADRDY	ADC interruption ADC instance ready
LL_ADC_IT_EOC	ADC interruption ADC group regular end of unitary conversion
LL_ADC_IT_EOS	ADC interruption ADC group regular end of sequence conversions
LL_ADC_IT_OVR	ADC interruption ADC group regular overrun
LL_ADC_IT_EOSMP	ADC interruption ADC group regular end of sampling phase
LL_ADC_IT_JEOC	ADC interruption ADC group injected end of unitary conversion
LL_ADC_IT_JEOS	ADC interruption ADC group injected end of sequence conversions
LL_ADC_IT_JQOVF	ADC interruption ADC group injected contexts queue overflow
LL_ADC_IT_AWD1	ADC interruption ADC analog watchdog 1
LL_ADC_IT_AWD2	ADC interruption ADC analog watchdog 2
LL_ADC_IT_AWD3	ADC interruption ADC analog watchdog 3

ADC instance - Low power mode

LL_ADC_LP_MODE_NONE	No ADC low power mode activated
LL_ADC_LP_AUTOWAIT	ADC low power mode auto delay: Dynamic low power mode, ADC conversions are performed only when necessary (when previous ADC conversion data is read). See description with function

Multimode - DMA transfer

LL_ADC_MULTI_REG_DMA_EACH_ADC	ADC multimode group regular conversions are transferred by DMA: each ADC uses its own DMA channel, with its individual DMA transfer settings
LL_ADC_MULTI_REG_DMA_LIMIT_RES12_10B	ADC multimode group regular conversions are transferred by DMA, one DMA channel for both ADC (DMA of ADC master), in limited mode (one shot mode): DMA transfer requests are stopped when number of DMA data transfers (number of ADC conversions) is reached. This ADC mode is intended to be used with DMA mode non-circular. Setting for ADC resolution of 12 and 10 bits
LL_ADC_MULTI_REG_DMA_LIMIT_RES8_6B	ADC multimode group regular conversions are transferred by DMA, one DMA channel for both ADC (DMA of ADC master), in limited mode (one shot mode): DMA transfer requests are stopped when number of DMA data transfers (number of ADC conversions) is reached. This ADC mode is intended to be used with DMA mode non-circular. Setting for ADC resolution of 8 and 6 bits
LL_ADC_MULTI_REG_DMA_UNLMT_RES12_10B	ADC multimode group regular conversions are transferred by DMA, one DMA channel for both ADC (DMA of ADC master), in unlimited mode: DMA transfer requests are unlimited, whatever number of DMA data transferred (number of ADC conversions). This ADC mode is intended to be used with DMA mode circular. Setting for ADC resolution of 12 and 10 bits
LL_ADC_MULTI_REG_DMA_UNLMT_RES8_6B	ADC multimode group regular conversions are transferred by DMA, one DMA channel for both ADC (DMA of ADC master), in unlimited mode: DMA transfer requests are unlimited, whatever number of DMA data transferred (number of ADC conversions). This ADC mode is intended to be used with DMA mode circular. Setting for ADC resolution of 8 and 6 bits

Multimode - ADC master or slave

LL_ADC_MULTI_MASTER	In multimode, selection among several ADC instances: ADC master
LL_ADC_MULTI_SLAVE	In multimode, selection among several ADC instances: ADC slave
LL_ADC_MULTI_MASTER_SLAVE	In multimode, selection among several ADC instances: both ADC master and ADC slave

Multimode - Mode

LL_ADC_MULTI_INDEPENDENT	ADC dual mode disabled (ADC independent mode)
LL_ADC_MULTI_DUAL_REG_SIMULT	ADC dual mode enabled: group regular simultaneous
LL_ADC_MULTI_DUAL_REG_INTERL	ADC dual mode enabled: Combined group regular interleaved
LL_ADC_MULTI_DUAL_INJ_SIMULT	ADC dual mode enabled: group injected simultaneous
LL_ADC_MULTI_DUAL_INJ_ALTERN	ADC dual mode enabled: group injected alternate trigger. Works only with external triggers (not internal SW start)
LL_ADC_MULTI_DUAL_REG_SIM_INJ_SIM	ADC dual mode enabled: Combined group regular simultaneous + group injected simultaneous
LL_ADC_MULTI_DUAL_REG_SIM_INJ_ALT	ADC dual mode enabled: Combined group regular simultaneous + group injected alternate trigger
LL_ADC_MULTI_DUAL_REG_INT_INJ_SIM	ADC dual mode enabled: Combined group regular interleaved + group injected simultaneous

Multimode - Delay between two sampling phases

LL_ADC_MULTI_TWOSMP_DELAY_1CYCLE	ADC multimode delay between two sampling phases: 1 ADC clock cycle
LL_ADC_MULTI_TWOSMP_DELAY_2CYCLES	ADC multimode delay between two sampling phases: 2 ADC clock cycles
LL_ADC_MULTI_TWOSMP_DELAY_3CYCLES	ADC multimode delay between two sampling phases: 3 ADC clock cycles
LL_ADC_MULTI_TWOSMP_DELAY_4CYCLES	ADC multimode delay between two sampling phases: 4 ADC clock cycles
LL_ADC_MULTI_TWOSMP_DELAY_5CYCLES	ADC multimode delay between two sampling phases: 5 ADC clock cycles
LL_ADC_MULTI_TWOSMP_DELAY_6CYCLES	ADC multimode delay between two sampling phases: 6 ADC clock cycles
LL_ADC_MULTI_TWOSMP_DELAY_7CYCLES	ADC multimode delay between two sampling phases: 7 ADC clock cycles
LL_ADC_MULTI_TWOSMP_DELAY_8CYCLES	ADC multimode delay between two

sampling phases: 8 ADC clock cycles

LL_ADC_MULTI_TWOSMP_DELAY_9CYCLES	ADC multimode delay between two sampling phases: 9 ADC clock cycles
LL_ADC_MULTI_TWOSMP_DELAY_10CYCLES	ADC multimode delay between two sampling phases: 10 ADC clock cycles
LL_ADC_MULTI_TWOSMP_DELAY_11CYCLES	ADC multimode delay between two sampling phases: 11 ADC clock cycles
LL_ADC_MULTI_TWOSMP_DELAY_12CYCLES	ADC multimode delay between two sampling phases: 12 ADC clock cycles

ADC instance - Offset number

LL_ADC_OFFSET_1	ADC offset number 1: ADC channel and offset level to which the offset programmed will be applied (independently of channel mapped on ADC group regular or group injected)
LL_ADC_OFFSET_2	ADC offset number 2: ADC channel and offset level to which the offset programmed will be applied (independently of channel mapped on ADC group regular or group injected)
LL_ADC_OFFSET_3	ADC offset number 3: ADC channel and offset level to which the offset programmed will be applied (independently of channel mapped on ADC group regular or group injected)
LL_ADC_OFFSET_4	ADC offset number 4: ADC channel and offset level to which the offset programmed will be applied (independently of channel mapped on ADC group regular or group injected)

ADC instance - Offset state

LL_ADC_OFFSET_DISABLE	ADC offset disabled (among ADC selected offset number 1, 2, 3 or 4)
LL_ADC_OFFSET_ENABLE	ADC offset enabled (among ADC selected offset number 1, 2, 3 or 4)

ADC registers compliant with specific purpose

LL_ADC_DMA_REG_REGULAR_DATA

LL_ADC_DMA_REG_REGULAR_DATA_MULTI

ADC group regular - Continuous mode

LL_ADC_REG_CONV_SINGLE	ADC conversions are performed in single mode: one conversion per trigger
LL_ADC_REG_CONV_CONTINUOUS	ADC conversions are performed in continuous mode: after the first trigger, following conversions launched successively automatically

ADC group regular - DMA transfer of ADC conversion data

LL_ADC_REG_DMA_TRANSFER_NONE	ADC conversions are not transferred by DMA
LL_ADC_REG_DMA_TRANSFER_LIMITED	ADC conversion data are transferred by DMA, in limited mode (one shot mode): DMA transfer requests are stopped when number of DMA data transfers (number of ADC conversions) is reached. This ADC mode is intended to

	be used with DMA mode non-circular.
LL_ADC_REG_DMA_TRANSFER_UNLIMITED	ADC conversion data are transferred by DMA, in unlimited mode: DMA transfer requests are unlimited, whatever number of DMA data transferred (number of ADC conversions). This ADC mode is intended to be used with DMA mode circular.

ADC group regular - Overrun behavior on conversion data

LL_ADC_REG_OVR_DATA_PRESERVED	ADC group regular behavior in case of overrun: data preserved
LL_ADC_REG_OVR_DATA_OVERWRITTEN	ADC group regular behavior in case of overrun: data overwritten

ADC group regular - Sequencer discontinuous mode

LL_ADC_REG_SEQ_DISCONT_DISABLE	ADC group regular sequencer discontinuous mode disable
LL_ADC_REG_SEQ_DISCONT_1RANK	ADC group regular sequencer discontinuous mode enable with sequence interruption every rank
LL_ADC_REG_SEQ_DISCONT_2RANKS	ADC group regular sequencer discontinuous mode enabled with sequence interruption every 2 ranks
LL_ADC_REG_SEQ_DISCONT_3RANKS	ADC group regular sequencer discontinuous mode enable with sequence interruption every 3 ranks
LL_ADC_REG_SEQ_DISCONT_4RANKS	ADC group regular sequencer discontinuous mode enable with sequence interruption every 4 ranks
LL_ADC_REG_SEQ_DISCONT_5RANKS	ADC group regular sequencer discontinuous mode enable with sequence interruption every 5 ranks
LL_ADC_REG_SEQ_DISCONT_6RANKS	ADC group regular sequencer discontinuous mode enable with sequence interruption every 6 ranks
LL_ADC_REG_SEQ_DISCONT_7RANKS	ADC group regular sequencer discontinuous mode enable with sequence interruption every 7 ranks
LL_ADC_REG_SEQ_DISCONT_8RANKS	ADC group regular sequencer discontinuous mode enable with sequence interruption every 8 ranks

ADC group regular - Sequencer ranks

LL_ADC_REG_RANK_1	ADC group regular sequencer rank 1
LL_ADC_REG_RANK_2	ADC group regular sequencer rank 2
LL_ADC_REG_RANK_3	ADC group regular sequencer rank 3
LL_ADC_REG_RANK_4	ADC group regular sequencer rank 4

LL_ADC_REG_RANK_5	ADC group regular sequencer rank 5
LL_ADC_REG_RANK_6	ADC group regular sequencer rank 6
LL_ADC_REG_RANK_7	ADC group regular sequencer rank 7
LL_ADC_REG_RANK_8	ADC group regular sequencer rank 8
LL_ADC_REG_RANK_9	ADC group regular sequencer rank 9
LL_ADC_REG_RANK_10	ADC group regular sequencer rank 10
LL_ADC_REG_RANK_11	ADC group regular sequencer rank 11
LL_ADC_REG_RANK_12	ADC group regular sequencer rank 12
LL_ADC_REG_RANK_13	ADC group regular sequencer rank 13
LL_ADC_REG_RANK_14	ADC group regular sequencer rank 14
LL_ADC_REG_RANK_15	ADC group regular sequencer rank 15
LL_ADC_REG_RANK_16	ADC group regular sequencer rank 16

ADC group regular - Sequencer scan length

LL_ADC_REG_SEQ_SCAN_DISABLE	ADC group regular sequencer disable (equivalent to sequencer of 1 rank: ADC conversion on only 1 channel)
LL_ADC_REG_SEQ_SCAN_ENABLE_2RANKS	ADC group regular sequencer enable with 2 ranks in the sequence
LL_ADC_REG_SEQ_SCAN_ENABLE_3RANKS	ADC group regular sequencer enable with 3 ranks in the sequence
LL_ADC_REG_SEQ_SCAN_ENABLE_4RANKS	ADC group regular sequencer enable with 4 ranks in the sequence
LL_ADC_REG_SEQ_SCAN_ENABLE_5RANKS	ADC group regular sequencer enable with 5 ranks in the sequence
LL_ADC_REG_SEQ_SCAN_ENABLE_6RANKS	ADC group regular sequencer enable with 6 ranks in the sequence
LL_ADC_REG_SEQ_SCAN_ENABLE_7RANKS	ADC group regular sequencer enable with 7 ranks in the sequence
LL_ADC_REG_SEQ_SCAN_ENABLE_8RANKS	ADC group regular sequencer enable with 8 ranks in the sequence
LL_ADC_REG_SEQ_SCAN_ENABLE_9RANKS	ADC group regular sequencer enable with 9 ranks in the sequence
LL_ADC_REG_SEQ_SCAN_ENABLE_10RANKS	ADC group regular sequencer enable with 10 ranks in the sequence
LL_ADC_REG_SEQ_SCAN_ENABLE_11RANKS	ADC group regular sequencer enable with 11 ranks in the sequence
LL_ADC_REG_SEQ_SCAN_ENABLE_12RANKS	ADC group regular sequencer enable with 12 ranks in the sequence
LL_ADC_REG_SEQ_SCAN_ENABLE_13RANKS	ADC group regular sequencer enable with 13 ranks in the sequence
LL_ADC_REG_SEQ_SCAN_ENABLE_14RANKS	ADC group regular sequencer enable

	with 14 ranks in the sequence
LL_ADC_REG_SEQ_SCAN_ENABLE_15RANKS	ADC group regular sequencer enable with 15 ranks in the sequence
LL_ADC_REG_SEQ_SCAN_ENABLE_16RANKS	ADC group regular sequencer enable with 16 ranks in the sequence

ADC group regular - Trigger edge

LL_ADC_REG_TRIG_EXT_RISING	ADC group regular conversion trigger polarity set to rising edge
LL_ADC_REG_TRIG_EXT_FALLING	ADC group regular conversion trigger polarity set to falling edge
LL_ADC_REG_TRIG_EXT_RISINGFALLING	ADC group regular conversion trigger polarity set to both rising and falling edges

ADC group regular - Trigger source

LL_ADC_REG_TRIG_SOFTWARE	ADC group regular conversion trigger internal: SW start.
LL_ADC_REG_TRIG_EXT_TIM1_CH1_ADC12	ADC group regular conversion trigger from external IP: TIM1 channel 1 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM1_CH2_ADC12	ADC group regular conversion trigger from external IP: TIM1 channel 2 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM1_CH3	ADC group regular conversion trigger from external IP: TIM1 channel 3 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM1_CH3	ADC group regular conversion trigger from external IP: TIM1 channel 3 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM2_CH2_ADC12	ADC group regular conversion trigger from external IP: TIM2 channel 2 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM3_TRGO_ADC12	ADC group regular conversion trigger from external IP: TIM3 TRGO. Trigger edge set to rising edge

	(default setting).
LL_ADC_REG_TRIG_EXT_TIM4_CH4_ADC12	ADC group regular conversion trigger from external IP: TIM4 channel 4 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_EXTI_LINE11_ADC12	ADC group regular conversion trigger from external IP: external interrupt line 11. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM8_TRGO_ADC12	ADC group regular conversion trigger from external IP: TIM8 TRGO. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM8_TRGO2	ADC group regular conversion trigger from external IP: TIM8 TRGO2. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM8_TRGO2	ADC group regular conversion trigger from external IP: TIM8 TRGO2. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM1_TRGO	ADC group regular conversion trigger from external IP: TIM1 TRGO. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM1_TRGO	ADC group regular conversion trigger from external IP: TIM1 TRGO. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM1_TRGO2	ADC group regular conversion trigger from external IP: TIM1 TRGO2. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM1_TRGO2	ADC group regular conversion trigger from external IP: TIM1 TRGO2. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM2_TRGO_ADC12	ADC group regular conversion trigger from external IP: TIM2 TRGO. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM4_TRGO	ADC group regular conversion trigger from external IP: TIM4 TRGO. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM4_TRGO	ADC group regular conversion trigger from external IP: TIM4 TRGO.

	Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM6_TRGO_ADC12	ADC group regular conversion trigger from external IP: TIM6 TRGO. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM15_TRGO	ADC group regular conversion trigger from external IP: TIM15 TRGO. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM15_TRGO	ADC group regular conversion trigger from external IP: TIM15 TRGO. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM3_CH4_ADC12	ADC group regular conversion trigger from external IP: TIM3 channel 4 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM3_CH1_ADC34	ADC group regular conversion trigger from external IP: TIM3 channel 1 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM2_CH3_ADC34	ADC group regular conversion trigger from external IP: TIM2 channel 3 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM8_CH1_ADC34	ADC group regular conversion trigger from external IP: TIM8 channel 1 event (capture compare: input capture or output capture). Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM8_TRGO__ADC34	ADC group regular conversion trigger from external IP: TIM8 TRGO. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_EXTI_LINE2_ADC34	ADC group regular conversion trigger from external IP: external interrupt line 2. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM4_CH1_ADC34	ADC group regular conversion trigger from external IP: TIM4 channel 1 event (capture compare: input capture or output capture). Trigger

	edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM2_TRGO__ADC34	ADC group regular conversion trigger from external IP: TIM2 TRGO. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM3_TRGO__ADC34	ADC group regular conversion trigger from external IP: TIM3 TRGO. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM7_TRGO_ADC34	ADC group regular conversion trigger from external IP: TIM7 TRGO. Trigger edge set to rising edge (default setting).
LL_ADC_REG_TRIG_EXT_TIM2_CH1_ADC34	ADC group regular conversion trigger from external IP: TIM2 CCx. Trigger edge set to rising edge (default setting).

ADC instance - Resolution

LL_ADC_RESOLUTION_12B	ADC resolution 12 bits
LL_ADC_RESOLUTION_10B	ADC resolution 10 bits
LL_ADC_RESOLUTION_8B	ADC resolution 8 bits
LL_ADC_RESOLUTION_6B	ADC resolution 6 bits

ADC helper macro

__LL_ADC_CHANNEL_TO_DECIMAL_NB

Description:

- Helper macro to get ADC channel number in decimal format from literals LL_ADC_CHANNEL_x.

Parameters:

- __CHANNEL__: This parameter can be one of the following values:
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15

  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18
  - LL_ADC_CHANNEL_VREFINT (5)
  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)
  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)
  - LL_ADC_CHANNEL_VOPAMP4 (4)

Return value:

- Value: between Min_Data=0 and Max_Data=18

Notes:

- Example: __LL_ADC_CHANNEL_TO_DECIMAL_NB(LL_ADC_CHANNEL_4) will return decimal number "4". The input can be a value from functions where a channel number is returned, either defined with number or with bitfield (only one bit must be set).

__LL_ADC_DECIMAL_NB_TO_CHANNEL

Description:

- Helper macro to get ADC channel in literal format LL_ADC_CHANNEL_x from number in decimal format.

Parameters:

- __DECIMAL_NB__: Value between Min_Data=0 and Max_Data=18

Return value:

- Returned: value can be one of the following values:
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18

- LL_ADC_CHANNEL_VREFINT (5)
- LL_ADC_CHANNEL_TEMPSENSOR (1)
- LL_ADC_CHANNEL_VBAT (1)
- LL_ADC_CHANNEL_VOPAMP1 (1)
- LL_ADC_CHANNEL_VOPAMP2 (2)
- LL_ADC_CHANNEL_VOPAMP3 (3)
- LL_ADC_CHANNEL_VOPAMP4 (4)

Notes:

- Example: __LL_ADC_DECIMAL_NB_TO_CHANNEL(4) will return a data equivalent to "LL_ADC_CHANNEL_4".

__LL_ADC_IS_CHANNEL_INTERNAL

Description:

- Helper macro to determine whether the selected channel corresponds to literal definitions of driver.

Parameters:

- __CHANNEL__: This parameter can be one of the following values:
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18
  - LL_ADC_CHANNEL_VREFINT (5)
  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)
  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)
  - LL_ADC_CHANNEL_VOPAMP4 (4)

Return value:

- Value: "0" if the channel corresponds to a parameter definition of a ADC external channel (channel connected to a GPIO pin). Value "1" if the channel corresponds to a parameter definition

of a ADC internal channel.

Notes:

- The different literal definitions of ADC channels are: ADC internal channel: LL_ADC_CHANNEL_VREFINT, LL_ADC_CHANNEL_TEMPSENSOR, ...ADC external channel (channel connected to a GPIO pin): LL_ADC_CHANNEL_1, LL_ADC_CHANNEL_2, ... The channel parameter must be a value defined from literal definition of a ADC internal channel (LL_ADC_CHANNEL_VREFINT, LL_ADC_CHANNEL_TEMPSENSOR, ...), ADC external channel (LL_ADC_CHANNEL_1, LL_ADC_CHANNEL_2, ...), must not be a value from functions where a channel number is returned from ADC registers, because internal and external channels share the same channel number in ADC registers. The differentiation is made only with parameters definitions of driver.

__LL_ADC_CHANNEL_INTERNAL_TO_EXTERNAL

Description:

- Helper macro to convert a channel defined from parameter definition of a ADC internal channel (LL_ADC_CHANNEL_VREFINT, LL_ADC_CHANNEL_TEMPSENSOR, ...), to its equivalent parameter definition of a ADC external channel (LL_ADC_CHANNEL_1, LL_ADC_CHANNEL_2, ...).

Parameters:

- __CHANNEL__: This parameter can be one of the following values:
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18
  - LL_ADC_CHANNEL_VREFINT (5)

  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)
  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)
  - LL_ADC_CHANNEL_VOPAMP4 (4)

Return value:

- Returned: value can be one of the following values:
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6
  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18

Notes:

- The channel parameter can be, additionally to a value defined from parameter definition of a ADC internal channel (LL_ADC_CHANNEL_VREFINT, LL_ADC_CHANNEL_TEMPSENSOR, ...), a value defined from parameter definition of ADC external channel (LL_ADC_CHANNEL_1, LL_ADC_CHANNEL_2, ...) or a value from functions where a channel number is returned from ADC registers.

__LL_ADC_IS_CHANNEL_INTERNAL_AVAILABLE

Description:

- Helper macro to determine whether the internal channel selected is available on the ADC instance selected.

Parameters:

- __ADC_INSTANCE__: ADC instance
- __CHANNEL__: This parameter can be one of the following values:
  - LL_ADC_CHANNEL_VREFINT (5)
  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)
  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)
  - LL_ADC_CHANNEL_VOPAMP4 (4)

Return value:

- Value: "0" if the internal channel selected is not available on the ADC instance selected. Value "1" if the internal channel selected is available on the ADC instance selected.

Notes:

- The channel parameter must be a value defined from parameter definition of a ADC internal channel (LL_ADC_CHANNEL_VREFINT, LL_ADC_CHANNEL_TEMPSENSOR, ...), must not be a value defined from parameter definition of ADC external channel (LL_ADC_CHANNEL_1, LL_ADC_CHANNEL_2, ...) or a value from functions where a channel number is returned from ADC registers, because internal and external channels share the same channel number in ADC registers. The differentiation is made only with parameters definitions of driver.

__LL_ADC_ANALOGWD_CHANNEL_GROUP

Description:

- Helper macro to define ADC analog watchdog parameter: define a single channel to monitor with analog watchdog from sequencer channel and groups definition.

Parameters:

- __CHANNEL__: This parameter can be one of the following values:
  - LL_ADC_CHANNEL_0
  - LL_ADC_CHANNEL_1
  - LL_ADC_CHANNEL_2
  - LL_ADC_CHANNEL_3
  - LL_ADC_CHANNEL_4
  - LL_ADC_CHANNEL_5
  - LL_ADC_CHANNEL_6

  - LL_ADC_CHANNEL_7
  - LL_ADC_CHANNEL_8
  - LL_ADC_CHANNEL_9
  - LL_ADC_CHANNEL_10
  - LL_ADC_CHANNEL_11
  - LL_ADC_CHANNEL_12
  - LL_ADC_CHANNEL_13
  - LL_ADC_CHANNEL_14
  - LL_ADC_CHANNEL_15
  - LL_ADC_CHANNEL_16
  - LL_ADC_CHANNEL_17
  - LL_ADC_CHANNEL_18
  - LL_ADC_CHANNEL_VREFINT (5)
  - LL_ADC_CHANNEL_TEMPSENSOR (1)
  - LL_ADC_CHANNEL_VBAT (1)
  - LL_ADC_CHANNEL_VOPAMP1 (1)
  - LL_ADC_CHANNEL_VOPAMP2 (2)
  - LL_ADC_CHANNEL_VOPAMP3 (3)
  - LL_ADC_CHANNEL_VOPAMP4 (4)
- __GROUP__: This parameter can be one of the following values:
  - LL_ADC_GROUP_REGULAR
  - LL_ADC_GROUP_INJECTED
  - LL_ADC_GROUP_REGULAR_INJECTED

Return value:

- Returned: value can be one of the following values:
  - LL_ADC_AWD_DISABLE
  - LL_ADC_AWD_ALL_CHANNELS_REG (0)
  - LL_ADC_AWD_ALL_CHANNELS_INJ (0)
  - LL_ADC_AWD_ALL_CHANNELS_REG_INJ
  - LL_ADC_AWD_CHANNEL_0_REG (0)
  - LL_ADC_AWD_CHANNEL_0_INJ (0)
  - LL_ADC_AWD_CHANNEL_0_REG_INJ
  - LL_ADC_AWD_CHANNEL_1_REG (0)
  - LL_ADC_AWD_CHANNEL_1_INJ (0)
  - LL_ADC_AWD_CHANNEL_1_REG_INJ
  - LL_ADC_AWD_CHANNEL_2_REG (0)
  - LL_ADC_AWD_CHANNEL_2_INJ (0)
  - LL_ADC_AWD_CHANNEL_2_REG_INJ
  - LL_ADC_AWD_CHANNEL_3_REG (0)
  - LL_ADC_AWD_CHANNEL_3_INJ (0)
  - LL_ADC_AWD_CHANNEL_3_REG_INJ
  - LL_ADC_AWD_CHANNEL_4_REG (0)
  - LL_ADC_AWD_CHANNEL_4_INJ (0)
  - LL_ADC_AWD_CHANNEL_4_REG_INJ
  - LL_ADC_AWD_CHANNEL_5_REG (0)
  - LL_ADC_AWD_CHANNEL_5_INJ (0)
  - LL_ADC_AWD_CHANNEL_5_REG_INJ
  - LL_ADC_AWD_CHANNEL_6_REG (0)
  - LL_ADC_AWD_CHANNEL_6_INJ (0)

- LL_ADC_AWD_CHANNEL_6_REG_INJ
- LL_ADC_AWD_CHANNEL_7_REG (0)
- LL_ADC_AWD_CHANNEL_7_INJ (0)
- LL_ADC_AWD_CHANNEL_7_REG_INJ
- LL_ADC_AWD_CHANNEL_8_REG (0)
- LL_ADC_AWD_CHANNEL_8_INJ (0)
- LL_ADC_AWD_CHANNEL_8_REG_INJ
- LL_ADC_AWD_CHANNEL_9_REG (0)
- LL_ADC_AWD_CHANNEL_9_INJ (0)
- LL_ADC_AWD_CHANNEL_9_REG_INJ
- LL_ADC_AWD_CHANNEL_10_REG (0)
- LL_ADC_AWD_CHANNEL_10_INJ (0)
- LL_ADC_AWD_CHANNEL_10_REG_INJ
- LL_ADC_AWD_CHANNEL_11_REG (0)
- LL_ADC_AWD_CHANNEL_11_INJ (0)
- LL_ADC_AWD_CHANNEL_11_REG_INJ
- LL_ADC_AWD_CHANNEL_12_REG (0)
- LL_ADC_AWD_CHANNEL_12_INJ (0)
- LL_ADC_AWD_CHANNEL_12_REG_INJ
- LL_ADC_AWD_CHANNEL_13_REG (0)
- LL_ADC_AWD_CHANNEL_13_INJ (0)
- LL_ADC_AWD_CHANNEL_13_REG_INJ
- LL_ADC_AWD_CHANNEL_14_REG (0)
- LL_ADC_AWD_CHANNEL_14_INJ (0)
- LL_ADC_AWD_CHANNEL_14_REG_INJ
- LL_ADC_AWD_CHANNEL_15_REG (0)
- LL_ADC_AWD_CHANNEL_15_INJ (0)
- LL_ADC_AWD_CHANNEL_15_REG_INJ
- LL_ADC_AWD_CHANNEL_16_REG (0)
- LL_ADC_AWD_CHANNEL_16_INJ (0)
- LL_ADC_AWD_CHANNEL_16_REG_INJ
- LL_ADC_AWD_CHANNEL_17_REG (0)
- LL_ADC_AWD_CHANNEL_17_INJ (0)
- LL_ADC_AWD_CHANNEL_17_REG_INJ
- LL_ADC_AWD_CHANNEL_18_REG (0)
- LL_ADC_AWD_CHANNEL_18_INJ (0)
- LL_ADC_AWD_CHANNEL_18_REG_INJ
- LL_ADC_AWD_CH_VREFINT_REG (0)(5)
- LL_ADC_AWD_CH_VREFINT_INJ (0)(5)
- LL_ADC_AWD_CH_VREFINT_REG_INJ (5)
- LL_ADC_AWD_CH_TEMPSENSOR_REG (0)(1)
- LL_ADC_AWD_CH_TEMPSENSOR_INJ (0)(1)
- LL_ADC_AWD_CH_TEMPSENSOR_REG_INJ (1)
- LL_ADC_AWD_CH_VBAT_REG (0)(1)
- LL_ADC_AWD_CH_VBAT_INJ (0)(1)
- LL_ADC_AWD_CH_VBAT_REG_INJ (1)
- LL_ADC_AWD_CH_VOPAMP1_REG (0)(1)
- LL_ADC_AWD_CH_VOPAMP1_INJ (0)(1)
- LL_ADC_AWD_CH_VOPAMP1_REG_INJ (1)

  - LL_ADC_AWD_CH_VOPAMP2_REG (0)(2)
  - LL_ADC_AWD_CH_VOPAMP2_INJ (0)(2)
  - LL_ADC_AWD_CH_VOPAMP2_REG_INJ (2)
  - LL_ADC_AWD_CH_VOPAMP3_REG (0)(3)
  - LL_ADC_AWD_CH_VOPAMP3_INJ (0)(3)
  - LL_ADC_AWD_CH_VOPAMP3_REG_INJ (3)
  - LL_ADC_AWD_CH_VOPAMP4_REG (0)(4)
  - LL_ADC_AWD_CH_VOPAMP4_INJ (0)(4)
  - LL_ADC_AWD_CH_VOPAMP4_REG_INJ (4)

Notes:

- To be used with function LL_ADC_SetAnalogWDMonitChannels(). Example: LL_ADC_SetAnalogWDMonitChannels(ADC1, LL_ADC_AWD1, __LL_ADC_ANALOGWD_CHANNEL_GROUP(LL_ADC_CHANNEL4, LL_ADC_GROUP_REGULAR))

__LL_ADC_ANALOGWD_SET_THRESHOLD_RESOLUTION

Description:

- Helper macro to set the value of ADC analog watchdog threshold high or low in function of ADC resolution, when ADC resolution is different of 12 bits.

Parameters:

- __ADC_RESOLUTION__: This parameter can be one of the following values:
  - LL_ADC_RESOLUTION_12B
  - LL_ADC_RESOLUTION_10B
  - LL_ADC_RESOLUTION_8B
  - LL_ADC_RESOLUTION_6B
- __AWD_THRESHOLD__: Value between Min_Data=0x000 and Max_Data=0xFFF

Return value:

- Value: between Min_Data=0x000 and Max_Data=0xFFF

Notes:

- To be used with function LL_ADC_ConfigAnalogWDThresholds() or LL_ADC_SetAnalogWDThresholds(). Example, with a ADC resolution of 8 bits, to set the value of analog watchdog threshold high (on 8 bits): LL_ADC_SetAnalogWDThresholds (< ADCx param>, __LL_ADC_ANALOGWD_SET_THRESHOLD_RESOLUTION(LL_ADC_RESOLUTION_8B, <threshold_value_8_bits>));

__LL_ADC_ANALOGWD_GET_THRESHOLD_RESOLUTION

Description:

- Helper macro to get the value of ADC analog watchdog threshold high or low in function of ADC resolution, when ADC resolution is different of 12 bits.

Parameters:

- __ADC_RESOLUTION__: This parameter can be one of the following values:
  - LL_ADC_RESOLUTION_12B
  - LL_ADC_RESOLUTION_10B
  - LL_ADC_RESOLUTION_8B
  - LL_ADC_RESOLUTION_6B
- __AWD_THRESHOLD_12_BITS__: Value between Min_Data=0x000 and Max_Data=0xFFF

Return value:

- Value: between Min_Data=0x000 and Max_Data=0xFFF

Notes:

- To be used with function LL_ADC_GetAnalogWDThresholds(). Example, with a ADC resolution of 8 bits, to get the value of analog watchdog threshold high (on 8 bits): < threshold_value_6_bits> = __LL_ADC_ANALOGWD_GET_THRESHOLD_RESOLUTION (LL_ADC_RESOLUTION_8B, LL_ADC_GetAnalogWDThresholds(<ADCx param>, LL_ADC_AWD_THRESHOLD_HIGH));

__LL_ADC_ANALOGWD_THRESHOLDS_HIGH_LOW

Description:

- Helper macro to get the ADC analog watchdog threshold high or low from raw value containing both thresholds concatenated.

Parameters:

- __AWD_THRESHOLD_TYPE__: This parameter can be one of the following values:
  - LL_ADC_AWD_THRESHOLD_HIGH
  - LL_ADC_AWD_THRESHOLD_LOW
- __AWD_THRESHOLDS__: Value between Min_Data=0x00000000 and Max_Data=0xFFFFFFFF

Return value:

- Value: between Min_Data=0x000 and Max_Data=0xFFF

Notes:

- To be used with function LL_ADC_GetAnalogWDThresholds(). Example, to

get analog watchdog threshold high from the register raw value: __LL_ADC_ANALOGWD_THRESHOLDS_HIGH_LOW(LL_ADC_AWD_THRESHOLD_HIGH, <raw_value_with_both_thresholds>);

__LL_ADC_CALIB_FACTOR_SINGLE_DIFF

Description:

- Helper macro to set the ADC calibration value with both single ended and differential modes calibration factors concatenated.

Parameters:

- __CALIB_FACTOR_SINGLE_ENDED__: Value between Min_Data=0x00 and Max_Data=0x7F
- __CALIB_FACTOR_DIFFERENTIAL__: Value between Min_Data=0x00 and Max_Data=0x7F

Return value:

- Value: between Min_Data=0x00000000 and Max_Data=0xFFFFFFFF

Notes:

- To be used with function LL_ADC_SetCalibrationFactor(). Example, to set calibration factors single ended to 0x55 and differential ended to 0x2A: LL_ADC_SetCalibrationFactor(ADC1, __LL_ADC_CALIB_FACTOR_SINGLE_DIFF(0x55, 0x2A))

__LL_ADC_MULTI_CONV_DATA_MASTER_SLAVE

Description:

- Helper macro to get the ADC multimode conversion data of ADC master or ADC slave from raw value with both ADC conversion data concatenated.

Parameters:

- __ADC_MULTI_MASTER_SLAVE__: This parameter can be one of the following values:
  - LL_ADC_MULTI_MASTER
  - LL_ADC_MULTI_SLAVE
- __ADC_MULTI_CONV_DATA__: Value between Min_Data=0x000 and Max_Data=0xFFF

Return value:

- Value: between Min_Data=0x000 and Max_Data=0xFFF

Notes:

- This macro is intended to be used when multimode transfer by DMA is enabled: refer to function LL_ADC_SetMultiDMATransfer(). In this case the transferred data need to processed with this macro to separate the conversion data of ADC

master and ADC slave.

__LL_ADC_COMMON_INSTANCE

Description:

- Helper macro to select the ADC common instance to which is belonging the selected ADC instance.

Parameters:

- __ADCx__: ADC instance

Return value:

- ADC: common register instance

Notes:

- ADC common register instance can be used for: Set parameters common to several ADC instancesMultimode (for devices with several ADC instances) Refer to functions having argument "ADCxy_COMMON" as parameter.

__LL_ADC_IS_ENABLED_ALL_COMMON_INSTANCE

Description:

- Helper macro to check if all ADC instances sharing the same ADC common instance are disabled.

Parameters:

- __ADCXY_COMMON__: ADC common instance (can be set directly from CMSIS definition or by using helper macro

Return value:

- Value: "0" if all ADC instances sharing the same ADC common instance are disabled. Value "1" if at least one ADC instance sharing the same ADC common instance is enabled.

Notes:

- This check is required by functions with setting conditioned to ADC state: All ADC instances of the ADC common group must be disabled. Refer to functions having argument "ADCxy_COMMON" as parameter. On devices with only 1 ADC common instance, parameter of this macro is useless and can be ignored (parameter kept for compatibility with devices featuring several ADC common instances).

__LL_ADC_DIGITAL_SCALE

Description:

- Helper macro to define the ADC conversion data full-scale digital value corresponding to the selected ADC resolution.

Parameters:

- __ADC_RESOLUTION__: This parameter can be one of the following values:

- LL_ADC_RESOLUTION_12B
- LL_ADC_RESOLUTION_10B
- LL_ADC_RESOLUTION_8B
- LL_ADC_RESOLUTION_6B

Return value:

- ADC: conversion data equivalent voltage value (unit: mVolt)

Notes:

- ADC conversion data full-scale corresponds to voltage range determined by analog voltage references Vref+ and Vref- (refer to reference manual).

__LL_ADC_CONVERT_DATA_RESOLUTION

Description:

- Helper macro to convert the ADC conversion data from a resolution to another resolution.

Parameters:

- __DATA__: ADC conversion data to be converted
- __ADC_RESOLUTION_CURRENT__: Resolution of to the data to be converted This parameter can be one of the following values:
  - LL_ADC_RESOLUTION_12B
  - LL_ADC_RESOLUTION_10B
  - LL_ADC_RESOLUTION_8B
  - LL_ADC_RESOLUTION_6B
- __ADC_RESOLUTION_TARGET__: Resolution of the data after conversion This parameter can be one of the following values:
  - LL_ADC_RESOLUTION_12B
  - LL_ADC_RESOLUTION_10B
  - LL_ADC_RESOLUTION_8B
  - LL_ADC_RESOLUTION_6B

Return value:

- ADC: conversion data to the requested resolution

__LL_ADC_CALC_DATA_TO_VOLTAGE

Description:

- Helper macro to calculate the voltage (unit: mVolt) corresponding to a ADC conversion data (unit: digital value).

Parameters:

- __VREFANALOG_VOLTAGE__: Analog reference voltage (unit: mV)
- __ADC_DATA__: ADC conversion data (resolution 12 bits) (unit: digital value).
- __ADC_RESOLUTION__: This parameter can be one of the following values:
  - LL_ADC_RESOLUTION_12B
  - LL_ADC_RESOLUTION_10B
  - LL_ADC_RESOLUTION_8B

– LL_ADC_RESOLUTION_6B

Return value:

- ADC: conversion data equivalent voltage value (unit: mVolt)

Notes:

- Analog reference voltage (Vref+) must be either known from user board environment or can be calculated using ADC measurement and ADC helper macro __LL_ADC_CALC_VREFANALOG_VOLTAGE().

__LL_ADC_CALC_VREFANALOG_VOLTAGE

Description:

- Helper macro to calculate analog reference voltage (Vref+) (unit: mVolt) from ADC conversion data of internal voltage reference VrefInt.

Parameters:

- __VREFINT_ADC_DATA__: ADC conversion data (resolution 12 bits) of internal voltage reference VrefInt (unit: digital value).
- __ADC_RESOLUTION__: This parameter can be one of the following values:
  – LL_ADC_RESOLUTION_12B
  – LL_ADC_RESOLUTION_10B
  – LL_ADC_RESOLUTION_8B
  – LL_ADC_RESOLUTION_6B

Return value:

- Analog: reference voltage (unit: mV)

Notes:

- Computation is using VrefInt calibration value stored in system memory for each device during production. This voltage depends on user board environment: voltage level connected to pin Vref+. On devices with small package, the pin Vref+ is not present and internally bonded to pin Vdda. On this STM32 serie, calibration data of internal voltage reference VrefInt corresponds to a resolution of 12 bits, this is the recommended ADC resolution to convert voltage of internal voltage reference VrefInt. Otherwise, this macro performs the processing to scale ADC conversion data to 12 bits.

__LL_ADC_CALC_TEMPERATURE

Description:

- Helper macro to calculate the temperature (unit: degree Celsius) from ADC conversion data of internal temperature sensor.

Parameters:

- __VREFANALOG_VOLTAGE__: Analog

reference voltage (unit: mV)

- __TEMPSENSOR_ADC_DATA__: ADC conversion data of internal temperature sensor (unit: digital value).
- __ADC_RESOLUTION__: ADC resolution at which internal temperature sensor voltage has been measured. This parameter can be one of the following values:
  - LL_ADC_RESOLUTION_12B
  - LL_ADC_RESOLUTION_10B
  - LL_ADC_RESOLUTION_8B
  - LL_ADC_RESOLUTION_6B

Return value:

- Temperature: (unit: degree Celsius)

Notes:

- Computation is using temperature sensor calibration values stored in system memory for each device during production. Calculation formula: Temperature = ((TS_ADC_DATA - TS_CAL1) * (TS_CAL2_TEMP - TS_CAL1_TEMP)) / (TS_CAL2 - TS_CAL1) + TS_CAL1_TEMP with TS_ADC_DATA = temperature sensor raw data measured by ADC Avg_Slope = (TS_CAL2 - TS_CAL1) / (TS_CAL2_TEMP - TS_CAL1_TEMP) TS_CAL1 = equivalent TS_ADC_DATA at temperature TEMP_DEGC_CAL1 (calibrated in factory) TS_CAL2 = equivalent TS_ADC_DATA at temperature TEMP_DEGC_CAL2 (calibrated in factory) Caution: Calculation relevancy under reserve that calibration parameters are correct (address and data). To calculate temperature using temperature sensor datasheet typical values (generic values less, therefore less accurate than calibrated values), use helper macro __LL_ADC_CALC_TEMPERATURE_TYP_PARAMS(). As calculation input, the analog reference voltage (Vref+) must be defined as it impacts the ADC LSB equivalent voltage. Analog reference voltage (Vref+) must be either known from user board environment or can be calculated using ADC measurement and ADC helper macro __LL_ADC_CALC_VREFANALOG_VOLTAGE(). On this STM32 serie, calibration data of temperature sensor corresponds to a resolution of 12 bits, this is the recommended ADC resolution to convert voltage of temperature sensor. Otherwise, this macro performs the processing to scale ADC conversion data to 12 bits.

__LL_ADC_CALC_TEMPERATURE_TYP_PARAMS

Description:

- Helper macro to calculate the temperature (unit: degree Celsius) from ADC conversion data of internal temperature sensor.

Parameters:

- __TEMPSENSOR_TYP_AVGSLOPE__: Device datasheet data: Temperature sensor slope typical value (unit: uV/DegCelsius). On STM32F3, refer to device datasheet parameter "Avg_Slope".
- __TEMPSENSOR_TYP_CALX_V__: Device datasheet data: Temperature sensor voltage typical value (at temperature and Vref+ defined in parameters below) (unit: mV). On STM32F3, refer to device datasheet parameter "V25" (corresponding to TS_CAL1).
- __TEMPSENSOR_CALX_TEMP__: Device datasheet data: Temperature at which temperature sensor voltage (see parameter above) is corresponding (unit: mV)
- __VREFANALOG_VOLTAGE__: Analog voltage reference (Vref+) voltage (unit: mV)
- __TEMPSENSOR_ADC_DATA__: ADC conversion data of internal temperature sensor (unit: digital value).
- __ADC_RESOLUTION__: ADC resolution at which internal temperature sensor voltage has been measured. This parameter can be one of the following values:
  - LL_ADC_RESOLUTION_12B
  - LL_ADC_RESOLUTION_10B
  - LL_ADC_RESOLUTION_8B
  - LL_ADC_RESOLUTION_6B

Return value:

- Temperature: (unit: degree Celsius)

Notes:

- Computation is using temperature sensor typical values (refer to device datasheet). Calculation formula: Temperature = (TS_TYP_CALx_VOLT(uV) - TS_ADC_DATA * Conversion_uV) / Avg_Slope + CALx_TEMP with TS_ADC_DATA = temperature sensor raw data measured by ADC (unit: digital value) Avg_Slope = temperature sensor slope (unit: uV/Degree Celsius) TS_TYP_CALx_VOLT = temperature sensor digital value at temperature CALx_TEMP (unit: mV) Caution: Calculation relevancy under reserve the temperature sensor of the current device has characteristics in line with datasheet typical values. If temperature sensor calibration values are available on on this device (presence of macro __LL_ADC_CALC_TEMPERATURE()),

temperature calculation will be more accurate using helper macro __LL_ADC_CALC_TEMPERATURE(). As calculation input, the analog reference voltage (Vref+) must be defined as it impacts the ADC LSB equivalent voltage. Analog reference voltage (Vref+) must be either known from user board environment or can be calculated using ADC measurement and ADC helper macro __LL_ADC_CALC_VREFANALOG_VOLTAGE(). ADC measurement data must correspond to a resolution of 12bits (full scale digital value 4095). If not the case, the data must be preliminarily rescaled to an equivalent resolution of 12 bits.

Common write and read registers Macros

LL_ADC_WriteReg

Description:

- Write a value in ADC register.

Parameters:

- __INSTANCE__: ADC Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_ADC_ReadReg

Description:

- Read a value in ADC register.

Parameters:

- __INSTANCE__: ADC Instance
- __REG__: Register to be read

Return value:

- Register: value

60 LL BUS Generic Driver

60.1 BUS Firmware driver API description

60.1.1 Detailed description of functions

LL_AHB1_GRP1_EnableClock

Function name **__STATIC_INLINE void LL_AHB1_GRP1_EnableClock (uint32_t Periphs)**

Function description Enable AHB1 peripherals clock.

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_AHB1_GRP1_PERIPH_DMA1
  - LL_AHB1_GRP1_PERIPH_DMA2 (*)
  - LL_AHB1_GRP1_PERIPH_SRAM
  - LL_AHB1_GRP1_PERIPH_FLASH
  - LL_AHB1_GRP1_PERIPH_FMC (*)
  - LL_AHB1_GRP1_PERIPH_CRC
  - LL_AHB1_GRP1_PERIPH_GPIOH (*)
  - LL_AHB1_GRP1_PERIPH_GPIOA
  - LL_AHB1_GRP1_PERIPH_GPIOB
  - LL_AHB1_GRP1_PERIPH_GPIOC
  - LL_AHB1_GRP1_PERIPH_GPIOD
  - LL_AHB1_GRP1_PERIPH_GPIOE (*)
  - LL_AHB1_GRP1_PERIPH_GPIOF
  - LL_AHB1_GRP1_PERIPH_GPIOG (*)
  - LL_AHB1_GRP1_PERIPH_TSC
  - LL_AHB1_GRP1_PERIPH_ADC1 (*)
  - LL_AHB1_GRP1_PERIPH_ADC12 (*)
  - LL_AHB1_GRP1_PERIPH_ADC34 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- AHBENR DMA1EN LL_AHB1_GRP1_EnableClock
- AHBENR DMA2EN LL_AHB1_GRP1_EnableClock
- AHBENR SRAMEN LL_AHB1_GRP1_EnableClock
- AHBENR FLITFEN LL_AHB1_GRP1_EnableClock
- AHBENR FMCEN LL_AHB1_GRP1_EnableClock
- AHBENR CRCEN LL_AHB1_GRP1_EnableClock
- AHBENR GPIOHEN LL_AHB1_GRP1_EnableClock
- AHBENR GPIOAEN LL_AHB1_GRP1_EnableClock
- AHBENR GPIOBEN LL_AHB1_GRP1_EnableClock
- AHBENR GPIOCEN LL_AHB1_GRP1_EnableClock
- AHBENR GPIODEN LL_AHB1_GRP1_EnableClock
- AHBENR GPIOEEN LL_AHB1_GRP1_EnableClock
- AHBENR GPIOFEN LL_AHB1_GRP1_EnableClock
- AHBENR GPIOGEN LL_AHB1_GRP1_EnableClock
- AHBENR TSCEN LL_AHB1_GRP1_EnableClock
- AHBENR ADC1EN LL_AHB1_GRP1_EnableClock

- AHBENR ADC12EN LL_AHB1_GRP1_EnableClock
- AHBENR ADC34EN LL_AHB1_GRP1_EnableClock

LL_AHB1_GRP1_IsEnabledClock

Function name
__STATIC_INLINE uint32_t LL_AHB1_GRP1_IsEnabledClock (uint32_t Periphs)

Function description
Check if AHB1 peripheral clock is enabled or not.

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_AHB1_GRP1_PERIPH_DMA1
  - LL_AHB1_GRP1_PERIPH_DMA2 (*)
  - LL_AHB1_GRP1_PERIPH_SRAM
  - LL_AHB1_GRP1_PERIPH_FLASH
  - LL_AHB1_GRP1_PERIPH_FMC (*)
  - LL_AHB1_GRP1_PERIPH_CRC
  - LL_AHB1_GRP1_PERIPH_GPIOH (*)
  - LL_AHB1_GRP1_PERIPH_GPIOA
  - LL_AHB1_GRP1_PERIPH_GPIOB
  - LL_AHB1_GRP1_PERIPH_GPIOC
  - LL_AHB1_GRP1_PERIPH_GPIOD
  - LL_AHB1_GRP1_PERIPH_GPIOE (*)
  - LL_AHB1_GRP1_PERIPH_GPIOF
  - LL_AHB1_GRP1_PERIPH_GPIOG (*)
  - LL_AHB1_GRP1_PERIPH_TSC
  - LL_AHB1_GRP1_PERIPH_ADC1 (*)
  - LL_AHB1_GRP1_PERIPH_ADC12 (*)
  - LL_AHB1_GRP1_PERIPH_ADC34 (*)

Return values
- **State:** of Periphs (1 or 0).

Reference Manual to LL API cross reference:
- AHBENR DMA1EN LL_AHB1_GRP1_IsEnabledClock
- AHBENR DMA2EN LL_AHB1_GRP1_IsEnabledClock
- AHBENR SRAMEN LL_AHB1_GRP1_IsEnabledClock
- AHBENR FLITFEN LL_AHB1_GRP1_IsEnabledClock
- AHBENR FMCEN LL_AHB1_GRP1_IsEnabledClock
- AHBENR CRCEN LL_AHB1_GRP1_IsEnabledClock
- AHBENR GPIOHEN LL_AHB1_GRP1_IsEnabledClock
- AHBENR GPIOAEN LL_AHB1_GRP1_IsEnabledClock
- AHBENR GPIOBEN LL_AHB1_GRP1_IsEnabledClock
- AHBENR GPIOCEN LL_AHB1_GRP1_IsEnabledClock
- AHBENR GPIODEN LL_AHB1_GRP1_IsEnabledClock
- AHBENR GPIOEEN LL_AHB1_GRP1_IsEnabledClock
- AHBENR GPIOFEN LL_AHB1_GRP1_IsEnabledClock
- AHBENR GPIOGEN LL_AHB1_GRP1_IsEnabledClock
- AHBENR TSCEN LL_AHB1_GRP1_IsEnabledClock
- AHBENR ADC1EN LL_AHB1_GRP1_IsEnabledClock
- AHBENR ADC12EN LL_AHB1_GRP1_IsEnabledClock
- AHBENR ADC34EN LL_AHB1_GRP1_IsEnabledClock

LL_AHB1_GRP1_DisableClock

Function name
__STATIC_INLINE void LL_AHB1_GRP1_DisableClock (uint32_t Periphs)

Function description
Disable AHB1 peripherals clock.

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_AHB1_GRP1_PERIPH_DMA1
  - LL_AHB1_GRP1_PERIPH_DMA2 (*)
  - LL_AHB1_GRP1_PERIPH_SRAM
  - LL_AHB1_GRP1_PERIPH_FLASH
  - LL_AHB1_GRP1_PERIPH_FMC (*)
  - LL_AHB1_GRP1_PERIPH_CRC
  - LL_AHB1_GRP1_PERIPH_GPIOH (*)
  - LL_AHB1_GRP1_PERIPH_GPIOA
  - LL_AHB1_GRP1_PERIPH_GPIOB
  - LL_AHB1_GRP1_PERIPH_GPIOC
  - LL_AHB1_GRP1_PERIPH_GPIOD
  - LL_AHB1_GRP1_PERIPH_GPIOE (*)
  - LL_AHB1_GRP1_PERIPH_GPIOF
  - LL_AHB1_GRP1_PERIPH_GPIOG (*)
  - LL_AHB1_GRP1_PERIPH_TSC
  - LL_AHB1_GRP1_PERIPH_ADC1 (*)
  - LL_AHB1_GRP1_PERIPH_ADC12 (*)
  - LL_AHB1_GRP1_PERIPH_ADC34 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- AHBENR DMA1EN LL_AHB1_GRP1_DisableClock
- AHBENR DMA2EN LL_AHB1_GRP1_DisableClock
- AHBENR SRAMEN LL_AHB1_GRP1_DisableClock
- AHBENR FLITFEN LL_AHB1_GRP1_DisableClock
- AHBENR FMCEN LL_AHB1_GRP1_DisableClock
- AHBENR CRCEN LL_AHB1_GRP1_DisableClock
- AHBENR GPIOHEN LL_AHB1_GRP1_DisableClock
- AHBENR GPIOAEN LL_AHB1_GRP1_DisableClock
- AHBENR GPIOBEN LL_AHB1_GRP1_DisableClock
- AHBENR GPIOCEN LL_AHB1_GRP1_DisableClock
- AHBENR GPIODEN LL_AHB1_GRP1_DisableClock
- AHBENR GPIOEEN LL_AHB1_GRP1_DisableClock
- AHBENR GPIOFEN LL_AHB1_GRP1_DisableClock
- AHBENR GPIOGEN LL_AHB1_GRP1_DisableClock
- AHBENR TSCEN LL_AHB1_GRP1_DisableClock
- AHBENR ADC1EN LL_AHB1_GRP1_DisableClock
- AHBENR ADC12EN LL_AHB1_GRP1_DisableClock
- AHBENR ADC34EN LL_AHB1_GRP1_DisableClock

LL_AHB1_GRP1_ForceReset

Function name
__STATIC_INLINE void LL_AHB1_GRP1_ForceReset (uint32_t Periphs)

Function description
Force AHB1 peripherals reset.

Parameters

- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_AHB1_GRP1_PERIPH_ALL
  - LL_AHB1_GRP1_PERIPH_FMC (*)
  - LL_AHB1_GRP1_PERIPH_GPIOH (*)
  - LL_AHB1_GRP1_PERIPH_GPIOA
  - LL_AHB1_GRP1_PERIPH_GPIOB
  - LL_AHB1_GRP1_PERIPH_GPIOC
  - LL_AHB1_GRP1_PERIPH_GPIOD
  - LL_AHB1_GRP1_PERIPH_GPIOE (*)
  - LL_AHB1_GRP1_PERIPH_GPIOF
  - LL_AHB1_GRP1_PERIPH_GPIOG (*)
  - LL_AHB1_GRP1_PERIPH_TSC
  - LL_AHB1_GRP1_PERIPH_ADC1 (*)
  - LL_AHB1_GRP1_PERIPH_ADC12 (*)
  - LL_AHB1_GRP1_PERIPH_ADC34 (*)

Return values

- **None**

Reference Manual to LL API cross reference:

- AHBRSTR FMCRST LL_AHB1_GRP1_ForceReset
- AHBRSTR GPIOHRST LL_AHB1_GRP1_ForceReset
- AHBRSTR GPIOARST LL_AHB1_GRP1_ForceReset
- AHBRSTR GPIOBRST LL_AHB1_GRP1_ForceReset
- AHBRSTR GPIOCRST LL_AHB1_GRP1_ForceReset
- AHBRSTR GPIODRST LL_AHB1_GRP1_ForceReset
- AHBRSTR GPIOERST LL_AHB1_GRP1_ForceReset
- AHBRSTR GPIOFRST LL_AHB1_GRP1_ForceReset
- AHBRSTR GPIOGRST LL_AHB1_GRP1_ForceReset
- AHBRSTR TSCRST LL_AHB1_GRP1_ForceReset
- AHBRSTR ADC1RST LL_AHB1_GRP1_ForceReset
- AHBRSTR ADC12RST LL_AHB1_GRP1_ForceReset
- AHBRSTR ADC34RST LL_AHB1_GRP1_ForceReset

LL_AHB1_GRP1_ReleaseReset

Function name

__STATIC_INLINE void LL_AHB1_GRP1_ReleaseReset (uint32_t Periphs)

Function description

Release AHB1 peripherals reset.

Parameters

- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_AHB1_GRP1_PERIPH_ALL
  - LL_AHB1_GRP1_PERIPH_FMC (*)
  - LL_AHB1_GRP1_PERIPH_GPIOH (*)
  - LL_AHB1_GRP1_PERIPH_GPIOA
  - LL_AHB1_GRP1_PERIPH_GPIOB
  - LL_AHB1_GRP1_PERIPH_GPIOC
  - LL_AHB1_GRP1_PERIPH_GPIOD
  - LL_AHB1_GRP1_PERIPH_GPIOE (*)
  - LL_AHB1_GRP1_PERIPH_GPIOF
  - LL_AHB1_GRP1_PERIPH_GPIOG (*)
  - LL_AHB1_GRP1_PERIPH_TSC
  - LL_AHB1_GRP1_PERIPH_ADC1 (*)
  - LL_AHB1_GRP1_PERIPH_ADC12 (*)

– LL_AHB1_GRP1_PERIPH_ADC34 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- AHBRSTR FMCRST LL_AHB1_GRP1_ReleaseReset
- AHBRSTR GPIOHRST LL_AHB1_GRP1_ReleaseReset
- AHBRSTR GPIOARST LL_AHB1_GRP1_ReleaseReset
- AHBRSTR GPIOBRST LL_AHB1_GRP1_ReleaseReset
- AHBRSTR GPIOCRST LL_AHB1_GRP1_ReleaseReset
- AHBRSTR GPIODRST LL_AHB1_GRP1_ReleaseReset
- AHBRSTR GPIOERST LL_AHB1_GRP1_ReleaseReset
- AHBRSTR GPIOFRST LL_AHB1_GRP1_ReleaseReset
- AHBRSTR GPIOGRST LL_AHB1_GRP1_ReleaseReset
- AHBRSTR TSCRST LL_AHB1_GRP1_ReleaseReset
- AHBRSTR ADC1RST LL_AHB1_GRP1_ReleaseReset
- AHBRSTR ADC12RST LL_AHB1_GRP1_ReleaseReset
- AHBRSTR ADC34RST LL_AHB1_GRP1_ReleaseReset

LL_APB1_GRP1_EnableClock

Function name
__STATIC_INLINE void LL_APB1_GRP1_EnableClock (uint32_t Periphs)

Function description
Enable APB1 peripherals clock.

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  – LL_APB1_GRP1_PERIPH_TIM2
  – LL_APB1_GRP1_PERIPH_TIM3 (*)
  – LL_APB1_GRP1_PERIPH_TIM4 (*)
  – LL_APB1_GRP1_PERIPH_TIM5 (*)
  – LL_APB1_GRP1_PERIPH_TIM6
  – LL_APB1_GRP1_PERIPH_TIM7 (*)
  – LL_APB1_GRP1_PERIPH_TIM12 (*)
  – LL_APB1_GRP1_PERIPH_TIM13 (*)
  – LL_APB1_GRP1_PERIPH_TIM14 (*)
  – LL_APB1_GRP1_PERIPH_TIM18 (*)
  – LL_APB1_GRP1_PERIPH_WWDG
  – LL_APB1_GRP1_PERIPH_SPI2 (*)
  – LL_APB1_GRP1_PERIPH_SPI3 (*)
  – LL_APB1_GRP1_PERIPH_USART2
  – LL_APB1_GRP1_PERIPH_USART3
  – LL_APB1_GRP1_PERIPH_UART4 (*)
  – LL_APB1_GRP1_PERIPH_UART5 (*)
  – LL_APB1_GRP1_PERIPH_I2C1
  – LL_APB1_GRP1_PERIPH_I2C2 (*)
  – LL_APB1_GRP1_PERIPH_USB (*)
  – LL_APB1_GRP1_PERIPH_CAN (*)
  – LL_APB1_GRP1_PERIPH_DAC2 (*)
  – LL_APB1_GRP1_PERIPH_PWR
  – LL_APB1_GRP1_PERIPH_DAC1
  – LL_APB1_GRP1_PERIPH_CEC (*)
  – LL_APB1_GRP1_PERIPH_I2C3 (*)

Return values
- **None**

Reference Manual to LL API cross reference:

- APB1ENR TIM2EN LL_APB1_GRP1_EnableClock
- APB1ENR TIM3EN LL_APB1_GRP1_EnableClock
- APB1ENR TIM4EN LL_APB1_GRP1_EnableClock
- APB1ENR TIM5EN LL_APB1_GRP1_EnableClock
- APB1ENR TIM6EN LL_APB1_GRP1_EnableClock
- APB1ENR TIM7EN LL_APB1_GRP1_EnableClock
- APB1ENR TIM12EN LL_APB1_GRP1_EnableClock
- APB1ENR TIM13EN LL_APB1_GRP1_EnableClock
- APB1ENR TIM14EN LL_APB1_GRP1_EnableClock
- APB1ENR TIM18EN LL_APB1_GRP1_EnableClock
- APB1ENR WWDGEN LL_APB1_GRP1_EnableClock
- APB1ENR SPI2EN LL_APB1_GRP1_EnableClock
- APB1ENR SPI3EN LL_APB1_GRP1_EnableClock
- APB1ENR USART2EN LL_APB1_GRP1_EnableClock
- APB1ENR USART3EN LL_APB1_GRP1_EnableClock
- APB1ENR UART4EN LL_APB1_GRP1_EnableClock
- APB1ENR UART5EN LL_APB1_GRP1_EnableClock
- APB1ENR I2C1EN LL_APB1_GRP1_EnableClock
- APB1ENR I2C2EN LL_APB1_GRP1_EnableClock
- APB1ENR USBEN LL_APB1_GRP1_EnableClock
- APB1ENR CANEN LL_APB1_GRP1_EnableClock
- APB1ENR DAC2EN LL_APB1_GRP1_EnableClock
- APB1ENR PWREN LL_APB1_GRP1_EnableClock
- APB1ENR DAC1EN LL_APB1_GRP1_EnableClock
- APB1ENR CECEN LL_APB1_GRP1_EnableClock
- APB1ENR I2C3EN LL_APB1_GRP1_EnableClock

LL_APB1_GRP1_IsEnabledClock

Function name **__STATIC_INLINE uint32_t LL_APB1_GRP1_IsEnabledClock (uint32_t Periphs)**

Function description Check if APB1 peripheral clock is enabled or not.

Parameters

- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_APB1_GRP1_PERIPH_TIM2
  - LL_APB1_GRP1_PERIPH_TIM3 (*)
  - LL_APB1_GRP1_PERIPH_TIM4 (*)
  - LL_APB1_GRP1_PERIPH_TIM5 (*)
  - LL_APB1_GRP1_PERIPH_TIM6
  - LL_APB1_GRP1_PERIPH_TIM7 (*)
  - LL_APB1_GRP1_PERIPH_TIM12 (*)
  - LL_APB1_GRP1_PERIPH_TIM13 (*)
  - LL_APB1_GRP1_PERIPH_TIM14 (*)
  - LL_APB1_GRP1_PERIPH_TIM18 (*)
  - LL_APB1_GRP1_PERIPH_WWDG
  - LL_APB1_GRP1_PERIPH_SPI2 (*)
  - LL_APB1_GRP1_PERIPH_SPI3 (*)
  - LL_APB1_GRP1_PERIPH_USART2
  - LL_APB1_GRP1_PERIPH_USART3
  - LL_APB1_GRP1_PERIPH_UART4 (*)
  - LL_APB1_GRP1_PERIPH_UART5 (*)
  - LL_APB1_GRP1_PERIPH_I2C1

  - LL_APB1_GRP1_PERIPH_I2C2 (*)
  - LL_APB1_GRP1_PERIPH_USB (*)
  - LL_APB1_GRP1_PERIPH_CAN (*)
  - LL_APB1_GRP1_PERIPH_DAC2 (*)
  - LL_APB1_GRP1_PERIPH_PWR
  - LL_APB1_GRP1_PERIPH_DAC1
  - LL_APB1_GRP1_PERIPH_CEC (*)
  - LL_APB1_GRP1_PERIPH_I2C3 (*)

Return values
- **State:** of Periphs (1 or 0).

Reference Manual to LL API cross reference:
- APB1ENR TIM2EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR TIM3EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR TIM4EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR TIM5EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR TIM6EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR TIM7EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR TIM12EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR TIM13EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR TIM14EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR TIM18EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR WWDGEN LL_APB1_GRP1_IsEnabledClock
- APB1ENR SPI2EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR SPI3EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR USART2EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR USART3EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR UART4EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR UART5EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR I2C1EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR I2C2EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR USBEN LL_APB1_GRP1_IsEnabledClock
- APB1ENR CANEN LL_APB1_GRP1_IsEnabledClock
- APB1ENR DAC2EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR PWREN LL_APB1_GRP1_IsEnabledClock
- APB1ENR DAC1EN LL_APB1_GRP1_IsEnabledClock
- APB1ENR CECEN LL_APB1_GRP1_IsEnabledClock
- APB1ENR I2C3EN LL_APB1_GRP1_IsEnabledClock

LL_APB1_GRP1_DisableClock

Function name
__STATIC_INLINE void LL_APB1_GRP1_DisableClock (uint32_t Periphs)

Function description
Disable APB1 peripherals clock.

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_APB1_GRP1_PERIPH_TIM2
  - LL_APB1_GRP1_PERIPH_TIM3 (*)
  - LL_APB1_GRP1_PERIPH_TIM4 (*)
  - LL_APB1_GRP1_PERIPH_TIM5 (*)
  - LL_APB1_GRP1_PERIPH_TIM6
  - LL_APB1_GRP1_PERIPH_TIM7 (*)
  - LL_APB1_GRP1_PERIPH_TIM12 (*)
  - LL_APB1_GRP1_PERIPH_TIM13 (*)

- LL_APB1_GRP1_PERIPH_TIM14 (*)
- LL_APB1_GRP1_PERIPH_TIM18 (*)
- LL_APB1_GRP1_PERIPH_WWDG
- LL_APB1_GRP1_PERIPH_SPI2 (*)
- LL_APB1_GRP1_PERIPH_SPI3 (*)
- LL_APB1_GRP1_PERIPH_USART2
- LL_APB1_GRP1_PERIPH_USART3
- LL_APB1_GRP1_PERIPH_UART4 (*)
- LL_APB1_GRP1_PERIPH_UART5 (*)
- LL_APB1_GRP1_PERIPH_I2C1
- LL_APB1_GRP1_PERIPH_I2C2 (*)
- LL_APB1_GRP1_PERIPH_USB (*)
- LL_APB1_GRP1_PERIPH_CAN (*)
- LL_APB1_GRP1_PERIPH_DAC2 (*)
- LL_APB1_GRP1_PERIPH_PWR
- LL_APB1_GRP1_PERIPH_DAC1
- LL_APB1_GRP1_PERIPH_CEC (*)
- LL_APB1_GRP1_PERIPH_I2C3 (*)

Return values

- **None**

Reference Manual to LL API cross reference:

- APB1ENR TIM2EN LL_APB1_GRP1_DisableClock
- APB1ENR TIM3EN LL_APB1_GRP1_DisableClock
- APB1ENR TIM4EN LL_APB1_GRP1_DisableClock
- APB1ENR TIM5EN LL_APB1_GRP1_DisableClock
- APB1ENR TIM6EN LL_APB1_GRP1_DisableClock
- APB1ENR TIM7EN LL_APB1_GRP1_DisableClock
- APB1ENR TIM12EN LL_APB1_GRP1_DisableClock
- APB1ENR TIM13EN LL_APB1_GRP1_DisableClock
- APB1ENR TIM14EN LL_APB1_GRP1_DisableClock
- APB1ENR TIM18EN LL_APB1_GRP1_DisableClock
- APB1ENR WWDGEN LL_APB1_GRP1_DisableClock
- APB1ENR SPI2EN LL_APB1_GRP1_DisableClock
- APB1ENR SPI3EN LL_APB1_GRP1_DisableClock
- APB1ENR USART2EN LL_APB1_GRP1_DisableClock
- APB1ENR USART3EN LL_APB1_GRP1_DisableClock
- APB1ENR UART4EN LL_APB1_GRP1_DisableClock
- APB1ENR UART5EN LL_APB1_GRP1_DisableClock
- APB1ENR I2C1EN LL_APB1_GRP1_DisableClock
- APB1ENR I2C2EN LL_APB1_GRP1_DisableClock
- APB1ENR USBEN LL_APB1_GRP1_DisableClock
- APB1ENR CANEN LL_APB1_GRP1_DisableClock
- APB1ENR DAC2EN LL_APB1_GRP1_DisableClock
- APB1ENR PWREN LL_APB1_GRP1_DisableClock
- APB1ENR DAC1EN LL_APB1_GRP1_DisableClock
- APB1ENR CECEN LL_APB1_GRP1_DisableClock
- APB1ENR I2C3EN LL_APB1_GRP1_DisableClock

LL_APB1_GRP1_ForceReset

Function name
__STATIC_INLINE void LL_APB1_GRP1_ForceReset (uint32_t Periphs)

Function description
Force APB1 peripherals reset.

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_APB1_GRP1_PERIPH_ALL
  - LL_APB1_GRP1_PERIPH_TIM2
  - LL_APB1_GRP1_PERIPH_TIM3 (*)
  - LL_APB1_GRP1_PERIPH_TIM4 (*)
  - LL_APB1_GRP1_PERIPH_TIM5 (*)
  - LL_APB1_GRP1_PERIPH_TIM6
  - LL_APB1_GRP1_PERIPH_TIM7 (*)
  - LL_APB1_GRP1_PERIPH_TIM12 (*)
  - LL_APB1_GRP1_PERIPH_TIM13 (*)
  - LL_APB1_GRP1_PERIPH_TIM14 (*)
  - LL_APB1_GRP1_PERIPH_TIM18 (*)
  - LL_APB1_GRP1_PERIPH_WWDG
  - LL_APB1_GRP1_PERIPH_SPI2 (*)
  - LL_APB1_GRP1_PERIPH_SPI3 (*)
  - LL_APB1_GRP1_PERIPH_USART2
  - LL_APB1_GRP1_PERIPH_USART3
  - LL_APB1_GRP1_PERIPH_UART4 (*)
  - LL_APB1_GRP1_PERIPH_UART5 (*)
  - LL_APB1_GRP1_PERIPH_I2C1
  - LL_APB1_GRP1_PERIPH_I2C2 (*)
  - LL_APB1_GRP1_PERIPH_USB (*)
  - LL_APB1_GRP1_PERIPH_CAN (*)
  - LL_APB1_GRP1_PERIPH_DAC2 (*)
  - LL_APB1_GRP1_PERIPH_PWR
  - LL_APB1_GRP1_PERIPH_DAC1
  - LL_APB1_GRP1_PERIPH_CEC (*)
  - LL_APB1_GRP1_PERIPH_I2C3 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- APB1RSTR TIM2RST LL_APB1_GRP1_ForceReset
- APB1RSTR TIM3RST LL_APB1_GRP1_ForceReset
- APB1RSTR TIM4RST LL_APB1_GRP1_ForceReset
- APB1RSTR TIM5RST LL_APB1_GRP1_ForceReset
- APB1RSTR TIM6RST LL_APB1_GRP1_ForceReset
- APB1RSTR TIM7RST LL_APB1_GRP1_ForceReset
- APB1RSTR TIM12RST LL_APB1_GRP1_ForceReset
- APB1RSTR TIM13RST LL_APB1_GRP1_ForceReset
- APB1RSTR TIM14RST LL_APB1_GRP1_ForceReset
- APB1RSTR TIM18RST LL_APB1_GRP1_ForceReset
- APB1RSTR WWDGRST LL_APB1_GRP1_ForceReset
- APB1RSTR SPI2RST LL_APB1_GRP1_ForceReset
- APB1RSTR SPI3RST LL_APB1_GRP1_ForceReset
- APB1RSTR USART2RST LL_APB1_GRP1_ForceReset
- APB1RSTR USART3RST LL_APB1_GRP1_ForceReset
- APB1RSTR UART4RST LL_APB1_GRP1_ForceReset

- APB1RSTR UART5RST LL_APB1_GRP1_ForceReset
- APB1RSTR I2C1RST LL_APB1_GRP1_ForceReset
- APB1RSTR I2C2RST LL_APB1_GRP1_ForceReset
- APB1RSTR USBRST LL_APB1_GRP1_ForceReset
- APB1RSTR CANRST LL_APB1_GRP1_ForceReset
- APB1RSTR DAC2RST LL_APB1_GRP1_ForceReset
- APB1RSTR PWRRST LL_APB1_GRP1_ForceReset
- APB1RSTR DAC1RST LL_APB1_GRP1_ForceReset
- APB1RSTR CECRST LL_APB1_GRP1_ForceReset
- APB1RSTR I2C3RST LL_APB1_GRP1_ForceReset

LL_APB1_GRP1_ReleaseReset

Function name
__STATIC_INLINE void LL_APB1_GRP1_ReleaseReset (uint32_t Periphs)

Function description
Release APB1 peripherals reset.

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_APB1_GRP1_PERIPH_ALL
  - LL_APB1_GRP1_PERIPH_TIM2
  - LL_APB1_GRP1_PERIPH_TIM3 (*)
  - LL_APB1_GRP1_PERIPH_TIM4 (*)
  - LL_APB1_GRP1_PERIPH_TIM5 (*)
  - LL_APB1_GRP1_PERIPH_TIM6
  - LL_APB1_GRP1_PERIPH_TIM7 (*)
  - LL_APB1_GRP1_PERIPH_TIM12 (*)
  - LL_APB1_GRP1_PERIPH_TIM13 (*)
  - LL_APB1_GRP1_PERIPH_TIM14 (*)
  - LL_APB1_GRP1_PERIPH_TIM18 (*)
  - LL_APB1_GRP1_PERIPH_WWDG
  - LL_APB1_GRP1_PERIPH_SPI2 (*)
  - LL_APB1_GRP1_PERIPH_SPI3 (*)
  - LL_APB1_GRP1_PERIPH_USART2
  - LL_APB1_GRP1_PERIPH_USART3
  - LL_APB1_GRP1_PERIPH_UART4 (*)
  - LL_APB1_GRP1_PERIPH_UART5 (*)
  - LL_APB1_GRP1_PERIPH_I2C1
  - LL_APB1_GRP1_PERIPH_I2C2 (*)
  - LL_APB1_GRP1_PERIPH_USB (*)
  - LL_APB1_GRP1_PERIPH_CAN (*)
  - LL_APB1_GRP1_PERIPH_DAC2 (*)
  - LL_APB1_GRP1_PERIPH_PWR
  - LL_APB1_GRP1_PERIPH_DAC1
  - LL_APB1_GRP1_PERIPH_CEC (*)
  - LL_APB1_GRP1_PERIPH_I2C3 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- APB1RSTR TIM2RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR TIM3RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR TIM4RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR TIM5RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR TIM6RST LL_APB1_GRP1_ReleaseReset

- APB1RSTR TIM7RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR TIM12RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR TIM13RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR TIM14RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR TIM18RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR WWDGRST LL_APB1_GRP1_ReleaseReset
- APB1RSTR SPI2RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR SPI3RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR USART2RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR USART3RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR UART4RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR UART5RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR I2C1RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR I2C2RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR USBRST LL_APB1_GRP1_ReleaseReset
- APB1RSTR CANRST LL_APB1_GRP1_ReleaseReset
- APB1RSTR DAC2RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR PWRRST LL_APB1_GRP1_ReleaseReset
- APB1RSTR DAC1RST LL_APB1_GRP1_ReleaseReset
- APB1RSTR CECRST LL_APB1_GRP1_ReleaseReset
- APB1RSTR I2C3RST LL_APB1_GRP1_ReleaseReset

LL_APB2_GRP1_EnableClock

Function name **__STATIC_INLINE void LL_APB2_GRP1_EnableClock (uint32_t Periphs)**

Function description Enable APB2 peripherals clock.

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_APB2_GRP1_PERIPH_SYSCFG
  - LL_APB2_GRP1_PERIPH_ADC1 (*)
  - LL_APB2_GRP1_PERIPH_TIM1 (*)
  - LL_APB2_GRP1_PERIPH_SPI1 (*)
  - LL_APB2_GRP1_PERIPH_TIM8 (*)
  - LL_APB2_GRP1_PERIPH_USART1
  - LL_APB2_GRP1_PERIPH_SPI4 (*)
  - LL_APB2_GRP1_PERIPH_TIM15
  - LL_APB2_GRP1_PERIPH_TIM16
  - LL_APB2_GRP1_PERIPH_TIM17
  - LL_APB2_GRP1_PERIPH_TIM19 (*)
  - LL_APB2_GRP1_PERIPH_TIM20 (*)
  - LL_APB2_GRP1_PERIPH_HRTIM1 (*)
  - LL_APB2_GRP1_PERIPH_SDADC1 (*)
  - LL_APB2_GRP1_PERIPH_SDADC2 (*)
  - LL_APB2_GRP1_PERIPH_SDADC3 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- APB2ENR SYSCFGEN LL_APB2_GRP1_EnableClock
- APB2ENR ADC1EN LL_APB2_GRP1_EnableClock
- APB2ENR TIM1EN LL_APB2_GRP1_EnableClock
- APB2ENR SPI1EN LL_APB2_GRP1_EnableClock
- APB2ENR TIM8EN LL_APB2_GRP1_EnableClock

- APB2ENR USART1EN LL_APB2_GRP1_EnableClock
- APB2ENR SPI4EN LL_APB2_GRP1_EnableClock
- APB2ENR TIM15EN LL_APB2_GRP1_EnableClock
- APB2ENR TIM16EN LL_APB2_GRP1_EnableClock
- APB2ENR TIM17EN LL_APB2_GRP1_EnableClock
- APB2ENR TIM19EN LL_APB2_GRP1_EnableClock
- APB2ENR TIM20EN LL_APB2_GRP1_EnableClock
- APB2ENR HRTIM1EN LL_APB2_GRP1_EnableClock
- APB2ENR SDADC1EN LL_APB2_GRP1_EnableClock
- APB2ENR SDADC2EN LL_APB2_GRP1_EnableClock
- APB2ENR SDADC3EN LL_APB2_GRP1_EnableClock

LL_APB2_GRP1_IsEnabledClock

Function name
__STATIC_INLINE uint32_t LL_APB2_GRP1_IsEnabledClock (uint32_t Periphs)

Function description
Check if APB2 peripheral clock is enabled or not.

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_APB2_GRP1_PERIPH_SYSCFG
  - LL_APB2_GRP1_PERIPH_ADC1 (*)
  - LL_APB2_GRP1_PERIPH_TIM1 (*)
  - LL_APB2_GRP1_PERIPH_SPI1 (*)
  - LL_APB2_GRP1_PERIPH_TIM8 (*)
  - LL_APB2_GRP1_PERIPH_USART1
  - LL_APB2_GRP1_PERIPH_SPI4 (*)
  - LL_APB2_GRP1_PERIPH_TIM15
  - LL_APB2_GRP1_PERIPH_TIM16
  - LL_APB2_GRP1_PERIPH_TIM17
  - LL_APB2_GRP1_PERIPH_TIM19 (*)
  - LL_APB2_GRP1_PERIPH_TIM20 (*)
  - LL_APB2_GRP1_PERIPH_HRTIM1 (*)
  - LL_APB2_GRP1_PERIPH_SDADC1 (*)
  - LL_APB2_GRP1_PERIPH_SDADC2 (*)
  - LL_APB2_GRP1_PERIPH_SDADC3 (*)

Return values
- **State:** of Periphs (1 or 0).

Reference Manual to LL API cross reference:
- APB2ENR SYSCFGEN LL_APB2_GRP1_IsEnabledClock
- APB2ENR ADC1EN LL_APB2_GRP1_IsEnabledClock
- APB2ENR TIM1EN LL_APB2_GRP1_IsEnabledClock
- APB2ENR SPI1EN LL_APB2_GRP1_IsEnabledClock
- APB2ENR TIM8EN LL_APB2_GRP1_IsEnabledClock
- APB2ENR USART1EN LL_APB2_GRP1_IsEnabledClock
- APB2ENR SPI4EN LL_APB2_GRP1_IsEnabledClock
- APB2ENR TIM15EN LL_APB2_GRP1_IsEnabledClock
- APB2ENR TIM16EN LL_APB2_GRP1_IsEnabledClock
- APB2ENR TIM17EN LL_APB2_GRP1_IsEnabledClock
- APB2ENR TIM19EN LL_APB2_GRP1_IsEnabledClock
- APB2ENR TIM20EN LL_APB2_GRP1_IsEnabledClock
- APB2ENR HRTIM1EN LL_APB2_GRP1_IsEnabledClock
- APB2ENR SDADC1EN LL_APB2_GRP1_IsEnabledClock
- APB2ENR SDADC2EN LL_APB2_GRP1_IsEnabledClock

- APB2ENR SDADC3EN LL_APB2_GRP1_IsEnabledClock

LL_APB2_GRP1_DisableClock

Function name
__STATIC_INLINE void LL_APB2_GRP1_DisableClock (uint32_t Periphs)

Function description
Disable APB2 peripherals clock.

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_APB2_GRP1_PERIPH_SYSCFG
  - LL_APB2_GRP1_PERIPH_ADC1 (*)
  - LL_APB2_GRP1_PERIPH_TIM1 (*)
  - LL_APB2_GRP1_PERIPH_SPI1 (*)
  - LL_APB2_GRP1_PERIPH_TIM8 (*)
  - LL_APB2_GRP1_PERIPH_USART1
  - LL_APB2_GRP1_PERIPH_SPI4 (*)
  - LL_APB2_GRP1_PERIPH_TIM15
  - LL_APB2_GRP1_PERIPH_TIM16
  - LL_APB2_GRP1_PERIPH_TIM17
  - LL_APB2_GRP1_PERIPH_TIM19 (*)
  - LL_APB2_GRP1_PERIPH_TIM20 (*)
  - LL_APB2_GRP1_PERIPH_HRTIM1 (*)
  - LL_APB2_GRP1_PERIPH_SDADC1 (*)
  - LL_APB2_GRP1_PERIPH_SDADC2 (*)
  - LL_APB2_GRP1_PERIPH_SDADC3 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- APB2ENR SYSCFGEN LL_APB2_GRP1_DisableClock
- APB2ENR ADC1EN LL_APB2_GRP1_DisableClock
- APB2ENR TIM1EN LL_APB2_GRP1_DisableClock
- APB2ENR SPI1EN LL_APB2_GRP1_DisableClock
- APB2ENR TIM8EN LL_APB2_GRP1_DisableClock
- APB2ENR USART1EN LL_APB2_GRP1_DisableClock
- APB2ENR SPI4EN LL_APB2_GRP1_DisableClock
- APB2ENR TIM15EN LL_APB2_GRP1_DisableClock
- APB2ENR TIM16EN LL_APB2_GRP1_DisableClock
- APB2ENR TIM17EN LL_APB2_GRP1_DisableClock
- APB2ENR TIM19EN LL_APB2_GRP1_DisableClock
- APB2ENR TIM20EN LL_APB2_GRP1_DisableClock
- APB2ENR HRTIM1EN LL_APB2_GRP1_DisableClock
- APB2ENR SDADC1EN LL_APB2_GRP1_DisableClock
- APB2ENR SDADC2EN LL_APB2_GRP1_DisableClock
- APB2ENR SDADC3EN LL_APB2_GRP1_DisableClock

LL_APB2_GRP1_ForceReset

Function name
__STATIC_INLINE void LL_APB2_GRP1_ForceReset (uint32_t Periphs)

Function description
Force APB2 peripherals reset.

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.

  - LL_APB2_GRP1_PERIPH_ALL
  - LL_APB2_GRP1_PERIPH_SYSCFG
  - LL_APB2_GRP1_PERIPH_ADC1 (*)
  - LL_APB2_GRP1_PERIPH_TIM1 (*)
  - LL_APB2_GRP1_PERIPH_SPI1 (*)
  - LL_APB2_GRP1_PERIPH_TIM8 (*)
  - LL_APB2_GRP1_PERIPH_USART1
  - LL_APB2_GRP1_PERIPH_SPI4 (*)
  - LL_APB2_GRP1_PERIPH_TIM15
  - LL_APB2_GRP1_PERIPH_TIM16
  - LL_APB2_GRP1_PERIPH_TIM17
  - LL_APB2_GRP1_PERIPH_TIM19 (*)
  - LL_APB2_GRP1_PERIPH_TIM20 (*)
  - LL_APB2_GRP1_PERIPH_HRTIM1 (*)
  - LL_APB2_GRP1_PERIPH_SDADC1 (*)
  - LL_APB2_GRP1_PERIPH_SDADC2 (*)
  - LL_APB2_GRP1_PERIPH_SDADC3 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- APB2RSTR SYSCFGRST LL_APB2_GRP1_ForceReset
- APB2RSTR ADC1RST LL_APB2_GRP1_ForceReset
- APB2RSTR TIM1RST LL_APB2_GRP1_ForceReset
- APB2RSTR SPI1RST LL_APB2_GRP1_ForceReset
- APB2RSTR TIM8RST LL_APB2_GRP1_ForceReset
- APB2RSTR USART1RST LL_APB2_GRP1_ForceReset
- APB2RSTR SPI4RST LL_APB2_GRP1_ForceReset
- APB2RSTR TIM15RST LL_APB2_GRP1_ForceReset
- APB2RSTR TIM16RST LL_APB2_GRP1_ForceReset
- APB2RSTR TIM17RST LL_APB2_GRP1_ForceReset
- APB2RSTR TIM19RST LL_APB2_GRP1_ForceReset
- APB2RSTR TIM20RST LL_APB2_GRP1_ForceReset
- APB2RSTR HRTIM1RST LL_APB2_GRP1_ForceReset
- APB2RSTR SDADC1RST LL_APB2_GRP1_ForceReset
- APB2RSTR SDADC2RST LL_APB2_GRP1_ForceReset
- APB2RSTR SDADC3RST LL_APB2_GRP1_ForceReset

LL_APB2_GRP1_ReleaseReset

Function name
__STATIC_INLINE void LL_APB2_GRP1_ReleaseReset (uint32_t Periphs)

Function description
Release APB2 peripherals reset.

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_APB2_GRP1_PERIPH_ALL
  - LL_APB2_GRP1_PERIPH_SYSCFG
  - LL_APB2_GRP1_PERIPH_ADC1 (*)
  - LL_APB2_GRP1_PERIPH_TIM1 (*)
  - LL_APB2_GRP1_PERIPH_SPI1 (*)
  - LL_APB2_GRP1_PERIPH_TIM8 (*)
  - LL_APB2_GRP1_PERIPH_USART1
  - LL_APB2_GRP1_PERIPH_SPI4 (*)
  - LL_APB2_GRP1_PERIPH_TIM15

  - LL_APB2_GRP1_PERIPH_TIM16
  - LL_APB2_GRP1_PERIPH_TIM17
  - LL_APB2_GRP1_PERIPH_TIM19 (*)
  - LL_APB2_GRP1_PERIPH_TIM20 (*)
  - LL_APB2_GRP1_PERIPH_HRTIM1 (*)
  - LL_APB2_GRP1_PERIPH_SDADC1 (*)
  - LL_APB2_GRP1_PERIPH_SDADC2 (*)
  - LL_APB2_GRP1_PERIPH_SDADC3 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- APB2RSTR SYSCFGRST LL_APB2_GRP1_ReleaseReset
- APB2RSTR ADC1RST LL_APB2_GRP1_ReleaseReset
- APB2RSTR TIM1RST LL_APB2_GRP1_ReleaseReset
- APB2RSTR SPI1RST LL_APB2_GRP1_ReleaseReset
- APB2RSTR TIM8RST LL_APB2_GRP1_ReleaseReset
- APB2RSTR USART1RST LL_APB2_GRP1_ReleaseReset
- APB2RSTR SPI4RST LL_APB2_GRP1_ReleaseReset
- APB2RSTR TIM15RST LL_APB2_GRP1_ReleaseReset
- APB2RSTR TIM16RST LL_APB2_GRP1_ReleaseReset
- APB2RSTR TIM17RST LL_APB2_GRP1_ReleaseReset
- APB2RSTR TIM19RST LL_APB2_GRP1_ReleaseReset
- APB2RSTR TIM20RST LL_APB2_GRP1_ReleaseReset
- APB2RSTR HRTIM1RST LL_APB2_GRP1_ReleaseReset
- APB2RSTR SDADC1RST LL_APB2_GRP1_ReleaseReset
- APB2RSTR SDADC2RST LL_APB2_GRP1_ReleaseReset
- APB2RSTR SDADC3RST LL_APB2_GRP1_ReleaseReset

60.2 BUS Firmware driver defines

60.2.1 BUS

AHB1 GRP1 PERIPH

LL_AHB1_GRP1_PERIPH_ALL

LL_AHB1_GRP1_PERIPH_DMA1

LL_AHB1_GRP1_PERIPH_DMA2

LL_AHB1_GRP1_PERIPH_SRAM

LL_AHB1_GRP1_PERIPH_FLASH

LL_AHB1_GRP1_PERIPH_CRC

LL_AHB1_GRP1_PERIPH_GPIOA

LL_AHB1_GRP1_PERIPH_GPIOB

LL_AHB1_GRP1_PERIPH_GPIOC

LL_AHB1_GRP1_PERIPH_GPIOD

LL_AHB1_GRP1_PERIPH_GPIOE

LL_AHB1_GRP1_PERIPH_GPIOF

LL_AHB1_GRP1_PERIPH_TSC

LL_AHB1_GRP1_PERIPH_ADC12

LL_AHB1_GRP1_PERIPH_ADC34

APB1 GRP1 PERIPH

LL_APB1_GRP1_PERIPH_ALL

LL_APB1_GRP1_PERIPH_TIM2

LL_APB1_GRP1_PERIPH_TIM3

LL_APB1_GRP1_PERIPH_TIM4

LL_APB1_GRP1_PERIPH_TIM6

LL_APB1_GRP1_PERIPH_TIM7

LL_APB1_GRP1_PERIPH_WWDG

LL_APB1_GRP1_PERIPH_SPI2

LL_APB1_GRP1_PERIPH_SPI3

LL_APB1_GRP1_PERIPH_USART2

LL_APB1_GRP1_PERIPH_USART3

LL_APB1_GRP1_PERIPH_UART4

LL_APB1_GRP1_PERIPH_UART5

LL_APB1_GRP1_PERIPH_I2C1

LL_APB1_GRP1_PERIPH_I2C2

LL_APB1_GRP1_PERIPH_USB

LL_APB1_GRP1_PERIPH_CAN

LL_APB1_GRP1_PERIPH_PWR

LL_APB1_GRP1_PERIPH_DAC1

APB2 GRP1 PERIPH

LL_APB2_GRP1_PERIPH_ALL

LL_APB2_GRP1_PERIPH_SYSCFG

LL_APB2_GRP1_PERIPH_TIM1

LL_APB2_GRP1_PERIPH_SPI1

LL_APB2_GRP1_PERIPH_TIM8

LL_APB2_GRP1_PERIPH_USART1

LL_APB2_GRP1_PERIPH_TIM15

LL_APB2_GRP1_PERIPH_TIM16

LL_APB2_GRP1_PERIPH_TIM17

61 LL COMP Generic Driver

61.1 COMP Firmware driver registers structures

61.1.1 LL_COMP_InitTypeDef

Data Fields

- ***uint32_t PowerMode***
- ***uint32_t InputPlus***
- ***uint32_t InputMinus***
- ***uint32_t InputHysteresis***
- ***uint32_t OutputSelection***
- ***uint32_t OutputPolarity***
- ***uint32_t OutputBlankingSource***

Field Documentation

- ***uint32_t LL_COMP_InitTypeDef::PowerMode***
  Set comparator operating mode to adjust power and speed. This parameter can be a value of ***COMP_LL_EC_POWERMODE***This feature can be modified afterwards using unitary function **LL_COMP_SetPowerMode()**.
- ***uint32_t LL_COMP_InitTypeDef::InputPlus***
  Set comparator input plus (non-inverting input). This parameter can be a value of ***COMP_LL_EC_INPUT_PLUS***This feature can be modified afterwards using unitary function **LL_COMP_SetInputPlus()**.
- ***uint32_t LL_COMP_InitTypeDef::InputMinus***
  Set comparator input minus (inverting input). This parameter can be a value of ***COMP_LL_EC_INPUT_MINUS***This feature can be modified afterwards using unitary function **LL_COMP_SetInputMinus()**.
- ***uint32_t LL_COMP_InitTypeDef::InputHysteresis***
  Set comparator hysteresis mode of the input minus. This parameter can be a value of ***COMP_LL_EC_INPUT_HYSTERESIS***This feature can be modified afterwards using unitary function **LL_COMP_SetInputHysteresis()**.
- ***uint32_t LL_COMP_InitTypeDef::OutputSelection***
  Set comparator output selection. This parameter can be a value of ***COMP_LL_EC_OUTPUT_SELECTION***This feature can be modified afterwards using unitary function **LL_COMP_SetOutputSelection()**.
- ***uint32_t LL_COMP_InitTypeDef::OutputPolarity***
  Set comparator output polarity. This parameter can be a value of ***COMP_LL_EC_OUTPUT_POLARITY***This feature can be modified afterwards using unitary function **LL_COMP_SetOutputPolarity()**.
- ***uint32_t LL_COMP_InitTypeDef::OutputBlankingSource***
  Set comparator blanking source. This parameter can be a value of ***COMP_LL_EC_OUTPUT_BLANKING_SOURCE***This feature can be modified afterwards using unitary function **LL_COMP_SetOutputBlankingSource()**.

61.2 COMP Firmware driver API description

61.2.1 Detailed description of functions

LL_COMP_SetCommonWindowMode

Function name	**__STATIC_INLINE void LL_COMP_SetCommonWindowMode (COMP_Common_TypeDef * COMPxy_COMMON, uint32_t WindowMode)**
Function description	Set window mode of a pair of comparators instances (2 consecutive COMP instances odd and even COMP<x> and COMP<x+1>).
Parameters	• **COMPxy_COMMON:** Comparator common instance (can be set directly from CMSIS definition or by using helper macro __LL_COMP_COMMON_INSTANCE()) • **WindowMode:** This parameter can be one of the following values: (1) Parameter available on devices: STM32F302xB/C, STM32F303xB/C, STM32F358xC (2) Parameter available on devices: STM32F303xB/C, STM32F358xC – LL_COMP_WINDOWMODE_DISABLE – LL_COMP_WINDOWMODE_COMP1_INPUT_PLUS_COMMON (1) – LL_COMP_WINDOWMODE_COMP3_INPUT_PLUS_COMMON (2) – LL_COMP_WINDOWMODE_COMP5_INPUT_PLUS_COMMON (2)
Return values	• **None**
Reference Manual to LL API cross reference:	• CSR COMPxWNDWEN LL_COMP_SetCommonWindowMode

LL_COMP_GetCommonWindowMode

Function name	**__STATIC_INLINE uint32_t LL_COMP_GetCommonWindowMode (COMP_Common_TypeDef * COMPxy_COMMON)**
Function description	Get window mode of a pair of comparators instances (2 consecutive COMP instances odd and even COMP<x> and COMP<x+1>).
Parameters	• **COMPxy_COMMON:** Comparator common instance (can be set directly from CMSIS definition or by using helper macro __LL_COMP_COMMON_INSTANCE())
Return values	• **Returned:** value can be one of the following values: (1) Parameter available on devices: STM32F302xB/C, STM32F303xB/C, STM32F358xC (2) Parameter available on devices: STM32F303xB/C, STM32F358xC – LL_COMP_WINDOWMODE_DISABLE – LL_COMP_WINDOWMODE_COMP1_INPUT_PLUS_COMMON (1) – LL_COMP_WINDOWMODE_COMP3_INPUT_PLUS_COMMON (2)

– LL_COMP_WINDOWMODE_COMP5_INPUT_PLUS_COMMON (2)

Reference Manual to LL API cross reference:
- CSR COMPxWNDWEN LL_COMP_GetCommonWindowMode

LL_COMP_SetPowerMode

Function name: **__STATIC_INLINE void LL_COMP_SetPowerMode (COMP_TypeDef * COMPx, uint32_t PowerMode)**

Function description: Set comparator instance operating mode to adjust power and speed.

Parameters:
- **COMPx:** Comparator instance
- **PowerMode:** This parameter can be one of the following values: (1) Parameter available only on devices: STM32F302xB/C, STM32F303xB/C, STM32F358xC
  – LL_COMP_POWERMODE_HIGHSPEED
  – LL_COMP_POWERMODE_MEDIUMSPEED (1)
  – LL_COMP_POWERMODE_LOWPOWER (1)
  – LL_COMP_POWERMODE_ULTRALOWPOWER (1)

Return values:
- **None**

Reference Manual to LL API cross reference:
- CSR COMPxMODE LL_COMP_SetPowerMode

LL_COMP_GetPowerMode

Function name: **__STATIC_INLINE uint32_t LL_COMP_GetPowerMode (COMP_TypeDef * COMPx)**

Function description: Get comparator instance operating mode to adjust power and speed.

Parameters:
- **COMPx:** Comparator instance

Return values:
- **Returned:** value can be one of the following values: (1) Parameter available only on devices: STM32F302xB/C, STM32F303xB/C, STM32F358xC
  – LL_COMP_POWERMODE_HIGHSPEED
  – LL_COMP_POWERMODE_MEDIUMSPEED (1)
  – LL_COMP_POWERMODE_LOWPOWER (1)
  – LL_COMP_POWERMODE_ULTRALOWPOWER (1)

Reference Manual to LL API cross reference:
- CSR COMPxMODE LL_COMP_GetPowerMode

LL_COMP_ConfigInputs

Function name

__STATIC_INLINE void LL_COMP_ConfigInputs (COMP_TypeDef * COMPx, uint32_t InputMinus, uint32_t InputPlus)

Function description

Set comparator inputs minus (inverting) and plus (non-inverting).

Parameters

- **COMPx:** Comparator instance
- **InputMinus:** This parameter can be one of the following values:
  - LL_COMP_INPUT_MINUS_1_4VREFINT
  - LL_COMP_INPUT_MINUS_1_2VREFINT
  - LL_COMP_INPUT_MINUS_3_4VREFINT
  - LL_COMP_INPUT_MINUS_VREFINT
  - LL_COMP_INPUT_MINUS_DAC1_CH1
  - LL_COMP_INPUT_MINUS_DAC1_CH2 (3)
  - LL_COMP_INPUT_MINUS_DAC2_CH1 (2)
  - LL_COMP_INPUT_MINUS_IO1
  - LL_COMP_INPUT_MINUS_IO2
  - LL_COMP_INPUT_MINUS_IO3 (1)
  - LL_COMP_INPUT_MINUS_IO4 (1) Parameter available on all devices except STM32F301x6/8, STM32F318x8, STM32F302x6/8, STM32F303x6/8, STM32F328xx, STM32F334xx.
  - (2) Parameter available only on devices STM32F303x6/8, STM32F328x8, STM32F334xx.
  - (3) Parameter available on all devices except STM32F301x6/8, STM32F318x8, STM32F302xx.
  -
- **InputPlus:** This parameter can be one of the following values: (1) Parameter available only on devices STM32F302xB/C, STM32F303xB/C, STM32F358xC.
  - LL_COMP_INPUT_PLUS_IO1
  - LL_COMP_INPUT_PLUS_IO2 (1)
  - LL_COMP_INPUT_PLUS_DAC1_CH1_COMP1 (2)
  - LL_COMP_INPUT_PLUS_DAC1_CH1_COMP2 (3)
- (2) Parameter available on devices: STM32F302xB/C, STM32F302xD/E, STM32F303xB/C/D/E, STM32F358xC, STM32F398xE.
- (3) Parameter available on devices: STM32F301x6/8, STM32F318xx, STM32F302x6/8.

Return values

- **None**

Notes

- In case of comparator input selected to be connected to IO: GPIO pins are specific to each comparator instance. Refer to description of parameters or to reference manual.
- On this STM32 serie, a voltage scaler is used when COMP input is based on VrefInt (VrefInt or subdivision of VrefInt): Voltage scaler requires a delay for voltage stabilization. Refer to device datasheet, parameter "tS_SC".

Reference Manual to LL API cross reference:

- CSR INMSEL LL_COMP_ConfigInputs
- CSR NONINSEL LL_COMP_ConfigInputs

LL_COMP_SetInputPlus

Function name	**__STATIC_INLINE void LL_COMP_SetInputPlus (COMP_TypeDef * COMPx, uint32_t InputPlus)**
Function description	Set comparator input plus (non-inverting).
Parameters	• **COMPx:** Comparator instance • **InputPlus:** This parameter can be one of the following values: (1) Parameter available only on devices STM32F302xB/C, STM32F303xB/C, STM32F358xC. – LL_COMP_INPUT_PLUS_IO1 – LL_COMP_INPUT_PLUS_IO2 (1) – LL_COMP_INPUT_PLUS_DAC1_CH1_COMP1 (2) – LL_COMP_INPUT_PLUS_DAC1_CH1_COMP2 (3) • (2) Parameter available on devices: STM32F302xB/C, STM32F302xD/E, STM32F303xB/C/D/E, STM32F358xC, STM32F398xE. • (3) Parameter available on devices: STM32F301x6/8, STM32F318xx, STM32F302x6/8.
Return values	• **None**
Notes	• In case of comparator input selected to be connected to IO: GPIO pins are specific to each comparator instance. Refer to description of parameters or to reference manual.
Reference Manual to LL API cross reference:	• CSR NONINSEL LL_COMP_SetInputPlus

LL_COMP_GetInputPlus

Function name	**__STATIC_INLINE uint32_t LL_COMP_GetInputPlus (COMP_TypeDef * COMPx)**
Function description	Get comparator input plus (non-inverting).
Parameters	• **COMPx:** Comparator instance
Return values	• **Returned:** value can be one of the following values: (1) Parameter available only on devices STM32F302xB/C, STM32F303xB/C, STM32F358xC. – LL_COMP_INPUT_PLUS_IO1 – LL_COMP_INPUT_PLUS_IO2 (1) – LL_COMP_INPUT_PLUS_DAC1_CH1_COMP1 (2) – LL_COMP_INPUT_PLUS_DAC1_CH1_COMP2 (3) • (2) Parameter available on devices: STM32F302xB/C, STM32F302xD/E, STM32F303xB/C/D/E, STM32F358xC, STM32F398xE. • (3) Parameter available on devices: STM32F301x6/8, STM32F318xx, STM32F302x6/8.
Notes	• In case of comparator input selected to be connected to IO: GPIO pins are specific to each comparator instance. Refer to description of parameters or to reference manual.

Reference Manual to LL API cross reference:
- CSR NONINSEL LL_COMP_GetInputPlus

LL_COMP_SetInputMinus

Function name
__STATIC_INLINE void LL_COMP_SetInputMinus (COMP_TypeDef * COMPx, uint32_t InputMinus)

Function description
Set comparator input minus (inverting).

Parameters
- **COMPx:** Comparator instance
- **InputMinus:** This parameter can be one of the following values:
  - LL_COMP_INPUT_MINUS_1_4VREFINT
  - LL_COMP_INPUT_MINUS_1_2VREFINT
  - LL_COMP_INPUT_MINUS_3_4VREFINT
  - LL_COMP_INPUT_MINUS_VREFINT
  - LL_COMP_INPUT_MINUS_DAC1_CH1
  - LL_COMP_INPUT_MINUS_DAC1_CH2 (3)
  - LL_COMP_INPUT_MINUS_DAC2_CH1 (2)
  - LL_COMP_INPUT_MINUS_IO1
  - LL_COMP_INPUT_MINUS_IO2
  - LL_COMP_INPUT_MINUS_IO3 (1)
  - LL_COMP_INPUT_MINUS_IO4 (1) Parameter available on all devices except STM32F301x6/8, STM32F318x8, STM32F302x6/8, STM32F303x6/8, STM32F328xx, STM32F334xx.
  - (2) Parameter available only on devices STM32F303x6/8, STM32F328x8, STM32F334xx.
  - (3) Parameter available on all devices except STM32F301x6/8, STM32F318x8, STM32F302xx.
  -

Return values
- **None**

Notes
- In case of comparator input selected to be connected to IO: GPIO pins are specific to each comparator instance. Refer to description of parameters or to reference manual.
- On this STM32 serie, a voltage scaler is used when COMP input is based on VrefInt (VrefInt or subdivision of VrefInt): Voltage scaler requires a delay for voltage stabilization. Refer to device datasheet, parameter "tS_SC".

Reference Manual to LL API cross reference:
- CSR INMSEL LL_COMP_SetInputMinus

LL_COMP_GetInputMinus

Function name	**__STATIC_INLINE uint32_t LL_COMP_GetInputMinus (COMP_TypeDef * COMPx)**
Function description	Get comparator input minus (inverting).
Parameters	• **COMPx:** Comparator instance
Return values	• **Returned:** value can be one of the following values: – LL_COMP_INPUT_MINUS_1_4VREFINT – LL_COMP_INPUT_MINUS_1_2VREFINT – LL_COMP_INPUT_MINUS_3_4VREFINT – LL_COMP_INPUT_MINUS_VREFINT – LL_COMP_INPUT_MINUS_DAC1_CH1 – LL_COMP_INPUT_MINUS_DAC1_CH2 (3) – LL_COMP_INPUT_MINUS_DAC2_CH1 (2) – LL_COMP_INPUT_MINUS_IO1 – LL_COMP_INPUT_MINUS_IO2 – LL_COMP_INPUT_MINUS_IO3 (1) – LL_COMP_INPUT_MINUS_IO4 (1) Parameter available on all devices except STM32F301x6/8, STM32F318x8, STM32F302x6/8, STM32F303x6/8, STM32F328xx, STM32F334xx. – (2) Parameter available only on devices STM32F303x6/8, STM32F328x8, STM32F334xx. – (3) Parameter available on all devices except STM32F301x6/8, STM32F318x8, STM32F302xx. –
Notes	• In case of comparator input selected to be connected to IO: GPIO pins are specific to each comparator instance. Refer to description of parameters or to reference manual.
Reference Manual to LL API cross reference:	• CSR INMSEL LL_COMP_GetInputMinus

LL_COMP_SetInputHysteresis

Function name	**__STATIC_INLINE void LL_COMP_SetInputHysteresis (COMP_TypeDef * COMPx, uint32_t InputHysteresis)**
Function description	Set comparator instance hysteresis mode of the input minus (inverting input).
Parameters	• **COMPx:** Comparator instance • **InputHysteresis:** This parameter can be one of the following values: (1) Parameter available only on devices: STM32F302xB/C, STM32F303xB/C, STM32F358xC – LL_COMP_HYSTERESIS_NONE – LL_COMP_HYSTERESIS_LOW (1) – LL_COMP_HYSTERESIS_MEDIUM (1) – LL_COMP_HYSTERESIS_HIGH (1)
Return values	• **None**

Reference Manual to LL API cross reference:
- CSR COMPxHYST LL_COMP_SetInputHysteresis

LL_COMP_GetInputHysteresis

Function name
__STATIC_INLINE uint32_t LL_COMP_GetInputHysteresis (COMP_TypeDef * COMPx)

Function description
Get comparator instance hysteresis mode of the minus (inverting) input.

Parameters
- **COMPx:** Comparator instance

Return values
- **Returned:** value can be one of the following values: (1) Parameter available only on devices: STM32F302xB/C, STM32F303xB/C, STM32F358xC
  - LL_COMP_HYSTERESIS_NONE
  - LL_COMP_HYSTERESIS_LOW (1)
  - LL_COMP_HYSTERESIS_MEDIUM (1)
  - LL_COMP_HYSTERESIS_HIGH (1)

Reference Manual to LL API cross reference:
- CSR COMPxHYST LL_COMP_GetInputHysteresis

LL_COMP_SetOutputSelection

Function name
__STATIC_INLINE void LL_COMP_SetOutputSelection (COMP_TypeDef * COMPx, uint32_t OutputSelection)

Function description
Set comparator output selection.

Parameters
- **COMPx:** Comparator instance
- **OutputSelection:** This parameter can be one of the following values: (1) Parameter available on devices: STM32F302x8, STM32F318xx, STM32F303x8, STM32F328xx, STM32F334x8, STM32F302xC, STM32F302xE, STM32F303xC, STM32F358xx, STM32F303xE, STM32F398xx.
  - LL_COMP_OUTPUT_NONE
  - LL_COMP_OUTPUT_TIM1_BKIN
  - LL_COMP_OUTPUT_TIM1_BKIN2
  - LL_COMP_OUTPUT_TIM1_TIM8_BKIN2
  - LL_COMP_OUTPUT_TIM8_BKIN (4)
  - LL_COMP_OUTPUT_TIM8_BKIN2 (4)
  - LL_COMP_OUTPUT_TIM1_TIM8_BKIN2 (4)
  - LL_COMP_OUTPUT_TIM20_BKIN (5)
  - LL_COMP_OUTPUT_TIM20_BKIN2 (5)
  - LL_COMP_OUTPUT_TIM1_TIM8_TIM20_BKIN2 (5)
  - LL_COMP_OUTPUT_TIM1_OCCLR_COMP1_2_3_7 (4)
  - LL_COMP_OUTPUT_TIM2_OCCLR_COMP1_2_3 (4)
  - LL_COMP_OUTPUT_TIM3_OCCLR_COMP1_2_4_5 (4)
  - LL_COMP_OUTPUT_TIM8_OCCLR_COMP4_5_6_7 (4)
  - LL_COMP_OUTPUT_TIM3_OCCLR_COMP2_4 (6)

  - LL_COMP_OUTPUT_TIM1_IC1_COMP2 (2)
  - LL_COMP_OUTPUT_TIM2_IC4_COMP2 (2)
  - LL_COMP_OUTPUT_TIM3_IC1_COMP2 (1)
  - LL_COMP_OUTPUT_TIM1_IC1_COMP1_2 (3)
  - LL_COMP_OUTPUT_TIM2_IC4_COMP1_2 (3)
  - LL_COMP_OUTPUT_TIM3_IC1_COMP1_2 (3)
  - LL_COMP_OUTPUT_TIM20_OCCLR_COMP2 (5)
  - LL_COMP_OUTPUT_TIM3_IC2_COMP3 (4)
  - LL_COMP_OUTPUT_TIM4_IC1_COMP3 (4)
  - LL_COMP_OUTPUT_TIM15_IC1_COMP3 (4)
  - LL_COMP_OUTPUT_TIM15_BKIN
  - LL_COMP_OUTPUT_TIM3_IC3_COMP4 (1)
  - LL_COMP_OUTPUT_TIM4_IC2_COMP4
  - LL_COMP_OUTPUT_TIM15_IC2_COMP4
  - LL_COMP_OUTPUT_TIM15_OCCLR_COMP4
  - LL_COMP_OUTPUT_TIM2_IC1_COMP5 (4)
  - LL_COMP_OUTPUT_TIM4_IC3_COMP5 (4)
  - LL_COMP_OUTPUT_TIM17_IC1_COMP5 (4)
  - LL_COMP_OUTPUT_TIM16_BKIN
  - LL_COMP_OUTPUT_TIM2_IC2_COMP6
  - LL_COMP_OUTPUT_TIM2_OCCLR_COMP6
  - LL_COMP_OUTPUT_TIM4_IC4_COMP6
  - LL_COMP_OUTPUT_TIM16_IC1_COMP6
  - LL_COMP_OUTPUT_TIM16_OCCLR_COMP6
  - LL_COMP_OUTPUT_TIM1_IC2_COMP7 (4)
  - LL_COMP_OUTPUT_TIM2_IC3_COMP7 (4)
  - LL_COMP_OUTPUT_TIM17_OCCLR_COMP7 (4)
  - LL_COMP_OUTPUT_TIM17_BKIN (4)

- (2) Parameter available on devices: STM32F301x8, STM32F302x8, STM32F318xx, STM32F303x8, STM32F328xx, STM32F334x8.
- (3) Parameter available on devices: STM32F302xC, STM32F302xE, STM32F303xC, STM32F358xx, STM32F303xE, STM32F398xx.
- (4) Parameter available on devices: STM32F303xC, STM32F358xx, STM32F303xE, STM32F398xx.
- (5) Parameter available on devices: STM32F303xE, STM32F398xx.
- (6) Parameter available on devices: STM32F303x8, STM32F328xx, STM32F334x8.

Return values
- **None**

Notes
- Availability of parameters of output selection to timer depends on timers availability on the selected device.

Reference Manual to LL API cross reference:
- CSR COMPxOUTSEL LL_COMP_SetOutputSelection

LL_COMP_GetOutputSelection

Function name **__STATIC_INLINE uint32_t LL_COMP_GetOutputSelection (COMP_TypeDef * COMPx)**

Function description Get comparator output selection.

Parameters
- **COMPx:** Comparator instance

Return values
- **Returned:** value can be one of the following values: (1) Parameter available on devices: STM32F302x8, STM32F318xx, STM32F303x8, STM32F328xx, STM32F334x8, STM32F302xC, STM32F302xE, STM32F303xC, STM32F358xx, STM32F303xE, STM32F398xx.
  - LL_COMP_OUTPUT_NONE
  - LL_COMP_OUTPUT_TIM1_BKIN
  - LL_COMP_OUTPUT_TIM1_BKIN2
  - LL_COMP_OUTPUT_TIM1_TIM8_BKIN2
  - LL_COMP_OUTPUT_TIM8_BKIN (4)
  - LL_COMP_OUTPUT_TIM8_BKIN2 (4)
  - LL_COMP_OUTPUT_TIM1_TIM8_BKIN2 (4)
  - LL_COMP_OUTPUT_TIM20_BKIN (5)
  - LL_COMP_OUTPUT_TIM20_BKIN2 (5)
  - LL_COMP_OUTPUT_TIM1_TIM8_TIM20_BKIN2 (5)
  - LL_COMP_OUTPUT_TIM1_OCCLR_COMP1_2_3_7 (4)
  - LL_COMP_OUTPUT_TIM2_OCCLR_COMP1_2_3 (4)
  - LL_COMP_OUTPUT_TIM3_OCCLR_COMP1_2_4_5 (4)
  - LL_COMP_OUTPUT_TIM8_OCCLR_COMP4_5_6_7 (4)
  - LL_COMP_OUTPUT_TIM3_OCCLR_COMP2_4 (6)
  - LL_COMP_OUTPUT_TIM1_IC1_COMP2 (2)
  - LL_COMP_OUTPUT_TIM2_IC4_COMP2 (2)
  - LL_COMP_OUTPUT_TIM3_IC1_COMP2 (1)
  - LL_COMP_OUTPUT_TIM1_IC1_COMP1_2 (3)
  - LL_COMP_OUTPUT_TIM2_IC4_COMP1_2 (3)
  - LL_COMP_OUTPUT_TIM3_IC1_COMP1_2 (3)
  - LL_COMP_OUTPUT_TIM20_OCCLR_COMP2 (5)
  - LL_COMP_OUTPUT_TIM3_IC2_COMP3 (4)
  - LL_COMP_OUTPUT_TIM4_IC1_COMP3 (4)
  - LL_COMP_OUTPUT_TIM15_IC1_COMP3 (4)
  - LL_COMP_OUTPUT_TIM15_BKIN
  - LL_COMP_OUTPUT_TIM3_IC3_COMP4 (1)
  - LL_COMP_OUTPUT_TIM4_IC2_COMP4
  - LL_COMP_OUTPUT_TIM15_IC2_COMP4
  - LL_COMP_OUTPUT_TIM15_OCCLR_COMP4
  - LL_COMP_OUTPUT_TIM2_IC1_COMP5 (4)
  - LL_COMP_OUTPUT_TIM4_IC3_COMP5 (4)
  - LL_COMP_OUTPUT_TIM17_IC1_COMP5 (4)
  - LL_COMP_OUTPUT_TIM16_BKIN
  - LL_COMP_OUTPUT_TIM2_IC2_COMP6
  - LL_COMP_OUTPUT_TIM2_OCCLR_COMP6
  - LL_COMP_OUTPUT_TIM4_IC4_COMP6
  - LL_COMP_OUTPUT_TIM16_IC1_COMP6
  - LL_COMP_OUTPUT_TIM16_OCCLR_COMP6
  - LL_COMP_OUTPUT_TIM1_IC2_COMP7 (4)

  - LL_COMP_OUTPUT_TIM2_IC3_COMP7 (4)
  - LL_COMP_OUTPUT_TIM17_OCCLR_COMP7 (4)
  - LL_COMP_OUTPUT_TIM17_BKIN (4)
- (2) Parameter available on devices: STM32F301x8, STM32F302x8, STM32F318xx, STM32F303x8, STM32F328xx, STM32F334x8.
- (3) Parameter available on devices: STM32F302xC, STM32F302xE, STM32F303xC, STM32F358xx, STM32F303xE, STM32F398xx.
- (4) Parameter available on devices: STM32F303xC, STM32F358xx, STM32F303xE, STM32F398xx.
- (5) Parameter available on devices: STM32F303xE, STM32F398xx.
- (6) Parameter available on devices: STM32F303x8, STM32F328xx, STM32F334x8.

Notes
- Availability of parameters of output selection to timer depends on timers availability on the selected device.

Reference Manual to LL API cross reference:
- CSR COMPxOUTSEL LL_COMP_GetOutputSelection

LL_COMP_SetOutputPolarity

Function name
__STATIC_INLINE void LL_COMP_SetOutputPolarity (COMP_TypeDef * COMPx, uint32_t OutputPolarity)

Function description
Set comparator instance output polarity.

Parameters
- **COMPx:** Comparator instance
- **OutputPolarity:** This parameter can be one of the following values:
  - LL_COMP_OUTPUTPOL_NONINVERTED
  - LL_COMP_OUTPUTPOL_INVERTED

Return values
- **None**

Reference Manual to LL API cross reference:
- CSR COMPxPOL LL_COMP_SetOutputPolarity

LL_COMP_GetOutputPolarity

Function name
__STATIC_INLINE uint32_t LL_COMP_GetOutputPolarity (COMP_TypeDef * COMPx)

Function description
Get comparator instance output polarity.

Parameters
- **COMPx:** Comparator instance

Return values
- **Returned:** value can be one of the following values:
  - LL_COMP_OUTPUTPOL_NONINVERTED
  - LL_COMP_OUTPUTPOL_INVERTED

Reference Manual to LL API cross reference:
- CSR COMPxPOL LL_COMP_GetOutputPolarity

LL_COMP_SetOutputBlankingSource

Function name
__STATIC_INLINE void LL_COMP_SetOutputBlankingSource (COMP_TypeDef * COMPx, uint32_t BlankingSource)

Function description
Set comparator instance blanking source.

Parameters
- **COMPx:** Comparator instance
- **BlankingSource:** This parameter can be one of the following values: (1) Parameter available on devices: STM32F301x8, STM32F302x8, STM32F318xx, STM32F303x8, STM32F334x8, STM32F328xx.
  - LL_COMP_BLANKINGSRC_NONE
  - LL_COMP_BLANKINGSRC_TIM1_OC5_COMP2 (1)
  - LL_COMP_BLANKINGSRC_TIM2_OC3_COMP2 (1)
  - LL_COMP_BLANKINGSRC_TIM3_OC3_COMP2 (1)
  - LL_COMP_BLANKINGSRC_TIM1_OC5_COMP1_2 (2)(3)
  - LL_COMP_BLANKINGSRC_TIM2_OC3_COMP1_2 (2)(3)
  - LL_COMP_BLANKINGSRC_TIM3_OC3_COMP1_2 (2)(3)
  - LL_COMP_BLANKINGSRC_TIM3_OC4_COMP4
  - LL_COMP_BLANKINGSRC_TIM15_OC1_COMP4
  - LL_COMP_BLANKINGSRC_TIM2_OC4_COMP6 (2)
  - LL_COMP_BLANKINGSRC_TIM15_OC2_COMP6 (1)(2)
  - LL_COMP_BLANKINGSRC_TIM1_OC5_COMP1_2_7 (3)
  - LL_COMP_BLANKINGSRC_TIM2_OC4_COMP3_6 (3)
  - LL_COMP_BLANKINGSRC_TIM8_OC5_COMP4_5_6_7 (3)
  - LL_COMP_BLANKINGSRC_TIM15_OC2_COMP6_7 (3)
- (2) Parameter available on devices: STM32F302xE, STM32F302xC.
- (3) Parameter available on devices: STM32F303xE, STM32F398xx, STM32F303xC, STM32F358xx.

Return values
- **None**

Notes
- Blanking source may be specific to each comparator instance. Refer to description of parameters or to reference manual.
- Availability of parameters of blanking source from timer depends on timers availability on the selected device.

Reference Manual to LL API cross reference:
- CSR COMPxBLANKING LL_COMP_SetOutputBlankingSource

LL_COMP_GetOutputBlankingSource

Function name
__STATIC_INLINE uint32_t LL_COMP_GetOutputBlankingSource (COMP_TypeDef * COMPx)

Function description
Get comparator instance blanking source.

Parameters
- **COMPx:** Comparator instance

Return values
- **Returned:** value can be one of the following values: (1) Parameter available on devices: STM32F301x8, STM32F302x8, STM32F318xx, STM32F303x8, STM32F334x8, STM32F328xx.

  - LL_COMP_BLANKINGSRC_NONE
  - LL_COMP_BLANKINGSRC_TIM1_OC5_COMP2 (1)
  - LL_COMP_BLANKINGSRC_TIM2_OC3_COMP2 (1)
  - LL_COMP_BLANKINGSRC_TIM3_OC3_COMP2 (1)
  - LL_COMP_BLANKINGSRC_TIM1_OC5_COMP1_2 (2)(3)
  - LL_COMP_BLANKINGSRC_TIM2_OC3_COMP1_2 (2)(3)
  - LL_COMP_BLANKINGSRC_TIM3_OC3_COMP1_2 (2)(3)
  - LL_COMP_BLANKINGSRC_TIM3_OC4_COMP4
  - LL_COMP_BLANKINGSRC_TIM15_OC1_COMP4
  - LL_COMP_BLANKINGSRC_TIM2_OC4_COMP6 (2)
  - LL_COMP_BLANKINGSRC_TIM15_OC2_COMP6 (1)(2)
  - LL_COMP_BLANKINGSRC_TIM1_OC5_COMP1_2_7 (3)
  - LL_COMP_BLANKINGSRC_TIM2_OC4_COMP3_6 (3)
  - LL_COMP_BLANKINGSRC_TIM8_OC5_COMP4_5_6_7 (3)
  - LL_COMP_BLANKINGSRC_TIM15_OC2_COMP6_7 (3)

- (2) Parameter available on devices: STM32F302xE, STM32F302xC.
- (3) Parameter available on devices: STM32F303xE, STM32F398xx, STM32F303xC, STM32F358xx.

Notes
- Availability of parameters of blanking source from timer depends on timers availability on the selected device.
- Blanking source may be specific to each comparator instance. Refer to description of parameters or to reference manual.

Reference Manual to LL API cross reference:
- CSR COMPxBLANKING LL_COMP_GetOutputBlankingSource

LL_COMP_Enable

Function name
__STATIC_INLINE void LL_COMP_Enable (COMP_TypeDef * COMPx)

Function description
Enable comparator instance.

Parameters
- **COMPx:** Comparator instance

Return values
- **None**

Notes
- After enable from off state, comparator requires a delay to reach reach propagation delay specification. Refer to device datasheet, parameter "tSTART".

Reference Manual to LL API cross reference:
- CSR COMPxEN LL_COMP_Enable

LL_COMP_Disable

Function name	**__STATIC_INLINE void LL_COMP_Disable (COMP_TypeDef * COMPx)**
Function description	Disable comparator instance.
Parameters	• **COMPx:** Comparator instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CSR COMPxEN LL_COMP_Disable

LL_COMP_IsEnabled

Function name	**__STATIC_INLINE uint32_t LL_COMP_IsEnabled (COMP_TypeDef * COMPx)**
Function description	Get comparator enable state (0: COMP is disabled, 1: COMP is enabled)
Parameters	• **COMPx:** Comparator instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR COMPxEN LL_COMP_IsEnabled

LL_COMP_Lock

Function name	**__STATIC_INLINE void LL_COMP_Lock (COMP_TypeDef * COMPx)**
Function description	Lock comparator instance.
Parameters	• **COMPx:** Comparator instance
Return values	• **None**
Notes	• Once locked, comparator configuration can be accessed in read-only. • The only way to unlock the comparator is a device hardware reset.
Reference Manual to LL API cross reference:	• CSR COMPxLOCK LL_COMP_Lock

LL_COMP_IsLocked

Function name	**__STATIC_INLINE uint32_t LL_COMP_IsLocked (COMP_TypeDef * COMPx)**
Function description	Get comparator lock state (0: COMP is unlocked, 1: COMP is locked).
Parameters	• **COMPx:** Comparator instance
Return values	• **State:** of bit (1 or 0).

Notes	• Once locked, comparator configuration can be accessed in read-only. • The only way to unlock the comparator is a device hardware reset.
Reference Manual to LL API cross reference:	• CSR COMPxLOCK LL_COMP_IsLocked

LL_COMP_ReadOutputLevel

Function name	**__STATIC_INLINE uint32_t LL_COMP_ReadOutputLevel (COMP_TypeDef * COMPx)**
Function description	Read comparator instance output level.
Parameters	• **COMPx:** Comparator instance
Return values	• **Returned:** value can be one of the following values: – LL_COMP_OUTPUT_LEVEL_LOW – LL_COMP_OUTPUT_LEVEL_HIGH
Notes	• The comparator output level depends on the selected polarity (Refer to function LL_COMP_SetOutputPolarity()). If the comparator polarity is not inverted: Comparator output is low when the input plus is at a lower voltage than the input minusComparator output is high when the input plus is at a higher voltage than the input minus If the comparator polarity is inverted:Comparator output is high when the input plus is at a lower voltage than the input minusComparator output is low when the input plus is at a higher voltage than the input minus
Reference Manual to LL API cross reference:	• CSR COMPxOUT LL_COMP_ReadOutputLevel

LL_COMP_DeInit

Function name	**ErrorStatus LL_COMP_DeInit (COMP_TypeDef * COMPx)**
Function description	De-initialize registers of the selected COMP instance to their default reset values.
Parameters	• **COMPx:** COMP instance
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: COMP registers are de-initialized – ERROR: COMP registers are not de-initialized
Notes	• If comparator is locked, de-initialization by software is not possible. The only way to unlock the comparator is a device hardware reset.

LL_COMP_Init

Function name	**ErrorStatus LL_COMP_Init (COMP_TypeDef * COMPx, LL_COMP_InitTypeDef * COMP_InitStruct)**
Function description	Initialize some features of COMP instance.
Parameters	• **COMPx:** COMP instance • **COMP_InitStruct:** Pointer to a LL_COMP_InitTypeDef structure
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: COMP registers are initialized – ERROR: COMP registers are not initialized
Notes	• This function configures features of the selected COMP instance. Some features are also available at scope COMP common instance (common to several COMP instances). Refer to functions having argument "COMPxy_COMMON" as parameter.

LL_COMP_StructInit

Function name	**void LL_COMP_StructInit (LL_COMP_InitTypeDef * COMP_InitStruct)**
Function description	Set each LL_COMP_InitTypeDef field to default value.
Parameters	• **COMP_InitStruct:** pointer to a LL_COMP_InitTypeDef structure whose fields will be set to default values.
Return values	• **None**

61.3 COMP Firmware driver defines

61.3.1 COMP

Comparator common modes - Window mode

LL_COMP_WINDOWMODE_DISABLE	Window mode disable: Comparators 1 and 2 are independent
LL_COMP_WINDOWMODE_COMP1_INPUT_PLUS_COMMON	Window mode enable: Comparators instances pair COMP1 and COMP2 have their input plus connected together. The common input is COMP1 input plus (COMP2 input plus is no more accessible).
LL_COMP_WINDOWMODE_COMP3_INPUT_PLUS_COMMON	Window mode enable: Comparators instances pair COMP3 and COMP4 have their input plus connected together. The common

	input is COMP3 input plus (COMP4 input plus is no more accessible).
LL_COMP_WINDOWMODE_COMP5_INPUT_PLUS_COMMON	Window mode enable: Comparators instances pair COMP5 and COMP6 have their input plus connected together. The common input is COMP5 input plus (COMP6 input plus is no more accessible).

Definitions of COMP hardware constraints delays

LL_COMP_DELAY_STARTUP_US	Delay for COMP startup time
LL_COMP_DELAY_VOLTAGE_SCALER_STAB_US	Delay for COMP voltage scaler stabilization time

Comparator input - Hysteresis

LL_COMP_HYSTERESIS_NONE	No hysteresis
LL_COMP_HYSTERESIS_LOW	Hysteresis level low (available only on devices: STM32F303xB/C, STM32F358xC)
LL_COMP_HYSTERESIS_MEDIUM	Hysteresis level medium (available only on devices: STM32F303xB/C, STM32F358xC)
LL_COMP_HYSTERESIS_HIGH	Hysteresis level high (available only on devices: STM32F303xB/C, STM32F358xC)

Comparator inputs - Input minus (input inverting) selection

LL_COMP_INPUT_MINUS_1_4VREFINT	Comparator input minus connected to 1/4 VrefInt
LL_COMP_INPUT_MINUS_1_2VREFINT	Comparator input minus connected to 1/2 VrefInt
LL_COMP_INPUT_MINUS_3_4VREFINT	Comparator input minus connected to 3/4 VrefInt
LL_COMP_INPUT_MINUS_VREFINT	Comparator input minus connected to VrefInt
LL_COMP_INPUT_MINUS_DAC1_CH1	Comparator input minus connected to DAC1 channel 1 (DAC_OUT1)
LL_COMP_INPUT_MINUS_DAC1_CH2	Comparator input minus connected to DAC1 channel 2 (DAC_OUT2)
LL_COMP_INPUT_MINUS_IO1	Comparator input minus connected to IO1 (pin PA0 for COMP1, pin PA2 for COMP2, PD15 for COMP3, PE8 for COMP4, PD13 for COMP5, PD10 for COMP6, PC0 for COMP7 (COMP instance availability depends on the selected device))
LL_COMP_INPUT_MINUS_IO2	Comparator input minus connected to IO2 (PB12 for COMP3, PB2 for COMP4, PB10 for COMP5, PB15 for COMP6 (COMP instance availability depends on the selected device))

LL_COMP_INPUT_MINUS_IO3	Comparator input minus connected to IO3 (pin PA5 for COMP1/2/3/4/5/6/7 (COMP instance availability depends on the selected device))
LL_COMP_INPUT_MINUS_IO4	Comparator input minus connected to IO4 (pin PA4 for COMP1/2/3/4/5/6/7 (COMP instance availability depends on the selected device))

Comparator inputs - Input plus (input non-inverting) selection

LL_COMP_INPUT_PLUS_IO1	Comparator input plus connected to IO1 (pin PA7 for COMP2, PB14 for COMP3, PB0 for COMP4, PD12 for COMP5, PD11 for COMP6, PA0 for COMP7) (COMP instance availability depends on the selected device)
LL_COMP_INPUT_PLUS_IO2	Comparator input plus connected to IO2 (pin PA3 for COMP2, PD14 for COMP3, PE7 for COMP4, PB13 for COMP5, PB11 for COMP6, PC1 for COMP7) (COMP instance availability depends on the selected device)
LL_COMP_INPUT_PLUS_DAC1_CH1_COMP1	Comparator input plus connected to DAC1 channel 1 (DAC_OUT1), through dedicated switch (Note: this switch is solely intended to redirect signals onto high impedance input, such as COMP1 input plus (highly resistive switch)) (specific to COMP instance: COMP1)
LL_COMP_INPUT_PLUS_DAC1_CH1	Comparator input plus connected to DAC1 channel 1 (DAC_OUT1), through dedicated switch. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.

Comparator output - Blanking source

LL_COMP_BLANKINGSRC_NONE	Comparator output without blanking
LL_COMP_BLANKINGSRC_TIM1_OC5_COMP1_2_7	Comparator output blanking source TIM1 OC5 (specific to COMP instance: COMP1, COMP2, COMP7)
LL_COMP_BLANKINGSRC_TIM2_OC3_COMP1_2	Comparator output blanking source TIM2 OC3 (specific to COMP instance: COMP1, COMP2)
LL_COMP_BLANKINGSRC_TIM3_OC3_COMP1_2	Comparator output blanking source TIM3 OC3 (specific to COMP instance: COMP1, COMP2)

LL_COMP_BLANKINGSRC_TIM2_OC4_COMP3_6	Comparator output blanking source TIM2 OC4 (specific to COMP instance: COMP3, COMP6)
LL_COMP_BLANKINGSRC_TIM8_OC5_COMP4_5_6_7	Comparator output blanking source TIM8 OC5 (specific to COMP instance: COMP4, COMP5, COMP6, COMP7)
LL_COMP_BLANKINGSRC_TIM15_OC2_COMP6_7	Comparator output blanking source TIM15 OC2 (specific to COMP instance: COMP6, COMP7)
LL_COMP_BLANKINGSRC_TIM3_OC4_COMP4	Comparator output blanking source TIM3 OC4 (specific to COMP instance: COMP4)
LL_COMP_BLANKINGSRC_TIM15_OC1_COMP4	Comparator output blanking source TIM15 OC1 (specific to COMP instance: COMP4)
LL_COMP_BLANKINGSRC_TIM1_OC5	Comparator output blanking source TIM1 OC5. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_BLANKINGSRC_TIM2_OC3	Comparator output blanking source TIM2 OC3. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_BLANKINGSRC_TIM2_OC4	Comparator output blanking source TIM2 OC4. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_BLANKINGSRC_TIM3_OC3	Comparator output blanking source TIM3 OC3. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.

LL_COMP_BLANKINGSRC_TIM3_OC4	Comparator output blanking source TIM3 OC4. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_BLANKINGSRC_TIM8_OC5	Comparator output blanking source TIM8 OC5. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_BLANKINGSRC_TIM15_OC1	Comparator output blanking source TIM15 OC1. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_BLANKINGSRC_TIM15_OC2	Comparator output blanking source TIM15 OC2. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.

Comparator output - Output level

LL_COMP_OUTPUT_LEVEL_LOW	Comparator output level low (if the polarity is not inverted, otherwise to be complemented)
LL_COMP_OUTPUT_LEVEL_HIGH	Comparator output level high (if the polarity is not inverted, otherwise to be complemented)

Comparator output - Output polarity

LL_COMP_OUTPUTPOL_NONINVERTED	COMP output polarity is not inverted: comparator output is high when the plus (non-inverting) input is at a higher voltage than the minus (inverting) input
LL_COMP_OUTPUTPOL_INVERTED	COMP output polarity is inverted: comparator output is low when the plus (non-inverting) input is at a lower voltage than the minus (inverting) input

Comparator output - Output selection

LL_COMP_OUTPUT_NONE	COMP output is not connected to other peripherals (except GPIO and EXTI that are always

	connected to COMP output) (specific to COMP instance: COMP2)
LL_COMP_OUTPUT_TIM1_BKIN	COMP output connected to TIM1 break input (BKIN)
LL_COMP_OUTPUT_TIM1_BKIN2	COMP output connected to TIM1 break input 2 (BKIN2)
LL_COMP_OUTPUT_TIM8_BKIN	COMP output connected to TIM8 break input (BKIN)
LL_COMP_OUTPUT_TIM8_BKIN2	COMP output connected to TIM8 break input 2 (BKIN2)
LL_COMP_OUTPUT_TIM1_TIM8_BKIN2	COMP output connected to TIM1 break input 2 and TIM8 break input 2 (BKIN2)
LL_COMP_OUTPUT_TIM1_OCCLR_COMP1_2_3_7	COMP output connected to TIM1 OCREF clear (specific to COMP instance: COMP1, COMP2, COMP3, COMP7)
LL_COMP_OUTPUT_TIM2_OCCLR_COMP1_2_3	COMP output connected to TIM2 OCREF clear (specific to COMP instance: COMP1, COMP2, COMP3)
LL_COMP_OUTPUT_TIM3_OCCLR_COMP1_2_4_5	COMP output connected to TIM3 OCREF clear (specific to COMP instance: COMP1, COMP2, COMP4, COMP5)
LL_COMP_OUTPUT_TIM8_OCCLR_COMP4_5_6_7	COMP output connected to TIM8 OCREF clear (specific to COMP instance: COMP4, COMP5, COMP6, COMP7)
LL_COMP_OUTPUT_TIM1_IC1_COMP1_2	COMP output connected to TIM1 input capture 1 (specific to COMP instance: COMP2)
LL_COMP_OUTPUT_TIM2_IC4_COMP1_2	COMP output connected to TIM2 input capture 4 (specific to COMP instance: COMP2)
LL_COMP_OUTPUT_TIM3_IC1_COMP1_2	COMP output connected to TIM3 input capture 1 (specific to COMP instance: COMP2)
LL_COMP_OUTPUT_TIM3_IC2_COMP3	COMP output connected to TIM3 input capture 2 (specific to COMP instance: COMP3)
LL_COMP_OUTPUT_TIM4_IC1_COMP3	COMP output connected to TIM4 input capture 1 (specific to COMP instance: COMP3)
LL_COMP_OUTPUT_TIM15_IC1_COMP3	COMP output connected to TIM15 input capture 1 (specific to COMP

	instance: COMP3)
LL_COMP_OUTPUT_TIM15_BKIN_COMP3	COMP output connected to TIM15 break input (BKIN)
LL_COMP_OUTPUT_TIM3_IC3_COMP4	COMP output connected to TIM3 input capture 3 (specific to COMP instance: COMP4)
LL_COMP_OUTPUT_TIM4_IC2_COMP4	COMP output connected to TIM4 input capture 2 (specific to COMP instance: COMP4)
LL_COMP_OUTPUT_TIM15_IC2_COMP4	COMP output connected to TIM15 input capture 1 (specific to COMP instance: COMP4)
LL_COMP_OUTPUT_TIM15_OCCLR_COMP4	COMP output connected to TIM15 OCREF clear (specific to COMP instance: COMP4)
LL_COMP_OUTPUT_TIM2_IC1_COMP5	COMP output connected to TIM2 input capture 1 (specific to COMP instance: COMP5)
LL_COMP_OUTPUT_TIM4_IC3_COMP5	COMP output connected to TIM4 input capture 3 (specific to COMP instance: COMP5)
LL_COMP_OUTPUT_TIM17_IC1_COMP5	COMP output connected to TIM17 input capture 1 (specific to COMP instance: COMP5)
LL_COMP_OUTPUT_TIM16_BKIN_COMP5	COMP output connected to TIM16 break input (BKIN)
LL_COMP_OUTPUT_TIM2_IC2_COMP6	COMP output connected to TIM2 input capture 2 (specific to COMP instance: COMP6)
LL_COMP_OUTPUT_TIM2_OCCLR_COMP6	COMP output connected to TIM2 OCREF clear (specific to COMP instance: COMP6)
LL_COMP_OUTPUT_TIM4_IC4_COMP6	COMP output connected to TIM4 input capture 4 (specific to COMP instance: COMP6)
LL_COMP_OUTPUT_TIM16_IC1_COMP6	COMP output connected to TIM16 input capture 1 (specific to COMP instance: COMP6)
LL_COMP_OUTPUT_TIM16_OCCLR_COMP6	COMP output connected to TIM16 OCREF clear (specific to COMP instance: COMP6)
LL_COMP_OUTPUT_TIM1_IC2_COMP7	COMP output connected to TIM2 input capture 1 (specific to COMP instance: COMP7)
LL_COMP_OUTPUT_TIM2_IC3_COMP7	COMP output connected to TIM4 input capture 3 (specific to COMP instance: COMP7)

LL_COMP_OUTPUT_TIM17_OCCLR_COMP7	COMP output connected to TIM17 OCREF clear (specific to COMP instance: COMP7)
LL_COMP_OUTPUT_TIM17_BKIN_COMP7	COMP output connected to TIM17 break input (BKIN)
LL_COMP_OUTPUT_TIM1_IC1	COMP output connected to TIM1 input capture 1. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM1_IC2	COMP output connected to TIM2 input capture 1. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM1_OCCLR	COMP output connected to TIM1 OCREF clear. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM2_IC1	COMP output connected to TIM2 input capture 1. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM2_IC2	COMP output connected to TIM2 input capture 2. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM2_IC3	COMP output connected to TIM4 input capture 3. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for

	COMP instance constraints.
LL_COMP_OUTPUT_TIM2_IC4	COMP output connected to TIM2 input capture 4. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM3_IC1	COMP output connected to TIM3 input capture 1. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM3_IC2	COMP output connected to TIM3 input capture 2. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM3_IC3	COMP output connected to TIM3 input capture 3. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM3_OCCLR	COMP output connected to TIM3 OCREF clear. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM4_IC1	COMP output connected to TIM4 input capture 1. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM4_IC2	COMP output connected to TIM4 input capture 2. Caution: Parameter specific to COMP

	instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM4_IC3	COMP output connected to TIM4 input capture 3. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM4_IC4	COMP output connected to TIM4 input capture 4. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM8_OCCLR	COMP output connected to TIM8 OCREF clear. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM15_IC1	COMP output connected to TIM15 input capture 1. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM15_IC2	COMP output connected to TIM15 input capture 1. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM15_BKIN	COMP output connected to TIM15 break input (BKIN). Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for

	COMP instance constraints.
LL_COMP_OUTPUT_TIM15_OCCLR	COMP output connected to TIM15 OCREF clear. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM16_IC1	COMP output connected to TIM16 input capture 1. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM16_BKIN	COMP output connected to TIM16 break input (BKIN). Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM16_OCCLR	COMP output connected to TIM16 OCREF clear. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM17_IC1	COMP output connected to TIM17 input capture 1. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.
LL_COMP_OUTPUT_TIM17_BKIN	COMP output connected to TIM17 break input (BKIN). Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.

LL_COMP_OUTPUT_TIM17_OCCLR	COMP output connected to TIM17 OCREF clear. Caution: Parameter specific to COMP instances, defined with generic naming, not taking into account COMP instance constraints. Refer to literal definitions above for COMP instance constraints.

Comparator modes - Power mode

LL_COMP_POWERMODE_HIGHSPEED	COMP power mode to high speed
LL_COMP_POWERMODE_MEDIUMSPEED	COMP power mode to medium speed
LL_COMP_POWERMODE_LOWPOWER	COMP power mode to low power
LL_COMP_POWERMODE_ULTRALOWPOWER	COMP power mode to ultra-low power

COMP helper macro

__LL_COMP_COMMON_INSTANCE

Description:

- Helper macro to select the COMP common instance to which is belonging the selected COMP instance.

Parameters:

- __COMPx__: COMP instance

Return value:

- COMP: common instance or value "0" if there is no COMP common instance.

Notes:

- COMP common register instance can be used to set parameters common to several COMP instances. Refer to functions having argument "COMPxy_COMMON" as parameter.

Common write and read registers macro

LL_COMP_WriteReg

Description:

- Write a value in COMP register.

Parameters:

- __INSTANCE__: comparator instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_COMP_ReadReg

Description:

- Read a value in COMP register.

Parameters:

- __INSTANCE__: comparator instance
- __REG__: Register to be read

Return value:

- Register: value

62 LL CORTEX Generic Driver

62.1 CORTEX Firmware driver API description

62.1.1 Detailed description of functions

LL_SYSTICK_IsActiveCounterFlag

Function name	**__STATIC_INLINE uint32_t LL_SYSTICK_IsActiveCounterFlag (void)**
Function description	This function checks if the Systick counter flag is active or not.
Return values	• **State:** of bit (1 or 0).
Notes	• It can be used in timeout function on application side.
Reference Manual to LL API cross reference:	• STK_CTRL COUNTFLAG LL_SYSTICK_IsActiveCounterFlag

LL_SYSTICK_SetClkSource

Function name	**__STATIC_INLINE void LL_SYSTICK_SetClkSource (uint32_t Source)**
Function description	Configures the SysTick clock source.
Parameters	• **Source:** This parameter can be one of the following values: – LL_SYSTICK_CLKSOURCE_HCLK_DIV8 – LL_SYSTICK_CLKSOURCE_HCLK
Return values	• **None**
Reference Manual to LL API cross reference:	• STK_CTRL CLKSOURCE LL_SYSTICK_SetClkSource

LL_SYSTICK_GetClkSource

Function name	**__STATIC_INLINE uint32_t LL_SYSTICK_GetClkSource (void)**
Function description	Get the SysTick clock source.
Return values	• **Returned:** value can be one of the following values: – LL_SYSTICK_CLKSOURCE_HCLK_DIV8 – LL_SYSTICK_CLKSOURCE_HCLK
Reference Manual to LL API cross reference:	• STK_CTRL CLKSOURCE LL_SYSTICK_GetClkSource

LL_SYSTICK_EnableIT

Function name	**__STATIC_INLINE void LL_SYSTICK_EnableIT (void)**
Function description	Enable SysTick exception request.
Return values	• **None**
Reference Manual to LL API cross reference:	• STK_CTRL TICKINT LL_SYSTICK_EnableIT

LL_SYSTICK_DisableIT

Function name	**__STATIC_INLINE void LL_SYSTICK_DisableIT (void)**
Function description	Disable SysTick exception request.
Return values	• **None**
Reference Manual to LL API cross reference:	• STK_CTRL TICKINT LL_SYSTICK_DisableIT

LL_SYSTICK_IsEnabledIT

Function name	**__STATIC_INLINE uint32_t LL_SYSTICK_IsEnabledIT (void)**
Function description	Checks if the SYSTICK interrupt is enabled or disabled.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• STK_CTRL TICKINT LL_SYSTICK_IsEnabledIT

LL_LPM_EnableSleep

Function name	**__STATIC_INLINE void LL_LPM_EnableSleep (void)**
Function description	Processor uses sleep as its low power mode.
Return values	• **None**
Reference Manual to LL API cross reference:	• SCB_SCR SLEEPDEEP LL_LPM_EnableSleep

LL_LPM_EnableDeepSleep

Function name	**__STATIC_INLINE void LL_LPM_EnableDeepSleep (void)**
Function description	Processor uses deep sleep as its low power mode.
Return values	• **None**
Reference Manual to LL API cross reference:	• SCB_SCR SLEEPDEEP LL_LPM_EnableDeepSleep

LL_LPM_EnableSleepOnExit

Function name	**__STATIC_INLINE void LL_LPM_EnableSleepOnExit (void)**
Function description	Configures sleep-on-exit when returning from Handler mode to Thread mode.
Return values	• **None**
Notes	• Setting this bit to 1 enables an interrupt-driven application to avoid returning to an empty main application.
Reference Manual to LL API cross reference:	• SCB_SCR SLEEPONEXIT LL_LPM_EnableSleepOnExit

LL_LPM_DisableSleepOnExit

Function name	**__STATIC_INLINE void LL_LPM_DisableSleepOnExit (void)**
Function description	Do not sleep when returning to Thread mode.
Return values	• **None**
Reference Manual to LL API cross reference:	• SCB_SCR SLEEPONEXIT LL_LPM_DisableSleepOnExit

LL_LPM_EnableEventOnPend

Function name	**__STATIC_INLINE void LL_LPM_EnableEventOnPend (void)**
Function description	Enabled events and all interrupts, including disabled interrupts, can wakeup the processor.
Return values	• **None**
Reference Manual to LL API cross reference:	• SCB_SCR SEVEONPEND LL_LPM_EnableEventOnPend

LL_LPM_DisableEventOnPend

Function name	**__STATIC_INLINE void LL_LPM_DisableEventOnPend (void)**
Function description	Only enabled interrupts or events can wakeup the processor, disabled interrupts are excluded.
Return values	• **None**
Reference Manual to LL API cross reference:	• SCB_SCR SEVEONPEND LL_LPM_DisableEventOnPend

LL_HANDLER_EnableFault

Function name	**__STATIC_INLINE void LL_HANDLER_EnableFault (uint32_t Fault)**
Function description	Enable a fault in System handler control register (SHCSR)
Parameters	• **Fault:** This parameter can be a combination of the following

values:
- LL_HANDLER_FAULT_USG
- LL_HANDLER_FAULT_BUS
- LL_HANDLER_FAULT_MEM

Return values
- **None**

Reference Manual to LL API cross reference:
- SCB_SHCSR MEMFAULTENA LL_HANDLER_EnableFault

LL_HANDLER_DisableFault

Function name
__STATIC_INLINE void LL_HANDLER_DisableFault (uint32_t Fault)

Function description
Disable a fault in System handler control register (SHCSR)

Parameters
- **Fault:** This parameter can be a combination of the following values:
  - LL_HANDLER_FAULT_USG
  - LL_HANDLER_FAULT_BUS
  - LL_HANDLER_FAULT_MEM

Return values
- **None**

Reference Manual to LL API cross reference:
- SCB_SHCSR MEMFAULTENA LL_HANDLER_DisableFault

LL_CPUID_GetImplementer

Function name
__STATIC_INLINE uint32_t LL_CPUID_GetImplementer (void)

Function description
Get Implementer code.

Return values
- **Value:** should be equal to 0x41 for ARM

Reference Manual to LL API cross reference:
- SCB_CPUID IMPLEMENTER LL_CPUID_GetImplementer

LL_CPUID_GetVariant

Function name
__STATIC_INLINE uint32_t LL_CPUID_GetVariant (void)

Function description
Get Variant number (The r value in the rnpn product revision identifier)

Return values
- **Value:** between 0 and 255 (0x0: revision 0)

Reference Manual to LL API cross reference:
- SCB_CPUID VARIANT LL_CPUID_GetVariant

LL_CPUID_GetConstant

Function name	**__STATIC_INLINE uint32_t LL_CPUID_GetConstant (void)**
Function description	Get Constant number.
Return values	• **Value:** should be equal to 0xF for Cortex-M4 devices
Reference Manual to LL API cross reference:	• SCB_CPUID ARCHITECTURE LL_CPUID_GetConstant

LL_CPUID_GetParNo

Function name	**__STATIC_INLINE uint32_t LL_CPUID_GetParNo (void)**
Function description	Get Part number.
Return values	• **Value:** should be equal to 0xC24 for Cortex-M4
Reference Manual to LL API cross reference:	• SCB_CPUID PARTNO LL_CPUID_GetParNo

LL_CPUID_GetRevision

Function name	**__STATIC_INLINE uint32_t LL_CPUID_GetRevision (void)**
Function description	Get Revision number (The p value in the rnpn product revision identifier, indicates patch release)
Return values	• **Value:** between 0 and 255 (0x1: patch 1)
Reference Manual to LL API cross reference:	• SCB_CPUID REVISION LL_CPUID_GetRevision

LL_MPU_Enable

Function name	**__STATIC_INLINE void LL_MPU_Enable (uint32_t Options)**
Function description	Enable MPU with input options.
Parameters	• **Options:** This parameter can be one of the following values: – LL_MPU_CTRL_HFNMI_PRIVDEF_NONE – LL_MPU_CTRL_HARDFAULT_NMI – LL_MPU_CTRL_PRIVILEGED_DEFAULT – LL_MPU_CTRL_HFNMI_PRIVDEF
Return values	• **None**
Reference Manual to LL API cross reference:	• MPU_CTRL ENABLE LL_MPU_Enable

LL_MPU_Disable

Function name **__STATIC_INLINE void LL_MPU_Disable (void)**

Function description Disable MPU.

Return values
- **None**

Reference Manual to LL API cross reference:
- MPU_CTRL ENABLE LL_MPU_Disable

LL_MPU_IsEnabled

Function name **__STATIC_INLINE uint32_t LL_MPU_IsEnabled (void)**

Function description Check if MPU is enabled or not.

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- MPU_CTRL ENABLE LL_MPU_IsEnabled

LL_MPU_EnableRegion

Function name **__STATIC_INLINE void LL_MPU_EnableRegion (uint32_t Region)**

Function description Enable a MPU region.

Parameters
- **Region:** This parameter can be one of the following values:
  - LL_MPU_REGION_NUMBER0
  - LL_MPU_REGION_NUMBER1
  - LL_MPU_REGION_NUMBER2
  - LL_MPU_REGION_NUMBER3
  - LL_MPU_REGION_NUMBER4
  - LL_MPU_REGION_NUMBER5
  - LL_MPU_REGION_NUMBER6
  - LL_MPU_REGION_NUMBER7

Return values
- **None**

Reference Manual to LL API cross reference:
- MPU_RASR ENABLE LL_MPU_EnableRegion

LL_MPU_ConfigRegion

Function name **__STATIC_INLINE void LL_MPU_ConfigRegion (uint32_t Region, uint32_t SubRegionDisable, uint32_t Address, uint32_t Attributes)**

Function description Configure and enable a region.

Parameters
- **Region:** This parameter can be one of the following values:
  - LL_MPU_REGION_NUMBER0
  - LL_MPU_REGION_NUMBER1
  - LL_MPU_REGION_NUMBER2
  - LL_MPU_REGION_NUMBER3

  - LL_MPU_REGION_NUMBER4
  - LL_MPU_REGION_NUMBER5
  - LL_MPU_REGION_NUMBER6
  - LL_MPU_REGION_NUMBER7
- **Address:** Value of region base address
- **SubRegionDisable:** Sub-region disable value between Min_Data = 0x00 and Max_Data = 0xFF
- **Attributes:** This parameter can be a combination of the following values:
  - LL_MPU_REGION_SIZE_32B or LL_MPU_REGION_SIZE_64B or LL_MPU_REGION_SIZE_128B or LL_MPU_REGION_SIZE_256B or LL_MPU_REGION_SIZE_512B or LL_MPU_REGION_SIZE_1KB or LL_MPU_REGION_SIZE_2KB or LL_MPU_REGION_SIZE_4KB or LL_MPU_REGION_SIZE_8KB or LL_MPU_REGION_SIZE_16KB or LL_MPU_REGION_SIZE_32KB or LL_MPU_REGION_SIZE_64KB or LL_MPU_REGION_SIZE_128KB or LL_MPU_REGION_SIZE_256KB or LL_MPU_REGION_SIZE_512KB or LL_MPU_REGION_SIZE_1MB or LL_MPU_REGION_SIZE_2MB or LL_MPU_REGION_SIZE_4MB or LL_MPU_REGION_SIZE_8MB or LL_MPU_REGION_SIZE_16MB or LL_MPU_REGION_SIZE_32MB or LL_MPU_REGION_SIZE_64MB or LL_MPU_REGION_SIZE_128MB or LL_MPU_REGION_SIZE_256MB or LL_MPU_REGION_SIZE_512MB or LL_MPU_REGION_SIZE_1GB or LL_MPU_REGION_SIZE_2GB or LL_MPU_REGION_SIZE_4GB
  - LL_MPU_REGION_NO_ACCESS or LL_MPU_REGION_PRIV_RW or LL_MPU_REGION_PRIV_RW_URO or LL_MPU_REGION_FULL_ACCESS or LL_MPU_REGION_PRIV_RO or LL_MPU_REGION_PRIV_RO_URO
  - LL_MPU_TEX_LEVEL0 or LL_MPU_TEX_LEVEL1 or LL_MPU_TEX_LEVEL2 or LL_MPU_TEX_LEVEL4
  - LL_MPU_INSTRUCTION_ACCESS_ENABLE or LL_MPU_INSTRUCTION_ACCESS_DISABLE
  - LL_MPU_ACCESS_SHAREABLE or LL_MPU_ACCESS_NOT_SHAREABLE
  - LL_MPU_ACCESS_CACHEABLE or LL_MPU_ACCESS_NOT_CACHEABLE
  - LL_MPU_ACCESS_BUFFERABLE or LL_MPU_ACCESS_NOT_BUFFERABLE

Return values

- **None**

Reference Manual to LL API cross reference:
- MPU_RNR REGION LL_MPU_ConfigRegion
- MPU_RBAR REGION LL_MPU_ConfigRegion
- MPU_RBAR ADDR LL_MPU_ConfigRegion
- MPU_RASR XN LL_MPU_ConfigRegion
- MPU_RASR AP LL_MPU_ConfigRegion
- MPU_RASR S LL_MPU_ConfigRegion
- MPU_RASR C LL_MPU_ConfigRegion
- MPU_RASR B LL_MPU_ConfigRegion
- MPU_RASR SIZE LL_MPU_ConfigRegion

LL_MPU_DisableRegion

Function name **__STATIC_INLINE void LL_MPU_DisableRegion (uint32_t Region)**

Function description Disable a region.

Parameters
- **Region:** This parameter can be one of the following values:
  - LL_MPU_REGION_NUMBER0
  - LL_MPU_REGION_NUMBER1
  - LL_MPU_REGION_NUMBER2
  - LL_MPU_REGION_NUMBER3
  - LL_MPU_REGION_NUMBER4
  - LL_MPU_REGION_NUMBER5
  - LL_MPU_REGION_NUMBER6
  - LL_MPU_REGION_NUMBER7

Return values
- **None**

Reference Manual to LL API cross reference:
- MPU_RNR REGION LL_MPU_DisableRegion
- MPU_RASR ENABLE LL_MPU_DisableRegion

62.2 CORTEX Firmware driver defines

62.2.1 CORTEX

MPU Bufferable Access

LL_MPU_ACCESS_BUFFERABLE	Bufferable memory attribute
LL_MPU_ACCESS_NOT_BUFFERABLE	Not Bufferable memory attribute

MPU Cacheable Access

LL_MPU_ACCESS_CACHEABLE	Cacheable memory attribute
LL_MPU_ACCESS_NOT_CACHEABLE	Not Cacheable memory attribute

SYSTICK Clock Source

LL_SYSTICK_CLKSOURCE_HCLK_DIV8	AHB clock divided by 8 selected as SysTick clock source.
LL_SYSTICK_CLKSOURCE_HCLK	AHB clock selected as SysTick clock source.

MPU Control

LL_MPU_CTRL_HFNMI_PRIVDEF_NONE	Disable NMI and privileged SW access

LL_MPU_CTRL_HARDFAULT_NMI	Enables the operation of MPU during hard fault, NMI, and FAULTMASK handlers
LL_MPU_CTRL_PRIVILEGED_DEFAULT	Enable privileged software access to default memory map
LL_MPU_CTRL_HFNMI_PRIVDEF	Enable NMI and privileged SW access

Handler Fault type

LL_HANDLER_FAULT_USG	Usage fault
LL_HANDLER_FAULT_BUS	Bus fault
LL_HANDLER_FAULT_MEM	Memory management fault

MPU Instruction Access

LL_MPU_INSTRUCTION_ACCESS_ENABLE	Instruction fetches enabled
LL_MPU_INSTRUCTION_ACCESS_DISABLE	Instruction fetches disabled

MPU Region Number

LL_MPU_REGION_NUMBER0	REGION Number 0
LL_MPU_REGION_NUMBER1	REGION Number 1
LL_MPU_REGION_NUMBER2	REGION Number 2
LL_MPU_REGION_NUMBER3	REGION Number 3
LL_MPU_REGION_NUMBER4	REGION Number 4
LL_MPU_REGION_NUMBER5	REGION Number 5
LL_MPU_REGION_NUMBER6	REGION Number 6
LL_MPU_REGION_NUMBER7	REGION Number 7

MPU Region Privileges

LL_MPU_REGION_NO_ACCESS	No access
LL_MPU_REGION_PRIV_RW	RW privileged (privileged access only)
LL_MPU_REGION_PRIV_RW_URO	RW privileged - RO user (Write in a user program generates a fault)
LL_MPU_REGION_FULL_ACCESS	RW privileged & user (Full access)
LL_MPU_REGION_PRIV_RO	RO privileged (privileged read only)
LL_MPU_REGION_PRIV_RO_URO	RO privileged & user (read only)

MPU Region Size

LL_MPU_REGION_SIZE_32B	32B Size of the MPU protection region
LL_MPU_REGION_SIZE_64B	64B Size of the MPU protection region
LL_MPU_REGION_SIZE_128B	128B Size of the MPU protection region
LL_MPU_REGION_SIZE_256B	256B Size of the MPU protection region
LL_MPU_REGION_SIZE_512B	512B Size of the MPU protection region
LL_MPU_REGION_SIZE_1KB	1KB Size of the MPU protection region
LL_MPU_REGION_SIZE_2KB	2KB Size of the MPU protection region

LL_MPU_REGION_SIZE_4KB	4KB Size of the MPU protection region
LL_MPU_REGION_SIZE_8KB	8KB Size of the MPU protection region
LL_MPU_REGION_SIZE_16KB	16KB Size of the MPU protection region
LL_MPU_REGION_SIZE_32KB	32KB Size of the MPU protection region
LL_MPU_REGION_SIZE_64KB	64KB Size of the MPU protection region
LL_MPU_REGION_SIZE_128KB	128KB Size of the MPU protection region
LL_MPU_REGION_SIZE_256KB	256KB Size of the MPU protection region
LL_MPU_REGION_SIZE_512KB	512KB Size of the MPU protection region
LL_MPU_REGION_SIZE_1MB	1MB Size of the MPU protection region
LL_MPU_REGION_SIZE_2MB	2MB Size of the MPU protection region
LL_MPU_REGION_SIZE_4MB	4MB Size of the MPU protection region
LL_MPU_REGION_SIZE_8MB	8MB Size of the MPU protection region
LL_MPU_REGION_SIZE_16MB	16MB Size of the MPU protection region
LL_MPU_REGION_SIZE_32MB	32MB Size of the MPU protection region
LL_MPU_REGION_SIZE_64MB	64MB Size of the MPU protection region
LL_MPU_REGION_SIZE_128MB	128MB Size of the MPU protection region
LL_MPU_REGION_SIZE_256MB	256MB Size of the MPU protection region
LL_MPU_REGION_SIZE_512MB	512MB Size of the MPU protection region
LL_MPU_REGION_SIZE_1GB	1GB Size of the MPU protection region
LL_MPU_REGION_SIZE_2GB	2GB Size of the MPU protection region
LL_MPU_REGION_SIZE_4GB	4GB Size of the MPU protection region

MPU Shareable Access

LL_MPU_ACCESS_SHAREABLE	Shareable memory attribute
LL_MPU_ACCESS_NOT_SHAREABLE	Not Shareable memory attribute

MPU TEX Level

LL_MPU_TEX_LEVEL0	b000 for TEX bits
LL_MPU_TEX_LEVEL1	b001 for TEX bits
LL_MPU_TEX_LEVEL2	b010 for TEX bits
LL_MPU_TEX_LEVEL4	b100 for TEX bits

63 LL CRC Generic Driver

63.1 CRC Firmware driver API description

63.1.1 Detailed description of functions

LL_CRC_ResetCRCCalculationUnit

Function name	**__STATIC_INLINE void LL_CRC_ResetCRCCalculationUnit (CRC_TypeDef * CRCx)**
Function description	Reset the CRC calculation unit.
Parameters	• **CRCx:** CRC Instance
Return values	• **None**
Notes	• If Programmable Initial CRC value feature is available, also set the Data Register to the value stored in the CRC_INIT register, otherwise, reset Data Register to its default value.
Reference Manual to LL API cross reference:	• CR RESET LL_CRC_ResetCRCCalculationUnit

LL_CRC_SetPolynomialSize

Function name	**__STATIC_INLINE void LL_CRC_SetPolynomialSize (CRC_TypeDef * CRCx, uint32_t PolySize)**
Function description	Configure size of the polynomial.
Parameters	• **CRCx:** CRC Instance • **PolySize:** This parameter can be one of the following values: – LL_CRC_POLYLENGTH_32B – LL_CRC_POLYLENGTH_16B – LL_CRC_POLYLENGTH_8B – LL_CRC_POLYLENGTH_7B
Return values	• **None**
Reference Manual to LL API cross reference:	• CR POLYSIZE LL_CRC_SetPolynomialSize

LL_CRC_GetPolynomialSize

Function name	**__STATIC_INLINE uint32_t LL_CRC_GetPolynomialSize (CRC_TypeDef * CRCx)**
Function description	Return size of the polynomial.
Parameters	• **CRCx:** CRC Instance
Return values	• **Returned:** value can be one of the following values: – LL_CRC_POLYLENGTH_32B – LL_CRC_POLYLENGTH_16B

  - LL_CRC_POLYLENGTH_8B
  - LL_CRC_POLYLENGTH_7B

Reference Manual to LL API cross reference:

- CR POLYSIZE LL_CRC_GetPolynomialSize

LL_CRC_SetInputDataReverseMode

Function name **__STATIC_INLINE void LL_CRC_SetInputDataReverseMode (CRC_TypeDef * CRCx, uint32_t ReverseMode)**

Function description Configure the reversal of the bit order of the input data.

Parameters

- **CRCx:** CRC Instance
- **ReverseMode:** This parameter can be one of the following values:
  - LL_CRC_INDATA_REVERSE_NONE
  - LL_CRC_INDATA_REVERSE_BYTE
  - LL_CRC_INDATA_REVERSE_HALFWORD
  - LL_CRC_INDATA_REVERSE_WORD

Return values

- **None**

Reference Manual to LL API cross reference:

- CR REV_IN LL_CRC_SetInputDataReverseMode

LL_CRC_GetInputDataReverseMode

Function name **__STATIC_INLINE uint32_t LL_CRC_GetInputDataReverseMode (CRC_TypeDef * CRCx)**

Function description Return type of reversal for input data bit order.

Parameters

- **CRCx:** CRC Instance

Return values

- **Returned:** value can be one of the following values:
  - LL_CRC_INDATA_REVERSE_NONE
  - LL_CRC_INDATA_REVERSE_BYTE
  - LL_CRC_INDATA_REVERSE_HALFWORD
  - LL_CRC_INDATA_REVERSE_WORD

Reference Manual to LL API cross reference:

- CR REV_IN LL_CRC_GetInputDataReverseMode

LL_CRC_SetOutputDataReverseMode

Function name **__STATIC_INLINE void LL_CRC_SetOutputDataReverseMode (CRC_TypeDef * CRCx, uint32_t ReverseMode)**

Function description Configure the reversal of the bit order of the Output data.

Parameters

- **CRCx:** CRC Instance
- **ReverseMode:** This parameter can be one of the following values:
  - LL_CRC_OUTDATA_REVERSE_NONE
  - LL_CRC_OUTDATA_REVERSE_BIT

Return values	• **None**
Reference Manual to LL API cross reference:	• CR REV_OUT LL_CRC_SetOutputDataReverseMode

LL_CRC_GetOutputDataReverseMode

Function name	**__STATIC_INLINE uint32_t LL_CRC_GetOutputDataReverseMode (CRC_TypeDef * CRCx)**
Function description	Configure the reversal of the bit order of the Output data.
Parameters	• **CRCx:** CRC Instance
Return values	• **Returned:** value can be one of the following values: – LL_CRC_OUTDATA_REVERSE_NONE – LL_CRC_OUTDATA_REVERSE_BIT
Reference Manual to LL API cross reference:	• CR REV_OUT LL_CRC_GetOutputDataReverseMode

LL_CRC_SetInitialData

Function name	**__STATIC_INLINE void LL_CRC_SetInitialData (CRC_TypeDef * CRCx, uint32_t InitCrc)**
Function description	Initialize the Programmable initial CRC value.
Parameters	• **CRCx:** CRC Instance • **InitCrc:** Value to be programmed in Programmable initial CRC value register
Return values	• **None**
Notes	• If the CRC size is less than 32 bits, the least significant bits are used to write the correct value • LL_CRC_DEFAULT_CRC_INITVALUE could be used as value for InitCrc parameter.
Reference Manual to LL API cross reference:	• INIT INIT LL_CRC_SetInitialData

LL_CRC_GetInitialData

Function name	**__STATIC_INLINE uint32_t LL_CRC_GetInitialData (CRC_TypeDef * CRCx)**
Function description	Return current Initial CRC value.
Parameters	• **CRCx:** CRC Instance
Return values	• **Value:** programmed in Programmable initial CRC value register
Notes	• If the CRC size is less than 32 bits, the least significant bits are used to read the correct value

Reference Manual to LL API cross reference:
- INIT INIT LL_CRC_GetInitialData

LL_CRC_SetPolynomialCoef

Function name: **__STATIC_INLINE void LL_CRC_SetPolynomialCoef (CRC_TypeDef * CRCx, uint32_t PolynomCoef)**

Function description: Initialize the Programmable polynomial value (coefficients of the polynomial to be used for CRC calculation).

Parameters:
- **CRCx:** CRC Instance
- **PolynomCoef:** Value to be programmed in Programmable Polynomial value register

Return values:
- **None**

Notes:
- LL_CRC_DEFAULT_CRC32_POLY could be used as value for PolynomCoef parameter.
- Please check Reference Manual and existing Errata Sheets, regarding possible limitations for Polynomial values usage. For example, for a polynomial of degree 7, X^7 + X^6 + X^5 + X^2 + 1 is written 0x65

Reference Manual to LL API cross reference:
- POL POL LL_CRC_SetPolynomialCoef

LL_CRC_GetPolynomialCoef

Function name: **__STATIC_INLINE uint32_t LL_CRC_GetPolynomialCoef (CRC_TypeDef * CRCx)**

Function description: Return current Programmable polynomial value.

Parameters:
- **CRCx:** CRC Instance

Return values:
- **Value:** programmed in Programmable Polynomial value register

Notes:
- Please check Reference Manual and existing Errata Sheets, regarding possible limitations for Polynomial values usage. For example, for a polynomial of degree 7, X^7 + X^6 + X^5 + X^2 + 1 is written 0x65

Reference Manual to LL API cross reference:
- POL POL LL_CRC_GetPolynomialCoef

LL_CRC_FeedData32

Function name: **__STATIC_INLINE void LL_CRC_FeedData32 (CRC_TypeDef * CRCx, uint32_t InData)**

Function description: Write given 32-bit data to the CRC calculator.

Parameters:
- **CRCx:** CRC Instance
- **InData:** value to be provided to CRC calculator between

between Min_Data=0 and Max_Data=0xFFFFFFFF

Return values	• **None**
Reference Manual to LL API cross reference:	• DR DR LL_CRC_FeedData32

LL_CRC_FeedData16

Function name	**__STATIC_INLINE void LL_CRC_FeedData16 (CRC_TypeDef * CRCx, uint16_t InData)**
Function description	Write given 16-bit data to the CRC calculator.
Parameters	• **CRCx:** CRC Instance • **InData:** 16 bit value to be provided to CRC calculator between between Min_Data=0 and Max_Data=0xFFFF
Return values	• **None**
Reference Manual to LL API cross reference:	• DR DR LL_CRC_FeedData16

LL_CRC_FeedData8

Function name	**__STATIC_INLINE void LL_CRC_FeedData8 (CRC_TypeDef * CRCx, uint8_t InData)**
Function description	Write given 8-bit data to the CRC calculator.
Parameters	• **CRCx:** CRC Instance • **InData:** 8 bit value to be provided to CRC calculator between between Min_Data=0 and Max_Data=0xFF
Return values	• **None**
Reference Manual to LL API cross reference:	• DR DR LL_CRC_FeedData8

LL_CRC_ReadData32

Function name	**__STATIC_INLINE uint32_t LL_CRC_ReadData32 (CRC_TypeDef * CRCx)**
Function description	Return current CRC calculation result.
Parameters	• **CRCx:** CRC Instance
Return values	• **Current:** CRC calculation result as stored in CRC_DR register (32 bits).
Reference Manual to LL API cross reference:	• DR DR LL_CRC_ReadData32

LL_CRC_ReadData16

Function name	**__STATIC_INLINE uint16_t LL_CRC_ReadData16 (CRC_TypeDef * CRCx)**
Function description	Return current CRC calculation result.
Parameters	• **CRCx:** CRC Instance
Return values	• **Current:** CRC calculation result as stored in CRC_DR register (16 bits).
Notes	• This function is expected to be used in a 16 bits CRC polynomial size context.
Reference Manual to LL API cross reference:	• DR DR LL_CRC_ReadData16

LL_CRC_ReadData8

Function name	**__STATIC_INLINE uint8_t LL_CRC_ReadData8 (CRC_TypeDef * CRCx)**
Function description	Return current CRC calculation result.
Parameters	• **CRCx:** CRC Instance
Return values	• **Current:** CRC calculation result as stored in CRC_DR register (8 bits).
Notes	• This function is expected to be used in a 8 bits CRC polynomial size context.
Reference Manual to LL API cross reference:	• DR DR LL_CRC_ReadData8

LL_CRC_ReadData7

Function name	**__STATIC_INLINE uint8_t LL_CRC_ReadData7 (CRC_TypeDef * CRCx)**
Function description	Return current CRC calculation result.
Parameters	• **CRCx:** CRC Instance
Return values	• **Current:** CRC calculation result as stored in CRC_DR register (7 bits).
Notes	• This function is expected to be used in a 7 bits CRC polynomial size context.
Reference Manual to LL API cross reference:	• DR DR LL_CRC_ReadData7

LL_CRC_Read_IDR

Function name	**__STATIC_INLINE uint32_t LL_CRC_Read_IDR (CRC_TypeDef * CRCx)**
Function description	Return data stored in the Independent Data(IDR) register.
Parameters	• **CRCx:** CRC Instance
Return values	• **Value:** stored in CRC_IDR register (General-purpose 8-bit data register).
Notes	• This register can be used as a temporary storage location for one byte.
Reference Manual to LL API cross reference:	• IDR IDR LL_CRC_Read_IDR

LL_CRC_Write_IDR

Function name	**__STATIC_INLINE void LL_CRC_Write_IDR (CRC_TypeDef * CRCx, uint32_t InData)**
Function description	Store data in the Independent Data(IDR) register.
Parameters	• **CRCx:** CRC Instance • **InData:** value to be stored in CRC_IDR register (8-bit) between between Min_Data=0 and Max_Data=0xFF
Return values	• **None**
Notes	• This register can be used as a temporary storage location for one byte.
Reference Manual to LL API cross reference:	• IDR IDR LL_CRC_Write_IDR

LL_CRC_DeInit

Function name	**ErrorStatus LL_CRC_DeInit (CRC_TypeDef * CRCx)**
Function description	De-initialize CRC registers (Registers restored to their default values).
Parameters	• **CRCx:** CRC Instance
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: CRC registers are de-initialized – ERROR: CRC registers are not de-initialized

63.2 CRC Firmware driver defines

63.2.1 CRC

Default CRC computation initialization value

LL_CRC_DEFAULT_CRC_INITVALUE	Default CRC computation initialization value

Default CRC generating polynomial value

LL_CRC_DEFAULT_CRC32_POLY Default CRC generating polynomial value

Input Data Reverse

LL_CRC_INDATA_REVERSE_NONE Input Data bit order not affected

LL_CRC_INDATA_REVERSE_BYTE Input Data bit reversal done by byte

LL_CRC_INDATA_REVERSE_HALFWORD Input Data bit reversal done by half-word

LL_CRC_INDATA_REVERSE_WORD Input Data bit reversal done by word

Output Data Reverse

LL_CRC_OUTDATA_REVERSE_NONE Output Data bit order not affected

LL_CRC_OUTDATA_REVERSE_BIT Output Data bit reversal done by bit

Polynomial length

LL_CRC_POLYLENGTH_32B 32 bits Polynomial size

LL_CRC_POLYLENGTH_16B 16 bits Polynomial size

LL_CRC_POLYLENGTH_8B 8 bits Polynomial size

LL_CRC_POLYLENGTH_7B 7 bits Polynomial size

Common Write and read registers Macros

LL_CRC_WriteReg

Description:

- Write a value in CRC register.

Parameters:

- __INSTANCE__: CRC Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_CRC_ReadReg

Description:

- Read a value in CRC register.

Parameters:

- __INSTANCE__: CRC Instance
- __REG__: Register to be read

Return value:

- Register: value

64 LL DAC Generic Driver

64.1 DAC Firmware driver registers structures

64.1.1 LL_DAC_InitTypeDef

Data Fields

- ***uint32_t TriggerSource***
- ***uint32_t WaveAutoGeneration***
- ***uint32_t WaveAutoGenerationConfig***
- ***uint32_t OutputBuffer***

Field Documentation

- ***uint32_t LL_DAC_InitTypeDef::TriggerSource***
  Set the conversion trigger source for the selected DAC channel: internal (SW start) or from external IP (timer event, external interrupt line). This parameter can be a value of ***DAC_LL_EC_TRIGGER_SOURCE***This feature can be modified afterwards using unitary function **LL_DAC_SetTriggerSource()**.
- ***uint32_t LL_DAC_InitTypeDef::WaveAutoGeneration***
  Set the waveform automatic generation mode for the selected DAC channel. This parameter can be a value of ***DAC_LL_EC_WAVE_AUTO_GENERATION_MODE***This feature can be modified afterwards using unitary function **LL_DAC_SetWaveAutoGeneration()**.
- ***uint32_t LL_DAC_InitTypeDef::WaveAutoGenerationConfig***
  Set the waveform automatic generation mode for the selected DAC channel. If waveform automatic generation mode is set to noise, this parameter can be a value of ***DAC_LL_EC_WAVE_NOISE_LFSR_UNMASK_BITS*** If waveform automatic generation mode is set to triangle, this parameter can be a value of ***DAC_LL_EC_WAVE_TRIANGLE_AMPLITUDE***
  Note: If waveform automatic generation mode is disabled, this parameter is discarded. This feature can be modified afterwards using unitary function **LL_DAC_SetWaveNoiseLFSR()** or **LL_DAC_SetWaveTriangleAmplitude()**, depending on the wave automatic generation selected.
- ***uint32_t LL_DAC_InitTypeDef::OutputBuffer***
  Set the output buffer for the selected DAC channel. This parameter can be a value of ***DAC_LL_EC_OUTPUT_BUFFER***This feature can be modified afterwards using unitary function **LL_DAC_SetOutputBuffer()**.

64.2 DAC Firmware driver API description

64.2.1 Detailed description of functions

LL_DAC_SetTriggerSource

Function name	**__STATIC_INLINE void LL_DAC_SetTriggerSource (DAC_TypeDef * DACx, uint32_t DAC_Channel, uint32_t TriggerSource)**
Function description	Set the conversion trigger source for the selected DAC channel.
Parameters	• **DACx:** DAC instance • **DAC_Channel:** This parameter can be one of the following

values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)
- **TriggerSource:** This parameter can be one of the following values: (1) On STM32F3, parameter not available on all devices (2) On STM32F3, parameter not available on all DAC instances: DAC1 (for DAC instances DACx available on the selected device).
  - LL_DAC_TRIG_SOFTWARE
  - LL_DAC_TRIG_EXT_TIM2_TRGO
  - LL_DAC_TRIG_EXT_TIM3_TRGO (1)
  - LL_DAC_TRIG_EXT_TIM4_TRGO (1)
  - LL_DAC_TRIG_EXT_TIM5_TRGO (1)
  - LL_DAC_TRIG_EXT_TIM6_TRGO
  - LL_DAC_TRIG_EXT_TIM7_TRGO (1)
  - LL_DAC_TRIG_EXT_TIM8_TRGO (1)
  - LL_DAC_TRIG_EXT_TIM15_TRGO (1)
  - LL_DAC_TRIG_EXT_TIM18_TRGO (1)
  - LL_DAC_TRIG_EXT_HRTIM1_DACTRG1 (1)
  - LL_DAC_TRIG_EXT_HRTIM1_DACTRG2 (1)(2)
  - LL_DAC_TRIG_EXT_HRTIM1_DACTRG3 (1) (3)
  - LL_DAC_TRIG_EXT_EXTI_LINE9
- (3) On STM32F3, parameter not available on all DAC instances: DAC2 (for DAC instances DACx available on the selected device).

Return values
- **None**

Notes
- For conversion trigger source to be effective, DAC trigger must be enabled using function LL_DAC_EnableTrigger().
- To set conversion trigger source, DAC channel must be disabled. Otherwise, the setting is discarded.
- Availability of parameters of trigger sources from timer depends on timers availability on the selected device.

Reference Manual to LL API cross reference:
- CR TSEL1 LL_DAC_SetTriggerSource
- CR TSEL2 LL_DAC_SetTriggerSource

LL_DAC_GetTriggerSource

Function name
__STATIC_INLINE uint32_t LL_DAC_GetTriggerSource (DAC_TypeDef * DACx, uint32_t DAC_Channel)

Function description
Get the conversion trigger source for the selected DAC channel.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)

Return values
- **Returned:** value can be one of the following values: (1) On STM32F3, parameter not available on all devices (2) On STM32F3, parameter not available on all DAC instances: DAC1 (for DAC instances DACx available on the selected device).
  - LL_DAC_TRIG_SOFTWARE
  - LL_DAC_TRIG_EXT_TIM2_TRGO
  - LL_DAC_TRIG_EXT_TIM3_TRGO (1)
  - LL_DAC_TRIG_EXT_TIM4_TRGO (1)
  - LL_DAC_TRIG_EXT_TIM5_TRGO (1)
  - LL_DAC_TRIG_EXT_TIM6_TRGO
  - LL_DAC_TRIG_EXT_TIM7_TRGO (1)
  - LL_DAC_TRIG_EXT_TIM8_TRGO (1)
  - LL_DAC_TRIG_EXT_TIM15_TRGO (1)
  - LL_DAC_TRIG_EXT_TIM18_TRGO (1)
  - LL_DAC_TRIG_EXT_HRTIM1_DACTRG1 (1)
  - LL_DAC_TRIG_EXT_HRTIM1_DACTRG2 (1)(2)
  - LL_DAC_TRIG_EXT_HRTIM1_DACTRG3 (1) (3)
  - LL_DAC_TRIG_EXT_EXTI_LINE9
- (3) On STM32F3, parameter not available on all DAC instances: DAC2 (for DAC instances DACx available on the selected device).

Notes
- For conversion trigger source to be effective, DAC trigger must be enabled using function LL_DAC_EnableTrigger().
- Availability of parameters of trigger sources from timer depends on timers availability on the selected device.

Reference Manual to LL API cross reference:
- CR TSEL1 LL_DAC_GetTriggerSource
- CR TSEL2 LL_DAC_GetTriggerSource

LL_DAC_SetWaveAutoGeneration

Function name
__STATIC_INLINE void LL_DAC_SetWaveAutoGeneration (DAC_TypeDef * DACx, uint32_t DAC_Channel, uint32_t WaveAutoGeneration)

Function description
Set the waveform automatic generation mode for the selected DAC channel.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)
- **WaveAutoGeneration:** This parameter can be one of the following values:
  - LL_DAC_WAVE_AUTO_GENERATION_NONE
  - LL_DAC_WAVE_AUTO_GENERATION_NOISE
  - LL_DAC_WAVE_AUTO_GENERATION_TRIANGLE

Return values
- **None**

Reference Manual to LL API cross reference:
- CR WAVE1 LL_DAC_SetWaveAutoGeneration
- CR WAVE2 LL_DAC_SetWaveAutoGeneration

LL_DAC_GetWaveAutoGeneration

Function name
__STATIC_INLINE uint32_t LL_DAC_GetWaveAutoGeneration (DAC_TypeDef * DACx, uint32_t DAC_Channel)

Function description
Get the waveform automatic generation mode for the selected DAC channel.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)

Return values
- **Returned:** value can be one of the following values:
  - LL_DAC_WAVE_AUTO_GENERATION_NONE
  - LL_DAC_WAVE_AUTO_GENERATION_NOISE
  - LL_DAC_WAVE_AUTO_GENERATION_TRIANGLE

Reference Manual to LL API cross reference:
- CR WAVE1 LL_DAC_GetWaveAutoGeneration
- CR WAVE2 LL_DAC_GetWaveAutoGeneration

LL_DAC_SetWaveNoiseLFSR

Function name
__STATIC_INLINE void LL_DAC_SetWaveNoiseLFSR (DAC_TypeDef * DACx, uint32_t DAC_Channel, uint32_t NoiseLFSRMask)

Function description
Set the noise waveform generation for the selected DAC channel: Noise mode and parameters LFSR (linear feedback shift register).

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)
- **NoiseLFSRMask:** This parameter can be one of the following values:
  - LL_DAC_NOISE_LFSR_UNMASK_BIT0
  - LL_DAC_NOISE_LFSR_UNMASK_BITS1_0
  - LL_DAC_NOISE_LFSR_UNMASK_BITS2_0
  - LL_DAC_NOISE_LFSR_UNMASK_BITS3_0
  - LL_DAC_NOISE_LFSR_UNMASK_BITS4_0
  - LL_DAC_NOISE_LFSR_UNMASK_BITS5_0
  - LL_DAC_NOISE_LFSR_UNMASK_BITS6_0
  - LL_DAC_NOISE_LFSR_UNMASK_BITS7_0
  - LL_DAC_NOISE_LFSR_UNMASK_BITS8_0
  - LL_DAC_NOISE_LFSR_UNMASK_BITS9_0
  - LL_DAC_NOISE_LFSR_UNMASK_BITS10_0

– LL_DAC_NOISE_LFSR_UNMASK_BITS11_0

Return values
- **None**

Notes
- For wave generation to be effective, DAC channel wave generation mode must be enabled using function LL_DAC_SetWaveAutoGeneration().
- This setting can be set when the selected DAC channel is disabled (otherwise, the setting operation is ignored).

Reference Manual to LL API cross reference:
- CR MAMP1 LL_DAC_SetWaveNoiseLFSR
- CR MAMP2 LL_DAC_SetWaveNoiseLFSR

LL_DAC_GetWaveNoiseLFSR

Function name
__STATIC_INLINE uint32_t LL_DAC_GetWaveNoiseLFSR (DAC_TypeDef * DACx, uint32_t DAC_Channel)

Function description
Set the noise waveform generation for the selected DAC channel: Noise mode and parameters LFSR (linear feedback shift register).

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  – LL_DAC_CHANNEL_1
  – LL_DAC_CHANNEL_2 (1)

Return values
- **Returned:** value can be one of the following values:
  – LL_DAC_NOISE_LFSR_UNMASK_BIT0
  – LL_DAC_NOISE_LFSR_UNMASK_BITS1_0
  – LL_DAC_NOISE_LFSR_UNMASK_BITS2_0
  – LL_DAC_NOISE_LFSR_UNMASK_BITS3_0
  – LL_DAC_NOISE_LFSR_UNMASK_BITS4_0
  – LL_DAC_NOISE_LFSR_UNMASK_BITS5_0
  – LL_DAC_NOISE_LFSR_UNMASK_BITS6_0
  – LL_DAC_NOISE_LFSR_UNMASK_BITS7_0
  – LL_DAC_NOISE_LFSR_UNMASK_BITS8_0
  – LL_DAC_NOISE_LFSR_UNMASK_BITS9_0
  – LL_DAC_NOISE_LFSR_UNMASK_BITS10_0
  – LL_DAC_NOISE_LFSR_UNMASK_BITS11_0

Reference Manual to LL API cross reference:
- CR MAMP1 LL_DAC_GetWaveNoiseLFSR
- CR MAMP2 LL_DAC_GetWaveNoiseLFSR

LL_DAC_SetWaveTriangleAmplitude

Function name
__STATIC_INLINE void LL_DAC_SetWaveTriangleAmplitude (DAC_TypeDef * DACx, uint32_t DAC_Channel, uint32_t TriangleAmplitude)

Function description
Set the triangle waveform generation for the selected DAC channel: triangle mode and amplitude.

Parameters
- **DACx:** DAC instance

- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)
- **TriangleAmplitude:** This parameter can be one of the following values:
  - LL_DAC_TRIANGLE_AMPLITUDE_1
  - LL_DAC_TRIANGLE_AMPLITUDE_3
  - LL_DAC_TRIANGLE_AMPLITUDE_7
  - LL_DAC_TRIANGLE_AMPLITUDE_15
  - LL_DAC_TRIANGLE_AMPLITUDE_31
  - LL_DAC_TRIANGLE_AMPLITUDE_63
  - LL_DAC_TRIANGLE_AMPLITUDE_127
  - LL_DAC_TRIANGLE_AMPLITUDE_255
  - LL_DAC_TRIANGLE_AMPLITUDE_511
  - LL_DAC_TRIANGLE_AMPLITUDE_1023
  - LL_DAC_TRIANGLE_AMPLITUDE_2047
  - LL_DAC_TRIANGLE_AMPLITUDE_4095

Return values
- **None**

Notes
- For wave generation to be effective, DAC channel wave generation mode must be enabled using function LL_DAC_SetWaveAutoGeneration().
- This setting can be set when the selected DAC channel is disabled (otherwise, the setting operation is ignored).

Reference Manual to LL API cross reference:
- CR MAMP1 LL_DAC_SetWaveTriangleAmplitude
- CR MAMP2 LL_DAC_SetWaveTriangleAmplitude

LL_DAC_GetWaveTriangleAmplitude

Function name
__STATIC_INLINE uint32_t LL_DAC_GetWaveTriangleAmplitude (DAC_TypeDef * DACx, uint32_t DAC_Channel)

Function description
Set the triangle waveform generation for the selected DAC channel: triangle mode and amplitude.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)

Return values
- **Returned:** value can be one of the following values:
  - LL_DAC_TRIANGLE_AMPLITUDE_1
  - LL_DAC_TRIANGLE_AMPLITUDE_3
  - LL_DAC_TRIANGLE_AMPLITUDE_7
  - LL_DAC_TRIANGLE_AMPLITUDE_15
  - LL_DAC_TRIANGLE_AMPLITUDE_31

  - LL_DAC_TRIANGLE_AMPLITUDE_63
  - LL_DAC_TRIANGLE_AMPLITUDE_127
  - LL_DAC_TRIANGLE_AMPLITUDE_255
  - LL_DAC_TRIANGLE_AMPLITUDE_511
  - LL_DAC_TRIANGLE_AMPLITUDE_1023
  - LL_DAC_TRIANGLE_AMPLITUDE_2047
  - LL_DAC_TRIANGLE_AMPLITUDE_4095

Reference Manual to LL API cross reference:
- CR MAMP1 LL_DAC_GetWaveTriangleAmplitude
- CR MAMP2 LL_DAC_GetWaveTriangleAmplitude

LL_DAC_SetOutputBuffer

Function name
__STATIC_INLINE void LL_DAC_SetOutputBuffer (DAC_TypeDef * DACx, uint32_t DAC_Channel, uint32_t OutputBuffer)

Function description
Set the output buffer for the selected DAC channel.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)
- **OutputBuffer:** This parameter can be one of the following values: (1) Feature specific to STM32F303x6/8 and STM32F328: On DAC1 channel 2, output buffer is replaced by a switch to connect DAC channel output to pin PA5. On DAC2 channel 1, output buffer is replaced by a switch to connect DAC channel output to pin PA6.
  - LL_DAC_OUTPUT_BUFFER_ENABLE
  - LL_DAC_OUTPUT_BUFFER_DISABLE
  - LL_DAC_OUTPUT_SWITCH_DISABLE (1)
  - LL_DAC_OUTPUT_SWITCH_ENABLE (1)

Return values
- **None**

Reference Manual to LL API cross reference:
- CR BOFF1 LL_DAC_SetOutputBuffer
- CR BOFF2 LL_DAC_SetOutputBuffer

LL_DAC_GetOutputBuffer

Function name
__STATIC_INLINE uint32_t LL_DAC_GetOutputBuffer (DAC_TypeDef * DACx, uint32_t DAC_Channel)

Function description
Get the output buffer state for the selected DAC channel.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1

– LL_DAC_CHANNEL_2 (1)

Return values
- **Returned:** value can be one of the following values: (1) Feature specific to STM32F303x6/8 and STM32F328: On DAC1 channel 2, output buffer is replaced by a switch to connect DAC channel output to pin PA5. On DAC2 channel 1, output buffer is replaced by a switch to connect DAC channel output to pin PA6.
  – LL_DAC_OUTPUT_BUFFER_ENABLE
  – LL_DAC_OUTPUT_BUFFER_DISABLE
  – LL_DAC_OUTPUT_SWITCH_DISABLE (1)
  – LL_DAC_OUTPUT_SWITCH_ENABLE (1)

Reference Manual to LL API cross reference:
- CR BOFF1 LL_DAC_GetOutputBuffer
- CR BOFF2 LL_DAC_GetOutputBuffer

LL_DAC_EnableDMAReq

Function name
__STATIC_INLINE void LL_DAC_EnableDMAReq (DAC_TypeDef * DACx, uint32_t DAC_Channel)

Function description
Enable DAC DMA transfer request of the selected channel.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  – LL_DAC_CHANNEL_1
  – LL_DAC_CHANNEL_2 (1)

Return values
- **None**

Notes
- To configure DMA source address (peripheral address), use function LL_DAC_DMA_GetRegAddr().

Reference Manual to LL API cross reference:
- CR DMAEN1 LL_DAC_EnableDMAReq
- CR DMAEN2 LL_DAC_EnableDMAReq

LL_DAC_DisableDMAReq

Function name
__STATIC_INLINE void LL_DAC_DisableDMAReq (DAC_TypeDef * DACx, uint32_t DAC_Channel)

Function description
Disable DAC DMA transfer request of the selected channel.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  – LL_DAC_CHANNEL_1
  – LL_DAC_CHANNEL_2 (1)

Return values
- **None**

Notes
- To configure DMA source address (peripheral address), use

function LL_DAC_DMA_GetRegAddr().

Reference Manual to LL API cross reference:
- CR DMAEN1 LL_DAC_DisableDMAReq
- CR DMAEN2 LL_DAC_DisableDMAReq

LL_DAC_IsDMAReqEnabled

Function name **__STATIC_INLINE uint32_t LL_DAC_IsDMAReqEnabled (DAC_TypeDef * DACx, uint32_t DAC_Channel)**

Function description Get DAC DMA transfer request state of the selected channel.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CR DMAEN1 LL_DAC_IsDMAReqEnabled
- CR DMAEN2 LL_DAC_IsDMAReqEnabled

LL_DAC_DMA_GetRegAddr

Function name **__STATIC_INLINE uint32_t LL_DAC_DMA_GetRegAddr (DAC_TypeDef * DACx, uint32_t DAC_Channel, uint32_t Register)**

Function description Function to help to configure DMA transfer to DAC: retrieve the DAC register address from DAC instance and a list of DAC registers intended to be used (most commonly) with DMA transfer.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)
- **Register:** This parameter can be one of the following values:
  - LL_DAC_DMA_REG_DATA_12BITS_RIGHT_ALIGNED
  - LL_DAC_DMA_REG_DATA_12BITS_LEFT_ALIGNED
  - LL_DAC_DMA_REG_DATA_8BITS_RIGHT_ALIGNED

Return values
- **DAC:** register address

Notes
- These DAC registers are data holding registers: when DAC conversion is requested, DAC generates a DMA transfer request to have data available in DAC data holding registers.
- This macro is intended to be used with LL DMA driver, refer to function "LL_DMA_ConfigAddresses()". Example: LL_DMA_ConfigAddresses(DMA1, LL_DMA_CHANNEL_1, (uint32_t)&< array or variable >, LL_DAC_DMA_GetRegAddr(DAC1, LL_DAC_CHANNEL_1, LL_DAC_DMA_REG_DATA_12BITS_RIGHT_ALIGNED),

LL_DMA_DIRECTION_MEMORY_TO_PERIPH);

Reference Manual to LL API cross reference:

- DHR12R1 DACC1DHR LL_DAC_DMA_GetRegAddr
- DHR12L1 DACC1DHR LL_DAC_DMA_GetRegAddr
- DHR8R1 DACC1DHR LL_DAC_DMA_GetRegAddr
- DHR12R2 DACC2DHR LL_DAC_DMA_GetRegAddr
- DHR12L2 DACC2DHR LL_DAC_DMA_GetRegAddr
- DHR8R2 DACC2DHR LL_DAC_DMA_GetRegAddr

LL_DAC_Enable

Function name **__STATIC_INLINE void LL_DAC_Enable (DAC_TypeDef * DACx, uint32_t DAC_Channel)**

Function description Enable DAC selected channel.

Parameters

- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)

Return values

- **None**

Notes

- After enable from off state, DAC channel requires a delay for output voltage to reach accuracy +/- 1 LSB. Refer to device datasheet, parameter "tWAKEUP".

Reference Manual to LL API cross reference:

- CR EN1 LL_DAC_Enable
- CR EN2 LL_DAC_Enable

LL_DAC_Disable

Function name **__STATIC_INLINE void LL_DAC_Disable (DAC_TypeDef * DACx, uint32_t DAC_Channel)**

Function description Disable DAC selected channel.

Parameters

- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)

Return values

- **None**

Reference Manual to LL API cross reference:

- CR EN1 LL_DAC_Disable
- CR EN2 LL_DAC_Disable

LL_DAC_IsEnabled

Function name	**__STATIC_INLINE uint32_t LL_DAC_IsEnabled (DAC_TypeDef * DACx, uint32_t DAC_Channel)**
Function description	Get DAC enable state of the selected channel.
Parameters	• **DACx:** DAC instance • **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability. – LL_DAC_CHANNEL_1 – LL_DAC_CHANNEL_2 (1)
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR EN1 LL_DAC_IsEnabled • CR EN2 LL_DAC_IsEnabled

LL_DAC_EnableTrigger

Function name	**__STATIC_INLINE void LL_DAC_EnableTrigger (DAC_TypeDef * DACx, uint32_t DAC_Channel)**
Function description	Enable DAC trigger of the selected channel.
Parameters	• **DACx:** DAC instance • **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability. – LL_DAC_CHANNEL_1 – LL_DAC_CHANNEL_2 (1)
Return values	• **None**
Notes	• - If DAC trigger is disabled, DAC conversion is performed automatically once the data holding register is updated, using functions "LL_DAC_ConvertData{8; 12}{Right; Left} Aligned()": LL_DAC_ConvertData12RightAligned(), ... If DAC trigger is enabled, DAC conversion is performed only when a hardware of software trigger event is occurring. Select trigger source using function LL_DAC_SetTriggerSource().
Reference Manual to LL API cross reference:	• CR TEN1 LL_DAC_EnableTrigger • CR TEN2 LL_DAC_EnableTrigger

LL_DAC_DisableTrigger

Function name	**__STATIC_INLINE void LL_DAC_DisableTrigger (DAC_TypeDef * DACx, uint32_t DAC_Channel)**
Function description	Disable DAC trigger of the selected channel.
Parameters	• **DACx:** DAC instance • **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on

all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)

Return values
- **None**

Reference Manual to LL API cross reference:
- CR TEN1 LL_DAC_DisableTrigger
- CR TEN2 LL_DAC_DisableTrigger

LL_DAC_IsTriggerEnabled

Function name
__STATIC_INLINE uint32_t LL_DAC_IsTriggerEnabled (DAC_TypeDef * DACx, uint32_t DAC_Channel)

Function description
Get DAC trigger state of the selected channel.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CR TEN1 LL_DAC_IsTriggerEnabled
- CR TEN2 LL_DAC_IsTriggerEnabled

LL_DAC_TrigSWConversion

Function name
__STATIC_INLINE void LL_DAC_TrigSWConversion (DAC_TypeDef * DACx, uint32_t DAC_Channel)

Function description
Trig DAC conversion by software for the selected DAC channel.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can a combination of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)

Return values
- **None**

Notes
- Preliminarily, DAC trigger must be set to software trigger using function LL_DAC_SetTriggerSource() with parameter "LL_DAC_TRIGGER_SOFTWARE". and DAC trigger must be enabled using function LL_DAC_EnableTrigger().
- For devices featuring DAC with 2 channels: this function can perform a SW start of both DAC channels simultaneously. Two channels can be selected as parameter. Example: (LL_DAC_CHANNEL_1 | LL_DAC_CHANNEL_2)

Reference Manual to
- SWTRIGR SWTRIG1 LL_DAC_TrigSWConversion

LL API cross reference:
- SWTRIGR SWTRIG2 LL_DAC_TrigSWConversion

LL_DAC_ConvertData12RightAligned

Function name: **__STATIC_INLINE void LL_DAC_ConvertData12RightAligned (DAC_TypeDef * DACx, uint32_t DAC_Channel, uint32_t Data)**

Function description: Set the data to be loaded in the data holding register in format 12 bits left alignment (LSB aligned on bit 0), for the selected DAC channel.

Parameters:
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)
- **Data:** Value between Min_Data=0x000 and Max_Data=0xFFF

Return values:
- **None**

Reference Manual to LL API cross reference:
- DHR12R1 DACC1DHR LL_DAC_ConvertData12RightAligned
- DHR12R2 DACC2DHR LL_DAC_ConvertData12RightAligned

LL_DAC_ConvertData12LeftAligned

Function name: **__STATIC_INLINE void LL_DAC_ConvertData12LeftAligned (DAC_TypeDef * DACx, uint32_t DAC_Channel, uint32_t Data)**

Function description: Set the data to be loaded in the data holding register in format 12 bits left alignment (MSB aligned on bit 15), for the selected DAC channel.

Parameters:
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)
- **Data:** Value between Min_Data=0x000 and Max_Data=0xFFF

Return values:
- **None**

Reference Manual to LL API cross reference:
- DHR12L1 DACC1DHR LL_DAC_ConvertData12LeftAligned
- DHR12L2 DACC2DHR LL_DAC_ConvertData12LeftAligned

LL_DAC_ConvertData8RightAligned

Function name
__STATIC_INLINE void LL_DAC_ConvertData8RightAligned (DAC_TypeDef * DACx, uint32_t DAC_Channel, uint32_t Data)

Function description
Set the data to be loaded in the data holding register in format 8 bits left alignment (LSB aligned on bit 0), for the selected DAC channel.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)
- **Data:** Value between Min_Data=0x00 and Max_Data=0xFF

Return values
- **None**

Reference Manual to LL API cross reference:
- DHR8R1 DACC1DHR LL_DAC_ConvertData8RightAligned
- DHR8R2 DACC2DHR LL_DAC_ConvertData8RightAligned

LL_DAC_ConvertDualData12RightAligned

Function name
__STATIC_INLINE void LL_DAC_ConvertDualData12RightAligned (DAC_TypeDef * DACx, uint32_t DataChannel1, uint32_t DataChannel2)

Function description
Set the data to be loaded in the data holding register in format 12 bits left alignment (LSB aligned on bit 0), for both DAC channels.

Parameters
- **DACx:** DAC instance
- **DataChannel1:** Value between Min_Data=0x000 and Max_Data=0xFFF
- **DataChannel2:** Value between Min_Data=0x000 and Max_Data=0xFFF

Return values
- **None**

Reference Manual to LL API cross reference:
- DHR12RD DACC1DHR LL_DAC_ConvertDualData12RightAligned
- DHR12RD DACC2DHR LL_DAC_ConvertDualData12RightAligned

LL_DAC_ConvertDualData12LeftAligned

Function name
__STATIC_INLINE void LL_DAC_ConvertDualData12LeftAligned (DAC_TypeDef * DACx, uint32_t DataChannel1, uint32_t DataChannel2)

Function description
Set the data to be loaded in the data holding register in format 12 bits left alignment (MSB aligned on bit 15), for both DAC channels.

Parameters
- **DACx:** DAC instance
- **DataChannel1:** Value between Min_Data=0x000 and Max_Data=0xFFF
- **DataChannel2:** Value between Min_Data=0x000 and

Max_Data=0xFFF

Return values
- **None**

Reference Manual to LL API cross reference:
- DHR12LD DACC1DHR LL_DAC_ConvertDualData12LeftAligned
- DHR12LD DACC2DHR LL_DAC_ConvertDualData12LeftAligned

LL_DAC_ConvertDualData8RightAligned

Function name
__STATIC_INLINE void LL_DAC_ConvertDualData8RightAligned (DAC_TypeDef * DACx, uint32_t DataChannel1, uint32_t DataChannel2)

Function description
Set the data to be loaded in the data holding register in format 8 bits left alignment (LSB aligned on bit 0), for both DAC channels.

Parameters
- **DACx:** DAC instance
- **DataChannel1:** Value between Min_Data=0x00 and Max_Data=0xFF
- **DataChannel2:** Value between Min_Data=0x00 and Max_Data=0xFF

Return values
- **None**

Reference Manual to LL API cross reference:
- DHR8RD DACC1DHR LL_DAC_ConvertDualData8RightAligned
- DHR8RD DACC2DHR LL_DAC_ConvertDualData8RightAligned

LL_DAC_RetrieveOutputData

Function name
__STATIC_INLINE uint32_t LL_DAC_RetrieveOutputData (DAC_TypeDef * DACx, uint32_t DAC_Channel)

Function description
Retrieve output data currently generated for the selected DAC channel.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)

Return values
- **Value:** between Min_Data=0x000 and Max_Data=0xFFF

Notes
- Whatever alignment and resolution settings (using functions "LL_DAC_ConvertData{8; 12}{Right; Left} Aligned()": LL_DAC_ConvertData12RightAligned(), ...), output data format is 12 bits right aligned (LSB aligned on bit 0).

Reference Manual to LL API cross reference:
- DOR1 DACC1DOR LL_DAC_RetrieveOutputData
- DOR2 DACC2DOR LL_DAC_RetrieveOutputData

LL_DAC_IsActiveFlag_DMAUDR1

Function name	**__STATIC_INLINE uint32_t LL_DAC_IsActiveFlag_DMAUDR1 (DAC_TypeDef * DACx)**
Function description	Get DAC underrun flag for DAC channel 1.
Parameters	• **DACx:** DAC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR DMAUDR1 LL_DAC_IsActiveFlag_DMAUDR1

LL_DAC_IsActiveFlag_DMAUDR2

Function name	**__STATIC_INLINE uint32_t LL_DAC_IsActiveFlag_DMAUDR2 (DAC_TypeDef * DACx)**
Function description	Get DAC underrun flag for DAC channel 2.
Parameters	• **DACx:** DAC instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR DMAUDR2 LL_DAC_IsActiveFlag_DMAUDR2

LL_DAC_ClearFlag_DMAUDR1

Function name	**__STATIC_INLINE void LL_DAC_ClearFlag_DMAUDR1 (DAC_TypeDef * DACx)**
Function description	Clear DAC underrun flag for DAC channel 1.
Parameters	• **DACx:** DAC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR DMAUDR1 LL_DAC_ClearFlag_DMAUDR1

LL_DAC_ClearFlag_DMAUDR2

Function name	**__STATIC_INLINE void LL_DAC_ClearFlag_DMAUDR2 (DAC_TypeDef * DACx)**
Function description	Clear DAC underrun flag for DAC channel 2.
Parameters	• **DACx:** DAC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR DMAUDR2 LL_DAC_ClearFlag_DMAUDR2

LL_DAC_EnableIT_DMAUDR1

Function name	**__STATIC_INLINE void LL_DAC_EnableIT_DMAUDR1 (DAC_TypeDef * DACx)**
Function description	Enable DMA underrun interrupt for DAC channel 1.
Parameters	• **DACx:** DAC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR DMAUDRIE1 LL_DAC_EnableIT_DMAUDR1

LL_DAC_EnableIT_DMAUDR2

Function name	**__STATIC_INLINE void LL_DAC_EnableIT_DMAUDR2 (DAC_TypeDef * DACx)**
Function description	Enable DMA underrun interrupt for DAC channel 2.
Parameters	• **DACx:** DAC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR DMAUDRIE2 LL_DAC_EnableIT_DMAUDR2

LL_DAC_DisableIT_DMAUDR1

Function name	**__STATIC_INLINE void LL_DAC_DisableIT_DMAUDR1 (DAC_TypeDef * DACx)**
Function description	Disable DMA underrun interrupt for DAC channel 1.
Parameters	• **DACx:** DAC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR DMAUDRIE1 LL_DAC_DisableIT_DMAUDR1

LL_DAC_DisableIT_DMAUDR2

Function name	**__STATIC_INLINE void LL_DAC_DisableIT_DMAUDR2 (DAC_TypeDef * DACx)**
Function description	Disable DMA underrun interrupt for DAC channel 2.
Parameters	• **DACx:** DAC instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR DMAUDRIE2 LL_DAC_DisableIT_DMAUDR2

LL_DAC_IsEnabledIT_DMAUDR1

Function name
__STATIC_INLINE uint32_t LL_DAC_IsEnabledIT_DMAUDR1 (DAC_TypeDef * DACx)

Function description
Get DMA underrun interrupt for DAC channel 1.

Parameters
- **DACx:** DAC instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CR DMAUDRIE1 LL_DAC_IsEnabledIT_DMAUDR1

LL_DAC_IsEnabledIT_DMAUDR2

Function name
__STATIC_INLINE uint32_t LL_DAC_IsEnabledIT_DMAUDR2 (DAC_TypeDef * DACx)

Function description
Get DMA underrun interrupt for DAC channel 2.

Parameters
- **DACx:** DAC instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CR DMAUDRIE2 LL_DAC_IsEnabledIT_DMAUDR2

LL_DAC_DeInit

Function name
ErrorStatus LL_DAC_DeInit (DAC_TypeDef * DACx)

Function description
De-initialize registers of the selected DAC instance to their default reset values.

Parameters
- **DACx:** DAC instance

Return values
- **An:** ErrorStatus enumeration value:
  - SUCCESS: DAC registers are de-initialized
  - ERROR: not applicable

LL_DAC_Init

Function name
ErrorStatus LL_DAC_Init (DAC_TypeDef * DACx, uint32_t DAC_Channel, LL_DAC_InitTypeDef * DAC_InitStruct)

Function description
Initialize some features of DAC instance.

Parameters
- **DACx:** DAC instance
- **DAC_Channel:** This parameter can be one of the following values: (1) On this STM32 serie, parameter not available on all devices. Refer to device datasheet for channels availability.
  - LL_DAC_CHANNEL_1
  - LL_DAC_CHANNEL_2 (1)
- **DAC_InitStruct:** Pointer to a LL_DAC_InitTypeDef structure

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: DAC registers are initialized
  – ERROR: DAC registers are not initialized

Notes
- The setting of these parameters by function LL_DAC_Init() is conditioned to DAC state: DAC instance must be disabled.

LL_DAC_StructInit

Function name **void LL_DAC_StructInit (LL_DAC_InitTypeDef * DAC_InitStruct)**

Function description Set each LL_DAC_InitTypeDef field to default value.

Parameters
- **DAC_InitStruct:** pointer to a LL_DAC_InitTypeDef structure whose fields will be set to default values.

Return values
- **None**

64.3 DAC Firmware driver defines

64.3.1 DAC

DAC channels

LL_DAC_CHANNEL_1 DAC channel 1

LL_DAC_CHANNEL_2 DAC channel 2

DAC flags

LL_DAC_FLAG_DMAUDR1 DAC channel 1 flag DMA underrun

LL_DAC_FLAG_DMAUDR2 DAC channel 2 flag DMA underrun

Definitions of DAC hardware constraints delays

LL_DAC_DELAY_STARTUP_VOLTAGE_SETTLING_US Delay for DAC channel voltage settling time from DAC channel startup (transition from disable to enable)

LL_DAC_DELAY_VOLTAGE_SETTLING_US Delay for DAC channel voltage settling time

DAC interruptions

LL_DAC_IT_DMAUDRIE1 DAC channel 1 interruption DMA underrun

LL_DAC_IT_DMAUDRIE2 DAC channel 2 interruption DMA underrun

DAC channel output buffer

LL_DAC_OUTPUT_BUFFER_ENABLE The selected DAC channel output is buffered: higher drive current capability, but also higher current consumption

LL_DAC_OUTPUT_BUFFER_DISABLE The selected DAC channel output is not buffered: lower drive current capability, but also lower current consumption

DAC registers compliant with specific purpose

LL_DAC_DMA_REG_DATA_12BITS_RIGHT_ALIGNED	DAC channel data holding register 12 bits right aligned
LL_DAC_DMA_REG_DATA_12BITS_LEFT_ALIGNED	DAC channel data holding register 12 bits left aligned
LL_DAC_DMA_REG_DATA_8BITS_RIGHT_ALIGNED	DAC channel data holding register 8 bits right aligned

DAC channel output resolution

LL_DAC_RESOLUTION_12B	DAC channel resolution 12 bits
LL_DAC_RESOLUTION_8B	DAC channel resolution 8 bits

DAC trigger source

LL_DAC_TRIG_SOFTWARE	DAC channel conversion trigger internal (SW start)
LL_DAC_TRIG_EXT_TIM6_TRGO	DAC channel conversion trigger from external IP: TIM6 TRGO.
LL_DAC_TRIG_EXT_TIM3_TRGO	DAC channel conversion trigger from external IP: TIM3 TRGO. Trigger remap: by default, default trigger. If needed to restore trigger, use LL_SYSCFG_DAC1_TRIG1_REMAP_TIM3_TRGO for TIM3 selection.
LL_DAC_TRIG_EXT_TIM7_TRGO	DAC channel conversion trigger from external IP: TIM7 TRGO.
LL_DAC_TRIG_EXT_TIM15_TRGO	DAC channel conversion trigger from external IP: TIM5 TRGO.
LL_DAC_TRIG_EXT_TIM2_TRGO	DAC channel conversion trigger from external IP: TIM2 TRGO.
LL_DAC_TRIG_EXT_TIM4_TRGO	DAC channel conversion trigger from external IP: TIM4 TRGO.
LL_DAC_TRIG_EXT_TIM8_TRGO	DAC channel conversion trigger from external IP: TIM8 TRGO. Trigger remap: use LL_SYSCFG_DAC1_TRIG1_REMAP_TIM8_TRGO for TIM8 selection.
LL_DAC_TRIG_EXT_EXTI_LINE9	DAC channel conversion trigger from external IP: external interrupt line 9.

DAC waveform automatic generation mode

LL_DAC_WAVE_AUTO_GENERATION_NONE	DAC channel wave auto generation mode disabled.
LL_DAC_WAVE_AUTO_GENERATION_NOISE	DAC channel wave auto generation mode enabled, set generated noise waveform.
LL_DAC_WAVE_AUTO_GENERATION_TRIANGLE	DAC channel wave auto generation mode enabled, set generated triangle waveform.

DAC wave generation - Noise LFSR unmask bits

LL_DAC_NOISE_LFSR_UNMASK_BIT0	Noise wave generation, unmask LFSR bit0, for the selected DAC channel
LL_DAC_NOISE_LFSR_UNMASK_BITS1_0	Noise wave generation, unmask LFSR bits[1:0], for the selected DAC channel
LL_DAC_NOISE_LFSR_UNMASK_BITS2_0	Noise wave generation, unmask LFSR bits[2:0], for the selected DAC channel
LL_DAC_NOISE_LFSR_UNMASK_BITS3_0	Noise wave generation, unmask LFSR bits[3:0], for the selected DAC channel
LL_DAC_NOISE_LFSR_UNMASK_BITS4_0	Noise wave generation, unmask LFSR bits[4:0], for the selected DAC channel
LL_DAC_NOISE_LFSR_UNMASK_BITS5_0	Noise wave generation, unmask LFSR bits[5:0], for the selected DAC channel
LL_DAC_NOISE_LFSR_UNMASK_BITS6_0	Noise wave generation, unmask LFSR bits[6:0], for the selected DAC channel
LL_DAC_NOISE_LFSR_UNMASK_BITS7_0	Noise wave generation, unmask LFSR bits[7:0], for the selected DAC channel
LL_DAC_NOISE_LFSR_UNMASK_BITS8_0	Noise wave generation, unmask LFSR bits[8:0], for the selected DAC channel
LL_DAC_NOISE_LFSR_UNMASK_BITS9_0	Noise wave generation, unmask LFSR bits[9:0], for the selected DAC channel
LL_DAC_NOISE_LFSR_UNMASK_BITS10_0	Noise wave generation, unmask LFSR bits[10:0], for the selected DAC channel
LL_DAC_NOISE_LFSR_UNMASK_BITS11_0	Noise wave generation, unmask LFSR bits[11:0], for the selected DAC channel

DAC wave generation - Triangle amplitude

LL_DAC_TRIANGLE_AMPLITUDE_1	Triangle wave generation, amplitude of 1 LSB of DAC output range, for the selected DAC channel
LL_DAC_TRIANGLE_AMPLITUDE_3	Triangle wave generation, amplitude of 3 LSB of DAC output range, for the selected DAC channel
LL_DAC_TRIANGLE_AMPLITUDE_7	Triangle wave generation, amplitude of 7 LSB of DAC output range, for the selected DAC channel
LL_DAC_TRIANGLE_AMPLITUDE_15	Triangle wave generation, amplitude of 15 LSB of DAC output range, for the selected DAC channel
LL_DAC_TRIANGLE_AMPLITUDE_31	Triangle wave generation, amplitude of 31 LSB of DAC output range, for the selected DAC channel
LL_DAC_TRIANGLE_AMPLITUDE_63	Triangle wave generation, amplitude of 63 LSB of DAC output range, for the selected DAC channel
LL_DAC_TRIANGLE_AMPLITUDE_127	Triangle wave generation, amplitude of 127

	LSB of DAC output range, for the selected DAC channel
LL_DAC_TRIANGLE_AMPLITUDE_255	Triangle wave generation, amplitude of 255 LSB of DAC output range, for the selected DAC channel
LL_DAC_TRIANGLE_AMPLITUDE_511	Triangle wave generation, amplitude of 512 LSB of DAC output range, for the selected DAC channel
LL_DAC_TRIANGLE_AMPLITUDE_1023	Triangle wave generation, amplitude of 1023 LSB of DAC output range, for the selected DAC channel
LL_DAC_TRIANGLE_AMPLITUDE_2047	Triangle wave generation, amplitude of 2047 LSB of DAC output range, for the selected DAC channel
LL_DAC_TRIANGLE_AMPLITUDE_4095	Triangle wave generation, amplitude of 4095 LSB of DAC output range, for the selected DAC channel

DAC helper macro

__LL_DAC_CHANNEL_TO_DECIMAL_NB	**Description:** • Helper macro to get DAC channel number in decimal format from literals LL_DAC_CHANNEL_x. **Parameters:** • __CHANNEL__: This parameter can be one of the following values: – LL_DAC_CHANNEL_1 – LL_DAC_CHANNEL_2 (1) **Return value:** • 1...2: (value "2" depending on DAC channel 2 availability) **Notes:** • The input can be a value from functions where a channel number is returned.
__LL_DAC_DECIMAL_NB_TO_CHANNEL	**Description:** • Helper macro to get DAC channel in literal format LL_DAC_CHANNEL_x from number in decimal format. **Parameters:** • __DECIMAL_NB__: 1...2 (value "2" depending on DAC channel 2 availability) **Return value:** • Returned: value can be one of the following values: – LL_DAC_CHANNEL_1

– LL_DAC_CHANNEL_2 (1)

Notes:

- If the input parameter does not correspond to a DAC channel, this macro returns value '0'.

__LL_DAC_DIGITAL_SCALE

Description:

- Helper macro to define the DAC conversion data full-scale digital value corresponding to the selected DAC resolution.

Parameters:

- __DAC_RESOLUTION__: This parameter can be one of the following values:
  – LL_DAC_RESOLUTION_12B
  – LL_DAC_RESOLUTION_8B

Return value:

- ADC: conversion data equivalent voltage value (unit: mVolt)

Notes:

- DAC conversion data full-scale corresponds to voltage range determined by analog voltage references Vref+ and Vref- (refer to reference manual).

__LL_DAC_CALC_VOLTAGE_TO_DATA

Description:

- Helper macro to calculate the DAC conversion data (unit: digital value) corresponding to a voltage (unit: mVolt).

Parameters:

- __VREFANALOG_VOLTAGE__: Analog reference voltage (unit: mV)
- __DAC_VOLTAGE__: Voltage to be generated by DAC channel (unit: mVolt).
- __DAC_RESOLUTION__: This parameter can be one of the following values:
  – LL_DAC_RESOLUTION_12B
  – LL_DAC_RESOLUTION_8B

Return value:

- DAC: conversion data (unit: digital value)

Notes:

- This helper macro is intended to provide input data in voltage rather than digital value, to be used with LL DAC functions such as LL_DAC_ConvertData12RightAligned(). Analog reference voltage (Vref+) must be

either known from user board environment or can be calculated using ADC measurement and ADC helper macro __LL_ADC_CALC_VREFANALOG_VOLTAGE().

Common write and read registers macros

LL_DAC_WriteReg

Description:

- Write a value in DAC register.

Parameters:

- __INSTANCE__: DAC Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_DAC_ReadReg

Description:

- Read a value in DAC register.

Parameters:

- __INSTANCE__: DAC Instance
- __REG__: Register to be read

Return value:

- Register: value

65 LL DMA Generic Driver

65.1 DMA Firmware driver registers structures

65.1.1 LL_DMA_InitTypeDef

Data Fields

- ***uint32_t PeriphOrM2MSrcAddress***
- ***uint32_t MemoryOrM2MDstAddress***
- ***uint32_t Direction***
- ***uint32_t Mode***
- ***uint32_t PeriphOrM2MSrcIncMode***
- ***uint32_t MemoryOrM2MDstIncMode***
- ***uint32_t PeriphOrM2MSrcDataSize***
- ***uint32_t MemoryOrM2MDstDataSize***
- ***uint32_t NbData***
- ***uint32_t Priority***

Field Documentation

- ***uint32_t LL_DMA_InitTypeDef::PeriphOrM2MSrcAddress***
  Specifies the peripheral base address for DMA transfer or as Source base address in case of memory to memory transfer direction.This parameter must be a value between Min_Data = 0 and Max_Data = 0xFFFFFFFF.
- ***uint32_t LL_DMA_InitTypeDef::MemoryOrM2MDstAddress***
  Specifies the memory base address for DMA transfer or as Destination base address in case of memory to memory transfer direction.This parameter must be a value between Min_Data = 0 and Max_Data = 0xFFFFFFFF.
- ***uint32_t LL_DMA_InitTypeDef::Direction***
  Specifies if the data will be transferred from memory to peripheral, from memory to memory or from peripheral to memory. This parameter can be a value of ***DMA_LL_EC_DIRECTION***This feature can be modified afterwards using unitary function **LL_DMA_SetDataTransferDirection()**.
- ***uint32_t LL_DMA_InitTypeDef::Mode***
  Specifies the normal or circular operation mode. This parameter can be a value of ***DMA_LL_EC_MODE***
  Note:: The circular buffer mode cannot be used if the memory to memory data transfer direction is configured on the selected Channel This feature can be modified afterwards using unitary function **LL_DMA_SetMode()**.
- ***uint32_t LL_DMA_InitTypeDef::PeriphOrM2MSrcIncMode***
  Specifies whether the Peripheral address or Source address in case of memory to memory transfer direction is incremented or not. This parameter can be a value of ***DMA_LL_EC_PERIPH***This feature can be modified afterwards using unitary function **LL_DMA_SetPeriphIncMode()**.
- ***uint32_t LL_DMA_InitTypeDef::MemoryOrM2MDstIncMode***
  Specifies whether the Memory address or Destination address in case of memory to memory transfer direction is incremented or not. This parameter can be a value of ***DMA_LL_EC_MEMORY***This feature can be modified afterwards using unitary function **LL_DMA_SetMemoryIncMode()**.
- ***uint32_t LL_DMA_InitTypeDef::PeriphOrM2MSrcDataSize***
  Specifies the Peripheral data size alignment or Source data size alignment (byte, half word, word) in case of memory to memory transfer direction. This parameter can be a

value of ***DMA_LL_EC_PDATAALIGN***This feature can be modified afterwards using unitary function **LL_DMA_SetPeriphSize()**.

- ***uint32_t LL_DMA_InitTypeDef::MemoryOrM2MDstDataSize***
  Specifies the Memory data size alignment or Destination data size alignment (byte, half word, word) in case of memory to memory transfer direction. This parameter can be a value of ***DMA_LL_EC_MDATAALIGN***This feature can be modified afterwards using unitary function **LL_DMA_SetMemorySize()**.
- ***uint32_t LL_DMA_InitTypeDef::NbData***
  Specifies the number of data to transfer, in data unit. The data unit is equal to the source buffer configuration set in PeripheralSize or MemorySize parameters depending in the transfer direction. This parameter must be a value between Min_Data = 0 and Max_Data = 0x0000FFFFThis feature can be modified afterwards using unitary function **LL_DMA_SetDataLength()**.
- ***uint32_t LL_DMA_InitTypeDef::Priority***
  Specifies the channel priority level. This parameter can be a value of ***DMA_LL_EC_PRIORITY***This feature can be modified afterwards using unitary function **LL_DMA_SetChannelPriorityLevel()**.

65.2 DMA Firmware driver API description

65.2.1 Detailed description of functions

LL_DMA_EnableChannel

Function name	**__STATIC_INLINE void LL_DMA_EnableChannel (DMA_TypeDef * DMAx, uint32_t Channel)**
Function description	Enable DMA channel.
Parameters	• **DMAx:** DMAx Instance • **Channel:** This parameter can be one of the following values: – LL_DMA_CHANNEL_1 – LL_DMA_CHANNEL_2 – LL_DMA_CHANNEL_3 – LL_DMA_CHANNEL_4 – LL_DMA_CHANNEL_5 – LL_DMA_CHANNEL_6 – LL_DMA_CHANNEL_7
Return values	• **None**
Reference Manual to LL API cross reference:	• CCR EN LL_DMA_EnableChannel

LL_DMA_DisableChannel

Function name	**__STATIC_INLINE void LL_DMA_DisableChannel (DMA_TypeDef * DMAx, uint32_t Channel)**
Function description	Disable DMA channel.
Parameters	• **DMAx:** DMAx Instance • **Channel:** This parameter can be one of the following values: – LL_DMA_CHANNEL_1 – LL_DMA_CHANNEL_2 – LL_DMA_CHANNEL_3

  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **None**

Reference Manual to LL API cross reference:
- CCR EN LL_DMA_DisableChannel

LL_DMA_IsEnabledChannel

Function name
__STATIC_INLINE uint32_t LL_DMA_IsEnabledChannel (DMA_TypeDef * DMAx, uint32_t Channel)

Function description
Check if DMA channel is enabled or disabled.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CCR EN LL_DMA_IsEnabledChannel

LL_DMA_ConfigTransfer

Function name
__STATIC_INLINE void LL_DMA_ConfigTransfer (DMA_TypeDef * DMAx, uint32_t Channel, uint32_t Configuration)

Function description
Configure all parameters link to DMA transfer.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7
- **Configuration:** This parameter must be a combination of all the following values:
  - LL_DMA_DIRECTION_PERIPH_TO_MEMORY or LL_DMA_DIRECTION_MEMORY_TO_PERIPH or LL_DMA_DIRECTION_MEMORY_TO_MEMORY
  - LL_DMA_MODE_NORMAL or

LL_DMA_MODE_CIRCULAR
- LL_DMA_PERIPH_INCREMENT or LL_DMA_PERIPH_NOINCREMENT
- LL_DMA_MEMORY_INCREMENT or LL_DMA_MEMORY_NOINCREMENT
- LL_DMA_PDATAALIGN_BYTE or LL_DMA_PDATAALIGN_HALFWORD or LL_DMA_PDATAALIGN_WORD
- LL_DMA_MDATAALIGN_BYTE or LL_DMA_MDATAALIGN_HALFWORD or LL_DMA_MDATAALIGN_WORD
- LL_DMA_PRIORITY_LOW or LL_DMA_PRIORITY_MEDIUM or LL_DMA_PRIORITY_HIGH or LL_DMA_PRIORITY_VERYHIGH

Return values
- **None**

Reference Manual to LL API cross reference:
- CCR DIR LL_DMA_ConfigTransfer
- CCR MEM2MEM LL_DMA_ConfigTransfer
- CCR CIRC LL_DMA_ConfigTransfer
- CCR PINC LL_DMA_ConfigTransfer
- CCR MINC LL_DMA_ConfigTransfer
- CCR PSIZE LL_DMA_ConfigTransfer
- CCR MSIZE LL_DMA_ConfigTransfer
- CCR PL LL_DMA_ConfigTransfer

LL_DMA_SetDataTransferDirection

Function name
__STATIC_INLINE void LL_DMA_SetDataTransferDirection (DMA_TypeDef * DMAx, uint32_t Channel, uint32_t Direction)

Function description
Set Data transfer direction (read from peripheral or from memory).

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7
- **Direction:** This parameter can be one of the following values:
  - LL_DMA_DIRECTION_PERIPH_TO_MEMORY
  - LL_DMA_DIRECTION_MEMORY_TO_PERIPH
  - LL_DMA_DIRECTION_MEMORY_TO_MEMORY

Return values
- **None**

Reference Manual to LL API cross reference:
- CCR DIR LL_DMA_SetDataTransferDirection
- CCR MEM2MEM LL_DMA_SetDataTransferDirection

LL_DMA_GetDataTransferDirection

Function name
__STATIC_INLINE uint32_t LL_DMA_GetDataTransferDirection (DMA_TypeDef * DMAx, uint32_t Channel)

Function description
Get Data transfer direction (read from peripheral or from memory).

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **Returned:** value can be one of the following values:
  - LL_DMA_DIRECTION_PERIPH_TO_MEMORY
  - LL_DMA_DIRECTION_MEMORY_TO_PERIPH
  - LL_DMA_DIRECTION_MEMORY_TO_MEMORY

Reference Manual to LL API cross reference:
- CCR DIR LL_DMA_GetDataTransferDirection
- CCR MEM2MEM LL_DMA_GetDataTransferDirection

LL_DMA_SetMode

Function name
__STATIC_INLINE void LL_DMA_SetMode (DMA_TypeDef * DMAx, uint32_t Channel, uint32_t Mode)

Function description
Set DMA mode circular or normal.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7
- **Mode:** This parameter can be one of the following values:
  - LL_DMA_MODE_NORMAL
  - LL_DMA_MODE_CIRCULAR

Return values
- **None**

Notes
- The circular buffer mode cannot be used if the memory-to-memory data transfer is configured on the selected Channel.

Reference Manual to LL API cross reference:
- CCR CIRC LL_DMA_SetMode

LL_DMA_GetMode

Function name
__STATIC_INLINE uint32_t LL_DMA_GetMode (DMA_TypeDef * DMAx, uint32_t Channel)

Function description
Get DMA mode circular or normal.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **Returned:** value can be one of the following values:
  - LL_DMA_MODE_NORMAL
  - LL_DMA_MODE_CIRCULAR

Reference Manual to LL API cross reference:
- CCR CIRC LL_DMA_GetMode

LL_DMA_SetPeriphIncMode

Function name
__STATIC_INLINE void LL_DMA_SetPeriphIncMode (DMA_TypeDef * DMAx, uint32_t Channel, uint32_t PeriphOrM2MSrcIncMode)

Function description
Set Peripheral increment mode.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7
- **PeriphOrM2MSrcIncMode:** This parameter can be one of the following values:
  - LL_DMA_PERIPH_INCREMENT
  - LL_DMA_PERIPH_NOINCREMENT

Return values
- **None**

Reference Manual to LL API cross reference:
- CCR PINC LL_DMA_SetPeriphIncMode

LL_DMA_GetPeriphIncMode

Function name	**__STATIC_INLINE uint32_t LL_DMA_GetPeriphIncMode (DMA_TypeDef * DMAx, uint32_t Channel)**
Function description	Get Peripheral increment mode.
Parameters	• **DMAx:** DMAx Instance • **Channel:** This parameter can be one of the following values: – LL_DMA_CHANNEL_1 – LL_DMA_CHANNEL_2 – LL_DMA_CHANNEL_3 – LL_DMA_CHANNEL_4 – LL_DMA_CHANNEL_5 – LL_DMA_CHANNEL_6 – LL_DMA_CHANNEL_7
Return values	• **Returned:** value can be one of the following values: – LL_DMA_PERIPH_INCREMENT – LL_DMA_PERIPH_NOINCREMENT
Reference Manual to LL API cross reference:	• CCR PINC LL_DMA_GetPeriphIncMode

LL_DMA_SetMemoryIncMode

Function name	**__STATIC_INLINE void LL_DMA_SetMemoryIncMode (DMA_TypeDef * DMAx, uint32_t Channel, uint32_t MemoryOrM2MDstIncMode)**
Function description	Set Memory increment mode.
Parameters	• **DMAx:** DMAx Instance • **Channel:** This parameter can be one of the following values: – LL_DMA_CHANNEL_1 – LL_DMA_CHANNEL_2 – LL_DMA_CHANNEL_3 – LL_DMA_CHANNEL_4 – LL_DMA_CHANNEL_5 – LL_DMA_CHANNEL_6 – LL_DMA_CHANNEL_7 • **MemoryOrM2MDstIncMode:** This parameter can be one of the following values: – LL_DMA_MEMORY_INCREMENT – LL_DMA_MEMORY_NOINCREMENT
Return values	• **None**
Reference Manual to LL API cross reference:	• CCR MINC LL_DMA_SetMemoryIncMode

LL_DMA_GetMemoryIncMode

Function name	**__STATIC_INLINE uint32_t LL_DMA_GetMemoryIncMode (DMA_TypeDef * DMAx, uint32_t Channel)**
Function description	Get Memory increment mode.
Parameters	• **DMAx:** DMAx Instance • **Channel:** This parameter can be one of the following values: – LL_DMA_CHANNEL_1 – LL_DMA_CHANNEL_2 – LL_DMA_CHANNEL_3 – LL_DMA_CHANNEL_4 – LL_DMA_CHANNEL_5 – LL_DMA_CHANNEL_6 – LL_DMA_CHANNEL_7
Return values	• **Returned:** value can be one of the following values: – LL_DMA_MEMORY_INCREMENT – LL_DMA_MEMORY_NOINCREMENT
Reference Manual to LL API cross reference:	• CCR MINC LL_DMA_GetMemoryIncMode

LL_DMA_SetPeriphSize

Function name	**__STATIC_INLINE void LL_DMA_SetPeriphSize (DMA_TypeDef * DMAx, uint32_t Channel, uint32_t PeriphOrM2MSrcDataSize)**
Function description	Set Peripheral size.
Parameters	• **DMAx:** DMAx Instance • **Channel:** This parameter can be one of the following values: – LL_DMA_CHANNEL_1 – LL_DMA_CHANNEL_2 – LL_DMA_CHANNEL_3 – LL_DMA_CHANNEL_4 – LL_DMA_CHANNEL_5 – LL_DMA_CHANNEL_6 – LL_DMA_CHANNEL_7 • **PeriphOrM2MSrcDataSize:** This parameter can be one of the following values: – LL_DMA_PDATAALIGN_BYTE – LL_DMA_PDATAALIGN_HALFWORD – LL_DMA_PDATAALIGN_WORD
Return values	• **None**
Reference Manual to LL API cross reference:	• CCR PSIZE LL_DMA_SetPeriphSize

LL_DMA_GetPeriphSize

Function name
__STATIC_INLINE uint32_t LL_DMA_GetPeriphSize (DMA_TypeDef * DMAx, uint32_t Channel)

Function description
Get Peripheral size.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **Returned:** value can be one of the following values:
  - LL_DMA_PDATAALIGN_BYTE
  - LL_DMA_PDATAALIGN_HALFWORD
  - LL_DMA_PDATAALIGN_WORD

Reference Manual to LL API cross reference:
- CCR PSIZE LL_DMA_GetPeriphSize

LL_DMA_SetMemorySize

Function name
__STATIC_INLINE void LL_DMA_SetMemorySize (DMA_TypeDef * DMAx, uint32_t Channel, uint32_t MemoryOrM2MDstDataSize)

Function description
Set Memory size.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7
- **MemoryOrM2MDstDataSize:** This parameter can be one of the following values:
  - LL_DMA_MDATAALIGN_BYTE
  - LL_DMA_MDATAALIGN_HALFWORD
  - LL_DMA_MDATAALIGN_WORD

Return values
- **None**

Reference Manual to LL API cross reference:
- CCR MSIZE LL_DMA_SetMemorySize

LL_DMA_GetMemorySize

Function name	**__STATIC_INLINE uint32_t LL_DMA_GetMemorySize (DMA_TypeDef * DMAx, uint32_t Channel)**
Function description	Get Memory size.
Parameters	• **DMAx:** DMAx Instance • **Channel:** This parameter can be one of the following values: – LL_DMA_CHANNEL_1 – LL_DMA_CHANNEL_2 – LL_DMA_CHANNEL_3 – LL_DMA_CHANNEL_4 – LL_DMA_CHANNEL_5 – LL_DMA_CHANNEL_6 – LL_DMA_CHANNEL_7
Return values	• **Returned:** value can be one of the following values: – LL_DMA_MDATAALIGN_BYTE – LL_DMA_MDATAALIGN_HALFWORD – LL_DMA_MDATAALIGN_WORD
Reference Manual to LL API cross reference:	• CCR MSIZE LL_DMA_GetMemorySize

LL_DMA_SetChannelPriorityLevel

Function name	**__STATIC_INLINE void LL_DMA_SetChannelPriorityLevel (DMA_TypeDef * DMAx, uint32_t Channel, uint32_t Priority)**
Function description	Set Channel priority level.
Parameters	• **DMAx:** DMAx Instance • **Channel:** This parameter can be one of the following values: – LL_DMA_CHANNEL_1 – LL_DMA_CHANNEL_2 – LL_DMA_CHANNEL_3 – LL_DMA_CHANNEL_4 – LL_DMA_CHANNEL_5 – LL_DMA_CHANNEL_6 – LL_DMA_CHANNEL_7 • **Priority:** This parameter can be one of the following values: – LL_DMA_PRIORITY_LOW – LL_DMA_PRIORITY_MEDIUM – LL_DMA_PRIORITY_HIGH – LL_DMA_PRIORITY_VERYHIGH
Return values	• **None**
Reference Manual to LL API cross reference:	• CCR PL LL_DMA_SetChannelPriorityLevel

LL_DMA_GetChannelPriorityLevel

Function name
__STATIC_INLINE uint32_t LL_DMA_GetChannelPriorityLevel (DMA_TypeDef * DMAx, uint32_t Channel)

Function description
Get Channel priority level.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **Returned:** value can be one of the following values:
  - LL_DMA_PRIORITY_LOW
  - LL_DMA_PRIORITY_MEDIUM
  - LL_DMA_PRIORITY_HIGH
  - LL_DMA_PRIORITY_VERYHIGH

Reference Manual to LL API cross reference:
- CCR PL LL_DMA_GetChannelPriorityLevel

LL_DMA_SetDataLength

Function name
__STATIC_INLINE void LL_DMA_SetDataLength (DMA_TypeDef * DMAx, uint32_t Channel, uint32_t NbData)

Function description
Set Number of data to transfer.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7
- **NbData:** Between Min_Data = 0 and Max_Data = 0x0000FFFF

Return values
- **None**

Notes
- This action has no effect if channel is enabled.

Reference Manual to LL API cross reference:
- CNDTR NDT LL_DMA_SetDataLength

LL_DMA_GetDataLength

Function name	**__STATIC_INLINE uint32_t LL_DMA_GetDataLength (DMA_TypeDef * DMAx, uint32_t Channel)**
Function description	Get Number of data to transfer.
Parameters	• **DMAx:** DMAx Instance • **Channel:** This parameter can be one of the following values: – LL_DMA_CHANNEL_1 – LL_DMA_CHANNEL_2 – LL_DMA_CHANNEL_3 – LL_DMA_CHANNEL_4 – LL_DMA_CHANNEL_5 – LL_DMA_CHANNEL_6 – LL_DMA_CHANNEL_7
Return values	• **Between:** Min_Data = 0 and Max_Data = 0xFFFFFFFF
Notes	• Once the channel is enabled, the return value indicate the remaining bytes to be transmitted.
Reference Manual to LL API cross reference:	• CNDTR NDT LL_DMA_GetDataLength

LL_DMA_ConfigAddresses

Function name	**__STATIC_INLINE void LL_DMA_ConfigAddresses (DMA_TypeDef * DMAx, uint32_t Channel, uint32_t SrcAddress, uint32_t DstAddress, uint32_t Direction)**
Function description	Configure the Source and Destination addresses.
Parameters	• **DMAx:** DMAx Instance • **Channel:** This parameter can be one of the following values: – LL_DMA_CHANNEL_1 – LL_DMA_CHANNEL_2 – LL_DMA_CHANNEL_3 – LL_DMA_CHANNEL_4 – LL_DMA_CHANNEL_5 – LL_DMA_CHANNEL_6 – LL_DMA_CHANNEL_7 • **SrcAddress:** Between Min_Data = 0 and Max_Data = 0xFFFFFFFF • **DstAddress:** Between Min_Data = 0 and Max_Data = 0xFFFFFFFF • **Direction:** This parameter can be one of the following values: – LL_DMA_DIRECTION_PERIPH_TO_MEMORY – LL_DMA_DIRECTION_MEMORY_TO_PERIPH – LL_DMA_DIRECTION_MEMORY_TO_MEMORY
Return values	• **None**
Notes	• This API must not be called when the DMA channel is enabled. • Each IP using DMA provides an API to get directly the

register adress (LL_PPP_DMA_GetRegAddr).

Reference Manual to LL API cross reference:
- CPAR PA LL_DMA_ConfigAddresses
- CMAR MA LL_DMA_ConfigAddresses

LL_DMA_SetMemoryAddress

Function name
__STATIC_INLINE void LL_DMA_SetMemoryAddress (DMA_TypeDef * DMAx, uint32_t Channel, uint32_t MemoryAddress)

Function description
Set the Memory address.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7
- **MemoryAddress:** Between Min_Data = 0 and Max_Data = 0xFFFFFFFF

Return values
- **None**

Notes
- Interface used for direction LL_DMA_DIRECTION_PERIPH_TO_MEMORY or LL_DMA_DIRECTION_MEMORY_TO_PERIPH only.
- This API must not be called when the DMA channel is enabled.

Reference Manual to LL API cross reference:
- CMAR MA LL_DMA_SetMemoryAddress

LL_DMA_SetPeriphAddress

Function name
__STATIC_INLINE void LL_DMA_SetPeriphAddress (DMA_TypeDef * DMAx, uint32_t Channel, uint32_t PeriphAddress)

Function description
Set the Peripheral address.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7
- **PeriphAddress:** Between Min_Data = 0 and Max_Data = 0xFFFFFFFF

Return values
- **None**

Notes
- Interface used for direction LL_DMA_DIRECTION_PERIPH_TO_MEMORY or LL_DMA_DIRECTION_MEMORY_TO_PERIPH only.
- This API must not be called when the DMA channel is enabled.

Reference Manual to LL API cross reference:
- CPAR PA LL_DMA_SetPeriphAddress

LL_DMA_GetMemoryAddress

Function name
__STATIC_INLINE uint32_t LL_DMA_GetMemoryAddress (DMA_TypeDef * DMAx, uint32_t Channel)

Function description
Get Memory address.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **Between:** Min_Data = 0 and Max_Data = 0xFFFFFFFF

Notes
- Interface used for direction LL_DMA_DIRECTION_PERIPH_TO_MEMORY or LL_DMA_DIRECTION_MEMORY_TO_PERIPH only.

Reference Manual to LL API cross reference:
- CMAR MA LL_DMA_GetMemoryAddress

LL_DMA_GetPeriphAddress

Function name
__STATIC_INLINE uint32_t LL_DMA_GetPeriphAddress (DMA_TypeDef * DMAx, uint32_t Channel)

Function description
Get Peripheral address.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **Between:** Min_Data = 0 and Max_Data = 0xFFFFFFFF

Notes
- Interface used for direction LL_DMA_DIRECTION_PERIPH_TO_MEMORY or LL_DMA_DIRECTION_MEMORY_TO_PERIPH only.

Reference Manual to LL API cross reference:
- CPAR PA LL_DMA_GetPeriphAddress

LL_DMA_SetM2MSrcAddress

Function name **__STATIC_INLINE void LL_DMA_SetM2MSrcAddress (DMA_TypeDef * DMAx, uint32_t Channel, uint32_t MemoryAddress)**

Function description Set the Memory to Memory Source address.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7
- **MemoryAddress:** Between Min_Data = 0 and Max_Data = 0xFFFFFFFF

Return values
- **None**

Notes
- Interface used for direction LL_DMA_DIRECTION_MEMORY_TO_MEMORY only.
- This API must not be called when the DMA channel is enabled.

Reference Manual to LL API cross reference:
- CPAR PA LL_DMA_SetM2MSrcAddress

LL_DMA_SetM2MDstAddress

Function name **__STATIC_INLINE void LL_DMA_SetM2MDstAddress (DMA_TypeDef * DMAx, uint32_t Channel, uint32_t MemoryAddress)**

Function description Set the Memory to Memory Destination address.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7
- **MemoryAddress:** Between Min_Data = 0 and Max_Data =

0xFFFFFFFF

Return values
- **None**

Notes
- Interface used for direction LL_DMA_DIRECTION_MEMORY_TO_MEMORY only.
- This API must not be called when the DMA channel is enabled.

Reference Manual to LL API cross reference:
- CMAR MA LL_DMA_SetM2MDstAddress

LL_DMA_GetM2MSrcAddress

Function name
__STATIC_INLINE uint32_t LL_DMA_GetM2MSrcAddress (DMA_TypeDef * DMAx, uint32_t Channel)

Function description
Get the Memory to Memory Source address.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **Between:** Min_Data = 0 and Max_Data = 0xFFFFFFFF

Notes
- Interface used for direction LL_DMA_DIRECTION_MEMORY_TO_MEMORY only.

Reference Manual to LL API cross reference:
- CPAR PA LL_DMA_GetM2MSrcAddress

LL_DMA_GetM2MDstAddress

Function name
__STATIC_INLINE uint32_t LL_DMA_GetM2MDstAddress (DMA_TypeDef * DMAx, uint32_t Channel)

Function description
Get the Memory to Memory Destination address.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **Between:** Min_Data = 0 and Max_Data = 0xFFFFFFFF

Notes
- Interface used for direction

LL_DMA_DIRECTION_MEMORY_TO_MEMORY only.

Reference Manual to LL API cross reference:
- CMAR MA LL_DMA_GetM2MDstAddress

LL_DMA_IsActiveFlag_GI1

Function name **__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_GI1 (DMA_TypeDef * DMAx)**

Function description Get Channel 1 global interrupt flag.

Parameters
- **DMAx:** DMAx Instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- ISR GIF1 LL_DMA_IsActiveFlag_GI1

LL_DMA_IsActiveFlag_GI2

Function name **__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_GI2 (DMA_TypeDef * DMAx)**

Function description Get Channel 2 global interrupt flag.

Parameters
- **DMAx:** DMAx Instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- ISR GIF2 LL_DMA_IsActiveFlag_GI2

LL_DMA_IsActiveFlag_GI3

Function name **__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_GI3 (DMA_TypeDef * DMAx)**

Function description Get Channel 3 global interrupt flag.

Parameters
- **DMAx:** DMAx Instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- ISR GIF3 LL_DMA_IsActiveFlag_GI3

LL_DMA_IsActiveFlag_GI4

Function name **__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_GI4 (DMA_TypeDef * DMAx)**

Function description Get Channel 4 global interrupt flag.

Parameters
- **DMAx:** DMAx Instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• ISR GIF4 LL_DMA_IsActiveFlag_GI4

LL_DMA_IsActiveFlag_GI5

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_GI5 (DMA_TypeDef * DMAx)**
Function description	Get Channel 5 global interrupt flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR GIF5 LL_DMA_IsActiveFlag_GI5

LL_DMA_IsActiveFlag_GI6

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_GI6 (DMA_TypeDef * DMAx)**
Function description	Get Channel 6 global interrupt flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR GIF6 LL_DMA_IsActiveFlag_GI6

LL_DMA_IsActiveFlag_GI7

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_GI7 (DMA_TypeDef * DMAx)**
Function description	Get Channel 7 global interrupt flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR GIF7 LL_DMA_IsActiveFlag_GI7

LL_DMA_IsActiveFlag_TC1

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_TC1 (DMA_TypeDef * DMAx)**
Function description	Get Channel 1 transfer complete flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• ISR TCIF1 LL_DMA_IsActiveFlag_TC1

LL_DMA_IsActiveFlag_TC2

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_TC2 (DMA_TypeDef * DMAx)**
Function description	Get Channel 2 transfer complete flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TCIF2 LL_DMA_IsActiveFlag_TC2

LL_DMA_IsActiveFlag_TC3

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_TC3 (DMA_TypeDef * DMAx)**
Function description	Get Channel 3 transfer complete flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TCIF3 LL_DMA_IsActiveFlag_TC3

LL_DMA_IsActiveFlag_TC4

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_TC4 (DMA_TypeDef * DMAx)**
Function description	Get Channel 4 transfer complete flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TCIF4 LL_DMA_IsActiveFlag_TC4

LL_DMA_IsActiveFlag_TC5

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_TC5 (DMA_TypeDef * DMAx)**
Function description	Get Channel 5 transfer complete flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• ISR TCIF5 LL_DMA_IsActiveFlag_TC5

LL_DMA_IsActiveFlag_TC6

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_TC6 (DMA_TypeDef * DMAx)**
Function description	Get Channel 6 transfer complete flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TCIF6 LL_DMA_IsActiveFlag_TC6

LL_DMA_IsActiveFlag_TC7

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_TC7 (DMA_TypeDef * DMAx)**
Function description	Get Channel 7 transfer complete flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TCIF7 LL_DMA_IsActiveFlag_TC7

LL_DMA_IsActiveFlag_HT1

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_HT1 (DMA_TypeDef * DMAx)**
Function description	Get Channel 1 half transfer flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR HTIF1 LL_DMA_IsActiveFlag_HT1

LL_DMA_IsActiveFlag_HT2

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_HT2 (DMA_TypeDef * DMAx)**
Function description	Get Channel 2 half transfer flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• ISR HTIF2 LL_DMA_IsActiveFlag_HT2

LL_DMA_IsActiveFlag_HT3

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_HT3 (DMA_TypeDef * DMAx)**
Function description	Get Channel 3 half transfer flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR HTIF3 LL_DMA_IsActiveFlag_HT3

LL_DMA_IsActiveFlag_HT4

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_HT4 (DMA_TypeDef * DMAx)**
Function description	Get Channel 4 half transfer flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR HTIF4 LL_DMA_IsActiveFlag_HT4

LL_DMA_IsActiveFlag_HT5

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_HT5 (DMA_TypeDef * DMAx)**
Function description	Get Channel 5 half transfer flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR HTIF5 LL_DMA_IsActiveFlag_HT5

LL_DMA_IsActiveFlag_HT6

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_HT6 (DMA_TypeDef * DMAx)**
Function description	Get Channel 6 half transfer flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• ISR HTIF6 LL_DMA_IsActiveFlag_HT6

LL_DMA_IsActiveFlag_HT7

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_HT7 (DMA_TypeDef * DMAx)**
Function description	Get Channel 7 half transfer flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR HTIF7 LL_DMA_IsActiveFlag_HT7

LL_DMA_IsActiveFlag_TE1

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_TE1 (DMA_TypeDef * DMAx)**
Function description	Get Channel 1 transfer error flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TEIF1 LL_DMA_IsActiveFlag_TE1

LL_DMA_IsActiveFlag_TE2

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_TE2 (DMA_TypeDef * DMAx)**
Function description	Get Channel 2 transfer error flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TEIF2 LL_DMA_IsActiveFlag_TE2

LL_DMA_IsActiveFlag_TE3

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_TE3 (DMA_TypeDef * DMAx)**
Function description	Get Channel 3 transfer error flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• ISR TEIF3 LL_DMA_IsActiveFlag_TE3

LL_DMA_IsActiveFlag_TE4

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_TE4 (DMA_TypeDef * DMAx)**
Function description	Get Channel 4 transfer error flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TEIF4 LL_DMA_IsActiveFlag_TE4

LL_DMA_IsActiveFlag_TE5

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_TE5 (DMA_TypeDef * DMAx)**
Function description	Get Channel 5 transfer error flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TEIF5 LL_DMA_IsActiveFlag_TE5

LL_DMA_IsActiveFlag_TE6

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_TE6 (DMA_TypeDef * DMAx)**
Function description	Get Channel 6 transfer error flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TEIF6 LL_DMA_IsActiveFlag_TE6

LL_DMA_IsActiveFlag_TE7

Function name	**__STATIC_INLINE uint32_t LL_DMA_IsActiveFlag_TE7 (DMA_TypeDef * DMAx)**
Function description	Get Channel 7 transfer error flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• ISR TEIF7 LL_DMA_IsActiveFlag_TE7

LL_DMA_ClearFlag_GI1

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_GI1 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 1 global interrupt flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CGIF1 LL_DMA_ClearFlag_GI1

LL_DMA_ClearFlag_GI2

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_GI2 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 2 global interrupt flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CGIF2 LL_DMA_ClearFlag_GI2

LL_DMA_ClearFlag_GI3

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_GI3 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 3 global interrupt flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CGIF3 LL_DMA_ClearFlag_GI3

LL_DMA_ClearFlag_GI4

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_GI4 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 4 global interrupt flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**

Reference Manual to LL API cross reference:	• IFCR CGIF4 LL_DMA_ClearFlag_GI4

LL_DMA_ClearFlag_GI5

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_GI5 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 5 global interrupt flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CGIF5 LL_DMA_ClearFlag_GI5

LL_DMA_ClearFlag_GI6

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_GI6 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 6 global interrupt flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CGIF6 LL_DMA_ClearFlag_GI6

LL_DMA_ClearFlag_GI7

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_GI7 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 7 global interrupt flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CGIF7 LL_DMA_ClearFlag_GI7

LL_DMA_ClearFlag_TC1

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_TC1 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 1 transfer complete flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**

Reference Manual to LL API cross reference:	• IFCR CTCIF1 LL_DMA_ClearFlag_TC1

LL_DMA_ClearFlag_TC2

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_TC2 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 2 transfer complete flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CTCIF2 LL_DMA_ClearFlag_TC2

LL_DMA_ClearFlag_TC3

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_TC3 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 3 transfer complete flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CTCIF3 LL_DMA_ClearFlag_TC3

LL_DMA_ClearFlag_TC4

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_TC4 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 4 transfer complete flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CTCIF4 LL_DMA_ClearFlag_TC4

LL_DMA_ClearFlag_TC5

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_TC5 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 5 transfer complete flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**

Reference Manual to LL API cross reference:	• IFCR CTCIF5 LL_DMA_ClearFlag_TC5

LL_DMA_ClearFlag_TC6

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_TC6 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 6 transfer complete flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CTCIF6 LL_DMA_ClearFlag_TC6

LL_DMA_ClearFlag_TC7

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_TC7 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 7 transfer complete flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CTCIF7 LL_DMA_ClearFlag_TC7

LL_DMA_ClearFlag_HT1

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_HT1 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 1 half transfer flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CHTIF1 LL_DMA_ClearFlag_HT1

LL_DMA_ClearFlag_HT2

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_HT2 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 2 half transfer flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**

Reference Manual to LL API cross reference:	• IFCR CHTIF2 LL_DMA_ClearFlag_HT2

LL_DMA_ClearFlag_HT3

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_HT3 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 3 half transfer flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CHTIF3 LL_DMA_ClearFlag_HT3

LL_DMA_ClearFlag_HT4

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_HT4 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 4 half transfer flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CHTIF4 LL_DMA_ClearFlag_HT4

LL_DMA_ClearFlag_HT5

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_HT5 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 5 half transfer flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CHTIF5 LL_DMA_ClearFlag_HT5

LL_DMA_ClearFlag_HT6

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_HT6 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 6 half transfer flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**

Reference Manual to LL API cross reference:	• IFCR CHTIF6 LL_DMA_ClearFlag_HT6

LL_DMA_ClearFlag_HT7

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_HT7 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 7 half transfer flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CHTIF7 LL_DMA_ClearFlag_HT7

LL_DMA_ClearFlag_TE1

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_TE1 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 1 transfer error flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CTEIF1 LL_DMA_ClearFlag_TE1

LL_DMA_ClearFlag_TE2

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_TE2 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 2 transfer error flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CTEIF2 LL_DMA_ClearFlag_TE2

LL_DMA_ClearFlag_TE3

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_TE3 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 3 transfer error flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**

Reference Manual to LL API cross reference:	• IFCR CTEIF3 LL_DMA_ClearFlag_TE3

LL_DMA_ClearFlag_TE4

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_TE4 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 4 transfer error flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CTEIF4 LL_DMA_ClearFlag_TE4

LL_DMA_ClearFlag_TE5

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_TE5 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 5 transfer error flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CTEIF5 LL_DMA_ClearFlag_TE5

LL_DMA_ClearFlag_TE6

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_TE6 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 6 transfer error flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IFCR CTEIF6 LL_DMA_ClearFlag_TE6

LL_DMA_ClearFlag_TE7

Function name	**__STATIC_INLINE void LL_DMA_ClearFlag_TE7 (DMA_TypeDef * DMAx)**
Function description	Clear Channel 7 transfer error flag.
Parameters	• **DMAx:** DMAx Instance
Return values	• **None**

Reference Manual to LL API cross reference:
- IFCR CTEIF7 LL_DMA_ClearFlag_TE7

LL_DMA_EnableIT_TC

Function name **__STATIC_INLINE void LL_DMA_EnableIT_TC (DMA_TypeDef * DMAx, uint32_t Channel)**

Function description Enable Transfer complete interrupt.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **None**

Reference Manual to LL API cross reference:
- CCR TCIE LL_DMA_EnableIT_TC

LL_DMA_EnableIT_HT

Function name **__STATIC_INLINE void LL_DMA_EnableIT_HT (DMA_TypeDef * DMAx, uint32_t Channel)**

Function description Enable Half transfer interrupt.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **None**

Reference Manual to LL API cross reference:
- CCR HTIE LL_DMA_EnableIT_HT

LL_DMA_EnableIT_TE

Function name **__STATIC_INLINE void LL_DMA_EnableIT_TE (DMA_TypeDef * DMAx, uint32_t Channel)**

Function description Enable Transfer error interrupt.

Parameters
- **DMAx:** DMAx Instance

- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **None**

Reference Manual to LL API cross reference:
- CCR TEIE LL_DMA_EnableIT_TE

LL_DMA_DisableIT_TC

Function name
__STATIC_INLINE void LL_DMA_DisableIT_TC (DMA_TypeDef * DMAx, uint32_t Channel)

Function description
Disable Transfer complete interrupt.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **None**

Reference Manual to LL API cross reference:
- CCR TCIE LL_DMA_DisableIT_TC

LL_DMA_DisableIT_HT

Function name
__STATIC_INLINE void LL_DMA_DisableIT_HT (DMA_TypeDef * DMAx, uint32_t Channel)

Function description
Disable Half transfer interrupt.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **None**

Reference Manual to LL API cross reference:
- CCR HTIE LL_DMA_DisableIT_HT

LL_DMA_DisableIT_TE

Function name: **__STATIC_INLINE void LL_DMA_DisableIT_TE (DMA_TypeDef * DMAx, uint32_t Channel)**

Function description: Disable Transfer error interrupt.

Parameters:
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values:
- **None**

Reference Manual to LL API cross reference:
- CCR TEIE LL_DMA_DisableIT_TE

LL_DMA_IsEnabledIT_TC

Function name: **__STATIC_INLINE uint32_t LL_DMA_IsEnabledIT_TC (DMA_TypeDef * DMAx, uint32_t Channel)**

Function description: Check if Transfer complete Interrupt is enabled.

Parameters:
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values:
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CCR TCIE LL_DMA_IsEnabledIT_TC

LL_DMA_IsEnabledIT_HT

Function name: **__STATIC_INLINE uint32_t LL_DMA_IsEnabledIT_HT (DMA_TypeDef * DMAx, uint32_t Channel)**

Function description: Check if Half transfer Interrupt is enabled.

Parameters:
- **DMAx:** DMAx Instance

- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CCR HTIE LL_DMA_IsEnabledIT_HT

LL_DMA_IsEnabledIT_TE

Function name
__STATIC_INLINE uint32_t LL_DMA_IsEnabledIT_TE (DMA_TypeDef * DMAx, uint32_t Channel)

Function description
Check if Transfer error Interrupt is enabled.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CCR TEIE LL_DMA_IsEnabledIT_TE

LL_DMA_Init

Function name
uint32_t LL_DMA_Init (DMA_TypeDef * DMAx, uint32_t Channel, LL_DMA_InitTypeDef * DMA_InitStruct)

Function description
Initialize the DMA registers according to the specified parameters in DMA_InitStruct.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  - LL_DMA_CHANNEL_1
  - LL_DMA_CHANNEL_2
  - LL_DMA_CHANNEL_3
  - LL_DMA_CHANNEL_4
  - LL_DMA_CHANNEL_5
  - LL_DMA_CHANNEL_6
  - LL_DMA_CHANNEL_7
- **DMA_InitStruct:** pointer to a LL_DMA_InitTypeDef structure.

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: DMA registers are initialized
  – ERROR: Not applicable

Notes
- To convert DMAx_Channely Instance to DMAx Instance and Channely, use helper macros : __LL_DMA_GET_INSTANCE __LL_DMA_GET_CHANNEL

LL_DMA_DeInit

Function name **uint32_t LL_DMA_DeInit (DMA_TypeDef * DMAx, uint32_t Channel)**

Function description De-initialize the DMA registers to their default reset values.

Parameters
- **DMAx:** DMAx Instance
- **Channel:** This parameter can be one of the following values:
  – LL_DMA_CHANNEL_1
  – LL_DMA_CHANNEL_2
  – LL_DMA_CHANNEL_3
  – LL_DMA_CHANNEL_4
  – LL_DMA_CHANNEL_5
  – LL_DMA_CHANNEL_6
  – LL_DMA_CHANNEL_7

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: DMA registers are de-initialized
  – ERROR: DMA registers are not de-initialized

LL_DMA_StructInit

Function name **void LL_DMA_StructInit (LL_DMA_InitTypeDef * DMA_InitStruct)**

Function description Set each LL_DMA_InitTypeDef field to default value.

Parameters
- **DMA_InitStruct:** Pointer to a LL_DMA_InitTypeDef structure.

Return values
- **None**

65.3 DMA Firmware driver defines

65.3.1 DMA

CHANNEL

LL_DMA_CHANNEL_1	DMA Channel 1
LL_DMA_CHANNEL_2	DMA Channel 2
LL_DMA_CHANNEL_3	DMA Channel 3
LL_DMA_CHANNEL_4	DMA Channel 4
LL_DMA_CHANNEL_5	DMA Channel 5
LL_DMA_CHANNEL_6	DMA Channel 6
LL_DMA_CHANNEL_7	DMA Channel 7

LL_DMA_CHANNEL_ALL DMA Channel all (used only for function

Clear Flags Defines

LL_DMA_IFCR_CGIF1 Channel 1 global flag

LL_DMA_IFCR_CTCIF1 Channel 1 transfer complete flag

LL_DMA_IFCR_CHTIF1 Channel 1 half transfer flag

LL_DMA_IFCR_CTEIF1 Channel 1 transfer error flag

LL_DMA_IFCR_CGIF2 Channel 2 global flag

LL_DMA_IFCR_CTCIF2 Channel 2 transfer complete flag

LL_DMA_IFCR_CHTIF2 Channel 2 half transfer flag

LL_DMA_IFCR_CTEIF2 Channel 2 transfer error flag

LL_DMA_IFCR_CGIF3 Channel 3 global flag

LL_DMA_IFCR_CTCIF3 Channel 3 transfer complete flag

LL_DMA_IFCR_CHTIF3 Channel 3 half transfer flag

LL_DMA_IFCR_CTEIF3 Channel 3 transfer error flag

LL_DMA_IFCR_CGIF4 Channel 4 global flag

LL_DMA_IFCR_CTCIF4 Channel 4 transfer complete flag

LL_DMA_IFCR_CHTIF4 Channel 4 half transfer flag

LL_DMA_IFCR_CTEIF4 Channel 4 transfer error flag

LL_DMA_IFCR_CGIF5 Channel 5 global flag

LL_DMA_IFCR_CTCIF5 Channel 5 transfer complete flag

LL_DMA_IFCR_CHTIF5 Channel 5 half transfer flag

LL_DMA_IFCR_CTEIF5 Channel 5 transfer error flag

LL_DMA_IFCR_CGIF6 Channel 6 global flag

LL_DMA_IFCR_CTCIF6 Channel 6 transfer complete flag

LL_DMA_IFCR_CHTIF6 Channel 6 half transfer flag

LL_DMA_IFCR_CTEIF6 Channel 6 transfer error flag

LL_DMA_IFCR_CGIF7 Channel 7 global flag

LL_DMA_IFCR_CTCIF7 Channel 7 transfer complete flag

LL_DMA_IFCR_CHTIF7 Channel 7 half transfer flag

LL_DMA_IFCR_CTEIF7 Channel 7 transfer error flag

Transfer Direction

LL_DMA_DIRECTION_PERIPH_TO_MEMORY Peripheral to memory direction

LL_DMA_DIRECTION_MEMORY_TO_PERIPH Memory to peripheral direction

LL_DMA_DIRECTION_MEMORY_TO_MEMORY Memory to memory direction

Get Flags Defines

LL_DMA_ISR_GIF1 Channel 1 global flag

LL_DMA_ISR_TCIF1	Channel 1 transfer complete flag
LL_DMA_ISR_HTIF1	Channel 1 half transfer flag
LL_DMA_ISR_TEIF1	Channel 1 transfer error flag
LL_DMA_ISR_GIF2	Channel 2 global flag
LL_DMA_ISR_TCIF2	Channel 2 transfer complete flag
LL_DMA_ISR_HTIF2	Channel 2 half transfer flag
LL_DMA_ISR_TEIF2	Channel 2 transfer error flag
LL_DMA_ISR_GIF3	Channel 3 global flag
LL_DMA_ISR_TCIF3	Channel 3 transfer complete flag
LL_DMA_ISR_HTIF3	Channel 3 half transfer flag
LL_DMA_ISR_TEIF3	Channel 3 transfer error flag
LL_DMA_ISR_GIF4	Channel 4 global flag
LL_DMA_ISR_TCIF4	Channel 4 transfer complete flag
LL_DMA_ISR_HTIF4	Channel 4 half transfer flag
LL_DMA_ISR_TEIF4	Channel 4 transfer error flag
LL_DMA_ISR_GIF5	Channel 5 global flag
LL_DMA_ISR_TCIF5	Channel 5 transfer complete flag
LL_DMA_ISR_HTIF5	Channel 5 half transfer flag
LL_DMA_ISR_TEIF5	Channel 5 transfer error flag
LL_DMA_ISR_GIF6	Channel 6 global flag
LL_DMA_ISR_TCIF6	Channel 6 transfer complete flag
LL_DMA_ISR_HTIF6	Channel 6 half transfer flag
LL_DMA_ISR_TEIF6	Channel 6 transfer error flag
LL_DMA_ISR_GIF7	Channel 7 global flag
LL_DMA_ISR_TCIF7	Channel 7 transfer complete flag
LL_DMA_ISR_HTIF7	Channel 7 half transfer flag
LL_DMA_ISR_TEIF7	Channel 7 transfer error flag

IT Defines

LL_DMA_CCR_TCIE	Transfer complete interrupt
LL_DMA_CCR_HTIE	Half Transfer interrupt
LL_DMA_CCR_TEIE	Transfer error interrupt

Memory data alignment

LL_DMA_MDATAALIGN_BYTE	Memory data alignment : Byte
LL_DMA_MDATAALIGN_HALFWORD	Memory data alignment : HalfWord
LL_DMA_MDATAALIGN_WORD	Memory data alignment : Word

Memory increment mode

LL_DMA_MEMORY_INCREMENT Memory increment mode Enable

LL_DMA_MEMORY_NOINCREMENT Memory increment mode Disable

Transfer mode

LL_DMA_MODE_NORMAL Normal Mode

LL_DMA_MODE_CIRCULAR Circular Mode

Peripheral data alignment

LL_DMA_PDATAALIGN_BYTE Peripheral data alignment : Byte

LL_DMA_PDATAALIGN_HALFWORD Peripheral data alignment : HalfWord

LL_DMA_PDATAALIGN_WORD Peripheral data alignment : Word

Peripheral increment mode

LL_DMA_PERIPH_INCREMENT Peripheral increment mode Enable

LL_DMA_PERIPH_NOINCREMENT Peripheral increment mode Disable

Transfer Priority level

LL_DMA_PRIORITY_LOW Priority level : Low

LL_DMA_PRIORITY_MEDIUM Priority level : Medium

LL_DMA_PRIORITY_HIGH Priority level : High

LL_DMA_PRIORITY_VERYHIGH Priority level : Very_High

Convert DMAxChannely

__LL_DMA_GET_INSTANCE

Description:

- Convert DMAx_Channely into DMAx.

Parameters:

- __CHANNEL_INSTANCE__: DMAx_Channely

Return value:

- DMAx

__LL_DMA_GET_CHANNEL

Description:

- Convert DMAx_Channely into LL_DMA_CHANNEL_y.

Parameters:

- __CHANNEL_INSTANCE__: DMAx_Channely

Return value:

- LL_DMA_CHANNEL_y

__LL_DMA_GET_CHANNEL_INSTANCE

Description:

- Convert DMA Instance DMAx and LL_DMA_CHANNEL_y into DMAx_Channely.

Parameters:

- __DMA_INSTANCE__: DMAx
- __CHANNEL__: LL_DMA_CHANNEL_y

Return value:

- DMAx_Channely

Common Write and read registers macros

LL_DMA_WriteReg

Description:

- Write a value in DMA register.

Parameters:

- __INSTANCE__: DMA Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_DMA_ReadReg

Description:

- Read a value in DMA register.

Parameters:

- __INSTANCE__: DMA Instance
- __REG__: Register to be read

Return value:

- Register: value

66 LL EXTI Generic Driver

66.1 EXTI Firmware driver registers structures

66.1.1 LL_EXTI_InitTypeDef

Data Fields

- ***uint32_t Line_0_31***
- ***uint32_t Line_32_63***
- ***FunctionalState LineCommand***
- ***uint8_t Mode***
- ***uint8_t Trigger***

Field Documentation

- ***uint32_t LL_EXTI_InitTypeDef::Line_0_31***
  Specifies the EXTI lines to be enabled or disabled for Lines in range 0 to 31 This parameter can be any combination of ***EXTI_LL_EC_LINE***
- ***uint32_t LL_EXTI_InitTypeDef::Line_32_63***
  Specifies the EXTI lines to be enabled or disabled for Lines in range 32 to 63 This parameter can be any combination of ***EXTI_LL_EC_LINE***
- ***FunctionalState LL_EXTI_InitTypeDef::LineCommand***
  Specifies the new state of the selected EXTI lines. This parameter can be set either to ENABLE or DISABLE
- ***uint8_t LL_EXTI_InitTypeDef::Mode***
  Specifies the mode for the EXTI lines. This parameter can be a value of ***EXTI_LL_EC_MODE***.
- ***uint8_t LL_EXTI_InitTypeDef::Trigger***
  Specifies the trigger signal active edge for the EXTI lines. This parameter can be a value of ***EXTI_LL_EC_TRIGGER***.

66.2 EXTI Firmware driver API description

66.2.1 Detailed description of functions

LL_EXTI_EnableIT_0_31

Function name **__STATIC_INLINE void LL_EXTI_EnableIT_0_31 (uint32_t ExtiLine)**

Function description Enable ExtiLine Interrupt request for Lines in range 0 to 31.

Parameters
- **ExtiLine:** This parameter can be one of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8
  - LL_EXTI_LINE_9

  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12
  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_17
  - LL_EXTI_LINE_18
  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21
  - LL_EXTI_LINE_22
  - LL_EXTI_LINE_23
  - LL_EXTI_LINE_24
  - LL_EXTI_LINE_25
  - LL_EXTI_LINE_26
  - LL_EXTI_LINE_27
  - LL_EXTI_LINE_28
  - LL_EXTI_LINE_29
  - LL_EXTI_LINE_30
  - LL_EXTI_LINE_31
  - LL_EXTI_LINE_ALL_0_31

Return values
- **None**

Notes
- The reset value for the direct or internal lines (see RM) is set to 1 in order to enable the interrupt by default. Bits are set automatically at Power on.
- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:
- IMR IMx LL_EXTI_EnableIT_0_31

LL_EXTI_EnableIT_32_63

Function name
__STATIC_INLINE void LL_EXTI_EnableIT_32_63 (uint32_t ExtiLine)

Function description
Enable ExtiLine Interrupt request for Lines in range 32 to 63.

Parameters
- **ExtiLine:** This parameter can be one of the following values:
  - LL_EXTI_LINE_32
  - LL_EXTI_LINE_33
  - LL_EXTI_LINE_34
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38
  - LL_EXTI_LINE_39
  - LL_EXTI_LINE_ALL_32_63

Return values
- **None**

Notes
- The reset value for the direct lines (lines from 32 to 34, line 39) is set to 1 in order to enable the interrupt by default. Bits are set automatically at Power on.

Reference Manual to LL API cross reference:
- IMR2 IMx LL_EXTI_EnableIT_32_63

LL_EXTI_DisableIT_0_31

Function name **__STATIC_INLINE void LL_EXTI_DisableIT_0_31 (uint32_t ExtiLine)**

Function description Disable ExtiLine Interrupt request for Lines in range 0 to 31.

Parameters
- **ExtiLine:** This parameter can be one of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8
  - LL_EXTI_LINE_9
  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12
  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_17
  - LL_EXTI_LINE_18
  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21
  - LL_EXTI_LINE_22
  - LL_EXTI_LINE_23
  - LL_EXTI_LINE_24
  - LL_EXTI_LINE_25
  - LL_EXTI_LINE_26
  - LL_EXTI_LINE_27
  - LL_EXTI_LINE_28
  - LL_EXTI_LINE_29
  - LL_EXTI_LINE_30
  - LL_EXTI_LINE_31
  - LL_EXTI_LINE_ALL_0_31

Return values
- **None**

Notes
- The reset value for the direct or internal lines (see RM) is set to 1 in order to enable the interrupt by default. Bits are set automatically at Power on.

- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:

- IMR IMx LL_EXTI_DisableIT_0_31

LL_EXTI_DisableIT_32_63

Function name **__STATIC_INLINE void LL_EXTI_DisableIT_32_63 (uint32_t ExtiLine)**

Function description Disable ExtiLine Interrupt request for Lines in range 32 to 63.

Parameters

- **ExtiLine:** This parameter can be one of the following values:
  - LL_EXTI_LINE_32
  - LL_EXTI_LINE_33
  - LL_EXTI_LINE_34
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38
  - LL_EXTI_LINE_39
  - LL_EXTI_LINE_ALL_32_63

Return values

- **None**

Notes

- The reset value for the direct lines (lines from 32 to 34, line 39) is set to 1 in order to enable the interrupt by default. Bits are set automatically at Power on.

Reference Manual to LL API cross reference:

- IMR2 IMx LL_EXTI_DisableIT_32_63

LL_EXTI_IsEnabledIT_0_31

Function name **__STATIC_INLINE uint32_t LL_EXTI_IsEnabledIT_0_31 (uint32_t ExtiLine)**

Function description Indicate if ExtiLine Interrupt request is enabled for Lines in range 0 to 31.

Parameters

- **ExtiLine:** This parameter can be one of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8
  - LL_EXTI_LINE_9
  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12

  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_17
  - LL_EXTI_LINE_18
  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21
  - LL_EXTI_LINE_22
  - LL_EXTI_LINE_23
  - LL_EXTI_LINE_24
  - LL_EXTI_LINE_25
  - LL_EXTI_LINE_26
  - LL_EXTI_LINE_27
  - LL_EXTI_LINE_28
  - LL_EXTI_LINE_29
  - LL_EXTI_LINE_30
  - LL_EXTI_LINE_31
  - LL_EXTI_LINE_ALL_0_31

Return values
- **State:** of bit (1 or 0).

Notes
- The reset value for the direct or internal lines (see RM) is set to 1 in order to enable the interrupt by default. Bits are set automatically at Power on.
- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:
- IMR IMx LL_EXTI_IsEnabledIT_0_31

LL_EXTI_IsEnabledIT_32_63

Function name
__STATIC_INLINE uint32_t LL_EXTI_IsEnabledIT_32_63 (uint32_t ExtiLine)

Function description
Indicate if ExtiLine Interrupt request is enabled for Lines in range 32 to 63.

Parameters
- **ExtiLine:** This parameter can be one of the following values:
  - LL_EXTI_LINE_32
  - LL_EXTI_LINE_33
  - LL_EXTI_LINE_34
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38
  - LL_EXTI_LINE_39
  - LL_EXTI_LINE_ALL_32_63

Return values
- **State:** of bit (1 or 0).

Notes
- The reset value for the direct lines (lines from 32 to 34, line 39) is set to 1 in order to enable the interrupt by default. Bits

are set automatically at Power on.

Reference Manual to LL API cross reference:

- IMR2 IMx LL_EXTI_IsEnabledIT_32_63

LL_EXTI_EnableEvent_0_31

Function name **__STATIC_INLINE void LL_EXTI_EnableEvent_0_31 (uint32_t ExtiLine)**

Function description Enable ExtiLine Event request for Lines in range 0 to 31.

Parameters

- **ExtiLine:** This parameter can be one of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8
  - LL_EXTI_LINE_9
  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12
  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_17
  - LL_EXTI_LINE_18
  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21
  - LL_EXTI_LINE_22
  - LL_EXTI_LINE_23
  - LL_EXTI_LINE_24
  - LL_EXTI_LINE_25
  - LL_EXTI_LINE_26
  - LL_EXTI_LINE_27
  - LL_EXTI_LINE_28
  - LL_EXTI_LINE_29
  - LL_EXTI_LINE_30
  - LL_EXTI_LINE_31
  - LL_EXTI_LINE_ALL_0_31

Return values

- **None**

Notes

- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:
- EMR EMx LL_EXTI_EnableEvent_0_31

LL_EXTI_EnableEvent_32_63

Function name: **__STATIC_INLINE void LL_EXTI_EnableEvent_32_63 (uint32_t ExtiLine)**

Function description: Enable ExtiLine Event request for Lines in range 32 to 63.

Parameters:
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_32
  - LL_EXTI_LINE_33
  - LL_EXTI_LINE_34
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38
  - LL_EXTI_LINE_39
  - LL_EXTI_LINE_ALL_32_63

Return values:
- **None**

Reference Manual to LL API cross reference:
- EMR2 EMx LL_EXTI_EnableEvent_32_63

LL_EXTI_DisableEvent_0_31

Function name: **__STATIC_INLINE void LL_EXTI_DisableEvent_0_31 (uint32_t ExtiLine)**

Function description: Disable ExtiLine Event request for Lines in range 0 to 31.

Parameters:
- **ExtiLine:** This parameter can be one of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8
  - LL_EXTI_LINE_9
  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12
  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_17
  - LL_EXTI_LINE_18

  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21
  - LL_EXTI_LINE_22
  - LL_EXTI_LINE_23
  - LL_EXTI_LINE_24
  - LL_EXTI_LINE_25
  - LL_EXTI_LINE_26
  - LL_EXTI_LINE_27
  - LL_EXTI_LINE_28
  - LL_EXTI_LINE_29
  - LL_EXTI_LINE_30
  - LL_EXTI_LINE_31
  - LL_EXTI_LINE_ALL_0_31

Return values
- **None**

Notes
- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:
- EMR EMx LL_EXTI_DisableEvent_0_31

LL_EXTI_DisableEvent_32_63

Function name
__STATIC_INLINE void LL_EXTI_DisableEvent_32_63 (uint32_t ExtiLine)

Function description
Disable ExtiLine Event request for Lines in range 32 to 63.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_32
  - LL_EXTI_LINE_33
  - LL_EXTI_LINE_34
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38
  - LL_EXTI_LINE_39
  - LL_EXTI_LINE_ALL_32_63

Return values
- **None**

Reference Manual to LL API cross reference:
- EMR2 EMx LL_EXTI_DisableEvent_32_63

LL_EXTI_IsEnabledEvent_0_31

Function name
__STATIC_INLINE uint32_t LL_EXTI_IsEnabledEvent_0_31 (uint32_t ExtiLine)

Function description
Indicate if ExtiLine Event request is enabled for Lines in range 0 to 31.

Parameters
- **ExtiLine:** This parameter can be one of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8
  - LL_EXTI_LINE_9
  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12
  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_17
  - LL_EXTI_LINE_18
  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21
  - LL_EXTI_LINE_22
  - LL_EXTI_LINE_23
  - LL_EXTI_LINE_24
  - LL_EXTI_LINE_25
  - LL_EXTI_LINE_26
  - LL_EXTI_LINE_27
  - LL_EXTI_LINE_28
  - LL_EXTI_LINE_29
  - LL_EXTI_LINE_30
  - LL_EXTI_LINE_31
  - LL_EXTI_LINE_ALL_0_31

Return values
- **State:** of bit (1 or 0).

Notes
- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:
- EMR EMx LL_EXTI_IsEnabledEvent_0_31

LL_EXTI_IsEnabledEvent_32_63

Function name
__STATIC_INLINE uint32_t LL_EXTI_IsEnabledEvent_32_63 (uint32_t ExtiLine)

Function description
Indicate if ExtiLine Event request is enabled for Lines in range 32 to 63.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_32
  - LL_EXTI_LINE_33
  - LL_EXTI_LINE_34
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38
  - LL_EXTI_LINE_39
  - LL_EXTI_LINE_ALL_32_63

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- EMR2 EMx LL_EXTI_IsEnabledEvent_32_63

LL_EXTI_EnableRisingTrig_0_31

Function name
__STATIC_INLINE void LL_EXTI_EnableRisingTrig_0_31 (uint32_t ExtiLine)

Function description
Enable ExtiLine Rising Edge Trigger for Lines in range 0 to 31.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8
  - LL_EXTI_LINE_9
  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12
  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_18
  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21

- LL_EXTI_LINE_22
- LL_EXTI_LINE_29
- LL_EXTI_LINE_30
- LL_EXTI_LINE_31

Return values
- **None**

Notes
- The configurable wakeup lines are edge-triggered. No glitch must be generated on these lines. If a rising edge on a configurable interrupt line occurs during a write operation in the EXTI_RTSR register, the pending bit is not set. Rising and falling edge triggers can be set for the same interrupt line. In this case, both generate a trigger condition.
- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:
- RTSR RTx LL_EXTI_EnableRisingTrig_0_31

LL_EXTI_EnableRisingTrig_32_63

Function name
__STATIC_INLINE void LL_EXTI_EnableRisingTrig_32_63 (uint32_t ExtiLine)

Function description
Enable ExtiLine Rising Edge Trigger for Lines in range 32 to 63.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38

Return values
- **None**

Notes
- The configurable wakeup lines are edge-triggered. No glitch must be generated on these lines. If a rising edge on a configurable interrupt line occurs during a write operation in the EXTI_RTSR register, the pending bit is not set.Rising and falling edge triggers can be set for the same interrupt line. In this case, both generate a trigger condition.

Reference Manual to LL API cross reference:
- RTSR2 RTx LL_EXTI_EnableRisingTrig_32_63

LL_EXTI_DisableRisingTrig_0_31

Function name
__STATIC_INLINE void LL_EXTI_DisableRisingTrig_0_31 (uint32_t ExtiLine)

Function description
Disable ExtiLine Rising Edge Trigger for Lines in range 0 to 31.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2

  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8
  - LL_EXTI_LINE_9
  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12
  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_18
  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21
  - LL_EXTI_LINE_22
  - LL_EXTI_LINE_29
  - LL_EXTI_LINE_30
  - LL_EXTI_LINE_31

Return values
- **None**

Notes
- The configurable wakeup lines are edge-triggered. No glitch must be generated on these lines. If a rising edge on a configurable interrupt line occurs during a write operation in the EXTI_RTSR register, the pending bit is not set. Rising and falling edge triggers can be set for the same interrupt line. In this case, both generate a trigger condition.
- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:
- RTSR RTx LL_EXTI_DisableRisingTrig_0_31

LL_EXTI_DisableRisingTrig_32_63

Function name
__STATIC_INLINE void LL_EXTI_DisableRisingTrig_32_63 (uint32_t ExtiLine)

Function description
Disable ExtiLine Rising Edge Trigger for Lines in range 32 to 63.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38

Return values
- **None**

Notes
- The configurable wakeup lines are edge-triggered. No glitch must be generated on these lines. If a rising edge on a configurable interrupt line occurs during a write operation in

the EXTI_RTSR register, the pending bit is not set. Rising and falling edge triggers can be set for the same interrupt line. In this case, both generate a trigger condition.

Reference Manual to LL API cross reference:

- RTSR2 RTx LL_EXTI_DisableRisingTrig_32_63

LL_EXTI_IsEnabledRisingTrig_0_31

Function name **__STATIC_INLINE uint32_t LL_EXTI_IsEnabledRisingTrig_0_31 (uint32_t ExtiLine)**

Function description Check if rising edge trigger is enabled for Lines in range 0 to 31.

Parameters

- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8
  - LL_EXTI_LINE_9
  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12
  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_18
  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21
  - LL_EXTI_LINE_22
  - LL_EXTI_LINE_29
  - LL_EXTI_LINE_30
  - LL_EXTI_LINE_31

Return values

- **State:** of bit (1 or 0).

Notes

- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:

- RTSR RTx LL_EXTI_IsEnabledRisingTrig_0_31

LL_EXTI_IsEnabledRisingTrig_32_63

Function name
__STATIC_INLINE uint32_t LL_EXTI_IsEnabledRisingTrig_32_63 (uint32_t ExtiLine)

Function description
Check if rising edge trigger is enabled for Lines in range 32 to 63.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- RTSR2 RTx LL_EXTI_IsEnabledRisingTrig_32_63

LL_EXTI_EnableFallingTrig_0_31

Function name
__STATIC_INLINE void LL_EXTI_EnableFallingTrig_0_31 (uint32_t ExtiLine)

Function description
Enable ExtiLine Falling Edge Trigger for Lines in range 0 to 31.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8
  - LL_EXTI_LINE_9
  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12
  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_18
  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21
  - LL_EXTI_LINE_22
  - LL_EXTI_LINE_29
  - LL_EXTI_LINE_30
  - LL_EXTI_LINE_31

Return values
- **None**

Notes
- The configurable wakeup lines are edge-triggered. No glitch must be generated on these lines. If a falling edge on a configurable interrupt line occurs during a write operation in the EXTI_FTSR register, the pending bit is not set. Rising and falling edge triggers can be set for the same interrupt line. In this case, both generate a trigger condition.
- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:
- FTSR FTx LL_EXTI_EnableFallingTrig_0_31

LL_EXTI_EnableFallingTrig_32_63

Function name **__STATIC_INLINE void LL_EXTI_EnableFallingTrig_32_63 (uint32_t ExtiLine)**

Function description Enable ExtiLine Falling Edge Trigger for Lines in range 32 to 63.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38

Return values
- **None**

Notes
- The configurable wakeup lines are edge-triggered. No glitch must be generated on these lines. If a Falling edge on a configurable interrupt line occurs during a write operation in the EXTI_FTSR register, the pending bit is not set. Rising and falling edge triggers can be set for the same interrupt line. In this case, both generate a trigger condition.

Reference Manual to LL API cross reference:
- FTSR2 FTx LL_EXTI_EnableFallingTrig_32_63

LL_EXTI_DisableFallingTrig_0_31

Function name **__STATIC_INLINE void LL_EXTI_DisableFallingTrig_0_31 (uint32_t ExtiLine)**

Function description Disable ExtiLine Falling Edge Trigger for Lines in range 0 to 31.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8

  - LL_EXTI_LINE_9
  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12
  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_18
  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21
  - LL_EXTI_LINE_22
  - LL_EXTI_LINE_29
  - LL_EXTI_LINE_30
  - LL_EXTI_LINE_31

Return values
- **None**

Notes
- The configurable wakeup lines are edge-triggered. No glitch must be generated on these lines. If a Falling edge on a configurable interrupt line occurs during a write operation in the EXTI_FTSR register, the pending bit is not set. Rising and falling edge triggers can be set for the same interrupt line. In this case, both generate a trigger condition.
- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:
- FTSR FTx LL_EXTI_DisableFallingTrig_0_31

LL_EXTI_DisableFallingTrig_32_63

Function name
__STATIC_INLINE void LL_EXTI_DisableFallingTrig_32_63 (uint32_t ExtiLine)

Function description
Disable ExtiLine Falling Edge Trigger for Lines in range 32 to 63.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38

Return values
- **None**

Notes
- The configurable wakeup lines are edge-triggered. No glitch must be generated on these lines. If a Falling edge on a configurable interrupt line occurs during a write operation in the EXTI_FTSR register, the pending bit is not set. Rising and falling edge triggers can be set for the same interrupt line. In this case, both generate a trigger condition.

Reference Manual to LL API cross reference:
- FTSR2 FTx LL_EXTI_DisableFallingTrig_32_63

LL_EXTI_IsEnabledFallingTrig_0_31

Function name
__STATIC_INLINE uint32_t LL_EXTI_IsEnabledFallingTrig_0_31 (uint32_t ExtiLine)

Function description
Check if falling edge trigger is enabled for Lines in range 0 to 31.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8
  - LL_EXTI_LINE_9
  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12
  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_18
  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21
  - LL_EXTI_LINE_22
  - LL_EXTI_LINE_29
  - LL_EXTI_LINE_30
  - LL_EXTI_LINE_31

Return values
- **State:** of bit (1 or 0).

Notes
- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:
- FTSR FTx LL_EXTI_IsEnabledFallingTrig_0_31

LL_EXTI_IsEnabledFallingTrig_32_63

Function name
__STATIC_INLINE uint32_t LL_EXTI_IsEnabledFallingTrig_32_63 (uint32_t ExtiLine)

Function description
Check if falling edge trigger is enabled for Lines in range 32 to 63.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:

  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- FTSR2 FTx LL_EXTI_IsEnabledFallingTrig_32_63

LL_EXTI_GenerateSWI_0_31

Function name
__STATIC_INLINE void LL_EXTI_GenerateSWI_0_31 (uint32_t ExtiLine)

Function description
Generate a software Interrupt Event for Lines in range 0 to 31.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8
  - LL_EXTI_LINE_9
  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12
  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_18
  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21
  - LL_EXTI_LINE_22
  - LL_EXTI_LINE_29
  - LL_EXTI_LINE_30
  - LL_EXTI_LINE_31

Return values
- **None**

Notes
- If the interrupt is enabled on this line in the EXTI_IMR, writing a 1 to this bit when it is at '0' sets the corresponding pending bit in EXTI_PR resulting in an interrupt request generation. This bit is cleared by clearing the corresponding bit in the EXTI_PR register (by writing a 1 into the bit)
- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:
- SWIER SWIx LL_EXTI_GenerateSWI_0_31

LL_EXTI_GenerateSWI_32_63

Function name: **__STATIC_INLINE void LL_EXTI_GenerateSWI_32_63 (uint32_t ExtiLine)**

Function description: Generate a software Interrupt Event for Lines in range 32 to 63.

Parameters:
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38

Return values:
- **None**

Notes:
- If the interrupt is enabled on this line inthe EXTI_IMR2, writing a 1 to this bit when it is at '0' sets the corresponding pending bit in EXTI_PR2 resulting in an interrupt request generation. This bit is cleared by clearing the corresponding bit in the EXTI_PR2 register (by writing a 1 into the bit)

Reference Manual to LL API cross reference:
- SWIER2 SWIx LL_EXTI_GenerateSWI_32_63

LL_EXTI_IsActiveFlag_0_31

Function name: **__STATIC_INLINE uint32_t LL_EXTI_IsActiveFlag_0_31 (uint32_t ExtiLine)**

Function description: Check if the ExtLine Flag is set or not for Lines in range 0 to 31.

Parameters:
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8
  - LL_EXTI_LINE_9
  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12
  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_18

  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21
  - LL_EXTI_LINE_22
  - LL_EXTI_LINE_29
  - LL_EXTI_LINE_30
  - LL_EXTI_LINE_31

Return values
- **State:** of bit (1 or 0).

Notes
- This bit is set when the selected edge event arrives on the interrupt line. This bit is cleared by writing a 1 to the bit.
- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:
- PR PIFx LL_EXTI_IsActiveFlag_0_31

LL_EXTI_IsActiveFlag_32_63

Function name
__STATIC_INLINE uint32_t LL_EXTI_IsActiveFlag_32_63 (uint32_t ExtiLine)

Function description
Check if the ExtLine Flag is set or not for Lines in range 32 to 63.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38

Return values
- **State:** of bit (1 or 0).

Notes
- This bit is set when the selected edge event arrives on the interrupt line. This bit is cleared by writing a 1 to the bit.

Reference Manual to LL API cross reference:
- PR2 PIFx LL_EXTI_IsActiveFlag_32_63

LL_EXTI_ReadFlag_0_31

Function name
__STATIC_INLINE uint32_t LL_EXTI_ReadFlag_0_31 (uint32_t ExtiLine)

Function description
Read ExtLine Combination Flag for Lines in range 0 to 31.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6

- LL_EXTI_LINE_7
- LL_EXTI_LINE_8
- LL_EXTI_LINE_9
- LL_EXTI_LINE_10
- LL_EXTI_LINE_11
- LL_EXTI_LINE_12
- LL_EXTI_LINE_13
- LL_EXTI_LINE_14
- LL_EXTI_LINE_15
- LL_EXTI_LINE_16
- LL_EXTI_LINE_18
- LL_EXTI_LINE_19
- LL_EXTI_LINE_20
- LL_EXTI_LINE_21
- LL_EXTI_LINE_22
- LL_EXTI_LINE_29
- LL_EXTI_LINE_30
- LL_EXTI_LINE_31

Return values
- **@note:** This bit is set when the selected edge event arrives on the interrupt

Notes
- This bit is set when the selected edge event arrives on the interrupt line. This bit is cleared by writing a 1 to the bit.
- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:
- PR PIFx LL_EXTI_ReadFlag_0_31

LL_EXTI_ReadFlag_32_63

Function name
__STATIC_INLINE uint32_t LL_EXTI_ReadFlag_32_63 (uint32_t ExtiLine)

Function description
Read ExtLine Combination Flag for Lines in range 32 to 63.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36
  - LL_EXTI_LINE_37
  - LL_EXTI_LINE_38

Return values
- **@note:** This bit is set when the selected edge event arrives on the interrupt

Notes
- This bit is set when the selected edge event arrives on the interrupt line. This bit is cleared by writing a 1 to the bit.

Reference Manual to LL API cross reference:
- PR2 PIFx LL_EXTI_ReadFlag_32_63

LL_EXTI_ClearFlag_0_31

Function name
__STATIC_INLINE void LL_EXTI_ClearFlag_0_31 (uint32_t ExtiLine)

Function description
Clear ExtLine Flags for Lines in range 0 to 31.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_0
  - LL_EXTI_LINE_1
  - LL_EXTI_LINE_2
  - LL_EXTI_LINE_3
  - LL_EXTI_LINE_4
  - LL_EXTI_LINE_5
  - LL_EXTI_LINE_6
  - LL_EXTI_LINE_7
  - LL_EXTI_LINE_8
  - LL_EXTI_LINE_9
  - LL_EXTI_LINE_10
  - LL_EXTI_LINE_11
  - LL_EXTI_LINE_12
  - LL_EXTI_LINE_13
  - LL_EXTI_LINE_14
  - LL_EXTI_LINE_15
  - LL_EXTI_LINE_16
  - LL_EXTI_LINE_18
  - LL_EXTI_LINE_19
  - LL_EXTI_LINE_20
  - LL_EXTI_LINE_21
  - LL_EXTI_LINE_22
  - LL_EXTI_LINE_29
  - LL_EXTI_LINE_30
  - LL_EXTI_LINE_31

Return values
- **None**

Notes
- This bit is set when the selected edge event arrives on the interrupt line. This bit is cleared by writing a 1 to the bit.
- Please check each device line mapping for EXTI Line availability

Reference Manual to LL API cross reference:
- PR PIFx LL_EXTI_ClearFlag_0_31

LL_EXTI_ClearFlag_32_63

Function name
__STATIC_INLINE void LL_EXTI_ClearFlag_32_63 (uint32_t ExtiLine)

Function description
Clear ExtLine Flags for Lines in range 32 to 63.

Parameters
- **ExtiLine:** This parameter can be a combination of the following values:
  - LL_EXTI_LINE_35
  - LL_EXTI_LINE_36

– LL_EXTI_LINE_37
– LL_EXTI_LINE_38

Return values
- **None**

Notes
- This bit is set when the selected edge event arrives on the interrupt line. This bit is cleared by writing a 1 to the bit.

Reference Manual to LL API cross reference:
- PR2 PIFx LL_EXTI_ClearFlag_32_63

LL_EXTI_Init

Function name **uint32_t LL_EXTI_Init (LL_EXTI_InitTypeDef * EXTI_InitStruct)**

Function description Initialize the EXTI registers according to the specified parameters in EXTI_InitStruct.

Parameters
- **EXTI_InitStruct:** pointer to a LL_EXTI_InitTypeDef structure.

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: EXTI registers are initialized
  – ERROR: not applicable

LL_EXTI_DeInit

Function name **uint32_t LL_EXTI_DeInit (void)**

Function description De-initialize the EXTI registers to their default reset values.

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: EXTI registers are de-initialized
  – ERROR: not applicable

LL_EXTI_StructInit

Function name **void LL_EXTI_StructInit (LL_EXTI_InitTypeDef * EXTI_InitStruct)**

Function description Set each LL_EXTI_InitTypeDef field to default value.

Parameters
- **EXTI_InitStruct:** Pointer to a LL_EXTI_InitTypeDef structure.

Return values
- **None**

66.3 EXTI Firmware driver defines

66.3.1 EXTI

LINE

LL_EXTI_LINE_0	Extended line 0
LL_EXTI_LINE_1	Extended line 1
LL_EXTI_LINE_2	Extended line 2
LL_EXTI_LINE_3	Extended line 3
LL_EXTI_LINE_4	Extended line 4

LL_EXTI_LINE_5	Extended line 5
LL_EXTI_LINE_6	Extended line 6
LL_EXTI_LINE_7	Extended line 7
LL_EXTI_LINE_8	Extended line 8
LL_EXTI_LINE_9	Extended line 9
LL_EXTI_LINE_10	Extended line 10
LL_EXTI_LINE_11	Extended line 11
LL_EXTI_LINE_12	Extended line 12
LL_EXTI_LINE_13	Extended line 13
LL_EXTI_LINE_14	Extended line 14
LL_EXTI_LINE_15	Extended line 15
LL_EXTI_LINE_16	Extended line 16
LL_EXTI_LINE_17	Extended line 17
LL_EXTI_LINE_18	Extended line 18
LL_EXTI_LINE_19	Extended line 19
LL_EXTI_LINE_20	Extended line 20
LL_EXTI_LINE_21	Extended line 21
LL_EXTI_LINE_22	Extended line 22
LL_EXTI_LINE_23	Extended line 23
LL_EXTI_LINE_24	Extended line 24
LL_EXTI_LINE_25	Extended line 25
LL_EXTI_LINE_26	Extended line 26
LL_EXTI_LINE_28	Extended line 28
LL_EXTI_LINE_29	Extended line 29
LL_EXTI_LINE_30	Extended line 30
LL_EXTI_LINE_31	Extended line 31
LL_EXTI_LINE_ALL_0_31	All Extended line not reserved
LL_EXTI_LINE_32	Extended line 32
LL_EXTI_LINE_33	Extended line 33
LL_EXTI_LINE_34	Extended line 34
LL_EXTI_LINE_35	Extended line 35
LL_EXTI_LINE_ALL_32_63	All Extended line not reserved
LL_EXTI_LINE_ALL	All Extended line
LL_EXTI_LINE_NONE	None Extended line

Mode

LL_EXTI_MODE_IT	Interrupt Mode

LL_EXTI_MODE_EVENT Event Mode

LL_EXTI_MODE_IT_EVENT Interrupt & Event Mode

Edge Trigger

LL_EXTI_TRIGGER_NONE No Trigger Mode

LL_EXTI_TRIGGER_RISING Trigger Rising Mode

LL_EXTI_TRIGGER_FALLING Trigger Falling Mode

LL_EXTI_TRIGGER_RISING_FALLING Trigger Rising & Falling Mode

Common Write and read registers Macros

LL_EXTI_WriteReg

Description:

- Write a value in EXTI register.

Parameters:

- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_EXTI_ReadReg

Description:

- Read a value in EXTI register.

Parameters:

- __REG__: Register to be read

Return value:

- Register: value

67 LL GPIO Generic Driver

67.1 GPIO Firmware driver registers structures

67.1.1 LL_GPIO_InitTypeDef

Data Fields

- ***uint32_t Pin***
- ***uint32_t Mode***
- ***uint32_t Speed***
- ***uint32_t OutputType***
- ***uint32_t Pull***
- ***uint32_t Alternate***

Field Documentation

- ***uint32_t LL_GPIO_InitTypeDef::Pin***
  Specifies the GPIO pins to be configured. This parameter can be any value of ***GPIO_LL_EC_PIN***
- ***uint32_t LL_GPIO_InitTypeDef::Mode***
  Specifies the operating mode for the selected pins. This parameter can be a value of ***GPIO_LL_EC_MODE***.GPIO HW configuration can be modified afterwards using unitary function **LL_GPIO_SetPinMode()**.
- ***uint32_t LL_GPIO_InitTypeDef::Speed***
  Specifies the speed for the selected pins. This parameter can be a value of ***GPIO_LL_EC_SPEED***.GPIO HW configuration can be modified afterwards using unitary function **LL_GPIO_SetPinSpeed()**.
- ***uint32_t LL_GPIO_InitTypeDef::OutputType***
  Specifies the operating output type for the selected pins. This parameter can be a value of ***GPIO_LL_EC_OUTPUT***.GPIO HW configuration can be modified afterwards using unitary function **LL_GPIO_SetPinOutputType()**.
- ***uint32_t LL_GPIO_InitTypeDef::Pull***
  Specifies the operating Pull-up/Pull down for the selected pins. This parameter can be a value of ***GPIO_LL_EC_PULL***.GPIO HW configuration can be modified afterwards using unitary function **LL_GPIO_SetPinPull()**.
- ***uint32_t LL_GPIO_InitTypeDef::Alternate***
  Specifies the Peripheral to be connected to the selected pins. This parameter can be a value of ***GPIO_LL_EC_AF***.GPIO HW configuration can be modified afterwards using unitary function **LL_GPIO_SetAFPin_0_7()** and **LL_GPIO_SetAFPin_8_15()**.

67.2 GPIO Firmware driver API description

67.2.1 Detailed description of functions

LL_GPIO_SetPinMode

Function name	**__STATIC_INLINE void LL_GPIO_SetPinMode (GPIO_TypeDef * GPIOx, uint32_t Pin, uint32_t Mode)**
Function description	Configure gpio mode for a dedicated pin on dedicated port.
Parameters	• **GPIOx:** GPIO Port • **Pin:** This parameter can be one of the following values:

  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7
  - LL_GPIO_PIN_8
  - LL_GPIO_PIN_9
  - LL_GPIO_PIN_10
  - LL_GPIO_PIN_11
  - LL_GPIO_PIN_12
  - LL_GPIO_PIN_13
  - LL_GPIO_PIN_14
  - LL_GPIO_PIN_15
- **Mode:** This parameter can be one of the following values:
  - LL_GPIO_MODE_INPUT
  - LL_GPIO_MODE_OUTPUT
  - LL_GPIO_MODE_ALTERNATE
  - LL_GPIO_MODE_ANALOG

Return values
- **None**

Notes
- I/O mode can be Input mode, General purpose output, Alternate function mode or Analog.
- Warning: only one pin can be passed as parameter.

Reference Manual to LL API cross reference:
- MODER MODEy LL_GPIO_SetPinMode

LL_GPIO_GetPinMode

Function name
__STATIC_INLINE uint32_t LL_GPIO_GetPinMode (GPIO_TypeDef * GPIOx, uint32_t Pin)

Function description
Return gpio mode for a dedicated pin on dedicated port.

Parameters
- **GPIOx:** GPIO Port
- **Pin:** This parameter can be one of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7
  - LL_GPIO_PIN_8
  - LL_GPIO_PIN_9
  - LL_GPIO_PIN_10
  - LL_GPIO_PIN_11
  - LL_GPIO_PIN_12
  - LL_GPIO_PIN_13

– LL_GPIO_PIN_14
– LL_GPIO_PIN_15

Return values
- **Returned:** value can be one of the following values:
  – LL_GPIO_MODE_INPUT
  – LL_GPIO_MODE_OUTPUT
  – LL_GPIO_MODE_ALTERNATE
  – LL_GPIO_MODE_ANALOG

Notes
- I/O mode can be Input mode, General purpose output, Alternate function mode or Analog.
- Warning: only one pin can be passed as parameter.

Reference Manual to LL API cross reference:
- MODER MODEy LL_GPIO_GetPinMode

LL_GPIO_SetPinOutputType

Function name
__STATIC_INLINE void LL_GPIO_SetPinOutputType (GPIO_TypeDef * GPIOx, uint32_t PinMask, uint32_t OutputType)

Function description
Configure gpio output type for several pins on dedicated port.

Parameters
- **GPIOx:** GPIO Port
- **PinMask:** This parameter can be a combination of the following values:
  – LL_GPIO_PIN_0
  – LL_GPIO_PIN_1
  – LL_GPIO_PIN_2
  – LL_GPIO_PIN_3
  – LL_GPIO_PIN_4
  – LL_GPIO_PIN_5
  – LL_GPIO_PIN_6
  – LL_GPIO_PIN_7
  – LL_GPIO_PIN_8
  – LL_GPIO_PIN_9
  – LL_GPIO_PIN_10
  – LL_GPIO_PIN_11
  – LL_GPIO_PIN_12
  – LL_GPIO_PIN_13
  – LL_GPIO_PIN_14
  – LL_GPIO_PIN_15
  – LL_GPIO_PIN_ALL
- **OutputType:** This parameter can be one of the following values:
  – LL_GPIO_OUTPUT_PUSHPULL
  – LL_GPIO_OUTPUT_OPENDRAIN

Return values
- **None**

Notes
- Output type as to be set when gpio pin is in output or alternate modes. Possible type are Push-pull or Open-drain.

Reference Manual to LL API cross reference:
- OTYPER OTy LL_GPIO_SetPinOutputType

LL_GPIO_GetPinOutputType

Function name: **__STATIC_INLINE uint32_t LL_GPIO_GetPinOutputType (GPIO_TypeDef * GPIOx, uint32_t Pin)**

Function description: Return gpio output type for several pins on dedicated port.

Parameters:
- **GPIOx:** GPIO Port
- **Pin:** This parameter can be one of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7
  - LL_GPIO_PIN_8
  - LL_GPIO_PIN_9
  - LL_GPIO_PIN_10
  - LL_GPIO_PIN_11
  - LL_GPIO_PIN_12
  - LL_GPIO_PIN_13
  - LL_GPIO_PIN_14
  - LL_GPIO_PIN_15
  - LL_GPIO_PIN_ALL

Return values:
- **Returned:** value can be one of the following values:
  - LL_GPIO_OUTPUT_PUSHPULL
  - LL_GPIO_OUTPUT_OPENDRAIN

Notes:
- Output type as to be set when gpio pin is in output or alternate modes. Possible type are Push-pull or Open-drain.
- Warning: only one pin can be passed as parameter.

Reference Manual to LL API cross reference:
- OTYPER OTy LL_GPIO_GetPinOutputType

LL_GPIO_SetPinSpeed

Function name: **__STATIC_INLINE void LL_GPIO_SetPinSpeed (GPIO_TypeDef * GPIOx, uint32_t Pin, uint32_t Speed)**

Function description: Configure gpio speed for a dedicated pin on dedicated port.

Parameters:
- **GPIOx:** GPIO Port
- **Pin:** This parameter can be one of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4

  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7
  - LL_GPIO_PIN_8
  - LL_GPIO_PIN_9
  - LL_GPIO_PIN_10
  - LL_GPIO_PIN_11
  - LL_GPIO_PIN_12
  - LL_GPIO_PIN_13
  - LL_GPIO_PIN_14
  - LL_GPIO_PIN_15
- **Speed:** This parameter can be one of the following values:
  - LL_GPIO_SPEED_FREQ_LOW
  - LL_GPIO_SPEED_FREQ_MEDIUM
  - LL_GPIO_SPEED_FREQ_HIGH

Return values
- **None**

Notes
- I/O speed can be Low, Medium, Fast or High speed.
- Warning: only one pin can be passed as parameter.
- Refer to datasheet for frequency specifications and the power supply and load conditions for each speed.

Reference Manual to LL API cross reference:
- OSPEEDR OSPEEDy LL_GPIO_SetPinSpeed

LL_GPIO_GetPinSpeed

Function name
__STATIC_INLINE uint32_t LL_GPIO_GetPinSpeed (GPIO_TypeDef * GPIOx, uint32_t Pin)

Function description
Return gpio speed for a dedicated pin on dedicated port.

Parameters
- **GPIOx:** GPIO Port
- **Pin:** This parameter can be one of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7
  - LL_GPIO_PIN_8
  - LL_GPIO_PIN_9
  - LL_GPIO_PIN_10
  - LL_GPIO_PIN_11
  - LL_GPIO_PIN_12
  - LL_GPIO_PIN_13
  - LL_GPIO_PIN_14
  - LL_GPIO_PIN_15

Return values
- **Returned:** value can be one of the following values:
  - LL_GPIO_SPEED_FREQ_LOW
  - LL_GPIO_SPEED_FREQ_MEDIUM

– LL_GPIO_SPEED_FREQ_HIGH

Notes
- I/O speed can be Low, Medium, Fast or High speed.
- Warning: only one pin can be passed as parameter.
- Refer to datasheet for frequency specifications and the power supply and load conditions for each speed.

Reference Manual to LL API cross reference:
- OSPEEDR OSPEEDy LL_GPIO_GetPinSpeed

LL_GPIO_SetPinPull

Function name **__STATIC_INLINE void LL_GPIO_SetPinPull (GPIO_TypeDef * GPIOx, uint32_t Pin, uint32_t Pull)**

Function description Configure gpio pull-up or pull-down for a dedicated pin on a dedicated port.

Parameters
- **GPIOx:** GPIO Port
- **Pin:** This parameter can be one of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7
  - LL_GPIO_PIN_8
  - LL_GPIO_PIN_9
  - LL_GPIO_PIN_10
  - LL_GPIO_PIN_11
  - LL_GPIO_PIN_12
  - LL_GPIO_PIN_13
  - LL_GPIO_PIN_14
  - LL_GPIO_PIN_15
- **Pull:** This parameter can be one of the following values:
  - LL_GPIO_PULL_NO
  - LL_GPIO_PULL_UP
  - LL_GPIO_PULL_DOWN

Return values
- **None**

Notes
- Warning: only one pin can be passed as parameter.

Reference Manual to LL API cross reference:
- PUPDR PUPDy LL_GPIO_SetPinPull

LL_GPIO_GetPinPull

Function name **__STATIC_INLINE uint32_t LL_GPIO_GetPinPull (GPIO_TypeDef * GPIOx, uint32_t Pin)**

Function description Return gpio pull-up or pull-down for a dedicated pin on a dedicated port.

Parameters
- **GPIOx:** GPIO Port
- **Pin:** This parameter can be one of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7
  - LL_GPIO_PIN_8
  - LL_GPIO_PIN_9
  - LL_GPIO_PIN_10
  - LL_GPIO_PIN_11
  - LL_GPIO_PIN_12
  - LL_GPIO_PIN_13
  - LL_GPIO_PIN_14
  - LL_GPIO_PIN_15

Return values
- **Returned:** value can be one of the following values:
  - LL_GPIO_PULL_NO
  - LL_GPIO_PULL_UP
  - LL_GPIO_PULL_DOWN

Notes
- Warning: only one pin can be passed as parameter.

Reference Manual to LL API cross reference:
- PUPDR PUPDy LL_GPIO_GetPinPull

LL_GPIO_SetAFPin_0_7

Function name
__STATIC_INLINE void LL_GPIO_SetAFPin_0_7 (GPIO_TypeDef * GPIOx, uint32_t Pin, uint32_t Alternate)

Function description
Configure gpio alternate function of a dedicated pin from 0 to 7 for a dedicated port.

Parameters
- **GPIOx:** GPIO Port
- **Pin:** This parameter can be one of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7
- **Alternate:** This parameter can be one of the following values:
  - LL_GPIO_AF_0
  - LL_GPIO_AF_1
  - LL_GPIO_AF_2
  - LL_GPIO_AF_3
  - LL_GPIO_AF_4

- LL_GPIO_AF_5
- LL_GPIO_AF_6
- LL_GPIO_AF_7
- LL_GPIO_AF_8
- LL_GPIO_AF_9
- LL_GPIO_AF_10
- LL_GPIO_AF_11
- LL_GPIO_AF_12
- LL_GPIO_AF_13
- LL_GPIO_AF_14
- LL_GPIO_AF_15

Return values
- **None**

Notes
- Possible values are from AF0 to AF15 depending on target.
- Warning: only one pin can be passed as parameter.

Reference Manual to LL API cross reference:
- AFRL AFSELy LL_GPIO_SetAFPin_0_7

LL_GPIO_GetAFPin_0_7

Function name
__STATIC_INLINE uint32_t LL_GPIO_GetAFPin_0_7 (GPIO_TypeDef * GPIOx, uint32_t Pin)

Function description
Return gpio alternate function of a dedicated pin from 0 to 7 for a dedicated port.

Parameters
- **GPIOx:** GPIO Port
- **Pin:** This parameter can be one of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7

Return values
- **Returned:** value can be one of the following values:
  - LL_GPIO_AF_0
  - LL_GPIO_AF_1
  - LL_GPIO_AF_2
  - LL_GPIO_AF_3
  - LL_GPIO_AF_4
  - LL_GPIO_AF_5
  - LL_GPIO_AF_6
  - LL_GPIO_AF_7
  - LL_GPIO_AF_8
  - LL_GPIO_AF_9
  - LL_GPIO_AF_10
  - LL_GPIO_AF_11
  - LL_GPIO_AF_12
  - LL_GPIO_AF_13
  - LL_GPIO_AF_14

– LL_GPIO_AF_15

Reference Manual to LL API cross reference:
- AFRL AFSELy LL_GPIO_GetAFPin_0_7

LL_GPIO_SetAFPin_8_15

Function name
__STATIC_INLINE void LL_GPIO_SetAFPin_8_15 (GPIO_TypeDef * GPIOx, uint32_t Pin, uint32_t Alternate)

Function description
Configure gpio alternate function of a dedicated pin from 8 to 15 for a dedicated port.

Parameters
- **GPIOx:** GPIO Port
- **Pin:** This parameter can be one of the following values:
  – LL_GPIO_PIN_8
  – LL_GPIO_PIN_9
  – LL_GPIO_PIN_10
  – LL_GPIO_PIN_11
  – LL_GPIO_PIN_12
  – LL_GPIO_PIN_13
  – LL_GPIO_PIN_14
  – LL_GPIO_PIN_15
- **Alternate:** This parameter can be one of the following values:
  – LL_GPIO_AF_0
  – LL_GPIO_AF_1
  – LL_GPIO_AF_2
  – LL_GPIO_AF_3
  – LL_GPIO_AF_4
  – LL_GPIO_AF_5
  – LL_GPIO_AF_6
  – LL_GPIO_AF_7
  – LL_GPIO_AF_8
  – LL_GPIO_AF_9
  – LL_GPIO_AF_10
  – LL_GPIO_AF_11
  – LL_GPIO_AF_12
  – LL_GPIO_AF_13
  – LL_GPIO_AF_14
  – LL_GPIO_AF_15

Return values
- **None**

Notes
- Possible values are from AF0 to AF15 depending on target.
- Warning: only one pin can be passed as parameter.

Reference Manual to LL API cross reference:
- AFRH AFSELy LL_GPIO_SetAFPin_8_15

LL_GPIO_GetAFPin_8_15

Function name
__STATIC_INLINE uint32_t LL_GPIO_GetAFPin_8_15 (GPIO_TypeDef * GPIOx, uint32_t Pin)

Function description
Return gpio alternate function of a dedicated pin from 8 to 15 for a dedicated port.

Parameters
- **GPIOx:** GPIO Port
- **Pin:** This parameter can be one of the following values:
  - LL_GPIO_PIN_8
  - LL_GPIO_PIN_9
  - LL_GPIO_PIN_10
  - LL_GPIO_PIN_11
  - LL_GPIO_PIN_12
  - LL_GPIO_PIN_13
  - LL_GPIO_PIN_14
  - LL_GPIO_PIN_15

Return values
- **Returned:** value can be one of the following values:
  - LL_GPIO_AF_0
  - LL_GPIO_AF_1
  - LL_GPIO_AF_2
  - LL_GPIO_AF_3
  - LL_GPIO_AF_4
  - LL_GPIO_AF_5
  - LL_GPIO_AF_6
  - LL_GPIO_AF_7
  - LL_GPIO_AF_8
  - LL_GPIO_AF_9
  - LL_GPIO_AF_10
  - LL_GPIO_AF_11
  - LL_GPIO_AF_12
  - LL_GPIO_AF_13
  - LL_GPIO_AF_14
  - LL_GPIO_AF_15

Notes
- Possible values are from AF0 to AF15 depending on target.

Reference Manual to LL API cross reference:
- AFRH AFSELy LL_GPIO_GetAFPin_8_15

LL_GPIO_LockPin

Function name
__STATIC_INLINE void LL_GPIO_LockPin (GPIO_TypeDef * GPIOx, uint32_t PinMask)

Function description
Lock configuration of several pins for a dedicated port.

Parameters
- **GPIOx:** GPIO Port
- **PinMask:** This parameter can be a combination of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3

  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7
  - LL_GPIO_PIN_8
  - LL_GPIO_PIN_9
  - LL_GPIO_PIN_10
  - LL_GPIO_PIN_11
  - LL_GPIO_PIN_12
  - LL_GPIO_PIN_13
  - LL_GPIO_PIN_14
  - LL_GPIO_PIN_15
  - LL_GPIO_PIN_ALL

Return values
- **None**

Notes
- When the lock sequence has been applied on a port bit, the value of this port bit can no longer be modified until the next reset.
- Each lock bit freezes a specific configuration register (control and alternate function registers).

Reference Manual to LL API cross reference:
- LCKR LCKK LL_GPIO_LockPin

LL_GPIO_IsPinLocked

Function name
__STATIC_INLINE uint32_t LL_GPIO_IsPinLocked (GPIO_TypeDef * GPIOx, uint32_t PinMask)

Function description
Return 1 if all pins passed as parameter, of a dedicated port, are locked.

Parameters
- **GPIOx:** GPIO Port
- **PinMask:** This parameter can be a combination of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7
  - LL_GPIO_PIN_8
  - LL_GPIO_PIN_9
  - LL_GPIO_PIN_10
  - LL_GPIO_PIN_11
  - LL_GPIO_PIN_12
  - LL_GPIO_PIN_13
  - LL_GPIO_PIN_14
  - LL_GPIO_PIN_15
  - LL_GPIO_PIN_ALL

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- LCKR LCKy LL_GPIO_IsPinLocked

LL_GPIO_IsAnyPinLocked

Function name
__STATIC_INLINE uint32_t LL_GPIO_IsAnyPinLocked (GPIO_TypeDef * GPIOx)

Function description
Return 1 if one of the pin of a dedicated port is locked.

Parameters
- **GPIOx:** GPIO Port

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- LCKR LCKK LL_GPIO_IsAnyPinLocked

LL_GPIO_ReadInputPort

Function name
__STATIC_INLINE uint32_t LL_GPIO_ReadInputPort (GPIO_TypeDef * GPIOx)

Function description
Return full input data register value for a dedicated port.

Parameters
- **GPIOx:** GPIO Port

Return values
- **Input:** data register value of port

Reference Manual to LL API cross reference:
- IDR IDy LL_GPIO_ReadInputPort

LL_GPIO_IsInputPinSet

Function name
__STATIC_INLINE uint32_t LL_GPIO_IsInputPinSet (GPIO_TypeDef * GPIOx, uint32_t PinMask)

Function description
Return if input data level for several pins of dedicated port is high or low.

Parameters
- **GPIOx:** GPIO Port
- **PinMask:** This parameter can be a combination of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7
  - LL_GPIO_PIN_8
  - LL_GPIO_PIN_9
  - LL_GPIO_PIN_10
  - LL_GPIO_PIN_11

  - LL_GPIO_PIN_12
  - LL_GPIO_PIN_13
  - LL_GPIO_PIN_14
  - LL_GPIO_PIN_15
  - LL_GPIO_PIN_ALL

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- IDR IDy LL_GPIO_IsInputPinSet

LL_GPIO_WriteOutputPort

Function name
__STATIC_INLINE void LL_GPIO_WriteOutputPort (GPIO_TypeDef * GPIOx, uint32_t PortValue)

Function description
Write output data register for the port.

Parameters
- **GPIOx:** GPIO Port
- **PortValue:** Level value for each pin of the port

Return values
- **None**

Reference Manual to LL API cross reference:
- ODR ODy LL_GPIO_WriteOutputPort

LL_GPIO_ReadOutputPort

Function name
__STATIC_INLINE uint32_t LL_GPIO_ReadOutputPort (GPIO_TypeDef * GPIOx)

Function description
Return full output data register value for a dedicated port.

Parameters
- **GPIOx:** GPIO Port

Return values
- **Output:** data register value of port

Reference Manual to LL API cross reference:
- ODR ODy LL_GPIO_ReadOutputPort

LL_GPIO_IsOutputPinSet

Function name
__STATIC_INLINE uint32_t LL_GPIO_IsOutputPinSet (GPIO_TypeDef * GPIOx, uint32_t PinMask)

Function description
Return if input data level for several pins of dedicated port is high or low.

Parameters
- **GPIOx:** GPIO Port
- **PinMask:** This parameter can be a combination of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5

- LL_GPIO_PIN_6
- LL_GPIO_PIN_7
- LL_GPIO_PIN_8
- LL_GPIO_PIN_9
- LL_GPIO_PIN_10
- LL_GPIO_PIN_11
- LL_GPIO_PIN_12
- LL_GPIO_PIN_13
- LL_GPIO_PIN_14
- LL_GPIO_PIN_15
- LL_GPIO_PIN_ALL

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- ODR ODy LL_GPIO_IsOutputPinSet

LL_GPIO_SetOutputPin

Function name
__STATIC_INLINE void LL_GPIO_SetOutputPin (GPIO_TypeDef * GPIOx, uint32_t PinMask)

Function description
Set several pins to high level on dedicated gpio port.

Parameters
- **GPIOx:** GPIO Port
- **PinMask:** This parameter can be a combination of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7
  - LL_GPIO_PIN_8
  - LL_GPIO_PIN_9
  - LL_GPIO_PIN_10
  - LL_GPIO_PIN_11
  - LL_GPIO_PIN_12
  - LL_GPIO_PIN_13
  - LL_GPIO_PIN_14
  - LL_GPIO_PIN_15
  - LL_GPIO_PIN_ALL

Return values
- **None**

Reference Manual to LL API cross reference:
- BSRR BSy LL_GPIO_SetOutputPin

LL_GPIO_ResetOutputPin

Function name
__STATIC_INLINE void LL_GPIO_ResetOutputPin (GPIO_TypeDef * GPIOx, uint32_t PinMask)

Function description
Set several pins to low level on dedicated gpio port.

Parameters
- **GPIOx:** GPIO Port
- **PinMask:** This parameter can be a combination of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7
  - LL_GPIO_PIN_8
  - LL_GPIO_PIN_9
  - LL_GPIO_PIN_10
  - LL_GPIO_PIN_11
  - LL_GPIO_PIN_12
  - LL_GPIO_PIN_13
  - LL_GPIO_PIN_14
  - LL_GPIO_PIN_15
  - LL_GPIO_PIN_ALL

Return values
- **None**

Reference Manual to LL API cross reference:
- BRR BRy LL_GPIO_ResetOutputPin

LL_GPIO_TogglePin

Function name
__STATIC_INLINE void LL_GPIO_TogglePin (GPIO_TypeDef * GPIOx, uint32_t PinMask)

Function description
Toggle data value for several pin of dedicated port.

Parameters
- **GPIOx:** GPIO Port
- **PinMask:** This parameter can be a combination of the following values:
  - LL_GPIO_PIN_0
  - LL_GPIO_PIN_1
  - LL_GPIO_PIN_2
  - LL_GPIO_PIN_3
  - LL_GPIO_PIN_4
  - LL_GPIO_PIN_5
  - LL_GPIO_PIN_6
  - LL_GPIO_PIN_7
  - LL_GPIO_PIN_8
  - LL_GPIO_PIN_9
  - LL_GPIO_PIN_10
  - LL_GPIO_PIN_11

- LL_GPIO_PIN_12
- LL_GPIO_PIN_13
- LL_GPIO_PIN_14
- LL_GPIO_PIN_15
- LL_GPIO_PIN_ALL

Return values
- **None**

Reference Manual to LL API cross reference:
- ODR ODy LL_GPIO_TogglePin

LL_GPIO_DeInit

Function name
ErrorStatus LL_GPIO_DeInit (GPIO_TypeDef * GPIOx)

Function description
De-initialize GPIO registers (Registers restored to their default values).

Parameters
- **GPIOx:** GPIO Port

Return values
- **An:** ErrorStatus enumeration value:
  - SUCCESS: GPIO registers are de-initialized
  - ERROR: Wrong GPIO Port

LL_GPIO_Init

Function name
ErrorStatus LL_GPIO_Init (GPIO_TypeDef * GPIOx, LL_GPIO_InitTypeDef * GPIO_InitStruct)

Function description
Initialize GPIO registers according to the specified parameters in GPIO_InitStruct.

Parameters
- **GPIOx:** GPIO Port
- **GPIO_InitStruct:** pointer to a LL_GPIO_InitTypeDef structure that contains the configuration information for the specified GPIO peripheral.

Return values
- **An:** ErrorStatus enumeration value:
  - SUCCESS: GPIO registers are initialized according to GPIO_InitStruct content
  - ERROR: Not applicable

LL_GPIO_StructInit

Function name
void LL_GPIO_StructInit (LL_GPIO_InitTypeDef * GPIO_InitStruct)

Function description
Set each LL_GPIO_InitTypeDef field to default value.

Parameters
- **GPIO_InitStruct:** pointer to a LL_GPIO_InitTypeDef structure whose fields will be set to default values.

Return values
- **None**

67.3 GPIO Firmware driver defines

67.3.1 GPIO

Alternate Function

LL_GPIO_AF_0	Select alternate function 0
LL_GPIO_AF_1	Select alternate function 1
LL_GPIO_AF_2	Select alternate function 2
LL_GPIO_AF_3	Select alternate function 3
LL_GPIO_AF_4	Select alternate function 4
LL_GPIO_AF_5	Select alternate function 5
LL_GPIO_AF_6	Select alternate function 6
LL_GPIO_AF_7	Select alternate function 7
LL_GPIO_AF_8	Select alternate function 8
LL_GPIO_AF_9	Select alternate function 9
LL_GPIO_AF_10	Select alternate function 10
LL_GPIO_AF_11	Select alternate function 11
LL_GPIO_AF_12	Select alternate function 12
LL_GPIO_AF_13	Select alternate function 13
LL_GPIO_AF_14	Select alternate function 14
LL_GPIO_AF_15	Select alternate function 15

Mode

LL_GPIO_MODE_INPUT	Select input mode
LL_GPIO_MODE_OUTPUT	Select output mode
LL_GPIO_MODE_ALTERNATE	Select alternate function mode
LL_GPIO_MODE_ANALOG	Select analog mode

Output Type

LL_GPIO_OUTPUT_PUSHPULL	Select push-pull as output type
LL_GPIO_OUTPUT_OPENDRAIN	Select open-drain as output type

PIN

LL_GPIO_PIN_0	Select pin 0
LL_GPIO_PIN_1	Select pin 1
LL_GPIO_PIN_2	Select pin 2
LL_GPIO_PIN_3	Select pin 3
LL_GPIO_PIN_4	Select pin 4
LL_GPIO_PIN_5	Select pin 5
LL_GPIO_PIN_6	Select pin 6
LL_GPIO_PIN_7	Select pin 7

LL_GPIO_PIN_8 Select pin 8

LL_GPIO_PIN_9 Select pin 9

LL_GPIO_PIN_10 Select pin 10

LL_GPIO_PIN_11 Select pin 11

LL_GPIO_PIN_12 Select pin 12

LL_GPIO_PIN_13 Select pin 13

LL_GPIO_PIN_14 Select pin 14

LL_GPIO_PIN_15 Select pin 15

LL_GPIO_PIN_ALL Select all pins

Pull Up Pull Down

LL_GPIO_PULL_NO Select I/O no pull

LL_GPIO_PULL_UP Select I/O pull up

LL_GPIO_PULL_DOWN Select I/O pull down

Output Speed

LL_GPIO_SPEED_FREQ_LOW Select I/O low output speed

LL_GPIO_SPEED_FREQ_MEDIUM Select I/O medium output speed

LL_GPIO_SPEED_FREQ_HIGH Select I/O high output speed

Common Write and read registers Macros

LL_GPIO_WriteReg

Description:

- Write a value in GPIO register.

Parameters:

- __INSTANCE__: GPIO Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_GPIO_ReadReg

Description:

- Read a value in GPIO register.

Parameters:

- __INSTANCE__: GPIO Instance
- __REG__: Register to be read

Return value:

- Register: value

68 LL HRTIM Generic Driver

68.1 HRTIM Firmware driver API description

68.1.1 Detailed description of functions

LL_HRTIM_SetSyncInSrc

Function name	**__STATIC_INLINE void LL_HRTIM_SetSyncInSrc (HRTIM_TypeDef * HRTIMx, uint32_t SyncInSrc)**
Function description	Select the HRTIM synchronization input source.
Parameters	• **HRTIMx:** High Resolution Timer instance • **SyncInSrc:** This parameter can be one of the following values: – LL_HRTIM_SYNCIN_SRC_NONE – LL_HRTIM_SYNCIN_SRC_TIM_EVENT – LL_HRTIM_SYNCIN_SRC_EXTERNAL_EVENT
Return values	• **None**
Notes	• This function must not be called when the concerned timer(s) is (are) enabled .
Reference Manual to LL API cross reference:	• MCR SYNCIN LL_HRTIM_SetSyncInSrc

LL_HRTIM_GetSyncInSrc

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_GetSyncInSrc (HRTIM_TypeDef * HRTIMx)**
Function description	Get actual HRTIM synchronization input source.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **SyncInSrc:** Returned value can be one of the following values: – LL_HRTIM_SYNCIN_SRC_NONE – LL_HRTIM_SYNCIN_SRC_TIM_EVENT – LL_HRTIM_SYNCIN_SRC_EXTERNAL_EVENT
Reference Manual to LL API cross reference:	• MCR SYNCIN LL_HRTIM_SetSyncInSrc

LL_HRTIM_ConfigSyncOut

Function name	**__STATIC_INLINE void LL_HRTIM_ConfigSyncOut (HRTIM_TypeDef * HRTIMx, uint32_t Config, uint32_t Src)**
Function description	Configure the HRTIM synchronization output.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Config:** This parameter can be one of the following values:

  - LL_HRTIM_SYNCOUT_DISABLED
  - LL_HRTIM_SYNCOUT_POSITIVE_PULSE
  - LL_HRTIM_SYNCOUT_NEGATIVE_PULSE
- **Src:** This parameter can be one of the following values:
  - LL_HRTIM_SYNCOUT_SRC_MASTER_START
  - LL_HRTIM_SYNCOUT_SRC_MASTER_CMP1
  - LL_HRTIM_SYNCOUT_SRC_TIMA_START
  - LL_HRTIM_SYNCOUT_SRC_TIMA_CMP1

Return values
- **None**

Reference Manual to LL API cross reference:
- MCR SYNCSRC LL_HRTIM_ConfigSyncOut
- MCR SYNCOUT LL_HRTIM_ConfigSyncOut

LL_HRTIM_SetSyncOutConfig

Function name
__STATIC_INLINE void LL_HRTIM_SetSyncOutConfig (HRTIM_TypeDef * HRTIMx, uint32_t SyncOutConfig)

Function description
Set the routing and conditioning of the synchronization output event.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **SyncOutConfig:** This parameter can be one of the following values:
  - LL_HRTIM_SYNCOUT_DISABLED
  - LL_HRTIM_SYNCOUT_POSITIVE_PULSE
  - LL_HRTIM_SYNCOUT_NEGATIVE_PULSE

Return values
- **None**

Notes
- This function can be called only when the master timer is enabled.

Reference Manual to LL API cross reference:
- MCR SYNCOUT LL_HRTIM_SetSyncOutConfig

LL_HRTIM_GetSyncOutConfig

Function name
__STATIC_INLINE uint32_t LL_HRTIM_GetSyncOutConfig (HRTIM_TypeDef * HRTIMx)

Function description
Get actual routing and conditioning of the synchronization output event.

Parameters
- **HRTIMx:** High Resolution Timer instance

Return values
- **SyncOutConfig:** Returned value can be one of the following values:
  - LL_HRTIM_SYNCOUT_DISABLED
  - LL_HRTIM_SYNCOUT_POSITIVE_PULSE
  - LL_HRTIM_SYNCOUT_NEGATIVE_PULSE

Reference Manual to LL API cross reference:
- MCR SYNCOUT LL_HRTIM_GetSyncOutConfig

LL_HRTIM_SetSyncOutSrc

Function name	**__STATIC_INLINE void LL_HRTIM_SetSyncOutSrc (HRTIM_TypeDef * HRTIMx, uint32_t SyncOutSrc)**
Function description	Set the source and event to be sent on the HRTIM synchronization output.
Parameters	• **HRTIMx:** High Resolution Timer instance • **SyncOutSrc:** This parameter can be one of the following values: – LL_HRTIM_SYNCOUT_SRC_MASTER_START – LL_HRTIM_SYNCOUT_SRC_MASTER_CMP1 – LL_HRTIM_SYNCOUT_SRC_TIMA_START – LL_HRTIM_SYNCOUT_SRC_TIMA_CMP1
Return values	• **None**
Reference Manual to LL API cross reference:	• MCR SYNCSRC LL_HRTIM_SetSyncOutSrc

LL_HRTIM_GetSyncOutSrc

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_GetSyncOutSrc (HRTIM_TypeDef * HRTIMx)**
Function description	Get actual source and event sent on the HRTIM synchronization output.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **SyncOutSrc:** Returned value can be one of the following values: – LL_HRTIM_SYNCOUT_SRC_MASTER_START – LL_HRTIM_SYNCOUT_SRC_MASTER_CMP1 – LL_HRTIM_SYNCOUT_SRC_TIMA_START – LL_HRTIM_SYNCOUT_SRC_TIMA_CMP1
Reference Manual to LL API cross reference:	• MCR SYNCSRC LL_HRTIM_GetSyncOutSrc

LL_HRTIM_SuspendUpdate

Function name	**__STATIC_INLINE void LL_HRTIM_SuspendUpdate (HRTIM_TypeDef * HRTIMx, uint32_t Timers)**
Function description	Disable (temporarily) update event generation.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timers:** This parameter can be a combination of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E

Return values
- **None**

Notes
- Allow to temporarily disable the transfer from preload to active registers, whatever the selected update event. This allows to modify several registers in multiple timers.

Reference Manual to LL API cross reference:
- CR1 MUDIS LL_HRTIM_SuspendUpdate
- CR1 TAUDIS LL_HRTIM_SuspendUpdate
- CR1 TBUDIS LL_HRTIM_SuspendUpdate
- CR1 TCUDIS LL_HRTIM_SuspendUpdate
- CR1 TDUDIS LL_HRTIM_SuspendUpdate
- CR1 TEUDIS LL_HRTIM_SuspendUpdate

LL_HRTIM_ResumeUpdate

Function name
__STATIC_INLINE void LL_HRTIM_ResumeUpdate (HRTIM_TypeDef * HRTIMx, uint32_t Timers)

Function description
Enable update event generation.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timers:** This parameter can be a combination of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Notes
- The regular update event takes place.

Reference Manual to LL API cross reference:
- CR1 MUDIS LL_HRTIM_ResumeUpdate
- CR1 TAUDIS LL_HRTIM_ResumeUpdate
- CR1 TBUDIS LL_HRTIM_ResumeUpdate
- CR1 TCUDIS LL_HRTIM_ResumeUpdate
- CR1 TDUDIS LL_HRTIM_ResumeUpdate
- CR1 TEUDIS LL_HRTIM_ResumeUpdate

LL_HRTIM_ForceUpdate

Function name
__STATIC_INLINE void LL_HRTIM_ForceUpdate (HRTIM_TypeDef * HRTIMx, uint32_t Timers)

Function description
Force an immediate transfer from the preload to the active register .

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timers:** This parameter can be a combination of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D

– LL_HRTIM_TIMER_E

Return values
- **None**

Notes
- Any pending update request is cancelled.

Reference Manual to LL API cross reference:
- CR2 MSWU LL_HRTIM_ForceUpdate
- CR2 TASWU LL_HRTIM_ForceUpdate
- CR2 TBSWU LL_HRTIM_ForceUpdate
- CR2 TCSWU LL_HRTIM_ForceUpdate
- CR2 TDSWU LL_HRTIM_ForceUpdate
- CR2 TESWU LL_HRTIM_ForceUpdate

LL_HRTIM_CounterReset

Function name
__STATIC_INLINE void LL_HRTIM_CounterReset (HRTIM_TypeDef * HRTIMx, uint32_t Timers)

Function description
Reset the HRTIM timer(s) counter.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timers:** This parameter can be a combination of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- CR2 MRST LL_HRTIM_CounterReset
- CR2 TARST LL_HRTIM_CounterReset
- CR2 TBRST LL_HRTIM_CounterReset
- CR2 TCRST LL_HRTIM_CounterReset
- CR2 TDRST LL_HRTIM_CounterReset
- CR2 TERST LL_HRTIM_CounterReset

LL_HRTIM_EnableOutput

Function name
__STATIC_INLINE void LL_HRTIM_EnableOutput (HRTIM_TypeDef * HRTIMx, uint32_t Outputs)

Function description
Enable the HRTIM timer(s) output(s) .

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Outputs:** This parameter can be a combination of the following values:
  – LL_HRTIM_OUTPUT_TA1
  – LL_HRTIM_OUTPUT_TA2
  – LL_HRTIM_OUTPUT_TB1
  – LL_HRTIM_OUTPUT_TB2
  – LL_HRTIM_OUTPUT_TC1
  – LL_HRTIM_OUTPUT_TC2
  – LL_HRTIM_OUTPUT_TD1
  – LL_HRTIM_OUTPUT_TD2

  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2

Return values
- **None**

Reference Manual to LL API cross reference:
- OENR TA1OEN LL_HRTIM_EnableOutput
- OENR TA2OEN LL_HRTIM_EnableOutput
- OENR TB1OEN LL_HRTIM_EnableOutput
- OENR TB2OEN LL_HRTIM_EnableOutput
- OENR TC1OEN LL_HRTIM_EnableOutput
- OENR TC2OEN LL_HRTIM_EnableOutput
- OENR TD1OEN LL_HRTIM_EnableOutput
- OENR TD2OEN LL_HRTIM_EnableOutput
- OENR TE1OEN LL_HRTIM_EnableOutput
- OENR TE2OEN LL_HRTIM_EnableOutput

LL_HRTIM_DisableOutput

Function name
__STATIC_INLINE void LL_HRTIM_DisableOutput (HRTIM_TypeDef * HRTIMx, uint32_t Outputs)

Function description
Disable the HRTIM timer(s) output(s) .

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Outputs:** This parameter can be a combination of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2

Return values
- **None**

Reference Manual to LL API cross reference:
- OENR TA1OEN LL_HRTIM_DisableOutput
- OENR TA2OEN LL_HRTIM_DisableOutput
- OENR TB1OEN LL_HRTIM_DisableOutput
- OENR TB2OEN LL_HRTIM_DisableOutput
- OENR TC1OEN LL_HRTIM_DisableOutput
- OENR TC2OEN LL_HRTIM_DisableOutput
- OENR TD1OEN LL_HRTIM_DisableOutput
- OENR TD2OEN LL_HRTIM_DisableOutput
- OENR TE1OEN LL_HRTIM_DisableOutput
- OENR TE2OEN LL_HRTIM_DisableOutput

LL_HRTIM_IsEnabledOutput

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledOutput (HRTIM_TypeDef * HRTIMx, uint32_t Output)

Function description
Indicates whether the HRTIM timer output is enabled.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2

Return values
- **State:** of TxyOEN bit in HRTIM_OENR register (1 or 0).

Reference Manual to LL API cross reference:
- OENR TA1OEN LL_HRTIM_IsEnabledOutput
- OENR TA2OEN LL_HRTIM_IsEnabledOutput
- OENR TB1OEN LL_HRTIM_IsEnabledOutput
- OENR TB2OEN LL_HRTIM_IsEnabledOutput
- OENR TC1OEN LL_HRTIM_IsEnabledOutput
- OENR TC2OEN LL_HRTIM_IsEnabledOutput
- OENR TD1OEN LL_HRTIM_IsEnabledOutput
- OENR TD2OEN LL_HRTIM_IsEnabledOutput
- OENR TE1OEN LL_HRTIM_IsEnabledOutput
- OENR TE2OEN LL_HRTIM_IsEnabledOutput

LL_HRTIM_IsDisabledOutput

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsDisabledOutput (HRTIM_TypeDef * HRTIMx, uint32_t Output)

Function description
Indicates whether the HRTIM timer output is disabled.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2

Return values
- **State:** of TxyODS bit in HRTIM_ODSR register (1 or 0).

Reference Manual to LL API cross reference:
- ODISR TA1ODIS LL_HRTIM_IsDisabledOutput
- ODISR TA2ODIS LL_HRTIM_IsDisabledOutput
- ODISR TB1ODIS LL_HRTIM_IsDisabledOutput
- ODISR TB2ODIS LL_HRTIM_IsDisabledOutput
- ODISR TC1ODIS LL_HRTIM_IsDisabledOutput
- ODISR TC2ODIS LL_HRTIM_IsDisabledOutput
- ODISR TD1ODIS LL_HRTIM_IsDisabledOutput

- ODISR TD2ODIS LL_HRTIM_IsDisabledOutput
- ODISR TE1ODIS LL_HRTIM_IsDisabledOutput
- ODISR TE2ODIS LL_HRTIM_IsDisabledOutput

LL_HRTIM_ConfigADCTrig

Function name

__STATIC_INLINE void LL_HRTIM_ConfigADCTrig (HRTIM_TypeDef * HRTIMx, uint32_t ADCTrig, uint32_t Update, uint32_t Src)

Function description

Configure an ADC trigger.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **ADCTrig:** This parameter can be one of the following values:
  - LL_HRTIM_ADCTRIG_1
  - LL_HRTIM_ADCTRIG_2
  - LL_HRTIM_ADCTRIG_3
  - LL_HRTIM_ADCTRIG_4
- **Update:** This parameter can be one of the following values:
  - LL_HRTIM_ADCTRIG_UPDATE_MASTER
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_A
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_B
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_C
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_D
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_E
- **Src:** This parameter can be a combination of the following values:

Reference Manual to LL API cross reference:

- CR1 ADC1USRC LL_HRTIM_ConfigADCTrig
- CR1 ADC2USRC LL_HRTIM_ConfigADCTrig
- CR1 ADC3USRC LL_HRTIM_ConfigADCTrig
- CR1 ADC4USRC LL_HRTIM_ConfigADCTrig
- ADC1R ADC1MC4 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1MPER LL_HRTIM_ConfigADCTrig
- ADC1R ADC1EEV1 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1EEV2 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1EEV3 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1EEV4 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1EEV5 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TAC2 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TAC3 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TAC4 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TAPER LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TARST LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TBC2 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TBC3 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TBC4 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TBPER LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TBRST LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TCC2 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TCC3 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TCC4 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TCPER LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TDC2 LL_HRTIM_ConfigADCTrig

- ADC1R ADC1TDC3 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TDC4 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TDPER LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TEC2 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TEC3 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TEC4 LL_HRTIM_ConfigADCTrig
- ADC1R ADC1TEPER LL_HRTIM_ConfigADCTrig
- ADC2R ADC2MC1 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2MC2 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2MC3 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2MC4 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2MPER LL_HRTIM_ConfigADCTrig
- ADC2R ADC2EEV6 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2EEV7 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2EEV8 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2EEV9 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2EEV10 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TAC2 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TAC3 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TAC4 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TAPER LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TBC2 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TBC3 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TBC4 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TBPER LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TCC2 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TCC3 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TCC4 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TCPER LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TCRST LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TDC2 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TDC3 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TDC4 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TDPER LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TDRST LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TEC2 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TEC3 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TEC4 LL_HRTIM_ConfigADCTrig
- ADC2R ADC2TERST LL_HRTIM_ConfigADCTrig
- ADC3R ADC3MC1 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3MC2 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3MC3 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3MC4 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3MPER LL_HRTIM_ConfigADCTrig
- ADC3R ADC3EEV1 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3EEV2 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3EEV3 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3EEV4 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3EEV5 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TAC2 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TAC3 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TAC4 LL_HRTIM_ConfigADCTrig

- ADC3R ADC3TAPER LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TARST LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TBC2 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TBC3 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TBC4 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TBPER LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TBRST LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TCC2 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TCC3 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TCC4 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TCPER LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TDC2 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TDC3 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TDC4 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TDPER LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TEC2 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TEC3 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TEC4 LL_HRTIM_ConfigADCTrig
- ADC3R ADC3TEPER LL_HRTIM_ConfigADCTrig
- ADC4R ADC4MC1 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4MC2 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4MC3 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4MC4 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4MPER LL_HRTIM_ConfigADCTrig
- ADC4R ADC4EEV6 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4EEV7 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4EEV8 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4EEV9 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4EEV10 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TAC2 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TAC3 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TAC4 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TAPER LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TBC2 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TBC3 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TBC4 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TBPER LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TCC2 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TCC3 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TCC4 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TCPER LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TCRST LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TDC2 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TDC3 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TDC4 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TDPER LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TDRST LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TEC2 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TEC3 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TEC4 LL_HRTIM_ConfigADCTrig
- ADC4R ADC4TERST LL_HRTIM_ConfigADCTrig

LL_HRTIM_SetADCTrigUpdate

Function name
__STATIC_INLINE void LL_HRTIM_SetADCTrigUpdate (HRTIM_TypeDef * HRTIMx, uint32_t ADCTrig, uint32_t Update)

Function description
Associate the ADCx trigger to a timer triggering the update of the HRTIM_ADCxR register.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **ADCTrig:** This parameter can be one of the following values:
  - LL_HRTIM_ADCTRIG_1
  - LL_HRTIM_ADCTRIG_2
  - LL_HRTIM_ADCTRIG_3
  - LL_HRTIM_ADCTRIG_4
- **Update:** This parameter can be one of the following values:
  - LL_HRTIM_ADCTRIG_UPDATE_MASTER
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_A
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_B
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_C
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_D
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_E

Return values
- **None**

Notes
- When the preload is disabled in the source timer, the HRTIM_ADCxR registers are not preloaded either: a write access will result in an immediate update of the trigger source.

Reference Manual to LL API cross reference:
- CR1 ADC1USRC LL_HRTIM_SetADCTrigUpdate
- CR1 ADC2USRC LL_HRTIM_SetADCTrigUpdate
- CR1 ADC3USRC LL_HRTIM_SetADCTrigUpdate
- CR1 ADC4USRC LL_HRTIM_SetADCTrigUpdate

LL_HRTIM_GetADCTrigUpdate

Function name
__STATIC_INLINE uint32_t LL_HRTIM_GetADCTrigUpdate (HRTIM_TypeDef * HRTIMx, uint32_t ADCTrig)

Function description
Get the source timer triggering the update of the HRTIM_ADCxR register.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **ADCTrig:** This parameter can be one of the following values:
  - LL_HRTIM_ADCTRIG_1
  - LL_HRTIM_ADCTRIG_2
  - LL_HRTIM_ADCTRIG_3
  - LL_HRTIM_ADCTRIG_4

Return values
- **Update:** Returned value can be one of the following values:
  - LL_HRTIM_ADCTRIG_UPDATE_MASTER
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_A
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_B
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_C
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_D
  - LL_HRTIM_ADCTRIG_UPDATE_TIMER_E

Reference Manual to LL API cross reference:

- CR1 ADC1USRC LL_HRTIM_GetADCTrigUpdate
- CR1 ADC2USRC LL_HRTIM_GetADCTrigUpdate
- CR1 ADC3USRC LL_HRTIM_GetADCTrigUpdate
- CR1 ADC4USRC LL_HRTIM_GetADCTrigUpdate

LL_HRTIM_SetADCTrigSrc

Function name

__STATIC_INLINE void LL_HRTIM_SetADCTrigSrc (HRTIM_TypeDef * HRTIMx, uint32_t ADCTrig, uint32_t Src)

Function description

Specify which events (timer events and/or external events) are used as triggers for ADC conversion.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **ADCTrig:** This parameter can be one of the following values:
  - LL_HRTIM_ADCTRIG_1
  - LL_HRTIM_ADCTRIG_2
  - LL_HRTIM_ADCTRIG_3
  - LL_HRTIM_ADCTRIG_4
- **Src:** This parameter can be a combination of the following values:

Reference Manual to LL API cross reference:

- ADC1R ADC1MC4 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1MPER LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1EEV1 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1EEV2 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1EEV3 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1EEV4 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1EEV5 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TAC2 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TAC3 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TAC4 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TAPER LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TARST LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TBC2 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TBC3 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TBC4 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TBPER LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TBRST LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TCC2 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TCC3 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TCC4 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TCPER LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TDC2 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TDC3 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TDC4 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TDPER LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TEC2 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TEC3 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TEC4 LL_HRTIM_SetADCTrigSrc
- ADC1R ADC1TEPER LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2MC1 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2MC2 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2MC3 LL_HRTIM_SetADCTrigSrc

- ADC2R ADC2MC4 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2MPER LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2EEV6 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2EEV7 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2EEV8 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2EEV9 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2EEV10 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TAC2 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TAC3 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TAC4 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TAPER LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TBC2 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TBC3 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TBC4 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TBPER LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TCC2 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TCC3 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TCC4 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TCPER LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TCRST LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TDC2 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TDC3 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TDC4 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TDPER LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TDRST LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TEC2 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TEC3 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TEC4 LL_HRTIM_SetADCTrigSrc
- ADC2R ADC2TERST LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3MC1 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3MC2 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3MC3 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3MC4 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3MPER LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3EEV1 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3EEV2 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3EEV3 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3EEV4 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3EEV5 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TAC2 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TAC3 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TAC4 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TAPER LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TARST LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TBC2 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TBC3 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TBC4 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TBPER LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TBRST LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TCC2 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TCC3 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TCC4 LL_HRTIM_SetADCTrigSrc

- ADC3R ADC3TCPER LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TDC2 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TDC3 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TDC4 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TDPER LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TEC2 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TEC3 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TEC4 LL_HRTIM_SetADCTrigSrc
- ADC3R ADC3TEPER LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4MC1 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4MC2 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4MC3 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4MC4 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4MPER LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4EEV6 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4EEV7 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4EEV8 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4EEV9 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4EEV10 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TAC2 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TAC3 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TAC4 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TAPER LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TBC2 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TBC3 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TBC4 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TBPER LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TCC2 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TCC3 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TCC4 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TCPER LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TCRST LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TDC2 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TDC3 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TDC4 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TDPER LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TDRST LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TEC2 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TEC3 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TEC4 LL_HRTIM_SetADCTrigSrc
- ADC4R ADC4TERST LL_HRTIM_SetADCTrigSrc

LL_HRTIM_GetADCTrigSrc

Function name **__STATIC_INLINE uint32_t LL_HRTIM_GetADCTrigSrc (HRTIM_TypeDef * HRTIMx, uint32_t ADCTrig)**

Function description Indicate which events (timer events and/or external events) are currently used as triggers for ADC conversion.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **ADCTrig:** This parameter can be one of the following values:
  - LL_HRTIM_ADCTRIG_1
  - LL_HRTIM_ADCTRIG_2

– LL_HRTIM_ADCTRIG_3
– LL_HRTIM_ADCTRIG_4

Return values

- **Src:** This parameter can be a combination of the following values:

Reference Manual to LL API cross reference:

- ADC1R ADC1MC4 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1MPER LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1EEV1 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1EEV2 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1EEV3 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1EEV4 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1EEV5 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TAC2 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TAC3 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TAC4 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TAPER LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TARST LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TBC2 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TBC3 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TBC4 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TBPER LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TBRST LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TCC2 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TCC3 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TCC4 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TCPER LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TDC2 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TDC3 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TDC4 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TDPER LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TEC2 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TEC3 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TEC4 LL_HRTIM_GetADCTrigSrc
- ADC1R ADC1TEPER LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2MC1 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2MC2 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2MC3 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2MC4 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2MPER LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2EEV6 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2EEV7 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2EEV8 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2EEV9 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2EEV10 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TAC2 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TAC3 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TAC4 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TAPER LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TBC2 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TBC3 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TBC4 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TBPER LL_HRTIM_GetADCTrigSrc

- ADC2R ADC2TCC2 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TCC3 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TCC4 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TCPER LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TCRST LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TDC2 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TDC3 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TDC4 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TDPER LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TDRST LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TEC2 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TEC3 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TEC4 LL_HRTIM_GetADCTrigSrc
- ADC2R ADC2TERST LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3MC1 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3MC2 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3MC3 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3MC4 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3MPER LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3EEV1 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3EEV2 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3EEV3 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3EEV4 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3EEV5 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TAC2 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TAC3 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TAC4 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TAPER LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TARST LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TBC2 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TBC3 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TBC4 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TBPER LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TBRST LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TCC2 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TCC3 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TCC4 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TCPER LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TDC2 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TDC3 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TDC4 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TDPER LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TEC2 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TEC3 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TEC4 LL_HRTIM_GetADCTrigSrc
- ADC3R ADC3TEPER LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4MC1 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4MC2 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4MC3 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4MC4 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4MPER LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4EEV6 LL_HRTIM_GetADCTrigSrc

- ADC4R ADC4EEV7 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4EEV8 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4EEV9 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4EEV10 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TAC2 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TAC3 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TAC4 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TAPER LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TBC2 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TBC3 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TBC4 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TBPER LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TCC2 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TCC3 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TCC4 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TCPER LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TCRST LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TDC2 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TDC3 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TDC4 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TDPER LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TDRST LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TEC2 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TEC3 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TEC4 LL_HRTIM_GetADCTrigSrc
- ADC4R ADC4TERST LL_HRTIM_GetADCTrigSrc

LL_HRTIM_ConfigDLLCalibration

Function name	**__STATIC_INLINE void LL_HRTIM_ConfigDLLCalibration (HRTIM_TypeDef * HRTIMx, uint32_t Mode, uint32_t Period)**
Function description	Configure the DLL calibration mode.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Mode:** This parameter can be one of the following values: – LL_HRTIM_DLLCALIBRATION_MODE_SINGLESHOT – LL_HRTIM_DLLCALIBRATION_MODE_CONTINUOUS • **Period:** This parameter can be one of the following values: – LL_HRTIM_DLLCALIBRATION_RATE_7300 – LL_HRTIM_DLLCALIBRATION_RATE_910 – LL_HRTIM_DLLCALIBRATION_RATE_114 – LL_HRTIM_DLLCALIBRATION_RATE_14
Return values	• **None**
Reference Manual to LL API cross reference:	• DLLCR CALEN LL_HRTIM_ConfigDLLCalibration • DLLCR CALRTE LL_HRTIM_ConfigDLLCalibration

LL_HRTIM_StartDLLCalibration

Function name	**__STATIC_INLINE void LL_HRTIM_StartDLLCalibration (HRTIM_TypeDef * HRTIMx)**
Function description	Launch DLL calibration.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DLLCR CAL LL_HRTIM_StartDLLCalibration

LL_HRTIM_TIM_CounterEnable

Function name	**__STATIC_INLINE void LL_HRTIM_TIM_CounterEnable (HRTIM_TypeDef * HRTIMx, uint32_t Timers)**
Function description	Enable timer(s) counter.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timers:** This parameter can be a combination of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• MDIER TECEN LL_HRTIM_TIM_CounterEnable • MDIER TDCEN LL_HRTIM_TIM_CounterEnable • MDIER TCCEN LL_HRTIM_TIM_CounterEnable • MDIER TBCEN LL_HRTIM_TIM_CounterEnable • MDIER TACEN LL_HRTIM_TIM_CounterEnable • MDIER MCEN LL_HRTIM_TIM_CounterEnable

LL_HRTIM_TIM_CounterDisable

Function name	**__STATIC_INLINE void LL_HRTIM_TIM_CounterDisable (HRTIM_TypeDef * HRTIMx, uint32_t Timers)**
Function description	Disable timer(s) counter.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timers:** This parameter can be a combination of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**

Reference Manual to LL API cross reference:
- MDIER TECEN LL_HRTIM_TIM_CounterDisable
- MDIER TDCEN LL_HRTIM_TIM_CounterDisable
- MDIER TCCEN LL_HRTIM_TIM_CounterDisable
- MDIER TBCEN LL_HRTIM_TIM_CounterDisable
- MDIER TACEN LL_HRTIM_TIM_CounterDisable
- MDIER MCEN LL_HRTIM_TIM_CounterDisable

LL_HRTIM_TIM_IsCounterEnabled

Function name **__STATIC_INLINE uint32_t LL_HRTIM_TIM_IsCounterEnabled (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description Indicate whether the timer counter is enabled.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of MCEN or TxCEN bit HRTIM_MCR register (1 or 0).

Reference Manual to LL API cross reference:
- MDIER TECEN LL_HRTIM_TIM_IsCounterEnabled
- MDIER TDCEN LL_HRTIM_TIM_IsCounterEnabled
- MDIER TCCEN LL_HRTIM_TIM_IsCounterEnabled
- MDIER TBCEN LL_HRTIM_TIM_IsCounterEnabled
- MDIER TACEN LL_HRTIM_TIM_IsCounterEnabled
- MDIER MCEN LL_HRTIM_TIM_IsCounterEnabled

LL_HRTIM_TIM_SetPrescaler

Function name **__STATIC_INLINE void LL_HRTIM_TIM_SetPrescaler (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Prescaler)**

Function description Set the timer clock prescaler ratio.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Prescaler:** This parameter can be one of the following values:
  - LL_HRTIM_PRESCALERRATIO_MUL32
  - LL_HRTIM_PRESCALERRATIO_MUL16
  - LL_HRTIM_PRESCALERRATIO_MUL8
  - LL_HRTIM_PRESCALERRATIO_MUL4
  - LL_HRTIM_PRESCALERRATIO_MUL2
  - LL_HRTIM_PRESCALERRATIO_DIV1
  - LL_HRTIM_PRESCALERRATIO_DIV2

– LL_HRTIM_PRESCALERRATIO_DIV4

Return values
- **None**

Notes
- The counter clock equivalent frequency (CK_CNT) is equal to fHRCK / 2^CKPSC[2:0].
- The prescaling ratio cannot be modified once the timer counter is enabled.

Reference Manual to LL API cross reference:
- MCR CKPSC LL_HRTIM_TIM_SetPrescaler
- TIMxCR CKPSC LL_HRTIM_TIM_SetPrescaler

LL_HRTIM_TIM_GetPrescaler

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetPrescaler (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get the timer clock prescaler ratio.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **Prescaler:** Returned value can be one of the following values:
  – LL_HRTIM_PRESCALERRATIO_MUL32
  – LL_HRTIM_PRESCALERRATIO_MUL16
  – LL_HRTIM_PRESCALERRATIO_MUL8
  – LL_HRTIM_PRESCALERRATIO_MUL4
  – LL_HRTIM_PRESCALERRATIO_MUL2
  – LL_HRTIM_PRESCALERRATIO_DIV1
  – LL_HRTIM_PRESCALERRATIO_DIV2
  – LL_HRTIM_PRESCALERRATIO_DIV4

Reference Manual to LL API cross reference:
- MCR CKPSC LL_HRTIM_TIM_GetPrescaler
- TIMxCR CKPSC LL_HRTIM_TIM_GetPrescaler

LL_HRTIM_TIM_SetCounterMode

Function name
__STATIC_INLINE void LL_HRTIM_TIM_SetCounterMode (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Mode)

Function description
Set the counter operating mode mode (single-shot, continuous or re-triggerable).

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C

  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Mode:** This parameter can be one of the following values:
  - LL_HRTIM_MODE_CONTINUOUS
  - LL_HRTIM_MODE_SINGLESHOT
  - LL_HRTIM_MODE_RETRIGGERABLE

Return values
- **None**

Reference Manual to LL API cross reference:
- MCR CONT LL_HRTIM_TIM_SetCounterMode
- MCR RETRIG LL_HRTIM_TIM_SetCounterMode
- TIMxCR CONT LL_HRTIM_TIM_SetCounterMode
- TIMxCR RETRIG LL_HRTIM_TIM_SetCounterMode

LL_HRTIM_TIM_GetCounterMode

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetCounterMode (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get the counter operating mode mode.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **Mode:** Returned value can be one of the following values:
  - LL_HRTIM_MODE_CONTINUOUS
  - LL_HRTIM_MODE_SINGLESHOT
  - LL_HRTIM_MODE_RETRIGGERABLE

Reference Manual to LL API cross reference:
- MCR CONT LL_HRTIM_TIM_GetCounterMode
- MCR RETRIG LL_HRTIM_TIM_GetCounterMode
- TIMxCR CONT LL_HRTIM_TIM_GetCounterMode
- TIMxCR RETRIG LL_HRTIM_TIM_GetCounterMode

LL_HRTIM_TIM_EnableHalfMode

Function name
__STATIC_INLINE void LL_HRTIM_TIM_EnableHalfMode (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the half duty-cycle mode.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Notes
- When the half mode is enabled, HRTIM_MCMP1R (or HRTIM_CMP1xR) active register is automatically updated with HRTIM_MPER/2 (or HRTIM_PERxR/2) value when HRTIM_MPER (or HRTIM_PERxR) register is written.

Reference Manual to LL API cross reference:
- MCR HALF LL_HRTIM_TIM_EnableHalfMode
- TIMxCR HALF LL_HRTIM_TIM_EnableHalfMode

LL_HRTIM_TIM_DisableHalfMode

Function name
__STATIC_INLINE void LL_HRTIM_TIM_DisableHalfMode (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the half duty-cycle mode.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MCR HALF LL_HRTIM_TIM_DisableHalfMode
- TIMxCR HALF LL_HRTIM_TIM_DisableHalfMode

LL_HRTIM_TIM_IsEnabledHalfMode

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_IsEnabledHalfMode (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether half duty-cycle mode is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of HALF bit to 1 in HRTIM_MCR or HRTIM_TIMxCR register (1 or 0).

Reference Manual to LL API cross reference:
- MCR HALF LL_HRTIM_TIM_IsEnabledHalfMode
- TIMxCR HALF LL_HRTIM_TIM_IsEnabledHalfMode

LL_HRTIM_TIM_EnableStartOnSync

Function name	**__STATIC_INLINE void LL_HRTIM_TIM_EnableStartOnSync (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Enable the timer start when receiving a synchronization input event.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• MCR SYNCSTRTM LL_HRTIM_TIM_EnableStartOnSync • TIMxCR SYNSTRTA LL_HRTIM_TIM_EnableStartOnSync

LL_HRTIM_TIM_DisableStartOnSync

Function name	**__STATIC_INLINE void LL_HRTIM_TIM_DisableStartOnSync (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Disable the timer start when receiving a synchronization input event.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• MCR SYNCSTRTM LL_HRTIM_TIM_DisableStartOnSync • TIMxCR SYNSTRTA LL_HRTIM_TIM_DisableStartOnSync

LL_HRTIM_TIM_IsEnabledStartOnSync

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_TIM_IsEnabledStartOnSync (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Indicate whether the timer start when receiving a synchronization input event.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A

  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of SYNCSTRTx bit in HRTIM_MCR or HRTIM_TIMxCR register (1 or 0).

Reference Manual to LL API cross reference:
- MCR SYNCSTRTM LL_HRTIM_TIM_IsEnabledStartOnSync
- TIMxCR SYNSTRTA LL_HRTIM_TIM_IsEnabledStartOnSync

LL_HRTIM_TIM_EnableResetOnSync

Function name
__STATIC_INLINE void LL_HRTIM_TIM_EnableResetOnSync (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the timer reset when receiving a synchronization input event.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MCR SYNCRSTM LL_HRTIM_TIM_EnableResetOnSync
- TIMxCR SYNCRSTA LL_HRTIM_TIM_EnableResetOnSync

LL_HRTIM_TIM_DisableResetOnSync

Function name
__STATIC_INLINE void LL_HRTIM_TIM_DisableResetOnSync (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the timer reset when receiving a synchronization input event.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MCR SYNCRSTM LL_HRTIM_TIM_DisableResetOnSync
- TIMxCR SYNCRSTA LL_HRTIM_TIM_DisableResetOnSync

LL_HRTIM_TIM_IsEnabledResetOnSync

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_TIM_IsEnabledResetOnSync (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Indicate whether the timer reset when receiving a synchronization input event.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• MCR SYNCRSTM LL_HRTIM_TIM_IsEnabledResetOnSync • TIMxCR SYNCRSTA LL_HRTIM_TIM_IsEnabledResetOnSync

LL_HRTIM_TIM_SetDACTrig

Function name	**__STATIC_INLINE void LL_HRTIM_TIM_SetDACTrig (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t DACTrig)**
Function description	Set the HRTIM output the DAC synchronization event is generated on (DACtrigOutx).
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E • **DACTrig:** This parameter can be one of the following values: – LL_HRTIM_DACTRIG_NONE – LL_HRTIM_DACTRIG_DACTRIGOUT_1 – LL_HRTIM_DACTRIG_DACTRIGOUT_2 – LL_HRTIM_DACTRIG_DACTRIGOUT_3
Return values	• **None**
Reference Manual to LL API cross reference:	• MCR DACSYNC LL_HRTIM_TIM_SetDACTrig • TIMxCR DACSYNC LL_HRTIM_TIM_SetDACTrig

LL_HRTIM_TIM_GetDACTrig

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetDACTrig (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Get the HRTIM output the DAC synchronization event is generated

on (DACtrigOutx).

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **DACTrig:** Returned value can be one of the following values:
  - LL_HRTIM_DACTRIG_NONE
  - LL_HRTIM_DACTRIG_DACTRIGOUT_1
  - LL_HRTIM_DACTRIG_DACTRIGOUT_2
  - LL_HRTIM_DACTRIG_DACTRIGOUT_3

Reference Manual to LL API cross reference:
- MCR DACSYNC LL_HRTIM_TIM_GetDACTrig
- TIMxCR DACSYNC LL_HRTIM_TIM_GetDACTrig

LL_HRTIM_TIM_EnablePreload

Function name
__STATIC_INLINE void LL_HRTIM_TIM_EnablePreload (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the timer registers preload mechanism.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Notes
- When the preload mode is enabled, accessed registers are shadow registers. Their content is transferred into the active register after an update request, either software or synchronized with an event.

Reference Manual to LL API cross reference:
- MCR PREEN LL_HRTIM_TIM_EnablePreload
- TIMxCR PREEN LL_HRTIM_TIM_EnablePreload

LL_HRTIM_TIM_DisablePreload

Function name	**__STATIC_INLINE void LL_HRTIM_TIM_DisablePreload (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Disable the timer registers preload mechanism.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• MCR PREEN LL_HRTIM_TIM_DisablePreload • TIMxCR PREEN LL_HRTIM_TIM_DisablePreload

LL_HRTIM_TIM_IsEnabledPreload

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_TIM_IsEnabledPreload (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Indicate whether the timer registers preload mechanism is enabled.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **State:** of PREEN bit in HRTIM_MCR or HRTIM_TIMxCR register (1 or 0).
Reference Manual to LL API cross reference:	• MCR PREEN LL_HRTIM_TIM_IsEnabledPreload • TIMxCR PREEN LL_HRTIM_TIM_IsEnabledPreload

LL_HRTIM_TIM_SetUpdateTrig

Function name	**__STATIC_INLINE void LL_HRTIM_TIM_SetUpdateTrig (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t UpdateTrig)**
Function description	Set the timer register update trigger.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B

  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **UpdateTrig:** This parameter can be one of the following values:

Reference Manual to LL API cross reference:

- MCR MREPU LL_HRTIM_TIM_SetUpdateTrig
- TIMxCR TAU LL_HRTIM_TIM_SetUpdateTrig
- TIMxCR TBU LL_HRTIM_TIM_SetUpdateTrig
- TIMxCR TCU LL_HRTIM_TIM_SetUpdateTrig
- TIMxCR TDU LL_HRTIM_TIM_SetUpdateTrig
- TIMxCR TEU LL_HRTIM_TIM_SetUpdateTrig
- TIMxCR MSTU LL_HRTIM_TIM_SetUpdateTrig

LL_HRTIM_TIM_GetUpdateTrig

Function name **__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetUpdateTrig (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description Set the timer register update trigger.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values

- **UpdateTrig:** Returned value can be one of the following values:

Reference Manual to LL API cross reference:

- MCR MREPU LL_HRTIM_TIM_GetUpdateTrig
- TIMxCR TBU LL_HRTIM_TIM_GetUpdateTrig
- TIMxCR TCU LL_HRTIM_TIM_GetUpdateTrig
- TIMxCR TDU LL_HRTIM_TIM_GetUpdateTrig
- TIMxCR TEU LL_HRTIM_TIM_GetUpdateTrig
- TIMxCR MSTU LL_HRTIM_TIM_GetUpdateTrig

LL_HRTIM_TIM_SetUpdateGating

Function name **__STATIC_INLINE void LL_HRTIM_TIM_SetUpdateGating (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t UpdateGating)**

Function description Set the timer registers update condition (how the registers update occurs relatively to the burst DMA transaction or an external update request received on one of the update enable inputs (UPD_EN[3:1])).

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C

  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **UpdateGating:** This parameter can be one of the following values:

Reference Manual to LL API cross reference:
- MCR BRSTDMA LL_HRTIM_TIM_SetUpdateGating
- TIMxCR UPDGAT LL_HRTIM_TIM_SetUpdateGating

LL_HRTIM_TIM_GetUpdateGating

Function name **__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetUpdateGating (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description Get the timer registers update condition.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **UpdateGating:** Returned value can be one of the following values:

Reference Manual to LL API cross reference:
- MCR BRSTDMA LL_HRTIM_TIM_GetUpdateGating
- TIMxCR UPDGAT LL_HRTIM_TIM_GetUpdateGating

LL_HRTIM_TIM_EnablePushPullMode

Function name **__STATIC_INLINE void LL_HRTIM_TIM_EnablePushPullMode (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description Enable the push-pull mode.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxCR PSHPLL LL_HRTIM_TIM_EnablePushPullMode

LL_HRTIM_TIM_DisablePushPullMode

Function name	**__STATIC_INLINE void LL_HRTIM_TIM_DisablePushPullMode (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Disable the push-pull mode.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• TIMxCR PSHPLL LL_HRTIM_TIM_DisablePushPullMode

LL_HRTIM_TIM_IsEnabledPushPullMode

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_TIM_IsEnabledPushPullMode (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Indicate whether the push-pull mode is enabled.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **State:** of PSHPLL bit in HRTIM_TIMxCR register (1 or 0).
Reference Manual to LL API cross reference:	• TIMxCR PSHPLL LL_HRTIM_TIM_IsEnabledPushPullMode •

LL_HRTIM_TIM_SetCompareMode

Function name	**__STATIC_INLINE void LL_HRTIM_TIM_SetCompareMode (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t CompareUnit, uint32_t Mode)**
Function description	Set the functioning mode of the compare unit (CMP2 or CMP4 can operate in standard mode or in auto delayed mode).
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E

- **CompareUnit:** This parameter can be one of the following values:
  - LL_HRTIM_COMPAREUNIT_2
  - LL_HRTIM_COMPAREUNIT_4
- **Mode:** This parameter can be one of the following values:
  - LL_HRTIM_COMPAREMODE_REGULAR
  - LL_HRTIM_COMPAREMODE_DELAY_NOTIMEOUT
  - LL_HRTIM_COMPAREMODE_DELAY_CMP1
  - LL_HRTIM_COMPAREMODE_DELAY_CMP3

Return values
- **None**

Notes
- In auto-delayed mode the compare match occurs independently from the timer counter value.

Reference Manual to LL API cross reference:
- TIMxCR DELCMP2 LL_HRTIM_TIM_SetCompareMode
- TIMxCR DELCMP4 LL_HRTIM_TIM_SetCompareMode

LL_HRTIM_TIM_GetCompareMode

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetCompareMode (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t CompareUnit)

Function description
Get the functioning mode of the compare unit.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **CompareUnit:** This parameter can be one of the following values:
  - LL_HRTIM_COMPAREUNIT_2
  - LL_HRTIM_COMPAREUNIT_4

Return values
- **Mode:** Returned value can be one of the following values:
  - LL_HRTIM_COMPAREMODE_REGULAR
  - LL_HRTIM_COMPAREMODE_DELAY_NOTIMEOUT
  - LL_HRTIM_COMPAREMODE_DELAY_CMP1
  - LL_HRTIM_COMPAREMODE_DELAY_CMP3

Reference Manual to LL API cross reference:
- TIMxCR DELCMP2 LL_HRTIM_TIM_GetCompareMode
- TIMxCR DELCMP4 LL_HRTIM_TIM_GetCompareMode

LL_HRTIM_TIM_SetCounter

Function name
__STATIC_INLINE void LL_HRTIM_TIM_SetCounter (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Counter)

Function description
Set the timer counter value.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:

  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Counter:** Value between 0 and 0xFFFF

Return values
- **None**

Notes
- This function can only be called when the timer is stopped.
- For HR clock prescaling ratio below 32 (CKPSC[2:0] < 5), the least significant bits of the counter are not significant. They cannot be written and return 0 when read.
- The timer behavior is not guaranteed if the counter value is set above the period.

Reference Manual to LL API cross reference:
- MCNTR MCNT LL_HRTIM_TIM_SetCounter
- CNTxR CNTx LL_HRTIM_TIM_SetCounter

LL_HRTIM_TIM_GetCounter

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetCounter (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get actual timer counter value.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **Counter:** Value between 0 and 0xFFFF

Reference Manual to LL API cross reference:
- MCNTR MCNT LL_HRTIM_TIM_GetCounter
- CNTxR CNTx LL_HRTIM_TIM_GetCounter

LL_HRTIM_TIM_SetPeriod

Function name
__STATIC_INLINE void LL_HRTIM_TIM_SetPeriod (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Period)

Function description
Set the timer period value.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

- **Period:** Value between 0 and 0xFFFF

Return values
- **None**

Reference Manual to LL API cross reference:
- MPER MPER LL_HRTIM_TIM_SetPeriod
- PERxR PERx LL_HRTIM_TIM_SetPeriod

LL_HRTIM_TIM_GetPeriod

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetPeriod (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get actual timer period value.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **Period:** Value between 0 and 0xFFFF

Reference Manual to LL API cross reference:
- MPER MPER LL_HRTIM_TIM_GetPeriod
- PERxR PERx LL_HRTIM_TIM_GetPeriod

LL_HRTIM_TIM_SetRepetition

Function name
__STATIC_INLINE void LL_HRTIM_TIM_SetRepetition (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Repetition)

Function description
Set the timer repetition period value.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Repetition:** Value between 0 and 0xFF

Return values
- **None**

Reference Manual to LL API cross reference:
- MREP MREP LL_HRTIM_TIM_SetRepetition
- REPxR REPx LL_HRTIM_TIM_SetRepetition

LL_HRTIM_TIM_GetRepetition

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetRepetition (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get actual timer repetition period value.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **Repetition:** Value between 0 and 0xFF

Reference Manual to LL API cross reference:
- MREP MREP LL_HRTIM_TIM_GetRepetition
- REPxR REPx LL_HRTIM_TIM_GetRepetition

LL_HRTIM_TIM_SetCompare1

Function name
__STATIC_INLINE void LL_HRTIM_TIM_SetCompare1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t CompareValue)

Function description
Set the compare value of the compare unit 1.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **CompareValue:** Compare value must be above or equal to 3 periods of the fHRTIM clock, that is 0x60 if CKPSC[2:0] = 0, 0x30 if CKPSC[2:0] = 1, 0x18 if CKPSC[2:0] = 2,...

Return values
- **None**

Reference Manual to LL API cross reference:
- MCMP1R MCMP1 LL_HRTIM_TIM_SetCompare1
- CMP1xR CMP1x LL_HRTIM_TIM_SetCompare1

LL_HRTIM_TIM_GetCompare1

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetCompare1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get actual compare value of the compare unit 1.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A

  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **CompareValue:** Compare value must be above or equal to 3 periods of the fHRTIM clock, that is 0x60 if CKPSC[2:0] = 0, 0x30 if CKPSC[2:0] = 1, 0x18 if CKPSC[2:0] = 2,...

Reference Manual to LL API cross reference:
- MCMP1R MCMP1 LL_HRTIM_TIM_GetCompare1
- CMP1xR CMP1x LL_HRTIM_TIM_GetCompare1

LL_HRTIM_TIM_SetCompare2

Function name
__STATIC_INLINE void LL_HRTIM_TIM_SetCompare2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t CompareValue)

Function description
Set the compare value of the compare unit 2.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **CompareValue:** Compare value must be above or equal to 3 periods of the fHRTIM clock, that is 0x60 if CKPSC[2:0] = 0, 0x30 if CKPSC[2:0] = 1, 0x18 if CKPSC[2:0] = 2,...

Return values
- **None**

Reference Manual to LL API cross reference:
- MCMP2R MCMP2 LL_HRTIM_TIM_SetCompare2
- CMP2xR CMP2x LL_HRTIM_TIM_SetCompare2

LL_HRTIM_TIM_GetCompare2

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetCompare2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get actual compare value of the compare unit 2.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **CompareValue:** Compare value must be above or equal to 3 periods of the fHRTIM clock, that is 0x60 if CKPSC[2:0] = 0,

0x30 if CKPSC[2:0] = 1, 0x18 if CKPSC[2:0] = 2,...

Reference Manual to LL API cross reference:
- MCMP2R MCMP2 LL_HRTIM_TIM_GetCompare2
- CMP2xR CMP2x LL_HRTIM_TIM_GetCompare2
-

LL_HRTIM_TIM_SetCompare3

Function name
__STATIC_INLINE void LL_HRTIM_TIM_SetCompare3 (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t CompareValue)

Function description
Set the compare value of the compare unit 3.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **CompareValue:** Compare value must be above or equal to 3 periods of the fHRTIM clock, that is 0x60 if CKPSC[2:0] = 0, 0x30 if CKPSC[2:0] = 1, 0x18 if CKPSC[2:0] = 2,...

Return values
- **None**

Reference Manual to LL API cross reference:
- MCMP3R MCMP3 LL_HRTIM_TIM_SetCompare3
- CMP3xR CMP3x LL_HRTIM_TIM_SetCompare3

LL_HRTIM_TIM_GetCompare3

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetCompare3 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get actual compare value of the compare unit 3.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **CompareValue:** Compare value must be above or equal to 3 periods of the fHRTIM clock, that is 0x60 if CKPSC[2:0] = 0, 0x30 if CKPSC[2:0] = 1, 0x18 if CKPSC[2:0] = 2,...

Reference Manual to LL API cross reference:
- MCMP3R MCMP3 LL_HRTIM_TIM_GetCompare3
- CMP3xR CMP3x LL_HRTIM_TIM_GetCompare3

LL_HRTIM_TIM_SetCompare4

Function name
__STATIC_INLINE void LL_HRTIM_TIM_SetCompare4 (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t CompareValue)

Function description
Set the compare value of the compare unit 4.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **CompareValue:** Compare value must be above or equal to 3 periods of the fHRTIM clock, that is 0x60 if CKPSC[2:0] = 0, 0x30 if CKPSC[2:0] = 1, 0x18 if CKPSC[2:0] = 2,...

Return values
- **None**

Reference Manual to LL API cross reference:
- MCMP4R MCMP4 LL_HRTIM_TIM_SetCompare4
- CMP4xR CMP4x LL_HRTIM_TIM_SetCompare4

LL_HRTIM_TIM_GetCompare4

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetCompare4 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get actual compare value of the compare unit 4.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **CompareValue:** Compare value must be above or equal to 3 periods of the fHRTIM clock, that is 0x60 if CKPSC[2:0] = 0, 0x30 if CKPSC[2:0] = 1, 0x18 if CKPSC[2:0] = 2,...

Reference Manual to LL API cross reference:
- MCMP4R MCMP4 LL_HRTIM_TIM_GetCompare4
- CMP4xR CMP4x LL_HRTIM_TIM_GetCompare4

LL_HRTIM_TIM_SetResetTrig

Function name
__STATIC_INLINE void LL_HRTIM_TIM_SetResetTrig (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t ResetTrig)

Function description
Set the reset trigger of a timer counter.

Parameters
- **HRTIMx:** High Resolution Timer instance

- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **ResetTrig:** This parameter can be a combination of the following values:
  - LL_HRTIM_RESETTRIG_NONE
  - LL_HRTIM_RESETTRIG_UPDATE
  - LL_HRTIM_RESETTRIG_CMP2
  - LL_HRTIM_RESETTRIG_CMP4
  - LL_HRTIM_RESETTRIG_MASTER_PER
  - LL_HRTIM_RESETTRIG_MASTER_CMP1
  - LL_HRTIM_RESETTRIG_MASTER_CMP2
  - LL_HRTIM_RESETTRIG_MASTER_CMP3
  - LL_HRTIM_RESETTRIG_MASTER_CMP4
  - LL_HRTIM_RESETTRIG_EEV_1
  - LL_HRTIM_RESETTRIG_EEV_2
  - LL_HRTIM_RESETTRIG_EEV_3
  - LL_HRTIM_RESETTRIG_EEV_4
  - LL_HRTIM_RESETTRIG_EEV_5
  - LL_HRTIM_RESETTRIG_EEV_6
  - LL_HRTIM_RESETTRIG_EEV_7
  - LL_HRTIM_RESETTRIG_EEV_8
  - LL_HRTIM_RESETTRIG_EEV_9
  - LL_HRTIM_RESETTRIG_EEV_10
  - LL_HRTIM_RESETTRIG_OTHER1_CMP1
  - LL_HRTIM_RESETTRIG_OTHER1_CMP2
  - LL_HRTIM_RESETTRIG_OTHER1_CMP4
  - LL_HRTIM_RESETTRIG_OTHER2_CMP1
  - LL_HRTIM_RESETTRIG_OTHER2_CMP2
  - LL_HRTIM_RESETTRIG_OTHER2_CMP4
  - LL_HRTIM_RESETTRIG_OTHER3_CMP1
  - LL_HRTIM_RESETTRIG_OTHER3_CMP2
  - LL_HRTIM_RESETTRIG_OTHER3_CMP4
  - LL_HRTIM_RESETTRIG_OTHER4_CMP1
  - LL_HRTIM_RESETTRIG_OTHER4_CMP2
  - LL_HRTIM_RESETTRIG_OTHER4_CMP4

Return values

- **None**

Notes

- The reset of the timer counter can be triggered by up to 30 events that can be selected among the following sources: The timing unit: Compare 2, Compare 4 and Update (3 events). The master timer: Reset and Compare 1..4 (5 events). The external events EXTEVNT1..10 (10 events). All other timing units (e.g. Timer B..E for timer A): Compare 1, 2 and 4 (12 events).

Reference Manual to LL API cross reference:

- RSTxR UPDT LL_HRTIM_TIM_SetResetTrig
- RSTxR CMP2 LL_HRTIM_TIM_SetResetTrig
- RSTxR CMP4 LL_HRTIM_TIM_SetResetTrig
- RSTxR MSTPER LL_HRTIM_TIM_SetResetTrig

- RSTxR MSTCMP1 LL_HRTIM_TIM_SetResetTrig
- RSTxR MSTCMP2 LL_HRTIM_TIM_SetResetTrig
- RSTxR MSTCMP3 LL_HRTIM_TIM_SetResetTrig
- RSTxR MSTCMP4 LL_HRTIM_TIM_SetResetTrig
- RSTxR EXTEVNT1 LL_HRTIM_TIM_SetResetTrig
- RSTxR EXTEVNT2 LL_HRTIM_TIM_SetResetTrig
- RSTxR EXTEVNT3 LL_HRTIM_TIM_SetResetTrig
- RSTxR EXTEVNT4 LL_HRTIM_TIM_SetResetTrig
- RSTxR EXTEVNT5 LL_HRTIM_TIM_SetResetTrig
- RSTxR EXTEVNT6 LL_HRTIM_TIM_SetResetTrig
- RSTxR EXTEVNT7 LL_HRTIM_TIM_SetResetTrig
- RSTxR EXTEVNT8 LL_HRTIM_TIM_SetResetTrig
- RSTxR EXTEVNT9 LL_HRTIM_TIM_SetResetTrig
- RSTxR EXTEVNT10 LL_HRTIM_TIM_SetResetTrig
- RSTxR TIMBCMP1 LL_HRTIM_TIM_SetResetTrig
- RSTxR TIMBCMP2 LL_HRTIM_TIM_SetResetTrig
- RSTxR TIMBCMP4 LL_HRTIM_TIM_SetResetTrig
- RSTxR TIMCCMP1 LL_HRTIM_TIM_SetResetTrig
- RSTxR TIMCCMP2 LL_HRTIM_TIM_SetResetTrig
- RSTxR TIMCCMP4 LL_HRTIM_TIM_SetResetTrig
- RSTxR TIMDCMP1 LL_HRTIM_TIM_SetResetTrig
- RSTxR TIMDCMP2 LL_HRTIM_TIM_SetResetTrig
- RSTxR TIMDCMP4 LL_HRTIM_TIM_SetResetTrig
- RSTxR TIMECMP1 LL_HRTIM_TIM_SetResetTrig
- RSTxR TIMECMP2 LL_HRTIM_TIM_SetResetTrig
- RSTxR TIMECMP4 LL_HRTIM_TIM_SetResetTrig

LL_HRTIM_TIM_GetResetTrig

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetResetTrig (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get actual reset trigger of a timer counter.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **ResetTrig:** Returned value can be one of the following values:
  - LL_HRTIM_RESETTRIG_NONE
  - LL_HRTIM_RESETTRIG_UPDATE
  - LL_HRTIM_RESETTRIG_CMP2
  - LL_HRTIM_RESETTRIG_CMP4
  - LL_HRTIM_RESETTRIG_MASTER_PER
  - LL_HRTIM_RESETTRIG_MASTER_CMP1
  - LL_HRTIM_RESETTRIG_MASTER_CMP2
  - LL_HRTIM_RESETTRIG_MASTER_CMP3
  - LL_HRTIM_RESETTRIG_MASTER_CMP4
  - LL_HRTIM_RESETTRIG_EEV_1

  - LL_HRTIM_RESETTRIG_EEV_2
  - LL_HRTIM_RESETTRIG_EEV_3
  - LL_HRTIM_RESETTRIG_EEV_4
  - LL_HRTIM_RESETTRIG_EEV_5
  - LL_HRTIM_RESETTRIG_EEV_6
  - LL_HRTIM_RESETTRIG_EEV_7
  - LL_HRTIM_RESETTRIG_EEV_8
  - LL_HRTIM_RESETTRIG_EEV_9
  - LL_HRTIM_RESETTRIG_EEV_10
  - LL_HRTIM_RESETTRIG_OTHER1_CMP1
  - LL_HRTIM_RESETTRIG_OTHER1_CMP2
  - LL_HRTIM_RESETTRIG_OTHER1_CMP4
  - LL_HRTIM_RESETTRIG_OTHER2_CMP1
  - LL_HRTIM_RESETTRIG_OTHER2_CMP2
  - LL_HRTIM_RESETTRIG_OTHER2_CMP4
  - LL_HRTIM_RESETTRIG_OTHER3_CMP1
  - LL_HRTIM_RESETTRIG_OTHER3_CMP2
  - LL_HRTIM_RESETTRIG_OTHER3_CMP4
  - LL_HRTIM_RESETTRIG_OTHER4_CMP1
  - LL_HRTIM_RESETTRIG_OTHER4_CMP2
  - LL_HRTIM_RESETTRIG_OTHER4_CMP4

Reference Manual to LL API cross reference:

- RSTxR UPDT LL_HRTIM_TIM_GetResetTrig
- RSTxR CMP2 LL_HRTIM_TIM_GetResetTrig
- RSTxR CMP4 LL_HRTIM_TIM_GetResetTrig
- RSTxR MSTPER LL_HRTIM_TIM_GetResetTrig
- RSTxR MSTCMP1 LL_HRTIM_TIM_GetResetTrig
- RSTxR MSTCMP2 LL_HRTIM_TIM_GetResetTrig
- RSTxR MSTCMP3 LL_HRTIM_TIM_GetResetTrig
- RSTxR MSTCMP4 LL_HRTIM_TIM_GetResetTrig
- RSTxR EXTEVNT1 LL_HRTIM_TIM_GetResetTrig
- RSTxR EXTEVNT2 LL_HRTIM_TIM_GetResetTrig
- RSTxR EXTEVNT3 LL_HRTIM_TIM_GetResetTrig
- RSTxR EXTEVNT4 LL_HRTIM_TIM_GetResetTrig
- RSTxR EXTEVNT5 LL_HRTIM_TIM_GetResetTrig
- RSTxR EXTEVNT6 LL_HRTIM_TIM_GetResetTrig
- RSTxR EXTEVNT7 LL_HRTIM_TIM_GetResetTrig
- RSTxR EXTEVNT8 LL_HRTIM_TIM_GetResetTrig
- RSTxR EXTEVNT9 LL_HRTIM_TIM_GetResetTrig
- RSTxR EXTEVNT10 LL_HRTIM_TIM_GetResetTrig
- RSTxR TIMBCMP1 LL_HRTIM_TIM_GetResetTrig
- RSTxR TIMBCMP2 LL_HRTIM_TIM_GetResetTrig
- RSTxR TIMBCMP4 LL_HRTIM_TIM_GetResetTrig
- RSTxR TIMCCMP1 LL_HRTIM_TIM_GetResetTrig
- RSTxR TIMCCMP2 LL_HRTIM_TIM_GetResetTrig
- RSTxR TIMCCMP4 LL_HRTIM_TIM_GetResetTrig
- RSTxR TIMDCMP1 LL_HRTIM_TIM_GetResetTrig
- RSTxR TIMDCMP2 LL_HRTIM_TIM_GetResetTrig
- RSTxR TIMDCMP4 LL_HRTIM_TIM_GetResetTrig
- RSTxR TIMECMP1 LL_HRTIM_TIM_GetResetTrig
- RSTxR TIMECMP2 LL_HRTIM_TIM_GetResetTrig
- RSTxR TIMECMP4 LL_HRTIM_TIM_GetResetTrig

LL_HRTIM_TIM_GetCapture1

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetCapture1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get captured value for capture unit 1.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **Captured:** value

Reference Manual to LL API cross reference:
- CPT1xR CPT1x LL_HRTIM_TIM_GetCapture1

LL_HRTIM_TIM_GetCapture2

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetCapture2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get captured value for capture unit 2.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **Captured:** value

Reference Manual to LL API cross reference:
- CPT2xR CPT2x LL_HRTIM_TIM_GetCapture2

LL_HRTIM_TIM_SetCaptureTrig

Function name
__STATIC_INLINE void LL_HRTIM_TIM_SetCaptureTrig (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t CaptureUnit, uint32_t CaptureTrig)

Function description
Set the trigger of a capture unit for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **CaptureUnit:** This parameter can be one of the following values:

  - LL_HRTIM_CAPTUREUNIT_1
  - LL_HRTIM_CAPTUREUNIT_2
- **CaptureTrig:** This parameter can be a combination of the following values:
  - LL_HRTIM_CAPTURETRIG_NONE
  - LL_HRTIM_CAPTURETRIG_UPDATE
  - LL_HRTIM_CAPTURETRIG_EEV_1
  - LL_HRTIM_CAPTURETRIG_EEV_2
  - LL_HRTIM_CAPTURETRIG_EEV_3
  - LL_HRTIM_CAPTURETRIG_EEV_4
  - LL_HRTIM_CAPTURETRIG_EEV_5
  - LL_HRTIM_CAPTURETRIG_EEV_6
  - LL_HRTIM_CAPTURETRIG_EEV_7
  - LL_HRTIM_CAPTURETRIG_EEV_8
  - LL_HRTIM_CAPTURETRIG_EEV_9
  - LL_HRTIM_CAPTURETRIG_EEV_10
  - LL_HRTIM_CAPTURETRIG_TA1_SET
  - LL_HRTIM_CAPTURETRIG_TA1_RESET
  - LL_HRTIM_CAPTURETRIG_TIMA_CMP1
  - LL_HRTIM_CAPTURETRIG_TIMA_CMP2
  - LL_HRTIM_CAPTURETRIG_TB1_SET
  - LL_HRTIM_CAPTURETRIG_TB1_RESET
  - LL_HRTIM_CAPTURETRIG_TIMB_CMP1
  - LL_HRTIM_CAPTURETRIG_TIMB_CMP2
  - LL_HRTIM_CAPTURETRIG_TC1_SET
  - LL_HRTIM_CAPTURETRIG_TC1_RESET
  - LL_HRTIM_CAPTURETRIG_TIMC_CMP1
  - LL_HRTIM_CAPTURETRIG_TIMC_CMP2
  - LL_HRTIM_CAPTURETRIG_TD1_SET
  - LL_HRTIM_CAPTURETRIG_TD1_RESET
  - LL_HRTIM_CAPTURETRIG_TIMD_CMP1
  - LL_HRTIM_CAPTURETRIG_TIMD_CMP2
  - LL_HRTIM_CAPTURETRIG_TE1_SET
  - LL_HRTIM_CAPTURETRIG_TE1_RESET
  - LL_HRTIM_CAPTURETRIG_TIME_CMP1
  - LL_HRTIM_CAPTURETRIG_TIME_CMP2

Return values

- **None**

Reference Manual to LL API cross reference:

- CPT1xCR SWCPT LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR UPDCPT LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR EXEV1CPT LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR EXEV2CPT LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR EXEV3CPT LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR EXEV4CPT LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR EXEV5CPT LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR EXEV6CPT LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR EXEV7CPT LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR EXEV8CPT LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR EXEV9CPT LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR EXEV10CPT LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TA1SET LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TA1RST LL_HRTIM_TIM_SetCaptureTrig

- CPT1xCR TACMP1 LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TACMP2 LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TB1SET LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TB1RST LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TBCMP1 LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TBCMP2 LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TC1SET LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TC1RST LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TCCMP1 LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TCCMP2 LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TD1SET LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TD1RST LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TDCMP1 LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TDCMP2 LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TE1SET LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TE1RST LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TECMP1 LL_HRTIM_TIM_SetCaptureTrig
- CPT1xCR TECMP2 LL_HRTIM_TIM_SetCaptureTrig

LL_HRTIM_TIM_GetCaptureTrig

Function name

__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetCaptureTrig (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t CaptureUnit)

Function description

Get actual trigger of a capture unit for a given timer.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **CaptureUnit:** This parameter can be one of the following values:
  - LL_HRTIM_CAPTUREUNIT_1
  - LL_HRTIM_CAPTUREUNIT_2

Return values

- **CaptureTrig:** This parameter can be a combination of the following values:
  - LL_HRTIM_CAPTURETRIG_NONE
  - LL_HRTIM_CAPTURETRIG_UPDATE
  - LL_HRTIM_CAPTURETRIG_EEV_1
  - LL_HRTIM_CAPTURETRIG_EEV_2
  - LL_HRTIM_CAPTURETRIG_EEV_3
  - LL_HRTIM_CAPTURETRIG_EEV_4
  - LL_HRTIM_CAPTURETRIG_EEV_5
  - LL_HRTIM_CAPTURETRIG_EEV_6
  - LL_HRTIM_CAPTURETRIG_EEV_7
  - LL_HRTIM_CAPTURETRIG_EEV_8
  - LL_HRTIM_CAPTURETRIG_EEV_9
  - LL_HRTIM_CAPTURETRIG_EEV_10
  - LL_HRTIM_CAPTURETRIG_TA1_SET

  - LL_HRTIM_CAPTURETRIG_TA1_RESET
  - LL_HRTIM_CAPTURETRIG_TIMA_CMP1
  - LL_HRTIM_CAPTURETRIG_TIMA_CMP2
  - LL_HRTIM_CAPTURETRIG_TB1_SET
  - LL_HRTIM_CAPTURETRIG_TB1_RESET
  - LL_HRTIM_CAPTURETRIG_TIMB_CMP1
  - LL_HRTIM_CAPTURETRIG_TIMB_CMP2
  - LL_HRTIM_CAPTURETRIG_TC1_SET
  - LL_HRTIM_CAPTURETRIG_TC1_RESET
  - LL_HRTIM_CAPTURETRIG_TIMC_CMP1
  - LL_HRTIM_CAPTURETRIG_TIMC_CMP2
  - LL_HRTIM_CAPTURETRIG_TD1_SET
  - LL_HRTIM_CAPTURETRIG_TD1_RESET
  - LL_HRTIM_CAPTURETRIG_TIMD_CMP1
  - LL_HRTIM_CAPTURETRIG_TIMD_CMP2
  - LL_HRTIM_CAPTURETRIG_TE1_SET
  - LL_HRTIM_CAPTURETRIG_TE1_RESET
  - LL_HRTIM_CAPTURETRIG_TIME_CMP1
  - LL_HRTIM_CAPTURETRIG_TIME_CMP2

Reference Manual to LL API cross reference:

- CPT1xCR SWCPT LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR UPDCPT LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR EXEV1CPT LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR EXEV2CPT LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR EXEV3CPT LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR EXEV4CPT LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR EXEV5CPT LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR EXEV6CPT LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR EXEV7CPT LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR EXEV8CPT LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR EXEV9CPT LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR EXEV10CPT LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TA1SET LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TA1RST LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TACMP1 LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TACMP2 LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TB1SET LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TB1RST LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TBCMP1 LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TBCMP2 LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TC1SET LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TC1RST LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TCCMP1 LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TCCMP2 LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TD1SET LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TD1RST LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TDCMP1 LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TDCMP2 LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TE1SET LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TE1RST LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TECMP1 LL_HRTIM_TIM_GetCaptureTrig
- CPT1xCR TECMP2 LL_HRTIM_TIM_GetCaptureTrig

LL_HRTIM_TIM_EnableDeadTime

Function name	**__STATIC_INLINE void LL_HRTIM_TIM_EnableDeadTime (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Enable deadtime insertion for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• OUTxR DTEN LL_HRTIM_TIM_EnableDeadTime

LL_HRTIM_TIM_DisableDeadTime

Function name	**__STATIC_INLINE void LL_HRTIM_TIM_DisableDeadTime (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Disable deadtime insertion for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• OUTxR DTEN LL_HRTIM_TIM_DisableDeadTime

LL_HRTIM_TIM_IsEnabledDeadTime

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_TIM_IsEnabledDeadTime (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Indicate whether deadtime insertion is enabled for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **State:** of DTEN bit in HRTIM_OUTxR register (1 or 0).

Reference Manual to LL API cross reference:
- OUTxR DTEN LL_HRTIM_TIM_IsEnabledDeadTime

LL_HRTIM_TIM_SetDLYPRTMode

Function name: **__STATIC_INLINE void LL_HRTIM_TIM_SetDLYPRTMode (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t DLYPRTMode)**

Function description: Set the delayed protection (DLYPRT) mode.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **DLYPRTMode:** Delayed protection (DLYPRT) mode

Notes:
- This function must be called prior enabling the delayed protection
- Balanced Idle mode is only available in push-pull mode

Reference Manual to LL API cross reference:
- OUTxR DLYPRTEN LL_HRTIM_TIM_SetDLYPRTMode
- OUTxR DLYPRT LL_HRTIM_TIM_SetDLYPRTMode

LL_HRTIM_TIM_GetDLYPRTMode

Function name: **__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetDLYPRTMode (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description: Get the delayed protection (DLYPRT) mode.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values:
- **DLYPRTMode:** Delayed protection (DLYPRT) mode

Reference Manual to LL API cross reference:
- OUTxR DLYPRTEN LL_HRTIM_TIM_GetDLYPRTMode
- OUTxR DLYPRT LL_HRTIM_TIM_GetDLYPRTMode

LL_HRTIM_TIM_EnableDLYPRT

Function name: **__STATIC_INLINE void LL_HRTIM_TIM_EnableDLYPRT (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description: Enable delayed protection (DLYPRT) for a given timer.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:

  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Notes
- This function must not be called once the concerned timer is enabled

Reference Manual to LL API cross reference:
- OUTxR DLYPRTEN LL_HRTIM_TIM_EnableDLYPRT

LL_HRTIM_TIM_DisableDLYPRT

Function name
__STATIC_INLINE void LL_HRTIM_TIM_DisableDLYPRT (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable delayed protection (DLYPRT) for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Notes
- This function must not be called once the concerned timer is enabled

Reference Manual to LL API cross reference:
- OUTxR DLYPRTEN LL_HRTIM_TIM_DisableDLYPRT

LL_HRTIM_TIM_IsEnabledDLYPRT

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_IsEnabledDLYPRT (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether delayed protection (DLYPRT) is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of DLYPRTEN bit in HRTIM_OUTxR register (1 or 0).

Reference Manual to LL API cross reference:
- OUTxR DLYPRTEN LL_HRTIM_TIM_IsEnabledDLYPRT

LL_HRTIM_TIM_EnableFault

Function name: **__STATIC_INLINE void LL_HRTIM_TIM_EnableFault (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Faults)**

Function description: Enable the fault channel(s) for a given timer.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Faults:** This parameter can be a combination of the following values:
  - LL_HRTIM_FAULT_1
  - LL_HRTIM_FAULT_2
  - LL_HRTIM_FAULT_3
  - LL_HRTIM_FAULT_4
  - LL_HRTIM_FAULT_5

Return values:
- **None**

Reference Manual to LL API cross reference:
- FLTxR FLT1EN LL_HRTIM_TIM_EnableFault
- FLTxR FLT2EN LL_HRTIM_TIM_EnableFault
- FLTxR FLT3EN LL_HRTIM_TIM_EnableFault
- FLTxR FLT4EN LL_HRTIM_TIM_EnableFault
- FLTxR FLT5EN LL_HRTIM_TIM_EnableFault

LL_HRTIM_TIM_DisableFault

Function name: **__STATIC_INLINE void LL_HRTIM_TIM_DisableFault (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Faults)**

Function description: Disable the fault channel(s) for a given timer.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Faults:** This parameter can be a combination of the following values:
  - LL_HRTIM_FAULT_1
  - LL_HRTIM_FAULT_2
  - LL_HRTIM_FAULT_3
  - LL_HRTIM_FAULT_4
  - LL_HRTIM_FAULT_5

Return values
- **None**

Reference Manual to LL API cross reference:
- FLTxR FLT1EN LL_HRTIM_TIM_DisableFault
- FLTxR FLT2EN LL_HRTIM_TIM_DisableFault
- FLTxR FLT3EN LL_HRTIM_TIM_DisableFault
- FLTxR FLT4EN LL_HRTIM_TIM_DisableFault
- FLTxR FLT5EN LL_HRTIM_TIM_DisableFault

LL_HRTIM_TIM_IsEnabledFault

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_IsEnabledFault (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Fault)

Function description
Indicate whether the fault channel is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Fault:** This parameter can be one of the following values:
  - LL_HRTIM_FAULT_1
  - LL_HRTIM_FAULT_2
  - LL_HRTIM_FAULT_3
  - LL_HRTIM_FAULT_4
  - LL_HRTIM_FAULT_5

Return values
- **State:** of FLTxEN bit in HRTIM_FLTxR register (1 or 0).

Reference Manual to LL API cross reference:
- FLTxR FLT1EN LL_HRTIM_TIM_IsEnabledFault
- FLTxR FLT2EN LL_HRTIM_TIM_IsEnabledFault
- FLTxR FLT3EN LL_HRTIM_TIM_IsEnabledFault
- FLTxR FLT4EN LL_HRTIM_TIM_IsEnabledFault
- FLTxR FLT5EN LL_HRTIM_TIM_IsEnabledFault

LL_HRTIM_TIM_LockFault

Function name
__STATIC_INLINE void LL_HRTIM_TIM_LockFault (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Lock the fault conditioning set-up for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Notes
- Timer fault-related set-up is frozen until the next HRTIM or system reset

Reference Manual to LL API cross reference:
- FLTxR FLTLCK LL_HRTIM_TIM_LockFault

LL_HRTIM_TIM_SetBurstModeOption

Function name
__STATIC_INLINE void LL_HRTIM_TIM_SetBurstModeOption (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t BurtsModeOption)

Function description
Define how the timer behaves during a burst mode operation.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **BurtsModeOption:** This parameter can be one of the following values:
  - LL_HRTIM_BURSTMODE_MAINTAINCLOCK
  - LL_HRTIM_BURSTMODE_RESETCOUNTER

Return values
- **None**

Notes
- This function must not be called when the burst mode is enabled

Reference Manual to LL API cross reference:
- BMCR MTBM LL_HRTIM_TIM_SetBurstModeOption
- BMCR TABM LL_HRTIM_TIM_SetBurstModeOption
- BMCR TBBM LL_HRTIM_TIM_SetBurstModeOption
- BMCR TCBM LL_HRTIM_TIM_SetBurstModeOption
- BMCR TDBM LL_HRTIM_TIM_SetBurstModeOption
- BMCR TEBM LL_HRTIM_TIM_SetBurstModeOption

LL_HRTIM_TIM_GetBurstModeOption

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetBurstModeOption (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Retrieve how the timer behaves during a burst mode operation.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **BurtsMode:** This parameter can be one of the following values:
  - LL_HRTIM_BURSTMODE_MAINTAINCLOCK

– LL_HRTIM_BURSTMODE_RESETCOUNTER

Reference Manual to LL API cross reference:

- BMCR MCR LL_HRTIM_TIM_GetBurstModeOption
- BMCR TABM LL_HRTIM_TIM_GetBurstModeOption
- BMCR TBBM LL_HRTIM_TIM_GetBurstModeOption
- BMCR TCBM LL_HRTIM_TIM_GetBurstModeOption
- BMCR TDBM LL_HRTIM_TIM_GetBurstModeOption
- BMCR TEBM LL_HRTIM_TIM_GetBurstModeOption

LL_HRTIM_TIM_ConfigBurstDMA

Function name **__STATIC_INLINE void LL_HRTIM_TIM_ConfigBurstDMA (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Registers)**

Function description Program which registers are to be written by Burst DMA transfers.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Registers:** Registers to be updated by the DMA request

Reference Manual to LL API cross reference:

- BDMUPDR MTBM LL_HRTIM_TIM_ConfigBurstDMA
- BDMUPDR MICR LL_HRTIM_TIM_ConfigBurstDMA
- BDMUPDR MDIER LL_HRTIM_TIM_ConfigBurstDMA
- BDMUPDR MCNT LL_HRTIM_TIM_ConfigBurstDMA
- BDMUPDR MPER LL_HRTIM_TIM_ConfigBurstDMA
- BDMUPDR MREP LL_HRTIM_TIM_ConfigBurstDMA
- BDMUPDR MCMP1 LL_HRTIM_TIM_ConfigBurstDMA
- BDMUPDR MCMP2 LL_HRTIM_TIM_ConfigBurstDMA
- BDMUPDR MCMP3 LL_HRTIM_TIM_ConfigBurstDMA
- BDMUPDR MCMP4 LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxCR LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxICR LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxDIER LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxCNT LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxPER LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxREP LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxCMP1 LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxCMP2 LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxCMP3 LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxCMP4 LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxDTR LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxSET1R LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxRST1R LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxSET2R LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxRST2R LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIAEEFR1 LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxEEFR2 LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxRSTR LL_HRTIM_TIM_ConfigBurstDMA

- BDTxUPDR TIMxOUTR LL_HRTIM_TIM_ConfigBurstDMA
- BDTxUPDR TIMxLTCH LL_HRTIM_TIM_ConfigBurstDMA

LL_HRTIM_TIM_GetCurrentPushPullStatus

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetCurrentPushPullStatus (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Indicate on which output the signal is currently applied.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **CPPSTAT:** This parameter can be one of the following values: – LL_HRTIM_CPPSTAT_OUTPUT1 – LL_HRTIM_CPPSTAT_OUTPUT2
Notes	• Only significant when the timer operates in push-pull mode.
Reference Manual to LL API cross reference:	• TIMxISR CPPSTAT LL_HRTIM_TIM_GetCurrentPushPullStatus

LL_HRTIM_TIM_GetIdlePushPullStatus

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetIdlePushPullStatus (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Indicate on which output the signal was applied, in push-pull mode, balanced fault mode or delayed idle mode, when the protection was triggered.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **IPPSTAT:** This parameter can be one of the following values: – LL_HRTIM_IPPSTAT_OUTPUT1 – LL_HRTIM_IPPSTAT_OUTPUT2
Reference Manual to LL API cross reference:	• TIMxISR IPPSTAT LL_HRTIM_TIM_GetIdlePushPullStatus

LL_HRTIM_TIM_SetEventFilter

Function name

__STATIC_INLINE void LL_HRTIM_TIM_SetEventFilter (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Event, uint32_t Filter)

Function description

Set the event filter for a given timer.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_1
  - LL_HRTIM_EVENT_2
  - LL_HRTIM_EVENT_3
  - LL_HRTIM_EVENT_4
  - LL_HRTIM_EVENT_5
  - LL_HRTIM_EVENT_6
  - LL_HRTIM_EVENT_7
  - LL_HRTIM_EVENT_8
  - LL_HRTIM_EVENT_9
  - LL_HRTIM_EVENT_10
- **Filter:** This parameter can be one of the following values:
  - LL_HRTIM_EEFLTR_NONE
  - LL_HRTIM_EEFLTR_BLANKINGCMP1
  - LL_HRTIM_EEFLTR_BLANKINGCMP2
  - LL_HRTIM_EEFLTR_BLANKINGCMP3
  - LL_HRTIM_EEFLTR_BLANKINGCMP4
  - LL_HRTIM_EEFLTR_BLANKINGFLTR1
  - LL_HRTIM_EEFLTR_BLANKINGFLTR2
  - LL_HRTIM_EEFLTR_BLANKINGFLTR3
  - LL_HRTIM_EEFLTR_BLANKINGFLTR4
  - LL_HRTIM_EEFLTR_BLANKINGFLTR5
  - LL_HRTIM_EEFLTR_BLANKINGFLTR6
  - LL_HRTIM_EEFLTR_BLANKINGFLTR7
  - LL_HRTIM_EEFLTR_BLANKINGFLTR8
  - LL_HRTIM_EEFLTR_WINDOWINGCMP2
  - LL_HRTIM_EEFLTR_WINDOWINGCMP3
  - LL_HRTIM_EEFLTR_WINDOWINGTIM

Return values

- **None**

Notes

- This function must not be called when the timer counter is enabled.

Reference Manual to LL API cross reference:

- EEFxR1 EE1LTCH LL_HRTIM_TIM_SetEventFilter
- EEFxR1 EE2LTCH LL_HRTIM_TIM_SetEventFilter
- EEFxR1 EE3LTCH LL_HRTIM_TIM_SetEventFilter
- EEFxR1 EE4LTCH LL_HRTIM_TIM_SetEventFilter
- EEFxR1 EE5LTCH LL_HRTIM_TIM_SetEventFilter
- EEFxR2 EE6LTCH LL_HRTIM_TIM_SetEventFilter
- EEFxR2 EE7LTCH LL_HRTIM_TIM_SetEventFilter

- EEFxR2 EE8LTCH LL_HRTIM_TIM_SetEventFilter
- EEFxR2 EE9LTCH LL_HRTIM_TIM_SetEventFilter
- EEFxR2 EE10LTCH LL_HRTIM_TIM_SetEventFilter

LL_HRTIM_TIM_GetEventFilter

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetEventFilter (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Event)

Function description
Get actual event filter settings for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_1
  - LL_HRTIM_EVENT_2
  - LL_HRTIM_EVENT_3
  - LL_HRTIM_EVENT_4
  - LL_HRTIM_EVENT_5
  - LL_HRTIM_EVENT_6
  - LL_HRTIM_EVENT_7
  - LL_HRTIM_EVENT_8
  - LL_HRTIM_EVENT_9
  - LL_HRTIM_EVENT_10

Return values
- **Filter:** This parameter can be one of the following values:
  - LL_HRTIM_EEFLTR_NONE
  - LL_HRTIM_EEFLTR_BLANKINGCMP1
  - LL_HRTIM_EEFLTR_BLANKINGCMP2
  - LL_HRTIM_EEFLTR_BLANKINGCMP3
  - LL_HRTIM_EEFLTR_BLANKINGCMP4
  - LL_HRTIM_EEFLTR_BLANKINGFLTR1
  - LL_HRTIM_EEFLTR_BLANKINGFLTR2
  - LL_HRTIM_EEFLTR_BLANKINGFLTR3
  - LL_HRTIM_EEFLTR_BLANKINGFLTR4
  - LL_HRTIM_EEFLTR_BLANKINGFLTR5
  - LL_HRTIM_EEFLTR_BLANKINGFLTR6
  - LL_HRTIM_EEFLTR_BLANKINGFLTR7
  - LL_HRTIM_EEFLTR_BLANKINGFLTR8
  - LL_HRTIM_EEFLTR_WINDOWINGCMP2
  - LL_HRTIM_EEFLTR_WINDOWINGCMP3
  - LL_HRTIM_EEFLTR_WINDOWINGTIM

Reference Manual to LL API cross reference:
- EEFxR1 EE1FLTR LL_HRTIM_TIM_GetEventFilter
- EEFxR1 EE2FLTR LL_HRTIM_TIM_GetEventFilter
- EEFxR1 EE3FLTR LL_HRTIM_TIM_GetEventFilter
- EEFxR1 EE4FLTR LL_HRTIM_TIM_GetEventFilter
- EEFxR1 EE5FLTR LL_HRTIM_TIM_GetEventFilter
- EEFxR2 EE6FLTR LL_HRTIM_TIM_GetEventFilter

- EEFxR2 EE7FLTR LL_HRTIM_TIM_GetEventFilter
- EEFxR2 EE8FLTR LL_HRTIM_TIM_GetEventFilter
- EEFxR2 EE9FLTR LL_HRTIM_TIM_GetEventFilter
- EEFxR2 EE10FLTR LL_HRTIM_TIM_GetEventFilter

LL_HRTIM_TIM_SetEventLatchStatus

Function name

__STATIC_INLINE void LL_HRTIM_TIM_SetEventLatchStatus (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Event, uint32_t LatchStatus)

Function description

Enable or disable event latch mechanism for a given timer.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_1
  - LL_HRTIM_EVENT_2
  - LL_HRTIM_EVENT_3
  - LL_HRTIM_EVENT_4
  - LL_HRTIM_EVENT_5
  - LL_HRTIM_EVENT_6
  - LL_HRTIM_EVENT_7
  - LL_HRTIM_EVENT_8
  - LL_HRTIM_EVENT_9
  - LL_HRTIM_EVENT_10
- **LatchStatus:** This parameter can be one of the following values:
  - LL_HRTIM_EELATCH_DISABLED
  - LL_HRTIM_EELATCH_ENABLED

Return values

- **None**

Notes

- This function must not be called when the timer counter is enabled.

Reference Manual to LL API cross reference:

- EEFxR1 EE1LTCH LL_HRTIM_TIM_SetEventLatchStatus
- EEFxR1 EE2LTCH LL_HRTIM_TIM_SetEventLatchStatus
- EEFxR1 EE3LTCH LL_HRTIM_TIM_SetEventLatchStatus
- EEFxR1 EE4LTCH LL_HRTIM_TIM_SetEventLatchStatus
- EEFxR1 EE5LTCH LL_HRTIM_TIM_SetEventLatchStatus
- EEFxR2 EE6LTCH LL_HRTIM_TIM_SetEventLatchStatus
- EEFxR2 EE7LTCH LL_HRTIM_TIM_SetEventLatchStatus
- EEFxR2 EE8LTCH LL_HRTIM_TIM_SetEventLatchStatus
- EEFxR2 EE9LTCH LL_HRTIM_TIM_SetEventLatchStatus
- EEFxR2 EE10LTCH LL_HRTIM_TIM_SetEventLatchStatus

LL_HRTIM_TIM_GetEventLatchStatus

Function name
__STATIC_INLINE uint32_t LL_HRTIM_TIM_GetEventLatchStatus (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Event)

Function description
Get actual event latch status for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_1
  - LL_HRTIM_EVENT_2
  - LL_HRTIM_EVENT_3
  - LL_HRTIM_EVENT_4
  - LL_HRTIM_EVENT_5
  - LL_HRTIM_EVENT_6
  - LL_HRTIM_EVENT_7
  - LL_HRTIM_EVENT_8
  - LL_HRTIM_EVENT_9
  - LL_HRTIM_EVENT_10

Return values
- **LatchStatus:** This parameter can be one of the following values:
  - LL_HRTIM_EELATCH_DISABLED
  - LL_HRTIM_EELATCH_ENABLED

Reference Manual to LL API cross reference:
- EEFxR1 EE1LTCH LL_HRTIM_TIM_GetEventLatchStatus
- EEFxR1 EE2LTCH LL_HRTIM_TIM_GetEventLatchStatus
- EEFxR1 EE3LTCH LL_HRTIM_TIM_GetEventLatchStatus
- EEFxR1 EE4LTCH LL_HRTIM_TIM_GetEventLatchStatus
- EEFxR1 EE5LTCH LL_HRTIM_TIM_GetEventLatchStatus
- EEFxR2 EE6LTCH LL_HRTIM_TIM_GetEventLatchStatus
- EEFxR2 EE7LTCH LL_HRTIM_TIM_GetEventLatchStatus
- EEFxR2 EE8LTCH LL_HRTIM_TIM_GetEventLatchStatus
- EEFxR2 EE9LTCH LL_HRTIM_TIM_GetEventLatchStatus
- EEFxR2 EE10LTCH LL_HRTIM_TIM_GetEventLatchStatus

LL_HRTIM_DT_Config

Function name
__STATIC_INLINE void LL_HRTIM_DT_Config (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Configuration)

Function description
Configure the dead time insertion feature for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C

  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Configuration:** This parameter must be a combination of all the following values:
  - LL_HRTIM_DT_PRESCALER_MUL8 or ... or LL_HRTIM_DT_PRESCALER_DIV16
  - LL_HRTIM_DT_RISING_POSITIVE or LL_HRTIM_DT_RISING_NEGATIVE
  - LL_HRTIM_DT_FALLING_POSITIVE or LL_HRTIM_DT_FALLING_NEGATIVE

Return values
- **None**

Reference Manual to LL API cross reference:
- DTxR DTPRSC LL_HRTIM_DT_Config
- DTxR SDTF LL_HRTIM_DT_Config
- DTxR SDRT LL_HRTIM_DT_Config

LL_HRTIM_DT_SetPrescaler

Function name
__STATIC_INLINE void LL_HRTIM_DT_SetPrescaler (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Prescaler)

Function description
Set the deadtime prescaler value.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Prescaler:** This parameter can be one of the following values:
  - LL_HRTIM_DT_PRESCALER_MUL8
  - LL_HRTIM_DT_PRESCALER_MUL4
  - LL_HRTIM_DT_PRESCALER_MUL2
  - LL_HRTIM_DT_PRESCALER_DIV1
  - LL_HRTIM_DT_PRESCALER_DIV2
  - LL_HRTIM_DT_PRESCALER_DIV4
  - LL_HRTIM_DT_PRESCALER_DIV8
  - LL_HRTIM_DT_PRESCALER_DIV16

Return values
- **None**

Reference Manual to LL API cross reference:
- DTxR DTPRSC LL_HRTIM_DT_SetPrescaler

LL_HRTIM_DT_GetPrescaler

Function name
__STATIC_INLINE uint32_t LL_HRTIM_DT_GetPrescaler (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get actual deadtime prescaler value.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:

  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values

- **Prescaler:** This parameter can be one of the following values:
  - LL_HRTIM_DT_PRESCALER_MUL8
  - LL_HRTIM_DT_PRESCALER_MUL4
  - LL_HRTIM_DT_PRESCALER_MUL2
  - LL_HRTIM_DT_PRESCALER_DIV1
  - LL_HRTIM_DT_PRESCALER_DIV2
  - LL_HRTIM_DT_PRESCALER_DIV4
  - LL_HRTIM_DT_PRESCALER_DIV8
  - LL_HRTIM_DT_PRESCALER_DIV16

Reference Manual to LL API cross reference:

- DTxR DTPRSC LL_HRTIM_DT_GetPrescaler

LL_HRTIM_DT_SetRisingValue

Function name

__STATIC_INLINE void LL_HRTIM_DT_SetRisingValue (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t RisingValue)

Function description

Set the deadtime rising value.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **RisingValue:** Value between 0 and 0x1FF

Return values

- **None**

Reference Manual to LL API cross reference:

- DTxR DTR LL_HRTIM_DT_SetRisingValue

LL_HRTIM_DT_GetRisingValue

Function name

__STATIC_INLINE uint32_t LL_HRTIM_DT_GetRisingValue (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description

Get actual deadtime rising value.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D

– LL_HRTIM_TIMER_E

Return values
- **RisingValue:** Value between 0 and 0x1FF

Reference Manual to LL API cross reference:
- DTxR DTR LL_HRTIM_DT_GetRisingValue

LL_HRTIM_DT_SetRisingSign

Function name
__STATIC_INLINE void LL_HRTIM_DT_SetRisingSign (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t RisingSign)

Function description
Set the deadtime sign on rising edge.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E
- **RisingSign:** This parameter can be one of the following values:
  – LL_HRTIM_DT_RISING_POSITIVE
  – LL_HRTIM_DT_RISING_NEGATIVE

Return values
- **None**

Reference Manual to LL API cross reference:
- DTxR SDTR LL_HRTIM_DT_SetRisingSign

LL_HRTIM_DT_GetRisingSign

Function name
__STATIC_INLINE uint32_t LL_HRTIM_DT_GetRisingSign (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get actual deadtime sign on rising edge.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **RisingSign:** This parameter can be one of the following values:
  – LL_HRTIM_DT_RISING_POSITIVE
  – LL_HRTIM_DT_RISING_NEGATIVE

Reference Manual to LL API cross reference:
- DTxR SDTR LL_HRTIM_DT_GetRisingSign

LL_HRTIM_DT_SetFallingValue

Function name
__STATIC_INLINE void LL_HRTIM_DT_SetFallingValue (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t FallingValue)

Function description
Set the deadime falling value.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **FallingValue:** Value between 0 and 0x1FF

Return values
- **None**

Reference Manual to LL API cross reference:
- DTxR DTF LL_HRTIM_DT_SetFallingValue

LL_HRTIM_DT_GetFallingValue

Function name
__STATIC_INLINE uint32_t LL_HRTIM_DT_GetFallingValue (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get actual deadtime falling value.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **FallingValue:** Value between 0 and 0x1FF

Reference Manual to LL API cross reference:
- DTxR DTF LL_HRTIM_DT_GetFallingValue

LL_HRTIM_DT_SetFallingSign

Function name
__STATIC_INLINE void LL_HRTIM_DT_SetFallingSign (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t FallingSign)

Function description
Set the deadtime sign on falling edge.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

- **FallingSign:** This parameter can be one of the following values:
  - LL_HRTIM_DT_FALLING_POSITIVE
  - LL_HRTIM_DT_FALLING_NEGATIVE

Return values
- **None**

Reference Manual to LL API cross reference:
- DTxR SDTF LL_HRTIM_DT_SetFallingSign

LL_HRTIM_DT_GetFallingSign

Function name
__STATIC_INLINE uint32_t LL_HRTIM_DT_GetFallingSign (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get actual deadtime sign on falling edge.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **FallingSign:** This parameter can be one of the following values:
  - LL_HRTIM_DT_FALLING_POSITIVE
  - LL_HRTIM_DT_FALLING_NEGATIVE

Reference Manual to LL API cross reference:
- DTxR SDTF LL_HRTIM_DT_GetFallingSign

LL_HRTIM_DT_LockRising

Function name
__STATIC_INLINE void LL_HRTIM_DT_LockRising (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Lock the deadtime value and sign on rising edge.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- DTxR DTRLK LL_HRTIM_DT_LockRising

LL_HRTIM_DT_LockRisingSign

Function name
__STATIC_INLINE void LL_HRTIM_DT_LockRisingSign (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Lock the deadtime sign on rising edge.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- DTxR DTRSLK LL_HRTIM_DT_LockRisingSign

LL_HRTIM_DT_LockFalling

Function name
__STATIC_INLINE void LL_HRTIM_DT_LockFalling (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Lock the deadtime value and sign on falling edge.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- DTxR DTFLK LL_HRTIM_DT_LockFalling

LL_HRTIM_DT_LockFallingSign

Function name
__STATIC_INLINE void LL_HRTIM_DT_LockFallingSign (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Lock the deadtime sign on falling edge.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- DTxR DTFSLK LL_HRTIM_DT_LockFallingSign

LL_HRTIM_CHP_Config

Function name
__STATIC_INLINE void LL_HRTIM_CHP_Config (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Configuration)

Function description
Configure the chopper stage for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Configuration:** This parameter must be a combination of all the following values:
  - LL_HRTIM_CHP_PRESCALER_DIV16 or ... or LL_HRTIM_CHP_PRESCALER_DIV256
  - LL_HRTIM_CHP_DUTYCYCLE_0 or ... or LL_HRTIM_CHP_DUTYCYCLE_875
  - LL_HRTIM_CHP_PULSEWIDTH_16 or ... or LL_HRTIM_CHP_PULSEWIDTH_256

Return values
- **None**

Notes
- This function must not be called if the chopper mode is already enabled for one of the timer outputs.

Reference Manual to LL API cross reference:
- CHPxR CARFRQ LL_HRTIM_CHP_Config
- CHPxR CARDTY LL_HRTIM_CHP_Config
- CHPxR STRTPW LL_HRTIM_CHP_Config

LL_HRTIM_CHP_SetPrescaler

Function name
__STATIC_INLINE void LL_HRTIM_CHP_SetPrescaler (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t Prescaler)

Function description
Set prescaler determining the carrier frequency to be added on top of the timer output signals when chopper mode is enabled.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **Prescaler:** This parameter can be one of the following values:
  - LL_HRTIM_CHP_PRESCALER_DIV16
  - LL_HRTIM_CHP_PRESCALER_DIV32
  - LL_HRTIM_CHP_PRESCALER_DIV48

  - LL_HRTIM_CHP_PRESCALER_DIV64
  - LL_HRTIM_CHP_PRESCALER_DIV80
  - LL_HRTIM_CHP_PRESCALER_DIV96
  - LL_HRTIM_CHP_PRESCALER_DIV112
  - LL_HRTIM_CHP_PRESCALER_DIV128
  - LL_HRTIM_CHP_PRESCALER_DIV144
  - LL_HRTIM_CHP_PRESCALER_DIV160
  - LL_HRTIM_CHP_PRESCALER_DIV176
  - LL_HRTIM_CHP_PRESCALER_DIV192
  - LL_HRTIM_CHP_PRESCALER_DIV208
  - LL_HRTIM_CHP_PRESCALER_DIV224
  - LL_HRTIM_CHP_PRESCALER_DIV240
  - LL_HRTIM_CHP_PRESCALER_DIV256

Return values
- **None**

Notes
- This function must not be called if the chopper mode is already enabled for one of the timer outputs.

Reference Manual to LL API cross reference:
- CHPxR CARFRQ LL_HRTIM_CHP_SetPrescaler

LL_HRTIM_CHP_GetPrescaler

Function name
__STATIC_INLINE uint32_t LL_HRTIM_CHP_GetPrescaler (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get actual chopper stage prescaler value.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **Prescaler:** This parameter can be one of the following values:
  - LL_HRTIM_CHP_PRESCALER_DIV16
  - LL_HRTIM_CHP_PRESCALER_DIV32
  - LL_HRTIM_CHP_PRESCALER_DIV48
  - LL_HRTIM_CHP_PRESCALER_DIV64
  - LL_HRTIM_CHP_PRESCALER_DIV80
  - LL_HRTIM_CHP_PRESCALER_DIV96
  - LL_HRTIM_CHP_PRESCALER_DIV112
  - LL_HRTIM_CHP_PRESCALER_DIV128
  - LL_HRTIM_CHP_PRESCALER_DIV144
  - LL_HRTIM_CHP_PRESCALER_DIV160
  - LL_HRTIM_CHP_PRESCALER_DIV176
  - LL_HRTIM_CHP_PRESCALER_DIV192
  - LL_HRTIM_CHP_PRESCALER_DIV208
  - LL_HRTIM_CHP_PRESCALER_DIV224
  - LL_HRTIM_CHP_PRESCALER_DIV240

– LL_HRTIM_CHP_PRESCALER_DIV256

Reference Manual to LL API cross reference:
- CHPxR CARFRQ LL_HRTIM_CHP_GetPrescaler

LL_HRTIM_CHP_SetDutyCycle

Function name
__STATIC_INLINE void LL_HRTIM_CHP_SetDutyCycle (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t DutyCycle)

Function description
Set the chopper duty cycle.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E
- **DutyCycle:** This parameter can be one of the following values:
  – LL_HRTIM_CHP_DUTYCYCLE_0
  – LL_HRTIM_CHP_DUTYCYCLE_125
  – LL_HRTIM_CHP_DUTYCYCLE_250
  – LL_HRTIM_CHP_DUTYCYCLE_375
  – LL_HRTIM_CHP_DUTYCYCLE_500
  – LL_HRTIM_CHP_DUTYCYCLE_625
  – LL_HRTIM_CHP_DUTYCYCLE_750
  – LL_HRTIM_CHP_DUTYCYCLE_875

Return values
- **None**

Notes
- Duty cycle can be adjusted by 1/8 step (from 0/8 up to 7/8)
- This function must not be called if the chopper mode is already enabled for one of the timer outputs.

Reference Manual to LL API cross reference:
- CHPxR CARDTY LL_HRTIM_CHP_SetDutyCycle

LL_HRTIM_CHP_GetDutyCycle

Function name
__STATIC_INLINE uint32_t LL_HRTIM_CHP_GetDutyCycle (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Get actual chopper duty cycle.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **DutyCycle:** This parameter can be one of the following values:
  - LL_HRTIM_CHP_DUTYCYCLE_0
  - LL_HRTIM_CHP_DUTYCYCLE_125
  - LL_HRTIM_CHP_DUTYCYCLE_250
  - LL_HRTIM_CHP_DUTYCYCLE_375
  - LL_HRTIM_CHP_DUTYCYCLE_500
  - LL_HRTIM_CHP_DUTYCYCLE_625
  - LL_HRTIM_CHP_DUTYCYCLE_750
  - LL_HRTIM_CHP_DUTYCYCLE_875

Reference Manual to LL API cross reference:
- CHPxR CARDTY LL_HRTIM_CHP_GetDutyCycle

LL_HRTIM_CHP_SetPulseWidth

Function name
__STATIC_INLINE void LL_HRTIM_CHP_SetPulseWidth (HRTIM_TypeDef * HRTIMx, uint32_t Timer, uint32_t PulseWidth)

Function description
Set the start pulse width.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E
- **PulseWidth:** This parameter can be one of the following values:
  - LL_HRTIM_CHP_PULSEWIDTH_16
  - LL_HRTIM_CHP_PULSEWIDTH_32
  - LL_HRTIM_CHP_PULSEWIDTH_48
  - LL_HRTIM_CHP_PULSEWIDTH_64
  - LL_HRTIM_CHP_PULSEWIDTH_80
  - LL_HRTIM_CHP_PULSEWIDTH_96
  - LL_HRTIM_CHP_PULSEWIDTH_112
  - LL_HRTIM_CHP_PULSEWIDTH_128
  - LL_HRTIM_CHP_PULSEWIDTH_144
  - LL_HRTIM_CHP_PULSEWIDTH_160
  - LL_HRTIM_CHP_PULSEWIDTH_176
  - LL_HRTIM_CHP_PULSEWIDTH_192
  - LL_HRTIM_CHP_PULSEWIDTH_208
  - LL_HRTIM_CHP_PULSEWIDTH_224
  - LL_HRTIM_CHP_PULSEWIDTH_240
  - LL_HRTIM_CHP_PULSEWIDTH_256

Return values
- **None**

Notes
- This function must not be called if the chopper mode is already enabled for one of the timer outputs.

Reference Manual to LL API cross reference:
- CHPxR STRPW LL_HRTIM_CHP_SetPulseWidth

LL_HRTIM_CHP_GetPulseWidth

Function name: **__STATIC_INLINE uint32_t LL_HRTIM_CHP_GetPulseWidth (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description: Get actual start pulse width.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values:
- **PulseWidth:** This parameter can be one of the following values:
  - LL_HRTIM_CHP_PULSEWIDTH_16
  - LL_HRTIM_CHP_PULSEWIDTH_32
  - LL_HRTIM_CHP_PULSEWIDTH_48
  - LL_HRTIM_CHP_PULSEWIDTH_64
  - LL_HRTIM_CHP_PULSEWIDTH_80
  - LL_HRTIM_CHP_PULSEWIDTH_96
  - LL_HRTIM_CHP_PULSEWIDTH_112
  - LL_HRTIM_CHP_PULSEWIDTH_128
  - LL_HRTIM_CHP_PULSEWIDTH_144
  - LL_HRTIM_CHP_PULSEWIDTH_160
  - LL_HRTIM_CHP_PULSEWIDTH_176
  - LL_HRTIM_CHP_PULSEWIDTH_192
  - LL_HRTIM_CHP_PULSEWIDTH_208
  - LL_HRTIM_CHP_PULSEWIDTH_224
  - LL_HRTIM_CHP_PULSEWIDTH_240
  - LL_HRTIM_CHP_PULSEWIDTH_256

Reference Manual to LL API cross reference:
- CHPxR STRPW LL_HRTIM_CHP_GetPulseWidth

LL_HRTIM_OUT_SetOutputSetSrc

Function name: **__STATIC_INLINE void LL_HRTIM_OUT_SetOutputSetSrc (HRTIM_TypeDef * HRTIMx, uint32_t Output, uint32_t SetSrc)**

Function description: Set the timer output set source.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1

  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2
- **SetSrc:** This parameter can be a combination of the following values:
  - LL_HRTIM_CROSSBAR_NONE
  - LL_HRTIM_CROSSBAR_RESYNC
  - LL_HRTIM_CROSSBAR_TIMPER
  - LL_HRTIM_CROSSBAR_TIMCMP1
  - LL_HRTIM_CROSSBAR_TIMCMP2
  - LL_HRTIM_CROSSBAR_TIMCMP3
  - LL_HRTIM_CROSSBAR_TIMCMP4
  - LL_HRTIM_CROSSBAR_MASTERPER
  - LL_HRTIM_CROSSBAR_MASTERCMP1
  - LL_HRTIM_CROSSBAR_MASTERCMP2
  - LL_HRTIM_CROSSBAR_MASTERCMP3
  - LL_HRTIM_CROSSBAR_MASTERCMP4
  - LL_HRTIM_CROSSBAR_TIMEV_1
  - LL_HRTIM_CROSSBAR_TIMEV_2
  - LL_HRTIM_CROSSBAR_TIMEV_3
  - LL_HRTIM_CROSSBAR_TIMEV_4
  - LL_HRTIM_CROSSBAR_TIMEV_5
  - LL_HRTIM_CROSSBAR_TIMEV_6
  - LL_HRTIM_CROSSBAR_TIMEV_7
  - LL_HRTIM_CROSSBAR_TIMEV_8
  - LL_HRTIM_CROSSBAR_TIMEV_9
  - LL_HRTIM_CROSSBAR_EEV_1
  - LL_HRTIM_CROSSBAR_EEV_2
  - LL_HRTIM_CROSSBAR_EEV_3
  - LL_HRTIM_CROSSBAR_EEV_4
  - LL_HRTIM_CROSSBAR_EEV_5
  - LL_HRTIM_CROSSBAR_EEV_6
  - LL_HRTIM_CROSSBAR_EEV_7
  - LL_HRTIM_CROSSBAR_EEV_8
  - LL_HRTIM_CROSSBAR_EEV_9
  - LL_HRTIM_CROSSBAR_EEV_10
  - LL_HRTIM_CROSSBAR_UPDATE

Return values

- **None**

Reference Manual to LL API cross reference:

- SETx1R SST LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R RESYNC LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R PER LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R CMP1 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R CMP2 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R CMP3 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R CMP4 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R MSTPER LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R MSTCMP1 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R MSTCMP2 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R MSTCMP3 LL_HRTIM_OUT_SetOutputSetSrc

- SETx1R MSTCMP4 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT1 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT2 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT3 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT4 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT5 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT6 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT7 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT8 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT9 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT1 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT2 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT3 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT4 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT5 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT6 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT7 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT8 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT9 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT10 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R UPDATE LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R SST LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R RESYNC LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R PER LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R CMP1 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R CMP2 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R CMP3 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R CMP4 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R MSTPER LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R MSTCMP1 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R MSTCMP2 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R MSTCMP3 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R MSTCMP4 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT1 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT2 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT3 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT4 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT5 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT6 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT7 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT8 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R TIMEVNT9 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT1 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT2 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT3 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT4 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT5 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT6 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT7 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT8 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT9 LL_HRTIM_OUT_SetOutputSetSrc
- SETx1R EXEVNT10 LL_HRTIM_OUT_SetOutputSetSrc

- SETx1R UPDATE LL_HRTIM_OUT_SetOutputSetSrc

LL_HRTIM_OUT_GetOutputSetSrc

Function name
__STATIC_INLINE uint32_t LL_HRTIM_OUT_GetOutputSetSrc (HRTIM_TypeDef * HRTIMx, uint32_t Output)

Function description
Get the timer output set source.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2

Return values
- **SetSrc:** This parameter can be a combination of the following values:
  - LL_HRTIM_CROSSBAR_NONE
  - LL_HRTIM_CROSSBAR_RESYNC
  - LL_HRTIM_CROSSBAR_TIMPER
  - LL_HRTIM_CROSSBAR_TIMCMP1
  - LL_HRTIM_CROSSBAR_TIMCMP2
  - LL_HRTIM_CROSSBAR_TIMCMP3
  - LL_HRTIM_CROSSBAR_TIMCMP4
  - LL_HRTIM_CROSSBAR_MASTERPER
  - LL_HRTIM_CROSSBAR_MASTERCMP1
  - LL_HRTIM_CROSSBAR_MASTERCMP2
  - LL_HRTIM_CROSSBAR_MASTERCMP3
  - LL_HRTIM_CROSSBAR_MASTERCMP4
  - LL_HRTIM_CROSSBAR_TIMEV_1
  - LL_HRTIM_CROSSBAR_TIMEV_2
  - LL_HRTIM_CROSSBAR_TIMEV_3
  - LL_HRTIM_CROSSBAR_TIMEV_4
  - LL_HRTIM_CROSSBAR_TIMEV_5
  - LL_HRTIM_CROSSBAR_TIMEV_6
  - LL_HRTIM_CROSSBAR_TIMEV_7
  - LL_HRTIM_CROSSBAR_TIMEV_8
  - LL_HRTIM_CROSSBAR_TIMEV_9
  - LL_HRTIM_CROSSBAR_EEV_1
  - LL_HRTIM_CROSSBAR_EEV_2
  - LL_HRTIM_CROSSBAR_EEV_3
  - LL_HRTIM_CROSSBAR_EEV_4
  - LL_HRTIM_CROSSBAR_EEV_5
  - LL_HRTIM_CROSSBAR_EEV_6
  - LL_HRTIM_CROSSBAR_EEV_7
  - LL_HRTIM_CROSSBAR_EEV_8
  - LL_HRTIM_CROSSBAR_EEV_9

  - LL_HRTIM_CROSSBAR_EEV_10
  - LL_HRTIM_CROSSBAR_UPDATE

Reference Manual to LL API cross reference:

- SETx1R SST LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R RESYNC LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R PER LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R CMP1 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R CMP2 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R CMP3 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R CMP4 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R MSTPER LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R MSTCMP1 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R MSTCMP2 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R MSTCMP3 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R MSTCMP4 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT1 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT2 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT3 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT4 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT5 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT6 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT7 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT8 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT9 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT1 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT2 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT3 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT4 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT5 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT6 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT7 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT8 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT9 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT10 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R UPDATE LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R SST LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R RESYNC LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R PER LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R CMP1 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R CMP2 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R CMP3 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R CMP4 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R MSTPER LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R MSTCMP1 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R MSTCMP2 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R MSTCMP3 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R MSTCMP4 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT1 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT2 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT3 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT4 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT5 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT6 LL_HRTIM_OUT_GetOutputSetSrc

- SETx1R TIMEVNT7 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT8 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R TIMEVNT9 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT1 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT2 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT3 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT4 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT5 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT6 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT7 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT8 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT9 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R EXEVNT10 LL_HRTIM_OUT_GetOutputSetSrc
- SETx1R UPDATE LL_HRTIM_OUT_GetOutputSetSrc

LL_HRTIM_OUT_SetOutputResetSrc

Function name **__STATIC_INLINE void LL_HRTIM_OUT_SetOutputResetSrc (HRTIM_TypeDef * HRTIMx, uint32_t Output, uint32_t ResetSrc)**

Function description Set the timer output reset source.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2
- **ResetSrc:** This parameter can be a combination of the following values:
  - LL_HRTIM_CROSSBAR_NONE
  - LL_HRTIM_CROSSBAR_RESYNC
  - LL_HRTIM_CROSSBAR_TIMPER
  - LL_HRTIM_CROSSBAR_TIMCMP1
  - LL_HRTIM_CROSSBAR_TIMCMP2
  - LL_HRTIM_CROSSBAR_TIMCMP3
  - LL_HRTIM_CROSSBAR_TIMCMP4
  - LL_HRTIM_CROSSBAR_MASTERPER
  - LL_HRTIM_CROSSBAR_MASTERCMP1
  - LL_HRTIM_CROSSBAR_MASTERCMP2
  - LL_HRTIM_CROSSBAR_MASTERCMP3
  - LL_HRTIM_CROSSBAR_MASTERCMP4
  - LL_HRTIM_CROSSBAR_TIMEV_1
  - LL_HRTIM_CROSSBAR_TIMEV_2
  - LL_HRTIM_CROSSBAR_TIMEV_3
  - LL_HRTIM_CROSSBAR_TIMEV_4
  - LL_HRTIM_CROSSBAR_TIMEV_5

  - LL_HRTIM_CROSSBAR_TIMEV_6
  - LL_HRTIM_CROSSBAR_TIMEV_7
  - LL_HRTIM_CROSSBAR_TIMEV_8
  - LL_HRTIM_CROSSBAR_TIMEV_9
  - LL_HRTIM_CROSSBAR_EEV_1
  - LL_HRTIM_CROSSBAR_EEV_2
  - LL_HRTIM_CROSSBAR_EEV_3
  - LL_HRTIM_CROSSBAR_EEV_4
  - LL_HRTIM_CROSSBAR_EEV_5
  - LL_HRTIM_CROSSBAR_EEV_6
  - LL_HRTIM_CROSSBAR_EEV_7
  - LL_HRTIM_CROSSBAR_EEV_8
  - LL_HRTIM_CROSSBAR_EEV_9
  - LL_HRTIM_CROSSBAR_EEV_10
  - LL_HRTIM_CROSSBAR_UPDATE

Return values

- **None**

Reference Manual to LL API cross reference:

- RSTx1R RST LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R RESYNC LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R PER LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R CMP1 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R CMP2 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R CMP3 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R CMP4 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R MSTPER LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R MSTCMP1 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R MSTCMP2 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R MSTCMP3 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R MSTCMP4 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT1 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT2 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT3 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT4 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT5 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT6 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT7 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT8 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT9 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT1 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT2 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT3 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT4 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT5 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT6 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT7 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT8 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT9 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT10 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R UPDATE LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R RST LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R RESYNC LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R PER LL_HRTIM_OUT_SetOutputResetSrc

- RSTx1R CMP1 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R CMP2 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R CMP3 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R CMP4 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R MSTPER LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R MSTCMP1 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R MSTCMP2 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R MSTCMP3 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R MSTCMP4 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT1 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT2 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT3 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT4 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT5 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT6 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT7 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT8 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R TIMEVNT9 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT1 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT2 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT3 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT4 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT5 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT6 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT7 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT8 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT9 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R EXEVNT10 LL_HRTIM_OUT_SetOutputResetSrc
- RSTx1R UPDATE LL_HRTIM_OUT_SetOutputResetSrc

LL_HRTIM_OUT_GetOutputResetSrc

Function name
__STATIC_INLINE uint32_t LL_HRTIM_OUT_GetOutputResetSrc (HRTIM_TypeDef * HRTIMx, uint32_t Output)

Function description
Get the timer output set source.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2

Return values
- **ResetSrc:** This parameter can be a combination of the following values:
  - LL_HRTIM_CROSSBAR_NONE

  - LL_HRTIM_CROSSBAR_RESYNC
  - LL_HRTIM_CROSSBAR_TIMPER
  - LL_HRTIM_CROSSBAR_TIMCMP1
  - LL_HRTIM_CROSSBAR_TIMCMP2
  - LL_HRTIM_CROSSBAR_TIMCMP3
  - LL_HRTIM_CROSSBAR_TIMCMP4
  - LL_HRTIM_CROSSBAR_MASTERPER
  - LL_HRTIM_CROSSBAR_MASTERCMP1
  - LL_HRTIM_CROSSBAR_MASTERCMP2
  - LL_HRTIM_CROSSBAR_MASTERCMP3
  - LL_HRTIM_CROSSBAR_MASTERCMP4
  - LL_HRTIM_CROSSBAR_TIMEV_1
  - LL_HRTIM_CROSSBAR_TIMEV_2
  - LL_HRTIM_CROSSBAR_TIMEV_3
  - LL_HRTIM_CROSSBAR_TIMEV_4
  - LL_HRTIM_CROSSBAR_TIMEV_5
  - LL_HRTIM_CROSSBAR_TIMEV_6
  - LL_HRTIM_CROSSBAR_TIMEV_7
  - LL_HRTIM_CROSSBAR_TIMEV_8
  - LL_HRTIM_CROSSBAR_TIMEV_9
  - LL_HRTIM_CROSSBAR_EEV_1
  - LL_HRTIM_CROSSBAR_EEV_2
  - LL_HRTIM_CROSSBAR_EEV_3
  - LL_HRTIM_CROSSBAR_EEV_4
  - LL_HRTIM_CROSSBAR_EEV_5
  - LL_HRTIM_CROSSBAR_EEV_6
  - LL_HRTIM_CROSSBAR_EEV_7
  - LL_HRTIM_CROSSBAR_EEV_8
  - LL_HRTIM_CROSSBAR_EEV_9
  - LL_HRTIM_CROSSBAR_EEV_10
  - LL_HRTIM_CROSSBAR_UPDATE

Reference Manual to LL API cross reference:

- RSTx1R RST LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R RESYNC LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R PER LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R CMP1 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R CMP2 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R CMP3 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R CMP4 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R MSTPER LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R MSTCMP1 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R MSTCMP2 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R MSTCMP3 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R MSTCMP4 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT1 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT2 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT3 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT4 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT5 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT6 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT7 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT8 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT9 LL_HRTIM_OUT_GetOutputResetSrc

- RSTx1R EXEVNT1 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT2 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT3 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT4 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT5 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT6 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT7 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT8 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT9 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT10 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R UPDATE LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R RST LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R RESYNC LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R PER LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R CMP1 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R CMP2 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R CMP3 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R CMP4 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R MSTPER LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R MSTCMP1 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R MSTCMP2 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R MSTCMP3 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R MSTCMP4 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT1 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT2 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT3 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT4 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT5 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT6 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT7 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT8 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R TIMEVNT9 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT1 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT2 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT3 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT4 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT5 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT6 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT7 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT8 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT9 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R EXEVNT10 LL_HRTIM_OUT_GetOutputResetSrc
- RSTx1R UPDATE LL_HRTIM_OUT_GetOutputResetSrc

LL_HRTIM_OUT_Config

Function name **__STATIC_INLINE void LL_HRTIM_OUT_Config (HRTIM_TypeDef * HRTIMx, uint32_t Output, uint32_t Configuration)**

Function description Configure a timer output.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:

  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2
- **Configuration:** This parameter must be a combination of all the following values:
  - LL_HRTIM_OUT_POSITIVE_POLARITY or LL_HRTIM_OUT_NEGATIVE_POLARITY
  - LL_HRTIM_OUT_NO_IDLE or LL_HRTIM_OUT_IDLE_WHEN_BURST
  - LL_HRTIM_OUT_IDLELEVEL_INACTIVE or LL_HRTIM_OUT_IDLELEVEL_ACTIVE
  - LL_HRTIM_OUT_FAULTSTATE_NO_ACTION or LL_HRTIM_OUT_FAULTSTATE_ACTIVE or LL_HRTIM_OUT_FAULTSTATE_INACTIVE or LL_HRTIM_OUT_FAULTSTATE_HIGHZ
  - LL_HRTIM_OUT_CHOPPERMODE_DISABLED or LL_HRTIM_OUT_CHOPPERMODE_ENABLED
  - LL_HRTIM_OUT_BM_ENTRYMODE_REGULAR or LL_HRTIM_OUT_BM_ENTRYMODE_DELAYED

Return values
- **None**

Reference Manual to LL API cross reference:
- OUTxR POL1 LL_HRTIM_OUT_Config
- OUTxR IDLEM1 LL_HRTIM_OUT_Config
- OUTxR IDLES1 LL_HRTIM_OUT_Config
- OUTxR FAULT1 LL_HRTIM_OUT_Config
- OUTxR CHP1 LL_HRTIM_OUT_Config
- OUTxR DIDL1 LL_HRTIM_OUT_Config
- OUTxR POL2 LL_HRTIM_OUT_Config
- OUTxR IDLEM2 LL_HRTIM_OUT_Config
- OUTxR IDLES2 LL_HRTIM_OUT_Config
- OUTxR FAULT2 LL_HRTIM_OUT_Config
- OUTxR CHP2 LL_HRTIM_OUT_Config
- OUTxR DIDL2 LL_HRTIM_OUT_Config

LL_HRTIM_OUT_SetPolarity

Function name
__STATIC_INLINE void LL_HRTIM_OUT_SetPolarity (HRTIM_TypeDef * HRTIMx, uint32_t Output, uint32_t Polarity)

Function description
Set the polarity of a timer output.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2

  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2
- **Polarity:** This parameter can be one of the following values:
  - LL_HRTIM_OUT_POSITIVE_POLARITY
  - LL_HRTIM_OUT_NEGATIVE_POLARITY

Return values
- **None**

Reference Manual to LL API cross reference:
- OUTxR POL1 LL_HRTIM_OUT_SetPolarity
- OUTxR POL2 LL_HRTIM_OUT_SetPolarity

LL_HRTIM_OUT_GetPolarity

Function name
__STATIC_INLINE uint32_t LL_HRTIM_OUT_GetPolarity (HRTIM_TypeDef * HRTIMx, uint32_t Output)

Function description
Get actual polarity of the timer output.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2

Return values
- **Polarity:** This parameter can be one of the following values:
  - LL_HRTIM_OUT_POSITIVE_POLARITY
  - LL_HRTIM_OUT_NEGATIVE_POLARITY

Reference Manual to LL API cross reference:
- OUTxR POL1 LL_HRTIM_OUT_GetPolarity
- OUTxR POL2 LL_HRTIM_OUT_GetPolarity

LL_HRTIM_OUT_SetIdleMode

Function name
__STATIC_INLINE void LL_HRTIM_OUT_SetIdleMode (HRTIM_TypeDef * HRTIMx, uint32_t Output, uint32_t IdleMode)

Function description
Set the output IDLE mode.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1

  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2
- **IdleMode:** This parameter can be one of the following values:
  - LL_HRTIM_OUT_NO_IDLE
  - LL_HRTIM_OUT_IDLE_WHEN_BURST

Return values
- **None**

Notes
- This function must not be called when the burst mode is active

Reference Manual to LL API cross reference:
- OUTxR IDLEM1 LL_HRTIM_OUT_SetIdleMode
- OUTxR IDLEM2 LL_HRTIM_OUT_SetIdleMode

LL_HRTIM_OUT_GetIdleMode

Function name
__STATIC_INLINE uint32_t LL_HRTIM_OUT_GetIdleMode (HRTIM_TypeDef * HRTIMx, uint32_t Output)

Function description
Get actual output IDLE mode.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2

Return values
- **IdleMode:** This parameter can be one of the following values:
  - LL_HRTIM_OUT_NO_IDLE
  - LL_HRTIM_OUT_IDLE_WHEN_BURST

Reference Manual to LL API cross reference:
- OUTxR IDLEM1 LL_HRTIM_OUT_GetIdleMode
- OUTxR IDLEM2 LL_HRTIM_OUT_GetIdleMode

LL_HRTIM_OUT_SetIdleLevel

Function name
__STATIC_INLINE void LL_HRTIM_OUT_SetIdleLevel (HRTIM_TypeDef * HRTIMx, uint32_t Output, uint32_t IdleLevel)

Function description
Set the output IDLE level.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2
- **IdleLevel:** This parameter can be one of the following values:
  - LL_HRTIM_OUT_IDLELEVEL_INACTIVE
  - LL_HRTIM_OUT_IDLELEVEL_ACTIVE

Return values
- **None**

Notes
- This function must be called prior enabling the timer.
- Idle level isn't relevant when the output idle mode is set to LL_HRTIM_OUT_NO_IDLE.

Reference Manual to LL API cross reference:
- OUTxR IDLES1 LL_HRTIM_OUT_SetIdleLevel
- OUTxR IDLES2 LL_HRTIM_OUT_SetIdleLevel

LL_HRTIM_OUT_GetIdleLevel

Function name
__STATIC_INLINE uint32_t LL_HRTIM_OUT_GetIdleLevel (HRTIM_TypeDef * HRTIMx, uint32_t Output)

Function description
Get actual output IDLE level.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2

Return values
- **IdleLevel:** This parameter can be one of the following values:
  - LL_HRTIM_OUT_IDLELEVEL_INACTIVE
  - LL_HRTIM_OUT_IDLELEVEL_ACTIVE

Reference Manual to LL API cross reference:
- OUTxR IDLES1 LL_HRTIM_OUT_GetIdleLevel
- OUTxR IDLES2 LL_HRTIM_OUT_GetIdleLevel

LL_HRTIM_OUT_SetFaultState

Function name
__STATIC_INLINE void LL_HRTIM_OUT_SetFaultState (HRTIM_TypeDef * HRTIMx, uint32_t Output, uint32_t FaultState)

Function description
Set the output FAULT state.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2
- **FaultState:** This parameter can be one of the following values:
  - LL_HRTIM_OUT_FAULTSTATE_NO_ACTION
  - LL_HRTIM_OUT_FAULTSTATE_ACTIVE
  - LL_HRTIM_OUT_FAULTSTATE_INACTIVE
  - LL_HRTIM_OUT_FAULTSTATE_HIGHZ

Return values
- **None**

Notes
- This function must not called when the timer is enabled and a fault channel is enabled at timer level.

Reference Manual to LL API cross reference:
- OUTxR FAULT1 LL_HRTIM_OUT_SetFaultState
- OUTxR FAULT2 LL_HRTIM_OUT_SetFaultState

LL_HRTIM_OUT_GetFaultState

Function name
__STATIC_INLINE uint32_t LL_HRTIM_OUT_GetFaultState (HRTIM_TypeDef * HRTIMx, uint32_t Output)

Function description
Get actual FAULT state.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2

Return values
- **FaultState:** This parameter can be one of the following values:

- LL_HRTIM_OUT_FAULTSTATE_NO_ACTION
- LL_HRTIM_OUT_FAULTSTATE_ACTIVE
- LL_HRTIM_OUT_FAULTSTATE_INACTIVE
- LL_HRTIM_OUT_FAULTSTATE_HIGHZ

Reference Manual to LL API cross reference:

- OUTxR FAULT1 LL_HRTIM_OUT_GetFaultState
- OUTxR FAULT2 LL_HRTIM_OUT_GetFaultState

LL_HRTIM_OUT_SetChopperMode

Function name

__STATIC_INLINE void LL_HRTIM_OUT_SetChopperMode (HRTIM_TypeDef * HRTIMx, uint32_t Output, uint32_t ChopperMode)

Function description

Set the output chopper mode.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2
- **ChopperMode:** This parameter can be one of the following values:
  - LL_HRTIM_OUT_CHOPPERMODE_DISABLED
  - LL_HRTIM_OUT_CHOPPERMODE_ENABLED

Return values

- **None**

Notes

- This function must not called when the timer is enabled.

Reference Manual to LL API cross reference:

- OUTxR CHP1 LL_HRTIM_OUT_SetChopperMode
- OUTxR CHP2 LL_HRTIM_OUT_SetChopperMode

LL_HRTIM_OUT_GetChopperMode

Function name

__STATIC_INLINE uint32_t LL_HRTIM_OUT_GetChopperMode (HRTIM_TypeDef * HRTIMx, uint32_t Output)

Function description

Get actual output chopper mode.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2

  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2

Return values
- **ChopperMode:** This parameter can be one of the following values:
  - LL_HRTIM_OUT_CHOPPERMODE_DISABLED
  - LL_HRTIM_OUT_CHOPPERMODE_ENABLED

Reference Manual to LL API cross reference:
- OUTxR CHP1 LL_HRTIM_OUT_GetChopperMode
- OUTxR CHP2 LL_HRTIM_OUT_GetChopperMode

LL_HRTIM_OUT_SetBMEntryMode

Function name
__STATIC_INLINE void LL_HRTIM_OUT_SetBMEntryMode (HRTIM_TypeDef * HRTIMx, uint32_t Output, uint32_t BMEntryMode)

Function description
Set the output burst mode entry mode.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2
- **BMEntryMode:** This parameter can be one of the following values:
  - LL_HRTIM_OUT_BM_ENTRYMODE_REGULAR
  - LL_HRTIM_OUT_BM_ENTRYMODE_DELAYED

Return values
- **None**

Notes
- This function must not called when the timer is enabled.

Reference Manual to LL API cross reference:
- OUTxR DIDL1 LL_HRTIM_OUT_SetBMEntryMode
- OUTxR DIDL2 LL_HRTIM_OUT_SetBMEntryMode

LL_HRTIM_OUT_GetBMEntryMode

Function name
__STATIC_INLINE uint32_t LL_HRTIM_OUT_GetBMEntryMode (HRTIM_TypeDef * HRTIMx, uint32_t Output)

Function description
Get actual output burst mode entry mode.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2

  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2

Return values

- **BMEntryMode:** This parameter can be one of the following values:
  - LL_HRTIM_OUT_BM_ENTRYMODE_REGULAR
  - LL_HRTIM_OUT_BM_ENTRYMODE_DELAYED

Reference Manual to LL API cross reference:

- OUTxR DIDL1 LL_HRTIM_OUT_GetBMEntryMode
- OUTxR DIDL2 LL_HRTIM_OUT_GetBMEntryMode

LL_HRTIM_OUT_GetDLYPRTOutStatus

Function name

__STATIC_INLINE uint32_t LL_HRTIM_OUT_GetDLYPRTOutStatus (HRTIM_TypeDef * HRTIMx, uint32_t Output)

Function description

Get the level (active or inactive) of the designated output when the delayed protection was triggered.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2

Return values

- **OutputLevel:** This parameter can be one of the following values:
  - LL_HRTIM_OUT_LEVEL_INACTIVE
  - LL_HRTIM_OUT_LEVEL_ACTIVE

Reference Manual to LL API cross reference:

- TIMxISR O1SRSR LL_HRTIM_OUT_GetDLYPRTOutStatus
- TIMxISR O2SRSR LL_HRTIM_OUT_GetDLYPRTOutStatus

LL_HRTIM_OUT_ForceLevel

Function name

__STATIC_INLINE void LL_HRTIM_OUT_ForceLevel (HRTIM_TypeDef * HRTIMx, uint32_t Output, uint32_t OutputLevel)

Function description

Force the timer output to its active or inactive level.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2
- **OutputLevel:** This parameter can be one of the following values:
  - LL_HRTIM_OUT_LEVEL_INACTIVE
  - LL_HRTIM_OUT_LEVEL_ACTIVE

Return values
- **None**

Reference Manual to LL API cross reference:
- SETx1R SST LL_HRTIM_OUT_ForceLevel
- RSTx1R SRT LL_HRTIM_OUT_ForceLevel
- SETx2R SST LL_HRTIM_OUT_ForceLevel
- RSTx2R SRT LL_HRTIM_OUT_ForceLevel

LL_HRTIM_OUT_GetLevel

Function name
__STATIC_INLINE uint32_t LL_HRTIM_OUT_GetLevel (HRTIM_TypeDef * HRTIMx, uint32_t Output)

Function description
Get actual output level, before the output stage (chopper, polarity).

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Output:** This parameter can be one of the following values:
  - LL_HRTIM_OUTPUT_TA1
  - LL_HRTIM_OUTPUT_TA2
  - LL_HRTIM_OUTPUT_TB1
  - LL_HRTIM_OUTPUT_TB2
  - LL_HRTIM_OUTPUT_TC1
  - LL_HRTIM_OUTPUT_TC2
  - LL_HRTIM_OUTPUT_TD1
  - LL_HRTIM_OUTPUT_TD2
  - LL_HRTIM_OUTPUT_TE1
  - LL_HRTIM_OUTPUT_TE2

Return values
- **OutputLevel:** This parameter can be one of the following values:
  - LL_HRTIM_OUT_LEVEL_INACTIVE
  - LL_HRTIM_OUT_LEVEL_ACTIVE

Reference Manual to LL API cross reference:
- TIMxISR O1CPY LL_HRTIM_OUT_GetLevel
- TIMxISR O2CPY LL_HRTIM_OUT_GetLevel

LL_HRTIM_EE_Config

Function name

__STATIC_INLINE void LL_HRTIM_EE_Config (HRTIM_TypeDef * HRTIMx, uint32_t Event, uint32_t Configuration)

Function description

Configure external event conditioning.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_1
  - LL_HRTIM_EVENT_2
  - LL_HRTIM_EVENT_3
  - LL_HRTIM_EVENT_4
  - LL_HRTIM_EVENT_5
  - LL_HRTIM_EVENT_6
  - LL_HRTIM_EVENT_7
  - LL_HRTIM_EVENT_8
  - LL_HRTIM_EVENT_9
  - LL_HRTIM_EVENT_10
- **Configuration:** This parameter must be a combination of all the following values:
  - LL_HRTIM_EE_SRC_1 or LL_HRTIM_EE_SRC_2 or LL_HRTIM_EE_SRC_3 or LL_HRTIM_EE_SRC_4
  - LL_HRTIM_EE_POLARITY_HIGH or LL_HRTIM_EE_POLARITY_LOW
  - LL_HRTIM_EE_SENSITIVITY_LEVEL or LL_HRTIM_EE_SENSITIVITY_RISINGEDGE or LL_HRTIM_EE_SENSITIVITY_FALLINGEDGE or LL_HRTIM_EE_SENSITIVITY_BOTHEDGES
  - LL_HRTIM_EE_FASTMODE_DISABLE or LL_HRTIM_EE_FASTMODE_ENABLE

Return values

- **None**

Notes

- This function must not be called when the timer counter is enabled.
- Event source (EExSrc1..EExSRC4) mapping depends on configured event channel.
- Fast mode is available only for LL_HRTIM_EVENT_1..5.

Reference Manual to LL API cross reference:

- EECR1 EE1SRC LL_HRTIM_EE_Config
- EECR1 EE1POL LL_HRTIM_EE_Config
- EECR1 EE1SNS LL_HRTIM_EE_Config
- EECR1 EE1FAST LL_HRTIM_EE_Config
- EECR1 EE2SRC LL_HRTIM_EE_Config
- EECR1 EE2POL LL_HRTIM_EE_Config
- EECR1 EE2SNS LL_HRTIM_EE_Config
- EECR1 EE2FAST LL_HRTIM_EE_Config
- EECR1 EE3SRC LL_HRTIM_EE_Config
- EECR1 EE3POL LL_HRTIM_EE_Config
- EECR1 EE3SNS LL_HRTIM_EE_Config
- EECR1 EE3FAST LL_HRTIM_EE_Config
- EECR1 EE4SRC LL_HRTIM_EE_Config
- EECR1 EE4POL LL_HRTIM_EE_Config
- EECR1 EE4SNS LL_HRTIM_EE_Config

- EECR1 EE4FAST LL_HRTIM_EE_Config
- EECR1 EE5SRC LL_HRTIM_EE_Config
- EECR1 EE5POL LL_HRTIM_EE_Config
- EECR1 EE5SNS LL_HRTIM_EE_Config
- EECR1 EE5FAST LL_HRTIM_EE_Config
- EECR2 EE6SRC LL_HRTIM_EE_Config
- EECR2 EE6POL LL_HRTIM_EE_Config
- EECR2 EE6SNS LL_HRTIM_EE_Config
- EECR2 EE6FAST LL_HRTIM_EE_Config
- EECR2 EE7SRC LL_HRTIM_EE_Config
- EECR2 EE7POL LL_HRTIM_EE_Config
- EECR2 EE7SNS LL_HRTIM_EE_Config
- EECR2 EE7FAST LL_HRTIM_EE_Config
- EECR2 EE8SRC LL_HRTIM_EE_Config
- EECR2 EE8POL LL_HRTIM_EE_Config
- EECR2 EE8SNS LL_HRTIM_EE_Config
- EECR2 EE8FAST LL_HRTIM_EE_Config
- EECR2 EE9SRC LL_HRTIM_EE_Config
- EECR2 EE9POL LL_HRTIM_EE_Config
- EECR2 EE9SNS LL_HRTIM_EE_Config
- EECR2 EE9FAST LL_HRTIM_EE_Config
- EECR2 EE10SRC LL_HRTIM_EE_Config
- EECR2 EE10POL LL_HRTIM_EE_Config
- EECR2 EE10SNS LL_HRTIM_EE_Config
- EECR2 EE10FAST LL_HRTIM_EE_Config

LL_HRTIM_EE_SetSrc

Function name
__STATIC_INLINE void LL_HRTIM_EE_SetSrc (HRTIM_TypeDef * HRTIMx, uint32_t Event, uint32_t Src)

Function description
Set the external event source.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_1
  - LL_HRTIM_EVENT_2
  - LL_HRTIM_EVENT_3
  - LL_HRTIM_EVENT_4
  - LL_HRTIM_EVENT_5
  - LL_HRTIM_EVENT_6
  - LL_HRTIM_EVENT_7
  - LL_HRTIM_EVENT_8
  - LL_HRTIM_EVENT_9
  - LL_HRTIM_EVENT_10
- **Src:** This parameter can be one of the following values:
  - LL_HRTIM_EE_SRC_1
  - LL_HRTIM_EE_SRC_2
  - LL_HRTIM_EE_SRC_3
  - LL_HRTIM_EE_SRC_4

Return values
- **None**

Reference Manual to LL API cross
- EECR1 EE1SRC LL_HRTIM_EE_SetSrc

reference:

- EECR1 EE2SRC LL_HRTIM_EE_SetSrc
- EECR1 EE3SRC LL_HRTIM_EE_SetSrc
- EECR1 EE4SRC LL_HRTIM_EE_SetSrc
- EECR1 EE5SRC LL_HRTIM_EE_SetSrc
- EECR2 EE6SRC LL_HRTIM_EE_SetSrc
- EECR2 EE7SRC LL_HRTIM_EE_SetSrc
- EECR2 EE8SRC LL_HRTIM_EE_SetSrc
- EECR2 EE9SRC LL_HRTIM_EE_SetSrc
- EECR2 EE10SRC LL_HRTIM_EE_SetSrc

LL_HRTIM_EE_GetSrc

Function name **__STATIC_INLINE uint32_t LL_HRTIM_EE_GetSrc (HRTIM_TypeDef * HRTIMx, uint32_t Event)**

Function description Get actual external event source.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_1
  - LL_HRTIM_EVENT_2
  - LL_HRTIM_EVENT_3
  - LL_HRTIM_EVENT_4
  - LL_HRTIM_EVENT_5
  - LL_HRTIM_EVENT_6
  - LL_HRTIM_EVENT_7
  - LL_HRTIM_EVENT_8
  - LL_HRTIM_EVENT_9
  - LL_HRTIM_EVENT_10

Return values

- **EventSrc:** This parameter can be one of the following values:
  - LL_HRTIM_EE_SRC_1
  - LL_HRTIM_EE_SRC_2
  - LL_HRTIM_EE_SRC_3
  - LL_HRTIM_EE_SRC_4

Reference Manual to LL API cross reference:

- EECR1 EE1SRC LL_HRTIM_EE_GetSrc
- EECR1 EE2SRC LL_HRTIM_EE_GetSrc
- EECR1 EE3SRC LL_HRTIM_EE_GetSrc
- EECR1 EE4SRC LL_HRTIM_EE_GetSrc
- EECR1 EE5SRC LL_HRTIM_EE_GetSrc
- EECR2 EE6SRC LL_HRTIM_EE_GetSrc
- EECR2 EE7SRC LL_HRTIM_EE_GetSrc
- EECR2 EE8SRC LL_HRTIM_EE_GetSrc
- EECR2 EE9SRC LL_HRTIM_EE_GetSrc
- EECR2 EE10SRC LL_HRTIM_EE_GetSrc

LL_HRTIM_EE_SetPolarity

Function name **__STATIC_INLINE void LL_HRTIM_EE_SetPolarity (HRTIM_TypeDef * HRTIMx, uint32_t Event, uint32_t Polarity)**

Function description Set the polarity of an external event.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_1
  - LL_HRTIM_EVENT_2
  - LL_HRTIM_EVENT_3
  - LL_HRTIM_EVENT_4
  - LL_HRTIM_EVENT_5
  - LL_HRTIM_EVENT_6
  - LL_HRTIM_EVENT_7
  - LL_HRTIM_EVENT_8
  - LL_HRTIM_EVENT_9
  - LL_HRTIM_EVENT_10
- **Polarity:** This parameter can be one of the following values:
  - LL_HRTIM_EE_POLARITY_HIGH
  - LL_HRTIM_EE_POLARITY_LOW

Return values
- **None**

Notes
- This function must not be called when the timer counter is enabled.
- Event polarity is only significant when event detection is level-sensitive.

Reference Manual to LL API cross reference:
- EECR1 EE1POL LL_HRTIM_EE_SetPolarity
- EECR1 EE2POL LL_HRTIM_EE_SetPolarity
- EECR1 EE3POL LL_HRTIM_EE_SetPolarity
- EECR1 EE4POL LL_HRTIM_EE_SetPolarity
- EECR1 EE5POL LL_HRTIM_EE_SetPolarity
- EECR2 EE6POL LL_HRTIM_EE_SetPolarity
- EECR2 EE7POL LL_HRTIM_EE_SetPolarity
- EECR2 EE8POL LL_HRTIM_EE_SetPolarity
- EECR2 EE9POL LL_HRTIM_EE_SetPolarity
- EECR2 EE10POL LL_HRTIM_EE_SetPolarity

LL_HRTIM_EE_GetPolarity

Function name
__STATIC_INLINE uint32_t LL_HRTIM_EE_GetPolarity (HRTIM_TypeDef * HRTIMx, uint32_t Event)

Function description
Get actual polarity setting of an external event.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_1
  - LL_HRTIM_EVENT_2
  - LL_HRTIM_EVENT_3
  - LL_HRTIM_EVENT_4
  - LL_HRTIM_EVENT_5
  - LL_HRTIM_EVENT_6
  - LL_HRTIM_EVENT_7
  - LL_HRTIM_EVENT_8
  - LL_HRTIM_EVENT_9
  - LL_HRTIM_EVENT_10

Return values
- **Polarity:** This parameter can be one of the following values:
  - LL_HRTIM_EE_POLARITY_HIGH

– LL_HRTIM_EE_POLARITY_LOW

Reference Manual to LL API cross reference:

- EECR1 EE1POL LL_HRTIM_EE_GetPolarity
- EECR1 EE2POL LL_HRTIM_EE_GetPolarity
- EECR1 EE3POL LL_HRTIM_EE_GetPolarity
- EECR1 EE4POL LL_HRTIM_EE_GetPolarity
- EECR1 EE5POL LL_HRTIM_EE_GetPolarity
- EECR2 EE6POL LL_HRTIM_EE_GetPolarity
- EECR2 EE7POL LL_HRTIM_EE_GetPolarity
- EECR2 EE8POL LL_HRTIM_EE_GetPolarity
- EECR2 EE9POL LL_HRTIM_EE_GetPolarity
- EECR2 EE10POL LL_HRTIM_EE_GetPolarity

LL_HRTIM_EE_SetSensitivity

Function name **__STATIC_INLINE void LL_HRTIM_EE_SetSensitivity (HRTIM_TypeDef * HRTIMx, uint32_t Event, uint32_t Sensitivity)**

Function description Set the sensitivity of an external event.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_1
  - LL_HRTIM_EVENT_2
  - LL_HRTIM_EVENT_3
  - LL_HRTIM_EVENT_4
  - LL_HRTIM_EVENT_5
  - LL_HRTIM_EVENT_6
  - LL_HRTIM_EVENT_7
  - LL_HRTIM_EVENT_8
  - LL_HRTIM_EVENT_9
  - LL_HRTIM_EVENT_10
- **Sensitivity:** This parameter can be one of the following values:
  - LL_HRTIM_EE_SENSITIVITY_LEVEL
  - LL_HRTIM_EE_SENSITIVITY_RISINGEDGE
  - LL_HRTIM_EE_SENSITIVITY_FALLINGEDGE
  - LL_HRTIM_EE_SENSITIVITY_BOTHEDGES

Return values

- **None**

Reference Manual to LL API cross reference:

- EECR1 EE1SNS LL_HRTIM_EE_SetSensitivity
- EECR1 EE2SNS LL_HRTIM_EE_SetSensitivity
- EECR1 EE3SNS LL_HRTIM_EE_SetSensitivity
- EECR1 EE4SNS LL_HRTIM_EE_SetSensitivity
- EECR1 EE5SNS LL_HRTIM_EE_SetSensitivity
- EECR2 EE6SNS LL_HRTIM_EE_SetSensitivity
- EECR2 EE7SNS LL_HRTIM_EE_SetSensitivity
- EECR2 EE8SNS LL_HRTIM_EE_SetSensitivity
- EECR2 EE9SNS LL_HRTIM_EE_SetSensitivity
- EECR2 EE10SNS LL_HRTIM_EE_SetSensitivity

LL_HRTIM_EE_GetSensitivity

Function name
__STATIC_INLINE uint32_t LL_HRTIM_EE_GetSensitivity (HRTIM_TypeDef * HRTIMx, uint32_t Event)

Function description
Get actual sensitivity setting of an external event.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_1
  - LL_HRTIM_EVENT_2
  - LL_HRTIM_EVENT_3
  - LL_HRTIM_EVENT_4
  - LL_HRTIM_EVENT_5
  - LL_HRTIM_EVENT_6
  - LL_HRTIM_EVENT_7
  - LL_HRTIM_EVENT_8
  - LL_HRTIM_EVENT_9
  - LL_HRTIM_EVENT_10

Return values
- **Polarity:** This parameter can be one of the following values:
  - LL_HRTIM_EE_SENSITIVITY_LEVEL
  - LL_HRTIM_EE_SENSITIVITY_RISINGEDGE
  - LL_HRTIM_EE_SENSITIVITY_FALLINGEDGE
  - LL_HRTIM_EE_SENSITIVITY_BOTHEDGES

Reference Manual to LL API cross reference:
- EECR1 EE1SNS LL_HRTIM_EE_GetSensitivity
- EECR1 EE2SNS LL_HRTIM_EE_GetSensitivity
- EECR1 EE3SNS LL_HRTIM_EE_GetSensitivity
- EECR1 EE4SNS LL_HRTIM_EE_GetSensitivity
- EECR1 EE5SNS LL_HRTIM_EE_GetSensitivity
- EECR2 EE6SNS LL_HRTIM_EE_GetSensitivity
- EECR2 EE7SNS LL_HRTIM_EE_GetSensitivity
- EECR2 EE8SNS LL_HRTIM_EE_GetSensitivity
- EECR2 EE9SNS LL_HRTIM_EE_GetSensitivity
- EECR2 EE10SNS LL_HRTIM_EE_GetSensitivity

LL_HRTIM_EE_SetFastMode

Function name
__STATIC_INLINE void LL_HRTIM_EE_SetFastMode (HRTIM_TypeDef * HRTIMx, uint32_t Event, uint32_t FastMode)

Function description
Set the fast mode of an external event.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_1
  - LL_HRTIM_EVENT_2
  - LL_HRTIM_EVENT_3
  - LL_HRTIM_EVENT_4
  - LL_HRTIM_EVENT_5
- **FastMode:** This parameter can be one of the following values:
  - LL_HRTIM_EE_FASTMODE_DISABLE
  - LL_HRTIM_EE_FASTMODE_ENABLE

Return values
- **None**

Notes
- This function must not be called when the timer counter is enabled.

Reference Manual to LL API cross reference:
- EECR1 EE1FAST LL_HRTIM_EE_SetFastMode
- EECR1 EE2FAST LL_HRTIM_EE_SetFastMode
- EECR1 EE3FAST LL_HRTIM_EE_SetFastMode
- EECR1 EE4FAST LL_HRTIM_EE_SetFastMode
- EECR1 EE5FAST LL_HRTIM_EE_SetFastMode
- EECR2 EE6FAST LL_HRTIM_EE_SetFastMode
- EECR2 EE7FAST LL_HRTIM_EE_SetFastMode
- EECR2 EE8FAST LL_HRTIM_EE_SetFastMode
- EECR2 EE9FAST LL_HRTIM_EE_SetFastMode
- EECR2 EE10FAST LL_HRTIM_EE_SetFastMode

LL_HRTIM_EE_GetFastMode

Function name
__STATIC_INLINE uint32_t LL_HRTIM_EE_GetFastMode (HRTIM_TypeDef * HRTIMx, uint32_t Event)

Function description
Get actual fast mode setting of an external event.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_1
  - LL_HRTIM_EVENT_2
  - LL_HRTIM_EVENT_3
  - LL_HRTIM_EVENT_4
  - LL_HRTIM_EVENT_5

Return values
- **FastMode:** This parameter can be one of the following values:
  - LL_HRTIM_EE_FASTMODE_DISABLE
  - LL_HRTIM_EE_FASTMODE_ENABLE

Reference Manual to LL API cross reference:
- EECR1 EE1FAST LL_HRTIM_EE_GetFastMode
- EECR1 EE2FAST LL_HRTIM_EE_GetFastMode
- EECR1 EE3FAST LL_HRTIM_EE_GetFastMode
- EECR1 EE4FAST LL_HRTIM_EE_GetFastMode
- EECR1 EE5FAST LL_HRTIM_EE_GetFastMode
- EECR2 EE6FAST LL_HRTIM_EE_GetFastMode
- EECR2 EE7FAST LL_HRTIM_EE_GetFastMode
- EECR2 EE8FAST LL_HRTIM_EE_GetFastMode
- EECR2 EE9FAST LL_HRTIM_EE_GetFastMode
- EECR2 EE10FAST LL_HRTIM_EE_GetFastMode

LL_HRTIM_EE_SetFilter

Function name
__STATIC_INLINE void LL_HRTIM_EE_SetFilter (HRTIM_TypeDef * HRTIMx, uint32_t Event, uint32_t Filter)

Function description
Set the digital noise filter of a external event.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_6

  - LL_HRTIM_EVENT_7
  - LL_HRTIM_EVENT_8
  - LL_HRTIM_EVENT_9
  - LL_HRTIM_EVENT_10
- **Filter:** This parameter can be one of the following values:
  - LL_HRTIM_EE_FILTER_NONE
  - LL_HRTIM_EE_FILTER_1
  - LL_HRTIM_EE_FILTER_2
  - LL_HRTIM_EE_FILTER_3
  - LL_HRTIM_EE_FILTER_4
  - LL_HRTIM_EE_FILTER_5
  - LL_HRTIM_EE_FILTER_6
  - LL_HRTIM_EE_FILTER_7
  - LL_HRTIM_EE_FILTER_8
  - LL_HRTIM_EE_FILTER_9
  - LL_HRTIM_EE_FILTER_10
  - LL_HRTIM_EE_FILTER_11
  - LL_HRTIM_EE_FILTER_12
  - LL_HRTIM_EE_FILTER_13
  - LL_HRTIM_EE_FILTER_14
  - LL_HRTIM_EE_FILTER_15

Return values
- **None**

Reference Manual to LL API cross reference:
- EECR3 EE6F LL_HRTIM_EE_SetFilter
- EECR3 EE7F LL_HRTIM_EE_SetFilter
- EECR3 EE8F LL_HRTIM_EE_SetFilter
- EECR3 EE9F LL_HRTIM_EE_SetFilter
- EECR3 EE10F LL_HRTIM_EE_SetFilter

LL_HRTIM_EE_GetFilter

Function name
__STATIC_INLINE uint32_t LL_HRTIM_EE_GetFilter (HRTIM_TypeDef * HRTIMx, uint32_t Event)

Function description
Get actual digital noise filter setting of a external event.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Event:** This parameter can be one of the following values:
  - LL_HRTIM_EVENT_6
  - LL_HRTIM_EVENT_7
  - LL_HRTIM_EVENT_8
  - LL_HRTIM_EVENT_9
  - LL_HRTIM_EVENT_10

Return values
- **Filter:** This parameter can be one of the following values:
  - LL_HRTIM_EE_FILTER_NONE
  - LL_HRTIM_EE_FILTER_1
  - LL_HRTIM_EE_FILTER_2
  - LL_HRTIM_EE_FILTER_3
  - LL_HRTIM_EE_FILTER_4
  - LL_HRTIM_EE_FILTER_5
  - LL_HRTIM_EE_FILTER_6
  - LL_HRTIM_EE_FILTER_7
  - LL_HRTIM_EE_FILTER_8

  - LL_HRTIM_EE_FILTER_9
  - LL_HRTIM_EE_FILTER_10
  - LL_HRTIM_EE_FILTER_11
  - LL_HRTIM_EE_FILTER_12
  - LL_HRTIM_EE_FILTER_13
  - LL_HRTIM_EE_FILTER_14
  - LL_HRTIM_EE_FILTER_15

Reference Manual to LL API cross reference:

- EECR3 EE6F LL_HRTIM_EE_GetFilter
- EECR3 EE7F LL_HRTIM_EE_GetFilter
- EECR3 EE8F LL_HRTIM_EE_GetFilter
- EECR3 EE9F LL_HRTIM_EE_GetFilter
- EECR3 EE10F LL_HRTIM_EE_GetFilter

LL_HRTIM_EE_SetPrescaler

Function name
__STATIC_INLINE void LL_HRTIM_EE_SetPrescaler (HRTIM_TypeDef * HRTIMx, uint32_t Prescaler)

Function description
Set the external event prescaler.

Parameters

- **HRTIMx:** High Resolution Timer instance
- **Prescaler:** This parameter can be one of the following values:
  - LL_HRTIM_EE_PRESCALER_DIV1
  - LL_HRTIM_EE_PRESCALER_DIV2
  - LL_HRTIM_EE_PRESCALER_DIV4
  - LL_HRTIM_EE_PRESCALER_DIV8

Return values

- **None**

Reference Manual to LL API cross reference:

- EECR3 EEVSD LL_HRTIM_EE_SetPrescaler

LL_HRTIM_EE_GetPrescaler

Function name
__STATIC_INLINE uint32_t LL_HRTIM_EE_GetPrescaler (HRTIM_TypeDef * HRTIMx)

Function description
Get actual external event prescaler setting.

Parameters

- **HRTIMx:** High Resolution Timer instance

Return values

- **Prescaler:** This parameter can be one of the following values:
  - LL_HRTIM_EE_PRESCALER_DIV1
  - LL_HRTIM_EE_PRESCALER_DIV2
  - LL_HRTIM_EE_PRESCALER_DIV4
  - LL_HRTIM_EE_PRESCALER_DIV8

Reference Manual to LL API cross reference:

- EECR3 EEVSD LL_HRTIM_EE_GetPrescaler

LL_HRTIM_FLT_Config

Function name
__STATIC_INLINE void LL_HRTIM_FLT_Config (HRTIM_TypeDef * HRTIMx, uint32_t Fault, uint32_t Configuration)

Function description
Configure fault signal conditioning.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Fault:** This parameter can be one of the following values:
  - LL_HRTIM_FAULT_1
  - LL_HRTIM_FAULT_2
  - LL_HRTIM_FAULT_3
  - LL_HRTIM_FAULT_4
  - LL_HRTIM_FAULT_5
- **Configuration:** This parameter must be a combination of all the following values:
  - LL_HRTIM_FLT_SRC_DIGITALINPUT or LL_HRTIM_FLT_SRC_INTERNAL
  - LL_HRTIM_FLT_POLARITY_LOW or LL_HRTIM_FLT_POLARITY_HIGH

Return values
- **None**

Notes
- This function must not be called when the fault channel is enabled.

Reference Manual to LL API cross reference:
- FLTINR1 FLT1P LL_HRTIM_FLT_Config
- FLTINR1 FLT1SRC LL_HRTIM_FLT_Config
- FLTINR1 FLT2P LL_HRTIM_FLT_Config
- FLTINR1 FLT2SRC LL_HRTIM_FLT_Config
- FLTINR1 FLT3P LL_HRTIM_FLT_Config
- FLTINR1 FLT3SRC LL_HRTIM_FLT_Config
- FLTINR1 FLT4P LL_HRTIM_FLT_Config
- FLTINR1 FLT4SRC LL_HRTIM_FLT_Config
- FLTINR2 FLT5P LL_HRTIM_FLT_Config
- FLTINR2 FLT5SRC LL_HRTIM_FLT_Config

LL_HRTIM_FLT_SetSrc

Function name
__STATIC_INLINE void LL_HRTIM_FLT_SetSrc (HRTIM_TypeDef * HRTIMx, uint32_t Fault, uint32_t Src)

Function description
Set the source of a fault signal.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Fault:** This parameter can be one of the following values:
  - LL_HRTIM_FAULT_1
  - LL_HRTIM_FAULT_2
  - LL_HRTIM_FAULT_3
  - LL_HRTIM_FAULT_4
  - LL_HRTIM_FAULT_5
- **Src:** This parameter can be one of the following values:
  - LL_HRTIM_FLT_SRC_DIGITALINPUT
  - LL_HRTIM_FLT_SRC_INTERNAL

Return values
- **None**

Notes
- This function must not be called when the fault channel is enabled.

Reference Manual to LL API cross reference:
- FLTINR1 FLT1SRC LL_HRTIM_FLT_SetSrc
- FLTINR1 FLT2SRC LL_HRTIM_FLT_SetSrc
- FLTINR1 FLT3SRC LL_HRTIM_FLT_SetSrc
- FLTINR1 FLT4SRC LL_HRTIM_FLT_SetSrc
- FLTINR2 FLT5SRC LL_HRTIM_FLT_SetSrc

LL_HRTIM_FLT_GetSrc

Function name
__STATIC_INLINE uint32_t LL_HRTIM_FLT_GetSrc (HRTIM_TypeDef * HRTIMx, uint32_t Fault)

Function description
Get actual source of a fault signal.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Fault:** This parameter can be one of the following values:
  - LL_HRTIM_FAULT_1
  - LL_HRTIM_FAULT_2
  - LL_HRTIM_FAULT_3
  - LL_HRTIM_FAULT_4
  - LL_HRTIM_FAULT_5

Return values
- **Src:** This parameter can be one of the following values:
  - LL_HRTIM_FLT_SRC_DIGITALINPUT
  - LL_HRTIM_FLT_SRC_INTERNAL

Reference Manual to LL API cross reference:
- FLTINR1 FLT1SRC LL_HRTIM_FLT_GetSrc
- FLTINR1 FLT2SRC LL_HRTIM_FLT_GetSrc
- FLTINR1 FLT3SRC LL_HRTIM_FLT_GetSrc
- FLTINR1 FLT4SRC LL_HRTIM_FLT_GetSrc
- FLTINR2 FLT5SRC LL_HRTIM_FLT_GetSrc

LL_HRTIM_FLT_SetPolarity

Function name
__STATIC_INLINE void LL_HRTIM_FLT_SetPolarity (HRTIM_TypeDef * HRTIMx, uint32_t Fault, uint32_t Polarity)

Function description
Set the polarity of a fault signal.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Fault:** This parameter can be one of the following values:
  - LL_HRTIM_FAULT_1
  - LL_HRTIM_FAULT_2
  - LL_HRTIM_FAULT_3
  - LL_HRTIM_FAULT_4
  - LL_HRTIM_FAULT_5
- **Polarity:** This parameter can be one of the following values:
  - LL_HRTIM_FLT_POLARITY_LOW
  - LL_HRTIM_FLT_POLARITY_HIGH

Return values
- **None**

Notes
- This function must not be called when the fault channel is enabled.

Reference Manual to
- FLTINR1 FLT1P LL_HRTIM_FLT_SetPolarity

LL API cross reference:
- FLTINR1 FLT2P LL_HRTIM_FLT_SetPolarity
- FLTINR1 FLT3P LL_HRTIM_FLT_SetPolarity
- FLTINR1 FLT4P LL_HRTIM_FLT_SetPolarity
- FLTINR2 FLT5P LL_HRTIM_FLT_SetPolarity

LL_HRTIM_FLT_GetPolarity

Function name: **__STATIC_INLINE uint32_t LL_HRTIM_FLT_GetPolarity (HRTIM_TypeDef * HRTIMx, uint32_t Fault)**

Function description: Get actual polarity of a fault signal.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Fault:** This parameter can be one of the following values:
  - LL_HRTIM_FAULT_1
  - LL_HRTIM_FAULT_2
  - LL_HRTIM_FAULT_3
  - LL_HRTIM_FAULT_4
  - LL_HRTIM_FAULT_5

Return values:
- **Polarity:** This parameter can be one of the following values:
  - LL_HRTIM_FLT_POLARITY_LOW
  - LL_HRTIM_FLT_POLARITY_HIGH

Reference Manual to LL API cross reference:
- FLTINR1 FLT1P LL_HRTIM_FLT_GetPolarity
- FLTINR1 FLT2P LL_HRTIM_FLT_GetPolarity
- FLTINR1 FLT3P LL_HRTIM_FLT_GetPolarity
- FLTINR1 FLT4P LL_HRTIM_FLT_GetPolarity
- FLTINR2 FLT5P LL_HRTIM_FLT_GetPolarity

LL_HRTIM_FLT_SetFilter

Function name: **__STATIC_INLINE void LL_HRTIM_FLT_SetFilter (HRTIM_TypeDef * HRTIMx, uint32_t Fault, uint32_t Filter)**

Function description: Set the digital noise filter of a fault signal.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Fault:** This parameter can be one of the following values:
  - LL_HRTIM_FAULT_1
  - LL_HRTIM_FAULT_2
  - LL_HRTIM_FAULT_3
  - LL_HRTIM_FAULT_4
  - LL_HRTIM_FAULT_5
- **Filter:** This parameter can be one of the following values:
  - LL_HRTIM_FLT_FILTER_NONE
  - LL_HRTIM_FLT_FILTER_1
  - LL_HRTIM_FLT_FILTER_2
  - LL_HRTIM_FLT_FILTER_3
  - LL_HRTIM_FLT_FILTER_4
  - LL_HRTIM_FLT_FILTER_5
  - LL_HRTIM_FLT_FILTER_6
  - LL_HRTIM_FLT_FILTER_7
  - LL_HRTIM_FLT_FILTER_8
  - LL_HRTIM_FLT_FILTER_9
  - LL_HRTIM_FLT_FILTER_10

  - LL_HRTIM_FLT_FILTER_11
  - LL_HRTIM_FLT_FILTER_12
  - LL_HRTIM_FLT_FILTER_13
  - LL_HRTIM_FLT_FILTER_14
  - LL_HRTIM_FLT_FILTER_15

Return values
- **None**

Notes
- This function must not be called when the fault channel is enabled.

Reference Manual to LL API cross reference:
- FLTINR1 FLT1F LL_HRTIM_FLT_SetFilter
- FLTINR1 FLT2F LL_HRTIM_FLT_SetFilter
- FLTINR1 FLT3F LL_HRTIM_FLT_SetFilter
- FLTINR1 FLT4F LL_HRTIM_FLT_SetFilter
- FLTINR2 FLT5F LL_HRTIM_FLT_SetFilter

LL_HRTIM_FLT_GetFilter

Function name
__STATIC_INLINE uint32_t LL_HRTIM_FLT_GetFilter (HRTIM_TypeDef * HRTIMx, uint32_t Fault)

Function description
Get actual digital noise filter setting of a fault signal.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Fault:** This parameter can be one of the following values:
  - LL_HRTIM_FAULT_1
  - LL_HRTIM_FAULT_2
  - LL_HRTIM_FAULT_3
  - LL_HRTIM_FAULT_4
  - LL_HRTIM_FAULT_5

Return values
- **Filter:** This parameter can be one of the following values:
  - LL_HRTIM_FLT_FILTER_NONE
  - LL_HRTIM_FLT_FILTER_1
  - LL_HRTIM_FLT_FILTER_2
  - LL_HRTIM_FLT_FILTER_3
  - LL_HRTIM_FLT_FILTER_4
  - LL_HRTIM_FLT_FILTER_5
  - LL_HRTIM_FLT_FILTER_6
  - LL_HRTIM_FLT_FILTER_7
  - LL_HRTIM_FLT_FILTER_8
  - LL_HRTIM_FLT_FILTER_9
  - LL_HRTIM_FLT_FILTER_10
  - LL_HRTIM_FLT_FILTER_11
  - LL_HRTIM_FLT_FILTER_12
  - LL_HRTIM_FLT_FILTER_13
  - LL_HRTIM_FLT_FILTER_14
  - LL_HRTIM_FLT_FILTER_15

Reference Manual to LL API cross reference:
- FLTINR1 FLT1F LL_HRTIM_FLT_GetFilter
- FLTINR1 FLT2F LL_HRTIM_FLT_GetFilter
- FLTINR1 FLT3F LL_HRTIM_FLT_GetFilter
- FLTINR1 FLT4F LL_HRTIM_FLT_GetFilter
- FLTINR2 FLT5F LL_HRTIM_FLT_GetFilter

LL_HRTIM_FLT_SetPrescaler

Function name	**__STATIC_INLINE void LL_HRTIM_FLT_SetPrescaler (HRTIM_TypeDef * HRTIMx, uint32_t Prescaler)**
Function description	Set the fault circuitry prescaler.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Prescaler:** This parameter can be one of the following values: – LL_HRTIM_FLT_PRESCALER_DIV1 – LL_HRTIM_FLT_PRESCALER_DIV2 – LL_HRTIM_FLT_PRESCALER_DIV4 – LL_HRTIM_FLT_PRESCALER_DIV8
Return values	• **None**
Reference Manual to LL API cross reference:	• FLTINR2 FLTSD LL_HRTIM_FLT_SetPrescaler

LL_HRTIM_FLT_GetPrescaler

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_FLT_GetPrescaler (HRTIM_TypeDef * HRTIMx)**
Function description	Get actual fault circuitry prescaler setting.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **Prescaler:** This parameter can be one of the following values: – LL_HRTIM_FLT_PRESCALER_DIV1 – LL_HRTIM_FLT_PRESCALER_DIV2 – LL_HRTIM_FLT_PRESCALER_DIV4 – LL_HRTIM_FLT_PRESCALER_DIV8
Reference Manual to LL API cross reference:	• FLTINR2 FLTSD LL_HRTIM_FLT_GetPrescaler

LL_HRTIM_FLT_Lock

Function name	**__STATIC_INLINE void LL_HRTIM_FLT_Lock (HRTIM_TypeDef * HRTIMx, uint32_t Fault)**
Function description	Lock the fault signal conditioning settings.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Fault:** This parameter can be one of the following values: – LL_HRTIM_FAULT_1 – LL_HRTIM_FAULT_2 – LL_HRTIM_FAULT_3 – LL_HRTIM_FAULT_4 – LL_HRTIM_FAULT_5
Return values	• **None**
Reference Manual to LL API cross	• FLTINR1 FLT1LCK LL_HRTIM_FLT_Lock • FLTINR1 FLT2LCK LL_HRTIM_FLT_Lock

reference:
- FLTINR1 FLT3LCK LL_HRTIM_FLT_Lock
- FLTINR1 FLT4LCK LL_HRTIM_FLT_Lock
- FLTINR2 FLT5LCK LL_HRTIM_FLT_Lock

LL_HRTIM_FLT_Enable

Function name
__STATIC_INLINE void LL_HRTIM_FLT_Enable (HRTIM_TypeDef * HRTIMx, uint32_t Fault)

Function description
Enable the fault circuitry for the designated fault input.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Fault:** This parameter can be one of the following values:
  - LL_HRTIM_FAULT_1
  - LL_HRTIM_FAULT_2
  - LL_HRTIM_FAULT_3
  - LL_HRTIM_FAULT_4
  - LL_HRTIM_FAULT_5

Return values
- **None**

Reference Manual to LL API cross reference:
- FLTINR1 FLT1E LL_HRTIM_FLT_Enable
- FLTINR1 FLT2E LL_HRTIM_FLT_Enable
- FLTINR1 FLT3E LL_HRTIM_FLT_Enable
- FLTINR1 FLT4E LL_HRTIM_FLT_Enable
- FLTINR2 FLT5E LL_HRTIM_FLT_Enable

LL_HRTIM_FLT_Disable

Function name
__STATIC_INLINE void LL_HRTIM_FLT_Disable (HRTIM_TypeDef * HRTIMx, uint32_t Fault)

Function description
Disable the fault circuitry for for the designated fault input.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Fault:** This parameter can be one of the following values:
  - LL_HRTIM_FAULT_1
  - LL_HRTIM_FAULT_2
  - LL_HRTIM_FAULT_3
  - LL_HRTIM_FAULT_4
  - LL_HRTIM_FAULT_5

Return values
- **None**

Reference Manual to LL API cross reference:
- FLTINR1 FLT1E LL_HRTIM_FLT_Disable
- FLTINR1 FLT2E LL_HRTIM_FLT_Disable
- FLTINR1 FLT3E LL_HRTIM_FLT_Disable
- FLTINR1 FLT4E LL_HRTIM_FLT_Disable
- FLTINR2 FLT5E LL_HRTIM_FLT_Disable

LL_HRTIM_FLT_IsEnabled

Function name
__STATIC_INLINE uint32_t LL_HRTIM_FLT_IsEnabled (HRTIM_TypeDef * HRTIMx, uint32_t Fault)

Function description
Indicate whether the fault circuitry is enabled for a given fault input.

Parameters
- **HRTIMx:** High Resolution Timer instance *
- **HRTIMx:** High Resolution Timer instance
- **Fault:** This parameter can be one of the following values:
  - LL_HRTIM_FAULT_1
  - LL_HRTIM_FAULT_2
  - LL_HRTIM_FAULT_3
  - LL_HRTIM_FAULT_4
  - LL_HRTIM_FAULT_5

Return values
- **State:** of FLTxEN bit in HRTIM_FLTINRx register (1 or 0).

Reference Manual to LL API cross reference:
- FLTINR1 FLT1E LL_HRTIM_FLT_IsEnabled
- FLTINR1 FLT2E LL_HRTIM_FLT_IsEnabled
- FLTINR1 FLT3E LL_HRTIM_FLT_IsEnabled
- FLTINR1 FLT4E LL_HRTIM_FLT_IsEnabled
- FLTINR2 FLT5E LL_HRTIM_FLT_IsEnabled

LL_HRTIM_BM_Config

Function name
__STATIC_INLINE void LL_HRTIM_BM_Config (HRTIM_TypeDef * HRTIMx, uint32_t Configuration)

Function description
Configure the burst mode controller.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Configuration:** This parameter must be a combination of all the following values:
  - LL_HRTIM_BM_MODE_SINGLESHOT or LL_HRTIM_BM_MODE_CONTINOUS
  - LL_HRTIM_BM_CLKSRC_MASTER or ... or LL_HRTIM_BM_CLKSRC_FHRTIM
  - LL_HRTIM_BM_PRESCALER_DIV1 or ... LL_HRTIM_BM_PRESCALER_DIV32768

Return values
- **None**

Reference Manual to LL API cross reference:
- BMCR BMOM LL_HRTIM_BM_Config
- BMCR BMCLK LL_HRTIM_BM_Config
- BMCR BMPRSC LL_HRTIM_BM_Config

LL_HRTIM_BM_SetMode

Function name
__STATIC_INLINE void LL_HRTIM_BM_SetMode (HRTIM_TypeDef * HRTIMx, uint32_t Mode)

Function description
Set the burst mode controller operating mode.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Mode:** This parameter can be one of the following values:
  - LL_HRTIM_BM_MODE_SINGLESHOT
  - LL_HRTIM_BM_MODE_CONTINOUS

Return values
- **None**

Reference Manual to LL API cross reference:
- BMCR BMOM LL_HRTIM_BM_SetMode

LL_HRTIM_BM_GetMode

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_BM_GetMode (HRTIM_TypeDef * HRTIMx)**
Function description	Get actual burst mode controller operating mode.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **Mode:** This parameter can be one of the following values: – LL_HRTIM_BM_MODE_SINGLESHOT – LL_HRTIM_BM_MODE_CONTINOUS
Reference Manual to LL API cross reference:	• BMCR BMOM LL_HRTIM_BM_GetMode

LL_HRTIM_BM_SetClockSrc

Function name	**__STATIC_INLINE void LL_HRTIM_BM_SetClockSrc (HRTIM_TypeDef * HRTIMx, uint32_t ClockSrc)**
Function description	Set the burst mode controller clock source.
Parameters	• **HRTIMx:** High Resolution Timer instance • **ClockSrc:** This parameter can be one of the following values: – LL_HRTIM_BM_CLKSRC_MASTER – LL_HRTIM_BM_CLKSRC_TIMER_A – LL_HRTIM_BM_CLKSRC_TIMER_B – LL_HRTIM_BM_CLKSRC_TIMER_C – LL_HRTIM_BM_CLKSRC_TIMER_D – LL_HRTIM_BM_CLKSRC_TIMER_E – LL_HRTIM_BM_CLKSRC_TIM16_OC – LL_HRTIM_BM_CLKSRC_TIM17_OC – LL_HRTIM_BM_CLKSRC_TIM7_TRGO – LL_HRTIM_BM_CLKSRC_FHRTIM
Return values	• **None**
Reference Manual to LL API cross reference:	• BMCR BMCLK LL_HRTIM_BM_SetClockSrc

LL_HRTIM_BM_GetClockSrc

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_BM_GetClockSrc (HRTIM_TypeDef * HRTIMx)**
Function description	Get actual burst mode controller clock source.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **ClockSrc:** This parameter can be one of the following values: – LL_HRTIM_BM_CLKSRC_MASTER – LL_HRTIM_BM_CLKSRC_TIMER_A – LL_HRTIM_BM_CLKSRC_TIMER_B – LL_HRTIM_BM_CLKSRC_TIMER_C

  - LL_HRTIM_BM_CLKSRC_TIMER_D
  - LL_HRTIM_BM_CLKSRC_TIMER_E
  - LL_HRTIM_BM_CLKSRC_TIM16_OC
  - LL_HRTIM_BM_CLKSRC_TIM17_OC
  - LL_HRTIM_BM_CLKSRC_TIM7_TRGO
  - LL_HRTIM_BM_CLKSRC_FHRTIM

Reference Manual to LL API cross reference:
- BMCR BMCLK LL_HRTIM_BM_GetClockSrc

LL_HRTIM_BM_SetPrescaler

Function name
__STATIC_INLINE void LL_HRTIM_BM_SetPrescaler (HRTIM_TypeDef * HRTIMx, uint32_t Prescaler)

Function description
Set the burst mode controller prescaler.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Prescaler:** This parameter can be one of the following values:
  - LL_HRTIM_BM_PRESCALER_DIV1
  - LL_HRTIM_BM_PRESCALER_DIV2
  - LL_HRTIM_BM_PRESCALER_DIV4
  - LL_HRTIM_BM_PRESCALER_DIV8
  - LL_HRTIM_BM_PRESCALER_DIV16
  - LL_HRTIM_BM_PRESCALER_DIV32
  - LL_HRTIM_BM_PRESCALER_DIV64
  - LL_HRTIM_BM_PRESCALER_DIV128
  - LL_HRTIM_BM_PRESCALER_DIV256
  - LL_HRTIM_BM_PRESCALER_DIV512
  - LL_HRTIM_BM_PRESCALER_DIV1024
  - LL_HRTIM_BM_PRESCALER_DIV2048
  - LL_HRTIM_BM_PRESCALER_DIV4096
  - LL_HRTIM_BM_PRESCALER_DIV8192
  - LL_HRTIM_BM_PRESCALER_DIV16384
  - LL_HRTIM_BM_PRESCALER_DIV32768

Return values
- **None**

Reference Manual to LL API cross reference:
- BMCR BMPRSC LL_HRTIM_BM_SetPrescaler

LL_HRTIM_BM_GetPrescaler

Function name
__STATIC_INLINE uint32_t LL_HRTIM_BM_GetPrescaler (HRTIM_TypeDef * HRTIMx)

Function description
Get actual burst mode controller prescaler setting.

Parameters
- **HRTIMx:** High Resolution Timer instance

Return values
- **Prescaler:** This parameter can be one of the following values:
  - LL_HRTIM_BM_PRESCALER_DIV1
  - LL_HRTIM_BM_PRESCALER_DIV2

  - LL_HRTIM_BM_PRESCALER_DIV4
  - LL_HRTIM_BM_PRESCALER_DIV8
  - LL_HRTIM_BM_PRESCALER_DIV16
  - LL_HRTIM_BM_PRESCALER_DIV32
  - LL_HRTIM_BM_PRESCALER_DIV64
  - LL_HRTIM_BM_PRESCALER_DIV128
  - LL_HRTIM_BM_PRESCALER_DIV256
  - LL_HRTIM_BM_PRESCALER_DIV512
  - LL_HRTIM_BM_PRESCALER_DIV1024
  - LL_HRTIM_BM_PRESCALER_DIV2048
  - LL_HRTIM_BM_PRESCALER_DIV4096
  - LL_HRTIM_BM_PRESCALER_DIV8192
  - LL_HRTIM_BM_PRESCALER_DIV16384
  - LL_HRTIM_BM_PRESCALER_DIV32768

Reference Manual to LL API cross reference:
- BMCR BMPRSC LL_HRTIM_BM_GetPrescaler

LL_HRTIM_BM_EnablePreload

Function name **__STATIC_INLINE void LL_HRTIM_BM_EnablePreload (HRTIM_TypeDef * HRTIMx)**

Function description Enable burst mode compare and period registers preload.

Parameters
- **HRTIMx:** High Resolution Timer instance

Return values
- **None**

Reference Manual to LL API cross reference:
- BMCR BMPREN LL_HRTIM_BM_EnablePreload

LL_HRTIM_BM_DisablePreload

Function name **__STATIC_INLINE void LL_HRTIM_BM_DisablePreload (HRTIM_TypeDef * HRTIMx)**

Function description Disable burst mode compare and period registers preload.

Parameters
- **HRTIMx:** High Resolution Timer instance

Return values
- **None**

Reference Manual to LL API cross reference:
- BMCR BMPREN LL_HRTIM_BM_DisablePreload

LL_HRTIM_BM_IsEnabledPreload

Function name **__STATIC_INLINE uint32_t LL_HRTIM_BM_IsEnabledPreload (HRTIM_TypeDef * HRTIMx)**

Function description Indicate whether burst mode compare and period registers are preloaded.

Parameters
- **HRTIMx:** High Resolution Timer instance

Return values
- **State:** of BMPREN bit in HRTIM_BMCR register (1 or 0).

Reference Manual to LL API cross reference:
- BMCR BMPREN LL_HRTIM_BM_IsEnabledPreload

LL_HRTIM_BM_SetTrig

Function name
__STATIC_INLINE void LL_HRTIM_BM_SetTrig (HRTIM_TypeDef * HRTIMx, uint32_t Trig)

Function description
Set the burst mode controller trigger.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Trig:** This parameter can be a combination of the following values:
  - LL_HRTIM_BM_TRIG_NONE
  - LL_HRTIM_BM_TRIG_MASTER_RESET
  - LL_HRTIM_BM_TRIG_MASTER_REPETITION
  - LL_HRTIM_BM_TRIG_MASTER_CMP1
  - LL_HRTIM_BM_TRIG_MASTER_CMP2
  - LL_HRTIM_BM_TRIG_MASTER_CMP3
  - LL_HRTIM_BM_TRIG_MASTER_CMP4
  - LL_HRTIM_BM_TRIG_TIMA_RESET
  - LL_HRTIM_BM_TRIG_TIMA_REPETITION
  - LL_HRTIM_BM_TRIG_TIMA_CMP1
  - LL_HRTIM_BM_TRIG_TIMA_CMP2
  - LL_HRTIM_BM_TRIG_TIMB_RESET
  - LL_HRTIM_BM_TRIG_TIMB_REPETITION
  - LL_HRTIM_BM_TRIG_TIMB_CMP1
  - LL_HRTIM_BM_TRIG_TIMB_CMP2
  - LL_HRTIM_BM_TRIG_TIMC_RESET
  - LL_HRTIM_BM_TRIG_TIMC_REPETITION
  - LL_HRTIM_BM_TRIG_TIMC_CMP1
  - LL_HRTIM_BM_TRIG_TIMC_CMP2
  - LL_HRTIM_BM_TRIG_TIMD_RESET
  - LL_HRTIM_BM_TRIG_TIMD_REPETITION
  - LL_HRTIM_BM_TRIG_TIMD_CMP1
  - LL_HRTIM_BM_TRIG_TIMD_CMP2
  - LL_HRTIM_BM_TRIG_TIME_RESET
  - LL_HRTIM_BM_TRIG_TIME_REPETITION
  - LL_HRTIM_BM_TRIG_TIME_CMP1
  - LL_HRTIM_BM_TRIG_TIME_CMP2
  - LL_HRTIM_BM_TRIG_TIMA_EVENT7
  - LL_HRTIM_BM_TRIG_TIMD_EVENT8
  - LL_HRTIM_BM_TRIG_EVENT_7
  - LL_HRTIM_BM_TRIG_EVENT_8
  - LL_HRTIM_BM_TRIG_EVENT_ONCHIP

Return values
- **None**

Reference Manual to LL API cross reference:
- BMTRGR SW LL_HRTIM_BM_SetTrig
- BMTRGR MSTRST LL_HRTIM_BM_SetTrig
- BMTRGR MSTREP LL_HRTIM_BM_SetTrig
- BMTRGR MSTCMP1 LL_HRTIM_BM_SetTrig

- BMTRGR MSTCMP2 LL_HRTIM_BM_SetTrig
- BMTRGR MSTCMP3 LL_HRTIM_BM_SetTrig
- BMTRGR MSTCMP4 LL_HRTIM_BM_SetTrig
- BMTRGR TARST LL_HRTIM_BM_SetTrig
- BMTRGR TAREP LL_HRTIM_BM_SetTrig
- BMTRGR TACMP1 LL_HRTIM_BM_SetTrig
- BMTRGR TACMP2 LL_HRTIM_BM_SetTrig
- BMTRGR TBRST LL_HRTIM_BM_SetTrig
- BMTRGR TBREP LL_HRTIM_BM_SetTrig
- BMTRGR TBCMP1 LL_HRTIM_BM_SetTrig
- BMTRGR TBCMP2 LL_HRTIM_BM_SetTrig
- BMTRGR TCRST LL_HRTIM_BM_SetTrig
- BMTRGR TCREP LL_HRTIM_BM_SetTrig
- BMTRGR TCCMP1 LL_HRTIM_BM_SetTrig
- BMTRGR TCCMP2 LL_HRTIM_BM_SetTrig
- BMTRGR TDRST LL_HRTIM_BM_SetTrig
- BMTRGR TDREP LL_HRTIM_BM_SetTrig
- BMTRGR TDCMP1 LL_HRTIM_BM_SetTrig
- BMTRGR TDCMP2 LL_HRTIM_BM_SetTrig
- BMTRGR TERST LL_HRTIM_BM_SetTrig
- BMTRGR TEREP LL_HRTIM_BM_SetTrig
- BMTRGR TECMP1 LL_HRTIM_BM_SetTrig
- BMTRGR TECMP2 LL_HRTIM_BM_SetTrig
- BMTRGR TAEEV7 LL_HRTIM_BM_SetTrig
- BMTRGR TAEEV8 LL_HRTIM_BM_SetTrig
- BMTRGR EEV7 LL_HRTIM_BM_SetTrig
- BMTRGR EEV8 LL_HRTIM_BM_SetTrig
- BMTRGR OCHIPEV LL_HRTIM_BM_SetTrig

LL_HRTIM_BM_GetTrig

Function name **__STATIC_INLINE uint32_t LL_HRTIM_BM_GetTrig (HRTIM_TypeDef * HRTIMx)**

Function description Get actual burst mode controller trigger.

Parameters
- **HRTIMx:** High Resolution Timer instance

Return values
- **Trig:** This parameter can be a combination of the following values:
  - LL_HRTIM_BM_TRIG_NONE
  - LL_HRTIM_BM_TRIG_MASTER_RESET
  - LL_HRTIM_BM_TRIG_MASTER_REPETITION
  - LL_HRTIM_BM_TRIG_MASTER_CMP1
  - LL_HRTIM_BM_TRIG_MASTER_CMP2
  - LL_HRTIM_BM_TRIG_MASTER_CMP3
  - LL_HRTIM_BM_TRIG_MASTER_CMP4
  - LL_HRTIM_BM_TRIG_TIMA_RESET
  - LL_HRTIM_BM_TRIG_TIMA_REPETITION
  - LL_HRTIM_BM_TRIG_TIMA_CMP1
  - LL_HRTIM_BM_TRIG_TIMA_CMP2
  - LL_HRTIM_BM_TRIG_TIMB_RESET
  - LL_HRTIM_BM_TRIG_TIMB_REPETITION
  - LL_HRTIM_BM_TRIG_TIMB_CMP1

  - LL_HRTIM_BM_TRIG_TIMB_CMP2
  - LL_HRTIM_BM_TRIG_TIMC_RESET
  - LL_HRTIM_BM_TRIG_TIMC_REPETITION
  - LL_HRTIM_BM_TRIG_TIMC_CMP1
  - LL_HRTIM_BM_TRIG_TIMC_CMP2
  - LL_HRTIM_BM_TRIG_TIMD_RESET
  - LL_HRTIM_BM_TRIG_TIMD_REPETITION
  - LL_HRTIM_BM_TRIG_TIMD_CMP1
  - LL_HRTIM_BM_TRIG_TIMD_CMP2
  - LL_HRTIM_BM_TRIG_TIME_RESET
  - LL_HRTIM_BM_TRIG_TIME_REPETITION
  - LL_HRTIM_BM_TRIG_TIME_CMP1
  - LL_HRTIM_BM_TRIG_TIME_CMP2
  - LL_HRTIM_BM_TRIG_TIMA_EVENT7
  - LL_HRTIM_BM_TRIG_TIMD_EVENT8
  - LL_HRTIM_BM_TRIG_EVENT_7
  - LL_HRTIM_BM_TRIG_EVENT_8
  - LL_HRTIM_BM_TRIG_EVENT_ONCHIP

Reference Manual to LL API cross reference:

- BMTRGR SW LL_HRTIM_BM_GetTrig
- BMTRGR MSTRST LL_HRTIM_BM_GetTrig
- BMTRGR MSTREP LL_HRTIM_BM_GetTrig
- BMTRGR MSTCMP1 LL_HRTIM_BM_GetTrig
- BMTRGR MSTCMP2 LL_HRTIM_BM_GetTrig
- BMTRGR MSTCMP3 LL_HRTIM_BM_GetTrig
- BMTRGR MSTCMP4 LL_HRTIM_BM_GetTrig
- BMTRGR TARST LL_HRTIM_BM_GetTrig
- BMTRGR TAREP LL_HRTIM_BM_GetTrig
- BMTRGR TACMP1 LL_HRTIM_BM_GetTrig
- BMTRGR TACMP2 LL_HRTIM_BM_GetTrig
- BMTRGR TBRST LL_HRTIM_BM_GetTrig
- BMTRGR TBREP LL_HRTIM_BM_GetTrig
- BMTRGR TBCMP1 LL_HRTIM_BM_GetTrig
- BMTRGR TBCMP2 LL_HRTIM_BM_GetTrig
- BMTRGR TCRST LL_HRTIM_BM_GetTrig
- BMTRGR TCREP LL_HRTIM_BM_GetTrig
- BMTRGR TCCMP1 LL_HRTIM_BM_GetTrig
- BMTRGR TCCMP2 LL_HRTIM_BM_GetTrig
- BMTRGR TDRST LL_HRTIM_BM_GetTrig
- BMTRGR TDREP LL_HRTIM_BM_GetTrig
- BMTRGR TDCMP1 LL_HRTIM_BM_GetTrig
- BMTRGR TDCMP2 LL_HRTIM_BM_GetTrig
- BMTRGR TERST LL_HRTIM_BM_GetTrig
- BMTRGR TEREP LL_HRTIM_BM_GetTrig
- BMTRGR TECMP1 LL_HRTIM_BM_GetTrig
- BMTRGR TECMP2 LL_HRTIM_BM_GetTrig
- BMTRGR TAEEV7 LL_HRTIM_BM_GetTrig
- BMTRGR TAEEV8 LL_HRTIM_BM_GetTrig
- BMTRGR EEV7 LL_HRTIM_BM_GetTrig
- BMTRGR EEV8 LL_HRTIM_BM_GetTrig
- BMTRGR OCHIPEV LL_HRTIM_BM_GetTrig

LL_HRTIM_BM_SetCompare

Function name	**__STATIC_INLINE void LL_HRTIM_BM_SetCompare (HRTIM_TypeDef * HRTIMx, uint32_t CompareValue)**
Function description	Set the burst mode controller compare value.
Parameters	• **HRTIMx:** High Resolution Timer instance • **CompareValue:** Compare value must be above or equal to 3 periods of the fHRTIM clock, that is 0x60 if CKPSC[2:0] = 0, 0x30 if CKPSC[2:0] = 1, 0x18 if CKPSC[2:0] = 2,...
Return values	• **None**
Reference Manual to LL API cross reference:	• BMCMPR BMCMP LL_HRTIM_BM_SetCompare

LL_HRTIM_BM_GetCompare

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_BM_GetCompare (HRTIM_TypeDef * HRTIMx)**
Function description	Get actual burst mode controller compare value.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **CompareValue:** Compare value must be above or equal to 3 periods of the fHRTIM clock, that is 0x60 if CKPSC[2:0] = 0, 0x30 if CKPSC[2:0] = 1, 0x18 if CKPSC[2:0] = 2,...
Reference Manual to LL API cross reference:	• BMCMPR BMCMP LL_HRTIM_BM_GetCompare

LL_HRTIM_BM_SetPeriod

Function name	**__STATIC_INLINE void LL_HRTIM_BM_SetPeriod (HRTIM_TypeDef * HRTIMx, uint32_t Period)**
Function description	Set the burst mode controller period.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Period:** The period value must be above or equal to 3 periods of the fHRTIM clock, that is 0x60 if CKPSC[2:0] = 0, 0x30 if CKPSC[2:0] = 1, 0x18 if CKPSC[2:0] = 2,... The maximum value is 0x0000 FFDF.
Return values	• **None**
Reference Manual to LL API cross reference:	• BMPER BMPER LL_HRTIM_BM_SetPeriod

LL_HRTIM_BM_GetPeriod

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_BM_GetPeriod (HRTIM_TypeDef * HRTIMx)**
Function description	Get actual burst mode controller period.

Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **The:** period value must be above or equal to 3 periods of the fHRTIM clock, that is 0x60 if CKPSC[2:0] = 0, 0x30 if CKPSC[2:0] = 1, 0x18 if CKPSC[2:0] = 2,... The maximum value is 0x0000 FFDF.
Reference Manual to LL API cross reference:	• BMPER BMPER LL_HRTIM_BM_GetPeriod

LL_HRTIM_BM_Enable

Function name	**__STATIC_INLINE void LL_HRTIM_BM_Enable (HRTIM_TypeDef * HRTIMx)**
Function description	Enable the burst mode controller.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• BMCR BME LL_HRTIM_BM_Enable

LL_HRTIM_BM_Disable

Function name	**__STATIC_INLINE void LL_HRTIM_BM_Disable (HRTIM_TypeDef * HRTIMx)**
Function description	Disable the burst mode controller.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• BMCR BME LL_HRTIM_BM_Disable

LL_HRTIM_BM_IsEnabled

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_BM_IsEnabled (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether the burst mode controller is enabled.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of BME bit in HRTIM_BMCR register (1 or 0).
Reference Manual to LL API cross reference:	• BMCR BME LL_HRTIM_BM_IsEnabled

LL_HRTIM_BM_Start

Function name	**__STATIC_INLINE void LL_HRTIM_BM_Start (HRTIM_TypeDef * HRTIMx)**
Function description	Trigger the burst operation (software trigger)
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• BMTRGR SW LL_HRTIM_BM_Start

LL_HRTIM_BM_Stop

Function name	**__STATIC_INLINE void LL_HRTIM_BM_Stop (HRTIM_TypeDef * HRTIMx)**
Function description	Stop the burst mode operation.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Notes	• Causes a burst mode early termination.
Reference Manual to LL API cross reference:	• BMCR BMSTAT LL_HRTIM_BM_Stop

LL_HRTIM_BM_GetStatus

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_BM_GetStatus (HRTIM_TypeDef * HRTIMx)**
Function description	Get actual burst mode status.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **Status:** This parameter can be one of the following values: – LL_HRTIM_BM_STATUS_NORMAL – LL_HRTIM_BM_STATUS_BURST_ONGOING
Reference Manual to LL API cross reference:	• BMCR BMSTAT LL_HRTIM_BM_GetStatus

LL_HRTIM_ClearFlag_FLT1

Function name	**__STATIC_INLINE void LL_HRTIM_ClearFlag_FLT1 (HRTIM_TypeDef * HRTIMx)**
Function description	Clear the Fault 1 interrupt flag.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**

Reference Manual to LL API cross reference:	• ICR FLT1C LL_HRTIM_ClearFlag_FLT1

LL_HRTIM_IsActiveFlag_FLT1

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_FLT1 (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether Fault 1 interrupt occurred.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of FLT1 bit in HRTIM_ISR register (1 or 0).
Reference Manual to LL API cross reference:	• ICR FLT1 LL_HRTIM_IsActiveFlag_FLT1

LL_HRTIM_ClearFlag_FLT2

Function name	**__STATIC_INLINE void LL_HRTIM_ClearFlag_FLT2 (HRTIM_TypeDef * HRTIMx)**
Function description	Clear the Fault 2 interrupt flag.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ICR FLT2C LL_HRTIM_ClearFlag_FLT2

LL_HRTIM_IsActiveFlag_FLT2

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_FLT2 (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether Fault 2 interrupt occurred.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of FLT2 bit in HRTIM_ISR register (1 or 0).
Reference Manual to LL API cross reference:	• ICR FLT2 LL_HRTIM_IsActiveFlag_FLT2

LL_HRTIM_ClearFlag_FLT3

Function name	**__STATIC_INLINE void LL_HRTIM_ClearFlag_FLT3 (HRTIM_TypeDef * HRTIMx)**
Function description	Clear the Fault 3 interrupt flag.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**

Reference Manual to LL API cross reference:	• ICR FLT3C LL_HRTIM_ClearFlag_FLT3

LL_HRTIM_IsActiveFlag_FLT3

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_FLT3 (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether Fault 3 interrupt occurred.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of FLT3 bit in HRTIM_ISR register (1 or 0).
Reference Manual to LL API cross reference:	• ICR FLT3 LL_HRTIM_IsActiveFlag_FLT3

LL_HRTIM_ClearFlag_FLT4

Function name	**__STATIC_INLINE void LL_HRTIM_ClearFlag_FLT4 (HRTIM_TypeDef * HRTIMx)**
Function description	Clear the Fault 4 interrupt flag.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ICR FLT4C LL_HRTIM_ClearFlag_FLT4

LL_HRTIM_IsActiveFlag_FLT4

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_FLT4 (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether Fault 4 interrupt occurred.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of FLT4 bit in HRTIM_ISR register (1 or 0).
Reference Manual to LL API cross reference:	• ICR FLT4 LL_HRTIM_IsActiveFlag_FLT4

LL_HRTIM_ClearFlag_FLT5

Function name	**__STATIC_INLINE void LL_HRTIM_ClearFlag_FLT5 (HRTIM_TypeDef * HRTIMx)**
Function description	Clear the Fault 5 interrupt flag.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**

Reference Manual to LL API cross reference:	• ICR FLT5C LL_HRTIM_ClearFlag_FLT5

LL_HRTIM_IsActiveFlag_FLT5

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_FLT5 (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether Fault 5 interrupt occurred.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of FLT5 bit in HRTIM_ISR register (1 or 0).
Reference Manual to LL API cross reference:	• ICR FLT5 LL_HRTIM_IsActiveFlag_FLT5

LL_HRTIM_ClearFlag_SYSFLT

Function name	**__STATIC_INLINE void LL_HRTIM_ClearFlag_SYSFLT (HRTIM_TypeDef * HRTIMx)**
Function description	Clear the System Fault interrupt flag.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ICR SYSFLTC LL_HRTIM_ClearFlag_SYSFLT

LL_HRTIM_IsActiveFlag_SYSFLT

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_SYSFLT (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether System Fault interrupt occurred.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of SYSFLT bit in HRTIM_ISR register (1 or 0).
Reference Manual to LL API cross reference:	• ISR SYSFLT LL_HRTIM_IsActiveFlag_SYSFLT

LL_HRTIM_ClearFlag_DLLRDY

Function name	**__STATIC_INLINE void LL_HRTIM_ClearFlag_DLLRDY (HRTIM_TypeDef * HRTIMx)**
Function description	Clear the DLL ready interrupt flag.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**

Reference Manual to LL API cross reference:	• ICR DLLRDYC LL_HRTIM_ClearFlag_DLLRDY

LL_HRTIM_IsActiveFlag_DLLRDY

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_DLLRDY (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether DLL ready interrupt occurred.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of DLLRDY bit in HRTIM_ISR register (1 or 0).
Reference Manual to LL API cross reference:	• ISR DLLRDY LL_HRTIM_IsActiveFlag_DLLRDY

LL_HRTIM_ClearFlag_BMPER

Function name	**__STATIC_INLINE void LL_HRTIM_ClearFlag_BMPER (HRTIM_TypeDef * HRTIMx)**
Function description	Clear the Burst Mode period interrupt flag.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ICR BMPERC LL_HRTIM_ClearFlag_BMPER

LL_HRTIM_IsActiveFlag_BMPER

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_BMPER (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether Burst Mode period interrupt occurred.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of BMPER bit in HRTIM_ISR register (1 or 0).
Reference Manual to LL API cross reference:	• ISR BMPER LL_HRTIM_IsActiveFlag_BMPER

LL_HRTIM_ClearFlag_SYNC

Function name	**__STATIC_INLINE void LL_HRTIM_ClearFlag_SYNC (HRTIM_TypeDef * HRTIMx)**
Function description	Clear the Synchronization Input interrupt flag.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**

Reference Manual to LL API cross reference:
- MICR SYNCC LL_HRTIM_ClearFlag_SYNC

LL_HRTIM_IsActiveFlag_SYNC

Function name: **__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_SYNC (HRTIM_TypeDef * HRTIMx)**

Function description: Indicate whether the Synchronization Input interrupt occurred.

Parameters:
- **HRTIMx:** High Resolution Timer instance

Return values:
- **State:** of SYNC bit in HRTIM_MISR register (1 or 0).

Reference Manual to LL API cross reference:
- MISR SYNC LL_HRTIM_IsActiveFlag_SYNC

LL_HRTIM_ClearFlag_UPDATE

Function name: **__STATIC_INLINE void LL_HRTIM_ClearFlag_UPDATE (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description: Clear the update interrupt flag for a given timer (including the master timer) .

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values:
- **None**

Reference Manual to LL API cross reference:
- MICR MUPDC LL_HRTIM_ClearFlag_UPDATE
- TIMxICR UPDC LL_HRTIM_ClearFlag_UPDATE

LL_HRTIM_IsActiveFlag_UPDATE

Function name: **__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_UPDATE (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description: Indicate whether the update interrupt has occurred for a given timer (including the master timer) .

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of MUPD/UPD bit in HRTIM_MISR/HRTIM_TIMxISR register (1 or 0).

Reference Manual to LL API cross reference:
- MISR MUPD LL_HRTIM_IsActiveFlag_UPDATE
- TIMxISR UPD LL_HRTIM_IsActiveFlag_UPDATE

LL_HRTIM_ClearFlag_REP

Function name
__STATIC_INLINE void LL_HRTIM_ClearFlag_REP (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Clear the repetition interrupt flag for a given timer (including the master timer) .

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MICR MREPC LL_HRTIM_ClearFlag_REP
- TIMxICR REPC LL_HRTIM_ClearFlag_REP

LL_HRTIM_IsActiveFlag_REP

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_REP (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the repetition interrupt has occurred for a given timer (including the master timer) .

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of MREP/REP bit in HRTIM_MISR/HRTIM_TIMxISR register (1 or 0).

Reference Manual to LL API cross reference:
- MISR MREP LL_HRTIM_IsActiveFlag_REP
- TIMxISR REP LL_HRTIM_IsActiveFlag_REP

LL_HRTIM_ClearFlag_CMP1

Function name
__STATIC_INLINE void LL_HRTIM_ClearFlag_CMP1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Clear the compare 1 match interrupt for a given timer (including the master timer).

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MICR MCMP1C LL_HRTIM_ClearFlag_CMP1
- TIMxICR CMP1C LL_HRTIM_ClearFlag_CMP1

LL_HRTIM_IsActiveFlag_CMP1

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_CMP1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the compare match 1 interrupt has occurred for a given timer (including the master timer) .

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of MCMP1/CMP1 bit in HRTIM_MISR/HRTIM_TIMxISR register (1 or 0).

Reference Manual to LL API cross reference:
- MISR MCMP1 LL_HRTIM_IsActiveFlag_CMP1
- TIMxISR CMP1 LL_HRTIM_IsActiveFlag_CMP1

LL_HRTIM_ClearFlag_CMP2

Function name
__STATIC_INLINE void LL_HRTIM_ClearFlag_CMP2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Clear the compare 2 match interrupt for a given timer (including the master timer).

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A

  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MICR MCMP2C LL_HRTIM_ClearFlag_CMP2
- TIMxICR CMP2C LL_HRTIM_ClearFlag_CMP2

LL_HRTIM_IsActiveFlag_CMP2

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_CMP2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the compare match 2 interrupt has occurred for a given timer (including the master timer) .

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of MCMP2/CMP2 bit in HRTIM_MISR/HRTIM_TIMxISR register (1 or 0).

Reference Manual to LL API cross reference:
- MISR MCMP2 LL_HRTIM_IsActiveFlag_CMP2
- TIMxISR CMP2 LL_HRTIM_IsActiveFlag_CMP2

LL_HRTIM_ClearFlag_CMP3

Function name
__STATIC_INLINE void LL_HRTIM_ClearFlag_CMP3 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Clear the compare 3 match interrupt for a given timer (including the master timer).

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MICR MCMP3C LL_HRTIM_ClearFlag_CMP3
- TIMxICR CMP3C LL_HRTIM_ClearFlag_CMP3

LL_HRTIM_IsActiveFlag_CMP3

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_CMP3 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the compare match 3 interrupt has occurred for a given timer (including the master timer) .

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of MCMP3/CMP3 bit in HRTIM_MISR/HRTIM_TIMxISR register (1 or 0).

Reference Manual to LL API cross reference:
- MISR MCMP3 LL_HRTIM_IsActiveFlag_CMP3
- TIMxISR CMP3 LL_HRTIM_IsActiveFlag_CMP3

LL_HRTIM_ClearFlag_CMP4

Function name
__STATIC_INLINE void LL_HRTIM_ClearFlag_CMP4 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Clear the compare 4 match interrupt for a given timer (including the master timer).

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MICR MCMP4C LL_HRTIM_ClearFlag_CMP4
- TIMxICR CMP4C LL_HRTIM_ClearFlag_CMP4

LL_HRTIM_IsActiveFlag_CMP4

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_CMP4 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the compare match 4 interrupt has occurred for a given timer (including the master timer) .

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A

- LL_HRTIM_TIMER_B
- LL_HRTIM_TIMER_C
- LL_HRTIM_TIMER_D
- LL_HRTIM_TIMER_E

Return values
- **State:** of MCMP4/CMP4 bit in HRTIM_MISR/HRTIM_TIMxISR register (1 or 0).

Reference Manual to LL API cross reference:
- MISR MCMP4 LL_HRTIM_IsActiveFlag_CMP4
- TIMxISR CMP4 LL_HRTIM_IsActiveFlag_CMP4

LL_HRTIM_ClearFlag_CPT1

Function name
__STATIC_INLINE void LL_HRTIM_ClearFlag_CPT1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Clear the capture 1 interrupt flag for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxICR CPT1C LL_HRTIM_ClearFlag_CPT1

LL_HRTIM_IsActiveFlag_CPT1

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_CPT1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the capture 1 interrupt occurred for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of CPT1 bit in HRTIM_TIMxISR register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxISR CPT1 LL_HRTIM_IsActiveFlag_CPT1

LL_HRTIM_ClearFlag_CPT2

Function name
__STATIC_INLINE void LL_HRTIM_ClearFlag_CPT2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Clear the capture 2 interrupt flag for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxICR CPT2C LL_HRTIM_ClearFlag_CPT2

LL_HRTIM_IsActiveFlag_CPT2

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_CPT2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the capture 2 interrupt occurred for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of CPT2 bit in HRTIM_TIMxISR register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxISR CPT2 LL_HRTIM_IsActiveFlag_CPT2

LL_HRTIM_ClearFlag_SET1

Function name
__STATIC_INLINE void LL_HRTIM_ClearFlag_SET1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Clear the output 1 set interrupt flag for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxICR SET1C LL_HRTIM_ClearFlag_SET1

LL_HRTIM_IsActiveFlag_SET1

Function name **__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_SET1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description Indicate whether the output 1 set interrupt occurred for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of SETx1 bit in HRTIM_TIMxISR register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxISR SET1 LL_HRTIM_IsActiveFlag_SET1

LL_HRTIM_ClearFlag_RST1

Function name **__STATIC_INLINE void LL_HRTIM_ClearFlag_RST1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description Clear the output 1 reset interrupt flag for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxICR RST1C LL_HRTIM_ClearFlag_RST1

LL_HRTIM_IsActiveFlag_RST1

Function name **__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_RST1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description Indicate whether the output 1 reset interrupt occurred for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B

  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of RSTx1 bit in HRTIM_TIMxISR register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxISR RST1 LL_HRTIM_IsActiveFlag_RST1

LL_HRTIM_ClearFlag_SET2

Function name
__STATIC_INLINE void LL_HRTIM_ClearFlag_SET2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Clear the output 2 set interrupt flag for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxICR SET2C LL_HRTIM_ClearFlag_SET2

LL_HRTIM_IsActiveFlag_SET2

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_SET2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the output 2 set interrupt occurred for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of SETx2 bit in HRTIM_TIMxISR register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxISR SET2 LL_HRTIM_IsActiveFlag_SET2

LL_HRTIM_ClearFlag_RST2

Function name
__STATIC_INLINE void LL_HRTIM_ClearFlag_RST2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description	Clear the output 2reset interrupt flag for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• TIMxICR RST2C LL_HRTIM_ClearFlag_RST2

LL_HRTIM_IsActiveFlag_RST2

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_RST2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Indicate whether the output 2 reset interrupt occurred for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **State:** of RSTx2 bit in HRTIM_TIMxISR register (1 or 0).
Reference Manual to LL API cross reference:	• TIMxISR RST2 LL_HRTIM_IsActiveFlag_RST2

LL_HRTIM_ClearFlag_RST

Function name	**__STATIC_INLINE void LL_HRTIM_ClearFlag_RST (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Clear the reset and/or roll-over interrupt flag for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• TIMxICR RSTC LL_HRTIM_ClearFlag_RST

LL_HRTIM_IsActiveFlag_RST

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_RST (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the reset and/or roll-over interrupt occurred for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of RST bit in HRTIM_TIMxISR register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxISR RST LL_HRTIM_IsActiveFlag_RST

LL_HRTIM_ClearFlag_DLYPRT

Function name
__STATIC_INLINE void LL_HRTIM_ClearFlag_DLYPRT (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Clear the delayed protection interrupt flag for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxICR DLYPRTC LL_HRTIM_ClearFlag_DLYPRT

LL_HRTIM_IsActiveFlag_DLYPRT

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsActiveFlag_DLYPRT (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the delayed protection interrupt occurred for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values	• **State:** of DLYPRT bit in HRTIM_TIMxISR register (1 or 0).
Reference Manual to LL API cross reference:	• TIMxISR DLYPRT LL_HRTIM_IsActiveFlag_DLYPRT

LL_HRTIM_EnableIT_FLT1

Function name	**__STATIC_INLINE void LL_HRTIM_EnableIT_FLT1 (HRTIM_TypeDef * HRTIMx)**
Function description	Enable the fault 1 interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER FLT1IE LL_HRTIM_EnableIT_FLT1

LL_HRTIM_DisableIT_FLT1

Function name	**__STATIC_INLINE void LL_HRTIM_DisableIT_FLT1 (HRTIM_TypeDef * HRTIMx)**
Function description	Disable the fault 1 interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER FLT1IE LL_HRTIM_DisableIT_FLT1

LL_HRTIM_IsEnabledIT_FLT1

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_FLT1 (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether the fault 1 interrupt is enabled.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of FLT1IE bit in HRTIM_IER register (1 or 0).
Reference Manual to LL API cross reference:	• IER FLT1IE LL_HRTIM_IsEnabledIT_FLT1

LL_HRTIM_EnableIT_FLT2

Function name	**__STATIC_INLINE void LL_HRTIM_EnableIT_FLT2 (HRTIM_TypeDef * HRTIMx)**
Function description	Enable the fault 2 interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**

Reference Manual to LL API cross reference:	• IER FLT2IE LL_HRTIM_EnableIT_FLT2

LL_HRTIM_DisableIT_FLT2

Function name	**__STATIC_INLINE void LL_HRTIM_DisableIT_FLT2 (HRTIM_TypeDef * HRTIMx)**
Function description	Disable the fault 2 interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER FLT2IE LL_HRTIM_DisableIT_FLT2

LL_HRTIM_IsEnabledIT_FLT2

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_FLT2 (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether the fault 2 interrupt is enabled.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of FLT2IE bit in HRTIM_IER register (1 or 0).
Reference Manual to LL API cross reference:	• IER FLT2IE LL_HRTIM_IsEnabledIT_FLT2

LL_HRTIM_EnableIT_FLT3

Function name	**__STATIC_INLINE void LL_HRTIM_EnableIT_FLT3 (HRTIM_TypeDef * HRTIMx)**
Function description	Enable the fault 3 interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER FLT3IE LL_HRTIM_EnableIT_FLT3

LL_HRTIM_DisableIT_FLT3

Function name	**__STATIC_INLINE void LL_HRTIM_DisableIT_FLT3 (HRTIM_TypeDef * HRTIMx)**
Function description	Disable the fault 3 interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**

Reference Manual to LL API cross reference:	• IER FLT3IE LL_HRTIM_DisableIT_FLT3

LL_HRTIM_IsEnabledIT_FLT3

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_FLT3 (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether the fault 3 interrupt is enabled.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of FLT3IE bit in HRTIM_IER register (1 or 0).
Reference Manual to LL API cross reference:	• IER FLT3IE LL_HRTIM_IsEnabledIT_FLT3

LL_HRTIM_EnableIT_FLT4

Function name	**__STATIC_INLINE void LL_HRTIM_EnableIT_FLT4 (HRTIM_TypeDef * HRTIMx)**
Function description	Enable the fault 4 interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER FLT4IE LL_HRTIM_EnableIT_FLT4

LL_HRTIM_DisableIT_FLT4

Function name	**__STATIC_INLINE void LL_HRTIM_DisableIT_FLT4 (HRTIM_TypeDef * HRTIMx)**
Function description	Disable the fault 4 interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER FLT4IE LL_HRTIM_DisableIT_FLT4

LL_HRTIM_IsEnabledIT_FLT4

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_FLT4 (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether the fault 4 interrupt is enabled.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of FLT4IE bit in HRTIM_IER register (1 or 0).

Reference Manual to LL API cross reference:	• IER FLT4IE LL_HRTIM_IsEnabledIT_FLT4

LL_HRTIM_EnableIT_FLT5

Function name	**__STATIC_INLINE void LL_HRTIM_EnableIT_FLT5 (HRTIM_TypeDef * HRTIMx)**
Function description	Enable the fault 5 interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER FLT5IE LL_HRTIM_EnableIT_FLT5

LL_HRTIM_DisableIT_FLT5

Function name	**__STATIC_INLINE void LL_HRTIM_DisableIT_FLT5 (HRTIM_TypeDef * HRTIMx)**
Function description	Disable the fault 5 interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER FLT5IE LL_HRTIM_DisableIT_FLT5

LL_HRTIM_IsEnabledIT_FLT5

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_FLT5 (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether the fault 5 interrupt is enabled.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of FLT5IE bit in HRTIM_IER register (1 or 0).
Reference Manual to LL API cross reference:	• IER FLT5IE LL_HRTIM_IsEnabledIT_FLT5

LL_HRTIM_EnableIT_SYSFLT

Function name	**__STATIC_INLINE void LL_HRTIM_EnableIT_SYSFLT (HRTIM_TypeDef * HRTIMx)**
Function description	Enable the system fault interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**

Reference Manual to LL API cross reference:	• IER SYSFLTIE LL_HRTIM_EnableIT_SYSFLT

LL_HRTIM_DisableIT_SYSFLT

Function name	**__STATIC_INLINE void LL_HRTIM_DisableIT_SYSFLT (HRTIM_TypeDef * HRTIMx)**
Function description	Disable the system fault interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER SYSFLTIE LL_HRTIM_DisableIT_SYSFLT

LL_HRTIM_IsEnabledIT_SYSFLT

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_SYSFLT (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether the system fault interrupt is enabled.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of SYSFLTIE bit in HRTIM_IER register (1 or 0).
Reference Manual to LL API cross reference:	• IER SYSFLTIE LL_HRTIM_IsEnabledIT_SYSFLT

LL_HRTIM_EnableIT_DLLRDY

Function name	**__STATIC_INLINE void LL_HRTIM_EnableIT_DLLRDY (HRTIM_TypeDef * HRTIMx)**
Function description	Enable the DLL ready interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER DLLRDYIE LL_HRTIM_EnableIT_DLLRDY

LL_HRTIM_DisableIT_DLLRDY

Function name	**__STATIC_INLINE void LL_HRTIM_DisableIT_DLLRDY (HRTIM_TypeDef * HRTIMx)**
Function description	Disable the DLL ready interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**

Reference Manual to LL API cross reference:	• IER DLLRDYIE LL_HRTIM_DisableIT_DLLRDY

LL_HRTIM_IsEnabledIT_DLLRDY

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_DLLRDY (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether the DLL ready interrupt is enabled.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of DLLRDYIE bit in HRTIM_IER register (1 or 0).
Reference Manual to LL API cross reference:	• IER DLLRDYIE LL_HRTIM_IsEnabledIT_DLLRDY

LL_HRTIM_EnableIT_BMPER

Function name	**__STATIC_INLINE void LL_HRTIM_EnableIT_BMPER (HRTIM_TypeDef * HRTIMx)**
Function description	Enable the burst mode period interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER BMPERIE LL_HRTIM_EnableIT_BMPER

LL_HRTIM_DisableIT_BMPER

Function name	**__STATIC_INLINE void LL_HRTIM_DisableIT_BMPER (HRTIM_TypeDef * HRTIMx)**
Function description	Disable the burst mode period interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• IER BMPERIE LL_HRTIM_DisableIT_BMPER

LL_HRTIM_IsEnabledIT_BMPER

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_BMPER (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether the burst mode period interrupt is enabled.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of BMPERIE bit in HRTIM_IER register (1 or 0).

Reference Manual to LL API cross reference:	• IER BMPERIE LL_HRTIM_IsEnabledIT_BMPER

LL_HRTIM_EnableIT_SYNC

Function name	**__STATIC_INLINE void LL_HRTIM_EnableIT_SYNC (HRTIM_TypeDef * HRTIMx)**
Function description	Enable the synchronization input interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• MDIER SYNCIE LL_HRTIM_EnableIT_SYNC

LL_HRTIM_DisableIT_SYNC

Function name	**__STATIC_INLINE void LL_HRTIM_DisableIT_SYNC (HRTIM_TypeDef * HRTIMx)**
Function description	Disable the synchronization input interrupt.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• MDIER SYNCIE LL_HRTIM_DisableIT_SYNC

LL_HRTIM_IsEnabledIT_SYNC

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_SYNC (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether the synchronization input interrupt is enabled.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of SYNCIE bit in HRTIM_MDIER register (1 or 0).
Reference Manual to LL API cross reference:	• MDIER SYNCIE LL_HRTIM_IsEnabledIT_SYNC

LL_HRTIM_EnableIT_UPDATE

Function name	**__STATIC_INLINE void LL_HRTIM_EnableIT_UPDATE (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Enable the update interrupt for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B

  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MUPDIE LL_HRTIM_EnableIT_UPDATE
- TIMxDIER UPDIE LL_HRTIM_EnableIT_UPDATE

LL_HRTIM_DisableIT_UPDATE

Function name
__STATIC_INLINE void LL_HRTIM_DisableIT_UPDATE (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the update interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MUPDIE LL_HRTIM_DisableIT_UPDATE
- TIMxDIER UPDIE LL_HRTIM_DisableIT_UPDATE

LL_HRTIM_IsEnabledIT_UPDATE

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_UPDATE (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the update interrupt is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of MUPDIE/UPDIE bit in HRTIM_MDIER/HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- MDIER MUPDIE LL_HRTIM_IsEnabledIT_UPDATE
- TIMxDIER UPDIE LL_HRTIM_IsEnabledIT_UPDATE

LL_HRTIM_EnableIT_REP

Function name
__STATIC_INLINE void LL_HRTIM_EnableIT_REP (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the repetition interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MREPIE LL_HRTIM_EnableIT_REP
- TIMxDIER REPIE LL_HRTIM_EnableIT_REP

LL_HRTIM_DisableIT_REP

Function name
__STATIC_INLINE void LL_HRTIM_DisableIT_REP (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the repetition interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MREPIE LL_HRTIM_DisableIT_REP
- TIMxDIER REPIE LL_HRTIM_DisableIT_REP

LL_HRTIM_IsEnabledIT_REP

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_REP (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the repetition interrupt is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D

– LL_HRTIM_TIMER_E

Return values
- **State:** of MREPIE/REPIE bit in HRTIM_MDIER/HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- MDIER MREPIE LL_HRTIM_IsEnabledIT_REP
- TIMxDIER REPIE LL_HRTIM_IsEnabledIT_REP

LL_HRTIM_EnableIT_CMP1

Function name **__STATIC_INLINE void LL_HRTIM_EnableIT_CMP1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description Enable the compare 1 interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP1IE LL_HRTIM_EnableIT_CMP1
- TIMxDIER CMP1IE LL_HRTIM_EnableIT_CMP1

LL_HRTIM_DisableIT_CMP1

Function name **__STATIC_INLINE void LL_HRTIM_DisableIT_CMP1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description Disable the compare 1 interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP1IE LL_HRTIM_DisableIT_CMP1
- TIMxDIER CMP1IE LL_HRTIM_DisableIT_CMP1

LL_HRTIM_IsEnabledIT_CMP1

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_CMP1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Indicate whether the compare 1 interrupt is enabled for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **State:** of MCMP1IE/CMP1IE bit in HRTIM_MDIER/HRTIM_TIMxDIER register (1 or 0).
Reference Manual to LL API cross reference:	• MDIER MCMP1IE LL_HRTIM_IsEnabledIT_CMP1 • TIMxDIER CMP1IE LL_HRTIM_IsEnabledIT_CMP1

LL_HRTIM_EnableIT_CMP2

Function name	**__STATIC_INLINE void LL_HRTIM_EnableIT_CMP2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Enable the compare 2 interrupt for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• MDIER MCMP2IE LL_HRTIM_EnableIT_CMP2 • TIMxDIER CMP2IE LL_HRTIM_EnableIT_CMP2

LL_HRTIM_DisableIT_CMP2

Function name	**__STATIC_INLINE void LL_HRTIM_DisableIT_CMP2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Disable the compare 2 interrupt for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C

– LL_HRTIM_TIMER_D
– LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP2IE LL_HRTIM_DisableIT_CMP2
- TIMxDIER CMP2IE LL_HRTIM_DisableIT_CMP2

LL_HRTIM_IsEnabledIT_CMP2

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_CMP2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the compare 2 interrupt is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **State:** of MCMP2IE/CMP2IE bit in HRTIM_MDIER/HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- MDIER MCMP2IE LL_HRTIM_IsEnabledIT_CMP2
- TIMxDIER CMP2IE LL_HRTIM_IsEnabledIT_CMP2

LL_HRTIM_EnableIT_CMP3

Function name
__STATIC_INLINE void LL_HRTIM_EnableIT_CMP3 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the compare 3 interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP3IE LL_HRTIM_EnableIT_CMP3
- TIMxDIER CMP3IE LL_HRTIM_EnableIT_CMP3

LL_HRTIM_DisableIT_CMP3

Function name
__STATIC_INLINE void LL_HRTIM_DisableIT_CMP3 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the compare 3 interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP3IE LL_HRTIM_DisableIT_CMP3
- TIMxDIER CMP3IE LL_HRTIM_DisableIT_CMP3

LL_HRTIM_IsEnabledIT_CMP3

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_CMP3 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the compare 3 interrupt is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of MCMP3IE/CMP3IE bit in HRTIM_MDIER/HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- MDIER MCMP3IE LL_HRTIM_IsEnabledIT_CMP3
- TIMxDIER CMP3IE LL_HRTIM_IsEnabledIT_CMP3

LL_HRTIM_EnableIT_CMP4

Function name
__STATIC_INLINE void LL_HRTIM_EnableIT_CMP4 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the compare 4 interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C

– LL_HRTIM_TIMER_D
– LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP4IE LL_HRTIM_EnableIT_CMP4
- TIMxDIER CMP4IE LL_HRTIM_EnableIT_CMP4

LL_HRTIM_DisableIT_CMP4

Function name
__STATIC_INLINE void LL_HRTIM_DisableIT_CMP4 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the compare 4 interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP4IE LL_HRTIM_DisableIT_CMP4
- TIMxDIER CMP4IE LL_HRTIM_DisableIT_CMP4

LL_HRTIM_IsEnabledIT_CMP4

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_CMP4 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the compare 4 interrupt is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **State:** of MCMP4IE/CMP4IE bit in HRTIM_MDIER/HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- MDIER MCMP4IE LL_HRTIM_IsEnabledIT_CMP4
- TIMxDIER CMP4IE LL_HRTIM_IsEnabledIT_CMP4

LL_HRTIM_EnableIT_CPT1

Function name
__STATIC_INLINE void LL_HRTIM_EnableIT_CPT1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the capture 1 interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER CPT1IE LL_HRTIM_EnableIT_CPT1

LL_HRTIM_DisableIT_CPT1

Function name
__STATIC_INLINE void LL_HRTIM_DisableIT_CPT1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the capture 1 interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER CPT1IE LL_HRTIM_DisableIT_CPT1

LL_HRTIM_IsEnabledIT_CPT1

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_CPT1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the capture 1 interrupt is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of CPT1IE bit in HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxDIER CPT1IE LL_HRTIM_IsEnabledIT_CPT1

LL_HRTIM_EnableIT_CPT2

Function name: **__STATIC_INLINE void LL_HRTIM_EnableIT_CPT2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description: Enable the capture 2 interrupt for a given timer.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values:
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER CPT2IE LL_HRTIM_EnableIT_CPT2

LL_HRTIM_DisableIT_CPT2

Function name: **__STATIC_INLINE void LL_HRTIM_DisableIT_CPT2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description: Enable the capture 2 interrupt for a given timer.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values:
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER CPT2IE LL_HRTIM_DisableIT_CPT2

LL_HRTIM_IsEnabledIT_CPT2

Function name: **__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_CPT2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description: Indicate whether the capture 2 interrupt is enabled for a given timer.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B

  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of CPT2IE bit in HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxDIER CPT2IE LL_HRTIM_IsEnabledIT_CPT2

LL_HRTIM_EnableIT_SET1

Function name
__STATIC_INLINE void LL_HRTIM_EnableIT_SET1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the output 1 set interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER SET1IE LL_HRTIM_EnableIT_SET1

LL_HRTIM_DisableIT_SET1

Function name
__STATIC_INLINE void LL_HRTIM_DisableIT_SET1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the output 1 set interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER SET1IE LL_HRTIM_DisableIT_SET1

LL_HRTIM_IsEnabledIT_SET1

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_SET1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the output 1 set interrupt is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of SET1xIE bit in HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxDIER SET1IE LL_HRTIM_IsEnabledIT_SET1

LL_HRTIM_EnableIT_RST1

Function name
__STATIC_INLINE void LL_HRTIM_EnableIT_RST1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the output 1 reset interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER RST1IE LL_HRTIM_EnableIT_RST1

LL_HRTIM_DisableIT_RST1

Function name
__STATIC_INLINE void LL_HRTIM_DisableIT_RST1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the output 1 reset interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER RST1IE LL_HRTIM_DisableIT_RST1

LL_HRTIM_IsEnabledIT_RST1

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_RST1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the output 1 reset interrupt is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of RST1xIE bit in HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxDIER RST1IE LL_HRTIM_IsEnabledIT_RST1

LL_HRTIM_EnableIT_SET2

Function name
__STATIC_INLINE void LL_HRTIM_EnableIT_SET2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the output 2 set interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER SET2IE LL_HRTIM_EnableIT_SET2

LL_HRTIM_DisableIT_SET2

Function name
__STATIC_INLINE void LL_HRTIM_DisableIT_SET2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the output 2 set interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B

– LL_HRTIM_TIMER_C
– LL_HRTIM_TIMER_D
– LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER SET2IE LL_HRTIM_DisableIT_SET2

LL_HRTIM_IsEnabledIT_SET2

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_SET2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the output 2 set interrupt is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **State:** of SET2xIE bit in HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxDIER SET2IE LL_HRTIM_IsEnabledIT_SET2

LL_HRTIM_EnableIT_RST2

Function name
__STATIC_INLINE void LL_HRTIM_EnableIT_RST2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the output 2 reset interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER RST2IE LL_HRTIM_EnableIT_RST2

LL_HRTIM_DisableIT_RST2

Function name
__STATIC_INLINE void LL_HRTIM_DisableIT_RST2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the output 2 reset interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER RST2IE LL_HRTIM_DisableIT_RST2

LL_HRTIM_IsEnabledIT_RST2

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_RST2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the output 2 reset LL_HRTIM_IsEnabledIT_RST2 is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of RST2xIE bit in HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxDIER RST2IE LL_HRTIM_DisableIT_RST2

LL_HRTIM_EnableIT_RST

Function name
__STATIC_INLINE void LL_HRTIM_EnableIT_RST (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the reset/roll-over interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER RSTIE LL_HRTIM_EnableIT_RST

LL_HRTIM_DisableIT_RST

Function name: **__STATIC_INLINE void LL_HRTIM_DisableIT_RST (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description: Disable the reset/roll-over interrupt for a given timer.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values:
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER RSTIE LL_HRTIM_DisableIT_RST

LL_HRTIM_IsEnabledIT_RST

Function name: **__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_RST (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description: Indicate whether the reset/roll-over interrupt is enabled for a given timer.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values:
- **State:** of RSTIE bit in HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxDIER RSTIE LL_HRTIM_IsEnabledIT_RST

LL_HRTIM_EnableIT_DLYPRT

Function name: **__STATIC_INLINE void LL_HRTIM_EnableIT_DLYPRT (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**

Function description: Enable the delayed protection interrupt for a given timer.

Parameters:
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B

  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER DLYPRTIE LL_HRTIM_EnableIT_DLYPRT

LL_HRTIM_DisableIT_DLYPRT

Function name
__STATIC_INLINE void LL_HRTIM_DisableIT_DLYPRT (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the delayed protection interrupt for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER DLYPRTIE LL_HRTIM_DisableIT_DLYPRT

LL_HRTIM_IsEnabledIT_DLYPRT

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledIT_DLYPRT (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the delayed protection interrupt is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of DLYPRTIE bit in HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxDIER DLYPRTIE LL_HRTIM_IsEnabledIT_DLYPRT

LL_HRTIM_EnableDMAReq_SYNC

Function name	**__STATIC_INLINE void LL_HRTIM_EnableDMAReq_SYNC (HRTIM_TypeDef * HRTIMx)**
Function description	Enable the synchronization input DMA request.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• MDIER SYNCDE LL_HRTIM_EnableDMAReq_SYNC

LL_HRTIM_DisableDMAReq_SYNC

Function name	**__STATIC_INLINE void LL_HRTIM_DisableDMAReq_SYNC (HRTIM_TypeDef * HRTIMx)**
Function description	Disable the synchronization input DMA request.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• MDIER SYNCDE LL_HRTIM_DisableDMAReq_SYNC

LL_HRTIM_IsEnabledDMAReq_SYNC

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_SYNC (HRTIM_TypeDef * HRTIMx)**
Function description	Indicate whether the synchronization input DMA request is enabled.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **State:** of SYNCDE bit in HRTIM_MDIER register (1 or 0).
Reference Manual to LL API cross reference:	• MDIER SYNCDE LL_HRTIM_IsEnabledDMAReq_SYNC

LL_HRTIM_EnableDMAReq_UPDATE

Function name	**__STATIC_INLINE void LL_HRTIM_EnableDMAReq_UPDATE (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Enable the update DMA request for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D

– LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MUPDDE LL_HRTIM_EnableDMAReq_UPDATE
- TIMxDIER UPDDE LL_HRTIM_EnableDMAReq_UPDATE

LL_HRTIM_DisableDMAReq_UPDATE

Function name
__STATIC_INLINE void LL_HRTIM_DisableDMAReq_UPDATE (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the update DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MUPDDE LL_HRTIM_DisableDMAReq_UPDATE
- TIMxDIER UPDDE LL_HRTIM_DisableDMAReq_UPDATE

LL_HRTIM_IsEnabledDMAReq_UPDATE

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_UPDATE (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the update DMA request is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **State:** of MUPDDE/UPDDE bit in HRTIM_MDIER/HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- MDIER MUPDDE LL_HRTIM_IsEnabledDMAReq_UPDATE
- TIMxDIER UPDDE LL_HRTIM_IsEnabledDMAReq_UPDATE

LL_HRTIM_EnableDMAReq_REP

Function name	**__STATIC_INLINE void LL_HRTIM_EnableDMAReq_REP (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Enable the repetition DMA request for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• MDIER MREPDE LL_HRTIM_EnableDMAReq_REP • TIMxDIER REPDE LL_HRTIM_EnableDMAReq_REP

LL_HRTIM_DisableDMAReq_REP

Function name	**__STATIC_INLINE void LL_HRTIM_DisableDMAReq_REP (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Disable the repetition DMA request for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• MDIER MREPDE LL_HRTIM_DisableDMAReq_REP • TIMxDIER REPDE LL_HRTIM_DisableDMAReq_REP

LL_HRTIM_IsEnabledDMAReq_REP

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_REP (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Indicate whether the repetition DMA request is enabled for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_MASTER – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C

– LL_HRTIM_TIMER_D
– LL_HRTIM_TIMER_E

Return values
- **State:** of MREPDE/REPDE bit in HRTIM_MDIER/HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- MDIER MREPDE LL_HRTIM_IsEnabledDMAReq_REP
- TIMxDIER REPDE LL_HRTIM_IsEnabledDMAReq_REP

LL_HRTIM_EnableDMAReq_CMP1

Function name
__STATIC_INLINE void LL_HRTIM_EnableDMAReq_CMP1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the compare 1 DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP1DE LL_HRTIM_EnableDMAReq_CMP1
- TIMxDIER CMP1DE LL_HRTIM_EnableDMAReq_CMP1

LL_HRTIM_DisableDMAReq_CMP1

Function name
__STATIC_INLINE void LL_HRTIM_DisableDMAReq_CMP1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the compare 1 DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP1DE LL_HRTIM_DisableDMAReq_CMP1
- TIMxDIER CMP1DE LL_HRTIM_DisableDMAReq_CMP1

LL_HRTIM_IsEnabledDMAReq_CMP1

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_CMP1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the compare 1 DMA request is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of MCMP1DE/CMP1DE bit in HRTIM_MDIER/HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- MDIER MCMP1DE LL_HRTIM_IsEnabledDMAReq_CMP1
- TIMxDIER CMP1DE LL_HRTIM_IsEnabledDMAReq_CMP1

LL_HRTIM_EnableDMAReq_CMP2

Function name
__STATIC_INLINE void LL_HRTIM_EnableDMAReq_CMP2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the compare 2 DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP2DE LL_HRTIM_EnableDMAReq_CMP2
- TIMxDIER CMP2DE LL_HRTIM_EnableDMAReq_CMP2

LL_HRTIM_DisableDMAReq_CMP2

Function name
__STATIC_INLINE void LL_HRTIM_DisableDMAReq_CMP2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the compare 2 DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B

  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP2DE LL_HRTIM_DisableDMAReq_CMP2
- TIMxDIER CMP2DE LL_HRTIM_DisableDMAReq_CMP2

LL_HRTIM_IsEnabledDMAReq_CMP2

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_CMP2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the compare 2 DMA request is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of MCMP2DE/CMP2DE bit in HRTIM_MDIER/HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- MDIER MCMP2DE LL_HRTIM_IsEnabledDMAReq_CMP2
- TIMxDIER CMP2DE LL_HRTIM_IsEnabledDMAReq_CMP2

LL_HRTIM_EnableDMAReq_CMP3

Function name
__STATIC_INLINE void LL_HRTIM_EnableDMAReq_CMP3 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the compare 3 DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP3DE LL_HRTIM_EnableDMAReq_CMP3
- TIMxDIER CMP3DE LL_HRTIM_EnableDMAReq_CMP3

LL_HRTIM_DisableDMAReq_CMP3

Function name
__STATIC_INLINE void LL_HRTIM_DisableDMAReq_CMP3 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the compare 3 DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP3DE LL_HRTIM_DisableDMAReq_CMP3
- TIMxDIER CMP3DE LL_HRTIM_DisableDMAReq_CMP3

LL_HRTIM_IsEnabledDMAReq_CMP3

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_CMP3 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the compare 3 DMA request is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of MCMP3DE/CMP3DE bit in HRTIM_MDIER/HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- MDIER MCMP3DE LL_HRTIM_IsEnabledDMAReq_CMP3
- TIMxDIER CMP3DE LL_HRTIM_IsEnabledDMAReq_CMP3

LL_HRTIM_EnableDMAReq_CMP4

Function name
__STATIC_INLINE void LL_HRTIM_EnableDMAReq_CMP4 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the compare 4 DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_MASTER
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B

– LL_HRTIM_TIMER_C
– LL_HRTIM_TIMER_D
– LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP4DE LL_HRTIM_EnableDMAReq_CMP4
- TIMxDIER CMP4DE LL_HRTIM_EnableDMAReq_CMP4

LL_HRTIM_DisableDMAReq_CMP4

Function name
__STATIC_INLINE void LL_HRTIM_DisableDMAReq_CMP4 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the compare 4 DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- MDIER MCMP4DE LL_HRTIM_DisableDMAReq_CMP4
- TIMxDIER CMP4DE LL_HRTIM_DisableDMAReq_CMP4

LL_HRTIM_IsEnabledDMAReq_CMP4

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_CMP4 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the compare 4 DMA request is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  – LL_HRTIM_TIMER_MASTER
  – LL_HRTIM_TIMER_A
  – LL_HRTIM_TIMER_B
  – LL_HRTIM_TIMER_C
  – LL_HRTIM_TIMER_D
  – LL_HRTIM_TIMER_E

Return values
- **State:** of MCMP4DE/CMP4DE bit in HRTIM_MDIER/HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- MDIER MCMP4DE LL_HRTIM_IsEnabledDMAReq_CMP4
- TIMxDIER CMP4DE LL_HRTIM_IsEnabledDMAReq_CMP4

LL_HRTIM_EnableDMAReq_CPT1

Function name
__STATIC_INLINE void LL_HRTIM_EnableDMAReq_CPT1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the capture 1 DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER CPT1DE LL_HRTIM_EnableDMAReq_CPT1

LL_HRTIM_DisableDMAReq_CPT1

Function name
__STATIC_INLINE void LL_HRTIM_DisableDMAReq_CPT1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the capture 1 DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER CPT1DE LL_HRTIM_DisableDMAReq_CPT1

LL_HRTIM_IsEnabledDMAReq_CPT1

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_CPT1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the capture 1 DMA request is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of CPT1DE bit in HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxDIER CPT1DE LL_HRTIM_IsEnabledDMAReq_CPT1

LL_HRTIM_EnableDMAReq_CPT2

Function name
__STATIC_INLINE void LL_HRTIM_EnableDMAReq_CPT2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the capture 2 DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER CPT2DE LL_HRTIM_EnableDMAReq_CPT2

LL_HRTIM_DisableDMAReq_CPT2

Function name
__STATIC_INLINE void LL_HRTIM_DisableDMAReq_CPT2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the capture 2 DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER CPT2DE LL_HRTIM_DisableDMAReq_CPT2

LL_HRTIM_IsEnabledDMAReq_CPT2

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_CPT2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the capture 2 DMA request is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:

- LL_HRTIM_TIMER_A
- LL_HRTIM_TIMER_B
- LL_HRTIM_TIMER_C
- LL_HRTIM_TIMER_D
- LL_HRTIM_TIMER_E

Return values
- **State:** of CPT2DE bit in HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxDIER CPT2DE LL_HRTIM_IsEnabledDMAReq_CPT2

LL_HRTIM_EnableDMAReq_SET1

Function name
__STATIC_INLINE void LL_HRTIM_EnableDMAReq_SET1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the output 1 set DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER SET1DE LL_HRTIM_EnableDMAReq_SET1

LL_HRTIM_DisableDMAReq_SET1

Function name
__STATIC_INLINE void LL_HRTIM_DisableDMAReq_SET1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the output 1 set DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER SET1DE LL_HRTIM_DisableDMAReq_SET1

LL_HRTIM_IsEnabledDMAReq_SET1

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_SET1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Indicate whether the output 1 set DMA request is enabled for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **State:** of SET1xDE bit in HRTIM_TIMxDIER register (1 or 0).
Reference Manual to LL API cross reference:	• TIMxDIER SET1DE LL_HRTIM_IsEnabledDMAReq_SET1

LL_HRTIM_EnableDMAReq_RST1

Function name	**__STATIC_INLINE void LL_HRTIM_EnableDMAReq_RST1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Enable the output 1 reset DMA request for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• TIMxDIER RST1DE LL_HRTIM_EnableDMAReq_RST1

LL_HRTIM_DisableDMAReq_RST1

Function name	**__STATIC_INLINE void LL_HRTIM_DisableDMAReq_RST1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Disable the output 1 reset DMA request for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER RST1DE LL_HRTIM_DisableDMAReq_RST1

LL_HRTIM_IsEnabledDMAReq_RST1

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_RST1 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the output 1 reset interrupt is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of RST1xDE bit in HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxDIER RST1DE LL_HRTIM_IsEnabledDMAReq_RST1

LL_HRTIM_EnableDMAReq_SET2

Function name
__STATIC_INLINE void LL_HRTIM_EnableDMAReq_SET2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the output 2 set DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER SET2DE LL_HRTIM_EnableDMAReq_SET2

LL_HRTIM_DisableDMAReq_SET2

Function name
__STATIC_INLINE void LL_HRTIM_DisableDMAReq_SET2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the output 2 set DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:

- LL_HRTIM_TIMER_A
- LL_HRTIM_TIMER_B
- LL_HRTIM_TIMER_C
- LL_HRTIM_TIMER_D
- LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER SET2DE LL_HRTIM_DisableDMAReq_SET2

LL_HRTIM_IsEnabledDMAReq_SET2

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_SET2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the output 2 set DMA request is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of SET2xDE bit in HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxDIER SET2DE LL_HRTIM_IsEnabledDMAReq_SET2

LL_HRTIM_EnableDMAReq_RST2

Function name
__STATIC_INLINE void LL_HRTIM_EnableDMAReq_RST2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the output 2 reset DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER RST2DE LL_HRTIM_EnableDMAReq_RST2

LL_HRTIM_DisableDMAReq_RST2

Function name	**__STATIC_INLINE void LL_HRTIM_DisableDMAReq_RST2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Disable the output 2 reset DMA request for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **None**
Reference Manual to LL API cross reference:	• TIMxDIER RST2DE LL_HRTIM_DisableDMAReq_RST2

LL_HRTIM_IsEnabledDMAReq_RST2

Function name	**__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_RST2 (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Indicate whether the output 2 reset DMA request is enabled for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E
Return values	• **State:** of RST2xDE bit in HRTIM_TIMxDIER register (1 or 0).
Reference Manual to LL API cross reference:	• TIMxDIER RST2DE LL_HRTIM_IsEnabledDMAReq_RST2

LL_HRTIM_EnableDMAReq_RST

Function name	**__STATIC_INLINE void LL_HRTIM_EnableDMAReq_RST (HRTIM_TypeDef * HRTIMx, uint32_t Timer)**
Function description	Enable the reset/roll-over DMA request for a given timer.
Parameters	• **HRTIMx:** High Resolution Timer instance • **Timer:** This parameter can be one of the following values: – LL_HRTIM_TIMER_A – LL_HRTIM_TIMER_B – LL_HRTIM_TIMER_C – LL_HRTIM_TIMER_D – LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER RSTDE LL_HRTIM_EnableDMAReq_RST

LL_HRTIM_DisableDMAReq_RST

Function name
__STATIC_INLINE void LL_HRTIM_DisableDMAReq_RST (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the reset/roll-over DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER RSTDE LL_HRTIM_DisableDMAReq_RST

LL_HRTIM_IsEnabledDMAReq_RST

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_RST (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the reset/roll-over DMA request is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of RSTDE bit in HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxDIER RSTDE LL_HRTIM_IsEnabledDMAReq_RST

LL_HRTIM_EnableDMAReq_DLYPRT

Function name
__STATIC_INLINE void LL_HRTIM_EnableDMAReq_DLYPRT (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Enable the delayed protection DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:

- LL_HRTIM_TIMER_A
- LL_HRTIM_TIMER_B
- LL_HRTIM_TIMER_C
- LL_HRTIM_TIMER_D
- LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER DLYPRTDE LL_HRTIM_EnableDMAReq_DLYPRT

LL_HRTIM_DisableDMAReq_DLYPRT

Function name
__STATIC_INLINE void LL_HRTIM_DisableDMAReq_DLYPRT (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Disable the delayed protection DMA request for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **None**

Reference Manual to LL API cross reference:
- TIMxDIER DLYPRTDE LL_HRTIM_DisableDMAReq_DLYPRT

LL_HRTIM_IsEnabledDMAReq_DLYPRT

Function name
__STATIC_INLINE uint32_t LL_HRTIM_IsEnabledDMAReq_DLYPRT (HRTIM_TypeDef * HRTIMx, uint32_t Timer)

Function description
Indicate whether the delayed protection DMA request is enabled for a given timer.

Parameters
- **HRTIMx:** High Resolution Timer instance
- **Timer:** This parameter can be one of the following values:
  - LL_HRTIM_TIMER_A
  - LL_HRTIM_TIMER_B
  - LL_HRTIM_TIMER_C
  - LL_HRTIM_TIMER_D
  - LL_HRTIM_TIMER_E

Return values
- **State:** of DLYPRTDE bit in HRTIM_TIMxDIER register (1 or 0).

Reference Manual to LL API cross reference:
- TIMxDIER DLYPRTDE LL_HRTIM_IsEnabledDMAReq_DLYPRT

LL_HRTIM_DeInit

Function name	**ErrorStatus LL_HRTIM_DeInit (HRTIM_TypeDef * HRTIMx)**
Function description	Set HRTIM instance registers to their reset values.
Parameters	• **HRTIMx:** High Resolution Timer instance
Return values	• **ErrorStatus:** enumeration value: – SUCCESS: HRTIMx registers are de-initialized – ERROR: invalid HRTIMx instance

68.2 HRTIM Firmware driver defines

68.2.1 HRTIM

ADC TRIGGER

LL_HRTIM_ADCTRIG_1	ADC trigger 1 identifier
LL_HRTIM_ADCTRIG_2	ADC trigger 2 identifier
LL_HRTIM_ADCTRIG_3	ADC trigger 3 identifier
LL_HRTIM_ADCTRIG_4	ADC trigger 4 identifier

ADC TRIGGER 1/3 SOURCE

LL_HRTIM_ADCTRIG_SRC13_NONE	No ADC trigger event
LL_HRTIM_ADCTRIG_SRC13_MCMP1	ADC Trigger on master compare 1
LL_HRTIM_ADCTRIG_SRC13_MCMP2	ADC Trigger on master compare 2
LL_HRTIM_ADCTRIG_SRC13_MCMP3	ADC Trigger on master compare 3
LL_HRTIM_ADCTRIG_SRC13_MCMP4	ADC Trigger on master compare 4
LL_HRTIM_ADCTRIG_SRC13_MPER	ADC Trigger on master period
LL_HRTIM_ADCTRIG_SRC13_EEV1	ADC Trigger on external event 1
LL_HRTIM_ADCTRIG_SRC13_EEV2	ADC Trigger on external event 2
LL_HRTIM_ADCTRIG_SRC13_EEV3	ADC Trigger on external event 3
LL_HRTIM_ADCTRIG_SRC13_EEV4	ADC Trigger on external event 4
LL_HRTIM_ADCTRIG_SRC13_EEV5	ADC Trigger on external event 5
LL_HRTIM_ADCTRIG_SRC13_TIMACMP2	ADC Trigger on Timer A compare 2
LL_HRTIM_ADCTRIG_SRC13_TIMACMP3	ADC Trigger on Timer A compare 3
LL_HRTIM_ADCTRIG_SRC13_TIMACMP4	ADC Trigger on Timer A compare 4
LL_HRTIM_ADCTRIG_SRC13_TIMAPER	ADC Trigger on Timer A period
LL_HRTIM_ADCTRIG_SRC13_TIMARST	ADC Trigger on Timer A reset
LL_HRTIM_ADCTRIG_SRC13_TIMBCMP2	ADC Trigger on Timer B compare 2
LL_HRTIM_ADCTRIG_SRC13_TIMBCMP3	ADC Trigger on Timer B compare 3
LL_HRTIM_ADCTRIG_SRC13_TIMBCMP4	ADC Trigger on Timer B compare 4
LL_HRTIM_ADCTRIG_SRC13_TIMBPER	ADC Trigger on Timer B period

LL_HRTIM_ADCTRIG_SRC13_TIMBRST	ADC Trigger on Timer B reset
LL_HRTIM_ADCTRIG_SRC13_TIMCCMP2	ADC Trigger on Timer C compare 2
LL_HRTIM_ADCTRIG_SRC13_TIMCCMP3	ADC Trigger on Timer C compare 3
LL_HRTIM_ADCTRIG_SRC13_TIMCCMP4	ADC Trigger on Timer C compare 4
LL_HRTIM_ADCTRIG_SRC13_TIMCPER	ADC Trigger on Timer C period
LL_HRTIM_ADCTRIG_SRC13_TIMDCMP2	ADC Trigger on Timer D compare 2
LL_HRTIM_ADCTRIG_SRC13_TIMDCMP3	ADC Trigger on Timer D compare 3
LL_HRTIM_ADCTRIG_SRC13_TIMDCMP4	ADC Trigger on Timer D compare 4
LL_HRTIM_ADCTRIG_SRC13_TIMDPER	ADC Trigger on Timer D period
LL_HRTIM_ADCTRIG_SRC13_TIMECMP2	ADC Trigger on Timer E compare 2
LL_HRTIM_ADCTRIG_SRC13_TIMECMP3	ADC Trigger on Timer E compare 3
LL_HRTIM_ADCTRIG_SRC13_TIMECMP4	ADC Trigger on Timer E compare 4
LL_HRTIM_ADCTRIG_SRC13_TIMEPER	ADC Trigger on Timer E period
ADC TRIGGER 2/4 SOURCE	
LL_HRTIM_ADCTRIG_SRC24_NONE	No ADC trigger event
LL_HRTIM_ADCTRIG_SRC24_MCMP1	ADC Trigger on master compare 1
LL_HRTIM_ADCTRIG_SRC24_MCMP2	ADC Trigger on master compare 2
LL_HRTIM_ADCTRIG_SRC24_MCMP3	ADC Trigger on master compare 3
LL_HRTIM_ADCTRIG_SRC24_MCMP4	ADC Trigger on master compare 4
LL_HRTIM_ADCTRIG_SRC24_MPER	ADC Trigger on master period
LL_HRTIM_ADCTRIG_SRC24_EEV6	ADC Trigger on external event 6
LL_HRTIM_ADCTRIG_SRC24_EEV7	ADC Trigger on external event 7
LL_HRTIM_ADCTRIG_SRC24_EEV8	ADC Trigger on external event 8
LL_HRTIM_ADCTRIG_SRC24_EEV9	ADC Trigger on external event 9
LL_HRTIM_ADCTRIG_SRC24_EEV10	ADC Trigger on external event 10
LL_HRTIM_ADCTRIG_SRC24_TIMACMP2	ADC Trigger on Timer A compare 2
LL_HRTIM_ADCTRIG_SRC24_TIMACMP3	ADC Trigger on Timer A compare 3
LL_HRTIM_ADCTRIG_SRC24_TIMACMP4	ADC Trigger on Timer A compare 4
LL_HRTIM_ADCTRIG_SRC24_TIMAPER	ADC Trigger on Timer A period
LL_HRTIM_ADCTRIG_SRC24_TIMBCMP2	ADC Trigger on Timer B compare 2
LL_HRTIM_ADCTRIG_SRC24_TIMBCMP3	ADC Trigger on Timer B compare 3
LL_HRTIM_ADCTRIG_SRC24_TIMBCMP4	ADC Trigger on Timer B compare 4
LL_HRTIM_ADCTRIG_SRC24_TIMBPER	ADC Trigger on Timer B period
LL_HRTIM_ADCTRIG_SRC24_TIMCCMP2	ADC Trigger on Timer C compare 2
LL_HRTIM_ADCTRIG_SRC24_TIMCCMP3	ADC Trigger on Timer C compare 3
LL_HRTIM_ADCTRIG_SRC24_TIMCCMP4	ADC Trigger on Timer C compare 4

LL_HRTIM_ADCTRIG_SRC24_TIMCPER	ADC Trigger on Timer C period
LL_HRTIM_ADCTRIG_SRC24_TIMCRST	ADC Trigger on Timer C reset
LL_HRTIM_ADCTRIG_SRC24_TIMDCMP2	ADC Trigger on Timer D compare 2
LL_HRTIM_ADCTRIG_SRC24_TIMDCMP3	ADC Trigger on Timer D compare 3
LL_HRTIM_ADCTRIG_SRC24_TIMDCMP4	ADC Trigger on Timer D compare 4
LL_HRTIM_ADCTRIG_SRC24_TIMDPER	ADC Trigger on Timer D period
LL_HRTIM_ADCTRIG_SRC24_TIMDRST	ADC Trigger on Timer D reset
LL_HRTIM_ADCTRIG_SRC24_TIMECMP2	ADC Trigger on Timer E compare 2
LL_HRTIM_ADCTRIG_SRC24_TIMECMP3	ADC Trigger on Timer E compare 3
LL_HRTIM_ADCTRIG_SRC24_TIMECMP4	ADC Trigger on Timer E compare 4
LL_HRTIM_ADCTRIG_SRC24_TIMERST	ADC Trigger on Timer E reset

ADC TRIGGER UPDATE

LL_HRTIM_ADCTRIG_UPDATE_MASTER	HRTIM_ADCxR register update is triggered by the Master timer
LL_HRTIM_ADCTRIG_UPDATE_TIMER_A	HRTIM_ADCxR register update is triggered by the Timer A
LL_HRTIM_ADCTRIG_UPDATE_TIMER_B	HRTIM_ADCxR register update is triggered by the Timer B
LL_HRTIM_ADCTRIG_UPDATE_TIMER_C	HRTIM_ADCxR register update is triggered by the Timer C
LL_HRTIM_ADCTRIG_UPDATE_TIMER_D	HRTIM_ADCxR register update is triggered by the Timer D
LL_HRTIM_ADCTRIG_UPDATE_TIMER_E	HRTIM_ADCxR register update is triggered by the Timer E

BURST MODE CLOCK SOURCE

LL_HRTIM_BM_CLKSRC_MASTER	Master timer counter reset/roll-over is used as clock source for the burst mode counter
LL_HRTIM_BM_CLKSRC_TIMER_A	Timer A counter reset/roll-over is used as clock source for the burst mode counter
LL_HRTIM_BM_CLKSRC_TIMER_B	Timer B counter reset/roll-over is used as clock source for the burst mode counter
LL_HRTIM_BM_CLKSRC_TIMER_C	Timer C counter reset/roll-over is used as clock source for the burst mode counter
LL_HRTIM_BM_CLKSRC_TIMER_D	Timer D counter reset/roll-over is used as clock source for the burst mode counter
LL_HRTIM_BM_CLKSRC_TIMER_E	Timer E counter reset/roll-over is used as clock source for the burst mode counter
LL_HRTIM_BM_CLKSRC_TIM16_OC	On-chip Event 1 (BMClk[1]), acting as a burst mode counter clock
LL_HRTIM_BM_CLKSRC_TIM17_OC	On-chip Event 2 (BMClk[2]), acting as a burst mode counter clock

LL_HRTIM_BM_CLKSRC_TIM7_TRGO	On-chip Event 3 (BMClk[3]), acting as a burst mode counter clock
LL_HRTIM_BM_CLKSRC_FHRTIM	Prescaled fHRTIM clock is used as clock source for the burst mode counter

BURST MODE OPERATING MODE

LL_HRTIM_BM_MODE_SINGLESHOT	Burst mode operates in single shot mode
LL_HRTIM_BM_MODE_CONTINOUS	Burst mode operates in continuous mode

BURST MODE PRESCALER

LL_HRTIM_BM_PRESCALER_DIV1	fBRST = fHRTIM
LL_HRTIM_BM_PRESCALER_DIV2	fBRST = fHRTIM/2
LL_HRTIM_BM_PRESCALER_DIV4	fBRST = fHRTIM/4
LL_HRTIM_BM_PRESCALER_DIV8	fBRST = fHRTIM/8
LL_HRTIM_BM_PRESCALER_DIV16	fBRST = fHRTIM/16
LL_HRTIM_BM_PRESCALER_DIV32	fBRST = fHRTIM/32
LL_HRTIM_BM_PRESCALER_DIV64	fBRST = fHRTIM/64
LL_HRTIM_BM_PRESCALER_DIV128	fBRST = fHRTIM/128
LL_HRTIM_BM_PRESCALER_DIV256	fBRST = fHRTIM/256
LL_HRTIM_BM_PRESCALER_DIV512	fBRST = fHRTIM/512
LL_HRTIM_BM_PRESCALER_DIV1024	fBRST = fHRTIM/1024
LL_HRTIM_BM_PRESCALER_DIV2048	fBRST = fHRTIM/2048
LL_HRTIM_BM_PRESCALER_DIV4096	fBRST = fHRTIM/4096
LL_HRTIM_BM_PRESCALER_DIV8192	fBRST = fHRTIM/8192
LL_HRTIM_BM_PRESCALER_DIV16384	fBRST = fHRTIM/16384
LL_HRTIM_BM_PRESCALER_DIV32768	fBRST = fHRTIM/32768

HRTIM BURST MODE STATUS

LL_HRTIM_BM_STATUS_NORMAL	Normal operation
LL_HRTIM_BM_STATUS_BURST_ONGOING	Burst operation on-going

HRTIM BURST MODE TRIGGER

LL_HRTIM_BM_TRIG_NONE	No trigger
LL_HRTIM_BM_TRIG_MASTER_RESET	Master timer reset event is starting the burst mode operation
LL_HRTIM_BM_TRIG_MASTER_REPETITION	Master timer repetition event is starting the burst mode operation
LL_HRTIM_BM_TRIG_MASTER_CMP1	Master timer compare 1 event is starting the burst mode operation
LL_HRTIM_BM_TRIG_MASTER_CMP2	Master timer compare 2 event is starting the burst mode operation
LL_HRTIM_BM_TRIG_MASTER_CMP3	Master timer compare 3 event is starting the burst mode operation

LL_HRTIM_BM_TRIG_MASTER_CMP4	Master timer compare 4 event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMA_RESET	Timer A reset event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMA_REPETITION	Timer A repetition event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMA_CMP1	Timer A compare 1 event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMA_CMP2	Timer A compare 2 event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMB_RESET	Timer B reset event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMB_REPETITION	Timer B repetition event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMB_CMP1	Timer B compare 1 event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMB_CMP2	Timer B compare 2 event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMC_RESET	Timer C resetevent is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMC_REPETITION	Timer C repetition event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMC_CMP1	Timer C compare 1 event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMC_CMP2	Timer C compare 2 event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMD_RESET	Timer D reset event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMD_REPETITION	Timer D repetition event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMD_CMP1	Timer D compare 1 event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMD_CMP2	Timer D compare 2 event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIME_RESET	Timer E reset event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIME_REPETITION	Timer E repetition event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIME_CMP1	Timer E compare 1 event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIME_CMP2	Timer E compare 2 event is starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMA_EVENT7	Timer A period following an external event 7 (conditioned by TIMA filters) is

	starting the burst mode operation
LL_HRTIM_BM_TRIG_TIMD_EVENT8	Timer D period following an external event 8 (conditioned by TIMD filters) is starting the burst mode operation
LL_HRTIM_BM_TRIG_EVENT_7	External event 7 conditioned by TIMA filters is starting the burst mode operation
LL_HRTIM_BM_TRIG_EVENT_8	External event 8 conditioned by TIMD filters is starting the burst mode operation
LL_HRTIM_BM_TRIG_EVENT_ONCHIP	A rising edge on an on-chip Event (for instance from GP timer or comparator) triggers the burst mode operation

BURST DMA

LL_HRTIM_BURSTDMA_NONE	No register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_MCR	MCR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_MICR	MICR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_MDIER	MDIER register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_MCNT	MCNTR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_MPER	MPER register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_MREP	MREPR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_MCMP1	MCMP1R register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_MCMP2	MCMP2R register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_MCMP3	MCMP3R register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_MCMP4	MCMP4R register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMMCR	TIMxCR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMICR	TIMxICR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMDIER	TIMxDIER register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMCNT	CNTxCR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMPER	PERxR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMREP	REPxR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMCMP1	CMP1xR register is updated by Burst DMA accesses

LL_HRTIM_BURSTDMA_TIMCMP2	CMP2xR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMCMP3	CMP3xR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMCMP4	CMP4xR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMDTR	DTxR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMSET1R	SET1R register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMRST1R	RST1R register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMSET2R	SET2R register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMRST2R	RST1R register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMEEFR1	EEFxR1 register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMEEFR2	EEFxR2 register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMRSTR	RSTxR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMCHPR	CHPxR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMOUTR	OUTxR register is updated by Burst DMA accesses
LL_HRTIM_BURSTDMA_TIMFLTR	FLTxR register is updated by Burst DMA accesses

BURST MODE

LL_HRTIM_BURSTMODE_MAINTAINCLOCK	Timer counter clock is maintained and the timer operates normally
LL_HRTIM_BURSTMODE_RESETCOUNTER	Timer counter clock is stopped and the counter is reset

DLL CALIBRATION RATE

LL_HRTIM_DLLCALIBRATION_RATE_7300	Periodic DLL calibration: T = 1048576 * tHRTIM (7.3 ms)
LL_HRTIM_DLLCALIBRATION_RATE_910	Periodic DLL calibration: T = 131072 * tHRTIM (910 ms)
LL_HRTIM_DLLCALIBRATION_RATE_114	Periodic DLL calibration: T = 16384 * tHRTIM (114 ms)
LL_HRTIM_DLLCALIBRATION_RATE_14	Periodic DLL calibration: T = 2048 * tHRTIM (14 ms)

CAPTURE TRIGGER

LL_HRTIM_CAPTURETRIG_NONE	Capture trigger is disabled
LL_HRTIM_CAPTURETRIG_UPDATE	The update event triggers the Capture
LL_HRTIM_CAPTURETRIG_EEV_1	The External event 1 triggers the Capture
LL_HRTIM_CAPTURETRIG_EEV_2	The External event 2 triggers the Capture
LL_HRTIM_CAPTURETRIG_EEV_3	The External event 3 triggers the Capture
LL_HRTIM_CAPTURETRIG_EEV_4	The External event 4 triggers the Capture

LL_HRTIM_CAPTURETRIG_EEV_5	The External event 5 triggers the Capture
LL_HRTIM_CAPTURETRIG_EEV_6	The External event 6 triggers the Capture
LL_HRTIM_CAPTURETRIG_EEV_7	The External event 7 triggers the Capture
LL_HRTIM_CAPTURETRIG_EEV_8	The External event 8 triggers the Capture
LL_HRTIM_CAPTURETRIG_EEV_9	The External event 9 triggers the Capture
LL_HRTIM_CAPTURETRIG_EEV_10	The External event 10 triggers the Capture
LL_HRTIM_CAPTURETRIG_TA1_SET	Capture is triggered by TA1 output inactive to active transition
LL_HRTIM_CAPTURETRIG_TA1_RESET	Capture is triggered by TA1 output active to inactive transition
LL_HRTIM_CAPTURETRIG_TIMA_CMP1	Timer A Compare 1 triggers Capture
LL_HRTIM_CAPTURETRIG_TIMA_CMP2	Timer A Compare 2 triggers Capture
LL_HRTIM_CAPTURETRIG_TB1_SET	Capture is triggered by TB1 output inactive to active transition
LL_HRTIM_CAPTURETRIG_TB1_RESET	Capture is triggered by TB1 output active to inactive transition
LL_HRTIM_CAPTURETRIG_TIMB_CMP1	Timer B Compare 1 triggers Capture
LL_HRTIM_CAPTURETRIG_TIMB_CMP2	Timer B Compare 2 triggers Capture
LL_HRTIM_CAPTURETRIG_TC1_SET	Capture is triggered by TC1 output inactive to active transition
LL_HRTIM_CAPTURETRIG_TC1_RESET	Capture is triggered by TC1 output active to inactive transition
LL_HRTIM_CAPTURETRIG_TIMC_CMP1	Timer C Compare 1 triggers Capture
LL_HRTIM_CAPTURETRIG_TIMC_CMP2	Timer C Compare 2 triggers Capture
LL_HRTIM_CAPTURETRIG_TD1_SET	Capture is triggered by TD1 output inactive to active transition
LL_HRTIM_CAPTURETRIG_TD1_RESET	Capture is triggered by TD1 output active to inactive transition
LL_HRTIM_CAPTURETRIG_TIMD_CMP1	Timer D Compare 1 triggers Capture
LL_HRTIM_CAPTURETRIG_TIMD_CMP2	Timer D Compare 2 triggers Capture
LL_HRTIM_CAPTURETRIG_TE1_SET	Capture is triggered by TE1 output inactive to active transition
LL_HRTIM_CAPTURETRIG_TE1_RESET	Capture is triggered by TE1 output active to inactive transition
LL_HRTIM_CAPTURETRIG_TIME_CMP1	Timer E Compare 1 triggers Capture
LL_HRTIM_CAPTURETRIG_TIME_CMP2	Timer E Compare 2 triggers Capture

CAPTURE UNIT ID

LL_HRTIM_CAPTUREUNIT_1	Capture unit 1 identifier
LL_HRTIM_CAPTUREUNIT_2	Capture unit 2 identifier

CHOPPER MODE DUTY CYCLE

LL_HRTIM_CHP_DUTYCYCLE_0	Only 1st pulse is present
LL_HRTIM_CHP_DUTYCYCLE_125	Duty cycle of the carrier signal is 12.5 %
LL_HRTIM_CHP_DUTYCYCLE_250	Duty cycle of the carrier signal is 25 %
LL_HRTIM_CHP_DUTYCYCLE_375	Duty cycle of the carrier signal is 37.5 %
LL_HRTIM_CHP_DUTYCYCLE_500	Duty cycle of the carrier signal is 50 %
LL_HRTIM_CHP_DUTYCYCLE_625	Duty cycle of the carrier signal is 62.5 %
LL_HRTIM_CHP_DUTYCYCLE_750	Duty cycle of the carrier signal is 75 %
LL_HRTIM_CHP_DUTYCYCLE_875	Duty cycle of the carrier signal is 87.5 %

CHOPPER MODE PRESCALER

LL_HRTIM_CHP_PRESCALER_DIV16	fCHPFRQ = fHRTIM / 16
LL_HRTIM_CHP_PRESCALER_DIV32	fCHPFRQ = fHRTIM / 32
LL_HRTIM_CHP_PRESCALER_DIV48	fCHPFRQ = fHRTIM / 48
LL_HRTIM_CHP_PRESCALER_DIV64	fCHPFRQ = fHRTIM / 64
LL_HRTIM_CHP_PRESCALER_DIV80	fCHPFRQ = fHRTIM / 80
LL_HRTIM_CHP_PRESCALER_DIV96	fCHPFRQ = fHRTIM / 96
LL_HRTIM_CHP_PRESCALER_DIV112	fCHPFRQ = fHRTIM / 112
LL_HRTIM_CHP_PRESCALER_DIV128	fCHPFRQ = fHRTIM / 128
LL_HRTIM_CHP_PRESCALER_DIV144	fCHPFRQ = fHRTIM / 144
LL_HRTIM_CHP_PRESCALER_DIV160	fCHPFRQ = fHRTIM / 160
LL_HRTIM_CHP_PRESCALER_DIV176	fCHPFRQ = fHRTIM / 176
LL_HRTIM_CHP_PRESCALER_DIV192	fCHPFRQ = fHRTIM / 192
LL_HRTIM_CHP_PRESCALER_DIV208	fCHPFRQ = fHRTIM / 208
LL_HRTIM_CHP_PRESCALER_DIV224	fCHPFRQ = fHRTIM / 224
LL_HRTIM_CHP_PRESCALER_DIV240	fCHPFRQ = fHRTIM / 240
LL_HRTIM_CHP_PRESCALER_DIV256	fCHPFRQ = fHRTIM / 256

CHOPPER MODE PULSE WIDTH

LL_HRTIM_CHP_PULSEWIDTH_16	tSTPW = tHRTIM x 16
LL_HRTIM_CHP_PULSEWIDTH_32	tSTPW = tHRTIM x 32
LL_HRTIM_CHP_PULSEWIDTH_48	tSTPW = tHRTIM x 48
LL_HRTIM_CHP_PULSEWIDTH_64	tSTPW = tHRTIM x 64
LL_HRTIM_CHP_PULSEWIDTH_80	tSTPW = tHRTIM x 80
LL_HRTIM_CHP_PULSEWIDTH_96	tSTPW = tHRTIM x 96
LL_HRTIM_CHP_PULSEWIDTH_112	tSTPW = tHRTIM x 112
LL_HRTIM_CHP_PULSEWIDTH_128	tSTPW = tHRTIM x 128
LL_HRTIM_CHP_PULSEWIDTH_144	tSTPW = tHRTIM x 144

LL_HRTIM_CHP_PULSEWIDTH_160	tSTPW = tHRTIM x 160
LL_HRTIM_CHP_PULSEWIDTH_176	tSTPW = tHRTIM x 176
LL_HRTIM_CHP_PULSEWIDTH_192	tSTPW = tHRTIM x 192
LL_HRTIM_CHP_PULSEWIDTH_208	tSTPW = tHRTIM x 208
LL_HRTIM_CHP_PULSEWIDTH_224	tSTPW = tHRTIM x 224
LL_HRTIM_CHP_PULSEWIDTH_240	tSTPW = tHRTIM x 240
LL_HRTIM_CHP_PULSEWIDTH_256	tSTPW = tHRTIM x 256

COMPARE MODE

LL_HRTIM_COMPAREMODE_REGULAR	standard compare mode
LL_HRTIM_COMPAREMODE_DELAY_NOTIMEOUT	Compare event generated only if a capture has occurred
LL_HRTIM_COMPAREMODE_DELAY_CMP1	Compare event generated if a capture has occurred or after a Compare 1 match (timeout if capture event is missing)
LL_HRTIM_COMPAREMODE_DELAY_CMP3	Compare event generated if a capture has occurred or after a Compare 3 match (timeout if capture event is missing)

COMPARE UNIT ID

LL_HRTIM_COMPAREUNIT_2	Compare unit 2 identifier
LL_HRTIM_COMPAREUNIT_4	Compare unit 4 identifier

CURRENT PUSH-PULL STATUS

LL_HRTIM_CPPSTAT_OUTPUT1	Signal applied on output 1 and output 2 forced inactive
LL_HRTIM_CPPSTAT_OUTPUT2	Signal applied on output 2 and output 1 forced inactive

CROSSBAR INPUT

LL_HRTIM_CROSSBAR_NONE	Reset the output set crossbar
LL_HRTIM_CROSSBAR_RESYNC	Timer reset event coming solely from software or SYNC input forces an output level transision
LL_HRTIM_CROSSBAR_TIMPER	Timer period event forces an output level transision
LL_HRTIM_CROSSBAR_TIMCMP1	Timer compare 1 event forces an output level transision
LL_HRTIM_CROSSBAR_TIMCMP2	Timer compare 2 event forces an output level transision
LL_HRTIM_CROSSBAR_TIMCMP3	Timer compare 3 event forces an output level transision
LL_HRTIM_CROSSBAR_TIMCMP4	Timer compare 4 event forces an output level transision

LL_HRTIM_CROSSBAR_MASTERPER	The master timer period event forces an output level transision
LL_HRTIM_CROSSBAR_MASTERCMP1	Master Timer compare 1 event forces an output level transision
LL_HRTIM_CROSSBAR_MASTERCMP2	Master Timer compare 2 event forces an output level transision
LL_HRTIM_CROSSBAR_MASTERCMP3	Master Timer compare 3 event forces an output level transision
LL_HRTIM_CROSSBAR_MASTERCMP4	Master Timer compare 4 event forces an output level transision
LL_HRTIM_CROSSBAR_TIMEV_1	Timer event 1 forces an output level transision
LL_HRTIM_CROSSBAR_TIMEV_2	Timer event 2 forces an output level transision
LL_HRTIM_CROSSBAR_TIMEV_3	Timer event 3 forces an output level transision
LL_HRTIM_CROSSBAR_TIMEV_4	Timer event 4 forces an output level transision
LL_HRTIM_CROSSBAR_TIMEV_5	Timer event 5 forces an output level transision
LL_HRTIM_CROSSBAR_TIMEV_6	Timer event 6 forces an output level transision
LL_HRTIM_CROSSBAR_TIMEV_7	Timer event 7 forces an output level transision
LL_HRTIM_CROSSBAR_TIMEV_8	Timer event 8 forces an output level transision
LL_HRTIM_CROSSBAR_TIMEV_9	Timer event 9 forces an output level transision
LL_HRTIM_CROSSBAR_EEV_1	External event 1 forces an output level transision
LL_HRTIM_CROSSBAR_EEV_2	External event 2 forces an output level transision
LL_HRTIM_CROSSBAR_EEV_3	External event 3 forces an output level transision
LL_HRTIM_CROSSBAR_EEV_4	External event 4 forces an output level transision
LL_HRTIM_CROSSBAR_EEV_5	External event 5 forces an output level transision
LL_HRTIM_CROSSBAR_EEV_6	External event 6 forces an output level transision
LL_HRTIM_CROSSBAR_EEV_7	External event 7 forces an output level transision
LL_HRTIM_CROSSBAR_EEV_8	External event 8 forces an output level transision
LL_HRTIM_CROSSBAR_EEV_9	External event 9 forces an output level transision
LL_HRTIM_CROSSBAR_EEV_10	External event 10 forces an output level transision
LL_HRTIM_CROSSBAR_UPDATE	Timer register update event forces an output level transision

DAC TRIGGER

LL_HRTIM_DACTRIG_NONE	No DAC synchronization event generated
LL_HRTIM_DACTRIG_DACTRIGOUT_1	DAC synchronization event generated on DACTrigOut1 output upon timer update
LL_HRTIM_DACTRIG_DACTRIGOUT_2	DAC synchronization event generated on DACTrigOut2 output upon timer update
LL_HRTIM_DACTRIG_DACTRIGOUT_3	DAC synchronization event generated on DACTrigOut3 output upon timer update

DLL CALIBRATION MODE

LL_HRTIM_DLLCALIBRATION_MODE_SINGLESHOT	Calibration is perfomed only once
LL_HRTIM_DLLCALIBRATION_MODE_CONTINUOUS	Calibration is performed periodically

DELAYED PROTECTION (DLYPRT) MODE

LL_HRTIM_DLYPRT_DELAYOUT1_EEV6	Timers A, B, C: Output 1 delayed Idle on external Event 6
LL_HRTIM_DLYPRT_DELAYOUT2_EEV6	Timers A, B, C: Output 2 delayed Idle on external Event 6
LL_HRTIM_DLYPRT_DELAYBOTH_EEV6	Timers A, B, C: Output 1 and output 2 delayed Idle on external Event 6
LL_HRTIM_DLYPRT_BALANCED_EEV6	Timers A, B, C: Balanced Idle on external Event 6
LL_HRTIM_DLYPRT_DELAYOUT1_EEV7	Timers A, B, C: Output 1 delayed Idle on external Event 7
LL_HRTIM_DLYPRT_DELAYOUT2_EEV7	Timers A, B, C: Output 2 delayed Idle on external Event 7
LL_HRTIM_DLYPRT_DELAYBOTH_EEV7	Timers A, B, C: Output 1 and output2 delayed Idle on external Event 7
LL_HRTIM_DLYPRT_BALANCED_EEV7	Timers A, B, C: Balanced Idle on external Event 7
LL_HRTIM_DLYPRT_DELAYOUT1_EEV8	Timers D, E: Output 1 delayed Idle on external Event 8
LL_HRTIM_DLYPRT_DELAYOUT2_EEV8	Timers D, E: Output 2 delayed Idle on external Event 8
LL_HRTIM_DLYPRT_DELAYBOTH_EEV8	Timers D, E: Output 1 and output 2 delayed Idle on external Event 8
LL_HRTIM_DLYPRT_BALANCED_EEV8	Timers D, E: Balanced Idle on external Event 8
LL_HRTIM_DLYPRT_DELAYOUT1_EEV9	Timers D, E: Output 1 delayed Idle on external Event 9
LL_HRTIM_DLYPRT_DELAYOUT2_EEV9	Timers D, E: Output 2 delayed Idle on external Event 9
LL_HRTIM_DLYPRT_DELAYBOTH_EEV9	Timers D, E: Output 1 and output2 delayed

	Idle on external Event 9
LL_HRTIM_DLYPRT_BALANCED_EEV9	Timers D, E: Balanced Idle on external Event 9

DEADTIME FALLING SIGN

LL_HRTIM_DT_FALLING_POSITIVE	Positive deadtime on falling edge
LL_HRTIM_DT_FALLING_NEGATIVE	Negative deadtime on falling edge

DEADTIME PRESCALER

LL_HRTIM_DT_PRESCALER_MUL8	fDTG = fHRTIM * 8
LL_HRTIM_DT_PRESCALER_MUL4	fDTG = fHRTIM * 4
LL_HRTIM_DT_PRESCALER_MUL2	fDTG = fHRTIM * 2
LL_HRTIM_DT_PRESCALER_DIV1	fDTG = fHRTIM
LL_HRTIM_DT_PRESCALER_DIV2	fDTG = fHRTIM / 2
LL_HRTIM_DT_PRESCALER_DIV4	fDTG = fHRTIM / 4
LL_HRTIM_DT_PRESCALER_DIV8	fDTG = fHRTIM / 8
LL_HRTIM_DT_PRESCALER_DIV16	fDTG = fHRTIM / 16

DEADTIME RISING SIGN

LL_HRTIM_DT_RISING_POSITIVE	Positive deadtime on rising edge
LL_HRTIM_DT_RISING_NEGATIVE	Negative deadtime on rising edge

EXTERNAL EVENT FAST MODE

LL_HRTIM_EE_FASTMODE_DISABLE	External Event is re-synchronized by the HRTIM logic before acting on outputs
LL_HRTIM_EE_FASTMODE_ENABLE	External Event is acting asynchronously on outputs (low latency mode)

EXTERNAL EVENT DIGITAL FILTER

LL_HRTIM_EE_FILTER_NONE	Filter disabled
LL_HRTIM_EE_FILTER_1	fSAMPLING = fHRTIM, N=2
LL_HRTIM_EE_FILTER_2	fSAMPLING = fHRTIM, N=4
LL_HRTIM_EE_FILTER_3	fSAMPLING = fHRTIM, N=8
LL_HRTIM_EE_FILTER_4	fSAMPLING = fEEVS/2, N=6
LL_HRTIM_EE_FILTER_5	fSAMPLING = fEEVS/2, N=8
LL_HRTIM_EE_FILTER_6	fSAMPLING = fEEVS/4, N=6
LL_HRTIM_EE_FILTER_7	fSAMPLING = fEEVS/4, N=8
LL_HRTIM_EE_FILTER_8	fSAMPLING = fEEVS/8, N=6
LL_HRTIM_EE_FILTER_9	fSAMPLING = fEEVS/8, N=8
LL_HRTIM_EE_FILTER_10	fSAMPLING = fEEVS/16, N=5
LL_HRTIM_EE_FILTER_11	fSAMPLING = fEEVS/16, N=6
LL_HRTIM_EE_FILTER_12	fSAMPLING = fEEVS/16, N=8

LL_HRTIM_EE_FILTER_13 fSAMPLING = fEEVS/32, N=5

LL_HRTIM_EE_FILTER_14 fSAMPLING = fEEVS/32, N=6

LL_HRTIM_EE_FILTER_15 fSAMPLING = fEEVS/32, N=8

EXTERNAL EVENT POLARITY

LL_HRTIM_EE_POLARITY_HIGH External event is active high

LL_HRTIM_EE_POLARITY_LOW External event is active low

EXTERNAL EVENT PRESCALER

LL_HRTIM_EE_PRESCALER_DIV1 fEEVS = fHRTIM

LL_HRTIM_EE_PRESCALER_DIV2 fEEVS = fHRTIM / 2

LL_HRTIM_EE_PRESCALER_DIV4 fEEVS = fHRTIM / 4

LL_HRTIM_EE_PRESCALER_DIV8 fEEVS = fHRTIM / 8

EXTERNAL EVENT SENSITIVITY

LL_HRTIM_EE_SENSITIVITY_LEVEL External event is active on level

LL_HRTIM_EE_SENSITIVITY_RISINGEDGE External event is active on Rising edge

LL_HRTIM_EE_SENSITIVITY_FALLINGEDGE External event is active on Falling edge

LL_HRTIM_EE_SENSITIVITY_BOTHEDGES External event is active on Rising and Falling edges

EXTERNAL EVENT SOURCE

LL_HRTIM_EE_SRC_1 External event source 1 (EExSrc1)

LL_HRTIM_EE_SRC_2 External event source 2 (EExSrc2)

LL_HRTIM_EE_SRC_3 External event source 3 (EExSrc3)

LL_HRTIM_EE_SRC_4 External event source 4 (EExSrc4)

EXTERNAL EVENT ID

LL_HRTIM_EVENT_1 External event channel 1 identifier

LL_HRTIM_EVENT_2 External event channel 2 identifier

LL_HRTIM_EVENT_3 External event channel 3 identifier

LL_HRTIM_EVENT_4 External event channel 4 identifier

LL_HRTIM_EVENT_5 External event channel 5 identifier

LL_HRTIM_EVENT_6 External event channel 6 identifier

LL_HRTIM_EVENT_7 External event channel 7 identifier

LL_HRTIM_EVENT_8 External event channel 8 identifier

LL_HRTIM_EVENT_9 External event channel 9 identifier

LL_HRTIM_EVENT_10 External event channel 10 identifier

FAULT ID

LL_HRTIM_FAULT_1 Fault channel 1 identifier

LL_HRTIM_FAULT_2 Fault channel 2 identifier

LL_HRTIM_FAULT_3 Fault channel 3 identifier

LL_HRTIM_FAULT_4 Fault channel 4 identifier

LL_HRTIM_FAULT_5 Fault channel 5 identifier

FAULT DIGITAL FILTER

LL_HRTIM_FLT_FILTER_NONE Filter disabled

LL_HRTIM_FLT_FILTER_1 fSAMPLING= fHRTIM, N=2

LL_HRTIM_FLT_FILTER_2 fSAMPLING= fHRTIM, N=4

LL_HRTIM_FLT_FILTER_3 fSAMPLING= fHRTIM, N=8

LL_HRTIM_FLT_FILTER_4 fSAMPLING= fFLTS/2, N=6

LL_HRTIM_FLT_FILTER_5 fSAMPLING= fFLTS/2, N=8

LL_HRTIM_FLT_FILTER_6 fSAMPLING= fFLTS/4, N=6

LL_HRTIM_FLT_FILTER_7 fSAMPLING= fFLTS/4, N=8

LL_HRTIM_FLT_FILTER_8 fSAMPLING= fFLTS/8, N=6

LL_HRTIM_FLT_FILTER_9 fSAMPLING= fFLTS/8, N=8

LL_HRTIM_FLT_FILTER_10 fSAMPLING= fFLTS/16, N=5

LL_HRTIM_FLT_FILTER_11 fSAMPLING= fFLTS/16, N=6

LL_HRTIM_FLT_FILTER_12 fSAMPLING= fFLTS/16, N=8

LL_HRTIM_FLT_FILTER_13 fSAMPLING= fFLTS/32, N=5

LL_HRTIM_FLT_FILTER_14 fSAMPLING= fFLTS/32, N=6

LL_HRTIM_FLT_FILTER_15 fSAMPLING= fFLTS/32, N=8

FAULT POLARITY

LL_HRTIM_FLT_POLARITY_LOW Fault input is active low

LL_HRTIM_FLT_POLARITY_HIGH Fault input is active high

BURST FAULT PRESCALER

LL_HRTIM_FLT_PRESCALER_DIV1 fFLTS = fHRTIM

LL_HRTIM_FLT_PRESCALER_DIV2 fFLTS = fHRTIM / 2

LL_HRTIM_FLT_PRESCALER_DIV4 fFLTS = fHRTIM / 4

LL_HRTIM_FLT_PRESCALER_DIV8 fFLTS = fHRTIM / 8

FAULT SOURCE

LL_HRTIM_FLT_SRC_DIGITALINPUT Fault input is FLT input pin

LL_HRTIM_FLT_SRC_INTERNAL Fault input is FLT_Int signal (e.g. internal comparator)

Get Flags Defines

LL_HRTIM_ISR_FLT1

LL_HRTIM_ISR_FLT2

LL_HRTIM_ISR_FLT3

LL_HRTIM_ISR_FLT4

LL_HRTIM_ISR_FLT5

LL_HRTIM_ISR_SYSFLT

LL_HRTIM_ISR_DLLRDY

LL_HRTIM_ISR_BMPER

LL_HRTIM_MISR_MCMP1

LL_HRTIM_MISR_MCMP2

LL_HRTIM_MISR_MCMP3

LL_HRTIM_MISR_MCMP4

LL_HRTIM_MISR_MREP

LL_HRTIM_MISR_SYNC

LL_HRTIM_MISR_MUPD

LL_HRTIM_TIMISR_CMP1

LL_HRTIM_TIMISR_CMP2

LL_HRTIM_TIMISR_CMP3

LL_HRTIM_TIMISR_CMP4

LL_HRTIM_TIMISR_REP

LL_HRTIM_TIMISR_UPD

LL_HRTIM_TIMISR_CPT1

LL_HRTIM_TIMISR_CPT2

LL_HRTIM_TIMISR_SET1

LL_HRTIM_TIMISR_RST1

LL_HRTIM_TIMISR_SET2

LL_HRTIM_TIMISR_RST2

LL_HRTIM_TIMISR_RST

LL_HRTIM_TIMISR_DLYPRT

IDLE PUSH-PULL STATUS

LL_HRTIM_IPPSTAT_OUTPUT1	Protection occurred when the output 1 was active and output 2 forced inactive
LL_HRTIM_IPPSTAT_OUTPUT2	Protection occurred when the output 2 was active and output 1 forced inactive

IT Defines

LL_HRTIM_IER_FLT1IE

LL_HRTIM_IER_FLT2IE

LL_HRTIM_IER_FLT3IE

LL_HRTIM_IER_FLT4IE

LL_HRTIM_IER_FLT5IE

LL_HRTIM_IER_SYSFLTIE

LL_HRTIM_IER_DLLRDYIE

LL_HRTIM_IER_BMPERIE

LL_HRTIM_MDIER_MCMP1IE

LL_HRTIM_MDIER_MCMP2IE

LL_HRTIM_MDIER_MCMP3IE

LL_HRTIM_MDIER_MCMP4IE

LL_HRTIM_MDIER_MREPIE

LL_HRTIM_MDIER_SYNCIE

LL_HRTIM_MDIER_MUPDIE

LL_HRTIM_TIMDIER_CMP1IE

LL_HRTIM_TIMDIER_CMP2IE

LL_HRTIM_TIMDIER_CMP3IE

LL_HRTIM_TIMDIER_CMP4IE

LL_HRTIM_TIMDIER_REPIE

LL_HRTIM_TIMDIER_UPDIE

LL_HRTIM_TIMDIER_CPT1IE

LL_HRTIM_TIMDIER_CPT2IE

LL_HRTIM_TIMDIER_SET1IE

LL_HRTIM_TIMDIER_RST1IE

LL_HRTIM_TIMDIER_SET2IE

LL_HRTIM_TIMDIER_RST2IE

LL_HRTIM_TIMDIER_RSTIE

LL_HRTIM_TIMDIER_DLYPRTIE

COUNTER MODE

LL_HRTIM_MODE_CONTINUOUS	The timer operates in continuous (free-running) mode
LL_HRTIM_MODE_SINGLESHOT	The timer operates in non retriggerable single-shot mode
LL_HRTIM_MODE_RETRIGGERABLE	The timer operates in retriggerable single-shot mode

OUTPUT ID

LL_HRTIM_OUTPUT_TA1	Timer A - Output 1 identifier
LL_HRTIM_OUTPUT_TA2	Timer A - Output 2 identifier
LL_HRTIM_OUTPUT_TB1	Timer B - Output 1 identifier
LL_HRTIM_OUTPUT_TB2	Timer B - Output 2 identifier
LL_HRTIM_OUTPUT_TC1	Timer C - Output 1 identifier
LL_HRTIM_OUTPUT_TC2	Timer C - Output 2 identifier
LL_HRTIM_OUTPUT_TD1	Timer D - Output 1 identifier

LL_HRTIM_OUTPUT_TD2	Timer D - Output 2 identifier
LL_HRTIM_OUTPUT_TE1	Timer E - Output 1 identifier
LL_HRTIM_OUTPUT_TE2	Timer E - Output 2 identifier

OUTPUT STATE

LL_HRTIM_OUTPUTSTATE_IDLE	Main operating mode, where the output can take the active or inactive level as programmed in the crossbar unit
LL_HRTIM_OUTPUTSTATE_RUN	Default operating state (e.g. after an HRTIM reset, when the outputs are disabled by software or during a burst mode operation)
LL_HRTIM_OUTPUTSTATE_FAULT	Safety state, entered in case of a shut-down request on FAULTx inputs

OUTPUT BURST MODE ENTRY MODE

LL_HRTIM_OUT_BM_ENTRYMODE_REGULAR	The programmed Idle state is applied immediately to the Output
LL_HRTIM_OUT_BM_ENTRYMODE_DELAYED	Deadtime is inserted on output before entering the idle mode

OUTPUT CHOPPER MODE

LL_HRTIM_OUT_CHOPPERMODE_DISABLED	Output signal is not altered
LL_HRTIM_OUT_CHOPPERMODE_ENABLED	Output signal is chopped by a carrier signal

OUTPUT FAULT STATE

LL_HRTIM_OUT_FAULTSTATE_NO_ACTION	The output is not affected by the fault input
LL_HRTIM_OUT_FAULTSTATE_ACTIVE	Output at active level when in FAULT state
LL_HRTIM_OUT_FAULTSTATE_INACTIVE	Output at inactive level when in FAULT state
LL_HRTIM_OUT_FAULTSTATE_HIGHZ	Output is tri-stated when in FAULT state

OUTPUT IDLE LEVEL

LL_HRTIM_OUT_IDLELEVEL_INACTIVE	Output at inactive level when in IDLE state
LL_HRTIM_OUT_IDLELEVEL_ACTIVE	Output at active level when in IDLE state

OUTPUT IDLE MODE

LL_HRTIM_OUT_NO_IDLE	The output is not affected by the burst mode operation
LL_HRTIM_OUT_IDLE_WHEN_BURST	The output is in idle state when requested by the burst mode controller

OUTPUT LEVEL

LL_HRTIM_OUT_LEVEL_INACTIVE	Corresponds to a logic level 0 for a positive polarity (High) and to a logic level 1 for a negative polarity (Low)

LL_HRTIM_OUT_LEVEL_ACTIVE	Corresponds to a logic level 1 for a positive polarity (High) and to a logic level 0 for a negative polarity (Low)

OUPUT_POLARITY

LL_HRTIM_OUT_POSITIVE_POLARITY	Output is acitve HIGH
LL_HRTIM_OUT_NEGATIVE_POLARITY	Output is active LOW

PRESCALER RATIO

LL_HRTIM_PRESCALERRATIO_MUL32	fHRCK: fHRTIM x 32 = 4.608 GHz - Resolution: 217 ps - Min PWM frequency: 70.3 kHz (fHRTIM=144MHz)
LL_HRTIM_PRESCALERRATIO_MUL16	fHRCK: fHRTIM x 16 = 2.304 GHz - Resolution: 434 ps - Min PWM frequency: 35.1 KHz (fHRTIM=144MHz)
LL_HRTIM_PRESCALERRATIO_MUL8	fHRCK: fHRTIM x 8 = 1.152 GHz - Resolution: 868 ps - Min PWM frequency: 17.6 kHz (fHRTIM=144MHz)
LL_HRTIM_PRESCALERRATIO_MUL4	fHRCK: fHRTIM x 4 = 576 MHz - Resolution: 1.73 ns - Min PWM frequency: 8.8 kHz (fHRTIM=144MHz)
LL_HRTIM_PRESCALERRATIO_MUL2	fHRCK: fHRTIM x 2 = 288 MHz - Resolution: 3.47 ns - Min PWM frequency: 4.4 kHz (fHRTIM=144MHz)
LL_HRTIM_PRESCALERRATIO_DIV1	fHRCK: fHRTIM = 144 MHz - Resolution: 6.95 ns - Min PWM frequency: 2.2 kHz (fHRTIM=144MHz)
LL_HRTIM_PRESCALERRATIO_DIV2	fHRCK: fHRTIM / 2 = 72 MHz - Resolution: 13.88 ns- Min PWM frequency: 1.1 kHz (fHRTIM=144MHz)
LL_HRTIM_PRESCALERRATIO_DIV4	fHRCK: fHRTIM / 4 = 36 MHz - Resolution: 27.7 ns- Min PWM frequency: 550Hz (fHRTIM=144MHz)

RESET TRIGGER

LL_HRTIM_RESETTRIG_NONE	No counter reset trigger
LL_HRTIM_RESETTRIG_UPDATE	The timer counter is reset upon update event
LL_HRTIM_RESETTRIG_CMP2	The timer counter is reset upon Timer Compare 2 event
LL_HRTIM_RESETTRIG_CMP4	The timer counter is reset upon Timer Compare 4 event
LL_HRTIM_RESETTRIG_MASTER_PER	The timer counter is reset upon master timer period event
LL_HRTIM_RESETTRIG_MASTER_CMP1	The timer counter is reset upon master timer Compare 1 event
LL_HRTIM_RESETTRIG_MASTER_CMP2	The timer counter is reset upon master timer Compare 2 event

LL_HRTIM_RESETTRIG_MASTER_CMP3	The timer counter is reset upon master timer Compare 3 event
LL_HRTIM_RESETTRIG_MASTER_CMP4	The timer counter is reset upon master timer Compare 4 event
LL_HRTIM_RESETTRIG_EEV_1	The timer counter is reset upon external event 1
LL_HRTIM_RESETTRIG_EEV_2	The timer counter is reset upon external event 2
LL_HRTIM_RESETTRIG_EEV_3	The timer counter is reset upon external event 3
LL_HRTIM_RESETTRIG_EEV_4	The timer counter is reset upon external event 4
LL_HRTIM_RESETTRIG_EEV_5	The timer counter is reset upon external event 5
LL_HRTIM_RESETTRIG_EEV_6	The timer counter is reset upon external event 6
LL_HRTIM_RESETTRIG_EEV_7	The timer counter is reset upon external event 7
LL_HRTIM_RESETTRIG_EEV_8	The timer counter is reset upon external event 8
LL_HRTIM_RESETTRIG_EEV_9	The timer counter is reset upon external event 9
LL_HRTIM_RESETTRIG_EEV_10	The timer counter is reset upon external event 10
LL_HRTIM_RESETTRIG_OTHER1_CMP1	The timer counter is reset upon other timer Compare 1 event
LL_HRTIM_RESETTRIG_OTHER1_CMP2	The timer counter is reset upon other timer Compare 2 event
LL_HRTIM_RESETTRIG_OTHER1_CMP4	The timer counter is reset upon other timer Compare 4 event
LL_HRTIM_RESETTRIG_OTHER2_CMP1	The timer counter is reset upon other timer Compare 1 event
LL_HRTIM_RESETTRIG_OTHER2_CMP2	The timer counter is reset upon other timer Compare 2 event
LL_HRTIM_RESETTRIG_OTHER2_CMP4	The timer counter is reset upon other timer Compare 4 event
LL_HRTIM_RESETTRIG_OTHER3_CMP1	The timer counter is reset upon other timer Compare 1 event
LL_HRTIM_RESETTRIG_OTHER3_CMP2	The timer counter is reset upon other timer Compare 2 event
LL_HRTIM_RESETTRIG_OTHER3_CMP4	The timer counter is reset upon other timer Compare 4 event
LL_HRTIM_RESETTRIG_OTHER4_CMP1	The timer counter is reset upon other timer Compare 1 event

LL_HRTIM_RESETTRIG_OTHER4_CMP2	The timer counter is reset upon other timer Compare 2 event
LL_HRTIM_RESETTRIG_OTHER4_CMP4	The timer counter is reset upon other timer Compare 4 event

SYNCHRONIZATION INPUT SOURCE

LL_HRTIM_SYNCIN_SRC_NONE	HRTIM is not synchronized and runs in standalone mode
LL_HRTIM_SYNCIN_SRC_TIM_EVENT	The HRTIM is synchronized with the on-chip timer
LL_HRTIM_SYNCIN_SRC_EXTERNAL_EVENT	A positive pulse on SYNCIN input triggers the HRTIM

SYNCHRONIZATION OUTPUT POLARITY

LL_HRTIM_SYNCOUT_DISABLED	Synchronization output event is disabled
LL_HRTIM_SYNCOUT_POSITIVE_PULSE	SCOUT pin has a low idle level and issues a positive pulse of 16 fHRTIM clock cycles length for the synchronization
LL_HRTIM_SYNCOUT_NEGATIVE_PULSE	SCOUT pin has a high idle level and issues a negative pulse of 16 fHRTIM clock cycles length for the synchronization

SYNCHRONIZATION OUTPUT SOURCE

LL_HRTIM_SYNCOUT_SRC_MASTER_START	A pulse is sent on the SYNCOUT output upon master timer start event
LL_HRTIM_SYNCOUT_SRC_MASTER_CMP1	A pulse is sent on the SYNCOUT output upon master timer compare 1 event
LL_HRTIM_SYNCOUT_SRC_TIMA_START	A pulse is sent on the SYNCOUT output upon timer A start or reset events
LL_HRTIM_SYNCOUT_SRC_TIMA_CMP1	A pulse is sent on the SYNCOUT output upon timer A compare 1 event

TIMER ID

LL_HRTIM_TIMER_MASTER	Master timer identifier
LL_HRTIM_TIMER_A	Timer A identifier
LL_HRTIM_TIMER_B	Timer B identifier
LL_HRTIM_TIMER_C	Timer C identifier
LL_HRTIM_TIMER_D	Timer D identifier
LL_HRTIM_TIMER_E	Timer E identifier

TIMER EXTERNAL EVENT FILTER

LL_HRTIM_EEFLTR_NONE	
LL_HRTIM_EEFLTR_BLANKINGCMP1	Blanking from counter reset/roll-over to Compare 1
LL_HRTIM_EEFLTR_BLANKINGCMP2	Blanking from counter reset/roll-over to Compare 2

LL_HRTIM_EEFLTR_BLANKINGCMP3	Blanking from counter reset/roll-over to Compare 3
LL_HRTIM_EEFLTR_BLANKINGCMP4	Blanking from counter reset/roll-over to Compare 4
LL_HRTIM_EEFLTR_BLANKINGFLTR1	Blanking from another timing unit: TIMFLTR1 source
LL_HRTIM_EEFLTR_BLANKINGFLTR2	Blanking from another timing unit: TIMFLTR2 source
LL_HRTIM_EEFLTR_BLANKINGFLTR3	Blanking from another timing unit: TIMFLTR3 source
LL_HRTIM_EEFLTR_BLANKINGFLTR4	Blanking from another timing unit: TIMFLTR4 source
LL_HRTIM_EEFLTR_BLANKINGFLTR5	Blanking from another timing unit: TIMFLTR5 source
LL_HRTIM_EEFLTR_BLANKINGFLTR6	Blanking from another timing unit: TIMFLTR6 source
LL_HRTIM_EEFLTR_BLANKINGFLTR7	Blanking from another timing unit: TIMFLTR7 source
LL_HRTIM_EEFLTR_BLANKINGFLTR8	Blanking from another timing unit: TIMFLTR8 source
LL_HRTIM_EEFLTR_WINDOWINGCMP2	Windowing from counter reset/roll-over to Compare 2
LL_HRTIM_EEFLTR_WINDOWINGCMP3	Windowing from counter reset/roll-over to Compare 3
LL_HRTIM_EEFLTR_WINDOWINGTIM	Windowing from another timing unit: TIMWIN source

TIMER EXTERNAL EVENT LATCH STATUS

LL_HRTIM_EELATCH_DISABLED	Event is ignored if it happens during a blank, or passed through during a window
LL_HRTIM_EELATCH_ENABLED	Event is latched and delayed till the end of the blanking or windowing period

UPDATE GATING

LL_HRTIM_UPDATEGATING_INDEPENDENT	Update done independently from the DMA burst transfer completion
LL_HRTIM_UPDATEGATING_DMABURST	Update done when the DMA burst transfer is completed
LL_HRTIM_UPDATEGATING_DMABURST_UPDATE	Update done on timer roll-over following a DMA burst transfer completion
LL_HRTIM_UPDATEGATING_UPDEN1	Slave timer only - Update done on a rising edge of HRTIM update enable input 1
LL_HRTIM_UPDATEGATING_UPDEN2	Slave timer only - Update done on a rising edge of HRTIM update

	enable input 2
LL_HRTIM_UPDATEGATING_UPDEN3	Slave timer only - Update done on a rising edge of HRTIM update enable input 3
LL_HRTIM_UPDATEGATING_UPDEN1_UPDATE	Slave timer only - Update done on the update event following a rising edge of HRTIM update enable input 1
LL_HRTIM_UPDATEGATING_UPDEN2_UPDATE	Slave timer only - Update done on the update event following a rising edge of HRTIM update enable input 2
LL_HRTIM_UPDATEGATING_UPDEN3_UPDATE	Slave timer only - Update done on the update event following a rising edge of HRTIM update enable input 3

UPDATE TRIGGER

LL_HRTIM_UPDATETRIG_NONE	Register update is disabled
LL_HRTIM_UPDATETRIG_MASTER	Register update is triggered by the master timer update
LL_HRTIM_UPDATETRIG_TIMER_A	Register update is triggered by the timer A update
LL_HRTIM_UPDATETRIG_TIMER_B	Register update is triggered by the timer B update
LL_HRTIM_UPDATETRIG_TIMER_C	Register update is triggered by the timer C update
LL_HRTIM_UPDATETRIG_TIMER_D	Register update is triggered by the timer D update
LL_HRTIM_UPDATETRIG_TIMER_E	Register update is triggered by the timer E update
LL_HRTIM_UPDATETRIG_REPETITION	Register update is triggered when the counter rolls over and HRTIM_REPx = 0
LL_HRTIM_UPDATETRIG_RESET	Register update is triggered by counter reset or roll-over to 0 after reaching the period value in continuous mode

Exported_Macros

__LL_HRTIM_GET_OUTPUT_STATE

Description:

- HELPER macro returning the output state from output enable/disable status.

Parameters:

- __OUTPUT_STATUS_EN__: output enable status
- __OUTPUT_STATUS_DIS__: output Disable status

Return value:

- Returned: value can be one of the following values:

- LL_HRTIM_OUTPUTSTATE_IDLE
- LL_HRTIM_OUTPUTSTATE_RUN
- LL_HRTIM_OUTPUTSTATE_FAULT

Common Write and read registers Macros

LL_HRTIM_WriteReg

Description:

- Write a value in HRTIM register.

Parameters:

- __INSTANCE__: HRTIM Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_HRTIM_ReadReg

Description:

- Read a value in HRTIM register.

Parameters:

- __INSTANCE__: HRTIM Instance
- __REG__: Register to be read

Return value:

- Register: value

69 LL I2C Generic Driver

69.1 I2C Firmware driver registers structures

69.1.1 LL_I2C_InitTypeDef

Data Fields

- ***uint32_t PeripheralMode***
- ***uint32_t Timing***
- ***uint32_t AnalogFilter***
- ***uint32_t DigitalFilter***
- ***uint32_t OwnAddress1***
- ***uint32_t TypeAcknowledge***
- ***uint32_t OwnAddrSize***

Field Documentation

- ***uint32_t LL_I2C_InitTypeDef::PeripheralMode***
  Specifies the peripheral mode. This parameter can be a value of ***I2C_LL_EC_PERIPHERAL_MODE***This feature can be modified afterwards using unitary function **LL_I2C_SetMode()**.
- ***uint32_t LL_I2C_InitTypeDef::Timing***
  Specifies the SDA setup, hold time and the SCL high, low period values. This parameter must be set by referring to the STM32CubeMX Tool and the helper macro **__LL_I2C_CONVERT_TIMINGS()**This feature can be modified afterwards using unitary function **LL_I2C_SetTiming()**.
- ***uint32_t LL_I2C_InitTypeDef::AnalogFilter***
  Enables or disables analog noise filter. This parameter can be a value of ***I2C_LL_EC_ANALOGFILTER_SELECTION***This feature can be modified afterwards using unitary functions **LL_I2C_EnableAnalogFilter()** or **LL_I2C_DisableAnalogFilter()**.
- ***uint32_t LL_I2C_InitTypeDef::DigitalFilter***
  Configures the digital noise filter. This parameter can be a number between Min_Data = 0x00 and Max_Data = 0x0FThis feature can be modified afterwards using unitary function **LL_I2C_SetDigitalFilter()**.
- ***uint32_t LL_I2C_InitTypeDef::OwnAddress1***
  Specifies the device own address 1. This parameter must be a value between Min_Data = 0x00 and Max_Data = 0x3FFThis feature can be modified afterwards using unitary function **LL_I2C_SetOwnAddress1()**.
- ***uint32_t LL_I2C_InitTypeDef::TypeAcknowledge***
  Specifies the ACKnowledge or Non ACKnowledge condition after the address receive match code or next received byte. This parameter can be a value of ***I2C_LL_EC_I2C_ACKNOWLEDGE***This feature can be modified afterwards using unitary function **LL_I2C_AcknowledgeNextData()**.
- ***uint32_t LL_I2C_InitTypeDef::OwnAddrSize***
  Specifies the device own address 1 size (7-bit or 10-bit). This parameter can be a value of ***I2C_LL_EC_OWNADDRESS1***This feature can be modified afterwards using unitary function **LL_I2C_SetOwnAddress1()**.

69.2 I2C Firmware driver API description

69.2.1 Detailed description of functions

LL_I2C_Enable

Function name	**__STATIC_INLINE void LL_I2C_Enable (I2C_TypeDef * I2Cx)**
Function description	Enable I2C peripheral (PE = 1).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 PE LL_I2C_Enable

LL_I2C_Disable

Function name	**__STATIC_INLINE void LL_I2C_Disable (I2C_TypeDef * I2Cx)**
Function description	Disable I2C peripheral (PE = 0).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• When PE = 0, the I2C SCL and SDA lines are released. Internal state machines and status bits are put back to their reset value. When cleared, PE must be kept low for at least 3 APB clock cycles.
Reference Manual to LL API cross reference:	• CR1 PE LL_I2C_Disable

LL_I2C_IsEnabled

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabled (I2C_TypeDef * I2Cx)**
Function description	Check if the I2C peripheral is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 PE LL_I2C_IsEnabled

LL_I2C_ConfigFilters

Function name	**__STATIC_INLINE void LL_I2C_ConfigFilters (I2C_TypeDef * I2Cx, uint32_t AnalogFilter, uint32_t DigitalFilter)**
Function description	Configure Noise Filters (Analog and Digital).
Parameters	• **I2Cx:** I2C Instance. • **AnalogFilter:** This parameter can be one of the following

values:
  - LL_I2C_ANALOGFILTER_ENABLE
  - LL_I2C_ANALOGFILTER_DISABLE
- **DigitalFilter:** This parameter must be a value between Min_Data=0x00 (Digital filter disabled) and Max_Data=0x0F (Digital filter enabled and filtering capability up to 15*ti2cclk). This parameter is used to configure the digital noise filter on SDA and SCL input. The digital filter will filter spikes with a length of up to DNF[3:0]*ti2cclk.

Return values
- **None**

Notes
- If the analog filter is also enabled, the digital filter is added to analog filter. The filters can only be programmed when the I2C is disabled (PE = 0).

Reference Manual to LL API cross reference:
- CR1 ANFOFF LL_I2C_ConfigFilters
- CR1 DNF LL_I2C_ConfigFilters

LL_I2C_SetDigitalFilter

Function name
__STATIC_INLINE void LL_I2C_SetDigitalFilter (I2C_TypeDef * I2Cx, uint32_t DigitalFilter)

Function description
Configure Digital Noise Filter.

Parameters
- **I2Cx:** I2C Instance.
- **DigitalFilter:** This parameter must be a value between Min_Data=0x00 (Digital filter disabled) and Max_Data=0x0F (Digital filter enabled and filtering capability up to 15*ti2cclk). This parameter is used to configure the digital noise filter on SDA and SCL input. The digital filter will filter spikes with a length of up to DNF[3:0]*ti2cclk.

Return values
- **None**

Notes
- If the analog filter is also enabled, the digital filter is added to analog filter. This filter can only be programmed when the I2C is disabled (PE = 0).

Reference Manual to LL API cross reference:
- CR1 DNF LL_I2C_SetDigitalFilter

LL_I2C_GetDigitalFilter

Function name
__STATIC_INLINE uint32_t LL_I2C_GetDigitalFilter (I2C_TypeDef * I2Cx)

Function description
Get the current Digital Noise Filter configuration.

Parameters
- **I2Cx:** I2C Instance.

Return values
- **Value:** between Min_Data=0x0 and Max_Data=0xF

Reference Manual to LL API cross reference:
- CR1 DNF LL_I2C_GetDigitalFilter

LL_I2C_EnableAnalogFilter

Function name	**__STATIC_INLINE void LL_I2C_EnableAnalogFilter (I2C_TypeDef * I2Cx)**
Function description	Enable Analog Noise Filter.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• This filter can only be programmed when the I2C is disabled (PE = 0).
Reference Manual to LL API cross reference:	• CR1 ANFOFF LL_I2C_EnableAnalogFilter

LL_I2C_DisableAnalogFilter

Function name	**__STATIC_INLINE void LL_I2C_DisableAnalogFilter (I2C_TypeDef * I2Cx)**
Function description	Disable Analog Noise Filter.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• This filter can only be programmed when the I2C is disabled (PE = 0).
Reference Manual to LL API cross reference:	• CR1 ANFOFF LL_I2C_DisableAnalogFilter

LL_I2C_IsEnabledAnalogFilter

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledAnalogFilter (I2C_TypeDef * I2Cx)**
Function description	Check if Analog Noise Filter is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 ANFOFF LL_I2C_IsEnabledAnalogFilter

LL_I2C_EnableDMAReq_TX

Function name	**__STATIC_INLINE void LL_I2C_EnableDMAReq_TX (I2C_TypeDef * I2Cx)**
Function description	Enable DMA transmission requests.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**

Reference Manual to LL API cross reference:	• CR1 TXDMAEN LL_I2C_EnableDMAReq_TX

LL_I2C_DisableDMAReq_TX

Function name	**__STATIC_INLINE void LL_I2C_DisableDMAReq_TX (I2C_TypeDef * I2Cx)**
Function description	Disable DMA transmission requests.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 TXDMAEN LL_I2C_DisableDMAReq_TX

LL_I2C_IsEnabledDMAReq_TX

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledDMAReq_TX (I2C_TypeDef * I2Cx)**
Function description	Check if DMA transmission requests are enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 TXDMAEN LL_I2C_IsEnabledDMAReq_TX

LL_I2C_EnableDMAReq_RX

Function name	**__STATIC_INLINE void LL_I2C_EnableDMAReq_RX (I2C_TypeDef * I2Cx)**
Function description	Enable DMA reception requests.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 RXDMAEN LL_I2C_EnableDMAReq_RX

LL_I2C_DisableDMAReq_RX

Function name	**__STATIC_INLINE void LL_I2C_DisableDMAReq_RX (I2C_TypeDef * I2Cx)**
Function description	Disable DMA reception requests.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**

Reference Manual to LL API cross reference:	• CR1 RXDMAEN LL_I2C_DisableDMAReq_RX

LL_I2C_IsEnabledDMAReq_RX

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledDMAReq_RX (I2C_TypeDef * I2Cx)**
Function description	Check if DMA reception requests are enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 RXDMAEN LL_I2C_IsEnabledDMAReq_RX

LL_I2C_DMA_GetRegAddr

Function name	**__STATIC_INLINE uint32_t LL_I2C_DMA_GetRegAddr (I2C_TypeDef * I2Cx, uint32_t Direction)**
Function description	Get the data register address used for DMA transfer.
Parameters	• **I2Cx:** I2C Instance • **Direction:** This parameter can be one of the following values: – LL_I2C_DMA_REG_DATA_TRANSMIT – LL_I2C_DMA_REG_DATA_RECEIVE
Return values	• **Address:** of data register
Reference Manual to LL API cross reference:	• TXDR TXDATA LL_I2C_DMA_GetRegAddr • RXDR RXDATA LL_I2C_DMA_GetRegAddr

LL_I2C_EnableClockStretching

Function name	**__STATIC_INLINE void LL_I2C_EnableClockStretching (I2C_TypeDef * I2Cx)**
Function description	Enable Clock stretching.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• This bit can only be programmed when the I2C is disabled (PE = 0).
Reference Manual to LL API cross reference:	• CR1 NOSTRETCH LL_I2C_EnableClockStretching

LL_I2C_DisableClockStretching

Function name	**__STATIC_INLINE void LL_I2C_DisableClockStretching (I2C_TypeDef * I2Cx)**
Function description	Disable Clock stretching.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• This bit can only be programmed when the I2C is disabled (PE = 0).
Reference Manual to LL API cross reference:	• CR1 NOSTRETCH LL_I2C_DisableClockStretching

LL_I2C_IsEnabledClockStretching

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledClockStretching (I2C_TypeDef * I2Cx)**
Function description	Check if Clock stretching is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 NOSTRETCH LL_I2C_IsEnabledClockStretching

LL_I2C_EnableSlaveByteControl

Function name	**__STATIC_INLINE void LL_I2C_EnableSlaveByteControl (I2C_TypeDef * I2Cx)**
Function description	Enable hardware byte control in slave mode.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 SBC LL_I2C_EnableSlaveByteControl

LL_I2C_DisableSlaveByteControl

Function name	**__STATIC_INLINE void LL_I2C_DisableSlaveByteControl (I2C_TypeDef * I2Cx)**
Function description	Disable hardware byte control in slave mode.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 SBC LL_I2C_DisableSlaveByteControl

LL_I2C_IsEnabledSlaveByteControl

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledSlaveByteControl (I2C_TypeDef * I2Cx)**
Function description	Check if hardware byte control in slave mode is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 SBC LL_I2C_IsEnabledSlaveByteControl

LL_I2C_EnableWakeUpFromStop

Function name	**__STATIC_INLINE void LL_I2C_EnableWakeUpFromStop (I2C_TypeDef * I2Cx)**
Function description	Enable Wakeup from STOP.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• Macro IS_I2C_WAKEUP_FROMSTOP_INSTANCE(I2Cx) can be used to check whether or not WakeUpFromStop feature is supported by the I2Cx Instance. • This bit can only be programmed when Digital Filter is disabled.
Reference Manual to LL API cross reference:	• CR1 WUPEN LL_I2C_EnableWakeUpFromStop

LL_I2C_DisableWakeUpFromStop

Function name	**__STATIC_INLINE void LL_I2C_DisableWakeUpFromStop (I2C_TypeDef * I2Cx)**
Function description	Disable Wakeup from STOP.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• Macro IS_I2C_WAKEUP_FROMSTOP_INSTANCE(I2Cx) can be used to check whether or not WakeUpFromStop feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• CR1 WUPEN LL_I2C_DisableWakeUpFromStop

LL_I2C_IsEnabledWakeUpFromStop

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledWakeUpFromStop (I2C_TypeDef * I2Cx)**
Function description	Check if Wakeup from STOP is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_I2C_WAKEUP_FROMSTOP_INSTANCE(I2Cx) can be used to check whether or not WakeUpFromStop feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• CR1 WUPEN LL_I2C_IsEnabledWakeUpFromStop

LL_I2C_EnableGeneralCall

Function name	**__STATIC_INLINE void LL_I2C_EnableGeneralCall (I2C_TypeDef * I2Cx)**
Function description	Enable General Call.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• When enabled the Address 0x00 is ACKed.
Reference Manual to LL API cross reference:	• CR1 GCEN LL_I2C_EnableGeneralCall

LL_I2C_DisableGeneralCall

Function name	**__STATIC_INLINE void LL_I2C_DisableGeneralCall (I2C_TypeDef * I2Cx)**
Function description	Disable General Call.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• When disabled the Address 0x00 is NACKed.
Reference Manual to LL API cross reference:	• CR1 GCEN LL_I2C_DisableGeneralCall

LL_I2C_IsEnabledGeneralCall

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledGeneralCall (I2C_TypeDef * I2Cx)**
Function description	Check if General Call is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CR1 GCEN LL_I2C_IsEnabledGeneralCall

LL_I2C_SetMasterAddressingMode

Function name: **__STATIC_INLINE void LL_I2C_SetMasterAddressingMode (I2C_TypeDef * I2Cx, uint32_t AddressingMode)**

Function description: Configure the Master to operate in 7-bit or 10-bit addressing mode.

Parameters:
- **I2Cx:** I2C Instance.
- **AddressingMode:** This parameter can be one of the following values:
  - LL_I2C_ADDRESSING_MODE_7BIT
  - LL_I2C_ADDRESSING_MODE_10BIT

Return values:
- **None**

Notes:
- Changing this bit is not allowed, when the START bit is set.

Reference Manual to LL API cross reference:
- CR2 ADD10 LL_I2C_SetMasterAddressingMode

LL_I2C_GetMasterAddressingMode

Function name: **__STATIC_INLINE uint32_t LL_I2C_GetMasterAddressingMode (I2C_TypeDef * I2Cx)**

Function description: Get the Master addressing mode.

Parameters:
- **I2Cx:** I2C Instance.

Return values:
- **Returned:** value can be one of the following values:
  - LL_I2C_ADDRESSING_MODE_7BIT
  - LL_I2C_ADDRESSING_MODE_10BIT

Reference Manual to LL API cross reference:
- CR2 ADD10 LL_I2C_GetMasterAddressingMode

LL_I2C_SetOwnAddress1

Function name: **__STATIC_INLINE void LL_I2C_SetOwnAddress1 (I2C_TypeDef * I2Cx, uint32_t OwnAddress1, uint32_t OwnAddrSize)**

Function description: Set the Own Address1.

Parameters:
- **I2Cx:** I2C Instance.
- **OwnAddress1:** This parameter must be a value between Min_Data=0 and Max_Data=0x3FF.
- **OwnAddrSize:** This parameter can be one of the following values:
  - LL_I2C_OWNADDRESS1_7BIT
  - LL_I2C_OWNADDRESS1_10BIT

Return values:
- **None**

Reference Manual to LL API cross reference:	• OAR1 OA1 LL_I2C_SetOwnAddress1 • OAR1 OA1MODE LL_I2C_SetOwnAddress1

LL_I2C_EnableOwnAddress1

Function name	**__STATIC_INLINE void LL_I2C_EnableOwnAddress1 (I2C_TypeDef * I2Cx)**
Function description	Enable acknowledge on Own Address1 match address.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• OAR1 OA1EN LL_I2C_EnableOwnAddress1

LL_I2C_DisableOwnAddress1

Function name	**__STATIC_INLINE void LL_I2C_DisableOwnAddress1 (I2C_TypeDef * I2Cx)**
Function description	Disable acknowledge on Own Address1 match address.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• OAR1 OA1EN LL_I2C_DisableOwnAddress1

LL_I2C_IsEnabledOwnAddress1

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledOwnAddress1 (I2C_TypeDef * I2Cx)**
Function description	Check if Own Address1 acknowledge is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• OAR1 OA1EN LL_I2C_IsEnabledOwnAddress1

LL_I2C_SetOwnAddress2

Function name	**__STATIC_INLINE void LL_I2C_SetOwnAddress2 (I2C_TypeDef * I2Cx, uint32_t OwnAddress2, uint32_t OwnAddrMask)**
Function description	Set the 7bits Own Address2.
Parameters	• **I2Cx:** I2C Instance. • **OwnAddress2:** Value between Min_Data=0 and Max_Data=0x7F.

- **OwnAddrMask:** This parameter can be one of the following values:
  - LL_I2C_OWNADDRESS2_NOMASK
  - LL_I2C_OWNADDRESS2_MASK01
  - LL_I2C_OWNADDRESS2_MASK02
  - LL_I2C_OWNADDRESS2_MASK03
  - LL_I2C_OWNADDRESS2_MASK04
  - LL_I2C_OWNADDRESS2_MASK05
  - LL_I2C_OWNADDRESS2_MASK06
  - LL_I2C_OWNADDRESS2_MASK07

Return values
- **None**

Notes
- This action has no effect if own address2 is enabled.

Reference Manual to LL API cross reference:
- OAR2 OA2 LL_I2C_SetOwnAddress2
- OAR2 OA2MSK LL_I2C_SetOwnAddress2

LL_I2C_EnableOwnAddress2

Function name
__STATIC_INLINE void LL_I2C_EnableOwnAddress2 (I2C_TypeDef * I2Cx)

Function description
Enable acknowledge on Own Address2 match address.

Parameters
- **I2Cx:** I2C Instance.

Return values
- **None**

Reference Manual to LL API cross reference:
- OAR2 OA2EN LL_I2C_EnableOwnAddress2

LL_I2C_DisableOwnAddress2

Function name
__STATIC_INLINE void LL_I2C_DisableOwnAddress2 (I2C_TypeDef * I2Cx)

Function description
Disable acknowledge on Own Address2 match address.

Parameters
- **I2Cx:** I2C Instance.

Return values
- **None**

Reference Manual to LL API cross reference:
- OAR2 OA2EN LL_I2C_DisableOwnAddress2

LL_I2C_IsEnabledOwnAddress2

Function name
__STATIC_INLINE uint32_t LL_I2C_IsEnabledOwnAddress2 (I2C_TypeDef * I2Cx)

Function description
Check if Own Address1 acknowledge is enabled or disabled.

Parameters
- **I2Cx:** I2C Instance.

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• OAR2 OA2EN LL_I2C_IsEnabledOwnAddress2

LL_I2C_SetTiming

Function name	**__STATIC_INLINE void LL_I2C_SetTiming (I2C_TypeDef * I2Cx, uint32_t Timing)**
Function description	Configure the SDA setup, hold time and the SCL high, low period.
Parameters	• **I2Cx:** I2C Instance. • **Timing:** This parameter must be a value between Min_Data=0 and Max_Data=0xFFFFFFFF.
Return values	• **None**
Notes	• This bit can only be programmed when the I2C is disabled (PE = 0). • This parameter is computed with the STM32CubeMX Tool.
Reference Manual to LL API cross reference:	• TIMINGR TIMINGR LL_I2C_SetTiming

LL_I2C_GetTimingPrescaler

Function name	**__STATIC_INLINE uint32_t LL_I2C_GetTimingPrescaler (I2C_TypeDef * I2Cx)**
Function description	Get the Timing Prescaler setting.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **Value:** between Min_Data=0x0 and Max_Data=0xF
Reference Manual to LL API cross reference:	• TIMINGR PRESC LL_I2C_GetTimingPrescaler

LL_I2C_GetClockLowPeriod

Function name	**__STATIC_INLINE uint32_t LL_I2C_GetClockLowPeriod (I2C_TypeDef * I2Cx)**
Function description	Get the SCL low period setting.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0xFF
Reference Manual to LL API cross reference:	• TIMINGR SCLL LL_I2C_GetClockLowPeriod

LL_I2C_GetClockHighPeriod

Function name	**__STATIC_INLINE uint32_t LL_I2C_GetClockHighPeriod (I2C_TypeDef * I2Cx)**
Function description	Get the SCL high period setting.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0xFF
Reference Manual to LL API cross reference:	• TIMINGR SCLH LL_I2C_GetClockHighPeriod

LL_I2C_GetDataHoldTime

Function name	**__STATIC_INLINE uint32_t LL_I2C_GetDataHoldTime (I2C_TypeDef * I2Cx)**
Function description	Get the SDA hold time.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **Value:** between Min_Data=0x0 and Max_Data=0xF
Reference Manual to LL API cross reference:	• TIMINGR SDADEL LL_I2C_GetDataHoldTime

LL_I2C_GetDataSetupTime

Function name	**__STATIC_INLINE uint32_t LL_I2C_GetDataSetupTime (I2C_TypeDef * I2Cx)**
Function description	Get the SDA setup time.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **Value:** between Min_Data=0x0 and Max_Data=0xF
Reference Manual to LL API cross reference:	• TIMINGR SCLDEL LL_I2C_GetDataSetupTime

LL_I2C_SetMode

Function name	**__STATIC_INLINE void LL_I2C_SetMode (I2C_TypeDef * I2Cx, uint32_t PeripheralMode)**
Function description	Configure peripheral mode.
Parameters	• **I2Cx:** I2C Instance. • **PeripheralMode:** This parameter can be one of the following values: – LL_I2C_MODE_I2C – LL_I2C_MODE_SMBUS_HOST – LL_I2C_MODE_SMBUS_DEVICE – LL_I2C_MODE_SMBUS_DEVICE_ARP
Return values	• **None**

Notes
- Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.

Reference Manual to LL API cross reference:
- CR1 SMBHEN LL_I2C_SetMode
- CR1 SMBDEN LL_I2C_SetMode

LL_I2C_GetMode

Function name
__STATIC_INLINE uint32_t LL_I2C_GetMode (I2C_TypeDef * I2Cx)

Function description
Get peripheral mode.

Parameters
- **I2Cx:** I2C Instance.

Return values
- **Returned:** value can be one of the following values:
  - LL_I2C_MODE_I2C
  - LL_I2C_MODE_SMBUS_HOST
  - LL_I2C_MODE_SMBUS_DEVICE
  - LL_I2C_MODE_SMBUS_DEVICE_ARP

Notes
- Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.

Reference Manual to LL API cross reference:
- CR1 SMBHEN LL_I2C_GetMode
- CR1 SMBDEN LL_I2C_GetMode

LL_I2C_EnableSMBusAlert

Function name
__STATIC_INLINE void LL_I2C_EnableSMBusAlert (I2C_TypeDef * I2Cx)

Function description
Enable SMBus alert (Host or Device mode)

Parameters
- **I2Cx:** I2C Instance.

Return values
- **None**

Notes
- Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
- SMBus Device mode: SMBus Alert pin is drived low and Alert Response Address Header acknowledge is enabled. SMBus Host mode:SMBus Alert pin management is supported.

Reference Manual to LL API cross reference:
- CR1 ALERTEN LL_I2C_EnableSMBusAlert

LL_I2C_DisableSMBusAlert

Function name
__STATIC_INLINE void LL_I2C_DisableSMBusAlert (I2C_TypeDef * I2Cx)

Function description
Disable SMBus alert (Host or Device mode)

Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance. • SMBus Device mode: SMBus Alert pin is not drived (can be used as a standard GPIO) and Alert Response Address Header acknowledge is disabled. SMBus Host mode:SMBus Alert pin management is not supported.
Reference Manual to LL API cross reference:	• CR1 ALERTEN LL_I2C_DisableSMBusAlert

LL_I2C_IsEnabledSMBusAlert

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledSMBusAlert (I2C_TypeDef * I2Cx)**
Function description	Check if SMBus alert (Host or Device mode) is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• CR1 ALERTEN LL_I2C_IsEnabledSMBusAlert

LL_I2C_EnableSMBusPEC

Function name	**__STATIC_INLINE void LL_I2C_EnableSMBusPEC (I2C_TypeDef * I2Cx)**
Function description	Enable SMBus Packet Error Calculation (PEC).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• CR1 PECEN LL_I2C_EnableSMBusPEC

LL_I2C_DisableSMBusPEC

Function name	**__STATIC_INLINE void LL_I2C_DisableSMBusPEC (I2C_TypeDef * I2Cx)**
Function description	Disable SMBus Packet Error Calculation (PEC).

Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• CR1 PECEN LL_I2C_DisableSMBusPEC

LL_I2C_IsEnabledSMBusPEC

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledSMBusPEC (I2C_TypeDef * I2Cx)**
Function description	Check if SMBus Packet Error Calculation (PEC) is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• CR1 PECEN LL_I2C_IsEnabledSMBusPEC

LL_I2C_ConfigSMBusTimeout

Function name	**__STATIC_INLINE void LL_I2C_ConfigSMBusTimeout (I2C_TypeDef * I2Cx, uint32_t TimeoutA, uint32_t TimeoutAMode, uint32_t TimeoutB)**
Function description	Configure the SMBus Clock Timeout.
Parameters	• **I2Cx:** I2C Instance. • **TimeoutA:** This parameter must be a value between Min_Data=0 and Max_Data=0xFFF. • **TimeoutAMode:** This parameter can be one of the following values: – LL_I2C_SMBUS_TIMEOUTA_MODE_SCL_LOW – LL_I2C_SMBUS_TIMEOUTA_MODE_SDA_SCL_HIGH • **TimeoutB:**
Return values	• **None**
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance. • This configuration can only be programmed when associated Timeout is disabled (TimeoutA and/orTimeoutB).
Reference Manual to LL API cross reference:	• TIMEOUTR TIMEOUTA LL_I2C_ConfigSMBusTimeout • TIMEOUTR TIDLE LL_I2C_ConfigSMBusTimeout • TIMEOUTR TIMEOUTB LL_I2C_ConfigSMBusTimeout

LL_I2C_SetSMBusTimeoutA

Function name	**__STATIC_INLINE void LL_I2C_SetSMBusTimeoutA (I2C_TypeDef * I2Cx, uint32_t TimeoutA)**
Function description	Configure the SMBus Clock TimeoutA (SCL low timeout or SCL and SDA high timeout depends on TimeoutA mode).
Parameters	• **I2Cx:** I2C Instance. • **TimeoutA:** This parameter must be a value between Min_Data=0 and Max_Data=0xFFF.
Return values	• **None**
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance. • These bits can only be programmed when TimeoutA is disabled.
Reference Manual to LL API cross reference:	• TIMEOUTR TIMEOUTA LL_I2C_SetSMBusTimeoutA

LL_I2C_GetSMBusTimeoutA

Function name	**__STATIC_INLINE uint32_t LL_I2C_GetSMBusTimeoutA (I2C_TypeDef * I2Cx)**
Function description	Get the SMBus Clock TimeoutA setting.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **Value:** between Min_Data=0 and Max_Data=0xFFF
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• TIMEOUTR TIMEOUTA LL_I2C_GetSMBusTimeoutA

LL_I2C_SetSMBusTimeoutAMode

Function name	**__STATIC_INLINE void LL_I2C_SetSMBusTimeoutAMode (I2C_TypeDef * I2Cx, uint32_t TimeoutAMode)**
Function description	Set the SMBus Clock TimeoutA mode.
Parameters	• **I2Cx:** I2C Instance. • **TimeoutAMode:** This parameter can be one of the following values: – LL_I2C_SMBUS_TIMEOUTA_MODE_SCL_LOW – LL_I2C_SMBUS_TIMEOUTA_MODE_SDA_SCL_HIGH
Return values	• **None**
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.

- This bit can only be programmed when TimeoutA is disabled.

Reference Manual to LL API cross reference:

- TIMEOUTR TIDLE LL_I2C_SetSMBusTimeoutAMode

LL_I2C_GetSMBusTimeoutAMode

Function name **__STATIC_INLINE uint32_t LL_I2C_GetSMBusTimeoutAMode (I2C_TypeDef * I2Cx)**

Function description: Get the SMBus Clock TimeoutA mode.

Parameters:

- **I2Cx:** I2C Instance.

Return values:

- **Returned:** value can be one of the following values:
  - LL_I2C_SMBUS_TIMEOUTA_MODE_SCL_LOW
  - LL_I2C_SMBUS_TIMEOUTA_MODE_SDA_SCL_HIGH

Notes:

- Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.

Reference Manual to LL API cross reference:

- TIMEOUTR TIDLE LL_I2C_GetSMBusTimeoutAMode

LL_I2C_SetSMBusTimeoutB

Function name **__STATIC_INLINE void LL_I2C_SetSMBusTimeoutB (I2C_TypeDef * I2Cx, uint32_t TimeoutB)**

Function description: Configure the SMBus Extended Cumulative Clock TimeoutB (Master or Slave mode).

Parameters:

- **I2Cx:** I2C Instance.
- **TimeoutB:** This parameter must be a value between Min_Data=0 and Max_Data=0xFFF.

Return values:

- **None**

Notes:

- Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
- These bits can only be programmed when TimeoutB is disabled.

Reference Manual to LL API cross reference:

- TIMEOUTR TIMEOUTB LL_I2C_SetSMBusTimeoutB

LL_I2C_GetSMBusTimeoutB

Function name **__STATIC_INLINE uint32_t LL_I2C_GetSMBusTimeoutB (I2C_TypeDef * I2Cx)**

Function description: Get the SMBus Extented Cumulative Clock TimeoutB setting.

Parameters:

- **I2Cx:** I2C Instance.

Return values	• **Value:** between Min_Data=0 and Max_Data=0xFFF
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• TIMEOUTR TIMEOUTB LL_I2C_GetSMBusTimeoutB

LL_I2C_EnableSMBusTimeout

Function name	**__STATIC_INLINE void LL_I2C_EnableSMBusTimeout (I2C_TypeDef * I2Cx, uint32_t ClockTimeout)**
Function description	Enable the SMBus Clock Timeout.
Parameters	• **I2Cx:** I2C Instance. • **ClockTimeout:** This parameter can be one of the following values: – LL_I2C_SMBUS_TIMEOUTA – LL_I2C_SMBUS_TIMEOUTB – LL_I2C_SMBUS_ALL_TIMEOUT
Return values	• **None**
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• TIMEOUTR TIMOUTEN LL_I2C_EnableSMBusTimeout • TIMEOUTR TEXTEN LL_I2C_EnableSMBusTimeout

LL_I2C_DisableSMBusTimeout

Function name	**__STATIC_INLINE void LL_I2C_DisableSMBusTimeout (I2C_TypeDef * I2Cx, uint32_t ClockTimeout)**
Function description	Disable the SMBus Clock Timeout.
Parameters	• **I2Cx:** I2C Instance. • **ClockTimeout:** This parameter can be one of the following values: – LL_I2C_SMBUS_TIMEOUTA – LL_I2C_SMBUS_TIMEOUTB – LL_I2C_SMBUS_ALL_TIMEOUT
Return values	• **None**
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• TIMEOUTR TIMOUTEN LL_I2C_DisableSMBusTimeout • TIMEOUTR TEXTEN LL_I2C_DisableSMBusTimeout

LL_I2C_IsEnabledSMBusTimeout

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledSMBusTimeout (I2C_TypeDef * I2Cx, uint32_t ClockTimeout)**
Function description	Check if the SMBus Clock Timeout is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance. • **ClockTimeout:** This parameter can be one of the following values: – LL_I2C_SMBUS_TIMEOUTA – LL_I2C_SMBUS_TIMEOUTB – LL_I2C_SMBUS_ALL_TIMEOUT
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• TIMEOUTR TIMOUTEN LL_I2C_IsEnabledSMBusTimeout • TIMEOUTR TEXTEN LL_I2C_IsEnabledSMBusTimeout

LL_I2C_EnableIT_TX

Function name	**__STATIC_INLINE void LL_I2C_EnableIT_TX (I2C_TypeDef * I2Cx)**
Function description	Enable TXIS interrupt.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 TXIE LL_I2C_EnableIT_TX

LL_I2C_DisableIT_TX

Function name	**__STATIC_INLINE void LL_I2C_DisableIT_TX (I2C_TypeDef * I2Cx)**
Function description	Disable TXIS interrupt.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 TXIE LL_I2C_DisableIT_TX

LL_I2C_IsEnabledIT_TX

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledIT_TX (I2C_TypeDef * I2Cx)**
Function description	Check if the TXIS Interrupt is enabled or disabled.

Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 TXIE LL_I2C_IsEnabledIT_TX

LL_I2C_EnableIT_RX

Function name	**__STATIC_INLINE void LL_I2C_EnableIT_RX (I2C_TypeDef * I2Cx)**
Function description	Enable RXNE interrupt.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 RXIE LL_I2C_EnableIT_RX

LL_I2C_DisableIT_RX

Function name	**__STATIC_INLINE void LL_I2C_DisableIT_RX (I2C_TypeDef * I2Cx)**
Function description	Disable RXNE interrupt.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 RXIE LL_I2C_DisableIT_RX

LL_I2C_IsEnabledIT_RX

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledIT_RX (I2C_TypeDef * I2Cx)**
Function description	Check if the RXNE Interrupt is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 RXIE LL_I2C_IsEnabledIT_RX

LL_I2C_EnableIT_ADDR

Function name	**__STATIC_INLINE void LL_I2C_EnableIT_ADDR (I2C_TypeDef * I2Cx)**
Function description	Enable Address match interrupt (slave mode only).
Parameters	• **I2Cx:** I2C Instance.

Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 ADDRIE LL_I2C_EnableIT_ADDR

LL_I2C_DisableIT_ADDR

Function name	**__STATIC_INLINE void LL_I2C_DisableIT_ADDR (I2C_TypeDef * I2Cx)**
Function description	Disable Address match interrupt (slave mode only).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 ADDRIE LL_I2C_DisableIT_ADDR

LL_I2C_IsEnabledIT_ADDR

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledIT_ADDR (I2C_TypeDef * I2Cx)**
Function description	Check if Address match interrupt is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 ADDRIE LL_I2C_IsEnabledIT_ADDR

LL_I2C_EnableIT_NACK

Function name	**__STATIC_INLINE void LL_I2C_EnableIT_NACK (I2C_TypeDef * I2Cx)**
Function description	Enable Not acknowledge received interrupt.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 NACKIE LL_I2C_EnableIT_NACK

LL_I2C_DisableIT_NACK

Function name	**__STATIC_INLINE void LL_I2C_DisableIT_NACK (I2C_TypeDef * I2Cx)**
Function description	Disable Not acknowledge received interrupt.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**

Reference Manual to LL API cross reference:	• CR1 NACKIE LL_I2C_DisableIT_NACK

LL_I2C_IsEnabledIT_NACK

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledIT_NACK (I2C_TypeDef * I2Cx)**
Function description	Check if Not acknowledge received interrupt is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 NACKIE LL_I2C_IsEnabledIT_NACK

LL_I2C_EnableIT_STOP

Function name	**__STATIC_INLINE void LL_I2C_EnableIT_STOP (I2C_TypeDef * I2Cx)**
Function description	Enable STOP detection interrupt.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 STOPIE LL_I2C_EnableIT_STOP

LL_I2C_DisableIT_STOP

Function name	**__STATIC_INLINE void LL_I2C_DisableIT_STOP (I2C_TypeDef * I2Cx)**
Function description	Disable STOP detection interrupt.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 STOPIE LL_I2C_DisableIT_STOP

LL_I2C_IsEnabledIT_STOP

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledIT_STOP (I2C_TypeDef * I2Cx)**
Function description	Check if STOP detection interrupt is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• CR1 STOPIE LL_I2C_IsEnabledIT_STOP

LL_I2C_EnableIT_TC

Function name	**__STATIC_INLINE void LL_I2C_EnableIT_TC (I2C_TypeDef * I2Cx)**
Function description	Enable Transfer Complete interrupt.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• Any of these events will generate interrupt : Transfer Complete (TC) Transfer Complete Reload (TCR)
Reference Manual to LL API cross reference:	• CR1 TCIE LL_I2C_EnableIT_TC

LL_I2C_DisableIT_TC

Function name	**__STATIC_INLINE void LL_I2C_DisableIT_TC (I2C_TypeDef * I2Cx)**
Function description	Disable Transfer Complete interrupt.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• Any of these events will generate interrupt : Transfer Complete (TC) Transfer Complete Reload (TCR)
Reference Manual to LL API cross reference:	• CR1 TCIE LL_I2C_DisableIT_TC

LL_I2C_IsEnabledIT_TC

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledIT_TC (I2C_TypeDef * I2Cx)**
Function description	Check if Transfer Complete interrupt is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 TCIE LL_I2C_IsEnabledIT_TC

LL_I2C_EnableIT_ERR

Function name	**__STATIC_INLINE void LL_I2C_EnableIT_ERR (I2C_TypeDef * I2Cx)**
Function description	Enable Error interrupts.

Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance. • Any of these errors will generate interrupt : Arbitration Loss (ARLO) Bus Error detection (BERR) Overrun/Underrun (OVR) SMBus Timeout detection (TIMEOUT) SMBus PEC error detection (PECERR) SMBus Alert pin event detection (ALERT)
Reference Manual to LL API cross reference:	• CR1 ERRIE LL_I2C_EnableIT_ERR

LL_I2C_DisableIT_ERR

Function name	**__STATIC_INLINE void LL_I2C_DisableIT_ERR (I2C_TypeDef * I2Cx)**
Function description	Disable Error interrupts.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance. • Any of these errors will generate interrupt : Arbitration Loss (ARLO) Bus Error detection (BERR) Overrun/Underrun (OVR) SMBus Timeout detection (TIMEOUT) SMBus PEC error detection (PECERR) SMBus Alert pin event detection (ALERT)
Reference Manual to LL API cross reference:	• CR1 ERRIE LL_I2C_DisableIT_ERR

LL_I2C_IsEnabledIT_ERR

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledIT_ERR (I2C_TypeDef * I2Cx)**
Function description	Check if Error interrupts are enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 ERRIE LL_I2C_IsEnabledIT_ERR

LL_I2C_IsActiveFlag_TXE

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsActiveFlag_TXE (I2C_TypeDef * I2Cx)**
Function description	Indicate the status of Transmit data register empty flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• RESET: When next data is written in Transmit data register. SET: When Transmit data register is empty.
Reference Manual to LL API cross reference:	• ISR TXE LL_I2C_IsActiveFlag_TXE

LL_I2C_IsActiveFlag_TXIS

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsActiveFlag_TXIS (I2C_TypeDef * I2Cx)**
Function description	Indicate the status of Transmit interrupt flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• RESET: When next data is written in Transmit data register. SET: When Transmit data register is empty.
Reference Manual to LL API cross reference:	• ISR TXIS LL_I2C_IsActiveFlag_TXIS

LL_I2C_IsActiveFlag_RXNE

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsActiveFlag_RXNE (I2C_TypeDef * I2Cx)**
Function description	Indicate the status of Receive data register not empty flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• RESET: When Receive data register is read. SET: When the received data is copied in Receive data register.
Reference Manual to LL API cross reference:	• ISR RXNE LL_I2C_IsActiveFlag_RXNE

LL_I2C_IsActiveFlag_ADDR

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsActiveFlag_ADDR (I2C_TypeDef * I2Cx)**
Function description	Indicate the status of Address matched flag (slave mode).
Parameters	• **I2Cx:** I2C Instance.

Return values	• **State:** of bit (1 or 0).
Notes	• RESET: Clear default value. SET: When the received slave address matched with one of the enabled slave address.
Reference Manual to LL API cross reference:	• ISR ADDR LL_I2C_IsActiveFlag_ADDR

LL_I2C_IsActiveFlag_NACK

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsActiveFlag_NACK (I2C_TypeDef * I2Cx)**
Function description	Indicate the status of Not Acknowledge received flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• RESET: Clear default value. SET: When a NACK is received after a byte transmission.
Reference Manual to LL API cross reference:	• ISR NACKF LL_I2C_IsActiveFlag_NACK

LL_I2C_IsActiveFlag_STOP

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsActiveFlag_STOP (I2C_TypeDef * I2Cx)**
Function description	Indicate the status of Stop detection flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• RESET: Clear default value. SET: When a Stop condition is detected.
Reference Manual to LL API cross reference:	• ISR STOPF LL_I2C_IsActiveFlag_STOP

LL_I2C_IsActiveFlag_TC

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsActiveFlag_TC (I2C_TypeDef * I2Cx)**
Function description	Indicate the status of Transfer complete flag (master mode).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• RESET: Clear default value. SET: When RELOAD=0, AUTOEND=0 and NBYTES date have been transferred.
Reference Manual to LL API cross reference:	• ISR TC LL_I2C_IsActiveFlag_TC

LL_I2C_IsActiveFlag_TCR

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsActiveFlag_TCR (I2C_TypeDef * I2Cx)**
Function description	Indicate the status of Transfer complete flag (master mode).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• RESET: Clear default value. SET: When RELOAD=1 and NBYTES date have been transferred.
Reference Manual to LL API cross reference:	• ISR TCR LL_I2C_IsActiveFlag_TCR

LL_I2C_IsActiveFlag_BERR

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsActiveFlag_BERR (I2C_TypeDef * I2Cx)**
Function description	Indicate the status of Bus error flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• RESET: Clear default value. SET: When a misplaced Start or Stop condition is detected.
Reference Manual to LL API cross reference:	• ISR BERR LL_I2C_IsActiveFlag_BERR

LL_I2C_IsActiveFlag_ARLO

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsActiveFlag_ARLO (I2C_TypeDef * I2Cx)**
Function description	Indicate the status of Arbitration lost flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• RESET: Clear default value. SET: When arbitration lost.
Reference Manual to LL API cross reference:	• ISR ARLO LL_I2C_IsActiveFlag_ARLO

LL_I2C_IsActiveFlag_OVR

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsActiveFlag_OVR (I2C_TypeDef * I2Cx)**
Function description	Indicate the status of Overrun/Underrun flag (slave mode).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).

Notes	• RESET: Clear default value. SET: When an overrun/underrun error occurs (Clock Stretching Disabled).
Reference Manual to LL API cross reference:	• ISR OVR LL_I2C_IsActiveFlag_OVR

LL_I2C_IsActiveSMBusFlag_PECERR

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsActiveSMBusFlag_PECERR (I2C_TypeDef * I2Cx)**
Function description	Indicate the status of SMBus PEC error flag in reception.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance. • RESET: Clear default value. SET: When the received PEC does not match with the PEC register content.
Reference Manual to LL API cross reference:	• ISR PECERR LL_I2C_IsActiveSMBusFlag_PECERR

LL_I2C_IsActiveSMBusFlag_TIMEOUT

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsActiveSMBusFlag_TIMEOUT (I2C_TypeDef * I2Cx)**
Function description	Indicate the status of SMBus Timeout detection flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance. • RESET: Clear default value. SET: When a timeout or extended clock timeout occurs.
Reference Manual to LL API cross reference:	• ISR TIMEOUT LL_I2C_IsActiveSMBusFlag_TIMEOUT

LL_I2C_IsActiveSMBusFlag_ALERT

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsActiveSMBusFlag_ALERT (I2C_TypeDef * I2Cx)**
Function description	Indicate the status of SMBus alert flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to

check whether or not SMBus feature is supported by the I2Cx Instance.
- RESET: Clear default value. SET: When SMBus host configuration, SMBus alert enabled and a falling edge event occurs on SMBA pin.

Reference Manual to LL API cross reference:
- ISR ALERT LL_I2C_IsActiveSMBusFlag_ALERT

LL_I2C_IsActiveFlag_BUSY

Function name **__STATIC_INLINE uint32_t LL_I2C_IsActiveFlag_BUSY (I2C_TypeDef * I2Cx)**

Function description Indicate the status of Bus Busy flag.

Parameters
- **I2Cx:** I2C Instance.

Return values
- **State:** of bit (1 or 0).

Notes
- RESET: Clear default value. SET: When a Start condition is detected.

Reference Manual to LL API cross reference:
- ISR BUSY LL_I2C_IsActiveFlag_BUSY

LL_I2C_ClearFlag_ADDR

Function name **__STATIC_INLINE void LL_I2C_ClearFlag_ADDR (I2C_TypeDef * I2Cx)**

Function description Clear Address Matched flag.

Parameters
- **I2Cx:** I2C Instance.

Return values
- **None**

Reference Manual to LL API cross reference:
- ICR ADDRCF LL_I2C_ClearFlag_ADDR

LL_I2C_ClearFlag_NACK

Function name **__STATIC_INLINE void LL_I2C_ClearFlag_NACK (I2C_TypeDef * I2Cx)**

Function description Clear Not Acknowledge flag.

Parameters
- **I2Cx:** I2C Instance.

Return values
- **None**

Reference Manual to LL API cross reference:
- ICR NACKCF LL_I2C_ClearFlag_NACK

LL_I2C_ClearFlag_STOP

Function name	**__STATIC_INLINE void LL_I2C_ClearFlag_STOP (I2C_TypeDef * I2Cx)**
Function description	Clear Stop detection flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• ICR STOPCF LL_I2C_ClearFlag_STOP

LL_I2C_ClearFlag_TXE

Function name	**__STATIC_INLINE void LL_I2C_ClearFlag_TXE (I2C_TypeDef * I2Cx)**
Function description	Clear Transmit data register empty flag (TXE).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• This bit can be clear by software in order to flush the transmit data register (TXDR).
Reference Manual to LL API cross reference:	• ISR TXE LL_I2C_ClearFlag_TXE

LL_I2C_ClearFlag_BERR

Function name	**__STATIC_INLINE void LL_I2C_ClearFlag_BERR (I2C_TypeDef * I2Cx)**
Function description	Clear Bus error flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• ICR BERRCF LL_I2C_ClearFlag_BERR

LL_I2C_ClearFlag_ARLO

Function name	**__STATIC_INLINE void LL_I2C_ClearFlag_ARLO (I2C_TypeDef * I2Cx)**
Function description	Clear Arbitration lost flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• ICR ARLOCF LL_I2C_ClearFlag_ARLO

LL_I2C_ClearFlag_OVR

Function name	**__STATIC_INLINE void LL_I2C_ClearFlag_OVR (I2C_TypeDef * I2Cx)**
Function description	Clear Overrun/Underrun flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• ICR OVRCF LL_I2C_ClearFlag_OVR

LL_I2C_ClearSMBusFlag_PECERR

Function name	**__STATIC_INLINE void LL_I2C_ClearSMBusFlag_PECERR (I2C_TypeDef * I2Cx)**
Function description	Clear SMBus PEC error flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• ICR PECCF LL_I2C_ClearSMBusFlag_PECERR

LL_I2C_ClearSMBusFlag_TIMEOUT

Function name	**__STATIC_INLINE void LL_I2C_ClearSMBusFlag_TIMEOUT (I2C_TypeDef * I2Cx)**
Function description	Clear SMBus Timeout detection flag.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• ICR TIMOUTCF LL_I2C_ClearSMBusFlag_TIMEOUT

LL_I2C_ClearSMBusFlag_ALERT

Function name	**__STATIC_INLINE void LL_I2C_ClearSMBusFlag_ALERT (I2C_TypeDef * I2Cx)**
Function description	Clear SMBus Alert flag.
Parameters	• **I2Cx:** I2C Instance.

Return values	• **None**
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• ICR ALERTCF LL_I2C_ClearSMBusFlag_ALERT

LL_I2C_EnableAutoEndMode

Function name	**__STATIC_INLINE void LL_I2C_EnableAutoEndMode (I2C_TypeDef * I2Cx)**
Function description	Enable automatic STOP condition generation (master mode).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• Automatic end mode : a STOP condition is automatically sent when NBYTES data are transferred. This bit has no effect in slave mode or when RELOAD bit is set.
Reference Manual to LL API cross reference:	• CR2 AUTOEND LL_I2C_EnableAutoEndMode

LL_I2C_DisableAutoEndMode

Function name	**__STATIC_INLINE void LL_I2C_DisableAutoEndMode (I2C_TypeDef * I2Cx)**
Function description	Disable automatic STOP condition generation (master mode).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• Software end mode : TC flag is set when NBYTES data are transferre, stretching SCL low.
Reference Manual to LL API cross reference:	• CR2 AUTOEND LL_I2C_DisableAutoEndMode

LL_I2C_IsEnabledAutoEndMode

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledAutoEndMode (I2C_TypeDef * I2Cx)**
Function description	Check if automatic STOP condition is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR2 AUTOEND LL_I2C_IsEnabledAutoEndMode

LL_I2C_EnableReloadMode

Function name	**__STATIC_INLINE void LL_I2C_EnableReloadMode (I2C_TypeDef * I2Cx)**
Function description	Enable reload mode (master mode).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• The transfer is not completed after the NBYTES data transfer, NBYTES will be reloaded when TCR flag is set.
Reference Manual to LL API cross reference:	• CR2 RELOAD LL_I2C_EnableReloadMode

LL_I2C_DisableReloadMode

Function name	**__STATIC_INLINE void LL_I2C_DisableReloadMode (I2C_TypeDef * I2Cx)**
Function description	Disable reload mode (master mode).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• The transfer is completed after the NBYTES data transfer(STOP or RESTART will follow).
Reference Manual to LL API cross reference:	• CR2 RELOAD LL_I2C_DisableReloadMode

LL_I2C_IsEnabledReloadMode

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledReloadMode (I2C_TypeDef * I2Cx)**
Function description	Check if reload mode is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR2 RELOAD LL_I2C_IsEnabledReloadMode

LL_I2C_SetTransferSize

Function name	**__STATIC_INLINE void LL_I2C_SetTransferSize (I2C_TypeDef * I2Cx, uint32_t TransferSize)**
Function description	Configure the number of bytes for transfer.
Parameters	• **I2Cx:** I2C Instance. • **TransferSize:** This parameter must be a value between Min_Data=0x00 and Max_Data=0xFF.

Return values	• **None**
Notes	• Changing these bits when START bit is set is not allowed.
Reference Manual to LL API cross reference:	• CR2 NBYTES LL_I2C_SetTransferSize

LL_I2C_GetTransferSize

Function name	**__STATIC_INLINE uint32_t LL_I2C_GetTransferSize (I2C_TypeDef * I2Cx)**
Function description	Get the number of bytes configured for transfer.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **Value:** between Min_Data=0x0 and Max_Data=0xFF
Reference Manual to LL API cross reference:	• CR2 NBYTES LL_I2C_GetTransferSize

LL_I2C_AcknowledgeNextData

Function name	**__STATIC_INLINE void LL_I2C_AcknowledgeNextData (I2C_TypeDef * I2Cx, uint32_t TypeAcknowledge)**
Function description	Prepare the generation of a ACKnowledge or Non ACKnowledge condition after the address receive match code or next received byte.
Parameters	• **I2Cx:** I2C Instance. • **TypeAcknowledge:** This parameter can be one of the following values: – LL_I2C_ACK – LL_I2C_NACK
Return values	• **None**
Notes	• Usage in Slave mode only.
Reference Manual to LL API cross reference:	• CR2 NACK LL_I2C_AcknowledgeNextData

LL_I2C_GenerateStartCondition

Function name	**__STATIC_INLINE void LL_I2C_GenerateStartCondition (I2C_TypeDef * I2Cx)**
Function description	Generate a START or RESTART condition.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• The START bit can be set even if bus is BUSY or I2C is in slave mode. This action has no effect when RELOAD is set. •

Reference Manual to LL API cross reference:	• CR2 START LL_I2C_GenerateStartCondition

LL_I2C_GenerateStopCondition

Function name	**__STATIC_INLINE void LL_I2C_GenerateStopCondition (I2C_TypeDef * I2Cx)**
Function description	Generate a STOP condition after the current byte transfer (master mode).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 STOP LL_I2C_GenerateStopCondition

LL_I2C_EnableAuto10BitRead

Function name	**__STATIC_INLINE void LL_I2C_EnableAuto10BitRead (I2C_TypeDef * I2Cx)**
Function description	Enable automatic RESTART Read request condition for 10bit address header (master mode).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• The master sends the complete 10bit slave address read sequence : Start + 2 bytes 10bit address in Write direction + Restart + first 7 bits of 10bit address in Read direction.
Reference Manual to LL API cross reference:	• CR2 HEAD10R LL_I2C_EnableAuto10BitRead

LL_I2C_DisableAuto10BitRead

Function name	**__STATIC_INLINE void LL_I2C_DisableAuto10BitRead (I2C_TypeDef * I2Cx)**
Function description	Disable automatic RESTART Read request condition for 10bit address header (master mode).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• The master only sends the first 7 bits of 10bit address in Read direction.
Reference Manual to LL API cross reference:	• CR2 HEAD10R LL_I2C_DisableAuto10BitRead

LL_I2C_IsEnabledAuto10BitRead

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledAuto10BitRead (I2C_TypeDef * I2Cx)**
Function description	Check if automatic RESTART Read request condition for 10bit address header is enabled or disabled.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR2 HEAD10R LL_I2C_IsEnabledAuto10BitRead

LL_I2C_SetTransferRequest

Function name	**__STATIC_INLINE void LL_I2C_SetTransferRequest (I2C_TypeDef * I2Cx, uint32_t TransferRequest)**
Function description	Configure the transfer direction (master mode).
Parameters	• **I2Cx:** I2C Instance. • **TransferRequest:** This parameter can be one of the following values: – LL_I2C_REQUEST_WRITE – LL_I2C_REQUEST_READ
Return values	• **None**
Notes	• Changing these bits when START bit is set is not allowed.
Reference Manual to LL API cross reference:	• CR2 RD_WRN LL_I2C_SetTransferRequest

LL_I2C_GetTransferRequest

Function name	**__STATIC_INLINE uint32_t LL_I2C_GetTransferRequest (I2C_TypeDef * I2Cx)**
Function description	Get the transfer direction requested (master mode).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **Returned:** value can be one of the following values: – LL_I2C_REQUEST_WRITE – LL_I2C_REQUEST_READ
Reference Manual to LL API cross reference:	• CR2 RD_WRN LL_I2C_GetTransferRequest

LL_I2C_SetSlaveAddr

Function name	**__STATIC_INLINE void LL_I2C_SetSlaveAddr (I2C_TypeDef * I2Cx, uint32_t SlaveAddr)**
Function description	Configure the slave address for transfer (master mode).

Parameters	• **I2Cx:** I2C Instance. • **SlaveAddr:** This parameter must be a value between Min_Data=0x00 and Max_Data=0x3F.
Return values	• **None**
Notes	• Changing these bits when START bit is set is not allowed.
Reference Manual to LL API cross reference:	• CR2 SADD LL_I2C_SetSlaveAddr

LL_I2C_GetSlaveAddr

Function name	**__STATIC_INLINE uint32_t LL_I2C_GetSlaveAddr (I2C_TypeDef * I2Cx)**
Function description	Get the slave address programmed for transfer.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **Value:** between Min_Data=0x0 and Max_Data=0x3F
Reference Manual to LL API cross reference:	• CR2 SADD LL_I2C_GetSlaveAddr

LL_I2C_HandleTransfer

Function name	**__STATIC_INLINE void LL_I2C_HandleTransfer (I2C_TypeDef * I2Cx, uint32_t SlaveAddr, uint32_t SlaveAddrSize, uint32_t TransferSize, uint32_t EndMode, uint32_t Request)**
Function description	Handles I2Cx communication when starting transfer or during transfer (TC or TCR flag are set).
Parameters	• **I2Cx:** I2C Instance. • **SlaveAddr:** Specifies the slave address to be programmed. • **SlaveAddrSize:** This parameter can be one of the following values: – LL_I2C_ADDRSLAVE_7BIT – LL_I2C_ADDRSLAVE_10BIT • **TransferSize:** Specifies the number of bytes to be programmed. This parameter must be a value between Min_Data=0 and Max_Data=255. • **EndMode:** This parameter can be one of the following values: – LL_I2C_MODE_RELOAD – LL_I2C_MODE_AUTOEND – LL_I2C_MODE_SOFTEND – LL_I2C_MODE_SMBUS_RELOAD – LL_I2C_MODE_SMBUS_AUTOEND_NO_PEC – LL_I2C_MODE_SMBUS_SOFTEND_NO_PEC – LL_I2C_MODE_SMBUS_AUTOEND_WITH_PEC – LL_I2C_MODE_SMBUS_SOFTEND_WITH_PEC • **Request:** This parameter can be one of the following values: – LL_I2C_GENERATE_NOSTARTSTOP – LL_I2C_GENERATE_STOP

  - LL_I2C_GENERATE_START_READ
  - LL_I2C_GENERATE_START_WRITE
  - LL_I2C_GENERATE_RESTART_7BIT_READ
  - LL_I2C_GENERATE_RESTART_7BIT_WRITE
  - LL_I2C_GENERATE_RESTART_10BIT_READ
  - LL_I2C_GENERATE_RESTART_10BIT_WRITE

Return values
- **None**

Reference Manual to LL API cross reference:
- CR2 SADD LL_I2C_HandleTransfer
- CR2 ADD10 LL_I2C_HandleTransfer
- CR2 RD_WRN LL_I2C_HandleTransfer
- CR2 START LL_I2C_HandleTransfer
- CR2 STOP LL_I2C_HandleTransfer
- CR2 RELOAD LL_I2C_HandleTransfer
- CR2 NBYTES LL_I2C_HandleTransfer
- CR2 AUTOEND LL_I2C_HandleTransfer
- CR2 HEAD10R LL_I2C_HandleTransfer

LL_I2C_GetTransferDirection

Function name
__STATIC_INLINE uint32_t LL_I2C_GetTransferDirection (I2C_TypeDef * I2Cx)

Function description
Indicate the value of transfer direction (slave mode).

Parameters
- **I2Cx:** I2C Instance.

Return values
- **Returned:** value can be one of the following values:
  - LL_I2C_DIRECTION_WRITE
  - LL_I2C_DIRECTION_READ

Notes
- RESET: Write transfer, Slave enters in receiver mode. SET: Read transfer, Slave enters in transmitter mode.

Reference Manual to LL API cross reference:
- ISR DIR LL_I2C_GetTransferDirection

LL_I2C_GetAddressMatchCode

Function name
__STATIC_INLINE uint32_t LL_I2C_GetAddressMatchCode (I2C_TypeDef * I2Cx)

Function description
Return the slave matched address.

Parameters
- **I2Cx:** I2C Instance.

Return values
- **Value:** between Min_Data=0x00 and Max_Data=0x3F

Reference Manual to LL API cross reference:
- ISR ADDCODE LL_I2C_GetAddressMatchCode

LL_I2C_EnableSMBusPECCompare

Function name	**__STATIC_INLINE void LL_I2C_EnableSMBusPECCompare (I2C_TypeDef * I2Cx)**
Function description	Enable internal comparison of the SMBus Packet Error byte (transmission or reception mode).
Parameters	• **I2Cx:** I2C Instance.
Return values	• **None**
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance. • This feature is cleared by hardware when the PEC byte is transferred, or when a STOP condition or an Address Matched is received. This bit has no effect when RELOAD bit is set. This bit has no effect in device mode when SBC bit is not set.
Reference Manual to LL API cross reference:	• CR2 PECBYTE LL_I2C_EnableSMBusPECCompare

LL_I2C_IsEnabledSMBusPECCompare

Function name	**__STATIC_INLINE uint32_t LL_I2C_IsEnabledSMBusPECCompare (I2C_TypeDef * I2Cx)**
Function description	Check if the SMBus Packet Error byte internal comparison is requested or not.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.
Reference Manual to LL API cross reference:	• CR2 PECBYTE LL_I2C_IsEnabledSMBusPECCompare

LL_I2C_GetSMBusPEC

Function name	**__STATIC_INLINE uint32_t LL_I2C_GetSMBusPEC (I2C_TypeDef * I2Cx)**
Function description	Get the SMBus Packet Error byte calculated.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0xFF
Notes	• Macro IS_SMBUS_ALL_INSTANCE(I2Cx) can be used to check whether or not SMBus feature is supported by the I2Cx Instance.

Reference Manual to LL API cross reference:	• PECR PEC LL_I2C_GetSMBusPEC

LL_I2C_ReceiveData8

Function name	**__STATIC_INLINE uint8_t LL_I2C_ReceiveData8 (I2C_TypeDef * I2Cx)**
Function description	Read Receive Data register.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0xFF
Reference Manual to LL API cross reference:	• RXDR RXDATA LL_I2C_ReceiveData8

LL_I2C_TransmitData8

Function name	**__STATIC_INLINE void LL_I2C_TransmitData8 (I2C_TypeDef * I2Cx, uint8_t Data)**
Function description	Write in Transmit Data Register .
Parameters	• **I2Cx:** I2C Instance. • **Data:** Value between Min_Data=0x00 and Max_Data=0xFF
Return values	• **None**
Reference Manual to LL API cross reference:	• TXDR TXDATA LL_I2C_TransmitData8

LL_I2C_Init

Function name	**uint32_t LL_I2C_Init (I2C_TypeDef * I2Cx, LL_I2C_InitTypeDef * I2C_InitStruct)**
Function description	Initialize the I2C registers according to the specified parameters in I2C_InitStruct.
Parameters	• **I2Cx:** I2C Instance. • **I2C_InitStruct:** pointer to a LL_I2C_InitTypeDef structure.
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: I2C registers are initialized – ERROR: Not applicable

LL_I2C_DeInit

Function name	**uint32_t LL_I2C_DeInit (I2C_TypeDef * I2Cx)**
Function description	De-initialize the I2C registers to their default reset values.
Parameters	• **I2Cx:** I2C Instance.
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: I2C registers are de-initialized

– ERROR: I2C registers are not de-initialized

LL_I2C_StructInit

Function name	**void LL_I2C_StructInit (LL_I2C_InitTypeDef * I2C_InitStruct)**
Function description	Set each LL_I2C_InitTypeDef field to default value.
Parameters	• **I2C_InitStruct:** Pointer to a LL_I2C_InitTypeDef structure.
Return values	• **None**

69.3 I2C Firmware driver defines

69.3.1 I2C

Master Addressing Mode

LL_I2C_ADDRESSING_MODE_7BIT	Master operates in 7-bit addressing mode.
LL_I2C_ADDRESSING_MODE_10BIT	Master operates in 10-bit addressing mode.

Slave Address Length

LL_I2C_ADDRSLAVE_7BIT	Slave Address in 7-bit.
LL_I2C_ADDRSLAVE_10BIT	Slave Address in 10-bit.

Analog Filter Selection

LL_I2C_ANALOGFILTER_ENABLE	Analog filter is enabled.
LL_I2C_ANALOGFILTER_DISABLE	Analog filter is disabled.

Clear Flags Defines

LL_I2C_ICR_ADDRCF	Address Matched flag
LL_I2C_ICR_NACKCF	Not Acknowledge flag
LL_I2C_ICR_STOPCF	Stop detection flag
LL_I2C_ICR_BERRCF	Bus error flag
LL_I2C_ICR_ARLOCF	Arbitration Lost flag
LL_I2C_ICR_OVRCF	Overrun/Underrun flag
LL_I2C_ICR_PECCF	PEC error flag
LL_I2C_ICR_TIMOUTCF	Timeout detection flag
LL_I2C_ICR_ALERTCF	Alert flag

Read Write Direction

LL_I2C_DIRECTION_WRITE	Write transfer request by master, slave enters receiver mode.
LL_I2C_DIRECTION_READ	Read transfer request by master, slave enters transmitter mode.

DMA Register Data

LL_I2C_DMA_REG_DATA_TRANSMIT	Get address of data register used for transmission

LL_I2C_DMA_REG_DATA_RECEIVE	Get address of data register used for reception

Start And Stop Generation

LL_I2C_GENERATE_NOSTARTSTOP	Don't Generate Stop and Start condition.
LL_I2C_GENERATE_STOP	Generate Stop condition (Size should be set to 0).
LL_I2C_GENERATE_START_READ	Generate Start for read request.
LL_I2C_GENERATE_START_WRITE	Generate Start for write request.
LL_I2C_GENERATE_RESTART_7BIT_READ	Generate Restart for read request, slave 7Bit address.
LL_I2C_GENERATE_RESTART_7BIT_WRITE	Generate Restart for write request, slave 7Bit address.
LL_I2C_GENERATE_RESTART_10BIT_READ	Generate Restart for read request, slave 10Bit address.
LL_I2C_GENERATE_RESTART_10BIT_WRITE	Generate Restart for write request, slave 10Bit address.

Get Flags Defines

LL_I2C_ISR_TXE	Transmit data register empty
LL_I2C_ISR_TXIS	Transmit interrupt status
LL_I2C_ISR_RXNE	Receive data register not empty
LL_I2C_ISR_ADDR	Address matched (slave mode)
LL_I2C_ISR_NACKF	Not Acknowledge received flag
LL_I2C_ISR_STOPF	Stop detection flag
LL_I2C_ISR_TC	Transfer Complete (master mode)
LL_I2C_ISR_TCR	Transfer Complete Reload
LL_I2C_ISR_BERR	Bus error
LL_I2C_ISR_ARLO	Arbitration lost
LL_I2C_ISR_OVR	Overrun/Underrun (slave mode)
LL_I2C_ISR_PECERR	PEC Error in reception (SMBus mode)
LL_I2C_ISR_TIMEOUT	Timeout detection flag (SMBus mode)
LL_I2C_ISR_ALERT	SMBus alert (SMBus mode)
LL_I2C_ISR_BUSY	Bus busy

Acknowledge Generation

LL_I2C_ACK	ACK is sent after current received byte.
LL_I2C_NACK	NACK is sent after current received byte.

IT Defines

LL_I2C_CR1_TXIE	TX Interrupt enable
LL_I2C_CR1_RXIE	RX Interrupt enable

LL_I2C_CR1_ADDRIE	Address match Interrupt enable (slave only)
LL_I2C_CR1_NACKIE	Not acknowledge received Interrupt enable
LL_I2C_CR1_STOPIE	STOP detection Interrupt enable
LL_I2C_CR1_TCIE	Transfer Complete interrupt enable
LL_I2C_CR1_ERRIE	Error interrupts enable

Transfer End Mode

LL_I2C_MODE_RELOAD	Enable I2C Reload mode.
LL_I2C_MODE_AUTOEND	Enable I2C Automatic end mode with no HW PEC comparison.
LL_I2C_MODE_SOFTEND	Enable I2C Software end mode with no HW PEC comparison.
LL_I2C_MODE_SMBUS_RELOAD	Enable SMBUS Automatic end mode with HW PEC comparison.
LL_I2C_MODE_SMBUS_AUTOEND_NO_PEC	Enable SMBUS Automatic end mode with HW PEC comparison.
LL_I2C_MODE_SMBUS_SOFTEND_NO_PEC	Enable SMBUS Software end mode with HW PEC comparison.
LL_I2C_MODE_SMBUS_AUTOEND_WITH_PEC	Enable SMBUS Automatic end mode with HW PEC comparison.
LL_I2C_MODE_SMBUS_SOFTEND_WITH_PEC	Enable SMBUS Software end mode with HW PEC comparison.

Own Address 1 Length

LL_I2C_OWNADDRESS1_7BIT	Own address 1 is a 7-bit address.
LL_I2C_OWNADDRESS1_10BIT	Own address 1 is a 10-bit address.

Own Address 2 Masks

LL_I2C_OWNADDRESS2_NOMASK	Own Address2 No mask.
LL_I2C_OWNADDRESS2_MASK01	Only Address2 bits[7:2] are compared.
LL_I2C_OWNADDRESS2_MASK02	Only Address2 bits[7:3] are compared.
LL_I2C_OWNADDRESS2_MASK03	Only Address2 bits[7:4] are compared.
LL_I2C_OWNADDRESS2_MASK04	Only Address2 bits[7:5] are compared.
LL_I2C_OWNADDRESS2_MASK05	Only Address2 bits[7:6] are compared.
LL_I2C_OWNADDRESS2_MASK06	Only Address2 bits[7] are compared.
LL_I2C_OWNADDRESS2_MASK07	No comparison is done. All Address2 are acknowledged.

Peripheral Mode

LL_I2C_MODE_I2C	I2C Master or Slave mode
LL_I2C_MODE_SMBUS_HOST	SMBus Host address acknowledge
LL_I2C_MODE_SMBUS_DEVICE	SMBus Device default mode (Default address not acknowledge)

LL_I2C_MODE_SMBUS_DEVICE_ARP SMBus Device Default address acknowledge

Transfer Request Direction

LL_I2C_REQUEST_WRITE Master request a write transfer.

LL_I2C_REQUEST_READ Master request a read transfer.

SMBus TimeoutA Mode SCL SDA Timeout

LL_I2C_SMBUS_TIMEOUTA_MODE_SCL_LOW TimeoutA is used to detect SCL low level timeout.

LL_I2C_SMBUS_TIMEOUTA_MODE_SDA_SCL_HIGH TimeoutA is used to detect both SCL and SDA high level timeout.

SMBus Timeout Selection

LL_I2C_SMBUS_TIMEOUTA TimeoutA enable bit

LL_I2C_SMBUS_TIMEOUTB TimeoutB (extended clock) enable bit

LL_I2C_SMBUS_ALL_TIMEOUT TimeoutA and TimeoutB (extended clock) enable bits

Convert SDA SCL timings

__LL_I2C_CONVERT_TIMINGS **Description:**

- Configure the SDA setup, hold time and the SCL high, low period.

Parameters:

- __PRESCALER__: This parameter must be a value between Min_Data=0 and Max_Data=0xF.
- __DATA_SETUP_TIME__: This parameter must be a value between Min_Data=0 and Max_Data=0xF. (tscldel = (SCLDEL+1)xtpresc)
- __DATA_HOLD_TIME__: This parameter must be a value between Min_Data=0 and Max_Data=0xF. (tsdadel = SDADELxtpresc)
- __CLOCK_HIGH_PERIOD__: This parameter must be a value between Min_Data=0 and Max_Data=0xFF. (tsclh = (SCLH+1)xtpresc)
- __CLOCK_LOW_PERIOD__: This parameter must be a value between Min_Data=0 and Max_Data=0xFF. (tscll = (SCLL+1)xtpresc)

Return value:

- Value: between Min_Data=0 and Max_Data=0xFFFFFFFF

Common Write and read registers Macros

LL_I2C_WriteReg **Description:**

- Write a value in I2C register.

Parameters:

- __INSTANCE__: I2C Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_I2C_ReadReg

Description:

- Read a value in I2C register.

Parameters:

- __INSTANCE__: I2C Instance
- __REG__: Register to be read

Return value:

- Register: value

70 LL I2S Generic Driver

70.1 I2S Firmware driver registers structures

70.1.1 LL_I2S_InitTypeDef

Data Fields

- ***uint32_t Mode***
- ***uint32_t Standard***
- ***uint32_t DataFormat***
- ***uint32_t MCLKOutput***
- ***uint32_t AudioFreq***
- ***uint32_t ClockPolarity***

Field Documentation

- ***uint32_t LL_I2S_InitTypeDef::Mode***
  Specifies the I2S operating mode. This parameter can be a value of ***I2S_LL_EC_MODE***This feature can be modified afterwards using unitary function **LL_I2S_SetTransferMode()**.
- ***uint32_t LL_I2S_InitTypeDef::Standard***
  Specifies the standard used for the I2S communication. This parameter can be a value of ***I2S_LL_EC_STANDARD***This feature can be modified afterwards using unitary function **LL_I2S_SetStandard()**.
- ***uint32_t LL_I2S_InitTypeDef::DataFormat***
  Specifies the data format for the I2S communication. This parameter can be a value of ***I2S_LL_EC_DATA_FORMAT***This feature can be modified afterwards using unitary function **LL_I2S_SetDataFormat()**.
- ***uint32_t LL_I2S_InitTypeDef::MCLKOutput***
  Specifies whether the I2S MCLK output is enabled or not. This parameter can be a value of ***I2S_LL_EC_MCLK_OUTPUT***This feature can be modified afterwards using unitary functions **LL_I2S_EnableMasterClock()** or **LL_I2S_DisableMasterClock**.
- ***uint32_t LL_I2S_InitTypeDef::AudioFreq***
  Specifies the frequency selected for the I2S communication. This parameter can be a value of ***I2S_LL_EC_AUDIO_FREQ***Audio Frequency can be modified afterwards using Reference manual formulas to calculate Prescaler Linear, Parity and unitary functions **LL_I2S_SetPrescalerLinear()** and **LL_I2S_SetPrescalerParity()** to set it.
- ***uint32_t LL_I2S_InitTypeDef::ClockPolarity***
  Specifies the idle state of the I2S clock. This parameter can be a value of ***I2S_LL_EC_POLARITY***This feature can be modified afterwards using unitary function **LL_I2S_SetClockPolarity()**.

70.2 I2S Firmware driver API description

70.2.1 Detailed description of functions

LL_I2S_Enable

Function name	**__STATIC_INLINE void LL_I2S_Enable (SPI_TypeDef * SPIx)**
Function description	Select I2S mode and Enable I2S peripheral.
Parameters	• **SPIx:** SPI Instance

Return values	• **None**
Reference Manual to LL API cross reference:	• I2SCFGR I2SMOD LL_I2S_Enable • I2SCFGR I2SE LL_I2S_Enable

LL_I2S_Disable

Function name	**__STATIC_INLINE void LL_I2S_Disable (SPI_TypeDef * SPIx)**
Function description	Disable I2S peripheral.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• I2SCFGR I2SE LL_I2S_Disable

LL_I2S_IsEnabled

Function name	**__STATIC_INLINE uint32_t LL_I2S_IsEnabled (SPI_TypeDef * SPIx)**
Function description	Check if I2S peripheral is enabled.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• I2SCFGR I2SE LL_I2S_IsEnabled

LL_I2S_SetDataFormat

Function name	**__STATIC_INLINE void LL_I2S_SetDataFormat (SPI_TypeDef * SPIx, uint32_t DataFormat)**
Function description	Set I2S data frame length.
Parameters	• **SPIx:** SPI Instance • **DataFormat:** This parameter can be one of the following values: – LL_I2S_DATAFORMAT_16B – LL_I2S_DATAFORMAT_16B_EXTENDED – LL_I2S_DATAFORMAT_24B – LL_I2S_DATAFORMAT_32B
Return values	• **None**
Reference Manual to LL API cross reference:	• I2SCFGR DATLEN LL_I2S_SetDataFormat • I2SCFGR CHLEN LL_I2S_SetDataFormat

LL_I2S_GetDataFormat

Function name	**__STATIC_INLINE uint32_t LL_I2S_GetDataFormat (SPI_TypeDef * SPIx)**
Function description	Get I2S data frame length.
Parameters	• **SPIx:** SPI Instance
Return values	• **Returned:** value can be one of the following values: – LL_I2S_DATAFORMAT_16B – LL_I2S_DATAFORMAT_16B_EXTENDED – LL_I2S_DATAFORMAT_24B – LL_I2S_DATAFORMAT_32B
Reference Manual to LL API cross reference:	• I2SCFGR DATLEN LL_I2S_GetDataFormat • I2SCFGR CHLEN LL_I2S_GetDataFormat

LL_I2S_SetClockPolarity

Function name	**__STATIC_INLINE void LL_I2S_SetClockPolarity (SPI_TypeDef * SPIx, uint32_t ClockPolarity)**
Function description	Set I2S clock polarity.
Parameters	• **SPIx:** SPI Instance • **ClockPolarity:** This parameter can be one of the following values: – LL_I2S_POLARITY_LOW – LL_I2S_POLARITY_HIGH
Return values	• **None**
Reference Manual to LL API cross reference:	• I2SCFGR CKPOL LL_I2S_SetClockPolarity

LL_I2S_GetClockPolarity

Function name	**__STATIC_INLINE uint32_t LL_I2S_GetClockPolarity (SPI_TypeDef * SPIx)**
Function description	Get I2S clock polarity.
Parameters	• **SPIx:** SPI Instance
Return values	• **Returned:** value can be one of the following values: – LL_I2S_POLARITY_LOW – LL_I2S_POLARITY_HIGH
Reference Manual to LL API cross reference:	• I2SCFGR CKPOL LL_I2S_GetClockPolarity

LL_I2S_SetStandard

Function name
__STATIC_INLINE void LL_I2S_SetStandard (SPI_TypeDef * SPIx, uint32_t Standard)

Function description
Set I2S standard protocol.

Parameters
- **SPIx:** SPI Instance
- **Standard:** This parameter can be one of the following values:
  - LL_I2S_STANDARD_PHILIPS
  - LL_I2S_STANDARD_MSB
  - LL_I2S_STANDARD_LSB
  - LL_I2S_STANDARD_PCM_SHORT
  - LL_I2S_STANDARD_PCM_LONG

Return values
- **None**

Reference Manual to LL API cross reference:
- I2SCFGR I2SSTD LL_I2S_SetStandard
- I2SCFGR PCMSYNC LL_I2S_SetStandard

LL_I2S_GetStandard

Function name
__STATIC_INLINE uint32_t LL_I2S_GetStandard (SPI_TypeDef * SPIx)

Function description
Get I2S standard protocol.

Parameters
- **SPIx:** SPI Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_I2S_STANDARD_PHILIPS
  - LL_I2S_STANDARD_MSB
  - LL_I2S_STANDARD_LSB
  - LL_I2S_STANDARD_PCM_SHORT
  - LL_I2S_STANDARD_PCM_LONG

Reference Manual to LL API cross reference:
- I2SCFGR I2SSTD LL_I2S_GetStandard
- I2SCFGR PCMSYNC LL_I2S_GetStandard

LL_I2S_SetTransferMode

Function name
__STATIC_INLINE void LL_I2S_SetTransferMode (SPI_TypeDef * SPIx, uint32_t Mode)

Function description
Set I2S transfer mode.

Parameters
- **SPIx:** SPI Instance
- **Mode:** This parameter can be one of the following values:
  - LL_I2S_MODE_SLAVE_TX
  - LL_I2S_MODE_SLAVE_RX
  - LL_I2S_MODE_MASTER_TX
  - LL_I2S_MODE_MASTER_RX

Return values
- **None**

Reference Manual to LL API cross reference:	• I2SCFGR I2SCFG LL_I2S_SetTransferMode

LL_I2S_GetTransferMode

Function name	**__STATIC_INLINE uint32_t LL_I2S_GetTransferMode (SPI_TypeDef * SPIx)**
Function description	Get I2S transfer mode.
Parameters	• **SPIx:** SPI Instance
Return values	• **Returned:** value can be one of the following values: – LL_I2S_MODE_SLAVE_TX – LL_I2S_MODE_SLAVE_RX – LL_I2S_MODE_MASTER_TX – LL_I2S_MODE_MASTER_RX
Reference Manual to LL API cross reference:	• I2SCFGR I2SCFG LL_I2S_GetTransferMode

LL_I2S_SetPrescalerLinear

Function name	**__STATIC_INLINE void LL_I2S_SetPrescalerLinear (SPI_TypeDef * SPIx, uint8_t PrescalerLinear)**
Function description	Set I2S linear prescaler.
Parameters	• **SPIx:** SPI Instance • **PrescalerLinear:** Value between Min_Data=0x02 and Max_Data=0xFF
Return values	• **None**
Reference Manual to LL API cross reference:	• I2SPR I2SDIV LL_I2S_SetPrescalerLinear

LL_I2S_GetPrescalerLinear

Function name	**__STATIC_INLINE uint32_t LL_I2S_GetPrescalerLinear (SPI_TypeDef * SPIx)**
Function description	Get I2S linear prescaler.
Parameters	• **SPIx:** SPI Instance
Return values	• **PrescalerLinear:** Value between Min_Data=0x02 and Max_Data=0xFF
Reference Manual to LL API cross reference:	• I2SPR I2SDIV LL_I2S_GetPrescalerLinear

LL_I2S_SetPrescalerParity

Function name	**__STATIC_INLINE void LL_I2S_SetPrescalerParity (SPI_TypeDef * SPIx, uint32_t PrescalerParity)**
Function description	Set I2S parity prescaler.
Parameters	• **SPIx:** SPI Instance • **PrescalerParity:** This parameter can be one of the following values: – LL_I2S_PRESCALER_PARITY_EVEN – LL_I2S_PRESCALER_PARITY_ODD
Return values	• **None**
Reference Manual to LL API cross reference:	• I2SPR ODD LL_I2S_SetPrescalerParity

LL_I2S_GetPrescalerParity

Function name	**__STATIC_INLINE uint32_t LL_I2S_GetPrescalerParity (SPI_TypeDef * SPIx)**
Function description	Get I2S parity prescaler.
Parameters	• **SPIx:** SPI Instance
Return values	• **Returned:** value can be one of the following values: – LL_I2S_PRESCALER_PARITY_EVEN – LL_I2S_PRESCALER_PARITY_ODD
Reference Manual to LL API cross reference:	• I2SPR ODD LL_I2S_GetPrescalerParity

LL_I2S_EnableMasterClock

Function name	**__STATIC_INLINE void LL_I2S_EnableMasterClock (SPI_TypeDef * SPIx)**
Function description	Enable the master clock ouput (Pin MCK)
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• I2SPR MCKOE LL_I2S_EnableMasterClock

LL_I2S_DisableMasterClock

Function name	**__STATIC_INLINE void LL_I2S_DisableMasterClock (SPI_TypeDef * SPIx)**
Function description	Disable the master clock ouput (Pin MCK)
Parameters	• **SPIx:** SPI Instance
Return values	• **None**

Reference Manual to LL API cross reference:	• I2SPR MCKOE LL_I2S_DisableMasterClock

LL_I2S_IsEnabledMasterClock

Function name	**__STATIC_INLINE uint32_t LL_I2S_IsEnabledMasterClock (SPI_TypeDef * SPIx)**
Function description	Check if the master clock ouput (Pin MCK) is enabled.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• I2SPR MCKOE LL_I2S_IsEnabledMasterClock

LL_I2S_IsActiveFlag_RXNE

Function name	**__STATIC_INLINE uint32_t LL_I2S_IsActiveFlag_RXNE (SPI_TypeDef * SPIx)**
Function description	Check if Rx buffer is not empty.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR RXNE LL_I2S_IsActiveFlag_RXNE

LL_I2S_IsActiveFlag_TXE

Function name	**__STATIC_INLINE uint32_t LL_I2S_IsActiveFlag_TXE (SPI_TypeDef * SPIx)**
Function description	Check if Tx buffer is empty.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR TXE LL_I2S_IsActiveFlag_TXE

LL_I2S_IsActiveFlag_BSY

Function name	**__STATIC_INLINE uint32_t LL_I2S_IsActiveFlag_BSY (SPI_TypeDef * SPIx)**
Function description	Get busy flag.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• SR BSY LL_I2S_IsActiveFlag_BSY

LL_I2S_IsActiveFlag_OVR

Function name	**__STATIC_INLINE uint32_t LL_I2S_IsActiveFlag_OVR (SPI_TypeDef * SPIx)**
Function description	Get overrun error flag.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR OVR LL_I2S_IsActiveFlag_OVR

LL_I2S_IsActiveFlag_UDR

Function name	**__STATIC_INLINE uint32_t LL_I2S_IsActiveFlag_UDR (SPI_TypeDef * SPIx)**
Function description	Get underrun error flag.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR UDR LL_I2S_IsActiveFlag_UDR

LL_I2S_IsActiveFlag_FRE

Function name	**__STATIC_INLINE uint32_t LL_I2S_IsActiveFlag_FRE (SPI_TypeDef * SPIx)**
Function description	Get frame format error flag.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR FRE LL_I2S_IsActiveFlag_FRE

LL_I2S_IsActiveFlag_CHSIDE

Function name	**__STATIC_INLINE uint32_t LL_I2S_IsActiveFlag_CHSIDE (SPI_TypeDef * SPIx)**
Function description	Get channel side flag.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Notes	• 0: Channel Left has to be transmitted or has been received 1: Channel Right has to be transmitted or has been received It

has no significance in PCM mode.

Reference Manual to LL API cross reference:
- SR CHSIDE LL_I2S_IsActiveFlag_CHSIDE

LL_I2S_ClearFlag_OVR

Function name: **__STATIC_INLINE void LL_I2S_ClearFlag_OVR (SPI_TypeDef * SPIx)**

Function description: Clear overrun error flag.

Parameters:
- **SPIx:** SPI Instance

Return values:
- **None**

Reference Manual to LL API cross reference:
- SR OVR LL_I2S_ClearFlag_OVR

LL_I2S_ClearFlag_UDR

Function name: **__STATIC_INLINE void LL_I2S_ClearFlag_UDR (SPI_TypeDef * SPIx)**

Function description: Clear underrun error flag.

Parameters:
- **SPIx:** SPI Instance

Return values:
- **None**

Reference Manual to LL API cross reference:
- SR UDR LL_I2S_ClearFlag_UDR

LL_I2S_ClearFlag_FRE

Function name: **__STATIC_INLINE void LL_I2S_ClearFlag_FRE (SPI_TypeDef * SPIx)**

Function description: Clear frame format error flag.

Parameters:
- **SPIx:** SPI Instance

Return values:
- **None**

Reference Manual to LL API cross reference:
- SR FRE LL_I2S_ClearFlag_FRE

LL_I2S_EnableIT_ERR

Function name: **__STATIC_INLINE void LL_I2S_EnableIT_ERR (SPI_TypeDef * SPIx)**

Function description: Enable error IT.

Parameters:
- **SPIx:** SPI Instance

Return values:
- **None**

Notes	• This bit controls the generation of an interrupt when an error condition occurs (OVR, UDR and FRE in I2S mode).
Reference Manual to LL API cross reference:	• CR2 ERRIE LL_I2S_EnableIT_ERR

LL_I2S_EnableIT_RXNE

Function name	**__STATIC_INLINE void LL_I2S_EnableIT_RXNE (SPI_TypeDef * SPIx)**
Function description	Enable Rx buffer not empty IT.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 RXNEIE LL_I2S_EnableIT_RXNE

LL_I2S_EnableIT_TXE

Function name	**__STATIC_INLINE void LL_I2S_EnableIT_TXE (SPI_TypeDef * SPIx)**
Function description	Enable Tx buffer empty IT.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 TXEIE LL_I2S_EnableIT_TXE

LL_I2S_DisableIT_ERR

Function name	**__STATIC_INLINE void LL_I2S_DisableIT_ERR (SPI_TypeDef * SPIx)**
Function description	Disable error IT.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Notes	• This bit controls the generation of an interrupt when an error condition occurs (OVR, UDR and FRE in I2S mode).
Reference Manual to LL API cross reference:	• CR2 ERRIE LL_I2S_DisableIT_ERR

LL_I2S_DisableIT_RXNE

Function name	**__STATIC_INLINE void LL_I2S_DisableIT_RXNE (SPI_TypeDef * SPIx)**
Function description	Disable Rx buffer not empty IT.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 RXNEIE LL_I2S_DisableIT_RXNE

LL_I2S_DisableIT_TXE

Function name	**__STATIC_INLINE void LL_I2S_DisableIT_TXE (SPI_TypeDef * SPIx)**
Function description	Disable Tx buffer empty IT.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 TXEIE LL_I2S_DisableIT_TXE

LL_I2S_IsEnabledIT_ERR

Function name	**__STATIC_INLINE uint32_t LL_I2S_IsEnabledIT_ERR (SPI_TypeDef * SPIx)**
Function description	Check if ERR IT is enabled.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR2 ERRIE LL_I2S_IsEnabledIT_ERR

LL_I2S_IsEnabledIT_RXNE

Function name	**__STATIC_INLINE uint32_t LL_I2S_IsEnabledIT_RXNE (SPI_TypeDef * SPIx)**
Function description	Check if RXNE IT is enabled.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR2 RXNEIE LL_I2S_IsEnabledIT_RXNE

LL_I2S_IsEnabledIT_TXE

Function name	**__STATIC_INLINE uint32_t LL_I2S_IsEnabledIT_TXE (SPI_TypeDef * SPIx)**
Function description	Check if TXE IT is enabled.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR2 TXEIE LL_I2S_IsEnabledIT_TXE

LL_I2S_EnableDMAReq_RX

Function name	**__STATIC_INLINE void LL_I2S_EnableDMAReq_RX (SPI_TypeDef * SPIx)**
Function description	Enable DMA Rx.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 RXDMAEN LL_I2S_EnableDMAReq_RX

LL_I2S_DisableDMAReq_RX

Function name	**__STATIC_INLINE void LL_I2S_DisableDMAReq_RX (SPI_TypeDef * SPIx)**
Function description	Disable DMA Rx.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 RXDMAEN LL_I2S_DisableDMAReq_RX

LL_I2S_IsEnabledDMAReq_RX

Function name	**__STATIC_INLINE uint32_t LL_I2S_IsEnabledDMAReq_RX (SPI_TypeDef * SPIx)**
Function description	Check if DMA Rx is enabled.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR2 RXDMAEN LL_I2S_IsEnabledDMAReq_RX

LL_I2S_EnableDMAReq_TX

Function name	**__STATIC_INLINE void LL_I2S_EnableDMAReq_TX (SPI_TypeDef * SPIx)**
Function description	Enable DMA Tx.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 TXDMAEN LL_I2S_EnableDMAReq_TX

LL_I2S_DisableDMAReq_TX

Function name	**__STATIC_INLINE void LL_I2S_DisableDMAReq_TX (SPI_TypeDef * SPIx)**
Function description	Disable DMA Tx.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 TXDMAEN LL_I2S_DisableDMAReq_TX

LL_I2S_IsEnabledDMAReq_TX

Function name	**__STATIC_INLINE uint32_t LL_I2S_IsEnabledDMAReq_TX (SPI_TypeDef * SPIx)**
Function description	Check if DMA Tx is enabled.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR2 TXDMAEN LL_I2S_IsEnabledDMAReq_TX

LL_I2S_ReceiveData16

Function name	**__STATIC_INLINE uint16_t LL_I2S_ReceiveData16 (SPI_TypeDef * SPIx)**
Function description	Read 16-Bits in data register.
Parameters	• **SPIx:** SPI Instance
Return values	• **RxData:** Value between Min_Data=0x0000 and Max_Data=0xFFFF
Reference Manual to LL API cross reference:	• DR DR LL_I2S_ReceiveData16

LL_I2S_TransmitData16

Function name	**__STATIC_INLINE void LL_I2S_TransmitData16 (SPI_TypeDef * SPIx, uint16_t TxData)**
Function description	Write 16-Bits in data register.
Parameters	• **SPIx:** SPI Instance • **TxData:** Value between Min_Data=0x0000 and Max_Data=0xFFFF
Return values	• **None**
Reference Manual to LL API cross reference:	• DR DR LL_I2S_TransmitData16

LL_I2S_DeInit

Function name	**ErrorStatus LL_I2S_DeInit (SPI_TypeDef * SPIx)**
Function description	De-initialize the SPI/I2S registers to their default reset values.
Parameters	• **SPIx:** SPI Instance
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: SPI registers are de-initialized – ERROR: SPI registers are not de-initialized

LL_I2S_Init

Function name	**ErrorStatus LL_I2S_Init (SPI_TypeDef * SPIx, LL_I2S_InitTypeDef * I2S_InitStruct)**
Function description	Initializes the SPI/I2S registers according to the specified parameters in I2S_InitStruct.
Parameters	• **SPIx:** SPI Instance • **I2S_InitStruct:** pointer to a LL_I2S_InitTypeDef structure
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: SPI registers are Initialized – ERROR: SPI registers are not Initialized
Notes	• As some bits in SPI configuration registers can only be written when the SPI is disabled (SPI_CR1_SPE bit =0), SPI IP should be in disabled state prior calling this function. Otherwise, ERROR result will be returned.

LL_I2S_StructInit

Function name	**void LL_I2S_StructInit (LL_I2S_InitTypeDef * I2S_InitStruct)**
Function description	Set each LL_I2S_InitTypeDef field to default value.
Parameters	• **I2S_InitStruct:** pointer to a LL_I2S_InitTypeDef structure whose fields will be set to default values.
Return values	• **None**

LL_I2S_ConfigPrescaler

Function name	**void LL_I2S_ConfigPrescaler (SPI_TypeDef * SPIx, uint32_t PrescalerLinear, uint32_t PrescalerParity)**
Function description	Set linear and parity prescaler.
Parameters	• **SPIx:** SPI Instance • **PrescalerLinear:** value: Min_Data=0x02 and Max_Data=0xFF. • **PrescalerParity:** This parameter can be one of the following values: – LL_I2S_PRESCALER_PARITY_EVEN – LL_I2S_PRESCALER_PARITY_ODD
Return values	• **None**
Notes	• To calculate value of PrescalerLinear(I2SDIV[7:0] bits) and PrescalerParity(ODD bit) Check Audio frequency table and formulas inside Reference Manual (SPI/I2S).

LL_I2S_InitFullDuplex

Function name	**ErrorStatus LL_I2S_InitFullDuplex (SPI_TypeDef * I2Sxext, LL_I2S_InitTypeDef * I2S_InitStruct)**
Function description	Configures the full duplex mode for the I2Sx peripheral using its extension I2Sxext according to the specified parameters in the I2S_InitStruct.
Parameters	• **I2Sxext:** SPI Instance • **I2S_InitStruct:** pointer to a LL_I2S_InitTypeDef structure
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: I2Sxext registers are Initialized – ERROR: I2Sxext registers are not Initialized
Notes	• The structure pointed by I2S_InitStruct parameter should be the same used for the master I2S peripheral. In this case, if the master is configured as transmitter, the slave will be receiver and vice versa. Or you can force a different mode by modifying the field I2S_Mode to the value I2S_SlaveRx or I2S_SlaveTx independently of the master configuration.

70.3 I2S Firmware driver defines

70.3.1 I2S

Audio Frequency

LL_I2S_AUDIOFREQ_192K	Audio Frequency configuration 192000 Hz
LL_I2S_AUDIOFREQ_96K	Audio Frequency configuration 96000 Hz
LL_I2S_AUDIOFREQ_48K	Audio Frequency configuration 48000 Hz
LL_I2S_AUDIOFREQ_44K	Audio Frequency configuration 44100 Hz
LL_I2S_AUDIOFREQ_32K	Audio Frequency configuration 32000 Hz
LL_I2S_AUDIOFREQ_22K	Audio Frequency configuration 22050 Hz

LL_I2S_AUDIOFREQ_16K	Audio Frequency configuration 16000 Hz
LL_I2S_AUDIOFREQ_11K	Audio Frequency configuration 11025 Hz
LL_I2S_AUDIOFREQ_8K	Audio Frequency configuration 8000 Hz
LL_I2S_AUDIOFREQ_DEFAULT	Audio Freq not specified. Register I2SDIV = 2

Data format

LL_I2S_DATAFORMAT_16B	Data length 16 bits, Channel lenght 16bit
LL_I2S_DATAFORMAT_16B_EXTENDED	Data length 16 bits, Channel lenght 32bit
LL_I2S_DATAFORMAT_24B	Data length 24 bits, Channel lenght 32bit
LL_I2S_DATAFORMAT_32B	Data length 16 bits, Channel lenght 32bit

Get Flags Defines

LL_I2S_SR_RXNE	Rx buffer not empty flag
LL_I2S_SR_TXE	Tx buffer empty flag
LL_I2S_SR_BSY	Busy flag
LL_I2S_SR_UDR	Underrun flag
LL_I2S_SR_OVR	Overrun flag
LL_I2S_SR_FRE	TI mode frame format error flag

MCLK Output

LL_I2S_MCLK_OUTPUT_DISABLE	Master clock output is disabled
LL_I2S_MCLK_OUTPUT_ENABLE	Master clock output is enabled

Operation Mode

LL_I2S_MODE_SLAVE_TX	Slave Tx configuration
LL_I2S_MODE_SLAVE_RX	Slave Rx configuration
LL_I2S_MODE_MASTER_TX	Master Tx configuration
LL_I2S_MODE_MASTER_RX	Master Rx configuration

Clock Polarity

LL_I2S_POLARITY_LOW	Clock steady state is low level
LL_I2S_POLARITY_HIGH	Clock steady state is high level

Prescaler Factor

LL_I2S_PRESCALER_PARITY_EVEN	Odd factor: Real divider value is = I2SDIV * 2
LL_I2S_PRESCALER_PARITY_ODD	Odd factor: Real divider value is = (I2SDIV * 2)+1

I2s Standard

LL_I2S_STANDARD_PHILIPS	I2S standard philips
LL_I2S_STANDARD_MSB	MSB justified standard (left justified)
LL_I2S_STANDARD_LSB	LSB justified standard (right justified)
LL_I2S_STANDARD_PCM_SHORT	PCM standard, short frame synchronization
LL_I2S_STANDARD_PCM_LONG	PCM standard, long frame synchronization

Common Write and read registers Macros

LL_I2S_WriteReg

Description:

- Write a value in I2S register.

Parameters:

- __INSTANCE__: I2S Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_I2S_ReadReg

Description:

- Read a value in I2S register.

Parameters:

- __INSTANCE__: I2S Instance
- __REG__: Register to be read

Return value:

- Register: value

71 LL IWDG Generic Driver

71.1 IWDG Firmware driver API description

71.1.1 Detailed description of functions

LL_IWDG_Enable

Function name	**__STATIC_INLINE void LL_IWDG_Enable (IWDG_TypeDef * IWDGx)**
Function description	Start the Independent Watchdog.
Parameters	• **IWDGx:** IWDG Instance
Return values	• **None**
Notes	• Except if the hardware watchdog option is selected
Reference Manual to LL API cross reference:	• KR KEY LL_IWDG_Enable

LL_IWDG_ReloadCounter

Function name	**__STATIC_INLINE void LL_IWDG_ReloadCounter (IWDG_TypeDef * IWDGx)**
Function description	Reloads IWDG counter with value defined in the reload register.
Parameters	• **IWDGx:** IWDG Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• KR KEY LL_IWDG_ReloadCounter

LL_IWDG_EnableWriteAccess

Function name	**__STATIC_INLINE void LL_IWDG_EnableWriteAccess (IWDG_TypeDef * IWDGx)**
Function description	Enable write access to IWDG_PR, IWDG_RLR and IWDG_WINR registers.
Parameters	• **IWDGx:** IWDG Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• KR KEY LL_IWDG_EnableWriteAccess

LL_IWDG_DisableWriteAccess

Function name
__STATIC_INLINE void LL_IWDG_DisableWriteAccess (IWDG_TypeDef * IWDGx)

Function description
Disable write access to IWDG_PR, IWDG_RLR and IWDG_WINR registers.

Parameters
- **IWDGx:** IWDG Instance

Return values
- **None**

Reference Manual to LL API cross reference:
- KR KEY LL_IWDG_DisableWriteAccess

LL_IWDG_SetPrescaler

Function name
__STATIC_INLINE void LL_IWDG_SetPrescaler (IWDG_TypeDef * IWDGx, uint32_t Prescaler)

Function description
Select the prescaler of the IWDG.

Parameters
- **IWDGx:** IWDG Instance
- **Prescaler:** This parameter can be one of the following values:
  - LL_IWDG_PRESCALER_4
  - LL_IWDG_PRESCALER_8
  - LL_IWDG_PRESCALER_16
  - LL_IWDG_PRESCALER_32
  - LL_IWDG_PRESCALER_64
  - LL_IWDG_PRESCALER_128
  - LL_IWDG_PRESCALER_256

Return values
- **None**

Reference Manual to LL API cross reference:
- PR PR LL_IWDG_SetPrescaler

LL_IWDG_GetPrescaler

Function name
__STATIC_INLINE uint32_t LL_IWDG_GetPrescaler (IWDG_TypeDef * IWDGx)

Function description
Get the selected prescaler of the IWDG.

Parameters
- **IWDGx:** IWDG Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_IWDG_PRESCALER_4
  - LL_IWDG_PRESCALER_8
  - LL_IWDG_PRESCALER_16
  - LL_IWDG_PRESCALER_32
  - LL_IWDG_PRESCALER_64
  - LL_IWDG_PRESCALER_128
  - LL_IWDG_PRESCALER_256

Reference Manual to LL API cross
- PR PR LL_IWDG_GetPrescaler

reference:

LL_IWDG_SetReloadCounter

Function name	**__STATIC_INLINE void LL_IWDG_SetReloadCounter (IWDG_TypeDef * IWDGx, uint32_t Counter)**
Function description	Specify the IWDG down-counter reload value.
Parameters	• **IWDGx:** IWDG Instance • **Counter:** Value between Min_Data=0 and Max_Data=0x0FFF
Return values	• **None**
Reference Manual to LL API cross reference:	• RLR RL LL_IWDG_SetReloadCounter

LL_IWDG_GetReloadCounter

Function name	**__STATIC_INLINE uint32_t LL_IWDG_GetReloadCounter (IWDG_TypeDef * IWDGx)**
Function description	Get the specified IWDG down-counter reload value.
Parameters	• **IWDGx:** IWDG Instance
Return values	• **Value:** between Min_Data=0 and Max_Data=0x0FFF
Reference Manual to LL API cross reference:	• RLR RL LL_IWDG_GetReloadCounter

LL_IWDG_SetWindow

Function name	**__STATIC_INLINE void LL_IWDG_SetWindow (IWDG_TypeDef * IWDGx, uint32_t Window)**
Function description	Specify high limit of the window value to be compared to the down-counter.
Parameters	• **IWDGx:** IWDG Instance • **Window:** Value between Min_Data=0 and Max_Data=0x0FFF
Return values	• **None**
Reference Manual to LL API cross reference:	• WINR WIN LL_IWDG_SetWindow

LL_IWDG_GetWindow

Function name	**__STATIC_INLINE uint32_t LL_IWDG_GetWindow (IWDG_TypeDef * IWDGx)**
Function description	Get the high limit of the window value specified.
Parameters	• **IWDGx:** IWDG Instance

Return values	• **Value:** between Min_Data=0 and Max_Data=0x0FFF
Reference Manual to LL API cross reference:	• WINR WIN LL_IWDG_GetWindow

LL_IWDG_IsActiveFlag_PVU

Function name	**__STATIC_INLINE uint32_t LL_IWDG_IsActiveFlag_PVU (IWDG_TypeDef * IWDGx)**
Function description	Check if flag Prescaler Value Update is set or not.
Parameters	• **IWDGx:** IWDG Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR PVU LL_IWDG_IsActiveFlag_PVU

LL_IWDG_IsActiveFlag_RVU

Function name	**__STATIC_INLINE uint32_t LL_IWDG_IsActiveFlag_RVU (IWDG_TypeDef * IWDGx)**
Function description	Check if flag Reload Value Update is set or not.
Parameters	• **IWDGx:** IWDG Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR RVU LL_IWDG_IsActiveFlag_RVU

LL_IWDG_IsActiveFlag_WVU

Function name	**__STATIC_INLINE uint32_t LL_IWDG_IsActiveFlag_WVU (IWDG_TypeDef * IWDGx)**
Function description	Check if flag Window Value Update is set or not.
Parameters	• **IWDGx:** IWDG Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR WVU LL_IWDG_IsActiveFlag_WVU

LL_IWDG_IsReady

Function name	**__STATIC_INLINE uint32_t LL_IWDG_IsReady (IWDG_TypeDef * IWDGx)**
Function description	Check if all flags Prescaler, Reload & Window Value Update are reset or not.
Parameters	• **IWDGx:** IWDG Instance

Return values
- **State:** of bits (1 or 0).

Reference Manual to LL API cross reference:
- SR PVU LL_IWDG_IsReady
- SR WVU LL_IWDG_IsReady
- SR RVU LL_IWDG_IsReady

71.2 IWDG Firmware driver defines

71.2.1 IWDG

Get Flags Defines

LL_IWDG_SR_PVU	Watchdog prescaler value update
LL_IWDG_SR_RVU	Watchdog counter reload value update
LL_IWDG_SR_WVU	Watchdog counter window value update

Prescaler Divider

LL_IWDG_PRESCALER_4	Divider by 4
LL_IWDG_PRESCALER_8	Divider by 8
LL_IWDG_PRESCALER_16	Divider by 16
LL_IWDG_PRESCALER_32	Divider by 32
LL_IWDG_PRESCALER_64	Divider by 64
LL_IWDG_PRESCALER_128	Divider by 128
LL_IWDG_PRESCALER_256	Divider by 256

Common Write and read registers Macros

LL_IWDG_WriteReg

Description:

- Write a value in IWDG register.

Parameters:

- __INSTANCE__: IWDG Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_IWDG_ReadReg

Description:

- Read a value in IWDG register.

Parameters:

- __INSTANCE__: IWDG Instance
- __REG__: Register to be read

Return value:

- Register: value

72 LL OPAMP Generic Driver

72.1 OPAMP Firmware driver registers structures

72.1.1 LL_OPAMP_InitTypeDef

Data Fields

- ***uint32_t FunctionalMode***
- ***uint32_t InputNonInverting***
- ***uint32_t InputInverting***

Field Documentation

- ***uint32_t LL_OPAMP_InitTypeDef::FunctionalMode***
  Set OPAMP functional mode by setting internal connections: OPAMP operation in standalone, follower, ... This parameter can be a value of ***OPAMP_LL_EC_FUNCTIONAL_MODE***
  Note: If OPAMP is configured in mode PGA, the gain can be configured using function **LL_OPAMP_SetPGAGain()**. This feature can be modified afterwards using unitary function **LL_OPAMP_SetFunctionalMode()**.
- ***uint32_t LL_OPAMP_InitTypeDef::InputNonInverting***
  Set OPAMP input non-inverting connection. This parameter can be a value of ***OPAMP_LL_EC_INPUT_NONINVERTING***This feature can be modified afterwards using unitary function **LL_OPAMP_SetInputNonInverting()**.
- ***uint32_t LL_OPAMP_InitTypeDef::InputInverting***
  Set OPAMP inverting input connection. This parameter can be a value of ***OPAMP_LL_EC_INPUT_INVERTING***
  Note:OPAMP inverting input is used with OPAMP in mode standalone or PGA with external capacitors for filtering circuit. Otherwise (OPAMP in mode follower), OPAMP inverting input is not used (not connected to GPIO pin), this parameter is discarded. This feature can be modified afterwards using unitary function **LL_OPAMP_SetInputInverting()**.

72.2 OPAMP Firmware driver API description

72.2.1 Detailed description of functions

LL_OPAMP_SetMode

Function name	**__STATIC_INLINE void LL_OPAMP_SetMode (OPAMP_TypeDef * OPAMPx, uint32_t Mode)**
Function description	Set OPAMP mode calibration or functional.
Parameters	• **OPAMPx:** OPAMP instance • **Mode:** This parameter can be one of the following values: – LL_OPAMP_MODE_FUNCTIONAL – LL_OPAMP_MODE_CALIBRATION
Return values	• **None**
Notes	• OPAMP mode corresponds to functional or calibration mode: functional mode: OPAMP operation in standalone, follower, ... Set functional mode using function

LL_OPAMP_SetFunctionalMode().calibration mode: offset calibration of the selected transistors differential pair NMOS or PMOS.

Reference Manual to LL API cross reference:
- CSR CALON LL_OPAMP_SetMode

LL_OPAMP_GetMode

Function name: **__STATIC_INLINE uint32_t LL_OPAMP_GetMode (OPAMP_TypeDef * OPAMPx)**

Function description: Get OPAMP mode calibration or functional.

Parameters:
- **OPAMPx:** OPAMP instance

Return values:
- **Returned:** value can be one of the following values:
  - LL_OPAMP_MODE_FUNCTIONAL
  - LL_OPAMP_MODE_CALIBRATION

Notes:
- OPAMP mode corresponds to functional or calibration mode: functional mode: OPAMP operation in standalone, follower, ... Set functional mode using function LL_OPAMP_SetFunctionalMode().calibration mode: offset calibration of the selected transistors differential pair NMOS or PMOS.

Reference Manual to LL API cross reference:
- CSR CALON LL_OPAMP_GetMode

LL_OPAMP_SetFunctionalMode

Function name: **__STATIC_INLINE void LL_OPAMP_SetFunctionalMode (OPAMP_TypeDef * OPAMPx, uint32_t FunctionalMode)**

Function description: Set OPAMP functional mode by setting internal connections.

Parameters:
- **OPAMPx:** OPAMP instance
- **FunctionalMode:** This parameter can be one of the following values:
  - LL_OPAMP_MODE_STANDALONE
  - LL_OPAMP_MODE_FOLLOWER
  - LL_OPAMP_MODE_PGA
  - LL_OPAMP_MODE_PGA_EXT_FILT_IO0
  - LL_OPAMP_MODE_PGA_EXT_FILT_IO1

Return values:
- **None**

Notes:
- This function reset bit of calibration mode to ensure to be in functional mode, in order to have OPAMP parameters (inputs selection, ...) set with the corresponding OPAMP mode to be effective.

Reference Manual to LL API cross reference:
- CSR VMSEL LL_OPAMP_SetFunctionalMode

LL_OPAMP_GetFunctionalMode

Function name	**__STATIC_INLINE uint32_t LL_OPAMP_GetFunctionalMode (OPAMP_TypeDef * OPAMPx)**
Function description	Get OPAMP functional mode from setting of internal connections.
Parameters	• **OPAMPx:** OPAMP instance
Return values	• **Returned:** value can be one of the following values: – LL_OPAMP_MODE_STANDALONE – LL_OPAMP_MODE_FOLLOWER – LL_OPAMP_MODE_PGA – LL_OPAMP_MODE_PGA_EXT_FILT_IO0 – LL_OPAMP_MODE_PGA_EXT_FILT_IO1
Reference Manual to LL API cross reference:	• CSR VMSEL LL_OPAMP_GetFunctionalMode

LL_OPAMP_SetPGAGain

Function name	**__STATIC_INLINE void LL_OPAMP_SetPGAGain (OPAMP_TypeDef * OPAMPx, uint32_t PGAGain)**
Function description	Set OPAMP PGA gain.
Parameters	• **OPAMPx:** OPAMP instance • **PGAGain:** This parameter can be one of the following values: – LL_OPAMP_PGA_GAIN_2 – LL_OPAMP_PGA_GAIN_4 – LL_OPAMP_PGA_GAIN_8 – LL_OPAMP_PGA_GAIN_16
Return values	• **None**
Notes	• Preliminarily, OPAMP must be set in mode PGA using function LL_OPAMP_SetFunctionalMode().
Reference Manual to LL API cross reference:	• CSR PGGAIN LL_OPAMP_SetPGAGain

LL_OPAMP_GetPGAGain

Function name	**__STATIC_INLINE uint32_t LL_OPAMP_GetPGAGain (OPAMP_TypeDef * OPAMPx)**
Function description	Get OPAMP PGA gain.
Parameters	• **OPAMPx:** OPAMP instance
Return values	• **Returned:** value can be one of the following values: – LL_OPAMP_PGA_GAIN_2 – LL_OPAMP_PGA_GAIN_4 – LL_OPAMP_PGA_GAIN_8 – LL_OPAMP_PGA_GAIN_16
Notes	• Preliminarily, OPAMP must be set in mode PGA using

function LL_OPAMP_SetFunctionalMode().

Reference Manual to LL API cross reference:
- CSR PGGAIN LL_OPAMP_GetPGAGain

LL_OPAMP_SetInputNonInverting

Function name: **__STATIC_INLINE void LL_OPAMP_SetInputNonInverting (OPAMP_TypeDef * OPAMPx, uint32_t InputNonInverting)**

Function description: Set OPAMP non-inverting input connection.

Parameters:
- **OPAMPx:** OPAMP instance
- **InputNonInverting:** This parameter can be one of the following values: (1) Parameter specific to OPAMP instances: OPAMP4.
  - LL_OPAMP_INPUT_NONINVERT_IO0
  - LL_OPAMP_INPUT_NONINVERT_IO1
  - LL_OPAMP_INPUT_NONINVERT_IO2
  - LL_OPAMP_INPUT_NONINVERT_IO3
  - LL_OPAMP_INPUT_NONINV_DAC1_CH1 (1)
  - LL_OPAMP_INPUT_NONINV_DAC1_CH2 (2)
- (2) Parameter specific to OPAMP instances: OPAMP1, OPAMP3.

Return values:
- **None**

Reference Manual to LL API cross reference:
- CSR VPSEL LL_OPAMP_SetInputNonInverting

LL_OPAMP_GetInputNonInverting

Function name: **__STATIC_INLINE uint32_t LL_OPAMP_GetInputNonInverting (OPAMP_TypeDef * OPAMPx)**

Function description: Get OPAMP non-inverting input connection.

Parameters:
- **OPAMPx:** OPAMP instance

Return values:
- **Returned:** value can be one of the following values: (1) Parameter specific to OPAMP instances: OPAMP4.
  - LL_OPAMP_INPUT_NONINVERT_IO0
  - LL_OPAMP_INPUT_NONINVERT_IO1
  - LL_OPAMP_INPUT_NONINVERT_IO2
  - LL_OPAMP_INPUT_NONINVERT_IO3
  - LL_OPAMP_INPUT_NONINV_DAC1_CH1 (1)
  - LL_OPAMP_INPUT_NONINV_DAC1_CH2 (2)
- (2) Parameter specific to OPAMP instances: OPAMP1, OPAMP3.

Reference Manual to LL API cross reference:
- CSR VPSEL LL_OPAMP_GetInputNonInverting

LL_OPAMP_SetInputInverting

Function name	**__STATIC_INLINE void LL_OPAMP_SetInputInverting (OPAMP_TypeDef * OPAMPx, uint32_t InputInverting)**
Function description	Set OPAMP inverting input connection.
Parameters	• **OPAMPx:** OPAMP instance • **InputInverting:** This parameter can be one of the following values: – LL_OPAMP_INPUT_INVERT_IO0 – LL_OPAMP_INPUT_INVERT_IO1 – LL_OPAMP_INPUT_INVERT_CONNECT_NO
Return values	• **None**
Notes	• OPAMP inverting input is used with OPAMP in mode standalone or PGA with external capacitors for filtering circuit. Otherwise (OPAMP in mode follower), OPAMP inverting input is not used (not connected to GPIO pin).
Reference Manual to LL API cross reference:	• CSR VMSEL LL_OPAMP_SetInputInverting

LL_OPAMP_GetInputInverting

Function name	**__STATIC_INLINE uint32_t LL_OPAMP_GetInputInverting (OPAMP_TypeDef * OPAMPx)**
Function description	Get OPAMP inverting input connection.
Parameters	• **OPAMPx:** OPAMP instance
Return values	• **Returned:** value can be one of the following values: – LL_OPAMP_INPUT_INVERT_IO0 – LL_OPAMP_INPUT_INVERT_IO1 – LL_OPAMP_INPUT_INVERT_CONNECT_NO
Reference Manual to LL API cross reference:	• CSR VMSEL LL_OPAMP_GetInputInverting

LL_OPAMP_SetInputNonInvertingSecondary

Function name	**__STATIC_INLINE void LL_OPAMP_SetInputNonInvertingSecondary (OPAMP_TypeDef * OPAMPx, uint32_t InputNonInverting)**
Function description	Set OPAMP non-inverting input secondary connection.
Parameters	• **OPAMPx:** OPAMP instance • **InputNonInverting:** This parameter can be one of the following values: (1) Parameter specific to OPAMP instances: OPAMP4. – LL_OPAMP_INPUT_NONINVERT_IO0_SEC – LL_OPAMP_INPUT_NONINVERT_IO1_SEC – LL_OPAMP_INPUT_NONINVERT_IO2_SEC – LL_OPAMP_INPUT_NONINVERT_IO3_SEC – LL_OPAMP_INPUT_NONINV_DAC1_CH1_SEC (1)

– LL_OPAMP_INPUT_NONINV_DAC1_CH2_SEC (2)
- (2) Parameter specific to OPAMP instances: OPAMP1, OPAMP3.

Return values
- **None**

Reference Manual to LL API cross reference:
- CSR VPSSEL LL_OPAMP_SetInputNonInvertingSecondary

LL_OPAMP_GetInputNonInvertingSecondary

Function name
__STATIC_INLINE uint32_t LL_OPAMP_GetInputNonInvertingSecondary (OPAMP_TypeDef * OPAMPx)

Function description
Get OPAMP non-inverting input secondary connection.

Parameters
- **OPAMPx:** OPAMP instance

Return values
- **Returned:** value can be one of the following values: (1) Parameter specific to OPAMP instances: OPAMP4.
  – LL_OPAMP_INPUT_NONINVERT_IO0_SEC
  – LL_OPAMP_INPUT_NONINVERT_IO1_SEC
  – LL_OPAMP_INPUT_NONINVERT_IO2_SEC
  – LL_OPAMP_INPUT_NONINVERT_IO3_SEC
  – LL_OPAMP_INPUT_NONINV_DAC1_CH1_SEC (1)
  – LL_OPAMP_INPUT_NONINV_DAC1_CH2_SEC (2)
- (2) Parameter specific to OPAMP instances: OPAMP1, OPAMP3.

Reference Manual to LL API cross reference:
- CSR VPSSEL LL_OPAMP_GetInputNonInvertingSecondary

LL_OPAMP_SetInputInvertingSecondary

Function name
__STATIC_INLINE void LL_OPAMP_SetInputInvertingSecondary (OPAMP_TypeDef * OPAMPx, uint32_t InputInverting)

Function description
Set OPAMP inverting input secondary connection.

Parameters
- **OPAMPx:** OPAMP instance
- **InputInverting:** This parameter can be one of the following values:
  – LL_OPAMP_INPUT_INVERT_IO0_SEC
  – LL_OPAMP_INPUT_INVERT_IO1_SEC

Return values
- **None**

Notes
- OPAMP inverting input is used with OPAMP in mode standalone or PGA with external capacitors for filtering circuit. Otherwise (OPAMP in mode follower), OPAMP inverting input is not used (not connected to GPIO pin).

Reference Manual to LL API cross reference:
- CSR VMSSEL LL_OPAMP_SetInputInvertingSecondary

LL_OPAMP_GetInputInvertingSecondary

Function name	**__STATIC_INLINE uint32_t LL_OPAMP_GetInputInvertingSecondary (OPAMP_TypeDef * OPAMPx)**
Function description	Get OPAMP inverting input secondary connection.
Parameters	• **OPAMPx:** OPAMP instance
Return values	• **Returned:** value can be one of the following values: – LL_OPAMP_INPUT_INVERT_IO0_SEC – LL_OPAMP_INPUT_INVERT_IO1_SEC
Reference Manual to LL API cross reference:	• CSR VMSSEL LL_OPAMP_GetInputInvertingSecondary

LL_OPAMP_SetInputsMuxMode

Function name	**__STATIC_INLINE void LL_OPAMP_SetInputsMuxMode (OPAMP_TypeDef * OPAMPx, uint32_t InputsMuxMode)**
Function description	Set OPAMP inputs multiplexer mode.
Parameters	• **OPAMPx:** OPAMP instance • **InputsMuxMode:** This parameter can be one of the following values: – LL_OPAMP_INPUT_MUX_DISABLE – LL_OPAMP_INPUT_MUX_TIM1_CH6
Return values	• **None**
Reference Manual to LL API cross reference:	• CSR TCMEN LL_OPAMP_SetInputsMuxMode

LL_OPAMP_GetInputsMuxMode

Function name	**__STATIC_INLINE uint32_t LL_OPAMP_GetInputsMuxMode (OPAMP_TypeDef * OPAMPx)**
Function description	Get OPAMP inputs multiplexer mode.
Parameters	• **OPAMPx:** OPAMP instance
Return values	• **Returned:** value can be one of the following values: – LL_OPAMP_INPUT_MUX_DISABLE – LL_OPAMP_INPUT_MUX_TIM1_CH6
Reference Manual to LL API cross reference:	• CSR TCMEN LL_OPAMP_GetInputsMuxMode

LL_OPAMP_SetTrimmingMode

Function name	**__STATIC_INLINE void LL_OPAMP_SetTrimmingMode (OPAMP_TypeDef * OPAMPx, uint32_t TrimmingMode)**
Function description	Set OPAMP trimming mode.

Parameters	• **OPAMPx:** OPAMP instance • **TrimmingMode:** This parameter can be one of the following values: – LL_OPAMP_TRIMMING_FACTORY – LL_OPAMP_TRIMMING_USER
Return values	• **None**
Reference Manual to LL API cross reference:	• CSR USERTRIM LL_OPAMP_SetTrimmingMode

LL_OPAMP_GetTrimmingMode

Function name	**__STATIC_INLINE uint32_t LL_OPAMP_GetTrimmingMode (OPAMP_TypeDef * OPAMPx)**
Function description	Get OPAMP trimming mode.
Parameters	• **OPAMPx:** OPAMP instance
Return values	• **Returned:** value can be one of the following values: – LL_OPAMP_TRIMMING_FACTORY – LL_OPAMP_TRIMMING_USER
Reference Manual to LL API cross reference:	• CSR USERTRIM LL_OPAMP_GetTrimmingMode

LL_OPAMP_SetCalibrationSelection

Function name	**__STATIC_INLINE void LL_OPAMP_SetCalibrationSelection (OPAMP_TypeDef * OPAMPx, uint32_t TransistorsDiffPair)**
Function description	Set OPAMP offset to calibrate the selected transistors differential pair NMOS or PMOS.
Parameters	• **OPAMPx:** OPAMP instance • **TransistorsDiffPair:** This parameter can be one of the following values: (1) Default parameters to be used for calibration using two trimming steps (one with each transistors differential pair NMOS and PMOS) – LL_OPAMP_TRIMMING_NMOS (1) – LL_OPAMP_TRIMMING_PMOS (1) – LL_OPAMP_TRIMMING_NMOS_VREF_50PC_VDDA – LL_OPAMP_TRIMMING_PMOS_VREF_3_3PC_VDDA
Return values	• **None**
Notes	• Preliminarily, OPAMP must be set in mode calibration using function LL_OPAMP_SetMode().
Reference Manual to LL API cross reference:	• CSR CALSEL LL_OPAMP_SetCalibrationSelection

LL_OPAMP_GetCalibrationSelection

Function name	**__STATIC_INLINE uint32_t LL_OPAMP_GetCalibrationSelection (OPAMP_TypeDef * OPAMPx)**
Function description	Get OPAMP offset to calibrate the selected transistors differential pair NMOS or PMOS.
Parameters	• **OPAMPx:** OPAMP instance
Return values	• **Returned:** value can be one of the following values: (1) Default parameters to be used for calibration using two trimming steps (one with each transistors differential pair NMOS and PMOS) – LL_OPAMP_TRIMMING_NMOS (1) – LL_OPAMP_TRIMMING_PMOS (1) – LL_OPAMP_TRIMMING_NMOS_VREF_50PC_VDDA – LL_OPAMP_TRIMMING_PMOS_VREF_3_3PC_VDDA
Notes	• Preliminarily, OPAMP must be set in mode calibration using function LL_OPAMP_SetMode().
Reference Manual to LL API cross reference:	• CSR CALSEL LL_OPAMP_GetCalibrationSelection

LL_OPAMP_SetCalibrationVrefOutput

Function name	**__STATIC_INLINE void LL_OPAMP_SetCalibrationVrefOutput (OPAMP_TypeDef * OPAMPx, uint32_t CalibrationVrefOutput)**
Function description	Set OPAMP calibration internal reference voltage to output.
Parameters	• **OPAMPx:** OPAMP instance • **CalibrationVrefOutput:** This parameter can be one of the following values: – LL_OPAMP_VREF_OUTPUT_DISABLE – LL_OPAMP_VREF_OUTPUT_ENABLE
Return values	• **None**
Reference Manual to LL API cross reference:	• CSR TSTREF LL_OPAMP_SetCalibrationVrefOutput

LL_OPAMP_GetCalibrationVrefOutput

Function name	**__STATIC_INLINE uint32_t LL_OPAMP_GetCalibrationVrefOutput (OPAMP_TypeDef * OPAMPx)**
Function description	Get OPAMP calibration internal reference voltage to output.
Parameters	• **OPAMPx:** OPAMP instance
Return values	• **Returned:** value can be one of the following values: – LL_OPAMP_VREF_OUTPUT_DISABLE – LL_OPAMP_VREF_OUTPUT_ENABLE
Reference Manual to LL API cross	• CSR TSTREF LL_OPAMP_GetCalibrationVrefOutput

reference:

LL_OPAMP_IsCalibrationOutputSet

Function name	**__STATIC_INLINE uint32_t LL_OPAMP_IsCalibrationOutputSet (OPAMP_TypeDef * OPAMPx)**
Function description	Get OPAMP calibration result of toggling output.
Parameters	• **OPAMPx:** OPAMP instance
Return values	• **State:** of bit (1 or 0).
Notes	• This functions returns: 0 if OPAMP calibration output is reset 1 if OPAMP calibration output is set
Reference Manual to LL API cross reference:	• CSR OUTCAL LL_OPAMP_IsCalibrationOutputSet

LL_OPAMP_SetTrimmingValue

Function name	**__STATIC_INLINE void LL_OPAMP_SetTrimmingValue (OPAMP_TypeDef * OPAMPx, uint32_t TransistorsDiffPair, uint32_t TrimmingValue)**
Function description	Set OPAMP trimming factor for the selected transistors differential pair NMOS or PMOS, corresponding to the selected power mode.
Parameters	• **OPAMPx:** OPAMP instance • **TransistorsDiffPair:** This parameter can be one of the following values: – LL_OPAMP_TRIMMING_NMOS – LL_OPAMP_TRIMMING_PMOS • **TrimmingValue:** 0x00...0x1F
Return values	• **None**
Reference Manual to LL API cross reference:	• CSR TRIMOFFSETN LL_OPAMP_SetTrimmingValue • CSR TRIMOFFSETP LL_OPAMP_SetTrimmingValue

LL_OPAMP_GetTrimmingValue

Function name	**__STATIC_INLINE uint32_t LL_OPAMP_GetTrimmingValue (OPAMP_TypeDef * OPAMPx, uint32_t TransistorsDiffPair)**
Function description	Get OPAMP trimming factor for the selected transistors differential pair NMOS or PMOS, corresponding to the selected power mode.
Parameters	• **OPAMPx:** OPAMP instance • **TransistorsDiffPair:** This parameter can be one of the following values: – LL_OPAMP_TRIMMING_NMOS – LL_OPAMP_TRIMMING_PMOS
Return values	• **0x0...0x1F:**
Reference Manual to	• CSR TRIMOFFSETN LL_OPAMP_GetTrimmingValue

LL API cross reference:	• CSR TRIMOFFSETP LL_OPAMP_GetTrimmingValue

LL_OPAMP_Enable

Function name	**__STATIC_INLINE void LL_OPAMP_Enable (OPAMP_TypeDef * OPAMPx)**
Function description	Enable OPAMP instance.
Parameters	• **OPAMPx:** OPAMP instance
Return values	• **None**
Notes	• After enable from off state, OPAMP requires a delay to fullfill wake up time specification. Refer to device datasheet, parameter "tWAKEUP".
Reference Manual to LL API cross reference:	• CSR OPAMPXEN LL_OPAMP_Enable

LL_OPAMP_Disable

Function name	**__STATIC_INLINE void LL_OPAMP_Disable (OPAMP_TypeDef * OPAMPx)**
Function description	Disable OPAMP instance.
Parameters	• **OPAMPx:** OPAMP instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CSR OPAMPXEN LL_OPAMP_Disable

LL_OPAMP_IsEnabled

Function name	**__STATIC_INLINE uint32_t LL_OPAMP_IsEnabled (OPAMP_TypeDef * OPAMPx)**
Function description	Get OPAMP instance enable state (0: OPAMP is disabled, 1: OPAMP is enabled)
Parameters	• **OPAMPx:** OPAMP instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR OPAMPXEN LL_OPAMP_IsEnabled

LL_OPAMP_Lock

Function name	**__STATIC_INLINE void LL_OPAMP_Lock (OPAMP_TypeDef * OPAMPx)**
Function description	Lock OPAMP instance.
Parameters	• **OPAMPx:** OPAMP instance

Return values	• **None**
Notes	• Once locked, OPAMP configuration can be accessed in read-only. • The only way to unlock the OPAMP is a device hardware reset.
Reference Manual to LL API cross reference:	• CSR LOCK LL_OPAMP_Lock

LL_OPAMP_IsLocked

Function name	**__STATIC_INLINE uint32_t LL_OPAMP_IsLocked (OPAMP_TypeDef * OPAMPx)**
Function description	Get OPAMP lock state (0: OPAMP is unlocked, 1: OPAMP is locked).
Parameters	• **OPAMPx:** OPAMP instance
Return values	• **State:** of bit (1 or 0).
Notes	• Once locked, OPAMP configuration can be accessed in read-only. • The only way to unlock the OPAMP is a device hardware reset.
Reference Manual to LL API cross reference:	• CSR LOCK LL_OPAMP_IsLocked

LL_OPAMP_DeInit

Function name	**ErrorStatus LL_OPAMP_DeInit (OPAMP_TypeDef * OPAMPx)**
Function description	De-initialize registers of the selected OPAMP instance to their default reset values.
Parameters	• **OPAMPx:** OPAMP instance
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: OPAMP registers are de-initialized – ERROR: OPAMP registers are not de-initialized
Notes	• If comparator is locked, de-initialization by software is not possible. The only way to unlock the comparator is a device hardware reset.

LL_OPAMP_Init

Function name	**ErrorStatus LL_OPAMP_Init (OPAMP_TypeDef * OPAMPx, LL_OPAMP_InitTypeDef * OPAMP_InitStruct)**
Function description	Initialize some features of OPAMP instance.
Parameters	• **OPAMPx:** OPAMP instance • **OPAMP_InitStruct:** Pointer to a LL_OPAMP_InitTypeDef structure

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: OPAMP registers are initialized
  – ERROR: OPAMP registers are not initialized

Notes
- This function reset bit of calibration mode to ensure to be in functional mode, in order to have OPAMP parameters (inputs selection, ...) set with the corresponding OPAMP mode to be effective.

LL_OPAMP_StructInit

Function name **void LL_OPAMP_StructInit (LL_OPAMP_InitTypeDef * OPAMP_InitStruct)**

Function description Set each LL_OPAMP_InitTypeDef field to default value.

Parameters
- **OPAMP_InitStruct:** pointer to a LL_OPAMP_InitTypeDef structure whose fields will be set to default values.

Return values
- **None**

72.3 OPAMP Firmware driver defines

72.3.1 OPAMP

OPAMP functional mode

LL_OPAMP_MODE_STANDALONE	OPAMP functional mode, OPAMP operation in standalone
LL_OPAMP_MODE_FOLLOWER	OPAMP functional mode, OPAMP operation in follower
LL_OPAMP_MODE_PGA	OPAMP functional mode, OPAMP operation in PGA
LL_OPAMP_MODE_PGA_EXT_FILT_IO0	OPAMP functional mode, OPAMP operation in PGA with external filtering on OPAMP input IO0.
LL_OPAMP_MODE_PGA_EXT_FILT_IO1	OPAMP functional mode, OPAMP operation in PGA with external filtering on OPAMP input IO1.

Definitions of OPAMP hardware constraints delays

LL_OPAMP_DELAY_STARTUP_US Delay for OPAMP startup time

OPAMP input inverting

LL_OPAMP_INPUT_INVERT_IO0	OPAMP inverting input connected to GPIO pin (pin PC5 for OPAMP1, pin PC5 for OPAMP2, pin PB10 for OPAMP3, pin PB10 for OPAMP4). Note: OPAMP inverting input is used with OPAMP in mode standalone or PGA with external capacitors for filtering circuit. Otherwise (OPAMP in mode follower), OPAMP inverting input is not used (not connected to GPIO pin).

LL_OPAMP_INPUT_INVERT_IO1	OPAMP inverting input connected to GPIO pin (pin PA3 for OPAMP1, pin PA5 for OPAMP2, pin PB2 for OPAMP3, pin PD8 for OPAMP4). Note: OPAMP inverting input is used with OPAMP in mode standalone or PGA with external capacitors for filtering circuit. Otherwise (OPAMP in mode follower), OPAMP inverting input is not used (not connected to GPIO pin).
LL_OPAMP_INPUT_INVERT_CONNECT_NO	OPAMP inverting input not externally connected (intended for OPAMP in mode follower or PGA without external capacitors for filtering). Note: On this STM32 serie, this literal include cases of value 0x11 for mode follower and value 0x10 for mode PGA.

OPAMP input inverting secondary

LL_OPAMP_INPUT_INVERT_IO0_SEC	OPAMP inverting input secondary connected to GPIO pin (pin PC5 for OPAMP1, pin PC5 for OPAMP2, pin PB10 for OPAMP3, pin PB10 for OPAMP4). Note: OPAMP inverting input is used with OPAMP in mode standalone or PGA with external capacitors for filtering circuit. Otherwise (OPAMP in mode follower), OPAMP inverting input is not used (not connected to GPIO pin).
LL_OPAMP_INPUT_INVERT_IO1_SEC	OPAMP inverting input secondary connected to GPIO pin (pin PA3 for OPAMP1, pin PA5 for OPAMP2, pin PB2 for OPAMP3, pin PD8 for OPAMP4). Note: OPAMP inverting input is used with OPAMP in mode standalone or PGA with external capacitors for filtering circuit. Otherwise (OPAMP in mode follower), OPAMP inverting input is not used (not connected to GPIO pin).

OPAMP inputs multiplexer mode

LL_OPAMP_INPUT_MUX_DISABLE	OPAMP inputs multiplexer mode dosabled.
LL_OPAMP_INPUT_MUX_TIM1_CH6	OPAMP inputs multiplexer mode enabled, controlled by TIM1 CC6.

OPAMP input non-inverting

LL_OPAMP_INPUT_NONINVERT_IO0	OPAMP non inverting input connected to GPIO pin (pin PA1 for OPAMP1, pin PA7 for OPAMP2, pin PB0 for OPAMP3, pin PB13 for OPAMP4)
LL_OPAMP_INPUT_NONINVERT_IO1	OPAMP non inverting input connected to GPIO pin (pin PA7 for OPAMP1, pin PD14 for OPAMP2, pin PB13 for OPAMP3, pin PD11 for OPAMP4)
LL_OPAMP_INPUT_NONINVERT_IO2	OPAMP non inverting input connected to GPIO pin (pin PA3 for OPAMP1, pin PB0 for OPAMP2, pin PA1 for OPAMP3, pin PB11 for

OPAMP4)

LL_OPAMP_INPUT_NONINVERT_IO3	OPAMP non inverting input connected to GPIO pin (pin PA5 for OPAMP1, pin PB14 for OPAMP2, pin PA5 for OPAMP3, pin PA4 for OPAMP4)
LL_OPAMP_INPUT_NONINV_DAC1_CH1	OPAMP non inverting input connected to DAC1 channel1 output (specific to OPAMP instances: OPAMP4)
LL_OPAMP_INPUT_NONINV_DAC1_CH2	OPAMP non inverting input connected to DAC1 channel2 output (specific to OPAMP instances: OPAMP1, OPAMP3)

OPAMP input non-inverting secondary

LL_OPAMP_INPUT_NONINVERT_IO0_SEC	OPAMP non inverting input secondary connected to GPIO pin (pin PA1 for OPAMP1, pin PA7 for OPAMP2, pin PB0 for OPAMP3, pin PB13 for OPAMP4)
LL_OPAMP_INPUT_NONINVERT_IO1_SEC	OPAMP non inverting input secondary connected to GPIO pin (pin PA7 for OPAMP1, pin PD14 for OPAMP2, pin PB13 for OPAMP3, pin PD11 for OPAMP4)
LL_OPAMP_INPUT_NONINVERT_IO2_SEC	OPAMP non inverting input secondary connected to GPIO pin (pin PA3 for OPAMP1, pin PB0 for OPAMP2, pin PA1 for OPAMP3, pin PB11 for OPAMP4)
LL_OPAMP_INPUT_NONINVERT_IO3_SEC	OPAMP non inverting input secondary connected to GPIO pin (pin PA5 for OPAMP1, pin PD14 for OPAMP2, pin PA5 for OPAMP3, pin PA4 for OPAMP4)
LL_OPAMP_INPUT_NONINV_DAC1_CH1_SEC	OPAMP non inverting input secondary connected to DAC1 channel1 output (specific to OPAMP instances: OPAMP4)
LL_OPAMP_INPUT_NONINV_DAC1_CH2_SEC	OPAMP non inverting input secondary connected to DAC1 channel2 output (specific to OPAMP instances: OPAMP1, OPAMP3)

OPAMP mode calibration or functional.

LL_OPAMP_MODE_FUNCTIONAL	OPAMP functional mode
LL_OPAMP_MODE_CALIBRATION	OPAMP calibration mode

OPAMP PGA gain (relevant when OPAMP is in functional mode PGA)

LL_OPAMP_PGA_GAIN_2	OPAMP PGA gain 2
LL_OPAMP_PGA_GAIN_4	OPAMP PGA gain 4

LL_OPAMP_PGA_GAIN_8 OPAMP PGA gain 8

LL_OPAMP_PGA_GAIN_16 OPAMP PGA gain 16

OPAMP trimming mode

LL_OPAMP_TRIMMING_FACTORY OPAMP trimming factors set to factory values

LL_OPAMP_TRIMMING_USER OPAMP trimming factors set to user values

OPAMP trimming of transistors differential pair NMOS or PMOS

LL_OPAMP_TRIMMING_NMOS_VREF_90PC_VDDA OPAMP trimming of transistors differential pair NMOS (internal reference voltage set to 0.9*Vdda). Default parameters to be used for calibration using two trimming steps (one with each transistors differential pair NMOS and PMOS).

LL_OPAMP_TRIMMING_NMOS_VREF_50PC_VDDA OPAMP trimming of transistors differential pair NMOS (internal reference voltage set to 0.5*Vdda).

LL_OPAMP_TRIMMING_PMOS_VREF_10PC_VDDA OPAMP trimming of transistors differential pair PMOS (internal reference voltage set to 0.1*Vdda). Default parameters to be used for calibration using two trimming steps (one with each transistors differential pair NMOS and PMOS).

LL_OPAMP_TRIMMING_PMOS_VREF_3_3PC_VDDA OPAMP trimming of transistors differential pair PMOS (internal reference voltage set to 0.33*Vdda).

LL_OPAMP_TRIMMING_NMOS OPAMP trimming of transistors differential pair NMOS (internal reference voltage set to 0.9*Vdda). Default parameters to be used for calibration using two trimming steps (one with each transistors differential pair NMOS and PMOS).

LL_OPAMP_TRIMMING_PMOS OPAMP trimming of transistors differential pair PMOS (internal reference voltage set to 0.1*Vdda). Default parameters to be used for calibration using two trimming steps (one with each transistors differential pair NMOS and PMOS).

OPAMP internal reference voltage path state to output

LL_OPAMP_VREF_OUTPUT_DISABLE OPAMP internal reference voltage path to

output is disabled.

LL_OPAMP_VREF_OUTPUT_ENABLE — OPAMP internal reference voltage path to output is enabled.

Common write and read registers macro

LL_OPAMP_WriteReg

Description:

- Write a value in OPAMP register.

Parameters:

- __INSTANCE__: OPAMP Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_OPAMP_ReadReg

Description:

- Read a value in OPAMP register.

Parameters:

- __INSTANCE__: OPAMP Instance
- __REG__: Register to be read

Return value:

- Register: value

73 LL PWR Generic Driver

73.1 PWR Firmware driver API description

73.1.1 Detailed description of functions

LL_PWR_EnableSDADC

Function name
__STATIC_INLINE void LL_PWR_EnableSDADC (uint32_t Analogx)

Function description
Enables the SDADC peripheral functionality.

Parameters
- **Analogx:** This parameter can be a combination of the following values:
  - LL_PWR_SDADC_ANALOG1
  - LL_PWR_SDADC_ANALOG2
  - LL_PWR_SDADC_ANALOG3

Return values
- **None**

Reference Manual to LL API cross reference:
- CR ENSD1 LL_PWR_EnableSDADC
- CR ENSD2 LL_PWR_EnableSDADC
- CR ENSD3 LL_PWR_EnableSDADC

LL_PWR_DisableSDADC

Function name
__STATIC_INLINE void LL_PWR_DisableSDADC (uint32_t Analogx)

Function description
Disables the SDADC peripheral functionality.

Parameters
- **Analogx:** This parameter can be a combination of the following values:
  - LL_PWR_SDADC_ANALOG1
  - LL_PWR_SDADC_ANALOG2
  - LL_PWR_SDADC_ANALOG3

Return values
- **None**

Reference Manual to LL API cross reference:
- CR ENSD1 LL_PWR_EnableSDADC
- CR ENSD2 LL_PWR_EnableSDADC
- CR ENSD3 LL_PWR_EnableSDADC

LL_PWR_IsEnabledSDADC

Function name
__STATIC_INLINE uint32_t LL_PWR_IsEnabledSDADC (uint32_t Analogx)

Function description
Check if SDADCx has been enabled or not.

Parameters
- **Analogx:** This parameter can be a combination of the following values:
  - LL_PWR_SDADC_ANALOG1
  - LL_PWR_SDADC_ANALOG2

– LL_PWR_SDADC_ANALOG3

Return values
- **None**

Reference Manual to LL API cross reference:
- CR ENSD1 LL_PWR_IsEnabledSDADC
- CR ENSD2 LL_PWR_IsEnabledSDADC
- CR ENSD3 LL_PWR_IsEnabledSDADC

LL_PWR_EnableBkUpAccess

Function name **__STATIC_INLINE void LL_PWR_EnableBkUpAccess (void)**

Function description Enable access to the backup domain.

Return values
- **None**

Reference Manual to LL API cross reference:
- CR DBP LL_PWR_EnableBkUpAccess

LL_PWR_DisableBkUpAccess

Function name **__STATIC_INLINE void LL_PWR_DisableBkUpAccess (void)**

Function description Disable access to the backup domain.

Return values
- **None**

Reference Manual to LL API cross reference:
- CR DBP LL_PWR_DisableBkUpAccess

LL_PWR_IsEnabledBkUpAccess

Function name **__STATIC_INLINE uint32_t LL_PWR_IsEnabledBkUpAccess (void)**

Function description Check if the backup domain is enabled.

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CR DBP LL_PWR_IsEnabledBkUpAccess

LL_PWR_SetRegulModeDS

Function name **__STATIC_INLINE void LL_PWR_SetRegulModeDS (uint32_t RegulMode)**

Function description Set voltage Regulator mode during deep sleep mode.

Parameters
- **RegulMode:** This parameter can be one of the following values:
  – LL_PWR_REGU_DSMODE_MAIN
  – LL_PWR_REGU_DSMODE_LOW_POWER

Return values
- **None**

Reference Manual to LL API cross
- CR LPDS LL_PWR_SetRegulModeDS

reference:

LL_PWR_GetRegulModeDS

Function name	**__STATIC_INLINE uint32_t LL_PWR_GetRegulModeDS (void)**
Function description	Get voltage Regulator mode during deep sleep mode.
Return values	• **Returned:** value can be one of the following values: – LL_PWR_REGU_DSMODE_MAIN – LL_PWR_REGU_DSMODE_LOW_POWER
Reference Manual to LL API cross reference:	• CR LPDS LL_PWR_GetRegulModeDS

LL_PWR_SetPowerMode

Function name	**__STATIC_INLINE void LL_PWR_SetPowerMode (uint32_t PDMode)**
Function description	Set Power Down mode when CPU enters deepsleep.
Parameters	• **PDMode:** This parameter can be one of the following values: – LL_PWR_MODE_STOP_MAINREGU – LL_PWR_MODE_STOP_LPREGU – LL_PWR_MODE_STANDBY
Return values	• **None**
Reference Manual to LL API cross reference:	• CR PDDS LL_PWR_SetPowerMode • • CR LPDS LL_PWR_SetPowerMode

LL_PWR_GetPowerMode

Function name	**__STATIC_INLINE uint32_t LL_PWR_GetPowerMode (void)**
Function description	Get Power Down mode when CPU enters deepsleep.
Return values	• **Returned:** value can be one of the following values: – LL_PWR_MODE_STOP_MAINREGU – LL_PWR_MODE_STOP_LPREGU – LL_PWR_MODE_STANDBY
Reference Manual to LL API cross reference:	• CR PDDS LL_PWR_GetPowerMode • • CR LPDS LL_PWR_GetPowerMode

LL_PWR_SetPVDLevel

Function name	**__STATIC_INLINE void LL_PWR_SetPVDLevel (uint32_t PVDLevel)**
Function description	Configure the voltage threshold detected by the Power Voltage Detector.
Parameters	• **PVDLevel:** This parameter can be one of the following values:

  - LL_PWR_PVDLEVEL_0
  - LL_PWR_PVDLEVEL_1
  - LL_PWR_PVDLEVEL_2
  - LL_PWR_PVDLEVEL_3
  - LL_PWR_PVDLEVEL_4
  - LL_PWR_PVDLEVEL_5
  - LL_PWR_PVDLEVEL_6
  - LL_PWR_PVDLEVEL_7

Return values
- **None**

Reference Manual to LL API cross reference:
- CR PLS LL_PWR_SetPVDLevel

LL_PWR_GetPVDLevel

Function name **__STATIC_INLINE uint32_t LL_PWR_GetPVDLevel (void)**

Function description Get the voltage threshold detection.

Return values
- **Returned:** value can be one of the following values:
  - LL_PWR_PVDLEVEL_0
  - LL_PWR_PVDLEVEL_1
  - LL_PWR_PVDLEVEL_2
  - LL_PWR_PVDLEVEL_3
  - LL_PWR_PVDLEVEL_4
  - LL_PWR_PVDLEVEL_5
  - LL_PWR_PVDLEVEL_6
  - LL_PWR_PVDLEVEL_7

Reference Manual to LL API cross reference:
- CR PLS LL_PWR_GetPVDLevel

LL_PWR_EnablePVD

Function name **__STATIC_INLINE void LL_PWR_EnablePVD (void)**

Function description Enable Power Voltage Detector.

Return values
- **None**

Reference Manual to LL API cross reference:
- CR PVDE LL_PWR_EnablePVD

LL_PWR_DisablePVD

Function name **__STATIC_INLINE void LL_PWR_DisablePVD (void)**

Function description Disable Power Voltage Detector.

Return values
- **None**

Reference Manual to LL API cross reference:
- CR PVDE LL_PWR_DisablePVD

LL_PWR_IsEnabledPVD

Function name	**__STATIC_INLINE uint32_t LL_PWR_IsEnabledPVD (void)**
Function description	Check if Power Voltage Detector is enabled.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR PVDE LL_PWR_IsEnabledPVD

LL_PWR_EnableWakeUpPin

Function name	**__STATIC_INLINE void LL_PWR_EnableWakeUpPin (uint32_t WakeUpPin)**
Function description	Enable the WakeUp PINx functionality.
Parameters	• **WakeUpPin:** This parameter can be one of the following values: (*) not available on all devices – LL_PWR_WAKEUP_PIN1 – LL_PWR_WAKEUP_PIN2 – LL_PWR_WAKEUP_PIN3 (*)
Return values	• **None**
Reference Manual to LL API cross reference:	• CSR EWUP1 LL_PWR_EnableWakeUpPin • • CSR EWUP2 LL_PWR_EnableWakeUpPin • • CSR EWUP3 LL_PWR_EnableWakeUpPin

LL_PWR_DisableWakeUpPin

Function name	**__STATIC_INLINE void LL_PWR_DisableWakeUpPin (uint32_t WakeUpPin)**
Function description	Disable the WakeUp PINx functionality.
Parameters	• **WakeUpPin:** This parameter can be one of the following values: (*) not available on all devices – LL_PWR_WAKEUP_PIN1 – LL_PWR_WAKEUP_PIN2 – LL_PWR_WAKEUP_PIN3 (*)
Return values	• **None**
Reference Manual to LL API cross reference:	• CSR EWUP1 LL_PWR_DisableWakeUpPin • • CSR EWUP2 LL_PWR_DisableWakeUpPin • • CSR EWUP3 LL_PWR_DisableWakeUpPin

LL_PWR_IsEnabledWakeUpPin

Function name	**__STATIC_INLINE uint32_t LL_PWR_IsEnabledWakeUpPin (uint32_t WakeUpPin)**
Function description	Check if the WakeUp PINx functionality is enabled.
Parameters	• **WakeUpPin:** This parameter can be one of the following values: (*) not available on all devices – LL_PWR_WAKEUP_PIN1 – LL_PWR_WAKEUP_PIN2 – LL_PWR_WAKEUP_PIN3 (*)
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR EWUP1 LL_PWR_IsEnabledWakeUpPin • • CSR EWUP2 LL_PWR_IsEnabledWakeUpPin • • CSR EWUP3 LL_PWR_IsEnabledWakeUpPin

LL_PWR_IsActiveFlag_WU

Function name	**__STATIC_INLINE uint32_t LL_PWR_IsActiveFlag_WU (void)**
Function description	Get Wake-up Flag.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR WUF LL_PWR_IsActiveFlag_WU

LL_PWR_IsActiveFlag_SB

Function name	**__STATIC_INLINE uint32_t LL_PWR_IsActiveFlag_SB (void)**
Function description	Get Standby Flag.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR SBF LL_PWR_IsActiveFlag_SB

LL_PWR_IsActiveFlag_PVDO

Function name	**__STATIC_INLINE uint32_t LL_PWR_IsActiveFlag_PVDO (void)**
Function description	Indicate whether VDD voltage is below the selected PVD threshold.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR PVDO LL_PWR_IsActiveFlag_PVDO

LL_PWR_IsActiveFlag_VREFINTRDY

Function name	**__STATIC_INLINE uint32_t LL_PWR_IsActiveFlag_VREFINTRDY (void)**
Function description	Get Internal Reference VrefInt Flag.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR VREFINTRDYF LL_PWR_IsActiveFlag_VREFINTRDY

LL_PWR_ClearFlag_SB

Function name	**__STATIC_INLINE void LL_PWR_ClearFlag_SB (void)**
Function description	Clear Standby Flag.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR CSBF LL_PWR_ClearFlag_SB

LL_PWR_ClearFlag_WU

Function name	**__STATIC_INLINE void LL_PWR_ClearFlag_WU (void)**
Function description	Clear Wake-up Flags.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR CWUF LL_PWR_ClearFlag_WU

LL_PWR_DeInit

Function name	**ErrorStatus LL_PWR_DeInit (void)**
Function description	De-initialize the PWR registers to their default reset values.
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: PWR registers are de-initialized – ERROR: not applicable

73.2 PWR Firmware driver defines

73.2.1 PWR

Clear Flags Defines

LL_PWR_CR_CSBF	Clear standby flag
LL_PWR_CR_CWUF	Clear wakeup flag

Get Flags Defines

LL_PWR_CSR_WUF	Wakeup flag
LL_PWR_CSR_SBF	Standby flag

LL_PWR_CSR_PVDO	Power voltage detector output flag
LL_PWR_CSR_VREFINTRDYF	VREFINT ready flag
LL_PWR_CSR_EWUP1	Enable WKUP pin 1
LL_PWR_CSR_EWUP2	Enable WKUP pin 2
LL_PWR_CSR_EWUP3	Enable WKUP pin 3

Mode Power

LL_PWR_MODE_STOP_MAINREGU	Enter Stop mode when the CPU enters deepsleep
LL_PWR_MODE_STOP_LPREGU	Enter Stop mode (with low power Regulator ON) when the CPU enters deepsleep
LL_PWR_MODE_STANDBY	Enter Standby mode when the CPU enters deepsleep

Power Voltage Detector Level

LL_PWR_PVDLEVEL_0	Voltage threshold detected by PVD 2.2 V
LL_PWR_PVDLEVEL_1	Voltage threshold detected by PVD 2.3 V
LL_PWR_PVDLEVEL_2	Voltage threshold detected by PVD 2.4 V
LL_PWR_PVDLEVEL_3	Voltage threshold detected by PVD 2.5 V
LL_PWR_PVDLEVEL_4	Voltage threshold detected by PVD 2.6 V
LL_PWR_PVDLEVEL_5	Voltage threshold detected by PVD 2.7 V
LL_PWR_PVDLEVEL_6	Voltage threshold detected by PVD 2.8 V
LL_PWR_PVDLEVEL_7	Voltage threshold detected by PVD 2.9 V

Regulator Mode In Deep Sleep Mode

LL_PWR_REGU_DSMODE_MAIN	Voltage Regulator in main mode during deepsleep mode
LL_PWR_REGU_DSMODE_LOW_POWER	Voltage Regulator in low-power mode during deepsleep mode

Wakeup Pins

LL_PWR_WAKEUP_PIN1	WKUP pin 1 : PA0
LL_PWR_WAKEUP_PIN2	WKUP pin 2 : PC13
LL_PWR_WAKEUP_PIN3	WKUP pin 3 : PE6 or PA2 according to device

Common write and read registers Macros

LL_PWR_WriteReg

Description:

- Write a value in PWR register.

Parameters:

- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_PWR_ReadReg

Description:

- Read a value in PWR register.

Parameters:

- __REG__: Register to be read

Return value:

- Register: value

74 LL RCC Generic Driver

74.1 RCC Firmware driver registers structures

74.1.1 LL_RCC_ClocksTypeDef

Data Fields

- ***uint32_t SYSCLK_Frequency***
- ***uint32_t HCLK_Frequency***
- ***uint32_t PCLK1_Frequency***
- ***uint32_t PCLK2_Frequency***

Field Documentation

- ***uint32_t LL_RCC_ClocksTypeDef::SYSCLK_Frequency***
  SYSCLK clock frequency
- ***uint32_t LL_RCC_ClocksTypeDef::HCLK_Frequency***
  HCLK clock frequency
- ***uint32_t LL_RCC_ClocksTypeDef::PCLK1_Frequency***
  PCLK1 clock frequency
- ***uint32_t LL_RCC_ClocksTypeDef::PCLK2_Frequency***
  PCLK2 clock frequency

74.2 RCC Firmware driver API description

74.2.1 Detailed description of functions

LL_RCC_HSE_EnableCSS

Function name	**__STATIC_INLINE void LL_RCC_HSE_EnableCSS (void)**
Function description	Enable the Clock Security System.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR CSSON LL_RCC_HSE_EnableCSS

LL_RCC_HSE_DisableCSS

Function name	**__STATIC_INLINE void LL_RCC_HSE_DisableCSS (void)**
Function description	Disable the Clock Security System.
Return values	• **None**
Notes	• Cannot be disabled in HSE is ready (only by hardware)
Reference Manual to LL API cross reference:	• CR CSSON LL_RCC_HSE_DisableCSS

LL_RCC_HSE_EnableBypass

Function name	**__STATIC_INLINE void LL_RCC_HSE_EnableBypass (void)**
Function description	Enable HSE external oscillator (HSE Bypass)
Return values	• **None**
Reference Manual to LL API cross reference:	• CR HSEBYP LL_RCC_HSE_EnableBypass

LL_RCC_HSE_DisableBypass

Function name	**__STATIC_INLINE void LL_RCC_HSE_DisableBypass (void)**
Function description	Disable HSE external oscillator (HSE Bypass)
Return values	• **None**
Reference Manual to LL API cross reference:	• CR HSEBYP LL_RCC_HSE_DisableBypass

LL_RCC_HSE_Enable

Function name	**__STATIC_INLINE void LL_RCC_HSE_Enable (void)**
Function description	Enable HSE crystal oscillator (HSE ON)
Return values	• **None**
Reference Manual to LL API cross reference:	• CR HSEON LL_RCC_HSE_Enable

LL_RCC_HSE_Disable

Function name	**__STATIC_INLINE void LL_RCC_HSE_Disable (void)**
Function description	Disable HSE crystal oscillator (HSE ON)
Return values	• **None**
Reference Manual to LL API cross reference:	• CR HSEON LL_RCC_HSE_Disable

LL_RCC_HSE_IsReady

Function name	**__STATIC_INLINE uint32_t LL_RCC_HSE_IsReady (void)**
Function description	Check if HSE oscillator Ready.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR HSERDY LL_RCC_HSE_IsReady

LL_RCC_HSI_Enable

Function name	**__STATIC_INLINE void LL_RCC_HSI_Enable (void)**
Function description	Enable HSI oscillator.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR HSION LL_RCC_HSI_Enable

LL_RCC_HSI_Disable

Function name	**__STATIC_INLINE void LL_RCC_HSI_Disable (void)**
Function description	Disable HSI oscillator.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR HSION LL_RCC_HSI_Disable

LL_RCC_HSI_IsReady

Function name	**__STATIC_INLINE uint32_t LL_RCC_HSI_IsReady (void)**
Function description	Check if HSI clock is ready.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR HSIRDY LL_RCC_HSI_IsReady

LL_RCC_HSI_GetCalibration

Function name	**__STATIC_INLINE uint32_t LL_RCC_HSI_GetCalibration (void)**
Function description	Get HSI Calibration value.
Return values	• **Between:** Min_Data = 0x00 and Max_Data = 0xFF
Notes	• When HSITRIM is written, HSICAL is updated with the sum of HSITRIM and the factory trim value
Reference Manual to LL API cross reference:	• CR HSICAL LL_RCC_HSI_GetCalibration

LL_RCC_HSI_SetCalibTrimming

Function name	**__STATIC_INLINE void LL_RCC_HSI_SetCalibTrimming (uint32_t Value)**
Function description	Set HSI Calibration trimming.
Parameters	• **Value:** between Min_Data = 0x00 and Max_Data = 0x1F
Return values	• **None**

Notes	• user-programmable trimming value that is added to the HSICAL • Default value is 16, which, when added to the HSICAL value, should trim the HSI to 16 MHz +/- 1 %
Reference Manual to LL API cross reference:	• CR HSITRIM LL_RCC_HSI_SetCalibTrimming

LL_RCC_HSI_GetCalibTrimming

Function name	**__STATIC_INLINE uint32_t LL_RCC_HSI_GetCalibTrimming (void)**
Function description	Get HSI Calibration trimming.
Return values	• **Between:** Min_Data = 0x00 and Max_Data = 0x1F
Reference Manual to LL API cross reference:	• CR HSITRIM LL_RCC_HSI_GetCalibTrimming

LL_RCC_LSE_Enable

Function name	**__STATIC_INLINE void LL_RCC_LSE_Enable (void)**
Function description	Enable Low Speed External (LSE) crystal.
Return values	• **None**
Reference Manual to LL API cross reference:	• BDCR LSEON LL_RCC_LSE_Enable

LL_RCC_LSE_Disable

Function name	**__STATIC_INLINE void LL_RCC_LSE_Disable (void)**
Function description	Disable Low Speed External (LSE) crystal.
Return values	• **None**
Reference Manual to LL API cross reference:	• BDCR LSEON LL_RCC_LSE_Disable

LL_RCC_LSE_EnableBypass

Function name	**__STATIC_INLINE void LL_RCC_LSE_EnableBypass (void)**
Function description	Enable external clock source (LSE bypass).
Return values	• **None**
Reference Manual to LL API cross reference:	• BDCR LSEBYP LL_RCC_LSE_EnableBypass

LL_RCC_LSE_DisableBypass

Function name	**__STATIC_INLINE void LL_RCC_LSE_DisableBypass (void)**
Function description	Disable external clock source (LSE bypass).
Return values	• **None**
Reference Manual to LL API cross reference:	• BDCR LSEBYP LL_RCC_LSE_DisableBypass

LL_RCC_LSE_SetDriveCapability

Function name	**__STATIC_INLINE void LL_RCC_LSE_SetDriveCapability (uint32_t LSEDrive)**
Function description	Set LSE oscillator drive capability.
Parameters	• **LSEDrive:** This parameter can be one of the following values: – LL_RCC_LSEDRIVE_LOW – LL_RCC_LSEDRIVE_MEDIUMLOW – LL_RCC_LSEDRIVE_MEDIUMHIGH – LL_RCC_LSEDRIVE_HIGH
Return values	• **None**
Notes	• The oscillator is in Xtal mode when it is not in bypass mode.
Reference Manual to LL API cross reference:	• BDCR LSEDRV LL_RCC_LSE_SetDriveCapability

LL_RCC_LSE_GetDriveCapability

Function name	**__STATIC_INLINE uint32_t LL_RCC_LSE_GetDriveCapability (void)**
Function description	Get LSE oscillator drive capability.
Return values	• **Returned:** value can be one of the following values: – LL_RCC_LSEDRIVE_LOW – LL_RCC_LSEDRIVE_MEDIUMLOW – LL_RCC_LSEDRIVE_MEDIUMHIGH – LL_RCC_LSEDRIVE_HIGH
Reference Manual to LL API cross reference:	• BDCR LSEDRV LL_RCC_LSE_GetDriveCapability

LL_RCC_LSE_IsReady

Function name	**__STATIC_INLINE uint32_t LL_RCC_LSE_IsReady (void)**
Function description	Check if LSE oscillator Ready.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross	• BDCR LSERDY LL_RCC_LSE_IsReady

reference:

LL_RCC_LSI_Enable

Function name	**__STATIC_INLINE void LL_RCC_LSI_Enable (void)**
Function description	Enable LSI Oscillator.
Return values	• **None**
Reference Manual to LL API cross reference:	• CSR LSION LL_RCC_LSI_Enable

LL_RCC_LSI_Disable

Function name	**__STATIC_INLINE void LL_RCC_LSI_Disable (void)**
Function description	Disable LSI Oscillator.
Return values	• **None**
Reference Manual to LL API cross reference:	• CSR LSION LL_RCC_LSI_Disable

LL_RCC_LSI_IsReady

Function name	**__STATIC_INLINE uint32_t LL_RCC_LSI_IsReady (void)**
Function description	Check if LSI is Ready.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR LSIRDY LL_RCC_LSI_IsReady

LL_RCC_SetSysClkSource

Function name	**__STATIC_INLINE void LL_RCC_SetSysClkSource (uint32_t Source)**
Function description	Configure the system clock source.
Parameters	• **Source:** This parameter can be one of the following values: – LL_RCC_SYS_CLKSOURCE_HSI – LL_RCC_SYS_CLKSOURCE_HSE – LL_RCC_SYS_CLKSOURCE_PLL
Return values	• **None**
Reference Manual to LL API cross reference:	• CFGR SW LL_RCC_SetSysClkSource

LL_RCC_GetSysClkSource

Function name	**__STATIC_INLINE uint32_t LL_RCC_GetSysClkSource (void)**
Function description	Get the system clock source.
Return values	• **Returned:** value can be one of the following values: – LL_RCC_SYS_CLKSOURCE_STATUS_HSI – LL_RCC_SYS_CLKSOURCE_STATUS_HSE – LL_RCC_SYS_CLKSOURCE_STATUS_PLL
Reference Manual to LL API cross reference:	• CFGR SWS LL_RCC_GetSysClkSource

LL_RCC_SetAHBPrescaler

Function name	**__STATIC_INLINE void LL_RCC_SetAHBPrescaler (uint32_t Prescaler)**
Function description	Set AHB prescaler.
Parameters	• **Prescaler:** This parameter can be one of the following values: – LL_RCC_SYSCLK_DIV_1 – LL_RCC_SYSCLK_DIV_2 – LL_RCC_SYSCLK_DIV_4 – LL_RCC_SYSCLK_DIV_8 – LL_RCC_SYSCLK_DIV_16 – LL_RCC_SYSCLK_DIV_64 – LL_RCC_SYSCLK_DIV_128 – LL_RCC_SYSCLK_DIV_256 – LL_RCC_SYSCLK_DIV_512
Return values	• **None**
Reference Manual to LL API cross reference:	• CFGR HPRE LL_RCC_SetAHBPrescaler

LL_RCC_SetAPB1Prescaler

Function name	**__STATIC_INLINE void LL_RCC_SetAPB1Prescaler (uint32_t Prescaler)**
Function description	Set APB1 prescaler.
Parameters	• **Prescaler:** This parameter can be one of the following values: – LL_RCC_APB1_DIV_1 – LL_RCC_APB1_DIV_2 – LL_RCC_APB1_DIV_4 – LL_RCC_APB1_DIV_8 – LL_RCC_APB1_DIV_16
Return values	• **None**
Reference Manual to LL API cross	• CFGR PPRE1 LL_RCC_SetAPB1Prescaler

reference:

LL_RCC_SetAPB2Prescaler

Function name	**__STATIC_INLINE void LL_RCC_SetAPB2Prescaler (uint32_t Prescaler)**
Function description	Set APB2 prescaler.
Parameters	• **Prescaler:** This parameter can be one of the following values: – LL_RCC_APB2_DIV_1 – LL_RCC_APB2_DIV_2 – LL_RCC_APB2_DIV_4 – LL_RCC_APB2_DIV_8 – LL_RCC_APB2_DIV_16
Return values	• **None**
Reference Manual to LL API cross reference:	• CFGR PPRE2 LL_RCC_SetAPB2Prescaler

LL_RCC_GetAHBPrescaler

Function name	**__STATIC_INLINE uint32_t LL_RCC_GetAHBPrescaler (void)**
Function description	Get AHB prescaler.
Return values	• **Returned:** value can be one of the following values: – LL_RCC_SYSCLK_DIV_1 – LL_RCC_SYSCLK_DIV_2 – LL_RCC_SYSCLK_DIV_4 – LL_RCC_SYSCLK_DIV_8 – LL_RCC_SYSCLK_DIV_16 – LL_RCC_SYSCLK_DIV_64 – LL_RCC_SYSCLK_DIV_128 – LL_RCC_SYSCLK_DIV_256 – LL_RCC_SYSCLK_DIV_512
Reference Manual to LL API cross reference:	• CFGR HPRE LL_RCC_GetAHBPrescaler

LL_RCC_GetAPB1Prescaler

Function name	**__STATIC_INLINE uint32_t LL_RCC_GetAPB1Prescaler (void)**
Function description	Get APB1 prescaler.
Return values	• **Returned:** value can be one of the following values: – LL_RCC_APB1_DIV_1 – LL_RCC_APB1_DIV_2 – LL_RCC_APB1_DIV_4 – LL_RCC_APB1_DIV_8 – LL_RCC_APB1_DIV_16 •

Reference Manual to LL API cross reference:
- CFGR PPRE1 LL_RCC_GetAPB1Prescaler

LL_RCC_GetAPB2Prescaler

Function name
__STATIC_INLINE uint32_t LL_RCC_GetAPB2Prescaler (void)

Function description
Get APB2 prescaler.

Return values
- **Returned:** value can be one of the following values:
  - LL_RCC_APB2_DIV_1
  - LL_RCC_APB2_DIV_2
  - LL_RCC_APB2_DIV_4
  - LL_RCC_APB2_DIV_8
  - LL_RCC_APB2_DIV_16

Reference Manual to LL API cross reference:
- CFGR PPRE2 LL_RCC_GetAPB2Prescaler

LL_RCC_ConfigMCO

Function name
__STATIC_INLINE void LL_RCC_ConfigMCO (uint32_t MCOxSource, uint32_t MCOxPrescaler)

Function description
Configure MCOx.

Parameters
- **MCOxSource:** This parameter can be one of the following values: (*) value not defined in all devices
  - LL_RCC_MCO1SOURCE_NOCLOCK
  - LL_RCC_MCO1SOURCE_SYSCLK
  - LL_RCC_MCO1SOURCE_HSI
  - LL_RCC_MCO1SOURCE_HSE
  - LL_RCC_MCO1SOURCE_LSI
  - LL_RCC_MCO1SOURCE_LSE
  - LL_RCC_MCO1SOURCE_PLLCLK (*)
  - LL_RCC_MCO1SOURCE_PLLCLK_DIV_2
- **MCOxPrescaler:** This parameter can be one of the following values: (*) value not defined in all devices
  - LL_RCC_MCO1_DIV_1
  - LL_RCC_MCO1_DIV_2 (*)
  - LL_RCC_MCO1_DIV_4 (*)
  - LL_RCC_MCO1_DIV_8 (*)
  - LL_RCC_MCO1_DIV_16 (*)
  - LL_RCC_MCO1_DIV_32 (*)
  - LL_RCC_MCO1_DIV_64 (*)
  - LL_RCC_MCO1_DIV_128 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- CFGR MCO LL_RCC_ConfigMCO
- CFGR MCOPRE LL_RCC_ConfigMCO
- CFGR PLLNODIV LL_RCC_ConfigMCO

LL_RCC_SetUSARTClockSource

Function name
__STATIC_INLINE void LL_RCC_SetUSARTClockSource (uint32_t USARTxSource)

Function description
Configure USARTx clock source.

Parameters
- **USARTxSource:** This parameter can be one of the following values: (*) value not defined in all devices.
  - LL_RCC_USART1_CLKSOURCE_PCLK1 (*)
  - LL_RCC_USART1_CLKSOURCE_PCLK2 (*)
  - LL_RCC_USART1_CLKSOURCE_SYSCLK
  - LL_RCC_USART1_CLKSOURCE_LSE
  - LL_RCC_USART1_CLKSOURCE_HSI
  - LL_RCC_USART2_CLKSOURCE_PCLK1 (*)
  - LL_RCC_USART2_CLKSOURCE_SYSCLK (*)
  - LL_RCC_USART2_CLKSOURCE_LSE (*)
  - LL_RCC_USART2_CLKSOURCE_HSI (*)
  - LL_RCC_USART3_CLKSOURCE_PCLK1 (*)
  - LL_RCC_USART3_CLKSOURCE_SYSCLK (*)
  - LL_RCC_USART3_CLKSOURCE_LSE (*)
  - LL_RCC_USART3_CLKSOURCE_HSI (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- CFGR3 USART1SW LL_RCC_SetUSARTClockSource
- CFGR3 USART2SW LL_RCC_SetUSARTClockSource
- CFGR3 USART3SW LL_RCC_SetUSARTClockSource

LL_RCC_SetUARTClockSource

Function name
__STATIC_INLINE void LL_RCC_SetUARTClockSource (uint32_t UARTxSource)

Function description
Configure UARTx clock source.

Parameters
- **UARTxSource:** This parameter can be one of the following values:
  - LL_RCC_UART4_CLKSOURCE_PCLK1
  - LL_RCC_UART4_CLKSOURCE_SYSCLK
  - LL_RCC_UART4_CLKSOURCE_LSE
  - LL_RCC_UART4_CLKSOURCE_HSI
  - LL_RCC_UART5_CLKSOURCE_PCLK1
  - LL_RCC_UART5_CLKSOURCE_SYSCLK
  - LL_RCC_UART5_CLKSOURCE_LSE
  - LL_RCC_UART5_CLKSOURCE_HSI

Return values
- **None**

Reference Manual to LL API cross reference:
- CFGR3 UART4SW LL_RCC_SetUARTClockSource
- CFGR3 UART5SW LL_RCC_SetUARTClockSource

LL_RCC_SetI2CClockSource

Function name
__STATIC_INLINE void LL_RCC_SetI2CClockSource (uint32_t I2CxSource)

Function description
Configure I2Cx clock source.

Parameters
- **I2CxSource:** This parameter can be one of the following values: (*) value not defined in all devices.
  - LL_RCC_I2C1_CLKSOURCE_HSI
  - LL_RCC_I2C1_CLKSOURCE_SYSCLK
  - LL_RCC_I2C2_CLKSOURCE_HSI (*)
  - LL_RCC_I2C2_CLKSOURCE_SYSCLK (*)
  - LL_RCC_I2C3_CLKSOURCE_HSI (*)
  - LL_RCC_I2C3_CLKSOURCE_SYSCLK (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- CFGR3 I2C1SW LL_RCC_SetI2CClockSource
- CFGR3 I2C2SW LL_RCC_SetI2CClockSource
- CFGR3 I2C3SW LL_RCC_SetI2CClockSource

LL_RCC_SetI2SClockSource

Function name
__STATIC_INLINE void LL_RCC_SetI2SClockSource (uint32_t I2SxSource)

Function description
Configure I2Sx clock source.

Parameters
- **I2SxSource:** This parameter can be one of the following values:
  - LL_RCC_I2S_CLKSOURCE_SYSCLK
  - LL_RCC_I2S_CLKSOURCE_PIN

Return values
- **None**

Reference Manual to LL API cross reference:
- CFGR I2SSRC LL_RCC_SetI2SClockSource

LL_RCC_SetTIMClockSource

Function name
__STATIC_INLINE void LL_RCC_SetTIMClockSource (uint32_t TIMxSource)

Function description
Configure TIMx clock source.

Parameters
- **TIMxSource:** This parameter can be one of the following values: (*) value not defined in all devices.
  - LL_RCC_TIM1_CLKSOURCE_PCLK2
  - LL_RCC_TIM1_CLKSOURCE_PLL
  - LL_RCC_TIM8_CLKSOURCE_PCLK2 (*)
  - LL_RCC_TIM8_CLKSOURCE_PLL (*)
  - LL_RCC_TIM15_CLKSOURCE_PCLK2 (*)
  - LL_RCC_TIM15_CLKSOURCE_PLL (*)
  - LL_RCC_TIM16_CLKSOURCE_PCLK2 (*)
  - LL_RCC_TIM16_CLKSOURCE_PLL (*)
  - LL_RCC_TIM17_CLKSOURCE_PCLK2 (*)
  - LL_RCC_TIM17_CLKSOURCE_PLL (*)

- LL_RCC_TIM20_CLKSOURCE_PCLK2 (*)
- LL_RCC_TIM20_CLKSOURCE_PLL (*)
- LL_RCC_TIM2_CLKSOURCE_PCLK1 (*)
- LL_RCC_TIM2_CLKSOURCE_PLL (*)
- LL_RCC_TIM34_CLKSOURCE_PCLK1 (*)
- LL_RCC_TIM34_CLKSOURCE_PLL (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- CFGR3 TIM1SW LL_RCC_SetTIMClockSource
- CFGR3 TIM8SW LL_RCC_SetTIMClockSource
- CFGR3 TIM15SW LL_RCC_SetTIMClockSource
- CFGR3 TIM16SW LL_RCC_SetTIMClockSource
- CFGR3 TIM17SW LL_RCC_SetTIMClockSource
- CFGR3 TIM20SW LL_RCC_SetTIMClockSource
- CFGR3 TIM2SW LL_RCC_SetTIMClockSource
- CFGR3 TIM34SW LL_RCC_SetTIMClockSource

LL_RCC_SetUSBClockSource

Function name
__STATIC_INLINE void LL_RCC_SetUSBClockSource (uint32_t USBxSource)

Function description
Configure USB clock source.

Parameters
- **USBxSource:** This parameter can be one of the following values:
  - LL_RCC_USB_CLKSOURCE_PLL
  - LL_RCC_USB_CLKSOURCE_PLL_DIV_1_5

Return values
- **None**

Reference Manual to LL API cross reference:
- CFGR USBPRE LL_RCC_SetUSBClockSource

LL_RCC_SetADCClockSource

Function name
__STATIC_INLINE void LL_RCC_SetADCClockSource (uint32_t ADCxSource)

Function description
Configure ADC clock source.

Parameters
- **ADCxSource:** This parameter can be one of the following values: (*) value not defined in all devices.
  - LL_RCC_ADC12_CLKSRC_HCLK
  - LL_RCC_ADC12_CLKSRC_PLL_DIV_1
  - LL_RCC_ADC12_CLKSRC_PLL_DIV_2
  - LL_RCC_ADC12_CLKSRC_PLL_DIV_4
  - LL_RCC_ADC12_CLKSRC_PLL_DIV_6
  - LL_RCC_ADC12_CLKSRC_PLL_DIV_8
  - LL_RCC_ADC12_CLKSRC_PLL_DIV_10
  - LL_RCC_ADC12_CLKSRC_PLL_DIV_12
  - LL_RCC_ADC12_CLKSRC_PLL_DIV_16
  - LL_RCC_ADC12_CLKSRC_PLL_DIV_32
  - LL_RCC_ADC12_CLKSRC_PLL_DIV_64
  - LL_RCC_ADC12_CLKSRC_PLL_DIV_128

- LL_RCC_ADC12_CLKSRC_PLL_DIV_256
- LL_RCC_ADC34_CLKSRC_HCLK (*)
- LL_RCC_ADC34_CLKSRC_PLL_DIV_1 (*)
- LL_RCC_ADC34_CLKSRC_PLL_DIV_2 (*)
- LL_RCC_ADC34_CLKSRC_PLL_DIV_4 (*)
- LL_RCC_ADC34_CLKSRC_PLL_DIV_6 (*)
- LL_RCC_ADC34_CLKSRC_PLL_DIV_8 (*)
- LL_RCC_ADC34_CLKSRC_PLL_DIV_10 (*)
- LL_RCC_ADC34_CLKSRC_PLL_DIV_12 (*)
- LL_RCC_ADC34_CLKSRC_PLL_DIV_16 (*)
- LL_RCC_ADC34_CLKSRC_PLL_DIV_32 (*)
- LL_RCC_ADC34_CLKSRC_PLL_DIV_64 (*)
- LL_RCC_ADC34_CLKSRC_PLL_DIV_128 (*)
- LL_RCC_ADC34_CLKSRC_PLL_DIV_256 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- CFGR2 ADCPRE12 LL_RCC_SetADCClockSource
- CFGR2 ADCPRE34 LL_RCC_SetADCClockSource

LL_RCC_GetUSARTClockSource

Function name
__STATIC_INLINE uint32_t LL_RCC_GetUSARTClockSource (uint32_t USARTx)

Function description
Get USARTx clock source.

Parameters
- **USARTx:** This parameter can be one of the following values: (*) value not defined in all devices.
  - LL_RCC_USART1_CLKSOURCE
  - LL_RCC_USART2_CLKSOURCE (*)
  - LL_RCC_USART3_CLKSOURCE (*)

Return values
- **Returned:** value can be one of the following values: (*) value not defined in all devices.
  - LL_RCC_USART1_CLKSOURCE_PCLK1 (*)
  - LL_RCC_USART1_CLKSOURCE_PCLK2 (*)
  - LL_RCC_USART1_CLKSOURCE_SYSCLK
  - LL_RCC_USART1_CLKSOURCE_LSE
  - LL_RCC_USART1_CLKSOURCE_HSI
  - LL_RCC_USART2_CLKSOURCE_PCLK1 (*)
  - LL_RCC_USART2_CLKSOURCE_SYSCLK (*)
  - LL_RCC_USART2_CLKSOURCE_LSE (*)
  - LL_RCC_USART2_CLKSOURCE_HSI (*)
  - LL_RCC_USART3_CLKSOURCE_PCLK1 (*)
  - LL_RCC_USART3_CLKSOURCE_SYSCLK (*)
  - LL_RCC_USART3_CLKSOURCE_LSE (*)
  - LL_RCC_USART3_CLKSOURCE_HSI (*)

Reference Manual to LL API cross reference:
- CFGR3 USART1SW LL_RCC_GetUSARTClockSource
- CFGR3 USART2SW LL_RCC_GetUSARTClockSource
- CFGR3 USART3SW LL_RCC_GetUSARTClockSource

LL_RCC_GetUARTClockSource

Function name	**__STATIC_INLINE uint32_t LL_RCC_GetUARTClockSource (uint32_t UARTx)**
Function description	Get UARTx clock source.
Parameters	• **UARTx:** This parameter can be one of the following values: – LL_RCC_UART4_CLKSOURCE – LL_RCC_UART5_CLKSOURCE
Return values	• **Returned:** value can be one of the following values: – LL_RCC_UART4_CLKSOURCE_PCLK1 – LL_RCC_UART4_CLKSOURCE_SYSCLK – LL_RCC_UART4_CLKSOURCE_LSE – LL_RCC_UART4_CLKSOURCE_HSI – LL_RCC_UART5_CLKSOURCE_PCLK1 – LL_RCC_UART5_CLKSOURCE_SYSCLK – LL_RCC_UART5_CLKSOURCE_LSE – LL_RCC_UART5_CLKSOURCE_HSI
Reference Manual to LL API cross reference:	• CFGR3 UART4SW LL_RCC_GetUARTClockSource • CFGR3 UART5SW LL_RCC_GetUARTClockSource

LL_RCC_GetI2CClockSource

Function name	**__STATIC_INLINE uint32_t LL_RCC_GetI2CClockSource (uint32_t I2Cx)**
Function description	Get I2Cx clock source.
Parameters	• **I2Cx:** This parameter can be one of the following values: (*) value not defined in all devices. – LL_RCC_I2C1_CLKSOURCE – LL_RCC_I2C2_CLKSOURCE (*) – LL_RCC_I2C3_CLKSOURCE (*)
Return values	• **Returned:** value can be one of the following values: (*) value not defined in all devices. – LL_RCC_I2C1_CLKSOURCE_HSI – LL_RCC_I2C1_CLKSOURCE_SYSCLK – LL_RCC_I2C2_CLKSOURCE_HSI (*) – LL_RCC_I2C2_CLKSOURCE_SYSCLK (*) – LL_RCC_I2C3_CLKSOURCE_HSI (*) – LL_RCC_I2C3_CLKSOURCE_SYSCLK (*)
Reference Manual to LL API cross reference:	• CFGR3 I2C1SW LL_RCC_GetI2CClockSource • CFGR3 I2C2SW LL_RCC_GetI2CClockSource • CFGR3 I2C3SW LL_RCC_GetI2CClockSource

LL_RCC_GetI2SClockSource

Function name	**__STATIC_INLINE uint32_t LL_RCC_GetI2SClockSource (uint32_t I2Sx)**
Function description	Get I2Sx clock source.

Parameters
- **I2Sx:** This parameter can be one of the following values:
  - LL_RCC_I2S_CLKSOURCE

Return values
- **Returned:** value can be one of the following values:
  - LL_RCC_I2S_CLKSOURCE_SYSCLK
  - LL_RCC_I2S_CLKSOURCE_PIN

Reference Manual to LL API cross reference:
- CFGR I2SSRC LL_RCC_GetI2SClockSource

LL_RCC_GetTIMClockSource

Function name
__STATIC_INLINE uint32_t LL_RCC_GetTIMClockSource (uint32_t TIMx)

Function description
Get TIMx clock source.

Parameters
- **TIMx:** This parameter can be one of the following values: (*) value not defined in all devices.
  - LL_RCC_TIM1_CLKSOURCE
  - LL_RCC_TIM2_CLKSOURCE (*)
  - LL_RCC_TIM8_CLKSOURCE (*)
  - LL_RCC_TIM15_CLKSOURCE (*)
  - LL_RCC_TIM16_CLKSOURCE (*)
  - LL_RCC_TIM17_CLKSOURCE (*)
  - LL_RCC_TIM20_CLKSOURCE (*)
  - LL_RCC_TIM34_CLKSOURCE (*)

Return values
- **Returned:** value can be one of the following values: (*) value not defined in all devices.
  - LL_RCC_TIM1_CLKSOURCE_PCLK2
  - LL_RCC_TIM1_CLKSOURCE_PLL
  - LL_RCC_TIM8_CLKSOURCE_PCLK2 (*)
  - LL_RCC_TIM8_CLKSOURCE_PLL (*)
  - LL_RCC_TIM15_CLKSOURCE_PCLK2 (*)
  - LL_RCC_TIM15_CLKSOURCE_PLL (*)
  - LL_RCC_TIM16_CLKSOURCE_PCLK2 (*)
  - LL_RCC_TIM16_CLKSOURCE_PLL (*)
  - LL_RCC_TIM17_CLKSOURCE_PCLK2 (*)
  - LL_RCC_TIM17_CLKSOURCE_PLL (*)
  - LL_RCC_TIM20_CLKSOURCE_PCLK2 (*)
  - LL_RCC_TIM20_CLKSOURCE_PLL (*)
  - LL_RCC_TIM2_CLKSOURCE_PCLK1 (*)
  - LL_RCC_TIM2_CLKSOURCE_PLL (*)
  - LL_RCC_TIM34_CLKSOURCE_PCLK1 (*)
  - LL_RCC_TIM34_CLKSOURCE_PLL (*)

Reference Manual to LL API cross reference:
- CFGR3 TIM1SW LL_RCC_GetTIMClockSource
- CFGR3 TIM8SW LL_RCC_GetTIMClockSource
- CFGR3 TIM15SW LL_RCC_GetTIMClockSource
- CFGR3 TIM16SW LL_RCC_GetTIMClockSource
- CFGR3 TIM17SW LL_RCC_GetTIMClockSource
- CFGR3 TIM20SW LL_RCC_GetTIMClockSource
- CFGR3 TIM2SW LL_RCC_GetTIMClockSource

- CFGR3 TIM34SW LL_RCC_GetTIMClockSource

LL_RCC_GetUSBClockSource

Function name	**__STATIC_INLINE uint32_t LL_RCC_GetUSBClockSource (uint32_t USBx)**
Function description	Get USBx clock source.
Parameters	• **USBx:** This parameter can be one of the following values: – LL_RCC_USB_CLKSOURCE
Return values	• **Returned:** value can be one of the following values: – LL_RCC_USB_CLKSOURCE_PLL – LL_RCC_USB_CLKSOURCE_PLL_DIV_1_5
Reference Manual to LL API cross reference:	• CFGR USBPRE LL_RCC_GetUSBClockSource

LL_RCC_GetADCClockSource

Function name	**__STATIC_INLINE uint32_t LL_RCC_GetADCClockSource (uint32_t ADCx)**
Function description	Get ADCx clock source.
Parameters	• **ADCx:** This parameter can be one of the following values: (*) value not defined in all devices. – LL_RCC_ADC12_CLKSOURCE – LL_RCC_ADC34_CLKSOURCE (*)
Return values	• **Returned:** value can be one of the following values: (*) value not defined in all devices. – LL_RCC_ADC12_CLKSRC_HCLK – LL_RCC_ADC12_CLKSRC_PLL_DIV_1 – LL_RCC_ADC12_CLKSRC_PLL_DIV_2 – LL_RCC_ADC12_CLKSRC_PLL_DIV_4 – LL_RCC_ADC12_CLKSRC_PLL_DIV_6 – LL_RCC_ADC12_CLKSRC_PLL_DIV_8 – LL_RCC_ADC12_CLKSRC_PLL_DIV_10 – LL_RCC_ADC12_CLKSRC_PLL_DIV_12 – LL_RCC_ADC12_CLKSRC_PLL_DIV_16 – LL_RCC_ADC12_CLKSRC_PLL_DIV_32 – LL_RCC_ADC12_CLKSRC_PLL_DIV_64 – LL_RCC_ADC12_CLKSRC_PLL_DIV_128 – LL_RCC_ADC12_CLKSRC_PLL_DIV_256 – LL_RCC_ADC34_CLKSRC_HCLK (*) – LL_RCC_ADC34_CLKSRC_PLL_DIV_1 (*) – LL_RCC_ADC34_CLKSRC_PLL_DIV_2 (*) – LL_RCC_ADC34_CLKSRC_PLL_DIV_4 (*) – LL_RCC_ADC34_CLKSRC_PLL_DIV_6 (*) – LL_RCC_ADC34_CLKSRC_PLL_DIV_8 (*) – LL_RCC_ADC34_CLKSRC_PLL_DIV_10 (*) – LL_RCC_ADC34_CLKSRC_PLL_DIV_12 (*) – LL_RCC_ADC34_CLKSRC_PLL_DIV_16 (*)

  - LL_RCC_ADC34_CLKSRC_PLL_DIV_32 (*)
  - LL_RCC_ADC34_CLKSRC_PLL_DIV_64 (*)
  - LL_RCC_ADC34_CLKSRC_PLL_DIV_128 (*)
  - LL_RCC_ADC34_CLKSRC_PLL_DIV_256 (*)

Reference Manual to LL API cross reference:
- CFGR2 ADCPRE12 LL_RCC_GetADCClockSource
- CFGR2 ADCPRE34 LL_RCC_GetADCClockSource

LL_RCC_SetRTCClockSource

Function name: **__STATIC_INLINE void LL_RCC_SetRTCClockSource (uint32_t Source)**

Function description: Set RTC Clock Source.

Parameters:
- **Source:** This parameter can be one of the following values:
  - LL_RCC_RTC_CLKSOURCE_NONE
  - LL_RCC_RTC_CLKSOURCE_LSE
  - LL_RCC_RTC_CLKSOURCE_LSI
  - LL_RCC_RTC_CLKSOURCE_HSE_DIV32

Return values:
- **None**

Notes:
- Once the RTC clock source has been selected, it cannot be changed any more unless the Backup domain is reset. The BDRST bit can be used to reset them.

Reference Manual to LL API cross reference:
- BDCR RTCSEL LL_RCC_SetRTCClockSource

LL_RCC_GetRTCClockSource

Function name: **__STATIC_INLINE uint32_t LL_RCC_GetRTCClockSource (void)**

Function description: Get RTC Clock Source.

Return values:
- **Returned:** value can be one of the following values:
  - LL_RCC_RTC_CLKSOURCE_NONE
  - LL_RCC_RTC_CLKSOURCE_LSE
  - LL_RCC_RTC_CLKSOURCE_LSI
  - LL_RCC_RTC_CLKSOURCE_HSE_DIV32

Reference Manual to LL API cross reference:
- BDCR RTCSEL LL_RCC_GetRTCClockSource

LL_RCC_EnableRTC

Function name	**__STATIC_INLINE void LL_RCC_EnableRTC (void)**
Function description	Enable RTC.
Return values	• **None**
Reference Manual to LL API cross reference:	• BDCR RTCEN LL_RCC_EnableRTC

LL_RCC_DisableRTC

Function name	**__STATIC_INLINE void LL_RCC_DisableRTC (void)**
Function description	Disable RTC.
Return values	• **None**
Reference Manual to LL API cross reference:	• BDCR RTCEN LL_RCC_DisableRTC

LL_RCC_IsEnabledRTC

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsEnabledRTC (void)**
Function description	Check if RTC has been enabled or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• BDCR RTCEN LL_RCC_IsEnabledRTC

LL_RCC_ForceBackupDomainReset

Function name	**__STATIC_INLINE void LL_RCC_ForceBackupDomainReset (void)**
Function description	Force the Backup domain reset.
Return values	• **None**
Reference Manual to LL API cross reference:	• BDCR BDRST LL_RCC_ForceBackupDomainReset

LL_RCC_ReleaseBackupDomainReset

Function name	**__STATIC_INLINE void LL_RCC_ReleaseBackupDomainReset (void)**
Function description	Release the Backup domain reset.
Return values	• **None**
Reference Manual to LL API cross reference:	• BDCR BDRST LL_RCC_ReleaseBackupDomainReset

LL_RCC_PLL_Enable

Function name	**__STATIC_INLINE void LL_RCC_PLL_Enable (void)**
Function description	Enable PLL.
Return values	• **None**
Reference Manual to LL API cross reference:	• CR PLLON LL_RCC_PLL_Enable

LL_RCC_PLL_Disable

Function name	**__STATIC_INLINE void LL_RCC_PLL_Disable (void)**
Function description	Disable PLL.
Return values	• **None**
Notes	• Cannot be disabled if the PLL clock is used as the system clock
Reference Manual to LL API cross reference:	• CR PLLON LL_RCC_PLL_Disable

LL_RCC_PLL_IsReady

Function name	**__STATIC_INLINE uint32_t LL_RCC_PLL_IsReady (void)**
Function description	Check if PLL Ready.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR PLLRDY LL_RCC_PLL_IsReady

LL_RCC_PLL_ConfigDomain_SYS

Function name	**__STATIC_INLINE void LL_RCC_PLL_ConfigDomain_SYS (uint32_t Source, uint32_t PLLMul)**
Function description	Configure PLL used for SYSCLK Domain.
Parameters	• **Source:** This parameter can be one of the following values: – LL_RCC_PLLSOURCE_HSI_DIV_2 – LL_RCC_PLLSOURCE_HSE_DIV_1 – LL_RCC_PLLSOURCE_HSE_DIV_2 – LL_RCC_PLLSOURCE_HSE_DIV_3 – LL_RCC_PLLSOURCE_HSE_DIV_4 – LL_RCC_PLLSOURCE_HSE_DIV_5 – LL_RCC_PLLSOURCE_HSE_DIV_6 – LL_RCC_PLLSOURCE_HSE_DIV_7 – LL_RCC_PLLSOURCE_HSE_DIV_8 – LL_RCC_PLLSOURCE_HSE_DIV_9 – LL_RCC_PLLSOURCE_HSE_DIV_10 – LL_RCC_PLLSOURCE_HSE_DIV_11 – LL_RCC_PLLSOURCE_HSE_DIV_12

  - LL_RCC_PLLSOURCE_HSE_DIV_13
  - LL_RCC_PLLSOURCE_HSE_DIV_14
  - LL_RCC_PLLSOURCE_HSE_DIV_15
  - LL_RCC_PLLSOURCE_HSE_DIV_16
- **PLLMul:** This parameter can be one of the following values:
  - LL_RCC_PLL_MUL_2
  - LL_RCC_PLL_MUL_3
  - LL_RCC_PLL_MUL_4
  - LL_RCC_PLL_MUL_5
  - LL_RCC_PLL_MUL_6
  - LL_RCC_PLL_MUL_7
  - LL_RCC_PLL_MUL_8
  - LL_RCC_PLL_MUL_9
  - LL_RCC_PLL_MUL_10
  - LL_RCC_PLL_MUL_11
  - LL_RCC_PLL_MUL_12
  - LL_RCC_PLL_MUL_13
  - LL_RCC_PLL_MUL_14
  - LL_RCC_PLL_MUL_15
  - LL_RCC_PLL_MUL_16

Return values
- **None**

Reference Manual to LL API cross reference:
- CFGR PLLSRC LL_RCC_PLL_ConfigDomain_SYS
- CFGR PLLMUL LL_RCC_PLL_ConfigDomain_SYS
- CFGR2 PREDIV LL_RCC_PLL_ConfigDomain_SYS

LL_RCC_PLL_GetMainSource

Function name
__STATIC_INLINE uint32_t LL_RCC_PLL_GetMainSource (void)

Function description
Get the oscillator used as PLL clock source.

Return values
- **Returned:** value can be one of the following values: (*) value not defined in all devices
  - LL_RCC_PLLSOURCE_HSI (*)
  - LL_RCC_PLLSOURCE_HSI_DIV_2 (*)
  - LL_RCC_PLLSOURCE_HSE

Reference Manual to LL API cross reference:
- CFGR PLLSRC LL_RCC_PLL_GetMainSource

LL_RCC_PLL_GetMultiplicator

Function name
__STATIC_INLINE uint32_t LL_RCC_PLL_GetMultiplicator (void)

Function description
Get PLL multiplication Factor.

Return values
- **Returned:** value can be one of the following values:
  - LL_RCC_PLL_MUL_2
  - LL_RCC_PLL_MUL_3
  - LL_RCC_PLL_MUL_4
  - LL_RCC_PLL_MUL_5

  - LL_RCC_PLL_MUL_6
  - LL_RCC_PLL_MUL_7
  - LL_RCC_PLL_MUL_8
  - LL_RCC_PLL_MUL_9
  - LL_RCC_PLL_MUL_10
  - LL_RCC_PLL_MUL_11
  - LL_RCC_PLL_MUL_12
  - LL_RCC_PLL_MUL_13
  - LL_RCC_PLL_MUL_14
  - LL_RCC_PLL_MUL_15
  - LL_RCC_PLL_MUL_16

Reference Manual to LL API cross reference:
- CFGR PLLMUL LL_RCC_PLL_GetMultiplicator

LL_RCC_PLL_GetPrediv

Function name **__STATIC_INLINE uint32_t LL_RCC_PLL_GetPrediv (void)**

Function description Get PREDIV division factor for the main PLL.

Return values
- **Returned:** value can be one of the following values:
  - LL_RCC_PREDIV_DIV_1
  - LL_RCC_PREDIV_DIV_2
  - LL_RCC_PREDIV_DIV_3
  - LL_RCC_PREDIV_DIV_4
  - LL_RCC_PREDIV_DIV_5
  - LL_RCC_PREDIV_DIV_6
  - LL_RCC_PREDIV_DIV_7
  - LL_RCC_PREDIV_DIV_8
  - LL_RCC_PREDIV_DIV_9
  - LL_RCC_PREDIV_DIV_10
  - LL_RCC_PREDIV_DIV_11
  - LL_RCC_PREDIV_DIV_12
  - LL_RCC_PREDIV_DIV_13
  - LL_RCC_PREDIV_DIV_14
  - LL_RCC_PREDIV_DIV_15
  - LL_RCC_PREDIV_DIV_16

Notes
- They can be written only when the PLL is disabled

Reference Manual to LL API cross reference:
- CFGR2 PREDIV LL_RCC_PLL_GetPrediv

LL_RCC_ClearFlag_LSIRDY

Function name **__STATIC_INLINE void LL_RCC_ClearFlag_LSIRDY (void)**

Function description Clear LSI ready interrupt flag.

Return values
- **None**

Reference Manual to LL API cross reference:
- CIR LSIRDYC LL_RCC_ClearFlag_LSIRDY

LL_RCC_ClearFlag_LSERDY

Function name	**__STATIC_INLINE void LL_RCC_ClearFlag_LSERDY (void)**
Function description	Clear LSE ready interrupt flag.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR LSERDYC LL_RCC_ClearFlag_LSERDY

LL_RCC_ClearFlag_HSIRDY

Function name	**__STATIC_INLINE void LL_RCC_ClearFlag_HSIRDY (void)**
Function description	Clear HSI ready interrupt flag.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR HSIRDYC LL_RCC_ClearFlag_HSIRDY

LL_RCC_ClearFlag_HSERDY

Function name	**__STATIC_INLINE void LL_RCC_ClearFlag_HSERDY (void)**
Function description	Clear HSE ready interrupt flag.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR HSERDYC LL_RCC_ClearFlag_HSERDY

LL_RCC_ClearFlag_PLLRDY

Function name	**__STATIC_INLINE void LL_RCC_ClearFlag_PLLRDY (void)**
Function description	Clear PLL ready interrupt flag.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR PLLRDYC LL_RCC_ClearFlag_PLLRDY

LL_RCC_ClearFlag_HSECSS

Function name	**__STATIC_INLINE void LL_RCC_ClearFlag_HSECSS (void)**
Function description	Clear Clock security system interrupt flag.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR CSSC LL_RCC_ClearFlag_HSECSS

LL_RCC_IsActiveFlag_LSIRDY

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_LSIRDY (void)**
Function description	Check if LSI ready interrupt occurred or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CIR LSIRDYF LL_RCC_IsActiveFlag_LSIRDY

LL_RCC_IsActiveFlag_LSERDY

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_LSERDY (void)**
Function description	Check if LSE ready interrupt occurred or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CIR LSERDYF LL_RCC_IsActiveFlag_LSERDY

LL_RCC_IsActiveFlag_HSIRDY

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_HSIRDY (void)**
Function description	Check if HSI ready interrupt occurred or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CIR HSIRDYF LL_RCC_IsActiveFlag_HSIRDY

LL_RCC_IsActiveFlag_HSERDY

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_HSERDY (void)**
Function description	Check if HSE ready interrupt occurred or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CIR HSERDYF LL_RCC_IsActiveFlag_HSERDY

LL_RCC_IsActiveFlag_MCO1

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_MCO1 (void)**
Function description	Check if switch to new MCO source is effective or not.
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• CFGR MCOF LL_RCC_IsActiveFlag_MCO1

LL_RCC_IsActiveFlag_PLLRDY

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_PLLRDY (void)**
Function description	Check if PLL ready interrupt occurred or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CIR PLLRDYF LL_RCC_IsActiveFlag_PLLRDY

LL_RCC_IsActiveFlag_HSECSS

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_HSECSS (void)**
Function description	Check if Clock security system interrupt occurred or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CIR CSSF LL_RCC_IsActiveFlag_HSECSS

LL_RCC_IsActiveFlag_IWDGRST

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_IWDGRST (void)**
Function description	Check if RCC flag Independent Watchdog reset is set or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR IWDGRSTF LL_RCC_IsActiveFlag_IWDGRST

LL_RCC_IsActiveFlag_LPWRRST

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_LPWRRST (void)**
Function description	Check if RCC flag Low Power reset is set or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR LPWRRSTF LL_RCC_IsActiveFlag_LPWRRST

LL_RCC_IsActiveFlag_OBLRST

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_OBLRST (void)**

Function description	Check if RCC flag is set or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR OBLRSTF LL_RCC_IsActiveFlag_OBLRST

LL_RCC_IsActiveFlag_PINRST

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_PINRST (void)**
Function description	Check if RCC flag Pin reset is set or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR PINRSTF LL_RCC_IsActiveFlag_PINRST

LL_RCC_IsActiveFlag_PORRST

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_PORRST (void)**
Function description	Check if RCC flag POR/PDR reset is set or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR PORRSTF LL_RCC_IsActiveFlag_PORRST

LL_RCC_IsActiveFlag_SFTRST

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_SFTRST (void)**
Function description	Check if RCC flag Software reset is set or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR SFTRSTF LL_RCC_IsActiveFlag_SFTRST

LL_RCC_IsActiveFlag_WWDGRST

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_WWDGRST (void)**
Function description	Check if RCC flag Window Watchdog reset is set or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR WWDGRSTF LL_RCC_IsActiveFlag_WWDGRST

LL_RCC_IsActiveFlag_V18PWRRST

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsActiveFlag_V18PWRRST (void)**
Function description	Check if RCC Reset flag of the 1.8 V domain is set or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CSR V18PWRRSTF LL_RCC_IsActiveFlag_V18PWRRST

LL_RCC_ClearResetFlags

Function name	**__STATIC_INLINE void LL_RCC_ClearResetFlags (void)**
Function description	Set RMVF bit to clear the reset flags.
Return values	• **None**
Reference Manual to LL API cross reference:	• CSR RMVF LL_RCC_ClearResetFlags

LL_RCC_EnableIT_LSIRDY

Function name	**__STATIC_INLINE void LL_RCC_EnableIT_LSIRDY (void)**
Function description	Enable LSI ready interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR LSIRDYIE LL_RCC_EnableIT_LSIRDY

LL_RCC_EnableIT_LSERDY

Function name	**__STATIC_INLINE void LL_RCC_EnableIT_LSERDY (void)**
Function description	Enable LSE ready interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR LSERDYIE LL_RCC_EnableIT_LSERDY

LL_RCC_EnableIT_HSIRDY

Function name	**__STATIC_INLINE void LL_RCC_EnableIT_HSIRDY (void)**
Function description	Enable HSI ready interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR HSIRDYIE LL_RCC_EnableIT_HSIRDY

LL_RCC_EnableIT_HSERDY

Function name	**__STATIC_INLINE void LL_RCC_EnableIT_HSERDY (void)**
Function description	Enable HSE ready interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR HSERDYIE LL_RCC_EnableIT_HSERDY

LL_RCC_EnableIT_PLLRDY

Function name	**__STATIC_INLINE void LL_RCC_EnableIT_PLLRDY (void)**
Function description	Enable PLL ready interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR PLLRDYIE LL_RCC_EnableIT_PLLRDY

LL_RCC_DisableIT_LSIRDY

Function name	**__STATIC_INLINE void LL_RCC_DisableIT_LSIRDY (void)**
Function description	Disable LSI ready interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR LSIRDYIE LL_RCC_DisableIT_LSIRDY

LL_RCC_DisableIT_LSERDY

Function name	**__STATIC_INLINE void LL_RCC_DisableIT_LSERDY (void)**
Function description	Disable LSE ready interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR LSERDYIE LL_RCC_DisableIT_LSERDY

LL_RCC_DisableIT_HSIRDY

Function name	**__STATIC_INLINE void LL_RCC_DisableIT_HSIRDY (void)**
Function description	Disable HSI ready interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR HSIRDYIE LL_RCC_DisableIT_HSIRDY

LL_RCC_DisableIT_HSERDY

Function name	**__STATIC_INLINE void LL_RCC_DisableIT_HSERDY (void)**
Function description	Disable HSE ready interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR HSERDYIE LL_RCC_DisableIT_HSERDY

LL_RCC_DisableIT_PLLRDY

Function name	**__STATIC_INLINE void LL_RCC_DisableIT_PLLRDY (void)**
Function description	Disable PLL ready interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• CIR PLLRDYIE LL_RCC_DisableIT_PLLRDY

LL_RCC_IsEnabledIT_LSIRDY

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsEnabledIT_LSIRDY (void)**
Function description	Checks if LSI ready interrupt source is enabled or disabled.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CIR LSIRDYIE LL_RCC_IsEnabledIT_LSIRDY

LL_RCC_IsEnabledIT_LSERDY

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsEnabledIT_LSERDY (void)**
Function description	Checks if LSE ready interrupt source is enabled or disabled.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CIR LSERDYIE LL_RCC_IsEnabledIT_LSERDY

LL_RCC_IsEnabledIT_HSIRDY

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsEnabledIT_HSIRDY (void)**
Function description	Checks if HSI ready interrupt source is enabled or disabled.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CIR HSIRDYIE LL_RCC_IsEnabledIT_HSIRDY

LL_RCC_IsEnabledIT_HSERDY

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsEnabledIT_HSERDY (void)**
Function description	Checks if HSE ready interrupt source is enabled or disabled.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CIR HSERDYIE LL_RCC_IsEnabledIT_HSERDY

LL_RCC_IsEnabledIT_PLLRDY

Function name	**__STATIC_INLINE uint32_t LL_RCC_IsEnabledIT_PLLRDY (void)**
Function description	Checks if PLL ready interrupt source is enabled or disabled.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CIR PLLRDYIE LL_RCC_IsEnabledIT_PLLRDY

LL_RCC_DeInit

Function name	**ErrorStatus LL_RCC_DeInit (void)**
Function description	Reset the RCC clock configuration to the default reset state.
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: RCC registers are de-initialized – ERROR: not applicable
Notes	• The default reset state of the clock configuration is given below: HSI ON and used as system clock sourceHSE and PLL OFFAHB, APB1 and APB2 prescaler set to 1.CSS, MCO OFFAll interrupts disabled • This function doesn't modify the configuration of the Peripheral clocksLSI, LSE and RTC clocks

LL_RCC_GetSystemClocksFreq

Function name	**void LL_RCC_GetSystemClocksFreq (LL_RCC_ClocksTypeDef * RCC_Clocks)**
Function description	Return the frequencies of different on chip clocks; System, AHB, APB1 and APB2 buses clocks.
Parameters	• **RCC_Clocks:** pointer to a LL_RCC_ClocksTypeDef structure which will hold the clocks frequencies
Return values	• **None**
Notes	• Each time SYSCLK, HCLK, PCLK1 and/or PCLK2 clock changes, this function must be called to update structure fields. Otherwise, any configuration based on this function will be incorrect.

LL_RCC_GetUSARTClockFreq

Function name **uint32_t LL_RCC_GetUSARTClockFreq (uint32_t USARTxSource)**

Function description Return USARTx clock frequency.

Parameters
- **USARTxSource:** This parameter can be one of the following values: (*) value not defined in all devices.
  - LL_RCC_USART1_CLKSOURCE
  - LL_RCC_USART2_CLKSOURCE (*)
  - LL_RCC_USART3_CLKSOURCE (*)

Return values
- **USART:** clock frequency (in Hz)
  - LL_RCC_PERIPH_FREQUENCY_NO indicates that oscillator (HSI or LSE) is not ready

LL_RCC_GetUARTClockFreq

Function name **uint32_t LL_RCC_GetUARTClockFreq (uint32_t UARTxSource)**

Function description Return UARTx clock frequency.

Parameters
- **UARTxSource:** This parameter can be one of the following values:
  - LL_RCC_UART4_CLKSOURCE
  - LL_RCC_UART5_CLKSOURCE

Return values
- **UART:** clock frequency (in Hz)
  - LL_RCC_PERIPH_FREQUENCY_NO indicates that oscillator (HSI or LSE) is not ready

LL_RCC_GetI2CClockFreq

Function name **uint32_t LL_RCC_GetI2CClockFreq (uint32_t I2CxSource)**

Function description Return I2Cx clock frequency.

Parameters
- **I2CxSource:** This parameter can be one of the following values: (*) value not defined in all devices
  - LL_RCC_I2C1_CLKSOURCE
  - LL_RCC_I2C2_CLKSOURCE (*)
  - LL_RCC_I2C3_CLKSOURCE (*)

Return values
- **I2C:** clock frequency (in Hz)
  - LL_RCC_PERIPH_FREQUENCY_NO indicates that HSI oscillator is not ready

LL_RCC_GetI2SClockFreq

Function name **uint32_t LL_RCC_GetI2SClockFreq (uint32_t I2SxSource)**

Function description Return I2Sx clock frequency.

Parameters
- **I2SxSource:** This parameter can be one of the following values:
  - LL_RCC_I2S_CLKSOURCE

Return values
- **I2S:** clock frequency (in Hz)
  - LL_RCC_PERIPH_FREQUENCY_NA indicates that external clock is used

LL_RCC_GetUSBClockFreq

Function name **uint32_t LL_RCC_GetUSBClockFreq (uint32_t USBxSource)**

Function description Return USBx clock frequency.

Parameters
- **USBxSource:** This parameter can be one of the following values:
  - LL_RCC_USB_CLKSOURCE

Return values
- **USB:** clock frequency (in Hz)
  - LL_RCC_PERIPH_FREQUENCY_NO indicates that oscillator (HSI48) or PLL is not ready
  - LL_RCC_PERIPH_FREQUENCY_NA indicates that no clock source selected

LL_RCC_GetADCClockFreq

Function name **uint32_t LL_RCC_GetADCClockFreq (uint32_t ADCxSource)**

Function description Return ADCx clock frequency.

Parameters
- **ADCxSource:** This parameter can be one of the following values: (*) value not defined in all devices
  - LL_RCC_ADC_CLKSOURCE (*)
  - LL_RCC_ADC1_CLKSOURCE (*)
  - LL_RCC_ADC12_CLKSOURCE (*)
  - LL_RCC_ADC34_CLKSOURCE (*)

Return values
- **ADC:** clock frequency (in Hz)

LL_RCC_GetTIMClockFreq

Function name **uint32_t LL_RCC_GetTIMClockFreq (uint32_t TIMxSource)**

Function description Return TIMx clock frequency.

Parameters
- **TIMxSource:** This parameter can be one of the following values: (*) value not defined in all devices
  - LL_RCC_TIM1_CLKSOURCE
  - LL_RCC_TIM8_CLKSOURCE (*)
  - LL_RCC_TIM15_CLKSOURCE (*)
  - LL_RCC_TIM16_CLKSOURCE (*)
  - LL_RCC_TIM17_CLKSOURCE (*)
  - LL_RCC_TIM20_CLKSOURCE (*)
  - LL_RCC_TIM2_CLKSOURCE (*)
  - LL_RCC_TIM34_CLKSOURCE (*)

Return values
- **TIM:** clock frequency (in Hz)

LL_RCC_GetHRTIMClockFreq

Function name **uint32_t LL_RCC_GetHRTIMClockFreq (uint32_t HRTIMxSource)**

Function description

74.3 RCC Firmware driver defines

74.3.1 RCC

Peripheral ADC12 clock source selection

LL_RCC_ADC12_CLKSRC_HCLK	ADC12 clock disabled, ADC12 can use AHB clock
LL_RCC_ADC12_CLKSRC_PLL_DIV_1	ADC12 PLL clock divided by 1
LL_RCC_ADC12_CLKSRC_PLL_DIV_2	ADC12 PLL clock divided by 2
LL_RCC_ADC12_CLKSRC_PLL_DIV_4	ADC12 PLL clock divided by 4
LL_RCC_ADC12_CLKSRC_PLL_DIV_6	ADC12 PLL clock divided by 6
LL_RCC_ADC12_CLKSRC_PLL_DIV_8	ADC12 PLL clock divided by 8
LL_RCC_ADC12_CLKSRC_PLL_DIV_10	ADC12 PLL clock divided by 10
LL_RCC_ADC12_CLKSRC_PLL_DIV_12	ADC12 PLL clock divided by 12
LL_RCC_ADC12_CLKSRC_PLL_DIV_16	ADC12 PLL clock divided by 16
LL_RCC_ADC12_CLKSRC_PLL_DIV_32	ADC12 PLL clock divided by 32
LL_RCC_ADC12_CLKSRC_PLL_DIV_64	ADC12 PLL clock divided by 64
LL_RCC_ADC12_CLKSRC_PLL_DIV_128	ADC12 PLL clock divided by 128
LL_RCC_ADC12_CLKSRC_PLL_DIV_256	ADC12 PLL clock divided by 256

Peripheral ADC34 clock source selection

LL_RCC_ADC34_CLKSRC_HCLK	ADC34 clock disabled, ADC34 can use AHB clock
LL_RCC_ADC34_CLKSRC_PLL_DIV_1	ADC34 PLL clock divided by 1
LL_RCC_ADC34_CLKSRC_PLL_DIV_2	ADC34 PLL clock divided by 2
LL_RCC_ADC34_CLKSRC_PLL_DIV_4	ADC34 PLL clock divided by 4
LL_RCC_ADC34_CLKSRC_PLL_DIV_6	ADC34 PLL clock divided by 6
LL_RCC_ADC34_CLKSRC_PLL_DIV_8	ADC34 PLL clock divided by 8
LL_RCC_ADC34_CLKSRC_PLL_DIV_10	ADC34 PLL clock divided by 10
LL_RCC_ADC34_CLKSRC_PLL_DIV_12	ADC34 PLL clock divided by 12
LL_RCC_ADC34_CLKSRC_PLL_DIV_16	ADC34 PLL clock divided by 16
LL_RCC_ADC34_CLKSRC_PLL_DIV_32	ADC34 PLL clock divided by 32
LL_RCC_ADC34_CLKSRC_PLL_DIV_64	ADC34 PLL clock divided by 64
LL_RCC_ADC34_CLKSRC_PLL_DIV_128	ADC34 PLL clock divided by 128
LL_RCC_ADC34_CLKSRC_PLL_DIV_256	ADC34 PLL clock divided by 256

Peripheral ADC get clock source

LL_RCC_ADC12_CLKSOURCE	ADC12 Clock source selection
LL_RCC_ADC34_CLKSOURCE	ADC34 Clock source selection

APB low-speed prescaler (APB1)

LL_RCC_APB1_DIV_1	HCLK not divided
LL_RCC_APB1_DIV_2	HCLK divided by 2
LL_RCC_APB1_DIV_4	HCLK divided by 4
LL_RCC_APB1_DIV_8	HCLK divided by 8
LL_RCC_APB1_DIV_16	HCLK divided by 16

APB high-speed prescaler (APB2)

LL_RCC_APB2_DIV_1	HCLK not divided
LL_RCC_APB2_DIV_2	HCLK divided by 2
LL_RCC_APB2_DIV_4	HCLK divided by 4
LL_RCC_APB2_DIV_8	HCLK divided by 8
LL_RCC_APB2_DIV_16	HCLK divided by 16

Clear Flags Defines

LL_RCC_CIR_LSIRDYC	LSI Ready Interrupt Clear
LL_RCC_CIR_LSERDYC	LSE Ready Interrupt Clear
LL_RCC_CIR_HSIRDYC	HSI Ready Interrupt Clear
LL_RCC_CIR_HSERDYC	HSE Ready Interrupt Clear
LL_RCC_CIR_PLLRDYC	PLL Ready Interrupt Clear
LL_RCC_CIR_CSSC	Clock Security System Interrupt Clear

Get Flags Defines

LL_RCC_CIR_LSIRDYF	LSI Ready Interrupt flag
LL_RCC_CIR_LSERDYF	LSE Ready Interrupt flag
LL_RCC_CIR_HSIRDYF	HSI Ready Interrupt flag
LL_RCC_CIR_HSERDYF	HSE Ready Interrupt flag
LL_RCC_CFGR_MCOF	MCO flag
LL_RCC_CIR_PLLRDYF	PLL Ready Interrupt flag
LL_RCC_CIR_CSSF	Clock Security System Interrupt flag
LL_RCC_CSR_OBLRSTF	OBL reset flag
LL_RCC_CSR_PINRSTF	PIN reset flag
LL_RCC_CSR_PORRSTF	POR/PDR reset flag
LL_RCC_CSR_SFTRSTF	Software Reset flag
LL_RCC_CSR_IWDGRSTF	Independent Watchdog reset flag
LL_RCC_CSR_WWDGRSTF	Window watchdog reset flag

LL_RCC_CSR_LPWRRSTF Low-Power reset flag

LL_RCC_CSR_V18PWRRSTF Reset flag of the 1.8 V domain.

Peripheral I2C get clock source

LL_RCC_I2C1_CLKSOURCE I2C1 Clock source selection

LL_RCC_I2C2_CLKSOURCE I2C2 Clock source selection

Peripheral I2C clock source selection

LL_RCC_I2C1_CLKSOURCE_HSI HSI oscillator clock used as I2C1 clock source

LL_RCC_I2C1_CLKSOURCE_SYSCLK System clock selected as I2C1 clock source

LL_RCC_I2C2_CLKSOURCE_HSI HSI oscillator clock used as I2C2 clock source

LL_RCC_I2C2_CLKSOURCE_SYSCLK System clock selected as I2C2 clock source

Peripheral I2S get clock source

LL_RCC_I2S_CLKSOURCE I2S Clock source selection

Peripheral I2S clock source selection

LL_RCC_I2S_CLKSOURCE_SYSCLK System clock selected as I2S clock source

LL_RCC_I2S_CLKSOURCE_PIN External clock selected as I2S clock source

IT Defines

LL_RCC_CIR_LSIRDYIE LSI Ready Interrupt Enable

LL_RCC_CIR_LSERDYIE LSE Ready Interrupt Enable

LL_RCC_CIR_HSIRDYIE HSI Ready Interrupt Enable

LL_RCC_CIR_HSERDYIE HSE Ready Interrupt Enable

LL_RCC_CIR_PLLRDYIE PLL Ready Interrupt Enable

LSE oscillator drive capability

LL_RCC_LSEDRIVE_LOW Xtal mode lower driving capability

LL_RCC_LSEDRIVE_MEDIUMLOW Xtal mode medium low driving capability

LL_RCC_LSEDRIVE_MEDIUMHIGH Xtal mode medium high driving capability

LL_RCC_LSEDRIVE_HIGH Xtal mode higher driving capability

MCO1 SOURCE selection

LL_RCC_MCO1SOURCE_NOCLOCK MCO output disabled, no clock on MCO

LL_RCC_MCO1SOURCE_SYSCLK SYSCLK selection as MCO source

LL_RCC_MCO1SOURCE_HSI HSI selection as MCO source

LL_RCC_MCO1SOURCE_HSE HSE selection as MCO source

LL_RCC_MCO1SOURCE_LSI LSI selection as MCO source

LL_RCC_MCO1SOURCE_LSE LSE selection as MCO source

LL_RCC_MCO1SOURCE_PLLCLK_DIV_2 PLL clock divided by 2

MCO1 prescaler

LL_RCC_MCO1_DIV_1 MCO Clock divided by 1

Oscillator Values adaptation

HSE_VALUE	Value of the HSE oscillator in Hz
HSI_VALUE	Value of the HSI oscillator in Hz
LSE_VALUE	Value of the LSE oscillator in Hz
LSI_VALUE	Value of the LSI oscillator in Hz

Peripheral clock frequency

LL_RCC_PERIPH_FREQUENCY_NO	No clock enabled for the peripheral
LL_RCC_PERIPH_FREQUENCY_NA	Frequency cannot be provided as external clock

PLL SOURCE

LL_RCC_PLLSOURCE_HSE	HSE/PREDIV clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSI_DIV_2	HSI clock divided by 2 selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_1	HSE clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_2	HSE/2 clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_3	HSE/3 clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_4	HSE/4 clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_5	HSE/5 clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_6	HSE/6 clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_7	HSE/7 clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_8	HSE/8 clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_9	HSE/9 clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_10	HSE/10 clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_11	HSE/11 clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_12	HSE/12 clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_13	HSE/13 clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_14	HSE/14 clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_15	HSE/15 clock selected as PLL entry clock source
LL_RCC_PLLSOURCE_HSE_DIV_16	HSE/16 clock selected as PLL entry clock source

PLL Multiplicator factor

LL_RCC_PLL_MUL_2	PLL input clock*2
LL_RCC_PLL_MUL_3	PLL input clock*3
LL_RCC_PLL_MUL_4	PLL input clock*4
LL_RCC_PLL_MUL_5	PLL input clock*5
LL_RCC_PLL_MUL_6	PLL input clock*6
LL_RCC_PLL_MUL_7	PLL input clock*7
LL_RCC_PLL_MUL_8	PLL input clock*8

LL_RCC_PLL_MUL_9	PLL input clock*9
LL_RCC_PLL_MUL_10	PLL input clock*10
LL_RCC_PLL_MUL_11	PLL input clock*11
LL_RCC_PLL_MUL_12	PLL input clock*12
LL_RCC_PLL_MUL_13	PLL input clock*13
LL_RCC_PLL_MUL_14	PLL input clock*14
LL_RCC_PLL_MUL_15	PLL input clock*15
LL_RCC_PLL_MUL_16	PLL input clock*16

PREDIV Division factor

LL_RCC_PREDIV_DIV_1	PREDIV input clock not divided
LL_RCC_PREDIV_DIV_2	PREDIV input clock divided by 2
LL_RCC_PREDIV_DIV_3	PREDIV input clock divided by 3
LL_RCC_PREDIV_DIV_4	PREDIV input clock divided by 4
LL_RCC_PREDIV_DIV_5	PREDIV input clock divided by 5
LL_RCC_PREDIV_DIV_6	PREDIV input clock divided by 6
LL_RCC_PREDIV_DIV_7	PREDIV input clock divided by 7
LL_RCC_PREDIV_DIV_8	PREDIV input clock divided by 8
LL_RCC_PREDIV_DIV_9	PREDIV input clock divided by 9
LL_RCC_PREDIV_DIV_10	PREDIV input clock divided by 10
LL_RCC_PREDIV_DIV_11	PREDIV input clock divided by 11
LL_RCC_PREDIV_DIV_12	PREDIV input clock divided by 12
LL_RCC_PREDIV_DIV_13	PREDIV input clock divided by 13
LL_RCC_PREDIV_DIV_14	PREDIV input clock divided by 14
LL_RCC_PREDIV_DIV_15	PREDIV input clock divided by 15
LL_RCC_PREDIV_DIV_16	PREDIV input clock divided by 16

RTC clock source selection

LL_RCC_RTC_CLKSOURCE_NONE	No clock used as RTC clock
LL_RCC_RTC_CLKSOURCE_LSE	LSE oscillator clock used as RTC clock
LL_RCC_RTC_CLKSOURCE_LSI	LSI oscillator clock used as RTC clock
LL_RCC_RTC_CLKSOURCE_HSE_DIV32	HSE oscillator clock divided by 32 used as RTC clock

AHB prescaler

LL_RCC_SYSCLK_DIV_1	SYSCLK not divided
LL_RCC_SYSCLK_DIV_2	SYSCLK divided by 2
LL_RCC_SYSCLK_DIV_4	SYSCLK divided by 4
LL_RCC_SYSCLK_DIV_8	SYSCLK divided by 8
LL_RCC_SYSCLK_DIV_16	SYSCLK divided by 16

LL_RCC_SYSCLK_DIV_64	SYSCLK divided by 64
LL_RCC_SYSCLK_DIV_128	SYSCLK divided by 128
LL_RCC_SYSCLK_DIV_256	SYSCLK divided by 256
LL_RCC_SYSCLK_DIV_512	SYSCLK divided by 512

System clock switch

LL_RCC_SYS_CLKSOURCE_HSI	HSI selection as system clock
LL_RCC_SYS_CLKSOURCE_HSE	HSE selection as system clock
LL_RCC_SYS_CLKSOURCE_PLL	PLL selection as system clock

System clock switch status

LL_RCC_SYS_CLKSOURCE_STATUS_HSI	HSI used as system clock
LL_RCC_SYS_CLKSOURCE_STATUS_HSE	HSE used as system clock
LL_RCC_SYS_CLKSOURCE_STATUS_PLL	PLL used as system clock

TIMx Peripheral TIM get clock source

LL_RCC_TIM1_CLKSOURCE	TIM1 Clock source selection
LL_RCC_TIM8_CLKSOURCE	TIM8 Clock source selection

Peripheral TIM clock source selection

LL_RCC_TIM1_CLKSOURCE_PCLK2	PCLK2 used as TIM1 clock source
LL_RCC_TIM1_CLKSOURCE_PLL	PLL clock used as TIM1 clock source
LL_RCC_TIM8_CLKSOURCE_PCLK2	PCLK2 used as TIM8 clock source
LL_RCC_TIM8_CLKSOURCE_PLL	PLL clock used as TIM8 clock source

Peripheral UART get clock source

LL_RCC_UART4_CLKSOURCE	UART4 Clock source selection
LL_RCC_UART5_CLKSOURCE	UART5 Clock source selection

Peripheral UART clock source selection

LL_RCC_UART4_CLKSOURCE_PCLK1	PCLK1 clock used as UART4 clock source
LL_RCC_UART4_CLKSOURCE_SYSCLK	System clock selected as UART4 clock source
LL_RCC_UART4_CLKSOURCE_LSE	LSE oscillator clock used as UART4 clock source
LL_RCC_UART4_CLKSOURCE_HSI	HSI oscillator clock used as UART4 clock source
LL_RCC_UART5_CLKSOURCE_PCLK1	PCLK1 clock used as UART5 clock source
LL_RCC_UART5_CLKSOURCE_SYSCLK	System clock selected as UART5 clock source
LL_RCC_UART5_CLKSOURCE_LSE	LSE oscillator clock used as UART5 clock source
LL_RCC_UART5_CLKSOURCE_HSI	HSI oscillator clock used as UART5 clock source

Peripheral USART get clock source

LL_RCC_USART1_CLKSOURCE	USART1 Clock source selection
LL_RCC_USART2_CLKSOURCE	USART2 Clock source selection
LL_RCC_USART3_CLKSOURCE	USART3 Clock source selection

Peripheral USART clock source selection

LL_RCC_USART1_CLKSOURCE_PCLK2	PCLK2 clock used as USART1 clock source
LL_RCC_USART1_CLKSOURCE_SYSCLK	System clock selected as USART1 clock source
LL_RCC_USART1_CLKSOURCE_LSE	LSE oscillator clock used as USART1 clock source
LL_RCC_USART1_CLKSOURCE_HSI	HSI oscillator clock used as USART1 clock source
LL_RCC_USART2_CLKSOURCE_PCLK1	PCLK1 clock used as USART2 clock source
LL_RCC_USART2_CLKSOURCE_SYSCLK	System clock selected as USART2 clock source
LL_RCC_USART2_CLKSOURCE_LSE	LSE oscillator clock used as USART2 clock source
LL_RCC_USART2_CLKSOURCE_HSI	HSI oscillator clock used as USART2 clock source
LL_RCC_USART3_CLKSOURCE_PCLK1	PCLK1 clock used as USART3 clock source
LL_RCC_USART3_CLKSOURCE_SYSCLK	System clock selected as USART3 clock source
LL_RCC_USART3_CLKSOURCE_LSE	LSE oscillator clock used as USART3 clock source
LL_RCC_USART3_CLKSOURCE_HSI	HSI oscillator clock used as USART3 clock source

Peripheral USB get clock source

LL_RCC_USB_CLKSOURCE	USB Clock source selection

Peripheral USB clock source selection

LL_RCC_USB_CLKSOURCE_PLL	USB prescaler is PLL clock divided by 1
LL_RCC_USB_CLKSOURCE_PLL_DIV_1_5	USB prescaler is PLL clock divided by 1.5

Calculate frequencies

__LL_RCC_CALC_PLLCLK_ FREQ

Description:

- Helper macro to calculate the PLLCLK frequency.

Parameters:

- __INPUTFREQ__: PLL Input frequency (based on HSE div Prediv / HSI div 2)
- __PLLMUL__: This parameter can be one of the following values:
  - LL_RCC_PLL_MUL_2
  - LL_RCC_PLL_MUL_3
  - LL_RCC_PLL_MUL_4

  - LL_RCC_PLL_MUL_5
  - LL_RCC_PLL_MUL_6
  - LL_RCC_PLL_MUL_7
  - LL_RCC_PLL_MUL_8
  - LL_RCC_PLL_MUL_9
  - LL_RCC_PLL_MUL_10
  - LL_RCC_PLL_MUL_11
  - LL_RCC_PLL_MUL_12
  - LL_RCC_PLL_MUL_13
  - LL_RCC_PLL_MUL_14
  - LL_RCC_PLL_MUL_15
  - LL_RCC_PLL_MUL_16

Return value:

- PLL: clock frequency (in Hz)

Notes:

- ex: __LL_RCC_CALC_PLLCLK_FREQ (HSE_VALUE / (LL_RCC_PLL_GetPrediv () + 1), LL_RCC_PLL_GetMultiplicator());

__LL_RCC_CALC_HCLK_FREQ

Description:

- Helper macro to calculate the HCLK frequency.

Parameters:

- __SYSCLKFREQ__: SYSCLK frequency (based on HSE/HSI/PLLCLK)
- __AHBPRESCALER__: This parameter can be one of the following values:
  - LL_RCC_SYSCLK_DIV_1
  - LL_RCC_SYSCLK_DIV_2
  - LL_RCC_SYSCLK_DIV_4
  - LL_RCC_SYSCLK_DIV_8
  - LL_RCC_SYSCLK_DIV_16
  - LL_RCC_SYSCLK_DIV_64
  - LL_RCC_SYSCLK_DIV_128
  - LL_RCC_SYSCLK_DIV_256
  - LL_RCC_SYSCLK_DIV_512

Return value:

- HCLK: clock frequency (in Hz)

Notes:

- : __AHBPRESCALER__ be retrieved by LL_RCC_GetAHBPrescaler ex: __LL_RCC_CALC_HCLK_FREQ(LL_RCC_GetAHBPrescaler())

__LL_RCC_CALC_PCLK1_FREQ

Description:

- Helper macro to calculate the PCLK1 frequency (ABP1)

Parameters:

- __HCLKFREQ__: HCLK frequency
- __APB1PRESCALER__: This parameter can be one of the following values:
  - LL_RCC_APB1_DIV_1
  - LL_RCC_APB1_DIV_2
  - LL_RCC_APB1_DIV_4
  - LL_RCC_APB1_DIV_8
  - LL_RCC_APB1_DIV_16

Return value:

- PCLK1: clock frequency (in Hz)

Notes:

- : __APB1PRESCALER__ be retrieved by LL_RCC_GetAPB1Prescaler ex: __LL_RCC_CALC_PCLK1_FREQ(LL_RCC_GetAPB1Prescaler())

__LL_RCC_CALC_PCLK2_FREQ

Description:

- Helper macro to calculate the PCLK2 frequency (ABP2)

Parameters:

- __HCLKFREQ__: HCLK frequency
- __APB2PRESCALER__: This parameter can be one of the following values:
  - LL_RCC_APB2_DIV_1
  - LL_RCC_APB2_DIV_2
  - LL_RCC_APB2_DIV_4
  - LL_RCC_APB2_DIV_8
  - LL_RCC_APB2_DIV_16

Return value:

- PCLK2: clock frequency (in Hz)

Notes:

- : __APB2PRESCALER__ be retrieved by LL_RCC_GetAPB2Prescaler ex: __LL_RCC_CALC_PCLK2_FREQ(LL_RCC_GetAPB2Prescaler())

Common Write and read registers Macros

LL_RCC_WriteReg

Description:

- Write a value in RCC register.

Parameters:

- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_RCC_ReadReg

Description:

- Read a value in RCC register.

Parameters:

- __REG__: Register to be read

Return value:

- Register: value

75 LL RTC Generic Driver

75.1 RTC Firmware driver registers structures

75.1.1 LL_RTC_InitTypeDef

Data Fields

- ***uint32_t HourFormat***
- ***uint32_t AsynchPrescaler***
- ***uint32_t SynchPrescaler***

Field Documentation

- ***uint32_t LL_RTC_InitTypeDef::HourFormat***
  Specifies the RTC Hours Format. This parameter can be a value of ***RTC_LL_EC_HOURFORMAT***This feature can be modified afterwards using unitary function **LL_RTC_SetHourFormat()**.
- ***uint32_t LL_RTC_InitTypeDef::AsynchPrescaler***
  Specifies the RTC Asynchronous Predivider value. This parameter must be a number between Min_Data = 0x00 and Max_Data = 0x7FThis feature can be modified afterwards using unitary function **LL_RTC_SetAsynchPrescaler()**.
- ***uint32_t LL_RTC_InitTypeDef::SynchPrescaler***
  Specifies the RTC Synchronous Predivider value. This parameter must be a number between Min_Data = 0x00 and Max_Data = 0x7FFFThis feature can be modified afterwards using unitary function **LL_RTC_SetSynchPrescaler()**.

75.1.2 LL_RTC_TimeTypeDef

Data Fields

- ***uint32_t TimeFormat***
- ***uint8_t Hours***
- ***uint8_t Minutes***
- ***uint8_t Seconds***

Field Documentation

- ***uint32_t LL_RTC_TimeTypeDef::TimeFormat***
  Specifies the RTC AM/PM Time. This parameter can be a value of ***RTC_LL_EC_TIME_FORMAT***This feature can be modified afterwards using unitary function **LL_RTC_TIME_SetFormat()**.
- ***uint8_t LL_RTC_TimeTypeDef::Hours***
  Specifies the RTC Time Hours. This parameter must be a number between Min_Data = 0 and Max_Data = 12 if the **LL_RTC_TIME_FORMAT_PM** is selected. This parameter must be a number between Min_Data = 0 and Max_Data = 23 if the **LL_RTC_TIME_FORMAT_AM_OR_24** is selected.This feature can be modified afterwards using unitary function **LL_RTC_TIME_SetHour()**.
- ***uint8_t LL_RTC_TimeTypeDef::Minutes***
  Specifies the RTC Time Minutes. This parameter must be a number between Min_Data = 0 and Max_Data = 59This feature can be modified afterwards using unitary function **LL_RTC_TIME_SetMinute()**.
- ***uint8_t LL_RTC_TimeTypeDef::Seconds***
  Specifies the RTC Time Seconds. This parameter must be a number between

Min_Data = 0 and Max_Data = 59This feature can be modified afterwards using unitary function **LL_RTC_TIME_SetSecond()**.

75.1.3 LL_RTC_DateTypeDef

Data Fields

- ***uint8_t WeekDay***
- ***uint8_t Month***
- ***uint8_t Day***
- ***uint8_t Year***

Field Documentation

- ***uint8_t LL_RTC_DateTypeDef::WeekDay***
  Specifies the RTC Date WeekDay. This parameter can be a value of ***RTC_LL_EC_WEEKDAY***This feature can be modified afterwards using unitary function **LL_RTC_DATE_SetWeekDay()**.
- ***uint8_t LL_RTC_DateTypeDef::Month***
  Specifies the RTC Date Month. This parameter can be a value of ***RTC_LL_EC_MONTH***This feature can be modified afterwards using unitary function **LL_RTC_DATE_SetMonth()**.
- ***uint8_t LL_RTC_DateTypeDef::Day***
  Specifies the RTC Date Day. This parameter must be a number between Min_Data = 1 and Max_Data = 31This feature can be modified afterwards using unitary function **LL_RTC_DATE_SetDay()**.
- ***uint8_t LL_RTC_DateTypeDef::Year***
  Specifies the RTC Date Year. This parameter must be a number between Min_Data = 0 and Max_Data = 99This feature can be modified afterwards using unitary function **LL_RTC_DATE_SetYear()**.

75.1.4 LL_RTC_AlarmTypeDef

Data Fields

- ***LL_RTC_TimeTypeDef AlarmTime***
- ***uint32_t AlarmMask***
- ***uint32_t AlarmDateWeekDaySel***
- ***uint8_t AlarmDateWeekDay***

Field Documentation

- ***LL_RTC_TimeTypeDef LL_RTC_AlarmTypeDef::AlarmTime***
  Specifies the RTC Alarm Time members.
- ***uint32_t LL_RTC_AlarmTypeDef::AlarmMask***
  Specifies the RTC Alarm Masks. This parameter can be a value of ***RTC_LL_EC_ALMA_MASK*** for ALARM A or ***RTC_LL_EC_ALMB_MASK*** for ALARM B.This feature can be modified afterwards using unitary function **LL_RTC_ALMA_SetMask()** for ALARM A or **LL_RTC_ALMB_SetMask()** for ALARM B
- ***uint32_t LL_RTC_AlarmTypeDef::AlarmDateWeekDaySel***
  Specifies the RTC Alarm is on day or WeekDay. This parameter can be a value of ***RTC_LL_EC_ALMA_WEEKDAY_SELECTION*** for ALARM A or ***RTC_LL_EC_ALMB_WEEKDAY_SELECTION*** for ALARM BThis feature can be modified afterwards using unitary function **LL_RTC_ALMA_EnableWeekday()** or **LL_RTC_ALMA_DisableWeekday()** for ALARM A or **LL_RTC_ALMB_EnableWeekday()** or **LL_RTC_ALMB_DisableWeekday()** for ALARM B

- ***uint8_t LL_RTC_AlarmTypeDef::AlarmDateWeekDay***
  Specifies the RTC Alarm Day/WeekDay. If AlarmDateWeekDaySel set to day, this parameter must be a number between Min_Data = 1 and Max_Data = 31.This feature can be modified afterwards using unitary function **LL_RTC_ALMA_SetDay()** for ALARM A or **LL_RTC_ALMB_SetDay()** for ALARM B.If AlarmDateWeekDaySel set to Weekday, this parameter can be a value of ***RTC_LL_EC_WEEKDAY***.This feature can be modified afterwards using unitary function **LL_RTC_ALMA_SetWeekDay()** for ALARM A or **LL_RTC_ALMB_SetWeekDay()** for ALARM B.

75.2 RTC Firmware driver API description

75.2.1 Detailed description of functions

LL_RTC_SetHourFormat

Function name	**__STATIC_INLINE void LL_RTC_SetHourFormat (RTC_TypeDef * RTCx, uint32_t HourFormat)**
Function description	Set Hours format (24 hour/day or AM/PM hour format)
Parameters	• **RTCx:** RTC Instance • **HourFormat:** This parameter can be one of the following values: – LL_RTC_HOURFORMAT_24HOUR – LL_RTC_HOURFORMAT_AMPM
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before. • It can be written in initialization mode only (LL_RTC_EnableInitMode function)
Reference Manual to LL API cross reference:	• CR FMT LL_RTC_SetHourFormat

LL_RTC_GetHourFormat

Function name	**__STATIC_INLINE uint32_t LL_RTC_GetHourFormat (RTC_TypeDef * RTCx)**
Function description	Get Hours format (24 hour/day or AM/PM hour format)
Parameters	• **RTCx:** RTC Instance
Return values	• **Returned:** value can be one of the following values: – LL_RTC_HOURFORMAT_24HOUR – LL_RTC_HOURFORMAT_AMPM
Reference Manual to LL API cross reference:	• CR FMT LL_RTC_GetHourFormat

LL_RTC_SetAlarmOutEvent

Function name	**__STATIC_INLINE void LL_RTC_SetAlarmOutEvent (RTC_TypeDef * RTCx, uint32_t AlarmOutput)**
Function description	Select the flag to be routed to RTC_ALARM output.
Parameters	• **RTCx:** RTC Instance • **AlarmOutput:** This parameter can be one of the following values: – LL_RTC_ALARMOUT_DISABLE – LL_RTC_ALARMOUT_ALMA – LL_RTC_ALARMOUT_ALMB – LL_RTC_ALARMOUT_WAKEUP
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR OSEL LL_RTC_SetAlarmOutEvent

LL_RTC_GetAlarmOutEvent

Function name	**__STATIC_INLINE uint32_t LL_RTC_GetAlarmOutEvent (RTC_TypeDef * RTCx)**
Function description	Get the flag to be routed to RTC_ALARM output.
Parameters	• **RTCx:** RTC Instance
Return values	• **Returned:** value can be one of the following values: – LL_RTC_ALARMOUT_DISABLE – LL_RTC_ALARMOUT_ALMA – LL_RTC_ALARMOUT_ALMB – LL_RTC_ALARMOUT_WAKEUP
Reference Manual to LL API cross reference:	• CR OSEL LL_RTC_GetAlarmOutEvent

LL_RTC_SetAlarmOutputType

Function name	**__STATIC_INLINE void LL_RTC_SetAlarmOutputType (RTC_TypeDef * RTCx, uint32_t Output)**
Function description	Set RTC_ALARM output type (ALARM in push-pull or open-drain output)
Parameters	• **RTCx:** RTC Instance • **Output:** This parameter can be one of the following values: – LL_RTC_ALARM_OUTPUTTYPE_OPENDRAIN – LL_RTC_ALARM_OUTPUTTYPE_PUSHPULL
Return values	• **None**
Notes	• Used only when RTC_ALARM is mapped on PC13 • If all RTC alternate functions are disabled and PC13MODE =

1, PC13VALUE configures the PC13 output data

Reference Manual to LL API cross reference:
- TAFCR ALARMOUTTYPE LL_RTC_SetAlarmOutputType

LL_RTC_GetAlarmOutputType

Function name: **__STATIC_INLINE uint32_t LL_RTC_GetAlarmOutputType (RTC_TypeDef * RTCx)**

Function description: Get RTC_ALARM output type (ALARM in push-pull or open-drain output)

Parameters:
- **RTCx:** RTC Instance

Return values:
- **Returned:** value can be one of the following values:
  - LL_RTC_ALARM_OUTPUTTYPE_OPENDRAIN
  - LL_RTC_ALARM_OUTPUTTYPE_PUSHPULL

Notes:
- used only when RTC_ALARM is mapped on PC13
- If all RTC alternate functions are disabled and PC13MODE = 1, PC13VALUE configures the PC13 output data

Reference Manual to LL API cross reference:
- TAFCR ALARMOUTTYPE LL_RTC_GetAlarmOutputType

LL_RTC_EnablePushPullMode

Function name: **__STATIC_INLINE void LL_RTC_EnablePushPullMode (RTC_TypeDef * RTCx, uint32_t PinMask)**

Function description: Enable push-pull output on PC13, PC14 and/or PC15.

Parameters:
- **RTCx:** RTC Instance
- **PinMask:** This parameter can be a combination of the following values:
  - LL_RTC_PIN_PC13
  - LL_RTC_PIN_PC14
  - LL_RTC_PIN_PC15

Return values:
- **None**

Notes:
- PC13 forced to push-pull output if all RTC alternate functions are disabled
- PC14 and PC15 forced to push-pull output if LSE is disabled

Reference Manual to LL API cross reference:
- TAFCR PC13MODE LL_RTC_EnablePushPullMode
- TAFCR PC14MODE LL_RTC_EnablePushPullMode
- TAFCR PC15MODE LL_RTC_EnablePushPullMode

LL_RTC_DisablePushPullMode

Function name	**__STATIC_INLINE void LL_RTC_DisablePushPullMode (RTC_TypeDef * RTCx, uint32_t PinMask)**
Function description	Disable push-pull output on PC13, PC14 and/or PC15.
Parameters	• **RTCx:** RTC Instance • **PinMask:** This parameter can be a combination of the following values: – LL_RTC_PIN_PC13 – LL_RTC_PIN_PC14 – LL_RTC_PIN_PC15
Return values	• **None**
Notes	• PC13, PC14 and/or PC15 are controlled by the GPIO configuration registers. Consequently PC13, PC14 and/or PC15 are floating in Standby mode.
Reference Manual to LL API cross reference:	• TAFCR PC13MODE LL_RTC_DisablePushPullMode • TAFCR PC14MODE LL_RTC_DisablePushPullMode • TAFCR PC15MODE LL_RTC_DisablePushPullMode

LL_RTC_SetOutputPin

Function name	**__STATIC_INLINE void LL_RTC_SetOutputPin (RTC_TypeDef * RTCx, uint32_t PinMask)**
Function description	Set PC14 and/or PC15 to high level.
Parameters	• **RTCx:** RTC Instance • **PinMask:** This parameter can be a combination of the following values: – LL_RTC_PIN_PC14 – LL_RTC_PIN_PC15
Return values	• **None**
Notes	• Output data configuration is possible if the LSE is disabled and PushPull output is enabled (through LL_RTC_EnablePushPullMode)
Reference Manual to LL API cross reference:	• TAFCR PC14VALUE LL_RTC_SetOutputPin • TAFCR PC15VALUE LL_RTC_SetOutputPin

LL_RTC_ResetOutputPin

Function name	**__STATIC_INLINE void LL_RTC_ResetOutputPin (RTC_TypeDef * RTCx, uint32_t PinMask)**
Function description	Set PC14 and/or PC15 to low level.
Parameters	• **RTCx:** RTC Instance • **PinMask:** This parameter can be a combination of the following values: – LL_RTC_PIN_PC14 – LL_RTC_PIN_PC15

Return values	• **None**
Notes	• Output data configuration is possible if the LSE is disabled and PushPull output is enabled (through LL_RTC_EnablePushPullMode)
Reference Manual to LL API cross reference:	• TAFCR PC14VALUE LL_RTC_ResetOutputPin • TAFCR PC15VALUE LL_RTC_ResetOutputPin

LL_RTC_EnableInitMode

Function name	**__STATIC_INLINE void LL_RTC_EnableInitMode (RTC_TypeDef * RTCx)**
Function description	Enable initialization mode.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Initialization mode is used to program time and date register (RTC_TR and RTC_DR) and prescaler register (RTC_PRER). Counters are stopped and start counting from the new value when INIT is reset.
Reference Manual to LL API cross reference:	• ISR INIT LL_RTC_EnableInitMode

LL_RTC_DisableInitMode

Function name	**__STATIC_INLINE void LL_RTC_DisableInitMode (RTC_TypeDef * RTCx)**
Function description	Disable initialization mode (Free running mode)
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ISR INIT LL_RTC_DisableInitMode

LL_RTC_SetOutputPolarity

Function name	**__STATIC_INLINE void LL_RTC_SetOutputPolarity (RTC_TypeDef * RTCx, uint32_t Polarity)**
Function description	Set Output polarity (pin is low when ALRAF/ALRBF/WUTF is asserted)
Parameters	• **RTCx:** RTC Instance • **Polarity:** This parameter can be one of the following values: – LL_RTC_OUTPUTPOLARITY_PIN_HIGH – LL_RTC_OUTPUTPOLARITY_PIN_LOW
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection

function should be called before.

Reference Manual to LL API cross reference:
- CR POL LL_RTC_SetOutputPolarity

LL_RTC_GetOutputPolarity

Function name **__STATIC_INLINE uint32_t LL_RTC_GetOutputPolarity (RTC_TypeDef * RTCx)**

Function description Get Output polarity.

Parameters
- **RTCx:** RTC Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_RTC_OUTPUTPOLARITY_PIN_HIGH
  - LL_RTC_OUTPUTPOLARITY_PIN_LOW

Reference Manual to LL API cross reference:
- CR POL LL_RTC_GetOutputPolarity

LL_RTC_EnableShadowRegBypass

Function name **__STATIC_INLINE void LL_RTC_EnableShadowRegBypass (RTC_TypeDef * RTCx)**

Function description Enable Bypass the shadow registers.

Parameters
- **RTCx:** RTC Instance

Return values
- **None**

Notes
- Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.

Reference Manual to LL API cross reference:
- CR BYPSHAD LL_RTC_EnableShadowRegBypass

LL_RTC_DisableShadowRegBypass

Function name **__STATIC_INLINE void LL_RTC_DisableShadowRegBypass (RTC_TypeDef * RTCx)**

Function description Disable Bypass the shadow registers.

Parameters
- **RTCx:** RTC Instance

Return values
- **None**

Reference Manual to LL API cross reference:
- CR BYPSHAD LL_RTC_DisableShadowRegBypass

LL_RTC_IsShadowRegBypassEnabled

Function name **__STATIC_INLINE uint32_t LL_RTC_IsShadowRegBypassEnabled (RTC_TypeDef * RTCx)**

Function description	Check if Shadow registers bypass is enabled or not.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR BYPSHAD LL_RTC_IsShadowRegBypassEnabled

LL_RTC_EnableRefClock

Function name	**__STATIC_INLINE void LL_RTC_EnableRefClock (RTC_TypeDef * RTCx)**
Function description	Enable RTC_REFIN reference clock detection (50 or 60 Hz)
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before. • It can be written in initialization mode only (LL_RTC_EnableInitMode function)
Reference Manual to LL API cross reference:	• CR REFCKON LL_RTC_EnableRefClock

LL_RTC_DisableRefClock

Function name	**__STATIC_INLINE void LL_RTC_DisableRefClock (RTC_TypeDef * RTCx)**
Function description	Disable RTC_REFIN reference clock detection (50 or 60 Hz)
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before. • It can be written in initialization mode only (LL_RTC_EnableInitMode function)
Reference Manual to LL API cross reference:	• CR REFCKON LL_RTC_DisableRefClock

LL_RTC_SetAsynchPrescaler

Function name	**__STATIC_INLINE void LL_RTC_SetAsynchPrescaler (RTC_TypeDef * RTCx, uint32_t AsynchPrescaler)**
Function description	Set Asynchronous prescaler factor.
Parameters	• **RTCx:** RTC Instance • **AsynchPrescaler:** Value between Min_Data = 0 and Max_Data = 0x7F

Return values	• **None**
Reference Manual to LL API cross reference:	• PRER PREDIV_A LL_RTC_SetAsynchPrescaler

LL_RTC_SetSynchPrescaler

Function name	**__STATIC_INLINE void LL_RTC_SetSynchPrescaler (RTC_TypeDef * RTCx, uint32_t SynchPrescaler)**
Function description	Set Synchronous prescaler factor.
Parameters	• **RTCx:** RTC Instance • **SynchPrescaler:** Value between Min_Data = 0 and Max_Data = 0x7FFF
Return values	• **None**
Reference Manual to LL API cross reference:	• PRER PREDIV_S LL_RTC_SetSynchPrescaler

LL_RTC_GetAsynchPrescaler

Function name	**__STATIC_INLINE uint32_t LL_RTC_GetAsynchPrescaler (RTC_TypeDef * RTCx)**
Function description	Get Asynchronous prescaler factor.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data = 0 and Max_Data = 0x7F
Reference Manual to LL API cross reference:	• PRER PREDIV_A LL_RTC_GetAsynchPrescaler

LL_RTC_GetSynchPrescaler

Function name	**__STATIC_INLINE uint32_t LL_RTC_GetSynchPrescaler (RTC_TypeDef * RTCx)**
Function description	Get Synchronous prescaler factor.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data = 0 and Max_Data = 0x7FFF
Reference Manual to LL API cross reference:	• PRER PREDIV_S LL_RTC_GetSynchPrescaler

LL_RTC_EnableWriteProtection

Function name	**__STATIC_INLINE void LL_RTC_EnableWriteProtection (RTC_TypeDef * RTCx)**
Function description	Enable the write protection for RTC registers.
Parameters	• **RTCx:** RTC Instance

Return values	• **None**
Reference Manual to LL API cross reference:	• WPR KEY LL_RTC_EnableWriteProtection

LL_RTC_DisableWriteProtection

Function name	**__STATIC_INLINE void LL_RTC_DisableWriteProtection (RTC_TypeDef * RTCx)**
Function description	Disable the write protection for RTC registers.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• WPR KEY LL_RTC_DisableWriteProtection

LL_RTC_TIME_SetFormat

Function name	**__STATIC_INLINE void LL_RTC_TIME_SetFormat (RTC_TypeDef * RTCx, uint32_t TimeFormat)**
Function description	Set time format (AM/24-hour or PM notation)
Parameters	• **RTCx:** RTC Instance • **TimeFormat:** This parameter can be one of the following values: – LL_RTC_TIME_FORMAT_AM_OR_24 – LL_RTC_TIME_FORMAT_PM
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before. • It can be written in initialization mode only (LL_RTC_EnableInitMode function)
Reference Manual to LL API cross reference:	• TR PM LL_RTC_TIME_SetFormat

LL_RTC_TIME_GetFormat

Function name	**__STATIC_INLINE uint32_t LL_RTC_TIME_GetFormat (RTC_TypeDef * RTCx)**
Function description	Get time format (AM or PM notation)
Parameters	• **RTCx:** RTC Instance
Return values	• **Returned:** value can be one of the following values: – LL_RTC_TIME_FORMAT_AM_OR_24 – LL_RTC_TIME_FORMAT_PM
Notes	• if shadow mode is disabled (BYPSHAD=0), need to check if RSF flag is set before reading this bit • Read either RTC_SSR or RTC_TR locks the values in the

	higher-order calendar shadow registers until RTC_DR is read (LL_RTC_ReadReg(RTC, DR)).
Reference Manual to LL API cross reference:	• TR PM LL_RTC_TIME_GetFormat

LL_RTC_TIME_SetHour

Function name	**__STATIC_INLINE void LL_RTC_TIME_SetHour (RTC_TypeDef * RTCx, uint32_t Hours)**
Function description	Set Hours in BCD format.
Parameters	• **RTCx:** RTC Instance • **Hours:** Value between Min_Data=0x01 and Max_Data=0x12 or between Min_Data=0x00 and Max_Data=0x23
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before. • It can be written in initialization mode only (LL_RTC_EnableInitMode function) • helper macro __LL_RTC_CONVERT_BIN2BCD is available to convert hour from binary to BCD format
Reference Manual to LL API cross reference:	• TR HT LL_RTC_TIME_SetHour • TR HU LL_RTC_TIME_SetHour

LL_RTC_TIME_GetHour

Function name	**__STATIC_INLINE uint32_t LL_RTC_TIME_GetHour (RTC_TypeDef * RTCx)**
Function description	Get Hours in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x01 and Max_Data=0x12 or between Min_Data=0x00 and Max_Data=0x23
Notes	• if shadow mode is disabled (BYPSHAD=0), need to check if RSF flag is set before reading this bit • Read either RTC_SSR or RTC_TR locks the values in the higher-order calendar shadow registers until RTC_DR is read (LL_RTC_ReadReg(RTC, DR)). • helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert hour from BCD to Binary format
Reference Manual to LL API cross reference:	• TR HT LL_RTC_TIME_GetHour • TR HU LL_RTC_TIME_GetHour

LL_RTC_TIME_SetMinute

Function name	**__STATIC_INLINE void LL_RTC_TIME_SetMinute (RTC_TypeDef * RTCx, uint32_t Minutes)**
Function description	Set Minutes in BCD format.
Parameters	• **RTCx:** RTC Instance • **Minutes:** Value between Min_Data=0x00 and Max_Data=0x59
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before. • It can be written in initialization mode only (LL_RTC_EnableInitMode function) • helper macro __LL_RTC_CONVERT_BIN2BCD is available to convert Minutes from binary to BCD format
Reference Manual to LL API cross reference:	• TR MNT LL_RTC_TIME_SetMinute • TR MNU LL_RTC_TIME_SetMinute

LL_RTC_TIME_GetMinute

Function name	**__STATIC_INLINE uint32_t LL_RTC_TIME_GetMinute (RTC_TypeDef * RTCx)**
Function description	Get Minutes in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0x59
Notes	• if shadow mode is disabled (BYPSHAD=0), need to check if RSF flag is set before reading this bit • Read either RTC_SSR or RTC_TR locks the values in the higher-order calendar shadow registers until RTC_DR is read (LL_RTC_ReadReg(RTC, DR)). • helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert minute from BCD to Binary format
Reference Manual to LL API cross reference:	• TR MNT LL_RTC_TIME_GetMinute • TR MNU LL_RTC_TIME_GetMinute

LL_RTC_TIME_SetSecond

Function name	**__STATIC_INLINE void LL_RTC_TIME_SetSecond (RTC_TypeDef * RTCx, uint32_t Seconds)**
Function description	Set Seconds in BCD format.
Parameters	• **RTCx:** RTC Instance • **Seconds:** Value between Min_Data=0x00 and Max_Data=0x59
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection

function should be called before.
- It can be written in initialization mode only (LL_RTC_EnableInitMode function)
- helper macro __LL_RTC_CONVERT_BIN2BCD is available to convert Seconds from binary to BCD format

Reference Manual to LL API cross reference:
- TR ST LL_RTC_TIME_SetSecond
- TR SU LL_RTC_TIME_SetSecond

LL_RTC_TIME_GetSecond

Function name: **__STATIC_INLINE uint32_t LL_RTC_TIME_GetSecond (RTC_TypeDef * RTCx)**

Function description: Get Seconds in BCD format.

Parameters:
- **RTCx:** RTC Instance

Return values:
- **Value:** between Min_Data=0x00 and Max_Data=0x59

Notes:
- if shadow mode is disabled (BYPSHAD=0), need to check if RSF flag is set before reading this bit
- Read either RTC_SSR or RTC_TR locks the values in the higher-order calendar shadow registers until RTC_DR is read (LL_RTC_ReadReg(RTC, DR)).
- helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Seconds from BCD to Binary format

Reference Manual to LL API cross reference:
- TR ST LL_RTC_TIME_GetSecond
- TR SU LL_RTC_TIME_GetSecond

LL_RTC_TIME_Config

Function name: **__STATIC_INLINE void LL_RTC_TIME_Config (RTC_TypeDef * RTCx, uint32_t Format12_24, uint32_t Hours, uint32_t Minutes, uint32_t Seconds)**

Function description: Set time (hour, minute and second) in BCD format.

Parameters:
- **RTCx:** RTC Instance
- **Format12_24:** This parameter can be one of the following values:
  - LL_RTC_TIME_FORMAT_AM_OR_24
  - LL_RTC_TIME_FORMAT_PM
- **Hours:** Value between Min_Data=0x01 and Max_Data=0x12 or between Min_Data=0x00 and Max_Data=0x23
- **Minutes:** Value between Min_Data=0x00 and Max_Data=0x59
- **Seconds:** Value between Min_Data=0x00 and Max_Data=0x59

Return values:
- **None**

Notes:
- Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
- It can be written in initialization mode only (LL_RTC_EnableInitMode function)

- TimeFormat and Hours should follow the same format

Reference Manual to LL API cross reference:

- TR PM LL_RTC_TIME_Config
- TR HT LL_RTC_TIME_Config
- TR HU LL_RTC_TIME_Config
- TR MNT LL_RTC_TIME_Config
- TR MNU LL_RTC_TIME_Config
- TR ST LL_RTC_TIME_Config
- TR SU LL_RTC_TIME_Config

LL_RTC_TIME_Get

Function name
__STATIC_INLINE uint32_t LL_RTC_TIME_Get (RTC_TypeDef * RTCx)

Function description
Get time (hour, minute and second) in BCD format.

Parameters
- **RTCx:** RTC Instance

Return values
- **Combination:** of hours, minutes and seconds (Format: 0x00HHMMSS).

Notes
- if shadow mode is disabled (BYPSHAD=0), need to check if RSF flag is set before reading this bit
- Read either RTC_SSR or RTC_TR locks the values in the higher-order calendar shadow registers until RTC_DR is read (LL_RTC_ReadReg(RTC, DR)).
- helper macros __LL_RTC_GET_HOUR, __LL_RTC_GET_MINUTE and __LL_RTC_GET_SECOND are available to get independently each parameter.

Reference Manual to LL API cross reference:
- TR HT LL_RTC_TIME_Get
- TR HU LL_RTC_TIME_Get
- TR MNT LL_RTC_TIME_Get
- TR MNU LL_RTC_TIME_Get
- TR ST LL_RTC_TIME_Get
- TR SU LL_RTC_TIME_Get

LL_RTC_TIME_EnableDayLightStore

Function name
__STATIC_INLINE void LL_RTC_TIME_EnableDayLightStore (RTC_TypeDef * RTCx)

Function description
Memorize whether the daylight saving time change has been performed.

Parameters
- **RTCx:** RTC Instance

Return values
- **None**

Notes
- Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.

Reference Manual to LL API cross reference:
- CR BKP LL_RTC_TIME_EnableDayLightStore

LL_RTC_TIME_DisableDayLightStore

Function name	**__STATIC_INLINE void LL_RTC_TIME_DisableDayLightStore (RTC_TypeDef * RTCx)**
Function description	Disable memorization whether the daylight saving time change has been performed.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR BKP LL_RTC_TIME_DisableDayLightStore

LL_RTC_TIME_IsDayLightStoreEnabled

Function name	**__STATIC_INLINE uint32_t LL_RTC_TIME_IsDayLightStoreEnabled (RTC_TypeDef * RTCx)**
Function description	Check if RTC Day Light Saving stored operation has been enabled or not.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR BKP LL_RTC_TIME_IsDayLightStoreEnabled

LL_RTC_TIME_DecHour

Function name	**__STATIC_INLINE void LL_RTC_TIME_DecHour (RTC_TypeDef * RTCx)**
Function description	Subtract 1 hour (winter time change)
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR SUB1H LL_RTC_TIME_DecHour

LL_RTC_TIME_IncHour

Function name	**__STATIC_INLINE void LL_RTC_TIME_IncHour (RTC_TypeDef * RTCx)**
Function description	Add 1 hour (summer time change)
Parameters	• **RTCx:** RTC Instance

Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR ADD1H LL_RTC_TIME_IncHour

LL_RTC_TIME_GetSubSecond

Function name	**__STATIC_INLINE uint32_t LL_RTC_TIME_GetSubSecond (RTC_TypeDef * RTCx)**
Function description	Get Sub second value in the synchronous prescaler counter.
Parameters	• **RTCx:** RTC Instance
Return values	• **Sub:** second value (number between 0 and 65535)
Notes	• You can use both SubSeconds value and SecondFraction (PREDIV_S through LL_RTC_GetSynchPrescaler function) terms returned to convert Calendar SubSeconds value in second fraction ratio with time unit following generic formula: ==> Seconds fraction ratio * time_unit= [(SecondFraction-SubSeconds)/(SecondFraction+1)] * time_unit This conversion can be performed only if no shift operation is pending (ie. SHFP=0) when PREDIV_S >= SS.
Reference Manual to LL API cross reference:	• SSR SS LL_RTC_TIME_GetSubSecond

LL_RTC_TIME_Synchronize

Function name	**__STATIC_INLINE void LL_RTC_TIME_Synchronize (RTC_TypeDef * RTCx, uint32_t ShiftSecond, uint32_t Fraction)**
Function description	Synchronize to a remote clock with a high degree of precision.
Parameters	• **RTCx:** RTC Instance • **ShiftSecond:** This parameter can be one of the following values: – LL_RTC_SHIFT_SECOND_DELAY – LL_RTC_SHIFT_SECOND_ADVANCE • **Fraction:** Number of Seconds Fractions (any value from 0 to 0x7FFF)
Return values	• **None**
Notes	• This operation effectively subtracts from (delays) or advance the clock of a fraction of a second. • Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before. • When REFCKON is set, firmware must not write to Shift control register.
Reference Manual to LL API cross	• SHIFTR ADD1S LL_RTC_TIME_Synchronize

reference:
- SHIFTR SUBFS LL_RTC_TIME_Synchronize

LL_RTC_DATE_SetYear

Function name: **__STATIC_INLINE void LL_RTC_DATE_SetYear (RTC_TypeDef * RTCx, uint32_t Year)**

Function description: Set Year in BCD format.

Parameters:
- **RTCx:** RTC Instance
- **Year:** Value between Min_Data=0x00 and Max_Data=0x99

Return values:
- **None**

Notes:
- helper macro __LL_RTC_CONVERT_BIN2BCD is available to convert Year from binary to BCD format

Reference Manual to LL API cross reference:
- DR YT LL_RTC_DATE_SetYear
- DR YU LL_RTC_DATE_SetYear

LL_RTC_DATE_GetYear

Function name: **__STATIC_INLINE uint32_t LL_RTC_DATE_GetYear (RTC_TypeDef * RTCx)**

Function description: Get Year in BCD format.

Parameters:
- **RTCx:** RTC Instance

Return values:
- **Value:** between Min_Data=0x00 and Max_Data=0x99

Notes:
- if shadow mode is disabled (BYPSHAD=0), need to check if RSF flag is set before reading this bit
- helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Year from BCD to Binary format

Reference Manual to LL API cross reference:
- DR YT LL_RTC_DATE_GetYear
- DR YU LL_RTC_DATE_GetYear

LL_RTC_DATE_SetWeekDay

Function name: **__STATIC_INLINE void LL_RTC_DATE_SetWeekDay (RTC_TypeDef * RTCx, uint32_t WeekDay)**

Function description: Set Week day.

Parameters:
- **RTCx:** RTC Instance
- **WeekDay:** This parameter can be one of the following values:
  - LL_RTC_WEEKDAY_MONDAY
  - LL_RTC_WEEKDAY_TUESDAY
  - LL_RTC_WEEKDAY_WEDNESDAY
  - LL_RTC_WEEKDAY_THURSDAY
  - LL_RTC_WEEKDAY_FRIDAY
  - LL_RTC_WEEKDAY_SATURDAY
  - LL_RTC_WEEKDAY_SUNDAY

Return values
- **None**

Reference Manual to LL API cross reference:
- DR WDU LL_RTC_DATE_SetWeekDay

LL_RTC_DATE_GetWeekDay

Function name
__STATIC_INLINE uint32_t LL_RTC_DATE_GetWeekDay (RTC_TypeDef * RTCx)

Function description
Get Week day.

Parameters
- **RTCx:** RTC Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_RTC_WEEKDAY_MONDAY
  - LL_RTC_WEEKDAY_TUESDAY
  - LL_RTC_WEEKDAY_WEDNESDAY
  - LL_RTC_WEEKDAY_THURSDAY
  - LL_RTC_WEEKDAY_FRIDAY
  - LL_RTC_WEEKDAY_SATURDAY
  - LL_RTC_WEEKDAY_SUNDAY

Notes
- if shadow mode is disabled (BYPSHAD=0), need to check if RSF flag is set before reading this bit

Reference Manual to LL API cross reference:
- DR WDU LL_RTC_DATE_GetWeekDay

LL_RTC_DATE_SetMonth

Function name
__STATIC_INLINE void LL_RTC_DATE_SetMonth (RTC_TypeDef * RTCx, uint32_t Month)

Function description
Set Month in BCD format.

Parameters
- **RTCx:** RTC Instance
- **Month:** This parameter can be one of the following values:
  - LL_RTC_MONTH_JANUARY
  - LL_RTC_MONTH_FEBRUARY
  - LL_RTC_MONTH_MARCH
  - LL_RTC_MONTH_APRIL
  - LL_RTC_MONTH_MAY
  - LL_RTC_MONTH_JUNE
  - LL_RTC_MONTH_JULY
  - LL_RTC_MONTH_AUGUST
  - LL_RTC_MONTH_SEPTEMBER
  - LL_RTC_MONTH_OCTOBER
  - LL_RTC_MONTH_NOVEMBER
  - LL_RTC_MONTH_DECEMBER

Return values
- **None**

Notes
- helper macro __LL_RTC_CONVERT_BIN2BCD is available to convert Month from binary to BCD format

Reference Manual to
- DR MT LL_RTC_DATE_SetMonth

LL API cross reference:	• DR MU LL_RTC_DATE_SetMonth

LL_RTC_DATE_GetMonth

Function name	**__STATIC_INLINE uint32_t LL_RTC_DATE_GetMonth (RTC_TypeDef * RTCx)**
Function description	Get Month in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Returned:** value can be one of the following values: – LL_RTC_MONTH_JANUARY – LL_RTC_MONTH_FEBRUARY – LL_RTC_MONTH_MARCH – LL_RTC_MONTH_APRIL – LL_RTC_MONTH_MAY – LL_RTC_MONTH_JUNE – LL_RTC_MONTH_JULY – LL_RTC_MONTH_AUGUST – LL_RTC_MONTH_SEPTEMBER – LL_RTC_MONTH_OCTOBER – LL_RTC_MONTH_NOVEMBER – LL_RTC_MONTH_DECEMBER
Notes	• if shadow mode is disabled (BYPSHAD=0), need to check if RSF flag is set before reading this bit • helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Month from BCD to Binary format
Reference Manual to LL API cross reference:	• DR MT LL_RTC_DATE_GetMonth • DR MU LL_RTC_DATE_GetMonth

LL_RTC_DATE_SetDay

Function name	**__STATIC_INLINE void LL_RTC_DATE_SetDay (RTC_TypeDef * RTCx, uint32_t Day)**
Function description	Set Day in BCD format.
Parameters	• **RTCx:** RTC Instance • **Day:** Value between Min_Data=0x01 and Max_Data=0x31
Return values	• **None**
Notes	• helper macro __LL_RTC_CONVERT_BIN2BCD is available to convert Day from binary to BCD format
Reference Manual to LL API cross reference:	• DR DT LL_RTC_DATE_SetDay • DR DU LL_RTC_DATE_SetDay

LL_RTC_DATE_GetDay

Function name
__STATIC_INLINE uint32_t LL_RTC_DATE_GetDay (RTC_TypeDef * RTCx)

Function description
Get Day in BCD format.

Parameters
- **RTCx:** RTC Instance

Return values
- **Value:** between Min_Data=0x01 and Max_Data=0x31

Notes
- if shadow mode is disabled (BYPSHAD=0), need to check if RSF flag is set before reading this bit
- helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Day from BCD to Binary format

Reference Manual to LL API cross reference:
- DR DT LL_RTC_DATE_GetDay
- DR DU LL_RTC_DATE_GetDay

LL_RTC_DATE_Config

Function name
__STATIC_INLINE void LL_RTC_DATE_Config (RTC_TypeDef * RTCx, uint32_t WeekDay, uint32_t Day, uint32_t Month, uint32_t Year)

Function description
Set date (WeekDay, Day, Month and Year) in BCD format.

Parameters
- **RTCx:** RTC Instance
- **WeekDay:** This parameter can be one of the following values:
  - LL_RTC_WEEKDAY_MONDAY
  - LL_RTC_WEEKDAY_TUESDAY
  - LL_RTC_WEEKDAY_WEDNESDAY
  - LL_RTC_WEEKDAY_THURSDAY
  - LL_RTC_WEEKDAY_FRIDAY
  - LL_RTC_WEEKDAY_SATURDAY
  - LL_RTC_WEEKDAY_SUNDAY
- **Day:** Value between Min_Data=0x01 and Max_Data=0x31
- **Month:** This parameter can be one of the following values:
  - LL_RTC_MONTH_JANUARY
  - LL_RTC_MONTH_FEBRUARY
  - LL_RTC_MONTH_MARCH
  - LL_RTC_MONTH_APRIL
  - LL_RTC_MONTH_MAY
  - LL_RTC_MONTH_JUNE
  - LL_RTC_MONTH_JULY
  - LL_RTC_MONTH_AUGUST
  - LL_RTC_MONTH_SEPTEMBER
  - LL_RTC_MONTH_OCTOBER
  - LL_RTC_MONTH_NOVEMBER
  - LL_RTC_MONTH_DECEMBER
- **Year:** Value between Min_Data=0x00 and Max_Data=0x99

Return values
- **None**

Reference Manual to LL API cross
- DR WDU LL_RTC_DATE_Config
- DR MT LL_RTC_DATE_Config

reference:
- DR MU LL_RTC_DATE_Config
- DR DT LL_RTC_DATE_Config
- DR DU LL_RTC_DATE_Config
- DR YT LL_RTC_DATE_Config
- DR YU LL_RTC_DATE_Config

LL_RTC_DATE_Get

Function name: **__STATIC_INLINE uint32_t LL_RTC_DATE_Get (RTC_TypeDef * RTCx)**

Function description: Get date (WeekDay, Day, Month and Year) in BCD format.

Parameters:
- **RTCx:** RTC Instance

Return values:
- **Combination:** of WeekDay, Day, Month and Year (Format: 0xWWDDMMYY).

Notes:
- if shadow mode is disabled (BYPSHAD=0), need to check if RSF flag is set before reading this bit
- helper macros __LL_RTC_GET_WEEKDAY, __LL_RTC_GET_YEAR, __LL_RTC_GET_MONTH, and __LL_RTC_GET_DAY are available to get independently each parameter.

Reference Manual to LL API cross reference:
- DR WDU LL_RTC_DATE_Get
- DR MT LL_RTC_DATE_Get
- DR MU LL_RTC_DATE_Get
- DR DT LL_RTC_DATE_Get
- DR DU LL_RTC_DATE_Get
- DR YT LL_RTC_DATE_Get
- DR YU LL_RTC_DATE_Get

LL_RTC_ALMA_Enable

Function name: **__STATIC_INLINE void LL_RTC_ALMA_Enable (RTC_TypeDef * RTCx)**

Function description: Enable Alarm A.

Parameters:
- **RTCx:** RTC Instance

Return values:
- **None**

Notes:
- Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.

Reference Manual to LL API cross reference:
- CR ALRAE LL_RTC_ALMA_Enable

LL_RTC_ALMA_Disable

Function name: **__STATIC_INLINE void LL_RTC_ALMA_Disable (RTC_TypeDef * RTCx)**

Function description: Disable Alarm A.

Parameters:
- **RTCx:** RTC Instance

Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR ALRAE LL_RTC_ALMA_Disable

LL_RTC_ALMA_SetMask

Function name	**__STATIC_INLINE void LL_RTC_ALMA_SetMask (RTC_TypeDef * RTCx, uint32_t Mask)**
Function description	Specify the Alarm A masks.
Parameters	• **RTCx:** RTC Instance • **Mask:** This parameter can be a combination of the following values: – LL_RTC_ALMA_MASK_NONE – LL_RTC_ALMA_MASK_DATEWEEKDAY – LL_RTC_ALMA_MASK_HOURS – LL_RTC_ALMA_MASK_MINUTES – LL_RTC_ALMA_MASK_SECONDS – LL_RTC_ALMA_MASK_ALL
Return values	• **None**
Reference Manual to LL API cross reference:	• ALRMAR MSK4 LL_RTC_ALMA_SetMask • ALRMAR MSK3 LL_RTC_ALMA_SetMask • ALRMAR MSK2 LL_RTC_ALMA_SetMask • ALRMAR MSK1 LL_RTC_ALMA_SetMask

LL_RTC_ALMA_GetMask

Function name	**__STATIC_INLINE uint32_t LL_RTC_ALMA_GetMask (RTC_TypeDef * RTCx)**
Function description	Get the Alarm A masks.
Parameters	• **RTCx:** RTC Instance
Return values	• **Returned:** value can be can be a combination of the following values: – LL_RTC_ALMA_MASK_NONE – LL_RTC_ALMA_MASK_DATEWEEKDAY – LL_RTC_ALMA_MASK_HOURS – LL_RTC_ALMA_MASK_MINUTES – LL_RTC_ALMA_MASK_SECONDS – LL_RTC_ALMA_MASK_ALL
Reference Manual to LL API cross reference:	• ALRMAR MSK4 LL_RTC_ALMA_GetMask • ALRMAR MSK3 LL_RTC_ALMA_GetMask • ALRMAR MSK2 LL_RTC_ALMA_GetMask • ALRMAR MSK1 LL_RTC_ALMA_GetMask

LL_RTC_ALMA_EnableWeekday

Function name	**__STATIC_INLINE void LL_RTC_ALMA_EnableWeekday (RTC_TypeDef * RTCx)**
Function description	Enable AlarmA Week day selection (DU[3:0] represents the week day.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ALRMAR WDSEL LL_RTC_ALMA_EnableWeekday

LL_RTC_ALMA_DisableWeekday

Function name	**__STATIC_INLINE void LL_RTC_ALMA_DisableWeekday (RTC_TypeDef * RTCx)**
Function description	Disable AlarmA Week day selection (DU[3:0] represents the date)
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ALRMAR WDSEL LL_RTC_ALMA_DisableWeekday

LL_RTC_ALMA_SetDay

Function name	**__STATIC_INLINE void LL_RTC_ALMA_SetDay (RTC_TypeDef * RTCx, uint32_t Day)**
Function description	Set ALARM A Day in BCD format.
Parameters	• **RTCx:** RTC Instance • **Day:** Value between Min_Data=0x01 and Max_Data=0x31
Return values	• **None**
Notes	• helper macro __LL_RTC_CONVERT_BIN2BCD is available to convert Day from binary to BCD format
Reference Manual to LL API cross reference:	• ALRMAR DT LL_RTC_ALMA_SetDay • ALRMAR DU LL_RTC_ALMA_SetDay

LL_RTC_ALMA_GetDay

Function name	**__STATIC_INLINE uint32_t LL_RTC_ALMA_GetDay (RTC_TypeDef * RTCx)**
Function description	Get ALARM A Day in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x01 and Max_Data=0x31
Notes	• helper macro __LL_RTC_CONVERT_BCD2BIN is available

to convert Day from BCD to Binary format

Reference Manual to LL API cross reference:
- ALRMAR DT LL_RTC_ALMA_GetDay
- ALRMAR DU LL_RTC_ALMA_GetDay

LL_RTC_ALMA_SetWeekDay

Function name **__STATIC_INLINE void LL_RTC_ALMA_SetWeekDay (RTC_TypeDef * RTCx, uint32_t WeekDay)**

Function description Set ALARM A Weekday.

Parameters
- **RTCx:** RTC Instance
- **WeekDay:** This parameter can be one of the following values:
  - LL_RTC_WEEKDAY_MONDAY
  - LL_RTC_WEEKDAY_TUESDAY
  - LL_RTC_WEEKDAY_WEDNESDAY
  - LL_RTC_WEEKDAY_THURSDAY
  - LL_RTC_WEEKDAY_FRIDAY
  - LL_RTC_WEEKDAY_SATURDAY
  - LL_RTC_WEEKDAY_SUNDAY

Return values
- **None**

Reference Manual to LL API cross reference:
- ALRMAR DU LL_RTC_ALMA_SetWeekDay

LL_RTC_ALMA_GetWeekDay

Function name **__STATIC_INLINE uint32_t LL_RTC_ALMA_GetWeekDay (RTC_TypeDef * RTCx)**

Function description Get ALARM A Weekday.

Parameters
- **RTCx:** RTC Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_RTC_WEEKDAY_MONDAY
  - LL_RTC_WEEKDAY_TUESDAY
  - LL_RTC_WEEKDAY_WEDNESDAY
  - LL_RTC_WEEKDAY_THURSDAY
  - LL_RTC_WEEKDAY_FRIDAY
  - LL_RTC_WEEKDAY_SATURDAY
  - LL_RTC_WEEKDAY_SUNDAY

Reference Manual to LL API cross reference:
- ALRMAR DU LL_RTC_ALMA_GetWeekDay

LL_RTC_ALMA_SetTimeFormat

Function name **__STATIC_INLINE void LL_RTC_ALMA_SetTimeFormat (RTC_TypeDef * RTCx, uint32_t TimeFormat)**

Function description Set Alarm A time format (AM/24-hour or PM notation)

Parameters	• **RTCx:** RTC Instance • **TimeFormat:** This parameter can be one of the following values: – LL_RTC_ALMA_TIME_FORMAT_AM – LL_RTC_ALMA_TIME_FORMAT_PM
Return values	• **None**
Reference Manual to LL API cross reference:	• ALRMAR PM LL_RTC_ALMA_SetTimeFormat

LL_RTC_ALMA_GetTimeFormat

Function name	**__STATIC_INLINE uint32_t LL_RTC_ALMA_GetTimeFormat (RTC_TypeDef * RTCx)**
Function description	Get Alarm A time format (AM or PM notation)
Parameters	• **RTCx:** RTC Instance
Return values	• **Returned:** value can be one of the following values: – LL_RTC_ALMA_TIME_FORMAT_AM – LL_RTC_ALMA_TIME_FORMAT_PM
Reference Manual to LL API cross reference:	• ALRMAR PM LL_RTC_ALMA_GetTimeFormat

LL_RTC_ALMA_SetHour

Function name	**__STATIC_INLINE void LL_RTC_ALMA_SetHour (RTC_TypeDef * RTCx, uint32_t Hours)**
Function description	Set ALARM A Hours in BCD format.
Parameters	• **RTCx:** RTC Instance • **Hours:** Value between Min_Data=0x01 and Max_Data=0x12 or between Min_Data=0x00 and Max_Data=0x23
Return values	• **None**
Notes	• helper macro __LL_RTC_CONVERT_BIN2BCD is available to convert Hours from binary to BCD format
Reference Manual to LL API cross reference:	• ALRMAR HT LL_RTC_ALMA_SetHour • ALRMAR HU LL_RTC_ALMA_SetHour

LL_RTC_ALMA_GetHour

Function name	**__STATIC_INLINE uint32_t LL_RTC_ALMA_GetHour (RTC_TypeDef * RTCx)**
Function description	Get ALARM A Hours in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x01 and Max_Data=0x12 or between Min_Data=0x00 and Max_Data=0x23

Notes	• helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Hours from BCD to Binary format
Reference Manual to LL API cross reference:	• ALRMAR HT LL_RTC_ALMA_GetHour • ALRMAR HU LL_RTC_ALMA_GetHour

LL_RTC_ALMA_SetMinute

Function name	**__STATIC_INLINE void LL_RTC_ALMA_SetMinute (RTC_TypeDef * RTCx, uint32_t Minutes)**
Function description	Set ALARM A Minutes in BCD format.
Parameters	• **RTCx:** RTC Instance • **Minutes:** Value between Min_Data=0x00 and Max_Data=0x59
Return values	• **None**
Notes	• helper macro __LL_RTC_CONVERT_BIN2BCD is available to convert Minutes from binary to BCD format
Reference Manual to LL API cross reference:	• ALRMAR MNT LL_RTC_ALMA_SetMinute • ALRMAR MNU LL_RTC_ALMA_SetMinute

LL_RTC_ALMA_GetMinute

Function name	**__STATIC_INLINE uint32_t LL_RTC_ALMA_GetMinute (RTC_TypeDef * RTCx)**
Function description	Get ALARM A Minutes in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0x59
Notes	• helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Minutes from BCD to Binary format
Reference Manual to LL API cross reference:	• ALRMAR MNT LL_RTC_ALMA_GetMinute • ALRMAR MNU LL_RTC_ALMA_GetMinute

LL_RTC_ALMA_SetSecond

Function name	**__STATIC_INLINE void LL_RTC_ALMA_SetSecond (RTC_TypeDef * RTCx, uint32_t Seconds)**
Function description	Set ALARM A Seconds in BCD format.
Parameters	• **RTCx:** RTC Instance • **Seconds:** Value between Min_Data=0x00 and Max_Data=0x59
Return values	• **None**
Notes	• helper macro __LL_RTC_CONVERT_BIN2BCD is available to convert Seconds from binary to BCD format
Reference Manual to	• ALRMAR ST LL_RTC_ALMA_SetSecond

LL API cross reference:
- ALRMAR SU LL_RTC_ALMA_SetSecond

LL_RTC_ALMA_GetSecond

Function name: **__STATIC_INLINE uint32_t LL_RTC_ALMA_GetSecond (RTC_TypeDef * RTCx)**

Function description: Get ALARM A Seconds in BCD format.

Parameters:
- **RTCx:** RTC Instance

Return values:
- **Value:** between Min_Data=0x00 and Max_Data=0x59

Notes:
- helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Seconds from BCD to Binary format

Reference Manual to LL API cross reference:
- ALRMAR ST LL_RTC_ALMA_GetSecond
- ALRMAR SU LL_RTC_ALMA_GetSecond

LL_RTC_ALMA_ConfigTime

Function name: **__STATIC_INLINE void LL_RTC_ALMA_ConfigTime (RTC_TypeDef * RTCx, uint32_t Format12_24, uint32_t Hours, uint32_t Minutes, uint32_t Seconds)**

Function description: Set Alarm A Time (hour, minute and second) in BCD format.

Parameters:
- **RTCx:** RTC Instance
- **Format12_24:** This parameter can be one of the following values:
  - LL_RTC_ALMA_TIME_FORMAT_AM
  - LL_RTC_ALMA_TIME_FORMAT_PM
- **Hours:** Value between Min_Data=0x01 and Max_Data=0x12 or between Min_Data=0x00 and Max_Data=0x23
- **Minutes:** Value between Min_Data=0x00 and Max_Data=0x59
- **Seconds:** Value between Min_Data=0x00 and Max_Data=0x59

Return values:
- **None**

Reference Manual to LL API cross reference:
- ALRMAR PM LL_RTC_ALMA_ConfigTime
- ALRMAR HT LL_RTC_ALMA_ConfigTime
- ALRMAR HU LL_RTC_ALMA_ConfigTime
- ALRMAR MNT LL_RTC_ALMA_ConfigTime
- ALRMAR MNU LL_RTC_ALMA_ConfigTime
- ALRMAR ST LL_RTC_ALMA_ConfigTime
- ALRMAR SU LL_RTC_ALMA_ConfigTime

LL_RTC_ALMA_GetTime

Function name: **__STATIC_INLINE uint32_t LL_RTC_ALMA_GetTime (RTC_TypeDef * RTCx)**

Function description: Get Alarm B Time (hour, minute and second) in BCD format.

Parameters:
- **RTCx:** RTC Instance

Return values	• **Combination:** of hours, minutes and seconds.
Notes	• helper macros __LL_RTC_GET_HOUR, __LL_RTC_GET_MINUTE and __LL_RTC_GET_SECOND are available to get independently each parameter.
Reference Manual to LL API cross reference:	• ALRMAR HT LL_RTC_ALMA_GetTime • ALRMAR HU LL_RTC_ALMA_GetTime • ALRMAR MNT LL_RTC_ALMA_GetTime • ALRMAR MNU LL_RTC_ALMA_GetTime • ALRMAR ST LL_RTC_ALMA_GetTime • ALRMAR SU LL_RTC_ALMA_GetTime

LL_RTC_ALMA_SetSubSecondMask

Function name	**__STATIC_INLINE void LL_RTC_ALMA_SetSubSecondMask (RTC_TypeDef * RTCx, uint32_t Mask)**
Function description	Set Alarm A Mask the most-significant bits starting at this bit.
Parameters	• **RTCx:** RTC Instance • **Mask:** Value between Min_Data=0x00 and Max_Data=0xF
Return values	• **None**
Notes	• This register can be written only when ALRAE is reset in RTC_CR register, or in initialization mode.
Reference Manual to LL API cross reference:	• ALRMASSR MASKSS LL_RTC_ALMA_SetSubSecondMask

LL_RTC_ALMA_GetSubSecondMask

Function name	**__STATIC_INLINE uint32_t LL_RTC_ALMA_GetSubSecondMask (RTC_TypeDef * RTCx)**
Function description	Get Alarm A Mask the most-significant bits starting at this bit.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0xF
Reference Manual to LL API cross reference:	• ALRMASSR MASKSS LL_RTC_ALMA_GetSubSecondMask

LL_RTC_ALMA_SetSubSecond

Function name	**__STATIC_INLINE void LL_RTC_ALMA_SetSubSecond (RTC_TypeDef * RTCx, uint32_t Subsecond)**
Function description	Set Alarm A Sub seconds value.
Parameters	• **RTCx:** RTC Instance • **Subsecond:** Value between Min_Data=0x00 and Max_Data=0x7FFF
Return values	• **None**
Reference Manual to	• ALRMASSR SS LL_RTC_ALMA_SetSubSecond

LL API cross reference:

LL_RTC_ALMA_GetSubSecond

Function name	**__STATIC_INLINE uint32_t LL_RTC_ALMA_GetSubSecond (RTC_TypeDef * RTCx)**
Function description	Get Alarm A Sub seconds value.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0x7FFF
Reference Manual to LL API cross reference:	• ALRMASSR SS LL_RTC_ALMA_GetSubSecond

LL_RTC_ALMB_Enable

Function name	**__STATIC_INLINE void LL_RTC_ALMB_Enable (RTC_TypeDef * RTCx)**
Function description	Enable Alarm B.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR ALRBE LL_RTC_ALMB_Enable

LL_RTC_ALMB_Disable

Function name	**__STATIC_INLINE void LL_RTC_ALMB_Disable (RTC_TypeDef * RTCx)**
Function description	Disable Alarm B.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR ALRBE LL_RTC_ALMB_Disable

LL_RTC_ALMB_SetMask

Function name	**__STATIC_INLINE void LL_RTC_ALMB_SetMask (RTC_TypeDef * RTCx, uint32_t Mask)**
Function description	Specify the Alarm B masks.

Parameters
- **RTCx:** RTC Instance
- **Mask:** This parameter can be a combination of the following values:
  - LL_RTC_ALMB_MASK_NONE
  - LL_RTC_ALMB_MASK_DATEWEEKDAY
  - LL_RTC_ALMB_MASK_HOURS
  - LL_RTC_ALMB_MASK_MINUTES
  - LL_RTC_ALMB_MASK_SECONDS
  - LL_RTC_ALMB_MASK_ALL

Return values
- **None**

Reference Manual to LL API cross reference:
- ALRMBR MSK4 LL_RTC_ALMB_SetMask
- ALRMBR MSK3 LL_RTC_ALMB_SetMask
- ALRMBR MSK2 LL_RTC_ALMB_SetMask
- ALRMBR MSK1 LL_RTC_ALMB_SetMask

LL_RTC_ALMB_GetMask

Function name
__STATIC_INLINE uint32_t LL_RTC_ALMB_GetMask (RTC_TypeDef * RTCx)

Function description
Get the Alarm B masks.

Parameters
- **RTCx:** RTC Instance

Return values
- **Returned:** value can be can be a combination of the following values:
  - LL_RTC_ALMB_MASK_NONE
  - LL_RTC_ALMB_MASK_DATEWEEKDAY
  - LL_RTC_ALMB_MASK_HOURS
  - LL_RTC_ALMB_MASK_MINUTES
  - LL_RTC_ALMB_MASK_SECONDS
  - LL_RTC_ALMB_MASK_ALL

Reference Manual to LL API cross reference:
- ALRMBR MSK4 LL_RTC_ALMB_GetMask
- ALRMBR MSK3 LL_RTC_ALMB_GetMask
- ALRMBR MSK2 LL_RTC_ALMB_GetMask
- ALRMBR MSK1 LL_RTC_ALMB_GetMask

LL_RTC_ALMB_EnableWeekday

Function name
__STATIC_INLINE void LL_RTC_ALMB_EnableWeekday (RTC_TypeDef * RTCx)

Function description
Enable AlarmB Week day selection (DU[3:0] represents the week day.

Parameters
- **RTCx:** RTC Instance

Return values
- **None**

Reference Manual to LL API cross reference:
- ALRMBR WDSEL LL_RTC_ALMB_EnableWeekday

LL_RTC_ALMB_DisableWeekday

Function name	**__STATIC_INLINE void LL_RTC_ALMB_DisableWeekday (RTC_TypeDef * RTCx)**
Function description	Disable AlarmB Week day selection (DU[3:0] represents the date)
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ALRMBR WDSEL LL_RTC_ALMB_DisableWeekday

LL_RTC_ALMB_SetDay

Function name	**__STATIC_INLINE void LL_RTC_ALMB_SetDay (RTC_TypeDef * RTCx, uint32_t Day)**
Function description	Set ALARM B Day in BCD format.
Parameters	• **RTCx:** RTC Instance • **Day:** Value between Min_Data=0x01 and Max_Data=0x31
Return values	• **None**
Notes	• helper macro __LL_RTC_CONVERT_BIN2BCD is available to convert Day from binary to BCD format
Reference Manual to LL API cross reference:	• ALRMBR DT LL_RTC_ALMB_SetDay • ALRMBR DU LL_RTC_ALMB_SetDay

LL_RTC_ALMB_GetDay

Function name	**__STATIC_INLINE uint32_t LL_RTC_ALMB_GetDay (RTC_TypeDef * RTCx)**
Function description	Get ALARM B Day in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x01 and Max_Data=0x31
Notes	• helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Day from BCD to Binary format
Reference Manual to LL API cross reference:	• ALRMBR DT LL_RTC_ALMB_GetDay • ALRMBR DU LL_RTC_ALMB_GetDay

LL_RTC_ALMB_SetWeekDay

Function name	**__STATIC_INLINE void LL_RTC_ALMB_SetWeekDay (RTC_TypeDef * RTCx, uint32_t WeekDay)**
Function description	Set ALARM B Weekday.
Parameters	• **RTCx:** RTC Instance • **WeekDay:** This parameter can be one of the following values:

  - LL_RTC_WEEKDAY_MONDAY
  - LL_RTC_WEEKDAY_TUESDAY
  - LL_RTC_WEEKDAY_WEDNESDAY
  - LL_RTC_WEEKDAY_THURSDAY
  - LL_RTC_WEEKDAY_FRIDAY
  - LL_RTC_WEEKDAY_SATURDAY
  - LL_RTC_WEEKDAY_SUNDAY

Return values
- **None**

Reference Manual to LL API cross reference:
- ALRMBR DU LL_RTC_ALMB_SetWeekDay

LL_RTC_ALMB_GetWeekDay

Function name
__STATIC_INLINE uint32_t LL_RTC_ALMB_GetWeekDay (RTC_TypeDef * RTCx)

Function description
Get ALARM B Weekday.

Parameters
- **RTCx:** RTC Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_RTC_WEEKDAY_MONDAY
  - LL_RTC_WEEKDAY_TUESDAY
  - LL_RTC_WEEKDAY_WEDNESDAY
  - LL_RTC_WEEKDAY_THURSDAY
  - LL_RTC_WEEKDAY_FRIDAY
  - LL_RTC_WEEKDAY_SATURDAY
  - LL_RTC_WEEKDAY_SUNDAY

Reference Manual to LL API cross reference:
- ALRMBR DU LL_RTC_ALMB_GetWeekDay

LL_RTC_ALMB_SetTimeFormat

Function name
__STATIC_INLINE void LL_RTC_ALMB_SetTimeFormat (RTC_TypeDef * RTCx, uint32_t TimeFormat)

Function description
Set ALARM B time format (AM/24-hour or PM notation)

Parameters
- **RTCx:** RTC Instance
- **TimeFormat:** This parameter can be one of the following values:
  - LL_RTC_ALMB_TIME_FORMAT_AM
  - LL_RTC_ALMB_TIME_FORMAT_PM

Return values
- **None**

Reference Manual to LL API cross reference:
- ALRMBR PM LL_RTC_ALMB_SetTimeFormat

LL_RTC_ALMB_GetTimeFormat

Function name	**__STATIC_INLINE uint32_t LL_RTC_ALMB_GetTimeFormat (RTC_TypeDef * RTCx)**
Function description	Get ALARM B time format (AM or PM notation)
Parameters	• **RTCx:** RTC Instance
Return values	• **Returned:** value can be one of the following values: – LL_RTC_ALMB_TIME_FORMAT_AM – LL_RTC_ALMB_TIME_FORMAT_PM
Reference Manual to LL API cross reference:	• ALRMBR PM LL_RTC_ALMB_GetTimeFormat

LL_RTC_ALMB_SetHour

Function name	**__STATIC_INLINE void LL_RTC_ALMB_SetHour (RTC_TypeDef * RTCx, uint32_t Hours)**
Function description	Set ALARM B Hours in BCD format.
Parameters	• **RTCx:** RTC Instance • **Hours:** Value between Min_Data=0x01 and Max_Data=0x12 or between Min_Data=0x00 and Max_Data=0x23
Return values	• **None**
Notes	• helper macro __LL_RTC_CONVERT_BIN2BCD is available to convert Hours from binary to BCD format
Reference Manual to LL API cross reference:	• ALRMBR HT LL_RTC_ALMB_SetHour • ALRMBR HU LL_RTC_ALMB_SetHour

LL_RTC_ALMB_GetHour

Function name	**__STATIC_INLINE uint32_t LL_RTC_ALMB_GetHour (RTC_TypeDef * RTCx)**
Function description	Get ALARM B Hours in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x01 and Max_Data=0x12 or between Min_Data=0x00 and Max_Data=0x23
Notes	• helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Hours from BCD to Binary format
Reference Manual to LL API cross reference:	• ALRMBR HT LL_RTC_ALMB_GetHour • ALRMBR HU LL_RTC_ALMB_GetHour

LL_RTC_ALMB_SetMinute

Function name	**__STATIC_INLINE void LL_RTC_ALMB_SetMinute (RTC_TypeDef * RTCx, uint32_t Minutes)**
Function description	Set ALARM B Minutes in BCD format.
Parameters	• **RTCx:** RTC Instance • **Minutes:** between Min_Data=0x00 and Max_Data=0x59
Return values	• **None**
Notes	• helper macro __LL_RTC_CONVERT_BIN2BCD is available to convert Minutes from binary to BCD format
Reference Manual to LL API cross reference:	• ALRMBR MNT LL_RTC_ALMB_SetMinute • ALRMBR MNU LL_RTC_ALMB_SetMinute

LL_RTC_ALMB_GetMinute

Function name	**__STATIC_INLINE uint32_t LL_RTC_ALMB_GetMinute (RTC_TypeDef * RTCx)**
Function description	Get ALARM B Minutes in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0x59
Notes	• helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Minutes from BCD to Binary format
Reference Manual to LL API cross reference:	• ALRMBR MNT LL_RTC_ALMB_GetMinute • ALRMBR MNU LL_RTC_ALMB_GetMinute

LL_RTC_ALMB_SetSecond

Function name	**__STATIC_INLINE void LL_RTC_ALMB_SetSecond (RTC_TypeDef * RTCx, uint32_t Seconds)**
Function description	Set ALARM B Seconds in BCD format.
Parameters	• **RTCx:** RTC Instance • **Seconds:** Value between Min_Data=0x00 and Max_Data=0x59
Return values	• **None**
Notes	• helper macro __LL_RTC_CONVERT_BIN2BCD is available to convert Seconds from binary to BCD format
Reference Manual to LL API cross reference:	• ALRMBR ST LL_RTC_ALMB_SetSecond • ALRMBR SU LL_RTC_ALMB_SetSecond

LL_RTC_ALMB_GetSecond

Function name	**__STATIC_INLINE uint32_t LL_RTC_ALMB_GetSecond (RTC_TypeDef * RTCx)**
Function description	Get ALARM B Seconds in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0x59
Notes	• helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Seconds from BCD to Binary format
Reference Manual to LL API cross reference:	• ALRMBR ST LL_RTC_ALMB_GetSecond • ALRMBR SU LL_RTC_ALMB_GetSecond

LL_RTC_ALMB_ConfigTime

Function name	**__STATIC_INLINE void LL_RTC_ALMB_ConfigTime (RTC_TypeDef * RTCx, uint32_t Format12_24, uint32_t Hours, uint32_t Minutes, uint32_t Seconds)**
Function description	Set Alarm B Time (hour, minute and second) in BCD format.
Parameters	• **RTCx:** RTC Instance • **Format12_24:** This parameter can be one of the following values: – LL_RTC_ALMB_TIME_FORMAT_AM – LL_RTC_ALMB_TIME_FORMAT_PM • **Hours:** Value between Min_Data=0x01 and Max_Data=0x12 or between Min_Data=0x00 and Max_Data=0x23 • **Minutes:** Value between Min_Data=0x00 and Max_Data=0x59 • **Seconds:** Value between Min_Data=0x00 and Max_Data=0x59
Return values	• **None**
Reference Manual to LL API cross reference:	• ALRMBR PM LL_RTC_ALMB_ConfigTime • ALRMBR HT LL_RTC_ALMB_ConfigTime • ALRMBR HU LL_RTC_ALMB_ConfigTime • ALRMBR MNT LL_RTC_ALMB_ConfigTime • ALRMBR MNU LL_RTC_ALMB_ConfigTime • ALRMBR ST LL_RTC_ALMB_ConfigTime • ALRMBR SU LL_RTC_ALMB_ConfigTime

LL_RTC_ALMB_GetTime

Function name	**__STATIC_INLINE uint32_t LL_RTC_ALMB_GetTime (RTC_TypeDef * RTCx)**
Function description	Get Alarm B Time (hour, minute and second) in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Combination:** of hours, minutes and seconds.
Notes	• helper macros __LL_RTC_GET_HOUR,

__LL_RTC_GET_MINUTE and __LL_RTC_GET_SECOND are available to get independently each parameter.

Reference Manual to LL API cross reference:
- ALRMBR HT LL_RTC_ALMB_GetTime
- ALRMBR HU LL_RTC_ALMB_GetTime
- ALRMBR MNT LL_RTC_ALMB_GetTime
- ALRMBR MNU LL_RTC_ALMB_GetTime
- ALRMBR ST LL_RTC_ALMB_GetTime
- ALRMBR SU LL_RTC_ALMB_GetTime

LL_RTC_ALMB_SetSubSecondMask

Function name: **__STATIC_INLINE void LL_RTC_ALMB_SetSubSecondMask (RTC_TypeDef * RTCx, uint32_t Mask)**

Function description: Set Alarm B Mask the most-significant bits starting at this bit.

Parameters:
- **RTCx:** RTC Instance
- **Mask:** Value between Min_Data=0x00 and Max_Data=0xF

Return values:
- **None**

Notes:
- This register can be written only when ALRBE is reset in RTC_CR register, or in initialization mode.

Reference Manual to LL API cross reference:
- ALRMBSSR MASKSS LL_RTC_ALMB_SetSubSecondMask

LL_RTC_ALMB_GetSubSecondMask

Function name: **__STATIC_INLINE uint32_t LL_RTC_ALMB_GetSubSecondMask (RTC_TypeDef * RTCx)**

Function description: Get Alarm B Mask the most-significant bits starting at this bit.

Parameters:
- **RTCx:** RTC Instance

Return values:
- **Value:** between Min_Data=0x00 and Max_Data=0xF

Reference Manual to LL API cross reference:
- ALRMBSSR MASKSS LL_RTC_ALMB_GetSubSecondMask

LL_RTC_ALMB_SetSubSecond

Function name: **__STATIC_INLINE void LL_RTC_ALMB_SetSubSecond (RTC_TypeDef * RTCx, uint32_t Subsecond)**

Function description: Set Alarm B Sub seconds value.

Parameters:
- **RTCx:** RTC Instance
- **Subsecond:** Value between Min_Data=0x00 and Max_Data=0x7FFF

Return values:
- **None**

Reference Manual to LL API cross reference:
- ALRMBSSR SS LL_RTC_ALMB_SetSubSecond

LL_RTC_ALMB_GetSubSecond

Function name	**__STATIC_INLINE uint32_t LL_RTC_ALMB_GetSubSecond (RTC_TypeDef * RTCx)**
Function description	Get Alarm B Sub seconds value.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0x7FFF
Reference Manual to LL API cross reference:	• ALRMBSSR SS LL_RTC_ALMB_GetSubSecond

LL_RTC_TS_Enable

Function name	**__STATIC_INLINE void LL_RTC_TS_Enable (RTC_TypeDef * RTCx)**
Function description	Enable Timestamp.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR TSE LL_RTC_TS_Enable

LL_RTC_TS_Disable

Function name	**__STATIC_INLINE void LL_RTC_TS_Disable (RTC_TypeDef * RTCx)**
Function description	Disable Timestamp.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR TSE LL_RTC_TS_Disable

LL_RTC_TS_SetActiveEdge

Function name	**__STATIC_INLINE void LL_RTC_TS_SetActiveEdge (RTC_TypeDef * RTCx, uint32_t Edge)**
Function description	Set Time-stamp event active edge.
Parameters	• **RTCx:** RTC Instance • **Edge:** This parameter can be one of the following values: – LL_RTC_TIMESTAMP_EDGE_RISING – LL_RTC_TIMESTAMP_EDGE_FALLING

Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before. • TSE must be reset when TSEDGE is changed to avoid unwanted TSF setting
Reference Manual to LL API cross reference:	• CR TSEDGE LL_RTC_TS_SetActiveEdge

LL_RTC_TS_GetActiveEdge

Function name	**__STATIC_INLINE uint32_t LL_RTC_TS_GetActiveEdge (RTC_TypeDef * RTCx)**
Function description	Get Time-stamp event active edge.
Parameters	• **RTCx:** RTC Instance
Return values	• **Returned:** value can be one of the following values: – LL_RTC_TIMESTAMP_EDGE_RISING – LL_RTC_TIMESTAMP_EDGE_FALLING
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR TSEDGE LL_RTC_TS_GetActiveEdge

LL_RTC_TS_GetTimeFormat

Function name	**__STATIC_INLINE uint32_t LL_RTC_TS_GetTimeFormat (RTC_TypeDef * RTCx)**
Function description	Get Timestamp AM/PM notation (AM or 24-hour format)
Parameters	• **RTCx:** RTC Instance
Return values	• **Returned:** value can be one of the following values: – LL_RTC_TS_TIME_FORMAT_AM – LL_RTC_TS_TIME_FORMAT_PM
Reference Manual to LL API cross reference:	• TSTR PM LL_RTC_TS_GetTimeFormat

LL_RTC_TS_GetHour

Function name	**__STATIC_INLINE uint32_t LL_RTC_TS_GetHour (RTC_TypeDef * RTCx)**
Function description	Get Timestamp Hours in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x01 and Max_Data=0x12 or between Min_Data=0x00 and Max_Data=0x23
Notes	• helper macro __LL_RTC_CONVERT_BCD2BIN is available

to convert Hours from BCD to Binary format

Reference Manual to LL API cross reference:
- TSTR HT LL_RTC_TS_GetHour
- TSTR HU LL_RTC_TS_GetHour

LL_RTC_TS_GetMinute

Function name: **__STATIC_INLINE uint32_t LL_RTC_TS_GetMinute (RTC_TypeDef * RTCx)**

Function description: Get Timestamp Minutes in BCD format.

Parameters:
- **RTCx:** RTC Instance

Return values:
- **Value:** between Min_Data=0x00 and Max_Data=0x59

Notes:
- helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Minutes from BCD to Binary format

Reference Manual to LL API cross reference:
- TSTR MNT LL_RTC_TS_GetMinute
- TSTR MNU LL_RTC_TS_GetMinute

LL_RTC_TS_GetSecond

Function name: **__STATIC_INLINE uint32_t LL_RTC_TS_GetSecond (RTC_TypeDef * RTCx)**

Function description: Get Timestamp Seconds in BCD format.

Parameters:
- **RTCx:** RTC Instance

Return values:
- **Value:** between Min_Data=0x00 and Max_Data=0x59

Notes:
- helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Seconds from BCD to Binary format

Reference Manual to LL API cross reference:
- TSTR ST LL_RTC_TS_GetSecond
- TSTR SU LL_RTC_TS_GetSecond

LL_RTC_TS_GetTime

Function name: **__STATIC_INLINE uint32_t LL_RTC_TS_GetTime (RTC_TypeDef * RTCx)**

Function description: Get Timestamp time (hour, minute and second) in BCD format.

Parameters:
- **RTCx:** RTC Instance

Return values:
- **Combination:** of hours, minutes and seconds.

Notes:
- helper macros __LL_RTC_GET_HOUR, __LL_RTC_GET_MINUTE and __LL_RTC_GET_SECOND are available to get independently each parameter.

Reference Manual to LL API cross reference:
- TSTR HT LL_RTC_TS_GetTime
- TSTR HU LL_RTC_TS_GetTime
- TSTR MNT LL_RTC_TS_GetTime
- TSTR MNU LL_RTC_TS_GetTime
- TSTR ST LL_RTC_TS_GetTime

- TSTR SU LL_RTC_TS_GetTime

LL_RTC_TS_GetWeekDay

Function name	**__STATIC_INLINE uint32_t LL_RTC_TS_GetWeekDay (RTC_TypeDef * RTCx)**
Function description	Get Timestamp Week day.
Parameters	• **RTCx:** RTC Instance
Return values	• **Returned:** value can be one of the following values: – LL_RTC_WEEKDAY_MONDAY – LL_RTC_WEEKDAY_TUESDAY – LL_RTC_WEEKDAY_WEDNESDAY – LL_RTC_WEEKDAY_THURSDAY – LL_RTC_WEEKDAY_FRIDAY – LL_RTC_WEEKDAY_SATURDAY – LL_RTC_WEEKDAY_SUNDAY
Reference Manual to LL API cross reference:	• TSDR WDU LL_RTC_TS_GetWeekDay

LL_RTC_TS_GetMonth

Function name	**__STATIC_INLINE uint32_t LL_RTC_TS_GetMonth (RTC_TypeDef * RTCx)**
Function description	Get Timestamp Month in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Returned:** value can be one of the following values: – LL_RTC_MONTH_JANUARY – LL_RTC_MONTH_FEBRUARY – LL_RTC_MONTH_MARCH – LL_RTC_MONTH_APRIL – LL_RTC_MONTH_MAY – LL_RTC_MONTH_JUNE – LL_RTC_MONTH_JULY – LL_RTC_MONTH_AUGUST – LL_RTC_MONTH_SEPTEMBER – LL_RTC_MONTH_OCTOBER – LL_RTC_MONTH_NOVEMBER – LL_RTC_MONTH_DECEMBER
Notes	• helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Month from BCD to Binary format
Reference Manual to LL API cross reference:	• TSDR MT LL_RTC_TS_GetMonth • TSDR MU LL_RTC_TS_GetMonth

LL_RTC_TS_GetDay

Function name	**__STATIC_INLINE uint32_t LL_RTC_TS_GetDay (RTC_TypeDef * RTCx)**
Function description	Get Timestamp Day in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x01 and Max_Data=0x31
Notes	• helper macro __LL_RTC_CONVERT_BCD2BIN is available to convert Day from BCD to Binary format
Reference Manual to LL API cross reference:	• TSDR DT LL_RTC_TS_GetDay • TSDR DU LL_RTC_TS_GetDay

LL_RTC_TS_GetDate

Function name	**__STATIC_INLINE uint32_t LL_RTC_TS_GetDate (RTC_TypeDef * RTCx)**
Function description	Get Timestamp date (WeekDay, Day and Month) in BCD format.
Parameters	• **RTCx:** RTC Instance
Return values	• **Combination:** of Weekday, Day and Month
Notes	• helper macros __LL_RTC_GET_WEEKDAY, __LL_RTC_GET_MONTH, and __LL_RTC_GET_DAY are available to get independently each parameter.
Reference Manual to LL API cross reference:	• TSDR WDU LL_RTC_TS_GetDate • TSDR MT LL_RTC_TS_GetDate • TSDR MU LL_RTC_TS_GetDate • TSDR DT LL_RTC_TS_GetDate • TSDR DU LL_RTC_TS_GetDate

LL_RTC_TS_GetSubSecond

Function name	**__STATIC_INLINE uint32_t LL_RTC_TS_GetSubSecond (RTC_TypeDef * RTCx)**
Function description	Get time-stamp sub second value.
Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0xFFFF
Reference Manual to LL API cross reference:	• TSSSR SS LL_RTC_TS_GetSubSecond

LL_RTC_TS_EnableOnTamper

Function name	**__STATIC_INLINE void LL_RTC_TS_EnableOnTamper (RTC_TypeDef * RTCx)**
Function description	Activate timestamp on tamper detection event.
Parameters	• **RTCx:** RTC Instance

Return values
- **None**

Reference Manual to LL API cross reference:
- TAFCR TAMPTS LL_RTC_TS_EnableOnTamper

LL_RTC_TS_DisableOnTamper

Function name
__STATIC_INLINE void LL_RTC_TS_DisableOnTamper (RTC_TypeDef * RTCx)

Function description
Disable timestamp on tamper detection event.

Parameters
- **RTCx:** RTC Instance

Return values
- **None**

Reference Manual to LL API cross reference:
- TAFCR TAMPTS LL_RTC_TS_DisableOnTamper

LL_RTC_TAMPER_Enable

Function name
__STATIC_INLINE void LL_RTC_TAMPER_Enable (RTC_TypeDef * RTCx, uint32_t Tamper)

Function description
Enable RTC_TAMPx input detection.

Parameters
- **RTCx:** RTC Instance
- **Tamper:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_RTC_TAMPER_1
  - LL_RTC_TAMPER_2
  - LL_RTC_TAMPER_3 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- TAFCR TAMP1E LL_RTC_TAMPER_Enable
- TAFCR TAMP2E LL_RTC_TAMPER_Enable
- TAFCR TAMP3E LL_RTC_TAMPER_Enable

LL_RTC_TAMPER_Disable

Function name
__STATIC_INLINE void LL_RTC_TAMPER_Disable (RTC_TypeDef * RTCx, uint32_t Tamper)

Function description
Clear RTC_TAMPx input detection.

Parameters
- **RTCx:** RTC Instance
- **Tamper:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_RTC_TAMPER_1
  - LL_RTC_TAMPER_2
  - LL_RTC_TAMPER_3 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- TAFCR TAMP1E LL_RTC_TAMPER_Disable
- TAFCR TAMP2E LL_RTC_TAMPER_Disable

- TAFCR TAMP3E LL_RTC_TAMPER_Disable

LL_RTC_TAMPER_DisablePullUp

Function name	**__STATIC_INLINE void LL_RTC_TAMPER_DisablePullUp (RTC_TypeDef * RTCx)**
Function description	Disable RTC_TAMPx pull-up disable (Disable precharge of RTC_TAMPx pins)
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• TAFCR TAMPPUDIS LL_RTC_TAMPER_DisablePullUp

LL_RTC_TAMPER_EnablePullUp

Function name	**__STATIC_INLINE void LL_RTC_TAMPER_EnablePullUp (RTC_TypeDef * RTCx)**
Function description	Enable RTC_TAMPx pull-up disable (Precharge RTC_TAMPx pins before sampling)
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• TAFCR TAMPPUDIS LL_RTC_TAMPER_EnablePullUp

LL_RTC_TAMPER_SetPrecharge

Function name	**__STATIC_INLINE void LL_RTC_TAMPER_SetPrecharge (RTC_TypeDef * RTCx, uint32_t Duration)**
Function description	Set RTC_TAMPx precharge duration.
Parameters	• **RTCx:** RTC Instance • **Duration:** This parameter can be one of the following values: – LL_RTC_TAMPER_DURATION_1RTCCLK – LL_RTC_TAMPER_DURATION_2RTCCLK – LL_RTC_TAMPER_DURATION_4RTCCLK – LL_RTC_TAMPER_DURATION_8RTCCLK
Return values	• **None**
Reference Manual to LL API cross reference:	• TAFCR TAMPPRCH LL_RTC_TAMPER_SetPrecharge

LL_RTC_TAMPER_GetPrecharge

Function name	**__STATIC_INLINE uint32_t LL_RTC_TAMPER_GetPrecharge (RTC_TypeDef * RTCx)**
Function description	Get RTC_TAMPx precharge duration.

Parameters
- **RTCx:** RTC Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_RTC_TAMPER_DURATION_1RTCCLK
  - LL_RTC_TAMPER_DURATION_2RTCCLK
  - LL_RTC_TAMPER_DURATION_4RTCCLK
  - LL_RTC_TAMPER_DURATION_8RTCCLK

Reference Manual to LL API cross reference:
- TAFCR TAMPPRCH LL_RTC_TAMPER_GetPrecharge

LL_RTC_TAMPER_SetFilterCount

Function name
__STATIC_INLINE void LL_RTC_TAMPER_SetFilterCount (RTC_TypeDef * RTCx, uint32_t FilterCount)

Function description
Set RTC_TAMPx filter count.

Parameters
- **RTCx:** RTC Instance
- **FilterCount:** This parameter can be one of the following values:
  - LL_RTC_TAMPER_FILTER_DISABLE
  - LL_RTC_TAMPER_FILTER_2SAMPLE
  - LL_RTC_TAMPER_FILTER_4SAMPLE
  - LL_RTC_TAMPER_FILTER_8SAMPLE

Return values
- **None**

Reference Manual to LL API cross reference:
- TAFCR TAMPFLT LL_RTC_TAMPER_SetFilterCount

LL_RTC_TAMPER_GetFilterCount

Function name
__STATIC_INLINE uint32_t LL_RTC_TAMPER_GetFilterCount (RTC_TypeDef * RTCx)

Function description
Get RTC_TAMPx filter count.

Parameters
- **RTCx:** RTC Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_RTC_TAMPER_FILTER_DISABLE
  - LL_RTC_TAMPER_FILTER_2SAMPLE
  - LL_RTC_TAMPER_FILTER_4SAMPLE
  - LL_RTC_TAMPER_FILTER_8SAMPLE

Reference Manual to LL API cross reference:
- TAFCR TAMPFLT LL_RTC_TAMPER_GetFilterCount

LL_RTC_TAMPER_SetSamplingFreq

Function name
__STATIC_INLINE void LL_RTC_TAMPER_SetSamplingFreq (RTC_TypeDef * RTCx, uint32_t SamplingFreq)

Function description
Set Tamper sampling frequency.

Parameters
- **RTCx:** RTC Instance
- **SamplingFreq:** This parameter can be one of the following values:
  - LL_RTC_TAMPER_SAMPLFREQDIV_32768
  - LL_RTC_TAMPER_SAMPLFREQDIV_16384
  - LL_RTC_TAMPER_SAMPLFREQDIV_8192
  - LL_RTC_TAMPER_SAMPLFREQDIV_4096
  - LL_RTC_TAMPER_SAMPLFREQDIV_2048
  - LL_RTC_TAMPER_SAMPLFREQDIV_1024
  - LL_RTC_TAMPER_SAMPLFREQDIV_512
  - LL_RTC_TAMPER_SAMPLFREQDIV_256

Return values
- **None**

Reference Manual to LL API cross reference:
- TAFCR TAMPFREQ LL_RTC_TAMPER_SetSamplingFreq

LL_RTC_TAMPER_GetSamplingFreq

Function name
__STATIC_INLINE uint32_t LL_RTC_TAMPER_GetSamplingFreq (RTC_TypeDef * RTCx)

Function description
Get Tamper sampling frequency.

Parameters
- **RTCx:** RTC Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_RTC_TAMPER_SAMPLFREQDIV_32768
  - LL_RTC_TAMPER_SAMPLFREQDIV_16384
  - LL_RTC_TAMPER_SAMPLFREQDIV_8192
  - LL_RTC_TAMPER_SAMPLFREQDIV_4096
  - LL_RTC_TAMPER_SAMPLFREQDIV_2048
  - LL_RTC_TAMPER_SAMPLFREQDIV_1024
  - LL_RTC_TAMPER_SAMPLFREQDIV_512
  - LL_RTC_TAMPER_SAMPLFREQDIV_256

Reference Manual to LL API cross reference:
- TAFCR TAMPFREQ LL_RTC_TAMPER_GetSamplingFreq

LL_RTC_TAMPER_EnableActiveLevel

Function name
__STATIC_INLINE void LL_RTC_TAMPER_EnableActiveLevel (RTC_TypeDef * RTCx, uint32_t Tamper)

Function description
Enable Active level for Tamper input.

Parameters
- **RTCx:** RTC Instance
- **Tamper:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_RTC_TAMPER_ACTIVELEVEL_TAMP1
  - LL_RTC_TAMPER_ACTIVELEVEL_TAMP2
  - LL_RTC_TAMPER_ACTIVELEVEL_TAMP3 (*)

Return values
- **None**

Reference Manual to
- TAFCR TAMP1TRG LL_RTC_TAMPER_EnableActiveLevel

LL API cross reference:	• TAFCR TAMP2TRG LL_RTC_TAMPER_EnableActiveLevel • TAFCR TAMP3TRG LL_RTC_TAMPER_EnableActiveLevel

LL_RTC_TAMPER_DisableActiveLevel

Function name	**__STATIC_INLINE void LL_RTC_TAMPER_DisableActiveLevel (RTC_TypeDef * RTCx, uint32_t Tamper)**
Function description	Disable Active level for Tamper input.
Parameters	• **RTCx:** RTC Instance • **Tamper:** This parameter can be a combination of the following values: (*) value not defined in all devices. – LL_RTC_TAMPER_ACTIVELEVEL_TAMP1 – LL_RTC_TAMPER_ACTIVELEVEL_TAMP2 – LL_RTC_TAMPER_ACTIVELEVEL_TAMP3 (*)
Return values	• **None**
Reference Manual to LL API cross reference:	• TAFCR TAMP1TRG LL_RTC_TAMPER_DisableActiveLevel • TAFCR TAMP2TRG LL_RTC_TAMPER_DisableActiveLevel • TAFCR TAMP3TRG LL_RTC_TAMPER_DisableActiveLevel

LL_RTC_WAKEUP_Enable

Function name	**__STATIC_INLINE void LL_RTC_WAKEUP_Enable (RTC_TypeDef * RTCx)**
Function description	Enable Wakeup timer.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR WUTE LL_RTC_WAKEUP_Enable

LL_RTC_WAKEUP_Disable

Function name	**__STATIC_INLINE void LL_RTC_WAKEUP_Disable (RTC_TypeDef * RTCx)**
Function description	Disable Wakeup timer.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR WUTE LL_RTC_WAKEUP_Disable

LL_RTC_WAKEUP_IsEnabled

Function name
__STATIC_INLINE uint32_t LL_RTC_WAKEUP_IsEnabled (RTC_TypeDef * RTCx)

Function description
Check if Wakeup timer is enabled or not.

Parameters
- **RTCx:** RTC Instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CR WUTE LL_RTC_WAKEUP_IsEnabled

LL_RTC_WAKEUP_SetClock

Function name
__STATIC_INLINE void LL_RTC_WAKEUP_SetClock (RTC_TypeDef * RTCx, uint32_t WakeupClock)

Function description
Select Wakeup clock.

Parameters
- **RTCx:** RTC Instance
- **WakeupClock:** This parameter can be one of the following values:
  - LL_RTC_WAKEUPCLOCK_DIV_16
  - LL_RTC_WAKEUPCLOCK_DIV_8
  - LL_RTC_WAKEUPCLOCK_DIV_4
  - LL_RTC_WAKEUPCLOCK_DIV_2
  - LL_RTC_WAKEUPCLOCK_CKSPRE
  - LL_RTC_WAKEUPCLOCK_CKSPRE_WUT

Return values
- **None**

Notes
- Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
- Bit can be written only when RTC_CR WUTE bit = 0 and RTC_ISR WUTWF bit = 1

Reference Manual to LL API cross reference:
- CR WUCKSEL LL_RTC_WAKEUP_SetClock

LL_RTC_WAKEUP_GetClock

Function name
__STATIC_INLINE uint32_t LL_RTC_WAKEUP_GetClock (RTC_TypeDef * RTCx)

Function description
Get Wakeup clock.

Parameters
- **RTCx:** RTC Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_RTC_WAKEUPCLOCK_DIV_16
  - LL_RTC_WAKEUPCLOCK_DIV_8
  - LL_RTC_WAKEUPCLOCK_DIV_4
  - LL_RTC_WAKEUPCLOCK_DIV_2
  - LL_RTC_WAKEUPCLOCK_CKSPRE
  - LL_RTC_WAKEUPCLOCK_CKSPRE_WUT

Reference Manual to LL API cross reference:
- CR WUCKSEL LL_RTC_WAKEUP_GetClock

LL_RTC_WAKEUP_SetAutoReload

Function name: **__STATIC_INLINE void LL_RTC_WAKEUP_SetAutoReload (RTC_TypeDef * RTCx, uint32_t Value)**

Function description: Set Wakeup auto-reload value.

Parameters:
- **RTCx:** RTC Instance
- **Value:** Value between Min_Data=0x00 and Max_Data=0xFFFF

Return values:
- **None**

Notes:
- Bit can be written only when WUTWF is set to 1 in RTC_ISR

Reference Manual to LL API cross reference:
- WUTR WUT LL_RTC_WAKEUP_SetAutoReload

LL_RTC_WAKEUP_GetAutoReload

Function name: **__STATIC_INLINE uint32_t LL_RTC_WAKEUP_GetAutoReload (RTC_TypeDef * RTCx)**

Function description: Get Wakeup auto-reload value.

Parameters:
- **RTCx:** RTC Instance

Return values:
- **Value:** between Min_Data=0x00 and Max_Data=0xFFFF

Reference Manual to LL API cross reference:
- WUTR WUT LL_RTC_WAKEUP_GetAutoReload

LL_RTC_BAK_SetRegister

Function name: **__STATIC_INLINE void LL_RTC_BAK_SetRegister (RTC_TypeDef * RTCx, uint32_t BackupRegister, uint32_t Data)**

Function description: Writes a data in a specified RTC Backup data register.

Parameters:
- **RTCx:** RTC Instance
- **BackupRegister:** This parameter can be one of the following values: (*) value not defined in all devices.
  - LL_RTC_BKP_DR0
  - LL_RTC_BKP_DR1
  - LL_RTC_BKP_DR2
  - LL_RTC_BKP_DR3
  - LL_RTC_BKP_DR4
  - LL_RTC_BKP_DR5 (*)
  - LL_RTC_BKP_DR6 (*)
  - LL_RTC_BKP_DR7 (*)
  - LL_RTC_BKP_DR8 (*)
  - LL_RTC_BKP_DR9 (*)

  - LL_RTC_BKP_DR10 (*)
  - LL_RTC_BKP_DR11 (*)
  - LL_RTC_BKP_DR12 (*)
  - LL_RTC_BKP_DR13 (*)
  - LL_RTC_BKP_DR14 (*)
  - LL_RTC_BKP_DR15 (*)
  - LL_RTC_BKP_DR16 (*)
  - LL_RTC_BKP_DR17 (*)
  - LL_RTC_BKP_DR18 (*)
  - LL_RTC_BKP_DR19 (*)
  - LL_RTC_BKP_DR20 (*)
  - LL_RTC_BKP_DR21 (*)
  - LL_RTC_BKP_DR22 (*)
  - LL_RTC_BKP_DR23 (*)
  - LL_RTC_BKP_DR24 (*)
  - LL_RTC_BKP_DR25 (*)
  - LL_RTC_BKP_DR26 (*)
  - LL_RTC_BKP_DR27 (*)
  - LL_RTC_BKP_DR28 (*)
  - LL_RTC_BKP_DR29 (*)
  - LL_RTC_BKP_DR30 (*)
  - LL_RTC_BKP_DR31 (*)
- **Data:** Value between Min_Data=0x00 and Max_Data=0xFFFFFFFF

Return values
- **None**

Reference Manual to LL API cross reference:
- BKPxR BKP LL_RTC_BAK_SetRegister

LL_RTC_BAK_GetRegister

Function name
__STATIC_INLINE uint32_t LL_RTC_BAK_GetRegister (RTC_TypeDef * RTCx, uint32_t BackupRegister)

Function description
Reads data from the specified RTC Backup data Register.

Parameters
- **RTCx:** RTC Instance
- **BackupRegister:** This parameter can be one of the following values: (*) value not defined in all devices.
  - LL_RTC_BKP_DR0
  - LL_RTC_BKP_DR1
  - LL_RTC_BKP_DR2
  - LL_RTC_BKP_DR3
  - LL_RTC_BKP_DR4
  - LL_RTC_BKP_DR5 (*)
  - LL_RTC_BKP_DR6 (*)
  - LL_RTC_BKP_DR7 (*)
  - LL_RTC_BKP_DR8 (*)
  - LL_RTC_BKP_DR9 (*)
  - LL_RTC_BKP_DR10 (*)
  - LL_RTC_BKP_DR11 (*)
  - LL_RTC_BKP_DR12 (*)
  - LL_RTC_BKP_DR13 (*)

  - LL_RTC_BKP_DR14 (*)
  - LL_RTC_BKP_DR15 (*)
  - LL_RTC_BKP_DR16 (*)
  - LL_RTC_BKP_DR17 (*)
  - LL_RTC_BKP_DR18 (*)
  - LL_RTC_BKP_DR19 (*)
  - LL_RTC_BKP_DR20 (*)
  - LL_RTC_BKP_DR21 (*)
  - LL_RTC_BKP_DR22 (*)
  - LL_RTC_BKP_DR23 (*)
  - LL_RTC_BKP_DR24 (*)
  - LL_RTC_BKP_DR25 (*)
  - LL_RTC_BKP_DR26 (*)
  - LL_RTC_BKP_DR27 (*)
  - LL_RTC_BKP_DR28 (*)
  - LL_RTC_BKP_DR29 (*)
  - LL_RTC_BKP_DR30 (*)
  - LL_RTC_BKP_DR31 (*)

Return values
- **Value:** between Min_Data=0x00 and Max_Data=0xFFFFFFFF

Reference Manual to LL API cross reference:
- BKPxR BKP LL_RTC_BAK_GetRegister

LL_RTC_CAL_SetOutputFreq

Function name
__STATIC_INLINE void LL_RTC_CAL_SetOutputFreq (RTC_TypeDef * RTCx, uint32_t Frequency)

Function description
Set Calibration output frequency (1 Hz or 512 Hz)

Parameters
- **RTCx:** RTC Instance
- **Frequency:** This parameter can be one of the following values:
  - LL_RTC_CALIB_OUTPUT_NONE
  - LL_RTC_CALIB_OUTPUT_1HZ
  - LL_RTC_CALIB_OUTPUT_512HZ

Return values
- **None**

Notes
- Bits are write-protected. LL_RTC_DisableWriteProtection function should be called before.

Reference Manual to LL API cross reference:
- CR COE LL_RTC_CAL_SetOutputFreq
- CR COSEL LL_RTC_CAL_SetOutputFreq

LL_RTC_CAL_GetOutputFreq

Function name
__STATIC_INLINE uint32_t LL_RTC_CAL_GetOutputFreq (RTC_TypeDef * RTCx)

Function description
Get Calibration output frequency (1 Hz or 512 Hz)

Parameters
- **RTCx:** RTC Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_RTC_CALIB_OUTPUT_NONE
  - LL_RTC_CALIB_OUTPUT_1HZ
  - LL_RTC_CALIB_OUTPUT_512HZ

Reference Manual to LL API cross reference:
- CR COE LL_RTC_CAL_GetOutputFreq
- CR COSEL LL_RTC_CAL_GetOutputFreq

LL_RTC_CAL_SetPulse

Function name
__STATIC_INLINE void LL_RTC_CAL_SetPulse (RTC_TypeDef * RTCx, uint32_t Pulse)

Function description
Insert or not One RTCCLK pulse every 2exp11 pulses (frequency increased by 488.5 ppm)

Parameters
- **RTCx:** RTC Instance
- **Pulse:** This parameter can be one of the following values:
  - LL_RTC_CALIB_INSERTPULSE_NONE
  - LL_RTC_CALIB_INSERTPULSE_SET

Return values
- **None**

Notes
- Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
- Bit can be written only when RECALPF is set to 0 in RTC_ISR

Reference Manual to LL API cross reference:
- CALR CALP LL_RTC_CAL_SetPulse

LL_RTC_CAL_IsPulseInserted

Function name
__STATIC_INLINE uint32_t LL_RTC_CAL_IsPulseInserted (RTC_TypeDef * RTCx)

Function description
Check if one RTCCLK has been inserted or not every 2exp11 pulses (frequency increased by 488.5 ppm)

Parameters
- **RTCx:** RTC Instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CALR CALP LL_RTC_CAL_IsPulseInserted

LL_RTC_CAL_SetPeriod

Function name
__STATIC_INLINE void LL_RTC_CAL_SetPeriod (RTC_TypeDef * RTCx, uint32_t Period)

Function description
Set the calibration cycle period.

Parameters
- **RTCx:** RTC Instance
- **Period:** This parameter can be one of the following values:
  - LL_RTC_CALIB_PERIOD_32SEC
  - LL_RTC_CALIB_PERIOD_16SEC

– LL_RTC_CALIB_PERIOD_8SEC

Return values
- **None**

Notes
- Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
- Bit can be written only when RECALPF is set to 0 in RTC_ISR

Reference Manual to LL API cross reference:
- CALR CALW8 LL_RTC_CAL_SetPeriod
- CALR CALW16 LL_RTC_CAL_SetPeriod

LL_RTC_CAL_GetPeriod

Function name
__STATIC_INLINE uint32_t LL_RTC_CAL_GetPeriod (RTC_TypeDef * RTCx)

Function description
Get the calibration cycle period.

Parameters
- **RTCx:** RTC Instance

Return values
- **Returned:** value can be one of the following values:
  – LL_RTC_CALIB_PERIOD_32SEC
  – LL_RTC_CALIB_PERIOD_16SEC
  – LL_RTC_CALIB_PERIOD_8SEC

Reference Manual to LL API cross reference:
- CALR CALW8 LL_RTC_CAL_GetPeriod
- CALR CALW16 LL_RTC_CAL_GetPeriod

LL_RTC_CAL_SetMinus

Function name
__STATIC_INLINE void LL_RTC_CAL_SetMinus (RTC_TypeDef * RTCx, uint32_t CalibMinus)

Function description
Set Calibration minus.

Parameters
- **RTCx:** RTC Instance
- **CalibMinus:** Value between Min_Data=0x00 and Max_Data=0x1FF

Return values
- **None**

Notes
- Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
- Bit can be written only when RECALPF is set to 0 in RTC_ISR

Reference Manual to LL API cross reference:
- CALR CALM LL_RTC_CAL_SetMinus

LL_RTC_CAL_GetMinus

Function name
__STATIC_INLINE uint32_t LL_RTC_CAL_GetMinus (RTC_TypeDef * RTCx)

Function description
Get Calibration minus.

Parameters	• **RTCx:** RTC Instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data= 0x1FF
Reference Manual to LL API cross reference:	• CALR CALM LL_RTC_CAL_GetMinus

LL_RTC_IsActiveFlag_RECALP

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_RECALP (RTC_TypeDef * RTCx)**
Function description	Get Recalibration pending Flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR RECALPF LL_RTC_IsActiveFlag_RECALP

LL_RTC_IsActiveFlag_TAMP3

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_TAMP3 (RTC_TypeDef * RTCx)**
Function description	Get RTC_TAMP3 detection flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TAMP3F LL_RTC_IsActiveFlag_TAMP3

LL_RTC_IsActiveFlag_TAMP2

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_TAMP2 (RTC_TypeDef * RTCx)**
Function description	Get RTC_TAMP2 detection flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TAMP2F LL_RTC_IsActiveFlag_TAMP2

LL_RTC_IsActiveFlag_TAMP1

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_TAMP1 (RTC_TypeDef * RTCx)**
Function description	Get RTC_TAMP1 detection flag.
Parameters	• **RTCx:** RTC Instance

Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TAMP1F LL_RTC_IsActiveFlag_TAMP1

LL_RTC_IsActiveFlag_TSOV

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_TSOV (RTC_TypeDef * RTCx)**
Function description	Get Time-stamp overflow flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TSOVF LL_RTC_IsActiveFlag_TSOV

LL_RTC_IsActiveFlag_TS

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_TS (RTC_TypeDef * RTCx)**
Function description	Get Time-stamp flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TSF LL_RTC_IsActiveFlag_TS

LL_RTC_IsActiveFlag_WUT

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_WUT (RTC_TypeDef * RTCx)**
Function description	Get Wakeup timer flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR WUTF LL_RTC_IsActiveFlag_WUT

LL_RTC_IsActiveFlag_ALRB

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_ALRB (RTC_TypeDef * RTCx)**
Function description	Get Alarm B flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• ISR ALRBF LL_RTC_IsActiveFlag_ALRB

LL_RTC_IsActiveFlag_ALRA

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_ALRA (RTC_TypeDef * RTCx)**
Function description	Get Alarm A flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR ALRAF LL_RTC_IsActiveFlag_ALRA

LL_RTC_ClearFlag_TAMP3

Function name	**__STATIC_INLINE void LL_RTC_ClearFlag_TAMP3 (RTC_TypeDef * RTCx)**
Function description	Clear RTC_TAMP3 detection flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ISR TAMP3F LL_RTC_ClearFlag_TAMP3

LL_RTC_ClearFlag_TAMP2

Function name	**__STATIC_INLINE void LL_RTC_ClearFlag_TAMP2 (RTC_TypeDef * RTCx)**
Function description	Clear RTC_TAMP2 detection flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ISR TAMP2F LL_RTC_ClearFlag_TAMP2

LL_RTC_ClearFlag_TAMP1

Function name	**__STATIC_INLINE void LL_RTC_ClearFlag_TAMP1 (RTC_TypeDef * RTCx)**
Function description	Clear RTC_TAMP1 detection flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross	• ISR TAMP1F LL_RTC_ClearFlag_TAMP1

reference:

LL_RTC_ClearFlag_TSOV

Function name	**__STATIC_INLINE void LL_RTC_ClearFlag_TSOV (RTC_TypeDef * RTCx)**
Function description	Clear Time-stamp overflow flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ISR TSOVF LL_RTC_ClearFlag_TSOV

LL_RTC_ClearFlag_TS

Function name	**__STATIC_INLINE void LL_RTC_ClearFlag_TS (RTC_TypeDef * RTCx)**
Function description	Clear Time-stamp flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ISR TSF LL_RTC_ClearFlag_TS

LL_RTC_ClearFlag_WUT

Function name	**__STATIC_INLINE void LL_RTC_ClearFlag_WUT (RTC_TypeDef * RTCx)**
Function description	Clear Wakeup timer flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ISR WUTF LL_RTC_ClearFlag_WUT

LL_RTC_ClearFlag_ALRB

Function name	**__STATIC_INLINE void LL_RTC_ClearFlag_ALRB (RTC_TypeDef * RTCx)**
Function description	Clear Alarm B flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ISR ALRBF LL_RTC_ClearFlag_ALRB

LL_RTC_ClearFlag_ALRA

Function name	**__STATIC_INLINE void LL_RTC_ClearFlag_ALRA (RTC_TypeDef * RTCx)**
Function description	Clear Alarm A flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ISR ALRAF LL_RTC_ClearFlag_ALRA

LL_RTC_IsActiveFlag_INIT

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_INIT (RTC_TypeDef * RTCx)**
Function description	Get Initialization flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR INITF LL_RTC_IsActiveFlag_INIT

LL_RTC_IsActiveFlag_RS

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_RS (RTC_TypeDef * RTCx)**
Function description	Get Registers synchronization flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR RSF LL_RTC_IsActiveFlag_RS

LL_RTC_ClearFlag_RS

Function name	**__STATIC_INLINE void LL_RTC_ClearFlag_RS (RTC_TypeDef * RTCx)**
Function description	Clear Registers synchronization flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ISR RSF LL_RTC_ClearFlag_RS

LL_RTC_IsActiveFlag_INITS

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_INITS (RTC_TypeDef * RTCx)**
Function description	Get Initialization status flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR INITS LL_RTC_IsActiveFlag_INITS

LL_RTC_IsActiveFlag_SHP

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_SHP (RTC_TypeDef * RTCx)**
Function description	Get Shift operation pending flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR SHPF LL_RTC_IsActiveFlag_SHP

LL_RTC_IsActiveFlag_WUTW

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_WUTW (RTC_TypeDef * RTCx)**
Function description	Get Wakeup timer write flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR WUTWF LL_RTC_IsActiveFlag_WUTW

LL_RTC_IsActiveFlag_ALRBW

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_ALRBW (RTC_TypeDef * RTCx)**
Function description	Get Alarm B write flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR ALRBWF LL_RTC_IsActiveFlag_ALRBW

LL_RTC_IsActiveFlag_ALRAW

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsActiveFlag_ALRAW (RTC_TypeDef * RTCx)**
Function description	Get Alarm A write flag.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR ALRAWF LL_RTC_IsActiveFlag_ALRAW

LL_RTC_EnableIT_TS

Function name	**__STATIC_INLINE void LL_RTC_EnableIT_TS (RTC_TypeDef * RTCx)**
Function description	Enable Time-stamp interrupt.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR TSIE LL_RTC_EnableIT_TS

LL_RTC_DisableIT_TS

Function name	**__STATIC_INLINE void LL_RTC_DisableIT_TS (RTC_TypeDef * RTCx)**
Function description	Disable Time-stamp interrupt.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR TSIE LL_RTC_DisableIT_TS

LL_RTC_EnableIT_WUT

Function name	**__STATIC_INLINE void LL_RTC_EnableIT_WUT (RTC_TypeDef * RTCx)**
Function description	Enable Wakeup timer interrupt.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection

function should be called before.

Reference Manual to LL API cross reference:
- CR WUTIE LL_RTC_EnableIT_WUT

LL_RTC_DisableIT_WUT

Function name **__STATIC_INLINE void LL_RTC_DisableIT_WUT (RTC_TypeDef * RTCx)**

Function description Disable Wakeup timer interrupt.

Parameters
- **RTCx:** RTC Instance

Return values
- **None**

Notes
- Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.

Reference Manual to LL API cross reference:
- CR WUTIE LL_RTC_DisableIT_WUT

LL_RTC_EnableIT_ALRB

Function name **__STATIC_INLINE void LL_RTC_EnableIT_ALRB (RTC_TypeDef * RTCx)**

Function description Enable Alarm B interrupt.

Parameters
- **RTCx:** RTC Instance

Return values
- **None**

Notes
- Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.

Reference Manual to LL API cross reference:
- CR ALRBIE LL_RTC_EnableIT_ALRB

LL_RTC_DisableIT_ALRB

Function name **__STATIC_INLINE void LL_RTC_DisableIT_ALRB (RTC_TypeDef * RTCx)**

Function description Disable Alarm B interrupt.

Parameters
- **RTCx:** RTC Instance

Return values
- **None**

Notes
- Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.

Reference Manual to LL API cross reference:
- CR ALRBIE LL_RTC_DisableIT_ALRB

LL_RTC_EnableIT_ALRA

Function name	**__STATIC_INLINE void LL_RTC_EnableIT_ALRA (RTC_TypeDef * RTCx)**
Function description	Enable Alarm A interrupt.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR ALRAIE LL_RTC_EnableIT_ALRA

LL_RTC_DisableIT_ALRA

Function name	**__STATIC_INLINE void LL_RTC_DisableIT_ALRA (RTC_TypeDef * RTCx)**
Function description	Disable Alarm A interrupt.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Notes	• Bit is write-protected. LL_RTC_DisableWriteProtection function should be called before.
Reference Manual to LL API cross reference:	• CR ALRAIE LL_RTC_DisableIT_ALRA

LL_RTC_EnableIT_TAMP

Function name	**__STATIC_INLINE void LL_RTC_EnableIT_TAMP (RTC_TypeDef * RTCx)**
Function description	Enable all Tamper Interrupt.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• TAFCR TAMPIE LL_RTC_EnableIT_TAMP

LL_RTC_DisableIT_TAMP

Function name	**__STATIC_INLINE void LL_RTC_DisableIT_TAMP (RTC_TypeDef * RTCx)**
Function description	Disable all Tamper Interrupt.
Parameters	• **RTCx:** RTC Instance
Return values	• **None**
Reference Manual to	• TAFCR TAMPIE LL_RTC_DisableIT_TAMP

LL API cross reference:

LL_RTC_IsEnabledIT_TS

Function name **__STATIC_INLINE uint32_t LL_RTC_IsEnabledIT_TS (RTC_TypeDef * RTCx)**

Function description Check if Time-stamp interrupt is enabled or not.

Parameters
- **RTCx:** RTC Instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CR TSIE LL_RTC_IsEnabledIT_TS

LL_RTC_IsEnabledIT_WUT

Function name **__STATIC_INLINE uint32_t LL_RTC_IsEnabledIT_WUT (RTC_TypeDef * RTCx)**

Function description Check if Wakeup timer interrupt is enabled or not.

Parameters
- **RTCx:** RTC Instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CR WUTIE LL_RTC_IsEnabledIT_WUT

LL_RTC_IsEnabledIT_ALRB

Function name **__STATIC_INLINE uint32_t LL_RTC_IsEnabledIT_ALRB (RTC_TypeDef * RTCx)**

Function description Check if Alarm B interrupt is enabled or not.

Parameters
- **RTCx:** RTC Instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CR ALRBIE LL_RTC_IsEnabledIT_ALRB

LL_RTC_IsEnabledIT_ALRA

Function name **__STATIC_INLINE uint32_t LL_RTC_IsEnabledIT_ALRA (RTC_TypeDef * RTCx)**

Function description Check if Alarm A interrupt is enabled or not.

Parameters
- **RTCx:** RTC Instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross
- CR ALRAIE LL_RTC_IsEnabledIT_ALRA

reference:

LL_RTC_IsEnabledIT_TAMP

Function name	**__STATIC_INLINE uint32_t LL_RTC_IsEnabledIT_TAMP (RTC_TypeDef * RTCx)**
Function description	Check if all the TAMPER interrupts are enabled or not.
Parameters	• **RTCx:** RTC Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• TAFCR TAMPIE LL_RTC_IsEnabledIT_TAMP

LL_RTC_DeInit

Function name	**ErrorStatus LL_RTC_DeInit (RTC_TypeDef * RTCx)**
Function description	De-Initializes the RTC registers to their default reset values.
Parameters	• **RTCx:** RTC Instance
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: RTC registers are de-initialized – ERROR: RTC registers are not de-initialized
Notes	• This function doesn't reset the RTC Clock source and RTC Backup Data registers.

LL_RTC_Init

Function name	**ErrorStatus LL_RTC_Init (RTC_TypeDef * RTCx, LL_RTC_InitTypeDef * RTC_InitStruct)**
Function description	Initializes the RTC registers according to the specified parameters in RTC_InitStruct.
Parameters	• **RTCx:** RTC Instance • **RTC_InitStruct:** pointer to a LL_RTC_InitTypeDef structure that contains the configuration information for the RTC peripheral.
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: RTC registers are initialized – ERROR: RTC registers are not initialized
Notes	• The RTC Prescaler register is write protected and can be written in initialization mode only.

LL_RTC_StructInit

Function name **void LL_RTC_StructInit (LL_RTC_InitTypeDef * RTC_InitStruct)**

Function description Set each LL_RTC_InitTypeDef field to default value.

Parameters
- **RTC_InitStruct:** pointer to a LL_RTC_InitTypeDef structure which will be initialized.

Return values
- **None**

LL_RTC_TIME_Init

Function name **ErrorStatus LL_RTC_TIME_Init (RTC_TypeDef * RTCx, uint32_t RTC_Format, LL_RTC_TimeTypeDef * RTC_TimeStruct)**

Function description Set the RTC current time.

Parameters
- **RTCx:** RTC Instance
- **RTC_Format:** This parameter can be one of the following values:
  - LL_RTC_FORMAT_BIN
  - LL_RTC_FORMAT_BCD
- **RTC_TimeStruct:** pointer to a RTC_TimeTypeDef structure that contains the time configuration information for the RTC.

Return values
- **An:** ErrorStatus enumeration value:
  - SUCCESS: RTC Time register is configured
  - ERROR: RTC Time register is not configured

LL_RTC_TIME_StructInit

Function name **void LL_RTC_TIME_StructInit (LL_RTC_TimeTypeDef * RTC_TimeStruct)**

Function description Set each LL_RTC_TimeTypeDef field to default value (Time = 00h:00min:00sec).

Parameters
- **RTC_TimeStruct:** pointer to a LL_RTC_TimeTypeDef structure which will be initialized.

Return values
- **None**

LL_RTC_DATE_Init

Function name **ErrorStatus LL_RTC_DATE_Init (RTC_TypeDef * RTCx, uint32_t RTC_Format, LL_RTC_DateTypeDef * RTC_DateStruct)**

Function description Set the RTC current date.

Parameters
- **RTCx:** RTC Instance
- **RTC_Format:** This parameter can be one of the following values:
  - LL_RTC_FORMAT_BIN
  - LL_RTC_FORMAT_BCD
- **RTC_DateStruct:** pointer to a RTC_DateTypeDef structure

that contains the date configuration information for the RTC.

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: RTC Day register is configured
  – ERROR: RTC Day register is not configured

LL_RTC_DATE_StructInit

Function name **void LL_RTC_DATE_StructInit (LL_RTC_DateTypeDef * RTC_DateStruct)**

Function description Set each LL_RTC_DateTypeDef field to default value (date = Monday, January 01 xx00)

Parameters
- **RTC_DateStruct:** pointer to a LL_RTC_DateTypeDef structure which will be initialized.

Return values
- **None**

LL_RTC_ALMA_Init

Function name **ErrorStatus LL_RTC_ALMA_Init (RTC_TypeDef * RTCx, uint32_t RTC_Format, LL_RTC_AlarmTypeDef * RTC_AlarmStruct)**

Function description Set the RTC Alarm A.

Parameters
- **RTCx:** RTC Instance
- **RTC_Format:** This parameter can be one of the following values:
  – LL_RTC_FORMAT_BIN
  – LL_RTC_FORMAT_BCD
- **RTC_AlarmStruct:** pointer to a LL_RTC_AlarmTypeDef structure that contains the alarm configuration parameters.

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: ALARMA registers are configured
  – ERROR: ALARMA registers are not configured

Notes
- The Alarm register can only be written when the corresponding Alarm is disabled (Use LL_RTC_ALMA_Disable function).

LL_RTC_ALMB_Init

Function name **ErrorStatus LL_RTC_ALMB_Init (RTC_TypeDef * RTCx, uint32_t RTC_Format, LL_RTC_AlarmTypeDef * RTC_AlarmStruct)**

Function description Set the RTC Alarm B.

Parameters
- **RTCx:** RTC Instance
- **RTC_Format:** This parameter can be one of the following values:
  – LL_RTC_FORMAT_BIN
  – LL_RTC_FORMAT_BCD
- **RTC_AlarmStruct:** pointer to a LL_RTC_AlarmTypeDef structure that contains the alarm configuration parameters.

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: ALARMB registers are configured
  – ERROR: ALARMB registers are not configured

Notes
- The Alarm register can only be written when the corresponding Alarm is disabled (LL_RTC_ALMB_Disable function).

LL_RTC_ALMA_StructInit

Function name **void LL_RTC_ALMA_StructInit (LL_RTC_AlarmTypeDef * RTC_AlarmStruct)**

Function description Set each LL_RTC_AlarmTypeDef of ALARMA field to default value (Time = 00h:00mn:00sec / Day = 1st day of the month/Mask = all fields are masked).

Parameters
- **RTC_AlarmStruct:** pointer to a LL_RTC_AlarmTypeDef structure which will be initialized.

Return values
- **None**

LL_RTC_ALMB_StructInit

Function name **void LL_RTC_ALMB_StructInit (LL_RTC_AlarmTypeDef * RTC_AlarmStruct)**

Function description Set each LL_RTC_AlarmTypeDef of ALARMA field to default value (Time = 00h:00mn:00sec / Day = 1st day of the month/Mask = all fields are masked).

Parameters
- **RTC_AlarmStruct:** pointer to a LL_RTC_AlarmTypeDef structure which will be initialized.

Return values
- **None**

LL_RTC_EnterInitMode

Function name **ErrorStatus LL_RTC_EnterInitMode (RTC_TypeDef * RTCx)**

Function description Enters the RTC Initialization mode.

Parameters
- **RTCx:** RTC Instance

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: RTC is in Init mode
  – ERROR: RTC is not in Init mode

Notes
- The RTC Initialization mode is write protected, use the LL_RTC_DisableWriteProtection before calling this function.

LL_RTC_ExitInitMode

Function name **ErrorStatus LL_RTC_ExitInitMode (RTC_TypeDef * RTCx)**

Function description Exit the RTC Initialization mode.

Parameters
- **RTCx:** RTC Instance

Return values
- **An:** ErrorStatus enumeration value:

– SUCCESS: RTC exited from in Init mode
– ERROR: Not applicable

Notes
- When the initialization sequence is complete, the calendar restarts counting after 4 RTCCLK cycles.
- The RTC Initialization mode is write protected, use the LL_RTC_DisableWriteProtection before calling this function.

LL_RTC_WaitForSynchro

Function name **ErrorStatus LL_RTC_WaitForSynchro (RTC_TypeDef * RTCx)**

Function description Waits until the RTC Time and Day registers (RTC_TR and RTC_DR) are synchronized with RTC APB clock.

Parameters
- **RTCx:** RTC Instance

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: RTC registers are synchronised
  – ERROR: RTC registers are not synchronised

Notes
- The RTC Resynchronization mode is write protected, use the LL_RTC_DisableWriteProtection before calling this function.
- To read the calendar through the shadow registers after Calendar initialization, calendar update or after wakeup from low power modes the software must first clear the RSF flag. The software must then wait until it is set again before reading the calendar, which means that the calendar registers have been correctly copied into the RTC_TR and RTC_DR shadow registers.

75.3 RTC Firmware driver defines

75.3.1 RTC

ALARM OUTPUT

LL_RTC_ALARMOUT_DISABLE	Output disabled
LL_RTC_ALARMOUT_ALMA	Alarm A output enabled
LL_RTC_ALARMOUT_ALMB	Alarm B output enabled
LL_RTC_ALARMOUT_WAKEUP	Wakeup output enabled

ALARM OUTPUT TYPE

LL_RTC_ALARM_OUTPUTTYPE_OPENDRAIN	RTC_ALARM, when mapped on PC13, is open-drain output
LL_RTC_ALARM_OUTPUTTYPE_PUSHPULL	RTC_ALARM, when mapped on PC13, is push-pull output

ALARMA MASK

LL_RTC_ALMA_MASK_NONE	No masks applied on Alarm A
LL_RTC_ALMA_MASK_DATEWEEKDAY	Date/day do not care in Alarm A comparison
LL_RTC_ALMA_MASK_HOURS	Hours do not care in Alarm A comparison
LL_RTC_ALMA_MASK_MINUTES	Minutes do not care in Alarm A comparison

LL_RTC_ALMA_MASK_SECONDS Seconds do not care in Alarm A comparison

LL_RTC_ALMA_MASK_ALL Masks all

ALARMA TIME FORMAT

LL_RTC_ALMA_TIME_FORMAT_AM AM or 24-hour format

LL_RTC_ALMA_TIME_FORMAT_PM PM

RTC Alarm A Date WeekDay

LL_RTC_ALMA_DATEWEEKDAYSEL_DATE Alarm A Date is selected

LL_RTC_ALMA_DATEWEEKDAYSEL_WEEKDAY Alarm A WeekDay is selected

ALARMB MASK

LL_RTC_ALMB_MASK_NONE No masks applied on Alarm B

LL_RTC_ALMB_MASK_DATEWEEKDAY Date/day do not care in Alarm B comparison

LL_RTC_ALMB_MASK_HOURS Hours do not care in Alarm B comparison

LL_RTC_ALMB_MASK_MINUTES Minutes do not care in Alarm B comparison

LL_RTC_ALMB_MASK_SECONDS Seconds do not care in Alarm B comparison

LL_RTC_ALMB_MASK_ALL Masks all

ALARMB TIME FORMAT

LL_RTC_ALMB_TIME_FORMAT_AM AM or 24-hour format

LL_RTC_ALMB_TIME_FORMAT_PM PM

RTC Alarm B Date WeekDay

LL_RTC_ALMB_DATEWEEKDAYSEL_DATE Alarm B Date is selected

LL_RTC_ALMB_DATEWEEKDAYSEL_WEEKDAY Alarm B WeekDay is selected

BACKUP

LL_RTC_BKP_DR0

LL_RTC_BKP_DR1

LL_RTC_BKP_DR2

LL_RTC_BKP_DR3

LL_RTC_BKP_DR4

LL_RTC_BKP_DR5

LL_RTC_BKP_DR6

LL_RTC_BKP_DR7

LL_RTC_BKP_DR8

LL_RTC_BKP_DR9

LL_RTC_BKP_DR10

LL_RTC_BKP_DR11

LL_RTC_BKP_DR12

LL_RTC_BKP_DR13

LL_RTC_BKP_DR14

LL_RTC_BKP_DR15

Calibration pulse insertion

LL_RTC_CALIB_INSERTPULSE_NONE	No RTCCLK pulses are added
LL_RTC_CALIB_INSERTPULSE_SET	One RTCCLK pulse is effectively inserted every 2exp11 pulses (frequency increased by 488.5 ppm)

Calibration output

LL_RTC_CALIB_OUTPUT_NONE	Calibration output disabled
LL_RTC_CALIB_OUTPUT_1HZ	Calibration output is 1 Hz
LL_RTC_CALIB_OUTPUT_512HZ	Calibration output is 512 Hz

Calibration period

LL_RTC_CALIB_PERIOD_32SEC	Use a 32-second calibration cycle period
LL_RTC_CALIB_PERIOD_16SEC	Use a 16-second calibration cycle period
LL_RTC_CALIB_PERIOD_8SEC	Use a 8-second calibration cycle period

FORMAT

LL_RTC_FORMAT_BIN	Binary data format
LL_RTC_FORMAT_BCD	BCD data format

Get Flags Defines

LL_RTC_ISR_RECALPF

LL_RTC_ISR_TAMP3F

LL_RTC_ISR_TAMP2F

LL_RTC_ISR_TAMP1F

LL_RTC_ISR_TSOVF

LL_RTC_ISR_TSF

LL_RTC_ISR_WUTF

LL_RTC_ISR_ALRBF

LL_RTC_ISR_ALRAF

LL_RTC_ISR_INITF

LL_RTC_ISR_RSF

LL_RTC_ISR_INITS

LL_RTC_ISR_SHPF

LL_RTC_ISR_WUTWF

LL_RTC_ISR_ALRBWF

LL_RTC_ISR_ALRAWF

HOUR FORMAT

LL_RTC_HOURFORMAT_24HOUR	24 hour/day format

LL_RTC_HOURFORMAT_AMPM	AM/PM hour format

IT Defines

LL_RTC_CR_TSIE

LL_RTC_CR_WUTIE

LL_RTC_CR_ALRBIE

LL_RTC_CR_ALRAIE

LL_RTC_TAFCR_TAMPIE

MONTH

LL_RTC_MONTH_JANUARY	January
LL_RTC_MONTH_FEBRUARY	February
LL_RTC_MONTH_MARCH	March
LL_RTC_MONTH_APRIL	April
LL_RTC_MONTH_MAY	May
LL_RTC_MONTH_JUNE	June
LL_RTC_MONTH_JULY	July
LL_RTC_MONTH_AUGUST	August
LL_RTC_MONTH_SEPTEMBER	September
LL_RTC_MONTH_OCTOBER	October
LL_RTC_MONTH_NOVEMBER	November
LL_RTC_MONTH_DECEMBER	December

OUTPUT POLARITY PIN

LL_RTC_OUTPUTPOLARITY_PIN_HIGH	Pin is high when ALRAF/ALRBF/WUTF is asserted (depending on OSEL)
LL_RTC_OUTPUTPOLARITY_PIN_LOW	Pin is low when ALRAF/ALRBF/WUTF is asserted (depending on OSEL)

PIN

LL_RTC_PIN_PC13	PC13 is forced to push-pull output if all RTC alternate functions are disabled
LL_RTC_PIN_PC14	PC14 is forced to push-pull output if LSE is disabled
LL_RTC_PIN_PC15	PC15 is forced to push-pull output if LSE is disabled

SHIFT SECOND

LL_RTC_SHIFT_SECOND_DELAY

LL_RTC_SHIFT_SECOND_ADVANCE

TAMPER

LL_RTC_TAMPER_1	RTC_TAMP1 input detection
LL_RTC_TAMPER_2	RTC_TAMP2 input detection
LL_RTC_TAMPER_3	RTC_TAMP3 input detection

TAMPER ACTIVE LEVEL

LL_RTC_TAMPER_ACTIVELEVEL_TAMP1	RTC_TAMP1 input falling edge (if TAMPFLT = 00) or staying high (if TAMPFLT != 00) triggers a tamper detection event
LL_RTC_TAMPER_ACTIVELEVEL_TAMP2	RTC_TAMP2 input falling edge (if TAMPFLT = 00) or staying high (if TAMPFLT != 00) triggers a tamper detection event
LL_RTC_TAMPER_ACTIVELEVEL_TAMP3	RTC_TAMP3 input falling edge (if TAMPFLT = 00) or staying high (if TAMPFLT != 00) triggers a tamper detection event

TAMPER DURATION

LL_RTC_TAMPER_DURATION_1RTCCLK	Tamper pins are pre-charged before sampling during 1 RTCCLK cycle
LL_RTC_TAMPER_DURATION_2RTCCLK	Tamper pins are pre-charged before sampling during 2 RTCCLK cycles
LL_RTC_TAMPER_DURATION_4RTCCLK	Tamper pins are pre-charged before sampling during 4 RTCCLK cycles
LL_RTC_TAMPER_DURATION_8RTCCLK	Tamper pins are pre-charged before sampling during 8 RTCCLK cycles

TAMPER FILTER

LL_RTC_TAMPER_FILTER_DISABLE	Tamper filter is disabled
LL_RTC_TAMPER_FILTER_2SAMPLE	Tamper is activated after 2 consecutive samples at the active level
LL_RTC_TAMPER_FILTER_4SAMPLE	Tamper is activated after 4 consecutive samples at the active level
LL_RTC_TAMPER_FILTER_8SAMPLE	Tamper is activated after 8 consecutive samples at the active level.

TAMPER MASK

LL_RTC_TAMPER_MASK_TAMPER1	Tamper 1 event generates a trigger event. TAMP1F is masked and internally cleared by hardware.The backup registers are not erased
LL_RTC_TAMPER_MASK_TAMPER2	Tamper 2 event generates a trigger event. TAMP2F is masked and internally cleared by hardware. The backup registers are not erased.
LL_RTC_TAMPER_MASK_TAMPER3	Tamper 3 event generates a trigger event. TAMP3F is masked and internally cleared by hardware. The backup registers are not erased

TAMPER NO ERASE

LL_RTC_TAMPER_NOERASE_TAMPER1	Tamper 1 event does not erase the backup registers.
LL_RTC_TAMPER_NOERASE_TAMPER2	Tamper 2 event does not erase the backup registers.

LL_RTC_TAMPER_NOERASE_TAMPER3	Tamper 3 event does not erase the backup registers.

TAMPER SAMPLING FREQUENCY DIVIDER

LL_RTC_TAMPER_SAMPLFREQDIV_32768	Each of the tamper inputs are sampled with a frequency = RTCCLK / 32768
LL_RTC_TAMPER_SAMPLFREQDIV_16384	Each of the tamper inputs are sampled with a frequency = RTCCLK / 16384
LL_RTC_TAMPER_SAMPLFREQDIV_8192	Each of the tamper inputs are sampled with a frequency = RTCCLK / 8192
LL_RTC_TAMPER_SAMPLFREQDIV_4096	Each of the tamper inputs are sampled with a frequency = RTCCLK / 4096
LL_RTC_TAMPER_SAMPLFREQDIV_2048	Each of the tamper inputs are sampled with a frequency = RTCCLK / 2048
LL_RTC_TAMPER_SAMPLFREQDIV_1024	Each of the tamper inputs are sampled with a frequency = RTCCLK / 1024
LL_RTC_TAMPER_SAMPLFREQDIV_512	Each of the tamper inputs are sampled with a frequency = RTCCLK / 512
LL_RTC_TAMPER_SAMPLFREQDIV_256	Each of the tamper inputs are sampled with a frequency = RTCCLK / 256

TIMESTAMP EDGE

LL_RTC_TIMESTAMP_EDGE_RISING	RTC_TS input rising edge generates a time-stamp event
LL_RTC_TIMESTAMP_EDGE_FALLING	RTC_TS input falling edge generates a time-stamp even

TIME FORMAT

LL_RTC_TIME_FORMAT_AM_OR_24	AM or 24-hour format
LL_RTC_TIME_FORMAT_PM	PM

TIMESTAMP TIME FORMAT

LL_RTC_TS_TIME_FORMAT_AM	AM or 24-hour format
LL_RTC_TS_TIME_FORMAT_PM	PM

WAKEUP CLOCK DIV

LL_RTC_WAKEUPCLOCK_DIV_16	RTC/16 clock is selected
LL_RTC_WAKEUPCLOCK_DIV_8	RTC/8 clock is selected
LL_RTC_WAKEUPCLOCK_DIV_4	RTC/4 clock is selected
LL_RTC_WAKEUPCLOCK_DIV_2	RTC/2 clock is selected
LL_RTC_WAKEUPCLOCK_CKSPRE	ck_spre (usually 1 Hz) clock is selected
LL_RTC_WAKEUPCLOCK_CKSPRE_WUT	ck_spre (usually 1 Hz) clock is selected and 2exp16 is added to the WUT counter value

WEEK DAY

LL_RTC_WEEKDAY_MONDAY	Monday

LL_RTC_WEEKDAY_TUESDAY	Tuesday
LL_RTC_WEEKDAY_WEDNESDAY	Wednesday
LL_RTC_WEEKDAY_THURSDAY	Thrusday
LL_RTC_WEEKDAY_FRIDAY	Friday
LL_RTC_WEEKDAY_SATURDAY	Saturday
LL_RTC_WEEKDAY_SUNDAY	Sunday

Convert helper Macros

__LL_RTC_CONVERT_BIN2BCD

Description:

- Helper macro to convert a value from 2 digit decimal format to BCD format.

Parameters:

- __VALUE__: Byte to be converted

Return value:

- Converted: byte

__LL_RTC_CONVERT_BCD2BIN

Description:

- Helper macro to convert a value from BCD format to 2 digit decimal format.

Parameters:

- __VALUE__: BCD value to be converted

Return value:

- Converted: byte

Date helper Macros

__LL_RTC_GET_WEEKDAY

Description:

- Helper macro to retrieve weekday.

Parameters:

- __RTC_DATE__: Date returned by

Return value:

- Returned: value can be one of the following values:
  - LL_RTC_WEEKDAY_MONDAY
  - LL_RTC_WEEKDAY_TUESDAY
  - LL_RTC_WEEKDAY_WEDNESDAY
  - LL_RTC_WEEKDAY_THURSDAY
  - LL_RTC_WEEKDAY_FRIDAY
  - LL_RTC_WEEKDAY_SATURDAY
  - LL_RTC_WEEKDAY_SUNDAY

__LL_RTC_GET_YEAR

Description:

- Helper macro to retrieve Year in BCD format.

Parameters:

- __RTC_DATE__: Value returned by

Return value:

- Year: in BCD format (0x00 . . . 0x99)

__LL_RTC_GET_MONTH **Description:**

- Helper macro to retrieve Month in BCD format.

Parameters:

- __RTC_DATE__: Value returned by

Return value:

- Returned: value can be one of the following values:
  - LL_RTC_MONTH_JANUARY
  - LL_RTC_MONTH_FEBRUARY
  - LL_RTC_MONTH_MARCH
  - LL_RTC_MONTH_APRIL
  - LL_RTC_MONTH_MAY
  - LL_RTC_MONTH_JUNE
  - LL_RTC_MONTH_JULY
  - LL_RTC_MONTH_AUGUST
  - LL_RTC_MONTH_SEPTEMBER
  - LL_RTC_MONTH_OCTOBER
  - LL_RTC_MONTH_NOVEMBER
  - LL_RTC_MONTH_DECEMBER

__LL_RTC_GET_DAY **Description:**

- Helper macro to retrieve Day in BCD format.

Parameters:

- __RTC_DATE__: Value returned by

Return value:

- Day: in BCD format (0x01 . . . 0x31)

Time helper Macros

__LL_RTC_GET_HOUR **Description:**

- Helper macro to retrieve hour in BCD format.

Parameters:

- __RTC_TIME__: RTC time returned by

Return value:

- Hours: in BCD format (0x01. . .0x12 or between Min_Data=0x00 and Max_Data=0x23)

__LL_RTC_GET_MINUTE **Description:**

- Helper macro to retrieve minute in BCD format.

Parameters:

- __RTC_TIME__: RTC time returned by

Return value:

- Minutes: in BCD format (0x00. . .0x59)

__LL_RTC_GET_SECOND **Description:**

- Helper macro to retrieve second in BCD format.

Parameters:

- __RTC_TIME__: RTC time returned by

Return value:

- Seconds: in format (0x00. . .0x59)

Common Write and read registers Macros

LL_RTC_WriteReg **Description:**

- Write a value in RTC register.

Parameters:

- __INSTANCE__: RTC Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_RTC_ReadReg **Description:**

- Read a value in RTC register.

Parameters:

- __INSTANCE__: RTC Instance
- __REG__: Register to be read

Return value:

- Register: value

76 LL SPI Generic Driver

76.1 SPI Firmware driver registers structures

76.1.1 LL_SPI_InitTypeDef

Data Fields

- ***uint32_t TransferDirection***
- ***uint32_t Mode***
- ***uint32_t DataWidth***
- ***uint32_t ClockPolarity***
- ***uint32_t ClockPhase***
- ***uint32_t NSS***
- ***uint32_t BaudRate***
- ***uint32_t BitOrder***
- ***uint32_t CRCCalculation***
- ***uint32_t CRCPoly***

Field Documentation

- ***uint32_t LL_SPI_InitTypeDef::TransferDirection***
  Specifies the SPI unidirectional or bidirectional data mode. This parameter can be a value of ***SPI_LL_EC_TRANSFER_MODE***.This feature can be modified afterwards using unitary function **LL_SPI_SetTransferDirection()**.
- ***uint32_t LL_SPI_InitTypeDef::Mode***
  Specifies the SPI mode (Master/Slave). This parameter can be a value of ***SPI_LL_EC_MODE***.This feature can be modified afterwards using unitary function **LL_SPI_SetMode()**.
- ***uint32_t LL_SPI_InitTypeDef::DataWidth***
  Specifies the SPI data width. This parameter can be a value of ***SPI_LL_EC_DATAWIDTH***.This feature can be modified afterwards using unitary function **LL_SPI_SetDataWidth()**.
- ***uint32_t LL_SPI_InitTypeDef::ClockPolarity***
  Specifies the serial clock steady state. This parameter can be a value of ***SPI_LL_EC_POLARITY***.This feature can be modified afterwards using unitary function **LL_SPI_SetClockPolarity()**.
- ***uint32_t LL_SPI_InitTypeDef::ClockPhase***
  Specifies the clock active edge for the bit capture. This parameter can be a value of ***SPI_LL_EC_PHASE***.This feature can be modified afterwards using unitary function **LL_SPI_SetClockPhase()**.
- ***uint32_t LL_SPI_InitTypeDef::NSS***
  Specifies whether the NSS signal is managed by hardware (NSS pin) or by software using the SSI bit. This parameter can be a value of ***SPI_LL_EC_NSS_MODE***.This feature can be modified afterwards using unitary function **LL_SPI_SetNSSMode()**.
- ***uint32_t LL_SPI_InitTypeDef::BaudRate***
  Specifies the BaudRate prescaler value which will be used to configure the transmit and receive SCK clock. This parameter can be a value of ***SPI_LL_EC_BAUDRATEPRESCALER***.
  Note: The communication clock is derived from the master clock. The slave clock does not need to be set. This feature can be modified afterwards using unitary function **LL_SPI_SetBaudRatePrescaler()**.

- ***uint32_t LL_SPI_InitTypeDef::BitOrder***
  Specifies whether data transfers start from MSB or LSB bit. This parameter can be a value of ***SPI_LL_EC_BIT_ORDER***.This feature can be modified afterwards using unitary function **LL_SPI_SetTransferBitOrder()**.
- ***uint32_t LL_SPI_InitTypeDef::CRCCalculation***
  Specifies if the CRC calculation is enabled or not. This parameter can be a value of ***SPI_LL_EC_CRC_CALCULATION***.This feature can be modified afterwards using unitary functions **LL_SPI_EnableCRC()** and **LL_SPI_DisableCRC()**.
- ***uint32_t LL_SPI_InitTypeDef::CRCPoly***
  Specifies the polynomial used for the CRC calculation. This parameter must be a number between Min_Data = 0x00 and Max_Data = 0xFFFF.This feature can be modified afterwards using unitary function **LL_SPI_SetCRCPolynomial()**.

76.2 SPI Firmware driver API description

76.2.1 Detailed description of functions

LL_SPI_Enable

Function name	**__STATIC_INLINE void LL_SPI_Enable (SPI_TypeDef * SPIx)**
Function description	Enable SPI peripheral.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 SPE LL_SPI_Enable

LL_SPI_Disable

Function name	**__STATIC_INLINE void LL_SPI_Disable (SPI_TypeDef * SPIx)**
Function description	Disable SPI peripheral.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Notes	• When disabling the SPI, follow the procedure described in the Reference Manual.
Reference Manual to LL API cross reference:	• CR1 SPE LL_SPI_Disable

LL_SPI_IsEnabled

Function name	**__STATIC_INLINE uint32_t LL_SPI_IsEnabled (SPI_TypeDef * SPIx)**
Function description	Check if SPI peripheral is enabled.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross	• CR1 SPE LL_SPI_IsEnabled

reference:

LL_SPI_SetMode

Function name **__STATIC_INLINE void LL_SPI_SetMode (SPI_TypeDef * SPIx, uint32_t Mode)**

Function description Set SPI operation mode to Master or Slave.

Parameters
- **SPIx:** SPI Instance
- **Mode:** This parameter can be one of the following values:
  - LL_SPI_MODE_MASTER
  - LL_SPI_MODE_SLAVE

Return values
- **None**

Notes
- This bit should not be changed when communication is ongoing.

Reference Manual to LL API cross reference:
- CR1 MSTR LL_SPI_SetMode
- CR1 SSI LL_SPI_SetMode

LL_SPI_GetMode

Function name **__STATIC_INLINE uint32_t LL_SPI_GetMode (SPI_TypeDef * SPIx)**

Function description Get SPI operation mode (Master or Slave)

Parameters
- **SPIx:** SPI Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_SPI_MODE_MASTER
  - LL_SPI_MODE_SLAVE

Reference Manual to LL API cross reference:
- CR1 MSTR LL_SPI_GetMode
- CR1 SSI LL_SPI_GetMode

LL_SPI_SetStandard

Function name **__STATIC_INLINE void LL_SPI_SetStandard (SPI_TypeDef * SPIx, uint32_t Standard)**

Function description Set serial protocol used.

Parameters
- **SPIx:** SPI Instance
- **Standard:** This parameter can be one of the following values:
  - LL_SPI_PROTOCOL_MOTOROLA
  - LL_SPI_PROTOCOL_TI

Return values
- **None**

Notes
- This bit should be written only when SPI is disabled (SPE = 0) for correct operation.

Reference Manual to LL API cross
- CR2 FRF LL_SPI_SetStandard

reference:

LL_SPI_GetStandard

Function name	**__STATIC_INLINE uint32_t LL_SPI_GetStandard (SPI_TypeDef * SPIx)**
Function description	Get serial protocol used.
Parameters	• **SPIx:** SPI Instance
Return values	• **Returned:** value can be one of the following values: – LL_SPI_PROTOCOL_MOTOROLA – LL_SPI_PROTOCOL_TI
Reference Manual to LL API cross reference:	• CR2 FRF LL_SPI_GetStandard

LL_SPI_SetClockPhase

Function name	**__STATIC_INLINE void LL_SPI_SetClockPhase (SPI_TypeDef * SPIx, uint32_t ClockPhase)**
Function description	Set clock phase.
Parameters	• **SPIx:** SPI Instance • **ClockPhase:** This parameter can be one of the following values: – LL_SPI_PHASE_1EDGE – LL_SPI_PHASE_2EDGE
Return values	• **None**
Notes	• This bit should not be changed when communication is ongoing. This bit is not used in SPI TI mode.
Reference Manual to LL API cross reference:	• CR1 CPHA LL_SPI_SetClockPhase

LL_SPI_GetClockPhase

Function name	**__STATIC_INLINE uint32_t LL_SPI_GetClockPhase (SPI_TypeDef * SPIx)**
Function description	Get clock phase.
Parameters	• **SPIx:** SPI Instance
Return values	• **Returned:** value can be one of the following values: – LL_SPI_PHASE_1EDGE – LL_SPI_PHASE_2EDGE
Reference Manual to LL API cross reference:	• CR1 CPHA LL_SPI_GetClockPhase

LL_SPI_SetClockPolarity

Function name
__STATIC_INLINE void LL_SPI_SetClockPolarity (SPI_TypeDef * SPIx, uint32_t ClockPolarity)

Function description
Set clock polarity.

Parameters
- **SPIx:** SPI Instance
- **ClockPolarity:** This parameter can be one of the following values:
  - LL_SPI_POLARITY_LOW
  - LL_SPI_POLARITY_HIGH

Return values
- **None**

Notes
- This bit should not be changed when communication is ongoing. This bit is not used in SPI TI mode.

Reference Manual to LL API cross reference:
- CR1 CPOL LL_SPI_SetClockPolarity

LL_SPI_GetClockPolarity

Function name
__STATIC_INLINE uint32_t LL_SPI_GetClockPolarity (SPI_TypeDef * SPIx)

Function description
Get clock polarity.

Parameters
- **SPIx:** SPI Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_SPI_POLARITY_LOW
  - LL_SPI_POLARITY_HIGH

Reference Manual to LL API cross reference:
- CR1 CPOL LL_SPI_GetClockPolarity

LL_SPI_SetBaudRatePrescaler

Function name
__STATIC_INLINE void LL_SPI_SetBaudRatePrescaler (SPI_TypeDef * SPIx, uint32_t BaudRate)

Function description
Set baud rate prescaler.

Parameters
- **SPIx:** SPI Instance
- **BaudRate:** This parameter can be one of the following values:
  - LL_SPI_BAUDRATEPRESCALER_DIV2
  - LL_SPI_BAUDRATEPRESCALER_DIV4
  - LL_SPI_BAUDRATEPRESCALER_DIV8
  - LL_SPI_BAUDRATEPRESCALER_DIV16
  - LL_SPI_BAUDRATEPRESCALER_DIV32
  - LL_SPI_BAUDRATEPRESCALER_DIV64
  - LL_SPI_BAUDRATEPRESCALER_DIV128
  - LL_SPI_BAUDRATEPRESCALER_DIV256

Return values
- **None**

Notes
- These bits should not be changed when communication is ongoing. SPI BaudRate = fPCLK/Prescaler.

Reference Manual to LL API cross reference:
- CR1 BR LL_SPI_SetBaudRatePrescaler

LL_SPI_GetBaudRatePrescaler

Function name **__STATIC_INLINE uint32_t LL_SPI_GetBaudRatePrescaler (SPI_TypeDef * SPIx)**

Function description Get baud rate prescaler.

Parameters
- **SPIx:** SPI Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_SPI_BAUDRATEPRESCALER_DIV2
  - LL_SPI_BAUDRATEPRESCALER_DIV4
  - LL_SPI_BAUDRATEPRESCALER_DIV8
  - LL_SPI_BAUDRATEPRESCALER_DIV16
  - LL_SPI_BAUDRATEPRESCALER_DIV32
  - LL_SPI_BAUDRATEPRESCALER_DIV64
  - LL_SPI_BAUDRATEPRESCALER_DIV128
  - LL_SPI_BAUDRATEPRESCALER_DIV256

Reference Manual to LL API cross reference:
- CR1 BR LL_SPI_GetBaudRatePrescaler

LL_SPI_SetTransferBitOrder

Function name **__STATIC_INLINE void LL_SPI_SetTransferBitOrder (SPI_TypeDef * SPIx, uint32_t BitOrder)**

Function description Set transfer bit order.

Parameters
- **SPIx:** SPI Instance
- **BitOrder:** This parameter can be one of the following values:
  - LL_SPI_LSB_FIRST
  - LL_SPI_MSB_FIRST

Return values
- **None**

Notes
- This bit should not be changed when communication is ongoing. This bit is not used in SPI TI mode.

Reference Manual to LL API cross reference:
- CR1 LSBFIRST LL_SPI_SetTransferBitOrder

LL_SPI_GetTransferBitOrder

Function name **__STATIC_INLINE uint32_t LL_SPI_GetTransferBitOrder (SPI_TypeDef * SPIx)**

Function description Get transfer bit order.

Parameters
- **SPIx:** SPI Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_SPI_LSB_FIRST
  - LL_SPI_MSB_FIRST

Reference Manual to LL API cross reference:
- CR1 LSBFIRST LL_SPI_GetTransferBitOrder

LL_SPI_SetTransferDirection

Function name
__STATIC_INLINE void LL_SPI_SetTransferDirection (SPI_TypeDef * SPIx, uint32_t TransferDirection)

Function description
Set transfer direction mode.

Parameters
- **SPIx:** SPI Instance
- **TransferDirection:** This parameter can be one of the following values:
  - LL_SPI_FULL_DUPLEX
  - LL_SPI_SIMPLEX_RX
  - LL_SPI_HALF_DUPLEX_RX
  - LL_SPI_HALF_DUPLEX_TX

Return values
- **None**

Notes
- For Half-Duplex mode, Rx Direction is set by default. In master mode, the MOSI pin is used and in slave mode, the MISO pin is used for Half-Duplex.

Reference Manual to LL API cross reference:
- CR1 RXONLY LL_SPI_SetTransferDirection
- CR1 BIDIMODE LL_SPI_SetTransferDirection
- CR1 BIDIOE LL_SPI_SetTransferDirection

LL_SPI_GetTransferDirection

Function name
__STATIC_INLINE uint32_t LL_SPI_GetTransferDirection (SPI_TypeDef * SPIx)

Function description
Get transfer direction mode.

Parameters
- **SPIx:** SPI Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_SPI_FULL_DUPLEX
  - LL_SPI_SIMPLEX_RX
  - LL_SPI_HALF_DUPLEX_RX
  - LL_SPI_HALF_DUPLEX_TX

Reference Manual to LL API cross reference:
- CR1 RXONLY LL_SPI_GetTransferDirection
- CR1 BIDIMODE LL_SPI_GetTransferDirection
- CR1 BIDIOE LL_SPI_GetTransferDirection

LL_SPI_SetDataWidth

Function name
__STATIC_INLINE void LL_SPI_SetDataWidth (SPI_TypeDef * SPIx, uint32_t DataWidth)

Function description
Set frame data width.

Parameters
- **SPIx:** SPI Instance
- **DataWidth:** This parameter can be one of the following values:
  - LL_SPI_DATAWIDTH_4BIT
  - LL_SPI_DATAWIDTH_5BIT
  - LL_SPI_DATAWIDTH_6BIT
  - LL_SPI_DATAWIDTH_7BIT
  - LL_SPI_DATAWIDTH_8BIT
  - LL_SPI_DATAWIDTH_9BIT
  - LL_SPI_DATAWIDTH_10BIT
  - LL_SPI_DATAWIDTH_11BIT
  - LL_SPI_DATAWIDTH_12BIT
  - LL_SPI_DATAWIDTH_13BIT
  - LL_SPI_DATAWIDTH_14BIT
  - LL_SPI_DATAWIDTH_15BIT
  - LL_SPI_DATAWIDTH_16BIT

Return values
- **None**

Reference Manual to LL API cross reference:
- CR2 DS LL_SPI_SetDataWidth

LL_SPI_GetDataWidth

Function name
__STATIC_INLINE uint32_t LL_SPI_GetDataWidth (SPI_TypeDef * SPIx)

Function description
Get frame data width.

Parameters
- **SPIx:** SPI Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_SPI_DATAWIDTH_4BIT
  - LL_SPI_DATAWIDTH_5BIT
  - LL_SPI_DATAWIDTH_6BIT
  - LL_SPI_DATAWIDTH_7BIT
  - LL_SPI_DATAWIDTH_8BIT
  - LL_SPI_DATAWIDTH_9BIT
  - LL_SPI_DATAWIDTH_10BIT
  - LL_SPI_DATAWIDTH_11BIT
  - LL_SPI_DATAWIDTH_12BIT
  - LL_SPI_DATAWIDTH_13BIT
  - LL_SPI_DATAWIDTH_14BIT
  - LL_SPI_DATAWIDTH_15BIT
  - LL_SPI_DATAWIDTH_16BIT

Reference Manual to LL API cross reference:
- CR2 DS LL_SPI_GetDataWidth

LL_SPI_SetRxFIFOThreshold

Function name	**__STATIC_INLINE void LL_SPI_SetRxFIFOThreshold (SPI_TypeDef * SPIx, uint32_t Threshold)**
Function description	Set threshold of RXFIFO that triggers an RXNE event.
Parameters	• **SPIx:** SPI Instance • **Threshold:** This parameter can be one of the following values: – LL_SPI_RX_FIFO_TH_HALF – LL_SPI_RX_FIFO_TH_QUARTER
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 FRXTH LL_SPI_SetRxFIFOThreshold

LL_SPI_GetRxFIFOThreshold

Function name	**__STATIC_INLINE uint32_t LL_SPI_GetRxFIFOThreshold (SPI_TypeDef * SPIx)**
Function description	Get threshold of RXFIFO that triggers an RXNE event.
Parameters	• **SPIx:** SPI Instance
Return values	• **Returned:** value can be one of the following values: – LL_SPI_RX_FIFO_TH_HALF – LL_SPI_RX_FIFO_TH_QUARTER
Reference Manual to LL API cross reference:	• CR2 FRXTH LL_SPI_GetRxFIFOThreshold

LL_SPI_EnableCRC

Function name	**__STATIC_INLINE void LL_SPI_EnableCRC (SPI_TypeDef * SPIx)**
Function description	Enable CRC.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Notes	• This bit should be written only when SPI is disabled (SPE = 0) for correct operation.
Reference Manual to LL API cross reference:	• CR1 CRCEN LL_SPI_EnableCRC

LL_SPI_DisableCRC

Function name	**__STATIC_INLINE void LL_SPI_DisableCRC (SPI_TypeDef * SPIx)**
Function description	Disable CRC.

Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Notes	• This bit should be written only when SPI is disabled (SPE = 0) for correct operation.
Reference Manual to LL API cross reference:	• CR1 CRCEN LL_SPI_DisableCRC

LL_SPI_IsEnabledCRC

Function name	**__STATIC_INLINE uint32_t LL_SPI_IsEnabledCRC (SPI_TypeDef * SPIx)**
Function description	Check if CRC is enabled.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Notes	• This bit should be written only when SPI is disabled (SPE = 0) for correct operation.
Reference Manual to LL API cross reference:	• CR1 CRCEN LL_SPI_IsEnabledCRC

LL_SPI_SetCRCWidth

Function name	**__STATIC_INLINE void LL_SPI_SetCRCWidth (SPI_TypeDef * SPIx, uint32_t CRCLength)**
Function description	Set CRC Length.
Parameters	• **SPIx:** SPI Instance • **CRCLength:** This parameter can be one of the following values: – LL_SPI_CRC_8BIT – LL_SPI_CRC_16BIT
Return values	• **None**
Notes	• This bit should be written only when SPI is disabled (SPE = 0) for correct operation.
Reference Manual to LL API cross reference:	• CR1 CRCL LL_SPI_SetCRCWidth

LL_SPI_GetCRCWidth

Function name	**__STATIC_INLINE uint32_t LL_SPI_GetCRCWidth (SPI_TypeDef * SPIx)**
Function description	Get CRC Length.
Parameters	• **SPIx:** SPI Instance
Return values	• **Returned:** value can be one of the following values: – LL_SPI_CRC_8BIT

– LL_SPI_CRC_16BIT

Reference Manual to LL API cross reference:
- CR1 CRCL LL_SPI_GetCRCWidth

LL_SPI_SetCRCNext

Function name: **__STATIC_INLINE void LL_SPI_SetCRCNext (SPI_TypeDef * SPIx)**

Function description: Set CRCNext to transfer CRC on the line.

Parameters:
- **SPIx:** SPI Instance

Return values:
- **None**

Notes:
- This bit has to be written as soon as the last data is written in the SPIx_DR register.

Reference Manual to LL API cross reference:
- CR1 CRCNEXT LL_SPI_SetCRCNext

LL_SPI_SetCRCPolynomial

Function name: **__STATIC_INLINE void LL_SPI_SetCRCPolynomial (SPI_TypeDef * SPIx, uint32_t CRCPoly)**

Function description: Set polynomial for CRC calculation.

Parameters:
- **SPIx:** SPI Instance
- **CRCPoly:** This parameter must be a number between Min_Data = 0x00 and Max_Data = 0xFFFF

Return values:
- **None**

Reference Manual to LL API cross reference:
- CRCPR CRCPOLY LL_SPI_SetCRCPolynomial

LL_SPI_GetCRCPolynomial

Function name: **__STATIC_INLINE uint32_t LL_SPI_GetCRCPolynomial (SPI_TypeDef * SPIx)**

Function description: Get polynomial for CRC calculation.

Parameters:
- **SPIx:** SPI Instance

Return values:
- **Returned:** value is a number between Min_Data = 0x00 and Max_Data = 0xFFFF

Reference Manual to LL API cross reference:
- CRCPR CRCPOLY LL_SPI_GetCRCPolynomial

LL_SPI_GetRxCRC

Function name	**__STATIC_INLINE uint32_t LL_SPI_GetRxCRC (SPI_TypeDef * SPIx)**
Function description	Get Rx CRC.
Parameters	• **SPIx:** SPI Instance
Return values	• **Returned:** value is a number between Min_Data = 0x00 and Max_Data = 0xFFFF
Reference Manual to LL API cross reference:	• RXCRCR RXCRC LL_SPI_GetRxCRC

LL_SPI_GetTxCRC

Function name	**__STATIC_INLINE uint32_t LL_SPI_GetTxCRC (SPI_TypeDef * SPIx)**
Function description	Get Tx CRC.
Parameters	• **SPIx:** SPI Instance
Return values	• **Returned:** value is a number between Min_Data = 0x00 and Max_Data = 0xFFFF
Reference Manual to LL API cross reference:	• TXCRCR TXCRC LL_SPI_GetTxCRC

LL_SPI_SetNSSMode

Function name	**__STATIC_INLINE void LL_SPI_SetNSSMode (SPI_TypeDef * SPIx, uint32_t NSS)**
Function description	Set NSS mode.
Parameters	• **SPIx:** SPI Instance • **NSS:** This parameter can be one of the following values: – LL_SPI_NSS_SOFT – LL_SPI_NSS_HARD_INPUT – LL_SPI_NSS_HARD_OUTPUT
Return values	• **None**
Notes	• LL_SPI_NSS_SOFT Mode is not used in SPI TI mode.
Reference Manual to LL API cross reference:	• CR1 SSM LL_SPI_SetNSSMode • • CR2 SSOE LL_SPI_SetNSSMode

LL_SPI_GetNSSMode

Function name	**__STATIC_INLINE uint32_t LL_SPI_GetNSSMode (SPI_TypeDef * SPIx)**
Function description	Get NSS mode.
Parameters	• **SPIx:** SPI Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_SPI_NSS_SOFT
  - LL_SPI_NSS_HARD_INPUT
  - LL_SPI_NSS_HARD_OUTPUT

Reference Manual to LL API cross reference:
- CR1 SSM LL_SPI_GetNSSMode
-
- CR2 SSOE LL_SPI_GetNSSMode

LL_SPI_EnableNSSPulseMgt

Function name **__STATIC_INLINE void LL_SPI_EnableNSSPulseMgt (SPI_TypeDef * SPIx)**

Function description Enable NSS pulse management.

Parameters
- **SPIx:** SPI Instance

Return values
- **None**

Notes
- This bit should not be changed when communication is ongoing. This bit is not used in SPI TI mode.

Reference Manual to LL API cross reference:
- CR2 NSSP LL_SPI_EnableNSSPulseMgt

LL_SPI_DisableNSSPulseMgt

Function name **__STATIC_INLINE void LL_SPI_DisableNSSPulseMgt (SPI_TypeDef * SPIx)**

Function description Disable NSS pulse management.

Parameters
- **SPIx:** SPI Instance

Return values
- **None**

Notes
- This bit should not be changed when communication is ongoing. This bit is not used in SPI TI mode.

Reference Manual to LL API cross reference:
- CR2 NSSP LL_SPI_DisableNSSPulseMgt

LL_SPI_IsEnabledNSSPulse

Function name **__STATIC_INLINE uint32_t LL_SPI_IsEnabledNSSPulse (SPI_TypeDef * SPIx)**

Function description Check if NSS pulse is enabled.

Parameters
- **SPIx:** SPI Instance

Return values
- **State:** of bit (1 or 0).

Notes
- This bit should not be changed when communication is ongoing. This bit is not used in SPI TI mode.

Reference Manual to LL API cross reference:	• CR2 NSSP LL_SPI_IsEnabledNSSPulse

LL_SPI_IsActiveFlag_RXNE

Function name	**__STATIC_INLINE uint32_t LL_SPI_IsActiveFlag_RXNE (SPI_TypeDef * SPIx)**
Function description	Check if Rx buffer is not empty.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR RXNE LL_SPI_IsActiveFlag_RXNE

LL_SPI_IsActiveFlag_TXE

Function name	**__STATIC_INLINE uint32_t LL_SPI_IsActiveFlag_TXE (SPI_TypeDef * SPIx)**
Function description	Check if Tx buffer is empty.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR TXE LL_SPI_IsActiveFlag_TXE

LL_SPI_IsActiveFlag_CRCERR

Function name	**__STATIC_INLINE uint32_t LL_SPI_IsActiveFlag_CRCERR (SPI_TypeDef * SPIx)**
Function description	Get CRC error flag.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR CRCERR LL_SPI_IsActiveFlag_CRCERR

LL_SPI_IsActiveFlag_MODF

Function name	**__STATIC_INLINE uint32_t LL_SPI_IsActiveFlag_MODF (SPI_TypeDef * SPIx)**
Function description	Get mode fault error flag.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:	• SR MODF LL_SPI_IsActiveFlag_MODF

LL_SPI_IsActiveFlag_OVR

Function name	**__STATIC_INLINE uint32_t LL_SPI_IsActiveFlag_OVR (SPI_TypeDef * SPIx)**
Function description	Get overrun error flag.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR OVR LL_SPI_IsActiveFlag_OVR

LL_SPI_IsActiveFlag_BSY

Function name	**__STATIC_INLINE uint32_t LL_SPI_IsActiveFlag_BSY (SPI_TypeDef * SPIx)**
Function description	Get busy flag.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Notes	• The BSY flag is cleared under any one of the following conditions: -When the SPI is correctly disabled -When a fault is detected in Master mode (MODF bit set to 1) -In Master mode, when it finishes a data transmission and no new data is ready to be sent -In Slave mode, when the BSY flag is set to '0' for at least one SPI clock cycle between each data transfer.
Reference Manual to LL API cross reference:	• SR BSY LL_SPI_IsActiveFlag_BSY

LL_SPI_IsActiveFlag_FRE

Function name	**__STATIC_INLINE uint32_t LL_SPI_IsActiveFlag_FRE (SPI_TypeDef * SPIx)**
Function description	Get frame format error flag.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR FRE LL_SPI_IsActiveFlag_FRE

LL_SPI_GetRxFIFOLevel

Function name	**__STATIC_INLINE uint32_t LL_SPI_GetRxFIFOLevel (SPI_TypeDef * SPIx)**
Function description	Get FIFO reception Level.
Parameters	• **SPIx:** SPI Instance
Return values	• **Returned:** value can be one of the following values: – LL_SPI_RX_FIFO_EMPTY – LL_SPI_RX_FIFO_QUARTER_FULL – LL_SPI_RX_FIFO_HALF_FULL – LL_SPI_RX_FIFO_FULL
Reference Manual to LL API cross reference:	• SR FRLVL LL_SPI_GetRxFIFOLevel

LL_SPI_GetTxFIFOLevel

Function name	**__STATIC_INLINE uint32_t LL_SPI_GetTxFIFOLevel (SPI_TypeDef * SPIx)**
Function description	Get FIFO Transmission Level.
Parameters	• **SPIx:** SPI Instance
Return values	• **Returned:** value can be one of the following values: – LL_SPI_TX_FIFO_EMPTY – LL_SPI_TX_FIFO_QUARTER_FULL – LL_SPI_TX_FIFO_HALF_FULL – LL_SPI_TX_FIFO_FULL
Reference Manual to LL API cross reference:	• SR FTLVL LL_SPI_GetTxFIFOLevel

LL_SPI_ClearFlag_CRCERR

Function name	**__STATIC_INLINE void LL_SPI_ClearFlag_CRCERR (SPI_TypeDef * SPIx)**
Function description	Clear CRC error flag.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR CRCERR LL_SPI_ClearFlag_CRCERR

LL_SPI_ClearFlag_MODF

Function name	**__STATIC_INLINE void LL_SPI_ClearFlag_MODF (SPI_TypeDef * SPIx)**
Function description	Clear mode fault error flag.
Parameters	• **SPIx:** SPI Instance

Return values	• **None**
Notes	• Clearing this flag is done by a read access to the SPIx_SR register followed by a write access to the SPIx_CR1 register
Reference Manual to LL API cross reference:	• SR MODF LL_SPI_ClearFlag_MODF

LL_SPI_ClearFlag_OVR

Function name	**__STATIC_INLINE void LL_SPI_ClearFlag_OVR (SPI_TypeDef * SPIx)**
Function description	Clear overrun error flag.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Notes	• Clearing this flag is done by a read access to the SPIx_DR register followed by a read access to the SPIx_SR register
Reference Manual to LL API cross reference:	• SR OVR LL_SPI_ClearFlag_OVR

LL_SPI_ClearFlag_FRE

Function name	**__STATIC_INLINE void LL_SPI_ClearFlag_FRE (SPI_TypeDef * SPIx)**
Function description	Clear frame format error flag.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Notes	• Clearing this flag is done by reading SPIx_SR register
Reference Manual to LL API cross reference:	• SR FRE LL_SPI_ClearFlag_FRE

LL_SPI_EnableIT_ERR

Function name	**__STATIC_INLINE void LL_SPI_EnableIT_ERR (SPI_TypeDef * SPIx)**
Function description	Enable error interrupt.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Notes	• This bit controls the generation of an interrupt when an error condition occurs (CRCERR, OVR, MODF in SPI mode, FRE at TI mode).
Reference Manual to LL API cross reference:	• CR2 ERRIE LL_SPI_EnableIT_ERR

LL_SPI_EnableIT_RXNE

Function name	**__STATIC_INLINE void LL_SPI_EnableIT_RXNE (SPI_TypeDef * SPIx)**
Function description	Enable Rx buffer not empty interrupt.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 RXNEIE LL_SPI_EnableIT_RXNE

LL_SPI_EnableIT_TXE

Function name	**__STATIC_INLINE void LL_SPI_EnableIT_TXE (SPI_TypeDef * SPIx)**
Function description	Enable Tx buffer empty interrupt.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 TXEIE LL_SPI_EnableIT_TXE

LL_SPI_DisableIT_ERR

Function name	**__STATIC_INLINE void LL_SPI_DisableIT_ERR (SPI_TypeDef * SPIx)**
Function description	Disable error interrupt.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Notes	• This bit controls the generation of an interrupt when an error condition occurs (CRCERR, OVR, MODF in SPI mode, FRE at TI mode).
Reference Manual to LL API cross reference:	• CR2 ERRIE LL_SPI_DisableIT_ERR

LL_SPI_DisableIT_RXNE

Function name	**__STATIC_INLINE void LL_SPI_DisableIT_RXNE (SPI_TypeDef * SPIx)**
Function description	Disable Rx buffer not empty interrupt.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross	• CR2 RXNEIE LL_SPI_DisableIT_RXNE

reference:

LL_SPI_DisableIT_TXE

Function name	**__STATIC_INLINE void LL_SPI_DisableIT_TXE (SPI_TypeDef * SPIx)**
Function description	Disable Tx buffer empty interrupt.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 TXEIE LL_SPI_DisableIT_TXE

LL_SPI_IsEnabledIT_ERR

Function name	**__STATIC_INLINE uint32_t LL_SPI_IsEnabledIT_ERR (SPI_TypeDef * SPIx)**
Function description	Check if error interrupt is enabled.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR2 ERRIE LL_SPI_IsEnabledIT_ERR

LL_SPI_IsEnabledIT_RXNE

Function name	**__STATIC_INLINE uint32_t LL_SPI_IsEnabledIT_RXNE (SPI_TypeDef * SPIx)**
Function description	Check if Rx buffer not empty interrupt is enabled.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR2 RXNEIE LL_SPI_IsEnabledIT_RXNE

LL_SPI_IsEnabledIT_TXE

Function name	**__STATIC_INLINE uint32_t LL_SPI_IsEnabledIT_TXE (SPI_TypeDef * SPIx)**
Function description	Check if Tx buffer empty interrupt.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR2 TXEIE LL_SPI_IsEnabledIT_TXE

LL_SPI_EnableDMAReq_RX

Function name	**__STATIC_INLINE void LL_SPI_EnableDMAReq_RX (SPI_TypeDef * SPIx)**
Function description	Enable DMA Rx.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 RXDMAEN LL_SPI_EnableDMAReq_RX

LL_SPI_DisableDMAReq_RX

Function name	**__STATIC_INLINE void LL_SPI_DisableDMAReq_RX (SPI_TypeDef * SPIx)**
Function description	Disable DMA Rx.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 RXDMAEN LL_SPI_DisableDMAReq_RX

LL_SPI_IsEnabledDMAReq_RX

Function name	**__STATIC_INLINE uint32_t LL_SPI_IsEnabledDMAReq_RX (SPI_TypeDef * SPIx)**
Function description	Check if DMA Rx is enabled.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR2 RXDMAEN LL_SPI_IsEnabledDMAReq_RX

LL_SPI_EnableDMAReq_TX

Function name	**__STATIC_INLINE void LL_SPI_EnableDMAReq_TX (SPI_TypeDef * SPIx)**
Function description	Enable DMA Tx.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 TXDMAEN LL_SPI_EnableDMAReq_TX

LL_SPI_DisableDMAReq_TX

Function name	**__STATIC_INLINE void LL_SPI_DisableDMAReq_TX (SPI_TypeDef * SPIx)**
Function description	Disable DMA Tx.
Parameters	• **SPIx:** SPI Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 TXDMAEN LL_SPI_DisableDMAReq_TX

LL_SPI_IsEnabledDMAReq_TX

Function name	**__STATIC_INLINE uint32_t LL_SPI_IsEnabledDMAReq_TX (SPI_TypeDef * SPIx)**
Function description	Check if DMA Tx is enabled.
Parameters	• **SPIx:** SPI Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR2 TXDMAEN LL_SPI_IsEnabledDMAReq_TX

LL_SPI_SetDMAParity_RX

Function name	**__STATIC_INLINE void LL_SPI_SetDMAParity_RX (SPI_TypeDef * SPIx, uint32_t Parity)**
Function description	Set parity of Last DMA reception.
Parameters	• **SPIx:** SPI Instance • **Parity:** This parameter can be one of the following values: – LL_SPI_DMA_PARITY_ODD – LL_SPI_DMA_PARITY_EVEN
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 LDMARX LL_SPI_SetDMAParity_RX

LL_SPI_GetDMAParity_RX

Function name	**__STATIC_INLINE uint32_t LL_SPI_GetDMAParity_RX (SPI_TypeDef * SPIx)**
Function description	Get parity configuration for Last DMA reception.
Parameters	• **SPIx:** SPI Instance
Return values	• **Returned:** value can be one of the following values: – LL_SPI_DMA_PARITY_ODD – LL_SPI_DMA_PARITY_EVEN

Reference Manual to LL API cross reference:	• CR2 LDMARX LL_SPI_GetDMAParity_RX

LL_SPI_SetDMAParity_TX

Function name	**__STATIC_INLINE void LL_SPI_SetDMAParity_TX (SPI_TypeDef * SPIx, uint32_t Parity)**
Function description	Set parity of Last DMA transmission.
Parameters	• **SPIx:** SPI Instance • **Parity:** This parameter can be one of the following values: – LL_SPI_DMA_PARITY_ODD – LL_SPI_DMA_PARITY_EVEN
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 LDMATX LL_SPI_SetDMAParity_TX

LL_SPI_GetDMAParity_TX

Function name	**__STATIC_INLINE uint32_t LL_SPI_GetDMAParity_TX (SPI_TypeDef * SPIx)**
Function description	Get parity configuration for Last DMA transmission.
Parameters	• **SPIx:** SPI Instance
Return values	• **Returned:** value can be one of the following values: – LL_SPI_DMA_PARITY_ODD – LL_SPI_DMA_PARITY_EVEN
Reference Manual to LL API cross reference:	• CR2 LDMATX LL_SPI_GetDMAParity_TX

LL_SPI_DMA_GetRegAddr

Function name	**__STATIC_INLINE uint32_t LL_SPI_DMA_GetRegAddr (SPI_TypeDef * SPIx)**
Function description	Get the data register address used for DMA transfer.
Parameters	• **SPIx:** SPI Instance
Return values	• **Address:** of data register
Reference Manual to LL API cross reference:	• DR DR LL_SPI_DMA_GetRegAddr

LL_SPI_ReceiveData8

Function name	**__STATIC_INLINE uint8_t LL_SPI_ReceiveData8 (SPI_TypeDef * SPIx)**
Function description	Read 8-Bits in the data register.
Parameters	• **SPIx:** SPI Instance
Return values	• **RxData:** Value between Min_Data=0x00 and Max_Data=0xFF
Reference Manual to LL API cross reference:	• DR DR LL_SPI_ReceiveData8

LL_SPI_ReceiveData16

Function name	**__STATIC_INLINE uint16_t LL_SPI_ReceiveData16 (SPI_TypeDef * SPIx)**
Function description	Read 16-Bits in the data register.
Parameters	• **SPIx:** SPI Instance
Return values	• **RxData:** Value between Min_Data=0x00 and Max_Data=0xFFFF
Reference Manual to LL API cross reference:	• DR DR LL_SPI_ReceiveData16

LL_SPI_TransmitData8

Function name	**__STATIC_INLINE void LL_SPI_TransmitData8 (SPI_TypeDef * SPIx, uint8_t TxData)**
Function description	Write 8-Bits in the data register.
Parameters	• **SPIx:** SPI Instance • **TxData:** Value between Min_Data=0x00 and Max_Data=0xFF
Return values	• **None**
Reference Manual to LL API cross reference:	• DR DR LL_SPI_TransmitData8

LL_SPI_TransmitData16

Function name	**__STATIC_INLINE void LL_SPI_TransmitData16 (SPI_TypeDef * SPIx, uint16_t TxData)**
Function description	Write 16-Bits in the data register.
Parameters	• **SPIx:** SPI Instance • **TxData:** Value between Min_Data=0x00 and Max_Data=0xFFFF
Return values	• **None**

Reference Manual to LL API cross reference:	• DR DR LL_SPI_TransmitData16

LL_SPI_DeInit

Function name	**ErrorStatus LL_SPI_DeInit (SPI_TypeDef * SPIx)**
Function description	De-initialize the SPI registers to their default reset values.
Parameters	• **SPIx:** SPI Instance
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: SPI registers are de-initialized – ERROR: SPI registers are not de-initialized

LL_SPI_Init

Function name	**ErrorStatus LL_SPI_Init (SPI_TypeDef * SPIx, LL_SPI_InitTypeDef * SPI_InitStruct)**
Function description	Initialize the SPI registers according to the specified parameters in SPI_InitStruct.
Parameters	• **SPIx:** SPI Instance • **SPI_InitStruct:** pointer to a LL_SPI_InitTypeDef structure
Return values	• **An:** ErrorStatus enumeration value. (Return always SUCCESS)
Notes	• As some bits in SPI configuration registers can only be written when the SPI is disabled (SPI_CR1_SPE bit =0), SPI IP should be in disabled state prior calling this function. Otherwise, ERROR result will be returned.

LL_SPI_StructInit

Function name	**void LL_SPI_StructInit (LL_SPI_InitTypeDef * SPI_InitStruct)**
Function description	Set each LL_SPI_InitTypeDef field to default value.
Parameters	• **SPI_InitStruct:** pointer to a LL_SPI_InitTypeDef structure whose fields will be set to default values.
Return values	• **None**

76.3 SPI Firmware driver defines

76.3.1 SPI

Baud Rate Prescaler

LL_SPI_BAUDRATEPRESCALER_DIV2	BaudRate control equal to fPCLK/2
LL_SPI_BAUDRATEPRESCALER_DIV4	BaudRate control equal to fPCLK/4
LL_SPI_BAUDRATEPRESCALER_DIV8	BaudRate control equal to fPCLK/8
LL_SPI_BAUDRATEPRESCALER_DIV16	BaudRate control equal to fPCLK/16

LL_SPI_BAUDRATEPRESCALER_DIV32	BaudRate control equal to fPCLK/32
LL_SPI_BAUDRATEPRESCALER_DIV64	BaudRate control equal to fPCLK/64
LL_SPI_BAUDRATEPRESCALER_DIV128	BaudRate control equal to fPCLK/128
LL_SPI_BAUDRATEPRESCALER_DIV256	BaudRate control equal to fPCLK/256

Transmission Bit Order

LL_SPI_LSB_FIRST	Data is transmitted/received with the LSB first
LL_SPI_MSB_FIRST	Data is transmitted/received with the MSB first

CRC Calculation

LL_SPI_CRCCALCULATION_DISABLE	CRC calculation disabled
LL_SPI_CRCCALCULATION_ENABLE	CRC calculation enabled

CRC Length

LL_SPI_CRC_8BIT	8-bit CRC length
LL_SPI_CRC_16BIT	16-bit CRC length

Datawidth

LL_SPI_DATAWIDTH_4BIT	Data length for SPI transfer: 4 bits
LL_SPI_DATAWIDTH_5BIT	Data length for SPI transfer: 5 bits
LL_SPI_DATAWIDTH_6BIT	Data length for SPI transfer: 6 bits
LL_SPI_DATAWIDTH_7BIT	Data length for SPI transfer: 7 bits
LL_SPI_DATAWIDTH_8BIT	Data length for SPI transfer: 8 bits
LL_SPI_DATAWIDTH_9BIT	Data length for SPI transfer: 9 bits
LL_SPI_DATAWIDTH_10BIT	Data length for SPI transfer: 10 bits
LL_SPI_DATAWIDTH_11BIT	Data length for SPI transfer: 11 bits
LL_SPI_DATAWIDTH_12BIT	Data length for SPI transfer: 12 bits
LL_SPI_DATAWIDTH_13BIT	Data length for SPI transfer: 13 bits
LL_SPI_DATAWIDTH_14BIT	Data length for SPI transfer: 14 bits
LL_SPI_DATAWIDTH_15BIT	Data length for SPI transfer: 15 bits
LL_SPI_DATAWIDTH_16BIT	Data length for SPI transfer: 16 bits

DMA Parity

LL_SPI_DMA_PARITY_EVEN	Select DMA parity Even
LL_SPI_DMA_PARITY_ODD	Select DMA parity Odd

Get Flags Defines

LL_SPI_SR_RXNE	Rx buffer not empty flag
LL_SPI_SR_TXE	Tx buffer empty flag
LL_SPI_SR_BSY	Busy flag
LL_SPI_SR_CRCERR	CRC error flag
LL_SPI_SR_MODF	Mode fault flag

LL_SPI_SR_OVR Overrun flag

LL_SPI_SR_FRE TI mode frame format error flag

IT Defines

LL_SPI_CR2_RXNEIE Rx buffer not empty interrupt enable

LL_SPI_CR2_TXEIE Tx buffer empty interrupt enable

LL_SPI_CR2_ERRIE Error interrupt enable

Operation Mode

LL_SPI_MODE_MASTER Master configuration

LL_SPI_MODE_SLAVE Slave configuration

Slave Select Pin Mode

LL_SPI_NSS_SOFT NSS managed internally. NSS pin not used and free

LL_SPI_NSS_HARD_INPUT NSS pin used in Input. Only used in Master mode

LL_SPI_NSS_HARD_OUTPUT NSS pin used in Output. Only used in Slave mode as chip select

Clock Phase

LL_SPI_PHASE_1EDGE First clock transition is the first data capture edge

LL_SPI_PHASE_2EDGE Second clock transition is the first data capture edge

Clock Polarity

LL_SPI_POLARITY_LOW Clock to 0 when idle

LL_SPI_POLARITY_HIGH Clock to 1 when idle

Serial Protocol

LL_SPI_PROTOCOL_MOTOROLA Motorola mode. Used as default value

LL_SPI_PROTOCOL_TI TI mode

RX FIFO Level

LL_SPI_RX_FIFO_EMPTY FIFO reception empty

LL_SPI_RX_FIFO_QUARTER_FULL FIFO reception 1/4

LL_SPI_RX_FIFO_HALF_FULL FIFO reception 1/2

LL_SPI_RX_FIFO_FULL FIFO reception full

RX FIFO Threshold

LL_SPI_RX_FIFO_TH_HALF RXNE event is generated if FIFO level is greater than or equel to 1/2 (16-bit)

LL_SPI_RX_FIFO_TH_QUARTER RXNE event is generated if FIFO level is greater than or equel to 1/4 (8-bit)

Transfer Mode

LL_SPI_FULL_DUPLEX Full-Duplex mode. Rx and Tx transfer on 2 lines

LL_SPI_SIMPLEX_RX Simplex Rx mode. Rx transfer only on 1 line

LL_SPI_HALF_DUPLEX_RX Half-Duplex Rx mode. Rx transfer on 1 line

LL_SPI_HALF_DUPLEX_TX Half-Duplex Tx mode. Tx transfer on 1 line

TX FIFO Level

LL_SPI_TX_FIFO_EMPTY FIFO transmission empty

LL_SPI_TX_FIFO_QUARTER_FULL FIFO transmission 1/4

LL_SPI_TX_FIFO_HALF_FULL FIFO transmission 1/2

LL_SPI_TX_FIFO_FULL FIFO transmission full

Common Write and read registers Macros

LL_SPI_WriteReg

Description:

- Write a value in SPI register.

Parameters:

- __INSTANCE__: SPI Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_SPI_ReadReg

Description:

- Read a value in SPI register.

Parameters:

- __INSTANCE__: SPI Instance
- __REG__: Register to be read

Return value:

- Register: value

77 LL SYSTEM Generic Driver

77.1 SYSTEM Firmware driver API description

77.1.1 Detailed description of functions

LL_SYSCFG_SetRemapMemory

Function name	**__STATIC_INLINE void LL_SYSCFG_SetRemapMemory (uint32_t Memory)**
Function description	Set memory mapping at address 0x00000000.
Parameters	• **Memory:** This parameter can be one of the following values: (*) value not defined in all devices. – LL_SYSCFG_REMAP_FLASH – LL_SYSCFG_REMAP_SYSTEMFLASH – LL_SYSCFG_REMAP_SRAM – LL_SYSCFG_REMAP_FMC (*)
Return values	• **None**
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 MEM_MODE LL_SYSCFG_SetRemapMemory

LL_SYSCFG_GetRemapMemory

Function name	**__STATIC_INLINE uint32_t LL_SYSCFG_GetRemapMemory (void)**
Function description	Get memory mapping at address 0x00000000.
Return values	• **Returned:** value can be one of the following values: (*) value not defined in all devices. – LL_SYSCFG_REMAP_FLASH – LL_SYSCFG_REMAP_SYSTEMFLASH – LL_SYSCFG_REMAP_SRAM – LL_SYSCFG_REMAP_FMC (*)
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 MEM_MODE LL_SYSCFG_GetRemapMemory

LL_SYSCFG_SetRemapDMA_ADC

Function name	**__STATIC_INLINE void LL_SYSCFG_SetRemapDMA_ADC (uint32_t Remap)**
Function description	Set DMA request remapping bits for ADC.
Parameters	• **Remap:** This parameter can be one of the following values: (*) value not defined in all devices. – LL_SYSCFG_ADC24_RMP_DMA2_CH12 (*) – LL_SYSCFG_ADC24_RMP_DMA2_CH34 (*) – LL_SYSCFG_ADC2_RMP_DMA1_CH2 (*)

  - LL_SYSCFG_ADC2_RMP_DMA1_CH4 (*)
  - LL_SYSCFG_ADC2_RMP_DMA2 (*)
  - LL_SYSCFG_ADC2_RMP_DMA1 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- SYSCFG_CFGR1 ADC24_DMA_RMP LL_SYSCFG_SetRemapDMA_ADC
- SYSCFG_CFGR3 ADC2_DMA_RMP LL_SYSCFG_SetRemapDMA_ADC

LL_SYSCFG_SetRemapDMA_DAC

Function name
__STATIC_INLINE void LL_SYSCFG_SetRemapDMA_DAC (uint32_t Remap)

Function description
Set DMA request remapping bits for DAC.

Parameters
- **Remap:** This parameter can be one of the following values: (*) value not defined in all devices.
  - LL_SYSCFG_DAC1_CH1_RMP_DMA2_CH3
  - LL_SYSCFG_DAC1_CH1_RMP_DMA1_CH3
  - LL_SYSCFG_DAC1_OUT2_RMP_DMA2_CH4 (*)
  - LL_SYSCFG_DAC1_OUT2_RMP_DMA1_CH4 (*)
  - LL_SYSCFG_DAC2_OUT1_RMP_DMA2_CH5 (*)
  - LL_SYSCFG_DAC2_OUT1_RMP_DMA1_CH5 (*)
  - LL_SYSCFG_DAC2_CH1_RMP_NO (*)
  - LL_SYSCFG_DAC2_CH1_RMP_DMA1_CH5 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- SYSCFG_CFGR1 TIM6DAC1Ch1_DMA_RMP LL_SYSCFG_SetRemapDMA_DAC
- SYSCFG_CFGR1 DAC2Ch1_DMA_RMP LL_SYSCFG_SetRemapDMA_DAC

LL_SYSCFG_SetRemapDMA_TIM

Function name
__STATIC_INLINE void LL_SYSCFG_SetRemapDMA_TIM (uint32_t Remap)

Function description
Set DMA request remapping bits for TIM.

Parameters
- **Remap:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_SYSCFG_TIM16_RMP_DMA1_CH3 or LL_SYSCFG_TIM16_RMP_DMA1_CH6
  - LL_SYSCFG_TIM17_RMP_DMA1_CH1 or LL_SYSCFG_TIM17_RMP_DMA1_CH7
  - LL_SYSCFG_TIM6_RMP_DMA2_CH3 or LL_SYSCFG_TIM6_RMP_DMA1_CH3
  - LL_SYSCFG_TIM7_RMP_DMA2_CH4 or LL_SYSCFG_TIM7_RMP_DMA1_CH4 (*)
  - LL_SYSCFG_TIM18_RMP_DMA2_CH5 or LL_SYSCFG_TIM18_RMP_DMA1_CH5 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- SYSCFG_CFGR1 TIM16_DMA_RMP LL_SYSCFG_SetRemapDMA_TIM
- SYSCFG_CFGR1 TIM17_DMA_RMP LL_SYSCFG_SetRemapDMA_TIM
- SYSCFG_CFGR1 TIM6DAC1Ch1_DMA_RMP LL_SYSCFG_SetRemapDMA_TIM
- SYSCFG_CFGR1 TIM7DAC1Ch2_DMA_RMP LL_SYSCFG_SetRemapDMA_TIM
- SYSCFG_CFGR1 TIM18DAC2Ch1_DMA_RMP LL_SYSCFG_SetRemapDMA_TIM

LL_SYSCFG_SetRemapInput_TIM

Function name: **__STATIC_INLINE void LL_SYSCFG_SetRemapInput_TIM (uint32_t Remap)**

Function description: Set Timer input remap.

Parameters:
- **Remap:** This parameter can be one of the following values: (*) value not defined in all devices.
  - LL_SYSCFG_TIM1_ITR3_RMP_TIM4_TRGO (*)
  - LL_SYSCFG_TIM1_ITR3_RMP_TIM17_OC (*)
  - LL_SYSCFG_TIM15_ENCODEMODE_NOREDIRECTION (*)
  - LL_SYSCFG_TIM15_ENCODEMODE_TIM2 (*)
  - LL_SYSCFG_TIM15_ENCODEMODE_TIM3 (*)
  - LL_SYSCFG_TIM15_ENCODEMODE_TIM4 (*)

Return values:
- **None**

Reference Manual to LL API cross reference:
- SYSCFG_CFGR1 TIM1_ITR3_RMP LL_SYSCFG_SetRemapInput_TIM
- SYSCFG_CFGR1 ENCODER_MODE LL_SYSCFG_SetRemapInput_TIM

LL_SYSCFG_SetRemapTrigger_DAC

Function name: **__STATIC_INLINE void LL_SYSCFG_SetRemapTrigger_DAC (uint32_t Remap)**

Function description: Set DAC Trigger remap.

Parameters:
- **Remap:** This parameter can be one of the following values:
  - LL_SYSCFG_DAC1_TRIG1_RMP_TIM8_TRGO (*)
  - LL_SYSCFG_DAC1_TRIG1_RMP_TIM3_TRGO (*)
  - LL_SYSCFG_DAC1_TRIG3_RMP_TIM15_TRGO (*)
  - LL_SYSCFG_DAC1_TRIG3_RMP_HRTIM1_DAC1_TRIG1 (*)
  - LL_SYSCFG_DAC1_TRIG5_RMP_NO (*)
  - LL_SYSCFG_DAC1_TRIG5_RMP_HRTIM1_DAC1_TRIG2 (*)

  (*) value not defined in all devices.

Return values:
- **None**

Reference Manual to LL API cross
- SYSCFG_CFGR1 DAC1_TRIG1_RMP LL_SYSCFG_SetRemapTrigger_DAC
- SYSCFG_CFGR3 DAC1_TRG3_RMP

reference: LL_SYSCFG_SetRemapTrigger_DAC
- SYSCFG_CFGR3 DAC1_TRG5_RMP LL_SYSCFG_SetRemapTrigger_DAC

LL_SYSCFG_EnableRemapIT_USB

Function name **__STATIC_INLINE void LL_SYSCFG_EnableRemapIT_USB (void)**

Function description Enable USB interrupt remap.

Return values
- **None**

Notes
- Remap the USB interrupts (USB_HP, USB_LP and USB_WKUP) on interrupt lines 74, 75 and 76 respectively

Reference Manual to LL API cross reference:
- SYSCFG_CFGR1 USB_IT_RMP LL_SYSCFG_EnableRemapIT_USB

LL_SYSCFG_DisableRemapIT_USB

Function name **__STATIC_INLINE void LL_SYSCFG_DisableRemapIT_USB (void)**

Function description Disable USB interrupt remap.

Return values
- **None**

Reference Manual to LL API cross reference:
- SYSCFG_CFGR1 USB_IT_RMP LL_SYSCFG_DisableRemapIT_USB

LL_SYSCFG_EnableFastModePlus

Function name **__STATIC_INLINE void LL_SYSCFG_EnableFastModePlus (uint32_t ConfigFastModePlus)**

Function description Enable the I2C fast mode plus driving capability.

Parameters
- **ConfigFastModePlus:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_SYSCFG_I2C_FASTMODEPLUS_PB6
  - LL_SYSCFG_I2C_FASTMODEPLUS_PB7
  - LL_SYSCFG_I2C_FASTMODEPLUS_PB8
  - LL_SYSCFG_I2C_FASTMODEPLUS_PB9
  - LL_SYSCFG_I2C_FASTMODEPLUS_I2C1
  - LL_SYSCFG_I2C_FASTMODEPLUS_I2C2 (*)
  - LL_SYSCFG_I2C_FASTMODEPLUS_I2C3 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- SYSCFG_CFGR1 I2C_PB6_FMP LL_SYSCFG_EnableFastModePlus
- SYSCFG_CFGR1 I2C_PB7_FMP LL_SYSCFG_EnableFastModePlus
- SYSCFG_CFGR1 I2C_PB8_FMP LL_SYSCFG_EnableFastModePlus
- SYSCFG_CFGR1 I2C_PB9_FMP

LL_SYSCFG_EnableFastModePlus
- SYSCFG_CFGR1 I2C1_FMP LL_SYSCFG_EnableFastModePlus
- SYSCFG_CFGR1 I2C2_FMP LL_SYSCFG_EnableFastModePlus
- SYSCFG_CFGR1 I2C3_FMP LL_SYSCFG_EnableFastModePlus

LL_SYSCFG_DisableFastModePlus

Function name
__STATIC_INLINE void LL_SYSCFG_DisableFastModePlus (uint32_t ConfigFastModePlus)

Function description
Disable the I2C fast mode plus driving capability.

Parameters
- **ConfigFastModePlus:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_SYSCFG_I2C_FASTMODEPLUS_PB6
  - LL_SYSCFG_I2C_FASTMODEPLUS_PB7
  - LL_SYSCFG_I2C_FASTMODEPLUS_PB8
  - LL_SYSCFG_I2C_FASTMODEPLUS_PB9
  - LL_SYSCFG_I2C_FASTMODEPLUS_I2C1
  - LL_SYSCFG_I2C_FASTMODEPLUS_I2C2 (*)
  - LL_SYSCFG_I2C_FASTMODEPLUS_I2C3 (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- SYSCFG_CFGR1 I2C_PB6_FMP LL_SYSCFG_DisableFastModePlus
- SYSCFG_CFGR1 I2C_PB7_FMP LL_SYSCFG_DisableFastModePlus
- SYSCFG_CFGR1 I2C_PB8_FMP LL_SYSCFG_DisableFastModePlus
- SYSCFG_CFGR1 I2C_PB9_FMP LL_SYSCFG_DisableFastModePlus
- SYSCFG_CFGR1 I2C1_FMP LL_SYSCFG_DisableFastModePlus
- SYSCFG_CFGR1 I2C2_FMP LL_SYSCFG_DisableFastModePlus
- SYSCFG_CFGR1 I2C3_FMP LL_SYSCFG_DisableFastModePlus

LL_SYSCFG_EnableIT_FPU_IOC

Function name
__STATIC_INLINE void LL_SYSCFG_EnableIT_FPU_IOC (void)

Function description
Enable Floating Point Unit Invalid operation Interrupt.

Return values
- **None**

Reference Manual to LL API cross reference:
- SYSCFG_CFGR1 FPU_IE_0 LL_SYSCFG_EnableIT_FPU_IOC

LL_SYSCFG_EnableIT_FPU_DZC

Function name	**__STATIC_INLINE void LL_SYSCFG_EnableIT_FPU_DZC (void)**
Function description	Enable Floating Point Unit Divide-by-zero Interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_1 LL_SYSCFG_EnableIT_FPU_DZC

LL_SYSCFG_EnableIT_FPU_UFC

Function name	**__STATIC_INLINE void LL_SYSCFG_EnableIT_FPU_UFC (void)**
Function description	Enable Floating Point Unit Underflow Interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_2 LL_SYSCFG_EnableIT_FPU_UFC

LL_SYSCFG_EnableIT_FPU_OFC

Function name	**__STATIC_INLINE void LL_SYSCFG_EnableIT_FPU_OFC (void)**
Function description	Enable Floating Point Unit Overflow Interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_3 LL_SYSCFG_EnableIT_FPU_OFC

LL_SYSCFG_EnableIT_FPU_IDC

Function name	**__STATIC_INLINE void LL_SYSCFG_EnableIT_FPU_IDC (void)**
Function description	Enable Floating Point Unit Input denormal Interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_4 LL_SYSCFG_EnableIT_FPU_IDC

LL_SYSCFG_EnableIT_FPU_IXC

Function name	**__STATIC_INLINE void LL_SYSCFG_EnableIT_FPU_IXC (void)**
Function description	Enable Floating Point Unit Inexact Interrupt.
Return values	• **None**
Reference Manual to	• SYSCFG_CFGR1 FPU_IE_5

LL API cross reference:	LL_SYSCFG_EnableIT_FPU_IXC

LL_SYSCFG_DisableIT_FPU_IOC

Function name	**__STATIC_INLINE void LL_SYSCFG_DisableIT_FPU_IOC (void)**
Function description	Disable Floating Point Unit Invalid operation Interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_0 LL_SYSCFG_DisableIT_FPU_IOC

LL_SYSCFG_DisableIT_FPU_DZC

Function name	**__STATIC_INLINE void LL_SYSCFG_DisableIT_FPU_DZC (void)**
Function description	Disable Floating Point Unit Divide-by-zero Interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_1 LL_SYSCFG_DisableIT_FPU_DZC

LL_SYSCFG_DisableIT_FPU_UFC

Function name	**__STATIC_INLINE void LL_SYSCFG_DisableIT_FPU_UFC (void)**
Function description	Disable Floating Point Unit Underflow Interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_2 LL_SYSCFG_DisableIT_FPU_UFC

LL_SYSCFG_DisableIT_FPU_OFC

Function name	**__STATIC_INLINE void LL_SYSCFG_DisableIT_FPU_OFC (void)**
Function description	Disable Floating Point Unit Overflow Interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_3 LL_SYSCFG_DisableIT_FPU_OFC

LL_SYSCFG_DisableIT_FPU_IDC

Function name	**__STATIC_INLINE void LL_SYSCFG_DisableIT_FPU_IDC (void)**
Function description	Disable Floating Point Unit Input denormal Interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_4 LL_SYSCFG_DisableIT_FPU_IDC

LL_SYSCFG_DisableIT_FPU_IXC

Function name	**__STATIC_INLINE void LL_SYSCFG_DisableIT_FPU_IXC (void)**
Function description	Disable Floating Point Unit Inexact Interrupt.
Return values	• **None**
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_5 LL_SYSCFG_DisableIT_FPU_IXC

LL_SYSCFG_IsEnabledIT_FPU_IOC

Function name	**__STATIC_INLINE uint32_t LL_SYSCFG_IsEnabledIT_FPU_IOC (void)**
Function description	Check if Floating Point Unit Invalid operation Interrupt source is enabled or disabled.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_0 LL_SYSCFG_IsEnabledIT_FPU_IOC

LL_SYSCFG_IsEnabledIT_FPU_DZC

Function name	**__STATIC_INLINE uint32_t LL_SYSCFG_IsEnabledIT_FPU_DZC (void)**
Function description	Check if Floating Point Unit Divide-by-zero Interrupt source is enabled or disabled.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_1 LL_SYSCFG_IsEnabledIT_FPU_DZC

LL_SYSCFG_IsEnabledIT_FPU_UFC

Function name	**__STATIC_INLINE uint32_t LL_SYSCFG_IsEnabledIT_FPU_UFC (void)**
Function description	Check if Floating Point Unit Underflow Interrupt source is enabled or disabled.

Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_2 LL_SYSCFG_IsEnabledIT_FPU_UFC

LL_SYSCFG_IsEnabledIT_FPU_OFC

Function name	**__STATIC_INLINE uint32_t LL_SYSCFG_IsEnabledIT_FPU_OFC (void)**
Function description	Check if Floating Point Unit Overflow Interrupt source is enabled or disabled.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_3 LL_SYSCFG_IsEnabledIT_FPU_OFC

LL_SYSCFG_IsEnabledIT_FPU_IDC

Function name	**__STATIC_INLINE uint32_t LL_SYSCFG_IsEnabledIT_FPU_IDC (void)**
Function description	Check if Floating Point Unit Input denormal Interrupt source is enabled or disabled.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_4 LL_SYSCFG_IsEnabledIT_FPU_IDC

LL_SYSCFG_IsEnabledIT_FPU_IXC

Function name	**__STATIC_INLINE uint32_t LL_SYSCFG_IsEnabledIT_FPU_IXC (void)**
Function description	Check if Floating Point Unit Inexact Interrupt source is enabled or disabled.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SYSCFG_CFGR1 FPU_IE_5 LL_SYSCFG_IsEnabledIT_FPU_IXC

LL_SYSCFG_SetEXTISource

Function name	**__STATIC_INLINE void LL_SYSCFG_SetEXTISource (uint32_t Port, uint32_t Line)**
Function description	Configure source input for the EXTI external interrupt.
Parameters	• **Port:** This parameter can be one of the following values: (*) value not defined in all devices. – LL_SYSCFG_EXTI_PORTA – LL_SYSCFG_EXTI_PORTB – LL_SYSCFG_EXTI_PORTC

  - LL_SYSCFG_EXTI_PORTD
  - LL_SYSCFG_EXTI_PORTE (*)
  - LL_SYSCFG_EXTI_PORTF
  - LL_SYSCFG_EXTI_PORTG (*)
  - LL_SYSCFG_EXTI_PORTH (*)
- **Line:** This parameter can be one of the following values:
  - LL_SYSCFG_EXTI_LINE0
  - LL_SYSCFG_EXTI_LINE1
  - LL_SYSCFG_EXTI_LINE2
  - LL_SYSCFG_EXTI_LINE3
  - LL_SYSCFG_EXTI_LINE4
  - LL_SYSCFG_EXTI_LINE5
  - LL_SYSCFG_EXTI_LINE6
  - LL_SYSCFG_EXTI_LINE7
  - LL_SYSCFG_EXTI_LINE8
  - LL_SYSCFG_EXTI_LINE9
  - LL_SYSCFG_EXTI_LINE10
  - LL_SYSCFG_EXTI_LINE11
  - LL_SYSCFG_EXTI_LINE12
  - LL_SYSCFG_EXTI_LINE13
  - LL_SYSCFG_EXTI_LINE14
  - LL_SYSCFG_EXTI_LINE15

Return values

- **None**

Reference Manual to LL API cross reference:

- SYSCFG_EXTICR1 EXTI0 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI1 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI2 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI3 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI4 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI5 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI6 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI7 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI8 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI9 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI10 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI11 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI12 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI13 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI14 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR1 EXTI15 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI0 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI1 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI2 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI3 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI4 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI5 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI6 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI7 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI8 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI9 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI10 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI11 LL_SYSCFG_SetEXTISource

- SYSCFG_EXTICR2 EXTI12 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI13 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI14 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR2 EXTI15 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI0 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI1 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI2 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI3 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI4 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI5 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI6 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI7 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI8 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI9 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI10 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI11 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI12 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI13 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI14 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR3 EXTI15 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI0 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI1 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI2 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI3 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI4 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI5 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI6 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI7 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI8 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI9 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI10 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI11 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI12 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI13 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI14 LL_SYSCFG_SetEXTISource
- SYSCFG_EXTICR4 EXTI15 LL_SYSCFG_SetEXTISource

LL_SYSCFG_GetEXTISource

Function name **__STATIC_INLINE uint32_t LL_SYSCFG_GetEXTISource (uint32_t Line)**

Function description Get the configured defined for specific EXTI Line.

Parameters
- **Line:** This parameter can be one of the following values:
  - LL_SYSCFG_EXTI_LINE0
  - LL_SYSCFG_EXTI_LINE1
  - LL_SYSCFG_EXTI_LINE2
  - LL_SYSCFG_EXTI_LINE3
  - LL_SYSCFG_EXTI_LINE4
  - LL_SYSCFG_EXTI_LINE5
  - LL_SYSCFG_EXTI_LINE6
  - LL_SYSCFG_EXTI_LINE7

- LL_SYSCFG_EXTI_LINE8
- LL_SYSCFG_EXTI_LINE9
- LL_SYSCFG_EXTI_LINE10
- LL_SYSCFG_EXTI_LINE11
- LL_SYSCFG_EXTI_LINE12
- LL_SYSCFG_EXTI_LINE13
- LL_SYSCFG_EXTI_LINE14
- LL_SYSCFG_EXTI_LINE15

Return values

- **Returned:** value can be one of the following values: (*) value not defined in all devices.
  - LL_SYSCFG_EXTI_PORTA
  - LL_SYSCFG_EXTI_PORTB
  - LL_SYSCFG_EXTI_PORTC
  - LL_SYSCFG_EXTI_PORTD
  - LL_SYSCFG_EXTI_PORTE (*)
  - LL_SYSCFG_EXTI_PORTF
  - LL_SYSCFG_EXTI_PORTG (*)
  - LL_SYSCFG_EXTI_PORTH (*)

Reference Manual to LL API cross reference:

- SYSCFG_EXTICR1 EXTI0 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI1 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI2 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI3 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI4 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI5 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI6 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI7 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI8 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI9 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI10 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI11 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI12 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI13 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI14 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR1 EXTI15 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI0 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI1 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI2 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI3 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI4 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI5 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI6 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI7 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI8 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI9 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI10 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI11 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI12 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI13 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI14 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR2 EXTI15 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI0 LL_SYSCFG_GetEXTISource

- SYSCFG_EXTICR3 EXTI1 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI2 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI3 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI4 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI5 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI6 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI7 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI8 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI9 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI10 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI11 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI12 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI13 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI14 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR3 EXTI15 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI0 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI1 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI2 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI3 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI4 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI5 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI6 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI7 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI8 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI9 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI10 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI11 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI12 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI13 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI14 LL_SYSCFG_GetEXTISource
- SYSCFG_EXTICR4 EXTI15 LL_SYSCFG_GetEXTISource

LL_SYSCFG_SetTIMBreakInputs

Function name	**__STATIC_INLINE void LL_SYSCFG_SetTIMBreakInputs (uint32_t Break)**
Function description	Set connections to TIMx Break inputs.
Parameters	• **Break:** This parameter can be a combination of the following values: (*) value not defined in all devices. – LL_SYSCFG_TIMBREAK_PVD (*) – LL_SYSCFG_TIMBREAK_SRAM_PARITY (*) – LL_SYSCFG_TIMBREAK_LOCKUP
Return values	• **None**
Reference Manual to LL API cross reference:	• SYSCFG_CFGR2 LOCKUP_LOCK LL_SYSCFG_SetTIMBreakInputs • SYSCFG_CFGR2 SRAM_PARITY_LOCK LL_SYSCFG_SetTIMBreakInputs • SYSCFG_CFGR2 PVD_LOCK LL_SYSCFG_SetTIMBreakInputs

LL_SYSCFG_GetTIMBreakInputs

Function name	**__STATIC_INLINE uint32_t LL_SYSCFG_GetTIMBreakInputs (void)**
Function description	Get connections to TIMx Break inputs.
Return values	• **Returned:** value can be can be a combination of the following values: (*) value not defined in all devices. – LL_SYSCFG_TIMBREAK_PVD (*) – LL_SYSCFG_TIMBREAK_SRAM_PARITY (*) – LL_SYSCFG_TIMBREAK_LOCKUP
Reference Manual to LL API cross reference:	• SYSCFG_CFGR2 LOCKUP_LOCK LL_SYSCFG_GetTIMBreakInputs • SYSCFG_CFGR2 SRAM_PARITY_LOCK LL_SYSCFG_GetTIMBreakInputs • SYSCFG_CFGR2 PVD_LOCK LL_SYSCFG_GetTIMBreakInputs

LL_SYSCFG_DisableSRAMParityCheck

Function name	**__STATIC_INLINE void LL_SYSCFG_DisableSRAMParityCheck (void)**
Function description	Disable RAM Parity Check Disable.
Return values	• **None**
Reference Manual to LL API cross reference:	• SYSCFG_CFGR2 BYP_ADDR_PAR LL_SYSCFG_DisableSRAMParityCheck

LL_SYSCFG_IsActiveFlag_SP

Function name	**__STATIC_INLINE uint32_t LL_SYSCFG_IsActiveFlag_SP (void)**
Function description	Check if SRAM parity error detected.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SYSCFG_CFGR2 SRAM_PE LL_SYSCFG_IsActiveFlag_SP

LL_SYSCFG_ClearFlag_SP

Function name	**__STATIC_INLINE void LL_SYSCFG_ClearFlag_SP (void)**
Function description	Clear SRAM parity error flag.
Return values	• **None**
Reference Manual to LL API cross reference:	• SYSCFG_CFGR2 SRAM_PE LL_SYSCFG_ClearFlag_SP

LL_SYSCFG_EnableCCM_SRAMPageWRP

Function name	**__STATIC_INLINE void LL_SYSCFG_EnableCCM_SRAMPageWRP (uint32_t PageWRP)**
Function description	Enable CCM SRAM page write protection.
Parameters	• **PageWRP:** This parameter can be a combination of the following values: (*) value not defined in all devices. – LL_SYSCFG_CCMSRAMWRP_PAGE0 – LL_SYSCFG_CCMSRAMWRP_PAGE1 – LL_SYSCFG_CCMSRAMWRP_PAGE2 – LL_SYSCFG_CCMSRAMWRP_PAGE3 – LL_SYSCFG_CCMSRAMWRP_PAGE4 (*) – LL_SYSCFG_CCMSRAMWRP_PAGE5 (*) – LL_SYSCFG_CCMSRAMWRP_PAGE6 (*) – LL_SYSCFG_CCMSRAMWRP_PAGE7 (*) – LL_SYSCFG_CCMSRAMWRP_PAGE8 (*) – LL_SYSCFG_CCMSRAMWRP_PAGE9 (*) – LL_SYSCFG_CCMSRAMWRP_PAGE10 (*) – LL_SYSCFG_CCMSRAMWRP_PAGE11 (*) – LL_SYSCFG_CCMSRAMWRP_PAGE12 (*) – LL_SYSCFG_CCMSRAMWRP_PAGE13 (*) – LL_SYSCFG_CCMSRAMWRP_PAGE14 (*) – LL_SYSCFG_CCMSRAMWRP_PAGE15 (*)
Return values	• **None**
Notes	• Write protection is cleared only by a system reset
Reference Manual to LL API cross reference:	• SYSCFG_RCR PAGE0 LL_SYSCFG_EnableCCM_SRAMPageWRP • SYSCFG_RCR PAGE1 LL_SYSCFG_EnableCCM_SRAMPageWRP • SYSCFG_RCR PAGE2 LL_SYSCFG_EnableCCM_SRAMPageWRP • SYSCFG_RCR PAGE3 LL_SYSCFG_EnableCCM_SRAMPageWRP • SYSCFG_RCR PAGE4 LL_SYSCFG_EnableCCM_SRAMPageWRP • SYSCFG_RCR PAGE5 LL_SYSCFG_EnableCCM_SRAMPageWRP • SYSCFG_RCR PAGE6 LL_SYSCFG_EnableCCM_SRAMPageWRP • SYSCFG_RCR PAGE7 LL_SYSCFG_EnableCCM_SRAMPageWRP • SYSCFG_RCR PAGE8 LL_SYSCFG_EnableCCM_SRAMPageWRP • SYSCFG_RCR PAGE9 LL_SYSCFG_EnableCCM_SRAMPageWRP • SYSCFG_RCR PAGE10 LL_SYSCFG_EnableCCM_SRAMPageWRP • SYSCFG_RCR PAGE11 LL_SYSCFG_EnableCCM_SRAMPageWRP • SYSCFG_RCR PAGE12

LL_SYSCFG_EnableCCM_SRAMPageWRP
- SYSCFG_RCR PAGE13 LL_SYSCFG_EnableCCM_SRAMPageWRP
- SYSCFG_RCR PAGE14 LL_SYSCFG_EnableCCM_SRAMPageWRP
- SYSCFG_RCR PAGE15 LL_SYSCFG_EnableCCM_SRAMPageWRP

LL_DBGMCU_GetDeviceID

Function name	**__STATIC_INLINE uint32_t LL_DBGMCU_GetDeviceID (void)**
Function description	Return the device identifier.
Return values	• **Values:** between Min_Data=0x00 and Max_Data=0xFFF
Notes	• For STM32F303xC, STM32F358xx and STM32F302xC devices, the device ID is 0x422 • For STM32F373xx and STM32F378xx devices, the device ID is 0x432 • For STM32F303x8, STM32F334xx and STM32F328xx devices, the device ID is 0x438. • For STM32F302x8, STM32F301x8 and STM32F318xx devices, the device ID is 0x439 • For STM32F303xE, STM32F398xx and STM32F302xE devices, the device ID is 0x446
Reference Manual to LL API cross reference:	• DBGMCU_IDCODE DEV_ID LL_DBGMCU_GetDeviceID

LL_DBGMCU_GetRevisionID

Function name	**__STATIC_INLINE uint32_t LL_DBGMCU_GetRevisionID (void)**
Function description	Return the device revision identifier.
Return values	• **Values:** between Min_Data=0x00 and Max_Data=0xFFFF
Notes	• This field indicates the revision of the device.
Reference Manual to LL API cross reference:	• DBGMCU_IDCODE REV_ID LL_DBGMCU_GetRevisionID

LL_DBGMCU_EnableDBGSleepMode

Function name	**__STATIC_INLINE void LL_DBGMCU_EnableDBGSleepMode (void)**
Function description	Enable the Debug Module during SLEEP mode.
Return values	• **None**
Reference Manual to LL API cross reference:	• DBGMCU_CR DBG_SLEEP LL_DBGMCU_EnableDBGSleepMode

LL_DBGMCU_DisableDBGSleepMode

Function name	**__STATIC_INLINE void LL_DBGMCU_DisableDBGSleepMode (void)**
Function description	Disable the Debug Module during SLEEP mode.
Return values	• **None**
Reference Manual to LL API cross reference:	• DBGMCU_CR DBG_SLEEP LL_DBGMCU_DisableDBGSleepMode

LL_DBGMCU_EnableDBGStopMode

Function name	**__STATIC_INLINE void LL_DBGMCU_EnableDBGStopMode (void)**
Function description	Enable the Debug Module during STOP mode.
Return values	• **None**
Reference Manual to LL API cross reference:	• DBGMCU_CR DBG_STOP LL_DBGMCU_EnableDBGStopMode

LL_DBGMCU_DisableDBGStopMode

Function name	**__STATIC_INLINE void LL_DBGMCU_DisableDBGStopMode (void)**
Function description	Disable the Debug Module during STOP mode.
Return values	• **None**
Reference Manual to LL API cross reference:	• DBGMCU_CR DBG_STOP LL_DBGMCU_DisableDBGStopMode

LL_DBGMCU_EnableDBGStandbyMode

Function name	**__STATIC_INLINE void LL_DBGMCU_EnableDBGStandbyMode (void)**
Function description	Enable the Debug Module during STANDBY mode.
Return values	• **None**
Reference Manual to LL API cross reference:	• DBGMCU_CR DBG_STANDBY LL_DBGMCU_EnableDBGStandbyMode

LL_DBGMCU_DisableDBGStandbyMode

Function name	**__STATIC_INLINE void LL_DBGMCU_DisableDBGStandbyMode (void)**
Function description	Disable the Debug Module during STANDBY mode.
Return values	• **None**
Reference Manual to	• DBGMCU_CR DBG_STANDBY

LL API cross reference: LL_DBGMCU_DisableDBGStandbyMode

LL_DBGMCU_SetTracePinAssignment

Function name **__STATIC_INLINE void LL_DBGMCU_SetTracePinAssignment (uint32_t PinAssignment)**

Function description Set Trace pin assignment control.

Parameters
- **PinAssignment:** This parameter can be one of the following values:
  - LL_DBGMCU_TRACE_NONE
  - LL_DBGMCU_TRACE_ASYNCH
  - LL_DBGMCU_TRACE_SYNCH_SIZE1
  - LL_DBGMCU_TRACE_SYNCH_SIZE2
  - LL_DBGMCU_TRACE_SYNCH_SIZE4

Return values
- **None**

Reference Manual to LL API cross reference:
- DBGMCU_CR TRACE_IOEN LL_DBGMCU_SetTracePinAssignment
- DBGMCU_CR TRACE_MODE LL_DBGMCU_SetTracePinAssignment

LL_DBGMCU_GetTracePinAssignment

Function name **__STATIC_INLINE uint32_t LL_DBGMCU_GetTracePinAssignment (void)**

Function description Get Trace pin assignment control.

Return values
- **Returned:** value can be one of the following values:
  - LL_DBGMCU_TRACE_NONE
  - LL_DBGMCU_TRACE_ASYNCH
  - LL_DBGMCU_TRACE_SYNCH_SIZE1
  - LL_DBGMCU_TRACE_SYNCH_SIZE2
  - LL_DBGMCU_TRACE_SYNCH_SIZE4

Reference Manual to LL API cross reference:
- DBGMCU_CR TRACE_IOEN LL_DBGMCU_GetTracePinAssignment
- DBGMCU_CR TRACE_MODE LL_DBGMCU_GetTracePinAssignment

LL_DBGMCU_APB1_GRP1_FreezePeriph

Function name **__STATIC_INLINE void LL_DBGMCU_APB1_GRP1_FreezePeriph (uint32_t Periphs)**

Function description Freeze APB1 peripherals (group1 peripherals)

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_DBGMCU_APB1_GRP1_TIM2_STOP
  - LL_DBGMCU_APB1_GRP1_TIM3_STOP (*)
  - LL_DBGMCU_APB1_GRP1_TIM4_STOP (*)
  - LL_DBGMCU_APB1_GRP1_TIM5_STOP (*)
  - LL_DBGMCU_APB1_GRP1_TIM6_STOP

- LL_DBGMCU_APB1_GRP1_TIM7_STOP (*)
- LL_DBGMCU_APB1_GRP1_TIM12_STOP (*)
- LL_DBGMCU_APB1_GRP1_TIM13_STOP (*)
- LL_DBGMCU_APB1_GRP1_TIM14_STOP (*)
- LL_DBGMCU_APB1_GRP1_TIM18_STOP (*)
- LL_DBGMCU_APB1_GRP1_RTC_STOP
- LL_DBGMCU_APB1_GRP1_WWDG_STOP
- LL_DBGMCU_APB1_GRP1_IWDG_STOP
- LL_DBGMCU_APB1_GRP1_I2C1_STOP
- LL_DBGMCU_APB1_GRP1_I2C2_STOP (*)
- LL_DBGMCU_APB1_GRP1_I2C3_STOP (*)
- LL_DBGMCU_APB1_GRP1_CAN_STOP (*)

Return values

- **None**

Reference Manual to LL API cross reference:

- APB1_FZ DBG_TIM2_STOP
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_TIM3_STOP
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_TIM4_STOP
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_TIM5_STOP
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_TIM6_STOP
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_TIM7_STOP
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_TIM12_STOP
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_TIM13_STOP
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_TIM14_STOP
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_TIM18_STOP
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_RTC_STOP
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_WWDG_STOP
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_IWDG_STOP
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_I2C1_SMBUS_TIMEOUT
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_I2C2_SMBUS_TIMEOUT
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_I2C3_SMBUS_TIMEOUT
  LL_DBGMCU_APB1_GRP1_FreezePeriph
- APB1_FZ DBG_CAN_STOP
  LL_DBGMCU_APB1_GRP1_FreezePeriph

LL_DBGMCU_APB1_GRP1_UnFreezePeriph

Function name

__STATIC_INLINE void LL_DBGMCU_APB1_GRP1_UnFreezePeriph (uint32_t Periphs)

Function description

Unfreeze APB1 peripherals (group1 peripherals)

Parameters

- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_DBGMCU_APB1_GRP1_TIM2_STOP
  - LL_DBGMCU_APB1_GRP1_TIM3_STOP (*)
  - LL_DBGMCU_APB1_GRP1_TIM4_STOP (*)
  - LL_DBGMCU_APB1_GRP1_TIM5_STOP (*)
  - LL_DBGMCU_APB1_GRP1_TIM6_STOP
  - LL_DBGMCU_APB1_GRP1_TIM7_STOP (*)
  - LL_DBGMCU_APB1_GRP1_TIM12_STOP (*)
  - LL_DBGMCU_APB1_GRP1_TIM13_STOP (*)
  - LL_DBGMCU_APB1_GRP1_TIM14_STOP (*)
  - LL_DBGMCU_APB1_GRP1_TIM18_STOP (*)
  - LL_DBGMCU_APB1_GRP1_RTC_STOP
  - LL_DBGMCU_APB1_GRP1_WWDG_STOP
  - LL_DBGMCU_APB1_GRP1_IWDG_STOP
  - LL_DBGMCU_APB1_GRP1_I2C1_STOP
  - LL_DBGMCU_APB1_GRP1_I2C2_STOP (*)
  - LL_DBGMCU_APB1_GRP1_I2C3_STOP (*)
  - LL_DBGMCU_APB1_GRP1_CAN_STOP (*)

Return values

- **None**

Reference Manual to LL API cross reference:

- APB1_FZ DBG_TIM2_STOP LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_TIM3_STOP LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_TIM4_STOP LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_TIM5_STOP LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_TIM6_STOP LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_TIM7_STOP LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_TIM12_STOP LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_TIM13_STOP LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_TIM14_STOP LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_TIM18_STOP LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_RTC_STOP LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_WWDG_STOP LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_IWDG_STOP LL_DBGMCU_APB1_GRP1_UnFreezePeriph

- APB1_FZ DBG_I2C1_SMBUS_TIMEOUT LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_I2C2_SMBUS_TIMEOUT LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_I2C3_SMBUS_TIMEOUT LL_DBGMCU_APB1_GRP1_UnFreezePeriph
- APB1_FZ DBG_CAN_STOP LL_DBGMCU_APB1_GRP1_UnFreezePeriph

LL_DBGMCU_APB2_GRP1_FreezePeriph

Function name **__STATIC_INLINE void LL_DBGMCU_APB2_GRP1_FreezePeriph (uint32_t Periphs)**

Function description Freeze APB2 peripherals.

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_DBGMCU_APB2_GRP1_TIM1_STOP (*)
  - LL_DBGMCU_APB2_GRP1_TIM8_STOP (*)
  - LL_DBGMCU_APB2_GRP1_TIM15_STOP
  - LL_DBGMCU_APB2_GRP1_TIM16_STOP
  - LL_DBGMCU_APB2_GRP1_TIM17_STOP
  - LL_DBGMCU_APB2_GRP1_TIM19_STOP (*)
  - LL_DBGMCU_APB2_GRP1_TIM20_STOP (*)
  - LL_DBGMCU_APB2_GRP1_HRTIM1_STOP (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- APB2_FZ DBG_TIM1_STOP LL_DBGMCU_APB2_GRP1_FreezePeriph
- APB2_FZ DBG_TIM8_STOP LL_DBGMCU_APB2_GRP1_FreezePeriph
- APB2_FZ DBG_TIM15_STOP LL_DBGMCU_APB2_GRP1_FreezePeriph
- APB2_FZ DBG_TIM16_STOP LL_DBGMCU_APB2_GRP1_FreezePeriph
- APB2_FZ DBG_TIM17_STOP LL_DBGMCU_APB2_GRP1_FreezePeriph
- APB2_FZ DBG_TIM19_STOP LL_DBGMCU_APB2_GRP1_FreezePeriph
- APB2_FZ DBG_TIM20_STOP LL_DBGMCU_APB2_GRP1_FreezePeriph
- APB2_FZ DBG_HRTIM1_STOP LL_DBGMCU_APB2_GRP1_FreezePeriph

LL_DBGMCU_APB2_GRP1_UnFreezePeriph

Function name **__STATIC_INLINE void LL_DBGMCU_APB2_GRP1_UnFreezePeriph (uint32_t Periphs)**

Function description Unfreeze APB2 peripherals.

Parameters
- **Periphs:** This parameter can be a combination of the following values: (*) value not defined in all devices.
  - LL_DBGMCU_APB2_GRP1_TIM1_STOP (*)

- LL_DBGMCU_APB2_GRP1_TIM8_STOP (*)
- LL_DBGMCU_APB2_GRP1_TIM15_STOP
- LL_DBGMCU_APB2_GRP1_TIM16_STOP
- LL_DBGMCU_APB2_GRP1_TIM17_STOP
- LL_DBGMCU_APB2_GRP1_TIM19_STOP (*)
- LL_DBGMCU_APB2_GRP1_TIM20_STOP (*)
- LL_DBGMCU_APB2_GRP1_HRTIM1_STOP (*)

Return values
- **None**

Reference Manual to LL API cross reference:
- APB2_FZ DBG_TIM1_STOP LL_DBGMCU_APB2_GRP1_UnFreezePeriph
- APB2_FZ DBG_TIM8_STOP LL_DBGMCU_APB2_GRP1_UnFreezePeriph
- APB2_FZ DBG_TIM15_STOP LL_DBGMCU_APB2_GRP1_UnFreezePeriph
- APB2_FZ DBG_TIM16_STOP LL_DBGMCU_APB2_GRP1_UnFreezePeriph
- APB2_FZ DBG_TIM17_STOP LL_DBGMCU_APB2_GRP1_UnFreezePeriph
- APB2_FZ DBG_TIM19_STOP LL_DBGMCU_APB2_GRP1_UnFreezePeriph
- APB2_FZ DBG_TIM20_STOP LL_DBGMCU_APB2_GRP1_UnFreezePeriph
- APB2_FZ DBG_HRTIM1_STOP LL_DBGMCU_APB2_GRP1_UnFreezePeriph

LL_FLASH_SetLatency

Function name
__STATIC_INLINE void LL_FLASH_SetLatency (uint32_t Latency)

Function description
Set FLASH Latency.

Parameters
- **Latency:** This parameter can be one of the following values:
  - LL_FLASH_LATENCY_0
  - LL_FLASH_LATENCY_1
  - LL_FLASH_LATENCY_2

Return values
- **None**

Reference Manual to LL API cross reference:
- FLASH_ACR LATENCY LL_FLASH_SetLatency

LL_FLASH_GetLatency

Function name
__STATIC_INLINE uint32_t LL_FLASH_GetLatency (void)

Function description
Get FLASH Latency.

Return values
- **Returned:** value can be one of the following values:
  - LL_FLASH_LATENCY_0
  - LL_FLASH_LATENCY_1
  - LL_FLASH_LATENCY_2

Reference Manual to LL API cross
- FLASH_ACR LATENCY LL_FLASH_GetLatency

reference:

LL_FLASH_EnablePrefetch

Function name	**__STATIC_INLINE void LL_FLASH_EnablePrefetch (void)**
Function description	Enable Prefetch.
Return values	• **None**
Reference Manual to LL API cross reference:	• FLASH_ACR PRFTBE LL_FLASH_EnablePrefetch

LL_FLASH_DisablePrefetch

Function name	**__STATIC_INLINE void LL_FLASH_DisablePrefetch (void)**
Function description	Disable Prefetch.
Return values	• **None**
Reference Manual to LL API cross reference:	• FLASH_ACR PRFTBE LL_FLASH_DisablePrefetch

LL_FLASH_IsPrefetchEnabled

Function name	**__STATIC_INLINE uint32_t LL_FLASH_IsPrefetchEnabled (void)**
Function description	Check if Prefetch buffer is enabled.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• FLASH_ACR PRFTBS LL_FLASH_IsPrefetchEnabled

LL_FLASH_EnableHalfCycleAccess

Function name	**__STATIC_INLINE void LL_FLASH_EnableHalfCycleAccess (void)**
Function description	Enable Flash Half Cycle Access.
Return values	• **None**
Reference Manual to LL API cross reference:	• FLASH_ACR HLFCYA LL_FLASH_EnableHalfCycleAccess

LL_FLASH_DisableHalfCycleAccess

Function name	**__STATIC_INLINE void LL_FLASH_DisableHalfCycleAccess (void)**
Function description	Disable Flash Half Cycle Access.
Return values	• **None**

Reference Manual to LL API cross reference:	• FLASH_ACR HLFCYA LL_FLASH_DisableHalfCycleAccess

LL_FLASH_IsHalfCycleAccessEnabled

Function name	**__STATIC_INLINE uint32_t LL_FLASH_IsHalfCycleAccessEnabled (void)**
Function description	Check if Flash Half Cycle Access is enabled or not.
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• FLASH_ACR HLFCYA LL_FLASH_IsHalfCycleAccessEnabled

77.2 SYSTEM Firmware driver defines

77.2.1 SYSTEM

SYSCFG ADC DMA request REMAP

LL_SYSCFG_ADC24_RMP_DMA2_CH12	ADC24 DMA requests mapped on DMA2 channels 1 and 2
LL_SYSCFG_ADC24_RMP_DMA2_CH34	ADC24 DMA requests mapped on DMA2 channels 3 and 4

DBGMCU APB1 GRP1 STOP IP

LL_DBGMCU_APB1_GRP1_TIM2_STOP	TIM2 counter stopped when core is halted
LL_DBGMCU_APB1_GRP1_TIM3_STOP	TIM3 counter stopped when core is halted
LL_DBGMCU_APB1_GRP1_TIM4_STOP	TIM4 counter stopped when core is halted
LL_DBGMCU_APB1_GRP1_TIM6_STOP	TIM6 counter stopped when core is halted
LL_DBGMCU_APB1_GRP1_TIM7_STOP	TIM7 counter stopped when core is halted
LL_DBGMCU_APB1_GRP1_RTC_STOP	RTC counter stopped when core is halted
LL_DBGMCU_APB1_GRP1_WWDG_STOP	Debug Window Watchdog stopped when Core is halted
LL_DBGMCU_APB1_GRP1_IWDG_STOP	Debug Independent Watchdog stopped when Core is halted
LL_DBGMCU_APB1_GRP1_I2C1_STOP	I2C1 SMBUS timeout mode stopped when Core is halted
LL_DBGMCU_APB1_GRP1_I2C2_STOP	I2C2 SMBUS timeout mode stopped when Core is halted
LL_DBGMCU_APB1_GRP1_CAN_STOP	CAN debug stopped when Core is halted

DBGMCU APB2 GRP1 STOP IP

LL_DBGMCU_APB2_GRP1_TIM1_STOP	TIM1 counter stopped when core is halted
LL_DBGMCU_APB2_GRP1_TIM8_STOP	TIM8 counter stopped when core is halted
LL_DBGMCU_APB2_GRP1_TIM15_STOP	TIM15 counter stopped when core is halted

LL_DBGMCU_APB2_GRP1_TIM16_STOP	TIM16 counter stopped when core is halted
LL_DBGMCU_APB2_GRP1_TIM17_STOP	TIM17 counter stopped when core is halted

SYSCFG CCM SRAM WRP

LL_SYSCFG_CCMSRAMWRP_PAGE0	ICODE SRAM Write protection page 0
LL_SYSCFG_CCMSRAMWRP_PAGE1	ICODE SRAM Write protection page 1
LL_SYSCFG_CCMSRAMWRP_PAGE2	ICODE SRAM Write protection page 2
LL_SYSCFG_CCMSRAMWRP_PAGE3	ICODE SRAM Write protection page 3
LL_SYSCFG_CCMSRAMWRP_PAGE4	ICODE SRAM Write protection page 4
LL_SYSCFG_CCMSRAMWRP_PAGE5	ICODE SRAM Write protection page 5
LL_SYSCFG_CCMSRAMWRP_PAGE6	ICODE SRAM Write protection page 6
LL_SYSCFG_CCMSRAMWRP_PAGE7	ICODE SRAM Write protection page 7

SYSCFG DAC1/2 DMA1/2 request REMAP

LL_SYSCFG_DAC1_CH1_RMP_DMA2_CH3	DAC_CH1 DMA requests mapped on DMA2 channel 3
LL_SYSCFG_DAC1_CH1_RMP_DMA1_CH3	DAC_CH1 DMA requests mapped on DMA1 channel 3
LL_SYSCFG_DAC1_OUT2_RMP_DMA2_CH4	DAC1_OUT2 DMA requests mapped on DMA2 channel 4
LL_SYSCFG_DAC1_OUT2_RMP_DMA1_CH4	DAC1_OUT2 DMA requests mapped on DMA1 channel 4

SYSCFG DAC1 Trigger REMAP

LL_SYSCFG_DAC1_TRIG1_RMP_TIM8_TRGO	No remap: DAC trigger TRIG1 is TIM8_TRGO
LL_SYSCFG_DAC1_TRIG1_RMP_TIM3_TRGO	DAC trigger is TIM3_TRGO

SYSCFG EXTI LINE

LL_SYSCFG_EXTI_LINE0
LL_SYSCFG_EXTI_LINE1
LL_SYSCFG_EXTI_LINE2
LL_SYSCFG_EXTI_LINE3
LL_SYSCFG_EXTI_LINE4
LL_SYSCFG_EXTI_LINE5
LL_SYSCFG_EXTI_LINE6
LL_SYSCFG_EXTI_LINE7
LL_SYSCFG_EXTI_LINE8
LL_SYSCFG_EXTI_LINE9
LL_SYSCFG_EXTI_LINE10
LL_SYSCFG_EXTI_LINE11
LL_SYSCFG_EXTI_LINE12

LL_SYSCFG_EXTI_LINE13

LL_SYSCFG_EXTI_LINE14

LL_SYSCFG_EXTI_LINE15

SYSCFG EXTI PORT

LL_SYSCFG_EXTI_PORTA	EXTI PORT A
LL_SYSCFG_EXTI_PORTB	EXTI PORT B
LL_SYSCFG_EXTI_PORTC	EXTI PORT C
LL_SYSCFG_EXTI_PORTD	EXTI PORT D
LL_SYSCFG_EXTI_PORTE	EXTI PORT E
LL_SYSCFG_EXTI_PORTF	EXTI PORT F

SYSCFG I2C FASTMODEPLUS

LL_SYSCFG_I2C_FASTMODEPLUS_PB6	I2C PB6 Fast mode plus
LL_SYSCFG_I2C_FASTMODEPLUS_PB7	I2C PB7 Fast mode plus
LL_SYSCFG_I2C_FASTMODEPLUS_PB8	I2C PB8 Fast mode plus
LL_SYSCFG_I2C_FASTMODEPLUS_PB9	I2C PB9 Fast mode plus
LL_SYSCFG_I2C_FASTMODEPLUS_I2C1	I2C1 Fast mode plus
LL_SYSCFG_I2C_FASTMODEPLUS_I2C2	I2C2 Fast mode plus

FLASH LATENCY

LL_FLASH_LATENCY_0	FLASH Zero Latency cycle
LL_FLASH_LATENCY_1	FLASH One Latency cycle
LL_FLASH_LATENCY_2	FLASH Two Latency cycles

SYSCFG REMAP

LL_SYSCFG_REMAP_FLASH

LL_SYSCFG_REMAP_SYSTEMFLASH

LL_SYSCFG_REMAP_SRAM

SYSCFG TIM DMA request REMAP

LL_SYSCFG_TIM16_RMP_DMA1_CH3	TIM16_CH1 and TIM16_UP DMA requests mapped on DMA1 channel 3
LL_SYSCFG_TIM16_RMP_DMA1_CH6	TIM16_CH1 and TIM16_UP DMA requests mapped on DMA1 channel 6
LL_SYSCFG_TIM17_RMP_DMA1_CH1	TIM17_CH1 and TIM17_UP DMA requests mapped on DMA1 channel 1
LL_SYSCFG_TIM17_RMP_DMA1_CH7	TIM17_CH1 and TIM17_UP DMA requests mapped on DMA1 channel 7
LL_SYSCFG_TIM6_RMP_DMA2_CH3	TIM6 DMA requests mapped on DMA2 channel 3
LL_SYSCFG_TIM6_RMP_DMA1_CH3	TIM6 DMA requests mapped on DMA1 channel 3

LL_SYSCFG_TIM7_RMP_DMA2_CH4	TIM7 DMA requests mapped on DMA2 channel 4
LL_SYSCFG_TIM7_RMP_DMA1_CH4	TIM7 DMA requests mapped on DMA1 channel 4

SYSCFG TIM REMAP

LL_SYSCFG_TIM1_ITR3_RMP_TIM4_TRGO	TIM1_ITR3 = TIM4_TRGO
LL_SYSCFG_TIM1_ITR3_RMP_TIM17_OC	TIM1_ITR3 = TIM17_OC
LL_SYSCFG_TIM15_ENCODEMODE_NOREDIRECTION	No redirection
LL_SYSCFG_TIM15_ENCODEMODE_TIM2	TIM2 IC1 and TIM2 IC2 are connected to TIM15 IC1 and TIM15 IC2 respectively
LL_SYSCFG_TIM15_ENCODEMODE_TIM3	TIM3 IC1 and TIM3 IC2 are connected to TIM15 IC1 and TIM15 IC2 respectively
LL_SYSCFG_TIM15_ENCODEMODE_TIM4	TIM4 IC1 and TIM4 IC2 are connected to TIM15 IC1 and TIM15 IC2 respectively

SYSCFG TIMER BREAK

LL_SYSCFG_TIMBREAK_PVD	Enables and locks the PVD connection with TIMx Break Input and also the PVDE and PLS bits of the Power Control Interface
LL_SYSCFG_TIMBREAK_SRAM_PARITY	Enables and locks the SRAM_PARITY error signal with Break Input of TIMx
LL_SYSCFG_TIMBREAK_LOCKUP	Enables and locks the LOCKUP (Hardfault) output of CortexM0 with Break Input of TIMx

DBGMCU TRACE Pin Assignment

LL_DBGMCU_TRACE_NONE	TRACE pins not assigned (default state)
LL_DBGMCU_TRACE_ASYNCH	TRACE pin assignment for Asynchronous Mode
LL_DBGMCU_TRACE_SYNCH_SIZE1	TRACE pin assignment for Synchronous Mode with a TRACEDATA size of 1
LL_DBGMCU_TRACE_SYNCH_SIZE2	TRACE pin assignment for Synchronous Mode with a TRACEDATA size of 2
LL_DBGMCU_TRACE_SYNCH_SIZE4	TRACE pin assignment for Synchronous Mode with a TRACEDATA size of 4

78 LL TIM Generic Driver

78.1 TIM Firmware driver registers structures

78.1.1 LL_TIM_InitTypeDef

Data Fields

- ***uint16_t Prescaler***
- ***uint32_t CounterMode***
- ***uint32_t Autoreload***
- ***uint32_t ClockDivision***
- ***uint8_t RepetitionCounter***

Field Documentation

- ***uint16_t LL_TIM_InitTypeDef::Prescaler***
  Specifies the prescaler value used to divide the TIM clock. This parameter can be a number between Min_Data=0x0000 and Max_Data=0xFFFF.This feature can be modified afterwards using unitary function **LL_TIM_SetPrescaler()**.
- ***uint32_t LL_TIM_InitTypeDef::CounterMode***
  Specifies the counter mode. This parameter can be a value of ***TIM_LL_EC_COUNTERMODE***.This feature can be modified afterwards using unitary function **LL_TIM_SetCounterMode()**.
- ***uint32_t LL_TIM_InitTypeDef::Autoreload***
  Specifies the auto reload value to be loaded into the active Auto-Reload Register at the next update event. This parameter must be a number between Min_Data=0x0000 and Max_Data=0xFFFF. Some timer instances may support 32 bits counters. In that case this parameter must be a number between 0x0000 and 0xFFFFFFFF.This feature can be modified afterwards using unitary function **LL_TIM_SetAutoReload()**.
- ***uint32_t LL_TIM_InitTypeDef::ClockDivision***
  Specifies the clock division. This parameter can be a value of ***TIM_LL_EC_CLOCKDIVISION***.This feature can be modified afterwards using unitary function **LL_TIM_SetClockDivision()**.
- ***uint8_t LL_TIM_InitTypeDef::RepetitionCounter***
  Specifies the repetition counter value. Each time the RCR downcounter reaches zero, an update event is generated and counting restarts from the RCR value (N). This means in PWM mode that (N+1) corresponds to:the number of PWM periods in edge-aligned modethe number of half PWM period in center-aligned mode This parameter must be a number between 0x00 and 0xFF. This feature can be modified afterwards using unitary function **LL_TIM_SetRepetitionCounter()**.

78.1.2 LL_TIM_OC_InitTypeDef

Data Fields

- ***uint32_t OCMode***
- ***uint32_t OCState***
- ***uint32_t OCNState***
- ***uint32_t CompareValue***
- ***uint32_t OCPolarity***
- ***uint32_t OCNPolarity***
- ***uint32_t OCIdleState***
- ***uint32_t OCNIdleState***

Field Documentation

- ***uint32_t LL_TIM_OC_InitTypeDef::OCMode***
  Specifies the output mode. This parameter can be a value of ***TIM_LL_EC_OCMODE***.This feature can be modified afterwards using unitary function **LL_TIM_OC_SetMode()**.
- ***uint32_t LL_TIM_OC_InitTypeDef::OCState***
  Specifies the TIM Output Compare state. This parameter can be a value of ***TIM_LL_EC_OCSTATE***.This feature can be modified afterwards using unitary functions **LL_TIM_CC_EnableChannel()** or **LL_TIM_CC_DisableChannel()**.
- ***uint32_t LL_TIM_OC_InitTypeDef::OCNState***
  Specifies the TIM complementary Output Compare state. This parameter can be a value of ***TIM_LL_EC_OCSTATE***.This feature can be modified afterwards using unitary functions **LL_TIM_CC_EnableChannel()** or **LL_TIM_CC_DisableChannel()**.
- ***uint32_t LL_TIM_OC_InitTypeDef::CompareValue***
  Specifies the Compare value to be loaded into the Capture Compare Register. This parameter can be a number between Min_Data=0x0000 and Max_Data=0xFFFF.This feature can be modified afterwards using unitary function LL_TIM_OC_SetCompareCHx (x=1..6).
- ***uint32_t LL_TIM_OC_InitTypeDef::OCPolarity***
  Specifies the output polarity. This parameter can be a value of ***TIM_LL_EC_OCPOLARITY***.This feature can be modified afterwards using unitary function **LL_TIM_OC_SetPolarity()**.
- ***uint32_t LL_TIM_OC_InitTypeDef::OCNPolarity***
  Specifies the complementary output polarity. This parameter can be a value of ***TIM_LL_EC_OCPOLARITY***.This feature can be modified afterwards using unitary function **LL_TIM_OC_SetPolarity()**.
- ***uint32_t LL_TIM_OC_InitTypeDef::OCIdleState***
  Specifies the TIM Output Compare pin state during Idle state. This parameter can be a value of ***TIM_LL_EC_OCIDLESTATE***.This feature can be modified afterwards using unitary function **LL_TIM_OC_SetIdleState()**.
- ***uint32_t LL_TIM_OC_InitTypeDef::OCNIdleState***
  Specifies the TIM Output Compare pin state during Idle state. This parameter can be a value of ***TIM_LL_EC_OCIDLESTATE***.This feature can be modified afterwards using unitary function **LL_TIM_OC_SetIdleState()**.

78.1.3 LL_TIM_IC_InitTypeDef

Data Fields

- ***uint32_t ICPolarity***
- ***uint32_t ICActiveInput***
- ***uint32_t ICPrescaler***
- ***uint32_t ICFilter***

Field Documentation

- ***uint32_t LL_TIM_IC_InitTypeDef::ICPolarity***
  Specifies the active edge of the input signal. This parameter can be a value of ***TIM_LL_EC_IC_POLARITY***.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetPolarity()**.
- ***uint32_t LL_TIM_IC_InitTypeDef::ICActiveInput***
  Specifies the input. This parameter can be a value of ***TIM_LL_EC_ACTIVEINPUT***.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetActiveInput()**.
- ***uint32_t LL_TIM_IC_InitTypeDef::ICPrescaler***
  Specifies the Input Capture Prescaler. This parameter can be a value of

TIM_LL_EC_ICPSC.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetPrescaler()**.

- ***uint32_t LL_TIM_IC_InitTypeDef::ICFilter***
  Specifies the input capture filter. This parameter can be a value of *TIM_LL_EC_IC_FILTER*.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetFilter()**.

78.1.4 LL_TIM_ENCODER_InitTypeDef

Data Fields

- ***uint32_t EncoderMode***
- ***uint32_t IC1Polarity***
- ***uint32_t IC1ActiveInput***
- ***uint32_t IC1Prescaler***
- ***uint32_t IC1Filter***
- ***uint32_t IC2Polarity***
- ***uint32_t IC2ActiveInput***
- ***uint32_t IC2Prescaler***
- ***uint32_t IC2Filter***

Field Documentation

- ***uint32_t LL_TIM_ENCODER_InitTypeDef::EncoderMode***
  Specifies the encoder resolution (x2 or x4). This parameter can be a value of *TIM_LL_EC_ENCODERMODE*.This feature can be modified afterwards using unitary function **LL_TIM_SetEncoderMode()**.
- ***uint32_t LL_TIM_ENCODER_InitTypeDef::IC1Polarity***
  Specifies the active edge of TI1 input. This parameter can be a value of *TIM_LL_EC_IC_POLARITY*.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetPolarity()**.
- ***uint32_t LL_TIM_ENCODER_InitTypeDef::IC1ActiveInput***
  Specifies the TI1 input source This parameter can be a value of *TIM_LL_EC_ACTIVEINPUT*.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetActiveInput()**.
- ***uint32_t LL_TIM_ENCODER_InitTypeDef::IC1Prescaler***
  Specifies the TI1 input prescaler value. This parameter can be a value of *TIM_LL_EC_ICPSC*.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetPrescaler()**.
- ***uint32_t LL_TIM_ENCODER_InitTypeDef::IC1Filter***
  Specifies the TI1 input filter. This parameter can be a value of *TIM_LL_EC_IC_FILTER*.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetFilter()**.
- ***uint32_t LL_TIM_ENCODER_InitTypeDef::IC2Polarity***
  Specifies the active edge of TI2 input. This parameter can be a value of *TIM_LL_EC_IC_POLARITY*.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetPolarity()**.
- ***uint32_t LL_TIM_ENCODER_InitTypeDef::IC2ActiveInput***
  Specifies the TI2 input source This parameter can be a value of *TIM_LL_EC_ACTIVEINPUT*.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetActiveInput()**.
- ***uint32_t LL_TIM_ENCODER_InitTypeDef::IC2Prescaler***
  Specifies the TI2 input prescaler value. This parameter can be a value of *TIM_LL_EC_ICPSC*.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetPrescaler()**.

- ***uint32_t LL_TIM_ENCODER_InitTypeDef::IC2Filter***
  Specifies the TI2 input filter. This parameter can be a value of ***TIM_LL_EC_IC_FILTER***.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetFilter()**.

78.1.5 LL_TIM_HALLSENSOR_InitTypeDef

Data Fields

- ***uint32_t IC1Polarity***
- ***uint32_t IC1Prescaler***
- ***uint32_t IC1Filter***
- ***uint32_t CommutationDelay***

Field Documentation

- ***uint32_t LL_TIM_HALLSENSOR_InitTypeDef::IC1Polarity***
  Specifies the active edge of TI1 input. This parameter can be a value of ***TIM_LL_EC_IC_POLARITY***.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetPolarity()**.
- ***uint32_t LL_TIM_HALLSENSOR_InitTypeDef::IC1Prescaler***
  Specifies the TI1 input prescaler value. Prescaler must be set to get a maximum counter period longer than the time interval between 2 consecutive changes on the Hall inputs. This parameter can be a value of ***TIM_LL_EC_ICPSC***.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetPrescaler()**.
- ***uint32_t LL_TIM_HALLSENSOR_InitTypeDef::IC1Filter***
  Specifies the TI1 input filter. This parameter can be a value of ***TIM_LL_EC_IC_FILTER***.This feature can be modified afterwards using unitary function **LL_TIM_IC_SetFilter()**.
- ***uint32_t LL_TIM_HALLSENSOR_InitTypeDef::CommutationDelay***
  Specifies the compare value to be loaded into the Capture Compare Register. A positive pulse (TRGO event) is generated with a programmable delay every time a change occurs on the Hall inputs. This parameter can be a number between Min_Data = 0x0000 and Max_Data = 0xFFFF.This feature can be modified afterwards using unitary function **LL_TIM_OC_SetCompareCH2()**.

78.1.6 LL_TIM_BDTR_InitTypeDef

Data Fields

- ***uint32_t OSSRState***
- ***uint32_t OSSIState***
- ***uint32_t LockLevel***
- ***uint8_t DeadTime***
- ***uint16_t BreakState***
- ***uint32_t BreakPolarity***
- ***uint32_t BreakFilter***
- ***uint32_t Break2State***
- ***uint32_t Break2Polarity***
- ***uint32_t Break2Filter***
- ***uint32_t AutomaticOutput***

Field Documentation

- ***uint32_t LL_TIM_BDTR_InitTypeDef::OSSRState***
  Specifies the Off-State selection used in Run mode. This parameter can be a value of ***TIM_LL_EC_OSSR***This feature can be modified afterwards using unitary function **LL_TIM_SetOffStates()**

Note: This bit-field cannot be modified as long as LOCK level 2 has been programmed.

- ***uint32_t LL_TIM_BDTR_InitTypeDef::OSSIState***
  Specifies the Off-State used in Idle state. This parameter can be a value of ***TIM_LL_EC_OSSI***This feature can be modified afterwards using unitary function **LL_TIM_SetOffStates()**
  Note: This bit-field cannot be modified as long as LOCK level 2 has been programmed.
- ***uint32_t LL_TIM_BDTR_InitTypeDef::LockLevel***
  Specifies the LOCK level parameters. This parameter can be a value of ***TIM_LL_EC_LOCKLEVEL***
  Note: The LOCK bits can be written only once after the reset. Once the TIMx_BDTR register has been written, their content is frozen until the next reset.
- ***uint8_t LL_TIM_BDTR_InitTypeDef::DeadTime***
  Specifies the delay time between the switching-off and the switching-on of the outputs. This parameter can be a number between Min_Data = 0x00 and Max_Data = 0xFF.This feature can be modified afterwards using unitary function **LL_TIM_OC_SetDeadTime()**
  Note: This bit-field can not be modified as long as LOCK level 1, 2 or 3 has been programmed.
- ***uint16_t LL_TIM_BDTR_InitTypeDef::BreakState***
  Specifies whether the TIM Break input is enabled or not. This parameter can be a value of ***TIM_LL_EC_BREAK_ENABLE***This feature can be modified afterwards using unitary functions **LL_TIM_EnableBRK()** or **LL_TIM_DisableBRK()**
  Note: This bit-field can not be modified as long as LOCK level 1 has been programmed.
- ***uint32_t LL_TIM_BDTR_InitTypeDef::BreakPolarity***
  Specifies the TIM Break Input pin polarity. This parameter can be a value of ***TIM_LL_EC_BREAK_POLARITY***This feature can be modified afterwards using unitary function **LL_TIM_ConfigBRK()**
  Note: This bit-field can not be modified as long as LOCK level 1 has been programmed.
- ***uint32_t LL_TIM_BDTR_InitTypeDef::BreakFilter***
  Specifies the TIM Break Filter. This parameter can be a value of ***TIM_LL_EC_BREAK_FILTER***This feature can be modified afterwards using unitary function **LL_TIM_ConfigBRK()**
  Note: This bit-field can not be modified as long as LOCK level 1 has been programmed.
- ***uint32_t LL_TIM_BDTR_InitTypeDef::Break2State***
  Specifies whether the TIM Break2 input is enabled or not. This parameter can be a value of ***TIM_LL_EC_BREAK2_ENABLE***This feature can be modified afterwards using unitary functions **LL_TIM_EnableBRK2()** or **LL_TIM_DisableBRK2()**
  Note: This bit-field can not be modified as long as LOCK level 1 has been programmed.
- ***uint32_t LL_TIM_BDTR_InitTypeDef::Break2Polarity***
  Specifies the TIM Break2 Input pin polarity. This parameter can be a value of ***TIM_LL_EC_BREAK2_POLARITY***This feature can be modified afterwards using unitary function **LL_TIM_ConfigBRK2()**
  Note: This bit-field can not be modified as long as LOCK level 1 has been programmed.
- ***uint32_t LL_TIM_BDTR_InitTypeDef::Break2Filter***
  Specifies the TIM Break2 Filter. This parameter can be a value of ***TIM_LL_EC_BREAK2_FILTER***This feature can be modified afterwards using unitary function **LL_TIM_ConfigBRK2()**

Note: This bit-field can not be modified as long as LOCK level 1 has been programmed.

- ***uint32_t LL_TIM_BDTR_InitTypeDef::AutomaticOutput***
  Specifies whether the TIM Automatic Output feature is enabled or not. This parameter can be a value of ***TIM_LL_EC_AUTOMATICOUTPUT_ENABLE***This feature can be modified afterwards using unitary functions **LL_TIM_EnableAutomaticOutput()** or **LL_TIM_DisableAutomaticOutput()**
  Note: This bit-field can not be modified as long as LOCK level 1 has been programmed.

78.2 TIM Firmware driver API description

78.2.1 Detailed description of functions

LL_TIM_EnableCounter

Function name	**__STATIC_INLINE void LL_TIM_EnableCounter (TIM_TypeDef * TIMx)**
Function description	Enable timer counter.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 CEN LL_TIM_EnableCounter

LL_TIM_DisableCounter

Function name	**__STATIC_INLINE void LL_TIM_DisableCounter (TIM_TypeDef * TIMx)**
Function description	Disable timer counter.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 CEN LL_TIM_DisableCounter

LL_TIM_IsEnabledCounter

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledCounter (TIM_TypeDef * TIMx)**
Function description	Indicates whether the timer counter is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 CEN LL_TIM_IsEnabledCounter

LL_TIM_EnableUpdateEvent

Function name	**__STATIC_INLINE void LL_TIM_EnableUpdateEvent (TIM_TypeDef * TIMx)**
Function description	Enable update event generation.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 UDIS LL_TIM_EnableUpdateEvent

LL_TIM_DisableUpdateEvent

Function name	**__STATIC_INLINE void LL_TIM_DisableUpdateEvent (TIM_TypeDef * TIMx)**
Function description	Disable update event generation.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 UDIS LL_TIM_DisableUpdateEvent

LL_TIM_IsEnabledUpdateEvent

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledUpdateEvent (TIM_TypeDef * TIMx)**
Function description	Indicates whether update event generation is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 UDIS LL_TIM_IsEnabledUpdateEvent

LL_TIM_SetUpdateSource

Function name	**__STATIC_INLINE void LL_TIM_SetUpdateSource (TIM_TypeDef * TIMx, uint32_t UpdateSource)**
Function description	Set update event source.
Parameters	• **TIMx:** Timer instance • **UpdateSource:** This parameter can be one of the following values: – LL_TIM_UPDATESOURCE_REGULAR – LL_TIM_UPDATESOURCE_COUNTER
Return values	• **None**
Notes	• Update event source set to LL_TIM_UPDATESOURCE_REGULAR: any of the following

events generate an update interrupt or DMA request if enabled: Counter overflow/underflowSetting the UG bitUpdate generation through the slave mode controller
- Update event source set to LL_TIM_UPDATESOURCE_COUNTER: only counter overflow/underflow generates an update interrupt or DMA request if enabled.

Reference Manual to LL API cross reference:
- CR1 URS LL_TIM_SetUpdateSource

LL_TIM_GetUpdateSource

Function name **__STATIC_INLINE uint32_t LL_TIM_GetUpdateSource (TIM_TypeDef * TIMx)**

Function description Get actual event update source.

Parameters
- **TIMx:** Timer instance

Return values
- **Returned:** value can be one of the following values:
  - LL_TIM_UPDATESOURCE_REGULAR
  - LL_TIM_UPDATESOURCE_COUNTER

Reference Manual to LL API cross reference:
- CR1 URS LL_TIM_GetUpdateSource

LL_TIM_SetOnePulseMode

Function name **__STATIC_INLINE void LL_TIM_SetOnePulseMode (TIM_TypeDef * TIMx, uint32_t OnePulseMode)**

Function description Set one pulse mode (one shot v.s.

Parameters
- **TIMx:** Timer instance
- **OnePulseMode:** This parameter can be one of the following values:
  - LL_TIM_ONEPULSEMODE_SINGLE
  - LL_TIM_ONEPULSEMODE_REPETITIVE

Return values
- **None**

Reference Manual to LL API cross reference:
- CR1 OPM LL_TIM_SetOnePulseMode

LL_TIM_GetOnePulseMode

Function name **__STATIC_INLINE uint32_t LL_TIM_GetOnePulseMode (TIM_TypeDef * TIMx)**

Function description Get actual one pulse mode.

Parameters
- **TIMx:** Timer instance

Return values
- **Returned:** value can be one of the following values:
  - LL_TIM_ONEPULSEMODE_SINGLE

– LL_TIM_ONEPULSEMODE_REPETITIVE

Reference Manual to LL API cross reference:
- CR1 OPM LL_TIM_GetOnePulseMode

LL_TIM_SetCounterMode

Function name
__STATIC_INLINE void LL_TIM_SetCounterMode (TIM_TypeDef * TIMx, uint32_t CounterMode)

Function description
Set the timer counter counting mode.

Parameters
- **TIMx:** Timer instance
- **CounterMode:** This parameter can be one of the following values:
  – LL_TIM_COUNTERMODE_UP
  – LL_TIM_COUNTERMODE_DOWN
  – LL_TIM_COUNTERMODE_CENTER_UP
  – LL_TIM_COUNTERMODE_CENTER_DOWN
  – LL_TIM_COUNTERMODE_CENTER_UP_DOWN

Return values
- **None**

Notes
- Macro IS_TIM_COUNTER_MODE_SELECT_INSTANCE(TIMx) can be used to check whether or not the counter mode selection feature is supported by a timer instance.

Reference Manual to LL API cross reference:
- CR1 DIR LL_TIM_SetCounterMode
- CR1 CMS LL_TIM_SetCounterMode

LL_TIM_GetCounterMode

Function name
__STATIC_INLINE uint32_t LL_TIM_GetCounterMode (TIM_TypeDef * TIMx)

Function description
Get actual counter mode.

Parameters
- **TIMx:** Timer instance

Return values
- **Returned:** value can be one of the following values:
  – LL_TIM_COUNTERMODE_UP
  – LL_TIM_COUNTERMODE_DOWN
  – LL_TIM_COUNTERMODE_CENTER_UP
  – LL_TIM_COUNTERMODE_CENTER_DOWN
  – LL_TIM_COUNTERMODE_CENTER_UP_DOWN

Notes
- Macro IS_TIM_COUNTER_MODE_SELECT_INSTANCE(TIMx) can be used to check whether or not the counter mode selection feature is supported by a timer instance.

Reference Manual to LL API cross reference:
- CR1 DIR LL_TIM_GetCounterMode
- CR1 CMS LL_TIM_GetCounterMode

LL_TIM_EnableARRPreload

Function name	**__STATIC_INLINE void LL_TIM_EnableARRPreload (TIM_TypeDef * TIMx)**
Function description	Enable auto-reload (ARR) preload.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 ARPE LL_TIM_EnableARRPreload

LL_TIM_DisableARRPreload

Function name	**__STATIC_INLINE void LL_TIM_DisableARRPreload (TIM_TypeDef * TIMx)**
Function description	Disable auto-reload (ARR) preload.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 ARPE LL_TIM_DisableARRPreload

LL_TIM_IsEnabledARRPreload

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledARRPreload (TIM_TypeDef * TIMx)**
Function description	Indicates whether auto-reload (ARR) preload is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 ARPE LL_TIM_IsEnabledARRPreload

LL_TIM_SetClockDivision

Function name	**__STATIC_INLINE void LL_TIM_SetClockDivision (TIM_TypeDef * TIMx, uint32_t ClockDivision)**
Function description	Set the division ratio between the timer clock and the sampling clock used by the dead-time generators (when supported) and the digital filters.
Parameters	• **TIMx:** Timer instance • **ClockDivision:** This parameter can be one of the following values: – LL_TIM_CLOCKDIVISION_DIV1 – LL_TIM_CLOCKDIVISION_DIV2 – LL_TIM_CLOCKDIVISION_DIV4

Return values	• **None**
Notes	• Macro IS_TIM_CLOCK_DIVISION_INSTANCE(TIMx) can be used to check whether or not the clock division feature is supported by the timer instance.
Reference Manual to LL API cross reference:	• CR1 CKD LL_TIM_SetClockDivision

LL_TIM_GetClockDivision

Function name	**__STATIC_INLINE uint32_t LL_TIM_GetClockDivision (TIM_TypeDef * TIMx)**
Function description	Get the actual division ratio between the timer clock and the sampling clock used by the dead-time generators (when supported) and the digital filters.
Parameters	• **TIMx:** Timer instance
Return values	• **Returned:** value can be one of the following values: – LL_TIM_CLOCKDIVISION_DIV1 – LL_TIM_CLOCKDIVISION_DIV2 – LL_TIM_CLOCKDIVISION_DIV4
Notes	• Macro IS_TIM_CLOCK_DIVISION_INSTANCE(TIMx) can be used to check whether or not the clock division feature is supported by the timer instance.
Reference Manual to LL API cross reference:	• CR1 CKD LL_TIM_GetClockDivision

LL_TIM_SetCounter

Function name	**__STATIC_INLINE void LL_TIM_SetCounter (TIM_TypeDef * TIMx, uint32_t Counter)**
Function description	Set the counter value.
Parameters	• **TIMx:** Timer instance • **Counter:** Counter value (between Min_Data=0 and Max_Data=0xFFFF or 0xFFFFFFFF)
Return values	• **None**
Notes	• Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter.
Reference Manual to LL API cross reference:	• CNT CNT LL_TIM_SetCounter

LL_TIM_GetCounter

Function name	**__STATIC_INLINE uint32_t LL_TIM_GetCounter (TIM_TypeDef * TIMx)**

Function description	Get the counter value.
Parameters	• **TIMx:** Timer instance
Return values	• **Counter:** value (between Min_Data=0 and Max_Data=0xFFFF or 0xFFFFFFFF)
Notes	• Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter.
Reference Manual to LL API cross reference:	• CNT CNT LL_TIM_GetCounter

LL_TIM_GetDirection

Function name	**__STATIC_INLINE uint32_t LL_TIM_GetDirection (TIM_TypeDef * TIMx)**
Function description	Get the current direction of the counter.
Parameters	• **TIMx:** Timer instance
Return values	• **Returned:** value can be one of the following values: – LL_TIM_COUNTERDIRECTION_UP – LL_TIM_COUNTERDIRECTION_DOWN
Reference Manual to LL API cross reference:	• CR1 DIR LL_TIM_GetDirection

LL_TIM_SetPrescaler

Function name	**__STATIC_INLINE void LL_TIM_SetPrescaler (TIM_TypeDef * TIMx, uint32_t Prescaler)**
Function description	Set the prescaler value.
Parameters	• **TIMx:** Timer instance • **Prescaler:** between Min_Data=0 and Max_Data=65535
Return values	• **None**
Notes	• The counter clock frequency CK_CNT is equal to fCK_PSC / (PSC[15:0] + 1). • The prescaler can be changed on the fly as this control register is buffered. The new prescaler ratio is taken into account at the next update event. • Helper macro __LL_TIM_CALC_PSC can be used to calculate the Prescaler parameter
Reference Manual to LL API cross reference:	• PSC PSC LL_TIM_SetPrescaler

LL_TIM_GetPrescaler

Function name	**__STATIC_INLINE uint32_t LL_TIM_GetPrescaler (TIM_TypeDef * TIMx)**
Function description	Get the prescaler value.
Parameters	• **TIMx:** Timer instance
Return values	• **Prescaler:** value between Min_Data=0 and Max_Data=65535
Reference Manual to LL API cross reference:	• PSC PSC LL_TIM_GetPrescaler

LL_TIM_SetAutoReload

Function name	**__STATIC_INLINE void LL_TIM_SetAutoReload (TIM_TypeDef * TIMx, uint32_t AutoReload)**
Function description	Set the auto-reload value.
Parameters	• **TIMx:** Timer instance • **AutoReload:** between Min_Data=0 and Max_Data=65535
Return values	• **None**
Notes	• The counter is blocked while the auto-reload value is null. • Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter. • Helper macro __LL_TIM_CALC_ARR can be used to calculate the AutoReload parameter
Reference Manual to LL API cross reference:	• ARR ARR LL_TIM_SetAutoReload

LL_TIM_GetAutoReload

Function name	**__STATIC_INLINE uint32_t LL_TIM_GetAutoReload (TIM_TypeDef * TIMx)**
Function description	Get the auto-reload value.
Parameters	• **TIMx:** Timer instance
Return values	• **Auto-reload:** value
Notes	• Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter.
Reference Manual to LL API cross reference:	• ARR ARR LL_TIM_GetAutoReload

LL_TIM_SetRepetitionCounter

Function name	**__STATIC_INLINE void LL_TIM_SetRepetitionCounter (TIM_TypeDef * TIMx, uint32_t RepetitionCounter)**
Function description	Set the repetition counter value.
Parameters	• **TIMx:** Timer instance • **RepetitionCounter:** between Min_Data=0 and Max_Data=255
Return values	• **None**
Notes	• For advanced timer instances RepetitionCounter can be up to 65535 except for STM32F373xC and STM32F378xx devices. • Macro IS_TIM_REPETITION_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a repetition counter.
Reference Manual to LL API cross reference:	• RCR REP LL_TIM_SetRepetitionCounter

LL_TIM_GetRepetitionCounter

Function name	**__STATIC_INLINE uint32_t LL_TIM_GetRepetitionCounter (TIM_TypeDef * TIMx)**
Function description	Get the repetition counter value.
Parameters	• **TIMx:** Timer instance
Return values	• **Repetition:** counter value
Notes	• Macro IS_TIM_REPETITION_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a repetition counter.
Reference Manual to LL API cross reference:	• RCR REP LL_TIM_GetRepetitionCounter

LL_TIM_EnableUIFRemap

Function name	**__STATIC_INLINE void LL_TIM_EnableUIFRemap (TIM_TypeDef * TIMx)**
Function description	Force a continuous copy of the update interrupt flag (UIF) into the timer counter register (bit 31).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Notes	• This allows both the counter value and a potential roll-over condition signalled by the UIFCPY flag to be read in an atomic way.
Reference Manual to LL API cross reference:	• CR1 UIFREMAP LL_TIM_EnableUIFRemap

LL_TIM_DisableUIFRemap

Function name	**__STATIC_INLINE void LL_TIM_DisableUIFRemap (TIM_TypeDef * TIMx)**
Function description	Disable update interrupt flag (UIF) remapping.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 UIFREMAP LL_TIM_DisableUIFRemap

LL_TIM_CC_EnablePreload

Function name	**__STATIC_INLINE void LL_TIM_CC_EnablePreload (TIM_TypeDef * TIMx)**
Function description	Enable the capture/compare control bits (CCxE, CCxNE and OCxM) preload.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Notes	• CCxE, CCxNE and OCxM bits are preloaded, after having been written, they are updated only when a commutation event (COM) occurs. • Only on channels that have a complementary output. • Macro IS_TIM_COMMUTATION_EVENT_INSTANCE(TIMx) can be used to check whether or not a timer instance is able to generate a commutation event.
Reference Manual to LL API cross reference:	• CR2 CCPC LL_TIM_CC_EnablePreload

LL_TIM_CC_DisablePreload

Function name	**__STATIC_INLINE void LL_TIM_CC_DisablePreload (TIM_TypeDef * TIMx)**
Function description	Disable the capture/compare control bits (CCxE, CCxNE and OCxM) preload.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Notes	• Macro IS_TIM_COMMUTATION_EVENT_INSTANCE(TIMx) can be used to check whether or not a timer instance is able to generate a commutation event.
Reference Manual to LL API cross reference:	• CR2 CCPC LL_TIM_CC_DisablePreload

LL_TIM_CC_SetUpdate

Function name	**__STATIC_INLINE void LL_TIM_CC_SetUpdate (TIM_TypeDef * TIMx, uint32_t CCUpdateSource)**
Function description	Set the updated source of the capture/compare control bits (CCxE, CCxNE and OCxM).
Parameters	• **TIMx:** Timer instance • **CCUpdateSource:** This parameter can be one of the following values: – LL_TIM_CCUPDATESOURCE_COMG_ONLY – LL_TIM_CCUPDATESOURCE_COMG_AND_TRGI
Return values	• **None**
Notes	• Macro IS_TIM_COMMUTATION_EVENT_INSTANCE(TIMx) can be used to check whether or not a timer instance is able to generate a commutation event.
Reference Manual to LL API cross reference:	• CR2 CCUS LL_TIM_CC_SetUpdate

LL_TIM_CC_SetDMAReqTrigger

Function name	**__STATIC_INLINE void LL_TIM_CC_SetDMAReqTrigger (TIM_TypeDef * TIMx, uint32_t DMAReqTrigger)**
Function description	Set the trigger of the capture/compare DMA request.
Parameters	• **TIMx:** Timer instance • **DMAReqTrigger:** This parameter can be one of the following values: – LL_TIM_CCDMAREQUEST_CC – LL_TIM_CCDMAREQUEST_UPDATE
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 CCDS LL_TIM_CC_SetDMAReqTrigger

LL_TIM_CC_GetDMAReqTrigger

Function name	**__STATIC_INLINE uint32_t LL_TIM_CC_GetDMAReqTrigger (TIM_TypeDef * TIMx)**
Function description	Get actual trigger of the capture/compare DMA request.
Parameters	• **TIMx:** Timer instance
Return values	• **Returned:** value can be one of the following values: – LL_TIM_CCDMAREQUEST_CC – LL_TIM_CCDMAREQUEST_UPDATE
Reference Manual to LL API cross reference:	• CR2 CCDS LL_TIM_CC_GetDMAReqTrigger

LL_TIM_CC_SetLockLevel

Function name	**__STATIC_INLINE void LL_TIM_CC_SetLockLevel (TIM_TypeDef * TIMx, uint32_t LockLevel)**
Function description	Set the lock level to freeze the configuration of several capture/compare parameters.
Parameters	• **TIMx:** Timer instance • **LockLevel:** This parameter can be one of the following values: – LL_TIM_LOCKLEVEL_OFF – LL_TIM_LOCKLEVEL_1 – LL_TIM_LOCKLEVEL_2 – LL_TIM_LOCKLEVEL_3
Return values	• **None**
Notes	• Macro IS_TIM_BREAK_INSTANCE(TIMx) can be used to check whether or not the lock mechanism is supported by a timer instance.
Reference Manual to LL API cross reference:	• BDTR LOCK LL_TIM_CC_SetLockLevel

LL_TIM_CC_EnableChannel

Function name	**__STATIC_INLINE void LL_TIM_CC_EnableChannel (TIM_TypeDef * TIMx, uint32_t Channels)**
Function description	Enable capture/compare channels.
Parameters	• **TIMx:** Timer instance • **Channels:** This parameter can be a combination of the following values: – LL_TIM_CHANNEL_CH1 – LL_TIM_CHANNEL_CH1N – LL_TIM_CHANNEL_CH2 – LL_TIM_CHANNEL_CH2N – LL_TIM_CHANNEL_CH3 – LL_TIM_CHANNEL_CH3N – LL_TIM_CHANNEL_CH4 – LL_TIM_CHANNEL_CH5 – LL_TIM_CHANNEL_CH6
Return values	• **None**
Notes	• CH5 and CH6 channels are not available for all F3 devices
Reference Manual to LL API cross reference:	• CCER CC1E LL_TIM_CC_EnableChannel • CCER CC1NE LL_TIM_CC_EnableChannel • CCER CC2E LL_TIM_CC_EnableChannel • CCER CC2NE LL_TIM_CC_EnableChannel • CCER CC3E LL_TIM_CC_EnableChannel • CCER CC3NE LL_TIM_CC_EnableChannel • CCER CC4E LL_TIM_CC_EnableChannel • CCER CC5E LL_TIM_CC_EnableChannel

- CCER CC6E LL_TIM_CC_EnableChannel

LL_TIM_CC_DisableChannel

Function name
__STATIC_INLINE void LL_TIM_CC_DisableChannel (TIM_TypeDef * TIMx, uint32_t Channels)

Function description
Disable capture/compare channels.

Parameters
- **TIMx:** Timer instance
- **Channels:** This parameter can be a combination of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH1N
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH2N
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH3N
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6

Return values
- **None**

Notes
- CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CCER CC1E LL_TIM_CC_DisableChannel
- CCER CC1NE LL_TIM_CC_DisableChannel
- CCER CC2E LL_TIM_CC_DisableChannel
- CCER CC2NE LL_TIM_CC_DisableChannel
- CCER CC3E LL_TIM_CC_DisableChannel
- CCER CC3NE LL_TIM_CC_DisableChannel
- CCER CC4E LL_TIM_CC_DisableChannel
- CCER CC5E LL_TIM_CC_DisableChannel
- CCER CC6E LL_TIM_CC_DisableChannel

LL_TIM_CC_IsEnabledChannel

Function name
__STATIC_INLINE uint32_t LL_TIM_CC_IsEnabledChannel (TIM_TypeDef * TIMx, uint32_t Channels)

Function description
Indicate whether channel(s) is(are) enabled.

Parameters
- **TIMx:** Timer instance
- **Channels:** This parameter can be a combination of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH1N
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH2N
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH3N
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6

Return values
- **State:** of bit (1 or 0).

Notes
- CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CCER CC1E LL_TIM_CC_IsEnabledChannel
- CCER CC1NE LL_TIM_CC_IsEnabledChannel
- CCER CC2E LL_TIM_CC_IsEnabledChannel
- CCER CC2NE LL_TIM_CC_IsEnabledChannel
- CCER CC3E LL_TIM_CC_IsEnabledChannel
- CCER CC3NE LL_TIM_CC_IsEnabledChannel
- CCER CC4E LL_TIM_CC_IsEnabledChannel
- CCER CC5E LL_TIM_CC_IsEnabledChannel
- CCER CC6E LL_TIM_CC_IsEnabledChannel

LL_TIM_OC_ConfigOutput

Function name
__STATIC_INLINE void LL_TIM_OC_ConfigOutput (TIM_TypeDef * TIMx, uint32_t Channel, uint32_t Configuration)

Function description
Configure an output channel.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6
- **Configuration:** This parameter must be a combination of all the following values:
  - LL_TIM_OCPOLARITY_HIGH or LL_TIM_OCPOLARITY_LOW
  - LL_TIM_OCIDLESTATE_LOW or LL_TIM_OCIDLESTATE_HIGH

Return values
- **None**

Notes
- CH3 CH4 CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CCMR1 CC1S LL_TIM_OC_ConfigOutput
- CCMR1 CC2S LL_TIM_OC_ConfigOutput
- CCMR2 CC3S LL_TIM_OC_ConfigOutput
- CCMR2 CC4S LL_TIM_OC_ConfigOutput
- CCMR3 CC5S LL_TIM_OC_ConfigOutput
- CCMR3 CC6S LL_TIM_OC_ConfigOutput
- CCER CC1P LL_TIM_OC_ConfigOutput
- CCER CC2P LL_TIM_OC_ConfigOutput
- CCER CC3P LL_TIM_OC_ConfigOutput
- CCER CC4P LL_TIM_OC_ConfigOutput
- CCER CC5P LL_TIM_OC_ConfigOutput
- CCER CC6P LL_TIM_OC_ConfigOutput
- CR2 OIS1 LL_TIM_OC_ConfigOutput
- CR2 OIS2 LL_TIM_OC_ConfigOutput

- CR2 OIS3 LL_TIM_OC_ConfigOutput
- CR2 OIS4 LL_TIM_OC_ConfigOutput
- CR2 OIS5 LL_TIM_OC_ConfigOutput
- CR2 OIS6 LL_TIM_OC_ConfigOutput

LL_TIM_OC_SetMode

Function name	**__STATIC_INLINE void LL_TIM_OC_SetMode (TIM_TypeDef * TIMx, uint32_t Channel, uint32_t Mode)**
Function description	Define the behavior of the output reference signal OCxREF from which OCx and OCxN (when relevant) are derived.
Parameters	• **TIMx:** Timer instance • **Channel:** This parameter can be one of the following values: – LL_TIM_CHANNEL_CH1 – LL_TIM_CHANNEL_CH2 – LL_TIM_CHANNEL_CH3 – LL_TIM_CHANNEL_CH4 – LL_TIM_CHANNEL_CH5 – LL_TIM_CHANNEL_CH6 • **Mode:** This parameter can be one of the following values: – LL_TIM_OCMODE_FROZEN – LL_TIM_OCMODE_ACTIVE – LL_TIM_OCMODE_INACTIVE – LL_TIM_OCMODE_TOGGLE – LL_TIM_OCMODE_FORCED_INACTIVE – LL_TIM_OCMODE_FORCED_ACTIVE – LL_TIM_OCMODE_PWM1 – LL_TIM_OCMODE_PWM2 – LL_TIM_OCMODE_RETRIG_OPM1 – LL_TIM_OCMODE_RETRIG_OPM2 – LL_TIM_OCMODE_COMBINED_PWM1 – LL_TIM_OCMODE_COMBINED_PWM2 – LL_TIM_OCMODE_ASSYMETRIC_PWM1 – LL_TIM_OCMODE_ASSYMETRIC_PWM2
Return values	• **None**
Notes	• The following OC modes are not available on all F3 devices : LL_TIM_OCMODE_RETRIG_OPM1LL_TIM_OCMODE_RETRIG_OPM2LL_TIM_OCMODE_COMBINED_PWM1LL_TIM_OCMODE_COMBINED_PWM2LL_TIM_OCMODE_ASSYMETRIC_PWM1LL_TIM_OCMODE_ASSYMETRIC_PWM2 • CH5 and CH6 channels are not available for all F3 devices
Reference Manual to LL API cross reference:	• CCMR1 OC1M LL_TIM_OC_SetMode • CCMR1 OC2M LL_TIM_OC_SetMode • CCMR2 OC3M LL_TIM_OC_SetMode • CCMR2 OC4M LL_TIM_OC_SetMode • CCMR3 OC5M LL_TIM_OC_SetMode • CCMR3 OC6M LL_TIM_OC_SetMode

LL_TIM_OC_GetMode

Function name
__STATIC_INLINE uint32_t LL_TIM_OC_GetMode (TIM_TypeDef * TIMx, uint32_t Channel)

Function description
Get the output compare mode of an output channel.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6

Return values
- **Returned:** value can be one of the following values:
  - LL_TIM_OCMODE_FROZEN
  - LL_TIM_OCMODE_ACTIVE
  - LL_TIM_OCMODE_INACTIVE
  - LL_TIM_OCMODE_TOGGLE
  - LL_TIM_OCMODE_FORCED_INACTIVE
  - LL_TIM_OCMODE_FORCED_ACTIVE
  - LL_TIM_OCMODE_PWM1
  - LL_TIM_OCMODE_PWM2
  - LL_TIM_OCMODE_RETRIG_OPM1
  - LL_TIM_OCMODE_RETRIG_OPM2
  - LL_TIM_OCMODE_COMBINED_PWM1
  - LL_TIM_OCMODE_COMBINED_PWM2
  - LL_TIM_OCMODE_ASSYMETRIC_PWM1
  - LL_TIM_OCMODE_ASSYMETRIC_PWM2

Notes
- The following OC modes are not available on all F3 devices : LL_TIM_OCMODE_RETRIG_OPM1LL_TIM_OCMODE_RETRIG_OPM2LL_TIM_OCMODE_COMBINED_PWM1LL_TIM_OCMODE_COMBINED_PWM2LL_TIM_OCMODE_ASSYMETRIC_PWM1LL_TIM_OCMODE_ASSYMETRIC_PWM2
- CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CCMR1 OC1M LL_TIM_OC_GetMode
- CCMR1 OC2M LL_TIM_OC_GetMode
- CCMR2 OC3M LL_TIM_OC_GetMode
- CCMR2 OC4M LL_TIM_OC_GetMode
- CCMR3 OC5M LL_TIM_OC_GetMode
- CCMR3 OC6M LL_TIM_OC_GetMode

LL_TIM_OC_SetPolarity

Function name
__STATIC_INLINE void LL_TIM_OC_SetPolarity (TIM_TypeDef * TIMx, uint32_t Channel, uint32_t Polarity)

Function description
Set the polarity of an output channel.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1

  - LL_TIM_CHANNEL_CH1N
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH2N
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH3N
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6
- **Polarity:** This parameter can be one of the following values:
  - LL_TIM_OCPOLARITY_HIGH
  - LL_TIM_OCPOLARITY_LOW

Return values
- **None**

Notes
- CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CCER CC1P LL_TIM_OC_SetPolarity
- CCER CC1NP LL_TIM_OC_SetPolarity
- CCER CC2P LL_TIM_OC_SetPolarity
- CCER CC2NP LL_TIM_OC_SetPolarity
- CCER CC3P LL_TIM_OC_SetPolarity
- CCER CC3NP LL_TIM_OC_SetPolarity
- CCER CC4P LL_TIM_OC_SetPolarity
- CCER CC5P LL_TIM_OC_SetPolarity
- CCER CC6P LL_TIM_OC_SetPolarity

LL_TIM_OC_GetPolarity

Function name
__STATIC_INLINE uint32_t LL_TIM_OC_GetPolarity (TIM_TypeDef * TIMx, uint32_t Channel)

Function description
Get the polarity of an output channel.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH1N
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH2N
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH3N
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6

Return values
- **Returned:** value can be one of the following values:
  - LL_TIM_OCPOLARITY_HIGH
  - LL_TIM_OCPOLARITY_LOW

Notes
- CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CCER CC1P LL_TIM_OC_GetPolarity
- CCER CC1NP LL_TIM_OC_GetPolarity
- CCER CC2P LL_TIM_OC_GetPolarity
- CCER CC2NP LL_TIM_OC_GetPolarity
- CCER CC3P LL_TIM_OC_GetPolarity

- CCER CC3NP LL_TIM_OC_GetPolarity
- CCER CC4P LL_TIM_OC_GetPolarity
- CCER CC5P LL_TIM_OC_GetPolarity
- CCER CC6P LL_TIM_OC_GetPolarity

LL_TIM_OC_SetIdleState

Function name
__STATIC_INLINE void LL_TIM_OC_SetIdleState (TIM_TypeDef * TIMx, uint32_t Channel, uint32_t IdleState)

Function description
Set the IDLE state of an output channel.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH1N
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH2N
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH3N
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6
- **IdleState:** This parameter can be one of the following values:
  - LL_TIM_OCIDLESTATE_LOW
  - LL_TIM_OCIDLESTATE_HIGH

Return values
- **None**

Notes
- This function is significant only for the timer instances supporting the break feature. Macro IS_TIM_BREAK_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a break input.
- CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CR2 OIS1 LL_TIM_OC_SetIdleState
- CR2 OIS2N LL_TIM_OC_SetIdleState
- CR2 OIS2 LL_TIM_OC_SetIdleState
- CR2 OIS2N LL_TIM_OC_SetIdleState
- CR2 OIS3 LL_TIM_OC_SetIdleState
- CR2 OIS3N LL_TIM_OC_SetIdleState
- CR2 OIS4 LL_TIM_OC_SetIdleState
- CR2 OIS5 LL_TIM_OC_SetIdleState
- CR2 OIS6 LL_TIM_OC_SetIdleState

LL_TIM_OC_GetIdleState

Function name
__STATIC_INLINE uint32_t LL_TIM_OC_GetIdleState (TIM_TypeDef * TIMx, uint32_t Channel)

Function description
Get the IDLE state of an output channel.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH1N

  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH2N
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH3N
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6

Return values
- **Returned:** value can be one of the following values:
  - LL_TIM_OCIDLESTATE_LOW
  - LL_TIM_OCIDLESTATE_HIGH

Notes
- CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CR2 OIS1 LL_TIM_OC_GetIdleState
- CR2 OIS2N LL_TIM_OC_GetIdleState
- CR2 OIS2 LL_TIM_OC_GetIdleState
- CR2 OIS2N LL_TIM_OC_GetIdleState
- CR2 OIS3 LL_TIM_OC_GetIdleState
- CR2 OIS3N LL_TIM_OC_GetIdleState
- CR2 OIS4 LL_TIM_OC_GetIdleState
- CR2 OIS5 LL_TIM_OC_GetIdleState
- CR2 OIS6 LL_TIM_OC_GetIdleState

LL_TIM_OC_EnableFast

Function name
__STATIC_INLINE void LL_TIM_OC_EnableFast (TIM_TypeDef * TIMx, uint32_t Channel)

Function description
Enable fast mode for the output channel.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6

Return values
- **None**

Notes
- Acts only if the channel is configured in PWM1 or PWM2 mode.
- OC5FE and OC6FE are not available for all F3 devices
- CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CCMR1 OC1FE LL_TIM_OC_EnableFast
- CCMR1 OC2FE LL_TIM_OC_EnableFast
- CCMR2 OC3FE LL_TIM_OC_EnableFast
- CCMR2 OC4FE LL_TIM_OC_EnableFast
- CCMR3 OC5FE LL_TIM_OC_EnableFast
- CCMR3 OC6FE LL_TIM_OC_EnableFast

LL_TIM_OC_DisableFast

Function name	**__STATIC_INLINE void LL_TIM_OC_DisableFast (TIM_TypeDef * TIMx, uint32_t Channel)**
Function description	Disable fast mode for the output channel.
Parameters	• **TIMx:** Timer instance • **Channel:** This parameter can be one of the following values: – LL_TIM_CHANNEL_CH1 – LL_TIM_CHANNEL_CH2 – LL_TIM_CHANNEL_CH3 – LL_TIM_CHANNEL_CH4 – LL_TIM_CHANNEL_CH5 – LL_TIM_CHANNEL_CH6
Return values	• **None**
Notes	• OC5FE and OC6FE are not available for all F3 devices • CH5 and CH6 channels are not available for all F3 devices
Reference Manual to LL API cross reference:	• CCMR1 OC1FE LL_TIM_OC_DisableFast • CCMR1 OC2FE LL_TIM_OC_DisableFast • CCMR2 OC3FE LL_TIM_OC_DisableFast • CCMR2 OC4FE LL_TIM_OC_DisableFast • CCMR3 OC5FE LL_TIM_OC_DisableFast • CCMR3 OC6FE LL_TIM_OC_DisableFast

LL_TIM_OC_IsEnabledFast

Function name	**__STATIC_INLINE uint32_t LL_TIM_OC_IsEnabledFast (TIM_TypeDef * TIMx, uint32_t Channel)**
Function description	Indicates whether fast mode is enabled for the output channel.
Parameters	• **TIMx:** Timer instance • **Channel:** This parameter can be one of the following values: – LL_TIM_CHANNEL_CH1 – LL_TIM_CHANNEL_CH2 – LL_TIM_CHANNEL_CH3 – LL_TIM_CHANNEL_CH4 – LL_TIM_CHANNEL_CH5 – LL_TIM_CHANNEL_CH6
Return values	• **State:** of bit (1 or 0).
Notes	• OC5FE and OC6FE are not available for all F3 devices • CH5 and CH6 channels are not available for all F3 devices
Reference Manual to LL API cross reference:	• CCMR1 OC1FE LL_TIM_OC_IsEnabledFast • CCMR1 OC2FE LL_TIM_OC_IsEnabledFast • CCMR2 OC3FE LL_TIM_OC_IsEnabledFast • CCMR2 OC4FE LL_TIM_OC_IsEnabledFast • CCMR3 OC5FE LL_TIM_OC_IsEnabledFast • CCMR3 OC6FE LL_TIM_OC_IsEnabledFast

LL_TIM_OC_EnablePreload

Function name
__STATIC_INLINE void LL_TIM_OC_EnablePreload (TIM_TypeDef * TIMx, uint32_t Channel)

Function description
Enable compare register (TIMx_CCRx) preload for the output channel.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6

Return values
- **None**

Notes
- OC5PE and OC6PE are not available for all F3 devices
- CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CCMR1 OC1PE LL_TIM_OC_EnablePreload
- CCMR1 OC2PE LL_TIM_OC_EnablePreload
- CCMR2 OC3PE LL_TIM_OC_EnablePreload
- CCMR2 OC4PE LL_TIM_OC_EnablePreload
- CCMR3 OC5PE LL_TIM_OC_EnablePreload
- CCMR3 OC6PE LL_TIM_OC_EnablePreload

LL_TIM_OC_DisablePreload

Function name
__STATIC_INLINE void LL_TIM_OC_DisablePreload (TIM_TypeDef * TIMx, uint32_t Channel)

Function description
Disable compare register (TIMx_CCRx) preload for the output channel.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6

Return values
- **None**

Notes
- OC5PE and OC6PE are not available for all F3 devices
- CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CCMR1 OC1PE LL_TIM_OC_DisablePreload
- CCMR1 OC2PE LL_TIM_OC_DisablePreload
- CCMR2 OC3PE LL_TIM_OC_DisablePreload
- CCMR2 OC4PE LL_TIM_OC_DisablePreload
- CCMR3 OC5PE LL_TIM_OC_DisablePreload
- CCMR3 OC6PE LL_TIM_OC_DisablePreload

LL_TIM_OC_IsEnabledPreload

Function name
__STATIC_INLINE uint32_t LL_TIM_OC_IsEnabledPreload (TIM_TypeDef * TIMx, uint32_t Channel)

Function description
Indicates whether compare register (TIMx_CCRx) preload is enabled for the output channel.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6

Return values
- **State:** of bit (1 or 0).

Notes
- OC5PE and OC6PE are not available for all F3 devices
- CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CCMR1 OC1PE LL_TIM_OC_IsEnabledPreload
- CCMR1 OC2PE LL_TIM_OC_IsEnabledPreload
- CCMR2 OC3PE LL_TIM_OC_IsEnabledPreload
- CCMR2 OC4PE LL_TIM_OC_IsEnabledPreload
- CCMR3 OC5PE LL_TIM_OC_IsEnabledPreload
- CCMR3 OC6PE LL_TIM_OC_IsEnabledPreload

LL_TIM_OC_EnableClear

Function name
__STATIC_INLINE void LL_TIM_OC_EnableClear (TIM_TypeDef * TIMx, uint32_t Channel)

Function description
Enable clearing the output channel on an external event.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6

Return values
- **None**

Notes
- This function can only be used in Output compare and PWM modes. It does not work in Forced mode.
- Macro IS_TIM_OCXREF_CLEAR_INSTANCE(TIMx) can be used to check whether or not a timer instance can clear the OCxREF signal on an external event.
- OC5CE and OC6CE are not available for all F3 devices
- CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CCMR1 OC1CE LL_TIM_OC_EnableClear
- CCMR1 OC2CE LL_TIM_OC_EnableClear
- CCMR2 OC3CE LL_TIM_OC_EnableClear

- CCMR2 OC4CE LL_TIM_OC_EnableClear
- CCMR3 OC5CE LL_TIM_OC_EnableClear
- CCMR3 OC6CE LL_TIM_OC_EnableClear

LL_TIM_OC_DisableClear

Function name
__STATIC_INLINE void LL_TIM_OC_DisableClear (TIM_TypeDef * TIMx, uint32_t Channel)

Function description
Disable clearing the output channel on an external event.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6

Return values
- **None**

Notes
- Macro IS_TIM_OCXREF_CLEAR_INSTANCE(TIMx) can be used to check whether or not a timer instance can clear the OCxREF signal on an external event.
- OC5CE and OC6CE are not available for all F3 devices
- CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CCMR1 OC1CE LL_TIM_OC_DisableClear
- CCMR1 OC2CE LL_TIM_OC_DisableClear
- CCMR2 OC3CE LL_TIM_OC_DisableClear
- CCMR2 OC4CE LL_TIM_OC_DisableClear
- CCMR3 OC5CE LL_TIM_OC_DisableClear
- CCMR3 OC6CE LL_TIM_OC_DisableClear

LL_TIM_OC_IsEnabledClear

Function name
__STATIC_INLINE uint32_t LL_TIM_OC_IsEnabledClear (TIM_TypeDef * TIMx, uint32_t Channel)

Function description
Indicates clearing the output channel on an external event is enabled for the output channel.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6

Return values
- **State:** of bit (1 or 0).

Notes
- This function enables clearing the output channel on an external event.
- This function can only be used in Output compare and PWM

modes. It does not work in Forced mode.
- Macro IS_TIM_OCXREF_CLEAR_INSTANCE(TIMx) can be used to check whether or not a timer instance can clear the OCxREF signal on an external event.
- OC5CE and OC6CE are not available for all F3 devices
- CH5 and CH6 channels are not available for all F3 devices

Reference Manual to LL API cross reference:
- CCMR1 OC1CE LL_TIM_OC_IsEnabledClear
- CCMR1 OC2CE LL_TIM_OC_IsEnabledClear
- CCMR2 OC3CE LL_TIM_OC_IsEnabledClear
- CCMR2 OC4CE LL_TIM_OC_IsEnabledClear
- CCMR3 OC5CE LL_TIM_OC_IsEnabledClear
- CCMR3 OC6CE LL_TIM_OC_IsEnabledClear

LL_TIM_OC_SetDeadTime

Function name: **__STATIC_INLINE void LL_TIM_OC_SetDeadTime (TIM_TypeDef * TIMx, uint32_t DeadTime)**

Function description: Set the dead-time delay (delay inserted between the rising edge of the OCxREF signal and the rising edge if the Ocx and OCxN signals).

Parameters:
- **TIMx:** Timer instance
- **DeadTime:** between Min_Data=0 and Max_Data=255

Return values:
- **None**

Notes:
- Macro IS_TIM_BREAK_INSTANCE(TIMx) can be used to check whether or not dead-time insertion feature is supported by a timer instance.
- Helper macro __LL_TIM_CALC_DEADTIME can be used to calculate the DeadTime parameter

Reference Manual to LL API cross reference:
- BDTR DTG LL_TIM_OC_SetDeadTime

LL_TIM_OC_SetCompareCH1

Function name: **__STATIC_INLINE void LL_TIM_OC_SetCompareCH1 (TIM_TypeDef * TIMx, uint32_t CompareValue)**

Function description: Set compare value for output channel 1 (TIMx_CCR1).

Parameters:
- **TIMx:** Timer instance
- **CompareValue:** between Min_Data=0 and Max_Data=65535

Return values:
- **None**

Notes:
- In 32-bit timer implementations compare value can be between 0x00000000 and 0xFFFFFFFF.
- Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter.
- Macro IS_TIM_CC1_INSTANCE(TIMx) can be used to check whether or not output channel 1 is supported by a timer

instance.

Reference Manual to LL API cross reference:
- CCR1 CCR1 LL_TIM_OC_SetCompareCH1

LL_TIM_OC_SetCompareCH2

Function name: **__STATIC_INLINE void LL_TIM_OC_SetCompareCH2 (TIM_TypeDef * TIMx, uint32_t CompareValue)**

Function description: Set compare value for output channel 2 (TIMx_CCR2).

Parameters:
- **TIMx:** Timer instance
- **CompareValue:** between Min_Data=0 and Max_Data=65535

Return values:
- **None**

Notes:
- In 32-bit timer implementations compare value can be between 0x00000000 and 0xFFFFFFFF.
- Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter.
- Macro IS_TIM_CC2_INSTANCE(TIMx) can be used to check whether or not output channel 2 is supported by a timer instance.

Reference Manual to LL API cross reference:
- CCR2 CCR2 LL_TIM_OC_SetCompareCH2

LL_TIM_OC_SetCompareCH3

Function name: **__STATIC_INLINE void LL_TIM_OC_SetCompareCH3 (TIM_TypeDef * TIMx, uint32_t CompareValue)**

Function description: Set compare value for output channel 3 (TIMx_CCR3).

Parameters:
- **TIMx:** Timer instance
- **CompareValue:** between Min_Data=0 and Max_Data=65535

Return values:
- **None**

Notes:
- In 32-bit timer implementations compare value can be between 0x00000000 and 0xFFFFFFFF.
- Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter.
- Macro IS_TIM_CC3_INSTANCE(TIMx) can be used to check whether or not output channel is supported by a timer instance.

Reference Manual to LL API cross reference:
- CCR3 CCR3 LL_TIM_OC_SetCompareCH3

LL_TIM_OC_SetCompareCH4

Function name	**__STATIC_INLINE void LL_TIM_OC_SetCompareCH4 (TIM_TypeDef * TIMx, uint32_t CompareValue)**
Function description	Set compare value for output channel 4 (TIMx_CCR4).
Parameters	• **TIMx:** Timer instance • **CompareValue:** between Min_Data=0 and Max_Data=65535
Return values	• **None**
Notes	• In 32-bit timer implementations compare value can be between 0x00000000 and 0xFFFFFFFF. • Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter. • Macro IS_TIM_CC4_INSTANCE(TIMx) can be used to check whether or not output channel 4 is supported by a timer instance.
Reference Manual to LL API cross reference:	• CCR4 CCR4 LL_TIM_OC_SetCompareCH4

LL_TIM_OC_SetCompareCH5

Function name	**__STATIC_INLINE void LL_TIM_OC_SetCompareCH5 (TIM_TypeDef * TIMx, uint32_t CompareValue)**
Function description	Set compare value for output channel 5 (TIMx_CCR5).
Parameters	• **TIMx:** Timer instance • **CompareValue:** between Min_Data=0 and Max_Data=65535
Return values	• **None**
Notes	• Macro IS_TIM_CC5_INSTANCE(TIMx) can be used to check whether or not output channel 5 is supported by a timer instance. • CH5 channel is not available for all F3 devices
Reference Manual to LL API cross reference:	• CCR5 CCR5 LL_TIM_OC_SetCompareCH5

LL_TIM_OC_SetCompareCH6

Function name	**__STATIC_INLINE void LL_TIM_OC_SetCompareCH6 (TIM_TypeDef * TIMx, uint32_t CompareValue)**
Function description	Set compare value for output channel 6 (TIMx_CCR6).
Parameters	• **TIMx:** Timer instance • **CompareValue:** between Min_Data=0 and Max_Data=65535
Return values	• **None**

Notes	• Macro IS_TIM_CC6_INSTANCE(TIMx) can be used to check whether or not output channel 6 is supported by a timer instance. CCR6 CCR6 LL_TIM_OC_SetCompareCH6 • CH6 channel is not available for all F3 devices

LL_TIM_OC_GetCompareCH1

Function name	**__STATIC_INLINE uint32_t LL_TIM_OC_GetCompareCH1 (TIM_TypeDef * TIMx)**
Function description	Get compare value (TIMx_CCR1) set for output channel 1.
Parameters	• **TIMx:** Timer instance
Return values	• **CompareValue:** (between Min_Data=0 and Max_Data=65535)
Notes	• In 32-bit timer implementations returned compare value can be between 0x00000000 and 0xFFFFFFFF. • Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter. • Macro IS_TIM_CC1_INSTANCE(TIMx) can be used to check whether or not output channel 1 is supported by a timer instance.
Reference Manual to LL API cross reference:	• CCR1 CCR1 LL_TIM_OC_GetCompareCH1

LL_TIM_OC_GetCompareCH2

Function name	**__STATIC_INLINE uint32_t LL_TIM_OC_GetCompareCH2 (TIM_TypeDef * TIMx)**
Function description	Get compare value (TIMx_CCR2) set for output channel 2.
Parameters	• **TIMx:** Timer instance
Return values	• **CompareValue:** (between Min_Data=0 and Max_Data=65535)
Notes	• In 32-bit timer implementations returned compare value can be between 0x00000000 and 0xFFFFFFFF. • Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter. • Macro IS_TIM_CC2_INSTANCE(TIMx) can be used to check whether or not output channel 2 is supported by a timer instance.
Reference Manual to LL API cross reference:	• CCR2 CCR2 LL_TIM_OC_GetCompareCH2

LL_TIM_OC_GetCompareCH3

Function name	**__STATIC_INLINE uint32_t LL_TIM_OC_GetCompareCH3 (TIM_TypeDef * TIMx)**

Function description	Get compare value (TIMx_CCR3) set for output channel 3.
Parameters	• **TIMx:** Timer instance
Return values	• **CompareValue:** (between Min_Data=0 and Max_Data=65535)
Notes	• In 32-bit timer implementations returned compare value can be between 0x00000000 and 0xFFFFFFFF. • Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter. • Macro IS_TIM_CC3_INSTANCE(TIMx) can be used to check whether or not output channel 3 is supported by a timer instance.
Reference Manual to LL API cross reference:	• CCR3 CCR3 LL_TIM_OC_GetCompareCH3

LL_TIM_OC_GetCompareCH4

Function name	**__STATIC_INLINE uint32_t LL_TIM_OC_GetCompareCH4 (TIM_TypeDef * TIMx)**
Function description	Get compare value (TIMx_CCR4) set for output channel 4.
Parameters	• **TIMx:** Timer instance
Return values	• **CompareValue:** (between Min_Data=0 and Max_Data=65535)
Notes	• In 32-bit timer implementations returned compare value can be between 0x00000000 and 0xFFFFFFFF. • Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter. • Macro IS_TIM_CC4_INSTANCE(TIMx) can be used to check whether or not output channel 4 is supported by a timer instance.
Reference Manual to LL API cross reference:	• CCR4 CCR4 LL_TIM_OC_GetCompareCH4

LL_TIM_OC_GetCompareCH5

Function name	**__STATIC_INLINE uint32_t LL_TIM_OC_GetCompareCH5 (TIM_TypeDef * TIMx)**
Function description	Get compare value (TIMx_CCR5) set for output channel 5.
Parameters	• **TIMx:** Timer instance
Return values	• **CompareValue:** (between Min_Data=0 and Max_Data=65535)
Notes	• Macro IS_TIM_CC5_INSTANCE(TIMx) can be used to check whether or not output channel 5 is supported by a timer instance. CCR5 CCR5 LL_TIM_OC_GetCompareCH5

- CH5 channel is not available for all F3 devices

LL_TIM_OC_GetCompareCH6

Function name	**__STATIC_INLINE uint32_t LL_TIM_OC_GetCompareCH6 (TIM_TypeDef * TIMx)**
Function description	Get compare value (TIMx_CCR6) set for output channel 6.
Parameters	• **TIMx:** Timer instance
Return values	• **CompareValue:** (between Min_Data=0 and Max_Data=65535)
Notes	• Macro IS_TIM_CC6_INSTANCE(TIMx) can be used to check whether or not output channel 6 is supported by a timer instance. CCR6 CCR6 LL_TIM_OC_GetCompareCH6 • CH6 channel is not available for all F3 devices

LL_TIM_SetCH5CombinedChannels

Function name	**__STATIC_INLINE void LL_TIM_SetCH5CombinedChannels (TIM_TypeDef * TIMx, uint32_t GroupCH5)**
Function description	Select on which reference signal the OC5REF is combined to.
Parameters	• **TIMx:** Timer instance • **GroupCH5:** This parameter can be one of the following values: – LL_TIM_GROUPCH5_NONE – LL_TIM_GROUPCH5_OC1REFC – LL_TIM_GROUPCH5_OC2REFC – LL_TIM_GROUPCH5_OC3REFC
Return values	• **None**
Notes	• Macro IS_TIM_COMBINED3PHASEPWM_INSTANCE(TIMx) can be used to check whether or not a timer instance supports the combined 3-phase PWM mode. CCR5 GC5C3 LL_TIM_SetCH5CombinedChannels CCR5 GC5C2 LL_TIM_SetCH5CombinedChannels CCR5 GC5C1 LL_TIM_SetCH5CombinedChannels • CH5 channel is not available for all F3 devices

LL_TIM_IC_Config

Function name	**__STATIC_INLINE void LL_TIM_IC_Config (TIM_TypeDef * TIMx, uint32_t Channel, uint32_t Configuration)**
Function description	Configure input channel.
Parameters	• **TIMx:** Timer instance • **Channel:** This parameter can be one of the following values: – LL_TIM_CHANNEL_CH1 – LL_TIM_CHANNEL_CH2 – LL_TIM_CHANNEL_CH3 – LL_TIM_CHANNEL_CH4 • **Configuration:** This parameter must be a combination of all

the following values:
- LL_TIM_ACTIVEINPUT_DIRECTTI or LL_TIM_ACTIVEINPUT_INDIRECTTI or LL_TIM_ACTIVEINPUT_TRC
- LL_TIM_ICPSC_DIV1 or ... or LL_TIM_ICPSC_DIV8
- LL_TIM_IC_FILTER_FDIV1 or ... or LL_TIM_IC_FILTER_FDIV32_N8
- LL_TIM_IC_POLARITY_RISING or LL_TIM_IC_POLARITY_FALLING or LL_TIM_IC_POLARITY_BOTHEDGE

Return values
- **None**

Reference Manual to LL API cross reference:
- CCMR1 CC1S LL_TIM_IC_Config
- CCMR1 IC1PSC LL_TIM_IC_Config
- CCMR1 IC1F LL_TIM_IC_Config
- CCMR1 CC2S LL_TIM_IC_Config
- CCMR1 IC2PSC LL_TIM_IC_Config
- CCMR1 IC2F LL_TIM_IC_Config
- CCMR2 CC3S LL_TIM_IC_Config
- CCMR2 IC3PSC LL_TIM_IC_Config
- CCMR2 IC3F LL_TIM_IC_Config
- CCMR2 CC4S LL_TIM_IC_Config
- CCMR2 IC4PSC LL_TIM_IC_Config
- CCMR2 IC4F LL_TIM_IC_Config
- CCER CC1P LL_TIM_IC_Config
- CCER CC1NP LL_TIM_IC_Config
- CCER CC2P LL_TIM_IC_Config
- CCER CC2NP LL_TIM_IC_Config
- CCER CC3P LL_TIM_IC_Config
- CCER CC3NP LL_TIM_IC_Config
- CCER CC4P LL_TIM_IC_Config
- CCER CC4NP LL_TIM_IC_Config

LL_TIM_IC_SetActiveInput

Function name
__STATIC_INLINE void LL_TIM_IC_SetActiveInput (TIM_TypeDef * TIMx, uint32_t Channel, uint32_t ICActiveInput)

Function description
Set the active input.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4
- **ICActiveInput:** This parameter can be one of the following values:
  - LL_TIM_ACTIVEINPUT_DIRECTTI
  - LL_TIM_ACTIVEINPUT_INDIRECTTI
  - LL_TIM_ACTIVEINPUT_TRC

Return values
- **None**

Reference Manual to LL API cross reference:
- CCMR1 CC1S LL_TIM_IC_SetActiveInput
- CCMR1 CC2S LL_TIM_IC_SetActiveInput
- CCMR2 CC3S LL_TIM_IC_SetActiveInput
- CCMR2 CC4S LL_TIM_IC_SetActiveInput

LL_TIM_IC_GetActiveInput

Function name: **__STATIC_INLINE uint32_t LL_TIM_IC_GetActiveInput (TIM_TypeDef * TIMx, uint32_t Channel)**

Function description: Get the current active input.

Parameters:
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4

Return values:
- **Returned:** value can be one of the following values:
  - LL_TIM_ACTIVEINPUT_DIRECTTI
  - LL_TIM_ACTIVEINPUT_INDIRECTTI
  - LL_TIM_ACTIVEINPUT_TRC

Reference Manual to LL API cross reference:
- CCMR1 CC1S LL_TIM_IC_GetActiveInput
- CCMR1 CC2S LL_TIM_IC_GetActiveInput
- CCMR2 CC3S LL_TIM_IC_GetActiveInput
- CCMR2 CC4S LL_TIM_IC_GetActiveInput

LL_TIM_IC_SetPrescaler

Function name: **__STATIC_INLINE void LL_TIM_IC_SetPrescaler (TIM_TypeDef * TIMx, uint32_t Channel, uint32_t ICPrescaler)**

Function description: Set the prescaler of input channel.

Parameters:
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4
- **ICPrescaler:** This parameter can be one of the following values:
  - LL_TIM_ICPSC_DIV1
  - LL_TIM_ICPSC_DIV2
  - LL_TIM_ICPSC_DIV4
  - LL_TIM_ICPSC_DIV8

Return values:
- **None**

Reference Manual to LL API cross reference:
- CCMR1 IC1PSC LL_TIM_IC_SetPrescaler
- CCMR1 IC2PSC LL_TIM_IC_SetPrescaler
- CCMR2 IC3PSC LL_TIM_IC_SetPrescaler
- CCMR2 IC4PSC LL_TIM_IC_SetPrescaler

LL_TIM_IC_GetPrescaler

Function name
__STATIC_INLINE uint32_t LL_TIM_IC_GetPrescaler (TIM_TypeDef * TIMx, uint32_t Channel)

Function description
Get the current prescaler value acting on an input channel.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4

Return values
- **Returned:** value can be one of the following values:
  - LL_TIM_ICPSC_DIV1
  - LL_TIM_ICPSC_DIV2
  - LL_TIM_ICPSC_DIV4
  - LL_TIM_ICPSC_DIV8

Reference Manual to LL API cross reference:
- CCMR1 IC1PSC LL_TIM_IC_GetPrescaler
- CCMR1 IC2PSC LL_TIM_IC_GetPrescaler
- CCMR2 IC3PSC LL_TIM_IC_GetPrescaler
- CCMR2 IC4PSC LL_TIM_IC_GetPrescaler

LL_TIM_IC_SetFilter

Function name
__STATIC_INLINE void LL_TIM_IC_SetFilter (TIM_TypeDef * TIMx, uint32_t Channel, uint32_t ICFilter)

Function description
Set the input filter duration.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4
- **ICFilter:** This parameter can be one of the following values:
  - LL_TIM_IC_FILTER_FDIV1
  - LL_TIM_IC_FILTER_FDIV1_N2
  - LL_TIM_IC_FILTER_FDIV1_N4
  - LL_TIM_IC_FILTER_FDIV1_N8
  - LL_TIM_IC_FILTER_FDIV2_N6
  - LL_TIM_IC_FILTER_FDIV2_N8
  - LL_TIM_IC_FILTER_FDIV4_N6
  - LL_TIM_IC_FILTER_FDIV4_N8
  - LL_TIM_IC_FILTER_FDIV8_N6
  - LL_TIM_IC_FILTER_FDIV8_N8
  - LL_TIM_IC_FILTER_FDIV16_N5
  - LL_TIM_IC_FILTER_FDIV16_N6
  - LL_TIM_IC_FILTER_FDIV16_N8
  - LL_TIM_IC_FILTER_FDIV32_N5
  - LL_TIM_IC_FILTER_FDIV32_N6
  - LL_TIM_IC_FILTER_FDIV32_N8

Return values
- **None**

Reference Manual to LL API cross reference:
- CCMR1 IC1F LL_TIM_IC_SetFilter
- CCMR1 IC2F LL_TIM_IC_SetFilter
- CCMR2 IC3F LL_TIM_IC_SetFilter
- CCMR2 IC4F LL_TIM_IC_SetFilter

LL_TIM_IC_GetFilter

Function name
__STATIC_INLINE uint32_t LL_TIM_IC_GetFilter (TIM_TypeDef * TIMx, uint32_t Channel)

Function description
Get the input filter duration.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4

Return values
- **Returned:** value can be one of the following values:
  - LL_TIM_IC_FILTER_FDIV1
  - LL_TIM_IC_FILTER_FDIV1_N2
  - LL_TIM_IC_FILTER_FDIV1_N4
  - LL_TIM_IC_FILTER_FDIV1_N8
  - LL_TIM_IC_FILTER_FDIV2_N6
  - LL_TIM_IC_FILTER_FDIV2_N8
  - LL_TIM_IC_FILTER_FDIV4_N6
  - LL_TIM_IC_FILTER_FDIV4_N8
  - LL_TIM_IC_FILTER_FDIV8_N6
  - LL_TIM_IC_FILTER_FDIV8_N8
  - LL_TIM_IC_FILTER_FDIV16_N5
  - LL_TIM_IC_FILTER_FDIV16_N6
  - LL_TIM_IC_FILTER_FDIV16_N8
  - LL_TIM_IC_FILTER_FDIV32_N5
  - LL_TIM_IC_FILTER_FDIV32_N6
  - LL_TIM_IC_FILTER_FDIV32_N8

Reference Manual to LL API cross reference:
- CCMR1 IC1F LL_TIM_IC_GetFilter
- CCMR1 IC2F LL_TIM_IC_GetFilter
- CCMR2 IC3F LL_TIM_IC_GetFilter
- CCMR2 IC4F LL_TIM_IC_GetFilter

LL_TIM_IC_SetPolarity

Function name
__STATIC_INLINE void LL_TIM_IC_SetPolarity (TIM_TypeDef * TIMx, uint32_t Channel, uint32_t ICPolarity)

Function description
Set the input channel polarity.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3

  - LL_TIM_CHANNEL_CH4
- **ICPolarity:** This parameter can be one of the following values:
  - LL_TIM_IC_POLARITY_RISING
  - LL_TIM_IC_POLARITY_FALLING
  - LL_TIM_IC_POLARITY_BOTHEDGE

Return values
- **None**

Reference Manual to LL API cross reference:
- CCER CC1P LL_TIM_IC_SetPolarity
- CCER CC1NP LL_TIM_IC_SetPolarity
- CCER CC2P LL_TIM_IC_SetPolarity
- CCER CC2NP LL_TIM_IC_SetPolarity
- CCER CC3P LL_TIM_IC_SetPolarity
- CCER CC3NP LL_TIM_IC_SetPolarity
- CCER CC4P LL_TIM_IC_SetPolarity
- CCER CC4NP LL_TIM_IC_SetPolarity

LL_TIM_IC_GetPolarity

Function name
__STATIC_INLINE uint32_t LL_TIM_IC_GetPolarity (TIM_TypeDef * TIMx, uint32_t Channel)

Function description
Get the current input channel polarity.

Parameters
- **TIMx:** Timer instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4

Return values
- **Returned:** value can be one of the following values:
  - LL_TIM_IC_POLARITY_RISING
  - LL_TIM_IC_POLARITY_FALLING
  - LL_TIM_IC_POLARITY_BOTHEDGE

Reference Manual to LL API cross reference:
- CCER CC1P LL_TIM_IC_GetPolarity
- CCER CC1NP LL_TIM_IC_GetPolarity
- CCER CC2P LL_TIM_IC_GetPolarity
- CCER CC2NP LL_TIM_IC_GetPolarity
- CCER CC3P LL_TIM_IC_GetPolarity
- CCER CC3NP LL_TIM_IC_GetPolarity
- CCER CC4P LL_TIM_IC_GetPolarity
- CCER CC4NP LL_TIM_IC_GetPolarity

LL_TIM_IC_EnableXORCombination

Function name
__STATIC_INLINE void LL_TIM_IC_EnableXORCombination (TIM_TypeDef * TIMx)

Function description
Connect the TIMx_CH1, CH2 and CH3 pins to the TI1 input (XOR combination).

Parameters
- **TIMx:** Timer instance

Return values
- **None**

Notes	• Macro IS_TIM_XOR_INSTANCE(TIMx) can be used to check whether or not a timer instance provides an XOR input.
Reference Manual to LL API cross reference:	• CR2 TI1S LL_TIM_IC_EnableXORCombination

LL_TIM_IC_DisableXORCombination

Function name	**__STATIC_INLINE void LL_TIM_IC_DisableXORCombination (TIM_TypeDef * TIMx)**
Function description	Disconnect the TIMx_CH1, CH2 and CH3 pins from the TI1 input.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Notes	• Macro IS_TIM_XOR_INSTANCE(TIMx) can be used to check whether or not a timer instance provides an XOR input.
Reference Manual to LL API cross reference:	• CR2 TI1S LL_TIM_IC_DisableXORCombination

LL_TIM_IC_IsEnabledXORCombination

Function name	**__STATIC_INLINE uint32_t LL_TIM_IC_IsEnabledXORCombination (TIM_TypeDef * TIMx)**
Function description	Indicates whether the TIMx_CH1, CH2 and CH3 pins are connectected to the TI1 input.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_TIM_XOR_INSTANCE(TIMx) can be used to check whether or not a timer instance provides an XOR input.
Reference Manual to LL API cross reference:	• CR2 TI1S LL_TIM_IC_IsEnabledXORCombination

LL_TIM_IC_GetCaptureCH1

Function name	**__STATIC_INLINE uint32_t LL_TIM_IC_GetCaptureCH1 (TIM_TypeDef * TIMx)**
Function description	Get captured value for input channel 1.
Parameters	• **TIMx:** Timer instance
Return values	• **CapturedValue:** (between Min_Data=0 and Max_Data=65535)
Notes	• In 32-bit timer implementations returned captured value can be between 0x00000000 and 0xFFFFFFFF. • Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter.

- Macro IS_TIM_CC1_INSTANCE(TIMx) can be used to check whether or not input channel 1 is supported by a timer instance.

Reference Manual to LL API cross reference:

- CCR1 CCR1 LL_TIM_IC_GetCaptureCH1

LL_TIM_IC_GetCaptureCH2

Function name **__STATIC_INLINE uint32_t LL_TIM_IC_GetCaptureCH2 (TIM_TypeDef * TIMx)**

Function description Get captured value for input channel 2.

Parameters

- **TIMx:** Timer instance

Return values

- **CapturedValue:** (between Min_Data=0 and Max_Data=65535)

Notes

- In 32-bit timer implementations returned captured value can be between 0x00000000 and 0xFFFFFFFF.
- Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter.
- Macro IS_TIM_CC2_INSTANCE(TIMx) can be used to check whether or not input channel 2 is supported by a timer instance.

Reference Manual to LL API cross reference:

- CCR2 CCR2 LL_TIM_IC_GetCaptureCH2

LL_TIM_IC_GetCaptureCH3

Function name **__STATIC_INLINE uint32_t LL_TIM_IC_GetCaptureCH3 (TIM_TypeDef * TIMx)**

Function description Get captured value for input channel 3.

Parameters

- **TIMx:** Timer instance

Return values

- **CapturedValue:** (between Min_Data=0 and Max_Data=65535)

Notes

- In 32-bit timer implementations returned captured value can be between 0x00000000 and 0xFFFFFFFF.
- Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter.
- Macro IS_TIM_CC3_INSTANCE(TIMx) can be used to check whether or not input channel 3 is supported by a timer instance.

Reference Manual to LL API cross reference:

- CCR3 CCR3 LL_TIM_IC_GetCaptureCH3

LL_TIM_IC_GetCaptureCH4

Function name	**__STATIC_INLINE uint32_t LL_TIM_IC_GetCaptureCH4 (TIM_TypeDef * TIMx)**
Function description	Get captured value for input channel 4.
Parameters	• **TIMx:** Timer instance
Return values	• **CapturedValue:** (between Min_Data=0 and Max_Data=65535)
Notes	• In 32-bit timer implementations returned captured value can be between 0x00000000 and 0xFFFFFFFF. • Macro IS_TIM_32B_COUNTER_INSTANCE(TIMx) can be used to check whether or not a timer instance supports a 32 bits counter. • Macro IS_TIM_CC4_INSTANCE(TIMx) can be used to check whether or not input channel 4 is supported by a timer instance.
Reference Manual to LL API cross reference:	• CCR4 CCR4 LL_TIM_IC_GetCaptureCH4

LL_TIM_EnableExternalClock

Function name	**__STATIC_INLINE void LL_TIM_EnableExternalClock (TIM_TypeDef * TIMx)**
Function description	Enable external clock mode 2.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Notes	• When external clock mode 2 is enabled the counter is clocked by any active edge on the ETRF signal. • Macro IS_TIM_CLOCKSOURCE_ETRMODE2_INSTANCE(TIMx) can be used to check whether or not a timer instance supports external clock mode2.
Reference Manual to LL API cross reference:	• SMCR ECE LL_TIM_EnableExternalClock

LL_TIM_DisableExternalClock

Function name	**__STATIC_INLINE void LL_TIM_DisableExternalClock (TIM_TypeDef * TIMx)**
Function description	Disable external clock mode 2.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Notes	• Macro IS_TIM_CLOCKSOURCE_ETRMODE2_INSTANCE(TIMx) can be used to check whether or not a timer instance

supports external clock mode2.

Reference Manual to LL API cross reference:
- SMCR ECE LL_TIM_DisableExternalClock

LL_TIM_IsEnabledExternalClock

Function name
__STATIC_INLINE uint32_t LL_TIM_IsEnabledExternalClock (TIM_TypeDef * TIMx)

Function description
Indicate whether external clock mode 2 is enabled.

Parameters
- **TIMx:** Timer instance

Return values
- **State:** of bit (1 or 0).

Notes
- Macro IS_TIM_CLOCKSOURCE_ETRMODE2_INSTANCE(TIMx) can be used to check whether or not a timer instance supports external clock mode2.

Reference Manual to LL API cross reference:
- SMCR ECE LL_TIM_IsEnabledExternalClock

LL_TIM_SetClockSource

Function name
__STATIC_INLINE void LL_TIM_SetClockSource (TIM_TypeDef * TIMx, uint32_t ClockSource)

Function description
Set the clock source of the counter clock.

Parameters
- **TIMx:** Timer instance
- **ClockSource:** This parameter can be one of the following values:
  - LL_TIM_CLOCKSOURCE_INTERNAL
  - LL_TIM_CLOCKSOURCE_EXT_MODE1
  - LL_TIM_CLOCKSOURCE_EXT_MODE2

Return values
- **None**

Notes
- when selected clock source is external clock mode 1, the timer input the external clock is applied is selected by calling the LL_TIM_SetTriggerInput() function. This timer input must be configured by calling the LL_TIM_IC_Config() function.
- Macro IS_TIM_CLOCKSOURCE_ETRMODE1_INSTANCE(TIMx) can be used to check whether or not a timer instance supports external clock mode1.
- Macro IS_TIM_CLOCKSOURCE_ETRMODE2_INSTANCE(TIMx) can be used to check whether or not a timer instance supports external clock mode2.

Reference Manual to LL API cross reference:
- SMCR SMS LL_TIM_SetClockSource
- SMCR ECE LL_TIM_SetClockSource

LL_TIM_SetEncoderMode

Function name	**__STATIC_INLINE void LL_TIM_SetEncoderMode (TIM_TypeDef * TIMx, uint32_t EncoderMode)**
Function description	Set the encoder interface mode.
Parameters	• **TIMx:** Timer instance • **EncoderMode:** This parameter can be one of the following values: – LL_TIM_ENCODERMODE_X2_TI1 – LL_TIM_ENCODERMODE_X2_TI2 – LL_TIM_ENCODERMODE_X4_TI12
Return values	• **None**
Notes	• Macro IS_TIM_ENCODER_INTERFACE_INSTANCE(TIMx) can be used to check whether or not a timer instance supports the encoder mode.
Reference Manual to LL API cross reference:	• SMCR SMS LL_TIM_SetEncoderMode

LL_TIM_SetTriggerOutput

Function name	**__STATIC_INLINE void LL_TIM_SetTriggerOutput (TIM_TypeDef * TIMx, uint32_t TimerSynchronization)**
Function description	Set the trigger output (TRGO) used for timer synchronization .
Parameters	• **TIMx:** Timer instance • **TimerSynchronization:** This parameter can be one of the following values: – LL_TIM_TRGO_RESET – LL_TIM_TRGO_ENABLE – LL_TIM_TRGO_UPDATE – LL_TIM_TRGO_CC1IF – LL_TIM_TRGO_OC1REF – LL_TIM_TRGO_OC2REF – LL_TIM_TRGO_OC3REF – LL_TIM_TRGO_OC4REF
Return values	• **None**
Notes	• Macro IS_TIM_MASTER_INSTANCE(TIMx) can be used to check whether or not a timer instance can operate as a master timer.
Reference Manual to LL API cross reference:	• CR2 MMS LL_TIM_SetTriggerOutput

LL_TIM_SetTriggerOutput2

Function name	**__STATIC_INLINE void LL_TIM_SetTriggerOutput2 (TIM_TypeDef * TIMx, uint32_t ADCSynchronization)**
Function description	Set the trigger output 2 (TRGO2) used for ADC synchronization .

Parameters
- **TIMx:** Timer Instance
- **ADCSynchronization:** This parameter can be one of the following values:
  - LL_TIM_TRGO2_RESET
  - LL_TIM_TRGO2_ENABLE
  - LL_TIM_TRGO2_UPDATE
  - LL_TIM_TRGO2_CC1F
  - LL_TIM_TRGO2_OC1
  - LL_TIM_TRGO2_OC2
  - LL_TIM_TRGO2_OC3
  - LL_TIM_TRGO2_OC4
  - LL_TIM_TRGO2_OC5
  - LL_TIM_TRGO2_OC6
  - LL_TIM_TRGO2_OC4_RISINGFALLING
  - LL_TIM_TRGO2_OC6_RISINGFALLING
  - LL_TIM_TRGO2_OC4_RISING_OC6_RISING
  - LL_TIM_TRGO2_OC4_RISING_OC6_FALLING
  - LL_TIM_TRGO2_OC5_RISING_OC6_RISING
  - LL_TIM_TRGO2_OC5_RISING_OC6_FALLING

Return values
- **None**

Notes
- Macro IS_TIM_TRGO2_INSTANCE(TIMx) can be used to check whether or not a timer instance can be used for ADC synchronization.
- OC5 and OC6 are not available for all F3 devices

Reference Manual to LL API cross reference:
- CR2 MMS2 LL_TIM_SetTriggerOutput2

LL_TIM_SetSlaveMode

Function name
__STATIC_INLINE void LL_TIM_SetSlaveMode (TIM_TypeDef * TIMx, uint32_t SlaveMode)

Function description
Set the synchronization mode of a slave timer.

Parameters
- **TIMx:** Timer instance
- **SlaveMode:** This parameter can be one of the following values:
  - LL_TIM_SLAVEMODE_DISABLED
  - LL_TIM_SLAVEMODE_RESET
  - LL_TIM_SLAVEMODE_GATED
  - LL_TIM_SLAVEMODE_TRIGGER
  - LL_TIM_SLAVEMODE_COMBINED_RESETTRIGGER

Return values
- **None**

Notes
- Macro IS_TIM_SLAVE_INSTANCE(TIMx) can be used to check whether or not a timer instance can operate as a slave timer.

Reference Manual to LL API cross reference:
- SMCR SMS LL_TIM_SetSlaveMode

LL_TIM_SetTriggerInput

Function name	**__STATIC_INLINE void LL_TIM_SetTriggerInput (TIM_TypeDef * TIMx, uint32_t TriggerInput)**
Function description	Set the selects the trigger input to be used to synchronize the counter.
Parameters	• **TIMx:** Timer instance • **TriggerInput:** This parameter can be one of the following values: – LL_TIM_TS_ITR0 – LL_TIM_TS_ITR1 – LL_TIM_TS_ITR2 – LL_TIM_TS_ITR3 – LL_TIM_TS_TI1F_ED – LL_TIM_TS_TI1FP1 – LL_TIM_TS_TI2FP2 – LL_TIM_TS_ETRF
Return values	• **None**
Notes	• Macro IS_TIM_SLAVE_INSTANCE(TIMx) can be used to check whether or not a timer instance can operate as a slave timer.
Reference Manual to LL API cross reference:	• SMCR TS LL_TIM_SetTriggerInput

LL_TIM_EnableMasterSlaveMode

Function name	**__STATIC_INLINE void LL_TIM_EnableMasterSlaveMode (TIM_TypeDef * TIMx)**
Function description	Enable the Master/Slave mode.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Notes	• Macro IS_TIM_SLAVE_INSTANCE(TIMx) can be used to check whether or not a timer instance can operate as a slave timer.
Reference Manual to LL API cross reference:	• SMCR MSM LL_TIM_EnableMasterSlaveMode

LL_TIM_DisableMasterSlaveMode

Function name	**__STATIC_INLINE void LL_TIM_DisableMasterSlaveMode (TIM_TypeDef * TIMx)**
Function description	Disable the Master/Slave mode.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Notes	• Macro IS_TIM_SLAVE_INSTANCE(TIMx) can be used to

check whether or not a timer instance can operate as a slave timer.

Reference Manual to LL API cross reference:
- SMCR MSM LL_TIM_DisableMasterSlaveMode

LL_TIM_IsEnabledMasterSlaveMode

Function name: **__STATIC_INLINE uint32_t LL_TIM_IsEnabledMasterSlaveMode (TIM_TypeDef * TIMx)**

Function description: Indicates whether the Master/Slave mode is enabled.

Parameters:
- **TIMx:** Timer instance

Return values:
- **State:** of bit (1 or 0).

Notes:
- Macro IS_TIM_SLAVE_INSTANCE(TIMx) can be used to check whether or not a timer instance can operate as a slave timer.

Reference Manual to LL API cross reference:
- SMCR MSM LL_TIM_IsEnabledMasterSlaveMode

LL_TIM_ConfigETR

Function name: **__STATIC_INLINE void LL_TIM_ConfigETR (TIM_TypeDef * TIMx, uint32_t ETRPolarity, uint32_t ETRPrescaler, uint32_t ETRFilter)**

Function description: Configure the external trigger (ETR) input.

Parameters:
- **TIMx:** Timer instance
- **ETRPolarity:** This parameter can be one of the following values:
  - LL_TIM_ETR_POLARITY_NONINVERTED
  - LL_TIM_ETR_POLARITY_INVERTED
- **ETRPrescaler:** This parameter can be one of the following values:
  - LL_TIM_ETR_PRESCALER_DIV1
  - LL_TIM_ETR_PRESCALER_DIV2
  - LL_TIM_ETR_PRESCALER_DIV4
  - LL_TIM_ETR_PRESCALER_DIV8
- **ETRFilter:** This parameter can be one of the following values:
  - LL_TIM_ETR_FILTER_FDIV1
  - LL_TIM_ETR_FILTER_FDIV1_N2
  - LL_TIM_ETR_FILTER_FDIV1_N4
  - LL_TIM_ETR_FILTER_FDIV1_N8
  - LL_TIM_ETR_FILTER_FDIV2_N6
  - LL_TIM_ETR_FILTER_FDIV2_N8
  - LL_TIM_ETR_FILTER_FDIV4_N6
  - LL_TIM_ETR_FILTER_FDIV4_N8
  - LL_TIM_ETR_FILTER_FDIV8_N6
  - LL_TIM_ETR_FILTER_FDIV8_N8
  - LL_TIM_ETR_FILTER_FDIV16_N5

  - LL_TIM_ETR_FILTER_FDIV16_N6
  - LL_TIM_ETR_FILTER_FDIV16_N8
  - LL_TIM_ETR_FILTER_FDIV32_N5
  - LL_TIM_ETR_FILTER_FDIV32_N6
  - LL_TIM_ETR_FILTER_FDIV32_N8

Return values
- **None**

Notes
- Macro IS_TIM_ETR_INSTANCE(TIMx) can be used to check whether or not a timer instance provides an external trigger input.

Reference Manual to LL API cross reference:
- SMCR ETP LL_TIM_ConfigETR
- SMCR ETPS LL_TIM_ConfigETR
- SMCR ETF LL_TIM_ConfigETR

LL_TIM_EnableBRK

Function name
__STATIC_INLINE void LL_TIM_EnableBRK (TIM_TypeDef * TIMx)

Function description
Enable the break function.

Parameters
- **TIMx:** Timer instance

Return values
- **None**

Notes
- Macro IS_TIM_BREAK_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a break input.

Reference Manual to LL API cross reference:
- BDTR BKE LL_TIM_EnableBRK

LL_TIM_DisableBRK

Function name
__STATIC_INLINE void LL_TIM_DisableBRK (TIM_TypeDef * TIMx)

Function description
Disable the break function.

Parameters
- **TIMx:** Timer instance

Return values
- **None**

Notes
- Macro IS_TIM_BREAK_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a break input.

Reference Manual to LL API cross reference:
- BDTR BKE LL_TIM_DisableBRK

LL_TIM_ConfigBRK

Function name
__STATIC_INLINE void LL_TIM_ConfigBRK (TIM_TypeDef * TIMx, uint32_t BreakPolarity, uint32_t BreakFilter)

Function description
Configure the break input.

Parameters
- **TIMx:** Timer instance
- **BreakPolarity:** This parameter can be one of the following

values:
  - LL_TIM_BREAK_POLARITY_LOW
  - LL_TIM_BREAK_POLARITY_HIGH
- **BreakFilter:** This parameter can be one of the following values:
  - LL_TIM_BREAK_FILTER_FDIV1
  - LL_TIM_BREAK_FILTER_FDIV1_N2
  - LL_TIM_BREAK_FILTER_FDIV1_N4
  - LL_TIM_BREAK_FILTER_FDIV1_N8
  - LL_TIM_BREAK_FILTER_FDIV2_N6
  - LL_TIM_BREAK_FILTER_FDIV2_N8
  - LL_TIM_BREAK_FILTER_FDIV4_N6
  - LL_TIM_BREAK_FILTER_FDIV4_N8
  - LL_TIM_BREAK_FILTER_FDIV8_N6
  - LL_TIM_BREAK_FILTER_FDIV8_N8
  - LL_TIM_BREAK_FILTER_FDIV16_N5
  - LL_TIM_BREAK_FILTER_FDIV16_N6
  - LL_TIM_BREAK_FILTER_FDIV16_N8
  - LL_TIM_BREAK_FILTER_FDIV32_N5
  - LL_TIM_BREAK_FILTER_FDIV32_N6
  - LL_TIM_BREAK_FILTER_FDIV32_N8

Return values
- **None**

Notes
- Macro IS_TIM_BREAK_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a break input.

Reference Manual to LL API cross reference:
- BDTR BKP LL_TIM_ConfigBRK
- BDTR BKF LL_TIM_ConfigBRK

LL_TIM_EnableBRK2

Function name
__STATIC_INLINE void LL_TIM_EnableBRK2 (TIM_TypeDef * TIMx)

Function description
Enable the break 2 function.

Parameters
- **TIMx:** Timer instance

Return values
- **None**

Notes
- Macro IS_TIM_BKIN2_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a second break input.

Reference Manual to LL API cross reference:
- BDTR BK2E LL_TIM_EnableBRK2

LL_TIM_DisableBRK2

Function name
__STATIC_INLINE void LL_TIM_DisableBRK2 (TIM_TypeDef * TIMx)

Function description
Disable the break 2 function.

Parameters
- **TIMx:** Timer instance

Return values
- **None**

Notes
- Macro IS_TIM_BKIN2_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a second break input.

Reference Manual to LL API cross reference:
- BDTR BK2E LL_TIM_DisableBRK2

LL_TIM_ConfigBRK2

Function name
__STATIC_INLINE void LL_TIM_ConfigBRK2 (TIM_TypeDef * TIMx, uint32_t Break2Polarity, uint32_t Break2Filter)

Function description
Configure the break 2 input.

Parameters
- **TIMx:** Timer instance
- **Break2Polarity:** This parameter can be one of the following values:
  - LL_TIM_BREAK2_POLARITY_LOW
  - LL_TIM_BREAK2_POLARITY_HIGH
- **Break2Filter:** This parameter can be one of the following values:
  - LL_TIM_BREAK2_FILTER_FDIV1
  - LL_TIM_BREAK2_FILTER_FDIV1_N2
  - LL_TIM_BREAK2_FILTER_FDIV1_N4
  - LL_TIM_BREAK2_FILTER_FDIV1_N8
  - LL_TIM_BREAK2_FILTER_FDIV2_N6
  - LL_TIM_BREAK2_FILTER_FDIV2_N8
  - LL_TIM_BREAK2_FILTER_FDIV4_N6
  - LL_TIM_BREAK2_FILTER_FDIV4_N8
  - LL_TIM_BREAK2_FILTER_FDIV8_N6
  - LL_TIM_BREAK2_FILTER_FDIV8_N8
  - LL_TIM_BREAK2_FILTER_FDIV16_N5
  - LL_TIM_BREAK2_FILTER_FDIV16_N6
  - LL_TIM_BREAK2_FILTER_FDIV16_N8
  - LL_TIM_BREAK2_FILTER_FDIV32_N5
  - LL_TIM_BREAK2_FILTER_FDIV32_N6
  - LL_TIM_BREAK2_FILTER_FDIV32_N8

Return values
- **None**

Notes
- Macro IS_TIM_BKIN2_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a second break input.

Reference Manual to LL API cross reference:
- BDTR BK2P LL_TIM_ConfigBRK2
- BDTR BK2F LL_TIM_ConfigBRK2

LL_TIM_SetOffStates

Function name
__STATIC_INLINE void LL_TIM_SetOffStates (TIM_TypeDef * TIMx, uint32_t OffStateIdle, uint32_t OffStateRun)

Function description
Select the outputs off state (enabled v.s.

Parameters	• **TIMx:** Timer instance • **OffStateIdle:** This parameter can be one of the following values: – LL_TIM_OSSI_DISABLE – LL_TIM_OSSI_ENABLE • **OffStateRun:** This parameter can be one of the following values: – LL_TIM_OSSR_DISABLE – LL_TIM_OSSR_ENABLE
Return values	• **None**
Notes	• Macro IS_TIM_BREAK_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a break input.
Reference Manual to LL API cross reference:	• BDTR OSSI LL_TIM_SetOffStates • BDTR OSSR LL_TIM_SetOffStates

LL_TIM_EnableAutomaticOutput

Function name	**__STATIC_INLINE void LL_TIM_EnableAutomaticOutput (TIM_TypeDef * TIMx)**
Function description	Enable automatic output (MOE can be set by software or automatically when a break input is active).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Notes	• Macro IS_TIM_BREAK_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a break input.
Reference Manual to LL API cross reference:	• BDTR AOE LL_TIM_EnableAutomaticOutput

LL_TIM_DisableAutomaticOutput

Function name	**__STATIC_INLINE void LL_TIM_DisableAutomaticOutput (TIM_TypeDef * TIMx)**
Function description	Disable automatic output (MOE can be set only by software).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Notes	• Macro IS_TIM_BREAK_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a break input.
Reference Manual to LL API cross reference:	• BDTR AOE LL_TIM_DisableAutomaticOutput

LL_TIM_IsEnabledAutomaticOutput

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledAutomaticOutput (TIM_TypeDef * TIMx)**
Function description	Indicate whether automatic output is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_TIM_BREAK_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a break input.
Reference Manual to LL API cross reference:	• BDTR AOE LL_TIM_IsEnabledAutomaticOutput

LL_TIM_EnableAllOutputs

Function name	**__STATIC_INLINE void LL_TIM_EnableAllOutputs (TIM_TypeDef * TIMx)**
Function description	Enable the outputs (set the MOE bit in TIMx_BDTR register).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Notes	• The MOE bit in TIMx_BDTR register allows to enable /disable the outputs by software and is reset in case of break or break2 event • Macro IS_TIM_BREAK_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a break input.
Reference Manual to LL API cross reference:	• BDTR MOE LL_TIM_EnableAllOutputs

LL_TIM_DisableAllOutputs

Function name	**__STATIC_INLINE void LL_TIM_DisableAllOutputs (TIM_TypeDef * TIMx)**
Function description	Disable the outputs (reset the MOE bit in TIMx_BDTR register).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Notes	• The MOE bit in TIMx_BDTR register allows to enable /disable the outputs by software and is reset in case of break or break2 event. • Macro IS_TIM_BREAK_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a break input.
Reference Manual to LL API cross reference:	• BDTR MOE LL_TIM_DisableAllOutputs

LL_TIM_IsEnabledAllOutputs

Function name
__STATIC_INLINE uint32_t LL_TIM_IsEnabledAllOutputs (TIM_TypeDef * TIMx)

Function description
Indicates whether outputs are enabled.

Parameters
- **TIMx:** Timer instance

Return values
- **State:** of bit (1 or 0).

Notes
- Macro IS_TIM_BREAK_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a break input.

Reference Manual to LL API cross reference:
- BDTR MOE LL_TIM_IsEnabledAllOutputs

LL_TIM_ConfigDMABurst

Function name
__STATIC_INLINE void LL_TIM_ConfigDMABurst (TIM_TypeDef * TIMx, uint32_t DMABurstBaseAddress, uint32_t DMABurstLength)

Function description
Configures the timer DMA burst feature.

Parameters
- **TIMx:** Timer instance
- **DMABurstBaseAddress:** This parameter can be one of the following values:
  - LL_TIM_DMABURST_BASEADDR_CR1
  - LL_TIM_DMABURST_BASEADDR_CR2
  - LL_TIM_DMABURST_BASEADDR_SMCR
  - LL_TIM_DMABURST_BASEADDR_DIER
  - LL_TIM_DMABURST_BASEADDR_SR
  - LL_TIM_DMABURST_BASEADDR_EGR
  - LL_TIM_DMABURST_BASEADDR_CCMR1
  - LL_TIM_DMABURST_BASEADDR_CCMR2
  - LL_TIM_DMABURST_BASEADDR_CCER
  - LL_TIM_DMABURST_BASEADDR_CNT
  - LL_TIM_DMABURST_BASEADDR_PSC
  - LL_TIM_DMABURST_BASEADDR_ARR
  - LL_TIM_DMABURST_BASEADDR_RCR
  - LL_TIM_DMABURST_BASEADDR_CCR1
  - LL_TIM_DMABURST_BASEADDR_CCR2
  - LL_TIM_DMABURST_BASEADDR_CCR3
  - LL_TIM_DMABURST_BASEADDR_CCR4
  - LL_TIM_DMABURST_BASEADDR_BDTR
  - LL_TIM_DMABURST_BASEADDR_CCMR3 (*)
  - LL_TIM_DMABURST_BASEADDR_CCR5 (*)
  - LL_TIM_DMABURST_BASEADDR_CCR6 (*) (*) value not defined in all devices
  - LL_TIM_DMABURST_BASEADDR_OR
- **DMABurstLength:** This parameter can be one of the following values:
  - LL_TIM_DMABURST_LENGTH_1TRANSFER
  - LL_TIM_DMABURST_LENGTH_2TRANSFERS
  - LL_TIM_DMABURST_LENGTH_3TRANSFERS

- LL_TIM_DMABURST_LENGTH_4TRANSFERS
- LL_TIM_DMABURST_LENGTH_5TRANSFERS
- LL_TIM_DMABURST_LENGTH_6TRANSFERS
- LL_TIM_DMABURST_LENGTH_7TRANSFERS
- LL_TIM_DMABURST_LENGTH_8TRANSFERS
- LL_TIM_DMABURST_LENGTH_9TRANSFERS
- LL_TIM_DMABURST_LENGTH_10TRANSFERS
- LL_TIM_DMABURST_LENGTH_11TRANSFERS
- LL_TIM_DMABURST_LENGTH_12TRANSFERS
- LL_TIM_DMABURST_LENGTH_13TRANSFERS
- LL_TIM_DMABURST_LENGTH_14TRANSFERS
- LL_TIM_DMABURST_LENGTH_15TRANSFERS
- LL_TIM_DMABURST_LENGTH_16TRANSFERS
- LL_TIM_DMABURST_LENGTH_17TRANSFERS
- LL_TIM_DMABURST_LENGTH_18TRANSFERS

Return values
- **None**

Notes
- Macro IS_TIM_DMABURST_INSTANCE(TIMx) can be used to check whether or not a timer instance supports the DMA burst mode.

Reference Manual to LL API cross reference:
- DCR DBL LL_TIM_ConfigDMABurst
- DCR DBA LL_TIM_ConfigDMABurst

LL_TIM_SetRemap

Function name
__STATIC_INLINE void LL_TIM_SetRemap (TIM_TypeDef * TIMx, uint32_t Remap)

Function description
Remap TIM inputs (input channel, internal/external triggers).

Parameters
- **TIMx:** Timer instance
- **Remap:** Remap params depends on the TIMx. Description available only in CHM version of the User Manual (not in .pdf). Otherwise see Reference Manual description of OR registers.

Return values
- **None**

Notes
- Macro IS_TIM_REMAP_INSTANCE(TIMx) can be used to check whether or not a some timer inputs can be remapped.

Reference Manual to LL API cross reference:
- TIM1_OR ETR_RMP LL_TIM_SetRemap
- TIM8_OR ETR_RMP LL_TIM_SetRemap
- TIM20_OR ETR_RMP LL_TIM_SetRemap
-

LL_TIM_SetOCRefClearInputSource

Function name
__STATIC_INLINE void LL_TIM_SetOCRefClearInputSource (TIM_TypeDef * TIMx, uint32_t OCRefClearInputSource)

Function description
Set the OCREF clear input source.

Parameters
- **TIMx:** Timer instance
- **OCRefClearInputSource:** This parameter can be one of the

following values:
– LL_TIM_OCREF_CLR_INT_OCREF_CLR
– LL_TIM_OCREF_CLR_INT_ETR

Return values
- **None**

Notes
- The OCxREF signal of a given channel can be cleared when a high level is applied on the OCREF_CLR_INPUT
- This function can only be used in Output compare and PWM modes.

Reference Manual to LL API cross reference:
- SMCR OCCS LL_TIM_SetOCRefClearInputSource

LL_TIM_ClearFlag_UPDATE

Function name **__STATIC_INLINE void LL_TIM_ClearFlag_UPDATE (TIM_TypeDef * TIMx)**

Function description Clear the update interrupt flag (UIF).

Parameters
- **TIMx:** Timer instance

Return values
- **None**

Reference Manual to LL API cross reference:
- SR UIF LL_TIM_ClearFlag_UPDATE

LL_TIM_IsActiveFlag_UPDATE

Function name **__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_UPDATE (TIM_TypeDef * TIMx)**

Function description Indicate whether update interrupt flag (UIF) is set (update interrupt is pending).

Parameters
- **TIMx:** Timer instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- SR UIF LL_TIM_IsActiveFlag_UPDATE

LL_TIM_ClearFlag_CC1

Function name **__STATIC_INLINE void LL_TIM_ClearFlag_CC1 (TIM_TypeDef * TIMx)**

Function description Clear the Capture/Compare 1 interrupt flag (CC1F).

Parameters
- **TIMx:** Timer instance

Return values
- **None**

Reference Manual to LL API cross reference:
- SR CC1IF LL_TIM_ClearFlag_CC1

LL_TIM_IsActiveFlag_CC1

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_CC1 (TIM_TypeDef * TIMx)**
Function description	Indicate whether Capture/Compare 1 interrupt flag (CC1F) is set (Capture/Compare 1 interrupt is pending).
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR CC1IF LL_TIM_IsActiveFlag_CC1

LL_TIM_ClearFlag_CC2

Function name	**__STATIC_INLINE void LL_TIM_ClearFlag_CC2 (TIM_TypeDef * TIMx)**
Function description	Clear the Capture/Compare 2 interrupt flag (CC2F).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR CC2IF LL_TIM_ClearFlag_CC2

LL_TIM_IsActiveFlag_CC2

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_CC2 (TIM_TypeDef * TIMx)**
Function description	Indicate whether Capture/Compare 2 interrupt flag (CC2F) is set (Capture/Compare 2 interrupt is pending).
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR CC2IF LL_TIM_IsActiveFlag_CC2

LL_TIM_ClearFlag_CC3

Function name	**__STATIC_INLINE void LL_TIM_ClearFlag_CC3 (TIM_TypeDef * TIMx)**
Function description	Clear the Capture/Compare 3 interrupt flag (CC3F).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR CC3IF LL_TIM_ClearFlag_CC3

LL_TIM_IsActiveFlag_CC3

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_CC3 (TIM_TypeDef * TIMx)**
Function description	Indicate whether Capture/Compare 3 interrupt flag (CC3F) is set (Capture/Compare 3 interrupt is pending).
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR CC3IF LL_TIM_IsActiveFlag_CC3

LL_TIM_ClearFlag_CC4

Function name	**__STATIC_INLINE void LL_TIM_ClearFlag_CC4 (TIM_TypeDef * TIMx)**
Function description	Clear the Capture/Compare 4 interrupt flag (CC4F).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR CC4IF LL_TIM_ClearFlag_CC4

LL_TIM_IsActiveFlag_CC4

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_CC4 (TIM_TypeDef * TIMx)**
Function description	Indicate whether Capture/Compare 4 interrupt flag (CC4F) is set (Capture/Compare 4 interrupt is pending).
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR CC4IF LL_TIM_IsActiveFlag_CC4

LL_TIM_ClearFlag_CC5

Function name	**__STATIC_INLINE void LL_TIM_ClearFlag_CC5 (TIM_TypeDef * TIMx)**
Function description	Clear the Capture/Compare 5 interrupt flag (CC5F).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR CC5IF LL_TIM_ClearFlag_CC5

LL_TIM_IsActiveFlag_CC5

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_CC5 (TIM_TypeDef * TIMx)**
Function description	Indicate whether Capture/Compare 5 interrupt flag (CC5F) is set (Capture/Compare 5 interrupt is pending).
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR CC5IF LL_TIM_IsActiveFlag_CC5

LL_TIM_ClearFlag_CC6

Function name	**__STATIC_INLINE void LL_TIM_ClearFlag_CC6 (TIM_TypeDef * TIMx)**
Function description	Clear the Capture/Compare 6 interrupt flag (CC6F).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR CC6IF LL_TIM_ClearFlag_CC6

LL_TIM_IsActiveFlag_CC6

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_CC6 (TIM_TypeDef * TIMx)**
Function description	Indicate whether Capture/Compare 6 interrupt flag (CC6F) is set (Capture/Compare 6 interrupt is pending).
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR CC6IF LL_TIM_IsActiveFlag_CC6

LL_TIM_ClearFlag_COM

Function name	**__STATIC_INLINE void LL_TIM_ClearFlag_COM (TIM_TypeDef * TIMx)**
Function description	Clear the commutation interrupt flag (COMIF).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR COMIF LL_TIM_ClearFlag_COM

LL_TIM_IsActiveFlag_COM

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_COM (TIM_TypeDef * TIMx)**
Function description	Indicate whether commutation interrupt flag (COMIF) is set (commutation interrupt is pending).
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR COMIF LL_TIM_IsActiveFlag_COM

LL_TIM_ClearFlag_TRIG

Function name	**__STATIC_INLINE void LL_TIM_ClearFlag_TRIG (TIM_TypeDef * TIMx)**
Function description	Clear the trigger interrupt flag (TIF).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR TIF LL_TIM_ClearFlag_TRIG

LL_TIM_IsActiveFlag_TRIG

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_TRIG (TIM_TypeDef * TIMx)**
Function description	Indicate whether trigger interrupt flag (TIF) is set (trigger interrupt is pending).
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR TIF LL_TIM_IsActiveFlag_TRIG

LL_TIM_ClearFlag_BRK

Function name	**__STATIC_INLINE void LL_TIM_ClearFlag_BRK (TIM_TypeDef * TIMx)**
Function description	Clear the break interrupt flag (BIF).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR BIF LL_TIM_ClearFlag_BRK

LL_TIM_IsActiveFlag_BRK

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_BRK (TIM_TypeDef * TIMx)**
Function description	Indicate whether break interrupt flag (BIF) is set (break interrupt is pending).
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR BIF LL_TIM_IsActiveFlag_BRK

LL_TIM_ClearFlag_BRK2

Function name	**__STATIC_INLINE void LL_TIM_ClearFlag_BRK2 (TIM_TypeDef * TIMx)**
Function description	Clear the break 2 interrupt flag (B2IF).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR B2IF LL_TIM_ClearFlag_BRK2

LL_TIM_IsActiveFlag_BRK2

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_BRK2 (TIM_TypeDef * TIMx)**
Function description	Indicate whether break 2 interrupt flag (B2IF) is set (break 2 interrupt is pending).
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR B2IF LL_TIM_IsActiveFlag_BRK2

LL_TIM_ClearFlag_CC1OVR

Function name	**__STATIC_INLINE void LL_TIM_ClearFlag_CC1OVR (TIM_TypeDef * TIMx)**
Function description	Clear the Capture/Compare 1 over-capture interrupt flag (CC1OF).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR CC1OF LL_TIM_ClearFlag_CC1OVR

LL_TIM_IsActiveFlag_CC1OVR

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_CC1OVR (TIM_TypeDef * TIMx)**
Function description	Indicate whether Capture/Compare 1 over-capture interrupt flag (CC1OF) is set (Capture/Compare 1 interrupt is pending).
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR CC1OF LL_TIM_IsActiveFlag_CC1OVR

LL_TIM_ClearFlag_CC2OVR

Function name	**__STATIC_INLINE void LL_TIM_ClearFlag_CC2OVR (TIM_TypeDef * TIMx)**
Function description	Clear the Capture/Compare 2 over-capture interrupt flag (CC2OF).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR CC2OF LL_TIM_ClearFlag_CC2OVR

LL_TIM_IsActiveFlag_CC2OVR

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_CC2OVR (TIM_TypeDef * TIMx)**
Function description	Indicate whether Capture/Compare 2 over-capture interrupt flag (CC2OF) is set (Capture/Compare 2 over-capture interrupt is pending).
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR CC2OF LL_TIM_IsActiveFlag_CC2OVR

LL_TIM_ClearFlag_CC3OVR

Function name	**__STATIC_INLINE void LL_TIM_ClearFlag_CC3OVR (TIM_TypeDef * TIMx)**
Function description	Clear the Capture/Compare 3 over-capture interrupt flag (CC3OF).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR CC3OF LL_TIM_ClearFlag_CC3OVR

LL_TIM_IsActiveFlag_CC3OVR

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_CC3OVR (TIM_TypeDef * TIMx)**
Function description	Indicate whether Capture/Compare 3 over-capture interrupt flag (CC3OF) is set (Capture/Compare 3 over-capture interrupt is pending).
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR CC3OF LL_TIM_IsActiveFlag_CC3OVR

LL_TIM_ClearFlag_CC4OVR

Function name	**__STATIC_INLINE void LL_TIM_ClearFlag_CC4OVR (TIM_TypeDef * TIMx)**
Function description	Clear the Capture/Compare 4 over-capture interrupt flag (CC4OF).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• SR CC4OF LL_TIM_ClearFlag_CC4OVR

LL_TIM_IsActiveFlag_CC4OVR

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsActiveFlag_CC4OVR (TIM_TypeDef * TIMx)**
Function description	Indicate whether Capture/Compare 4 over-capture interrupt flag (CC4OF) is set (Capture/Compare 4 over-capture interrupt is pending).
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• SR CC4OF LL_TIM_IsActiveFlag_CC4OVR

LL_TIM_EnableIT_UPDATE

Function name	**__STATIC_INLINE void LL_TIM_EnableIT_UPDATE (TIM_TypeDef * TIMx)**
Function description	Enable update interrupt (UIE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross	• DIER UIE LL_TIM_EnableIT_UPDATE

reference:

LL_TIM_DisableIT_UPDATE

Function name	**__STATIC_INLINE void LL_TIM_DisableIT_UPDATE (TIM_TypeDef * TIMx)**
Function description	Disable update interrupt (UIE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER UIE LL_TIM_DisableIT_UPDATE

LL_TIM_IsEnabledIT_UPDATE

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledIT_UPDATE (TIM_TypeDef * TIMx)**
Function description	Indicates whether the update interrupt (UIE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER UIE LL_TIM_IsEnabledIT_UPDATE

LL_TIM_EnableIT_CC1

Function name	**__STATIC_INLINE void LL_TIM_EnableIT_CC1 (TIM_TypeDef * TIMx)**
Function description	Enable capture/compare 1 interrupt (CC1IE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC1IE LL_TIM_EnableIT_CC1

LL_TIM_DisableIT_CC1

Function name	**__STATIC_INLINE void LL_TIM_DisableIT_CC1 (TIM_TypeDef * TIMx)**
Function description	Disable capture/compare 1 interrupt (CC1IE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC1IE LL_TIM_DisableIT_CC1

LL_TIM_IsEnabledIT_CC1

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledIT_CC1 (TIM_TypeDef * TIMx)**
Function description	Indicates whether the capture/compare 1 interrupt (CC1IE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER CC1IE LL_TIM_IsEnabledIT_CC1

LL_TIM_EnableIT_CC2

Function name	**__STATIC_INLINE void LL_TIM_EnableIT_CC2 (TIM_TypeDef * TIMx)**
Function description	Enable capture/compare 2 interrupt (CC2IE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC2IE LL_TIM_EnableIT_CC2

LL_TIM_DisableIT_CC2

Function name	**__STATIC_INLINE void LL_TIM_DisableIT_CC2 (TIM_TypeDef * TIMx)**
Function description	Disable capture/compare 2 interrupt (CC2IE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC2IE LL_TIM_DisableIT_CC2

LL_TIM_IsEnabledIT_CC2

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledIT_CC2 (TIM_TypeDef * TIMx)**
Function description	Indicates whether the capture/compare 2 interrupt (CC2IE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER CC2IE LL_TIM_IsEnabledIT_CC2

LL_TIM_EnableIT_CC3

Function name	**__STATIC_INLINE void LL_TIM_EnableIT_CC3 (TIM_TypeDef * TIMx)**
Function description	Enable capture/compare 3 interrupt (CC3IE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC3IE LL_TIM_EnableIT_CC3

LL_TIM_DisableIT_CC3

Function name	**__STATIC_INLINE void LL_TIM_DisableIT_CC3 (TIM_TypeDef * TIMx)**
Function description	Disable capture/compare 3 interrupt (CC3IE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC3IE LL_TIM_DisableIT_CC3

LL_TIM_IsEnabledIT_CC3

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledIT_CC3 (TIM_TypeDef * TIMx)**
Function description	Indicates whether the capture/compare 3 interrupt (CC3IE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER CC3IE LL_TIM_IsEnabledIT_CC3

LL_TIM_EnableIT_CC4

Function name	**__STATIC_INLINE void LL_TIM_EnableIT_CC4 (TIM_TypeDef * TIMx)**
Function description	Enable capture/compare 4 interrupt (CC4IE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC4IE LL_TIM_EnableIT_CC4

LL_TIM_DisableIT_CC4

Function name	**__STATIC_INLINE void LL_TIM_DisableIT_CC4 (TIM_TypeDef * TIMx)**
Function description	Disable capture/compare 4 interrupt (CC4IE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC4IE LL_TIM_DisableIT_CC4

LL_TIM_IsEnabledIT_CC4

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledIT_CC4 (TIM_TypeDef * TIMx)**
Function description	Indicates whether the capture/compare 4 interrupt (CC4IE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER CC4IE LL_TIM_IsEnabledIT_CC4

LL_TIM_EnableIT_COM

Function name	**__STATIC_INLINE void LL_TIM_EnableIT_COM (TIM_TypeDef * TIMx)**
Function description	Enable commutation interrupt (COMIE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER COMIE LL_TIM_EnableIT_COM

LL_TIM_DisableIT_COM

Function name	**__STATIC_INLINE void LL_TIM_DisableIT_COM (TIM_TypeDef * TIMx)**
Function description	Disable commutation interrupt (COMIE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER COMIE LL_TIM_DisableIT_COM

LL_TIM_IsEnabledIT_COM

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledIT_COM (TIM_TypeDef * TIMx)**
Function description	Indicates whether the commutation interrupt (COMIE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER COMIE LL_TIM_IsEnabledIT_COM

LL_TIM_EnableIT_TRIG

Function name	**__STATIC_INLINE void LL_TIM_EnableIT_TRIG (TIM_TypeDef * TIMx)**
Function description	Enable trigger interrupt (TIE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER TIE LL_TIM_EnableIT_TRIG

LL_TIM_DisableIT_TRIG

Function name	**__STATIC_INLINE void LL_TIM_DisableIT_TRIG (TIM_TypeDef * TIMx)**
Function description	Disable trigger interrupt (TIE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER TIE LL_TIM_DisableIT_TRIG

LL_TIM_IsEnabledIT_TRIG

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledIT_TRIG (TIM_TypeDef * TIMx)**
Function description	Indicates whether the trigger interrupt (TIE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER TIE LL_TIM_IsEnabledIT_TRIG

LL_TIM_EnableIT_BRK

Function name	**__STATIC_INLINE void LL_TIM_EnableIT_BRK (TIM_TypeDef * TIMx)**
Function description	Enable break interrupt (BIE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER BIE LL_TIM_EnableIT_BRK

LL_TIM_DisableIT_BRK

Function name	**__STATIC_INLINE void LL_TIM_DisableIT_BRK (TIM_TypeDef * TIMx)**
Function description	Disable break interrupt (BIE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER BIE LL_TIM_DisableIT_BRK

LL_TIM_IsEnabledIT_BRK

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledIT_BRK (TIM_TypeDef * TIMx)**
Function description	Indicates whether the break interrupt (BIE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER BIE LL_TIM_IsEnabledIT_BRK

LL_TIM_EnableDMAReq_UPDATE

Function name	**__STATIC_INLINE void LL_TIM_EnableDMAReq_UPDATE (TIM_TypeDef * TIMx)**
Function description	Enable update DMA request (UDE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER UDE LL_TIM_EnableDMAReq_UPDATE

LL_TIM_DisableDMAReq_UPDATE

Function name	**__STATIC_INLINE void LL_TIM_DisableDMAReq_UPDATE (TIM_TypeDef * TIMx)**
Function description	Disable update DMA request (UDE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER UDE LL_TIM_DisableDMAReq_UPDATE

LL_TIM_IsEnabledDMAReq_UPDATE

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledDMAReq_UPDATE (TIM_TypeDef * TIMx)**
Function description	Indicates whether the update DMA request (UDE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER UDE LL_TIM_IsEnabledDMAReq_UPDATE

LL_TIM_EnableDMAReq_CC1

Function name	**__STATIC_INLINE void LL_TIM_EnableDMAReq_CC1 (TIM_TypeDef * TIMx)**
Function description	Enable capture/compare 1 DMA request (CC1DE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC1DE LL_TIM_EnableDMAReq_CC1

LL_TIM_DisableDMAReq_CC1

Function name	**__STATIC_INLINE void LL_TIM_DisableDMAReq_CC1 (TIM_TypeDef * TIMx)**
Function description	Disable capture/compare 1 DMA request (CC1DE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC1DE LL_TIM_DisableDMAReq_CC1

LL_TIM_IsEnabledDMAReq_CC1

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledDMAReq_CC1 (TIM_TypeDef * TIMx)**
Function description	Indicates whether the capture/compare 1 DMA request (CC1DE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER CC1DE LL_TIM_IsEnabledDMAReq_CC1

LL_TIM_EnableDMAReq_CC2

Function name	**__STATIC_INLINE void LL_TIM_EnableDMAReq_CC2 (TIM_TypeDef * TIMx)**
Function description	Enable capture/compare 2 DMA request (CC2DE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC2DE LL_TIM_EnableDMAReq_CC2

LL_TIM_DisableDMAReq_CC2

Function name	**__STATIC_INLINE void LL_TIM_DisableDMAReq_CC2 (TIM_TypeDef * TIMx)**
Function description	Disable capture/compare 2 DMA request (CC2DE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC2DE LL_TIM_DisableDMAReq_CC2

LL_TIM_IsEnabledDMAReq_CC2

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledDMAReq_CC2 (TIM_TypeDef * TIMx)**
Function description	Indicates whether the capture/compare 2 DMA request (CC2DE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER CC2DE LL_TIM_IsEnabledDMAReq_CC2

LL_TIM_EnableDMAReq_CC3

Function name	**__STATIC_INLINE void LL_TIM_EnableDMAReq_CC3 (TIM_TypeDef * TIMx)**
Function description	Enable capture/compare 3 DMA request (CC3DE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC3DE LL_TIM_EnableDMAReq_CC3

LL_TIM_DisableDMAReq_CC3

Function name	**__STATIC_INLINE void LL_TIM_DisableDMAReq_CC3 (TIM_TypeDef * TIMx)**
Function description	Disable capture/compare 3 DMA request (CC3DE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC3DE LL_TIM_DisableDMAReq_CC3

LL_TIM_IsEnabledDMAReq_CC3

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledDMAReq_CC3 (TIM_TypeDef * TIMx)**
Function description	Indicates whether the capture/compare 3 DMA request (CC3DE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER CC3DE LL_TIM_IsEnabledDMAReq_CC3

LL_TIM_EnableDMAReq_CC4

Function name	**__STATIC_INLINE void LL_TIM_EnableDMAReq_CC4 (TIM_TypeDef * TIMx)**
Function description	Enable capture/compare 4 DMA request (CC4DE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC4DE LL_TIM_EnableDMAReq_CC4

LL_TIM_DisableDMAReq_CC4

Function name	**__STATIC_INLINE void LL_TIM_DisableDMAReq_CC4 (TIM_TypeDef * TIMx)**
Function description	Disable capture/compare 4 DMA request (CC4DE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER CC4DE LL_TIM_DisableDMAReq_CC4

LL_TIM_IsEnabledDMAReq_CC4

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledDMAReq_CC4 (TIM_TypeDef * TIMx)**
Function description	Indicates whether the capture/compare 4 DMA request (CC4DE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER CC4DE LL_TIM_IsEnabledDMAReq_CC4

LL_TIM_EnableDMAReq_COM

Function name	**__STATIC_INLINE void LL_TIM_EnableDMAReq_COM (TIM_TypeDef * TIMx)**
Function description	Enable commutation DMA request (COMDE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER COMDE LL_TIM_EnableDMAReq_COM

LL_TIM_DisableDMAReq_COM

Function name	**__STATIC_INLINE void LL_TIM_DisableDMAReq_COM (TIM_TypeDef * TIMx)**
Function description	Disable commutation DMA request (COMDE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER COMDE LL_TIM_DisableDMAReq_COM

LL_TIM_IsEnabledDMAReq_COM

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledDMAReq_COM (TIM_TypeDef * TIMx)**
Function description	Indicates whether the commutation DMA request (COMDE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER COMDE LL_TIM_IsEnabledDMAReq_COM

LL_TIM_EnableDMAReq_TRIG

Function name	**__STATIC_INLINE void LL_TIM_EnableDMAReq_TRIG (TIM_TypeDef * TIMx)**
Function description	Enable trigger interrupt (TDE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER TDE LL_TIM_EnableDMAReq_TRIG

LL_TIM_DisableDMAReq_TRIG

Function name	**__STATIC_INLINE void LL_TIM_DisableDMAReq_TRIG (TIM_TypeDef * TIMx)**
Function description	Disable trigger interrupt (TDE).
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• DIER TDE LL_TIM_DisableDMAReq_TRIG

LL_TIM_IsEnabledDMAReq_TRIG

Function name	**__STATIC_INLINE uint32_t LL_TIM_IsEnabledDMAReq_TRIG (TIM_TypeDef * TIMx)**
Function description	Indicates whether the trigger interrupt (TDE) is enabled.
Parameters	• **TIMx:** Timer instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• DIER TDE LL_TIM_IsEnabledDMAReq_TRIG

LL_TIM_GenerateEvent_UPDATE

Function name	**__STATIC_INLINE void LL_TIM_GenerateEvent_UPDATE (TIM_TypeDef * TIMx)**
Function description	Generate an update event.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• EGR UG LL_TIM_GenerateEvent_UPDATE

LL_TIM_GenerateEvent_CC1

Function name	**__STATIC_INLINE void LL_TIM_GenerateEvent_CC1 (TIM_TypeDef * TIMx)**
Function description	Generate Capture/Compare 1 event.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• EGR CC1G LL_TIM_GenerateEvent_CC1

LL_TIM_GenerateEvent_CC2

Function name	**__STATIC_INLINE void LL_TIM_GenerateEvent_CC2 (TIM_TypeDef * TIMx)**
Function description	Generate Capture/Compare 2 event.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• EGR CC2G LL_TIM_GenerateEvent_CC2

LL_TIM_GenerateEvent_CC3

Function name	**__STATIC_INLINE void LL_TIM_GenerateEvent_CC3 (TIM_TypeDef * TIMx)**
Function description	Generate Capture/Compare 3 event.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• EGR CC3G LL_TIM_GenerateEvent_CC3

LL_TIM_GenerateEvent_CC4

Function name	**__STATIC_INLINE void LL_TIM_GenerateEvent_CC4 (TIM_TypeDef * TIMx)**
Function description	Generate Capture/Compare 4 event.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• EGR CC4G LL_TIM_GenerateEvent_CC4

LL_TIM_GenerateEvent_COM

Function name	**__STATIC_INLINE void LL_TIM_GenerateEvent_COM (TIM_TypeDef * TIMx)**
Function description	Generate commutation event.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• EGR COMG LL_TIM_GenerateEvent_COM

LL_TIM_GenerateEvent_TRIG

Function name	**__STATIC_INLINE void LL_TIM_GenerateEvent_TRIG (TIM_TypeDef * TIMx)**
Function description	Generate trigger event.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• EGR TG LL_TIM_GenerateEvent_TRIG

LL_TIM_GenerateEvent_BRK

Function name	**__STATIC_INLINE void LL_TIM_GenerateEvent_BRK (TIM_TypeDef * TIMx)**
Function description	Generate break event.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• EGR BG LL_TIM_GenerateEvent_BRK

LL_TIM_GenerateEvent_BRK2

Function name	**__STATIC_INLINE void LL_TIM_GenerateEvent_BRK2 (TIM_TypeDef * TIMx)**
Function description	Generate break 2 event.
Parameters	• **TIMx:** Timer instance
Return values	• **None**
Reference Manual to LL API cross reference:	• EGR B2G LL_TIM_GenerateEvent_BRK2

LL_TIM_DeInit

Function name	**ErrorStatus LL_TIM_DeInit (TIM_TypeDef * TIMx)**
Function description	Set TIMx registers to their reset values.
Parameters	• **TIMx:** Timer instance
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: TIMx registers are de-initialized – ERROR: invalid TIMx instance

LL_TIM_StructInit

Function name	**void LL_TIM_StructInit (LL_TIM_InitTypeDef * TIM_InitStruct)**
Function description	Set the fields of the time base unit configuration data structure to their default values.
Parameters	• **TIM_InitStruct:** pointer to a LL_TIM_InitTypeDef structure (time base unit configuration data structure)
Return values	• **None**

LL_TIM_Init

Function name	**ErrorStatus LL_TIM_Init (TIM_TypeDef * TIMx, LL_TIM_InitTypeDef * TIM_InitStruct)**
Function description	Configure the TIMx time base unit.
Parameters	• **TIMx:** Timer Instance • **TIM_InitStruct:** pointer to a LL_TIM_InitTypeDef structure (TIMx time base unit configuration data structure)
Return values	• **An:** ErrorStatus enumeration value: – SUCCESS: TIMx registers are de-initialized – ERROR: not applicable

LL_TIM_OC_StructInit

Function name	**void LL_TIM_OC_StructInit (LL_TIM_OC_InitTypeDef * TIM_OC_InitStruct)**
Function description	Set the fields of the TIMx output channel configuration data structure to their default values.

Parameters
- **TIM_OC_InitStruct:** pointer to a LL_TIM_OC_InitTypeDef structure (the output channel configuration data structure)

Return values
- **None**

LL_TIM_OC_Init

Function name **ErrorStatus LL_TIM_OC_Init (TIM_TypeDef * TIMx, uint32_t Channel, LL_TIM_OC_InitTypeDef * TIM_OC_InitStruct)**

Function description Configure the TIMx output channel.

Parameters
- **TIMx:** Timer Instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4
  - LL_TIM_CHANNEL_CH5
  - LL_TIM_CHANNEL_CH6
- **TIM_OC_InitStruct:** pointer to a LL_TIM_OC_InitTypeDef structure (TIMx output channel configuration data structure)

Return values
- **An:** ErrorStatus enumeration value:
  - SUCCESS: TIMx output channel is initialized
  - ERROR: TIMx output channel is not initialized

Notes
- OC5 and OC6 are not available for all F3 devices

LL_TIM_IC_StructInit

Function name **void LL_TIM_IC_StructInit (LL_TIM_IC_InitTypeDef * TIM_ICInitStruct)**

Function description Set the fields of the TIMx input channel configuration data structure to their default values.

Parameters
- **TIM_ICInitStruct:** pointer to a LL_TIM_IC_InitTypeDef structure (the input channel configuration data structure)

Return values
- **None**

LL_TIM_IC_Init

Function name **ErrorStatus LL_TIM_IC_Init (TIM_TypeDef * TIMx, uint32_t Channel, LL_TIM_IC_InitTypeDef * TIM_IC_InitStruct)**

Function description Configure the TIMx input channel.

Parameters
- **TIMx:** Timer Instance
- **Channel:** This parameter can be one of the following values:
  - LL_TIM_CHANNEL_CH1
  - LL_TIM_CHANNEL_CH2
  - LL_TIM_CHANNEL_CH3
  - LL_TIM_CHANNEL_CH4
- **TIM_IC_InitStruct:** pointer to a LL_TIM_IC_InitTypeDef structure (TIMx input channel configuration data structure)

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: TIMx output channel is initialized
  – ERROR: TIMx output channel is not initialized

LL_TIM_ENCODER_StructInit

Function name **void LL_TIM_ENCODER_StructInit (LL_TIM_ENCODER_InitTypeDef * TIM_EncoderInitStruct)**

Function description Fills each TIM_EncoderInitStruct field with its default value.

Parameters
- **TIM_EncoderInitStruct:** pointer to a LL_TIM_ENCODER_InitTypeDef structure (encoder interface configuration data structure)

Return values
- **None**

LL_TIM_ENCODER_Init

Function name **ErrorStatus LL_TIM_ENCODER_Init (TIM_TypeDef * TIMx, LL_TIM_ENCODER_InitTypeDef * TIM_EncoderInitStruct)**

Function description Configure the encoder interface of the timer instance.

Parameters
- **TIMx:** Timer Instance
- **TIM_EncoderInitStruct:** pointer to a LL_TIM_ENCODER_InitTypeDef structure (TIMx encoder interface configuration data structure)

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: TIMx registers are de-initialized
  – ERROR: not applicable

LL_TIM_HALLSENSOR_StructInit

Function name **void LL_TIM_HALLSENSOR_StructInit (LL_TIM_HALLSENSOR_InitTypeDef * TIM_HallSensorInitStruct)**

Function description Set the fields of the TIMx Hall sensor interface configuration data structure to their default values.

Parameters
- **TIM_HallSensorInitStruct:** pointer to a LL_TIM_HALLSENSOR_InitTypeDef structure (HALL sensor interface configuration data structure)

Return values
- **None**

LL_TIM_HALLSENSOR_Init

Function name **ErrorStatus LL_TIM_HALLSENSOR_Init (TIM_TypeDef * TIMx, LL_TIM_HALLSENSOR_InitTypeDef * TIM_HallSensorInitStruct)**

Function description Configure the Hall sensor interface of the timer instance.

Parameters
- **TIMx:** Timer Instance
- **TIM_HallSensorInitStruct:** pointer to a LL_TIM_HALLSENSOR_InitTypeDef structure (TIMx HALL

sensor interface configuration data structure)

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: TIMx registers are de-initialized
  – ERROR: not applicable

Notes
- TIMx CH1, CH2 and CH3 inputs connected through a XOR to the TI1 input channel
- TIMx slave mode controller is configured in reset mode. Selected internal trigger is TI1F_ED.
- Channel 1 is configured as input, IC1 is mapped on TRC.
- Captured value stored in TIMx_CCR1 correspond to the time elapsed between 2 changes on the inputs. It gives information about motor speed.
- Channel 2 is configured in output PWM 2 mode.
- Compare value stored in TIMx_CCR2 corresponds to the commutation delay.
- OC2REF is selected as trigger output on TRGO.
- LL_TIM_IC_POLARITY_BOTHEDGE must not be used for TI1 when it is used when TIMx operates in Hall sensor interface mode.

LL_TIM_BDTR_StructInit

Function name **void LL_TIM_BDTR_StructInit (LL_TIM_BDTR_InitTypeDef * TIM_BDTRInitStruct)**

Function description Set the fields of the Break and Dead Time configuration data structure to their default values.

Parameters
- **TIM_BDTRInitStruct:** pointer to a LL_TIM_BDTR_InitTypeDef structure (Break and Dead Time configuration data structure)

Return values
- **None**

LL_TIM_BDTR_Init

Function name **ErrorStatus LL_TIM_BDTR_Init (TIM_TypeDef * TIMx, LL_TIM_BDTR_InitTypeDef * TIM_BDTRInitStruct)**

Function description Configure the Break and Dead Time feature of the timer instance.

Parameters
- **TIMx:** Timer Instance
- **TIM_BDTRInitStruct:** pointer to a LL_TIM_BDTR_InitTypeDef structure(Break and Dead Time configuration data structure)

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: Break and Dead Time is initialized
  – ERROR: not applicable

Notes
- As the bits BK2P, BK2E, BK2F[3:0], BKF[3:0], AOE, BKP, BKE, OSSI, OSSR and DTG[7:0] can be write-locked depending on the LOCK configuration, it can be necessary to configure all of them during the first write access to the TIMx_BDTR register.
- Macro IS_TIM_BREAK_INSTANCE(TIMx) can be used to

check whether or not a timer instance provides a break input.

- Macro IS_TIM_BKIN2_INSTANCE(TIMx) can be used to check whether or not a timer instance provides a second break input.

78.3 TIM Firmware driver defines

78.3.1 TIM

Active Input Selection

LL_TIM_ACTIVEINPUT_DIRECTTI	ICx is mapped on TIx
LL_TIM_ACTIVEINPUT_INDIRECTTI	ICx is mapped on TIy
LL_TIM_ACTIVEINPUT_TRC	ICx is mapped on TRC

Automatic output enable

LL_TIM_AUTOMATICOUTPUT_DISABLE	MOE can be set only by software
LL_TIM_AUTOMATICOUTPUT_ENABLE	MOE can be set by software or automatically at the next update event

Break2 Enable

LL_TIM_BREAK2_DISABLE	Break2 function disabled
LL_TIM_BREAK2_ENABLE	Break2 function enabled

BREAK2 FILTER

LL_TIM_BREAK2_FILTER_FDIV1	No filter, BRK acts asynchronously
LL_TIM_BREAK2_FILTER_FDIV1_N2	fSAMPLING=fCK_INT, N=2
LL_TIM_BREAK2_FILTER_FDIV1_N4	fSAMPLING=fCK_INT, N=4
LL_TIM_BREAK2_FILTER_FDIV1_N8	fSAMPLING=fCK_INT, N=8
LL_TIM_BREAK2_FILTER_FDIV2_N6	fSAMPLING=fDTS/2, N=6
LL_TIM_BREAK2_FILTER_FDIV2_N8	fSAMPLING=fDTS/2, N=8
LL_TIM_BREAK2_FILTER_FDIV4_N6	fSAMPLING=fDTS/4, N=6
LL_TIM_BREAK2_FILTER_FDIV4_N8	fSAMPLING=fDTS/4, N=8
LL_TIM_BREAK2_FILTER_FDIV8_N6	fSAMPLING=fDTS/8, N=6
LL_TIM_BREAK2_FILTER_FDIV8_N8	fSAMPLING=fDTS/8, N=8
LL_TIM_BREAK2_FILTER_FDIV16_N5	fSAMPLING=fDTS/16, N=5
LL_TIM_BREAK2_FILTER_FDIV16_N6	fSAMPLING=fDTS/16, N=6
LL_TIM_BREAK2_FILTER_FDIV16_N8	fSAMPLING=fDTS/16, N=8
LL_TIM_BREAK2_FILTER_FDIV32_N5	fSAMPLING=fDTS/32, N=5
LL_TIM_BREAK2_FILTER_FDIV32_N6	fSAMPLING=fDTS/32, N=6
LL_TIM_BREAK2_FILTER_FDIV32_N8	fSAMPLING=fDTS/32, N=8

BREAK2 POLARITY

LL_TIM_BREAK2_POLARITY_LOW	Break input BRK2 is active low

LL_TIM_BREAK2_POLARITY_HIGH Break input BRK2 is active high

Break Enable

LL_TIM_BREAK_DISABLE Break function disabled

LL_TIM_BREAK_ENABLE Break function enabled

break filter

LL_TIM_BREAK_FILTER_FDIV1 No filter, BRK acts asynchronously

LL_TIM_BREAK_FILTER_FDIV1_N2 fSAMPLING=fCK_INT, N=2

LL_TIM_BREAK_FILTER_FDIV1_N4 fSAMPLING=fCK_INT, N=4

LL_TIM_BREAK_FILTER_FDIV1_N8 fSAMPLING=fCK_INT, N=8

LL_TIM_BREAK_FILTER_FDIV2_N6 fSAMPLING=fDTS/2, N=6

LL_TIM_BREAK_FILTER_FDIV2_N8 fSAMPLING=fDTS/2, N=8

LL_TIM_BREAK_FILTER_FDIV4_N6 fSAMPLING=fDTS/4, N=6

LL_TIM_BREAK_FILTER_FDIV4_N8 fSAMPLING=fDTS/4, N=8

LL_TIM_BREAK_FILTER_FDIV8_N6 fSAMPLING=fDTS/8, N=6

LL_TIM_BREAK_FILTER_FDIV8_N8 fSAMPLING=fDTS/8, N=8

LL_TIM_BREAK_FILTER_FDIV16_N5 fSAMPLING=fDTS/16, N=5

LL_TIM_BREAK_FILTER_FDIV16_N6 fSAMPLING=fDTS/16, N=6

LL_TIM_BREAK_FILTER_FDIV16_N8 fSAMPLING=fDTS/16, N=8

LL_TIM_BREAK_FILTER_FDIV32_N5 fSAMPLING=fDTS/32, N=5

LL_TIM_BREAK_FILTER_FDIV32_N6 fSAMPLING=fDTS/32, N=6

LL_TIM_BREAK_FILTER_FDIV32_N8 fSAMPLING=fDTS/32, N=8

break polarity

LL_TIM_BREAK_POLARITY_LOW Break input BRK is active low

LL_TIM_BREAK_POLARITY_HIGH Break input BRK is active high

Capture Compare DMA Request

LL_TIM_CCDMAREQUEST_CC CCx DMA request sent when CCx event occurs

LL_TIM_CCDMAREQUEST_UPDATE CCx DMA requests sent when update event occurs

Capture Compare Update Source

LL_TIM_CCUPDATESOURCE_COMG_ONLY Capture/compare control bits are updated by setting the COMG bit only

LL_TIM_CCUPDATESOURCE_COMG_AND_TRGI Capture/compare control bits are updated by setting the COMG bit or when a rising edge occurs on trigger input (TRGI)

Channel

LL_TIM_CHANNEL_CH1 Timer input/output channel 1

LL_TIM_CHANNEL_CH1N	Timer complementary output channel 1
LL_TIM_CHANNEL_CH2	Timer input/output channel 2
LL_TIM_CHANNEL_CH2N	Timer complementary output channel 2
LL_TIM_CHANNEL_CH3	Timer input/output channel 3
LL_TIM_CHANNEL_CH3N	Timer complementary output channel 3
LL_TIM_CHANNEL_CH4	Timer input/output channel 4
LL_TIM_CHANNEL_CH5	Timer output channel 5
LL_TIM_CHANNEL_CH6	Timer output channel 6

Clock Division

LL_TIM_CLOCKDIVISION_DIV1	tDTS=tCK_INT
LL_TIM_CLOCKDIVISION_DIV2	tDTS=2*tCK_INT
LL_TIM_CLOCKDIVISION_DIV4	tDTS=4*tCK_INT

Clock Source

LL_TIM_CLOCKSOURCE_INTERNAL	The timer is clocked by the internal clock provided from the RCC
LL_TIM_CLOCKSOURCE_EXT_MODE1	Counter counts at each rising or falling edge on a selected inpu t
LL_TIM_CLOCKSOURCE_EXT_MODE2	Counter counts at each rising or falling edge on the external trigger input ETR

Counter Direction

LL_TIM_COUNTERDIRECTION_UP	Timer counter counts up
LL_TIM_COUNTERDIRECTION_DOWN	Timer counter counts down

Counter Mode

LL_TIM_COUNTERMODE_UP	Counter used as upcounter
LL_TIM_COUNTERMODE_DOWN	Counter used as downcounter
LL_TIM_COUNTERMODE_CENTER_UP	The counter counts up and down alternatively. Output compare interrupt flags of output channels are set only when the counter is counting down.
LL_TIM_COUNTERMODE_CENTER_DOWN	The counter counts up and down alternatively. Output compare interrupt flags of output channels are set only when the counter is counting up
LL_TIM_COUNTERMODE_CENTER_UP_DOWN	The counter counts up and down alternatively. Output compare interrupt flags of output channels are set only when the counter is counting up or down.

DMA Burst Base Address

LL_TIM_DMABURST_BASEADDR_CR1	TIMx_CR1 register is the DMA base address for DMA burst

LL_TIM_DMABURST_BASEADDR_CR2	TIMx_CR2 register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_SMCR	TIMx_SMCR register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_DIER	TIMx_DIER register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_SR	TIMx_SR register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_EGR	TIMx_EGR register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_CCMR1	TIMx_CCMR1 register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_CCMR2	TIMx_CCMR2 register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_CCER	TIMx_CCER register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_CNT	TIMx_CNT register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_PSC	TIMx_PSC register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_ARR	TIMx_ARR register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_RCR	TIMx_RCR register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_CCR1	TIMx_CCR1 register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_CCR2	TIMx_CCR2 register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_CCR3	TIMx_CCR3 register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_CCR4	TIMx_CCR4 register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_BDTR	TIMx_BDTR register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_CCMR3	TIMx_CCMR3 register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_CCR5	TIMx_CCR5 register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_CCR6	TIMx_CCR6 register is the DMA base address for DMA burst
LL_TIM_DMABURST_BASEADDR_OR	TIMx_OR register is the DMA base address for DMA burst

DMA Burst Length

LL_TIM_DMABURST_LENGTH_1TRANSFER	Transfer is done to 1 register starting

	from the DMA burst base address
LL_TIM_DMABURST_LENGTH_2TRANSFERS	Transfer is done to 2 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_3TRANSFERS	Transfer is done to 3 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_4TRANSFERS	Transfer is done to 4 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_5TRANSFERS	Transfer is done to 5 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_6TRANSFERS	Transfer is done to 6 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_7TRANSFERS	Transfer is done to 7 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_8TRANSFERS	Transfer is done to 1 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_9TRANSFERS	Transfer is done to 9 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_10TRANSFERS	Transfer is done to 10 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_11TRANSFERS	Transfer is done to 11 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_12TRANSFERS	Transfer is done to 12 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_13TRANSFERS	Transfer is done to 13 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_14TRANSFERS	Transfer is done to 14 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_15TRANSFERS	Transfer is done to 15 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_16TRANSFERS	Transfer is done to 16 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_17TRANSFERS	Transfer is done to 17 registers starting from the DMA burst base address
LL_TIM_DMABURST_LENGTH_18TRANSFERS	Transfer is done to 18 registers starting from the DMA burst base address

Encoder Mode

LL_TIM_ENCODERMODE_X2_TI1	Encoder mode 1 - Counter counts up/down on TI2FP2 edge depending on TI1FP1 level
LL_TIM_ENCODERMODE_X2_TI2	Encoder mode 2 - Counter counts up/down on TI1FP1 edge depending on TI2FP2 level
LL_TIM_ENCODERMODE_X4_TI12	Encoder mode 3 - Counter counts up/down on both TI1FP1 and TI2FP2 edges depending on the level of the other input l

External Trigger Filter

LL_TIM_ETR_FILTER_FDIV1	No filter, sampling is done at fDTS
LL_TIM_ETR_FILTER_FDIV1_N2	fSAMPLING=fCK_INT, N=2
LL_TIM_ETR_FILTER_FDIV1_N4	fSAMPLING=fCK_INT, N=4
LL_TIM_ETR_FILTER_FDIV1_N8	fSAMPLING=fCK_INT, N=8
LL_TIM_ETR_FILTER_FDIV2_N6	fSAMPLING=fDTS/2, N=6
LL_TIM_ETR_FILTER_FDIV2_N8	fSAMPLING=fDTS/2, N=8
LL_TIM_ETR_FILTER_FDIV4_N6	fSAMPLING=fDTS/4, N=6
LL_TIM_ETR_FILTER_FDIV4_N8	fSAMPLING=fDTS/4, N=8
LL_TIM_ETR_FILTER_FDIV8_N6	fSAMPLING=fDTS/8, N=8
LL_TIM_ETR_FILTER_FDIV8_N8	fSAMPLING=fDTS/16, N=5
LL_TIM_ETR_FILTER_FDIV16_N5	fSAMPLING=fDTS/16, N=6
LL_TIM_ETR_FILTER_FDIV16_N6	fSAMPLING=fDTS/16, N=8
LL_TIM_ETR_FILTER_FDIV16_N8	fSAMPLING=fDTS/16, N=5
LL_TIM_ETR_FILTER_FDIV32_N5	fSAMPLING=fDTS/32, N=5
LL_TIM_ETR_FILTER_FDIV32_N6	fSAMPLING=fDTS/32, N=6
LL_TIM_ETR_FILTER_FDIV32_N8	fSAMPLING=fDTS/32, N=8

External Trigger Polarity

LL_TIM_ETR_POLARITY_NONINVERTED	ETR is non-inverted, active at high level or rising edge
LL_TIM_ETR_POLARITY_INVERTED	ETR is inverted, active at low level or falling edge

External Trigger Prescaler

LL_TIM_ETR_PRESCALER_DIV1	ETR prescaler OFF
LL_TIM_ETR_PRESCALER_DIV2	ETR frequency is divided by 2
LL_TIM_ETR_PRESCALER_DIV4	ETR frequency is divided by 4
LL_TIM_ETR_PRESCALER_DIV8	ETR frequency is divided by 8

Get Flags Defines

LL_TIM_SR_UIF	Update interrupt flag
LL_TIM_SR_CC1IF	Capture/compare 1 interrupt flag
LL_TIM_SR_CC2IF	Capture/compare 2 interrupt flag
LL_TIM_SR_CC3IF	Capture/compare 3 interrupt flag
LL_TIM_SR_CC4IF	Capture/compare 4 interrupt flag
LL_TIM_SR_CC5IF	Capture/compare 5 interrupt flag
LL_TIM_SR_CC6IF	Capture/compare 6 interrupt flag
LL_TIM_SR_COMIF	COM interrupt flag
LL_TIM_SR_TIF	Trigger interrupt flag

LL_TIM_SR_BIF	Break interrupt flag
LL_TIM_SR_B2IF	Second break interrupt flag
LL_TIM_SR_CC1OF	Capture/Compare 1 overcapture flag
LL_TIM_SR_CC2OF	Capture/Compare 2 overcapture flag
LL_TIM_SR_CC3OF	Capture/Compare 3 overcapture flag
LL_TIM_SR_CC4OF	Capture/Compare 4 overcapture flag

GROUPCH5

LL_TIM_GROUPCH5_NONE	No effect of OC5REF on OC1REFC, OC2REFC and OC3REFC
LL_TIM_GROUPCH5_OC1REFC	OC1REFC is the logical AND of OC1REFC and OC5REF
LL_TIM_GROUPCH5_OC2REFC	OC2REFC is the logical AND of OC2REFC and OC5REF
LL_TIM_GROUPCH5_OC3REFC	OC3REFC is the logical AND of OC3REFC and OC5REF

Input Configuration Prescaler

LL_TIM_ICPSC_DIV1	No prescaler, capture is done each time an edge is detected on the capture input
LL_TIM_ICPSC_DIV2	Capture is done once every 2 events
LL_TIM_ICPSC_DIV4	Capture is done once every 4 events
LL_TIM_ICPSC_DIV8	Capture is done once every 8 events

Input Configuration Filter

LL_TIM_IC_FILTER_FDIV1	No filter, sampling is done at fDTS
LL_TIM_IC_FILTER_FDIV1_N2	fSAMPLING=fCK_INT, N=2
LL_TIM_IC_FILTER_FDIV1_N4	fSAMPLING=fCK_INT, N=4
LL_TIM_IC_FILTER_FDIV1_N8	fSAMPLING=fCK_INT, N=8
LL_TIM_IC_FILTER_FDIV2_N6	fSAMPLING=fDTS/2, N=6
LL_TIM_IC_FILTER_FDIV2_N8	fSAMPLING=fDTS/2, N=8
LL_TIM_IC_FILTER_FDIV4_N6	fSAMPLING=fDTS/4, N=6
LL_TIM_IC_FILTER_FDIV4_N8	fSAMPLING=fDTS/4, N=8
LL_TIM_IC_FILTER_FDIV8_N6	fSAMPLING=fDTS/8, N=6
LL_TIM_IC_FILTER_FDIV8_N8	fSAMPLING=fDTS/8, N=8
LL_TIM_IC_FILTER_FDIV16_N5	fSAMPLING=fDTS/16, N=5
LL_TIM_IC_FILTER_FDIV16_N6	fSAMPLING=fDTS/16, N=6
LL_TIM_IC_FILTER_FDIV16_N8	fSAMPLING=fDTS/16, N=8
LL_TIM_IC_FILTER_FDIV32_N5	fSAMPLING=fDTS/32, N=5
LL_TIM_IC_FILTER_FDIV32_N6	fSAMPLING=fDTS/32, N=6
LL_TIM_IC_FILTER_FDIV32_N8	fSAMPLING=fDTS/32, N=8

Input Configuration Polarity

LL_TIM_IC_POLARITY_RISING	The circuit is sensitive to TIxFP1 rising edge, TIxFP1 is not inverted
LL_TIM_IC_POLARITY_FALLING	The circuit is sensitive to TIxFP1 falling edge, TIxFP1 is inverted
LL_TIM_IC_POLARITY_BOTHEDGE	The circuit is sensitive to both TIxFP1 rising and falling edges, TIxFP1 is not inverted

IT Defines

LL_TIM_DIER_UIE	Update interrupt enable
LL_TIM_DIER_CC1IE	Capture/compare 1 interrupt enable
LL_TIM_DIER_CC2IE	Capture/compare 2 interrupt enable
LL_TIM_DIER_CC3IE	Capture/compare 3 interrupt enable
LL_TIM_DIER_CC4IE	Capture/compare 4 interrupt enable
LL_TIM_DIER_COMIE	COM interrupt enable
LL_TIM_DIER_TIE	Trigger interrupt enable
LL_TIM_DIER_BIE	Break interrupt enable

Lock Level

LL_TIM_LOCKLEVEL_OFF	LOCK OFF - No bit is write protected
LL_TIM_LOCKLEVEL_1	LOCK Level 1
LL_TIM_LOCKLEVEL_2	LOCK Level 2
LL_TIM_LOCKLEVEL_3	LOCK Level 3

Output Configuration Idle State

LL_TIM_OCIDLESTATE_LOW	OCx=0 (after a dead-time if OC is implemented) when MOE=0
LL_TIM_OCIDLESTATE_HIGH	OCx=1 (after a dead-time if OC is implemented) when MOE=0

Output Configuration Mode

LL_TIM_OCMODE_FROZEN	The comparison between the output compare register TIMx_CCRy and the counter TIMx_CNT has no effect on the output channel level
LL_TIM_OCMODE_ACTIVE	OCyREF is forced high on compare match
LL_TIM_OCMODE_INACTIVE	OCyREF is forced low on compare match
LL_TIM_OCMODE_TOGGLE	OCyREF toggles on compare match
LL_TIM_OCMODE_FORCED_INACTIVE	OCyREF is forced low
LL_TIM_OCMODE_FORCED_ACTIVE	OCyREF is forced high
LL_TIM_OCMODE_PWM1	In upcounting, channel y is active as long as TIMx_CNT<TIMx_CCRy else inactive. In downcounting, channel y is inactive as long as TIMx_CNT>TIMx_CCRy else active.

LL_TIM_OCMODE_PWM2	In upcounting, channel y is inactive as long as TIMx_CNT<TIMx_CCRy else active. In downcounting, channel y is active as long as TIMx_CNT>TIMx_CCRy else inactive
LL_TIM_OCMODE_RETRIG_OPM1	Retrigerrable OPM mode 1
LL_TIM_OCMODE_RETRIG_OPM2	Retrigerrable OPM mode 2
LL_TIM_OCMODE_COMBINED_PWM1	Combined PWM mode 1
LL_TIM_OCMODE_COMBINED_PWM2	Combined PWM mode 2
LL_TIM_OCMODE_ASSYMETRIC_PWM1	Asymmetric PWM mode 1
LL_TIM_OCMODE_ASSYMETRIC_PWM2	Asymmetric PWM mode 2

Output Configuration Polarity

LL_TIM_OCPOLARITY_HIGH	OCxactive high
LL_TIM_OCPOLARITY_LOW	OCxactive low

OCREF clear input selection

LL_TIM_OCREF_CLR_INT_OCREF_CLR	OCREF_CLR_INT is connected to the OCREF_CLR input
LL_TIM_OCREF_CLR_INT_ETR	OCREF_CLR_INT is connected to ETRF

Output Configuration State

LL_TIM_OCSTATE_DISABLE	OCx is not active
LL_TIM_OCSTATE_ENABLE	OCx signal is output on the corresponding output pin

One Pulse Mode

LL_TIM_ONEPULSEMODE_SINGLE	Counter is not stopped at update event
LL_TIM_ONEPULSEMODE_REPETITIVE	Counter stops counting at the next update event

OSSI

LL_TIM_OSSI_DISABLE	When inactive, OCx/OCxN outputs are disabled
LL_TIM_OSSI_ENABLE	When inactive, OxC/OCxN outputs are first forced with their inactive level then forced to their idle level after the deadtime

OSSR

LL_TIM_OSSR_DISABLE	When inactive, OCx/OCxN outputs are disabled
LL_TIM_OSSR_ENABLE	When inactive, OC/OCN outputs are enabled with their inactive level as soon as CCxE=1 or CCxNE=1

Slave Mode

LL_TIM_SLAVEMODE_DISABLED	Slave mode disabled
LL_TIM_SLAVEMODE_RESET	Reset Mode - Rising edge of the selected trigger input (TRGI) reinitializes the counter
LL_TIM_SLAVEMODE_GATED	Gated Mode - The counter clock is enabled when the trigger input (TRGI) is high

LL_TIM_SLAVEMODE_TRIGGER	Trigger Mode - The counter starts at a rising edge of the trigger TRGI
LL_TIM_SLAVEMODE_COMBINED_RESETTRIGGER	Combined reset + trigger mode - Rising edge of the selected trigger input (TRGI) reinitializes the counter, generates an update of the registers and starts the counter

TIM16 External Input Ch1 Remap

LL_TIM_TIM16_TI1_RMP_GPIO	TIM16 input capture 1 is connected to GPIO
LL_TIM_TIM16_TI1_RMP_RTC	TIM16 input capture 1 is connected to RTC wakeup interrupt
LL_TIM_TIM16_TI1_RMP_HSE_32	TIM16 input capture 1 is connected to HSE/32 clock
LL_TIM_TIM16_TI1_RMP_MCO	TIM16 input capture 1 is connected to MCO

TIM1 External Trigger ADC1 Remap

LL_TIM_TIM1_ETR_ADC1_RMP_NC	TIM1_ETR is not connected to ADC1 analog watchdog x
LL_TIM_TIM1_ETR_ADC1_RMP_AWD1	TIM1_ETR is connected to ADC1 analog watchdog 1
LL_TIM_TIM1_ETR_ADC1_RMP_AWD2	TIM1_ETR is connected to ADC1 analog watchdog 2
LL_TIM_TIM1_ETR_ADC1_RMP_AWD3	TIM1_ETR is connected to ADC1 analog watchdog 3

TIM1 External Trigger ADC4 Remap

LL_TIM_TIM1_ETR_ADC4_RMP_NC	TIM1_ETR is not connected to ADC4 analog watchdog x
LL_TIM_TIM1_ETR_ADC4_RMP_AWD1	TIM1_ETR is connected to ADC4 analog watchdog 1
LL_TIM_TIM1_ETR_ADC4_RMP_AWD2	TIM1_ETR is connected to ADC4 analog watchdog 2
LL_TIM_TIM1_ETR_ADC4_RMP_AWD3	TIM1_ETR is connected to ADC4 analog watchdog 3

TIM8 External Trigger ADC2 Remap

LL_TIM_TIM8_ETR_ADC2_RMP_NC	TIM8_ETR is not connected to ADC2 analog watchdog x
LL_TIM_TIM8_ETR_ADC2_RMP_AWD1	TIM8_ETR is connected to ADC2 analog watchdog
LL_TIM_TIM8_ETR_ADC2_RMP_AWD2	TIM8_ETR is connected to ADC2 analog watchdog 2
LL_TIM_TIM8_ETR_ADC2_RMP_AWD3	TIM8_ETR is connected to ADC2 analog watchdog 3

TIM8 External Trigger ADC3 Remap

LL_TIM_TIM8_ETR_ADC3_RMP_NC	TIM8_ETR is not connected to ADC3 analog watchdog x
LL_TIM_TIM8_ETR_ADC3_RMP_AWD1	TIM8_ETR is connected to ADC3 analog watchdog 1
LL_TIM_TIM8_ETR_ADC3_RMP_AWD2	TIM8_ETR is connected to ADC3 analog watchdog 2
LL_TIM_TIM8_ETR_ADC3_RMP_AWD3	TIM8_ETR is connected to ADC3 analog watchdog 3

Trigger Output

LL_TIM_TRGO_RESET	UG bit from the TIMx_EGR register is used as trigger output
LL_TIM_TRGO_ENABLE	Counter Enable signal (CNT_EN) is used as trigger output
LL_TIM_TRGO_UPDATE	Update event is used as trigger output
LL_TIM_TRGO_CC1IF	CC1 capture or a compare match is used as trigger output
LL_TIM_TRGO_OC1REF	OC1REF signal is used as trigger output
LL_TIM_TRGO_OC2REF	OC2REF signal is used as trigger output
LL_TIM_TRGO_OC3REF	OC3REF signal is used as trigger output
LL_TIM_TRGO_OC4REF	OC4REF signal is used as trigger output

Trigger Output 2

LL_TIM_TRGO2_RESET	UG bit from the TIMx_EGR register is used as trigger output 2
LL_TIM_TRGO2_ENABLE	Counter Enable signal (CNT_EN) is used as trigger output 2
LL_TIM_TRGO2_UPDATE	Update event is used as trigger output 2
LL_TIM_TRGO2_CC1F	CC1 capture or a compare match is used as trigger output 2
LL_TIM_TRGO2_OC1	OC1REF signal is used as trigger output 2
LL_TIM_TRGO2_OC2	OC2REF signal is used as trigger output 2
LL_TIM_TRGO2_OC3	OC3REF signal is used as trigger output 2
LL_TIM_TRGO2_OC4	OC4REF signal is used as trigger output 2
LL_TIM_TRGO2_OC5	OC5REF signal is used as trigger output 2
LL_TIM_TRGO2_OC6	OC6REF signal is used as trigger output 2
LL_TIM_TRGO2_OC4_RISINGFALLING	OC4REF rising or falling edges are used as trigger output 2
LL_TIM_TRGO2_OC6_RISINGFALLING	OC6REF rising or falling edges are used

	as trigger output 2
LL_TIM_TRGO2_OC4_RISING_OC6_RISING	OC4REF or OC6REF rising edges are used as trigger output 2
LL_TIM_TRGO2_OC4_RISING_OC6_FALLING	OC4REF rising or OC6REF falling edges are used as trigger output 2
LL_TIM_TRGO2_OC5_RISING_OC6_RISING	OC5REF or OC6REF rising edges are used as trigger output 2
LL_TIM_TRGO2_OC5_RISING_OC6_FALLING	OC5REF rising or OC6REF falling edges are used as trigger output 2

Trigger Selection

LL_TIM_TS_ITR0	Internal Trigger 0 (ITR0) is used as trigger input
LL_TIM_TS_ITR1	Internal Trigger 1 (ITR1) is used as trigger input
LL_TIM_TS_ITR2	Internal Trigger 2 (ITR2) is used as trigger input
LL_TIM_TS_ITR3	Internal Trigger 3 (ITR3) is used as trigger input
LL_TIM_TS_TI1F_ED	TI1 Edge Detector (TI1F_ED) is used as trigger input
LL_TIM_TS_TI1FP1	Filtered Timer Input 1 (TI1FP1) is used as trigger input
LL_TIM_TS_TI2FP2	Filtered Timer Input 2 (TI12P2) is used as trigger input
LL_TIM_TS_ETRF	Filtered external Trigger (ETRF) is used as trigger input

Update Source

LL_TIM_UPDATESOURCE_REGULAR	Counter overflow/underflow, Setting the UG bit or Update generation through the slave mode controller generates an update request
LL_TIM_UPDATESOURCE_COUNTER	Only counter overflow/underflow generates an update request

Exported_Macros

__LL_TIM_GETFLAG_UIFCPY

Description:

- HELPER macro retrieving the UIFCPY flag from the counter value.

Parameters:

- __CNT__: Counter value

Return value:

- UIF: status bit

Notes:

- ex: __LL_TIM_GETFLAG_UIFCPY (LL_TIM_GetCounter ()); Relevant only if UIF flag remapping has been enabled (UIF status bit is copied to TIMx_CNT register bit 31)

__LL_TIM_CALC_DEADTIME

Description:

- HELPER macro calculating DTG[0:7] in the TIMx_BDTR register to achieve the requested dead time duration.

Parameters:

- __TIMCLK__: timer input clock frequency (in Hz)
- __CKD__: This parameter can be one of the following values:
  - LL_TIM_CLOCKDIVISION_DIV1
  - LL_TIM_CLOCKDIVISION_DIV2
  - LL_TIM_CLOCKDIVISION_DIV4
- __DT__: deadtime duration (in ns)

Return value:

- DTG[0:7]

Notes:

- ex: __LL_TIM_CALC_DEADTIME (80000000, LL_TIM_GetClockDivision (), 120);

__LL_TIM_CALC_PSC

Description:

- HELPER macro calculating the prescaler value to achieve the required counter clock frequency.

Parameters:

- __TIMCLK__: timer input clock frequency (in Hz)
- __CNTCLK__: counter clock frequency (in Hz)

Return value:

- Prescaler: value (between Min_Data=0 and Max_Data=65535)

Notes:

- ex: __LL_TIM_CALC_PSC (80000000, 1000000);

__LL_TIM_CALC_ARR

Description:

- HELPER macro calculating the auto-reload value to achieve the required output signal frequency.

Parameters:

- __TIMCLK__: timer input clock frequency (in Hz)
- __PSC__: prescaler
- __FREQ__: output signal frequency (in Hz)

Return value:

- Auto-reload: value (between Min_Data=0 and Max_Data=65535)

Notes:

- ex: __LL_TIM_CALC_ARR (1000000, LL_TIM_GetPrescaler (), 10000);

__LL_TIM_CALC_DELAY

Description:

- HELPER macro calculating the compare value required to achieve the required timer output compare active/inactive delay.

Parameters:

- __TIMCLK__: timer input clock frequency (in Hz)
- __PSC__: prescaler
- __DELAY__: timer output compare active/inactive delay (in us)

Return value:

- Compare: value (between Min_Data=0 and Max_Data=65535)

Notes:

- ex: __LL_TIM_CALC_DELAY (1000000, LL_TIM_GetPrescaler (), 10);

__LL_TIM_CALC_PULSE

Description:

- HELPER macro calculating the auto-reload value to achieve the required pulse duration (when the timer operates in one pulse mode).

Parameters:

- __TIMCLK__: timer input clock frequency (in Hz)
- __PSC__: prescaler
- __DELAY__: timer output compare active/inactive delay (in us)
- __PULSE__: pulse duration (in us)

Return value:

- Auto-reload: value (between Min_Data=0 and Max_Data=65535)

Notes:

- ex: __LL_TIM_CALC_PULSE (1000000, LL_TIM_GetPrescaler (), 10, 20);

__LL_TIM_GET_ICPSC_RATIO

Description:

- HELPER macro retrieving the ratio of the input capture prescaler.

Parameters:

- __ICPSC__: This parameter can be one of the following values:
  - LL_TIM_ICPSC_DIV1
  - LL_TIM_ICPSC_DIV2
  - LL_TIM_ICPSC_DIV4
  - LL_TIM_ICPSC_DIV8

Return value:

- Input: capture prescaler ratio (1, 2, 4 or 8)

Notes:

- ex: __LL_TIM_GET_ICPSC_RATIO (LL_TIM_IC_GetPrescaler ());

Common Write and read registers Macros

LL_TIM_WriteReg

Description:

- Write a value in TIM register.

Parameters:

- __INSTANCE__: TIM Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_TIM_ReadReg

Description:

- Read a value in TIM register.

Parameters:

- __INSTANCE__: TIM Instance
- __REG__: Register to be read

Return value:

- Register: value

79 LL USART Generic Driver

79.1 USART Firmware driver registers structures

79.1.1 LL_USART_InitTypeDef

Data Fields

- ***uint32_t BaudRate***
- ***uint32_t DataWidth***
- ***uint32_t StopBits***
- ***uint32_t Parity***
- ***uint32_t TransferDirection***
- ***uint32_t HardwareFlowControl***
- ***uint32_t OverSampling***

Field Documentation

- ***uint32_t LL_USART_InitTypeDef::BaudRate***
  This field defines expected Usart communication baud rate.This feature can be modified afterwards using unitary function **LL_USART_SetBaudRate()**.
- ***uint32_t LL_USART_InitTypeDef::DataWidth***
  Specifies the number of data bits transmitted or received in a frame. This parameter can be a value of ***USART_LL_EC_DATAWIDTH***.This feature can be modified afterwards using unitary function **LL_USART_SetDataWidth()**.
- ***uint32_t LL_USART_InitTypeDef::StopBits***
  Specifies the number of stop bits transmitted. This parameter can be a value of ***USART_LL_EC_STOPBITS***.This feature can be modified afterwards using unitary function **LL_USART_SetStopBitsLength()**.
- ***uint32_t LL_USART_InitTypeDef::Parity***
  Specifies the parity mode. This parameter can be a value of ***USART_LL_EC_PARITY***.This feature can be modified afterwards using unitary function **LL_USART_SetParity()**.
- ***uint32_t LL_USART_InitTypeDef::TransferDirection***
  Specifies whether the Receive and/or Transmit mode is enabled or disabled. This parameter can be a value of ***USART_LL_EC_DIRECTION***.This feature can be modified afterwards using unitary function **LL_USART_SetTransferDirection()**.
- ***uint32_t LL_USART_InitTypeDef::HardwareFlowControl***
  Specifies whether the hardware flow control mode is enabled or disabled. This parameter can be a value of ***USART_LL_EC_HWCONTROL***.This feature can be modified afterwards using unitary function **LL_USART_SetHWFlowCtrl()**.
- ***uint32_t LL_USART_InitTypeDef::OverSampling***
  Specifies whether USART oversampling mode is 16 or 8. This parameter can be a value of ***USART_LL_EC_OVERSAMPLING***.This feature can be modified afterwards using unitary function **LL_USART_SetOverSampling()**.

79.1.2 LL_USART_ClockInitTypeDef

Data Fields

- ***uint32_t ClockOutput***
- ***uint32_t ClockPolarity***
- ***uint32_t ClockPhase***
- ***uint32_t LastBitClockPulse***

Field Documentation

- ***uint32_t LL_USART_ClockInitTypeDef::ClockOutput***
  Specifies whether the USART clock is enabled or disabled. This parameter can be a value of ***USART_LL_EC_CLOCK***.USART HW configuration can be modified afterwards using unitary functions **LL_USART_EnableSCLKOutput()** or **LL_USART_DisableSCLKOutput()**. For more details, refer to description of this function.
- ***uint32_t LL_USART_ClockInitTypeDef::ClockPolarity***
  Specifies the steady state of the serial clock. This parameter can be a value of ***USART_LL_EC_POLARITY***.USART HW configuration can be modified afterwards using unitary functions **LL_USART_SetClockPolarity()**. For more details, refer to description of this function.
- ***uint32_t LL_USART_ClockInitTypeDef::ClockPhase***
  Specifies the clock transition on which the bit capture is made. This parameter can be a value of ***USART_LL_EC_PHASE***.USART HW configuration can be modified afterwards using unitary functions **LL_USART_SetClockPhase()**. For more details, refer to description of this function.
- ***uint32_t LL_USART_ClockInitTypeDef::LastBitClockPulse***
  Specifies whether the clock pulse corresponding to the last transmitted data bit (MSB) has to be output on the SCLK pin in synchronous mode. This parameter can be a value of ***USART_LL_EC_LASTCLKPULSE***.USART HW configuration can be modified afterwards using unitary functions **LL_USART_SetLastClkPulseOutput()**. For more details, refer to description of this function.

79.2 USART Firmware driver API description

79.2.1 Detailed description of functions

LL_USART_Enable

Function name	**__STATIC_INLINE void LL_USART_Enable (USART_TypeDef * USARTx)**
Function description	USART Enable.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 UE LL_USART_Enable

LL_USART_Disable

Function name	**__STATIC_INLINE void LL_USART_Disable (USART_TypeDef * USARTx)**
Function description	USART Disable (all USART prescalers and outputs are disabled)
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• When USART is disabled, USART prescalers and outputs are stopped immediately, and current operations are discarded. The configuration of the USART is kept, but all the status

flags, in the USARTx_ISR are set to their default values.

Reference Manual to LL API cross reference:
- CR1 UE LL_USART_Disable

LL_USART_IsEnabled

Function name **__STATIC_INLINE uint32_t LL_USART_IsEnabled (USART_TypeDef * USARTx)**

Function description Indicate if USART is enabled.

Parameters
- **USARTx:** USART Instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CR1 UE LL_USART_IsEnabled

LL_USART_EnableInStopMode

Function name **__STATIC_INLINE void LL_USART_EnableInStopMode (USART_TypeDef * USARTx)**

Function description USART enabled in STOP Mode.

Parameters
- **USARTx:** USART Instance

Return values
- **None**

Notes
- When this function is enabled, USART is able to wake up the MCU from Stop mode, provided that USART clock selection is HSI or LSE in RCC.
- Macro IS_UART_WAKEUP_FROMSTOP_INSTANCE(USARTx) can be used to check whether or not Wake-up from Stop mode feature is supported by the USARTx instance.

Reference Manual to LL API cross reference:
- CR1 UESM LL_USART_EnableInStopMode

LL_USART_DisableInStopMode

Function name **__STATIC_INLINE void LL_USART_DisableInStopMode (USART_TypeDef * USARTx)**

Function description USART disabled in STOP Mode.

Parameters
- **USARTx:** USART Instance

Return values
- **None**

Notes
- When this function is disabled, USART is not able to wake up the MCU from Stop mode
- Macro IS_UART_WAKEUP_FROMSTOP_INSTANCE(USARTx) can be used to check whether or not Wake-up from Stop mode feature is supported by the USARTx instance.

Reference Manual to LL API cross reference:	• CR1 UESM LL_USART_DisableInStopMode

LL_USART_IsEnabledInStopMode

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledInStopMode (USART_TypeDef * USARTx)**
Function description	Indicate if USART is enabled in STOP Mode (able to wake up MCU from Stop mode or not)
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_UART_WAKEUP_FROMSTOP_INSTANCE(USARTx) can be used to check whether or not Wake-up from Stop mode feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR1 UESM LL_USART_IsEnabledInStopMode

LL_USART_EnableDirectionRx

Function name	**__STATIC_INLINE void LL_USART_EnableDirectionRx (USART_TypeDef * USARTx)**
Function description	Receiver Enable (Receiver is enabled and begins searching for a start bit)
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 RE LL_USART_EnableDirectionRx

LL_USART_DisableDirectionRx

Function name	**__STATIC_INLINE void LL_USART_DisableDirectionRx (USART_TypeDef * USARTx)**
Function description	Receiver Disable.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 RE LL_USART_DisableDirectionRx

LL_USART_EnableDirectionTx

Function name	**__STATIC_INLINE void LL_USART_EnableDirectionTx (USART_TypeDef * USARTx)**
Function description	Transmitter Enable.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 TE LL_USART_EnableDirectionTx

LL_USART_DisableDirectionTx

Function name	**__STATIC_INLINE void LL_USART_DisableDirectionTx (USART_TypeDef * USARTx)**
Function description	Transmitter Disable.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 TE LL_USART_DisableDirectionTx

LL_USART_SetTransferDirection

Function name	**__STATIC_INLINE void LL_USART_SetTransferDirection (USART_TypeDef * USARTx, uint32_t TransferDirection)**
Function description	Configure simultaneously enabled/disabled states of Transmitter and Receiver.
Parameters	• **USARTx:** USART Instance • **TransferDirection:** This parameter can be one of the following values: – LL_USART_DIRECTION_NONE – LL_USART_DIRECTION_RX – LL_USART_DIRECTION_TX – LL_USART_DIRECTION_TX_RX
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 RE LL_USART_SetTransferDirection • CR1 TE LL_USART_SetTransferDirection

LL_USART_GetTransferDirection

Function name	**__STATIC_INLINE uint32_t LL_USART_GetTransferDirection (USART_TypeDef * USARTx)**
Function description	Return enabled/disabled states of Transmitter and Receiver.
Parameters	• **USARTx:** USART Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_USART_DIRECTION_NONE
  - LL_USART_DIRECTION_RX
  - LL_USART_DIRECTION_TX
  - LL_USART_DIRECTION_TX_RX

Reference Manual to LL API cross reference:
- CR1 RE LL_USART_GetTransferDirection
- CR1 TE LL_USART_GetTransferDirection

LL_USART_SetParity

Function name
__STATIC_INLINE void LL_USART_SetParity (USART_TypeDef * USARTx, uint32_t Parity)

Function description
Configure Parity (enabled/disabled and parity mode if enabled).

Parameters
- **USARTx:** USART Instance
- **Parity:** This parameter can be one of the following values:
  - LL_USART_PARITY_NONE
  - LL_USART_PARITY_EVEN
  - LL_USART_PARITY_ODD

Return values
- **None**

Notes
- This function selects if hardware parity control (generation and detection) is enabled or disabled. When the parity control is enabled (Odd or Even), computed parity bit is inserted at the MSB position (9th or 8th bit depending on data width) and parity is checked on the received data.

Reference Manual to LL API cross reference:
- CR1 PS LL_USART_SetParity
- CR1 PCE LL_USART_SetParity

LL_USART_GetParity

Function name
__STATIC_INLINE uint32_t LL_USART_GetParity (USART_TypeDef * USARTx)

Function description
Return Parity configuration (enabled/disabled and parity mode if enabled)

Parameters
- **USARTx:** USART Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_USART_PARITY_NONE
  - LL_USART_PARITY_EVEN
  - LL_USART_PARITY_ODD

Reference Manual to LL API cross reference:
- CR1 PS LL_USART_GetParity
- CR1 PCE LL_USART_GetParity

LL_USART_SetWakeUpMethod

Function name	**__STATIC_INLINE void LL_USART_SetWakeUpMethod (USART_TypeDef * USARTx, uint32_t Method)**
Function description	Set Receiver Wake Up method from Mute mode.
Parameters	• **USARTx:** USART Instance • **Method:** This parameter can be one of the following values: – LL_USART_WAKEUP_IDLELINE – LL_USART_WAKEUP_ADDRESSMARK
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 WAKE LL_USART_SetWakeUpMethod

LL_USART_GetWakeUpMethod

Function name	**__STATIC_INLINE uint32_t LL_USART_GetWakeUpMethod (USART_TypeDef * USARTx)**
Function description	Return Receiver Wake Up method from Mute mode.
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_WAKEUP_IDLELINE – LL_USART_WAKEUP_ADDRESSMARK
Reference Manual to LL API cross reference:	• CR1 WAKE LL_USART_GetWakeUpMethod

LL_USART_SetDataWidth

Function name	**__STATIC_INLINE void LL_USART_SetDataWidth (USART_TypeDef * USARTx, uint32_t DataWidth)**
Function description	Set Word length (i.e.
Parameters	• **USARTx:** USART Instance • **DataWidth:** This parameter can be one of the following values: (*) Values not available on all devices – LL_USART_DATAWIDTH_7B (*) – LL_USART_DATAWIDTH_8B – LL_USART_DATAWIDTH_9B
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 M0 LL_USART_SetDataWidth • CR1 M1 LL_USART_SetDataWidth

LL_USART_GetDataWidth

Function name	**__STATIC_INLINE uint32_t LL_USART_GetDataWidth (USART_TypeDef * USARTx)**
Function description	Return Word length (i.e.
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: (*) Values not available on all devices – LL_USART_DATAWIDTH_7B (*) – LL_USART_DATAWIDTH_8B – LL_USART_DATAWIDTH_9B
Reference Manual to LL API cross reference:	• CR1 M0 LL_USART_GetDataWidth • CR1 M1 LL_USART_GetDataWidth

LL_USART_EnableMuteMode

Function name	**__STATIC_INLINE void LL_USART_EnableMuteMode (USART_TypeDef * USARTx)**
Function description	Allow switch between Mute Mode and Active mode.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 MME LL_USART_EnableMuteMode

LL_USART_DisableMuteMode

Function name	**__STATIC_INLINE void LL_USART_DisableMuteMode (USART_TypeDef * USARTx)**
Function description	Prevent Mute Mode use.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 MME LL_USART_DisableMuteMode

LL_USART_IsEnabledMuteMode

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledMuteMode (USART_TypeDef * USARTx)**
Function description	Indicate if switch between Mute Mode and Active mode is allowed.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CR1 MME LL_USART_IsEnabledMuteMode

LL_USART_SetOverSampling

Function name: **__STATIC_INLINE void LL_USART_SetOverSampling (USART_TypeDef * USARTx, uint32_t OverSampling)**

Function description: Set Oversampling to 8-bit or 16-bit mode.

Parameters:
- **USARTx:** USART Instance
- **OverSampling:** This parameter can be one of the following values:
  - LL_USART_OVERSAMPLING_16
  - LL_USART_OVERSAMPLING_8

Return values:
- **None**

Reference Manual to LL API cross reference:
- CR1 OVER8 LL_USART_SetOverSampling

LL_USART_GetOverSampling

Function name: **__STATIC_INLINE uint32_t LL_USART_GetOverSampling (USART_TypeDef * USARTx)**

Function description: Return Oversampling mode.

Parameters:
- **USARTx:** USART Instance

Return values:
- **Returned:** value can be one of the following values:
  - LL_USART_OVERSAMPLING_16
  - LL_USART_OVERSAMPLING_8

Reference Manual to LL API cross reference:
- CR1 OVER8 LL_USART_GetOverSampling

LL_USART_SetLastClkPulseOutput

Function name: **__STATIC_INLINE void LL_USART_SetLastClkPulseOutput (USART_TypeDef * USARTx, uint32_t LastBitClockPulse)**

Function description: Configure if Clock pulse of the last data bit is output to the SCLK pin or not.

Parameters:
- **USARTx:** USART Instance
- **LastBitClockPulse:** This parameter can be one of the following values:
  - LL_USART_LASTCLKPULSE_NO_OUTPUT
  - LL_USART_LASTCLKPULSE_OUTPUT

Return values:
- **None**

Notes:
- Macro IS_USART_INSTANCE(USARTx) can be used to check whether or not Synchronous mode is supported by the USARTx instance.

Reference Manual to LL API cross reference:
- CR2 LBCL LL_USART_SetLastClkPulseOutput

LL_USART_GetLastClkPulseOutput

Function name: **__STATIC_INLINE uint32_t LL_USART_GetLastClkPulseOutput (USART_TypeDef * USARTx)**

Function description: Retrieve Clock pulse of the last data bit output configuration (Last bit Clock pulse output to the SCLK pin or not)

Parameters:
- **USARTx:** USART Instance

Return values:
- **Returned:** value can be one of the following values:
  - LL_USART_LASTCLKPULSE_NO_OUTPUT
  - LL_USART_LASTCLKPULSE_OUTPUT

Notes:
- Macro IS_USART_INSTANCE(USARTx) can be used to check whether or not Synchronous mode is supported by the USARTx instance.

Reference Manual to LL API cross reference:
- CR2 LBCL LL_USART_GetLastClkPulseOutput

LL_USART_SetClockPhase

Function name: **__STATIC_INLINE void LL_USART_SetClockPhase (USART_TypeDef * USARTx, uint32_t ClockPhase)**

Function description: Select the phase of the clock output on the SCLK pin in synchronous mode.

Parameters:
- **USARTx:** USART Instance
- **ClockPhase:** This parameter can be one of the following values:
  - LL_USART_PHASE_1EDGE
  - LL_USART_PHASE_2EDGE

Return values:
- **None**

Notes:
- Macro IS_USART_INSTANCE(USARTx) can be used to check whether or not Synchronous mode is supported by the USARTx instance.

Reference Manual to LL API cross reference:
- CR2 CPHA LL_USART_SetClockPhase

LL_USART_GetClockPhase

Function name: **__STATIC_INLINE uint32_t LL_USART_GetClockPhase (USART_TypeDef * USARTx)**

Function description: Return phase of the clock output on the SCLK pin in synchronous mode.

Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_PHASE_1EDGE – LL_USART_PHASE_2EDGE
Notes	• Macro IS_USART_INSTANCE(USARTx) can be used to check whether or not Synchronous mode is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 CPHA LL_USART_GetClockPhase

LL_USART_SetClockPolarity

Function name	**__STATIC_INLINE void LL_USART_SetClockPolarity (USART_TypeDef * USARTx, uint32_t ClockPolarity)**
Function description	Select the polarity of the clock output on the SCLK pin in synchronous mode.
Parameters	• **USARTx:** USART Instance • **ClockPolarity:** This parameter can be one of the following values: – LL_USART_POLARITY_LOW – LL_USART_POLARITY_HIGH
Return values	• **None**
Notes	• Macro IS_USART_INSTANCE(USARTx) can be used to check whether or not Synchronous mode is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 CPOL LL_USART_SetClockPolarity

LL_USART_GetClockPolarity

Function name	**__STATIC_INLINE uint32_t LL_USART_GetClockPolarity (USART_TypeDef * USARTx)**
Function description	Return polarity of the clock output on the SCLK pin in synchronous mode.
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_POLARITY_LOW – LL_USART_POLARITY_HIGH
Notes	• Macro IS_USART_INSTANCE(USARTx) can be used to check whether or not Synchronous mode is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 CPOL LL_USART_GetClockPolarity

LL_USART_ConfigClock

Function name	**__STATIC_INLINE void LL_USART_ConfigClock (USART_TypeDef * USARTx, uint32_t Phase, uint32_t Polarity, uint32_t LBCPOutput)**
Function description	Configure Clock signal format (Phase Polarity and choice about output of last bit clock pulse)
Parameters	• **USARTx:** USART Instance • **Phase:** This parameter can be one of the following values: – LL_USART_PHASE_1EDGE – LL_USART_PHASE_2EDGE • **Polarity:** This parameter can be one of the following values: – LL_USART_POLARITY_LOW – LL_USART_POLARITY_HIGH • **LBCPOutput:** This parameter can be one of the following values: – LL_USART_LASTCLKPULSE_NO_OUTPUT – LL_USART_LASTCLKPULSE_OUTPUT
Return values	• **None**
Notes	• Macro IS_USART_INSTANCE(USARTx) can be used to check whether or not Synchronous mode is supported by the USARTx instance. • Call of this function is equivalent to following function call sequence : Clock Phase configuration using LL_USART_SetClockPhase() functionClock Polarity configuration using LL_USART_SetClockPolarity() functionOutput of Last bit Clock pulse configuration using LL_USART_SetLastClkPulseOutput() function
Reference Manual to LL API cross reference:	• CR2 CPHA LL_USART_ConfigClock • CR2 CPOL LL_USART_ConfigClock • CR2 LBCL LL_USART_ConfigClock

LL_USART_EnableSCLKOutput

Function name	**__STATIC_INLINE void LL_USART_EnableSCLKOutput (USART_TypeDef * USARTx)**
Function description	Enable Clock output on SCLK pin.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_USART_INSTANCE(USARTx) can be used to check whether or not Synchronous mode is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 CLKEN LL_USART_EnableSCLKOutput

LL_USART_DisableSCLKOutput

Function name	**__STATIC_INLINE void LL_USART_DisableSCLKOutput (USART_TypeDef * USARTx)**
Function description	Disable Clock output on SCLK pin.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_USART_INSTANCE(USARTx) can be used to check whether or not Synchronous mode is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 CLKEN LL_USART_DisableSCLKOutput

LL_USART_IsEnabledSCLKOutput

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledSCLKOutput (USART_TypeDef * USARTx)**
Function description	Indicate if Clock output on SCLK pin is enabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_USART_INSTANCE(USARTx) can be used to check whether or not Synchronous mode is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 CLKEN LL_USART_IsEnabledSCLKOutput

LL_USART_SetStopBitsLength

Function name	**__STATIC_INLINE void LL_USART_SetStopBitsLength (USART_TypeDef * USARTx, uint32_t StopBits)**
Function description	Set the length of the stop bits.
Parameters	• **USARTx:** USART Instance • **StopBits:** This parameter can be one of the following values: – LL_USART_STOPBITS_0_5 – LL_USART_STOPBITS_1 – LL_USART_STOPBITS_1_5 – LL_USART_STOPBITS_2
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 STOP LL_USART_SetStopBitsLength

LL_USART_GetStopBitsLength

Function name	**__STATIC_INLINE uint32_t LL_USART_GetStopBitsLength (USART_TypeDef * USARTx)**
Function description	Retrieve the length of the stop bits.
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_STOPBITS_0_5 – LL_USART_STOPBITS_1 – LL_USART_STOPBITS_1_5 – LL_USART_STOPBITS_2
Reference Manual to LL API cross reference:	• CR2 STOP LL_USART_GetStopBitsLength

LL_USART_ConfigCharacter

Function name	**__STATIC_INLINE void LL_USART_ConfigCharacter (USART_TypeDef * USARTx, uint32_t DataWidth, uint32_t Parity, uint32_t StopBits)**
Function description	Configure Character frame format (Datawidth, Parity control, Stop Bits)
Parameters	• **USARTx:** USART Instance • **DataWidth:** This parameter can be one of the following values: – LL_USART_DATAWIDTH_7B (*) – LL_USART_DATAWIDTH_8B – LL_USART_DATAWIDTH_9B • **Parity:** This parameter can be one of the following values: – LL_USART_PARITY_NONE – LL_USART_PARITY_EVEN – LL_USART_PARITY_ODD • **StopBits:** This parameter can be one of the following values: (*) Values not available on all devices – LL_USART_STOPBITS_0_5 – LL_USART_STOPBITS_1 – LL_USART_STOPBITS_1_5 – LL_USART_STOPBITS_2
Return values	• **None**
Notes	• Call of this function is equivalent to following function call sequence : Data Width configuration using LL_USART_SetDataWidth() functionParity Control and mode configuration using LL_USART_SetParity() functionStop bits configuration using LL_USART_SetStopBitsLength() function
Reference Manual to LL API cross reference:	• CR1 PS LL_USART_ConfigCharacter • CR1 PCE LL_USART_ConfigCharacter • CR1 M0 LL_USART_ConfigCharacter • CR1 M1 LL_USART_ConfigCharacter • CR2 STOP LL_USART_ConfigCharacter

LL_USART_SetTXRXSwap

Function name	**__STATIC_INLINE void LL_USART_SetTXRXSwap (USART_TypeDef * USARTx, uint32_t SwapConfig)**
Function description	Configure TX/RX pins swapping setting.
Parameters	• **USARTx:** USART Instance • **SwapConfig:** This parameter can be one of the following values: – LL_USART_TXRX_STANDARD – LL_USART_TXRX_SWAPPED
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 SWAP LL_USART_SetTXRXSwap

LL_USART_GetTXRXSwap

Function name	**__STATIC_INLINE uint32_t LL_USART_GetTXRXSwap (USART_TypeDef * USARTx)**
Function description	Retrieve TX/RX pins swapping configuration.
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_TXRX_STANDARD – LL_USART_TXRX_SWAPPED
Reference Manual to LL API cross reference:	• CR2 SWAP LL_USART_GetTXRXSwap

LL_USART_SetRXPinLevel

Function name	**__STATIC_INLINE void LL_USART_SetRXPinLevel (USART_TypeDef * USARTx, uint32_t PinInvMethod)**
Function description	Configure RX pin active level logic.
Parameters	• **USARTx:** USART Instance • **PinInvMethod:** This parameter can be one of the following values: – LL_USART_RXPIN_LEVEL_STANDARD – LL_USART_RXPIN_LEVEL_INVERTED
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 RXINV LL_USART_SetRXPinLevel

LL_USART_GetRXPinLevel

Function name	**__STATIC_INLINE uint32_t LL_USART_GetRXPinLevel (USART_TypeDef * USARTx)**
Function description	Retrieve RX pin active level logic configuration.
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_RXPIN_LEVEL_STANDARD – LL_USART_RXPIN_LEVEL_INVERTED
Reference Manual to LL API cross reference:	• CR2 RXINV LL_USART_GetRXPinLevel

LL_USART_SetTXPinLevel

Function name	**__STATIC_INLINE void LL_USART_SetTXPinLevel (USART_TypeDef * USARTx, uint32_t PinInvMethod)**
Function description	Configure TX pin active level logic.
Parameters	• **USARTx:** USART Instance • **PinInvMethod:** This parameter can be one of the following values: – LL_USART_TXPIN_LEVEL_STANDARD – LL_USART_TXPIN_LEVEL_INVERTED
Return values	• **None**
Reference Manual to LL API cross reference:	• CR2 TXINV LL_USART_SetTXPinLevel

LL_USART_GetTXPinLevel

Function name	**__STATIC_INLINE uint32_t LL_USART_GetTXPinLevel (USART_TypeDef * USARTx)**
Function description	Retrieve TX pin active level logic configuration.
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_TXPIN_LEVEL_STANDARD – LL_USART_TXPIN_LEVEL_INVERTED
Reference Manual to LL API cross reference:	• CR2 TXINV LL_USART_GetTXPinLevel

LL_USART_SetBinaryDataLogic

Function name	**__STATIC_INLINE void LL_USART_SetBinaryDataLogic (USART_TypeDef * USARTx, uint32_t DataLogic)**
Function description	Configure Binary data logic.
Parameters	• **USARTx:** USART Instance

- **DataLogic:** This parameter can be one of the following values:
  - LL_USART_BINARY_LOGIC_POSITIVE
  - LL_USART_BINARY_LOGIC_NEGATIVE

Return values
- **None**

Notes
- Allow to define how Logical data from the data register are send/received : either in positive/direct logic (1=H, 0=L) or in negative/inverse logic (1=L, 0=H)

Reference Manual to LL API cross reference:
- CR2 DATAINV LL_USART_SetBinaryDataLogic

LL_USART_GetBinaryDataLogic

Function name
__STATIC_INLINE uint32_t LL_USART_GetBinaryDataLogic (USART_TypeDef * USARTx)

Function description
Retrieve Binary data configuration.

Parameters
- **USARTx:** USART Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_USART_BINARY_LOGIC_POSITIVE
  - LL_USART_BINARY_LOGIC_NEGATIVE

Reference Manual to LL API cross reference:
- CR2 DATAINV LL_USART_GetBinaryDataLogic

LL_USART_SetTransferBitOrder

Function name
__STATIC_INLINE void LL_USART_SetTransferBitOrder (USART_TypeDef * USARTx, uint32_t BitOrder)

Function description
Configure transfer bit order (either Less or Most Significant Bit First)

Parameters
- **USARTx:** USART Instance
- **BitOrder:** This parameter can be one of the following values:
  - LL_USART_BITORDER_LSBFIRST
  - LL_USART_BITORDER_MSBFIRST

Return values
- **None**

Notes
- MSB First means data is transmitted/received with the MSB first, following the start bit. LSB First means data is transmitted/received with data bit 0 first, following the start bit.

Reference Manual to LL API cross reference:
- CR2 MSBFIRST LL_USART_SetTransferBitOrder

LL_USART_GetTransferBitOrder

Function name	**__STATIC_INLINE uint32_t LL_USART_GetTransferBitOrder (USART_TypeDef * USARTx)**
Function description	Return transfer bit order (either Less or Most Significant Bit First)
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_BITORDER_LSBFIRST – LL_USART_BITORDER_MSBFIRST
Notes	• MSB First means data is transmitted/received with the MSB first, following the start bit. LSB First means data is transmitted/received with data bit 0 first, following the start bit.
Reference Manual to LL API cross reference:	• CR2 MSBFIRST LL_USART_GetTransferBitOrder

LL_USART_EnableAutoBaudRate

Function name	**__STATIC_INLINE void LL_USART_EnableAutoBaudRate (USART_TypeDef * USARTx)**
Function description	Enable Auto Baud-Rate Detection.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_USART_AUTOBAUDRATE_DETECTION_INSTANCE(USARTx) can be used to check whether or not Auto Baud Rate detection feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 ABREN LL_USART_EnableAutoBaudRate

LL_USART_DisableAutoBaudRate

Function name	**__STATIC_INLINE void LL_USART_DisableAutoBaudRate (USART_TypeDef * USARTx)**
Function description	Disable Auto Baud-Rate Detection.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_USART_AUTOBAUDRATE_DETECTION_INSTANCE(USARTx) can be used to check whether or not Auto Baud Rate detection feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 ABREN LL_USART_DisableAutoBaudRate

LL_USART_IsEnabledAutoBaud

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledAutoBaud (USART_TypeDef * USARTx)**
Function description	Indicate if Auto Baud-Rate Detection mechanism is enabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_USART_AUTOBAUDRATE_DETECTION_INSTANCE(USARTx) can be used to check whether or not Auto Baud Rate detection feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 ABREN LL_USART_IsEnabledAutoBaud

LL_USART_SetAutoBaudRateMode

Function name	**__STATIC_INLINE void LL_USART_SetAutoBaudRateMode (USART_TypeDef * USARTx, uint32_t AutoBaudRateMode)**
Function description	Set Auto Baud-Rate mode bits.
Parameters	• **USARTx:** USART Instance • **AutoBaudRateMode:** This parameter can be one of the following values: – LL_USART_AUTOBAUD_DETECT_ON_STARTBIT – LL_USART_AUTOBAUD_DETECT_ON_FALLINGEDGE – LL_USART_AUTOBAUD_DETECT_ON_7F_FRAME – LL_USART_AUTOBAUD_DETECT_ON_55_FRAME
Return values	• **None**
Notes	• Macro IS_USART_AUTOBAUDRATE_DETECTION_INSTANCE(USARTx) can be used to check whether or not Auto Baud Rate detection feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 ABRMODE LL_USART_SetAutoBaudRateMode

LL_USART_GetAutoBaudRateMode

Function name	**__STATIC_INLINE uint32_t LL_USART_GetAutoBaudRateMode (USART_TypeDef * USARTx)**
Function description	Return Auto Baud-Rate mode.
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_AUTOBAUD_DETECT_ON_STARTBIT – LL_USART_AUTOBAUD_DETECT_ON_FALLINGEDGE

– LL_USART_AUTOBAUD_DETECT_ON_7F_FRAME
– LL_USART_AUTOBAUD_DETECT_ON_55_FRAME

Notes
- Macro IS_USART_AUTOBAUDRATE_DETECTION_INSTANCE(USARTx) can be used to check whether or not Auto Baud Rate detection feature is supported by the USARTx instance.

Reference Manual to LL API cross reference:
- CR2 ABRMODE LL_USART_GetAutoBaudRateMode

LL_USART_EnableRxTimeout

Function name **__STATIC_INLINE void LL_USART_EnableRxTimeout (USART_TypeDef * USARTx)**

Function description Enable Receiver Timeout.

Parameters
- **USARTx:** USART Instance

Return values
- **None**

Reference Manual to LL API cross reference:
- CR2 RTOEN LL_USART_EnableRxTimeout

LL_USART_DisableRxTimeout

Function name **__STATIC_INLINE void LL_USART_DisableRxTimeout (USART_TypeDef * USARTx)**

Function description Disable Receiver Timeout.

Parameters
- **USARTx:** USART Instance

Return values
- **None**

Reference Manual to LL API cross reference:
- CR2 RTOEN LL_USART_DisableRxTimeout

LL_USART_IsEnabledRxTimeout

Function name **__STATIC_INLINE uint32_t LL_USART_IsEnabledRxTimeout (USART_TypeDef * USARTx)**

Function description Indicate if Receiver Timeout feature is enabled.

Parameters
- **USARTx:** USART Instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CR2 RTOEN LL_USART_IsEnabledRxTimeout

LL_USART_ConfigNodeAddress

Function name	**__STATIC_INLINE void LL_USART_ConfigNodeAddress (USART_TypeDef * USARTx, uint32_t AddressLen, uint32_t NodeAddress)**
Function description	Set Address of the USART node.
Parameters	• **USARTx:** USART Instance • **AddressLen:** This parameter can be one of the following values: – LL_USART_ADDRESS_DETECT_4B – LL_USART_ADDRESS_DETECT_7B • **NodeAddress:** 4 or 7 bit Address of the USART node.
Return values	• **None**
Notes	• This is used in multiprocessor communication during Mute mode or Stop mode, for wake up with address mark detection. • 4bits address node is used when 4-bit Address Detection is selected in ADDM7. (b7-b4 should be set to 0) 8bits address node is used when 7-bit Address Detection is selected in ADDM7. (This is used in multiprocessor communication during Mute mode or Stop mode, for wake up with 7-bit address mark detection. The MSB of the character sent by the transmitter should be equal to 1. It may also be used for character detection during normal reception, Mute mode inactive (for example, end of block detection in ModBus protocol). In this case, the whole received character (8-bit) is compared to the ADD[7:0] value and CMF flag is set on match)
Reference Manual to LL API cross reference:	• CR2 ADD LL_USART_ConfigNodeAddress • CR2 ADDM7 LL_USART_ConfigNodeAddress

LL_USART_GetNodeAddress

Function name	**__STATIC_INLINE uint32_t LL_USART_GetNodeAddress (USART_TypeDef * USARTx)**
Function description	Return 8 bit Address of the USART node as set in ADD field of CR2.
Parameters	• **USARTx:** USART Instance
Return values	• **Address:** of the USART node (Value between Min_Data=0 and Max_Data=255)
Notes	• If 4-bit Address Detection is selected in ADDM7, only 4bits (b3-b0) of returned value are relevant (b31-b4 are not relevant) If 7-bit Address Detection is selected in ADDM7, only 8bits (b7-b0) of returned value are relevant (b31-b8 are not relevant)
Reference Manual to LL API cross reference:	• CR2 ADD LL_USART_GetNodeAddress

LL_USART_GetNodeAddressLen

Function name	**__STATIC_INLINE uint32_t LL_USART_GetNodeAddressLen (USART_TypeDef * USARTx)**
Function description	Return Length of Node Address used in Address Detection mode (7-bit or 4-bit)
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_ADDRESS_DETECT_4B – LL_USART_ADDRESS_DETECT_7B
Reference Manual to LL API cross reference:	• CR2 ADDM7 LL_USART_GetNodeAddressLen

LL_USART_EnableRTSHWFlowCtrl

Function name	**__STATIC_INLINE void LL_USART_EnableRTSHWFlowCtrl (USART_TypeDef * USARTx)**
Function description	Enable RTS HW Flow Control.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_HWFLOW_INSTANCE(USARTx) can be used to check whether or not Hardware Flow control feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 RTSE LL_USART_EnableRTSHWFlowCtrl

LL_USART_DisableRTSHWFlowCtrl

Function name	**__STATIC_INLINE void LL_USART_DisableRTSHWFlowCtrl (USART_TypeDef * USARTx)**
Function description	Disable RTS HW Flow Control.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_HWFLOW_INSTANCE(USARTx) can be used to check whether or not Hardware Flow control feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 RTSE LL_USART_DisableRTSHWFlowCtrl

LL_USART_EnableCTSHWFlowCtrl

Function name	**__STATIC_INLINE void LL_USART_EnableCTSHWFlowCtrl (USART_TypeDef * USARTx)**
Function description	Enable CTS HW Flow Control.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_HWFLOW_INSTANCE(USARTx) can be used to check whether or not Hardware Flow control feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 CTSE LL_USART_EnableCTSHWFlowCtrl

LL_USART_DisableCTSHWFlowCtrl

Function name	**__STATIC_INLINE void LL_USART_DisableCTSHWFlowCtrl (USART_TypeDef * USARTx)**
Function description	Disable CTS HW Flow Control.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_HWFLOW_INSTANCE(USARTx) can be used to check whether or not Hardware Flow control feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 CTSE LL_USART_DisableCTSHWFlowCtrl

LL_USART_SetHWFlowCtrl

Function name	**__STATIC_INLINE void LL_USART_SetHWFlowCtrl (USART_TypeDef * USARTx, uint32_t HardwareFlowControl)**
Function description	Configure HW Flow Control mode (both CTS and RTS)
Parameters	• **USARTx:** USART Instance • **HardwareFlowControl:** This parameter can be one of the following values: – LL_USART_HWCONTROL_NONE – LL_USART_HWCONTROL_RTS – LL_USART_HWCONTROL_CTS – LL_USART_HWCONTROL_RTS_CTS
Return values	• **None**
Notes	• Macro IS_UART_HWFLOW_INSTANCE(USARTx) can be used to check whether or not Hardware Flow control feature is supported by the USARTx instance.
Reference Manual to LL API cross	• CR3 RTSE LL_USART_SetHWFlowCtrl • CR3 CTSE LL_USART_SetHWFlowCtrl

reference:

LL_USART_GetHWFlowCtrl

Function name	**__STATIC_INLINE uint32_t LL_USART_GetHWFlowCtrl (USART_TypeDef * USARTx)**
Function description	Return HW Flow Control configuration (both CTS and RTS)
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_HWCONTROL_NONE – LL_USART_HWCONTROL_RTS – LL_USART_HWCONTROL_CTS – LL_USART_HWCONTROL_RTS_CTS
Notes	• Macro IS_UART_HWFLOW_INSTANCE(USARTx) can be used to check whether or not Hardware Flow control feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 RTSE LL_USART_GetHWFlowCtrl • CR3 CTSE LL_USART_GetHWFlowCtrl

LL_USART_EnableOneBitSamp

Function name	**__STATIC_INLINE void LL_USART_EnableOneBitSamp (USART_TypeDef * USARTx)**
Function description	Enable One bit sampling method.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR3 ONEBIT LL_USART_EnableOneBitSamp

LL_USART_DisableOneBitSamp

Function name	**__STATIC_INLINE void LL_USART_DisableOneBitSamp (USART_TypeDef * USARTx)**
Function description	Disable One bit sampling method.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR3 ONEBIT LL_USART_DisableOneBitSamp

LL_USART_IsEnabledOneBitSamp

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledOneBitSamp (USART_TypeDef * USARTx)**
Function description	Indicate if One bit sampling method is enabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR3 ONEBIT LL_USART_IsEnabledOneBitSamp

LL_USART_EnableOverrunDetect

Function name	**__STATIC_INLINE void LL_USART_EnableOverrunDetect (USART_TypeDef * USARTx)**
Function description	Enable Overrun detection.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR3 OVRDIS LL_USART_EnableOverrunDetect

LL_USART_DisableOverrunDetect

Function name	**__STATIC_INLINE void LL_USART_DisableOverrunDetect (USART_TypeDef * USARTx)**
Function description	Disable Overrun detection.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR3 OVRDIS LL_USART_DisableOverrunDetect

LL_USART_IsEnabledOverrunDetect

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledOverrunDetect (USART_TypeDef * USARTx)**
Function description	Indicate if Overrun detection is enabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR3 OVRDIS LL_USART_IsEnabledOverrunDetect

LL_USART_SetWKUPType

Function name	**__STATIC_INLINE void LL_USART_SetWKUPType (USART_TypeDef * USARTx, uint32_t Type)**
Function description	Select event type for Wake UP Interrupt Flag (WUS[1:0] bits)
Parameters	• **USARTx:** USART Instance • **Type:** This parameter can be one of the following values: – LL_USART_WAKEUP_ON_ADDRESS – LL_USART_WAKEUP_ON_STARTBIT – LL_USART_WAKEUP_ON_RXNE
Return values	• **None**
Notes	• Macro IS_UART_WAKEUP_FROMSTOP_INSTANCE(USARTx) can be used to check whether or not Wake-up from Stop mode feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 WUS LL_USART_SetWKUPType

LL_USART_GetWKUPType

Function name	**__STATIC_INLINE uint32_t LL_USART_GetWKUPType (USART_TypeDef * USARTx)**
Function description	Return event type for Wake UP Interrupt Flag (WUS[1:0] bits)
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_WAKEUP_ON_ADDRESS – LL_USART_WAKEUP_ON_STARTBIT – LL_USART_WAKEUP_ON_RXNE
Notes	• Macro IS_UART_WAKEUP_FROMSTOP_INSTANCE(USARTx) can be used to check whether or not Wake-up from Stop mode feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 WUS LL_USART_GetWKUPType

LL_USART_SetBaudRate

Function name	**__STATIC_INLINE void LL_USART_SetBaudRate (USART_TypeDef * USARTx, uint32_t PeriphClk, uint32_t OverSampling, uint32_t BaudRate)**
Function description	Configure USART BRR register for achieving expected Baud Rate value.
Parameters	• **USARTx:** USART Instance • **PeriphClk:** Peripheral Clock • **OverSampling:** This parameter can be one of the following values:

  - LL_USART_OVERSAMPLING_16
  - LL_USART_OVERSAMPLING_8
- **BaudRate:** Baud Rate

Return values
- **None**

Notes
- Compute and set USARTDIV value in BRR Register (full BRR content) according to used Peripheral Clock, Oversampling mode, and expected Baud Rate values
- Peripheral clock and Baud rate values provided as function parameters should be valid (Baud rate value != 0)
- In case of oversampling by 16 and 8, BRR content must be greater than or equal to 16d.

Reference Manual to LL API cross reference:
- BRR BRR LL_USART_SetBaudRate

LL_USART_GetBaudRate

Function name
__STATIC_INLINE uint32_t LL_USART_GetBaudRate (USART_TypeDef * USARTx, uint32_t PeriphClk, uint32_t OverSampling)

Function description
Return current Baud Rate value, according to USARTDIV present in BRR register (full BRR content), and to used Peripheral Clock and Oversampling mode values.

Parameters
- **USARTx:** USART Instance
- **PeriphClk:** Peripheral Clock
- **OverSampling:** This parameter can be one of the following values:
  - LL_USART_OVERSAMPLING_16
  - LL_USART_OVERSAMPLING_8

Return values
- **Baud:** Rate

Notes
- In case of non-initialized or invalid value stored in BRR register, value 0 will be returned.
- In case of oversampling by 16 and 8, BRR content must be greater than or equal to 16d.

Reference Manual to LL API cross reference:
- BRR BRR LL_USART_GetBaudRate

LL_USART_SetRxTimeout

Function name
__STATIC_INLINE void LL_USART_SetRxTimeout (USART_TypeDef * USARTx, uint32_t Timeout)

Function description
Set Receiver Time Out Value (expressed in nb of bits duration)

Parameters
- **USARTx:** USART Instance
- **Timeout:** Value between Min_Data=0x00 and Max_Data=0x00FFFFFF

Return values
- **None**

Reference Manual to LL API cross reference:	• RTOR RTO LL_USART_SetRxTimeout

LL_USART_GetRxTimeout

Function name	**__STATIC_INLINE uint32_t LL_USART_GetRxTimeout (USART_TypeDef * USARTx)**
Function description	Get Receiver Time Out Value (expressed in nb of bits duration)
Parameters	• **USARTx:** USART Instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0x00FFFFFF
Reference Manual to LL API cross reference:	• RTOR RTO LL_USART_GetRxTimeout

LL_USART_SetBlockLength

Function name	**__STATIC_INLINE void LL_USART_SetBlockLength (USART_TypeDef * USARTx, uint32_t BlockLength)**
Function description	Set Block Length value in reception.
Parameters	• **USARTx:** USART Instance • **BlockLength:** Value between Min_Data=0x00 and Max_Data=0xFF
Return values	• **None**
Reference Manual to LL API cross reference:	• RTOR BLEN LL_USART_SetBlockLength

LL_USART_GetBlockLength

Function name	**__STATIC_INLINE uint32_t LL_USART_GetBlockLength (USART_TypeDef * USARTx)**
Function description	Get Block Length value in reception.
Parameters	• **USARTx:** USART Instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0xFF
Reference Manual to LL API cross reference:	• RTOR BLEN LL_USART_GetBlockLength

LL_USART_EnableIrda

Function name	**__STATIC_INLINE void LL_USART_EnableIrda (USART_TypeDef * USARTx)**
Function description	Enable IrDA mode.
Parameters	• **USARTx:** USART Instance

Return values	• **None**
Notes	• Macro IS_IRDA_INSTANCE(USARTx) can be used to check whether or not IrDA feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 IREN LL_USART_EnableIrda

LL_USART_DisableIrda

Function name	**__STATIC_INLINE void LL_USART_DisableIrda (USART_TypeDef * USARTx)**
Function description	Disable IrDA mode.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_IRDA_INSTANCE(USARTx) can be used to check whether or not IrDA feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 IREN LL_USART_DisableIrda

LL_USART_IsEnabledIrda

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledIrda (USART_TypeDef * USARTx)**
Function description	Indicate if IrDA mode is enabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_IRDA_INSTANCE(USARTx) can be used to check whether or not IrDA feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 IREN LL_USART_IsEnabledIrda

LL_USART_SetIrdaPowerMode

Function name	**__STATIC_INLINE void LL_USART_SetIrdaPowerMode (USART_TypeDef * USARTx, uint32_t PowerMode)**
Function description	Configure IrDA Power Mode (Normal or Low Power)
Parameters	• **USARTx:** USART Instance • **PowerMode:** This parameter can be one of the following values: – LL_USART_IRDA_POWER_NORMAL – LL_USART_IRDA_POWER_LOW

Return values	• **None**
Notes	• Macro IS_IRDA_INSTANCE(USARTx) can be used to check whether or not IrDA feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 IRLP LL_USART_SetIrdaPowerMode

LL_USART_GetIrdaPowerMode

Function name	**__STATIC_INLINE uint32_t LL_USART_GetIrdaPowerMode (USART_TypeDef * USARTx)**
Function description	Retrieve IrDA Power Mode configuration (Normal or Low Power)
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_IRDA_POWER_NORMAL – LL_USART_PHASE_2EDGE
Notes	• Macro IS_IRDA_INSTANCE(USARTx) can be used to check whether or not IrDA feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 IRLP LL_USART_GetIrdaPowerMode

LL_USART_SetIrdaPrescaler

Function name	**__STATIC_INLINE void LL_USART_SetIrdaPrescaler (USART_TypeDef * USARTx, uint32_t PrescalerValue)**
Function description	Set Irda prescaler value, used for dividing the USART clock source to achieve the Irda Low Power frequency (8 bits value)
Parameters	• **USARTx:** USART Instance • **PrescalerValue:** Value between Min_Data=0x00 and Max_Data=0xFF
Return values	• **None**
Notes	• Macro IS_IRDA_INSTANCE(USARTx) can be used to check whether or not IrDA feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• GTPR PSC LL_USART_SetIrdaPrescaler

LL_USART_GetIrdaPrescaler

Function name	**__STATIC_INLINE uint32_t LL_USART_GetIrdaPrescaler (USART_TypeDef * USARTx)**
Function description	Return Irda prescaler value, used for dividing the USART clock source to achieve the Irda Low Power frequency (8 bits value)

Parameters	• **USARTx:** USART Instance
Return values	• **Irda:** prescaler value (Value between Min_Data=0x00 and Max_Data=0xFF)
Notes	• Macro IS_IRDA_INSTANCE(USARTx) can be used to check whether or not IrDA feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• GTPR PSC LL_USART_GetIrdaPrescaler

LL_USART_EnableSmartcardNACK

Function name	**__STATIC_INLINE void LL_USART_EnableSmartcardNACK (USART_TypeDef * USARTx)**
Function description	Enable Smartcard NACK transmission.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 NACK LL_USART_EnableSmartcardNACK

LL_USART_DisableSmartcardNACK

Function name	**__STATIC_INLINE void LL_USART_DisableSmartcardNACK (USART_TypeDef * USARTx)**
Function description	Disable Smartcard NACK transmission.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 NACK LL_USART_DisableSmartcardNACK

LL_USART_IsEnabledSmartcardNACK

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledSmartcardNACK (USART_TypeDef * USARTx)**
Function description	Indicate if Smartcard NACK transmission is enabled.
Parameters	• **USARTx:** USART Instance

Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 NACK LL_USART_IsEnabledSmartcardNACK

LL_USART_EnableSmartcard

Function name	**__STATIC_INLINE void LL_USART_EnableSmartcard (USART_TypeDef * USARTx)**
Function description	Enable Smartcard mode.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 SCEN LL_USART_EnableSmartcard

LL_USART_DisableSmartcard

Function name	**__STATIC_INLINE void LL_USART_DisableSmartcard (USART_TypeDef * USARTx)**
Function description	Disable Smartcard mode.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 SCEN LL_USART_DisableSmartcard

LL_USART_IsEnabledSmartcard

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledSmartcard (USART_TypeDef * USARTx)**
Function description	Indicate if Smartcard mode is enabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the

USARTx instance.

Reference Manual to LL API cross reference:
- CR3 SCEN LL_USART_IsEnabledSmartcard

LL_USART_SetSmartcardAutoRetryCount

Function name
__STATIC_INLINE void LL_USART_SetSmartcardAutoRetryCount (USART_TypeDef * USARTx, uint32_t AutoRetryCount)

Function description
Set Smartcard Auto-Retry Count value (SCARCNT[2:0] bits)

Parameters
- **USARTx:** USART Instance
- **AutoRetryCount:** Value between Min_Data=0 and Max_Data=7

Return values
- **None**

Notes
- Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.
- This bit-field specifies the number of retries in transmit and receive, in Smartcard mode. In transmission mode, it specifies the number of automatic retransmission retries, before generating a transmission error (FE bit set). In reception mode, it specifies the number or erroneous reception trials, before generating a reception error (RXNE and PE bits set)

Reference Manual to LL API cross reference:
- CR3 SCARCNT LL_USART_SetSmartcardAutoRetryCount

LL_USART_GetSmartcardAutoRetryCount

Function name
__STATIC_INLINE uint32_t LL_USART_GetSmartcardAutoRetryCount (USART_TypeDef * USARTx)

Function description
Return Smartcard Auto-Retry Count value (SCARCNT[2:0] bits)

Parameters
- **USARTx:** USART Instance

Return values
- **Smartcard:** Auto-Retry Count value (Value between Min_Data=0 and Max_Data=7)

Notes
- Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.

Reference Manual to LL API cross reference:
- CR3 SCARCNT LL_USART_GetSmartcardAutoRetryCount

LL_USART_SetSmartcardPrescaler

Function name	**__STATIC_INLINE void LL_USART_SetSmartcardPrescaler (USART_TypeDef * USARTx, uint32_t PrescalerValue)**
Function description	Set Smartcard prescaler value, used for dividing the USART clock source to provide the SMARTCARD Clock (5 bits value)
Parameters	• **USARTx:** USART Instance • **PrescalerValue:** Value between Min_Data=0 and Max_Data=31
Return values	• **None**
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• GTPR PSC LL_USART_SetSmartcardPrescaler

LL_USART_GetSmartcardPrescaler

Function name	**__STATIC_INLINE uint32_t LL_USART_GetSmartcardPrescaler (USART_TypeDef * USARTx)**
Function description	Return Smartcard prescaler value, used for dividing the USART clock source to provide the SMARTCARD Clock (5 bits value)
Parameters	• **USARTx:** USART Instance
Return values	• **Smartcard:** prescaler value (Value between Min_Data=0 and Max_Data=31)
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• GTPR PSC LL_USART_GetSmartcardPrescaler

LL_USART_SetSmartcardGuardTime

Function name	**__STATIC_INLINE void LL_USART_SetSmartcardGuardTime (USART_TypeDef * USARTx, uint32_t GuardTime)**
Function description	Set Smartcard Guard time value, expressed in nb of baud clocks periods (GT[7:0] bits : Guard time value)
Parameters	• **USARTx:** USART Instance • **GuardTime:** Value between Min_Data=0x00 and Max_Data=0xFF
Return values	• **None**
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.

Reference Manual to LL API cross reference:	• GTPR GT LL_USART_SetSmartcardGuardTime

LL_USART_GetSmartcardGuardTime

Function name	**__STATIC_INLINE uint32_t LL_USART_GetSmartcardGuardTime (USART_TypeDef * USARTx)**
Function description	Return Smartcard Guard time value, expressed in nb of baud clocks periods (GT[7:0] bits : Guard time value)
Parameters	• **USARTx:** USART Instance
Return values	• **Smartcard:** Guard time value (Value between Min_Data=0x00 and Max_Data=0xFF)
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• GTPR GT LL_USART_GetSmartcardGuardTime

LL_USART_EnableHalfDuplex

Function name	**__STATIC_INLINE void LL_USART_EnableHalfDuplex (USART_TypeDef * USARTx)**
Function description	Enable Single Wire Half-Duplex mode.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_HALFDUPLEX_INSTANCE(USARTx) can be used to check whether or not Half-Duplex mode is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 HDSEL LL_USART_EnableHalfDuplex

LL_USART_DisableHalfDuplex

Function name	**__STATIC_INLINE void LL_USART_DisableHalfDuplex (USART_TypeDef * USARTx)**
Function description	Disable Single Wire Half-Duplex mode.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_HALFDUPLEX_INSTANCE(USARTx) can be used to check whether or not Half-Duplex mode is supported by the USARTx instance.

Reference Manual to LL API cross reference:	• CR3 HDSEL LL_USART_DisableHalfDuplex

LL_USART_IsEnabledHalfDuplex

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledHalfDuplex (USART_TypeDef * USARTx)**
Function description	Indicate if Single Wire Half-Duplex mode is enabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_UART_HALFDUPLEX_INSTANCE(USARTx) can be used to check whether or not Half-Duplex mode is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 HDSEL LL_USART_IsEnabledHalfDuplex

LL_USART_SetLINBrkDetectionLen

Function name	**__STATIC_INLINE void LL_USART_SetLINBrkDetectionLen (USART_TypeDef * USARTx, uint32_t LINBDLength)**
Function description	Set LIN Break Detection Length.
Parameters	• **USARTx:** USART Instance • **LINBDLength:** This parameter can be one of the following values: – LL_USART_LINBREAK_DETECT_10B – LL_USART_LINBREAK_DETECT_11B
Return values	• **None**
Notes	• Macro IS_UART_LIN_INSTANCE(USARTx) can be used to check whether or not LIN feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 LBDL LL_USART_SetLINBrkDetectionLen

LL_USART_GetLINBrkDetectionLen

Function name	**__STATIC_INLINE uint32_t LL_USART_GetLINBrkDetectionLen (USART_TypeDef * USARTx)**
Function description	Return LIN Break Detection Length.
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_LINBREAK_DETECT_10B – LL_USART_LINBREAK_DETECT_11B

Notes	• Macro IS_UART_LIN_INSTANCE(USARTx) can be used to check whether or not LIN feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 LBDL LL_USART_GetLINBrkDetectionLen

LL_USART_EnableLIN

Function name	**__STATIC_INLINE void LL_USART_EnableLIN (USART_TypeDef * USARTx)**
Function description	Enable LIN mode.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_LIN_INSTANCE(USARTx) can be used to check whether or not LIN feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 LINEN LL_USART_EnableLIN

LL_USART_DisableLIN

Function name	**__STATIC_INLINE void LL_USART_DisableLIN (USART_TypeDef * USARTx)**
Function description	Disable LIN mode.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_LIN_INSTANCE(USARTx) can be used to check whether or not LIN feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 LINEN LL_USART_DisableLIN

LL_USART_IsEnabledLIN

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledLIN (USART_TypeDef * USARTx)**
Function description	Indicate if LIN mode is enabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_UART_LIN_INSTANCE(USARTx) can be used to check whether or not LIN feature is supported by the USARTx instance.

Reference Manual to LL API cross reference:	• CR2 LINEN LL_USART_IsEnabledLIN

LL_USART_SetDEDeassertionTime

Function name	**__STATIC_INLINE void LL_USART_SetDEDeassertionTime (USART_TypeDef * USARTx, uint32_t Time)**
Function description	Set DEDT (Driver Enable De-Assertion Time), Time value expressed on 5 bits ([4:0] bits).
Parameters	• **USARTx:** USART Instance • **Time:** Value between Min_Data=0 and Max_Data=31
Return values	• **None**
Notes	• Macro IS_UART_DRIVER_ENABLE_INSTANCE(USARTx) can be used to check whether or not Driver Enable feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR1 DEDT LL_USART_SetDEDeassertionTime

LL_USART_GetDEDeassertionTime

Function name	**__STATIC_INLINE uint32_t LL_USART_GetDEDeassertionTime (USART_TypeDef * USARTx)**
Function description	Return DEDT (Driver Enable De-Assertion Time)
Parameters	• **USARTx:** USART Instance
Return values	• **Time:** value expressed on 5 bits ([4:0] bits) : Value between Min_Data=0 and Max_Data=31
Notes	• Macro IS_UART_DRIVER_ENABLE_INSTANCE(USARTx) can be used to check whether or not Driver Enable feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR1 DEDT LL_USART_GetDEDeassertionTime

LL_USART_SetDEAssertionTime

Function name	**__STATIC_INLINE void LL_USART_SetDEAssertionTime (USART_TypeDef * USARTx, uint32_t Time)**
Function description	Set DEAT (Driver Enable Assertion Time), Time value expressed on 5 bits ([4:0] bits).
Parameters	• **USARTx:** USART Instance • **Time:** Value between Min_Data=0 and Max_Data=31
Return values	• **None**

Notes	• Macro IS_UART_DRIVER_ENABLE_INSTANCE(USARTx) can be used to check whether or not Driver Enable feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR1 DEAT LL_USART_SetDEAssertionTime

LL_USART_GetDEAssertionTime

Function name	**__STATIC_INLINE uint32_t LL_USART_GetDEAssertionTime (USART_TypeDef * USARTx)**
Function description	Return DEAT (Driver Enable Assertion Time)
Parameters	• **USARTx:** USART Instance
Return values	• **Time:** value expressed on 5 bits ([4:0] bits) : Value between Min_Data=0 and Max_Data=31
Notes	• Macro IS_UART_DRIVER_ENABLE_INSTANCE(USARTx) can be used to check whether or not Driver Enable feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR1 DEAT LL_USART_GetDEAssertionTime

LL_USART_EnableDEMode

Function name	**__STATIC_INLINE void LL_USART_EnableDEMode (USART_TypeDef * USARTx)**
Function description	Enable Driver Enable (DE) Mode.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_DRIVER_ENABLE_INSTANCE(USARTx) can be used to check whether or not Driver Enable feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 DEM LL_USART_EnableDEMode

LL_USART_DisableDEMode

Function name	**__STATIC_INLINE void LL_USART_DisableDEMode (USART_TypeDef * USARTx)**
Function description	Disable Driver Enable (DE) Mode.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_DRIVER_ENABLE_INSTANCE(USARTx) can be used to check whether or not Driver Enable feature is supported by the USARTx instance.

Reference Manual to LL API cross reference:	• CR3 DEM LL_USART_DisableDEMode

LL_USART_IsEnabledDEMode

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledDEMode (USART_TypeDef * USARTx)**
Function description	Indicate if Driver Enable (DE) Mode is enabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_UART_DRIVER_ENABLE_INSTANCE(USARTx) can be used to check whether or not Driver Enable feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 DEM LL_USART_IsEnabledDEMode

LL_USART_SetDESignalPolarity

Function name	**__STATIC_INLINE void LL_USART_SetDESignalPolarity (USART_TypeDef * USARTx, uint32_t Polarity)**
Function description	Select Driver Enable Polarity.
Parameters	• **USARTx:** USART Instance • **Polarity:** This parameter can be one of the following values: – LL_USART_DE_POLARITY_HIGH – LL_USART_DE_POLARITY_LOW
Return values	• **None**
Notes	• Macro IS_UART_DRIVER_ENABLE_INSTANCE(USARTx) can be used to check whether or not Driver Enable feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 DEP LL_USART_SetDESignalPolarity

LL_USART_GetDESignalPolarity

Function name	**__STATIC_INLINE uint32_t LL_USART_GetDESignalPolarity (USART_TypeDef * USARTx)**
Function description	Return Driver Enable Polarity.
Parameters	• **USARTx:** USART Instance
Return values	• **Returned:** value can be one of the following values: – LL_USART_DE_POLARITY_HIGH – LL_USART_DE_POLARITY_LOW
Notes	• Macro IS_UART_DRIVER_ENABLE_INSTANCE(USARTx)

can be used to check whether or not Driver Enable feature is supported by the USARTx instance.

Reference Manual to LL API cross reference:
- CR3 DEP LL_USART_GetDESignalPolarity

LL_USART_ConfigAsyncMode

Function name: **__STATIC_INLINE void LL_USART_ConfigAsyncMode (USART_TypeDef * USARTx)**

Function description: Perform basic configuration of USART for enabling use in Asynchronous Mode (UART)

Parameters:
- **USARTx:** USART Instance

Return values:
- **None**

Notes:
- In UART mode, the following bits must be kept cleared: LINEN bit in the USART_CR2 register,CLKEN bit in the USART_CR2 register,SCEN bit in the USART_CR3 register,IREN bit in the USART_CR3 register,HDSEL bit in the USART_CR3 register.
- Call of this function is equivalent to following function call sequence : Clear LINEN in CR2 using LL_USART_DisableLIN() functionClear CLKEN in CR2 using LL_USART_DisableSCLKOutput() functionClear SCEN in CR3 using LL_USART_DisableSmartcard() functionClear IREN in CR3 using LL_USART_DisableIrda() functionClear HDSEL in CR3 using LL_USART_DisableHalfDuplex() function
- Other remaining configurations items related to Asynchronous Mode (as Baud Rate, Word length, Parity, ...) should be set using dedicated functions

Reference Manual to LL API cross reference:
- CR2 LINEN LL_USART_ConfigAsyncMode
- CR2 CLKEN LL_USART_ConfigAsyncMode
- CR3 SCEN LL_USART_ConfigAsyncMode
- CR3 IREN LL_USART_ConfigAsyncMode
- CR3 HDSEL LL_USART_ConfigAsyncMode

LL_USART_ConfigSyncMode

Function name: **__STATIC_INLINE void LL_USART_ConfigSyncMode (USART_TypeDef * USARTx)**

Function description: Perform basic configuration of USART for enabling use in Synchronous Mode.

Parameters:
- **USARTx:** USART Instance

Return values:
- **None**

Notes:
- In Synchronous mode, the following bits must be kept cleared: LINEN bit in the USART_CR2 register,SCEN bit in the USART_CR3 register,IREN bit in the USART_CR3 register,HDSEL bit in the USART_CR3 register. This function also sets the USART in Synchronous mode.

- Macro IS_USART_INSTANCE(USARTx) can be used to check whether or not Synchronous mode is supported by the USARTx instance.
- Call of this function is equivalent to following function call sequence : Clear LINEN in CR2 using LL_USART_DisableLIN() functionClear IREN in CR3 using LL_USART_DisableIrda() functionClear SCEN in CR3 using LL_USART_DisableSmartcard() functionClear HDSEL in CR3 using LL_USART_DisableHalfDuplex() functionSet CLKEN in CR2 using LL_USART_EnableSCLKOutput() function
- Other remaining configurations items related to Synchronous Mode (as Baud Rate, Word length, Parity, Clock Polarity, ...) should be set using dedicated functions

Reference Manual to LL API cross reference:

- CR2 LINEN LL_USART_ConfigSyncMode
- CR2 CLKEN LL_USART_ConfigSyncMode
- CR3 SCEN LL_USART_ConfigSyncMode
- CR3 IREN LL_USART_ConfigSyncMode
- CR3 HDSEL LL_USART_ConfigSyncMode

LL_USART_ConfigLINMode

Function name: **__STATIC_INLINE void LL_USART_ConfigLINMode (USART_TypeDef * USARTx)**

Function description: Perform basic configuration of USART for enabling use in LIN Mode.

Parameters:

- **USARTx:** USART Instance

Return values:

- **None**

Notes:

- In LIN mode, the following bits must be kept cleared: STOP and CLKEN bits in the USART_CR2 register,SCEN bit in the USART_CR3 register,IREN bit in the USART_CR3 register,HDSEL bit in the USART_CR3 register. This function also set the UART/USART in LIN mode.
- Macro IS_UART_LIN_INSTANCE(USARTx) can be used to check whether or not LIN feature is supported by the USARTx instance.
- Call of this function is equivalent to following function call sequence : Clear CLKEN in CR2 using LL_USART_DisableSCLKOutput() functionClear STOP in CR2 using LL_USART_SetStopBitsLength() functionClear SCEN in CR3 using LL_USART_DisableSmartcard() functionClear IREN in CR3 using LL_USART_DisableIrda() functionClear HDSEL in CR3 using LL_USART_DisableHalfDuplex() functionSet LINEN in CR2 using LL_USART_EnableLIN() function
- Other remaining configurations items related to LIN Mode (as Baud Rate, Word length, LIN Break Detection Length, ...) should be set using dedicated functions

Reference Manual to LL API cross reference:

- CR2 CLKEN LL_USART_ConfigLINMode
- CR2 STOP LL_USART_ConfigLINMode
- CR2 LINEN LL_USART_ConfigLINMode
- CR3 IREN LL_USART_ConfigLINMode

- CR3 SCEN LL_USART_ConfigLINMode
- CR3 HDSEL LL_USART_ConfigLINMode

LL_USART_ConfigHalfDuplexMode

Function name	**__STATIC_INLINE void LL_USART_ConfigHalfDuplexMode (USART_TypeDef * USARTx)**
Function description	Perform basic configuration of USART for enabling use in Half Duplex Mode.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• In Half Duplex mode, the following bits must be kept cleared: LINEN bit in the USART_CR2 register,CLKEN bit in the USART_CR2 register,SCEN bit in the USART_CR3 register,IREN bit in the USART_CR3 register, This function also sets the UART/USART in Half Duplex mode. • Macro IS_UART_HALFDUPLEX_INSTANCE(USARTx) can be used to check whether or not Half-Duplex mode is supported by the USARTx instance. • Call of this function is equivalent to following function call sequence : Clear LINEN in CR2 using LL_USART_DisableLIN() functionClear CLKEN in CR2 using LL_USART_DisableSCLKOutput() functionClear SCEN in CR3 using LL_USART_DisableSmartcard() functionClear IREN in CR3 using LL_USART_DisableIrda() functionSet HDSEL in CR3 using LL_USART_EnableHalfDuplex() function • Other remaining configurations items related to Half Duplex Mode (as Baud Rate, Word length, Parity, ...) should be set using dedicated functions
Reference Manual to LL API cross reference:	• CR2 LINEN LL_USART_ConfigHalfDuplexMode • CR2 CLKEN LL_USART_ConfigHalfDuplexMode • CR3 HDSEL LL_USART_ConfigHalfDuplexMode • CR3 SCEN LL_USART_ConfigHalfDuplexMode • CR3 IREN LL_USART_ConfigHalfDuplexMode

LL_USART_ConfigSmartcardMode

Function name	**__STATIC_INLINE void LL_USART_ConfigSmartcardMode (USART_TypeDef * USARTx)**
Function description	Perform basic configuration of USART for enabling use in Smartcard Mode.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• In Smartcard mode, the following bits must be kept cleared: LINEN bit in the USART_CR2 register,IREN bit in the USART_CR3 register,HDSEL bit in the USART_CR3 register. This function also configures Stop bits to 1.5 bits and sets the USART in Smartcard mode (SCEN bit). Clock Output is also

enabled (CLKEN).
- Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.
- Call of this function is equivalent to following function call sequence : Clear LINEN in CR2 using LL_USART_DisableLIN() functionClear IREN in CR3 using LL_USART_DisableIrda() functionClear HDSEL in CR3 using LL_USART_DisableHalfDuplex() functionConfigure STOP in CR2 using LL_USART_SetStopBitsLength() functionSet CLKEN in CR2 using LL_USART_EnableSCLKOutput() functionSet SCEN in CR3 using LL_USART_EnableSmartcard() function
- Other remaining configurations items related to Smartcard Mode (as Baud Rate, Word length, Parity, ...) should be set using dedicated functions

Reference Manual to LL API cross reference:
- CR2 LINEN LL_USART_ConfigSmartcardMode
- CR2 STOP LL_USART_ConfigSmartcardMode
- CR2 CLKEN LL_USART_ConfigSmartcardMode
- CR3 HDSEL LL_USART_ConfigSmartcardMode
- CR3 SCEN LL_USART_ConfigSmartcardMode

LL_USART_ConfigIrdaMode

Function name: **__STATIC_INLINE void LL_USART_ConfigIrdaMode (USART_TypeDef * USARTx)**

Function description: Perform basic configuration of USART for enabling use in Irda Mode.

Parameters:
- **USARTx:** USART Instance

Return values:
- **None**

Notes:
- In IRDA mode, the following bits must be kept cleared: LINEN bit in the USART_CR2 register,STOP and CLKEN bits in the USART_CR2 register,SCEN bit in the USART_CR3 register,HDSEL bit in the USART_CR3 register. This function also sets the UART/USART in IRDA mode (IREN bit).
- Macro IS_IRDA_INSTANCE(USARTx) can be used to check whether or not IrDA feature is supported by the USARTx instance.
- Call of this function is equivalent to following function call sequence : Clear LINEN in CR2 using LL_USART_DisableLIN() functionClear CLKEN in CR2 using LL_USART_DisableSCLKOutput() functionClear SCEN in CR3 using LL_USART_DisableSmartcard() functionClear HDSEL in CR3 using LL_USART_DisableHalfDuplex() functionConfigure STOP in CR2 using LL_USART_SetStopBitsLength() functionSet IREN in CR3 using LL_USART_EnableIrda() function
- Other remaining configurations items related to Irda Mode (as Baud Rate, Word length, Power mode, ...) should be set using dedicated functions

Reference Manual to
- CR2 LINEN LL_USART_ConfigIrdaMode

LL API cross reference:
- CR2 CLKEN LL_USART_ConfigIrdaMode
- CR2 STOP LL_USART_ConfigIrdaMode
- CR3 SCEN LL_USART_ConfigIrdaMode
- CR3 HDSEL LL_USART_ConfigIrdaMode
- CR3 IREN LL_USART_ConfigIrdaMode

LL_USART_ConfigMultiProcessMode

Function name: **__STATIC_INLINE void LL_USART_ConfigMultiProcessMode (USART_TypeDef * USARTx)**

Function description: Perform basic configuration of USART for enabling use in Multi processor Mode (several USARTs connected in a network, one of the USARTs can be the master, its TX output connected to the RX inputs of the other slaves USARTs).

Parameters:
- **USARTx:** USART Instance

Return values:
- **None**

Notes:
- In MultiProcessor mode, the following bits must be kept cleared: LINEN bit in the USART_CR2 register,CLKEN bit in the USART_CR2 register,SCEN bit in the USART_CR3 register,IREN bit in the USART_CR3 register,HDSEL bit in the USART_CR3 register.
- Call of this function is equivalent to following function call sequence : Clear LINEN in CR2 using LL_USART_DisableLIN() functionClear CLKEN in CR2 using LL_USART_DisableSCLKOutput() functionClear SCEN in CR3 using LL_USART_DisableSmartcard() functionClear IREN in CR3 using LL_USART_DisableIrda() functionClear HDSEL in CR3 using LL_USART_DisableHalfDuplex() function
- Other remaining configurations items related to Multi processor Mode (as Baud Rate, Wake Up Method, Node address, ...) should be set using dedicated functions

Reference Manual to LL API cross reference:
- CR2 LINEN LL_USART_ConfigMultiProcessMode
- CR2 CLKEN LL_USART_ConfigMultiProcessMode
- CR3 SCEN LL_USART_ConfigMultiProcessMode
- CR3 HDSEL LL_USART_ConfigMultiProcessMode
- CR3 IREN LL_USART_ConfigMultiProcessMode

LL_USART_IsActiveFlag_PE

Function name: **__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_PE (USART_TypeDef * USARTx)**

Function description: Check if the USART Parity Error Flag is set or not.

Parameters:
- **USARTx:** USART Instance

Return values:
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- ISR PE LL_USART_IsActiveFlag_PE

LL_USART_IsActiveFlag_FE

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_FE (USART_TypeDef * USARTx)**
Function description	Check if the USART Framing Error Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR FE LL_USART_IsActiveFlag_FE

LL_USART_IsActiveFlag_NE

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_NE (USART_TypeDef * USARTx)**
Function description	Check if the USART Noise error detected Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR NF LL_USART_IsActiveFlag_NE

LL_USART_IsActiveFlag_ORE

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_ORE (USART_TypeDef * USARTx)**
Function description	Check if the USART OverRun Error Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR ORE LL_USART_IsActiveFlag_ORE

LL_USART_IsActiveFlag_IDLE

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_IDLE (USART_TypeDef * USARTx)**
Function description	Check if the USART IDLE line detected Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR IDLE LL_USART_IsActiveFlag_IDLE

LL_USART_IsActiveFlag_RXNE

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_RXNE (USART_TypeDef * USARTx)**
Function description	Check if the USART Read Data Register Not Empty Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR RXNE LL_USART_IsActiveFlag_RXNE

LL_USART_IsActiveFlag_TC

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_TC (USART_TypeDef * USARTx)**
Function description	Check if the USART Transmission Complete Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TC LL_USART_IsActiveFlag_TC

LL_USART_IsActiveFlag_TXE

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_TXE (USART_TypeDef * USARTx)**
Function description	Check if the USART Transmit Data Register Empty Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TXE LL_USART_IsActiveFlag_TXE

LL_USART_IsActiveFlag_LBD

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_LBD (USART_TypeDef * USARTx)**
Function description	Check if the USART LIN Break Detection Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_UART_LIN_INSTANCE(USARTx) can be used to check whether or not LIN feature is supported by the USARTx instance.

Reference Manual to LL API cross reference:	• ISR LBDF LL_USART_IsActiveFlag_LBD

LL_USART_IsActiveFlag_nCTS

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_nCTS (USART_TypeDef * USARTx)**
Function description	Check if the USART CTS interrupt Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_UART_HWFLOW_INSTANCE(USARTx) can be used to check whether or not Hardware Flow control feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• ISR CTSIF LL_USART_IsActiveFlag_nCTS

LL_USART_IsActiveFlag_CTS

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_CTS (USART_TypeDef * USARTx)**
Function description	Check if the USART CTS Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_UART_HWFLOW_INSTANCE(USARTx) can be used to check whether or not Hardware Flow control feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• ISR CTS LL_USART_IsActiveFlag_CTS

LL_USART_IsActiveFlag_RTO

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_RTO (USART_TypeDef * USARTx)**
Function description	Check if the USART Receiver Time Out Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR RTOF LL_USART_IsActiveFlag_RTO

LL_USART_IsActiveFlag_EOB

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_EOB (USART_TypeDef * USARTx)**
Function description	Check if the USART End Of Block Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• ISR EOBF LL_USART_IsActiveFlag_EOB

LL_USART_IsActiveFlag_ABRE

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_ABRE (USART_TypeDef * USARTx)**
Function description	Check if the USART Auto-Baud Rate Error Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_USART_AUTOBAUDRATE_DETECTION_INSTANCE(USARTx) can be used to check whether or not Auto Baud Rate detection feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• ISR ABRE LL_USART_IsActiveFlag_ABRE

LL_USART_IsActiveFlag_ABR

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_ABR (USART_TypeDef * USARTx)**
Function description	Check if the USART Auto-Baud Rate Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_USART_AUTOBAUDRATE_DETECTION_INSTANCE(USARTx) can be used to check whether or not Auto Baud Rate detection feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• ISR ABRF LL_USART_IsActiveFlag_ABR

LL_USART_IsActiveFlag_BUSY

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_BUSY (USART_TypeDef * USARTx)**
Function description	Check if the USART Busy Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR BUSY LL_USART_IsActiveFlag_BUSY

LL_USART_IsActiveFlag_CM

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_CM (USART_TypeDef * USARTx)**
Function description	Check if the USART Character Match Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR CMF LL_USART_IsActiveFlag_CM

LL_USART_IsActiveFlag_SBK

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_SBK (USART_TypeDef * USARTx)**
Function description	Check if the USART Send Break Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR SBKF LL_USART_IsActiveFlag_SBK

LL_USART_IsActiveFlag_RWU

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_RWU (USART_TypeDef * USARTx)**
Function description	Check if the USART Receive Wake Up from mute mode Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR RWU LL_USART_IsActiveFlag_RWU

LL_USART_IsActiveFlag_WKUP

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_WKUP (USART_TypeDef * USARTx)**
Function description	Check if the USART Wake Up from stop mode Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_UART_WAKEUP_FROMSTOP_INSTANCE(USARTx) can be used to check whether or not Wake-up from Stop mode feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• ISR WUF LL_USART_IsActiveFlag_WKUP

LL_USART_IsActiveFlag_TEACK

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_TEACK (USART_TypeDef * USARTx)**
Function description	Check if the USART Transmit Enable Acknowledge Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR TEACK LL_USART_IsActiveFlag_TEACK

LL_USART_IsActiveFlag_REACK

Function name	**__STATIC_INLINE uint32_t LL_USART_IsActiveFlag_REACK (USART_TypeDef * USARTx)**
Function description	Check if the USART Receive Enable Acknowledge Flag is set or not.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• ISR REACK LL_USART_IsActiveFlag_REACK

LL_USART_ClearFlag_PE

Function name	**__STATIC_INLINE void LL_USART_ClearFlag_PE (USART_TypeDef * USARTx)**
Function description	Clear Parity Error Flag.
Parameters	• **USARTx:** USART Instance
Return values	• **None**

Reference Manual to LL API cross reference:	• ICR PECF LL_USART_ClearFlag_PE

LL_USART_ClearFlag_FE

Function name	**__STATIC_INLINE void LL_USART_ClearFlag_FE (USART_TypeDef * USARTx)**
Function description	Clear Framing Error Flag.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ICR FECF LL_USART_ClearFlag_FE

LL_USART_ClearFlag_NE

Function name	**__STATIC_INLINE void LL_USART_ClearFlag_NE (USART_TypeDef * USARTx)**
Function description	Clear Noise detected Flag.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ICR NCF LL_USART_ClearFlag_NE

LL_USART_ClearFlag_ORE

Function name	**__STATIC_INLINE void LL_USART_ClearFlag_ORE (USART_TypeDef * USARTx)**
Function description	Clear OverRun Error Flag.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ICR ORECF LL_USART_ClearFlag_ORE

LL_USART_ClearFlag_IDLE

Function name	**__STATIC_INLINE void LL_USART_ClearFlag_IDLE (USART_TypeDef * USARTx)**
Function description	Clear IDLE line detected Flag.
Parameters	• **USARTx:** USART Instance
Return values	• **None**

Reference Manual to LL API cross reference:	• ICR IDLECF LL_USART_ClearFlag_IDLE

LL_USART_ClearFlag_TC

Function name	**__STATIC_INLINE void LL_USART_ClearFlag_TC (USART_TypeDef * USARTx)**
Function description	Clear Transmission Complete Flag.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ICR TCCF LL_USART_ClearFlag_TC

LL_USART_ClearFlag_LBD

Function name	**__STATIC_INLINE void LL_USART_ClearFlag_LBD (USART_TypeDef * USARTx)**
Function description	Clear LIN Break Detection Flag.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_LIN_INSTANCE(USARTx) can be used to check whether or not LIN feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• ICR LBDCF LL_USART_ClearFlag_LBD

LL_USART_ClearFlag_nCTS

Function name	**__STATIC_INLINE void LL_USART_ClearFlag_nCTS (USART_TypeDef * USARTx)**
Function description	Clear CTS Interrupt Flag.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_HWFLOW_INSTANCE(USARTx) can be used to check whether or not Hardware Flow control feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• ICR CTSCF LL_USART_ClearFlag_nCTS

LL_USART_ClearFlag_RTO

Function name	**__STATIC_INLINE void LL_USART_ClearFlag_RTO (USART_TypeDef * USARTx)**
Function description	Clear Receiver Time Out Flag.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ICR RTOCF LL_USART_ClearFlag_RTO

LL_USART_ClearFlag_EOB

Function name	**__STATIC_INLINE void LL_USART_ClearFlag_EOB (USART_TypeDef * USARTx)**
Function description	Clear End Of Block Flag.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• ICR EOBCF LL_USART_ClearFlag_EOB

LL_USART_ClearFlag_CM

Function name	**__STATIC_INLINE void LL_USART_ClearFlag_CM (USART_TypeDef * USARTx)**
Function description	Clear Character Match Flag.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• ICR CMCF LL_USART_ClearFlag_CM

LL_USART_ClearFlag_WKUP

Function name	**__STATIC_INLINE void LL_USART_ClearFlag_WKUP (USART_TypeDef * USARTx)**
Function description	Clear Wake Up from stop mode Flag.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_WAKEUP_FROMSTOP_INSTANCE(USARTx) can be used to check whether or not Wake-up from Stop mode

feature is supported by the USARTx instance.

Reference Manual to LL API cross reference:
- ICR WUCF LL_USART_ClearFlag_WKUP

LL_USART_EnableIT_IDLE

Function name **__STATIC_INLINE void LL_USART_EnableIT_IDLE (USART_TypeDef * USARTx)**

Function description Enable IDLE Interrupt.

Parameters
- **USARTx:** USART Instance

Return values
- **None**

Reference Manual to LL API cross reference:
- CR1 IDLEIE LL_USART_EnableIT_IDLE

LL_USART_EnableIT_RXNE

Function name **__STATIC_INLINE void LL_USART_EnableIT_RXNE (USART_TypeDef * USARTx)**

Function description Enable RX Not Empty Interrupt.

Parameters
- **USARTx:** USART Instance

Return values
- **None**

Reference Manual to LL API cross reference:
- CR1 RXNEIE LL_USART_EnableIT_RXNE

LL_USART_EnableIT_TC

Function name **__STATIC_INLINE void LL_USART_EnableIT_TC (USART_TypeDef * USARTx)**

Function description Enable Transmission Complete Interrupt.

Parameters
- **USARTx:** USART Instance

Return values
- **None**

Reference Manual to LL API cross reference:
- CR1 TCIE LL_USART_EnableIT_TC

LL_USART_EnableIT_TXE

Function name **__STATIC_INLINE void LL_USART_EnableIT_TXE (USART_TypeDef * USARTx)**

Function description Enable TX Empty Interrupt.

Parameters
- **USARTx:** USART Instance

Return values
- **None**

Reference Manual to LL API cross reference:	• CR1 TXEIE LL_USART_EnableIT_TXE

LL_USART_EnableIT_PE

Function name	**__STATIC_INLINE void LL_USART_EnableIT_PE (USART_TypeDef * USARTx)**
Function description	Enable Parity Error Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 PEIE LL_USART_EnableIT_PE

LL_USART_EnableIT_CM

Function name	**__STATIC_INLINE void LL_USART_EnableIT_CM (USART_TypeDef * USARTx)**
Function description	Enable Character Match Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 CMIE LL_USART_EnableIT_CM

LL_USART_EnableIT_RTO

Function name	**__STATIC_INLINE void LL_USART_EnableIT_RTO (USART_TypeDef * USARTx)**
Function description	Enable Receiver Timeout Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 RTOIE LL_USART_EnableIT_RTO

LL_USART_EnableIT_EOB

Function name	**__STATIC_INLINE void LL_USART_EnableIT_EOB (USART_TypeDef * USARTx)**
Function description	Enable End Of Block Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the

USARTx instance.

Reference Manual to LL API cross reference:
- CR1 EOBIE LL_USART_EnableIT_EOB

LL_USART_EnableIT_LBD

Function name **__STATIC_INLINE void LL_USART_EnableIT_LBD (USART_TypeDef * USARTx)**

Function description Enable LIN Break Detection Interrupt.

Parameters
- **USARTx:** USART Instance

Return values
- **None**

Notes
- Macro IS_UART_LIN_INSTANCE(USARTx) can be used to check whether or not LIN feature is supported by the USARTx instance.

Reference Manual to LL API cross reference:
- CR2 LBDIE LL_USART_EnableIT_LBD

LL_USART_EnableIT_ERROR

Function name **__STATIC_INLINE void LL_USART_EnableIT_ERROR (USART_TypeDef * USARTx)**

Function description Enable Error Interrupt.

Parameters
- **USARTx:** USART Instance

Return values
- **None**

Notes
- When set, Error Interrupt Enable Bit is enabling interrupt generation in case of a framing error, overrun error or noise flag (FE=1 or ORE=1 or NF=1 in the USARTx_ISR register). 0: Interrupt is inhibited 1: An interrupt is generated when FE=1 or ORE=1 or NF=1 in the USARTx_ISR register.

Reference Manual to LL API cross reference:
- CR3 EIE LL_USART_EnableIT_ERROR

LL_USART_EnableIT_CTS

Function name **__STATIC_INLINE void LL_USART_EnableIT_CTS (USART_TypeDef * USARTx)**

Function description Enable CTS Interrupt.

Parameters
- **USARTx:** USART Instance

Return values
- **None**

Notes
- Macro IS_UART_HWFLOW_INSTANCE(USARTx) can be used to check whether or not Hardware Flow control feature is supported by the USARTx instance.

Reference Manual to LL API cross reference:	• CR3 CTSIE LL_USART_EnableIT_CTS

LL_USART_EnableIT_WKUP

Function name	**__STATIC_INLINE void LL_USART_EnableIT_WKUP (USART_TypeDef * USARTx)**
Function description	Enable Wake Up from Stop Mode Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_WAKEUP_FROMSTOP_INSTANCE(USARTx) can be used to check whether or not Wake-up from Stop mode feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 WUFIE LL_USART_EnableIT_WKUP

LL_USART_DisableIT_IDLE

Function name	**__STATIC_INLINE void LL_USART_DisableIT_IDLE (USART_TypeDef * USARTx)**
Function description	Disable IDLE Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 IDLEIE LL_USART_DisableIT_IDLE

LL_USART_DisableIT_RXNE

Function name	**__STATIC_INLINE void LL_USART_DisableIT_RXNE (USART_TypeDef * USARTx)**
Function description	Disable RX Not Empty Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 RXNEIE LL_USART_DisableIT_RXNE

LL_USART_DisableIT_TC

Function name	**__STATIC_INLINE void LL_USART_DisableIT_TC (USART_TypeDef * USARTx)**
Function description	Disable Transmission Complete Interrupt.

Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 TCIE LL_USART_DisableIT_TC

LL_USART_DisableIT_TXE

Function name	**__STATIC_INLINE void LL_USART_DisableIT_TXE (USART_TypeDef * USARTx)**
Function description	Disable TX Empty Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 TXEIE LL_USART_DisableIT_TXE

LL_USART_DisableIT_PE

Function name	**__STATIC_INLINE void LL_USART_DisableIT_PE (USART_TypeDef * USARTx)**
Function description	Disable Parity Error Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 PEIE LL_USART_DisableIT_PE

LL_USART_DisableIT_CM

Function name	**__STATIC_INLINE void LL_USART_DisableIT_CM (USART_TypeDef * USARTx)**
Function description	Disable Character Match Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 CMIE LL_USART_DisableIT_CM

LL_USART_DisableIT_RTO

Function name	**__STATIC_INLINE void LL_USART_DisableIT_RTO (USART_TypeDef * USARTx)**
Function description	Disable Receiver Timeout Interrupt.
Parameters	• **USARTx:** USART Instance

Return values	• **None**
Reference Manual to LL API cross reference:	• CR1 RTOIE LL_USART_DisableIT_RTO

LL_USART_DisableIT_EOB

Function name	**__STATIC_INLINE void LL_USART_DisableIT_EOB (USART_TypeDef * USARTx)**
Function description	Disable End Of Block Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR1 EOBIE LL_USART_DisableIT_EOB

LL_USART_DisableIT_LBD

Function name	**__STATIC_INLINE void LL_USART_DisableIT_LBD (USART_TypeDef * USARTx)**
Function description	Disable LIN Break Detection Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_LIN_INSTANCE(USARTx) can be used to check whether or not LIN feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 LBDIE LL_USART_DisableIT_LBD

LL_USART_DisableIT_ERROR

Function name	**__STATIC_INLINE void LL_USART_DisableIT_ERROR (USART_TypeDef * USARTx)**
Function description	Disable Error Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• When set, Error Interrupt Enable Bit is enabling interrupt generation in case of a framing error, overrun error or noise flag (FE=1 or ORE=1 or NF=1 in the USARTx_ISR register). 0: Interrupt is inhibited 1: An interrupt is generated when FE=1 or ORE=1 or NF=1 in the USARTx_ISR register.

Reference Manual to LL API cross reference:	• CR3 EIE LL_USART_DisableIT_ERROR

LL_USART_DisableIT_CTS

Function name	**__STATIC_INLINE void LL_USART_DisableIT_CTS (USART_TypeDef * USARTx)**
Function description	Disable CTS Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_HWFLOW_INSTANCE(USARTx) can be used to check whether or not Hardware Flow control feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 CTSIE LL_USART_DisableIT_CTS

LL_USART_DisableIT_WKUP

Function name	**__STATIC_INLINE void LL_USART_DisableIT_WKUP (USART_TypeDef * USARTx)**
Function description	Disable Wake Up from Stop Mode Interrupt.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_UART_WAKEUP_FROMSTOP_INSTANCE(USARTx) can be used to check whether or not Wake-up from Stop mode feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 WUFIE LL_USART_DisableIT_WKUP

LL_USART_IsEnabledIT_IDLE

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledIT_IDLE (USART_TypeDef * USARTx)**
Function description	Check if the USART IDLE Interrupt source is enabled or disabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 IDLEIE LL_USART_IsEnabledIT_IDLE

LL_USART_IsEnabledIT_RXNE

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledIT_RXNE (USART_TypeDef * USARTx)**
Function description	Check if the USART RX Not Empty Interrupt is enabled or disabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 RXNEIE LL_USART_IsEnabledIT_RXNE

LL_USART_IsEnabledIT_TC

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledIT_TC (USART_TypeDef * USARTx)**
Function description	Check if the USART Transmission Complete Interrupt is enabled or disabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 TCIE LL_USART_IsEnabledIT_TC

LL_USART_IsEnabledIT_TXE

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledIT_TXE (USART_TypeDef * USARTx)**
Function description	Check if the USART TX Empty Interrupt is enabled or disabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 TXEIE LL_USART_IsEnabledIT_TXE

LL_USART_IsEnabledIT_PE

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledIT_PE (USART_TypeDef * USARTx)**
Function description	Check if the USART Parity Error Interrupt is enabled or disabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 PEIE LL_USART_IsEnabledIT_PE

LL_USART_IsEnabledIT_CM

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledIT_CM (USART_TypeDef * USARTx)**
Function description	Check if the USART Character Match Interrupt is enabled or disabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 CMIE LL_USART_IsEnabledIT_CM

LL_USART_IsEnabledIT_RTO

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledIT_RTO (USART_TypeDef * USARTx)**
Function description	Check if the USART Receiver Timeout Interrupt is enabled or disabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR1 RTOIE LL_USART_IsEnabledIT_RTO

LL_USART_IsEnabledIT_EOB

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledIT_EOB (USART_TypeDef * USARTx)**
Function description	Check if the USART End Of Block Interrupt is enabled or disabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR1 EOBIE LL_USART_IsEnabledIT_EOB

LL_USART_IsEnabledIT_LBD

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledIT_LBD (USART_TypeDef * USARTx)**
Function description	Check if the USART LIN Break Detection Interrupt is enabled or disabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).

Notes	• Macro IS_UART_LIN_INSTANCE(USARTx) can be used to check whether or not LIN feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR2 LBDIE LL_USART_IsEnabledIT_LBD

LL_USART_IsEnabledIT_ERROR

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledIT_ERROR (USART_TypeDef * USARTx)**
Function description	Check if the USART Error Interrupt is enabled or disabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR3 EIE LL_USART_IsEnabledIT_ERROR

LL_USART_IsEnabledIT_CTS

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledIT_CTS (USART_TypeDef * USARTx)**
Function description	Check if the USART CTS Interrupt is enabled or disabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_UART_HWFLOW_INSTANCE(USARTx) can be used to check whether or not Hardware Flow control feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• CR3 CTSIE LL_USART_IsEnabledIT_CTS

LL_USART_IsEnabledIT_WKUP

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledIT_WKUP (USART_TypeDef * USARTx)**
Function description	Check if the USART Wake Up from Stop Mode Interrupt is enabled or disabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Notes	• Macro IS_UART_WAKEUP_FROMSTOP_INSTANCE(USARTx) can be used to check whether or not Wake-up from Stop mode feature is supported by the USARTx instance.
Reference Manual to LL API cross	• CR3 WUFIE LL_USART_IsEnabledIT_WKUP

reference:

LL_USART_EnableDMAReq_RX

Function name	**__STATIC_INLINE void LL_USART_EnableDMAReq_RX (USART_TypeDef * USARTx)**
Function description	Enable DMA Mode for reception.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR3 DMAR LL_USART_EnableDMAReq_RX

LL_USART_DisableDMAReq_RX

Function name	**__STATIC_INLINE void LL_USART_DisableDMAReq_RX (USART_TypeDef * USARTx)**
Function description	Disable DMA Mode for reception.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR3 DMAR LL_USART_DisableDMAReq_RX

LL_USART_IsEnabledDMAReq_RX

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledDMAReq_RX (USART_TypeDef * USARTx)**
Function description	Check if DMA Mode is enabled for reception.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR3 DMAR LL_USART_IsEnabledDMAReq_RX

LL_USART_EnableDMAReq_TX

Function name	**__STATIC_INLINE void LL_USART_EnableDMAReq_TX (USART_TypeDef * USARTx)**
Function description	Enable DMA Mode for transmission.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR3 DMAT LL_USART_EnableDMAReq_TX

LL_USART_DisableDMAReq_TX

Function name	**__STATIC_INLINE void LL_USART_DisableDMAReq_TX (USART_TypeDef * USARTx)**
Function description	Disable DMA Mode for transmission.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR3 DMAT LL_USART_DisableDMAReq_TX

LL_USART_IsEnabledDMAReq_TX

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledDMAReq_TX (USART_TypeDef * USARTx)**
Function description	Check if DMA Mode is enabled for transmission.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR3 DMAT LL_USART_IsEnabledDMAReq_TX

LL_USART_EnableDMADeactOnRxErr

Function name	**__STATIC_INLINE void LL_USART_EnableDMADeactOnRxErr (USART_TypeDef * USARTx)**
Function description	Enable DMA Disabling on Reception Error.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR3 DDRE LL_USART_EnableDMADeactOnRxErr

LL_USART_DisableDMADeactOnRxErr

Function name	**__STATIC_INLINE void LL_USART_DisableDMADeactOnRxErr (USART_TypeDef * USARTx)**
Function description	Disable DMA Disabling on Reception Error.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• CR3 DDRE LL_USART_DisableDMADeactOnRxErr

LL_USART_IsEnabledDMADeactOnRxErr

Function name	**__STATIC_INLINE uint32_t LL_USART_IsEnabledDMADeactOnRxErr (USART_TypeDef * USARTx)**
Function description	Indicate if DMA Disabling on Reception Error is disabled.
Parameters	• **USARTx:** USART Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR3 DDRE LL_USART_IsEnabledDMADeactOnRxErr

LL_USART_DMA_GetRegAddr

Function name	**__STATIC_INLINE uint32_t LL_USART_DMA_GetRegAddr (USART_TypeDef * USARTx, uint32_t Direction)**
Function description	Get the data register address used for DMA transfer.
Parameters	• **USARTx:** USART Instance • **Direction:** This parameter can be one of the following values: – LL_USART_DMA_REG_DATA_TRANSMIT – LL_USART_DMA_REG_DATA_RECEIVE
Return values	• **Address:** of data register
Reference Manual to LL API cross reference:	• RDR RDR LL_USART_DMA_GetRegAddr • • TDR TDR LL_USART_DMA_GetRegAddr

LL_USART_ReceiveData8

Function name	**__STATIC_INLINE uint8_t LL_USART_ReceiveData8 (USART_TypeDef * USARTx)**
Function description	Read Receiver Data register (Receive Data value, 8 bits)
Parameters	• **USARTx:** USART Instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0xFF
Reference Manual to LL API cross reference:	• RDR RDR LL_USART_ReceiveData8

LL_USART_ReceiveData9

Function name	**__STATIC_INLINE uint16_t LL_USART_ReceiveData9 (USART_TypeDef * USARTx)**
Function description	Read Receiver Data register (Receive Data value, 9 bits)
Parameters	• **USARTx:** USART Instance
Return values	• **Value:** between Min_Data=0x00 and Max_Data=0x1FF
Reference Manual to	• RDR RDR LL_USART_ReceiveData9

LL API cross reference:

LL_USART_TransmitData8

Function name	**__STATIC_INLINE void LL_USART_TransmitData8 (USART_TypeDef * USARTx, uint8_t Value)**
Function description	Write in Transmitter Data Register (Transmit Data value, 8 bits)
Parameters	• **USARTx:** USART Instance • **Value:** between Min_Data=0x00 and Max_Data=0xFF
Return values	• **None**
Reference Manual to LL API cross reference:	• TDR TDR LL_USART_TransmitData8

LL_USART_TransmitData9

Function name	**__STATIC_INLINE void LL_USART_TransmitData9 (USART_TypeDef * USARTx, uint16_t Value)**
Function description	Write in Transmitter Data Register (Transmit Data value, 9 bits)
Parameters	• **USARTx:** USART Instance • **Value:** between Min_Data=0x00 and Max_Data=0x1FF
Return values	• **None**
Reference Manual to LL API cross reference:	• TDR TDR LL_USART_TransmitData9

LL_USART_RequestAutoBaudRate

Function name	**__STATIC_INLINE void LL_USART_RequestAutoBaudRate (USART_TypeDef * USARTx)**
Function description	Request an Automatic Baud Rate measurement on next received data frame.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_USART_AUTOBAUDRATE_DETECTION_INSTANCE(USARTx) can be used to check whether or not Auto Baud Rate detection feature is supported by the USARTx instance.
Reference Manual to LL API cross reference:	• RQR ABRRQ LL_USART_RequestAutoBaudRate

LL_USART_RequestBreakSending

Function name	**__STATIC_INLINE void LL_USART_RequestBreakSending (USART_TypeDef * USARTx)**
Function description	Request Break sending.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• RQR SBKRQ LL_USART_RequestBreakSending

LL_USART_RequestEnterMuteMode

Function name	**__STATIC_INLINE void LL_USART_RequestEnterMuteMode (USART_TypeDef * USARTx)**
Function description	Put USART in mute mode and set the RWU flag.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• RQR MMRQ LL_USART_RequestEnterMuteMode

LL_USART_RequestRxDataFlush

Function name	**__STATIC_INLINE void LL_USART_RequestRxDataFlush (USART_TypeDef * USARTx)**
Function description	Request a Receive Data flush.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Reference Manual to LL API cross reference:	• RQR RXFRQ LL_USART_RequestRxDataFlush

LL_USART_RequestTxDataFlush

Function name	**__STATIC_INLINE void LL_USART_RequestTxDataFlush (USART_TypeDef * USARTx)**
Function description	Request a Transmit data flush.
Parameters	• **USARTx:** USART Instance
Return values	• **None**
Notes	• Macro IS_SMARTCARD_INSTANCE(USARTx) can be used to check whether or not Smartcard feature is supported by the USARTx instance.

Reference Manual to LL API cross reference:
- RQR TXFRQ LL_USART_RequestTxDataFlush

LL_USART_DeInit

Function name: **ErrorStatus LL_USART_DeInit (USART_TypeDef * USARTx)**

Function description: De-initialize USART registers (Registers restored to their default values).

Parameters:
- **USARTx:** USART Instance

Return values:
- **An:** ErrorStatus enumeration value:
  - SUCCESS: USART registers are de-initialized
  - ERROR: USART registers are not de-initialized

LL_USART_Init

Function name: **ErrorStatus LL_USART_Init (USART_TypeDef * USARTx, LL_USART_InitTypeDef * USART_InitStruct)**

Function description: Initialize USART registers according to the specified parameters in USART_InitStruct.

Parameters:
- **USARTx:** USART Instance
- **USART_InitStruct:** pointer to a LL_USART_InitTypeDef structure that contains the configuration information for the specified USART peripheral.

Return values:
- **An:** ErrorStatus enumeration value:
  - SUCCESS: USART registers are initialized according to USART_InitStruct content
  - ERROR: Problem occurred during USART Registers initialization

Notes:
- As some bits in USART configuration registers can only be written when the USART is disabled (USART_CR1_UE bit =0), USART IP should be in disabled state prior calling this function. Otherwise, ERROR result will be returned.
- Baud rate value stored in USART_InitStruct BaudRate field, should be valid (different from 0).

LL_USART_StructInit

Function name: **void LL_USART_StructInit (LL_USART_InitTypeDef * USART_InitStruct)**

Function description: Set each LL_USART_InitTypeDef field to default value.

Parameters:
- **USART_InitStruct:** pointer to a LL_USART_InitTypeDef structure whose fields will be set to default values.

Return values:
- **None**

LL_USART_ClockInit

Function name — **ErrorStatus LL_USART_ClockInit (USART_TypeDef * USARTx, LL_USART_ClockInitTypeDef * USART_ClockInitStruct)**

Function description — Initialize USART Clock related settings according to the specified parameters in the USART_ClockInitStruct.

Parameters
- **USARTx:** USART Instance
- **USART_ClockInitStruct:** pointer to a LL_USART_ClockInitTypeDef structure that contains the Clock configuration information for the specified USART peripheral.

Return values
- **An:** ErrorStatus enumeration value:
  - SUCCESS: USART registers related to Clock settings are initialized according to USART_ClockInitStruct content
  - ERROR: Problem occurred during USART Registers initialization

Notes
- As some bits in USART configuration registers can only be written when the USART is disabled (USART_CR1_UE bit =0), USART IP should be in disabled state prior calling this function. Otherwise, ERROR result will be returned.

LL_USART_ClockStructInit

Function name — **void LL_USART_ClockStructInit (LL_USART_ClockInitTypeDef * USART_ClockInitStruct)**

Function description — Set each field of a LL_USART_ClockInitTypeDef type structure to default value.

Parameters
- **USART_ClockInitStruct:** pointer to a LL_USART_ClockInitTypeDef structure whose fields will be set to default values.

Return values
- **None**

79.3 USART Firmware driver defines

79.3.1 USART

Address Length Detection

LL_USART_ADDRESS_DETECT_4B	4-bit address detection method selected
LL_USART_ADDRESS_DETECT_7B	7-bit address detection (in 8-bit data mode) method selected

Autobaud Detection

LL_USART_AUTOBAUD_DETECT_ON_STARTBIT	Measurement of the start bit is used to detect the baud rate
LL_USART_AUTOBAUD_DETECT_ON_FALLINGEDGE	Falling edge to falling edge measurement. Received frame must start with a single bit = 1 -> Frame = Start10xxxxxx

LL_USART_AUTOBAUD_DETECT_ON_7F_FRAME	0x7F frame detection
LL_USART_AUTOBAUD_DETECT_ON_55_FRAME	0x55 frame detection

Binary Data Inversion

LL_USART_BINARY_LOGIC_POSITIVE	Logical data from the data register are send/received in positive/direct logic. (1=H, 0=L)
LL_USART_BINARY_LOGIC_NEGATIVE	Logical data from the data register are send/received in negative/inverse logic. (1=L, 0=H). The parity bit is also inverted.

Bit Order

LL_USART_BITORDER_LSBFIRST	data is transmitted/received with data bit 0 first, following the start bit
LL_USART_BITORDER_MSBFIRST	data is transmitted/received with the MSB first, following the start bit

Clear Flags Defines

LL_USART_ICR_PECF	Parity error flag
LL_USART_ICR_FECF	Framing error flag
LL_USART_ICR_NCF	Noise detected flag
LL_USART_ICR_ORECF	Overrun error flag
LL_USART_ICR_IDLECF	Idle line detected flag
LL_USART_ICR_TCCF	Transmission complete flag
LL_USART_ICR_LBDCF	LIN break detection flag
LL_USART_ICR_CTSCF	CTS flag
LL_USART_ICR_RTOCF	Receiver timeout flag
LL_USART_ICR_EOBCF	End of block flag
LL_USART_ICR_CMCF	Character match flag
LL_USART_ICR_WUCF	Wakeup from Stop mode flag

Clock Signal

LL_USART_CLOCK_DISABLE	Clock signal not provided
LL_USART_CLOCK_ENABLE	Clock signal provided

Datawidth

LL_USART_DATAWIDTH_8B	8 bits word length : Start bit, 8 data bits, n stop bits
LL_USART_DATAWIDTH_9B	9 bits word length : Start bit, 9 data bits, n stop bits

Driver Enable Polarity

LL_USART_DE_POLARITY_HIGH	DE signal is active high
LL_USART_DE_POLARITY_LOW	DE signal is active low

Communication Direction

LL_USART_DIRECTION_NONE	Transmitter and Receiver are disabled

LL_USART_DIRECTION_RX	Transmitter is disabled and Receiver is enabled
LL_USART_DIRECTION_TX	Transmitter is enabled and Receiver is disabled
LL_USART_DIRECTION_TX_RX	Transmitter and Receiver are enabled

DMA Register Data

LL_USART_DMA_REG_DATA_TRANSMIT	Get address of data register used for transmission
LL_USART_DMA_REG_DATA_RECEIVE	Get address of data register used for reception

Get Flags Defines

LL_USART_ISR_PE	Parity error flag
LL_USART_ISR_FE	Framing error flag
LL_USART_ISR_NE	Noise detected flag
LL_USART_ISR_ORE	Overrun error flag
LL_USART_ISR_IDLE	Idle line detected flag
LL_USART_ISR_RXNE	Read data register not empty flag
LL_USART_ISR_TC	Transmission complete flag
LL_USART_ISR_TXE	Transmit data register empty flag
LL_USART_ISR_LBDF	LIN break detection flag
LL_USART_ISR_CTSIF	CTS interrupt flag
LL_USART_ISR_CTS	CTS flag
LL_USART_ISR_RTOF	Receiver timeout flag
LL_USART_ISR_EOBF	End of block flag
LL_USART_ISR_ABRE	Auto baud rate error flag
LL_USART_ISR_ABRF	Auto baud rate flag
LL_USART_ISR_BUSY	Busy flag
LL_USART_ISR_CMF	Character match flag
LL_USART_ISR_SBKF	Send break flag
LL_USART_ISR_RWU	Receiver wakeup from Mute mode flag
LL_USART_ISR_WUF	Wakeup from Stop mode flag
LL_USART_ISR_TEACK	Transmit enable acknowledge flag
LL_USART_ISR_REACK	Receive enable acknowledge flag

Hardware Control

LL_USART_HWCONTROL_NONE	CTS and RTS hardware flow control disabled
LL_USART_HWCONTROL_RTS	RTS output enabled, data is only requested when there is space in the receive buffer
LL_USART_HWCONTROL_CTS	CTS mode enabled, data is only transmitted when the nCTS input is asserted (tied to 0)
LL_USART_HWCONTROL_RTS_CTS	CTS and RTS hardware flow control enabled

IrDA Power

LL_USART_IRDA_POWER_NORMAL	IrDA normal power mode
LL_USART_IRDA_POWER_LOW	IrDA low power mode

IT Defines

LL_USART_CR1_IDLEIE	IDLE interrupt enable
LL_USART_CR1_RXNEIE	Read data register not empty interrupt enable
LL_USART_CR1_TCIE	Transmission complete interrupt enable
LL_USART_CR1_TXEIE	Transmit data register empty interrupt enable
LL_USART_CR1_PEIE	Parity error
LL_USART_CR1_CMIE	Character match interrupt enable
LL_USART_CR1_RTOIE	Receiver timeout interrupt enable
LL_USART_CR1_EOBIE	End of Block interrupt enable
LL_USART_CR2_LBDIE	LIN break detection interrupt enable
LL_USART_CR3_EIE	Error interrupt enable
LL_USART_CR3_CTSIE	CTS interrupt enable
LL_USART_CR3_WUFIE	Wakeup from Stop mode interrupt enable

Last Clock Pulse

LL_USART_LASTCLKPULSE_NO_OUTPUT	The clock pulse of the last data bit is not output to the SCLK pin
LL_USART_LASTCLKPULSE_OUTPUT	The clock pulse of the last data bit is output to the SCLK pin

LIN Break Detection Length

LL_USART_LINBREAK_DETECT_10B	10-bit break detection method selected
LL_USART_LINBREAK_DETECT_11B	11-bit break detection method selected

Oversampling

LL_USART_OVERSAMPLING_16	Oversampling by 16
LL_USART_OVERSAMPLING_8	Oversampling by 8

Parity Control

LL_USART_PARITY_NONE	Parity control disabled
LL_USART_PARITY_EVEN	Parity control enabled and Even Parity is selected
LL_USART_PARITY_ODD	Parity control enabled and Odd Parity is selected

Clock Phase

LL_USART_PHASE_1EDGE	The first clock transition is the first data capture edge
LL_USART_PHASE_2EDGE	The second clock transition is the first data capture edge

Clock Polarity

LL_USART_POLARITY_LOW	Steady low value on SCLK pin outside transmission window

LL_USART_POLARITY_HIGH	Steady high value on SCLK pin outside transmission window

RX Pin Active Level Inversion

LL_USART_RXPIN_LEVEL_STANDARD	RX pin signal works using the standard logic levels
LL_USART_RXPIN_LEVEL_INVERTED	RX pin signal values are inverted.

Stop Bits

LL_USART_STOPBITS_0_5	0.5 stop bit
LL_USART_STOPBITS_1	1 stop bit
LL_USART_STOPBITS_1_5	1.5 stop bits
LL_USART_STOPBITS_2	2 stop bits

TX Pin Active Level Inversion

LL_USART_TXPIN_LEVEL_STANDARD	TX pin signal works using the standard logic levels
LL_USART_TXPIN_LEVEL_INVERTED	TX pin signal values are inverted.

TX RX Pins Swap

LL_USART_TXRX_STANDARD	TX/RX pins are used as defined in standard pinout
LL_USART_TXRX_SWAPPED	TX and RX pins functions are swapped.

Wakeup

LL_USART_WAKEUP_IDLELINE	USART wake up from Mute mode on Idle Line
LL_USART_WAKEUP_ADDRESSMARK	USART wake up from Mute mode on Address Mark

Wakeup Activation

LL_USART_WAKEUP_ON_ADDRESS	Wake up active on address match
LL_USART_WAKEUP_ON_STARTBIT	Wake up active on Start bit detection
LL_USART_WAKEUP_ON_RXNE	Wake up active on RXNE

Exported_Macros_Helper

__LL_USART_DIV_SAMPLING8

Description:

- Compute USARTDIV value according to Peripheral Clock and expected Baud Rate in 8 bits sampling mode (32 bits value of USARTDIV is returned)

Parameters:

- __PERIPHCLK__: Peripheral Clock frequency used for USART instance
- __BAUDRATE__: Baud rate value to achieve

Return value:

- USARTDIV: value to be used for BRR register filling in OverSampling_8 case

__LL_USART_DIV_SAMPLING16

Description:

- Compute USARTDIV value according to Peripheral Clock and expected Baud Rate in 16 bits sampling mode (32 bits value of USARTDIV is returned)

Parameters:

- __PERIPHCLK__: Peripheral Clock frequency used for USART instance
- __BAUDRATE__: Baud rate value to achieve

Return value:

- USARTDIV: value to be used for BRR register filling in OverSampling_16 case

Common Write and read registers Macros

LL_USART_WriteReg

Description:

- Write a value in USART register.

Parameters:

- __INSTANCE__: USART Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_USART_ReadReg

Description:

- Read a value in USART register.

Parameters:

- __INSTANCE__: USART Instance
- __REG__: Register to be read

Return value:

- Register: value

80 LL UTILS Generic Driver

80.1 UTILS Firmware driver registers structures

80.1.1 LL_UTILS_PLLInitTypeDef

Data Fields

- ***uint32_t PLLMul***
- ***uint32_t Prediv***

Field Documentation

- ***uint32_t LL_UTILS_PLLInitTypeDef::PLLMul***
  Multiplication factor for PLL VCO input clock. This parameter can be a value of ***RCC_LL_EC_PLL_MUL***This feature can be modified afterwards using unitary function **LL_RCC_PLL_ConfigDomain_SYS()**.
- ***uint32_t LL_UTILS_PLLInitTypeDef::Prediv***
  Division factor for HSE used as PLL clock source. This parameter can be a value of ***RCC_LL_EC_PREDIV_DIV***This feature can be modified afterwards using unitary function **LL_RCC_PLL_ConfigDomain_SYS()**.

80.1.2 LL_UTILS_ClkInitTypeDef

Data Fields

- ***uint32_t AHBCLKDivider***
- ***uint32_t APB1CLKDivider***
- ***uint32_t APB2CLKDivider***

Field Documentation

- ***uint32_t LL_UTILS_ClkInitTypeDef::AHBCLKDivider***
  The AHB clock (HCLK) divider. This clock is derived from the system clock (SYSCLK). This parameter can be a value of ***RCC_LL_EC_SYSCLK_DIV***This feature can be modified afterwards using unitary function **LL_RCC_SetAHBPrescaler()**.
- ***uint32_t LL_UTILS_ClkInitTypeDef::APB1CLKDivider***
  The APB1 clock (PCLK1) divider. This clock is derived from the AHB clock (HCLK). This parameter can be a value of ***RCC_LL_EC_APB1_DIV***This feature can be modified afterwards using unitary function **LL_RCC_SetAPB1Prescaler()**.
- ***uint32_t LL_UTILS_ClkInitTypeDef::APB2CLKDivider***
  The APB2 clock (PCLK2) divider. This clock is derived from the AHB clock (HCLK). This parameter can be a value of ***RCC_LL_EC_APB2_DIV***This feature can be modified afterwards using unitary function **LL_RCC_SetAPB2Prescaler()**.

80.2 UTILS Firmware driver API description

80.2.1 System Configuration functions

System, AHB and APB buses clocks configuration

- The maximum frequency of the SYSCLK, HCLK, PCLK1 and PCLK2 is 72000000 Hz.

This section contains the following APIs:

- ***LL_SetSystemCoreClock()***
- ***LL_PLL_ConfigSystemClock_HSI()***

- *LL_PLL_ConfigSystemClock_HSE()*

80.2.2 Detailed description of functions

LL_GetUID_Word0

Function name **__STATIC_INLINE uint32_t LL_GetUID_Word0 (void)**

Function description Get Word0 of the unique device identifier (UID based on 96 bits)

Return values
- **UID[31:0]:** X and Y coordinates on the wafer expressed in BCD format

LL_GetUID_Word1

Function name **__STATIC_INLINE uint32_t LL_GetUID_Word1 (void)**

Function description Get Word1 of the unique device identifier (UID based on 96 bits)

Return values
- **UID[63:32]:** Wafer number (UID[39:32]) & LOT_NUM[23:0] (UID[63:40])

LL_GetUID_Word2

Function name **__STATIC_INLINE uint32_t LL_GetUID_Word2 (void)**

Function description Get Word2 of the unique device identifier (UID based on 96 bits)

Return values
- **UID[95:64]:** Lot number (ASCII encoded) - LOT_NUM[55:24]

LL_GetFlashSize

Function name **__STATIC_INLINE uint32_t LL_GetFlashSize (void)**

Function description Get Flash memory size.

Return values
- **FLASH_SIZE[15:0]:** Flash memory size

Notes
- This bitfield indicates the size of the device Flash memory expressed in Kbytes. As an example, 0x040 corresponds to 64 Kbytes.

LL_InitTick

Function name **__STATIC_INLINE void LL_InitTick (uint32_t HCLKFrequency, uint32_t Ticks)**

Function description This function configures the Cortex-M SysTick source of the time base.

Parameters
- **HCLKFrequency:** HCLK frequency in Hz (can be calculated thanks to RCC helper macro)
- **Ticks:** Number of ticks

Return values
- **None**

Notes
- When a RTOS is used, it is recommended to avoid changing the SysTick configuration by calling this function, for a delay use rather osDelay RTOS service.

LL_Init1msTick

Function name	**void LL_Init1msTick (uint32_t HCLKFrequency)**
Function description	This function configures the Cortex-M SysTick source to have 1ms time base.
Parameters	• **HCLKFrequency:** HCLK frequency in Hz
Return values	• **None**
Notes	• When a RTOS is used, it is recommended to avoid changing the Systick configuration by calling this function, for a delay use rather osDelay RTOS service. • HCLK frequency can be calculated thanks to RCC helper macro or function LL_RCC_GetSystemClocksFreq

LL_mDelay

Function name	**void LL_mDelay (uint32_t Delay)**
Function description	This function provides accurate delay (in milliseconds) based on SysTick counter flag.
Parameters	• **Delay:** specifies the delay time length, in milliseconds.
Return values	• **None**
Notes	• When a RTOS is used, it is recommended to avoid using blocking delay and use rather osDelay service. • To respect 1ms timebase, user should call LL_Init1msTick function which will configure Systick to 1ms

LL_SetSystemCoreClock

Function name	**void LL_SetSystemCoreClock (uint32_t HCLKFrequency)**
Function description	This function sets directly SystemCoreClock CMSIS variable.
Parameters	• **HCLKFrequency:** HCLK frequency in Hz (can be calculated thanks to RCC helper macro)
Return values	• **None**
Notes	• Variable can be calculated also through SystemCoreClockUpdate function.

LL_PLL_ConfigSystemClock_HSI

Function name	**ErrorStatus LL_PLL_ConfigSystemClock_HSI (LL_UTILS_PLLInitTypeDef * UTILS_PLLInitStruct, LL_UTILS_ClkInitTypeDef * UTILS_ClkInitStruct)**
Function description	This function configures system clock with HSI as clock source of the PLL.
Parameters	• **UTILS_PLLInitStruct:** pointer to a LL_UTILS_PLLInitTypeDef structure that contains the configuration information for the PLL. • **UTILS_ClkInitStruct:** pointer to a LL_UTILS_ClkInitTypeDef structure that contains the configuration information for the

BUS prescalers.

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: Max frequency configuration done
  – ERROR: Max frequency configuration not done

Notes
- The application need to ensure that PLL is disabled.
- Function is based on the following formula: PLL output frequency = ((HSI frequency / PREDIV) * PLLMUL)PREDIV: Set to 2 for few devicesPLLMUL: The application software must set correctly the PLL multiplication factor to not exceed 72MHz
- FLASH latency can be modified through this function.

LL_PLL_ConfigSystemClock_HSE

Function name

ErrorStatus LL_PLL_ConfigSystemClock_HSE (uint32_t HSEFrequency, uint32_t HSEBypass, LL_UTILS_PLLInitTypeDef * UTILS_PLLInitStruct, LL_UTILS_ClkInitTypeDef * UTILS_ClkInitStruct)

Function description

This function configures system clock with HSE as clock source of the PLL.

Parameters
- **HSEFrequency:** Value between Min_Data = 4000000 and Max_Data = 32000000
- **HSEBypass:** This parameter can be one of the following values:
  – LL_UTILS_HSEBYPASS_ON
  – LL_UTILS_HSEBYPASS_OFF
- **UTILS_PLLInitStruct:** pointer to a LL_UTILS_PLLInitTypeDef structure that contains the configuration information for the PLL.
- **UTILS_ClkInitStruct:** pointer to a LL_UTILS_ClkInitTypeDef structure that contains the configuration information for the BUS prescalers.

Return values
- **An:** ErrorStatus enumeration value:
  – SUCCESS: Max frequency configuration done
  – ERROR: Max frequency configuration not done

Notes
- The application need to ensure that PLL is disabled.
- Function is based on the following formula: PLL output frequency = ((HSI frequency / PREDIV) * PLLMUL)PREDIV: Set to 2 for few devicesPLLMUL: The application software must set correctly the PLL multiplication factor to not exceed UTILS_PLL_OUTPUT_MAX
- FLASH latency can be modified through this function.

80.3 UTILS Firmware driver defines

80.3.1 UTILS

HSE Bypass activation

LL_UTILS_HSEBYPASS_OFF	HSE Bypass is not enabled
LL_UTILS_HSEBYPASS_ON	HSE Bypass is enabled

81 LL WWDG Generic Driver

81.1 WWDG Firmware driver API description

81.1.1 Detailed description of functions

LL_WWDG_Enable

Function name	**__STATIC_INLINE void LL_WWDG_Enable (WWDG_TypeDef * WWDGx)**
Function description	Enable Window Watchdog.
Parameters	• **WWDGx:** WWDG Instance
Return values	• **None**
Notes	• It is enabled by setting the WDGA bit in the WWDG_CR register, then it cannot be disabled again except by a reset. This bit is set by software and only cleared by hardware after a reset. When WDGA = 1, the watchdog can generate a reset.
Reference Manual to LL API cross reference:	• CR WDGA LL_WWDG_Enable

LL_WWDG_IsEnabled

Function name	**__STATIC_INLINE uint32_t LL_WWDG_IsEnabled (WWDG_TypeDef * WWDGx)**
Function description	Checks if Window Watchdog is enabled.
Parameters	• **WWDGx:** WWDG Instance
Return values	• **State:** of bit (1 or 0).
Reference Manual to LL API cross reference:	• CR WDGA LL_WWDG_IsEnabled

LL_WWDG_SetCounter

Function name	**__STATIC_INLINE void LL_WWDG_SetCounter (WWDG_TypeDef * WWDGx, uint32_t Counter)**
Function description	Set the Watchdog counter value to provided value (7-bits T[6:0])
Parameters	• **WWDGx:** WWDG Instance • **Counter:** 0..0x7F (7 bit counter value)
Return values	• **None**
Notes	• When writing to the WWDG_CR register, always write 1 in the MSB b6 to avoid generating an immediate reset This counter is decremented every (4096 x 2expWDGTB) PCLK cycles A reset is produced when it rolls over from 0x40 to 0x3F (bit T6

becomes cleared) Setting the counter lower then 0x40 causes an immediate reset (if WWDG enabled)

Reference Manual to LL API cross reference:
- CR T LL_WWDG_SetCounter

LL_WWDG_GetCounter

Function name
__STATIC_INLINE uint32_t LL_WWDG_GetCounter (WWDG_TypeDef * WWDGx)

Function description
Return current Watchdog Counter Value (7 bits counter value)

Parameters
- **WWDGx:** WWDG Instance

Return values
- **7:** bit Watchdog Counter value

Reference Manual to LL API cross reference:
- CR T LL_WWDG_GetCounter

LL_WWDG_SetPrescaler

Function name
__STATIC_INLINE void LL_WWDG_SetPrescaler (WWDG_TypeDef * WWDGx, uint32_t Prescaler)

Function description
Set the time base of the prescaler (WDGTB).

Parameters
- **WWDGx:** WWDG Instance
- **Prescaler:** This parameter can be one of the following values:
  - LL_WWDG_PRESCALER_1
  - LL_WWDG_PRESCALER_2
  - LL_WWDG_PRESCALER_4
  - LL_WWDG_PRESCALER_8

Return values
- **None**

Notes
- Prescaler is used to apply ratio on PCLK clock, so that Watchdog counter is decremented every (4096 x 2expWDGTB) PCLK cycles

Reference Manual to LL API cross reference:
- CFR WDGTB LL_WWDG_SetPrescaler

LL_WWDG_GetPrescaler

Function name
__STATIC_INLINE uint32_t LL_WWDG_GetPrescaler (WWDG_TypeDef * WWDGx)

Function description
Return current Watchdog Prescaler Value.

Parameters
- **WWDGx:** WWDG Instance

Return values
- **Returned:** value can be one of the following values:
  - LL_WWDG_PRESCALER_1
  - LL_WWDG_PRESCALER_2
  - LL_WWDG_PRESCALER_4

– LL_WWDG_PRESCALER_8

Reference Manual to LL API cross reference:
- CFR WDGTB LL_WWDG_GetPrescaler

LL_WWDG_SetWindow

Function name: **__STATIC_INLINE void LL_WWDG_SetWindow (WWDG_TypeDef * WWDGx, uint32_t Window)**

Function description: Set the Watchdog Window value to be compared to the downcounter (7-bits W[6:0]).

Parameters:
- **WWDGx:** WWDG Instance
- **Window:** 0x00..0x7F (7 bit Window value)

Return values:
- **None**

Notes:
- This window value defines when write in the WWDG_CR register to program Watchdog counter is allowed. Watchdog counter value update must occur only when the counter value is lower than the Watchdog window register value. Otherwise, a MCU reset is generated if the 7-bit Watchdog counter value (in the control register) is refreshed before the downcounter has reached the watchdog window register value. Physically is possible to set the Window lower then 0x40 but it is not recommended. To generate an immediate reset, it is possible to set the Counter lower than 0x40.

Reference Manual to LL API cross reference:
- CFR W LL_WWDG_SetWindow

LL_WWDG_GetWindow

Function name: **__STATIC_INLINE uint32_t LL_WWDG_GetWindow (WWDG_TypeDef * WWDGx)**

Function description: Return current Watchdog Window Value (7 bits value)

Parameters:
- **WWDGx:** WWDG Instance

Return values:
- **7:** bit Watchdog Window value

Reference Manual to LL API cross reference:
- CFR W LL_WWDG_GetWindow

LL_WWDG_IsActiveFlag_EWKUP

Function name: **__STATIC_INLINE uint32_t LL_WWDG_IsActiveFlag_EWKUP (WWDG_TypeDef * WWDGx)**

Function description: Indicates if the WWDG Early Wakeup Interrupt Flag is set or not.

Parameters:
- **WWDGx:** WWDG Instance

Return values:
- **State:** of bit (1 or 0).

Notes:
- This bit is set by hardware when the counter has reached the

value 0x40. It must be cleared by software by writing 0. A write of 1 has no effect. This bit is also set if the interrupt is not enabled.

Reference Manual to LL API cross reference:
- SR EWIF LL_WWDG_IsActiveFlag_EWKUP

LL_WWDG_ClearFlag_EWKUP

Function name **__STATIC_INLINE void LL_WWDG_ClearFlag_EWKUP (WWDG_TypeDef * WWDGx)**

Function description Clear WWDG Early Wakeup Interrupt Flag (EWIF)

Parameters
- **WWDGx:** WWDG Instance

Return values
- **None**

Reference Manual to LL API cross reference:
- SR EWIF LL_WWDG_ClearFlag_EWKUP

LL_WWDG_EnableIT_EWKUP

Function name **__STATIC_INLINE void LL_WWDG_EnableIT_EWKUP (WWDG_TypeDef * WWDGx)**

Function description Enable the Early Wakeup Interrupt.

Parameters
- **WWDGx:** WWDG Instance

Return values
- **None**

Notes
- When set, an interrupt occurs whenever the counter reaches value 0x40. This interrupt is only cleared by hardware after a reset

Reference Manual to LL API cross reference:
- CFR EWI LL_WWDG_EnableIT_EWKUP

LL_WWDG_IsEnabledIT_EWKUP

Function name **__STATIC_INLINE uint32_t LL_WWDG_IsEnabledIT_EWKUP (WWDG_TypeDef * WWDGx)**

Function description Check if Early Wakeup Interrupt is enabled.

Parameters
- **WWDGx:** WWDG Instance

Return values
- **State:** of bit (1 or 0).

Reference Manual to LL API cross reference:
- CFR EWI LL_WWDG_IsEnabledIT_EWKUP

81.2 WWDG Firmware driver defines

81.2.1 WWDG

IT Defines

LL_WWDG_CFR_EWI

PRESCALER

LL_WWDG_PRESCALER_1 WWDG counter clock = (PCLK1/4096)/1

LL_WWDG_PRESCALER_2 WWDG counter clock = (PCLK1/4096)/2

LL_WWDG_PRESCALER_4 WWDG counter clock = (PCLK1/4096)/4

LL_WWDG_PRESCALER_8 WWDG counter clock = (PCLK1/4096)/8

Common Write and read registers macros

LL_WWDG_WriteReg **Description:**

- Write a value in WWDG register.

Parameters:

- __INSTANCE__: WWDG Instance
- __REG__: Register to be written
- __VALUE__: Value to be written in the register

Return value:

- None

LL_WWDG_ReadReg **Description:**

- Read a value in WWDG register.

Parameters:

- __INSTANCE__: WWDG Instance
- __REG__: Register to be read

Return value:

- Register: value

82 Correspondence between API registers and API low-layer driver functions

82.1 ADC

Table 25: Correspondence between ADC registers and ADC low-layer driver functions

Register	Field	Function
AWD2CR	AWD2CH	*LL_ADC_GetAnalogWDMonitChannels*
		LL_ADC_SetAnalogWDMonitChannels
AWD3CR	AWD3CH	*LL_ADC_GetAnalogWDMonitChannels*
		LL_ADC_SetAnalogWDMonitChannels
CALFACT	CALFACT_D	*LL_ADC_GetCalibrationFactor*
		LL_ADC_SetCalibrationFactor
	CALFACT_S	*LL_ADC_GetCalibrationFactor*
		LL_ADC_SetCalibrationFactor
CCR	CKMODE	*LL_ADC_GetCommonClock*
		LL_ADC_SetCommonClock
	DELAY	*LL_ADC_GetMultiTwoSamplingDelay*
		LL_ADC_SetMultiTwoSamplingDelay
	DMACFG	*LL_ADC_GetMultiDMATransfer*
		LL_ADC_SetMultiDMATransfer
	DUAL	*LL_ADC_GetMultimode*
		LL_ADC_SetMultimode
	MDMA	*LL_ADC_GetMultiDMATransfer*
		LL_ADC_SetMultiDMATransfer
	PRESC	*LL_ADC_GetCommonClock*
		LL_ADC_SetCommonClock
	TSEN	*LL_ADC_GetCommonPathInternalCh*
		LL_ADC_SetCommonPathInternalCh
	VBATEN	*LL_ADC_GetCommonPathInternalCh*
		LL_ADC_SetCommonPathInternalCh
	VREFEN	*LL_ADC_GetCommonPathInternalCh*
		LL_ADC_SetCommonPathInternalCh
CDR	RDATA_MST	*LL_ADC_DMA_GetRegAddr*
		LL_ADC_REG_ReadMultiConversionData32
	RDATA_SLV	*LL_ADC_DMA_GetRegAddr*
		LL_ADC_REG_ReadMultiConversionData32

Register	Field	Function
CFGR	ALIGN	*LL_ADC_GetDataAlignment*
		LL_ADC_SetDataAlignment
	AUTDLY	*LL_ADC_GetLowPowerMode*
		LL_ADC_SetLowPowerMode
	AWD1CH	*LL_ADC_GetAnalogWDMonitChannels*
		LL_ADC_SetAnalogWDMonitChannels
	AWD1EN	*LL_ADC_GetAnalogWDMonitChannels*
		LL_ADC_SetAnalogWDMonitChannels
	AWD1SGL	*LL_ADC_GetAnalogWDMonitChannels*
		LL_ADC_SetAnalogWDMonitChannels
	CONT	*LL_ADC_REG_GetContinuousMode*
		LL_ADC_REG_SetContinuousMode
	DISCEN	*LL_ADC_REG_GetSequencerDiscont*
		LL_ADC_REG_SetSequencerDiscont
	DISCNUM	*LL_ADC_REG_GetSequencerDiscont*
		LL_ADC_REG_SetSequencerDiscont
	DMACFG	*LL_ADC_REG_GetDMATransfer*
		LL_ADC_REG_SetDMATransfer
	DMAEN	*LL_ADC_REG_GetDMATransfer*
		LL_ADC_REG_SetDMATransfer
	EXTEN	*LL_ADC_REG_GetTriggerEdge*
		LL_ADC_REG_GetTriggerSource
		LL_ADC_REG_IsTriggerSourceSWStart
		LL_ADC_REG_SetTriggerEdge
		LL_ADC_REG_SetTriggerSource
	EXTSEL	*LL_ADC_REG_GetTriggerSource*
		LL_ADC_REG_SetTriggerSource
	JAUTO	*LL_ADC_INJ_GetTrigAuto*
		LL_ADC_INJ_SetTrigAuto
	JAWD1EN	*LL_ADC_GetAnalogWDMonitChannels*
		LL_ADC_SetAnalogWDMonitChannels
	JDISCEN	*LL_ADC_INJ_GetSequencerDiscont*
		LL_ADC_INJ_SetSequencerDiscont
	JQM	*LL_ADC_INJ_GetQueueMode*
		LL_ADC_INJ_SetQueueMode
	OVRMOD	*LL_ADC_REG_GetOverrun*

Register	Field	Function
		LL_ADC_REG_SetOverrun
	RES	*LL_ADC_GetResolution*
		LL_ADC_SetResolution
CR	ADCAL	*LL_ADC_IsCalibrationOnGoing*
		LL_ADC_StartCalibration
	ADCALDIF	*LL_ADC_StartCalibration*
	ADDIS	*LL_ADC_Disable*
		LL_ADC_IsDisableOngoing
	ADEN	*LL_ADC_Enable*
		LL_ADC_IsEnabled
	ADSTART	*LL_ADC_REG_IsConversionOngoing*
		LL_ADC_REG_StartConversion
	ADSTP	*LL_ADC_REG_IsStopConversionOngoing*
		LL_ADC_REG_StopConversion
	ADVREGEN	*LL_ADC_DisableInternalRegulator*
		LL_ADC_EnableInternalRegulator
		LL_ADC_IsInternalRegulatorEnabled
	JADSTART	*LL_ADC_INJ_IsConversionOngoing*
		LL_ADC_INJ_StartConversion
	JADSTP	*LL_ADC_INJ_IsStopConversionOngoing*
		LL_ADC_INJ_StopConversion
CSR	ADRDY_MST	*LL_ADC_IsActiveFlag_MST_ADRDY*
	ADRDY_SLV	*LL_ADC_IsActiveFlag_SLV_ADRDY*
	AWD1_MST	*LL_ADC_IsActiveFlag_MST_AWD1*
	AWD1_SLV	*LL_ADC_IsActiveFlag_SLV_AWD1*
	AWD2_MST	*LL_ADC_IsActiveFlag_MST_AWD2*
	AWD2_SLV	*LL_ADC_IsActiveFlag_SLV_AWD2*
	AWD3_MST	*LL_ADC_IsActiveFlag_MST_AWD3*
	AWD3_SLV	*LL_ADC_IsActiveFlag_SLV_AWD3*
	EOC_MST	*LL_ADC_IsActiveFlag_MST_EOC*
	EOC_SLV	*LL_ADC_IsActiveFlag_SLV_EOC*
	EOSMP_MST	*LL_ADC_IsActiveFlag_MST_EOSMP*
	EOSMP_SLV	*LL_ADC_IsActiveFlag_SLV_EOSMP*
	EOS_MST	*LL_ADC_IsActiveFlag_MST_EOS*
	EOS_SLV	*LL_ADC_IsActiveFlag_SLV_EOS*
	JEOC_MST	*LL_ADC_IsActiveFlag_MST_JEOC*

Register	Field	Function
	JEOC_SLV	*LL_ADC_IsActiveFlag_SLV_JEOC*
	JEOS_MST	*LL_ADC_IsActiveFlag_MST_JEOS*
	JEOS_SLV	*LL_ADC_IsActiveFlag_SLV_JEOS*
	JQOVF_MST	*LL_ADC_IsActiveFlag_MST_JQOVF*
	JQOVF_SLV	*LL_ADC_IsActiveFlag_SLV_JQOVF*
	OVR_MST	*LL_ADC_IsActiveFlag_MST_OVR*
	OVR_SLV	*LL_ADC_IsActiveFlag_SLV_OVR*
DIFSEL	DIFSEL	*LL_ADC_GetChannelSamplingTime*
DR	RDATA	*LL_ADC_DMA_GetRegAddr*
		LL_ADC_REG_ReadConversionData10
		LL_ADC_REG_ReadConversionData12
		LL_ADC_REG_ReadConversionData32
		LL_ADC_REG_ReadConversionData6
		LL_ADC_REG_ReadConversionData8
IER	ADRDYIE	*LL_ADC_DisableIT_ADRDY*
		LL_ADC_EnableIT_ADRDY
		LL_ADC_IsEnabledIT_ADRDY
	AWD1IE	*LL_ADC_DisableIT_AWD1*
		LL_ADC_EnableIT_AWD1
		LL_ADC_IsEnabledIT_AWD1
	AWD2IE	*LL_ADC_DisableIT_AWD2*
		LL_ADC_EnableIT_AWD2
		LL_ADC_IsEnabledIT_AWD2
	AWD3IE	*LL_ADC_DisableIT_AWD3*
		LL_ADC_EnableIT_AWD3
		LL_ADC_IsEnabledIT_AWD3
	EOCIE	*LL_ADC_DisableIT_EOC*
		LL_ADC_EnableIT_EOC
		LL_ADC_IsEnabledIT_EOC
	EOSIE	*LL_ADC_DisableIT_EOS*
		LL_ADC_EnableIT_EOS
		LL_ADC_IsEnabledIT_EOS
	EOSMPIE	*LL_ADC_DisableIT_EOSMP*
		LL_ADC_EnableIT_EOSMP
		LL_ADC_IsEnabledIT_EOSMP
	JEOCIE	*LL_ADC_DisableIT_JEOC*

Register	Field	Function
		LL_ADC_EnableIT_JEOC
		LL_ADC_IsEnabledIT_JEOC
	JEOSIE	*LL_ADC_DisableIT_JEOS*
		LL_ADC_EnableIT_JEOS
		LL_ADC_IsEnabledIT_JEOS
	JQOVFIE	*LL_ADC_DisableIT_JQOVF*
		LL_ADC_EnableIT_JQOVF
		LL_ADC_IsEnabledIT_JQOVF
	OVRIE	*LL_ADC_DisableIT_OVR*
		LL_ADC_EnableIT_OVR
		LL_ADC_IsEnabledIT_OVR
ISR	ADRDY	*LL_ADC_ClearFlag_ADRDY*
		LL_ADC_IsActiveFlag_ADRDY
	AWD1	*LL_ADC_ClearFlag_AWD1*
		LL_ADC_IsActiveFlag_AWD1
	AWD2	*LL_ADC_ClearFlag_AWD2*
		LL_ADC_IsActiveFlag_AWD2
	AWD3	*LL_ADC_ClearFlag_AWD3*
		LL_ADC_IsActiveFlag_AWD3
	EOC	*LL_ADC_ClearFlag_EOC*
		LL_ADC_IsActiveFlag_EOC
	EOS	*LL_ADC_ClearFlag_EOS*
		LL_ADC_IsActiveFlag_EOS
	EOSMP	*LL_ADC_ClearFlag_EOSMP*
		LL_ADC_IsActiveFlag_EOSMP
	JEOC	*LL_ADC_ClearFlag_JEOC*
		LL_ADC_IsActiveFlag_JEOC
	JEOS	*LL_ADC_ClearFlag_JEOS*
		LL_ADC_IsActiveFlag_JEOS
	JQOVF	*LL_ADC_ClearFlag_JQOVF*
		LL_ADC_IsActiveFlag_JQOVF
	OVR	*LL_ADC_ClearFlag_OVR*
		LL_ADC_IsActiveFlag_OVR
JDR1	JDATA	*LL_ADC_INJ_ReadConversionData10*
		LL_ADC_INJ_ReadConversionData12
		LL_ADC_INJ_ReadConversionData32

Register	Field	Function
		LL_ADC_INJ_ReadConversionData6
		LL_ADC_INJ_ReadConversionData8
JDR2	JDATA	*LL_ADC_INJ_ReadConversionData10*
		LL_ADC_INJ_ReadConversionData12
		LL_ADC_INJ_ReadConversionData32
		LL_ADC_INJ_ReadConversionData6
		LL_ADC_INJ_ReadConversionData8
JDR3	JDATA	*LL_ADC_INJ_ReadConversionData10*
		LL_ADC_INJ_ReadConversionData12
		LL_ADC_INJ_ReadConversionData32
		LL_ADC_INJ_ReadConversionData6
		LL_ADC_INJ_ReadConversionData8
JDR4	JDATA	*LL_ADC_INJ_ReadConversionData10*
		LL_ADC_INJ_ReadConversionData12
		LL_ADC_INJ_ReadConversionData32
		LL_ADC_INJ_ReadConversionData6
		LL_ADC_INJ_ReadConversionData8
JSQR	JEXTEN	*LL_ADC_INJ_ConfigQueueContext*
		LL_ADC_INJ_GetTriggerEdge
		LL_ADC_INJ_GetTriggerSource
		LL_ADC_INJ_IsTriggerSourceSWStart
		LL_ADC_INJ_SetTriggerEdge
		LL_ADC_INJ_SetTriggerSource
	JEXTSEL	*LL_ADC_INJ_ConfigQueueContext*
		LL_ADC_INJ_GetTriggerSource
		LL_ADC_INJ_SetTriggerSource
	JL	*LL_ADC_INJ_ConfigQueueContext*
		LL_ADC_INJ_GetSequencerLength
		LL_ADC_INJ_SetSequencerLength
	JSQ1	*LL_ADC_INJ_ConfigQueueContext*
		LL_ADC_INJ_GetSequencerRanks
		LL_ADC_INJ_SetSequencerRanks
	JSQ2	*LL_ADC_INJ_ConfigQueueContext*
		LL_ADC_INJ_GetSequencerRanks
		LL_ADC_INJ_SetSequencerRanks
	JSQ3	*LL_ADC_INJ_ConfigQueueContext*

Register	Field	Function
		LL_ADC_INJ_GetSequencerRanks
		LL_ADC_INJ_SetSequencerRanks
	JSQ4	*LL_ADC_INJ_ConfigQueueContext*
		LL_ADC_INJ_GetSequencerRanks
		LL_ADC_INJ_SetSequencerRanks
OFR1	OFFSET1	*LL_ADC_GetOffsetLevel*
		LL_ADC_SetOffset
	OFFSET1_CH	*LL_ADC_GetOffsetChannel*
		LL_ADC_SetOffset
	OFFSET1_EN	*LL_ADC_GetOffsetState*
		LL_ADC_SetOffset
		LL_ADC_SetOffsetState
OFR2	OFFSET2	*LL_ADC_GetOffsetLevel*
		LL_ADC_SetOffset
	OFFSET2_CH	*LL_ADC_GetOffsetChannel*
		LL_ADC_SetOffset
	OFFSET2_EN	*LL_ADC_GetOffsetState*
		LL_ADC_SetOffset
		LL_ADC_SetOffsetState
OFR3	OFFSET3	*LL_ADC_GetOffsetLevel*
		LL_ADC_SetOffset
	OFFSET3_CH	*LL_ADC_GetOffsetChannel*
		LL_ADC_SetOffset
	OFFSET3_EN	*LL_ADC_GetOffsetState*
		LL_ADC_SetOffset
		LL_ADC_SetOffsetState
OFR4	OFFSET4	*LL_ADC_GetOffsetLevel*
		LL_ADC_SetOffset
	OFFSET4_CH	*LL_ADC_GetOffsetChannel*
		LL_ADC_SetOffset
	OFFSET4_EN	*LL_ADC_GetOffsetState*
		LL_ADC_SetOffset
		LL_ADC_SetOffsetState
SMPR1	SMP0	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP1	*LL_ADC_GetChannelSamplingTime*

Register	Field	Function
		LL_ADC_SetChannelSamplingTime
	SMP2	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP3	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP4	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP5	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP6	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP7	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP8	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP9	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
SMPR2	SMP10	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP11	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP12	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP13	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP14	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP15	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP16	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP17	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
	SMP18	*LL_ADC_GetChannelSamplingTime*
		LL_ADC_SetChannelSamplingTime
SQR1	L	*LL_ADC_REG_GetSequencerLength*

Register	Field	Function
		LL_ADC_REG_SetSequencerLength
	SQ1	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
	SQ2	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
	SQ3	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
	SQ4	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
SQR2	SQ5	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
	SQ6	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
	SQ7	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
	SQ8	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
	SQ9	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
SQR3	SQ10	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
	SQ11	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
	SQ12	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
	SQ13	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
	SQ14	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
SQR4	SQ15	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
	SQ16	*LL_ADC_REG_GetSequencerRanks*
		LL_ADC_REG_SetSequencerRanks
TR1	HT1	*LL_ADC_ConfigAnalogWDThresholds*
		LL_ADC_GetAnalogWDThresholds
		LL_ADC_SetAnalogWDThresholds

Register	Field	Function
	LT1	*LL_ADC_ConfigAnalogWDThresholds*
		LL_ADC_GetAnalogWDThresholds
		LL_ADC_SetAnalogWDThresholds
TR2	HT2	*LL_ADC_ConfigAnalogWDThresholds*
		LL_ADC_GetAnalogWDThresholds
		LL_ADC_SetAnalogWDThresholds
	LT2	*LL_ADC_ConfigAnalogWDThresholds*
		LL_ADC_GetAnalogWDThresholds
		LL_ADC_SetAnalogWDThresholds
TR3	HT3	*LL_ADC_ConfigAnalogWDThresholds*
		LL_ADC_GetAnalogWDThresholds
		LL_ADC_SetAnalogWDThresholds
	LT3	*LL_ADC_ConfigAnalogWDThresholds*
		LL_ADC_GetAnalogWDThresholds
		LL_ADC_SetAnalogWDThresholds

82.2 BUS

Table 26: Correspondence between BUS registers and BUS low-layer driver functions

Register	Field	Function
AHBENR	ADC12EN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	ADC1EN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	ADC34EN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	CRCEN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	DMA1EN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	DMA2EN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock

Register	Field	Function
		LL_AHB1_GRP1_IsEnabledClock
	FLITFEN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	FMCEN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	GPIOAEN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	GPIOBEN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	GPIOCEN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	GPIODEN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	GPIOEEN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	GPIOFEN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	GPIOGEN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	GPIOHEN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	SRAMEN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock
		LL_AHB1_GRP1_IsEnabledClock
	TSCEN	*LL_AHB1_GRP1_DisableClock*
		LL_AHB1_GRP1_EnableClock

Register	Field	Function
		LL_AHB1_GRP1_IsEnabledClock
AHBRSTR	ADC12RST	*LL_AHB1_GRP1_ForceReset*
		LL_AHB1_GRP1_ReleaseReset
	ADC1RST	*LL_AHB1_GRP1_ForceReset*
		LL_AHB1_GRP1_ReleaseReset
	ADC34RST	*LL_AHB1_GRP1_ForceReset*
		LL_AHB1_GRP1_ReleaseReset
	FMCRST	*LL_AHB1_GRP1_ForceReset*
		LL_AHB1_GRP1_ReleaseReset
	GPIOARST	*LL_AHB1_GRP1_ForceReset*
		LL_AHB1_GRP1_ReleaseReset
	GPIOBRST	*LL_AHB1_GRP1_ForceReset*
		LL_AHB1_GRP1_ReleaseReset
	GPIOCRST	*LL_AHB1_GRP1_ForceReset*
		LL_AHB1_GRP1_ReleaseReset
	GPIODRST	*LL_AHB1_GRP1_ForceReset*
		LL_AHB1_GRP1_ReleaseReset
	GPIOERST	*LL_AHB1_GRP1_ForceReset*
		LL_AHB1_GRP1_ReleaseReset
	GPIOFRST	*LL_AHB1_GRP1_ForceReset*
		LL_AHB1_GRP1_ReleaseReset
	GPIOGRST	*LL_AHB1_GRP1_ForceReset*
		LL_AHB1_GRP1_ReleaseReset
	GPIOHRST	*LL_AHB1_GRP1_ForceReset*
		LL_AHB1_GRP1_ReleaseReset
	TSCRST	*LL_AHB1_GRP1_ForceReset*
		LL_AHB1_GRP1_ReleaseReset
APB1ENR	CANEN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	CECEN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	DAC1EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock

Register	Field	Function
	DAC2EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	I2C1EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	I2C2EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	I2C3EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	PWREN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	SPI2EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	SPI3EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	TIM12EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	TIM13EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	TIM14EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	TIM18EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	TIM2EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock

Register	Field	Function
	TIM3EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	TIM4EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	TIM5EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	TIM6EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	TIM7EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	UART4EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	UART5EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	USART2EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	USART3EN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	USBEN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
	WWDGEN	*LL_APB1_GRP1_DisableClock*
		LL_APB1_GRP1_EnableClock
		LL_APB1_GRP1_IsEnabledClock
APB1RSTR	CANRST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	CECRST	*LL_APB1_GRP1_ForceReset*

Register	Field	Function
		LL_APB1_GRP1_ReleaseReset
	DAC1RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	DAC2RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	I2C1RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	I2C2RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	I2C3RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	PWRRST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	SPI2RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	SPI3RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	TIM12RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	TIM13RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	TIM14RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	TIM18RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	TIM2RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	TIM3RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	TIM4RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	TIM5RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	TIM6RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	TIM7RST	*LL_APB1_GRP1_ForceReset*

Register	Field	Function
		LL_APB1_GRP1_ReleaseReset
	UART4RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	UART5RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	USART2RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	USART3RST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	USBRST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
	WWDGRST	*LL_APB1_GRP1_ForceReset*
		LL_APB1_GRP1_ReleaseReset
APB2ENR	ADC1EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
	HRTIM1EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
	SDADC1EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
	SDADC2EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
	SDADC3EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
	SPI1EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
	SPI4EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
	SYSCFGEN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock

Register	Field	Function
		LL_APB2_GRP1_IsEnabledClock
	TIM15EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
	TIM16EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
	TIM17EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
	TIM19EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
	TIM1EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
	TIM20EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
	TIM8EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
	USART1EN	*LL_APB2_GRP1_DisableClock*
		LL_APB2_GRP1_EnableClock
		LL_APB2_GRP1_IsEnabledClock
APB2RSTR	ADC1RST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset
	HRTIM1RST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset
	SDADC1RST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset
	SDADC2RST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset
	SDADC3RST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset
	SPI1RST	*LL_APB2_GRP1_ForceReset*

Register	Field	Function
		LL_APB2_GRP1_ReleaseReset
	SPI4RST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset
	SYSCFGRST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset
	TIM15RST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset
	TIM16RST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset
	TIM17RST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset
	TIM19RST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset
	TIM1RST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset
	TIM20RST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset
	TIM8RST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset
	USART1RST	*LL_APB2_GRP1_ForceReset*
		LL_APB2_GRP1_ReleaseReset

82.3 COMP

Table 27: Correspondence between COMP registers and COMP low-layer driver functions

Register	Field	Function
CSR	COMPxBLANKING	*LL_COMP_GetOutputBlankingSource*
		LL_COMP_SetOutputBlankingSource
	COMPxEN	*LL_COMP_Disable*
		LL_COMP_Enable
		LL_COMP_IsEnabled
	COMPxHYST	*LL_COMP_GetInputHysteresis*
		LL_COMP_SetInputHysteresis
	COMPxLOCK	*LL_COMP_IsLocked*
		LL_COMP_Lock
	COMPxMODE	*LL_COMP_GetPowerMode*
		LL_COMP_SetPowerMode

Register	Field	Function
	COMPxOUT	*LL_COMP_ReadOutputLevel*
	COMPxOUTSEL	*LL_COMP_GetOutputSelection*
		LL_COMP_SetOutputSelection
	COMPxPOL	*LL_COMP_GetOutputPolarity*
		LL_COMP_SetOutputPolarity
	COMPxWNDWEN	*LL_COMP_GetCommonWindowMode*
		LL_COMP_SetCommonWindowMode
	INMSEL	*LL_COMP_ConfigInputs*
		LL_COMP_GetInputMinus
		LL_COMP_SetInputMinus
	NONINSEL	*LL_COMP_ConfigInputs*
		LL_COMP_GetInputPlus
		LL_COMP_SetInputPlus

82.4 CORTEX

Table 28: Correspondence between CORTEX registers and CORTEX low-layer driver functions

Register	Field	Function
MPU_CTRL	ENABLE	*LL_MPU_Disable*
		LL_MPU_Enable
		LL_MPU_IsEnabled
MPU_RASR	AP	*LL_MPU_ConfigRegion*
	B	*LL_MPU_ConfigRegion*
	C	*LL_MPU_ConfigRegion*
	ENABLE	*LL_MPU_DisableRegion*
		LL_MPU_EnableRegion
	S	*LL_MPU_ConfigRegion*
	SIZE	*LL_MPU_ConfigRegion*
	XN	*LL_MPU_ConfigRegion*
MPU_RBAR	ADDR	*LL_MPU_ConfigRegion*
	REGION	*LL_MPU_ConfigRegion*
MPU_RNR	REGION	*LL_MPU_ConfigRegion*
		LL_MPU_DisableRegion
SCB_CPUID	ARCHITECTURE	*LL_CPUID_GetConstant*
	IMPLEMENTER	*LL_CPUID_GetImplementer*
	PARTNO	*LL_CPUID_GetParNo*
	REVISION	*LL_CPUID_GetRevision*

Register	Field	Function
	VARIANT	*LL_CPUID_GetVariant*
SCB_SCR	SEVEONPEND	*LL_LPM_DisableEventOnPend*
		LL_LPM_EnableEventOnPend
	SLEEPDEEP	*LL_LPM_EnableDeepSleep*
		LL_LPM_EnableSleep
	SLEEPONEXIT	*LL_LPM_DisableSleepOnExit*
		LL_LPM_EnableSleepOnExit
SCB_SHCSR	MEMFAULTENA	*LL_HANDLER_DisableFault*
		LL_HANDLER_EnableFault
STK_CTRL	CLKSOURCE	*LL_SYSTICK_GetClkSource*
		LL_SYSTICK_SetClkSource
	COUNTFLAG	*LL_SYSTICK_IsActiveCounterFlag*
	TICKINT	*LL_SYSTICK_DisableIT*
		LL_SYSTICK_EnableIT
		LL_SYSTICK_IsEnabledIT

82.5 CRC

Table 29: Correspondence between CRC registers and CRC low-layer driver functions

Register	Field	Function
CR	POLYSIZE	*LL_CRC_GetPolynomialSize*
		LL_CRC_SetPolynomialSize
	RESET	*LL_CRC_ResetCRCCalculationUnit*
	REV_IN	*LL_CRC_GetInputDataReverseMode*
		LL_CRC_SetInputDataReverseMode
	REV_OUT	*LL_CRC_GetOutputDataReverseMode*
		LL_CRC_SetOutputDataReverseMode
DR	DR	*LL_CRC_FeedData16*
		LL_CRC_FeedData32
		LL_CRC_FeedData8
		LL_CRC_ReadData16
		LL_CRC_ReadData32
		LL_CRC_ReadData7
		LL_CRC_ReadData8
IDR	IDR	*LL_CRC_Read_IDR*
		LL_CRC_Write_IDR
INIT	INIT	*LL_CRC_GetInitialData*

Register	Field	Function
		LL_CRC_SetInitialData
POL	POL	*LL_CRC_GetPolynomialCoef*
		LL_CRC_SetPolynomialCoef

82.6 DAC

Table 30: Correspondence between DAC registers and DAC low-layer driver functions

Register	Field	Function
CR	BOFF1	*LL_DAC_GetOutputBuffer*
		LL_DAC_SetOutputBuffer
	BOFF2	*LL_DAC_GetOutputBuffer*
		LL_DAC_SetOutputBuffer
	DMAEN1	*LL_DAC_DisableDMAReq*
		LL_DAC_EnableDMAReq
		LL_DAC_IsDMAReqEnabled
	DMAEN2	*LL_DAC_DisableDMAReq*
		LL_DAC_EnableDMAReq
		LL_DAC_IsDMAReqEnabled
	DMAUDRIE1	*LL_DAC_DisableIT_DMAUDR1*
		LL_DAC_EnableIT_DMAUDR1
		LL_DAC_IsEnabledIT_DMAUDR1
	DMAUDRIE2	*LL_DAC_DisableIT_DMAUDR2*
		LL_DAC_EnableIT_DMAUDR2
		LL_DAC_IsEnabledIT_DMAUDR2
	EN1	*LL_DAC_Disable*
		LL_DAC_Enable
		LL_DAC_IsEnabled
	EN2	*LL_DAC_Disable*
		LL_DAC_Enable
		LL_DAC_IsEnabled
	MAMP1	*LL_DAC_GetWaveNoiseLFSR*
		LL_DAC_GetWaveTriangleAmplitude
		LL_DAC_SetWaveNoiseLFSR
		LL_DAC_SetWaveTriangleAmplitude
	MAMP2	*LL_DAC_GetWaveNoiseLFSR*
		LL_DAC_GetWaveTriangleAmplitude
		LL_DAC_SetWaveNoiseLFSR

Register	Field	Function
		LL_DAC_SetWaveTriangleAmplitude
	TEN1	*LL_DAC_DisableTrigger*
		LL_DAC_EnableTrigger
		LL_DAC_IsTriggerEnabled
	TEN2	*LL_DAC_DisableTrigger*
		LL_DAC_EnableTrigger
		LL_DAC_IsTriggerEnabled
	TSEL1	*LL_DAC_GetTriggerSource*
		LL_DAC_SetTriggerSource
	TSEL2	*LL_DAC_GetTriggerSource*
		LL_DAC_SetTriggerSource
	WAVE1	*LL_DAC_GetWaveAutoGeneration*
		LL_DAC_SetWaveAutoGeneration
	WAVE2	*LL_DAC_GetWaveAutoGeneration*
		LL_DAC_SetWaveAutoGeneration
DHR12L1	DACC1DHR	*LL_DAC_ConvertData12LeftAligned*
		LL_DAC_DMA_GetRegAddr
DHR12L2	DACC2DHR	*LL_DAC_ConvertData12LeftAligned*
		LL_DAC_DMA_GetRegAddr
DHR12LD	DACC1DHR	*LL_DAC_ConvertDualData12LeftAligned*
	DACC2DHR	*LL_DAC_ConvertDualData12LeftAligned*
DHR12R1	DACC1DHR	*LL_DAC_ConvertData12RightAligned*
		LL_DAC_DMA_GetRegAddr
DHR12R2	DACC2DHR	*LL_DAC_ConvertData12RightAligned*
		LL_DAC_DMA_GetRegAddr
DHR12RD	DACC1DHR	*LL_DAC_ConvertDualData12RightAligned*
	DACC2DHR	*LL_DAC_ConvertDualData12RightAligned*
DHR8R1	DACC1DHR	*LL_DAC_ConvertData8RightAligned*
		LL_DAC_DMA_GetRegAddr
DHR8R2	DACC2DHR	*LL_DAC_ConvertData8RightAligned*
		LL_DAC_DMA_GetRegAddr
DHR8RD	DACC1DHR	*LL_DAC_ConvertDualData8RightAligned*
	DACC2DHR	*LL_DAC_ConvertDualData8RightAligned*
DOR1	DACC1DOR	*LL_DAC_RetrieveOutputData*
DOR2	DACC2DOR	*LL_DAC_RetrieveOutputData*
SR	DMAUDR1	*LL_DAC_ClearFlag_DMAUDR1*

Register	Field	Function
		LL_DAC_IsActiveFlag_DMAUDR1
	DMAUDR2	*LL_DAC_ClearFlag_DMAUDR2*
		LL_DAC_IsActiveFlag_DMAUDR2
SWTRIGR	SWTRIG1	*LL_DAC_TrigSWConversion*
	SWTRIG2	*LL_DAC_TrigSWConversion*

82.7 DMA

Table 31: Correspondence between DMA registers and DMA low-layer driver functions

Register	Field	Function
CCR	CIRC	*LL_DMA_ConfigTransfer*
		LL_DMA_GetMode
		LL_DMA_SetMode
	DIR	*LL_DMA_ConfigTransfer*
		LL_DMA_GetDataTransferDirection
		LL_DMA_SetDataTransferDirection
	EN	*LL_DMA_DisableChannel*
		LL_DMA_EnableChannel
		LL_DMA_IsEnabledChannel
	HTIE	*LL_DMA_DisableIT_HT*
		LL_DMA_EnableIT_HT
		LL_DMA_IsEnabledIT_HT
	MEM2MEM	*LL_DMA_ConfigTransfer*
		LL_DMA_GetDataTransferDirection
		LL_DMA_SetDataTransferDirection
	MINC	*LL_DMA_ConfigTransfer*
		LL_DMA_GetMemoryIncMode
		LL_DMA_SetMemoryIncMode
	MSIZE	*LL_DMA_ConfigTransfer*
		LL_DMA_GetMemorySize
		LL_DMA_SetMemorySize
	PINC	*LL_DMA_ConfigTransfer*
		LL_DMA_GetPeriphIncMode
		LL_DMA_SetPeriphIncMode
	PL	*LL_DMA_ConfigTransfer*
		LL_DMA_GetChannelPriorityLevel
		LL_DMA_SetChannelPriorityLevel

Register	Field	Function
	PSIZE	*LL_DMA_ConfigTransfer*
		LL_DMA_GetPeriphSize
		LL_DMA_SetPeriphSize
	TCIE	*LL_DMA_DisableIT_TC*
		LL_DMA_EnableIT_TC
		LL_DMA_IsEnabledIT_TC
	TEIE	*LL_DMA_DisableIT_TE*
		LL_DMA_EnableIT_TE
		LL_DMA_IsEnabledIT_TE
CMAR	MA	*LL_DMA_ConfigAddresses*
		LL_DMA_GetM2MDstAddress
		LL_DMA_GetMemoryAddress
		LL_DMA_SetM2MDstAddress
		LL_DMA_SetMemoryAddress
CNDTR	NDT	*LL_DMA_GetDataLength*
		LL_DMA_SetDataLength
CPAR	PA	*LL_DMA_ConfigAddresses*
		LL_DMA_GetM2MSrcAddress
		LL_DMA_GetPeriphAddress
		LL_DMA_SetM2MSrcAddress
		LL_DMA_SetPeriphAddress
IFCR	CGIF1	*LL_DMA_ClearFlag_GI1*
	CGIF2	*LL_DMA_ClearFlag_GI2*
	CGIF3	*LL_DMA_ClearFlag_GI3*
	CGIF4	*LL_DMA_ClearFlag_GI4*
	CGIF5	*LL_DMA_ClearFlag_GI5*
	CGIF6	*LL_DMA_ClearFlag_GI6*
	CGIF7	*LL_DMA_ClearFlag_GI7*
	CHTIF1	*LL_DMA_ClearFlag_HT1*
	CHTIF2	*LL_DMA_ClearFlag_HT2*
	CHTIF3	*LL_DMA_ClearFlag_HT3*
	CHTIF4	*LL_DMA_ClearFlag_HT4*
	CHTIF5	*LL_DMA_ClearFlag_HT5*
	CHTIF6	*LL_DMA_ClearFlag_HT6*
	CHTIF7	*LL_DMA_ClearFlag_HT7*
	CTCIF1	*LL_DMA_ClearFlag_TC1*

Register	Field	Function
	CTCIF2	*LL_DMA_ClearFlag_TC2*
	CTCIF3	*LL_DMA_ClearFlag_TC3*
	CTCIF4	*LL_DMA_ClearFlag_TC4*
	CTCIF5	*LL_DMA_ClearFlag_TC5*
	CTCIF6	*LL_DMA_ClearFlag_TC6*
	CTCIF7	*LL_DMA_ClearFlag_TC7*
	CTEIF1	*LL_DMA_ClearFlag_TE1*
	CTEIF2	*LL_DMA_ClearFlag_TE2*
	CTEIF3	*LL_DMA_ClearFlag_TE3*
	CTEIF4	*LL_DMA_ClearFlag_TE4*
	CTEIF5	*LL_DMA_ClearFlag_TE5*
	CTEIF6	*LL_DMA_ClearFlag_TE6*
	CTEIF7	*LL_DMA_ClearFlag_TE7*
ISR	GIF1	*LL_DMA_IsActiveFlag_GI1*
	GIF2	*LL_DMA_IsActiveFlag_GI2*
	GIF3	*LL_DMA_IsActiveFlag_GI3*
	GIF4	*LL_DMA_IsActiveFlag_GI4*
	GIF5	*LL_DMA_IsActiveFlag_GI5*
	GIF6	*LL_DMA_IsActiveFlag_GI6*
	GIF7	*LL_DMA_IsActiveFlag_GI7*
	HTIF1	*LL_DMA_IsActiveFlag_HT1*
	HTIF2	*LL_DMA_IsActiveFlag_HT2*
	HTIF3	*LL_DMA_IsActiveFlag_HT3*
	HTIF4	*LL_DMA_IsActiveFlag_HT4*
	HTIF5	*LL_DMA_IsActiveFlag_HT5*
	HTIF6	*LL_DMA_IsActiveFlag_HT6*
	HTIF7	*LL_DMA_IsActiveFlag_HT7*
	TCIF1	*LL_DMA_IsActiveFlag_TC1*
	TCIF2	*LL_DMA_IsActiveFlag_TC2*
	TCIF3	*LL_DMA_IsActiveFlag_TC3*
	TCIF4	*LL_DMA_IsActiveFlag_TC4*
	TCIF5	*LL_DMA_IsActiveFlag_TC5*
	TCIF6	*LL_DMA_IsActiveFlag_TC6*
	TCIF7	*LL_DMA_IsActiveFlag_TC7*
	TEIF1	*LL_DMA_IsActiveFlag_TE1*
	TEIF2	*LL_DMA_IsActiveFlag_TE2*

Register	Field	Function
	TEIF3	*LL_DMA_IsActiveFlag_TE3*
	TEIF4	*LL_DMA_IsActiveFlag_TE4*
	TEIF5	*LL_DMA_IsActiveFlag_TE5*
	TEIF6	*LL_DMA_IsActiveFlag_TE6*
	TEIF7	*LL_DMA_IsActiveFlag_TE7*

82.8 EXTI

Table 32: Correspondence between EXTI registers and EXTI low-layer driver functions

Register	Field	Function
EMR	EMx	*LL_EXTI_DisableEvent_0_31*
		LL_EXTI_EnableEvent_0_31
		LL_EXTI_IsEnabledEvent_0_31
EMR2	EMx	*LL_EXTI_DisableEvent_32_63*
		LL_EXTI_EnableEvent_32_63
		LL_EXTI_IsEnabledEvent_32_63
FTSR	FTx	*LL_EXTI_DisableFallingTrig_0_31*
		LL_EXTI_EnableFallingTrig_0_31
		LL_EXTI_IsEnabledFallingTrig_0_31
FTSR2	FTx	*LL_EXTI_DisableFallingTrig_32_63*
		LL_EXTI_EnableFallingTrig_32_63
		LL_EXTI_IsEnabledFallingTrig_32_63
IMR	IMx	*LL_EXTI_DisableIT_0_31*
		LL_EXTI_EnableIT_0_31
		LL_EXTI_IsEnabledIT_0_31
IMR2	IMx	*LL_EXTI_DisableIT_32_63*
		LL_EXTI_EnableIT_32_63
		LL_EXTI_IsEnabledIT_32_63
PR	PIFx	*LL_EXTI_ClearFlag_0_31*
		LL_EXTI_IsActiveFlag_0_31
		LL_EXTI_ReadFlag_0_31
PR2	PIFx	*LL_EXTI_ClearFlag_32_63*
		LL_EXTI_IsActiveFlag_32_63
		LL_EXTI_ReadFlag_32_63
RTSR	RTx	*LL_EXTI_DisableRisingTrig_0_31*
		LL_EXTI_EnableRisingTrig_0_31
		LL_EXTI_IsEnabledRisingTrig_0_31

Register	Field	Function
RTSR2	RTx	*LL_EXTI_DisableRisingTrig_32_63*
		LL_EXTI_EnableRisingTrig_32_63
		LL_EXTI_IsEnabledRisingTrig_32_63
SWIER	SWIx	*LL_EXTI_GenerateSWI_0_31*
SWIER2	SWIx	*LL_EXTI_GenerateSWI_32_63*

82.9 GPIO

Table 33: Correspondence between GPIO registers and GPIO low-layer driver functions

Register	Field	Function
AFRH	AFSELy	*LL_GPIO_GetAFPin_8_15*
		LL_GPIO_SetAFPin_8_15
AFRL	AFSELy	*LL_GPIO_GetAFPin_0_7*
		LL_GPIO_SetAFPin_0_7
BRR	BRy	*LL_GPIO_ResetOutputPin*
BSRR	BSy	*LL_GPIO_SetOutputPin*
IDR	IDy	*LL_GPIO_IsInputPinSet*
		LL_GPIO_ReadInputPort
LCKR	LCKK	*LL_GPIO_IsAnyPinLocked*
		LL_GPIO_LockPin
	LCKy	*LL_GPIO_IsPinLocked*
MODER	MODEy	*LL_GPIO_GetPinMode*
		LL_GPIO_SetPinMode
ODR	ODy	*LL_GPIO_IsOutputPinSet*
		LL_GPIO_ReadOutputPort
		LL_GPIO_TogglePin
		LL_GPIO_WriteOutputPort
OSPEEDR	OSPEEDy	*LL_GPIO_GetPinSpeed*
		LL_GPIO_SetPinSpeed
OTYPER	OTy	*LL_GPIO_GetPinOutputType*
		LL_GPIO_SetPinOutputType
PUPDR	PUPDy	*LL_GPIO_GetPinPull*
		LL_GPIO_SetPinPull

82.10 I2C

Table 34: Correspondence between I2C registers and I2C low-layer driver functions

Register	Field	Function
CR1	ADDRIE	*LL_I2C_DisableIT_ADDR*
		LL_I2C_EnableIT_ADDR
		LL_I2C_IsEnabledIT_ADDR
	ALERTEN	*LL_I2C_DisableSMBusAlert*
		LL_I2C_EnableSMBusAlert
		LL_I2C_IsEnabledSMBusAlert
	ANFOFF	*LL_I2C_ConfigFilters*
		LL_I2C_DisableAnalogFilter
		LL_I2C_EnableAnalogFilter
		LL_I2C_IsEnabledAnalogFilter
	DNF	*LL_I2C_ConfigFilters*
		LL_I2C_GetDigitalFilter
		LL_I2C_SetDigitalFilter
	ERRIE	*LL_I2C_DisableIT_ERR*
		LL_I2C_EnableIT_ERR
		LL_I2C_IsEnabledIT_ERR
	GCEN	*LL_I2C_DisableGeneralCall*
		LL_I2C_EnableGeneralCall
		LL_I2C_IsEnabledGeneralCall
	NACKIE	*LL_I2C_DisableIT_NACK*
		LL_I2C_EnableIT_NACK
		LL_I2C_IsEnabledIT_NACK
	NOSTRETCH	*LL_I2C_DisableClockStretching*
		LL_I2C_EnableClockStretching
		LL_I2C_IsEnabledClockStretching
	PE	*LL_I2C_Disable*
		LL_I2C_Enable
		LL_I2C_IsEnabled
	PECEN	*LL_I2C_DisableSMBusPEC*
		LL_I2C_EnableSMBusPEC
		LL_I2C_IsEnabledSMBusPEC
	RXDMAEN	*LL_I2C_DisableDMAReq_RX*
		LL_I2C_EnableDMAReq_RX
		LL_I2C_IsEnabledDMAReq_RX

Register	Field	Function
	RXIE	*LL_I2C_DisableIT_RX*
		LL_I2C_EnableIT_RX
		LL_I2C_IsEnabledIT_RX
	SBC	*LL_I2C_DisableSlaveByteControl*
		LL_I2C_EnableSlaveByteControl
		LL_I2C_IsEnabledSlaveByteControl
	SMBDEN	*LL_I2C_GetMode*
		LL_I2C_SetMode
	SMBHEN	*LL_I2C_GetMode*
		LL_I2C_SetMode
	STOPIE	*LL_I2C_DisableIT_STOP*
		LL_I2C_EnableIT_STOP
		LL_I2C_IsEnabledIT_STOP
	TCIE	*LL_I2C_DisableIT_TC*
		LL_I2C_EnableIT_TC
		LL_I2C_IsEnabledIT_TC
	TXDMAEN	*LL_I2C_DisableDMAReq_TX*
		LL_I2C_EnableDMAReq_TX
		LL_I2C_IsEnabledDMAReq_TX
	TXIE	*LL_I2C_DisableIT_TX*
		LL_I2C_EnableIT_TX
		LL_I2C_IsEnabledIT_TX
	WUPEN	*LL_I2C_DisableWakeUpFromStop*
		LL_I2C_EnableWakeUpFromStop
		LL_I2C_IsEnabledWakeUpFromStop
CR2	ADD10	*LL_I2C_GetMasterAddressingMode*
		LL_I2C_HandleTransfer
		LL_I2C_SetMasterAddressingMode
	AUTOEND	*LL_I2C_DisableAutoEndMode*
		LL_I2C_EnableAutoEndMode
		LL_I2C_HandleTransfer
		LL_I2C_IsEnabledAutoEndMode
	HEAD10R	*LL_I2C_DisableAuto10BitRead*
		LL_I2C_EnableAuto10BitRead
		LL_I2C_HandleTransfer
		LL_I2C_IsEnabledAuto10BitRead

Register	Field	Function
	NACK	*LL_I2C_AcknowledgeNextData*
	NBYTES	*LL_I2C_GetTransferSize*
		LL_I2C_HandleTransfer
		LL_I2C_SetTransferSize
	PECBYTE	*LL_I2C_EnableSMBusPECCompare*
		LL_I2C_IsEnabledSMBusPECCompare
	RD_WRN	*LL_I2C_GetTransferRequest*
		LL_I2C_HandleTransfer
		LL_I2C_SetTransferRequest
	RELOAD	*LL_I2C_DisableReloadMode*
		LL_I2C_EnableReloadMode
		LL_I2C_HandleTransfer
		LL_I2C_IsEnabledReloadMode
	SADD	*LL_I2C_GetSlaveAddr*
		LL_I2C_HandleTransfer
		LL_I2C_SetSlaveAddr
	START	*LL_I2C_GenerateStartCondition*
		LL_I2C_HandleTransfer
	STOP	*LL_I2C_GenerateStopCondition*
		LL_I2C_HandleTransfer
ICR	ADDRCF	*LL_I2C_ClearFlag_ADDR*
	ALERTCF	*LL_I2C_ClearSMBusFlag_ALERT*
	ARLOCF	*LL_I2C_ClearFlag_ARLO*
	BERRCF	*LL_I2C_ClearFlag_BERR*
	NACKCF	*LL_I2C_ClearFlag_NACK*
	OVRCF	*LL_I2C_ClearFlag_OVR*
	PECCF	*LL_I2C_ClearSMBusFlag_PECERR*
	STOPCF	*LL_I2C_ClearFlag_STOP*
	TIMOUTCF	*LL_I2C_ClearSMBusFlag_TIMEOUT*
ISR	ADDCODE	*LL_I2C_GetAddressMatchCode*
	ADDR	*LL_I2C_IsActiveFlag_ADDR*
	ALERT	*LL_I2C_IsActiveSMBusFlag_ALERT*
	ARLO	*LL_I2C_IsActiveFlag_ARLO*
	BERR	*LL_I2C_IsActiveFlag_BERR*
	BUSY	*LL_I2C_IsActiveFlag_BUSY*
	DIR	*LL_I2C_GetTransferDirection*

Register	Field	Function
	NACKF	*LL_I2C_IsActiveFlag_NACK*
	OVR	*LL_I2C_IsActiveFlag_OVR*
	PECERR	*LL_I2C_IsActiveSMBusFlag_PECERR*
	RXNE	*LL_I2C_IsActiveFlag_RXNE*
	STOPF	*LL_I2C_IsActiveFlag_STOP*
	TC	*LL_I2C_IsActiveFlag_TC*
	TCR	*LL_I2C_IsActiveFlag_TCR*
	TIMEOUT	*LL_I2C_IsActiveSMBusFlag_TIMEOUT*
	TXE	*LL_I2C_ClearFlag_TXE*
		LL_I2C_IsActiveFlag_TXE
	TXIS	*LL_I2C_IsActiveFlag_TXIS*
OAR1	OA1	*LL_I2C_SetOwnAddress1*
	OA1EN	*LL_I2C_DisableOwnAddress1*
		LL_I2C_EnableOwnAddress1
		LL_I2C_IsEnabledOwnAddress1
	OA1MODE	*LL_I2C_SetOwnAddress1*
OAR2	OA2	*LL_I2C_SetOwnAddress2*
	OA2EN	*LL_I2C_DisableOwnAddress2*
		LL_I2C_EnableOwnAddress2
		LL_I2C_IsEnabledOwnAddress2
	OA2MSK	*LL_I2C_SetOwnAddress2*
PECR	PEC	*LL_I2C_GetSMBusPEC*
RXDR	RXDATA	*LL_I2C_DMA_GetRegAddr*
		LL_I2C_ReceiveData8
TIMEOUTR	TEXTEN	*LL_I2C_DisableSMBusTimeout*
		LL_I2C_EnableSMBusTimeout
		LL_I2C_IsEnabledSMBusTimeout
	TIDLE	*LL_I2C_ConfigSMBusTimeout*
		LL_I2C_GetSMBusTimeoutAMode
		LL_I2C_SetSMBusTimeoutAMode
	TIMEOUTA	*LL_I2C_ConfigSMBusTimeout*
		LL_I2C_GetSMBusTimeoutA
		LL_I2C_SetSMBusTimeoutA
	TIMEOUTB	*LL_I2C_ConfigSMBusTimeout*
		LL_I2C_GetSMBusTimeoutB
		LL_I2C_SetSMBusTimeoutB

Register	Field	Function
	TIMOUTEN	*LL_I2C_DisableSMBusTimeout*
		LL_I2C_EnableSMBusTimeout
		LL_I2C_IsEnabledSMBusTimeout
TIMINGR	PRESC	*LL_I2C_GetTimingPrescaler*
	SCLDEL	*LL_I2C_GetDataSetupTime*
	SCLH	*LL_I2C_GetClockHighPeriod*
	SCLL	*LL_I2C_GetClockLowPeriod*
	SDADEL	*LL_I2C_GetDataHoldTime*
	TIMINGR	*LL_I2C_SetTiming*
TXDR	TXDATA	*LL_I2C_DMA_GetRegAddr*
		LL_I2C_TransmitData8

82.11 I2S

Table 35: Correspondence between I2S registers and I2S low-layer driver functions

Register	Field	Function
CR2	ERRIE	*LL_I2S_DisableIT_ERR*
		LL_I2S_EnableIT_ERR
		LL_I2S_IsEnabledIT_ERR
	RXDMAEN	*LL_I2S_DisableDMAReq_RX*
		LL_I2S_EnableDMAReq_RX
		LL_I2S_IsEnabledDMAReq_RX
	RXNEIE	*LL_I2S_DisableIT_RXNE*
		LL_I2S_EnableIT_RXNE
		LL_I2S_IsEnabledIT_RXNE
	TXDMAEN	*LL_I2S_DisableDMAReq_TX*
		LL_I2S_EnableDMAReq_TX
		LL_I2S_IsEnabledDMAReq_TX
	TXEIE	*LL_I2S_DisableIT_TXE*
		LL_I2S_EnableIT_TXE
		LL_I2S_IsEnabledIT_TXE
DR	DR	*LL_I2S_ReceiveData16*
		LL_I2S_TransmitData16
I2SCFGR	CHLEN	*LL_I2S_GetDataFormat*
		LL_I2S_SetDataFormat
	CKPOL	*LL_I2S_GetClockPolarity*
		LL_I2S_SetClockPolarity

Register	Field	Function
	DATLEN	*LL_I2S_GetDataFormat*
		LL_I2S_SetDataFormat
	I2SCFG	*LL_I2S_GetTransferMode*
		LL_I2S_SetTransferMode
	I2SE	*LL_I2S_Disable*
		LL_I2S_Enable
		LL_I2S_IsEnabled
	I2SMOD	*LL_I2S_Enable*
	I2SSTD	*LL_I2S_GetStandard*
		LL_I2S_SetStandard
	PCMSYNC	*LL_I2S_GetStandard*
		LL_I2S_SetStandard
I2SPR	I2SDIV	*LL_I2S_GetPrescalerLinear*
		LL_I2S_SetPrescalerLinear
	MCKOE	*LL_I2S_DisableMasterClock*
		LL_I2S_EnableMasterClock
		LL_I2S_IsEnabledMasterClock
	ODD	*LL_I2S_GetPrescalerParity*
		LL_I2S_SetPrescalerParity
SR	BSY	*LL_I2S_IsActiveFlag_BSY*
	CHSIDE	*LL_I2S_IsActiveFlag_CHSIDE*
	FRE	*LL_I2S_ClearFlag_FRE*
		LL_I2S_IsActiveFlag_FRE
	OVR	*LL_I2S_ClearFlag_OVR*
		LL_I2S_IsActiveFlag_OVR
	RXNE	*LL_I2S_IsActiveFlag_RXNE*
	TXE	*LL_I2S_IsActiveFlag_TXE*
	UDR	*LL_I2S_ClearFlag_UDR*
		LL_I2S_IsActiveFlag_UDR

82.12 IWDG

Table 36: Correspondence between IWDG registers and IWDG low-layer driver functions

Register	Field	Function
KR	KEY	*LL_IWDG_DisableWriteAccess*
		LL_IWDG_Enable
		LL_IWDG_EnableWriteAccess

Register	Field	Function
		LL_IWDG_ReloadCounter
PR	PR	*LL_IWDG_GetPrescaler*
		LL_IWDG_SetPrescaler
RLR	RL	*LL_IWDG_GetReloadCounter*
		LL_IWDG_SetReloadCounter
SR	PVU	*LL_IWDG_IsActiveFlag_PVU*
		LL_IWDG_IsReady
	RVU	*LL_IWDG_IsActiveFlag_RVU*
		LL_IWDG_IsReady
	WVU	*LL_IWDG_IsActiveFlag_WVU*
		LL_IWDG_IsReady
WINR	WIN	*LL_IWDG_GetWindow*
		LL_IWDG_SetWindow

82.13 OPAMP

Table 37: Correspondence between OPAMP registers and OPAMP low-layer driver functions

Register	Field	Function
CSR	CALON	*LL_OPAMP_GetMode*
		LL_OPAMP_SetMode
	CALSEL	*LL_OPAMP_GetCalibrationSelection*
		LL_OPAMP_SetCalibrationSelection
	LOCK	*LL_OPAMP_IsLocked*
		LL_OPAMP_Lock
	OPAMPXEN	*LL_OPAMP_Disable*
		LL_OPAMP_Enable
		LL_OPAMP_IsEnabled
	OUTCAL	*LL_OPAMP_IsCalibrationOutputSet*
	PGGAIN	*LL_OPAMP_GetPGAGain*
		LL_OPAMP_SetPGAGain
	TCMEN	*LL_OPAMP_GetInputsMuxMode*
		LL_OPAMP_SetInputsMuxMode
	TRIMOFFSETN	*LL_OPAMP_GetTrimmingValue*
		LL_OPAMP_SetTrimmingValue
	TRIMOFFSETP	*LL_OPAMP_GetTrimmingValue*
		LL_OPAMP_SetTrimmingValue
	TSTREF	*LL_OPAMP_GetCalibrationVrefOutput*

Register	Field	Function
		LL_OPAMP_SetCalibrationVrefOutput
	USERTRIM	*LL_OPAMP_GetTrimmingMode*
		LL_OPAMP_SetTrimmingMode
	VMSEL	*LL_OPAMP_GetFunctionalMode*
		LL_OPAMP_GetInputInverting
		LL_OPAMP_SetFunctionalMode
		LL_OPAMP_SetInputInverting
	VMSSEL	*LL_OPAMP_GetInputInvertingSecondary*
		LL_OPAMP_SetInputInvertingSecondary
	VPSEL	*LL_OPAMP_GetInputNonInverting*
		LL_OPAMP_SetInputNonInverting
	VPSSEL	*LL_OPAMP_GetInputNonInvertingSecondary*
		LL_OPAMP_SetInputNonInvertingSecondary

82.14 PWR

Table 38: Correspondence between PWR registers and PWR low-layer driver functions

Register	Field	Function
CR	CSBF	*LL_PWR_ClearFlag_SB*
	CWUF	*LL_PWR_ClearFlag_WU*
	DBP	*LL_PWR_DisableBkUpAccess*
		LL_PWR_EnableBkUpAccess
		LL_PWR_IsEnabledBkUpAccess
	ENSD1	*LL_PWR_EnableSDADC*
		LL_PWR_IsEnabledSDADC
	ENSD2	*LL_PWR_EnableSDADC*
		LL_PWR_IsEnabledSDADC
	ENSD3	*LL_PWR_EnableSDADC*
		LL_PWR_IsEnabledSDADC
	LPDS	*LL_PWR_GetPowerMode*
		LL_PWR_GetRegulModeDS
		LL_PWR_SetPowerMode
		LL_PWR_SetRegulModeDS
	PDDS	*LL_PWR_GetPowerMode*
		LL_PWR_SetPowerMode
	PLS	*LL_PWR_GetPVDLevel*
		LL_PWR_SetPVDLevel

Register	Field	Function
	PVDE	*LL_PWR_DisablePVD*
		LL_PWR_EnablePVD
		LL_PWR_IsEnabledPVD
CSR	EWUP1	*LL_PWR_DisableWakeUpPin*
		LL_PWR_EnableWakeUpPin
		LL_PWR_IsEnabledWakeUpPin
	EWUP2	*LL_PWR_DisableWakeUpPin*
		LL_PWR_EnableWakeUpPin
		LL_PWR_IsEnabledWakeUpPin
	EWUP3	*LL_PWR_DisableWakeUpPin*
		LL_PWR_EnableWakeUpPin
		LL_PWR_IsEnabledWakeUpPin
	PVDO	*LL_PWR_IsActiveFlag_PVDO*
	SBF	*LL_PWR_IsActiveFlag_SB*
	VREFINTRDYF	*LL_PWR_IsActiveFlag_VREFINTRDY*
	WUF	*LL_PWR_IsActiveFlag_WU*

82.15 RCC

Table 39: Correspondence between RCC registers and RCC low-layer driver functions

Register	Field	Function
BDCR	BDRST	*LL_RCC_ForceBackupDomainReset*
		LL_RCC_ReleaseBackupDomainReset
	LSEBYP	*LL_RCC_LSE_DisableBypass*
		LL_RCC_LSE_EnableBypass
	LSEDRV	*LL_RCC_LSE_GetDriveCapability*
		LL_RCC_LSE_SetDriveCapability
	LSEON	*LL_RCC_LSE_Disable*
		LL_RCC_LSE_Enable
	LSERDY	*LL_RCC_LSE_IsReady*
	RTCEN	*LL_RCC_DisableRTC*
		LL_RCC_EnableRTC
		LL_RCC_IsEnabledRTC
	RTCSEL	*LL_RCC_GetRTCClockSource*
		LL_RCC_SetRTCClockSource
CFGR	HPRE	*LL_RCC_GetAHBPrescaler*
		LL_RCC_SetAHBPrescaler

Register	Field	Function
	I2SSRC	*LL_RCC_GetI2SClockSource*
		LL_RCC_SetI2SClockSource
	MCO	*LL_RCC_ConfigMCO*
	MCOF	*LL_RCC_IsActiveFlag_MCO1*
	MCOPRE	*LL_RCC_ConfigMCO*
	PLLMUL	*LL_RCC_PLL_ConfigDomain_SYS*
		LL_RCC_PLL_GetMultiplicator
	PLLNODIV	*LL_RCC_ConfigMCO*
	PLLSRC	*LL_RCC_PLL_ConfigDomain_SYS*
		LL_RCC_PLL_GetMainSource
	PPRE1	*LL_RCC_GetAPB1Prescaler*
		LL_RCC_SetAPB1Prescaler
	PPRE2	*LL_RCC_GetAPB2Prescaler*
		LL_RCC_SetAPB2Prescaler
	SW	*LL_RCC_SetSysClkSource*
	SWS	*LL_RCC_GetSysClkSource*
	USBPRE	*LL_RCC_GetUSBClockSource*
		LL_RCC_SetUSBClockSource
CFGR2	ADCPRE12	*LL_RCC_GetADCClockSource*
		LL_RCC_SetADCClockSource
	ADCPRE34	*LL_RCC_GetADCClockSource*
		LL_RCC_SetADCClockSource
	PREDIV	*LL_RCC_PLL_ConfigDomain_SYS*
		LL_RCC_PLL_GetPrediv
CFGR3	I2C1SW	*LL_RCC_GetI2CClockSource*
		LL_RCC_SetI2CClockSource
	I2C2SW	*LL_RCC_GetI2CClockSource*
		LL_RCC_SetI2CClockSource
	I2C3SW	*LL_RCC_GetI2CClockSource*
		LL_RCC_SetI2CClockSource
	TIM15SW	*LL_RCC_GetTIMClockSource*
		LL_RCC_SetTIMClockSource
	TIM16SW	*LL_RCC_GetTIMClockSource*
		LL_RCC_SetTIMClockSource
	TIM17SW	*LL_RCC_GetTIMClockSource*
		LL_RCC_SetTIMClockSource

Register	Field	Function
	TIM1SW	*LL_RCC_GetTIMClockSource*
		LL_RCC_SetTIMClockSource
	TIM20SW	*LL_RCC_GetTIMClockSource*
		LL_RCC_SetTIMClockSource
	TIM2SW	*LL_RCC_GetTIMClockSource*
		LL_RCC_SetTIMClockSource
	TIM34SW	*LL_RCC_GetTIMClockSource*
		LL_RCC_SetTIMClockSource
	TIM8SW	*LL_RCC_GetTIMClockSource*
		LL_RCC_SetTIMClockSource
	UART4SW	*LL_RCC_GetUARTClockSource*
		LL_RCC_SetUARTClockSource
	UART5SW	*LL_RCC_GetUARTClockSource*
		LL_RCC_SetUARTClockSource
	USART1SW	*LL_RCC_GetUSARTClockSource*
		LL_RCC_SetUSARTClockSource
	USART2SW	*LL_RCC_GetUSARTClockSource*
		LL_RCC_SetUSARTClockSource
	USART3SW	*LL_RCC_GetUSARTClockSource*
		LL_RCC_SetUSARTClockSource
CIR	CSSC	*LL_RCC_ClearFlag_HSECSS*
	CSSF	*LL_RCC_IsActiveFlag_HSECSS*
	HSERDYC	*LL_RCC_ClearFlag_HSERDY*
	HSERDYF	*LL_RCC_IsActiveFlag_HSERDY*
	HSERDYIE	*LL_RCC_DisableIT_HSERDY*
		LL_RCC_EnableIT_HSERDY
		LL_RCC_IsEnabledIT_HSERDY
	HSIRDYC	*LL_RCC_ClearFlag_HSIRDY*
	HSIRDYF	*LL_RCC_IsActiveFlag_HSIRDY*
	HSIRDYIE	*LL_RCC_DisableIT_HSIRDY*
		LL_RCC_EnableIT_HSIRDY
		LL_RCC_IsEnabledIT_HSIRDY
	LSERDYC	*LL_RCC_ClearFlag_LSERDY*
	LSERDYF	*LL_RCC_IsActiveFlag_LSERDY*
	LSERDYIE	*LL_RCC_DisableIT_LSERDY*
		LL_RCC_EnableIT_LSERDY

Register	Field	Function
		LL_RCC_IsEnabledIT_LSERDY
	LSIRDYC	*LL_RCC_ClearFlag_LSIRDY*
	LSIRDYF	*LL_RCC_IsActiveFlag_LSIRDY*
	LSIRDYIE	*LL_RCC_DisableIT_LSIRDY*
		LL_RCC_EnableIT_LSIRDY
		LL_RCC_IsEnabledIT_LSIRDY
	PLLRDYC	*LL_RCC_ClearFlag_PLLRDY*
	PLLRDYF	*LL_RCC_IsActiveFlag_PLLRDY*
	PLLRDYIE	*LL_RCC_DisableIT_PLLRDY*
		LL_RCC_EnableIT_PLLRDY
		LL_RCC_IsEnabledIT_PLLRDY
CR	CSSON	*LL_RCC_HSE_DisableCSS*
		LL_RCC_HSE_EnableCSS
	HSEBYP	*LL_RCC_HSE_DisableBypass*
		LL_RCC_HSE_EnableBypass
	HSEON	*LL_RCC_HSE_Disable*
		LL_RCC_HSE_Enable
	HSERDY	*LL_RCC_HSE_IsReady*
	HSICAL	*LL_RCC_HSI_GetCalibration*
	HSION	*LL_RCC_HSI_Disable*
		LL_RCC_HSI_Enable
	HSIRDY	*LL_RCC_HSI_IsReady*
	HSITRIM	*LL_RCC_HSI_GetCalibTrimming*
		LL_RCC_HSI_SetCalibTrimming
	PLLON	*LL_RCC_PLL_Disable*
		LL_RCC_PLL_Enable
	PLLRDY	*LL_RCC_PLL_IsReady*
CSR	IWDGRSTF	*LL_RCC_IsActiveFlag_IWDGRST*
	LPWRRSTF	*LL_RCC_IsActiveFlag_LPWRRST*
	LSION	*LL_RCC_LSI_Disable*
		LL_RCC_LSI_Enable
	LSIRDY	*LL_RCC_LSI_IsReady*
	OBLRSTF	*LL_RCC_IsActiveFlag_OBLRST*
	PINRSTF	*LL_RCC_IsActiveFlag_PINRST*
	PORRSTF	*LL_RCC_IsActiveFlag_PORRST*
	RMVF	*LL_RCC_ClearResetFlags*

Register	Field	Function
	SFTRSTF	*LL_RCC_IsActiveFlag_SFTRST*
	V18PWRRSTF	*LL_RCC_IsActiveFlag_V18PWRRST*
	WWDGRSTF	*LL_RCC_IsActiveFlag_WWDGRST*

82.16 RTC

Table 40: Correspondence between RTC registers and RTC low-layer driver functions

Register	Field	Function
ALRMAR	DT	*LL_RTC_ALMA_GetDay*
		LL_RTC_ALMA_SetDay
	DU	*LL_RTC_ALMA_GetDay*
		LL_RTC_ALMA_GetWeekDay
		LL_RTC_ALMA_SetDay
		LL_RTC_ALMA_SetWeekDay
	HT	*LL_RTC_ALMA_ConfigTime*
		LL_RTC_ALMA_GetHour
		LL_RTC_ALMA_GetTime
		LL_RTC_ALMA_SetHour
	HU	*LL_RTC_ALMA_ConfigTime*
		LL_RTC_ALMA_GetHour
		LL_RTC_ALMA_GetTime
		LL_RTC_ALMA_SetHour
	MNT	*LL_RTC_ALMA_ConfigTime*
		LL_RTC_ALMA_GetMinute
		LL_RTC_ALMA_GetTime
		LL_RTC_ALMA_SetMinute
	MNU	*LL_RTC_ALMA_ConfigTime*
		LL_RTC_ALMA_GetMinute
		LL_RTC_ALMA_GetTime
		LL_RTC_ALMA_SetMinute
	MSK1	*LL_RTC_ALMA_GetMask*
		LL_RTC_ALMA_SetMask
	MSK2	*LL_RTC_ALMA_GetMask*
		LL_RTC_ALMA_SetMask
	MSK3	*LL_RTC_ALMA_GetMask*
		LL_RTC_ALMA_SetMask
	MSK4	*LL_RTC_ALMA_GetMask*

Register	Field	Function
		LL_RTC_ALMA_SetMask
	PM	*LL_RTC_ALMA_ConfigTime*
		LL_RTC_ALMA_GetTimeFormat
		LL_RTC_ALMA_SetTimeFormat
	ST	*LL_RTC_ALMA_ConfigTime*
		LL_RTC_ALMA_GetSecond
		LL_RTC_ALMA_GetTime
		LL_RTC_ALMA_SetSecond
	SU	*LL_RTC_ALMA_ConfigTime*
		LL_RTC_ALMA_GetSecond
		LL_RTC_ALMA_GetTime
		LL_RTC_ALMA_SetSecond
	WDSEL	*LL_RTC_ALMA_DisableWeekday*
		LL_RTC_ALMA_EnableWeekday
ALRMASSR	MASKSS	*LL_RTC_ALMA_GetSubSecondMask*
		LL_RTC_ALMA_SetSubSecondMask
	SS	*LL_RTC_ALMA_GetSubSecond*
		LL_RTC_ALMA_SetSubSecond
ALRMBR	DT	*LL_RTC_ALMB_GetDay*
		LL_RTC_ALMB_SetDay
	DU	*LL_RTC_ALMB_GetDay*
		LL_RTC_ALMB_GetWeekDay
		LL_RTC_ALMB_SetDay
		LL_RTC_ALMB_SetWeekDay
	HT	*LL_RTC_ALMB_ConfigTime*
		LL_RTC_ALMB_GetHour
		LL_RTC_ALMB_GetTime
		LL_RTC_ALMB_SetHour
	HU	*LL_RTC_ALMB_ConfigTime*
		LL_RTC_ALMB_GetHour
		LL_RTC_ALMB_GetTime
		LL_RTC_ALMB_SetHour
	MNT	*LL_RTC_ALMB_ConfigTime*
		LL_RTC_ALMB_GetMinute
		LL_RTC_ALMB_GetTime
		LL_RTC_ALMB_SetMinute

Register	Field	Function
	MNU	*LL_RTC_ALMB_ConfigTime*
		LL_RTC_ALMB_GetMinute
		LL_RTC_ALMB_GetTime
		LL_RTC_ALMB_SetMinute
	MSK1	*LL_RTC_ALMB_GetMask*
		LL_RTC_ALMB_SetMask
	MSK2	*LL_RTC_ALMB_GetMask*
		LL_RTC_ALMB_SetMask
	MSK3	*LL_RTC_ALMB_GetMask*
		LL_RTC_ALMB_SetMask
	MSK4	*LL_RTC_ALMB_GetMask*
		LL_RTC_ALMB_SetMask
	PM	*LL_RTC_ALMB_ConfigTime*
		LL_RTC_ALMB_GetTimeFormat
		LL_RTC_ALMB_SetTimeFormat
	ST	*LL_RTC_ALMB_ConfigTime*
		LL_RTC_ALMB_GetSecond
		LL_RTC_ALMB_GetTime
		LL_RTC_ALMB_SetSecond
	SU	*LL_RTC_ALMB_ConfigTime*
		LL_RTC_ALMB_GetSecond
		LL_RTC_ALMB_GetTime
		LL_RTC_ALMB_SetSecond
	WDSEL	*LL_RTC_ALMB_DisableWeekday*
		LL_RTC_ALMB_EnableWeekday
ALRMBSSR	MASKSS	*LL_RTC_ALMB_GetSubSecondMask*
		LL_RTC_ALMB_SetSubSecondMask
	SS	*LL_RTC_ALMB_GetSubSecond*
		LL_RTC_ALMB_SetSubSecond
BKPxR	BKP	*LL_RTC_BAK_GetRegister*
		LL_RTC_BAK_SetRegister
CALR	CALM	*LL_RTC_CAL_GetMinus*
		LL_RTC_CAL_SetMinus
	CALP	*LL_RTC_CAL_IsPulseInserted*
		LL_RTC_CAL_SetPulse
	CALW16	*LL_RTC_CAL_GetPeriod*

Register	Field	Function
		LL_RTC_CAL_SetPeriod
	CALW8	*LL_RTC_CAL_GetPeriod*
		LL_RTC_CAL_SetPeriod
CR	ADD1H	*LL_RTC_TIME_IncHour*
	ALRAE	*LL_RTC_ALMA_Disable*
		LL_RTC_ALMA_Enable
	ALRAIE	*LL_RTC_DisableIT_ALRA*
		LL_RTC_EnableIT_ALRA
		LL_RTC_IsEnabledIT_ALRA
	ALRBE	*LL_RTC_ALMB_Disable*
		LL_RTC_ALMB_Enable
	ALRBIE	*LL_RTC_DisableIT_ALRB*
		LL_RTC_EnableIT_ALRB
		LL_RTC_IsEnabledIT_ALRB
	BKP	*LL_RTC_TIME_DisableDayLightStore*
		LL_RTC_TIME_EnableDayLightStore
		LL_RTC_TIME_IsDayLightStoreEnabled
	BYPSHAD	*LL_RTC_DisableShadowRegBypass*
		LL_RTC_EnableShadowRegBypass
		LL_RTC_IsShadowRegBypassEnabled
	COE	*LL_RTC_CAL_GetOutputFreq*
		LL_RTC_CAL_SetOutputFreq
	COSEL	*LL_RTC_CAL_GetOutputFreq*
		LL_RTC_CAL_SetOutputFreq
	FMT	*LL_RTC_GetHourFormat*
		LL_RTC_SetHourFormat
	OSEL	*LL_RTC_GetAlarmOutEvent*
		LL_RTC_SetAlarmOutEvent
	POL	*LL_RTC_GetOutputPolarity*
		LL_RTC_SetOutputPolarity
	REFCKON	*LL_RTC_DisableRefClock*
		LL_RTC_EnableRefClock
	SUB1H	*LL_RTC_TIME_DecHour*
	TSE	*LL_RTC_TS_Disable*
		LL_RTC_TS_Enable
	TSEDGE	*LL_RTC_TS_GetActiveEdge*

Register	Field	Function
		LL_RTC_TS_SetActiveEdge
	TSIE	*LL_RTC_DisableIT_TS*
		LL_RTC_EnableIT_TS
		LL_RTC_IsEnabledIT_TS
	WUCKSEL	*LL_RTC_WAKEUP_GetClock*
		LL_RTC_WAKEUP_SetClock
	WUTE	*LL_RTC_WAKEUP_Disable*
		LL_RTC_WAKEUP_Enable
		LL_RTC_WAKEUP_IsEnabled
	WUTIE	*LL_RTC_DisableIT_WUT*
		LL_RTC_EnableIT_WUT
		LL_RTC_IsEnabledIT_WUT
DR	DT	*LL_RTC_DATE_Config*
		LL_RTC_DATE_Get
		LL_RTC_DATE_GetDay
		LL_RTC_DATE_SetDay
	DU	*LL_RTC_DATE_Config*
		LL_RTC_DATE_Get
		LL_RTC_DATE_GetDay
		LL_RTC_DATE_SetDay
	MT	*LL_RTC_DATE_Config*
		LL_RTC_DATE_Get
		LL_RTC_DATE_GetMonth
		LL_RTC_DATE_SetMonth
	MU	*LL_RTC_DATE_Config*
		LL_RTC_DATE_Get
		LL_RTC_DATE_GetMonth
		LL_RTC_DATE_SetMonth
	WDU	*LL_RTC_DATE_Config*
		LL_RTC_DATE_Get
		LL_RTC_DATE_GetWeekDay
		LL_RTC_DATE_SetWeekDay
	YT	*LL_RTC_DATE_Config*
		LL_RTC_DATE_Get
		LL_RTC_DATE_GetYear
		LL_RTC_DATE_SetYear

Register	Field	Function
	YU	*LL_RTC_DATE_Config*
		LL_RTC_DATE_Get
		LL_RTC_DATE_GetYear
		LL_RTC_DATE_SetYear
ISR	ALRAF	*LL_RTC_ClearFlag_ALRA*
		LL_RTC_IsActiveFlag_ALRA
	ALRAWF	*LL_RTC_IsActiveFlag_ALRAW*
	ALRBF	*LL_RTC_ClearFlag_ALRB*
		LL_RTC_IsActiveFlag_ALRB
	ALRBWF	*LL_RTC_IsActiveFlag_ALRBW*
	INIT	*LL_RTC_DisableInitMode*
		LL_RTC_EnableInitMode
	INITF	*LL_RTC_IsActiveFlag_INIT*
	INITS	*LL_RTC_IsActiveFlag_INITS*
	RECALPF	*LL_RTC_IsActiveFlag_RECALP*
	RSF	*LL_RTC_ClearFlag_RS*
		LL_RTC_IsActiveFlag_RS
	SHPF	*LL_RTC_IsActiveFlag_SHP*
	TAMP1F	*LL_RTC_ClearFlag_TAMP1*
		LL_RTC_IsActiveFlag_TAMP1
	TAMP2F	*LL_RTC_ClearFlag_TAMP2*
		LL_RTC_IsActiveFlag_TAMP2
	TAMP3F	*LL_RTC_ClearFlag_TAMP3*
		LL_RTC_IsActiveFlag_TAMP3
	TSF	*LL_RTC_ClearFlag_TS*
		LL_RTC_IsActiveFlag_TS
	TSOVF	*LL_RTC_ClearFlag_TSOV*
		LL_RTC_IsActiveFlag_TSOV
	WUTF	*LL_RTC_ClearFlag_WUT*
		LL_RTC_IsActiveFlag_WUT
	WUTWF	*LL_RTC_IsActiveFlag_WUTW*
PRER	PREDIV_A	*LL_RTC_GetAsynchPrescaler*
		LL_RTC_SetAsynchPrescaler
	PREDIV_S	*LL_RTC_GetSynchPrescaler*
		LL_RTC_SetSynchPrescaler
SHIFTR	ADD1S	*LL_RTC_TIME_Synchronize*

Register	Field	Function
	SUBFS	*LL_RTC_TIME_Synchronize*
SSR	SS	*LL_RTC_TIME_GetSubSecond*
TAFCR	ALARMOUTTYPE	*LL_RTC_GetAlarmOutputType*
		LL_RTC_SetAlarmOutputType
	PC13MODE	*LL_RTC_DisablePushPullMode*
		LL_RTC_EnablePushPullMode
	PC14MODE	*LL_RTC_DisablePushPullMode*
		LL_RTC_EnablePushPullMode
	PC14VALUE	*LL_RTC_ResetOutputPin*
		LL_RTC_SetOutputPin
	PC15MODE	*LL_RTC_DisablePushPullMode*
		LL_RTC_EnablePushPullMode
	PC15VALUE	*LL_RTC_ResetOutputPin*
		LL_RTC_SetOutputPin
	TAMP1E	*LL_RTC_TAMPER_Disable*
		LL_RTC_TAMPER_Enable
	TAMP1TRG	*LL_RTC_TAMPER_DisableActiveLevel*
		LL_RTC_TAMPER_EnableActiveLevel
	TAMP2E	*LL_RTC_TAMPER_Disable*
		LL_RTC_TAMPER_Enable
	TAMP2TRG	*LL_RTC_TAMPER_DisableActiveLevel*
		LL_RTC_TAMPER_EnableActiveLevel
	TAMP3E	*LL_RTC_TAMPER_Disable*
		LL_RTC_TAMPER_Enable
	TAMP3TRG	*LL_RTC_TAMPER_DisableActiveLevel*
		LL_RTC_TAMPER_EnableActiveLevel
	TAMPFLT	*LL_RTC_TAMPER_GetFilterCount*
		LL_RTC_TAMPER_SetFilterCount
	TAMPFREQ	*LL_RTC_TAMPER_GetSamplingFreq*
		LL_RTC_TAMPER_SetSamplingFreq
	TAMPIE	*LL_RTC_DisableIT_TAMP*
		LL_RTC_EnableIT_TAMP
		LL_RTC_IsEnabledIT_TAMP
	TAMPPRCH	*LL_RTC_TAMPER_GetPrecharge*
		LL_RTC_TAMPER_SetPrecharge
	TAMPPUDIS	*LL_RTC_TAMPER_DisablePullUp*

Register	Field	Function
		LL_RTC_TAMPER_EnablePullUp
	TAMPTS	*LL_RTC_TS_DisableOnTamper*
		LL_RTC_TS_EnableOnTamper
TR	HT	*LL_RTC_TIME_Config*
		LL_RTC_TIME_Get
		LL_RTC_TIME_GetHour
		LL_RTC_TIME_SetHour
	HU	*LL_RTC_TIME_Config*
		LL_RTC_TIME_Get
		LL_RTC_TIME_GetHour
		LL_RTC_TIME_SetHour
	MNT	*LL_RTC_TIME_Config*
		LL_RTC_TIME_Get
		LL_RTC_TIME_GetMinute
		LL_RTC_TIME_SetMinute
	MNU	*LL_RTC_TIME_Config*
		LL_RTC_TIME_Get
		LL_RTC_TIME_GetMinute
		LL_RTC_TIME_SetMinute
	PM	*LL_RTC_TIME_Config*
		LL_RTC_TIME_GetFormat
		LL_RTC_TIME_SetFormat
	ST	*LL_RTC_TIME_Config*
		LL_RTC_TIME_Get
		LL_RTC_TIME_GetSecond
		LL_RTC_TIME_SetSecond
	SU	*LL_RTC_TIME_Config*
		LL_RTC_TIME_Get
		LL_RTC_TIME_GetSecond
		LL_RTC_TIME_SetSecond
TSDR	DT	*LL_RTC_TS_GetDate*
		LL_RTC_TS_GetDay
	DU	*LL_RTC_TS_GetDate*
		LL_RTC_TS_GetDay
	MT	*LL_RTC_TS_GetDate*
		LL_RTC_TS_GetMonth

Register	Field	Function
	MU	*LL_RTC_TS_GetDate*
		LL_RTC_TS_GetMonth
	WDU	*LL_RTC_TS_GetDate*
		LL_RTC_TS_GetWeekDay
TSSSR	SS	*LL_RTC_TS_GetSubSecond*
TSTR	HT	*LL_RTC_TS_GetHour*
		LL_RTC_TS_GetTime
	HU	*LL_RTC_TS_GetHour*
		LL_RTC_TS_GetTime
	MNT	*LL_RTC_TS_GetMinute*
		LL_RTC_TS_GetTime
	MNU	*LL_RTC_TS_GetMinute*
		LL_RTC_TS_GetTime
	PM	*LL_RTC_TS_GetTimeFormat*
	ST	*LL_RTC_TS_GetSecond*
		LL_RTC_TS_GetTime
	SU	*LL_RTC_TS_GetSecond*
		LL_RTC_TS_GetTime
WPR	KEY	*LL_RTC_DisableWriteProtection*
		LL_RTC_EnableWriteProtection
WUTR	WUT	*LL_RTC_WAKEUP_GetAutoReload*
		LL_RTC_WAKEUP_SetAutoReload

82.17 SPI

Table 41: Correspondence between SPI registers and SPI low-layer driver functions

Register	Field	Function
CR1	BIDIMODE	*LL_SPI_GetTransferDirection*
		LL_SPI_SetTransferDirection
	BIDIOE	*LL_SPI_GetTransferDirection*
		LL_SPI_SetTransferDirection
	BR	*LL_SPI_GetBaudRatePrescaler*
		LL_SPI_SetBaudRatePrescaler
	CPHA	*LL_SPI_GetClockPhase*
		LL_SPI_SetClockPhase
	CPOL	*LL_SPI_GetClockPolarity*
		LL_SPI_SetClockPolarity

Register	Field	Function
	CRCEN	*LL_SPI_DisableCRC*
		LL_SPI_EnableCRC
		LL_SPI_IsEnabledCRC
	CRCL	*LL_SPI_GetCRCWidth*
		LL_SPI_SetCRCWidth
	CRCNEXT	*LL_SPI_SetCRCNext*
	LSBFIRST	*LL_SPI_GetTransferBitOrder*
		LL_SPI_SetTransferBitOrder
	MSTR	*LL_SPI_GetMode*
		LL_SPI_SetMode
	RXONLY	*LL_SPI_GetTransferDirection*
		LL_SPI_SetTransferDirection
	SPE	*LL_SPI_Disable*
		LL_SPI_Enable
		LL_SPI_IsEnabled
	SSI	*LL_SPI_GetMode*
		LL_SPI_SetMode
	SSM	*LL_SPI_GetNSSMode*
		LL_SPI_SetNSSMode
CR2	DS	*LL_SPI_GetDataWidth*
		LL_SPI_SetDataWidth
	ERRIE	*LL_SPI_DisableIT_ERR*
		LL_SPI_EnableIT_ERR
		LL_SPI_IsEnabledIT_ERR
	FRF	*LL_SPI_GetStandard*
		LL_SPI_SetStandard
	FRXTH	*LL_SPI_GetRxFIFOThreshold*
		LL_SPI_SetRxFIFOThreshold
	LDMARX	*LL_SPI_GetDMAParity_RX*
		LL_SPI_SetDMAParity_RX
	LDMATX	*LL_SPI_GetDMAParity_TX*
		LL_SPI_SetDMAParity_TX
	NSSP	*LL_SPI_DisableNSSPulseMgt*
		LL_SPI_EnableNSSPulseMgt
		LL_SPI_IsEnabledNSSPulse
	RXDMAEN	*LL_SPI_DisableDMAReq_RX*

Register	Field	Function
		LL_SPI_EnableDMAReq_RX
		LL_SPI_IsEnabledDMAReq_RX
	RXNEIE	*LL_SPI_DisableIT_RXNE*
		LL_SPI_EnableIT_RXNE
		LL_SPI_IsEnabledIT_RXNE
	SSOE	*LL_SPI_GetNSSMode*
		LL_SPI_SetNSSMode
	TXDMAEN	*LL_SPI_DisableDMAReq_TX*
		LL_SPI_EnableDMAReq_TX
		LL_SPI_IsEnabledDMAReq_TX
	TXEIE	*LL_SPI_DisableIT_TXE*
		LL_SPI_EnableIT_TXE
		LL_SPI_IsEnabledIT_TXE
CRCPR	CRCPOLY	*LL_SPI_GetCRCPolynomial*
		LL_SPI_SetCRCPolynomial
DR	DR	*LL_SPI_DMA_GetRegAddr*
		LL_SPI_ReceiveData16
		LL_SPI_ReceiveData8
		LL_SPI_TransmitData16
		LL_SPI_TransmitData8
RXCRCR	RXCRC	*LL_SPI_GetRxCRC*
SR	BSY	*LL_SPI_IsActiveFlag_BSY*
	CRCERR	*LL_SPI_ClearFlag_CRCERR*
		LL_SPI_IsActiveFlag_CRCERR
	FRE	*LL_SPI_ClearFlag_FRE*
		LL_SPI_IsActiveFlag_FRE
	FRLVL	*LL_SPI_GetRxFIFOLevel*
	FTLVL	*LL_SPI_GetTxFIFOLevel*
	MODF	*LL_SPI_ClearFlag_MODF*
		LL_SPI_IsActiveFlag_MODF
	OVR	*LL_SPI_ClearFlag_OVR*
		LL_SPI_IsActiveFlag_OVR
	RXNE	*LL_SPI_IsActiveFlag_RXNE*
	TXE	*LL_SPI_IsActiveFlag_TXE*
TXCRCR	TXCRC	*LL_SPI_GetTxCRC*

82.18 SYSTEM

Table 42: Correspondence between SYSTEM registers and SYSTEM low-layer driver functions

Register	Field	Function
APB1_FZ	DBG_CAN_STOP	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_I2C1_SMBUS_TIMEOUT	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_I2C2_SMBUS_TIMEOUT	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_I2C3_SMBUS_TIMEOUT	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_IWDG_STOP	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_RTC_STOP	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_TIM12_STOP	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_TIM13_STOP	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_TIM14_STOP	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_TIM18_STOP	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_TIM2_STOP	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_TIM3_STOP	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_TIM4_STOP	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph

Register	Field	Function
	DBG_TIM5_STOP	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_TIM6_STOP	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_TIM7_STOP	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
	DBG_WWDG_STOP	*LL_DBGMCU_APB1_GRP1_FreezePeriph*
		LL_DBGMCU_APB1_GRP1_UnFreezePeriph
APB2_FZ	DBG_HRTIM1_STOP	*LL_DBGMCU_APB2_GRP1_FreezePeriph*
		LL_DBGMCU_APB2_GRP1_UnFreezePeriph
	DBG_TIM15_STOP	*LL_DBGMCU_APB2_GRP1_FreezePeriph*
		LL_DBGMCU_APB2_GRP1_UnFreezePeriph
	DBG_TIM16_STOP	*LL_DBGMCU_APB2_GRP1_FreezePeriph*
		LL_DBGMCU_APB2_GRP1_UnFreezePeriph
	DBG_TIM17_STOP	*LL_DBGMCU_APB2_GRP1_FreezePeriph*
		LL_DBGMCU_APB2_GRP1_UnFreezePeriph
	DBG_TIM19_STOP	*LL_DBGMCU_APB2_GRP1_FreezePeriph*
		LL_DBGMCU_APB2_GRP1_UnFreezePeriph
	DBG_TIM1_STOP	*LL_DBGMCU_APB2_GRP1_FreezePeriph*
		LL_DBGMCU_APB2_GRP1_UnFreezePeriph
	DBG_TIM20_STOP	*LL_DBGMCU_APB2_GRP1_FreezePeriph*
		LL_DBGMCU_APB2_GRP1_UnFreezePeriph
	DBG_TIM8_STOP	*LL_DBGMCU_APB2_GRP1_FreezePeriph*
		LL_DBGMCU_APB2_GRP1_UnFreezePeriph
DBGMCU_CR	DBG_SLEEP	*LL_DBGMCU_DisableDBGSleepMode*
		LL_DBGMCU_EnableDBGSleepMode
	DBG_STANDBY	*LL_DBGMCU_DisableDBGStandbyMode*
		LL_DBGMCU_EnableDBGStandbyMode
	DBG_STOP	*LL_DBGMCU_DisableDBGStopMode*

Register	Field	Function
		LL_DBGMCU_EnableDBGStopMode
	TRACE_IOEN	*LL_DBGMCU_GetTracePinAssignment*
		LL_DBGMCU_SetTracePinAssignment
	TRACE_MODE	*LL_DBGMCU_GetTracePinAssignment*
		LL_DBGMCU_SetTracePinAssignment
DBGMCU_IDCODE	DEV_ID	*LL_DBGMCU_GetDeviceID*
	REV_ID	*LL_DBGMCU_GetRevisionID*
FLASH_ACR	HLFCYA	*LL_FLASH_DisableHalfCycleAccess*
		LL_FLASH_EnableHalfCycleAccess
		LL_FLASH_IsHalfCycleAccessEnabled
	LATENCY	*LL_FLASH_GetLatency*
		LL_FLASH_SetLatency
	PRFTBE	*LL_FLASH_DisablePrefetch*
		LL_FLASH_EnablePrefetch
	PRFTBS	*LL_FLASH_IsPrefetchEnabled*
SYSCFG_CFGR1	ADC24_DMA_RMP	*LL_SYSCFG_SetRemapDMA_ADC*
	DAC1_TRIG1_RMP	*LL_SYSCFG_SetRemapTrigger_DAC*
	DAC2Ch1_DMA_RMP	*LL_SYSCFG_SetRemapDMA_DAC*
	ENCODER_MODE	*LL_SYSCFG_SetRemapInput_TIM*
	FPU_IE_0	*LL_SYSCFG_DisableIT_FPU_IOC*
		LL_SYSCFG_EnableIT_FPU_IOC
		LL_SYSCFG_IsEnabledIT_FPU_IOC
	FPU_IE_1	*LL_SYSCFG_DisableIT_FPU_DZC*
		LL_SYSCFG_EnableIT_FPU_DZC
		LL_SYSCFG_IsEnabledIT_FPU_DZC
	FPU_IE_2	*LL_SYSCFG_DisableIT_FPU_UFC*
		LL_SYSCFG_EnableIT_FPU_UFC
		LL_SYSCFG_IsEnabledIT_FPU_UFC
	FPU_IE_3	*LL_SYSCFG_DisableIT_FPU_OFC*
		LL_SYSCFG_EnableIT_FPU_OFC
		LL_SYSCFG_IsEnabledIT_FPU_OFC
	FPU_IE_4	*LL_SYSCFG_DisableIT_FPU_IDC*
		LL_SYSCFG_EnableIT_FPU_IDC
		LL_SYSCFG_IsEnabledIT_FPU_IDC
	FPU_IE_5	*LL_SYSCFG_DisableIT_FPU_IXC*
		LL_SYSCFG_EnableIT_FPU_IXC

Register	Field	Function
		LL_SYSCFG_IsEnabledIT_FPU_IXC
	I2C1_FMP	*LL_SYSCFG_DisableFastModePlus*
		LL_SYSCFG_EnableFastModePlus
	I2C2_FMP	*LL_SYSCFG_DisableFastModePlus*
		LL_SYSCFG_EnableFastModePlus
	I2C3_FMP	*LL_SYSCFG_DisableFastModePlus*
		LL_SYSCFG_EnableFastModePlus
	I2C_PB6_FMP	*LL_SYSCFG_DisableFastModePlus*
		LL_SYSCFG_EnableFastModePlus
	I2C_PB7_FMP	*LL_SYSCFG_DisableFastModePlus*
		LL_SYSCFG_EnableFastModePlus
	I2C_PB8_FMP	*LL_SYSCFG_DisableFastModePlus*
		LL_SYSCFG_EnableFastModePlus
	I2C_PB9_FMP	*LL_SYSCFG_DisableFastModePlus*
		LL_SYSCFG_EnableFastModePlus
	MEM_MODE	*LL_SYSCFG_GetRemapMemory*
		LL_SYSCFG_SetRemapMemory
	TIM16_DMA_RMP	*LL_SYSCFG_SetRemapDMA_TIM*
	TIM17_DMA_RMP	*LL_SYSCFG_SetRemapDMA_TIM*
	TIM18DAC2Ch1_DMA_RMP	*LL_SYSCFG_SetRemapDMA_TIM*
	TIM1_ITR3_RMP	*LL_SYSCFG_SetRemapInput_TIM*
	TIM6DAC1Ch1_DMA_RMP	*LL_SYSCFG_SetRemapDMA_DAC*
		LL_SYSCFG_SetRemapDMA_TIM
	TIM7DAC1Ch2_DMA_RMP	*LL_SYSCFG_SetRemapDMA_TIM*
	USB_IT_RMP	*LL_SYSCFG_DisableRemapIT_USB*
		LL_SYSCFG_EnableRemapIT_USB
SYSCFG_CFGR2	BYP_ADDR_PAR	*LL_SYSCFG_DisableSRAMParityCheck*
	LOCKUP_LOCK	*LL_SYSCFG_GetTIMBreakInputs*
		LL_SYSCFG_SetTIMBreakInputs
	PVD_LOCK	*LL_SYSCFG_GetTIMBreakInputs*
		LL_SYSCFG_SetTIMBreakInputs
	SRAM_PARITY_LOCK	*LL_SYSCFG_GetTIMBreakInputs*
		LL_SYSCFG_SetTIMBreakInputs
	SRAM_PE	*LL_SYSCFG_ClearFlag_SP*
		LL_SYSCFG_IsActiveFlag_SP
SYSCFG_CFGR3	ADC2_DMA_RMP	*LL_SYSCFG_SetRemapDMA_ADC*

Register	Field	Function
	DAC1_TRG3_RMP	*LL_SYSCFG_SetRemapTrigger_DAC*
	DAC1_TRG5_RMP	*LL_SYSCFG_SetRemapTrigger_DAC*
SYSCFG_EXTICR1	EXTI0	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI1	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI10	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI11	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI12	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI13	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI14	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI15	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI2	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI3	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI4	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI5	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI6	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI7	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI8	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI9	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
SYSCFG_EXTICR2	EXTI0	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource

Register	Field	Function
	EXTI1	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI10	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI11	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI12	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI13	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI14	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI15	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI2	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI3	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI4	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI5	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI6	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI7	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI8	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI9	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
SYSCFG_EXTICR3	EXTI0	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI1	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI10	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource

Register	Field	Function
	EXTI11	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI12	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI13	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI14	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI15	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI2	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI3	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI4	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI5	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI6	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI7	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI8	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI9	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
SYSCFG_EXTICR4	EXTI0	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI1	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI10	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI11	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI12	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource

Register	Field	Function
	EXTI13	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI14	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI15	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI2	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI3	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI4	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI5	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI6	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI7	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI8	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
	EXTI9	*LL_SYSCFG_GetEXTISource*
		LL_SYSCFG_SetEXTISource
SYSCFG_RCR	PAGE0	*LL_SYSCFG_EnableCCM_SRAMPageWRP*
	PAGE1	*LL_SYSCFG_EnableCCM_SRAMPageWRP*
	PAGE10	*LL_SYSCFG_EnableCCM_SRAMPageWRP*
	PAGE11	*LL_SYSCFG_EnableCCM_SRAMPageWRP*
	PAGE12	*LL_SYSCFG_EnableCCM_SRAMPageWRP*
	PAGE13	*LL_SYSCFG_EnableCCM_SRAMPageWRP*
	PAGE14	*LL_SYSCFG_EnableCCM_SRAMPageWRP*
	PAGE15	*LL_SYSCFG_EnableCCM_SRAMPageWRP*
	PAGE2	*LL_SYSCFG_EnableCCM_SRAMPageWRP*
	PAGE3	*LL_SYSCFG_EnableCCM_SRAMPageWRP*
	PAGE4	*LL_SYSCFG_EnableCCM_SRAMPageWRP*
	PAGE5	*LL_SYSCFG_EnableCCM_SRAMPageWRP*
	PAGE6	*LL_SYSCFG_EnableCCM_SRAMPageWRP*
	PAGE7	*LL_SYSCFG_EnableCCM_SRAMPageWRP*

Register	Field	Function
	PAGE8	*LL_SYSCFG_EnableCCM_SRAMPageWRP*
	PAGE9	*LL_SYSCFG_EnableCCM_SRAMPageWRP*

82.19 TIM

Table 43: Correspondence between TIM registers and TIM low-layer driver functions

Register	Field	Function
ARR	ARR	*LL_TIM_GetAutoReload*
		LL_TIM_SetAutoReload
BDTR	AOE	*LL_TIM_DisableAutomaticOutput*
		LL_TIM_EnableAutomaticOutput
		LL_TIM_IsEnabledAutomaticOutput
	BK2E	*LL_TIM_DisableBRK2*
		LL_TIM_EnableBRK2
	BK2F	*LL_TIM_ConfigBRK2*
	BK2P	*LL_TIM_ConfigBRK2*
	BKE	*LL_TIM_DisableBRK*
		LL_TIM_EnableBRK
	BKF	*LL_TIM_ConfigBRK*
	BKP	*LL_TIM_ConfigBRK*
	DTG	*LL_TIM_OC_SetDeadTime*
	LOCK	*LL_TIM_CC_SetLockLevel*
	MOE	*LL_TIM_DisableAllOutputs*
		LL_TIM_EnableAllOutputs
		LL_TIM_IsEnabledAllOutputs
	OSSI	*LL_TIM_SetOffStates*
	OSSR	*LL_TIM_SetOffStates*
CCER	CC1E	*LL_TIM_CC_DisableChannel*
		LL_TIM_CC_EnableChannel
		LL_TIM_CC_IsEnabledChannel
	CC1NE	*LL_TIM_CC_DisableChannel*
		LL_TIM_CC_EnableChannel
		LL_TIM_CC_IsEnabledChannel
	CC1NP	*LL_TIM_IC_Config*
		LL_TIM_IC_GetPolarity
		LL_TIM_IC_SetPolarity
		LL_TIM_OC_GetPolarity

Register	Field	Function
		LL_TIM_OC_SetPolarity
	CC1P	*LL_TIM_IC_Config*
		LL_TIM_IC_GetPolarity
		LL_TIM_IC_SetPolarity
		LL_TIM_OC_ConfigOutput
		LL_TIM_OC_GetPolarity
		LL_TIM_OC_SetPolarity
	CC2E	*LL_TIM_CC_DisableChannel*
		LL_TIM_CC_EnableChannel
		LL_TIM_CC_IsEnabledChannel
	CC2NE	*LL_TIM_CC_DisableChannel*
		LL_TIM_CC_EnableChannel
		LL_TIM_CC_IsEnabledChannel
	CC2NP	*LL_TIM_IC_Config*
		LL_TIM_IC_GetPolarity
		LL_TIM_IC_SetPolarity
		LL_TIM_OC_GetPolarity
		LL_TIM_OC_SetPolarity
	CC2P	*LL_TIM_IC_Config*
		LL_TIM_IC_GetPolarity
		LL_TIM_IC_SetPolarity
		LL_TIM_OC_ConfigOutput
		LL_TIM_OC_GetPolarity
		LL_TIM_OC_SetPolarity
	CC3E	*LL_TIM_CC_DisableChannel*
		LL_TIM_CC_EnableChannel
		LL_TIM_CC_IsEnabledChannel
	CC3NE	*LL_TIM_CC_DisableChannel*
		LL_TIM_CC_EnableChannel
		LL_TIM_CC_IsEnabledChannel
	CC3NP	*LL_TIM_IC_Config*
		LL_TIM_IC_GetPolarity
		LL_TIM_IC_SetPolarity
		LL_TIM_OC_GetPolarity
		LL_TIM_OC_SetPolarity
	CC3P	*LL_TIM_IC_Config*

Register	Field	Function
		LL_TIM_IC_GetPolarity
		LL_TIM_IC_SetPolarity
		LL_TIM_OC_ConfigOutput
		LL_TIM_OC_GetPolarity
		LL_TIM_OC_SetPolarity
	CC4E	*LL_TIM_CC_DisableChannel*
		LL_TIM_CC_EnableChannel
		LL_TIM_CC_IsEnabledChannel
	CC4NP	*LL_TIM_IC_Config*
		LL_TIM_IC_GetPolarity
		LL_TIM_IC_SetPolarity
	CC4P	*LL_TIM_IC_Config*
		LL_TIM_IC_GetPolarity
		LL_TIM_IC_SetPolarity
		LL_TIM_OC_ConfigOutput
		LL_TIM_OC_GetPolarity
		LL_TIM_OC_SetPolarity
	CC5E	*LL_TIM_CC_DisableChannel*
		LL_TIM_CC_EnableChannel
		LL_TIM_CC_IsEnabledChannel
	CC5P	*LL_TIM_OC_ConfigOutput*
		LL_TIM_OC_GetPolarity
		LL_TIM_OC_SetPolarity
	CC6E	*LL_TIM_CC_DisableChannel*
		LL_TIM_CC_EnableChannel
		LL_TIM_CC_IsEnabledChannel
	CC6P	*LL_TIM_OC_ConfigOutput*
		LL_TIM_OC_GetPolarity
		LL_TIM_OC_SetPolarity
CCMR1	CC1S	*LL_TIM_IC_Config*
		LL_TIM_IC_GetActiveInput
		LL_TIM_IC_SetActiveInput
		LL_TIM_OC_ConfigOutput
	CC2S	*LL_TIM_IC_Config*
		LL_TIM_IC_GetActiveInput
		LL_TIM_IC_SetActiveInput

Register	Field	Function
		LL_TIM_OC_ConfigOutput
	IC1F	*LL_TIM_IC_Config*
		LL_TIM_IC_GetFilter
		LL_TIM_IC_SetFilter
	IC1PSC	*LL_TIM_IC_Config*
		LL_TIM_IC_GetPrescaler
		LL_TIM_IC_SetPrescaler
	IC2F	*LL_TIM_IC_Config*
		LL_TIM_IC_GetFilter
		LL_TIM_IC_SetFilter
	IC2PSC	*LL_TIM_IC_Config*
		LL_TIM_IC_GetPrescaler
		LL_TIM_IC_SetPrescaler
	OC1CE	*LL_TIM_OC_DisableClear*
		LL_TIM_OC_EnableClear
		LL_TIM_OC_IsEnabledClear
	OC1FE	*LL_TIM_OC_DisableFast*
		LL_TIM_OC_EnableFast
		LL_TIM_OC_IsEnabledFast
	OC1M	*LL_TIM_OC_GetMode*
		LL_TIM_OC_SetMode
	OC1PE	*LL_TIM_OC_DisablePreload*
		LL_TIM_OC_EnablePreload
		LL_TIM_OC_IsEnabledPreload
	OC2CE	*LL_TIM_OC_DisableClear*
		LL_TIM_OC_EnableClear
		LL_TIM_OC_IsEnabledClear
	OC2FE	*LL_TIM_OC_DisableFast*
		LL_TIM_OC_EnableFast
		LL_TIM_OC_IsEnabledFast
	OC2M	*LL_TIM_OC_GetMode*
		LL_TIM_OC_SetMode
	OC2PE	*LL_TIM_OC_DisablePreload*
		LL_TIM_OC_EnablePreload
		LL_TIM_OC_IsEnabledPreload
CCMR2	CC3S	*LL_TIM_IC_Config*

Register	Field	Function
		LL_TIM_IC_GetActiveInput
		LL_TIM_IC_SetActiveInput
		LL_TIM_OC_ConfigOutput
	CC4S	*LL_TIM_IC_Config*
		LL_TIM_IC_GetActiveInput
		LL_TIM_IC_SetActiveInput
		LL_TIM_OC_ConfigOutput
	IC3F	*LL_TIM_IC_Config*
		LL_TIM_IC_GetFilter
		LL_TIM_IC_SetFilter
	IC3PSC	*LL_TIM_IC_Config*
		LL_TIM_IC_GetPrescaler
		LL_TIM_IC_SetPrescaler
	IC4F	*LL_TIM_IC_Config*
		LL_TIM_IC_GetFilter
		LL_TIM_IC_SetFilter
	IC4PSC	*LL_TIM_IC_Config*
		LL_TIM_IC_GetPrescaler
		LL_TIM_IC_SetPrescaler
	OC3CE	*LL_TIM_OC_DisableClear*
		LL_TIM_OC_EnableClear
		LL_TIM_OC_IsEnabledClear
	OC3FE	*LL_TIM_OC_DisableFast*
		LL_TIM_OC_EnableFast
		LL_TIM_OC_IsEnabledFast
	OC3M	*LL_TIM_OC_GetMode*
		LL_TIM_OC_SetMode
	OC3PE	*LL_TIM_OC_DisablePreload*
		LL_TIM_OC_EnablePreload
		LL_TIM_OC_IsEnabledPreload
	OC4CE	*LL_TIM_OC_DisableClear*
		LL_TIM_OC_EnableClear
		LL_TIM_OC_IsEnabledClear
	OC4FE	*LL_TIM_OC_DisableFast*
		LL_TIM_OC_EnableFast
		LL_TIM_OC_IsEnabledFast

Register	Field	Function
	OC4M	*LL_TIM_OC_GetMode*
		LL_TIM_OC_SetMode
	OC4PE	*LL_TIM_OC_DisablePreload*
		LL_TIM_OC_EnablePreload
		LL_TIM_OC_IsEnabledPreload
CCMR3	CC5S	*LL_TIM_OC_ConfigOutput*
	CC6S	*LL_TIM_OC_ConfigOutput*
	OC5CE	*LL_TIM_OC_DisableClear*
		LL_TIM_OC_EnableClear
		LL_TIM_OC_IsEnabledClear
	OC5FE	*LL_TIM_OC_DisableFast*
		LL_TIM_OC_EnableFast
		LL_TIM_OC_IsEnabledFast
	OC5M	*LL_TIM_OC_GetMode*
		LL_TIM_OC_SetMode
	OC5PE	*LL_TIM_OC_DisablePreload*
		LL_TIM_OC_EnablePreload
		LL_TIM_OC_IsEnabledPreload
	OC6CE	*LL_TIM_OC_DisableClear*
		LL_TIM_OC_EnableClear
		LL_TIM_OC_IsEnabledClear
	OC6FE	*LL_TIM_OC_DisableFast*
		LL_TIM_OC_EnableFast
		LL_TIM_OC_IsEnabledFast
	OC6M	*LL_TIM_OC_GetMode*
		LL_TIM_OC_SetMode
	OC6PE	*LL_TIM_OC_DisablePreload*
		LL_TIM_OC_EnablePreload
		LL_TIM_OC_IsEnabledPreload
CCR1	CCR1	*LL_TIM_IC_GetCaptureCH1*
		LL_TIM_OC_GetCompareCH1
		LL_TIM_OC_SetCompareCH1
CCR2	CCR2	*LL_TIM_IC_GetCaptureCH2*
		LL_TIM_OC_GetCompareCH2
		LL_TIM_OC_SetCompareCH2
CCR3	CCR3	*LL_TIM_IC_GetCaptureCH3*

Register	Field	Function
		LL_TIM_OC_GetCompareCH3
		LL_TIM_OC_SetCompareCH3
CCR4	CCR4	*LL_TIM_IC_GetCaptureCH4*
		LL_TIM_OC_GetCompareCH4
		LL_TIM_OC_SetCompareCH4
CCR5	CCR5	*LL_TIM_OC_SetCompareCH5*
CNT	CNT	*LL_TIM_GetCounter*
		LL_TIM_SetCounter
CR1	ARPE	*LL_TIM_DisableARRPreload*
		LL_TIM_EnableARRPreload
		LL_TIM_IsEnabledARRPreload
	CEN	*LL_TIM_DisableCounter*
		LL_TIM_EnableCounter
		LL_TIM_IsEnabledCounter
	CKD	*LL_TIM_GetClockDivision*
		LL_TIM_SetClockDivision
	CMS	*LL_TIM_GetCounterMode*
		LL_TIM_SetCounterMode
	DIR	*LL_TIM_GetCounterMode*
		LL_TIM_GetDirection
		LL_TIM_SetCounterMode
	OPM	*LL_TIM_GetOnePulseMode*
		LL_TIM_SetOnePulseMode
	UDIS	*LL_TIM_DisableUpdateEvent*
		LL_TIM_EnableUpdateEvent
		LL_TIM_IsEnabledUpdateEvent
	UIFREMAP	*LL_TIM_DisableUIFRemap*
		LL_TIM_EnableUIFRemap
	URS	*LL_TIM_GetUpdateSource*
		LL_TIM_SetUpdateSource
CR2	CCDS	*LL_TIM_CC_GetDMAReqTrigger*
		LL_TIM_CC_SetDMAReqTrigger
	CCPC	*LL_TIM_CC_DisablePreload*
		LL_TIM_CC_EnablePreload
	CCUS	*LL_TIM_CC_SetUpdate*
	MMS	*LL_TIM_SetTriggerOutput*

Register	Field	Function
	MMS2	*LL_TIM_SetTriggerOutput2*
	OIS1	*LL_TIM_OC_ConfigOutput*
		LL_TIM_OC_GetIdleState
		LL_TIM_OC_SetIdleState
	OIS2	*LL_TIM_OC_ConfigOutput*
		LL_TIM_OC_GetIdleState
		LL_TIM_OC_SetIdleState
	OIS2N	*LL_TIM_OC_GetIdleState*
		LL_TIM_OC_SetIdleState
	OIS3	*LL_TIM_OC_ConfigOutput*
		LL_TIM_OC_GetIdleState
		LL_TIM_OC_SetIdleState
	OIS3N	*LL_TIM_OC_GetIdleState*
		LL_TIM_OC_SetIdleState
	OIS4	*LL_TIM_OC_ConfigOutput*
		LL_TIM_OC_GetIdleState
		LL_TIM_OC_SetIdleState
	OIS5	*LL_TIM_OC_ConfigOutput*
		LL_TIM_OC_GetIdleState
		LL_TIM_OC_SetIdleState
	OIS6	*LL_TIM_OC_ConfigOutput*
		LL_TIM_OC_GetIdleState
		LL_TIM_OC_SetIdleState
	TI1S	*LL_TIM_IC_DisableXORCombination*
		LL_TIM_IC_EnableXORCombination
		LL_TIM_IC_IsEnabledXORCombination
DCR	DBA	*LL_TIM_ConfigDMABurst*
	DBL	*LL_TIM_ConfigDMABurst*
DIER	BIE	*LL_TIM_DisableIT_BRK*
		LL_TIM_EnableIT_BRK
		LL_TIM_IsEnabledIT_BRK
	CC1DE	*LL_TIM_DisableDMAReq_CC1*
		LL_TIM_EnableDMAReq_CC1
		LL_TIM_IsEnabledDMAReq_CC1
	CC1IE	*LL_TIM_DisableIT_CC1*
		LL_TIM_EnableIT_CC1

Register	Field	Function
		LL_TIM_IsEnabledIT_CC1
	CC2DE	*LL_TIM_DisableDMAReq_CC2*
		LL_TIM_EnableDMAReq_CC2
		LL_TIM_IsEnabledDMAReq_CC2
	CC2IE	*LL_TIM_DisableIT_CC2*
		LL_TIM_EnableIT_CC2
		LL_TIM_IsEnabledIT_CC2
	CC3DE	*LL_TIM_DisableDMAReq_CC3*
		LL_TIM_EnableDMAReq_CC3
		LL_TIM_IsEnabledDMAReq_CC3
	CC3IE	*LL_TIM_DisableIT_CC3*
		LL_TIM_EnableIT_CC3
		LL_TIM_IsEnabledIT_CC3
	CC4DE	*LL_TIM_DisableDMAReq_CC4*
		LL_TIM_EnableDMAReq_CC4
		LL_TIM_IsEnabledDMAReq_CC4
	CC4IE	*LL_TIM_DisableIT_CC4*
		LL_TIM_EnableIT_CC4
		LL_TIM_IsEnabledIT_CC4
	COMDE	*LL_TIM_DisableDMAReq_COM*
		LL_TIM_EnableDMAReq_COM
		LL_TIM_IsEnabledDMAReq_COM
	COMIE	*LL_TIM_DisableIT_COM*
		LL_TIM_EnableIT_COM
		LL_TIM_IsEnabledIT_COM
	TDE	*LL_TIM_DisableDMAReq_TRIG*
		LL_TIM_EnableDMAReq_TRIG
		LL_TIM_IsEnabledDMAReq_TRIG
	TIE	*LL_TIM_DisableIT_TRIG*
		LL_TIM_EnableIT_TRIG
		LL_TIM_IsEnabledIT_TRIG
	UDE	*LL_TIM_DisableDMAReq_UPDATE*
		LL_TIM_EnableDMAReq_UPDATE
		LL_TIM_IsEnabledDMAReq_UPDATE
	UIE	*LL_TIM_DisableIT_UPDATE*
		LL_TIM_EnableIT_UPDATE

Register	Field	Function
		LL_TIM_IsEnabledIT_UPDATE
EGR	B2G	*LL_TIM_GenerateEvent_BRK2*
	BG	*LL_TIM_GenerateEvent_BRK*
	CC1G	*LL_TIM_GenerateEvent_CC1*
	CC2G	*LL_TIM_GenerateEvent_CC2*
	CC3G	*LL_TIM_GenerateEvent_CC3*
	CC4G	*LL_TIM_GenerateEvent_CC4*
	COMG	*LL_TIM_GenerateEvent_COM*
	TG	*LL_TIM_GenerateEvent_TRIG*
	UG	*LL_TIM_GenerateEvent_UPDATE*
PSC	PSC	*LL_TIM_GetPrescaler*
		LL_TIM_SetPrescaler
RCR	REP	*LL_TIM_GetRepetitionCounter*
		LL_TIM_SetRepetitionCounter
SMCR	ECE	*LL_TIM_DisableExternalClock*
		LL_TIM_EnableExternalClock
		LL_TIM_IsEnabledExternalClock
		LL_TIM_SetClockSource
	ETF	*LL_TIM_ConfigETR*
	ETP	*LL_TIM_ConfigETR*
	ETPS	*LL_TIM_ConfigETR*
	MSM	*LL_TIM_DisableMasterSlaveMode*
		LL_TIM_EnableMasterSlaveMode
		LL_TIM_IsEnabledMasterSlaveMode
	OCCS	*LL_TIM_SetOCRefClearInputSource*
	SMS	*LL_TIM_SetClockSource*
		LL_TIM_SetEncoderMode
		LL_TIM_SetSlaveMode
	TS	*LL_TIM_SetTriggerInput*
SR	B2IF	*LL_TIM_ClearFlag_BRK2*
		LL_TIM_IsActiveFlag_BRK2
	BIF	*LL_TIM_ClearFlag_BRK*
		LL_TIM_IsActiveFlag_BRK
	CC1IF	*LL_TIM_ClearFlag_CC1*
		LL_TIM_IsActiveFlag_CC1
	CC1OF	*LL_TIM_ClearFlag_CC1OVR*

Register	Field	Function
		LL_TIM_IsActiveFlag_CC1OVR
	CC2IF	*LL_TIM_ClearFlag_CC2*
		LL_TIM_IsActiveFlag_CC2
	CC2OF	*LL_TIM_ClearFlag_CC2OVR*
		LL_TIM_IsActiveFlag_CC2OVR
	CC3IF	*LL_TIM_ClearFlag_CC3*
		LL_TIM_IsActiveFlag_CC3
	CC3OF	*LL_TIM_ClearFlag_CC3OVR*
		LL_TIM_IsActiveFlag_CC3OVR
	CC4IF	*LL_TIM_ClearFlag_CC4*
		LL_TIM_IsActiveFlag_CC4
	CC4OF	*LL_TIM_ClearFlag_CC4OVR*
		LL_TIM_IsActiveFlag_CC4OVR
	CC5IF	*LL_TIM_ClearFlag_CC5*
		LL_TIM_IsActiveFlag_CC5
	CC6IF	*LL_TIM_ClearFlag_CC6*
		LL_TIM_IsActiveFlag_CC6
	COMIF	*LL_TIM_ClearFlag_COM*
		LL_TIM_IsActiveFlag_COM
	TIF	*LL_TIM_ClearFlag_TRIG*
		LL_TIM_IsActiveFlag_TRIG
	UIF	*LL_TIM_ClearFlag_UPDATE*
		LL_TIM_IsActiveFlag_UPDATE
TIM1_OR	ETR_RMP	*LL_TIM_SetRemap*
TIM20_OR	ETR_RMP	*LL_TIM_SetRemap*
TIM8_OR	ETR_RMP	*LL_TIM_SetRemap*

82.20 USART

Table 44: Correspondence between USART registers and USART low-layer driver functions

Register	Field	Function
BRR	BRR	*LL_USART_GetBaudRate*
		LL_USART_SetBaudRate
CR1	CMIE	*LL_USART_DisableIT_CM*
		LL_USART_EnableIT_CM
		LL_USART_IsEnabledIT_CM
	DEAT	*LL_USART_GetDEAssertionTime*

Register	Field	Function
		LL_USART_SetDEAssertionTime
	DEDT	*LL_USART_GetDEDeassertionTime*
		LL_USART_SetDEDeassertionTime
	EOBIE	*LL_USART_DisableIT_EOB*
		LL_USART_EnableIT_EOB
		LL_USART_IsEnabledIT_EOB
	IDLEIE	*LL_USART_DisableIT_IDLE*
		LL_USART_EnableIT_IDLE
		LL_USART_IsEnabledIT_IDLE
	M0	*LL_USART_ConfigCharacter*
		LL_USART_GetDataWidth
		LL_USART_SetDataWidth
	M1	*LL_USART_ConfigCharacter*
		LL_USART_GetDataWidth
		LL_USART_SetDataWidth
	MME	*LL_USART_DisableMuteMode*
		LL_USART_EnableMuteMode
		LL_USART_IsEnabledMuteMode
	OVER8	*LL_USART_GetOverSampling*
		LL_USART_SetOverSampling
	PCE	*LL_USART_ConfigCharacter*
		LL_USART_GetParity
		LL_USART_SetParity
	PEIE	*LL_USART_DisableIT_PE*
		LL_USART_EnableIT_PE
		LL_USART_IsEnabledIT_PE
	PS	*LL_USART_ConfigCharacter*
		LL_USART_GetParity
		LL_USART_SetParity
	RE	*LL_USART_DisableDirectionRx*
		LL_USART_EnableDirectionRx
		LL_USART_GetTransferDirection
		LL_USART_SetTransferDirection
	RTOIE	*LL_USART_DisableIT_RTO*
		LL_USART_EnableIT_RTO
		LL_USART_IsEnabledIT_RTO

Register	Field	Function
	RXNEIE	*LL_USART_DisableIT_RXNE*
		LL_USART_EnableIT_RXNE
		LL_USART_IsEnabledIT_RXNE
	TCIE	*LL_USART_DisableIT_TC*
		LL_USART_EnableIT_TC
		LL_USART_IsEnabledIT_TC
	TE	*LL_USART_DisableDirectionTx*
		LL_USART_EnableDirectionTx
		LL_USART_GetTransferDirection
		LL_USART_SetTransferDirection
	TXEIE	*LL_USART_DisableIT_TXE*
		LL_USART_EnableIT_TXE
		LL_USART_IsEnabledIT_TXE
	UE	*LL_USART_Disable*
		LL_USART_Enable
		LL_USART_IsEnabled
	UESM	*LL_USART_DisableInStopMode*
		LL_USART_EnableInStopMode
		LL_USART_IsEnabledInStopMode
	WAKE	*LL_USART_GetWakeUpMethod*
		LL_USART_SetWakeUpMethod
CR2	ABREN	*LL_USART_DisableAutoBaudRate*
		LL_USART_EnableAutoBaudRate
		LL_USART_IsEnabledAutoBaud
	ABRMODE	*LL_USART_GetAutoBaudRateMode*
		LL_USART_SetAutoBaudRateMode
	ADD	*LL_USART_ConfigNodeAddress*
		LL_USART_GetNodeAddress
	ADDM7	*LL_USART_ConfigNodeAddress*
		LL_USART_GetNodeAddressLen
	CLKEN	*LL_USART_ConfigAsyncMode*
		LL_USART_ConfigHalfDuplexMode
		LL_USART_ConfigIrdaMode
		LL_USART_ConfigLINMode
		LL_USART_ConfigMultiProcessMode
		LL_USART_ConfigSmartcardMode

Register	Field	Function
		LL_USART_ConfigSyncMode
		LL_USART_DisableSCLKOutput
		LL_USART_EnableSCLKOutput
		LL_USART_IsEnabledSCLKOutput
	CPHA	*LL_USART_ConfigClock*
		LL_USART_GetClockPhase
		LL_USART_SetClockPhase
	CPOL	*LL_USART_ConfigClock*
		LL_USART_GetClockPolarity
		LL_USART_SetClockPolarity
	DATAINV	*LL_USART_GetBinaryDataLogic*
		LL_USART_SetBinaryDataLogic
	LBCL	*LL_USART_ConfigClock*
		LL_USART_GetLastClkPulseOutput
		LL_USART_SetLastClkPulseOutput
	LBDIE	*LL_USART_DisableIT_LBD*
		LL_USART_EnableIT_LBD
		LL_USART_IsEnabledIT_LBD
	LBDL	*LL_USART_GetLINBrkDetectionLen*
		LL_USART_SetLINBrkDetectionLen
	LINEN	*LL_USART_ConfigAsyncMode*
		LL_USART_ConfigHalfDuplexMode
		LL_USART_ConfigIrdaMode
		LL_USART_ConfigLINMode
		LL_USART_ConfigMultiProcessMode
		LL_USART_ConfigSmartcardMode
		LL_USART_ConfigSyncMode
		LL_USART_DisableLIN
		LL_USART_EnableLIN
		LL_USART_IsEnabledLIN
	MSBFIRST	*LL_USART_GetTransferBitOrder*
		LL_USART_SetTransferBitOrder
	RTOEN	*LL_USART_DisableRxTimeout*
		LL_USART_EnableRxTimeout
		LL_USART_IsEnabledRxTimeout
	RXINV	*LL_USART_GetRXPinLevel*

Register	Field	Function
		LL_USART_SetRXPinLevel
	STOP	*LL_USART_ConfigCharacter*
		LL_USART_ConfigIrdaMode
		LL_USART_ConfigLINMode
		LL_USART_ConfigSmartcardMode
		LL_USART_GetStopBitsLength
		LL_USART_SetStopBitsLength
	SWAP	*LL_USART_GetTXRXSwap*
		LL_USART_SetTXRXSwap
	TXINV	*LL_USART_GetTXPinLevel*
		LL_USART_SetTXPinLevel
CR3	CTSE	*LL_USART_DisableCTSHWFlowCtrl*
		LL_USART_EnableCTSHWFlowCtrl
		LL_USART_GetHWFlowCtrl
		LL_USART_SetHWFlowCtrl
	CTSIE	*LL_USART_DisableIT_CTS*
		LL_USART_EnableIT_CTS
		LL_USART_IsEnabledIT_CTS
	DDRE	*LL_USART_DisableDMADeactOnRxErr*
		LL_USART_EnableDMADeactOnRxErr
		LL_USART_IsEnabledDMADeactOnRxErr
	DEM	*LL_USART_DisableDEMode*
		LL_USART_EnableDEMode
		LL_USART_IsEnabledDEMode
	DEP	*LL_USART_GetDESignalPolarity*
		LL_USART_SetDESignalPolarity
	DMAR	*LL_USART_DisableDMAReq_RX*
		LL_USART_EnableDMAReq_RX
		LL_USART_IsEnabledDMAReq_RX
	DMAT	*LL_USART_DisableDMAReq_TX*
		LL_USART_EnableDMAReq_TX
		LL_USART_IsEnabledDMAReq_TX
	EIE	*LL_USART_DisableIT_ERROR*
		LL_USART_EnableIT_ERROR
		LL_USART_IsEnabledIT_ERROR
	HDSEL	*LL_USART_ConfigAsyncMode*

Register	Field	Function
		LL_USART_ConfigHalfDuplexMode
		LL_USART_ConfigIrdaMode
		LL_USART_ConfigLINMode
		LL_USART_ConfigMultiProcessMode
		LL_USART_ConfigSmartcardMode
		LL_USART_ConfigSyncMode
		LL_USART_DisableHalfDuplex
		LL_USART_EnableHalfDuplex
		LL_USART_IsEnabledHalfDuplex
	IREN	*LL_USART_ConfigAsyncMode*
		LL_USART_ConfigHalfDuplexMode
		LL_USART_ConfigIrdaMode
		LL_USART_ConfigLINMode
		LL_USART_ConfigMultiProcessMode
		LL_USART_ConfigSyncMode
		LL_USART_DisableIrda
		LL_USART_EnableIrda
		LL_USART_IsEnabledIrda
	IRLP	*LL_USART_GetIrdaPowerMode*
		LL_USART_SetIrdaPowerMode
	NACK	*LL_USART_DisableSmartcardNACK*
		LL_USART_EnableSmartcardNACK
		LL_USART_IsEnabledSmartcardNACK
	ONEBIT	*LL_USART_DisableOneBitSamp*
		LL_USART_EnableOneBitSamp
		LL_USART_IsEnabledOneBitSamp
	OVRDIS	*LL_USART_DisableOverrunDetect*
		LL_USART_EnableOverrunDetect
		LL_USART_IsEnabledOverrunDetect
	RTSE	*LL_USART_DisableRTSHWFlowCtrl*
		LL_USART_EnableRTSHWFlowCtrl
		LL_USART_GetHWFlowCtrl
		LL_USART_SetHWFlowCtrl
	SCARCNT	*LL_USART_GetSmartcardAutoRetryCount*
		LL_USART_SetSmartcardAutoRetryCount
	SCEN	*LL_USART_ConfigAsyncMode*

Register	Field	Function
		LL_USART_ConfigHalfDuplexMode
		LL_USART_ConfigIrdaMode
		LL_USART_ConfigLINMode
		LL_USART_ConfigMultiProcessMode
		LL_USART_ConfigSmartcardMode
		LL_USART_ConfigSyncMode
		LL_USART_DisableSmartcard
		LL_USART_EnableSmartcard
		LL_USART_IsEnabledSmartcard
	WUFIE	*LL_USART_DisableIT_WKUP*
		LL_USART_EnableIT_WKUP
		LL_USART_IsEnabledIT_WKUP
	WUS	*LL_USART_GetWKUPType*
		LL_USART_SetWKUPType
GTPR	GT	*LL_USART_GetSmartcardGuardTime*
		LL_USART_SetSmartcardGuardTime
	PSC	*LL_USART_GetIrdaPrescaler*
		LL_USART_GetSmartcardPrescaler
		LL_USART_SetIrdaPrescaler
		LL_USART_SetSmartcardPrescaler
ICR	CMCF	*LL_USART_ClearFlag_CM*
	CTSCF	*LL_USART_ClearFlag_nCTS*
	EOBCF	*LL_USART_ClearFlag_EOB*
	FECF	*LL_USART_ClearFlag_FE*
	IDLECF	*LL_USART_ClearFlag_IDLE*
	LBDCF	*LL_USART_ClearFlag_LBD*
	NCF	*LL_USART_ClearFlag_NE*
	ORECF	*LL_USART_ClearFlag_ORE*
	PECF	*LL_USART_ClearFlag_PE*
	RTOCF	*LL_USART_ClearFlag_RTO*
	TCCF	*LL_USART_ClearFlag_TC*
	WUCF	*LL_USART_ClearFlag_WKUP*
ISR	ABRE	*LL_USART_IsActiveFlag_ABRE*
	ABRF	*LL_USART_IsActiveFlag_ABR*
	BUSY	*LL_USART_IsActiveFlag_BUSY*
	CMF	*LL_USART_IsActiveFlag_CM*

Register	Field	Function
	CTS	*LL_USART_IsActiveFlag_CTS*
	CTSIF	*LL_USART_IsActiveFlag_nCTS*
	EOBF	*LL_USART_IsActiveFlag_EOB*
	FE	*LL_USART_IsActiveFlag_FE*
	IDLE	*LL_USART_IsActiveFlag_IDLE*
	LBDF	*LL_USART_IsActiveFlag_LBD*
	NF	*LL_USART_IsActiveFlag_NE*
	ORE	*LL_USART_IsActiveFlag_ORE*
	PE	*LL_USART_IsActiveFlag_PE*
	REACK	*LL_USART_IsActiveFlag_REACK*
	RTOF	*LL_USART_IsActiveFlag_RTO*
	RWU	*LL_USART_IsActiveFlag_RWU*
	RXNE	*LL_USART_IsActiveFlag_RXNE*
	SBKF	*LL_USART_IsActiveFlag_SBK*
	TC	*LL_USART_IsActiveFlag_TC*
	TEACK	*LL_USART_IsActiveFlag_TEACK*
	TXE	*LL_USART_IsActiveFlag_TXE*
	WUF	*LL_USART_IsActiveFlag_WKUP*
RDR	RDR	*LL_USART_DMA_GetRegAddr*
		LL_USART_ReceiveData8
		LL_USART_ReceiveData9
RQR	ABRRQ	*LL_USART_RequestAutoBaudRate*
	MMRQ	*LL_USART_RequestEnterMuteMode*
	RXFRQ	*LL_USART_RequestRxDataFlush*
	SBKRQ	*LL_USART_RequestBreakSending*
	TXFRQ	*LL_USART_RequestTxDataFlush*
RTOR	BLEN	*LL_USART_GetBlockLength*
		LL_USART_SetBlockLength
	RTO	*LL_USART_GetRxTimeout*
		LL_USART_SetRxTimeout
TDR	TDR	*LL_USART_DMA_GetRegAddr*
		LL_USART_TransmitData8
		LL_USART_TransmitData9

82.21 WWDG

Table 45: Correspondence between WWDG registers and WWDG low-layer driver functions

Register	Field	Function
CFR	EWI	*LL_WWDG_EnableIT_EWKUP*
		LL_WWDG_IsEnabledIT_EWKUP
	W	*LL_WWDG_GetWindow*
		LL_WWDG_SetWindow
	WDGTB	*LL_WWDG_GetPrescaler*
		LL_WWDG_SetPrescaler
CR	T	*LL_WWDG_GetCounter*
		LL_WWDG_SetCounter
	WDGA	*LL_WWDG_Enable*
		LL_WWDG_IsEnabled
SR	EWIF	*LL_WWDG_ClearFlag_EWKUP*
		LL_WWDG_IsActiveFlag_EWKUP

83 FAQs

General subjects

Why should I use the HAL drivers?

There are many advantages in using the HAL drivers:

- Ease of use: you can use the HAL drivers to configure and control any peripheral embedded within your STM32 MCU without prior in-depth knowledge of the product.
- HAL drivers provide intuitive and ready-to-use APIs to configure the peripherals and support polling, interrupt and DMA programming model to accommodate all application requirements, thus allowing the end-user to build a complete application by calling a few APIs.
- Higher level of abstraction than a standard peripheral library allowing to transparently manage:
  - Data transfers and processing using blocking mode (polling) or non-blocking mode (interrupt or DMA)
  - Error management through peripheral error detection and timeout mechanism.
- Generic architecture speeding up initialization and porting, thus allowing customers to focus on innovation.
- Generic set of APIs with full compatibility across the STM32 series/lines, to ease the porting task between STM32 MCUs.
- The APIs provided within the HAL drivers are feature-oriented and do not require in-depth knowledge of peripheral operation.
- The APIs provided are modular. They include initialization, IO operation and control functions. The end-user has to call init function, then start the process by calling one IO operation functions (write, read, transmit, receive, …). Most of the peripherals have the same architecture.
- The number of functions required to build a complete and useful application is very reduced. As an example, to build a UART communication process, the user only has to call HAL_UART_Init() then HAL_UART_Transmit() or HAL_UART_Receive().

Which STM32F3 devices are supported by the HAL drivers?

The HAL drivers are developed to support all STM32F3 devices. To ensure compatibility between all devices and portability with others series and lines, the API is split into the generic and the extension APIs . For more details, please refer to *Table 5: "List of devices supported by HAL drivers"*.

What is the cost of using HAL drivers in term of code size and performance?

Like generic architecture drivers, the HAL drivers may induce firmware overhead.

This is due to the high abstraction level and ready-to-use APIs which allow data transfers, errors management and offloads the user application from implementation details.

Architecture

How many files should I modify to configure the HAL drivers?

Only one file needs to be modified: stm32f3xx_hal_conf.h. You can modify this file by disabling unused modules, or adjusting some parameters (i.e. HSE value, System configuration, …)

A template is provided in the HAL driver folders (stm32f3xx_hal_conf_template.h).

Which header files should I include in my application to use the HAL drivers?

Only stm32f3xx_hal.h file has to be included.

What is the difference between stm32f3xx_hal_ppp.c/.h and stm32f3xx_hal_ppp_*ex*.c/.h?

The HAL driver architecture supports common features across STM32 series/lines. To support specific features, the drivers are split into two groups.

- The generic APIs (stm32f3xx_hal_ppp.c): It includes the common set of APIs across all the STM32 product lines
- The extension APIs (stm32f3xx_hal_ppp_ex.c): It includes the specific APIs for specific device part number or family.

Initialization and I/O operation functions

How do I configure the system clock?

Unlike the standard library, the system clock configuration is not performed in CMSIS drivers file (system_stm32f3xx.c) but in the main user application by calling the two main functions, HAL_RCC_OscConfig() and HAL_RCC_ClockConfig(). It can be modified in any user application section.

What is the purpose of the *PPP_HandleTypeDef *pHandle* structure located in each driver in addition to the Initialization structure

PPP_HandleTypeDef *pHandle is the main structure implemented in the HAL drivers. It handles the peripheral configuration and registers, and embeds all the structures and variables required to follow the peripheral device flow (pointer to buffer, Error code, State,...)

However, this structure is not required to service peripherals such as GPIO, SYSTICK, PWR, and RCC.

What is the purpose of HAL_PPP_MspInit() and HAL_PPP_MspDeInit() functions?

These function are called within HAL_PPP_Init() and HAL_PPP_DeInit(), respectively. They are used to perform the low level Initialization/de-initialization related to the additional hardware resources (RCC, GPIO, NVIC and DMA).

These functions are declared in stm32f3xx_hal_msp.c. A template is provided in the HAL driver folders (stm32f3xx_hal_msp_template.c).

When and how should I use callbacks functions (functions declared with the attribute *__weak*)?

Use callback functions for the I/O operations used in DMA or interrupt mode. The PPP process complete callbacks are called to inform the user about process completion in real-time event mode (interrupts).

The Errors callbacks are called when a processing error occurs in DMA or interrupt mode. These callbacks are customized by the user to add user proprietary code. They can be declared in the application. Note that the same process completion callbacks are used for DMA and interrupt mode.

Is it mandatory to use HAL_Init() function at the beginning of the user application?

It is mandatory to use HAL_Init() function to enable the system configuration (Prefetch, Data instruction cache,…), configure the systTick and the NVIC priority grouping and the hardware low level initialization.

The SysTick configuration shall be adjusted by calling ***HAL_RCC_ClockConfig()*** function, to obtain 1 ms whatever the system clock.

Why do I need to configure the SysTick timer to use the HAL drivers?

The SysTick timer is configured to be used to generate variable increments by calling *HAL_IncTick()* function in Systick ISR and retrieve the value of this variable by calling *HAL_GetTick()* function.

The call HAL_GetTick() function is mandatory when using HAL drivers with Polling Process or when using HAL_Delay().

Why is the SysTick timer configured to have 1 ms?

This is mandatory to ensure correct IO operation in particular for polling mode operation where the 1 ms is required as timebase.

Could HAL_Delay() function block my application under certain conditions?

Care must be taken when using HAL_Delay() since this function provides accurate delay based on a variable incremented in SysTick ISR. This implies that if HAL_Delay() is called from a peripheral ISR process, then the SysTick interrupt must have higher priority (numerically lower) than the peripheral interrupt, otherwise the caller ISR process will be blocked. Use HAL_NVIC_SetPriority() function to change the SysTick interrupt priority.

What programming model sequence should I follow to use HAL drivers ?

Follow the sequence below to use the APIs provided in the HAL drivers:

1. Call HAL_Init() function to initialize the system (data cache, NVIC priority,…).
2. Initialize the system clock by calling HAL_RCC_OscConfig() followed by HAL_RCC_ClockConfig().
3. Add HAL_IncTick() function under SysTick_Handler() ISR function to enable polling process when using HAL_Delay() function
4. Start initializing your peripheral by calling HAL_PPP_Init().
5. Implement the hardware low level initialization (Peripheral clock, GPIO, DMA,..) by calling HAL_PPP_MspInit() in stm32f3xx_hal_msp.c
6. Start your process operation by calling IO operation functions.

What is the purpose of HAL_PPP_IRQHandler() function and when should I use it?

HAL_PPP_IRQHandler() is used to handle interrupt process. It is called under PPP_IRQHandler() function in stm32f3xx_it.c. In this case, the end-user has to implement only the callbacks functions (prefixed by __weak) to perform the appropriate action when an interrupt is detected. Advanced users can implement their own code in PPP_IRQHandler() without calling HAL_PPP_IRQHandler().

Can I use directly the macros defined in stm32f3xx_hal_ppp.h ?

Yes, you can: a set of macros is provided with the APIs. They allow accessing directly some specific features using peripheral flags.

Where must PPP_HandleTypedef structure peripheral handler be declared?

PPP_HandleTypedef structure peripheral handler must be declared as a global variable, so that all the structure fields are set to 0 by default. In this way, the peripheral handler default state are set to HAL_PPP_STATE_RESET, which is the default state for each peripheral after a system reset.

84 Revision history

Table 46: Document revision history

Date	Revision	Changes
05-Dec-2014	1	Initial release.
04-May-2015	2	Updated Common macros in *Section 2.9: "HAL common resources"*. Updated *Figure 7: "HAL driver model"*. Updated *Section 27.1.1: "I2S Extended features"*.
19-Jan-2016	3	Added LSE_STARTUP_TIMEOUT in *Table 11: "Define statements used for HAL configuration"* Performed HAL API alignment (macros/functions/constants renaming). Updated *Section 7: "HAL ADC Extension Driver"*: • Added HAL_ADCEx_RegularStop(), HAL_ADCEx_RegularStop_IT() and HAL_ADCEx_RegularStop_DMA() functions to perform ADC group regular conversion stop while ADC group injected can remain with conversion on going. • Added HAL_ADCEx_LevelOutOfWindow2Callback() and HAL_ADCEx_LevelOutOfWindow3Callback() functions. • Updated ADC multimode for devices with several ADC instances: Mixed configuration are now taken into account: ADC group regular in multimode, ADC group injected in independent mode (or the opposite). • Updated ADC group injected use-case when the auto-wait low-power feature is used. Updated *Section 8: "HAL CAN Generic Driver"*: modified CanTxMsgTypeDef/CanRxMsgTypeDef structures Data field. Updated *Section 9: "HAL CEC Generic Driver"*: • Splitted HAL_CEC_ErrorTypeDef structure into separate define statements. • Added definitions of CEC flags (CEC_FLAG_TXACKE,…). • Add definitions of CEC interrupts (CEC_IT_TXACKE,…). • Renamed CEC_ISR_XXX into CEC_FLAG_XXX. • Renamed CEC_IER_XXX into CEC_IT_XXX. • Added new API HAL_CEC_GetReceivedFrameSize to get the size of the received frame. Updated *Section 12: "HAL CORTEX Generic Driver"*: • Replaced __HAL_CORTEX_SYSTICKCLK_CONFIG macro by HAL_SYSTICK_CLKSourceConfig() function. • Added new CORTEX MPU APIs: HAL_MPU_ConfigRegion(), HAL_MPU_Disable() and HAL_MPU_Enable(). • Added APIs to manage set/reset of SLEEPONEXIT and SEVONPEND bits in SCR register. Updated *Section 15: "HAL DAC Generic Driver"*: added DAC_OUTPUTSWITCH_ENABLE constant. Updated *Section 20: "HAL FLASH Extension Driver"*: added FLASH API HAL_FLASHEx_OBGetUserData() to get the value saved in User data option byte. Updated *Section 21: "HAL GPIO Generic Driver"*: updated GPIO Output Speed naming to ensure HAL full compatibility. Updated *Section 28: "HAL IRDA Generic Driver"*: • Implemented the __HAL_UART_FLUSH_DRREGISTER macro, which is required by the In-Application Programming (IAP) using USART.

Date	Revision	Changes
19-Jan-2016	3 (continued)	Updated *Section 40: "HAL RCC Generic Driver"*: • Renamed __HAL_RCC_MCO_CONFIG into __HAL_RCC_MCO1_CONFIG. Updated *Section 41: "HAL RCC Extension Driver"*: updated RCC API functions to add HAL_RCCEx_GetPeriphCLKFreq interface. Updated *Section 42: "HAL RTC Generic Driver"*: • Updated definition of __HAL_RTC_TAMPER_TIMESTAMP_EXTI_GET_FLAG. Aligned different implementations of HAL_RTC_XXIRQHandler().Updated *Section 44: "HAL SDADC Generic Driver"*: added new __HAL_SDADC_ENABLE_IT(), __HAL_SDADC_GET_IT_SOURCE() and __HAL_SDADC_GET_FLAG() macros.Updated *Section 45: "HAL SMARTCARD Generic Driver"*: • Implemented the __HAL_UART_FLUSH_DRREGISTER macro, which is required by the In-Application Programming (IAP) using USART. • Added missing IDLE flag management. Updated *Section 48: "HAL SPI Generic Driver"*: added HAL_SPI_Get Error() function. Updated *Section 51: "HAL TIM Generic Driver"*: • Removed HAL_TIM_SlaveConfigSynchronization_DMA() from HAL_TIM API functions. • Added TIM edge modification macros: TIM_SET_CAPTUREPOLARITY(), TIM_RESET_CAPTUREPOLARITY() and __HAL_TIM_SET_CAPTUREPOLARITY. • Added URS_ENABLE, URS_DISABLE macros. • Added new HAL_TIM_SlaveConfigSynchronization_IT() function to handle the trigger interrupt activation. Updated *Section 54: "HAL UART Generic Driver"* and *Section 56: "HAL USART Generic Driver"*: • Implemented the __HAL_UART_FLUSH_DRREGISTER macro, which is required by the In-Application Programming (IAP) using the USART. Updated IT macro management in *Section 58: "HAL WWDG Generic Driver"*.

Date	Revision	Changes
06-Jun-2016	4	Changed GPIO_SPEED_LOW, GPIO_SPEED_MEDIUM, GPIO_SPEED_HIGH into GPIO_SPEED_FREQ_LOW, GPIO_SPEED_FREQ_MEDIUM, GPIO_SPEED_FREQ_HIGH in section *Section 2.11.2: "GPIOs"*. **HAL generic**: • Updated HAL driver compliancy with MISRA C 2004 rules. • Updated HAL weak empty callbacks to prevent unused argument compilation warnings. **HAL**: changed uwTick to global to allow overwrite of HAL_IncTick(). **HAL COMP**: modified COMP_INVERTINGINPUT_SELECTION() macro as COMP inverting inputs selection, depends on COMPx instance. **HAL DMA**: • Added __HAL_DMA_GET_COUNTER() macro that returns the number of remaining data units in the current DMA Channel transfer. • Provided new function HAL_DMA_Abort_IT() to abort current DMA transfer under interrupt mode without polling for DMA enable bit. **HAL GPIO**: Added macros to manage Fast Mode Plus on GPIOs. **HAL I2C**: • Aligned I2C driver with new state machine definition. • Updated __HAL_I2C_DISABLE_IT macro. • Added support for repeated start feature in multimaster mode (this feature allows the master to maintain I2C communications with slave). • Modified HAL_I2C_Master_Transmit to allow sending data of size 0. • Updated DMA Abort management: used new HAL_DMA_Abort() function and called HAL_I2C_ErrorCallback() when errors occur during DMA transfer. **HAL I2S**: removed support for I2S full-duplex feature on STM32F301x8 device. **HAL RCC**: • Optimized HAL_RCC_ClockConfig() and HAL_RCCEx_PeriphCLKConfig functions. • Updated HAL_RCC_OscConfig() function (Reset HSEON/LSEON and HSEBYP/LSEBYP bits before configuring the HSE/LSE). • Modified AHBPrescTable and APBPrescTable in HAL. • Removed RCC_CFGR_PLLNODIV bit definition from STM32F358xx, STM32F303xC and STM32F302xC devices. • Removed RCC_CSR_VREGRSTF bit definition in RCC_CSR register for STM32F303xC and STM32F303xE devices. • Removed USART2 and USART3 clock switch in RCC_CFGR3 register not supported by STM32F303x8, STM32F334x8 and STM32F328xx devices and for STM32F301x8, STM32F302x8 and STM32F318xx devices. • Removed RCC_CSR_V18PWRRSTF bit definition in RCC_CSR register not supported by STM32F318xx, STM32F328xx, STM32F358xx, STM32F378xx and STM32F398xx devices. • Removed flag RCC_FLAG_RMV which is write only. • Added RCC_CFGR_xxxx_BITNUMBER definitions to ensure portability between STM32 series. • Updated HAL_RCC_OscConfig() function to enable PWR only if necessary for LSE configuration.

Date	Revision	Changes
06-Jun-2016	4 (continued)	**HAL RTC**: added missing Tamper definitions (RTC_TAFCR register). **HAL SMARTCARD**: • Modified SMARTCARD_Receive_IT() to execute the RX flush request only when no data are read from RDR. • Added SMARTCARD_STOPBITS_0_5 definition used for smartcard mode. • Updated SMARTCARD_SetConfig() function following UART Baudrate calculation update. **HAL SPI**: • Updated HAL_SPI_TransmitReceive() function in slave mode to correctly receive the CRC when NSS pulse activated. • Added missing __IO in SPI_HandleTypeDef definition. • Updated IS_SPI_CRC_POLYNOMIAL macro definition as polynomial value should be odd only. **HAL TIM**: • Updated HAL_TIM_ConfigOCrefClear() function to correctly manage TIM state (BUSY, READY). • Used IS_TIM_HALL_INTERFACE_INSTANCE macro instead of IS_TIM_XOR_INSTANCE macro in HAL_TIMEx_HallSensor_xxx() functions. • Updated TIM_SLAVEMODE constants definitions using CMSIS bit definitions. **HAL UART-USART**: • Updated USART_SetConfig() function following UART Baudrate calculation update. • Removed USART2 and USART3 clock switch, which are not supported by STM32F303x8, STM32F334x8 and STM32F328xx devices and for STM32F301x8, STM32F302x8 and STM32F318xx devices. • Modified UART_Receive_IT() to execute the RX flush request only when no data are read from RDR. • Corrected macro used in assert_param of HAL_LIN_SendBreak() function. • Added UART_STOPBITS_0_5/USART_STOPBITS_0_5 definitions used for synchronous mode. **HAL USB**: corrected double buffer implementation in PCD_SET_EP_DBUF1_CNT() macro. **HAL WWDG**: aligned WWDG registers bits naming between all STM32 series.

Date	Revision	Changes
19-Jul-2016	5	Added Low-Level drivers for ADC, COMP, Cortex, CRC, DAC, DMA, EXTI, GPIO, HRTIM, I2C, IWDG, OPAMP, PWR, RCC, RTC, SPI, TIM, USART and WWDG peripherals and additional Low Level Bus, System and Utilities APIs. **HAL ADC:** • Updated assert_param within HAL_ADCEx_MultiModeConfigChannel() function to avoid issue during ADC configuration change from multimode to independent mode. **HAL CRC:** • Updated HAL_CRC_DeInit() function (restored IDR Register to Reset value). **HAL I2C:** • Updated I2C driver description concerning I2C address management. **HAL IWDG:** New simplified HAL IWDG driver: removed HAL_IWDG_Start(), HAL_IWDG_MspInit() and HAL_IWDG_GetState() APIs. The API functions are: • HAL_IWDG_Init(): this function insures the configuration and the launch of the IWDG counter. • HAL_IWDG_Refresh(): this function insures the reload of the IWDG counter. **HAL PWR**: • Aligned EWUPx power wakeup pins definitions with CMSIS definitions. **HAL SMBUS:** • Updated SMBUS address management in SMBUS driver description. **HAL SPI**: • Updated __SPI_HandleTypeDef definition by using __IO uint16_t type for TxXferCount and RxXferCount. • Updated SPI_2linesTxISR_8BIT() and SPI_2linesTxISR_16BIT() functions: added return so that SPI_2linesTxISR_8BITCRC() or SPI_2linesTxISR_16BITCRC() function is called from HAL_SPI_TransmitReceive_IT() when CRC is activated. **HAL WWDG:** • New simplified HAL WWDG driver: removed HAL_WWDG_Start(), HAL_WWDG_Start_IT(), HAL_WWDG_MspDeInit() and HAL_WWDG_GetState() APIs. • Updated HAL_WWDG_Refresh() API to remove counter parameter. • Added new field EWIMode in WWDG_InitTypeDef to specify Early Wakeup Interrupt. • The API functions are: HAL_WWDG_Init(), HAL_WWDG_MspInit(), HAL_WWDG_Refresh(), HAL_WWDG_IRQHandler() and HAL_WWDG_EarlyWakeupCallback().
02-Jan-2017	6	Update for release V1.4.0 of the HAL and LL drivers. Refer to the release note provided within the firmware package for details.
10-Jul-2017	7	Update for release V1.5.0 of the HAL and LL drivers. Refer to the release note provided within the firmware package for details.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved