



DNH^{AS}


N-3770 Kragerø
 NORWAY
 Phone: (47) 35 98 56 00
 Fax: (47) 35 98 56 10
 E-mail: dnh@dnh.no
 Web-site: www.dnh.no

T-60/S/20/330 S

DNH WW Ltd. Phone: (44) 1908 275 000
 England Fax: (44) 1908 275 100
 E-mail: dnh@dnh.co.uk
 DNH GmbH Phone: (49) 040 6569 30-0
 Germany Fax: (49) 040 6569 30-30
 E-mail: dnh@dnh.de

ISO 9001 CERTIFIED

Dimensions & Schematics

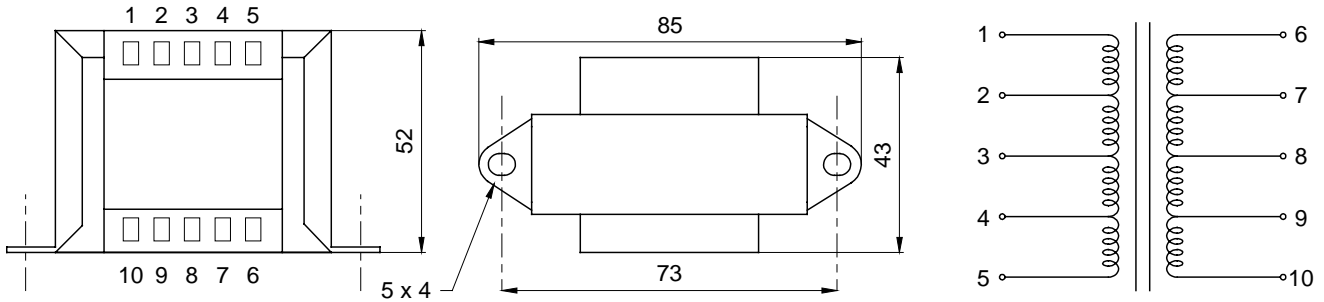

Characteristics

Tapping selection Secondary
 Line voltage 100 V (70 V / 50 V)
 Load impedance 20 Ω
 Maximum power 30 W
 Lowest recommended frequency 50 Hz
 Approximate weight 0,5 kg
 Winding wire Grade 1
 Specials

Tapping Description

Secondary terminals		1 : 4	1 : 3	1 : 2	2 : 4	2 : 3	3 : 4
Primary terminals							
6 : 7	50 Volt Line	30 W	25 W	15 W	4 W	2 W	1 W
6 : 8	70 Volt Line						
6 : 9	100 Volt Line						

Measured characteristics

Terminals	100 Volt Line		70 / 50 Volt Line	
	Input impedance	Power loss	Input impedance	Power loss
1 : 4	334 Ω	15 %	NA	NA
1 : 3	398 Ω	12 %	NA	NA
1 : 2	654 Ω	9 %	NA	NA
2 : 4	2632 Ω	18 %	NA	NA
2 : 3	4762 Ω	28 %	NA	NA
3 : 4	9090 Ω	54 %	NA	NA

